

CFR 47 FCC PART 15 SUBPART C

TEST REPORT

For

Digital Photo Frame

MODEL NUMBER: AF130, AF13X-YYYY (X is an Arabic numeral, representing different sales channels and regions, YYYY are Latin alphabets, representing different colors of product housing enclosure)

REPORT NUMBER: 4791924406-1-RF-1

ISSUE DATE: October 14, 2025

FCC ID:2AZGI-AF130

Prepared for

**Aura Home, Inc.
148 Lafayette Street, Floor 5, New York, NY 10013, USA**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

**Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan,
Guangdong, China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	October 14, 2025	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	ANSI C63.10-2020, Clause 6.2	FCC Part 15.207	Pass
Conducted Output Power	ANSI C63.10-2020, Clause 11.9.1.2	FCC Part 15.247 (b)(3)	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2020, Clause 11.8.1	FCC Part 15.247 (a)(2)	Pass
Power Spectral Density	ANSI C63.10-2020, Clause 11.10.2	FCC Part 15.247 (e)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2020, Clause 11.11	FCC Part 15.247(d)	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2020, Clause 11.12	FCC Part 15.247 (d) FCC Part 15.205/15.209	Pass
Duty Cycle	ANSI C63.10-2020, Clause 11.6	None; for reporting purposes only.	Pass

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C> when <Simple Acceptance> decision rule is applied.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	6
2. TEST METHODOLOGY.....	7
3. FACILITIES AND ACCREDITATION.....	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY</i>	<i>8</i>
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>CHANNEL LIST</i>	<i>9</i>
5.3. <i>MAXIMUM POWER</i>	<i>9</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>10</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i>	<i>10</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>10</i>
5.7. <i>SUPPORT UNITS FOR SYSTEM TEST</i>	<i>11</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	12
7. ANTENNA PORT TEST RESULTS	15
7.1. <i>CONDUCTED OUTPUT POWER</i>	<i>15</i>
7.2. <i>6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....</i>	<i>16</i>
7.3. <i>POWER SPECTRAL DENSITY</i>	<i>18</i>
7.4. <i>CONDUCTED BAND EDGE AND SPURIOUS EMISSION.....</i>	<i>20</i>
7.5. <i>DUTY CYCLE</i>	<i>22</i>
8. RADIATED TEST RESULTS.....	23
8.1. <i>RESTRICTED BANDEDGE – ANT1</i>	<i>31</i>
8.2. <i>RESTRICTED BANDEDGE – ANT2</i>	<i>36</i>
8.3. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ) – ANT1</i>	<i>41</i>
8.4. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ) – ANT2</i>	<i>47</i>
8.5. <i>SPURIOUS EMISSIONS(3 GHZ~18 GHZ) – ANT1</i>	<i>53</i>
8.6. <i>SPURIOUS EMISSIONS(3 GHZ~18 GHZ) – ANT2</i>	<i>65</i>
8.7. <i>SPURIOUS EMISSIONS(9 KHZ~30 MHZ)</i>	<i>77</i>
8.8. <i>SPURIOUS EMISSIONS(18 GHZ~26 GHZ)</i>	<i>80</i>
8.9. <i>SPURIOUS EMISSIONS(30 MHZ~1 GHZ)</i>	<i>82</i>

9. ANTENNA REQUIREMENT	84
10. AC POWER LINE CONDUCTED EMISSION	85
11. TEST DATA – ANT1	89
APPENDIX A1: Duty Cycle.....	89
APPENDIX B1: Maximum Conducted Output Power	91
APPENDIX C1: 6dB Bandwidth	92
APPENDIX D1: Occupied Channel Bandwidth	95
APPENDIX E1: Maximum Power Spectral Density Level.....	98
APPENDIX F1: Band Edge	101
APPENDIX G1: Conducted RF Spurious Emission.....	104
12. TEST DATA – ANT2	109
Appendix A2: Duty Cycle.....	109
Appendix B2: Maximum Conducted Output Power	111
Appendix C2: 6dB Bandwidth	112
Appendix D2: Occupied Channel Bandwidth	115
Appendix E2: Maximum Power Spectral Density Level.....	118
Appendix F2: Band Edge.....	121
Appendix G2: Conducted RF Spurious Emission.....	124

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Aura Home, Inc.
Address: 148 Lafayette Street, Floor 5, New York, NY 10013, USA

Manufacturer Information


Company Name: Aura Home, Inc.
Address: 148 Lafayette Street, Floor 5, New York, NY 10013, USA

EUT Information

EUT Name: Digital Photo Frame
Model: AF130
Series Model: AF13X-YYYY (X is an Arabic numeral, representing different sales channels and regions, YYYY are Latin alphabets, representing different colors of product housing enclosure)
Brand: **AURA**
Sample Received Date: August 26, 2025
Sample Status: Normal
Sample ID: 8852160
Date of Tested: August 26, 2025 to October 13, 2025


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	Pass

Prepared By:



Fanny Huang
Project Engineer

Checked By:



Kebo Zhang
Operations Leader

Approved By:



Stephen Guo
Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C , KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, ANSI C63.10-2020.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules. ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: C-20202, G-20240, R-20248 and T-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber E, the VCCI registration No. is G-20240 and R-20248 Shielding Room F, the VCCI registration No. is C-20202 and T-20202
---------------------------	---

Note 1:

All tests measurement facilities use to collect the measurement data are located at Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Digital Photo Frame
Model	AF130
Series Model	AF13X-YYYY (X is an Arabic numeral, representing different sales channels and regions, YYYY are Latin alphabets, representing different colors of product housing enclosure)
Model Difference	All models are identical, except for differences on model designation and colors of product housing enclosure for marketing purpose.

Frequency Range:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK
Data Rates:	1Mbps/2Mbps
Normal Test Voltage:	DC 3.87V via battery

5.2. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	11	2424	22	2446	33	2468
1	2404	12	2426	23	2448	34	2470
2	2406	13	2428	24	2450	35	2472
3	2408	14	2430	25	2452	36	2474
4	2410	15	2432	26	2454	37	2476
5	2412	16	2434	27	2456	38	2478
6	2414	17	2436	28	2458	39	2480
7	2416	18	2438	29	2460	/	/
8	2418	19	2440	30	2462	/	/
9	2420	20	2442	31	2464	/	/
10	2422	21	2444	32	2466	/	/

5.3. MAXIMUM POWER

ANT1

Test Mode	Frequency (MHz)	Channel Number	Maximum Peak Output Power (dBm)
LE 1M	2402 ~ 2480	0-39[40]	6.65
LE 2M	2402 ~ 2480	0-39[40]	6.68

ANT2

Test Mode	Frequency (MHz)	Channel Number	Maximum Peak Output Power (dBm)
LE 1M	2402 ~ 2480	0-39[40]	6.20
LE 2M	2402 ~ 2480	0-39[40]	6.27

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
LE 1M	CH 0(Low Channel), CH 19(MID Channel), CH 39(High Channel)	2402 MHz, 2440 MHz, 2480 MHz
LE 2M	CH 0(Low Channel), CH 19(MID Channel), CH 39(High Channel)	2402 MHz, 2440 MHz, 2480 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software Version		CMD		
Modulation Type	Transmit Antenna Number	Test Software setting value		
		CH 0	CH 19	CH 39
GFSK(1Mbps)	1 or 2	default	default	default
GFSK(2Mbps)	1 or 2	default	default	default

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2402-2480	FPC Antenna	3.7
2	2402-2480	FPC Antenna	5.9

Test Mode	Transmit and Receive Mode	Description
LE 1M	☒ 1TX, 1RX	Antenna 1 or Antenna 2 can be used as transmitting/receiving antenna.
LE 2M	☒ 1TX, 1RX	Antenna 1 or Antenna 2 can be used as transmitting/receiving antenna.
Note: 1.The EUT does not support transmission simultaneously. (declared by client)		

5.7. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	E42-80	R303U5AG

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/

ACCESSORIES


Item	Accessory	Brand Name	Model Name	Description
1	Adapter	/	AURA30-001	Input:100-240V~, 50/60 Hz, 1.0 A Output: 5Vdc, 3A; 9Vdc, 3A; 12Vdc, 2.5A; 15Vdc, 2A

TEST SETUP


The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

For others:

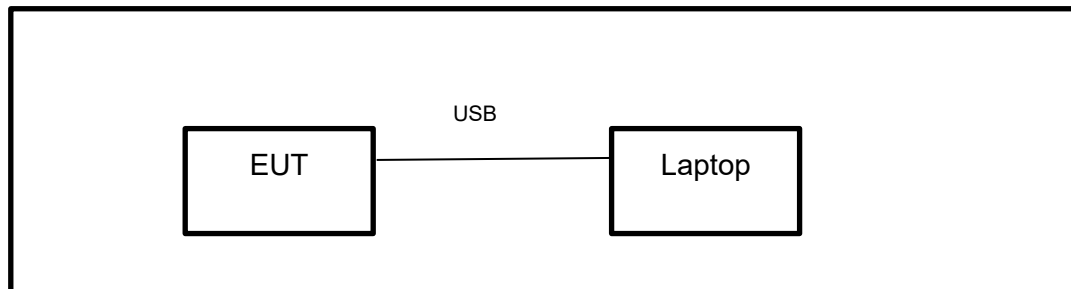

For AC Power Line Conducted Emission:

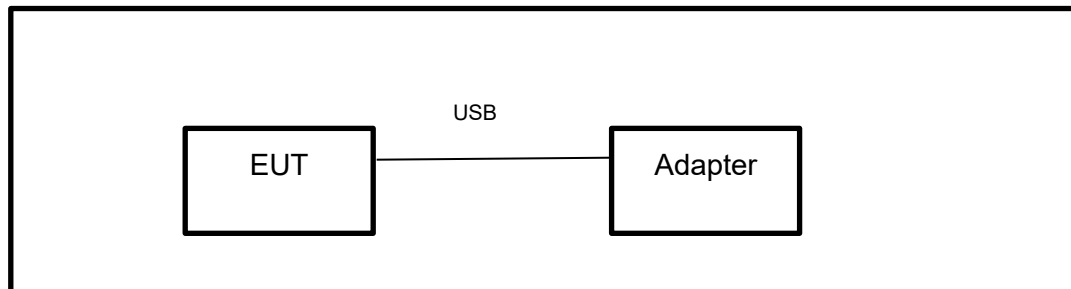

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System						
Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	/	Dec.27,2024	Dec.26,2025
Vector Signal Generator	R&S	SMBV100A	261637	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Signal Generator	R&S	SMB100A	178553	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Signal Analyzer	R&S	FSV40	101118	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Software						
Description	Manufacturer		Name		Version	
For R&S TS 8997 Test System	Rohde & Schwarz		EMC 32		10.60.10	
Tonsend RF Test System						
Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Due. Date
Wireless Connectivity Tester	R&S	CMW270	1201.0002K75-102529-FJ	Sep.13, 2024	Sep.12, 2025	Sep.11, 2026
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Attenuator	Aglient	8495B	2814a12853	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
RF Control Unit	Tonscend	JS0806-2	23B80620666	/	Dec.27,2024	Dec.26,2025
Software						
Description	Manufacturer	Name			Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System			V3.2.22	

Conducted Emissions						
Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Two-Line V-Network	R&S	ENV216	101983	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Software						
Description			Manufacturer	Name	Version	
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1	

Radiated Emissions						
Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	/	June 28, 2024	June.27 2027
Preamplifier	HP	8447D	2944A09099	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
EMI Measurement Receiver	R&S	ESR26	101377	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Horn Antenna	TDK	HRN-0118	130940	/	Dec.10, 2024	Dec.11, 2027
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Horn Antenna	Schwarzbeck	BBHA9170	697	/	Jun 30, 2024	Jun 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00003	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Preamplifier	TDK	PA-02-3	TRS-308-00002	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Loop antenna	Schwarzbeck	1519B	00008	/	Dec.09, 2024	Dec.08, 2027
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026
Software						

Description	Manufacturer	Name	Version
Test Software for Radiated Emissions	Farad	EZ-EMC	Ver. UL-3A1

Other Instrument						
Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.8, 2024	Sep.16, 2025	Sep.15, 2026
Barometer	Yiyi	Baro	N/A	Oct.10, 2024	Sep.19, 2025	Sep.18, 2026
Attenuator	Agilent	8495B	2814a12853	Sep.28, 2024	Sep.12, 2025	Sep.11, 2026

7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED OUTPUT POWER

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3)	Peak Conduct Output Power	1 watt or 30 dBm	2400-2483.5


TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.9.1.2.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

TEST SETUP



TEST ENVIRONMENT

Temperature	22.1°C	Relative Humidity	48.8%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.87V

TEST DATE / ENGINEER

Test Date	September 28, 2025	Test By	Walker Yuan
-----------	--------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix B1&B2

7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2020 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 1 % to 5 % of the OBW but not less than 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP**TEST ENVIRONMENT**

Temperature	22.1℃	Relative Humidity	48.8%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.87V

TEST DATE / ENGINEER

Test Date	September 28, 2025	Test By	Walker Yuan
-----------	--------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix C1&D1&C2&D2

7.3. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.10.2.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$> 1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP



TEST ENVIRONMENT

Temperature	22.1℃	Relative Humidity	48.8%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.87V

TEST DATE / ENGINEER

Test Date	September 28, 2025	Test By	Walker Yuan
-----------	--------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix E1&E2

7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.11.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	$\geq 1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	No faster than coupled (auto) time

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	No faster than coupled (auto) time

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

TEST SETUP**TEST ENVIRONMENT**

Temperature	22.1℃	Relative Humidity	48.8%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.87V

TEST DATE / ENGINEER

Test Date	September 28, 2025	Test By	Walker Yuan
-----------	--------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix F1&G1&F2&G2

7.5. DUTY CYCLE


LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP



TEST ENVIRONMENT

Temperature	22.1°C	Relative Humidity	48.8%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.87V

TEST DATE / ENGINEER

Test Date	September 28, 2025	Test By	Walker Yuan
-----------	--------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix A1&A2

8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Radiation Disturbance Test Limit for FCC (Class B)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit ($\mu\text{V/m}$) at 3 m	Field Strength Limit (dB $\mu\text{V/m}$) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	$2400/F(\text{kHz})$	300
0.490-1.705	$24000/F(\text{kHz})$	30
1.705-30.0	30	30

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.

7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.5. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

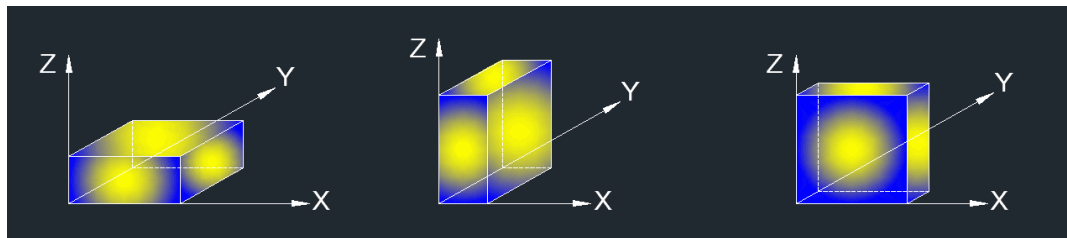

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

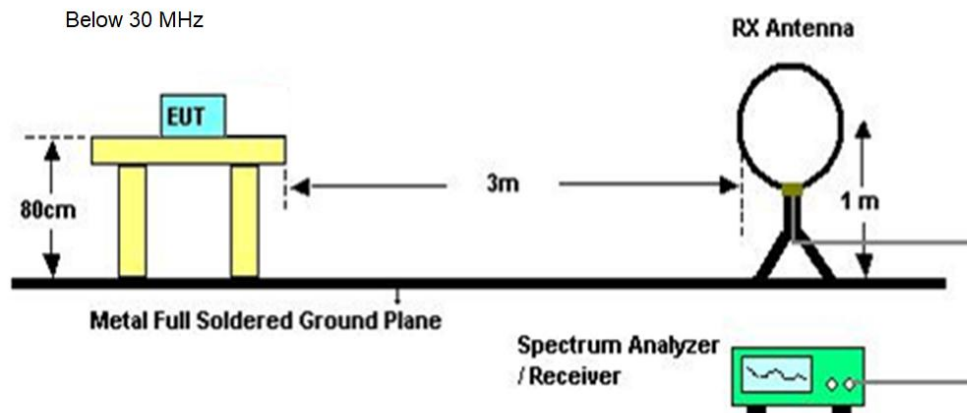

Below 1 GHz and above 30 MHz

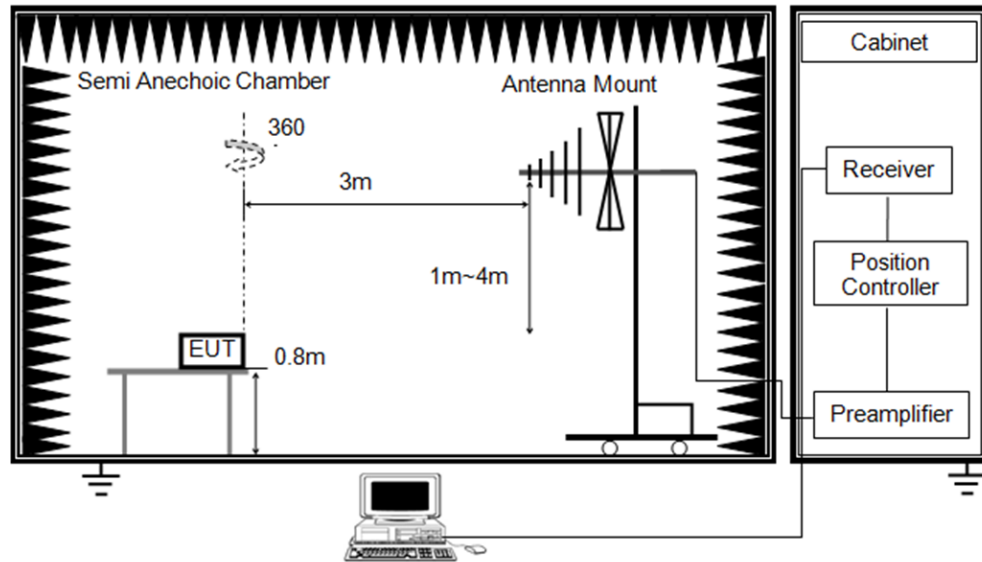

Above 1GHz

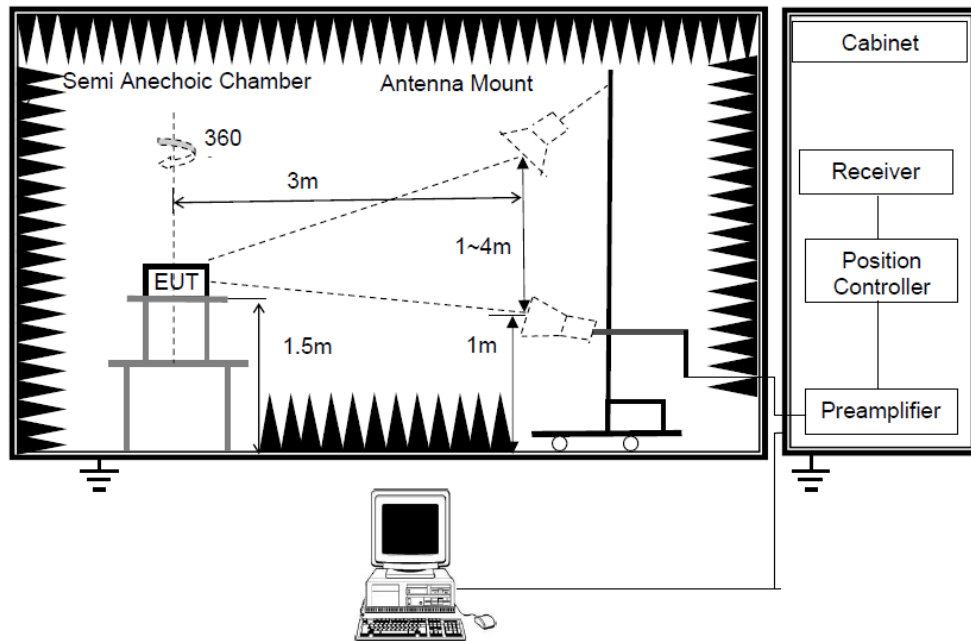

TEST ENVIRONMENT

Temperature	23.8°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.87V


TEST DATE / ENGINEER

Test Date	September 21, 2025	Test By	Leslie Xie
-----------	--------------------	---------	------------

TEST RESULTS

8.1. RESTRICTED BANDEDGE – ANT1


TX Radiated Test Result

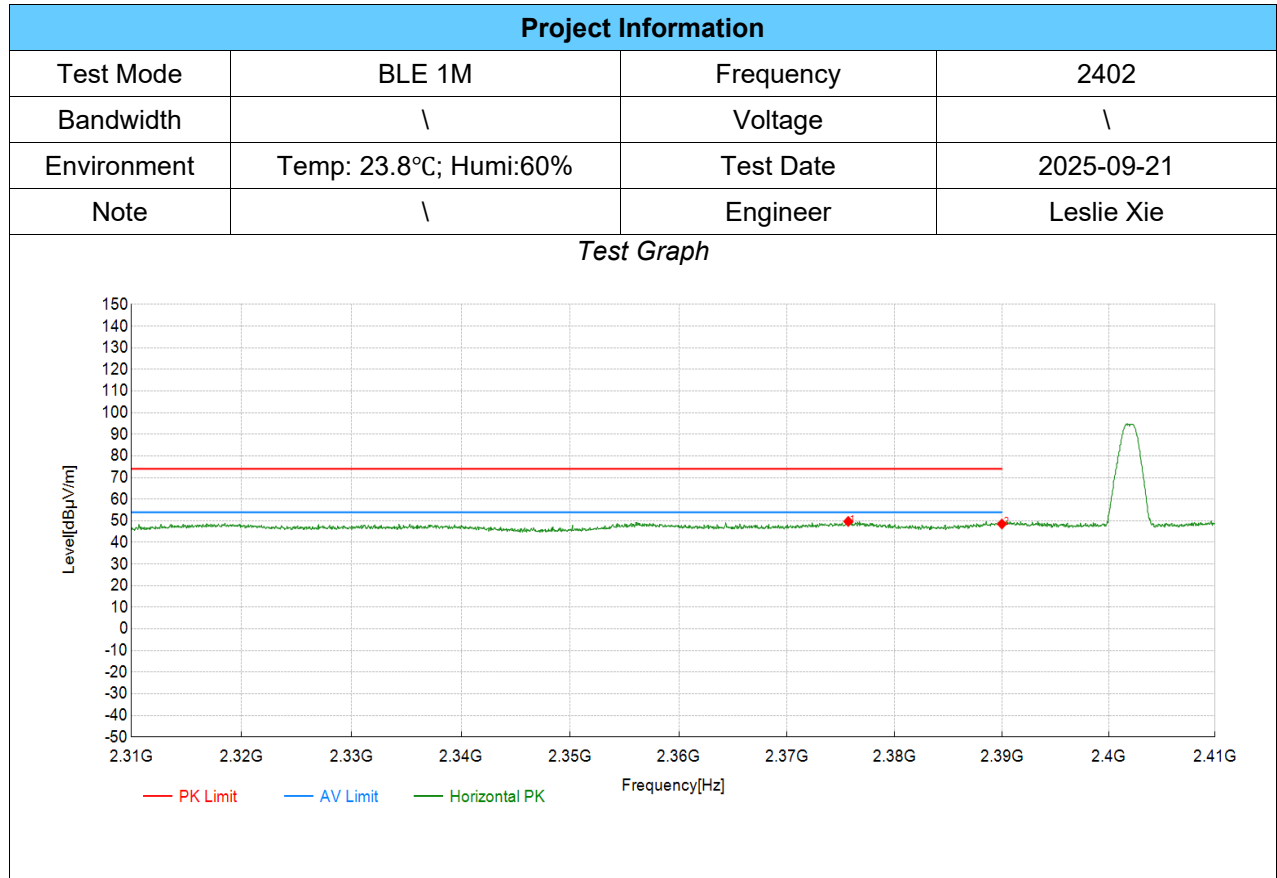

PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2375.68	40.96	49.70	8.74	74.00	24.30	PK	Horizontal	PASS
2	2390.00	39.60	48.54	8.94	74.00	25.46	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

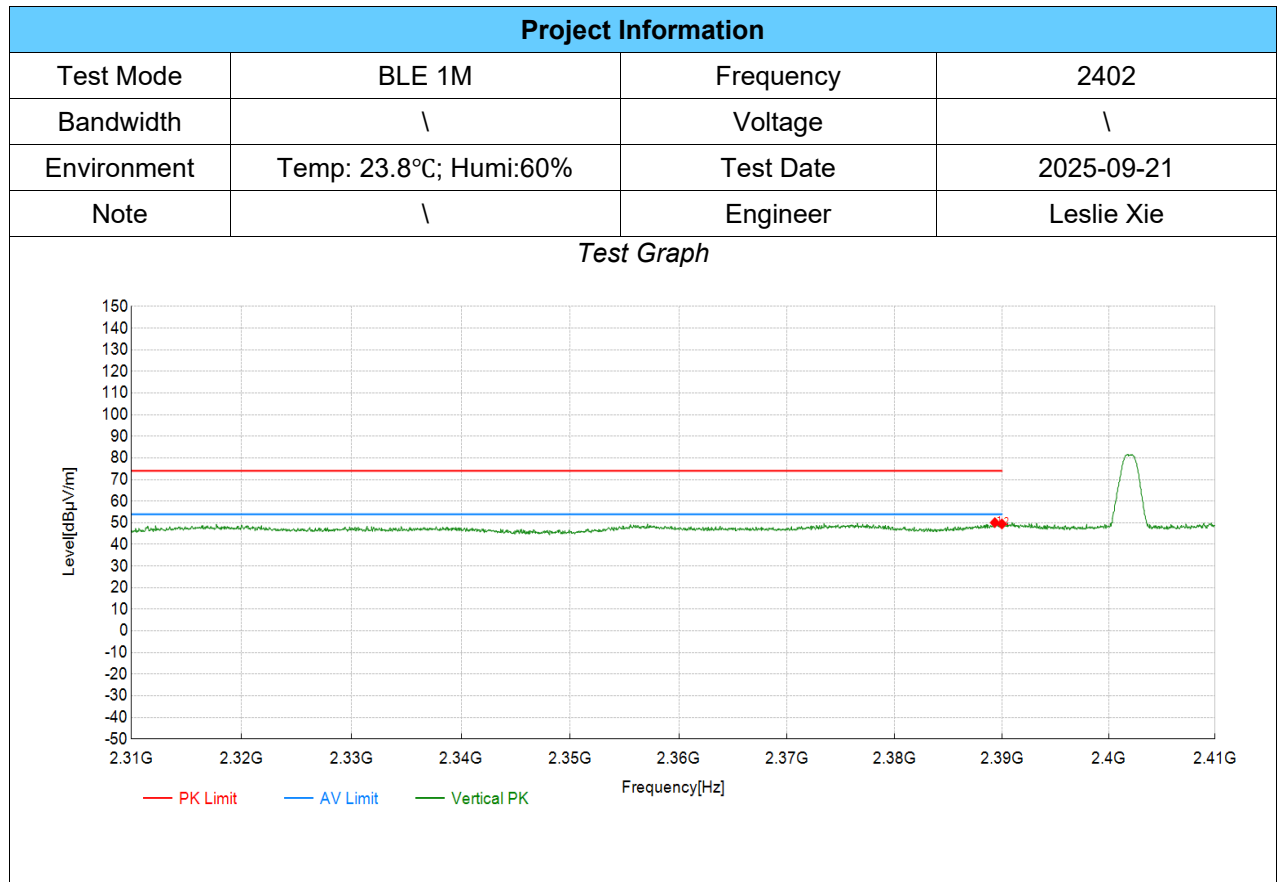

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2389.34	41.16	50.09	8.93	74.00	23.91	PK	Vertical	PASS
2	2390.00	40.54	49.48	8.94	74.00	24.52	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level


TX Radiated Test Result

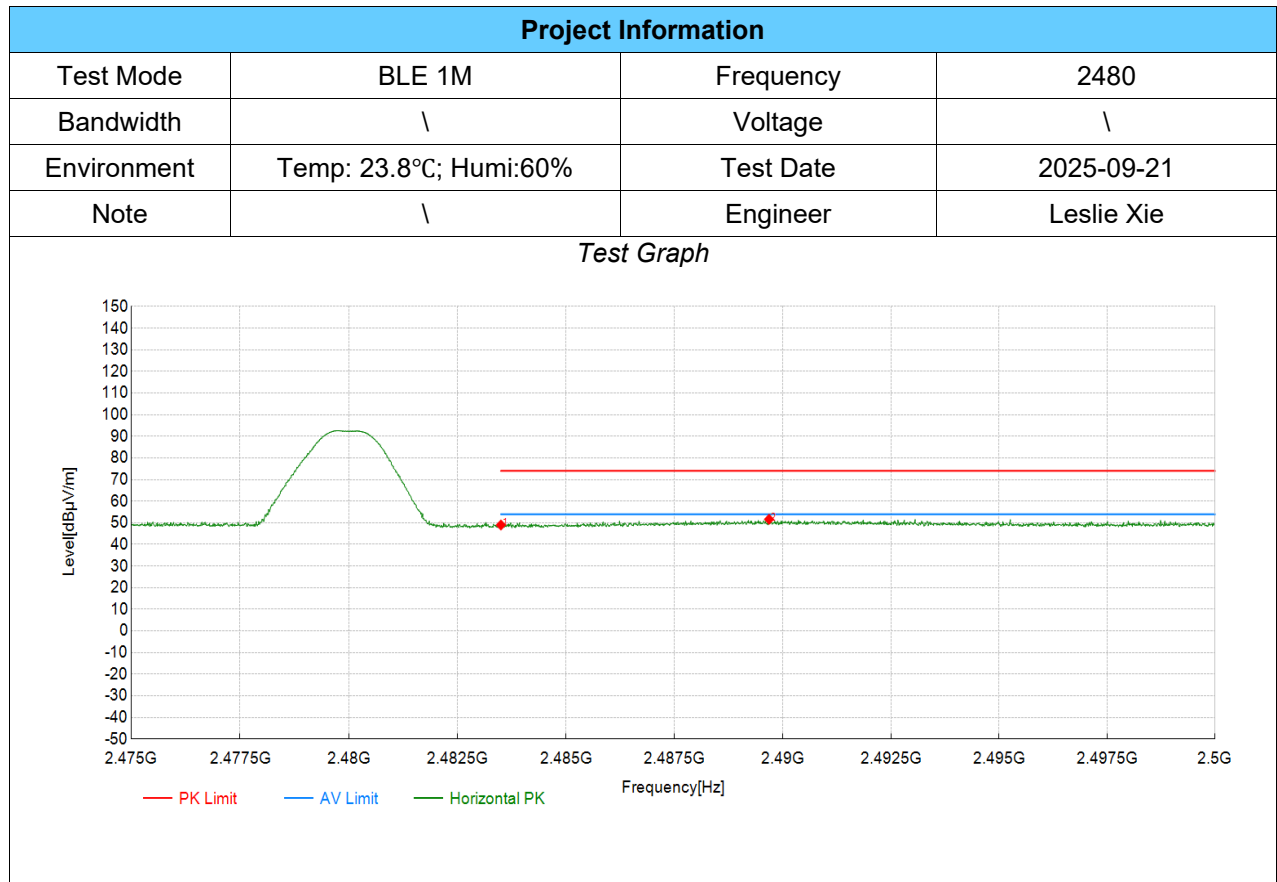

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	38.72	49.00	10.28	74.00	25.00	PK	Horizontal	PASS
2	2489.68	41.26	51.63	10.37	74.00	22.37	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level


TX Radiated Test Result

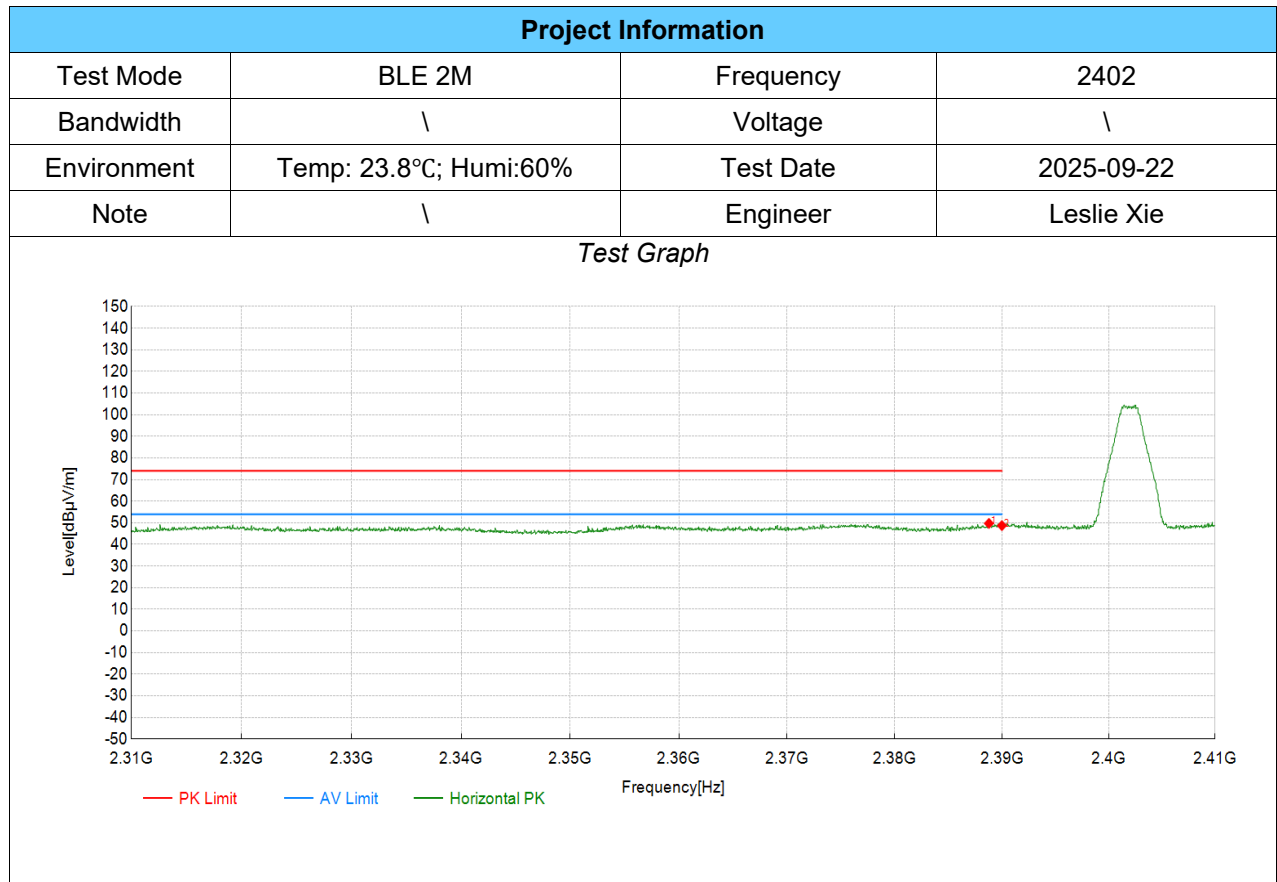

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2388.79	40.82	49.73	8.91	74.00	24.27	PK	Horizontal	PASS
2	2390.00	39.76	48.70	8.94	74.00	25.30	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

TX Radiated Test Result

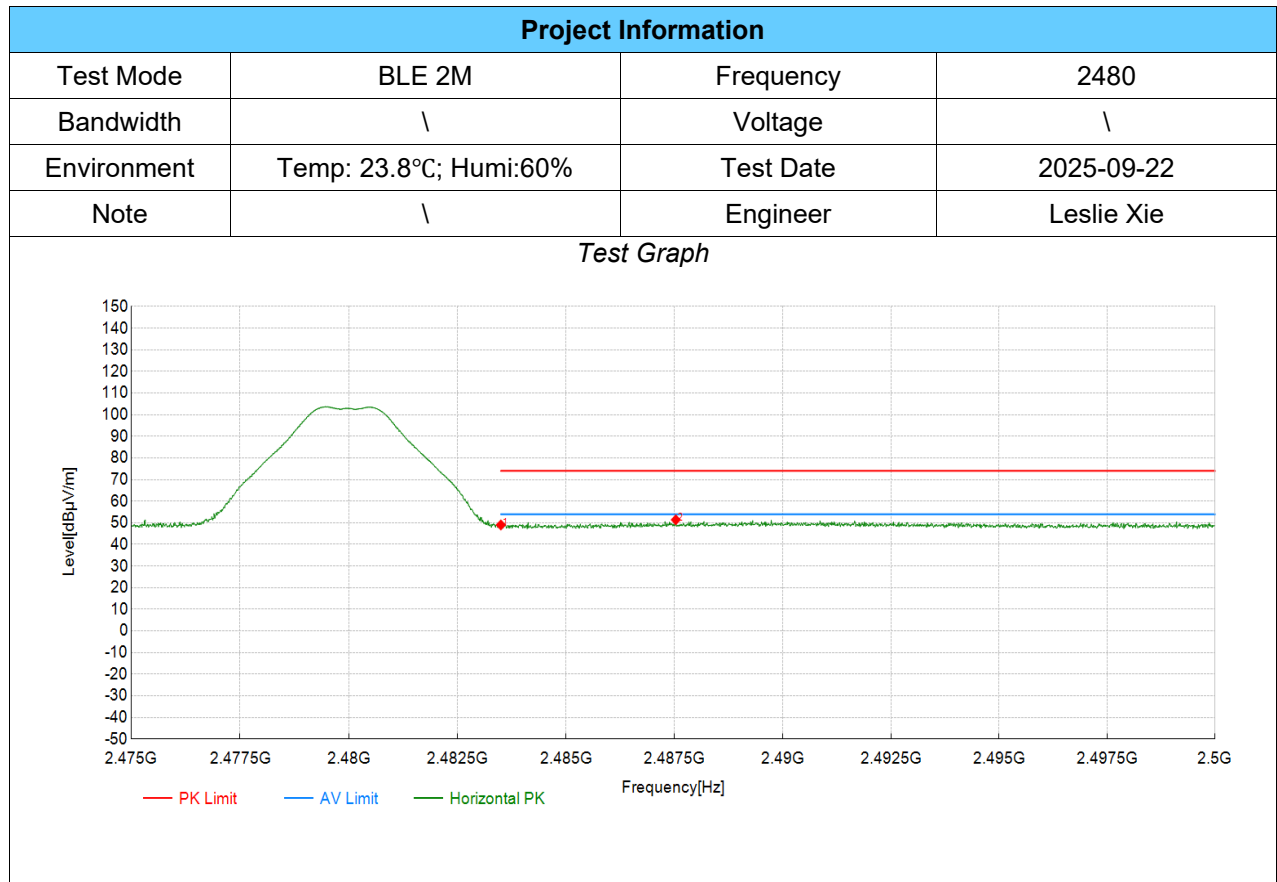


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	38.74	49.02	10.28	74.00	24.98	PK	Horizontal	PASS
2	2487.53	41.05	51.39	10.34	74.00	22.61	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
 (2) Margin = Limit - Level

8.2. RESTRICTED BANDEDGE – ANT2


TX Radiated Test Result

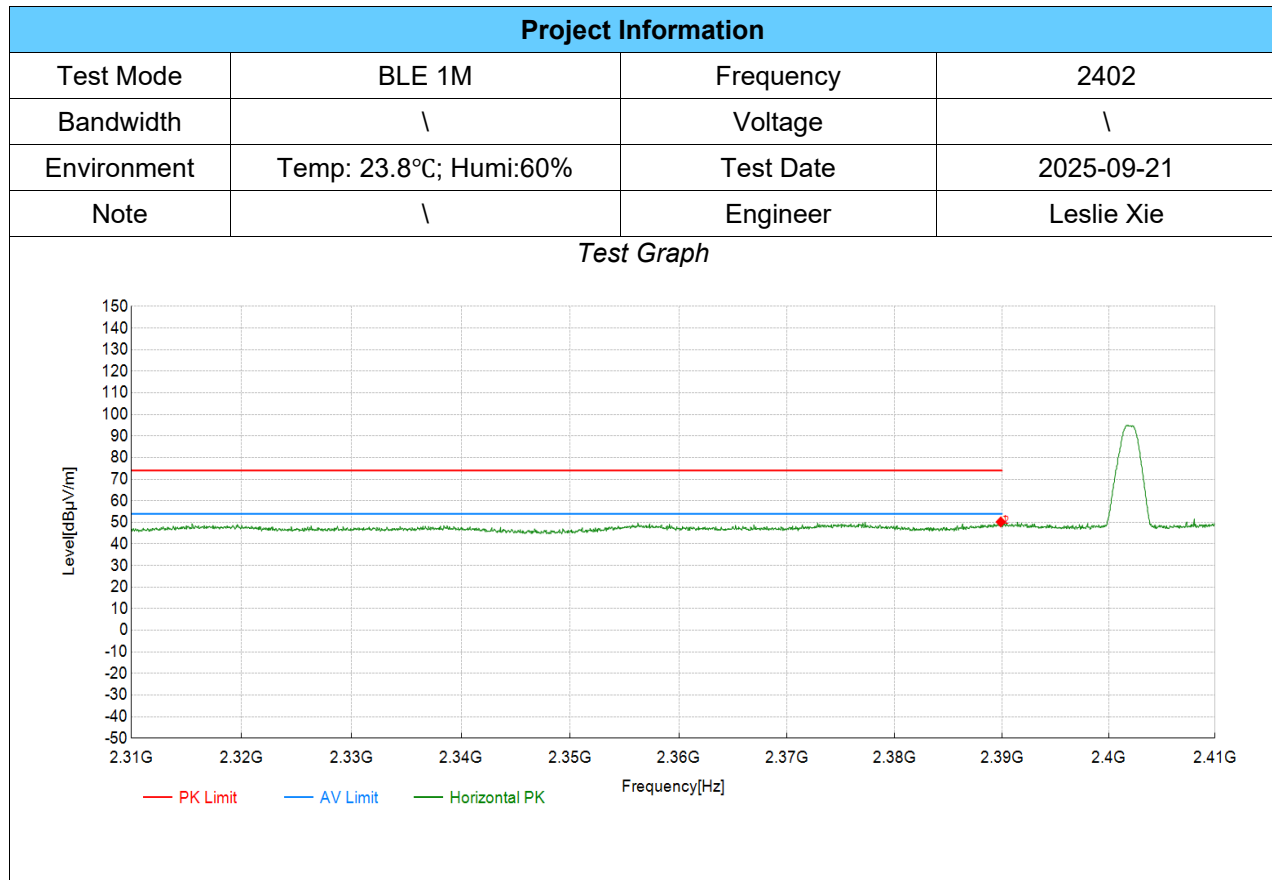

PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2389.89	41.27	50.20	8.93	74.00	23.80	PK	Horizontal	PASS
2	2390.00	41.03	49.97	8.94	74.00	24.03	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level


TX Radiated Test Result

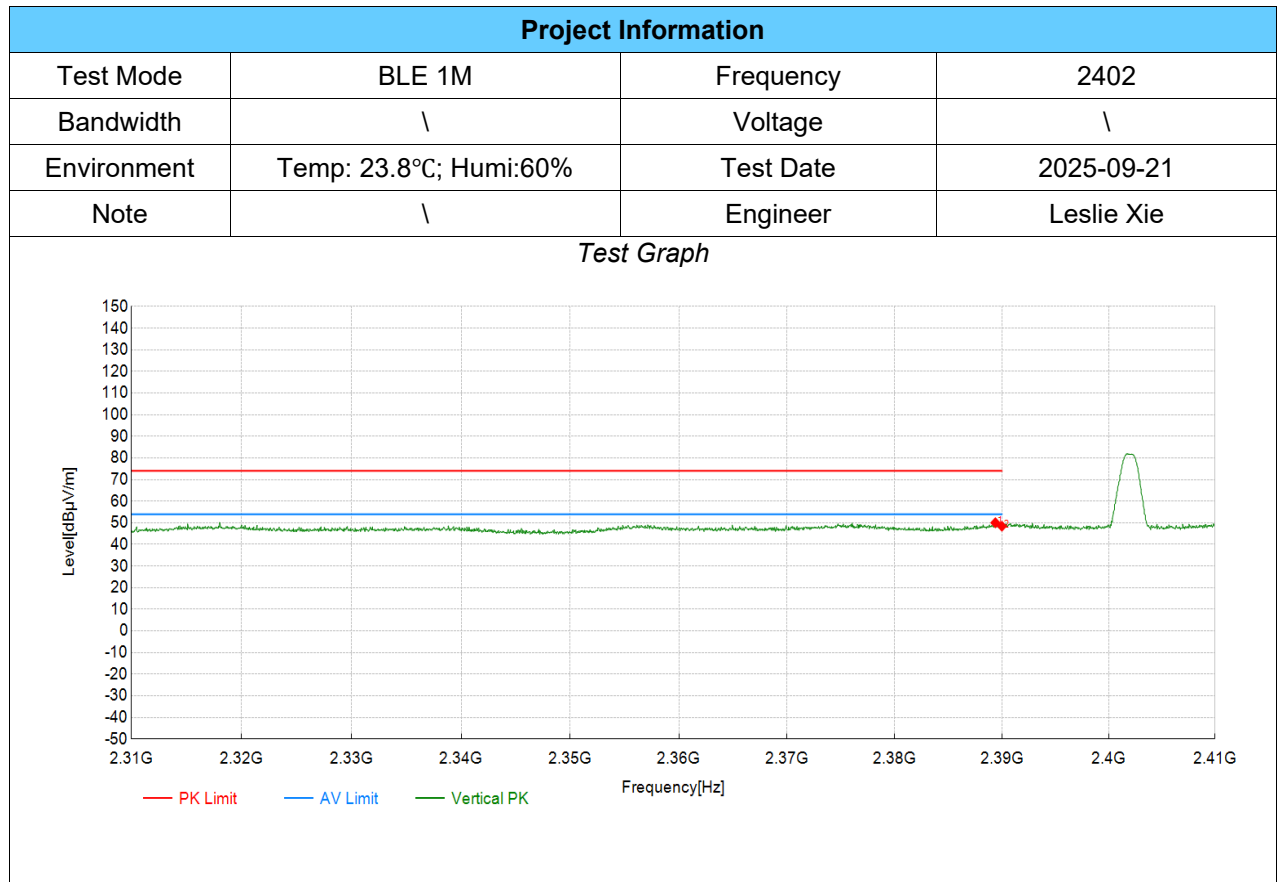

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2389.39	41.11	50.04	8.93	74.00	23.96	PK	Vertical	PASS
2	2390.00	39.50	48.44	8.94	74.00	25.56	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level


TX Radiated Test Result

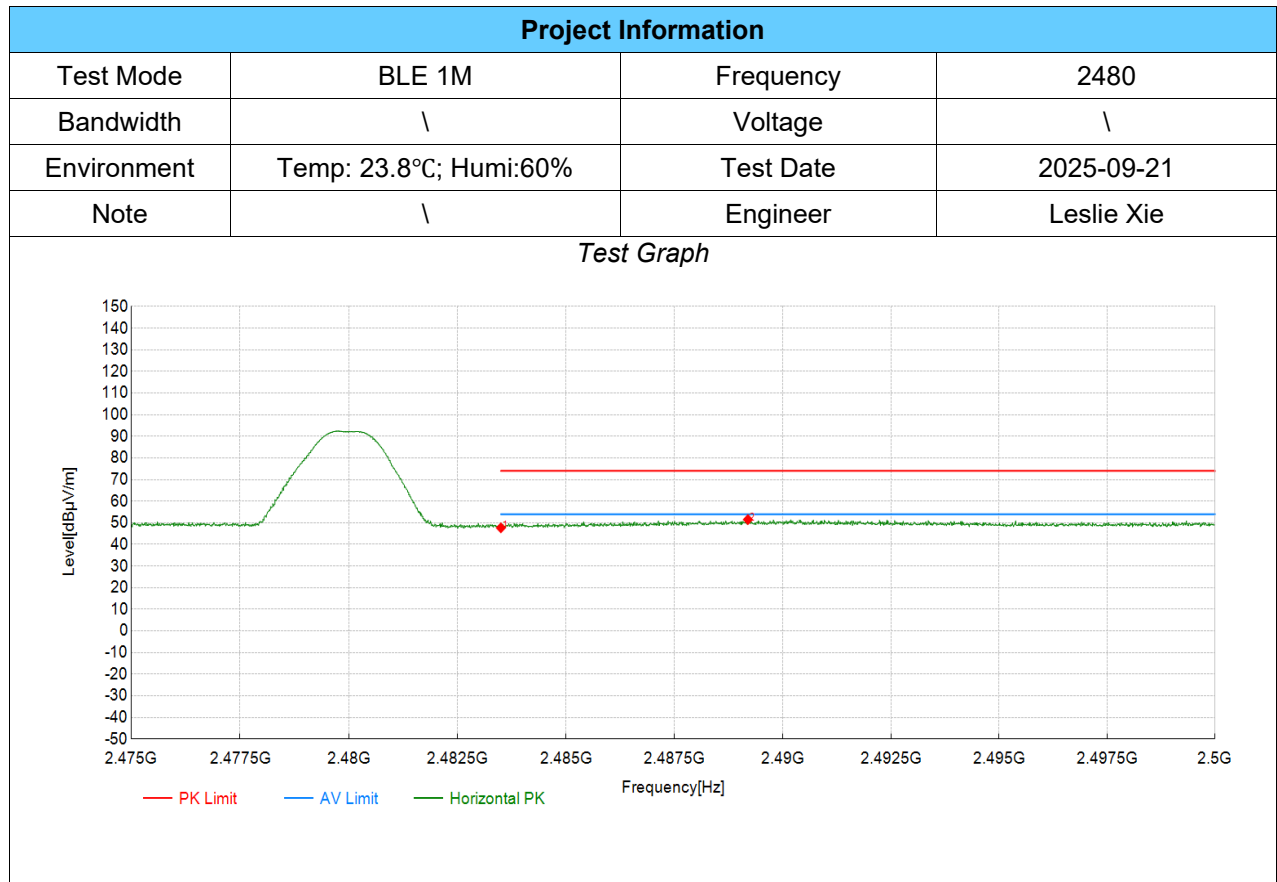

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	37.41	47.69	10.28	74.00	26.31	PK	Horizontal	PASS
2	2489.19	41.15	51.51	10.36	74.00	22.49	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level


TX Radiated Test Result

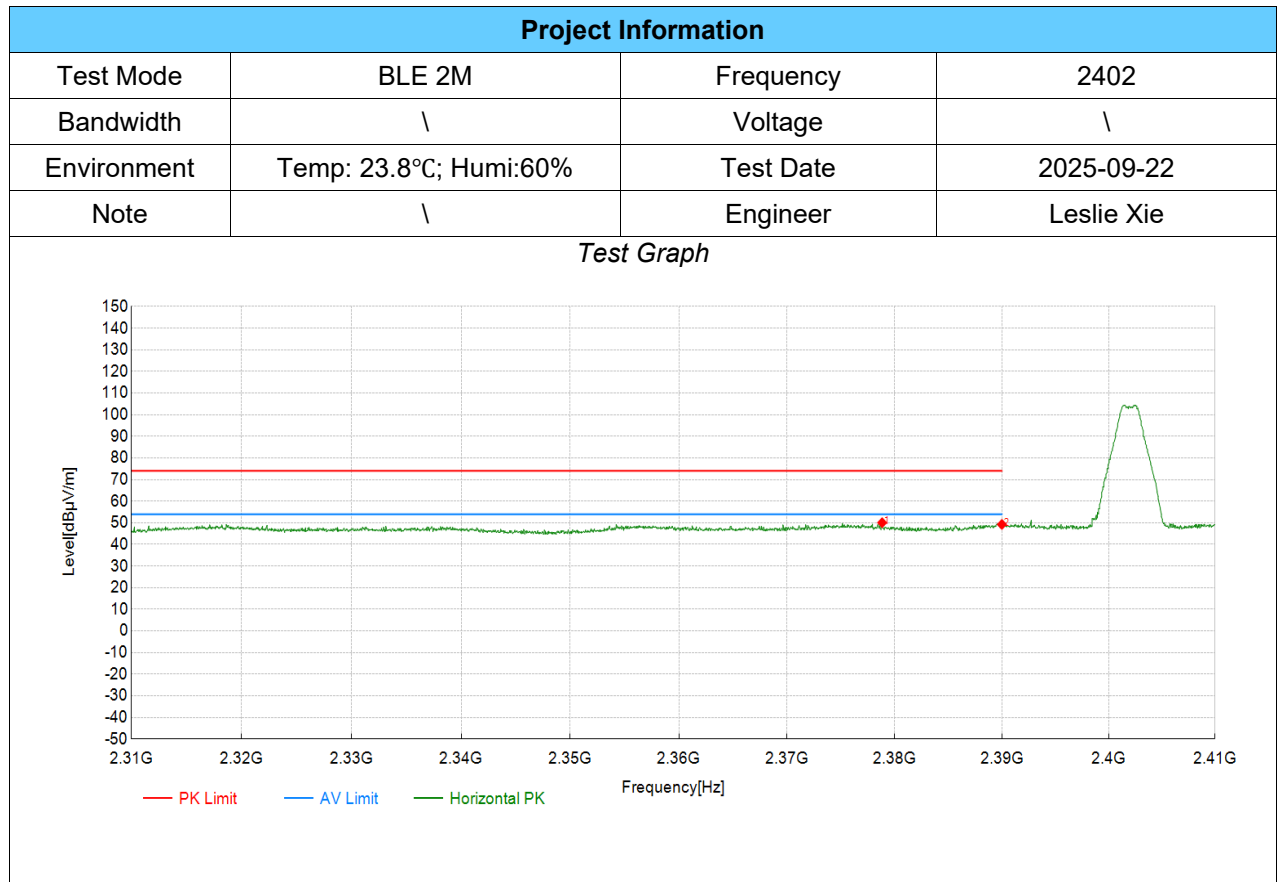

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2378.83	41.28	50.06	8.78	74.00	23.94	PK	Horizontal	PASS
2	2390.00	40.33	49.27	8.94	74.00	24.73	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

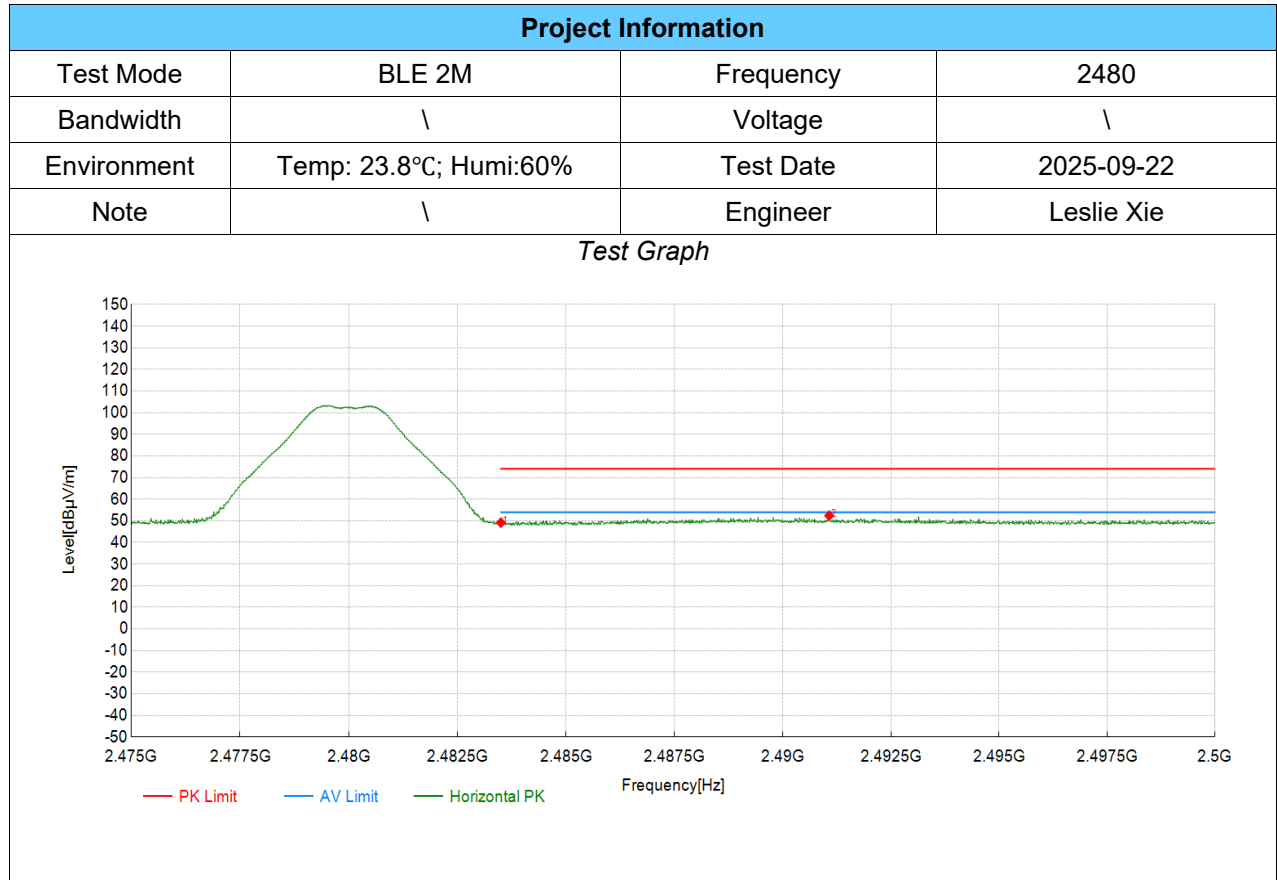


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	38.88	49.16	10.28	74.00	24.84	PK	Horizontal	PASS
2	2491.07	41.99	52.38	10.39	74.00	21.62	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

8.3. SPURIOUS EMISSIONS(1 GHZ~3 GHZ) – ANT1


TX Radiated Test Result

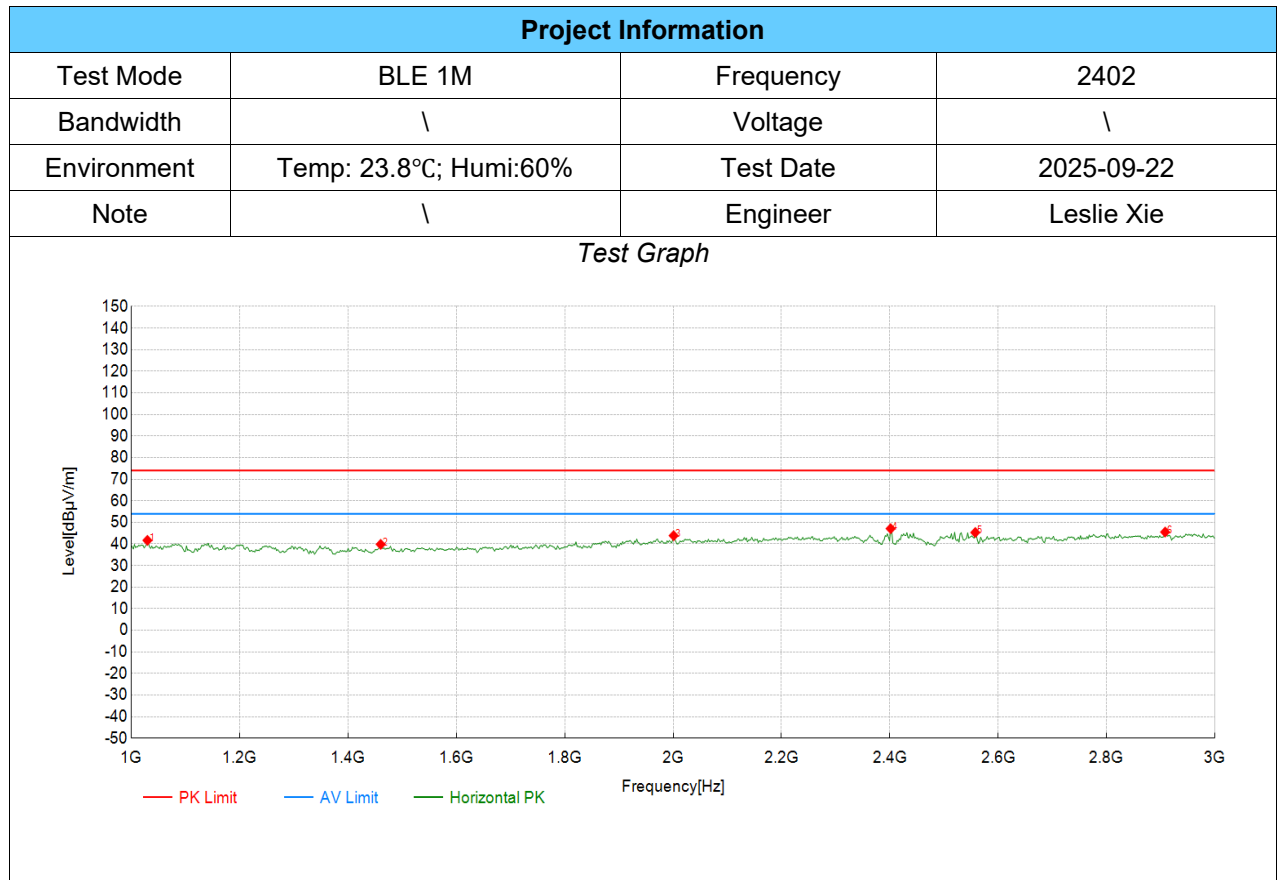

PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1030.03	52.15	41.67	-10.48	74.00	32.33	PK	Horizontal	PASS
2	1460.46	50.39	39.82	-10.57	74.00	34.18	PK	Horizontal	PASS
3	2001.00	49.70	43.85	-5.85	74.00	30.15	PK	Horizontal	PASS
4	2402.00	51.94	47.10	-4.84	/	/	PK	Horizontal	fundamental
5	2557.56	49.98	45.32	-4.66	74.00	28.68	PK	Horizontal	PASS
6	2907.91	49.03	45.53	-3.50	74.00	28.47	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level


TX Radiated Test Result

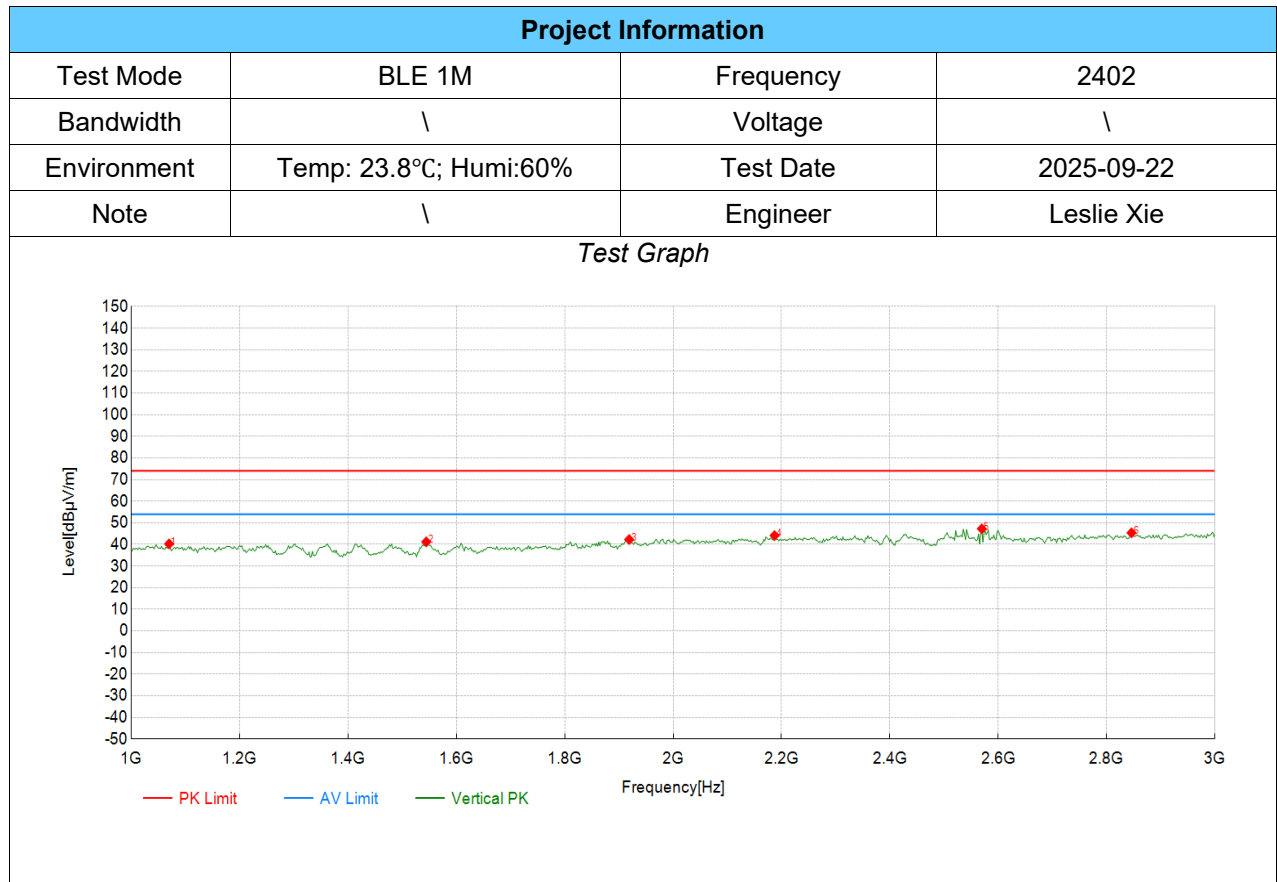

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1070.07	50.83	40.25	-10.58	74.00	33.75	PK	Vertical	PASS
2	1544.54	51.43	41.20	-10.23	74.00	32.80	PK	Vertical	PASS
3	1918.92	49.24	42.28	-6.96	74.00	31.72	PK	Vertical	PASS
4	2187.19	49.04	44.10	-4.94	74.00	29.90	PK	Vertical	PASS
5	2569.57	51.87	47.24	-4.63	74.00	26.76	PK	Vertical	PASS
6	2845.85	48.99	45.36	-3.63	74.00	28.64	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

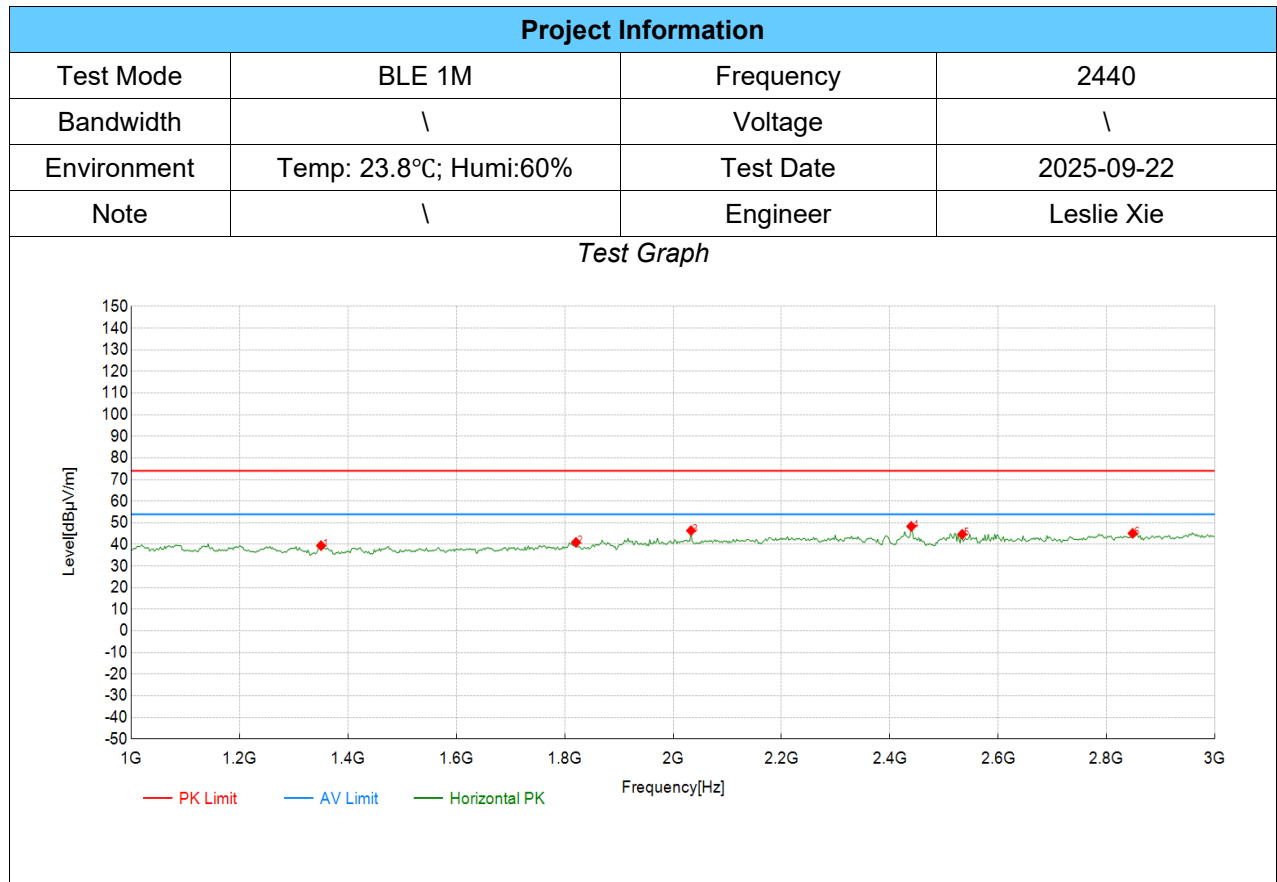

PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1350.35	50.12	39.44	-10.68	74.00	34.56	PK	Horizontal	PASS
2	1820.82	49.19	40.94	-8.25	74.00	33.06	PK	Horizontal	PASS
3	2033.03	52.25	46.38	-5.87	74.00	27.62	PK	Horizontal	PASS
4	2440.00	53.13	48.32	-4.81	/	/	PK	Horizontal	fundamental
5	2533.53	49.40	44.69	-4.71	74.00	29.31	PK	Horizontal	PASS
6	2847.85	48.76	45.13	-3.63	74.00	28.87	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level


TX Radiated Test Result

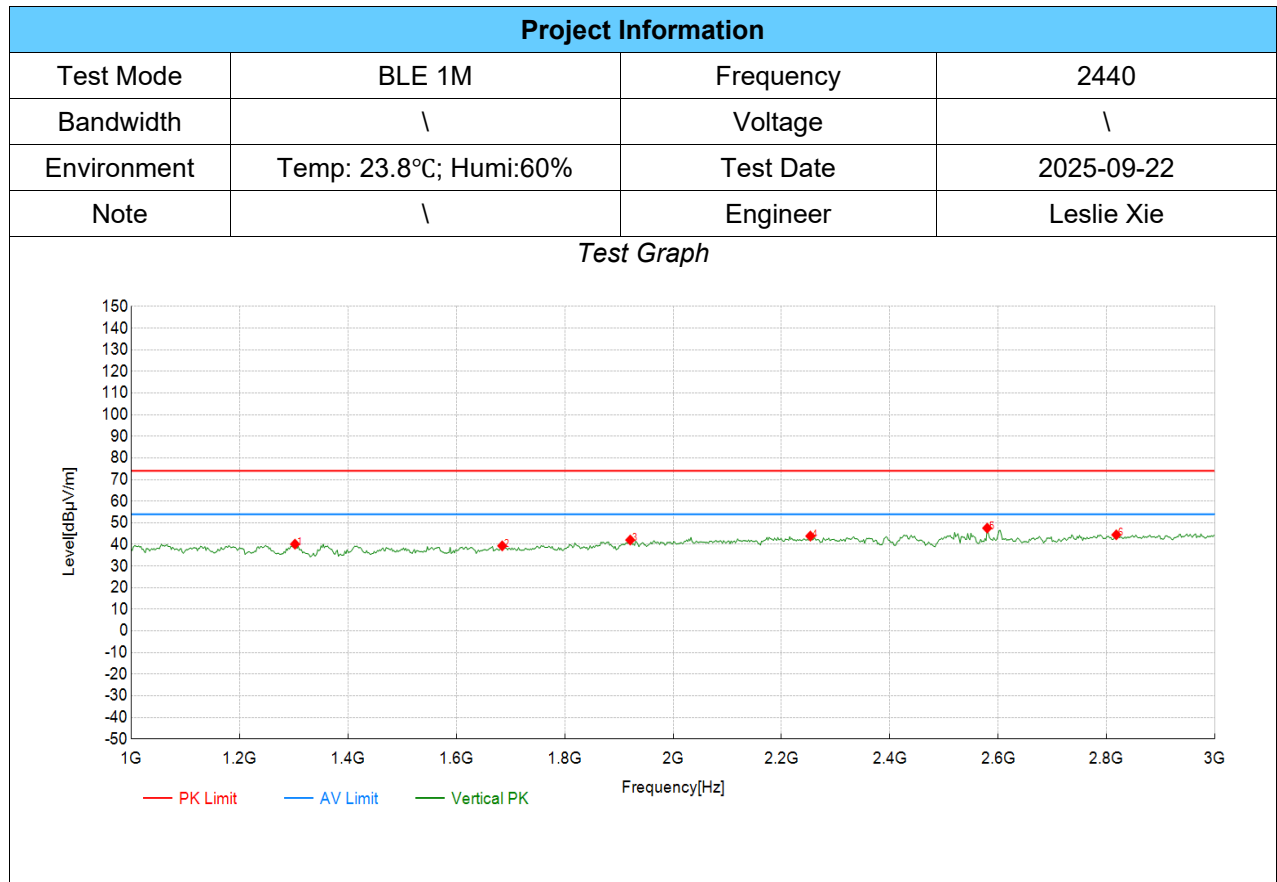

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1302.30	50.78	40.13	-10.65	74.00	33.87	PK	Vertical	PASS
2	1684.68	48.55	39.34	-9.21	74.00	34.66	PK	Vertical	PASS
3	1920.92	48.98	42.05	-6.93	74.00	31.95	PK	Vertical	PASS
4	2253.25	48.72	43.87	-4.85	74.00	30.13	PK	Vertical	PASS
5	2579.58	52.16	47.55	-4.61	74.00	26.45	PK	Vertical	PASS
6	2817.82	48.12	44.45	-3.67	74.00	29.55	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

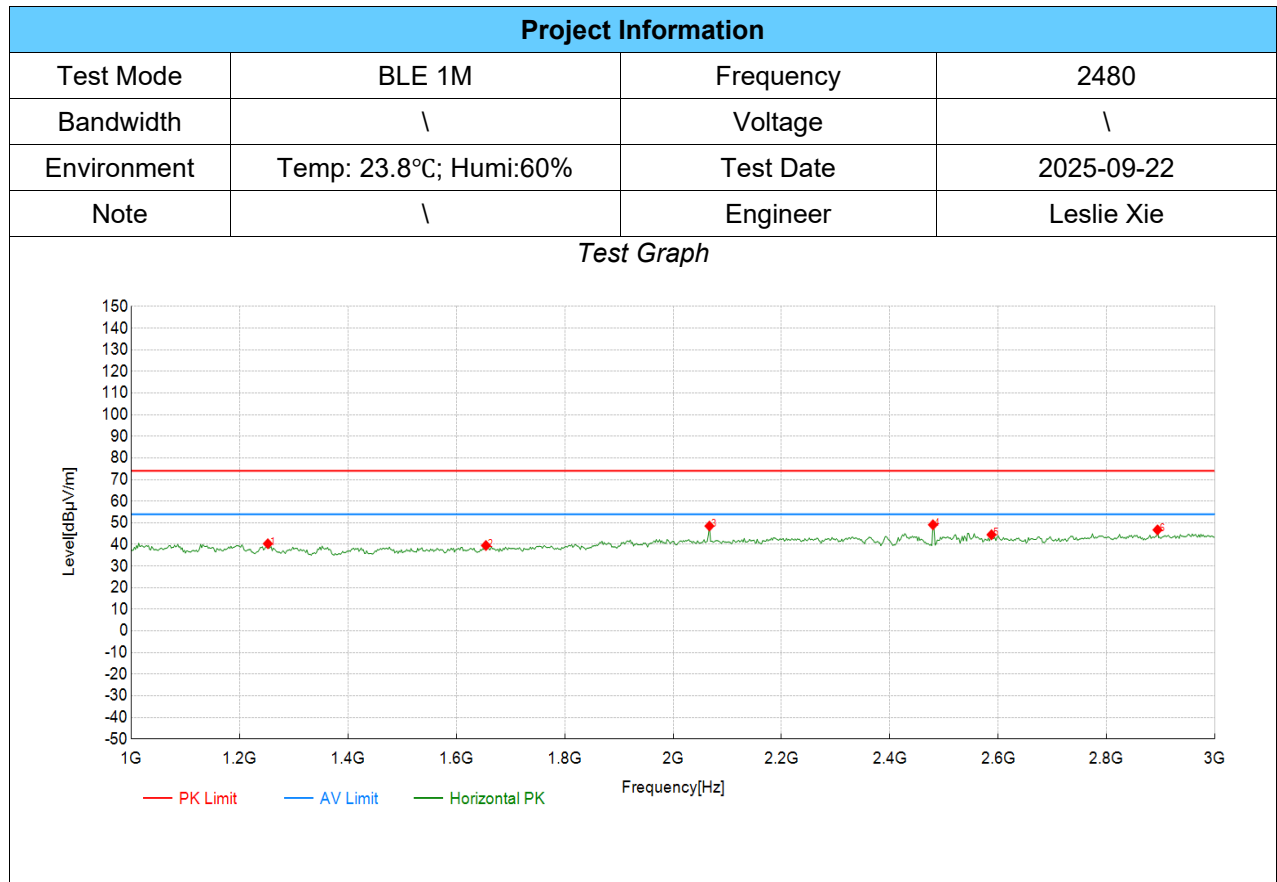

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1252.25	50.78	40.33	-10.45	74.00	33.67	PK	Horizontal	PASS
2	1654.65	48.97	39.51	-9.46	74.00	34.49	PK	Horizontal	PASS
3	2067.07	54.43	48.52	-5.91	74.00	25.48	PK	Horizontal	PASS
4	2480.00	53.89	49.09	-4.80	/	/	PK	Horizontal	fundamental
5	2587.59	49.10	44.50	-4.60	74.00	29.50	PK	Horizontal	PASS
6	2893.89	50.30	46.73	-3.57	74.00	27.27	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

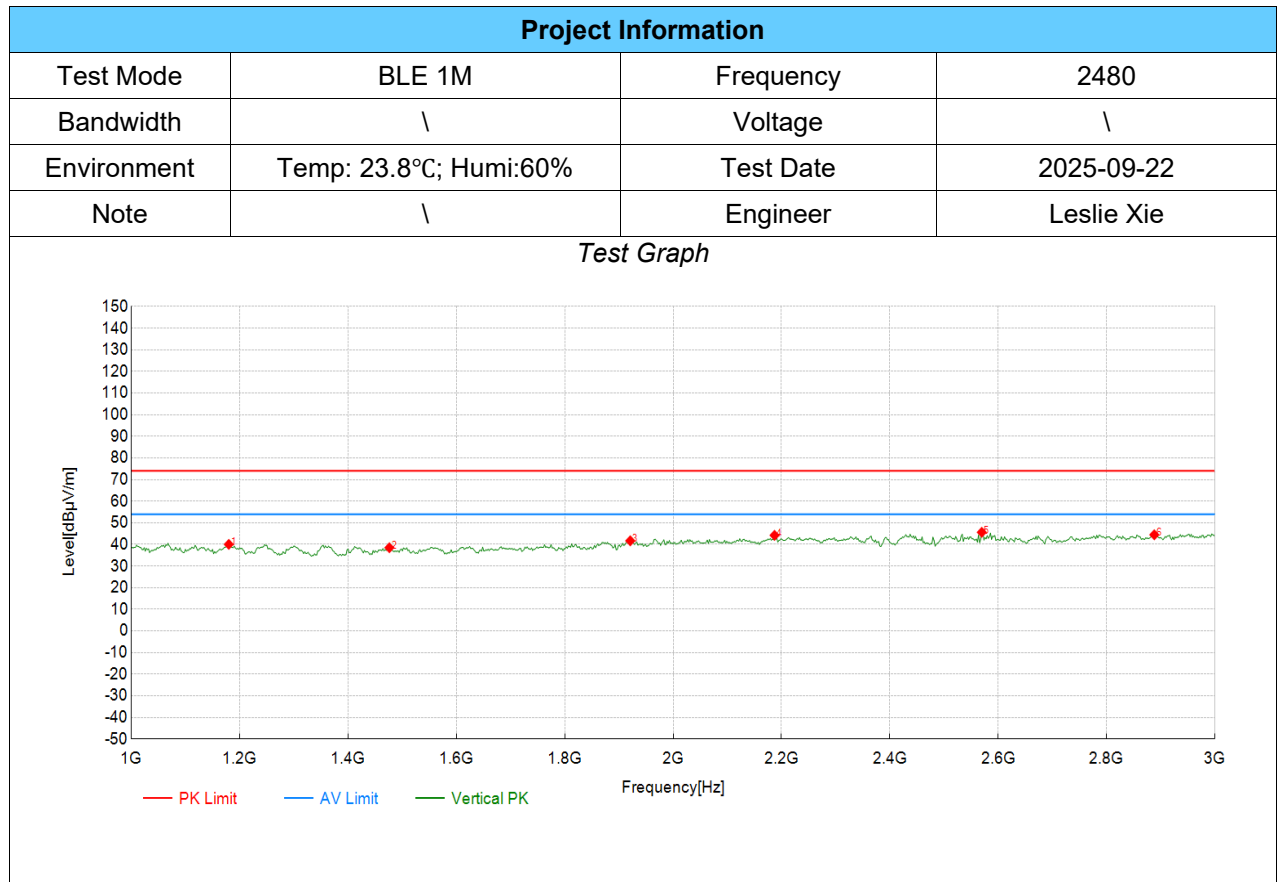


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1180.18	50.34	40.03	-10.31	74.00	33.97	PK	Vertical	PASS
2	1476.48	49.03	38.49	-10.54	74.00	35.51	PK	Vertical	PASS
3	1920.92	48.61	41.68	-6.93	74.00	32.32	PK	Vertical	PASS
4	2187.19	49.15	44.21	-4.94	74.00	29.79	PK	Vertical	PASS
5	2569.57	50.26	45.63	-4.63	74.00	28.37	PK	Vertical	PASS
6	2887.89	48.05	44.47	-3.58	74.00	29.53	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

8.4. SPURIOUS EMISSIONS(1 GHZ~3 GHZ) – ANT2


TX Radiated Test Result

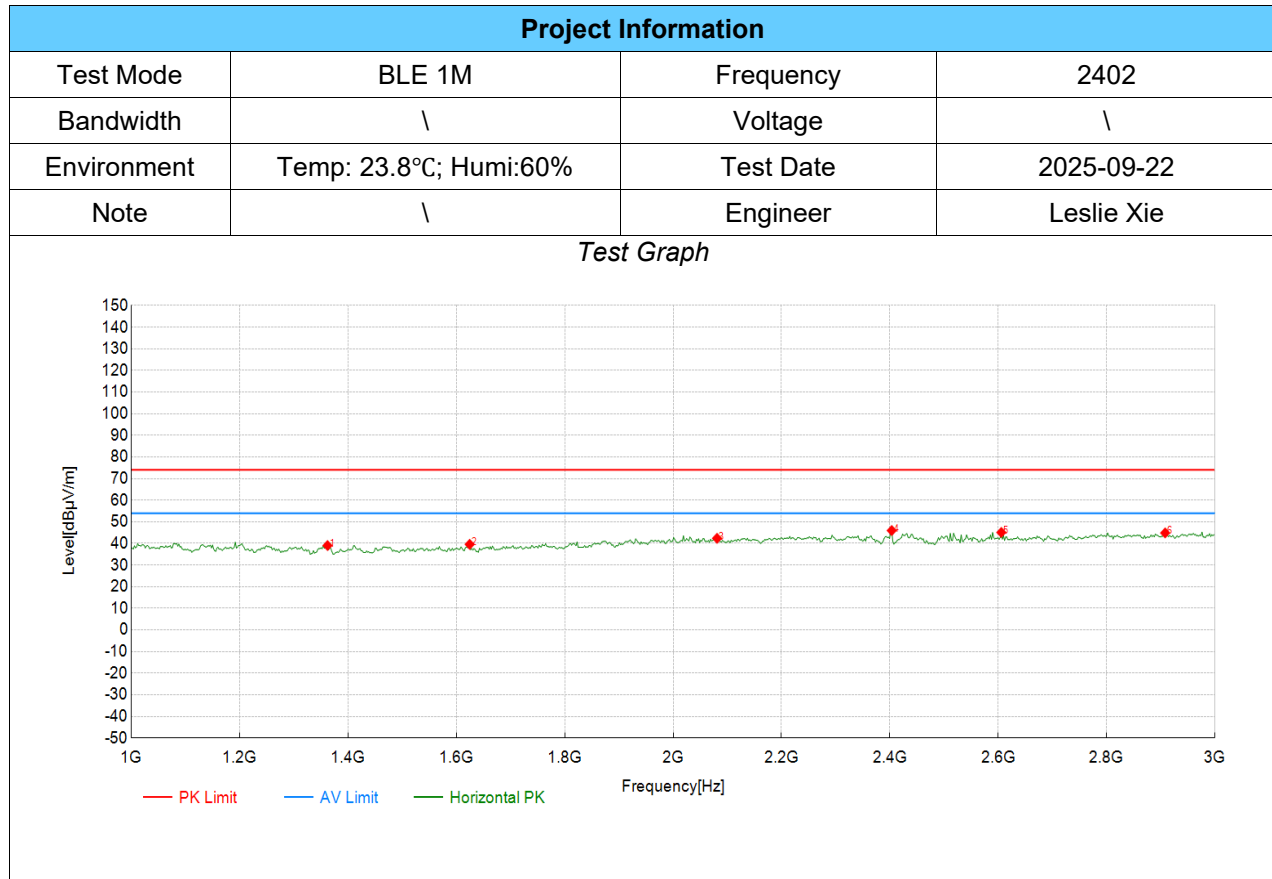

PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1362.36	49.74	39.04	-10.70	74.00	34.96	PK	Horizontal	PASS
2	1624.62	49.29	39.58	-9.71	74.00	34.42	PK	Horizontal	PASS
3	2081.08	48.30	42.38	-5.92	74.00	31.62	PK	Horizontal	PASS
4	2402.00	50.81	45.97	-4.84	/	/	PK	Horizontal	fundamental
5	2605.61	49.65	45.09	-4.56	74.00	28.91	PK	Horizontal	PASS
6	2907.91	48.36	44.86	-3.50	74.00	29.14	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

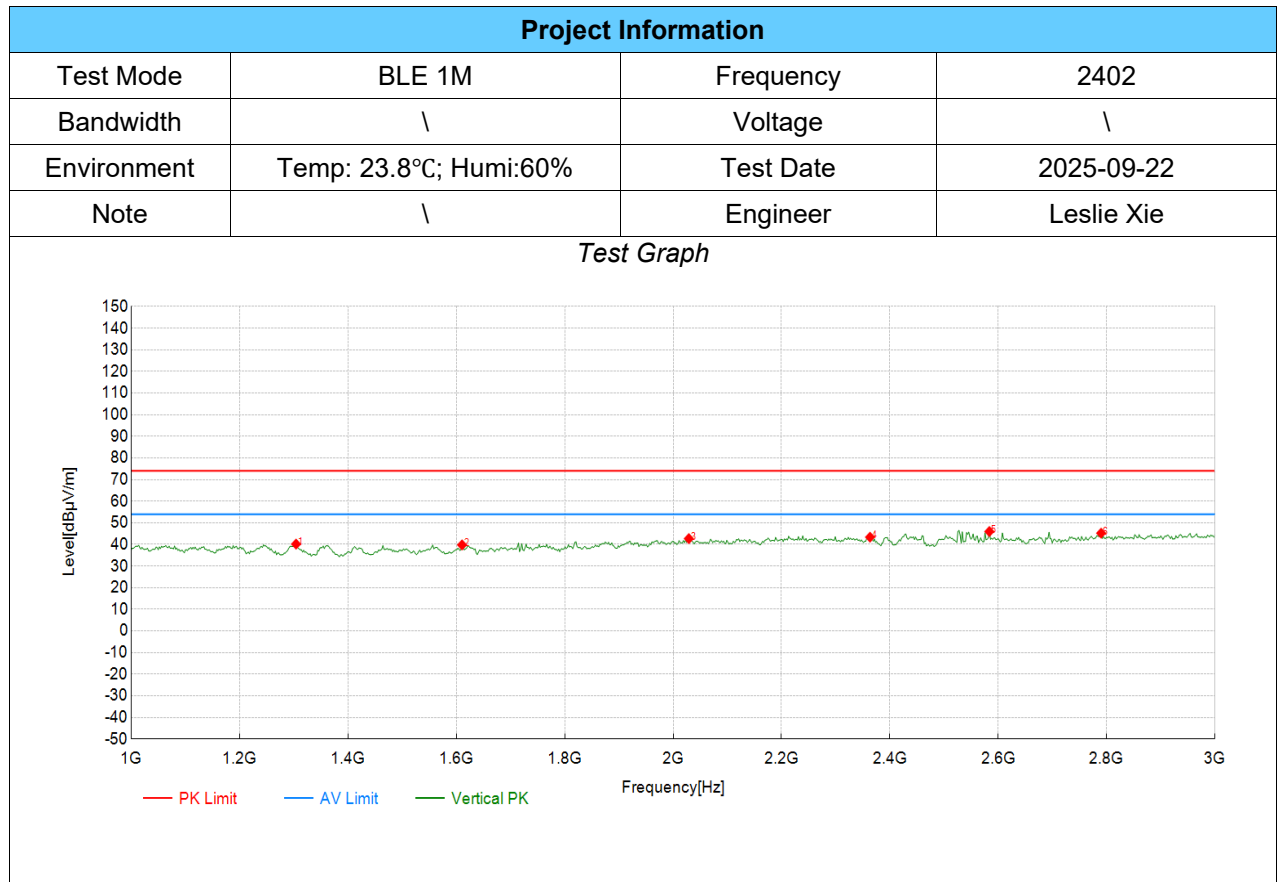

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1304.30	50.81	40.16	-10.65	74.00	33.84	PK	Vertical	PASS
2	1610.61	49.62	39.78	-9.84	74.00	34.22	PK	Vertical	PASS
3	2029.03	48.57	42.70	-5.87	74.00	31.30	PK	Vertical	PASS
4	2363.36	48.21	43.36	-4.85	74.00	30.64	PK	Vertical	PASS
5	2583.58	50.59	45.98	-4.61	74.00	28.02	PK	Vertical	PASS
6	2789.79	48.98	45.21	-3.77	74.00	28.79	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

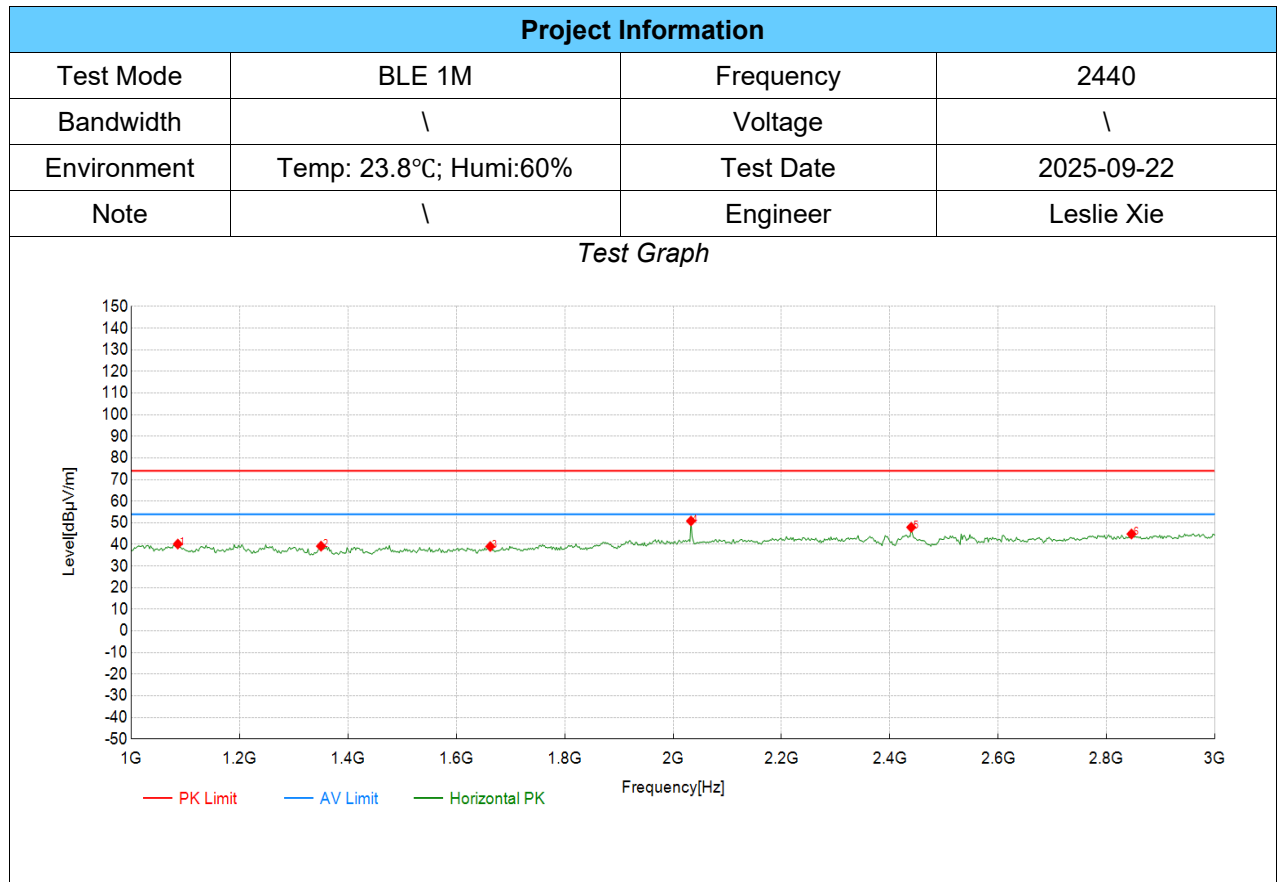

PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1086.09	50.81	40.18	-10.63	74.00	33.82	PK	Horizontal	PASS
2	1350.35	49.87	39.19	-10.68	74.00	34.81	PK	Horizontal	PASS
3	1662.66	48.45	39.05	-9.40	74.00	34.95	PK	Horizontal	PASS
4	2033.03	56.72	50.85	-5.87	74.00	23.15	PK	Horizontal	PASS
5	2440.00	52.74	47.93	-4.81	/	/	PK	Horizontal	fundamental
6	2845.85	48.47	44.84	-3.63	74.00	29.16	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level


TX Radiated Test Result

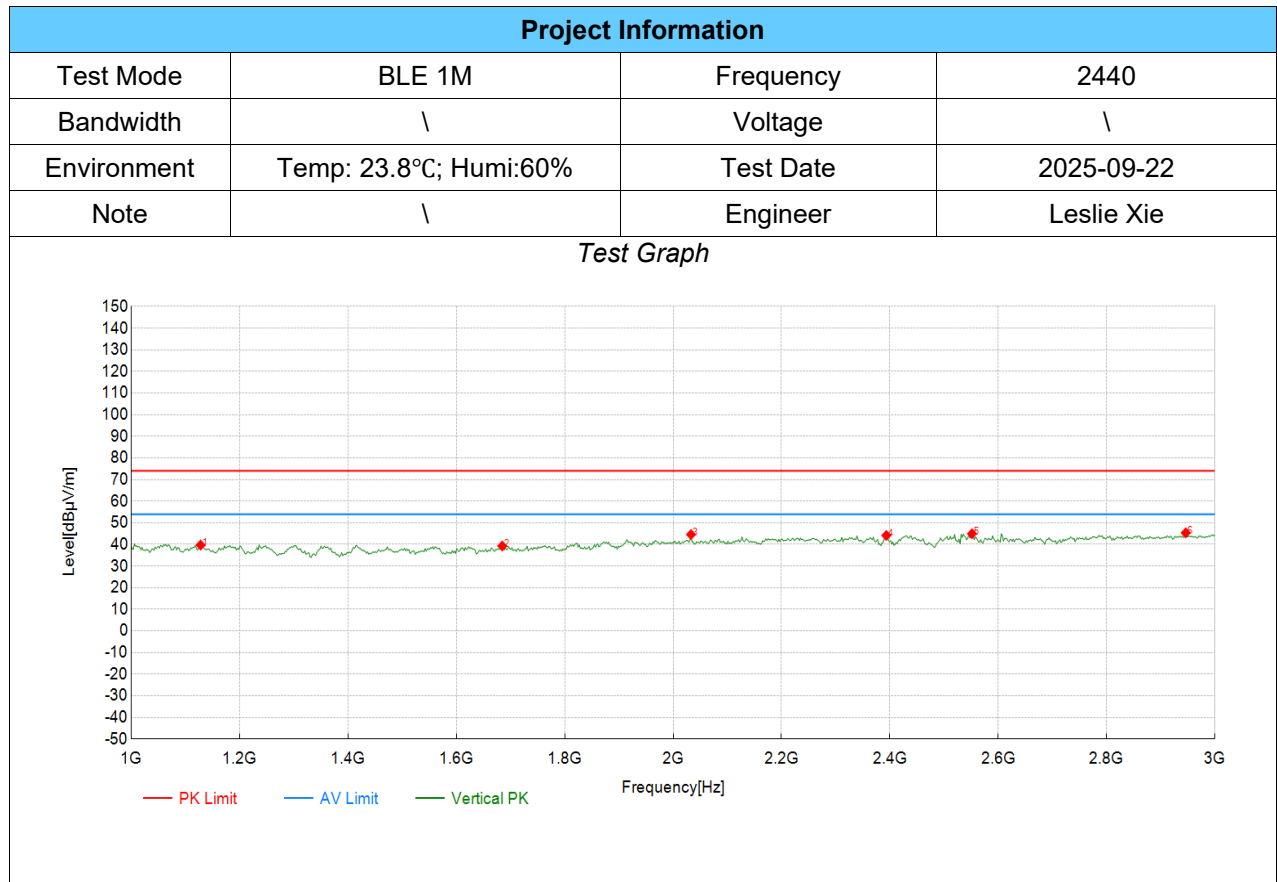

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1128.13	50.25	39.72	-10.53	74.00	34.28	PK	Vertical	PASS
2	1684.68	48.50	39.29	-9.21	74.00	34.71	PK	Vertical	PASS
3	2033.03	50.48	44.61	-5.87	74.00	29.39	PK	Vertical	PASS
4	2393.39	49.00	44.16	-4.84	74.00	29.84	PK	Vertical	PASS
5	2551.55	49.66	44.98	-4.68	74.00	29.02	PK	Vertical	PASS
6	2945.95	48.57	45.38	-3.19	74.00	28.62	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level


TX Radiated Test Result

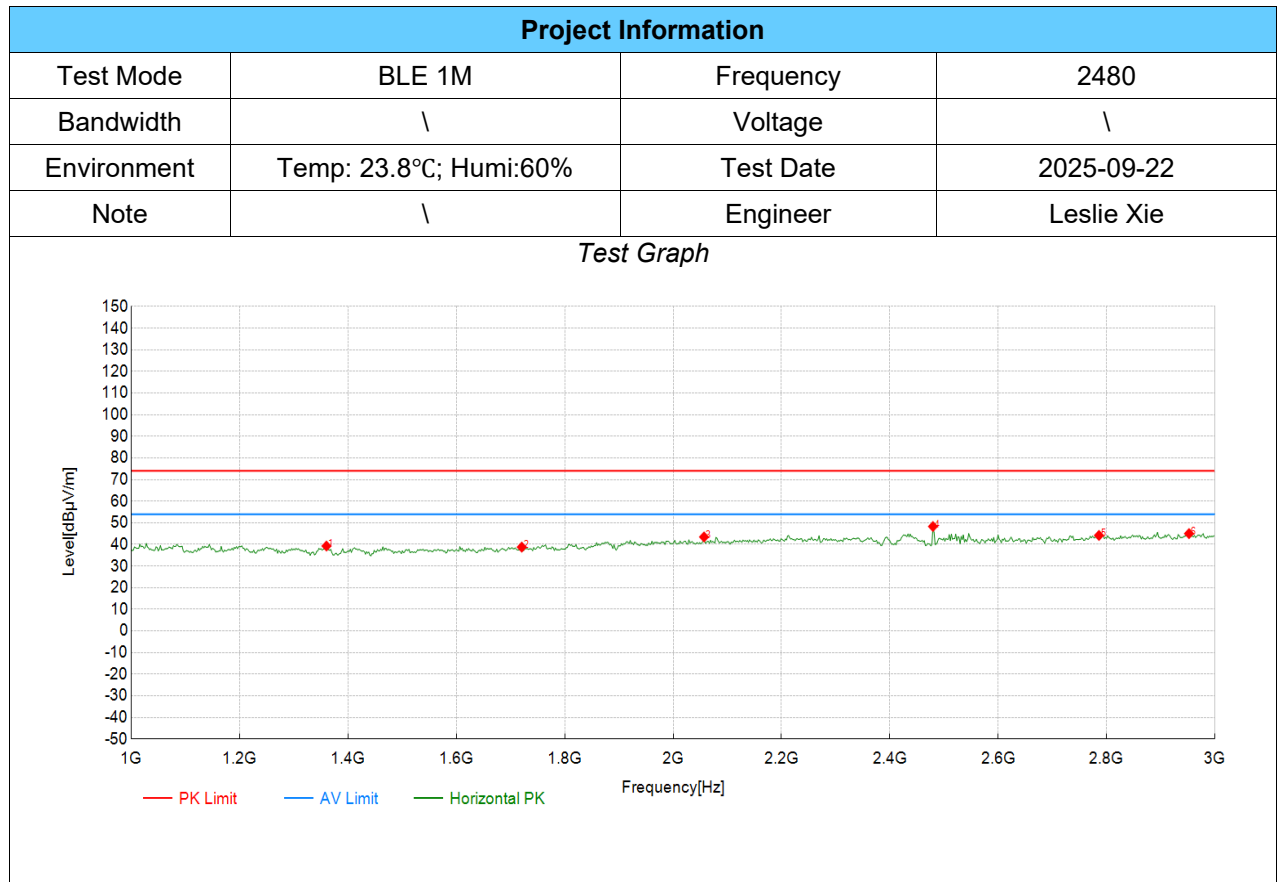

PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1360.36	49.95	39.26	-10.69	74.00	34.74	PK	Horizontal	PASS
2	1720.72	47.75	38.78	-8.97	74.00	35.22	PK	Horizontal	PASS
3	2057.06	49.36	43.46	-5.90	74.00	30.54	PK	Horizontal	PASS
4	2480.00	53.10	48.30	-4.80	/	/	PK	Horizontal	fundamental
5	2785.79	47.97	44.17	-3.80	74.00	29.83	PK	Horizontal	PASS
6	2951.95	48.14	45.00	-3.14	74.00	29.00	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

TX Radiated Test Result

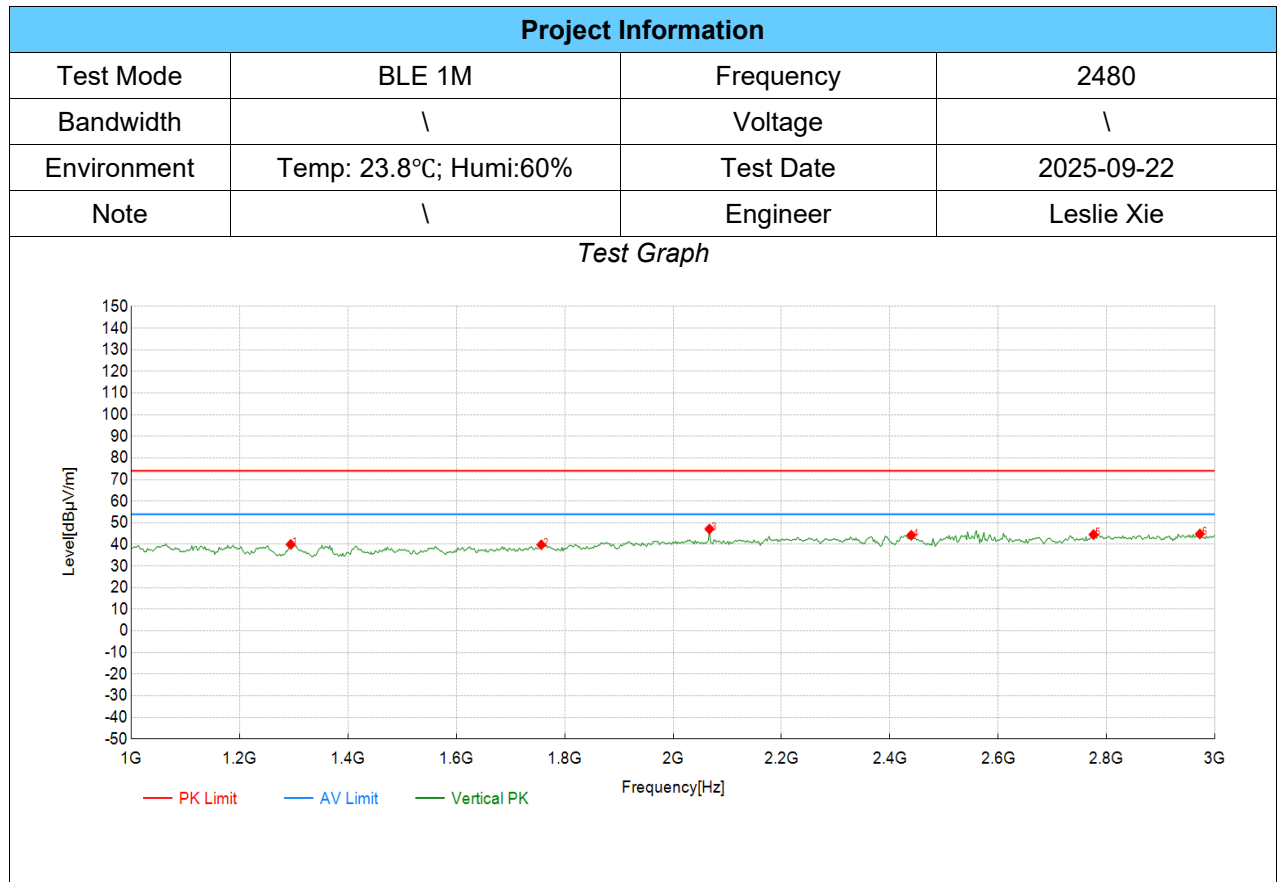


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1294.29	50.63	40.01	-10.62	74.00	33.99	PK	Vertical	PASS
2	1756.76	48.61	39.84	-8.77	74.00	34.16	PK	Vertical	PASS
3	2067.07	53.02	47.11	-5.91	74.00	26.89	PK	Vertical	PASS
4	2439.44	49.03	44.22	-4.81	74.00	29.78	PK	Vertical	PASS
5	2775.78	48.44	44.56	-3.88	74.00	29.44	PK	Vertical	PASS
6	2971.97	47.81	44.84	-2.97	74.00	29.16	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

8.5. SPURIOUS EMISSIONS(3 GHZ~18 GHZ) – ANT1


TX Radiated Test Result

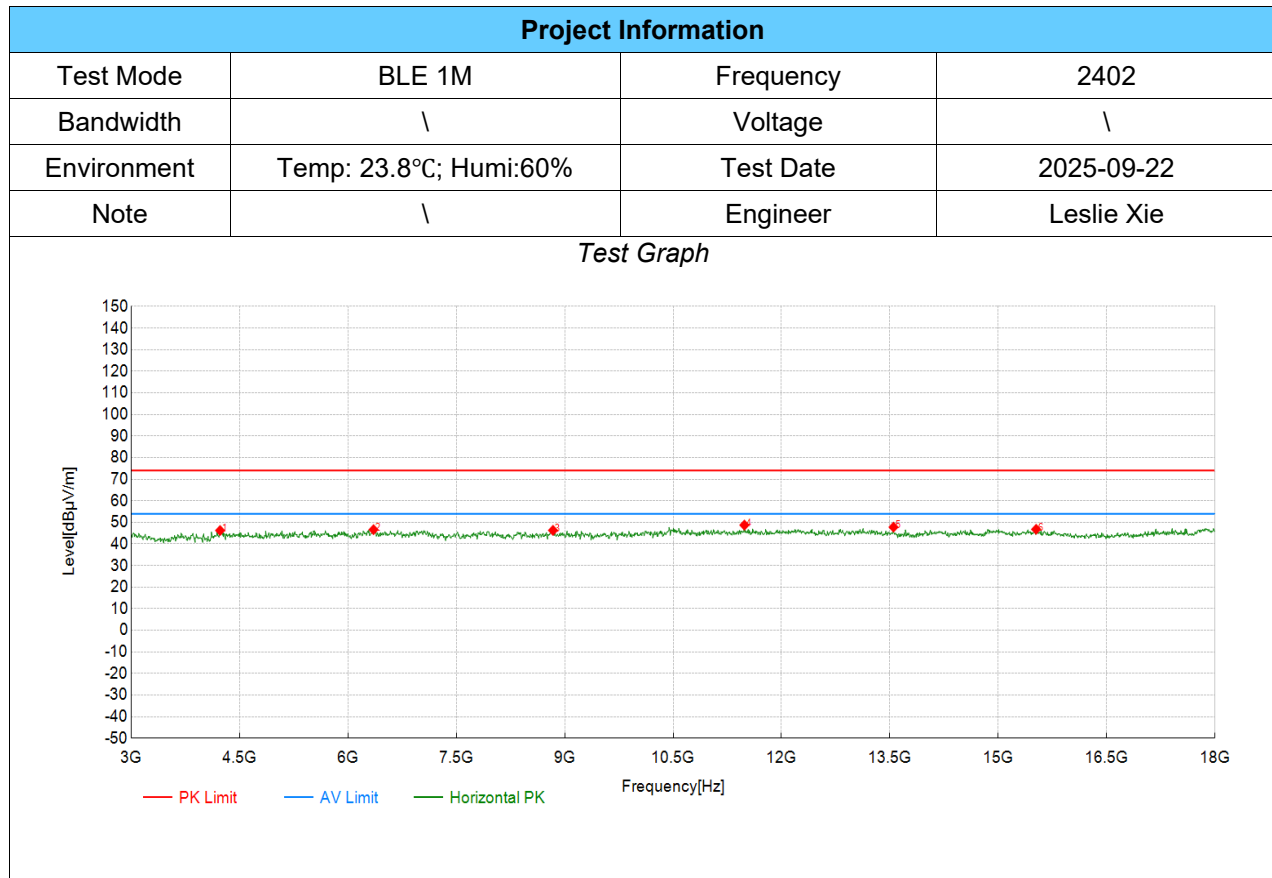

PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4230.62	45.89	46.24	0.35	74.00	27.76	PK	Horizontal	PASS
2	6354.18	43.08	46.62	3.54	74.00	27.38	PK	Horizontal	PASS
3	8837.92	39.78	46.29	6.51	74.00	27.71	PK	Horizontal	PASS
4	11486.74	39.16	48.75	9.59	74.00	25.25	PK	Horizontal	PASS
5	13550.28	36.32	47.80	11.48	74.00	26.20	PK	Horizontal	PASS
6	15523.76	32.04	46.80	14.76	74.00	27.20	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level


TX Radiated Test Result

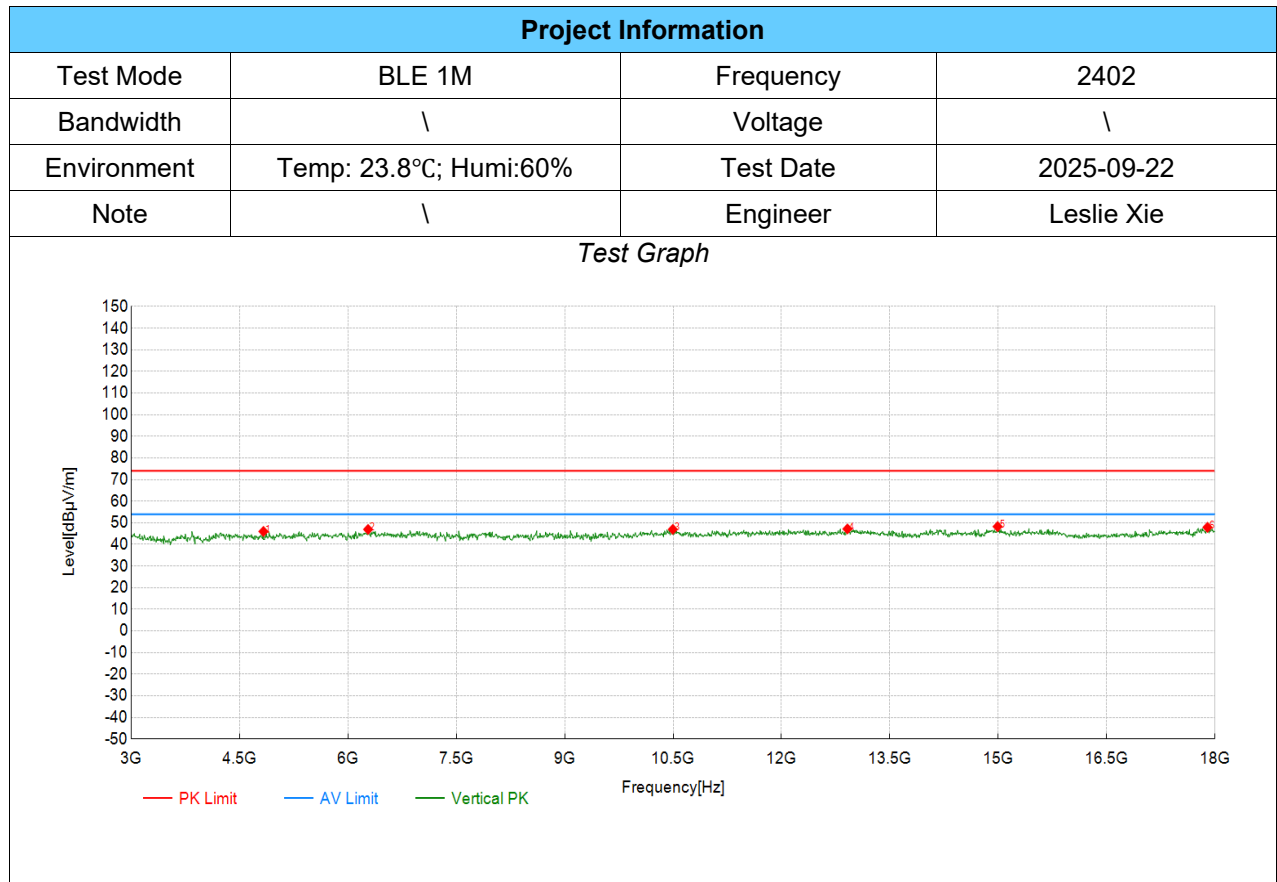

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4830.92	46.02	46.00	-0.02	74.00	28.00	PK	Vertical	PASS
2	6279.14	43.11	46.94	3.83	74.00	27.06	PK	Vertical	PASS
3	10496.25	38.88	46.97	8.09	74.00	27.03	PK	Vertical	PASS
4	12912.46	35.62	47.17	11.55	74.00	26.83	PK	Vertical	PASS
5	14991.00	34.61	48.25	13.64	74.00	25.75	PK	Vertical	PASS
6	17894.95	29.49	47.90	18.41	74.00	26.10	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

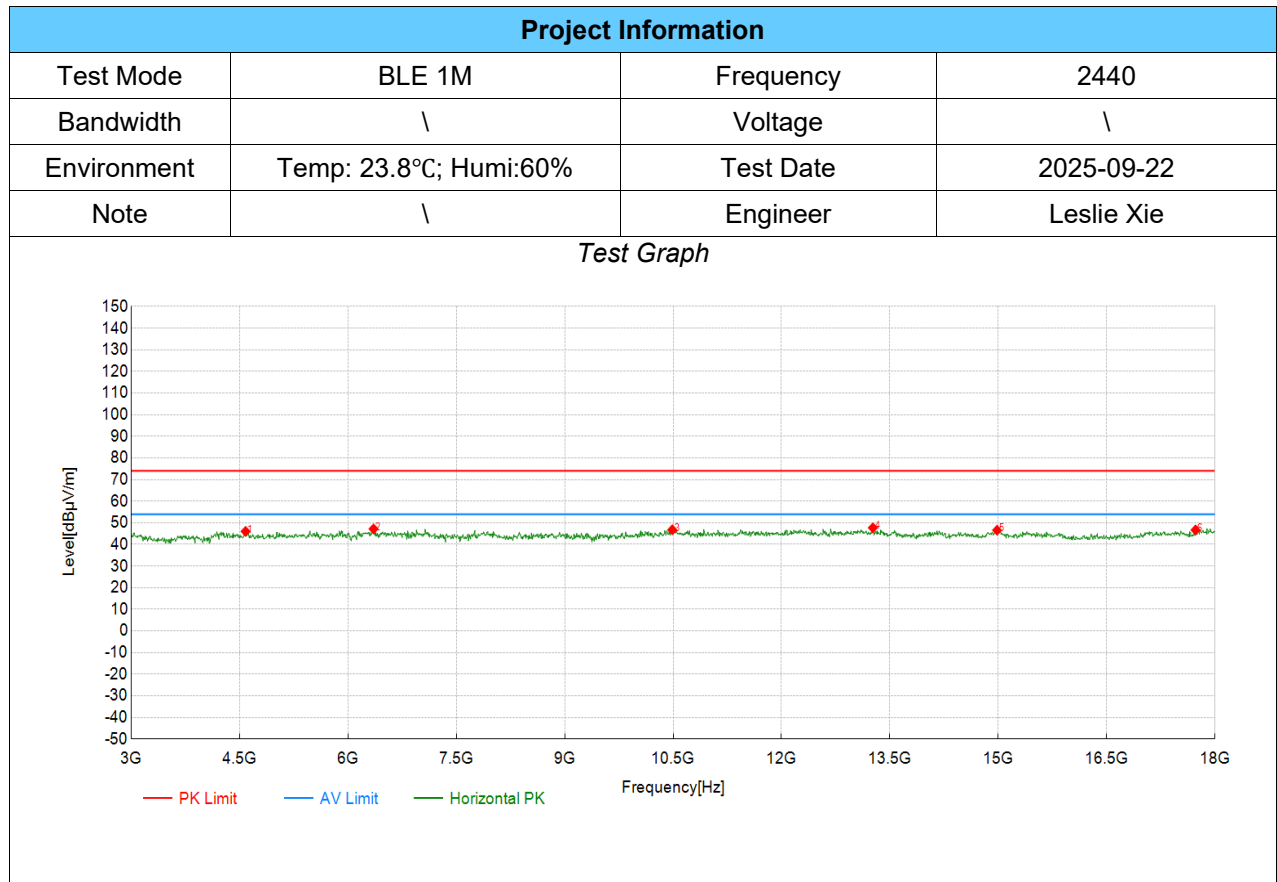

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4583.29	46.43	46.05	-0.38	74.00	27.95	PK	Horizontal	PASS
2	6354.18	43.66	47.20	3.54	74.00	26.80	PK	Horizontal	PASS
3	10488.74	38.71	46.79	8.08	74.00	27.21	PK	Horizontal	PASS
4	13265.13	36.13	47.70	11.57	74.00	26.30	PK	Horizontal	PASS
5	14983.49	32.92	46.57	13.65	74.00	27.43	PK	Horizontal	PASS
6	17729.86	29.49	46.69	17.20	74.00	27.31	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
 (2) Margin = Limit - Level


TX Radiated Test Result

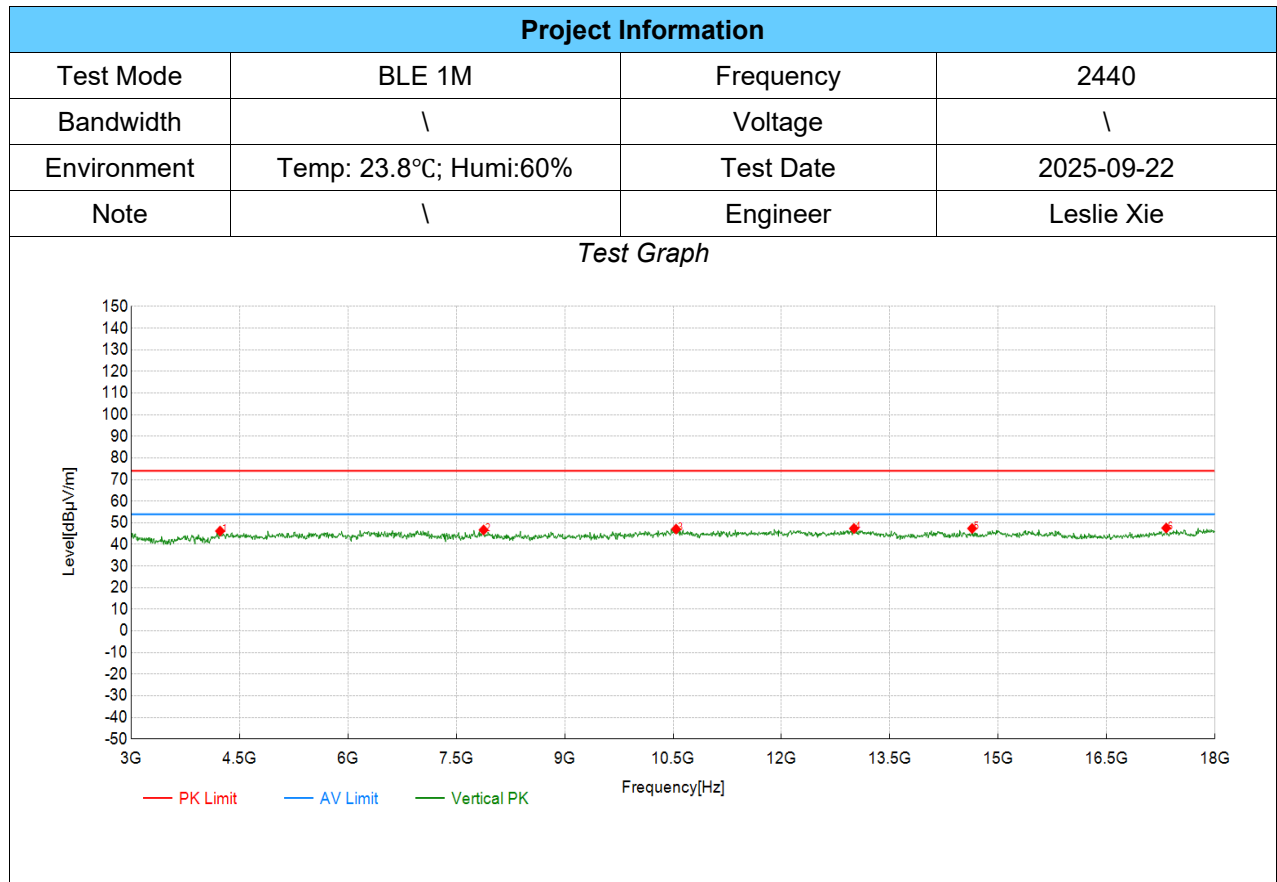

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4230.62	45.82	46.17	0.35	74.00	27.83	PK	Vertical	PASS
2	7877.44	40.92	46.68	5.76	74.00	27.32	PK	Vertical	PASS
3	10541.27	39.02	47.10	8.08	74.00	26.90	PK	Vertical	PASS
4	13002.50	35.52	47.37	11.85	74.00	26.63	PK	Vertical	PASS
5	14638.32	34.09	47.38	13.29	74.00	26.62	PK	Vertical	PASS
6	17324.66	29.90	47.60	17.70	74.00	26.40	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

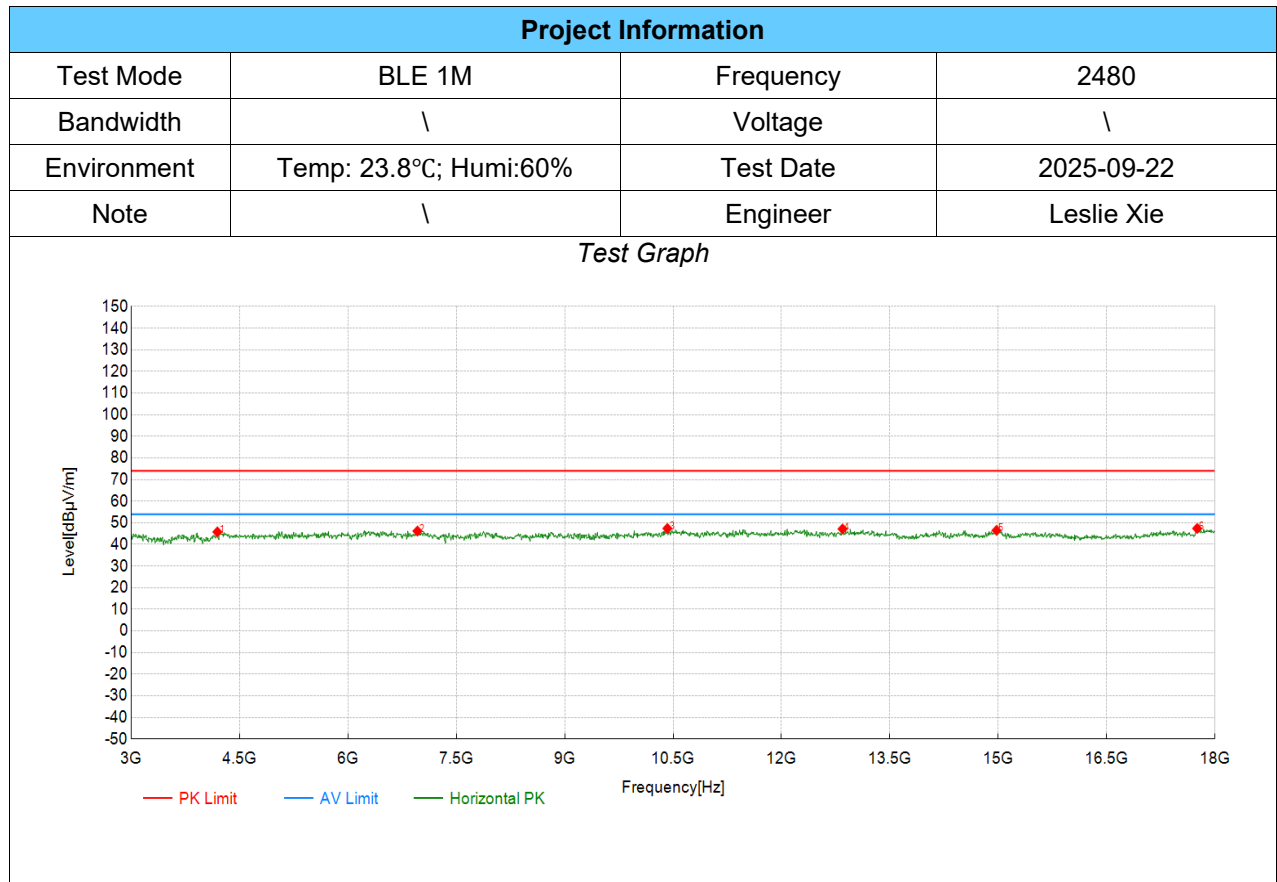

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4193.10	45.43	45.80	0.37	74.00	28.20	PK	Horizontal	PASS
2	6961.98	41.20	46.19	4.99	74.00	27.81	PK	Horizontal	PASS
3	10421.21	39.34	47.39	8.05	74.00	26.61	PK	Horizontal	PASS
4	12844.92	35.85	47.18	11.33	74.00	26.82	PK	Horizontal	PASS
5	14975.99	32.84	46.50	13.66	74.00	27.50	PK	Horizontal	PASS
6	17752.38	29.57	47.41	17.84	74.00	26.59	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

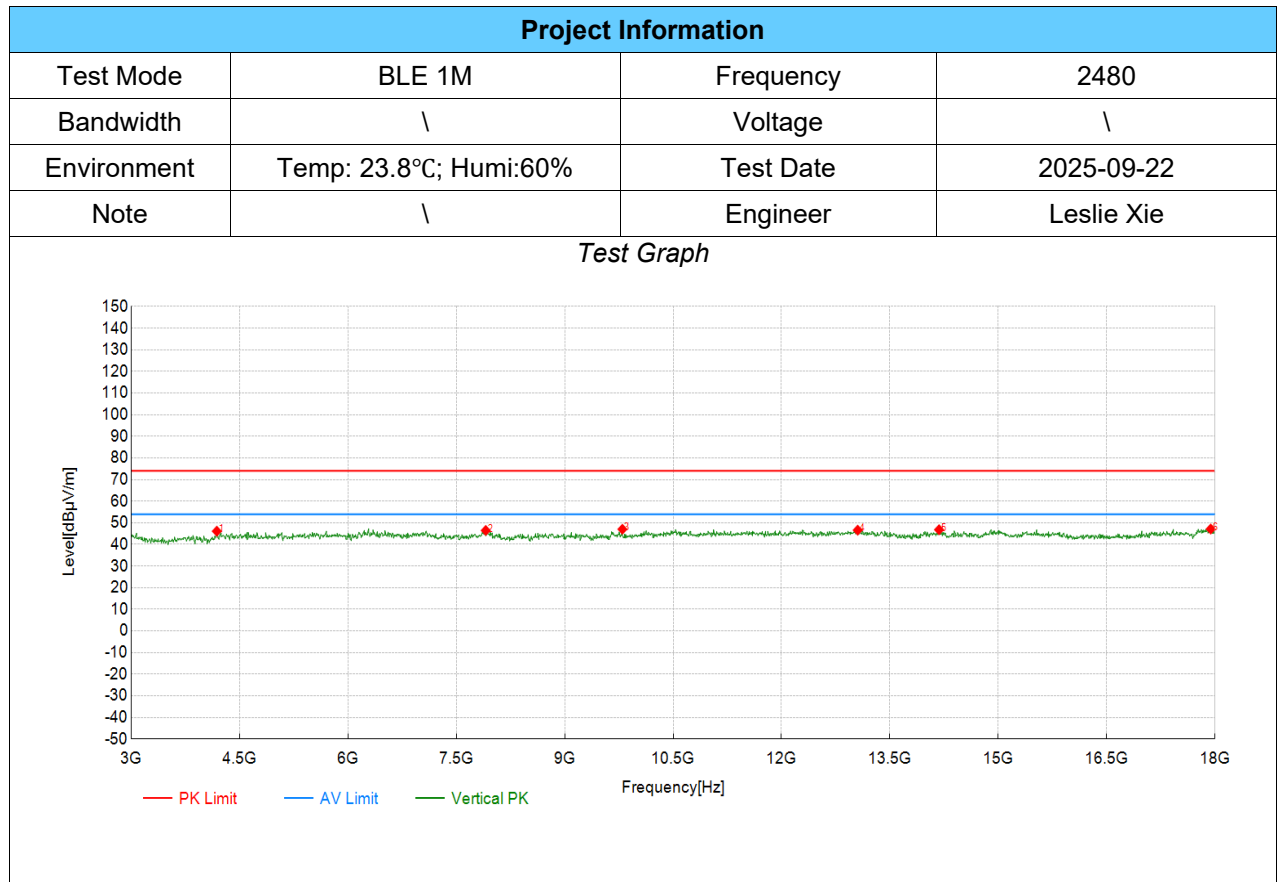

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4185.59	45.92	46.12	0.20	74.00	27.88	PK	Vertical	PASS
2	7907.45	40.44	46.46	6.02	74.00	27.54	PK	Vertical	PASS
3	9798.40	39.98	47.03	7.05	74.00	26.97	PK	Vertical	PASS
4	13055.03	34.83	46.59	11.76	74.00	27.41	PK	Vertical	PASS
5	14180.59	34.10	46.80	12.70	74.00	27.20	PK	Vertical	PASS
6	17939.97	28.69	47.12	18.43	74.00	26.88	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level


TX Radiated Test Result

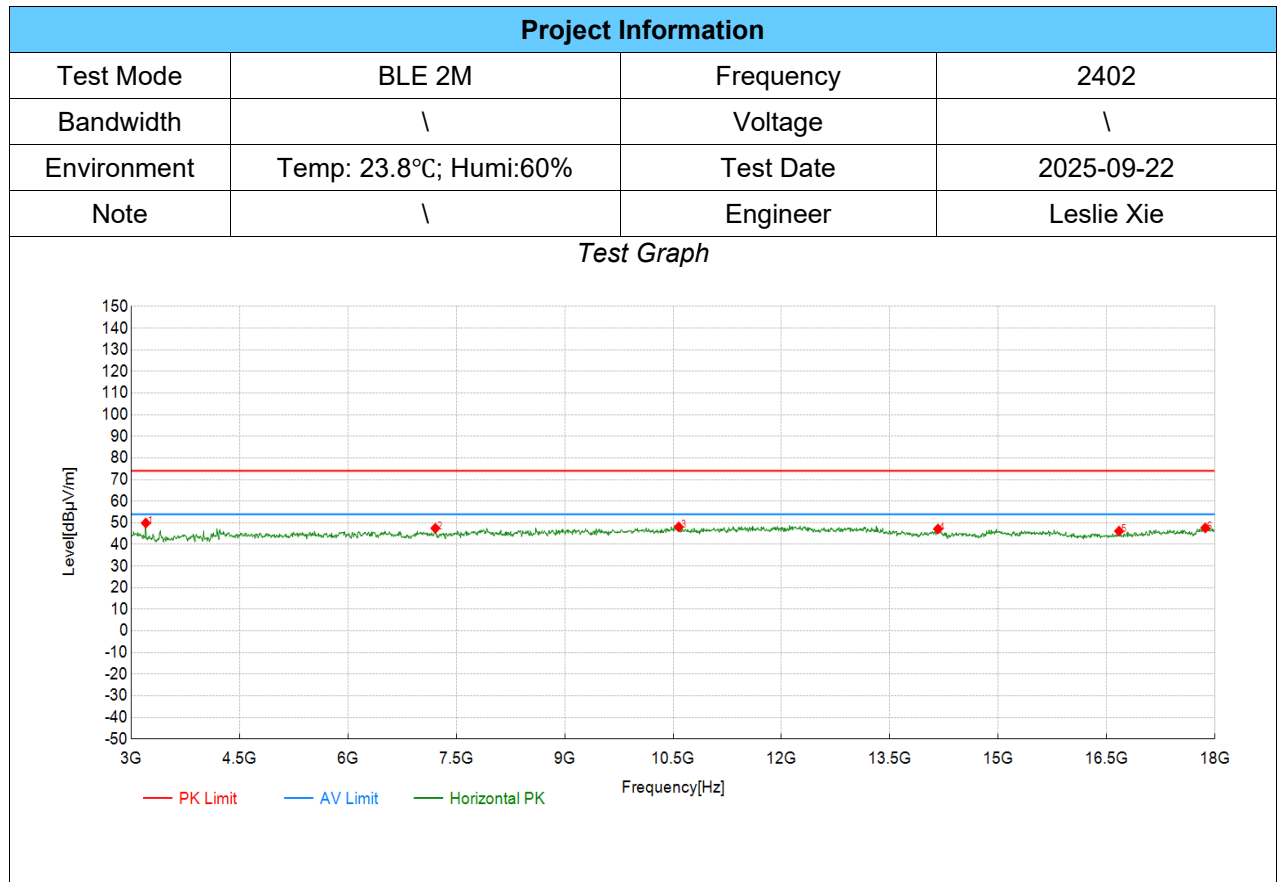

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3202.60	52.47	49.88	-2.59	74.00	24.12	PK	Horizontal	PASS
2	7209.60	43.21	47.48	4.27	74.00	26.52	PK	Horizontal	PASS
3	10578.79	40.00	48.09	8.09	74.00	25.91	PK	Horizontal	PASS
4	14165.58	34.49	47.15	12.66	74.00	26.85	PK	Horizontal	PASS
5	16671.84	29.64	46.17	16.53	74.00	27.83	PK	Horizontal	PASS
6	17864.93	29.21	47.61	18.40	74.00	26.39	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level


TX Radiated Test Result

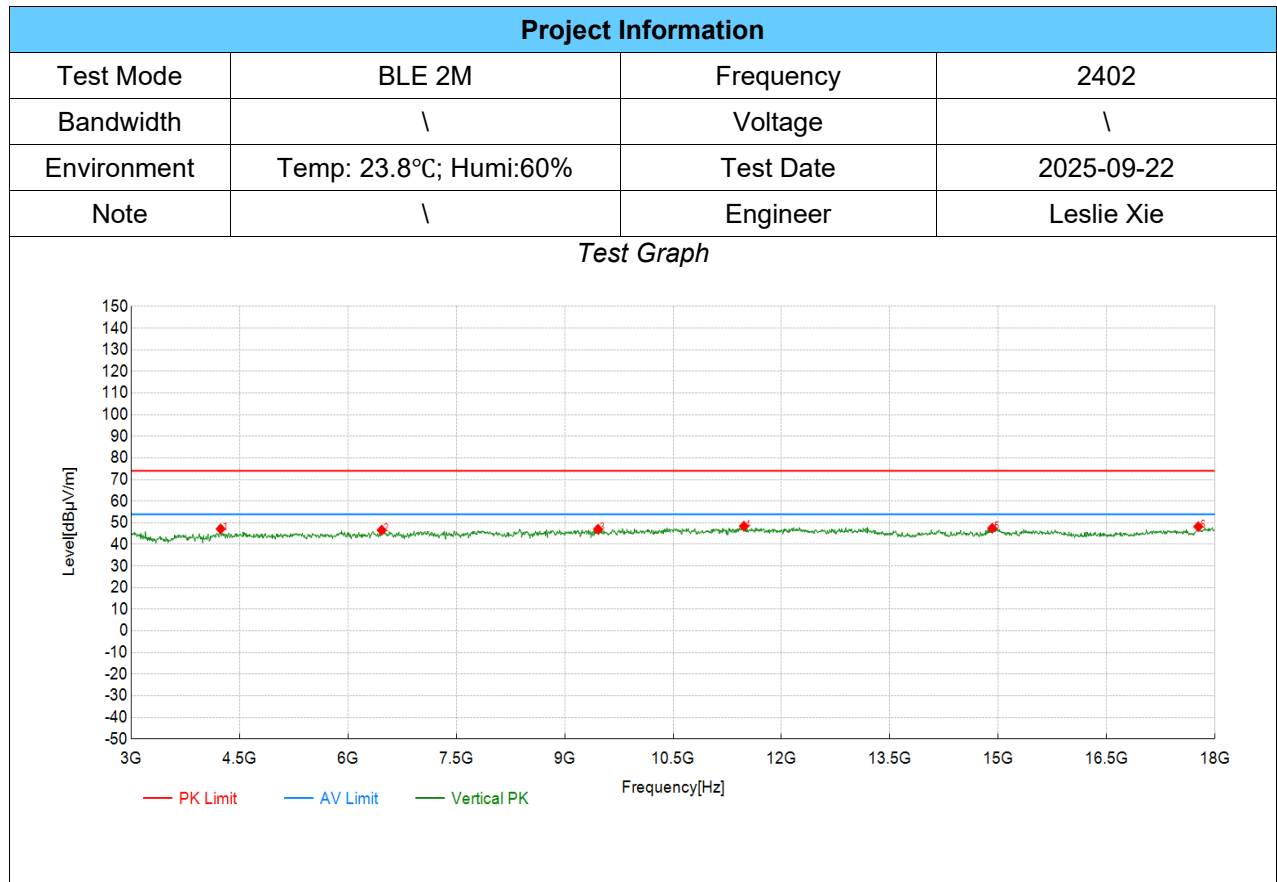

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4238.12	46.87	47.18	0.31	74.00	26.82	PK	Vertical	PASS
2	6466.73	43.22	46.60	3.38	74.00	27.40	PK	Vertical	PASS
3	9460.73	39.69	47.05	7.36	74.00	26.95	PK	Vertical	PASS
4	11479.24	38.88	48.44	9.56	74.00	25.56	PK	Vertical	PASS
5	14915.96	33.81	47.51	13.70	74.00	26.49	PK	Vertical	PASS
6	17767.38	29.22	48.22	19.00	74.00	25.78	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

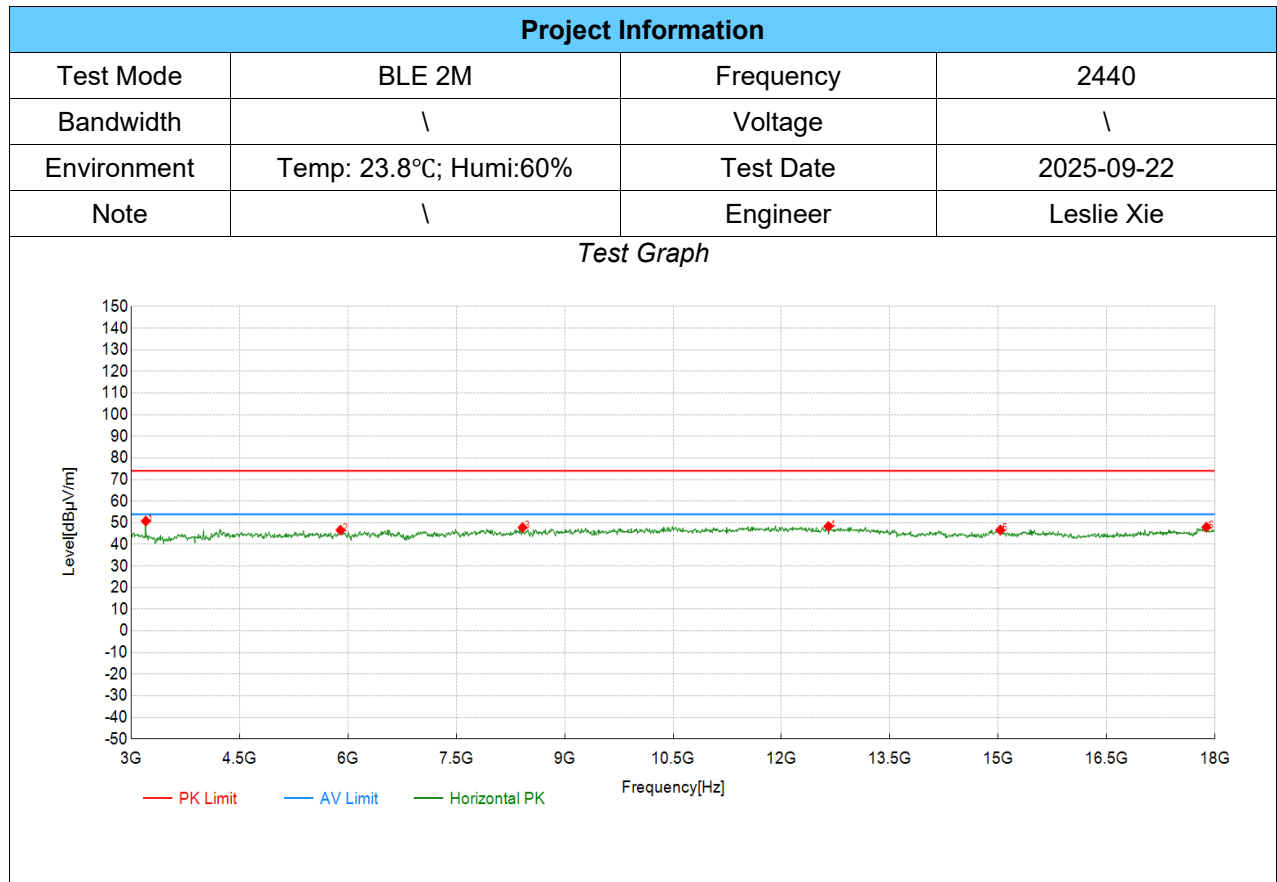

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3202.60	53.39	50.80	-2.59	74.00	23.20	PK	Horizontal	PASS
2	5896.45	43.99	46.60	2.61	74.00	27.40	PK	Horizontal	PASS
3	8417.71	41.21	47.86	6.65	74.00	26.14	PK	Horizontal	PASS
4	12649.82	37.34	48.34	11.00	74.00	25.66	PK	Horizontal	PASS
5	15028.51	33.01	46.67	13.66	74.00	27.33	PK	Horizontal	PASS
6	17879.94	29.57	47.98	18.41	74.00	26.02	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

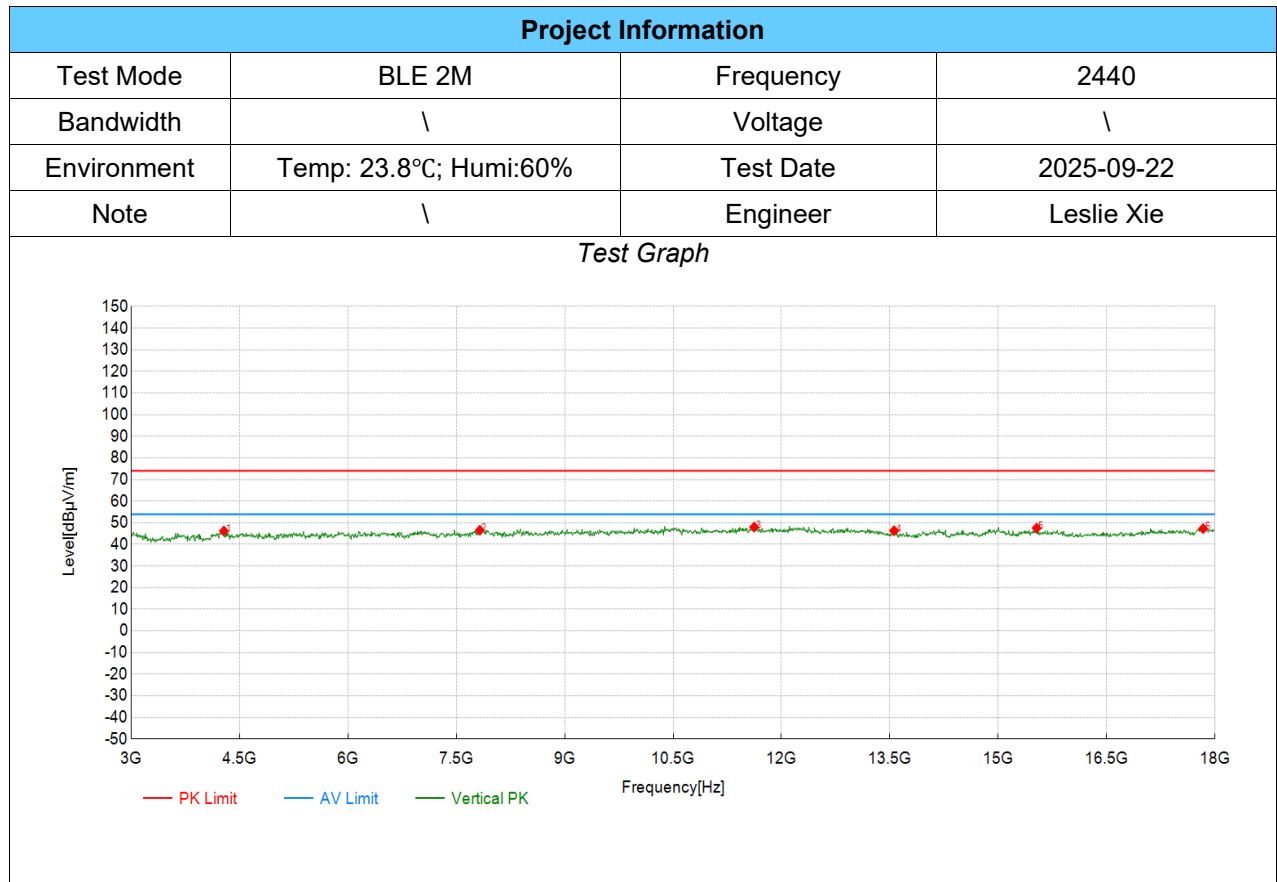

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4283.14	46.14	46.21	0.07	74.00	27.79	PK	Vertical	PASS
2	7824.91	41.48	46.57	5.09	74.00	27.43	PK	Vertical	PASS
3	11621.81	37.98	48.03	10.05	74.00	25.97	PK	Vertical	PASS
4	13557.78	34.84	46.32	11.48	74.00	27.68	PK	Vertical	PASS
5	15531.27	32.81	47.58	14.77	74.00	26.42	PK	Vertical	PASS
6	17834.92	28.92	47.32	18.40	74.00	26.68	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
 (2) Margin = Limit - Level


TX Radiated Test Result

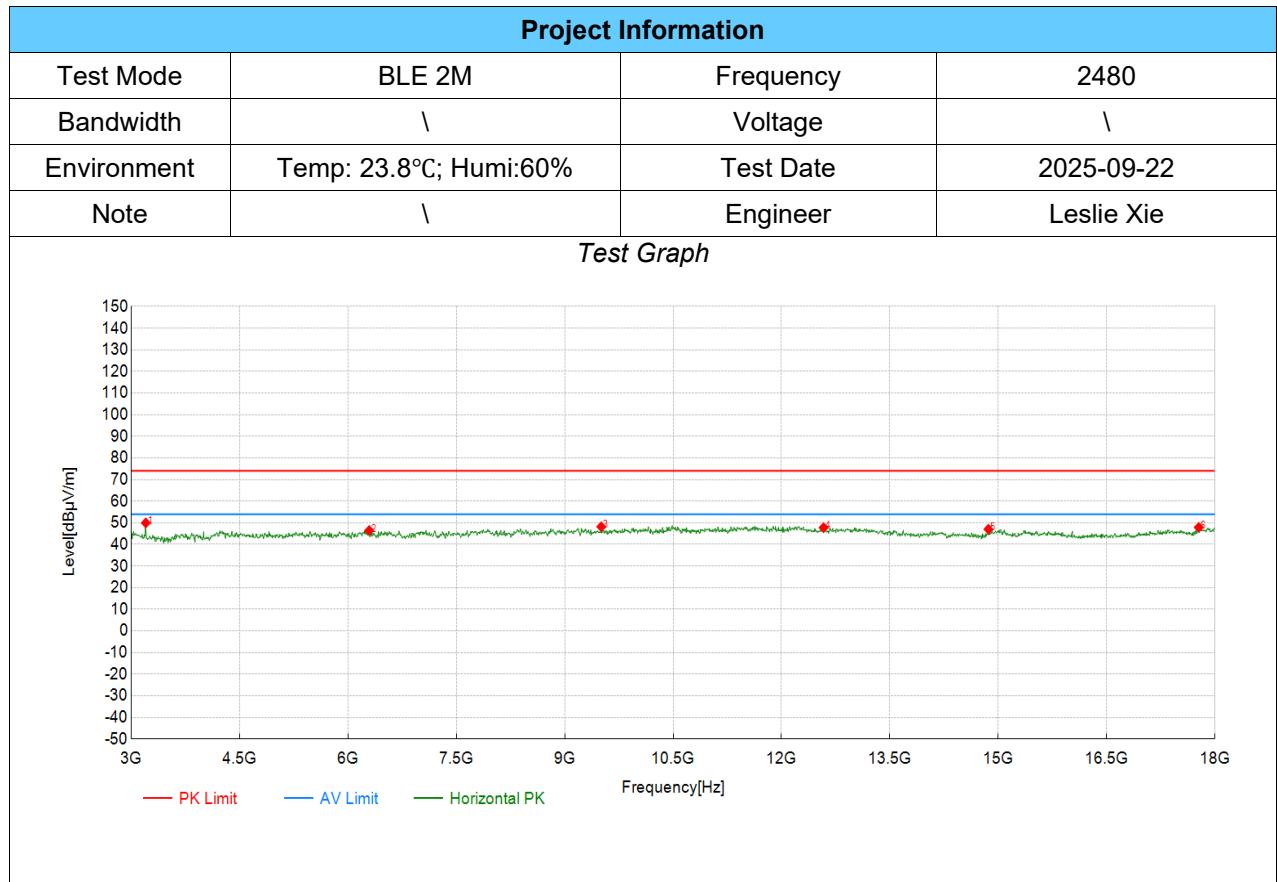

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3202.60	52.55	49.96	-2.59	74.00	24.04	PK	Horizontal	PASS
2	6294.15	42.51	46.42	3.91	74.00	27.58	PK	Horizontal	PASS
3	9505.75	40.74	48.18	7.44	74.00	25.82	PK	Horizontal	PASS
4	12582.29	36.85	47.75	10.90	74.00	26.25	PK	Horizontal	PASS
5	14863.43	33.31	47.05	13.74	74.00	26.95	PK	Horizontal	PASS
6	17774.89	28.81	47.88	19.07	74.00	26.12	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

TX Radiated Test Result

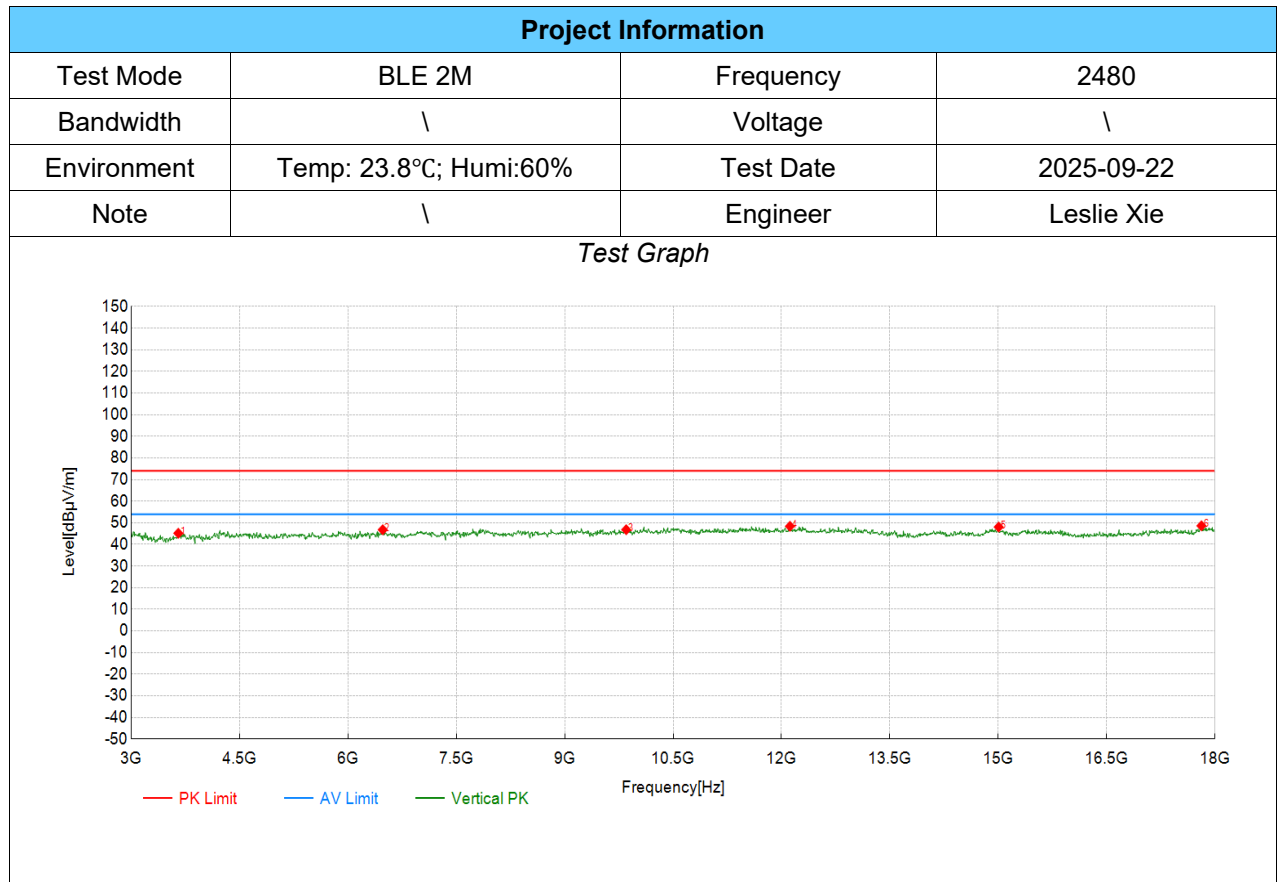


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3652.83	47.80	45.17	-2.63	74.00	28.83	PK	Vertical	PASS
2	6481.74	43.37	46.78	3.41	74.00	27.22	PK	Vertical	PASS
3	9850.93	39.70	46.82	7.12	74.00	27.18	PK	Vertical	PASS
4	12117.06	38.10	48.40	10.30	74.00	25.60	PK	Vertical	PASS
5	15006.00	34.42	48.06	13.64	74.00	25.94	PK	Vertical	PASS
6	17812.41	30.22	48.61	18.39	74.00	25.39	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

8.6. SPURIOUS EMISSIONS(3 GHZ~18 GHZ) – ANT2


TX Radiated Test Result

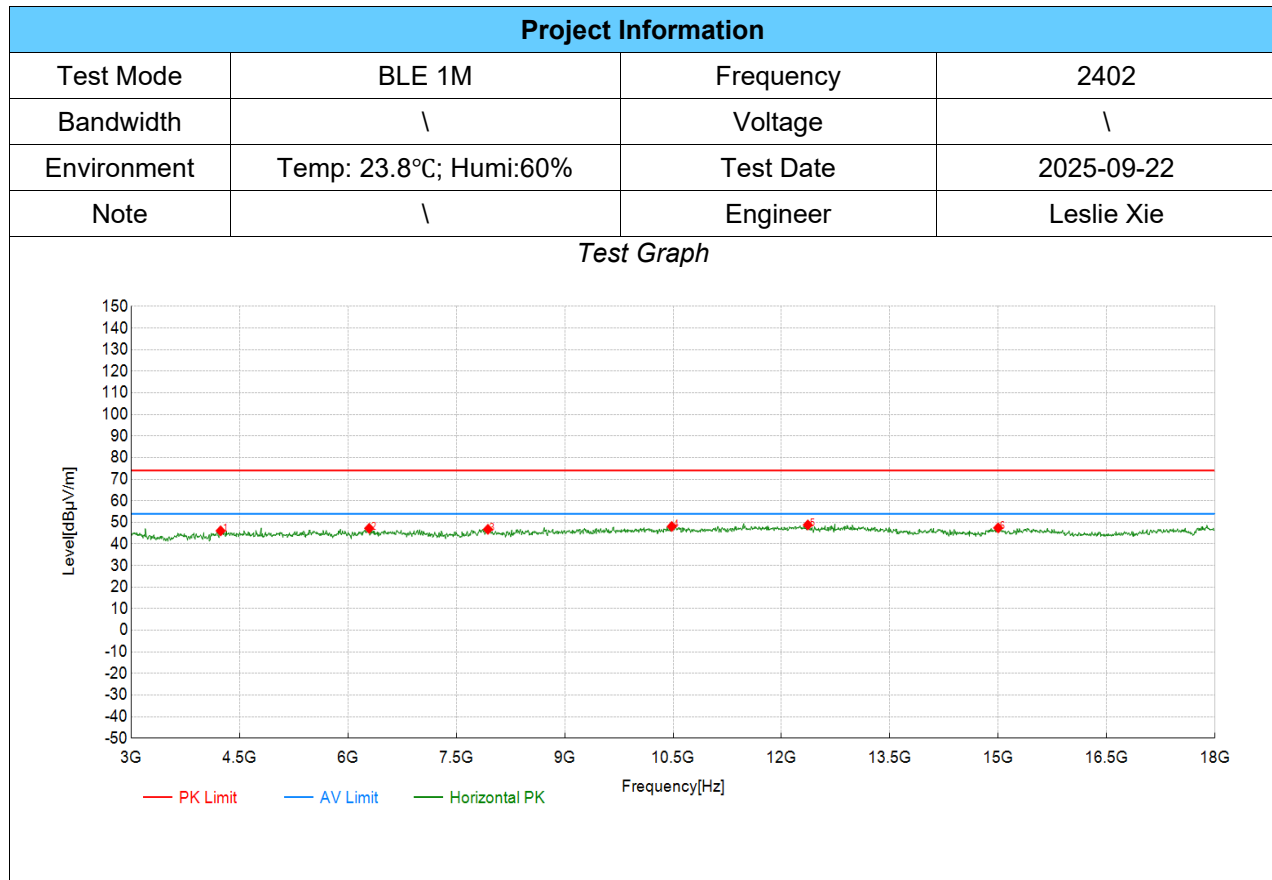

PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4238.12	45.77	46.08	0.31	74.00	27.92	PK	Horizontal	PASS
2	6294.15	43.32	47.23	3.91	74.00	26.77	PK	Horizontal	PASS
3	7937.47	40.83	46.79	5.96	74.00	27.21	PK	Horizontal	PASS
4	10481.24	40.03	48.11	8.08	74.00	25.89	PK	Horizontal	PASS
5	12364.68	38.34	48.81	10.47	74.00	25.19	PK	Horizontal	PASS
6	14998.50	33.82	47.46	13.64	74.00	26.54	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

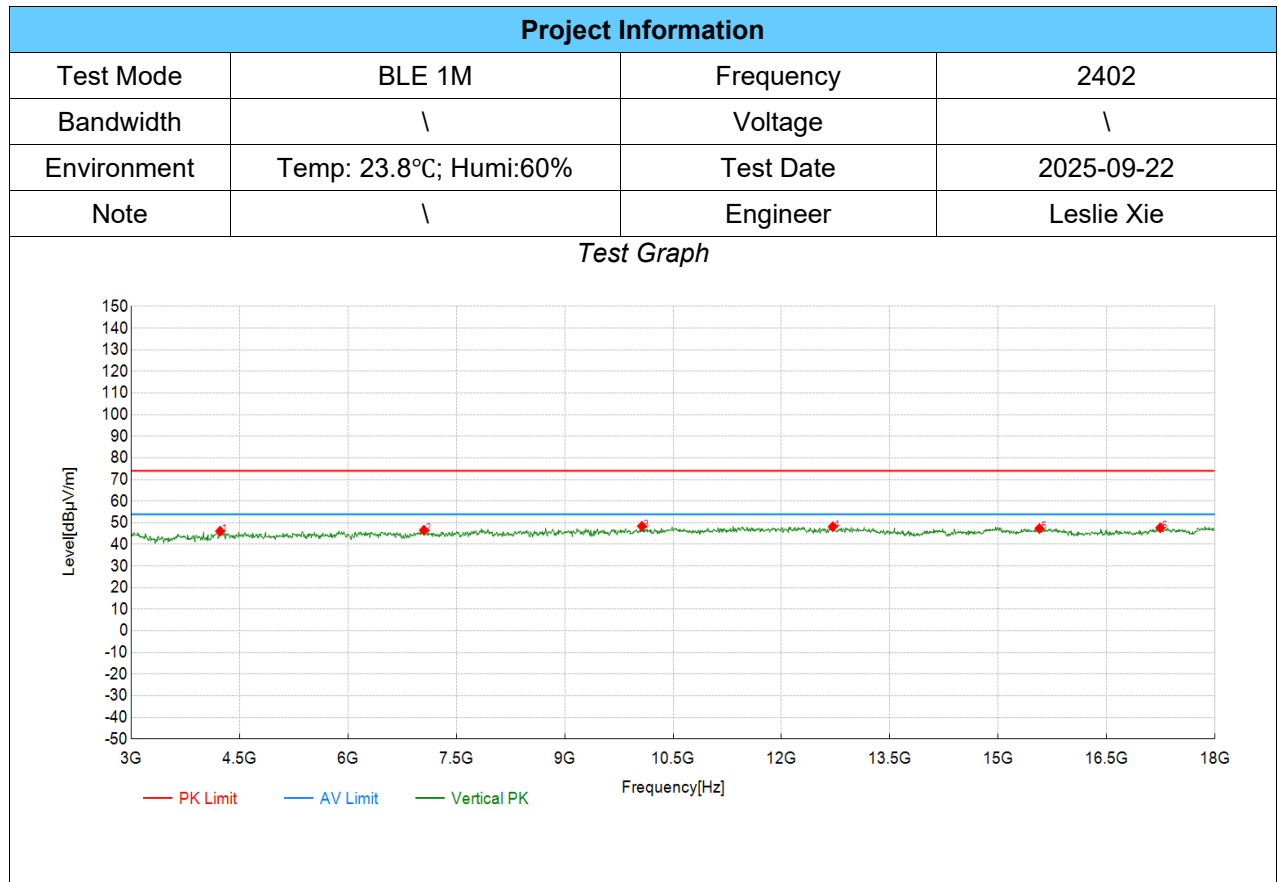

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4230.62	45.77	46.12	0.35	74.00	27.88	PK	Vertical	PASS
2	7052.03	41.47	46.58	5.11	74.00	27.42	PK	Vertical	PASS
3	10068.53	40.85	48.44	7.59	74.00	25.56	PK	Vertical	PASS
4	12709.85	37.15	48.22	11.07	74.00	25.78	PK	Vertical	PASS
5	15568.78	32.53	47.34	14.81	74.00	26.66	PK	Vertical	PASS
6	17242.12	30.07	47.69	17.62	74.00	26.31	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
 (2) Margin = Limit - Level


TX Radiated Test Result

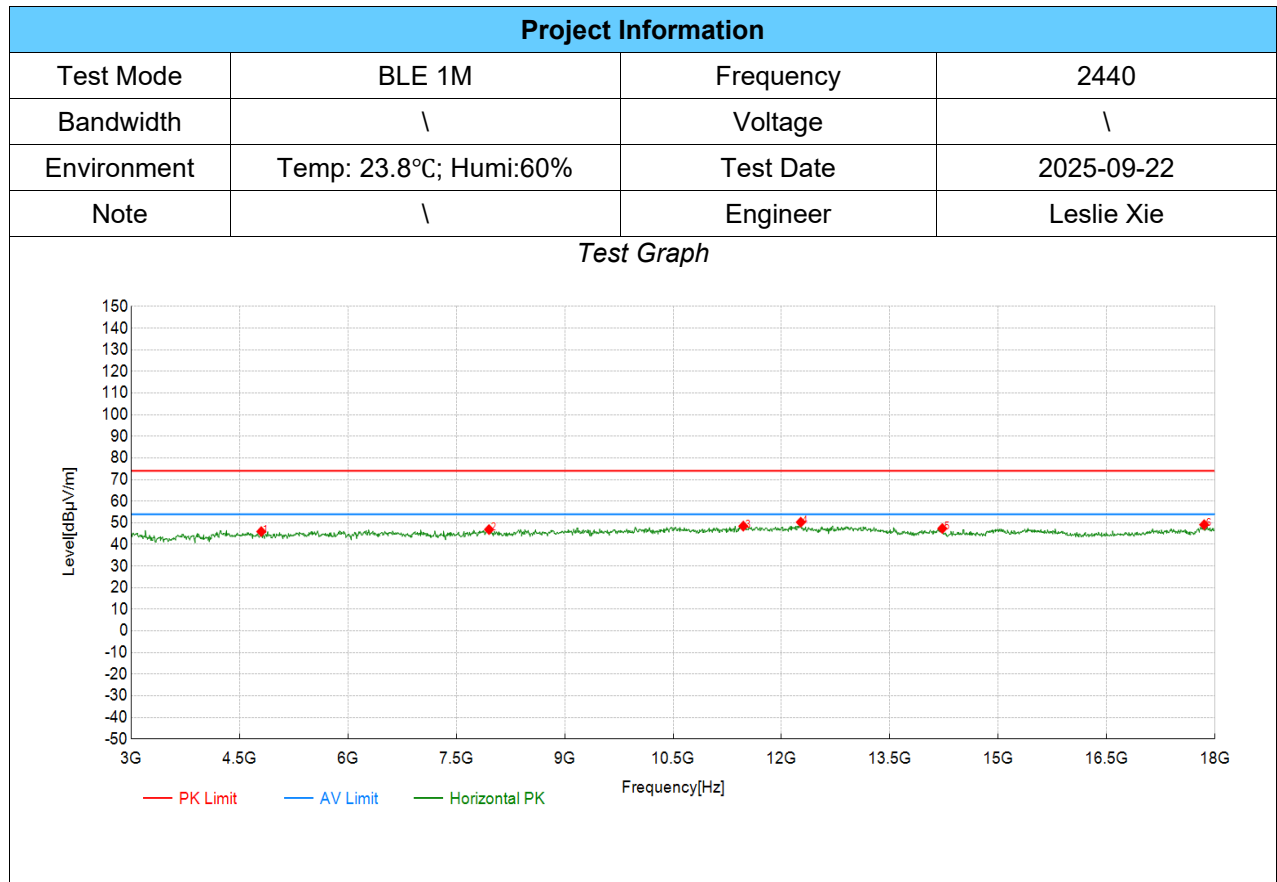

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4800.90	46.10	45.93	-0.17	74.00	28.07	PK	Horizontal	PASS
2	7952.48	40.96	46.88	5.92	74.00	27.12	PK	Horizontal	PASS
3	11471.74	38.95	48.48	9.53	74.00	25.52	PK	Horizontal	PASS
4	12267.13	39.83	50.27	10.44	74.00	23.73	PK	Horizontal	PASS
5	14225.61	34.65	47.38	12.73	74.00	26.62	PK	Horizontal	PASS
6	17849.92	30.74	49.14	18.40	74.00	24.86	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

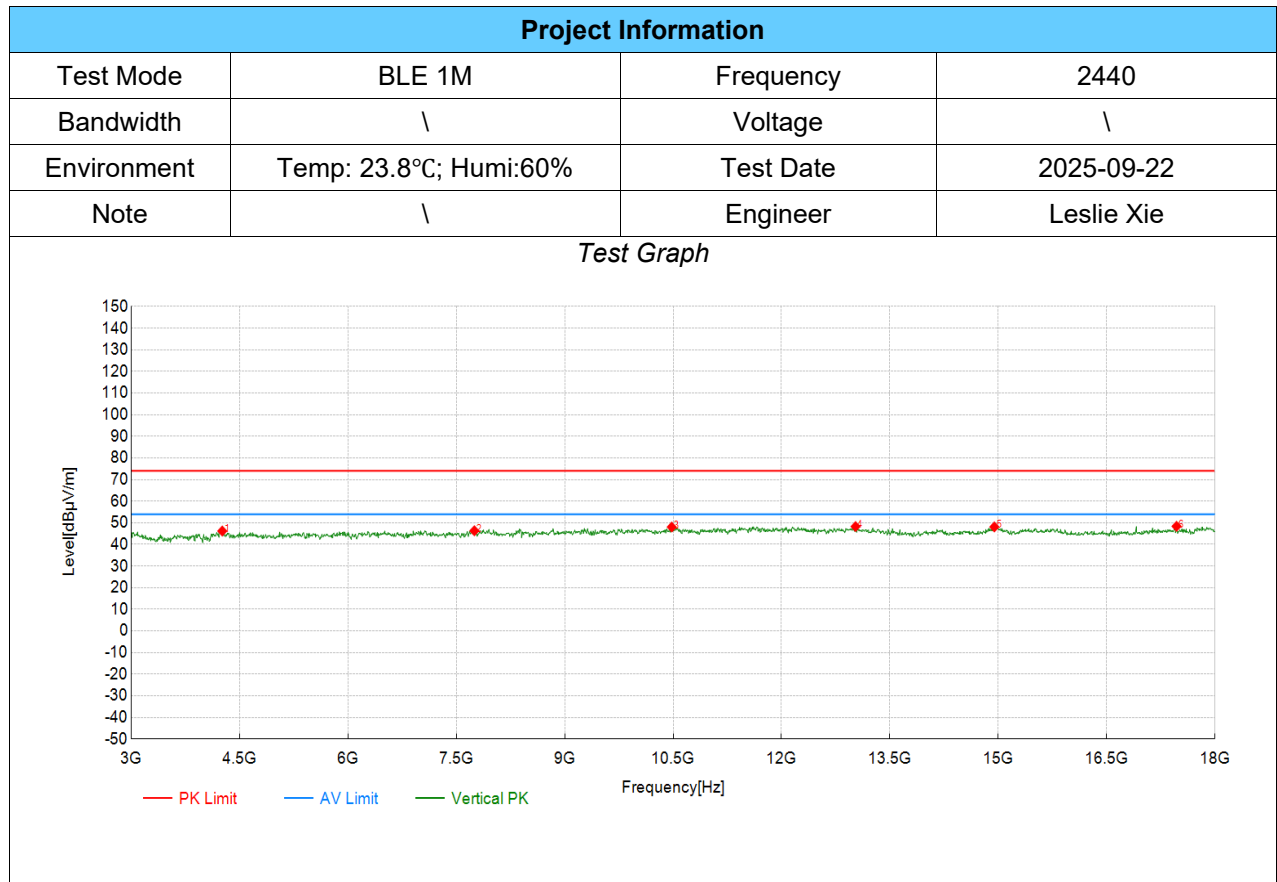

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4260.63	46.01	46.20	0.19	74.00	27.80	PK	Vertical	PASS
2	7749.87	41.45	46.32	4.87	74.00	27.68	PK	Vertical	PASS
3	10481.24	39.97	48.05	8.08	74.00	25.95	PK	Vertical	PASS
4	13025.01	36.47	48.28	11.81	74.00	25.72	PK	Vertical	PASS
5	14945.97	34.43	48.11	13.68	74.00	25.89	PK	Vertical	PASS
6	17467.23	30.74	48.39	17.65	74.00	25.61	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

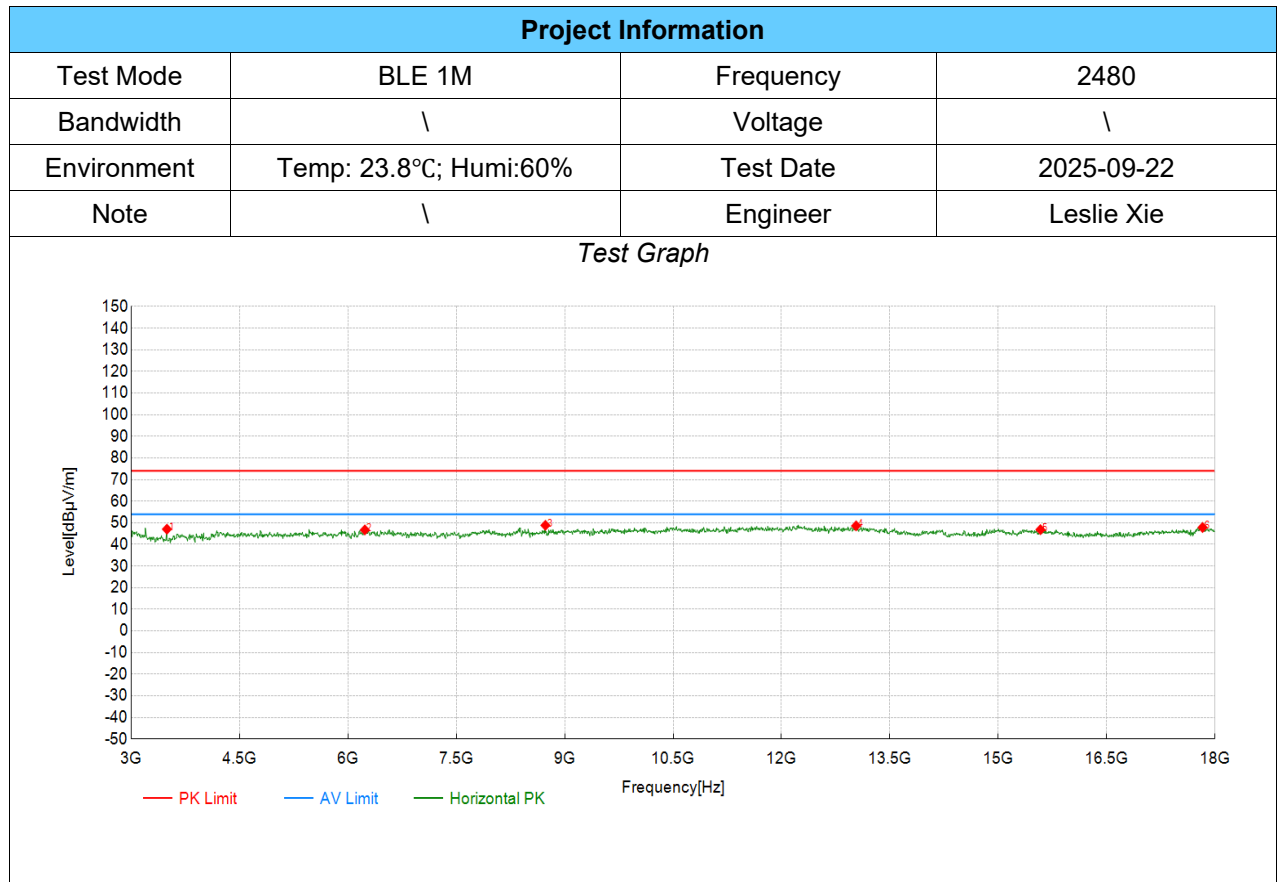

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3495.25	50.11	47.07	-3.04	74.00	26.93	PK	Horizontal	PASS
2	6234.12	43.14	46.73	3.59	74.00	27.27	PK	Horizontal	PASS
3	8732.87	42.82	48.83	6.01	74.00	25.17	PK	Horizontal	PASS
4	13032.52	36.81	48.60	11.79	74.00	25.40	PK	Horizontal	PASS
5	15583.79	32.01	46.84	14.83	74.00	27.16	PK	Horizontal	PASS
6	17827.41	29.44	47.84	18.40	74.00	26.16	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level


TX Radiated Test Result

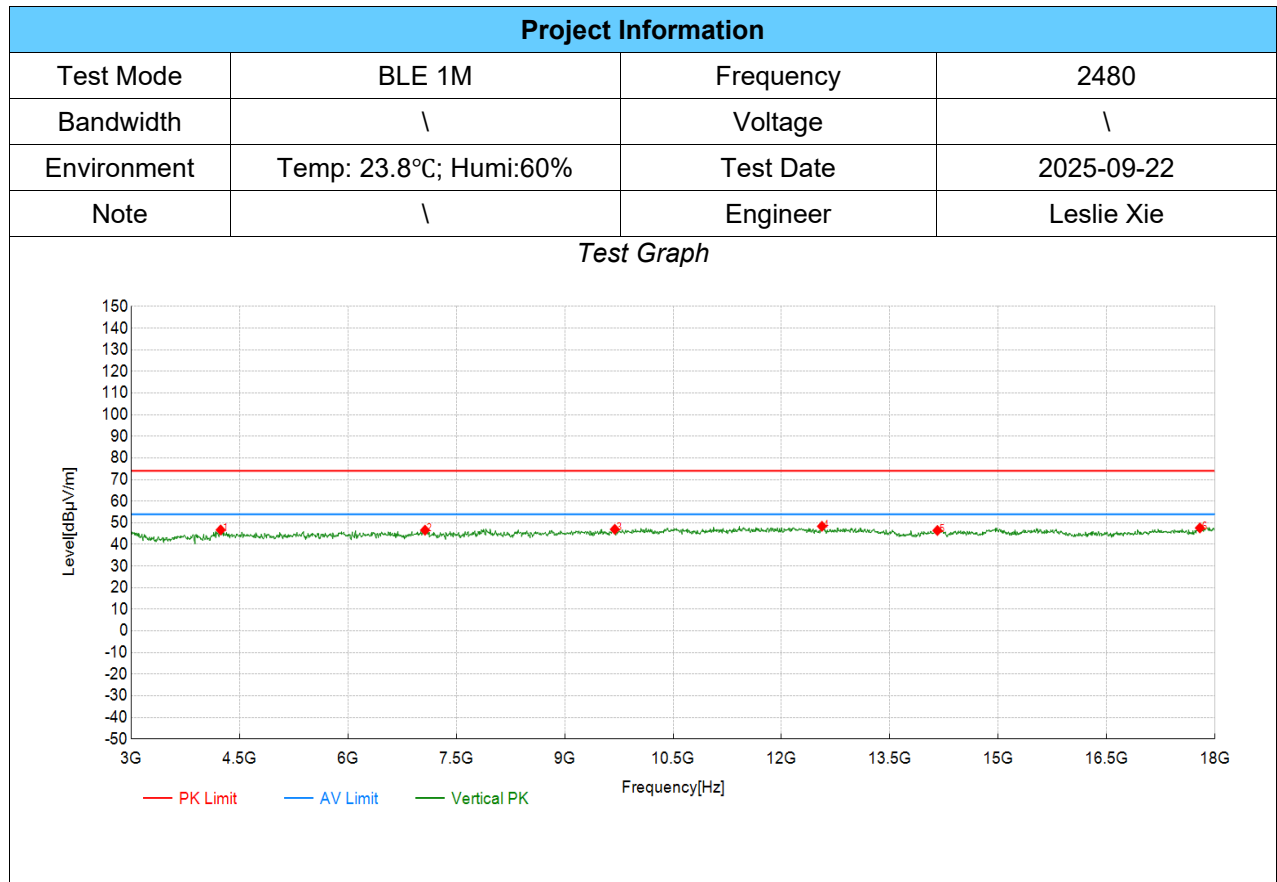

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4238.12	46.40	46.71	0.31	74.00	27.29	PK	Vertical	PASS
2	7067.03	41.55	46.59	5.04	74.00	27.41	PK	Vertical	PASS
3	9693.35	39.97	46.98	7.01	74.00	27.02	PK	Vertical	PASS
4	12559.78	37.55	48.39	10.84	74.00	25.61	PK	Vertical	PASS
5	14158.08	33.81	46.45	12.64	74.00	27.55	PK	Vertical	PASS
6	17789.89	28.96	47.63	18.67	74.00	26.37	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
 (2) Margin = Limit - Level


TX Radiated Test Result

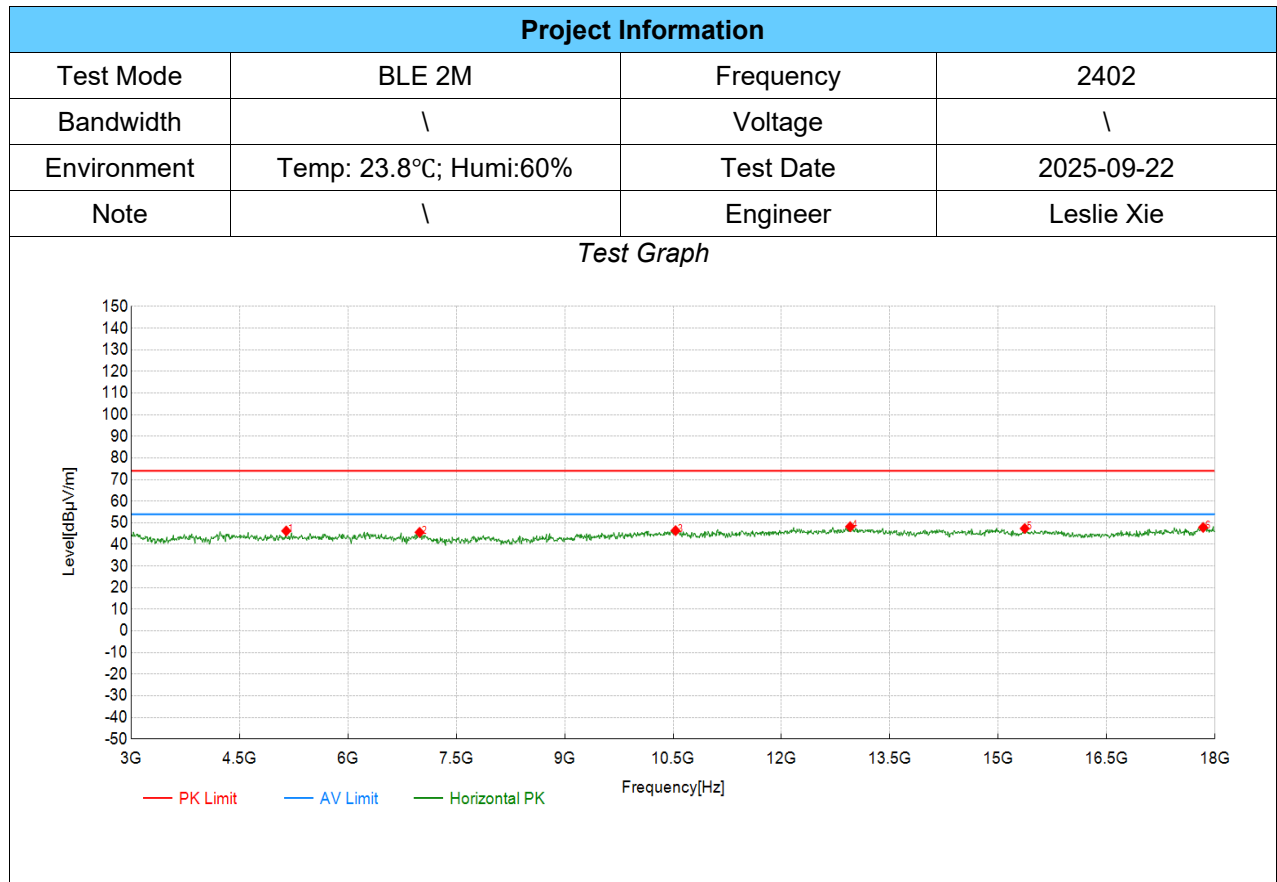

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5146.07	46.08	46.22	0.14	74.00	27.78	PK	Horizontal	PASS
2	6992.00	40.35	45.61	5.26	74.00	28.39	PK	Horizontal	PASS
3	10533.77	38.29	46.38	8.09	74.00	27.62	PK	Horizontal	PASS
4	12949.97	36.52	48.20	11.68	74.00	25.80	PK	Horizontal	PASS
5	15366.18	32.80	47.36	14.56	74.00	26.64	PK	Horizontal	PASS
6	17834.92	29.46	47.86	18.40	74.00	26.14	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

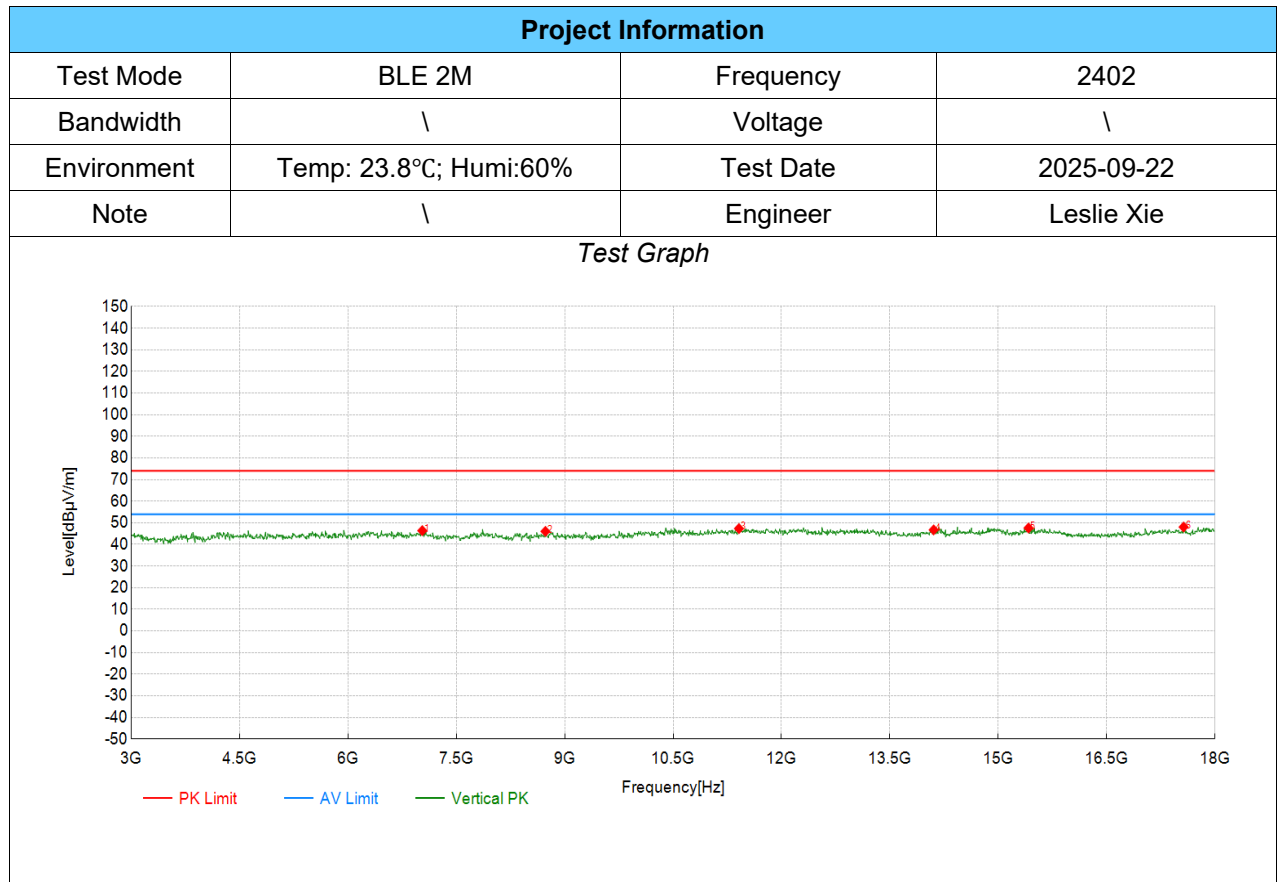

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	7029.51	41.17	46.38	5.21	74.00	27.62	PK	Vertical	PASS
2	8732.87	40.03	46.04	6.01	74.00	27.96	PK	Vertical	PASS
3	11411.71	38.05	47.34	9.29	74.00	26.66	PK	Vertical	PASS
4	14105.55	34.22	46.72	12.50	74.00	27.28	PK	Vertical	PASS
5	15418.71	32.87	47.60	14.73	74.00	26.40	PK	Vertical	PASS
6	17564.78	30.55	48.07	17.52	74.00	25.93	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

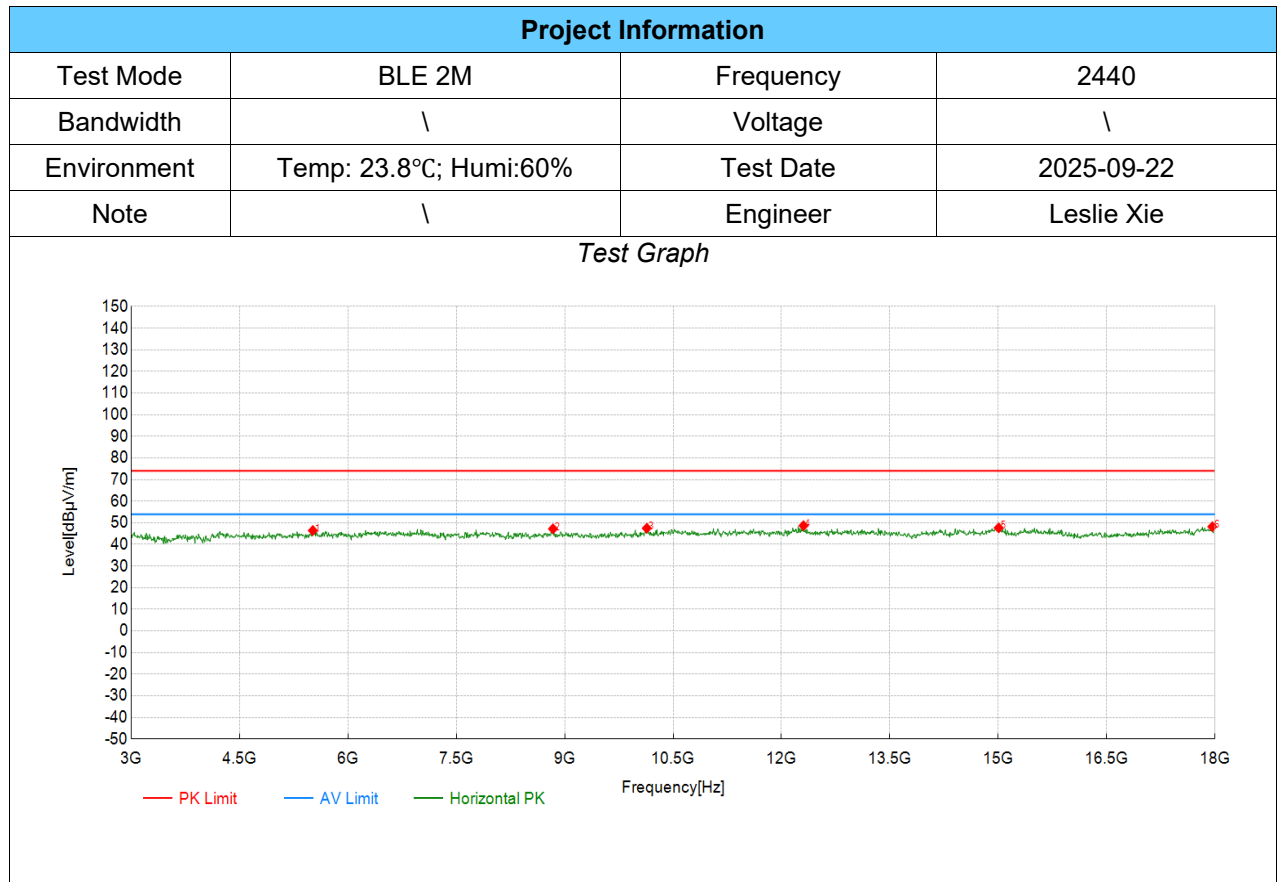

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5513.76	44.91	46.44	1.53	74.00	27.56	PK	Horizontal	PASS
2	8837.92	40.70	47.21	6.51	74.00	26.79	PK	Horizontal	PASS
3	10136.07	40.08	47.51	7.43	74.00	26.49	PK	Horizontal	PASS
4	12304.65	38.21	48.67	10.46	74.00	25.33	PK	Horizontal	PASS
5	15006.00	34.04	47.68	13.64	74.00	26.32	PK	Horizontal	PASS
6	17962.48	29.77	48.20	18.43	74.00	25.80	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level


TX Radiated Test Result

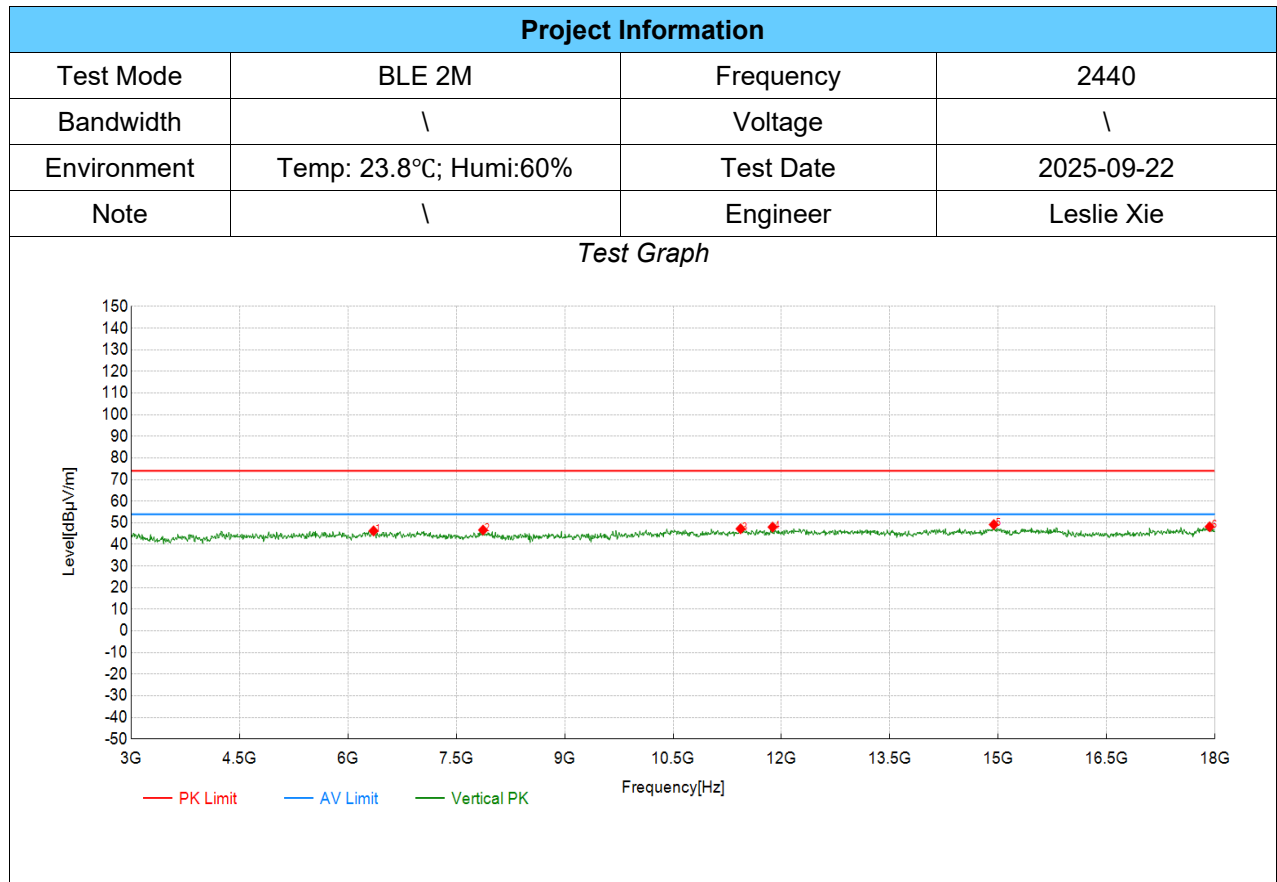

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	6354.18	42.70	46.24	3.54	74.00	27.76	PK	Vertical	PASS
2	7869.93	40.99	46.65	5.66	74.00	27.35	PK	Vertical	PASS
3	11434.22	37.86	47.24	9.38	74.00	26.76	PK	Vertical	PASS
4	11876.94	38.11	48.01	9.90	74.00	25.99	PK	Vertical	PASS
5	14938.47	35.51	49.19	13.68	74.00	24.81	PK	Vertical	PASS
6	17924.96	29.74	48.16	18.42	74.00	25.84	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

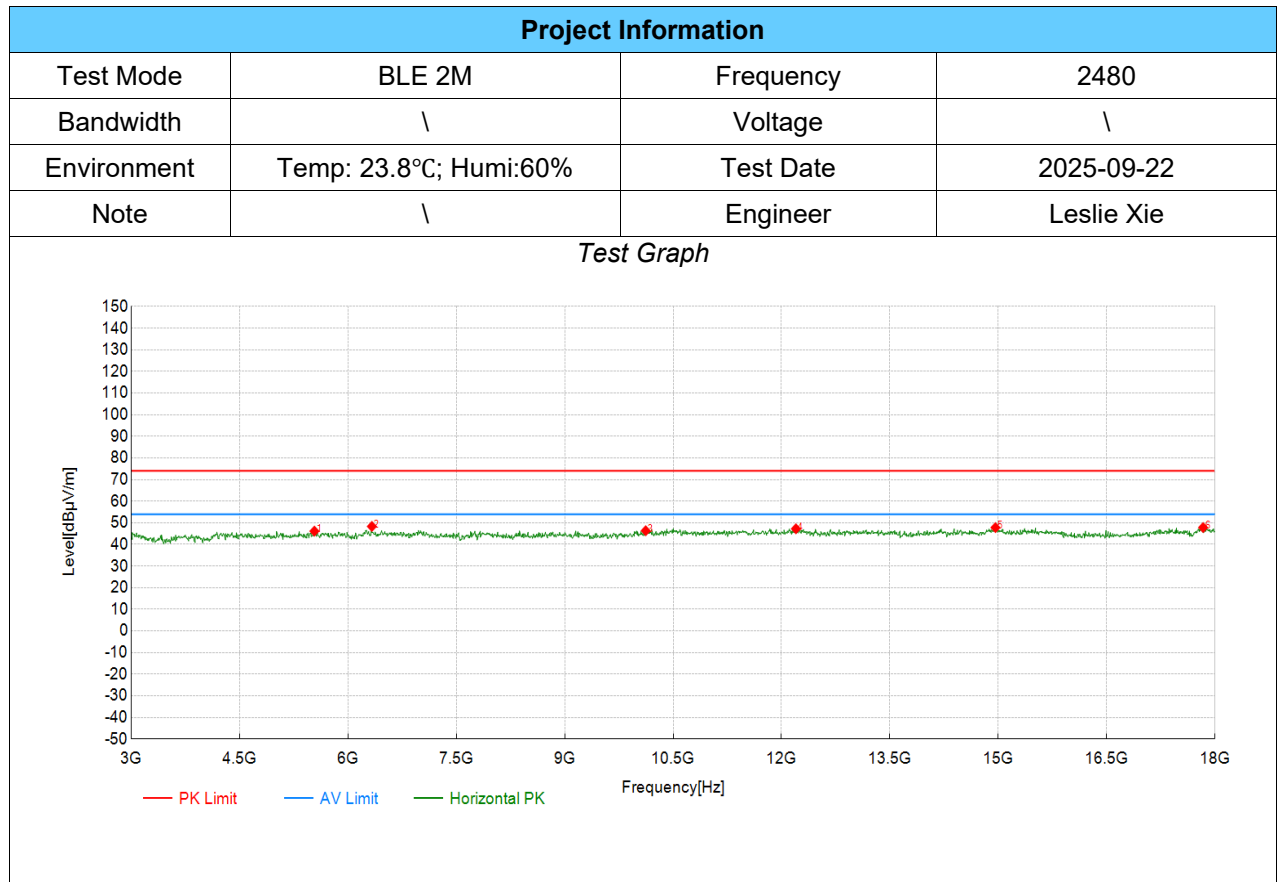

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5536.27	44.69	46.15	1.46	74.00	27.85	PK	Horizontal	PASS
2	6331.67	44.62	48.33	3.71	74.00	25.67	PK	Horizontal	PASS
3	10121.06	38.88	46.34	7.46	74.00	27.66	PK	Horizontal	PASS
4	12199.60	36.81	47.23	10.42	74.00	26.77	PK	Horizontal	PASS
5	14960.98	34.11	47.78	13.67	74.00	26.22	PK	Horizontal	PASS
6	17834.92	29.42	47.82	18.40	74.00	26.18	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

TX Radiated Test Result

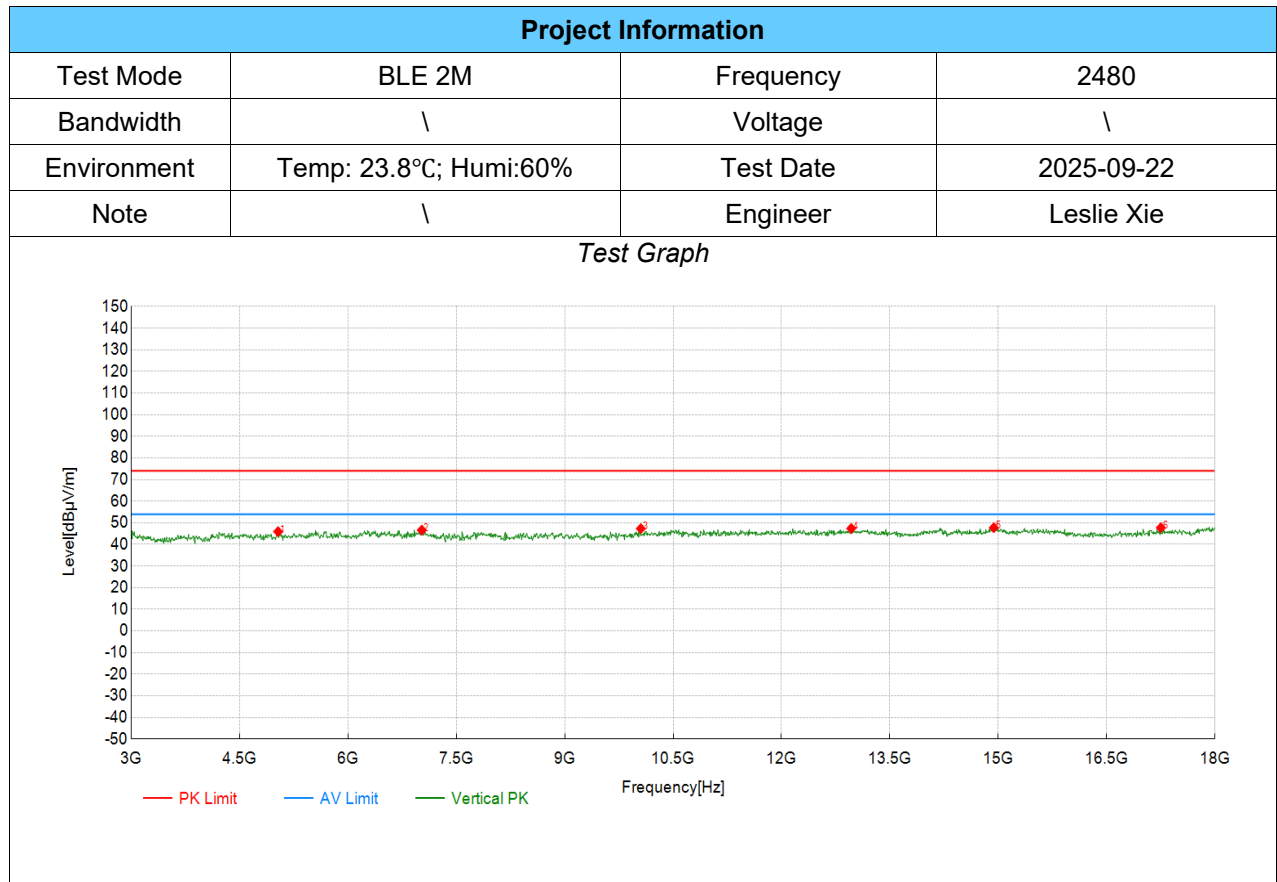


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	5033.52	45.98	45.94	-0.04	74.00	28.06	PK	Vertical	PASS
2	7022.01	41.41	46.64	5.23	74.00	27.36	PK	Vertical	PASS
3	10053.53	39.71	47.33	7.62	74.00	26.67	PK	Vertical	PASS
4	12964.98	35.65	47.38	11.73	74.00	26.62	PK	Vertical	PASS
5	14938.47	34.09	47.77	13.68	74.00	26.23	PK	Vertical	PASS
6	17249.62	30.11	47.74	17.63	74.00	26.26	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
 (2) Margin = Limit - Level


8.7. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 3.87V

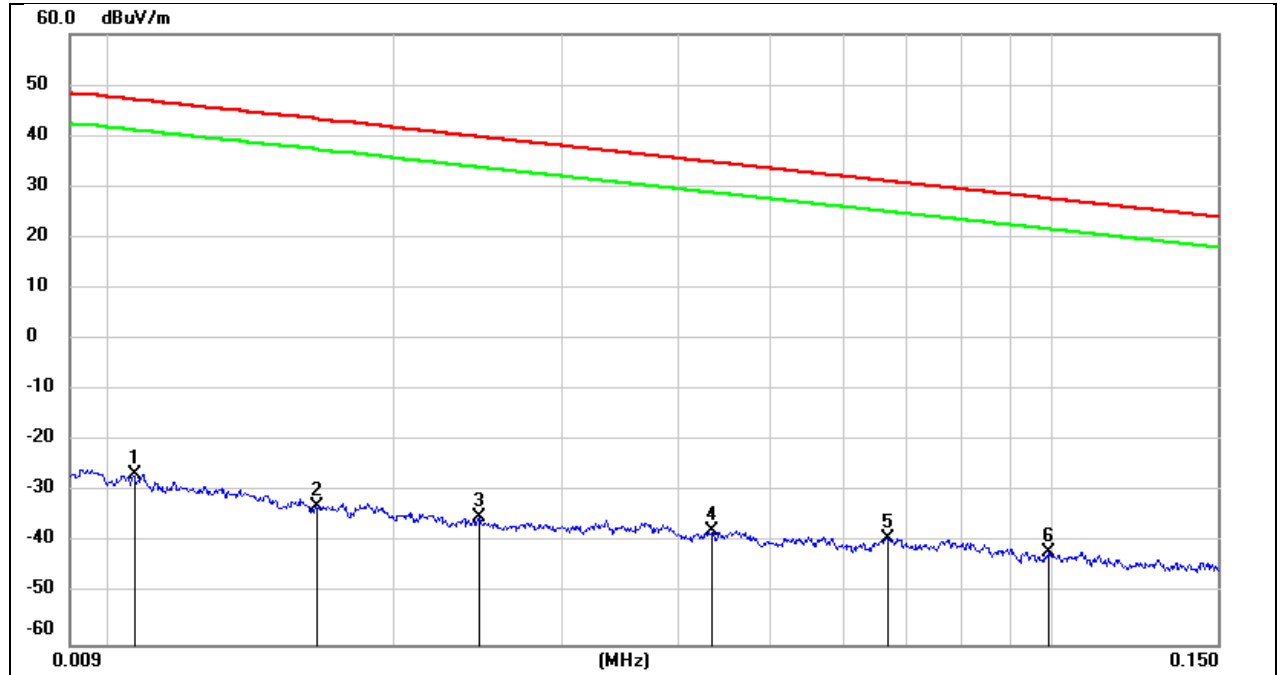


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)	Remark
1	0.0106	74.88	-101.39	-26.51	47.09	-73.60	peak
2	0.0165	68.64	-101.37	-32.73	43.25	-75.98	peak
3	0.0246	66.51	-101.36	-34.85	39.78	-74.63	peak
4	0.0434	63.82	-101.45	-37.63	34.85	-72.48	peak
5	0.0666	62.43	-101.55	-39.12	31.13	-70.25	peak
6	0.0990	59.99	-101.80	-41.81	27.69	-69.50	peak

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 3.87V

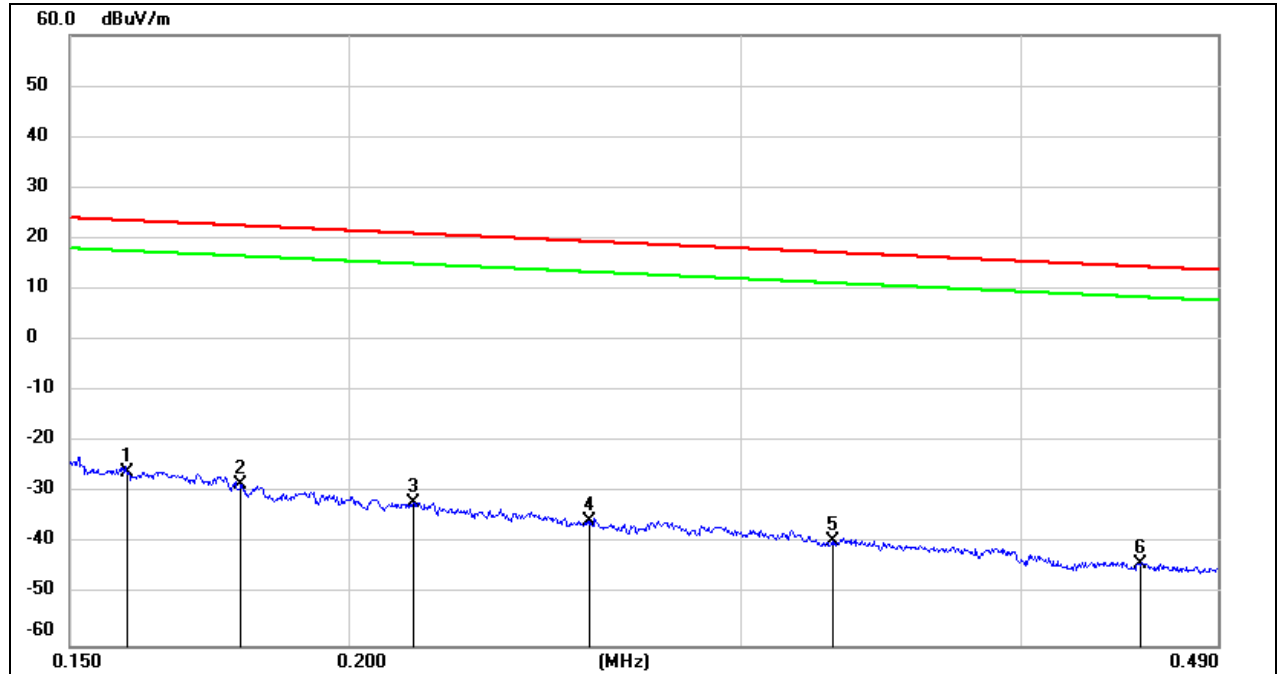

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)	Remark
1	0.1592	75.85	-101.65	-25.80	23.56	-49.36	peak
2	0.1789	73.32	-101.68	-28.36	22.55	-50.91	peak
3	0.2139	69.68	-101.74	-32.06	21.00	-53.06	peak
4	0.2564	66.27	-101.80	-35.53	19.42	-54.95	peak
5	0.3295	62.41	-101.88	-39.47	17.24	-56.71	peak
6	0.4526	58.18	-102.02	-43.84	14.49	-58.33	peak

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 3.87V

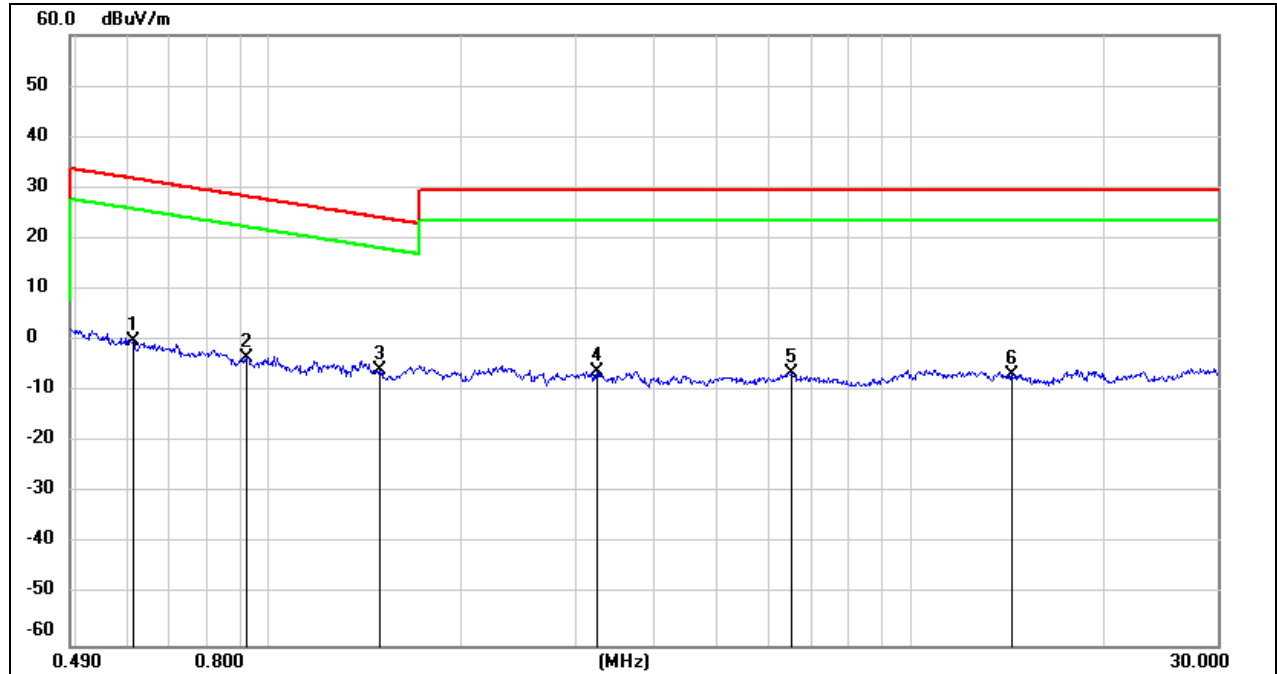


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)	Remark
1	0.6139	62.02	-62.08	-0.06	31.84	-31.90	peak
2	0.9233	58.83	-62.22	-3.39	28.30	-31.69	peak
3	1.4933	56.30	-62.04	-5.74	24.12	-29.86	peak
4	3.2389	55.34	-61.53	-6.19	29.54	-35.73	peak
5	6.5395	54.86	-61.28	-6.42	29.54	-35.96	peak
6	14.3597	54.38	-60.98	-6.60	29.54	-36.14	peak

Note: All modes and antennas have been tested, only the worst data recorded in the report.


8.8. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 3.87V

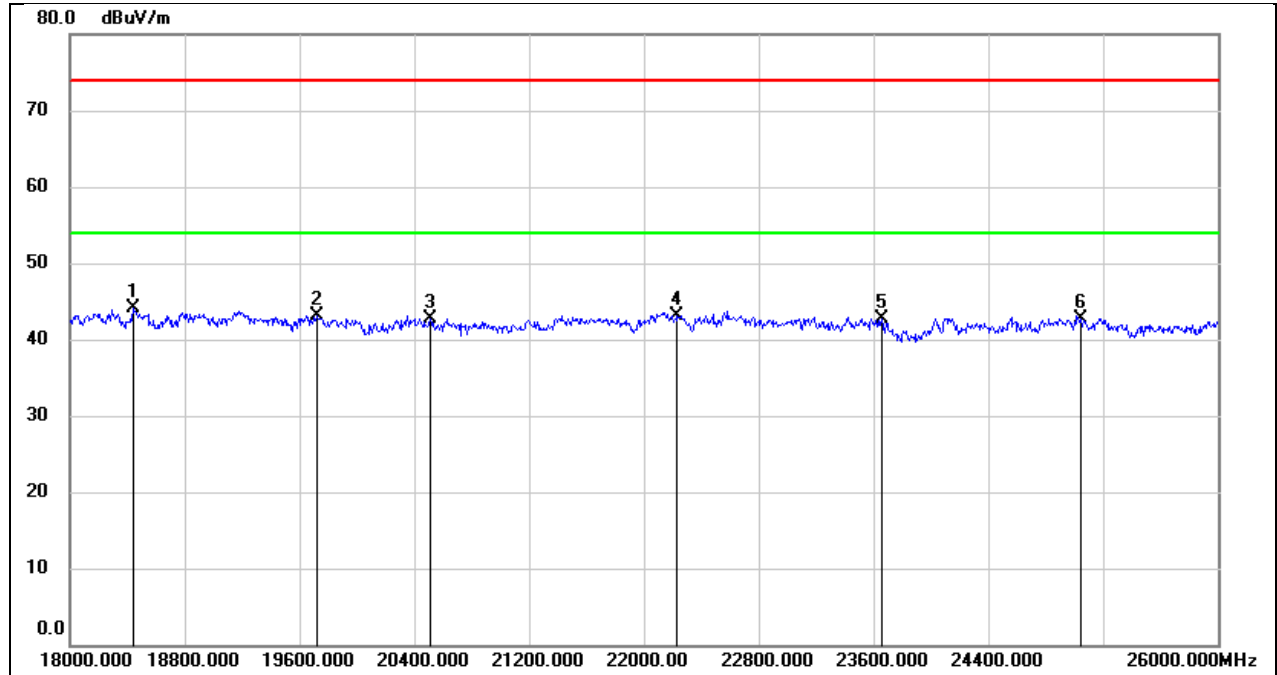

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18440.000	49.33	-5.32	44.01	74.00	-29.99	peak
2	19720.000	48.34	-5.28	43.06	74.00	-30.94	peak
3	20512.000	48.10	-5.35	42.75	74.00	-31.25	peak
4	22232.000	47.39	-4.23	43.16	74.00	-30.84	peak
5	23656.000	45.94	-3.17	42.77	74.00	-31.23	peak
6	25048.000	44.77	-2.02	42.75	74.00	-31.25	peak

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 3.87V

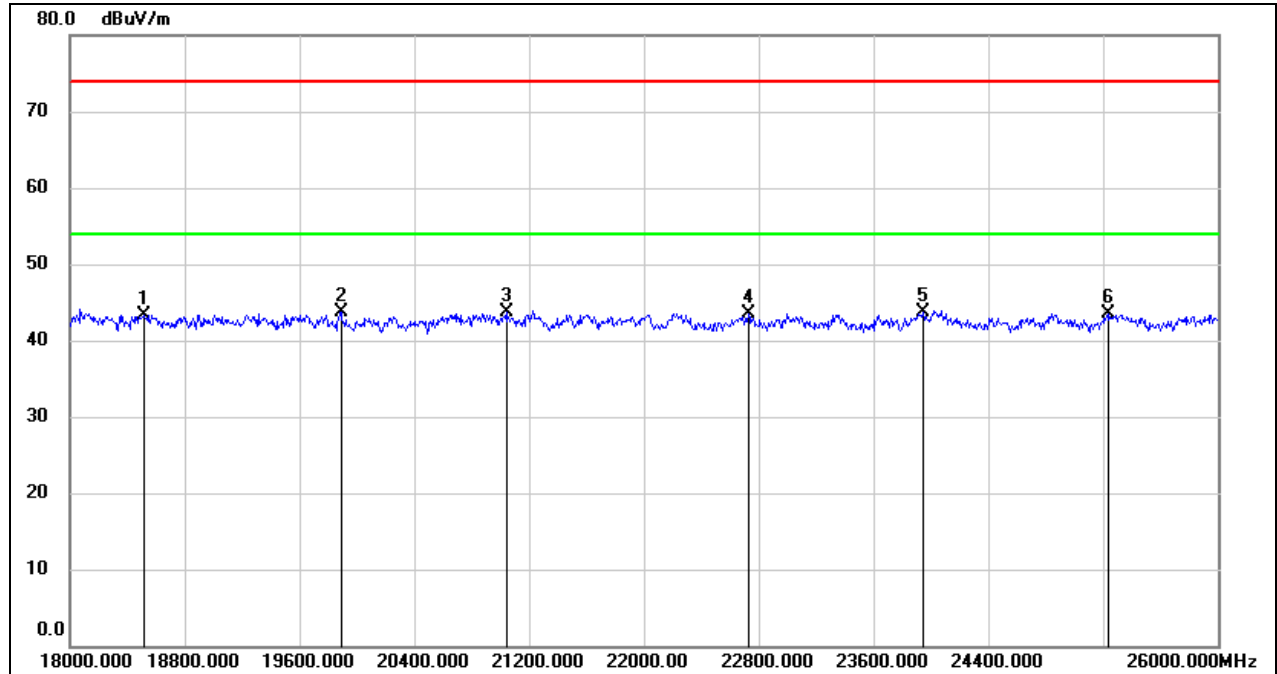


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18512.000	48.50	-5.26	43.24	74.00	-30.76	peak
2	19888.000	49.15	-5.36	43.79	74.00	-30.21	peak
3	21040.000	48.61	-4.86	43.75	74.00	-30.25	peak
4	22728.000	47.21	-3.71	43.50	74.00	-30.50	peak
5	23944.000	46.47	-2.85	43.62	74.00	-30.38	peak
6	25240.000	45.17	-1.68	43.49	74.00	-30.51	peak

Note: All modes and antennas have been tested, only the worst data recorded in the report.


8.9. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	DC 3.87V

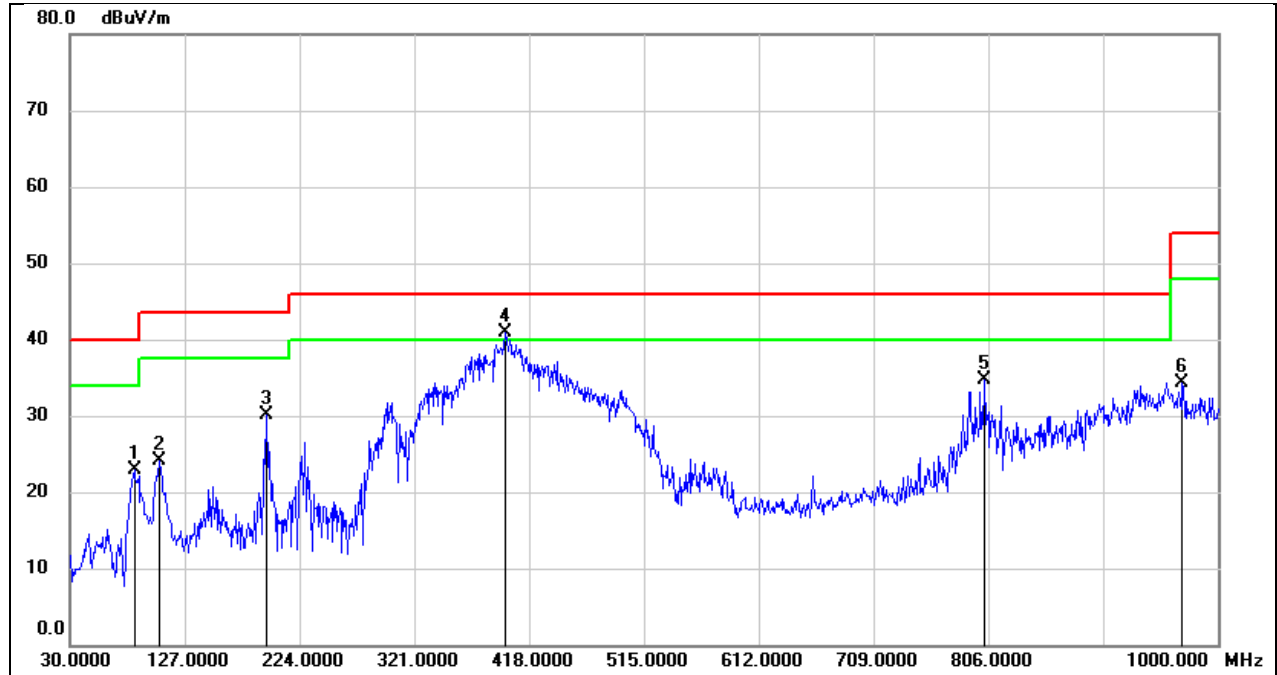

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	84.3200	39.14	-16.28	22.86	40.00	-17.14	QP
2	105.6600	39.77	-15.73	24.04	43.50	-19.46	QP
3	195.8700	42.34	-12.15	30.19	43.50	-13.31	QP
4	397.6300	50.45	-9.61	40.84	46.00	-5.16	QP
5	803.0900	37.28	-2.55	34.73	46.00	-11.27	QP
6	969.9300	34.95	-0.55	34.40	54.00	-19.60	QP

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	DC 3.87V

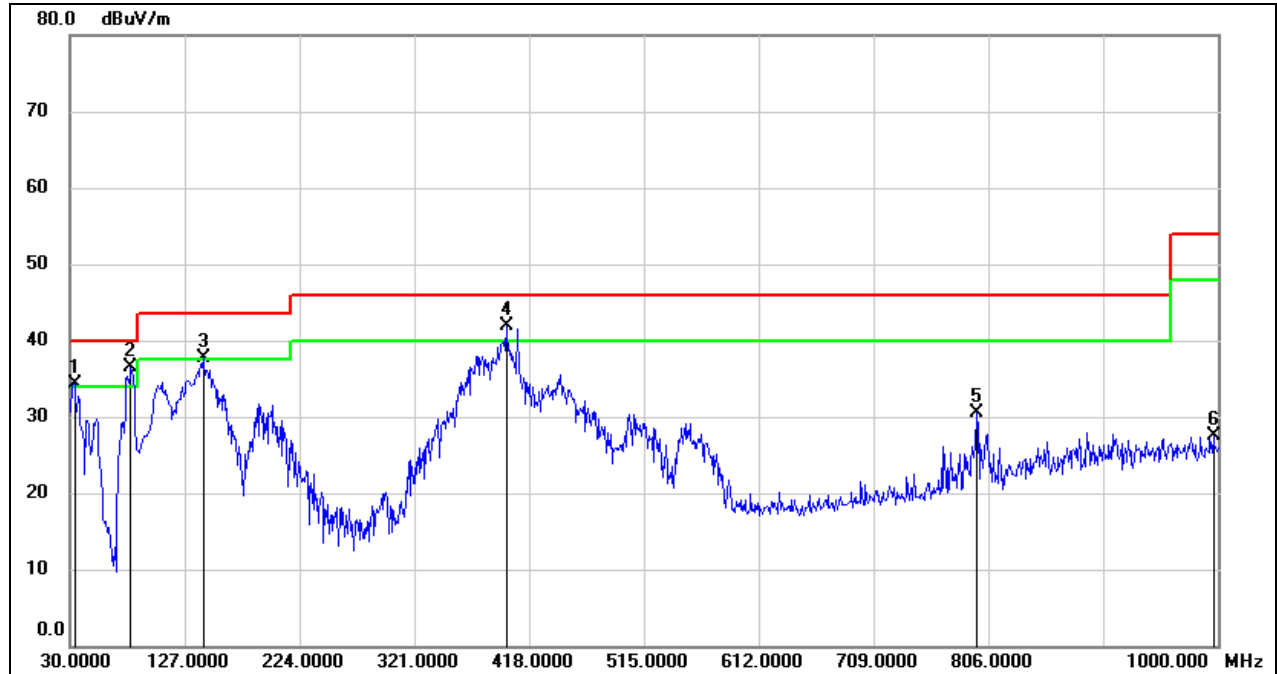

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.8800	48.73	-14.44	34.29	40.00	-5.71	QP
2	81.4100	52.60	-16.09	36.51	40.00	-3.49	QP
3	142.5200	51.46	-13.85	37.61	43.50	-5.89	QP
4	398.6000	51.45	-9.61	41.84	46.00	-4.16	QP
5	796.3000	33.14	-2.69	30.45	46.00	-15.55	QP
6	996.1200	27.60	-0.18	27.42	54.00	-26.58	QP

Note: All modes and antennas have been tested, only the worst data recorded in the report.

9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

10. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a).

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2020. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

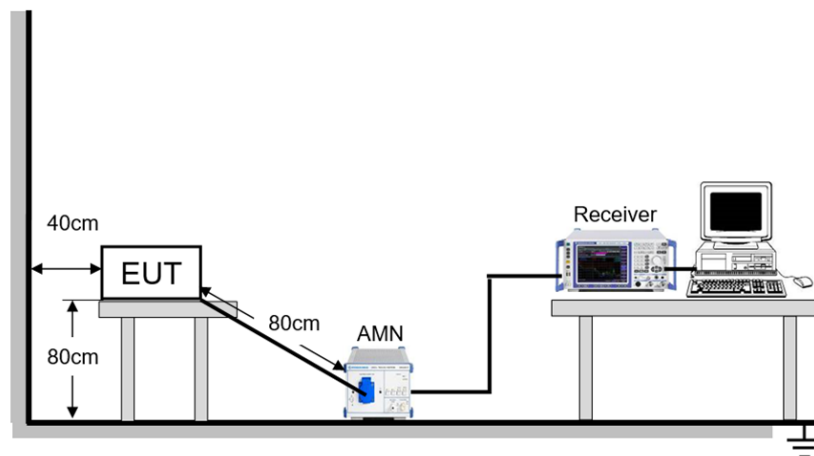

TEST ENVIRONMENT


Temperature	23.7°C	Relative Humidity	59%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V_60Hz

TEST DATE / ENGINEER

Test Date	September 9, 2025	Test By	Deacon Tan
-----------	-------------------	---------	------------

TEST RESULTS

Test Mode:	BLE 1M	Frequency(MHz):	2402
Line:	Line		

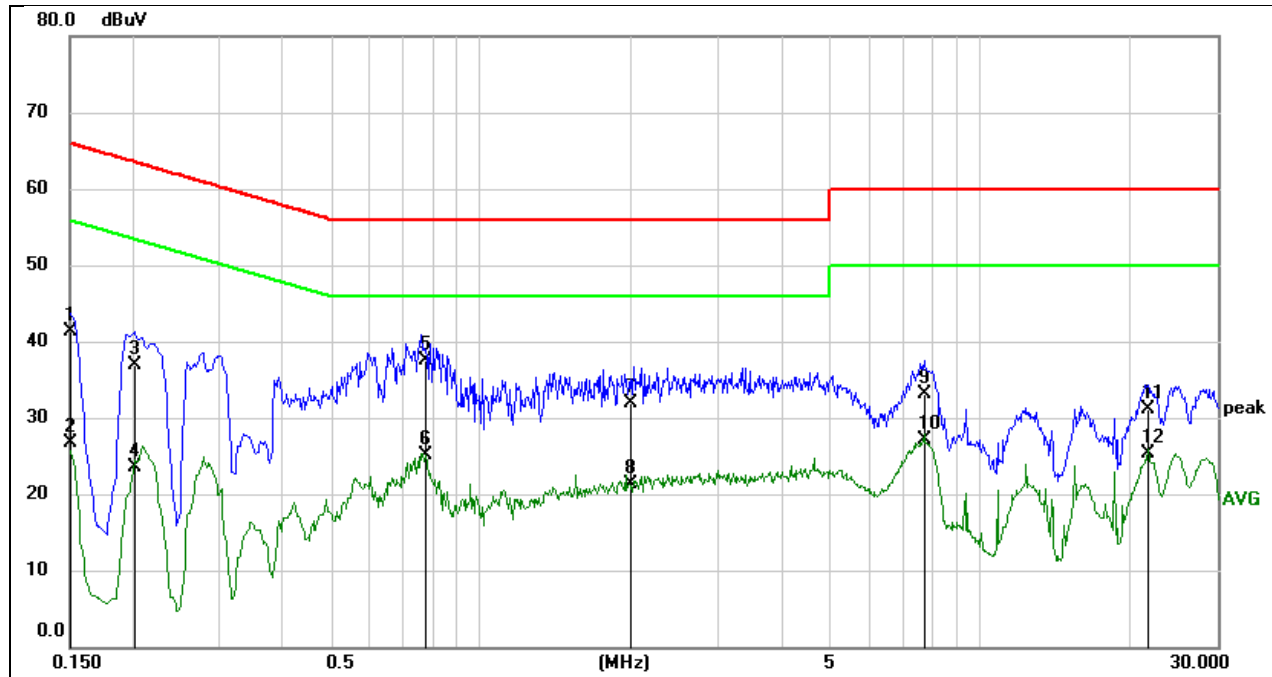


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1512	31.48	9.74	41.22	65.93	-24.71	QP
2	0.1512	16.89	9.74	26.63	55.93	-29.30	AVG
3	0.2031	27.28	9.64	36.92	63.48	-26.56	QP
4	0.2031	13.90	9.64	23.54	53.48	-29.94	AVG
5	0.7810	27.95	9.63	37.58	56.00	-18.42	QP
6	0.7810	15.38	9.63	25.01	46.00	-20.99	AVG
7	1.9878	22.12	9.74	31.86	56.00	-24.14	QP
8	1.9878	11.61	9.74	21.35	46.00	-24.65	AVG
9	7.7600	23.34	9.73	33.07	60.00	-26.93	QP
10	7.7600	17.31	9.73	27.04	50.00	-22.96	AVG
11	21.7278	21.30	9.72	31.02	60.00	-28.98	QP
12	21.7278	15.63	9.72	25.35	50.00	-24.65	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	BLE 1M	Frequency(MHz):	2402
Line:	Neutral		

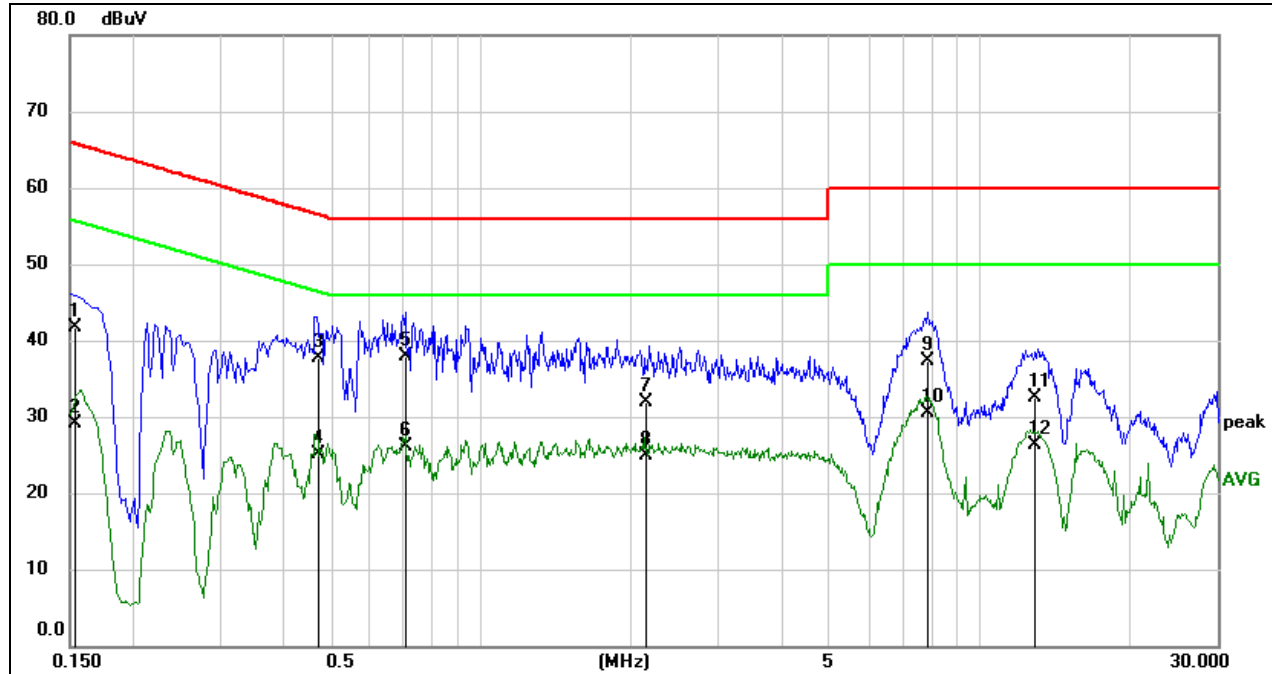

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1533	31.98	9.64	41.62	65.82	-24.20	QP
2	0.1533	19.56	9.64	29.20	55.82	-26.62	AVG
3	0.4718	28.00	9.64	37.64	56.48	-18.84	QP
4	0.4718	15.54	9.64	25.18	46.48	-21.30	AVG
5	0.7099	28.37	9.63	38.00	56.00	-18.00	QP
6	0.7099	16.42	9.63	26.05	46.00	-19.95	AVG
7	2.1396	22.28	9.64	31.92	56.00	-24.08	QP
8	2.1396	15.26	9.64	24.90	46.00	-21.10	AVG
9	7.8570	27.58	9.73	37.31	60.00	-22.69	QP
10	7.8570	20.74	9.73	30.47	50.00	-19.53	AVG
11	13.0462	22.70	9.74	32.44	60.00	-27.56	QP
12	13.0462	16.64	9.74	26.38	50.00	-23.62	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

11. TEST DATA – ANT1

APPENDIX A1: Duty Cycle

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
BLE 1M	0.391	0.626	0.6246	62.46	2.04	2.56	3
BLE 2M	0.194	0.625	0.3104	31.04	5.08	5.15	6


Note:

Duty Cycle Correction Factor= $10\log(1/x)$.

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

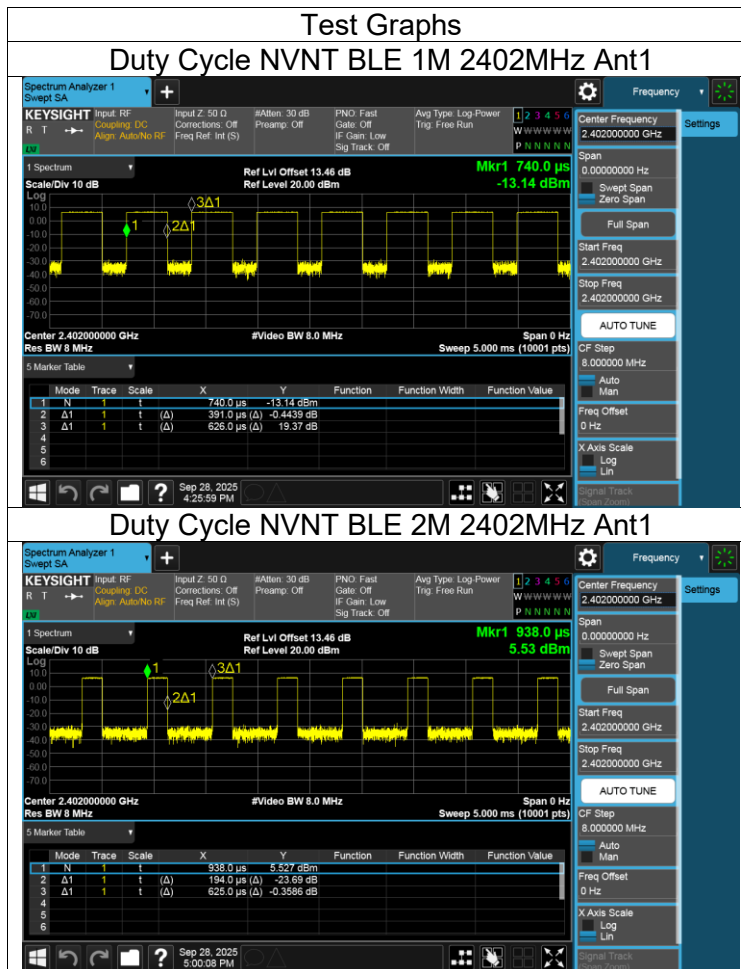


APPENDIX B1: Maximum Conducted Output Power

Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
BLE 1M	2402	Ant1	6.45	30	Pass
BLE 1M	2440	Ant1	6.63	30	Pass
BLE 1M	2480	Ant1	6.65	30	Pass
BLE 2M	2402	Ant1	6.42	30	Pass
BLE 2M	2440	Ant1	6.64	30	Pass
BLE 2M	2480	Ant1	6.68	30	Pass

APPENDIX C1: 6dB Bandwidth


Mode	Frequency (MHz)	Antenna	6dB Bandwidth (MHz)	Limit 6dB Bandwidth (MHz)	Verdict
BLE 1M	2402	Ant1	0.682	≥ 0.5	Pass
BLE 1M	2440	Ant1	0.702	≥ 0.5	Pass
BLE 1M	2480	Ant1	0.697	≥ 0.5	Pass
BLE 2M	2402	Ant1	1.259	≥ 0.5	Pass
BLE 2M	2440	Ant1	1.262	≥ 0.5	Pass
BLE 2M	2480	Ant1	1.239	≥ 0.5	Pass

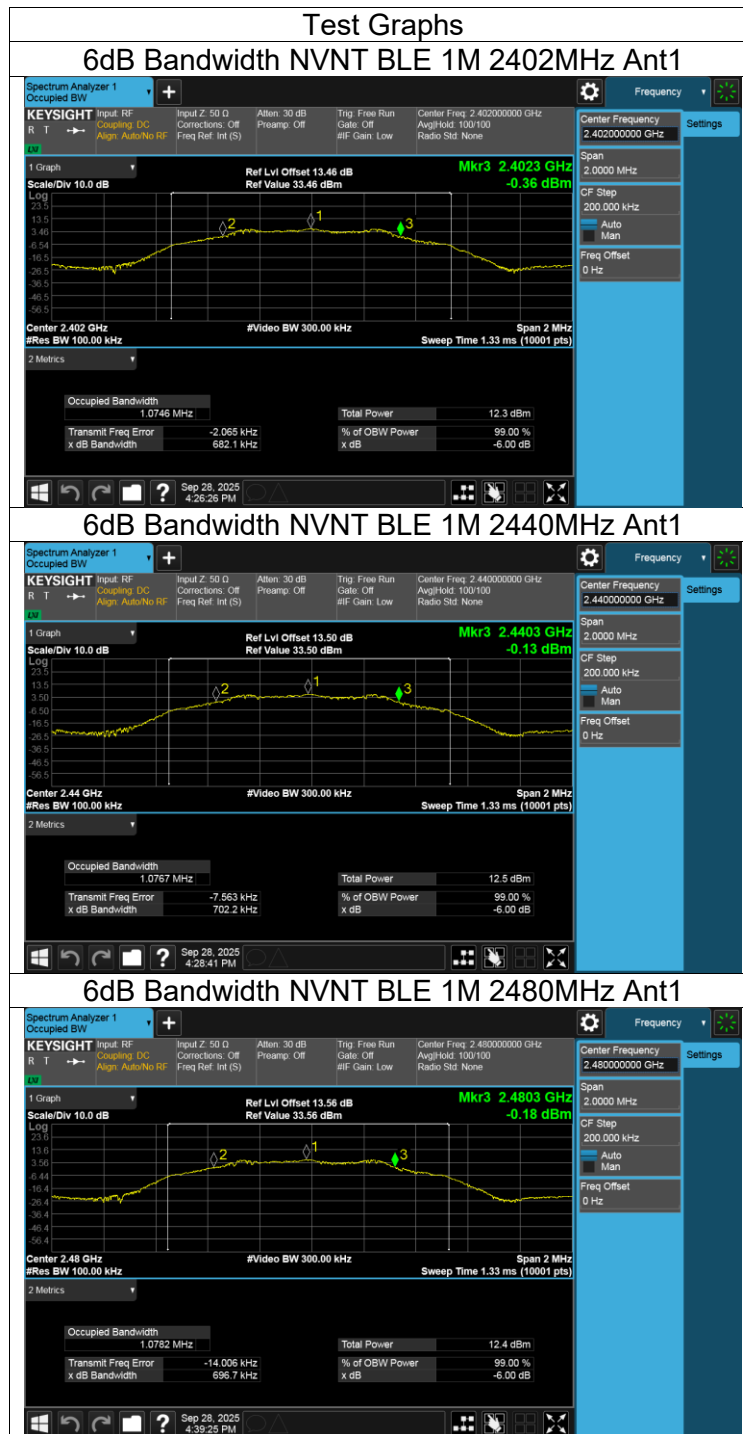




APPENDIX D1: Occupied Channel Bandwidth


Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
BLE 1M	2402	Ant1	1.063
BLE 1M	2440	Ant1	1.06
BLE 1M	2480	Ant1	1.057
BLE 2M	2402	Ant1	2.11
BLE 2M	2440	Ant1	2.114
BLE 2M	2480	Ant1	2.099

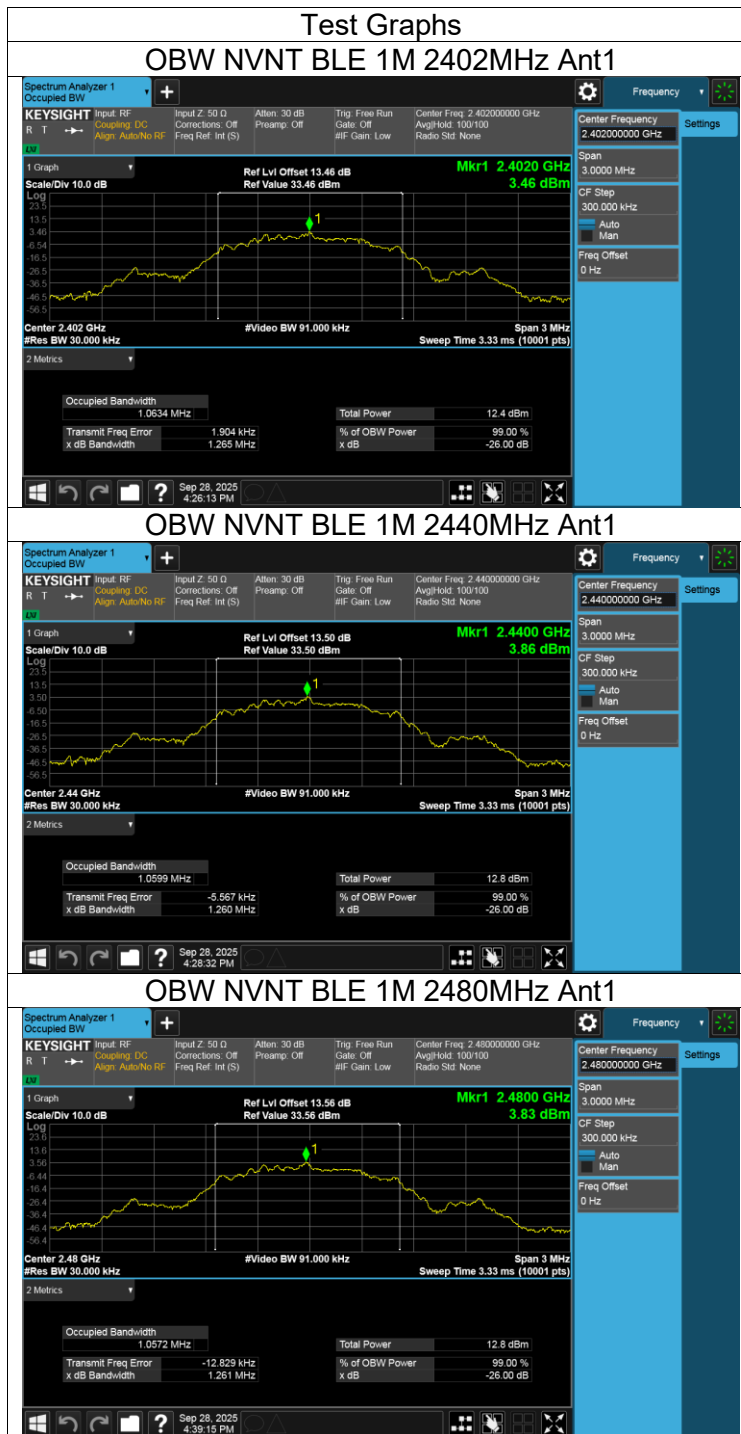


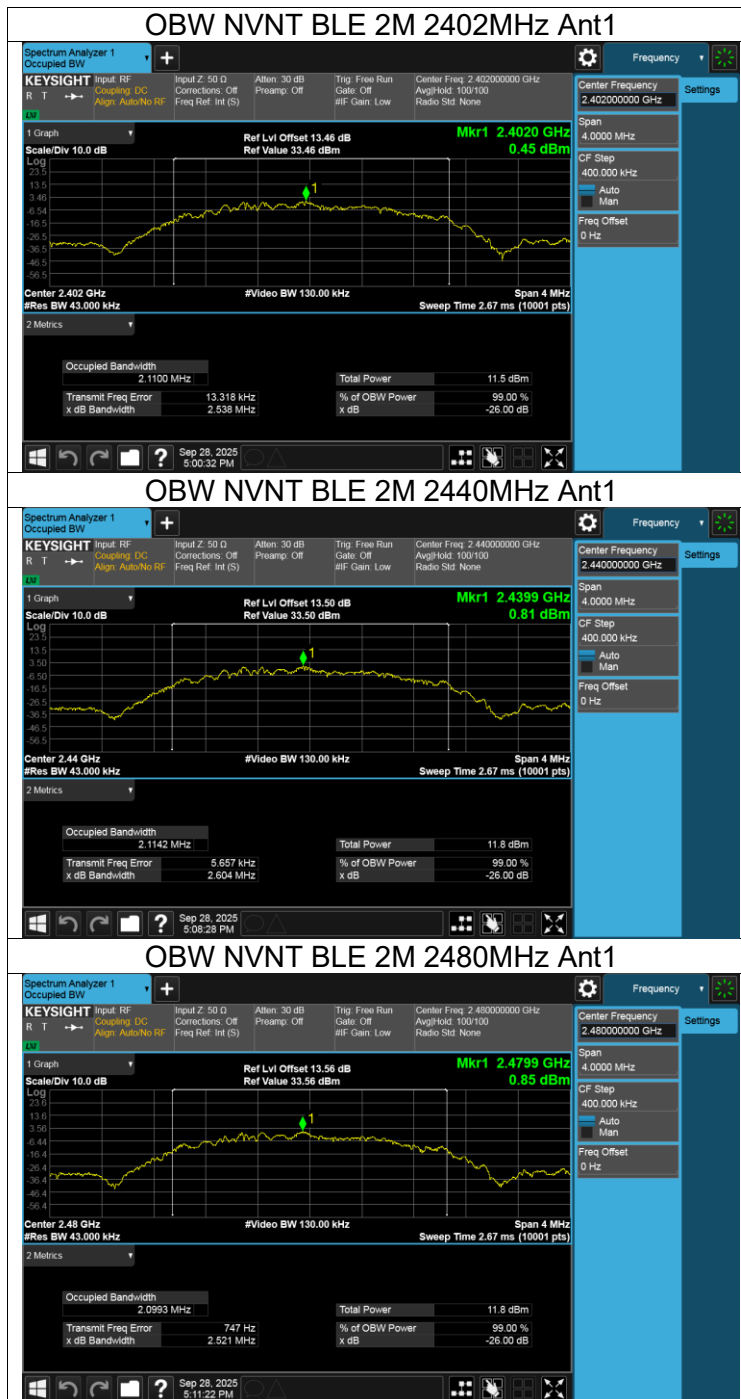

APPENDIX E1: Maximum Power Spectral Density Level

Mode	Frequency (MHz)	Antenna	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
BLE 1M	2402	Ant1	-8.18	8	Pass
BLE 1M	2440	Ant1	-7.88	8	Pass
BLE 1M	2480	Ant1	-7.89	8	Pass
BLE 2M	2402	Ant1	-11.48	8	Pass
BLE 2M	2440	Ant1	-11.28	8	Pass
BLE 2M	2480	Ant1	-11.28	8	Pass

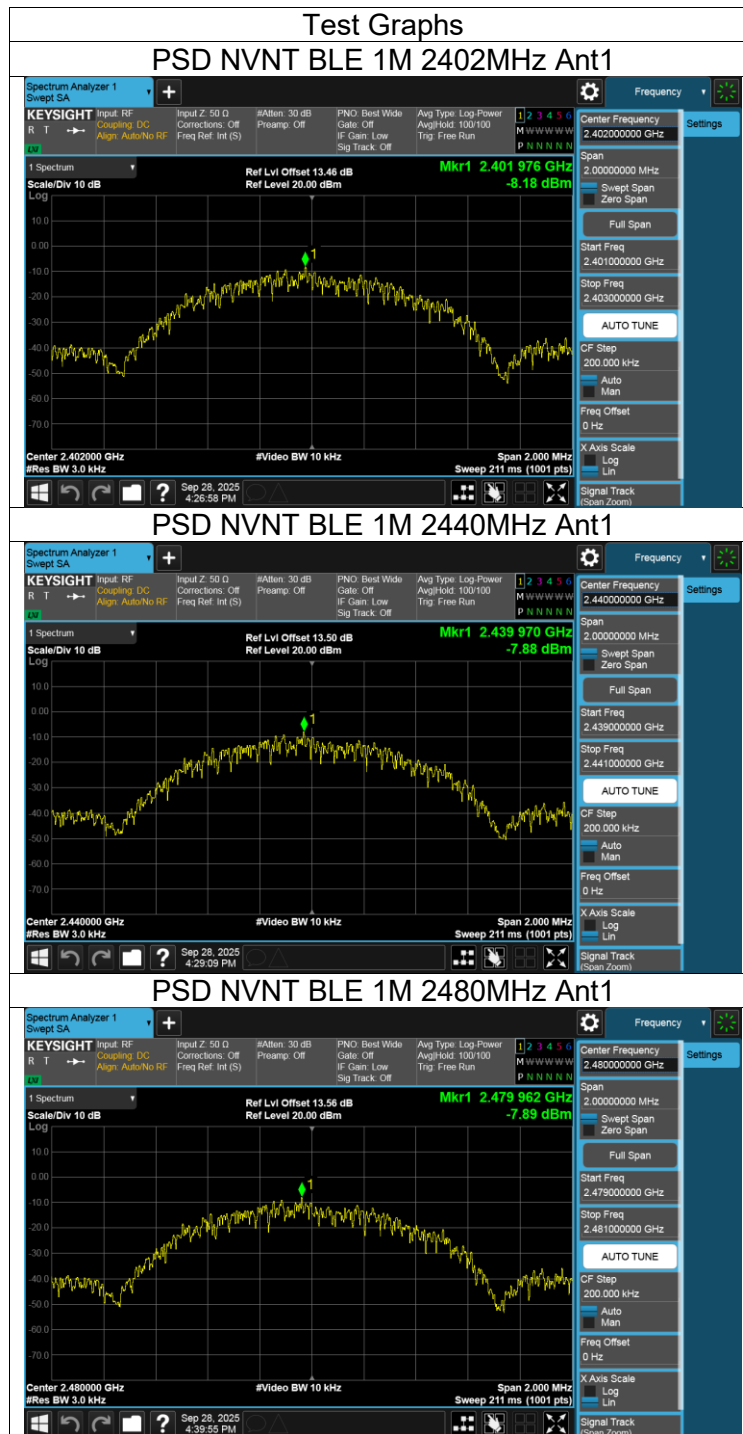


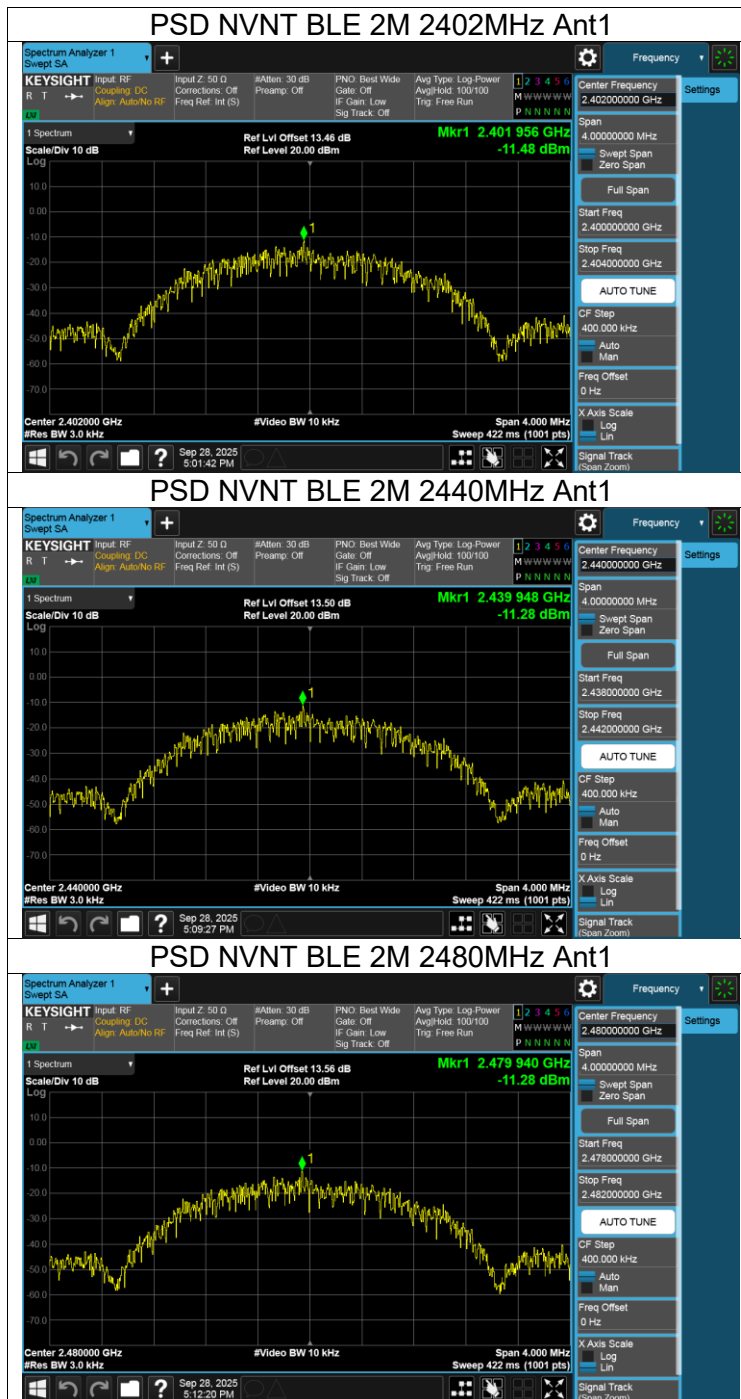

APPENDIX F1: Band Edge

Mode	Frequency (MHz)	Antenna	Verdict
BLE 1M	2402	Ant1	Pass
BLE 1M	2480	Ant1	Pass
BLE 2M	2402	Ant1	Pass
BLE 2M	2480	Ant1	Pass



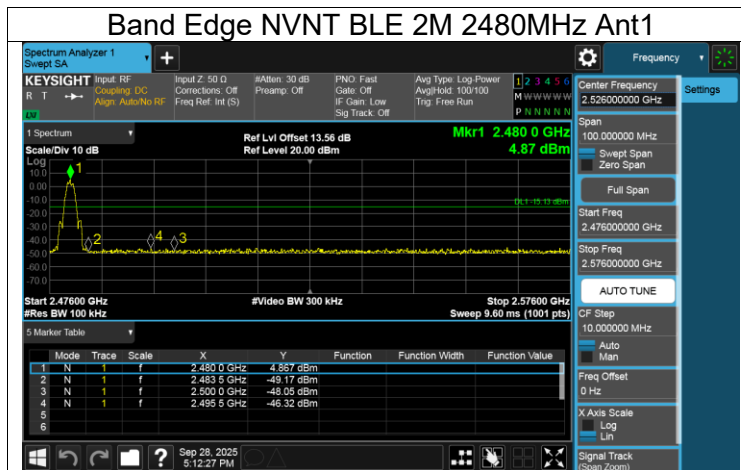

APPENDIX G1: Conducted RF Spurious Emission

Mode	Frequency (MHz)	Antenna	Verdict
BLE 1M	2402	Ant1	Pass
BLE 1M	2440	Ant1	Pass
BLE 1M	2480	Ant1	Pass
BLE 2M	2402	Ant1	Pass
BLE 2M	2440	Ant1	Pass
BLE 2M	2480	Ant1	Pass

