

测试报告书


Test report

Model Name :DZZ-LC600-IDU-1-V02;DZZ-LC600-IDU-2-V02


深圳市得自在科技有限公司
Shenzhen Be-Comfortable Technology Co. Ltd

目 录 (catalogue) :

1. 项目信息 (Model Information)
2. 无源驻波及匹配 (Passive and Matching)
3. 3D有源测试数据 (3D Active Test Data)
4. 环境处理 (Environmental treatment)
5. 总结 (Summary)

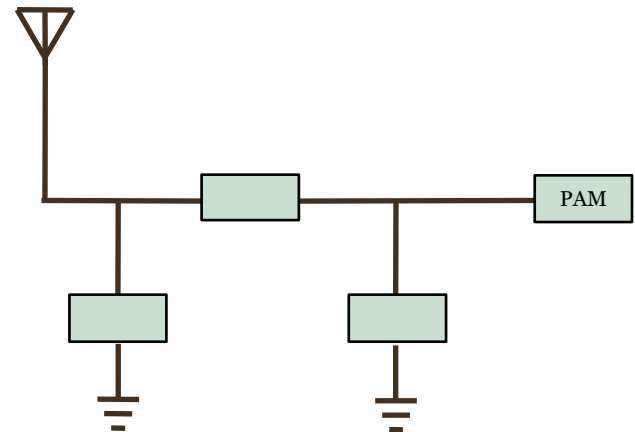Manufacturer		RF	
Model Name		Email	
Antenna Type	PIFA	Band	
Model pictures:	Matching Circuit : 		

E1: XZ的切面 PHI=0
E2: YZ的切面 PHI=90
H: XY的切面 Theta=90



以喇叭天线为参考

Take the horn antenna as a reference

3D test system: Shielded dark room
Test environment: temperature 22°C±3°C,
humidity 50%±15%

Test equipment: When testing passive data, use the network

Analyzers **Agilent E5071C**

When testing active data, use the heliometer

8960/CMW500




Test Picture: left

总全向辐射功率 (TIRP)


$$TIRP \equiv \frac{\pi}{2NM} \sum_{i=1}^{N-1} \sum_{j=0}^{M-1} [Eirp_{\theta}(\theta_i, \phi_j) + Eirp_{\phi}(\theta_i, \phi_j)] \sin(\theta_i)$$

总全向辐射灵敏度 (TIRS)

$$TIRS \equiv \frac{2NM}{\pi \sum_{i=1}^{N-1} \sum_{j=0}^{M-1} \left[\frac{1}{EIS_{\theta}(\theta_i, \phi_j)} + \frac{1}{EIS_{\phi}(\theta_i, \phi_j)} \right] \sin(\theta_i)}$$

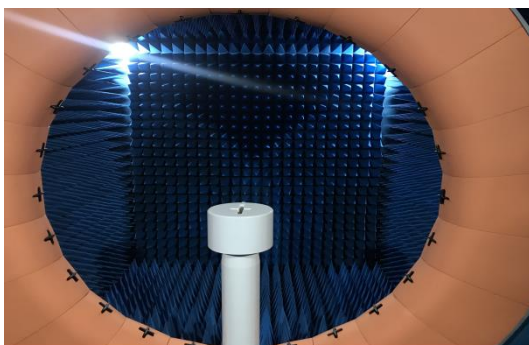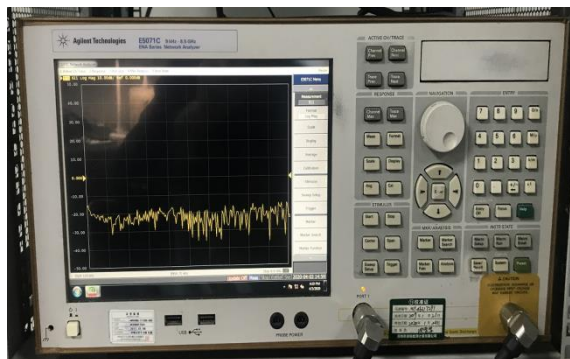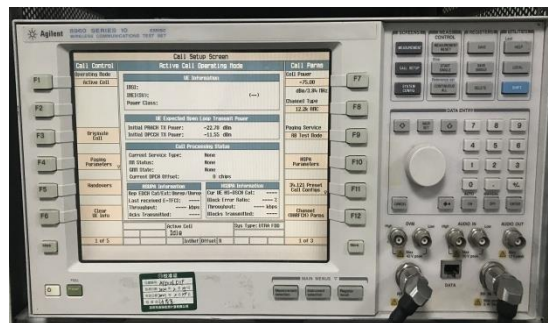

S11Parameters

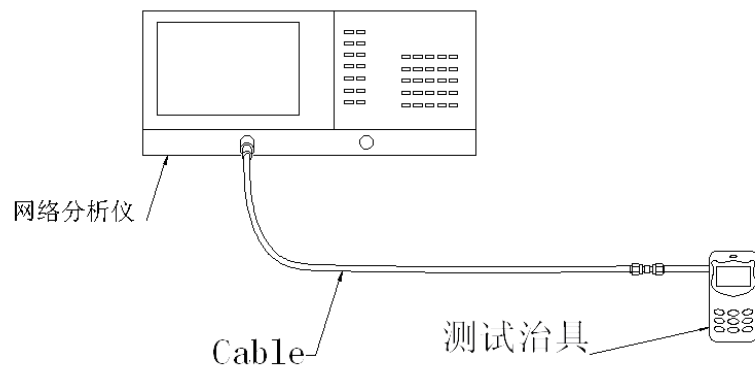

S11 Test method description

Test equipment.

Network analyzer (E5071C

30k-8.5Ghz)

Test method.

A 50-ohm CABLE is exported from the test port of the instrument, calibrated with calibration parts and then connected to the prototype.


The SMA connector of the prototype is calibrated with a calibration piece, and the return loss and VSWR corresponding to the relevant frequency points are recorded.

Antenna location





Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Efficiency (dBi)	-2.01	-2.10	-2.13	-2.03	-1.95	-1.85	-1.63	-1.47	-1.39	-1.30	-1.15
Gain (dBi)	2.22	2.25	2.48	2.25	1.89	2.06	2.23	2.33	2.34	2.52	2.55
Efficiency (%)	63.01	61.71	61.19	62.68	63.83	65.30	68.65	71.33	72.66	74.08	76.74


2400.0MHz, 0.0, 0.0, 0.0




Side View

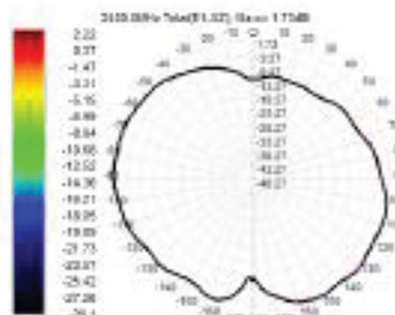


2400.0MHz, 0.0, 0.0, 0.0





2400.0MHz, 0.0, 0.0, 0.0




2400.0MHz, 0.0, 0.0, 0.0




Side View

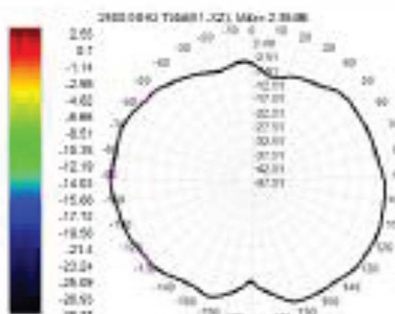

2400.0MHz, 0.0, 0.0, 0.0




2400.0MHz, 0.0, 0.0, 0.0









Frequency ID	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Frequency (MHz)	5150.0	5200.0	5250.0	5300.0	5350.0	5400.0	5450.0	5500.0	5550.0	5600.0	5650.0	5700.0	5750.0	5800.0	5850.0
Efficiency (dBi)	-3.10	-3.18	-3.13	-3.10	-2.95	-2.91	-2.95	-2.78	-2.59	-2.55	-2.40	-2.25	-2.11	-2.08	-2.20
Gain (dBi)	3.01	2.78	2.37	2.17	2.24	2.11	2.07	2.56	2.95	3.14	3.86	4.47	4.55	4.68	4.78
Efficiency (%)	56.50	58.03	58.59	59.01	60.68	61.20	60.74	62.75	65.13	65.64	67.60	65.56	61.50	61.94	65.28


5150.0MHz H+V, Eff: 56.5%







Back View

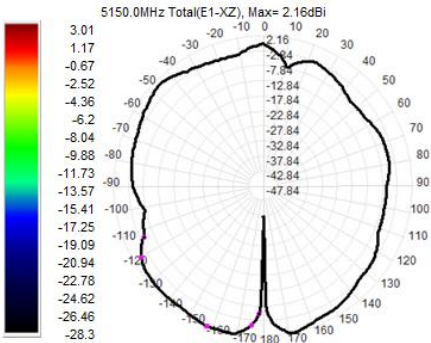

5850.0MHz H+V, Eff: 65.28%




Back View

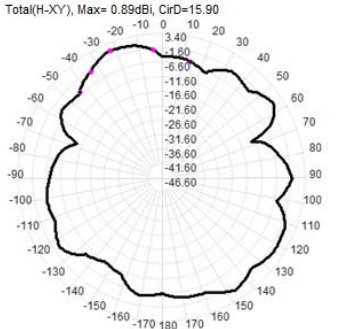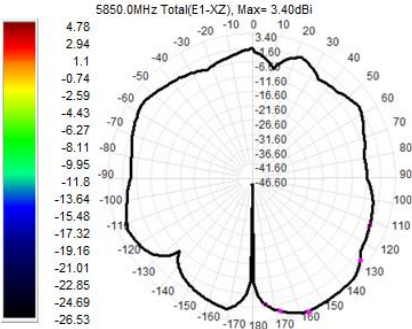

Antenna Location




Rev	Description	Date	Remark
A	New drawing		

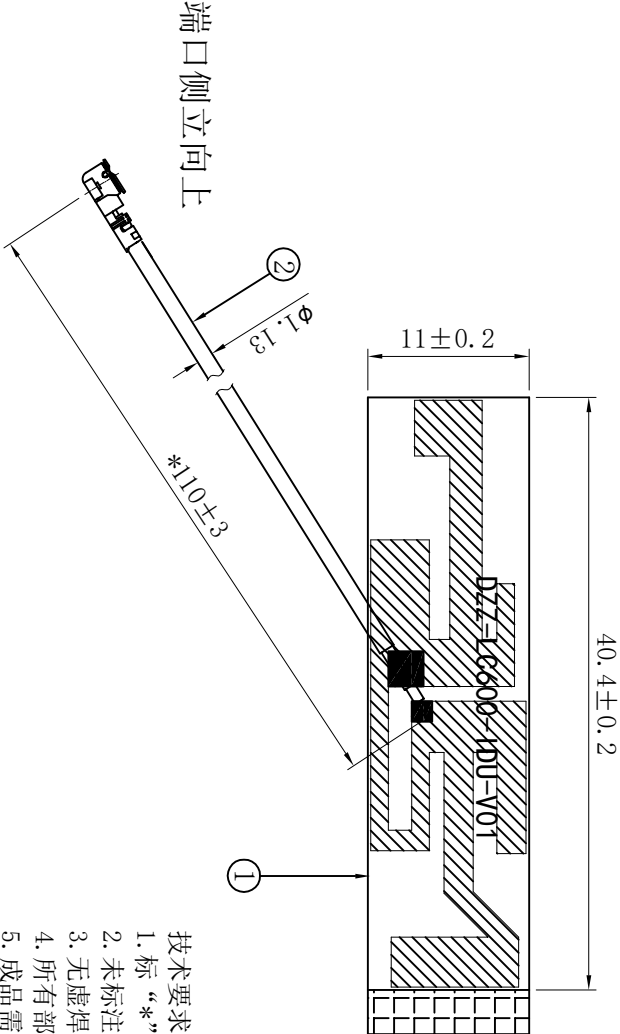

- 技术要求:
1. 标“*”尺寸为重点管控尺寸;
 2. 未标注尺寸依照图纸;
 3. 无虚焊、假焊、连锡、短路、断路等焊接不良现象;
 4. 所有部件需符合RoHS要求;
 5. 成品需全检性能。

1	2	3	4	5	6	7	8																																																											
					<table><tr><th>Rev</th><th>Description</th><th>Date</th><th>Remark</th></tr><tr><td>A</td><td>New drawing</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr></table>			Rev	Description	Date	Remark	A	New drawing																																																					
Rev	Description	Date	Remark																																																															
A	New drawing																																																																	
Be-Comfortable 得自在 深圳市得自在科技有限公司 SHEN ZHEN BE-COMFORTABLE CO., LTD																																																																		
<table><tr><td></td><td>Third Angle</td><td>Project</td><td>LC600-1DU</td><td>Date</td><td colspan="3">2022-11-26</td></tr><tr><td>0~10</td><td>±0.05</td><td></td><td>Part Name</td><td>WIFI-2天线</td><td>Designed by</td><td colspan="3">李从放</td></tr><tr><td>10~18</td><td>±0.10</td><td></td><td>Part No.</td><td>N12-8326-R0A</td><td>Checked by</td><td>RF</td><td colspan="3">周洪亮</td></tr><tr><td>18~30</td><td>±0.12</td><td></td><td>Material</td><td>/</td><td>Approved by</td><td>PE</td><td colspan="3"></td></tr><tr><td>30~40</td><td>±0.15</td><td></td><td>DWG No.</td><td>N12-8326-R0A</td><td>Unit</td><td>mm</td><td>Scale</td><td>1:1</td><td>Rev</td><td>A</td></tr><tr><td>40~</td><td>±0.20</td><td>Angle</td><td colspan="8">±0.5°</td></tr></table>						Third Angle	Project	LC600-1DU	Date	2022-11-26			0~10	±0.05		Part Name	WIFI-2天线	Designed by	李从放			10~18	±0.10		Part No.	N12-8326-R0A	Checked by	RF	周洪亮			18~30	±0.12		Material	/	Approved by	PE				30~40	±0.15		DWG No.	N12-8326-R0A	Unit	mm	Scale	1:1	Rev	A	40~	±0.20	Angle	±0.5°										
	Third Angle	Project	LC600-1DU	Date	2022-11-26																																																													
0~10	±0.05		Part Name	WIFI-2天线	Designed by	李从放																																																												
10~18	±0.10		Part No.	N12-8326-R0A	Checked by	RF	周洪亮																																																											
18~30	±0.12		Material	/	Approved by	PE																																																												
30~40	±0.15		DWG No.	N12-8326-R0A	Unit	mm	Scale	1:1	Rev	A																																																								
40~	±0.20	Angle	±0.5°																																																															
<table><tr><th>No.</th><th>Part No.</th><th>Name</th><th>Specification</th><th>Amount</th><th>Remark</th></tr><tr><td>2</td><td></td><td>同轴线+端子</td><td>1.13 双锡线 灰色+1代</td><td>1</td><td></td></tr><tr><td>1</td><td></td><td>FPC</td><td>单面板 黑色</td><td>1</td><td></td></tr></table>					No.	Part No.	Name	Specification	Amount	Remark	2		同轴线+端子	1.13 双锡线 灰色+1代	1		1		FPC	单面板 黑色	1																																													
No.	Part No.	Name	Specification	Amount	Remark																																																													
2		同轴线+端子	1.13 双锡线 灰色+1代	1																																																														
1		FPC	单面板 黑色	1																																																														
<table><tr><th>1</th><th>2</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th><th>8</th></tr><tr><td colspan="5"></td><td colspan="3"></td></tr></table>					1	2	3	4	5	6	7	8																																																						
1	2	3	4	5	6	7	8																																																											

Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Efficiency (dBi)	-1.60	-1.50	-1.40	-1.28	-1.29	-1.37	-1.37	-1.43	-1.43	-1.21	-1.04
Gain (dBi)	2.04	2.35	2.42	2.23	1.58	1.77	1.65	1.69	2.04	2.16	2.07
Efficiency (%)	69.18	70.80	72.50	74.40	74.36	73.03	72.96	71.91	71.90	75.63	78.63

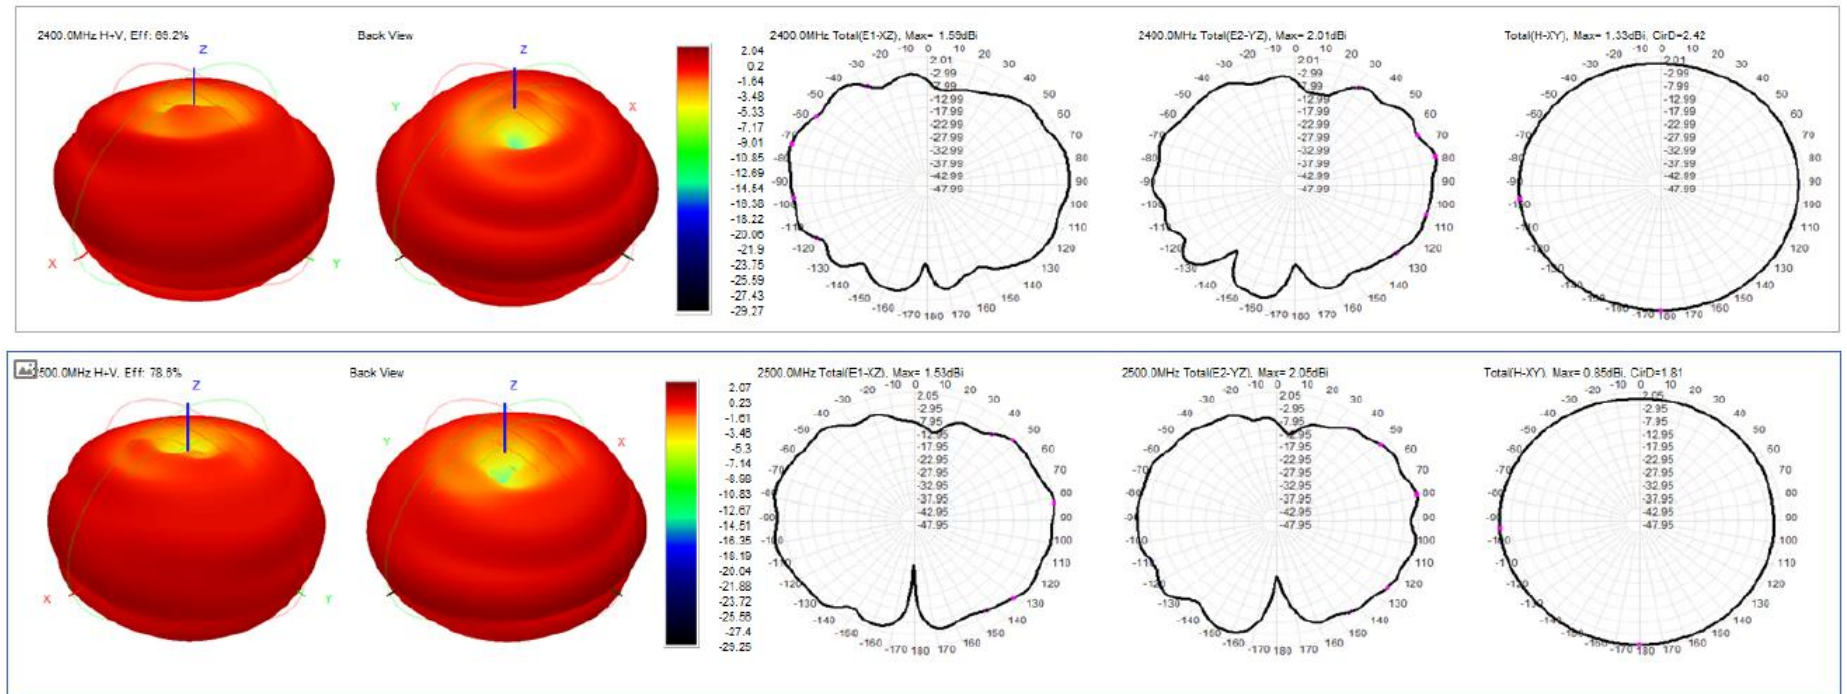

12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
5150.0	5200.0	5250.0	5300.0	5350.0	5400.0	5450.0	5500.0	5550.0	5600.0	5650.0	5700.0	5750.0	5800.0	5850.0
4.91	5.21	5.42	5.42	5.24	5.09	4.95	4.54	4.15	4.17	4.46	4.42	4.58	4.83	5.22
63.04	62.18	59.81	58.17	61.42	58.29	55.43	56.39	61.22	62.31	63.12	65.76	64.64	60.24	61.47

