

TEST REPORT

Applicant: Sichuan Injet New Energy Co., Ltd.

Address: No.19, Tumenjiang Road, Deyang, Sichuan, 618000, China

Product Name: Wi-Fi/Bluetooth Module

FCC ID: 2AZGW-AP6256

IC: 31210-AP6256

HVIN: AP6256

47 CFR Part 15, Subpart E(15.407)
RSS-247 Issue 4, July 24, 2025
RSS-Gen, Issue 5, February 2021 Amendment 2
Standard(s): ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 +
Errata to C63.10a-2024
KDB 789033 D02 General U-NII Test Procedures New Rules
v02r01

Report Number: 2602R03904E-RF-00D

Report Date: 2026/5/20

The above device has been tested and found compliant with the requirement of the relevant standards by Bay Area Compliance Laboratories Corp. (Dongguan).

Alice Tan

Reviewed By: Alice Tan

Title: RF Engineer

Pedro Yun

Approved By: Pedro Yun

Title: RF Supervisor

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 ACCESSORY INFORMATION	5
1.3 ANTENNA INFORMATION DETAIL ▲	6
1.4 EQUIPMENT MODIFICATIONS	6
2. SUMMARY OF TEST RESULTS	7
3. DESCRIPTION OF TEST CONFIGURATION	8
3.1 OPERATION FREQUENCY DETAIL	8
3.2 EUT OPERATION CONDITION	9
3.3 SUPPORT EQUIPMENT LIST AND DETAILS	10
3.4 SUPPORT CABLE LIST AND DETAILS	10
3.5 BLOCK DIAGRAM OF TEST SETUP	11
3.6 TEST FACILITY	13
3.7 MEASUREMENT UNCERTAINTY	13
4. REQUIREMENTS AND TEST PROCEDURES	14
4.1 AC LINE CONDUCTED EMISSIONS	14
4.1.1 Applicable Standard	14
4.1.2 EUT Setup	16
4.1.3 EMI Test Receiver Setup	16
4.1.4 Test Procedure	17
4.1.5 Corrected Amplitude & Margin Calculation	17
4.1.6 Test Result	17
4.2 RADIATION SPURIOUS EMISSIONS	18
4.2.1 Applicable Standard	18
4.2.2 EUT Setup	20
4.2.3 EMI Test Receiver & Spectrum Analyzer Setup	22
4.2.4 Test Procedure	22
4.2.5 Corrected Result & Margin Calculation	23
4.2.6 Test Result	23
4.3 26DB ATTENUATED BELOW THE CHANNEL POWER	24
4.3.1 Applicable Standard	24
4.3.2 EUT Setup	24
4.3.3 Test Procedure	24
4.3.4 Test Result	24
4.4 EMISSION BANDWIDTH	25
4.4.1 Applicable Standard	25
4.4.2 EUT Setup	25
4.4.3 Test Procedure	25
4.4.4 Test Result	26
4.5 MAXIMUM CONDUCTED OUTPUT POWER	27

4.5.1 Applicable Standard	27
4.5.2 EUT Setup	29
4.5.3 Test Procedure	29
4.5.4 Test Result	29
4.6 MAXIMUM POWER SPECTRAL DENSITY	30
4.6.1 Applicable Standard	30
4.6.2 EUT Setup	32
4.6.3 Test Procedure	32
4.6.4 Test Result	32
4.7 DUTY CYCLE	33
4.7.1 EUT Setup	33
4.7.2 Test Procedure	33
4.7.3 Judgment	33
4.8 ANTENNA REQUIREMENT	34
4.8.1 Applicable Standard	34
4.8.2 Judgment	34
4.9 ADDITIONAL REQUIREMENT	35
4.9.1 Applicable Standard	35
4.9.2 Judgment	36
5. TEST DATA AND RESULTS	37
5.1 AC LINE CONDUCTED EMISSIONS	37
5.2 RADIATION SPURIOUS EMISSIONS	40
5.3 26DB ATTENUATED BELOW THE CHANNEL POWER	119
5.4 EMISSION BANDWIDTH	122
5.5 99% OCCUPIED BANDWIDTH	132
5.6 MAXIMUM CONDUCTED OUTPUT POWER	142
5.7 MAXIMUM POWER SPECTRAL DENSITY	145
5.8 DUTY CYCLE	155
EXHIBIT A - EUT PHOTOGRAPHS	157
EXHIBIT B - TEST SETUP PHOTOGRAPHS	158

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2602R03904E-RF-00D	Original Report	2026/5/20

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Wi-Fi/Bluetooth Module
EUT Model:	AP6256
Operation Frequency:	5150-5250MHz: 5180-5240 MHz (802.11a/n ht20/ac vht20) 5190-5230 MHz (802.11n ht40/ac vht40) 5210 MHz (802.11ac vht80) 5250-5350MHz: 5260-5320 MHz (802.11a/n ht20/ac vht20) 5270-5310 MHz (802.11n ht40/ac vht40) 5290 MHz (802.11ac vht80) 5470-5725MHz: 5500-5720 MHz (802.11a/n ht20/ac vht20) 5510-5710 MHz (802.11n ht40/ac vht40) 5530-5690MHz (802.11ac vht80) 5725-5850MHz: 5745-5825 MHz (802.11a/n ht20/ac vht20) 5755-5795 MHz (802.11n ht40/ac vht40) 5775 MHz (802.11ac vht80)
Maximum Average Output Power (Conducted):	12.52 dBm in 5150-5250 MHz Band 15.27 dBm in 5250-5350 MHz Band 12.25 dBm in 5470-5725 MHz Band 13.82 dBm in 5725-5850 MHz Band
Maximum Average Output Power (EIRP):	15.81 dBm in 5150-5250 MHz Band 17.65 dBm in 5250-5350 MHz Band 13.53 dBm in 5470-5725 MHz Band
Modulation Type:	802.11a/n/ac: OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM
Rated Input Voltage:	DC 3.3V
Serial Number:	For AC line conducted emissions and Radiated Spurious Emissions tests: 3IK4-1 For RF Conducted test: 3IK4-2
EUT Received Date:	2026/3/18
EUT Received Status:	Good

1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
/	/	/	/

1.3 Antenna Information Detail▲

Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
PCB	50	5150-5250MHz	3.29dBi
		5250-5350MHz	2.38dBi
		5470-5725MHz	1.28dBi
		5725-5850MHz	1.75dBi

The design of compliance with §15.203:

- ☒ Unit uses a permanently attached antenna.
- ☐ Unit uses a unique coupling to the intentional radiator.
- ☐ Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a) RSS-Gen Clause 8.8	AC line conducted emissions	Compliant
FCC§15.205 & §15.209 & §15.407(b); RSS-247 Clause 7.3	Undesirable Emission& Restricted Bands	Compliant
RSS-247 Clause 7.3.1.3	26dB attenuated below the channel power	Compliant
FCC§15.407(a) (e) RSS-247 Clause 7.3 RSS-Gen Clause 6.7	Emission Bandwidth	Compliant
FCC§15.407(a) RSS-247 Clause 7.3	Maximum Conducted Output Power	Compliant
FCC§15.407 (a) RSS-247 Clause 7.3	Power Spectral Density	Compliant
§15.203 RSS-Gen Clause 6.8	Antenna Requirement	Compliant
RSS-247 Clause 7.3.7	Additional requirements	Compliant

3. DESCRIPTION OF TEST CONFIGURATION

3.1 Operation Frequency Detail

For 802.11a/n ht20/ac vht20:

5150-5250MHz Band		5250-5350 MHz Band		5470-5725 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
40	5200	56	5280	104	5520	153	5765
44	5220	60	5300	108	5540	157	5785
48	5240	64	5320	112	5560	161	5805
/	/	/	/	116	5580	165	5825
/	/	/	/	120	5600	/	/
/	/	/	/	124	5620	/	/
/	/	/	/	128	5640	/	/
/	/	/	/	132	5660	/	/
/	/	/	/	136	5680	/	/
/	/	/	/	140	5700	/	/
/	/	/	/	144*	5720	/	/

For 802.11n ht40/ac vht40:

5150-5250MHz		5250-5350 MHz		5470-5725 MHz		5725-5850MHz	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
46	5230	62	5310	110	5550	159	5795
/	/	/	/	118	5590	/	/
/	/	/	/	126	5630	/	/
/	/	/	/	134	5670	/	/
/	/	/	/	142*	5710	/	/

For 802.11ac vht80:

5150-5250MHz		5250-5350 MHz		5470-5725 MHz		5725-5850MHz	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
/	/	/	/	122	5610	/	/
/	/	/	/	138*	5690	/	/

Note:

1. *Additional channels cross the band 5470-5725MHz and 5725-5850 MHz, Conducted output power/ Power Spectral Density/bandwidth test with the additional channel to compliance with stricter limit of the two bands(5470-5725MHz more stricter).
2. The above frequencies in bold were performed the test.
- 3: For AC line conducted emissions, the maximum output power mode and channel was tested.
- 4: For Radiated Spurious Emissions 9kHz~1GHz and 18-40GHz, the maximum output power mode and channel was tested.

3.2 EUT Operation Condition

The system was configured for testing in Engineering Mode, which was provided by the manufacturer. The EUT configuration is below:

EUT Exercise Software:		MobaXterm_Personal_23.6		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:				
5150-5250 MHz Band:				
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5180	6Mbps	11
	Middle	5200	6Mbps	11
	Highest	5240	6Mbps	11
802.11ac vht20	Lowest	5180	MCS0	13
	Middle	5200	MCS0	13
	Highest	5240	MCS0	13
802.11ac vht40	Lowest	5190	MCS0	13
	Highest	5230	MCS0	13
802.11ac vht80	Middle	5210	MCS0	13
5250-5350 MHz Band:				
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5260	6Mbps	17
	Middle	5280	6Mbps	17
	Highest	5320	6Mbps	17
802.11ac vht20	Lowest	5260	MCS0	15
	Middle	5280	MCS0	15
	Highest	5320	MCS0	15
802.11ac vht40	Lowest	5270	MCS0	13
	Highest	5310	MCS0	13
802.11ac vht80	Middle	5290	MCS0	14
5470-5725 MHz Band:				
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5500	6Mbps	14
	Middle	5600	6Mbps	14
	Highest	5700	6Mbps	14
	Cross	5720	6Mbps	14
802.11ac vht20	Lowest	5500	MCS0	13
	Middle	5600	MCS0	13
	Highest	5700	MCS0	13
	Cross	5720	MCS0	13
802.11ac vht40	Lowest	5510	MCS0	12
	Middle	5590	MCS0	12
	Highest	5670	MCS0	12
	Cross	5710	MCS0	12
802.11ac vht80	Lowest	5530	MCS0	12
	Highest	5610	MCS0	12
	Cross	5690	MCS0	12

5725-5850 MHz Band:

Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5745	6Mbps	17
	Middle	5785	6Mbps	17
	Highest	5825	6Mbps	17
802.11ac vht20	Lowest	5745	MCS0	17
	Middle	5785	MCS0	17
	Highest	5825	MCS0	17
802.11ac vht40	Lowest	5755	MCS0	15
	Highest	5795	MCS0	15
802.11ac vht80	Middle	5775	MCS0	17

Note:

- 1.The system support 802.11a/n ht20/n ht40/ac vht20/ac vht40/ac vht80, the 802.11n ht20 and n ht40 were reduced since the identical parameters with 802.11ac vht20/ac vht40.
- 2.The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.

3.3 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	T430	00331-10000-00001-AA357_01
DJI	Adapter	QC24-EU	EMZBMA21110501EN
Unknown	Socket	Unknown	Unknown
Injet	Auxiliary development board	Unknown	3IK4-8
Injet	Fixture board	Unknown	Unknown

3.4 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Control cable	No	No	1.2	Laptop	Auxiliary development board
DC cable	No	No	1.0	Adapter	Laptop
DC cable	No	No	0.5	Socket	Adapter

3.5 Block Diagram of Test Setup


AC line conducted emissions:

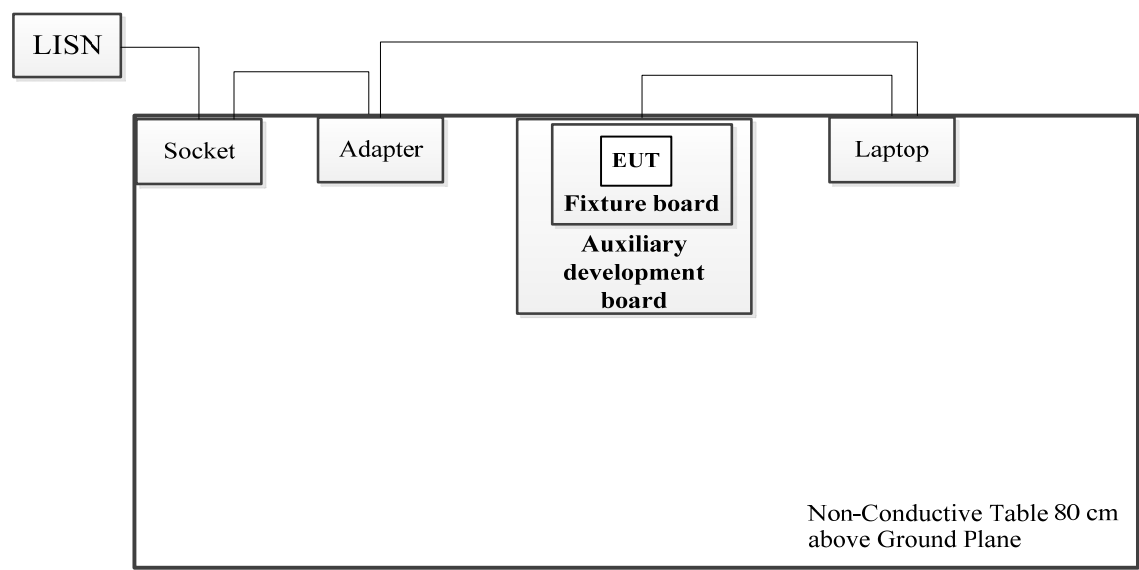

Spurious Emissions:
Below 1GHz:

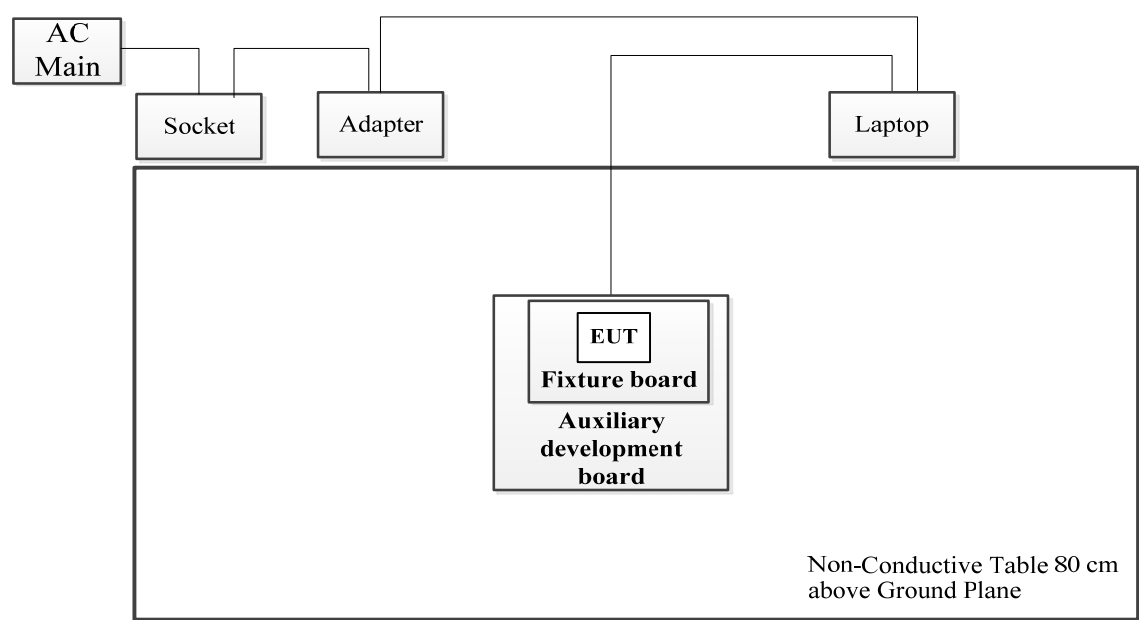

Above 1GHz:

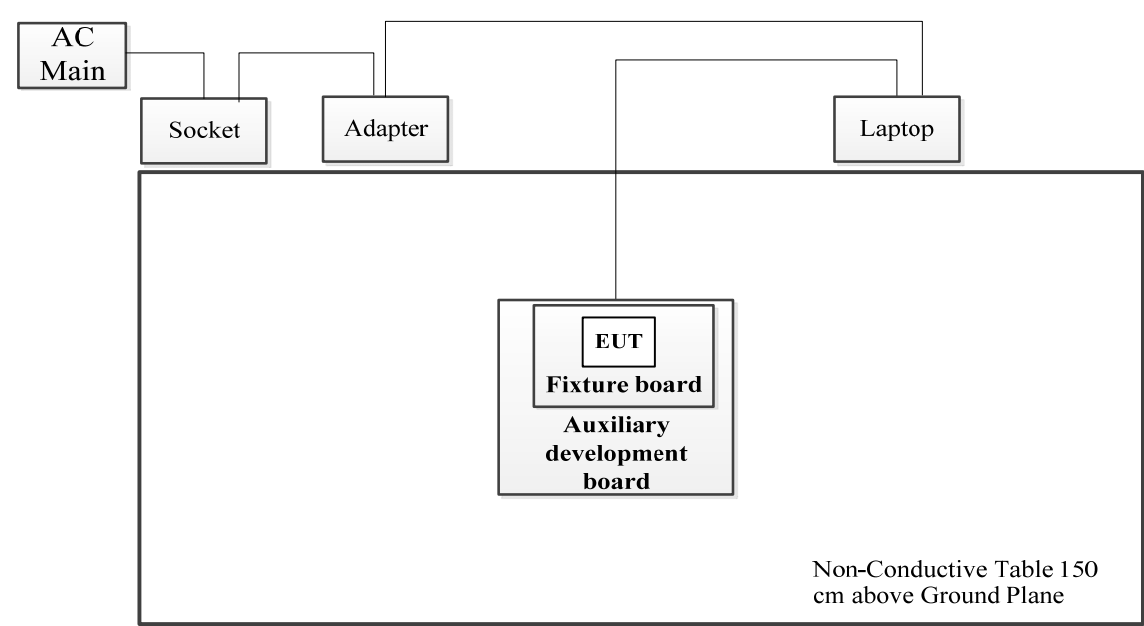

3.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3.7 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.55 dB
Power Spectral Density, conducted	±0.55 dB
Unwanted Emissions, radiated	9kHz~30MHz: 3.06dB, 30MHz~1GHz: 6.13 dB, 1GHz~6GHz: 4.79 dB, 6GHz~18GHz: 4.63 dB, 18GHz~26.5GHz: 4.79 dB, 26.5GHz~40GHz: 4.63 dB
Unwanted Emissions, conducted	±2.47 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.83 dB (150 kHz to 30 MHz)

4. REQUIREMENTS AND TEST PROCEDURES

4.1 AC Line Conducted Emissions

4.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

- (1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.
- (2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.
- (3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

RSS-Gen Clause 8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50 μ H / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ¹	56 to 46 ¹
0.5 – 5	56	46
5 – 30	60	50


Note 1: The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

(a) Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.

(b) Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

4.1.2 EUT Setup

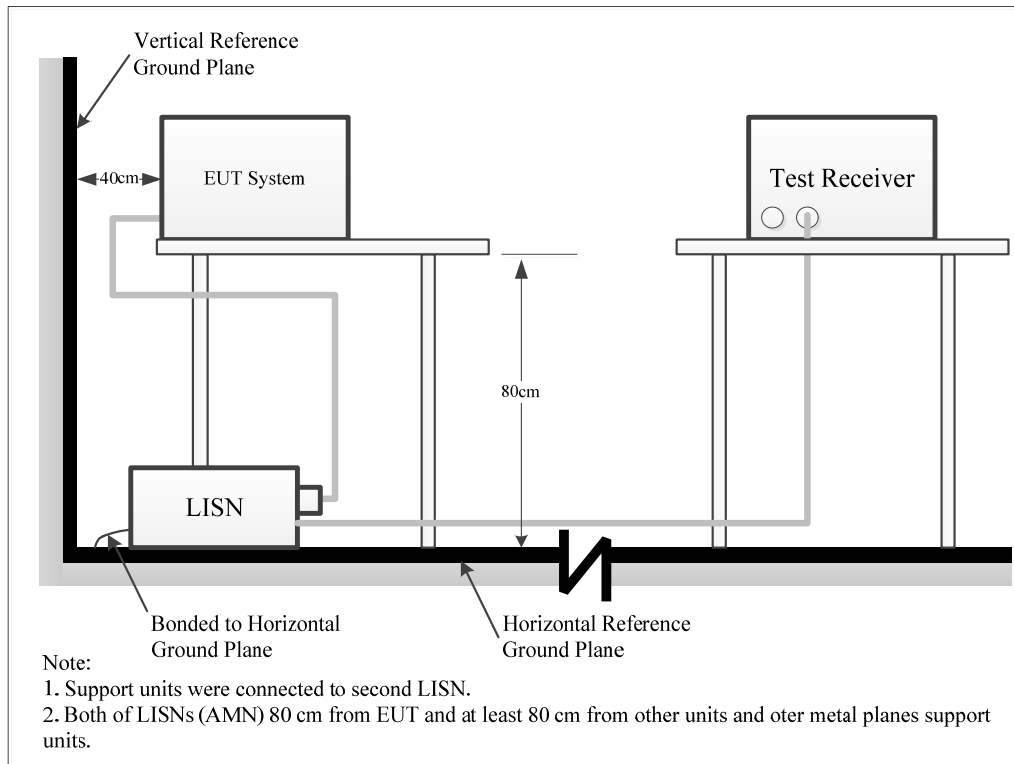

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207, RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

4.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

4.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase ("hot") line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

4.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The "**Margin**" column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.1.6 Test Result

Please refer to section 5.1.

4.2 Radiation Spurious Emissions

4.2.1 Applicable Standard

FCC §15.407 (b);

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
- (4) For transmitters operating solely in the 5.725-5.850 GHz band:
 - (i) All emissions shall be limited to a level of - 27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.
- (8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.
- (10) The provisions of § 15.205 apply to intentional radiators operating under this section.
- (11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.
- (c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

Frequency band 5150-5250 MHz:

RSS-247 Clause 7.3.1.3

For transmitters with operating frequencies in the band 5150-5250 MHz:

- a. all emissions outside the 5150-5350 MHz band shall not exceed -27 dBm/MHz peak e.i.r.p. spectral density;
- b. any unwanted emissions that falls between the upper edge of the 26 dB bandwidth and 5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth.
- c. if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing DFS (see section 7.3.6) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

Frequency band 5250-5350 MHz:

RSS-247 Clause 7.3.2.3

Devices shall comply with the following:

- a. all emissions outside the band 5150-5350 MHz shall not exceed -27dBm/MHz peak e.i.r.p spectral density.
- b. all emissions inside the band 5150-5250 MHz shall either:
 - i. not exceed -27 dBm/MHz peak e.i.r.p spectral density, or
 - ii. comply with the power spectral density for operation in section 7.3.1.2.

Frequency bands 5470-5725 MHz:

RSS-247 Clause 7.3.3.3

Equipment operating in the bands 5470-5725 MHz shall comply with the following unwanted emission limits:

- a. for devices with fundamental emissions fully contained within the 5470-5725 MHz band, all unwanted emissions outside the band 5470-5725MHz shall not exceed -27 dBm/MHz peak e.i.r.p. spectral density.
- b. for devices with bandwidth overlapping the band edge of 5725 MHz, all unwanted emissions shall not exceed -27 dBm/MHz peak e.i.r.p. spectral density at 5850 MHz instead of 5725 MHz.

Frequency band 5725-5850 MHz


RSS-247 Clause 7.3.4.3

Equipment operating in the band 5725-5850 MHz shall comply with the following peak e.i.r.p. spectral density limits:


- a. 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- b. 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- c. 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- d. -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

4.2.2 EUT Setup


9kHz~30MHz:

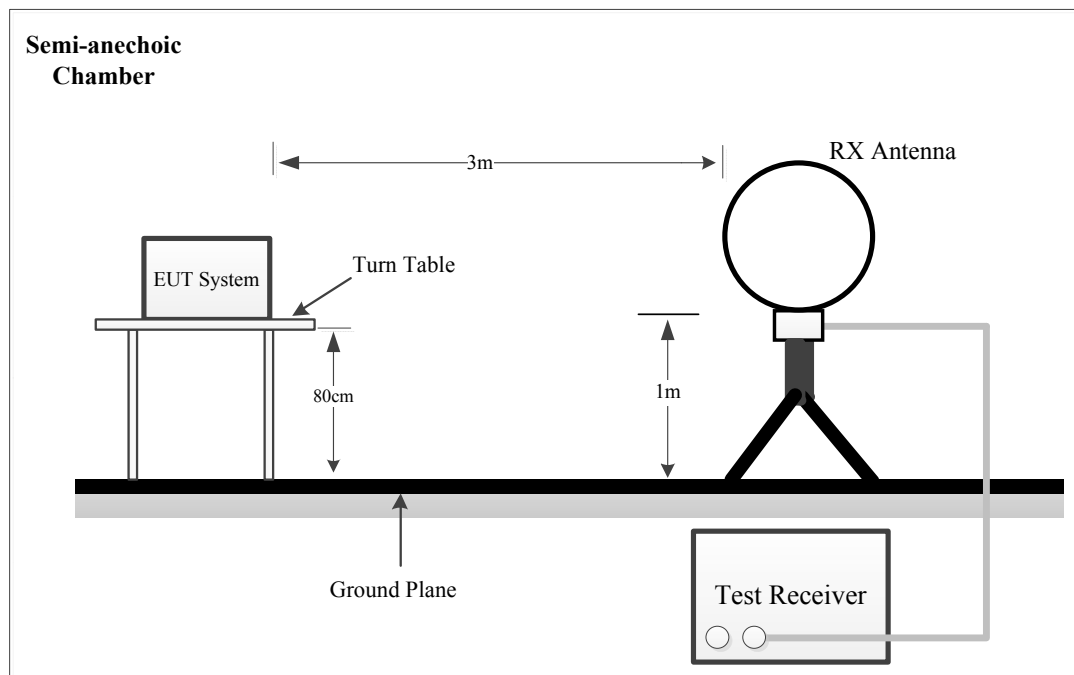


30MHz~1GHz:

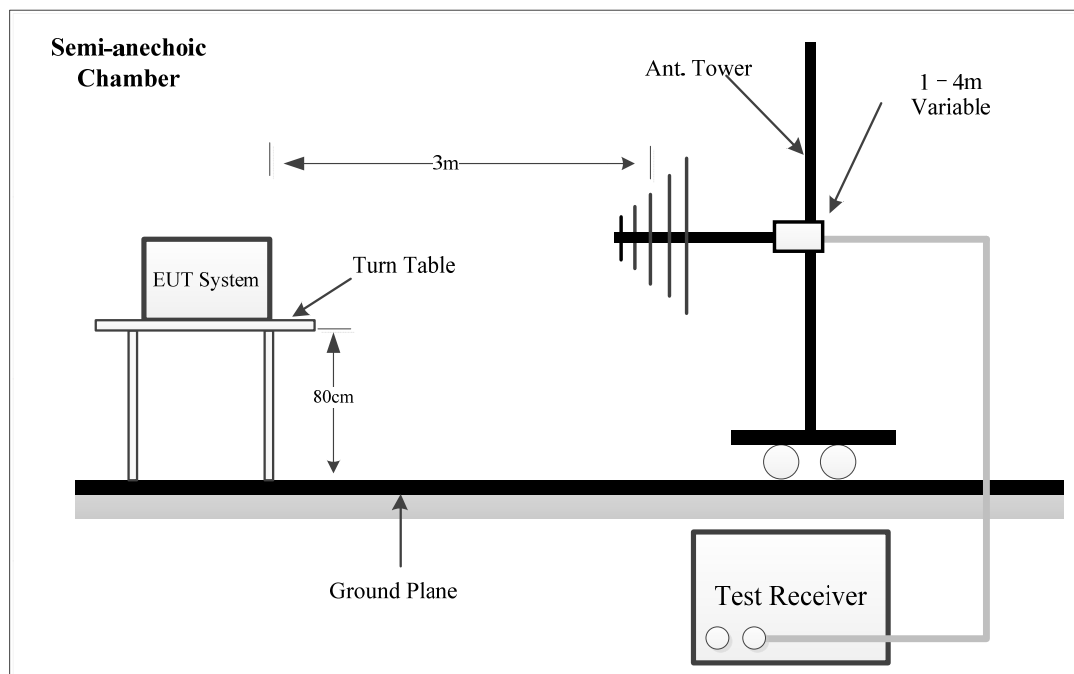

1-26.5GHz:

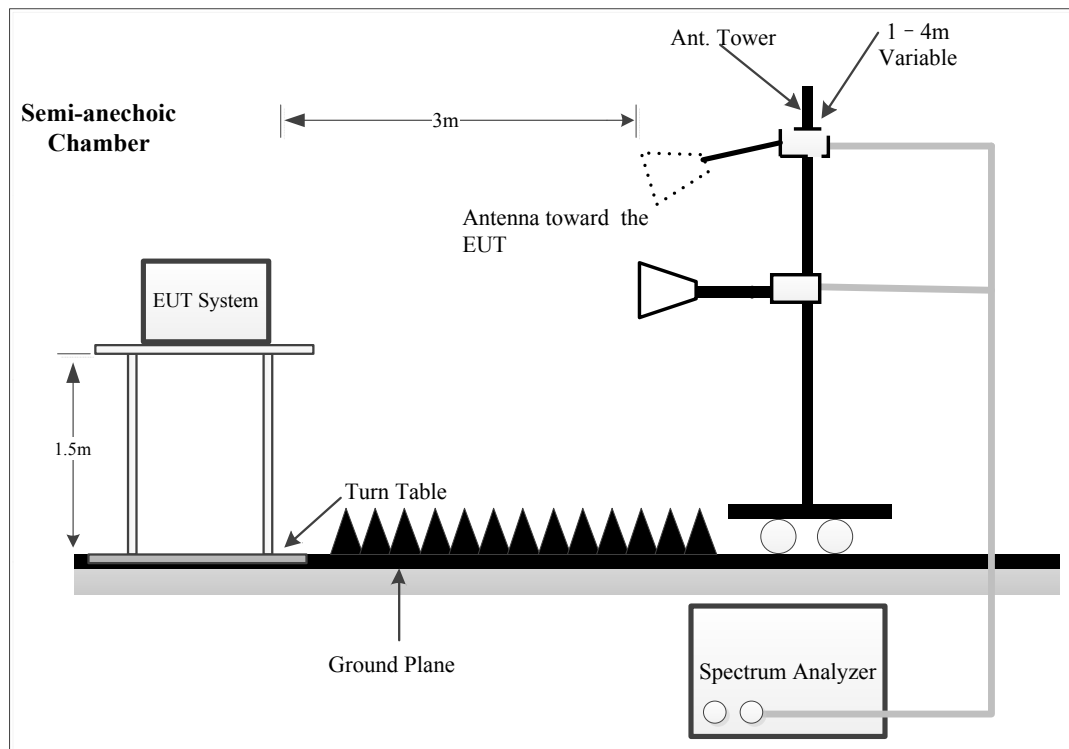

26.5-40GHz:

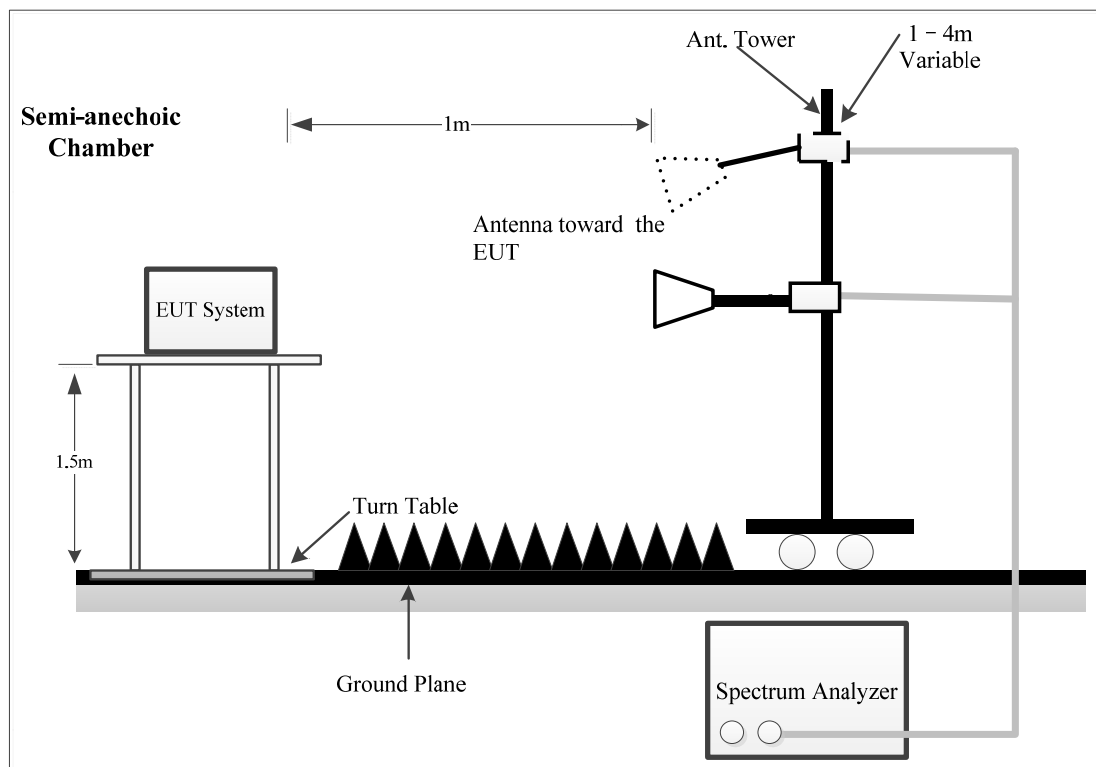

The radiated emission tests were performed in the semi-anechoic chamber, using the setup accordance with the ANSI C63.10-2020. The specification used was FCC 15.209, FCC 15.407, RSS-247, RSS-Gen limits.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

4.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz-1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W	Detector
9 kHz – 150 kHz	QP/AV	200 Hz	1 kHz	200 Hz	QP/AV
150 kHz – 30 MHz	QP/AV	9 kHz	30 kHz	9 kHz	QP/AV
30MHz – 1000 MHz	PK	120 kHz	500 kHz	/	PK
	QP	/	/	120kHz	QP

1GHz- 40GHz:

Pre-scan:

Frequency Range	Measurement	RBW	Video B/W	Detector
Above 1 GHz	Peak	1MHz	3 MHz	PK
	AV	1MHz	5kHz	PK

Final measurement for emission identified during the pre-scan:

Measurement	Detector	Duty cycle	RBW	Video B/W
PK	PK	Any	1MHz	3 MHz
Ave.	PK	>98%	1MHz	10 Hz
		<98%	1MHz	$\geq 1/T$

Note: T is minimum transmission duration

4.2.4 Test Procedure

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz -1 GHz, except 9-90 kHz, 110-490 kHz, employing an average detector, peak and Average detection modes for frequencies above 1 GHz.

If the maximized peak measured value is under the QP/Average limit by more than 6dB, then it is unnecessary to perform an QP/Average measurement.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

For Radiated 26.5-40GHz test, which was performed at 1.0 m distance, according to C63.10, the test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.0m Distance extrapolation Factor = $20 \log (\text{specific distance } [3m]/\text{test distance } [1.0m])$ dB= 9.54 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

4.2.5 Corrected Result & Margin Calculation

$$E_{Log} = 20 \times \log_{10}(E_{Linear})$$

E_{Linear} is the field strength of the emission, in $\mu\text{V/m}$

E_{Log} is the field strength of the emission, in $\text{dB}\mu\text{V/m}$

For 9kHz-30MHz test, test distance is 3m, extrapolation limit shall be calculated using Equation:

$$E_{\text{limit-measure}} = E_{\text{limit-Standard}} + 40 \times \log_{10} (d_{\text{standard}}/d_{\text{measure}})$$

The basic equation except 26.5-40GHz test is as follows:

Factor = Antenna Factor + Cable Loss- Amplifier Gain

For Radiated 26.5-40GHz test:

Factor = Antenna Factor + Cable Loss- Amplifier Gain - Distance extrapolation Factor

Result = Reading + Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

For the spurious emission below 30MHz, the limit was converted from $\text{dB}\mu\text{A/m}$ to $\text{dB}\mu\text{V/m}$ by adding 51.5 dB.

4.2.6 Test Result

Please refer to section 5.2.


4.3 26dB Attenuated Below the Channel Power

4.3.1 Applicable Standard

RSS-247 Clause 7.3.1.3

b. any unwanted emissions that falls between the upper edge of the 26 dB bandwidth and 5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth.

4.3.2 EUT Setup

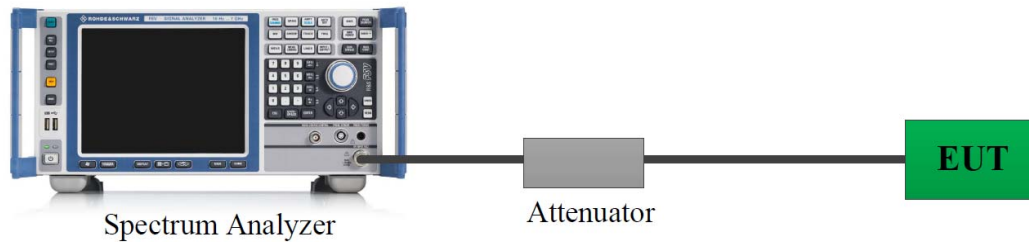

4.3.3 Test Procedure

- Set $RBW = 1\% \sim 5\%$ of the emission bandwidth.
- Set the $VBW > RBW$.
- Detector = RMS.
- Trace mode = max hold
- Measure the emission attenuated below the channel power

4.3.4 Test Result

Please refer to section 5.3.

4.4 Emission Bandwidth

4.4.1 Applicable Standard

FCC §15.407 (a), (h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

RSS-247 Clause 7.3.1.3


b. any unwanted emissions that falls between the upper edge of the 26 dB bandwidth and 5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth.

c. if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing DFS (see section 7.3.6) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

RSS-247 Clause 7.3.4.2

For equipment operating in the band 5725-5850 MHz, the 6 dB bandwidth shall be at least 500 kHz.

4.4.2 EUT Setup

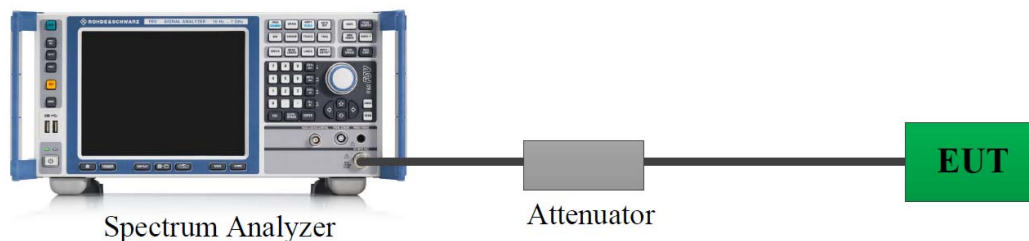

4.4.3 Test Procedure

26dB Emission Bandwidth:

According to ANSI C63.10-2020 Section 12.5.2

- Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

6 dB emission bandwidth:

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) ≥ 3 RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

99% Occupied Bandwidth:

According to ANSI C63.10-2020 Section 12.5.3&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.6.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

4.4.4 Test Result

Please refer to section 5.4 and section 5.5.

4.5 Maximum Conducted Output Power

4.5.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15 – 5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

RSS-247 Clause 7.3.1.2

Frequency band 5150-5250 MHz:

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed the lesser of:

- a. 30 mW; or
- b. $1.76 + 10 \log_{10} B$, dBm.

OEM devices installed in vehicles with a maximum e.i.r.p. greater than 15 mW shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For all other devices the maximum e.i.r.p. spectral density shall not exceed 10dBm/MHz. The maximum e.i.r.p. shall not exceed the lesser of:

- a. 200 mW; or
- b. $10 + 10 \log_{10} B$, dBm.

RSS-247 Clause 7.3.2.2**Frequency band 5250-5350 MHz:**

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed the lesser of:

- a. 30 mW; or
- b. $1.76 + 10 \log_{10} B$, dBm.

OEM devices installed in vehicles with a maximum e.i.r.p. greater than 15 mW shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

All other devices shall comply with the following:

a. the maximum power spectral density shall not exceed 11 dBm/MHz and the maximum conducted output power shall not exceed the lesser of:

- i. 250 mW; or
- ii. $11 + 10 \log_{10} B$, dBm.

b. the maximum e.i.r.p. shall not exceed the lesser of:

- i. 1.0 W; or
- ii. $17 + 10 \log_{10} B$, dBm.

c. Devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

RSS-247 Clause 7.3.3.2**Frequency band 5470-5725 MHz:**

Equipment operating in the band 5470-5725 MHz band shall comply with the following power limits:

a. the maximum conducted output power shall not exceed the lesser of:

- i. 250 mW; or
- ii. $11 + 10 \log_{10} B$, dBm.

b. the maximum power spectral density shall not exceed 11 dBm/MHz.

c. the maximum e.i.r.p. shall not exceed the lesser of:

- i. 1.0 W; or
- ii. $17 + 10 \log_{10} B$, dBm.

d. equipment with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

RSS-247 Clause 7.3.4.3**Frequency band 5725-5850 MHz:**

Equipment operating in the band 5725-5850 shall comply with the following power limits:

a. the maximum conducted output power shall not exceed 1 W; and


b. the maximum output power spectral density shall not exceed 30dBm/500 kHz.

When using transmitting antennas with a directional gain exceeding 6 dBi, the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

However, FFTP devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter maximum conducted output power and the power spectral density. FFTP operations exclude the use of PTMP systems, omnidirectional applications and multiple collocated transmitters transmitting the same information. However, remote stations of PTMP systems shall be permitted to operate at e.i.r.p. greater than 4 W under the same conditions as for FFTP systems.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

4.5.2 EUT Setup



A short RF cable with low cable loss connected to the EUT antenna port. The insert loss of this RF cable/attenuator was offset into the setting of test equipment:

Offset=Insert loss of RF cable+ Insert loss of attenuator

4.5.3 Test Procedure

According to ANSI C63.10-2020 Section 12.4.3.2

Method PM-G is measurement using a gated RF average power meter.

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

4.5.4 Test Result

Please refer to section 5.6.

4.6 Maximum Power Spectral Density

4.6.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

RSS-247 Clause 7.3.1.2

Frequency band 5150-5250 MHz:

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed the lesser of:

- a. 30 mW; or
- b. $1.76 + 10 \log_{10} B$, dBm.

OEM devices installed in vehicles with a maximum e.i.r.p. greater than 15 mW shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For all other devices the maximum e.i.r.p. spectral density shall not exceed 10dBm/MHz. The maximum e.i.r.p. shall not exceed the lesser of:

- a. 200 mW; or
- b. $10 + 10 \log_{10} B$, dBm.

RSS-247 Clause 7.3.2.2**Frequency band 5250-5350 MHz:**

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed the lesser of:

- a. 30 mW; or
- b. $1.76 + 10 \log_{10} B$, dBm.

OEM devices installed in vehicles with a maximum e.i.r.p. greater than 15 mW shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

All other devices shall comply with the following:

a. the maximum power spectral density shall not exceed 11 dBm/MHz and the maximum conducted output power shall not exceed the lesser of:

- i. 250 mW; or
- ii. $11 + 10 \log_{10} B$, dBm.

b. the maximum e.i.r.p. shall not exceed the lesser of:

- i. 1.0 W; or
- ii. $17 + 10 \log_{10} B$, dBm.

c. Devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

RSS-247 Clause 7.3.3.2**Frequency band 5470-5725 MHz:**

Equipment operating in the band 5470-5725 MHz band shall comply with the following power limits:

a. the maximum conducted output power shall not exceed the lesser of:

- i. 250 mW; or
- ii. $11 + 10 \log_{10} B$, dBm.

b. the maximum power spectral density shall not exceed 11 dBm/MHz.

c. the maximum e.i.r.p. shall not exceed the lesser of:

- i. 1.0 W; or
- ii. $17 + 10 \log_{10} B$, dBm.

d. equipment with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

RSS-247 Clause 7.3.4.3**Frequency band 5725-5850 MHz:**

Equipment operating in the band 5725-5850 shall comply with the following power limits:

a. the maximum conducted output power shall not exceed 1 W; and


b. the maximum output power spectral density shall not exceed 30dBm/500 kHz.

When using transmitting antennas with a directional gain exceeding 6 dBi, the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

However, FFTP devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter maximum conducted output power and the power spectral density. FFTP operations exclude the use of PTMP systems, omnidirectional applications and multiple collocated transmitters transmitting the same information. However, remote stations of PTMP systems shall be permitted to operate at e.i.r.p. greater than 4 W under the same conditions as for FFTP systems.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

4.6.2 EUT Setup

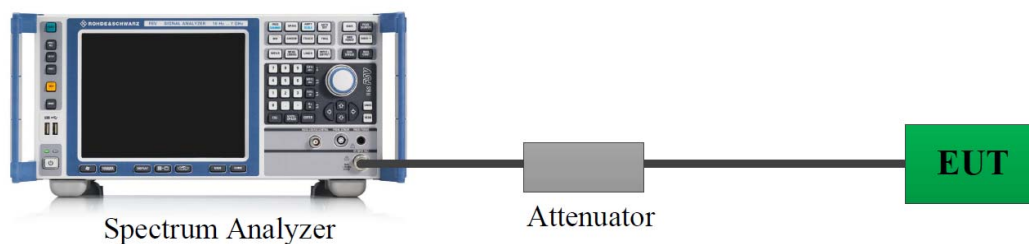

A short RF cable with low cable loss connected to the EUT antenna port. The insert loss of this RF cable/attenuator was offset into the setting of test equipment:

Offset=Insert loss of RF cable+ Insert loss of attenuator

4.6.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Duty cycle $\geq 98\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 should be applied.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$


KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 should be applied.

4.6.4 Test Result

Please refer to section 5.7.

4.7 Duty Cycle

4.7.1 EUT Setup

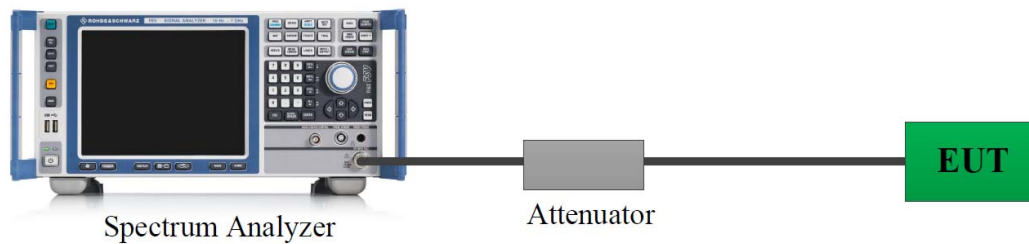

4.7.2 Test Procedure

According to ANSI C63.10-2020 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

4.7.3 Judgment

Report Only. Please refer to section 5.8.

4.8 Antenna Requirement

4.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

RSS-Gen Clause 6.8

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

4.8.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.3.

4.9 Additional requirement

4.9.1 Applicable Standard

According to RSS-247 Clause 7.3.7 Additional Requirements

The following requirements shall apply:

- a** the device shall automatically discontinue transmission in cases of absence of information to transmit, or operational failure. A description on how this is done shall accompany the application for equipment certification. Note that this is not intended to prohibit transmission of control or signalling information or the use of repetitive codes where required by the technology.
- b** all LE-LAN devices must contain security features to protect against modification of software by unauthorized parties.

Manufacturers must implement security features in any digitally modulated devices capable of operating in any of the frequency ranges within the 5 GHz band, so that third parties are not able to reprogram the device to operate outside the parameters for which the device was certified. The software must prevent the user from operating the transmitter with operating frequencies, output power, modulation types or other radio frequency parameters outside those that were approved for the device. Manufacturers may use various means, including the use of a private network that allows only authenticated users to download software, electronic signatures in software or coding in hardware that is decoded by software to verify that new software can be legally loaded into a device to meet these requirements and must describe the methods in their application for equipment certification.

Manufacturers must take steps to ensure that DFS functionality cannot be disabled by the operator of the LE-LAN device.

- c** the user manual for LE-LAN devices shall contain instructions related to the restrictions mentioned in the above sections, namely that:
 - i.** any devices capable of operating in the band 5150–5250 MHz shall only be used indoors to reduce the potential for harmful interference to co-channel mobile satellite systems (this requirement does not apply to OEM devices installed in vehicles by vehicle manufacturers);
 - ii.** for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit;
 - iii.** for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits as appropriate; and
 - iv.** where applicable, antenna type(s), antenna models(s), and worst-case tilt angle(s) necessary to remain compliant with the e.i.r.p. elevation mask requirement set forth in section 7.3.2.4 or 7.3.5.3 shall be clearly indicated.

4.9.2 Judgment

RSS-247 Clause 7.3.7 a:

The device shall automatically discontinue transmission in cases of absence of information to transmit, or operational failure. Please refer to the declaration

RSS-247 Clause 7.3.7 b:

The devices must contain security features to protect against modification of software by unauthorized parties. Please refer to the declaration

RSS-247 Clause 7.3.7 c:

- i. The device operates on 5150-5250MHz is only for indoor use.
- ii. This device is equipped with a built-in integrated antenna, and operates on 5250-5350MHz/5470-5725MHz/5725-5850 MHz meet the EIRP limit, please refer to the power test result.
- iii. This device is equipped with a built-in integrated antenna, and all the EIPR compliance with RSS-247 requirement. Please refer to the conducted output power test result.
- iv. The device EIRP less than 200mW (23 dBm) for 5250-5350MHz.

5. TEST DATA AND RESULTS

5.1 AC Line Conducted Emissions

Serial Number:	3IK4-1	Test Date:	2026/04/29
Test Site:	CE	Test Mode:	Transmitting
Tester:	Yolo Fan	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.1	Relative Humidity: (%)	62	ATM Pressure: (kPa)	100.3
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101614	2025/6/25	2026/6/24
Unknown	Coaxial Cable	RG 142	C-0200-05	2025/5/6	2026/5/5
Audix	Test Software	E3	191218 V9	N/A	N/A
R&S	EMI Test Receiver	ESCI	100224	2025/6/25	2026/6/24


* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Note: 802.11a 5320MHz was tested.

Project No.: 2602R03904E-RF
Port: Line
Test Mode: Transmitting
IF B/W 9kHz PK/AV


Serial No.: 3IK4-1
Tester: Yolo Fan
Note: 5G WIFI

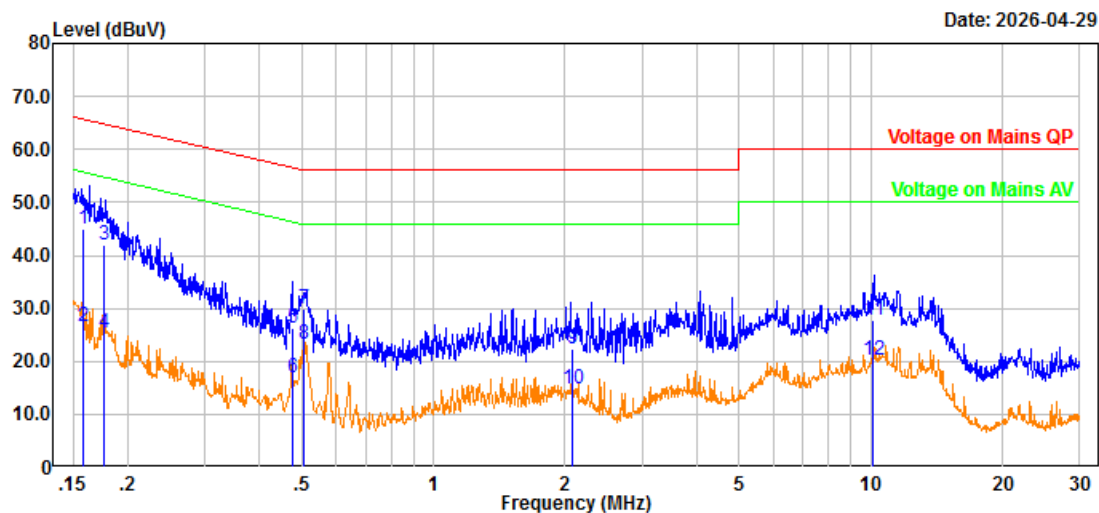

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	0.159	33.86	11.13	44.99	65.53	20.54	QP
2	0.159	15.53	11.13	26.66	55.53	28.87	Average
3	0.177	30.86	10.99	41.85	64.64	22.79	QP
4	0.177	14.44	10.99	25.43	54.64	29.21	Average
5	0.478	15.64	10.62	26.26	56.38	30.12	QP
6	0.478	6.34	10.62	16.96	46.38	29.42	Average
7	0.505	19.41	10.60	30.01	56.00	25.99	QP
8	0.505	12.75	10.60	23.35	46.00	22.65	Average
9	2.084	11.02	11.28	22.30	56.00	33.70	QP
10	2.084	3.55	11.28	14.83	46.00	31.17	Average
11	10.133	17.10	10.57	27.67	60.00	32.33	QP
12	10.133	9.79	10.57	20.36	50.00	29.64	Average

Project No.: 2602R03904E-RF
Port: neutral
Test Mode: Transmitting
IF B/W 9kHz PK/AV

Serial No.: 3IK4-1
Tester: Yolo Fan
Note: 5G WIFI

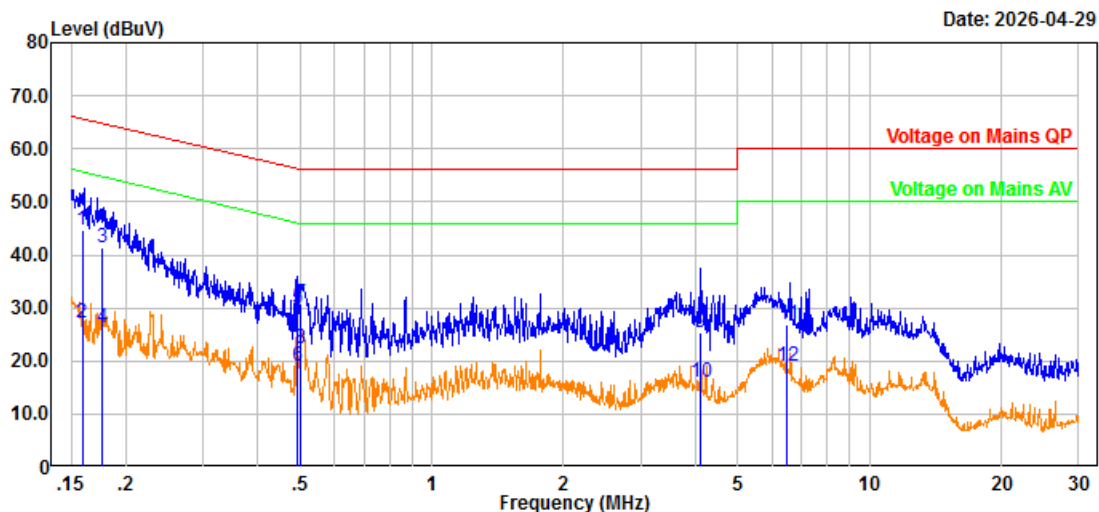

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Measurement
1	0.159	33.93	10.74	44.67	65.52	20.85	QP
2	0.159	16.54	10.74	27.28	55.52	28.24	Average
3	0.176	30.63	10.80	41.43	64.66	23.23	QP
4	0.176	15.56	10.80	26.36	54.66	28.30	Average
5	0.493	19.48	10.52	30.00	56.11	26.11	QP
6	0.493	8.57	10.52	19.09	46.11	27.02	Average
7	0.500	20.40	10.51	30.91	56.00	25.09	QP
8	0.500	11.85	10.51	22.36	46.00	23.64	Average
9	4.093	14.51	10.80	25.31	56.00	30.69	QP
10	4.093	5.05	10.80	15.85	46.00	30.15	Average
11	6.484	15.87	10.91	26.78	60.00	33.22	QP
12	6.484	7.98	10.91	18.89	50.00	31.11	Average

5.2 Radiation Spurious Emissions

1) 9kHz - 1GHz

Serial Number:	3IK4-1	Test Date:	2026/04/09~2026/05/18
Test Site:	Chamber A	Test Mode:	Transmitting
Tester:	Brian Yang	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	21.7~25.4	Relative Humidity: (%)	37~45	ATM Pressure: (kPa)	100.4~100.5

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
EMCO	Passive Loop Antenna	6512	9706-1206	2023/10/25	2026/10/24
Sunol Sciences	Hybrid Antenna	JB3	A060611-2	2024/4/16	2027/4/15
Narda	Coaxial Attenuator	757C-6dB	34010	2024/4/16	2027/4/15
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2025/6/30	2026/7/1
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2025/6/30	2026/7/1
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2025/6/30	2026/7/1
Sonoma	Amplifier	310N	372193	2025/8/15	2026/8/14
R&S	EMI Test Receiver	ESCI	100035	2025/6/25	2026/6/24
Audix	Test Software	E3	191218 V9	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below plots.
After pre-scan in the X, Y and Z axes of orientation, the worst case(Y axe) is refer to plots.


9kHz~30MHz

Three antenna orientations (parallel, perpendicular, and ground-parallel) was measured, the worst orientations was below:

5150-5250MHz(802.11ac20 5180MHz was tested):

Project No.: 2602R03904E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: 5G WIFI 5150-5250
RBW:200Hz VBW:1kHz


Serial No.: 3IK4-1
Tester: Brian Yang

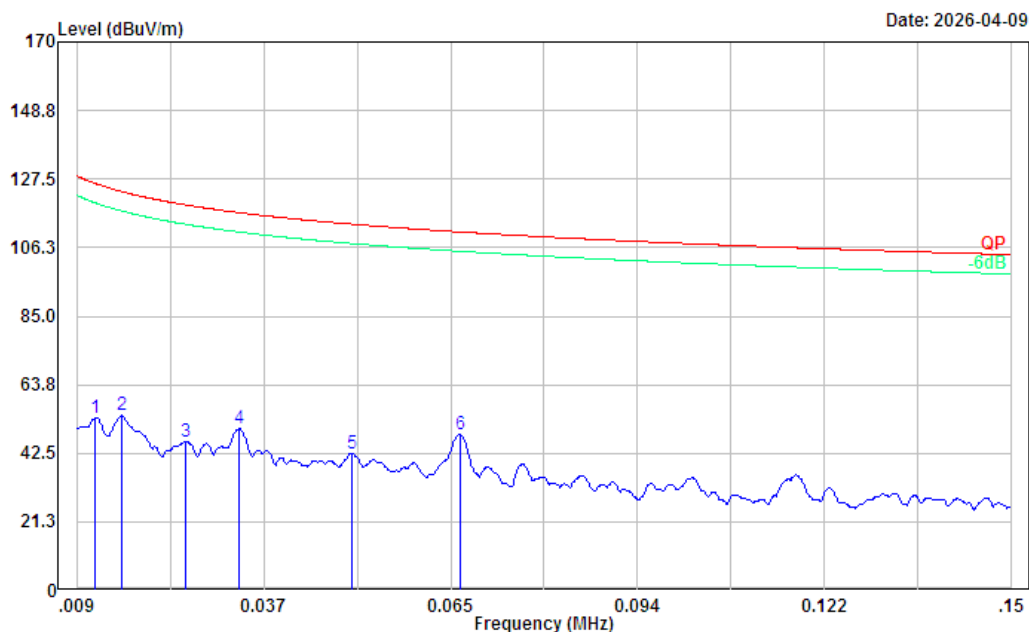

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	0.012	2.62	50.99	53.61	126.15	72.54	Peak
2	0.016	4.17	49.99	54.16	123.65	69.49	Peak
3	0.025	-1.64	47.69	46.05	119.47	73.42	Peak
4	0.034	4.11	46.04	50.15	117.09	66.94	Peak
5	0.050	-0.77	43.31	42.54	113.55	71.01	Peak
6	0.067	7.70	40.64	48.34	111.11	62.77	Peak

Project No.: 2602R03904E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: 5G WIFI 5150-5250
RBW:9kHz VBW:30kHz

Serial No.: 3IK4-1
Tester: Brian Yang

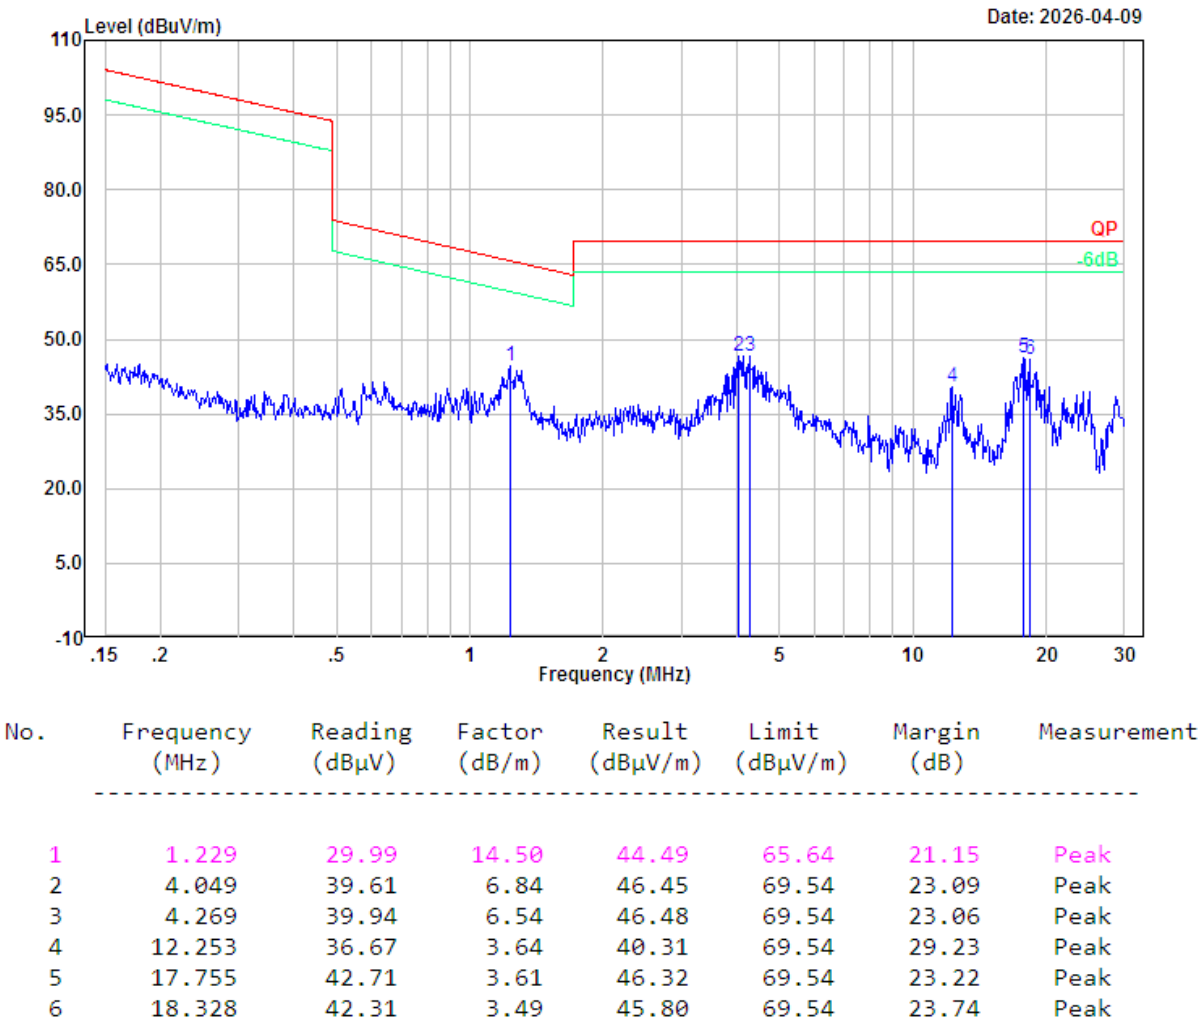

5250-5350MHz(802.11a 5320MHz was tested):

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Parallel


Tester: Brian Yang

Test Mode: Transmitting

Note: 5G WIFI 5250-5350

RBW:200Hz VBW:1kHz


Date: 2026-05-18

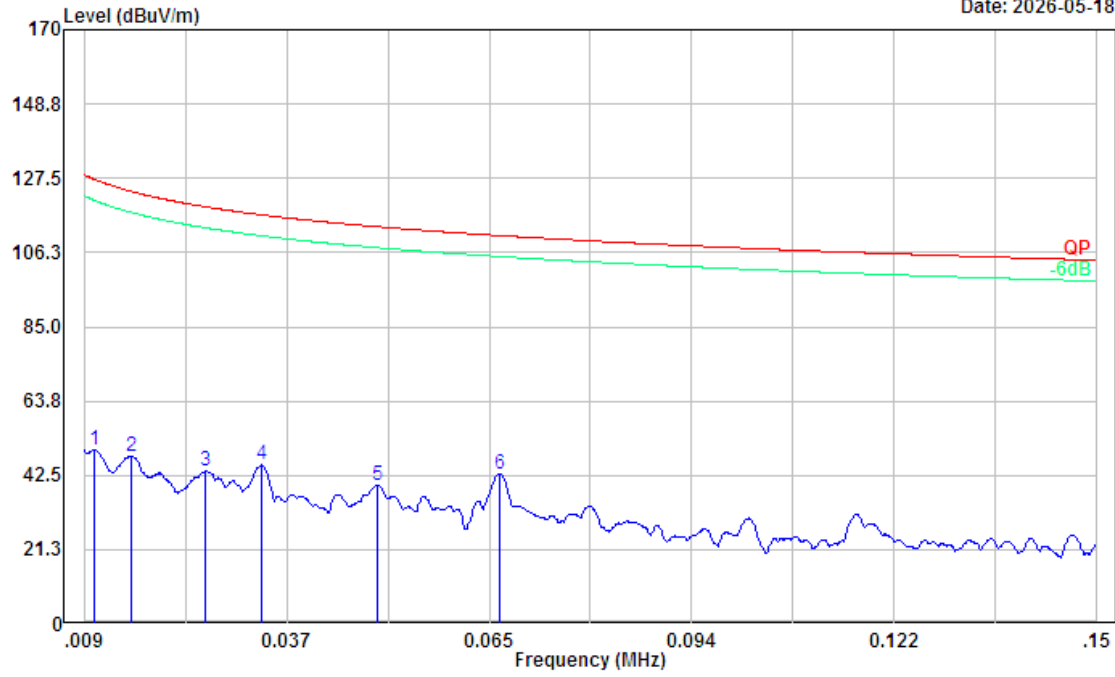

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	0.010	-1.63	51.36	49.73	127.26	77.53	Peak
2	0.015	-2.14	50.06	47.92	123.81	75.89	Peak
3	0.026	-3.96	47.59	43.63	119.33	75.70	Peak
4	0.034	-0.60	46.02	45.42	117.06	71.64	Peak
5	0.050	-3.82	43.41	39.59	113.64	74.05	Peak
6	0.067	2.32	40.64	42.96	111.11	68.15	Peak

Project No.: 2602R03904E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: 5G WIFI 5250-5350
RBW:9kHz VBW:30kHz

Serial No.: 3IK4-1
Tester: Brian Yang

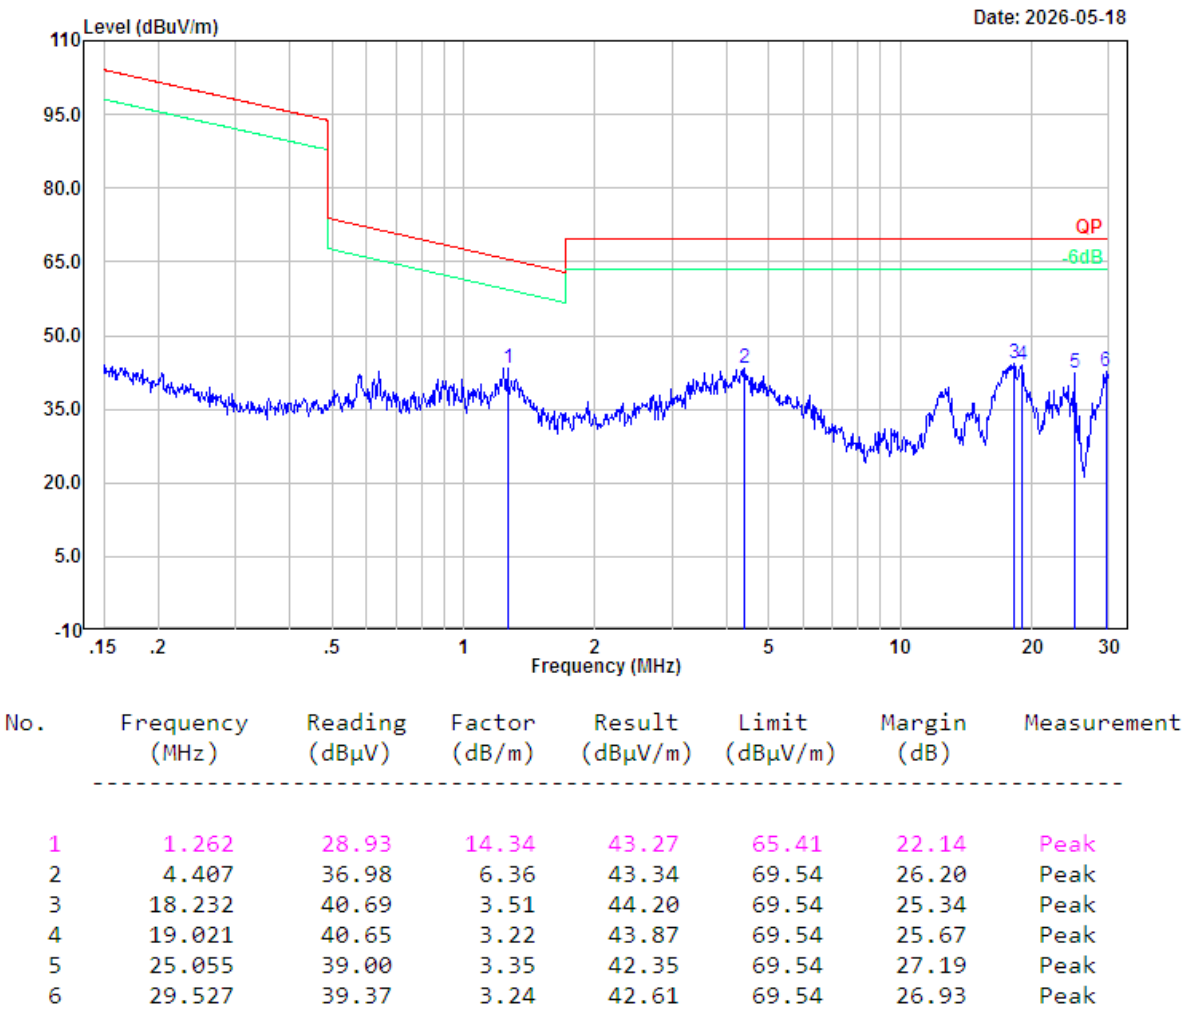


5470-5725MHz(802.11a 5500MHz was tested):

Project No.: 2602R03904E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: 5G WIFI 5470-5725
RBW:200Hz VBW:1kHz

Serial No.: 3IK4-1
Tester: Brian Yang

Date: 2026-05-18

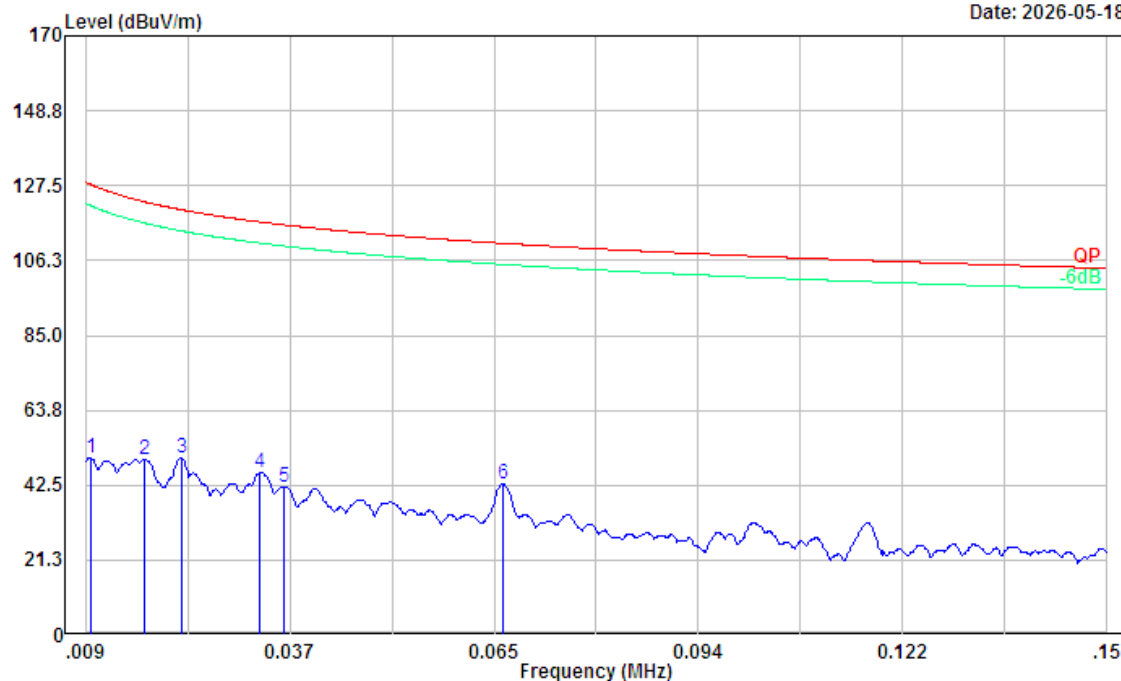


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	0.010	-1.45	51.69	50.24	127.86	77.62	Peak
2	0.017	0.17	49.63	49.80	122.91	73.11	Peak
3	0.022	2.01	48.40	50.41	120.66	70.25	Peak
4	0.033	0.03	46.12	46.15	117.21	71.06	Peak
5	0.036	-3.39	45.53	42.14	116.39	74.25	Peak
6	0.067	2.19	40.69	42.88	111.14	68.26	Peak

Project No.: 2602R03904E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: 5G WIFI 5470-5725
RBW:9kHz VBW:30kHz

Serial No.: 3IK4-1
Tester: Brian Yang

Date: 2026-05-18

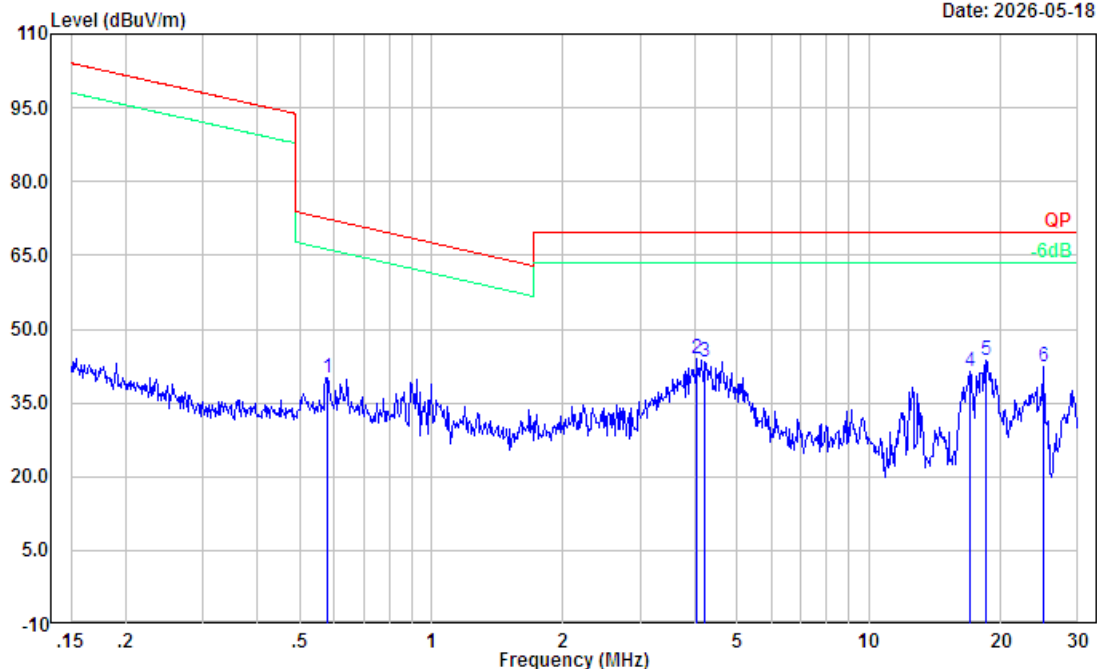

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	0.579	18.15	21.98	40.13	72.32	32.19	Peak
2	4.049	37.13	6.84	43.97	69.54	25.57	Peak
3	4.202	36.82	6.64	43.46	69.54	26.08	Peak
4	17.018	37.77	3.61	41.38	69.54	28.16	Peak
5	18.524	40.28	3.40	43.68	69.54	25.86	Peak
6	25.055	39.04	3.35	42.39	69.54	27.15	Peak

5725-5850MHz(802.11a 5745MHz was tested):

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Parallel


Tester: Brian Yang

Test Mode: Transmitting

Note: 5G WIFI 5725-5850

RBW:200Hz VBW:1kHz


Date: 2026-05-18

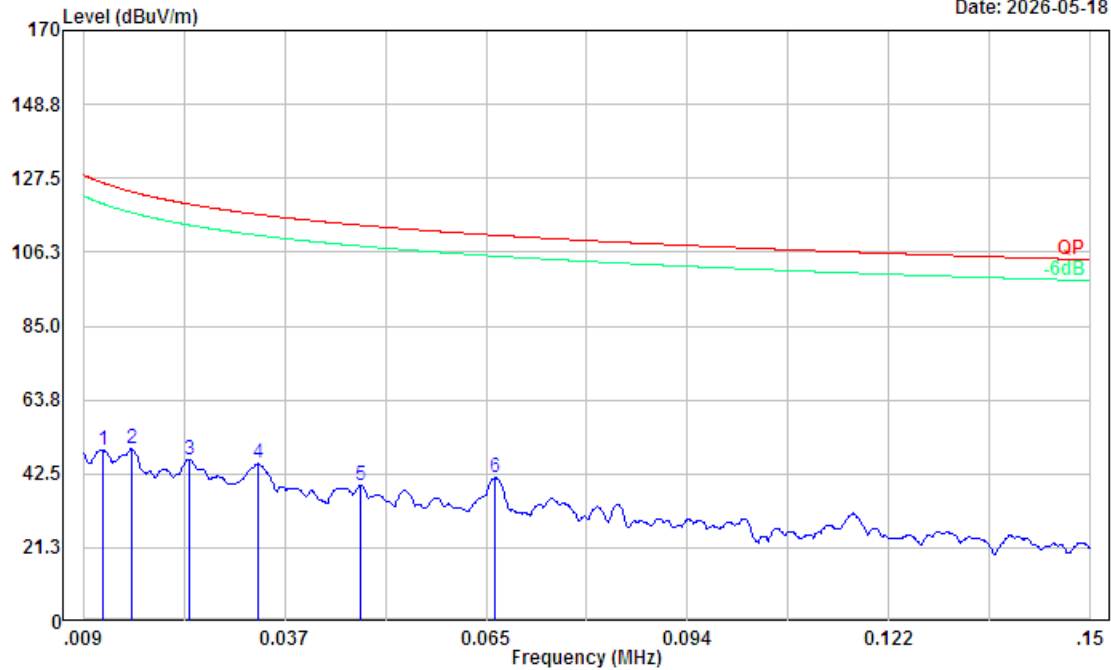

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	0.012	-1.62	51.03	49.41	126.26	76.85	Peak
2	0.016	-0.37	49.99	49.62	123.65	74.03	Peak
3	0.024	-1.34	48.06	46.72	120.07	73.35	Peak
4	0.033	-0.57	46.06	45.49	117.13	71.64	Peak
5	0.048	-4.63	43.72	39.09	114.02	74.93	Peak
6	0.067	0.72	40.67	41.39	111.13	69.74	Peak

Project No.: 2602R03904E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: 5G WIFI 5725-5850
RBW:9kHz VBW:30kHz

Serial No.: 3IK4-1
Tester: Brian Yang

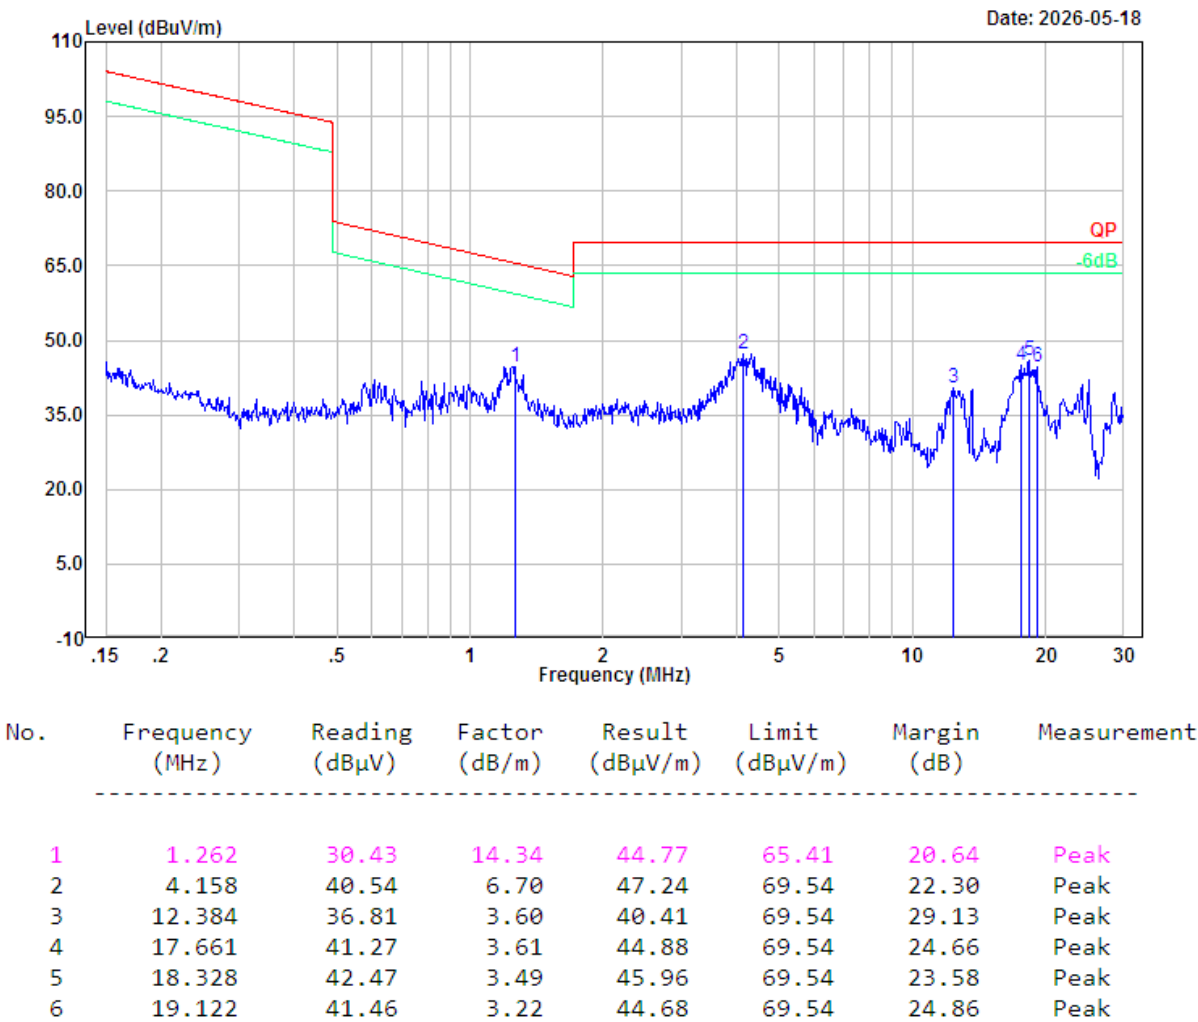

30MHz-1GHz

5150-5250MHz(802.11ac20 5180MHz was tested):

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1


Polarization: Horizontal

Tester: Brian Yang

Test Mode: Transmitting

Note: 5G WIFI 5150-5250

RBW:120kHz VBW:500kHz

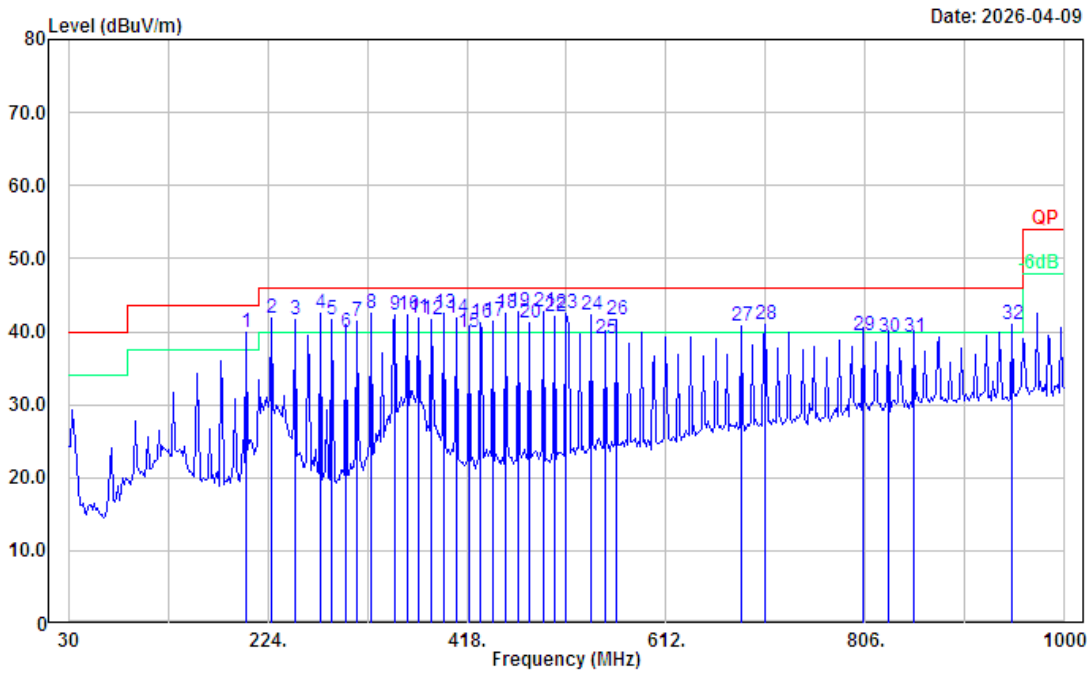

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	202.98	51.62	-11.81	39.81	43.50	3.69	QP
2	227.23	53.71	-11.97	41.74	46.00	4.26	QP
3	251.48	52.73	-11.09	41.64	46.00	4.36	QP
4	275.73	51.69	-9.28	42.41	46.00	3.59	QP
5	287.05	51.06	-9.46	41.60	46.00	4.40	QP
6	299.98	48.75	-8.78	39.97	46.00	6.03	QP
7	311.30	49.81	-8.33	41.48	46.00	4.52	QP
8	324.23	50.62	-8.22	42.40	46.00	3.60	QP
9	348.48	49.96	-7.65	42.31	46.00	3.69	QP
10	359.80	49.69	-7.44	42.25	46.00	3.75	QP
11	371.12	48.57	-6.69	41.88	46.00	4.12	QP
12	384.05	48.31	-6.73	41.58	46.00	4.42	QP
13	395.37	48.62	-6.08	42.54	46.00	3.46	QP
14	408.30	47.56	-5.73	41.83	46.00	4.17	QP
15	419.62	45.20	-5.37	39.83	46.00	6.17	QP
16	430.93	46.09	-4.98	41.11	46.00	4.89	QP
17	443.87	46.07	-4.57	41.50	46.00	4.50	QP
18	455.18	47.12	-4.61	42.51	46.00	3.49	QP
19	468.12	46.64	-3.97	42.67	46.00	3.33	QP
20	479.43	44.53	-3.35	41.18	46.00	4.82	QP
21	492.37	46.62	-3.82	42.80	46.00	3.20	QP
22	503.68	45.91	-3.78	42.13	46.00	3.87	QP
23	515.00	45.84	-3.45	42.39	46.00	3.61	QP


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement

24	539.25	44.98	-2.73	42.25	46.00	3.75	QP
25	552.18	41.52	-2.39	39.13	46.00	6.87	QP
26	563.50	43.99	-2.28	41.71	46.00	4.29	QP
27	684.75	40.00	0.76	40.76	46.00	5.24	QP
28	709.00	39.90	1.09	40.99	46.00	5.01	QP
29	804.38	35.98	3.52	39.50	46.00	6.50	QP
30	828.63	35.31	3.89	39.20	46.00	6.80	QP
31	852.88	34.94	4.26	39.20	46.00	6.80	QP
32	948.27	34.96	6.12	41.08	46.00	4.92	QP

Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 5G WIFI 5150-5250
RBW:120kHz VBW:500kHz

Serial No.: 3IK4-1
Tester: Brian Yang

Date: 2026-04-09

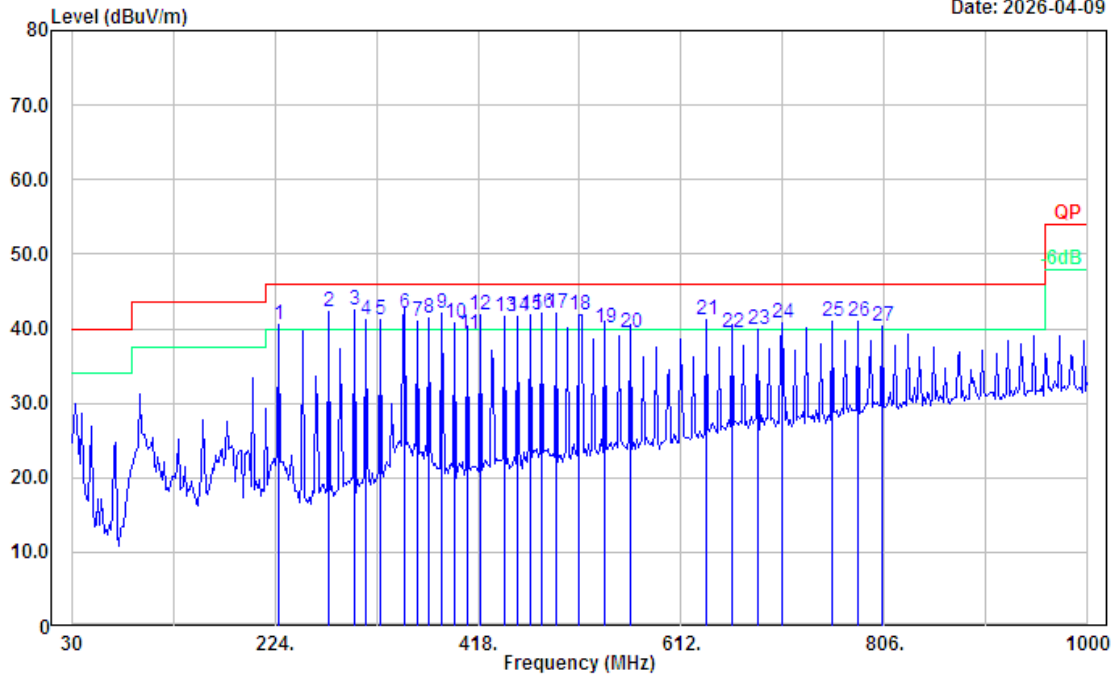

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	227.23	52.48	-11.97	40.51	46.00	5.49	QP
2	275.73	51.60	-9.28	42.32	46.00	3.68	QP
3	299.98	51.18	-8.78	42.40	46.00	3.60	QP
4	311.30	49.50	-8.33	41.17	46.00	4.83	QP
5	324.23	49.34	-8.22	41.12	46.00	4.88	QP
6	348.48	49.68	-7.65	42.03	46.00	3.97	QP
7	359.80	48.39	-7.44	40.95	46.00	5.05	QP
8	371.12	48.00	-6.69	41.31	46.00	4.69	QP
9	384.05	48.88	-6.73	42.15	46.00	3.85	QP
10	395.37	46.93	-6.08	40.85	46.00	5.15	QP
11	408.30	45.02	-5.73	39.29	46.00	6.71	QP
12	419.62	47.11	-5.37	41.74	46.00	4.26	QP
13	443.87	46.10	-4.57	41.53	46.00	4.47	QP
14	455.18	46.31	-4.61	41.70	46.00	4.30	QP
15	468.12	45.86	-3.97	41.89	46.00	4.11	QP
16	479.43	45.50	-3.35	42.15	46.00	3.85	QP
17	492.37	45.83	-3.82	42.01	46.00	3.99	QP
18	515.00	45.40	-3.45	41.95	46.00	4.05	QP
19	539.25	42.73	-2.73	40.00	46.00	6.00	QP
20	563.50	41.72	-2.28	39.44	46.00	6.56	QP
21	636.25	41.63	-0.34	41.29	46.00	4.71	QP
22	660.50	39.09	0.41	39.50	46.00	6.50	QP
23	684.75	39.23	0.76	39.99	46.00	6.01	QP


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement

24	709.00	39.64	1.09	40.73	46.00	5.27	QP
25	755.88	39.23	1.82	41.05	46.00	4.95	QP
26	780.13	38.30	2.71	41.01	46.00	4.99	QP
27	804.38	36.79	3.52	40.31	46.00	5.69	QP

5250-5350MHz(802.11a 5320MHz was tested):

Project No.: 2602R03904E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 5G WIFI 5250-5350
RBW:120kHz VBW:500kHz

Serial No.: 3IK4-1
Tester: Brian Yang

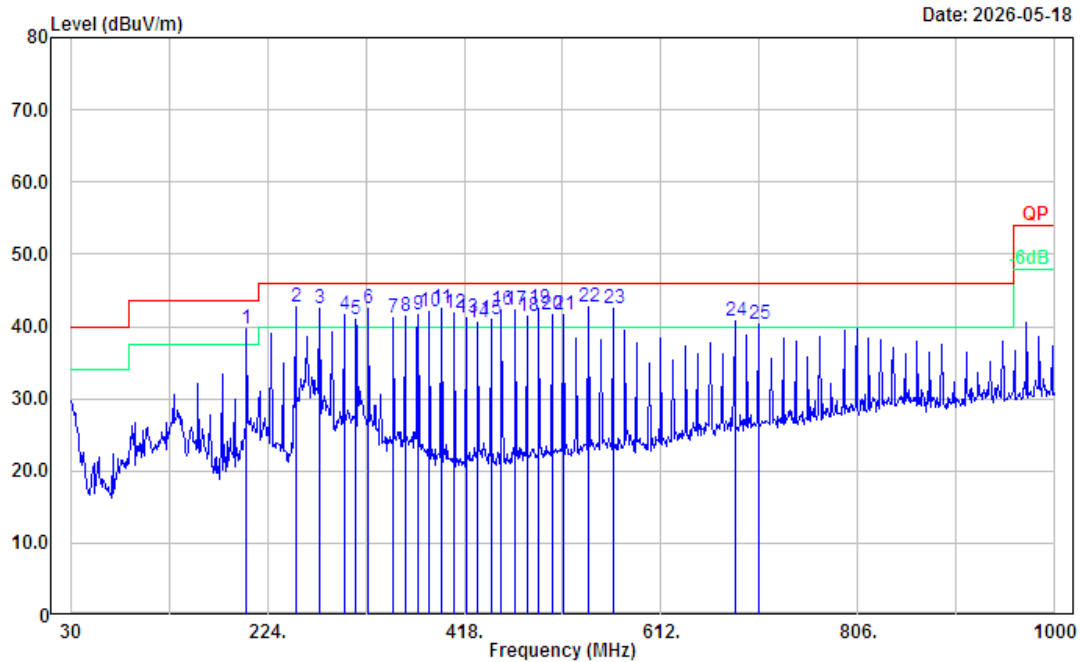

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	203.630	51.55	-11.88	39.67	43.50	3.83	QP
2	252.130	53.77	-11.01	42.76	46.00	3.24	QP
3	275.410	51.69	-9.26	42.43	46.00	3.57	QP
4	299.660	50.52	-8.80	41.72	46.00	4.28	QP
5	311.300	49.21	-8.33	40.88	46.00	5.12	QP
6	323.910	50.77	-8.22	42.55	46.00	3.45	QP
7	348.160	48.92	-7.66	41.26	46.00	4.74	QP
8	359.800	48.87	-7.44	41.43	46.00	4.57	QP
9	372.410	48.43	-6.73	41.70	46.00	4.30	QP
10	384.050	48.75	-6.73	42.02	46.00	3.98	QP
11	395.690	48.64	-6.08	42.56	46.00	3.44	QP
12	408.300	47.66	-5.73	41.93	46.00	4.07	QP
13	419.940	46.59	-5.36	41.23	46.00	4.77	QP
14	431.580	45.57	-4.95	40.62	46.00	5.38	QP
15	444.190	45.50	-4.58	40.92	46.00	5.08	QP
16	454.860	46.99	-4.61	42.38	46.00	3.62	QP
17	468.440	46.27	-3.94	42.33	46.00	3.67	QP
18	480.080	44.66	-3.32	41.34	46.00	4.66	QP
19	491.720	46.23	-3.82	42.41	46.00	3.59	QP
20	504.330	45.32	-3.76	41.56	46.00	4.44	QP
21	515.970	45.05	-3.42	41.63	46.00	4.37	QP
22	540.220	45.32	-2.70	42.62	46.00	3.38	QP
23	564.470	44.69	-2.27	42.42	46.00	3.58	QP


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement

24	684.750	40.00	0.76	40.76	46.00	5.24	QP
25	708.030	39.17	1.09	40.26	46.00	5.74	QP

Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 5G WIFI 5250-5350
RBW:120kHz VBW:500kHz

Serial No.: 3IK4-1
Tester: Brian Yang

Date: 2026-05-18

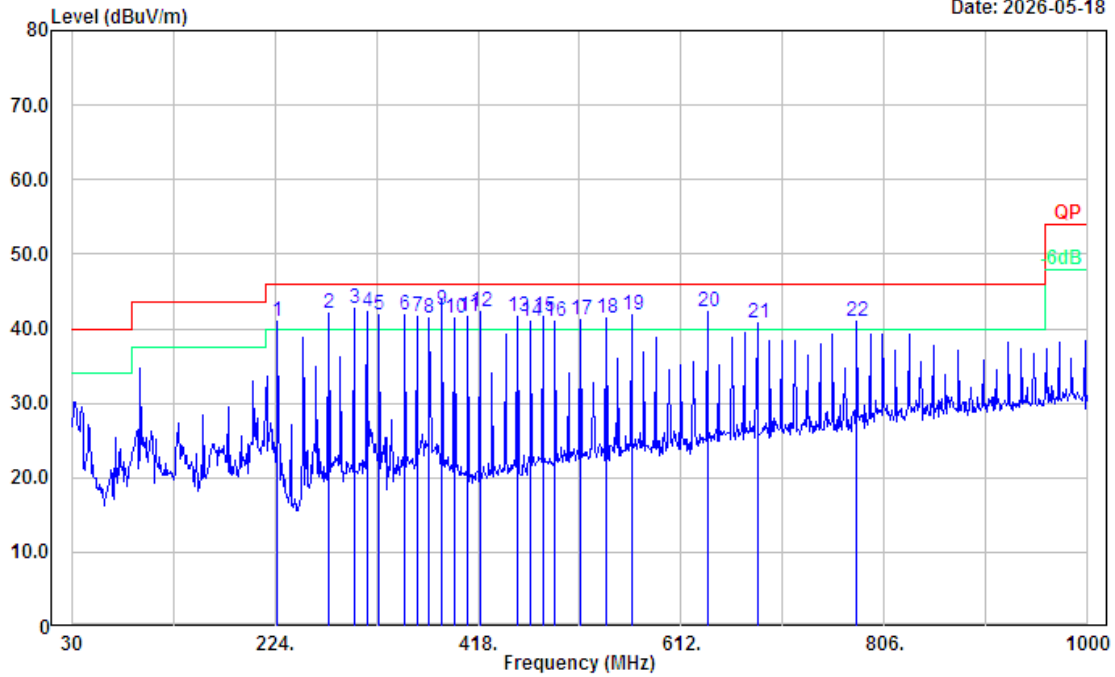


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	226.910	53.01	-11.97	41.04	46.00	4.96	QP
2	275.410	51.29	-9.26	42.03	46.00	3.97	QP
3	299.660	51.60	-8.80	42.80	46.00	3.20	QP
4	312.270	50.55	-8.32	42.23	46.00	3.77	QP
5	323.910	50.00	-8.22	41.78	46.00	4.22	QP
6	348.160	49.50	-7.66	41.84	46.00	4.16	QP
7	359.800	49.07	-7.44	41.63	46.00	4.37	QP
8	371.440	48.19	-6.70	41.49	46.00	4.51	QP
9	384.050	49.23	-6.73	42.50	46.00	3.50	QP
10	395.690	47.52	-6.08	41.44	46.00	4.56	QP
11	408.300	47.28	-5.73	41.55	46.00	4.45	QP
12	419.940	47.72	-5.36	42.36	46.00	3.64	QP
13	455.830	46.33	-4.61	41.72	46.00	4.28	QP
14	468.440	44.86	-3.94	40.92	46.00	5.08	QP
15	480.080	45.05	-3.32	41.73	46.00	4.27	QP
16	491.720	44.72	-3.82	40.90	46.00	5.10	QP
17	515.970	44.52	-3.42	41.10	46.00	4.90	QP
18	540.220	44.01	-2.70	41.31	46.00	4.69	QP
19	564.470	44.02	-2.27	41.75	46.00	4.25	QP
20	637.220	42.61	-0.30	42.31	46.00	3.69	QP
21	684.750	39.93	0.76	40.69	46.00	5.31	QP
22	779.810	38.19	2.71	40.90	46.00	5.10	QP

5470-5725MHz(802.11a 5500MHz was tested):

Project No.: 2602R03904E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 5G WIFI 5470-5725
RBW:120kHz VBW:500kHz

Serial No.: 3IK4-1
Tester: Brian Yang

Date: 2026-05-18

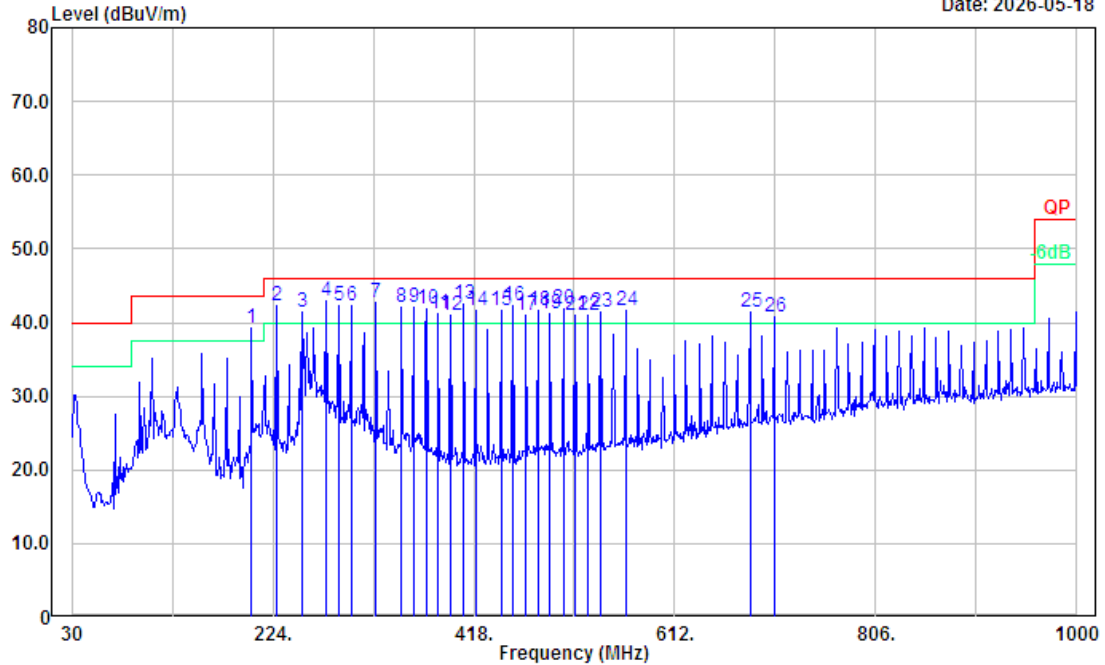

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	203.630	51.20	-11.88	39.32	43.50	4.18	QP
2	227.880	54.29	-11.99	42.30	46.00	3.70	QP
3	252.130	52.51	-11.01	41.50	46.00	4.50	QP
4	275.410	52.22	-9.26	42.96	46.00	3.04	QP
5	288.020	51.77	-9.45	42.32	46.00	3.68	QP
6	299.660	51.11	-8.80	42.31	46.00	3.69	QP
7	323.910	50.90	-8.22	42.68	46.00	3.32	QP
8	348.160	49.76	-7.66	42.10	46.00	3.90	QP
9	359.800	49.46	-7.44	42.02	46.00	3.98	QP
10	372.410	48.53	-6.73	41.80	46.00	4.20	QP
11	384.050	47.82	-6.73	41.09	46.00	4.91	QP
12	395.690	46.96	-6.08	40.88	46.00	5.12	QP
13	408.300	48.15	-5.73	42.42	46.00	3.58	QP
14	419.940	46.94	-5.36	41.58	46.00	4.42	QP
15	444.190	46.18	-4.58	41.60	46.00	4.40	QP
16	455.830	46.87	-4.61	42.26	46.00	3.74	QP
17	468.440	44.86	-3.94	40.92	46.00	5.08	QP
18	480.080	45.04	-3.32	41.72	46.00	4.28	QP
19	491.720	44.99	-3.82	41.17	46.00	4.83	QP
20	504.330	45.57	-3.76	41.81	46.00	4.19	QP
21	515.970	44.47	-3.42	41.05	46.00	4.95	QP
22	528.580	44.02	-3.05	40.97	46.00	5.03	QP
23	540.220	44.04	-2.70	41.34	46.00	4.66	QP


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement

24	564.470	43.83	-2.27	41.56	46.00	4.44	QP
25	684.750	40.73	0.76	41.49	46.00	4.51	QP
26	708.030	39.73	1.09	40.82	46.00	5.18	QP

Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 5G WIFI 5470-5725
RBW:120kHz VBW:500kHz

Serial No.: 3IK4-1
Tester: Brian Yang

Date: 2026-05-18

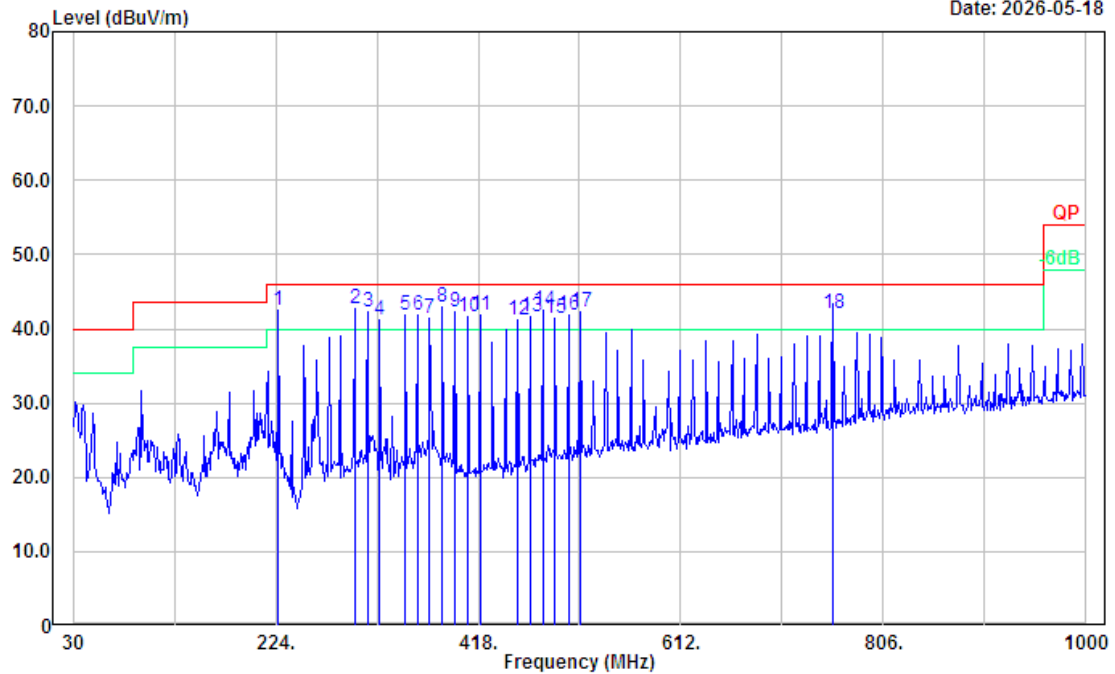


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	226.910	54.40	-11.97	42.43	46.00	3.57	QP
2	299.660	51.53	-8.80	42.73	46.00	3.27	QP
3	312.270	50.63	-8.32	42.31	46.00	3.69	QP
4	323.910	49.49	-8.22	41.27	46.00	4.73	QP
5	348.160	49.61	-7.66	41.95	46.00	4.05	QP
6	359.800	49.25	-7.44	41.81	46.00	4.19	QP
7	371.440	48.05	-6.70	41.35	46.00	4.65	QP
8	384.050	49.63	-6.73	42.90	46.00	3.10	QP
9	395.690	48.36	-6.08	42.28	46.00	3.72	QP
10	408.300	47.46	-5.73	41.73	46.00	4.27	QP
11	419.940	47.22	-5.36	41.86	46.00	4.14	QP
12	455.830	45.73	-4.61	41.12	46.00	4.88	QP
13	467.470	45.64	-4.02	41.62	46.00	4.38	QP
14	480.080	45.71	-3.32	42.39	46.00	3.61	QP
15	491.720	45.20	-3.82	41.38	46.00	4.62	QP
16	504.330	45.50	-3.76	41.74	46.00	4.26	QP
17	515.970	45.61	-3.42	42.19	46.00	3.81	QP
18	757.500	40.22	1.88	42.10	46.00	3.90	QP

5725-5850MHz(802.11a 5745MHz was tested):

Project No.: 2602R03904E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 5G WIFI 5725-5850
RBW:120kHz VBW:500kHz

Serial No.: 3IK4-1
Tester: Brian Yang

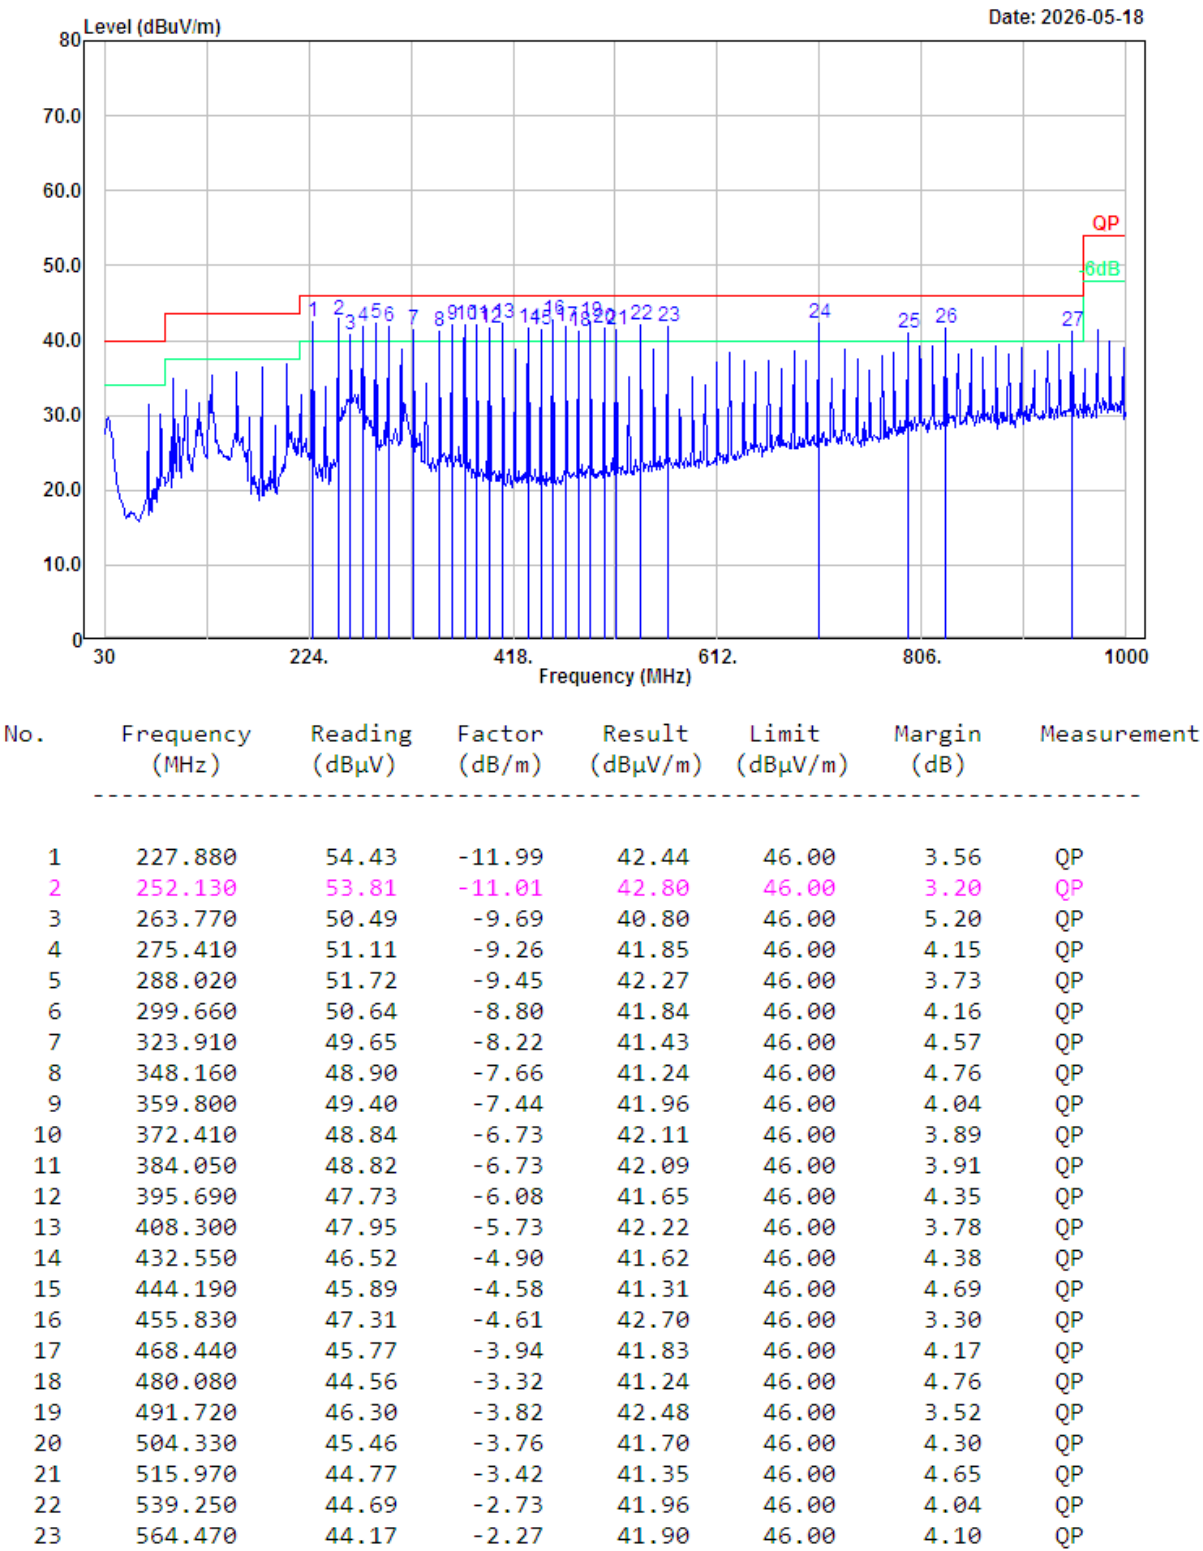


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement

24	708.030	41.13	1.09	42.22	46.00	3.78	QP
25	792.420	37.91	3.17	41.08	46.00	4.92	QP
26	828.310	37.70	3.89	41.59	46.00	4.41	QP
27	948.590	35.04	6.13	41.17	46.00	4.83	QP

Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 5G WIFI 5725-5850
RBW:120kHz VBW:500kHz

Serial No.: 3IK4-1
Tester: Brian Yang

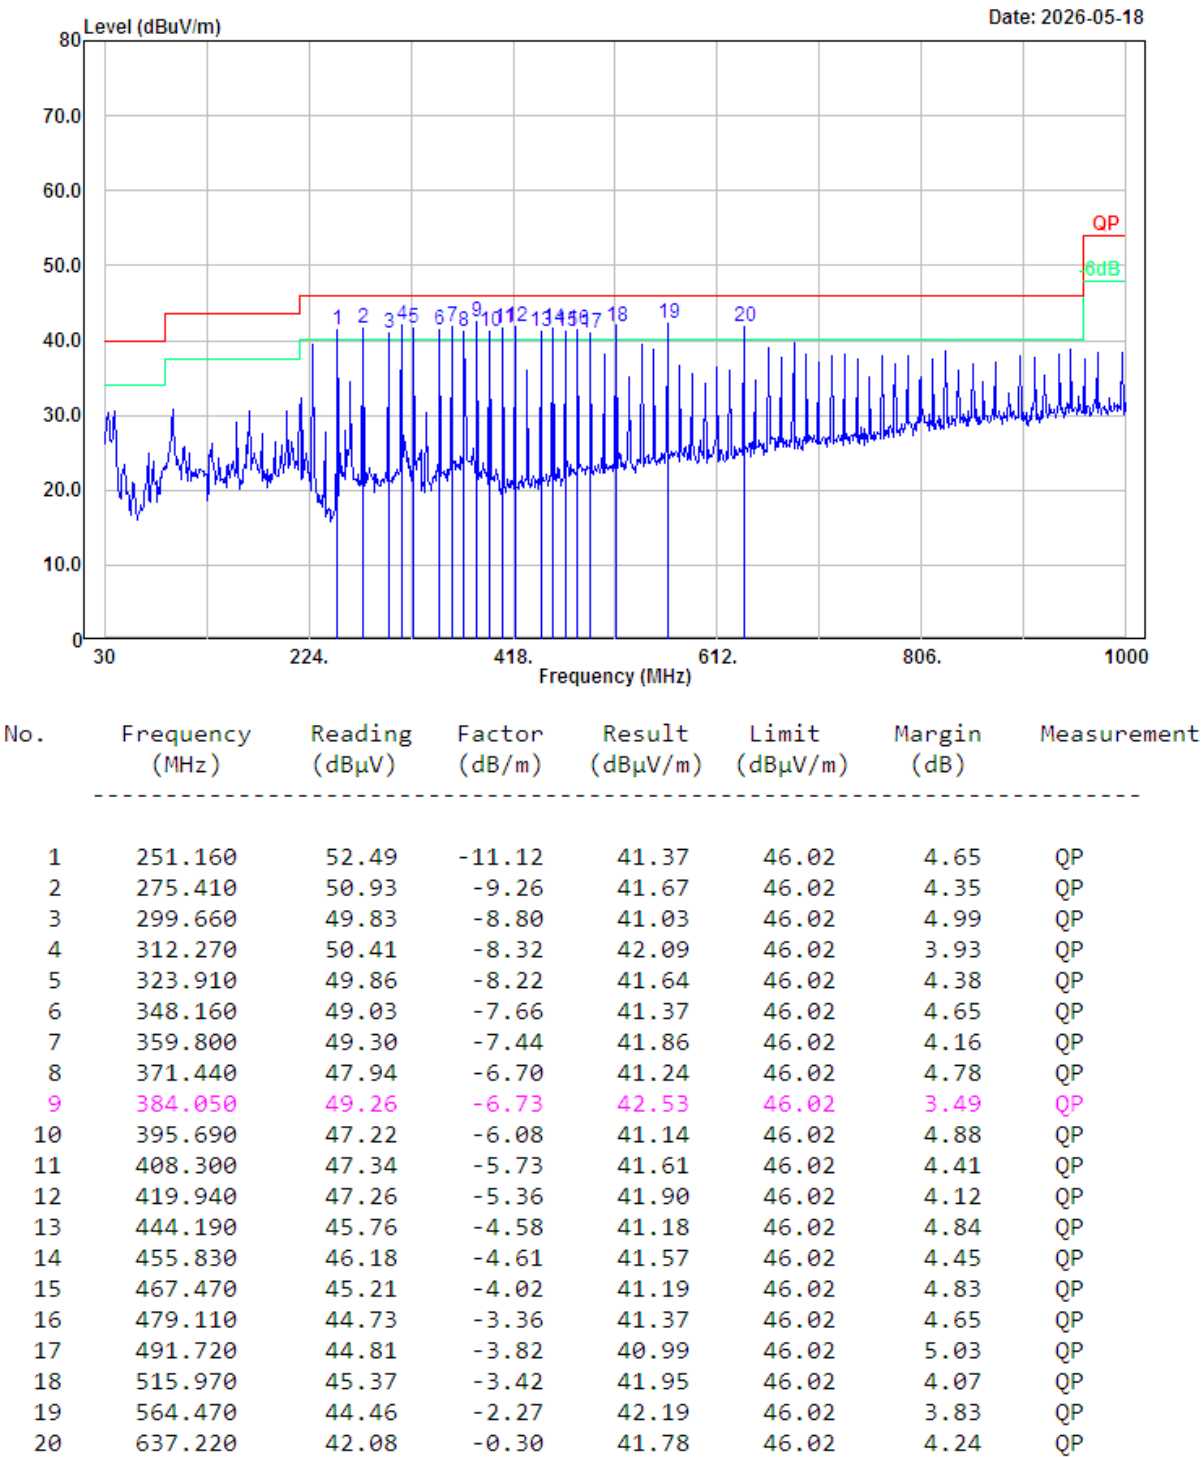

2) 1-40GHz:

Serial Number:	3IK4-1	Test Date:	2026/4/16
Test Site:	Chamber B	Test Mode:	Transmitting
Tester:	Leo Xiao	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.2	Relative Humidity: (%)	42	ATM Pressure: (kPa)	100.4
----------------------	------	---------------------------	----	---------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2026/2/21	2029/2/20
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2026/2/6	2029/2/5
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2025/11/17	2026/11/16
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2025/11/14	2026/11/13
AH	Preamplifier	PAM-0118P	469	2026/4/10	2027/4/10
AH	Preamplifier	PAM-1840VH	191	2025/9/4	2026/9/3
R&S	Spectrum Analyzer	FSV40	101944	2025/8/8	2026/8/7
Audix	Test Software	E3	191218 V9	N/A	N/A
Decentest	Multiplex Switch Test Control Set & Filter Switch Unit	DT7220SCU & DT7220FCU	DC79902 & DC79905	2025/8/25	2026/8/24

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case(Y axe) is refer to plots.

1-18GHz:

5150-5250MHz:


802.11a, Low Channel, Horizontal							
Project No.: 2602R03904E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11a_U-NII-1 low channel 5180MHz Peak:RBW:1MHz,VBW:3MHz				Serial No.: 3IK4-1 Tester: Leo Xiao			
Date: 2026-04-16							
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5935.70	50.56	0.57	51.13	68.20	17.07	Peak

802.11a, Low Channel, Vertical							
Project No.: 2602R03904E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11a_U-NII-1 low channel 5180MHz Peak:RBW:1MHz,VBW:3MHz				Serial No.: 3IK4-1 Tester: Leo Xiao			
Date: 2026-04-16							
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6049.00	50.76	0.36	51.12	68.20	17.08	Peak




Project No.: 2602R03904E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11a_U-NII-1 low channel 5180MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz				Serial No.: 3IK4-1 Tester: Leo Xiao			
Date: 2026-04-16							
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10360.00	49.90	1.90	51.80	68.20	16.40	Peak
2	15540.00	51.04	3.10	54.14	74.00	19.86	Peak
3	17990.00	51.12	10.51	61.63	74.00	12.37	Peak
4	17990.00	37.31	10.51	47.82	54.00	6.18	Average

Project No.: 2602R03904E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11a_U-NII-1 low channel 5180MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz				Serial No.: 3IK4-1 Tester: Leo Xiao			
Date: 2026-04-16							
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10360.00	49.24	1.90	51.14	68.20	17.06	Peak
2	15540.00	51.33	3.10	54.43	74.00	19.57	Peak
3	17834.40	50.43	9.28	59.71	74.00	14.29	Peak
4	17834.40	37.82	9.28	47.10	54.00	6.90	Average

802.11a, Middle Channel, Horizontal

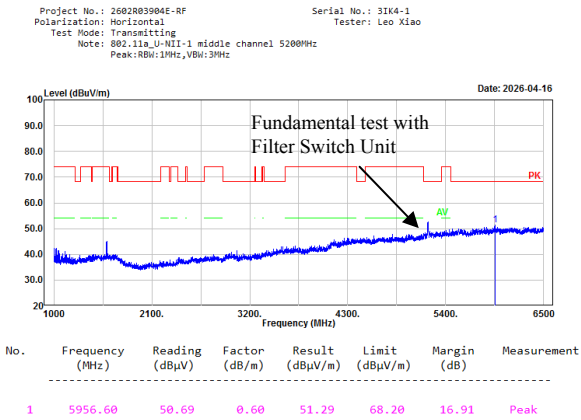

802.11a, Middle Channel, Vertical

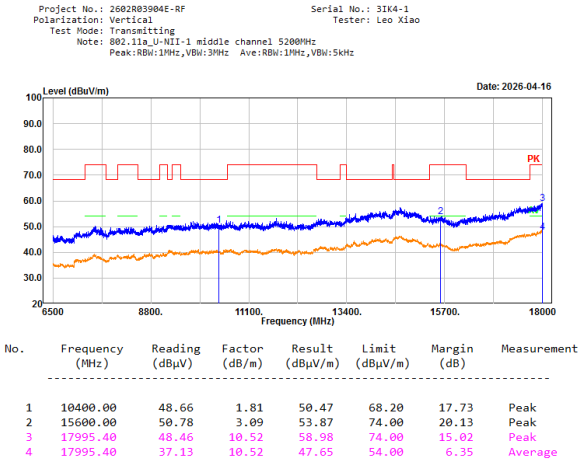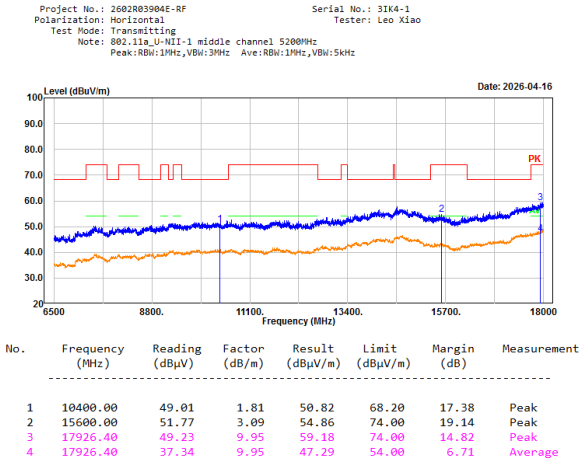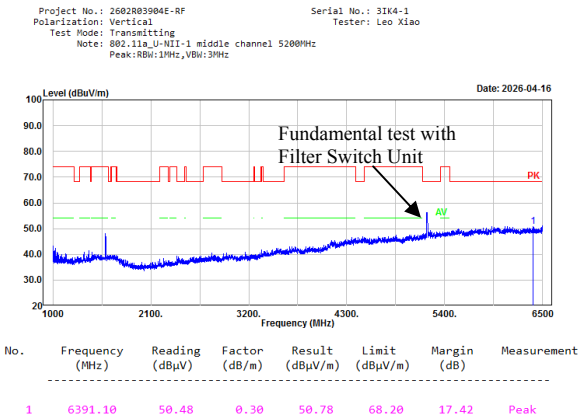

802.11a, High Channel, Horizontal

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Horizontal

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11a_U-NII-1 high channel 5240MHz

Peak:RBW:1MHz,VBW:3MHz

Level (dBuV/m)

Frequency (MHz)

Fundamental test with Filter Switch Unit

PK

AV

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6095.20	50.82	0.17	50.99	68.20	17.21	Peak

802.11a, High Channel, Vertical

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Vertical

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11a_U-NII-1 high channel 5240MHz

Peak:RBW:1MHz,VBW:3MHz

Level (dBuV/m)

Frequency (MHz)

Fundamental test with Filter Switch Unit

PK

AV

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6014.90	50.49	0.47	50.96	68.20	17.24	Peak

802.11a, High Channel, Horizontal

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Horizontal

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11a_U-NII-1 high channel 5240MHz

Peak:RBW:1MHz,VBW:3MHz

Ave:RBW:1MHz,VBW:5kHz

Level (dBuV/m)

Frequency (MHz)

PK

AV

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10480.00	48.53	1.81	50.34	68.20	17.86	Peak
2	15720.00	50.43	2.94	53.37	74.00	20.63	Peak
3	17993.10	49.21	10.52	59.73	74.00	14.27	Peak
4	17993.10	37.14	10.52	47.66	54.00	6.34	Average

802.11a, High Channel, Vertical

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Vertical

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11a_U-NII-1 high channel 5240MHz

Peak:RBW:1MHz,VBW:3MHz

Ave:RBW:1MHz,VBW:5kHz


Level (dBuV/m)

Frequency (MHz)


PK

AV




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10480.00	48.82	1.81	50.63	68.20	17.57	Peak
2	15720.00	50.98	2.94	53.92	74.00	20.08	Peak
3	17970.10	49.25	10.31	59.56	74.00	14.44	Peak
4	17970.10	37.37	10.31	47.68	54.00	6.32	Average

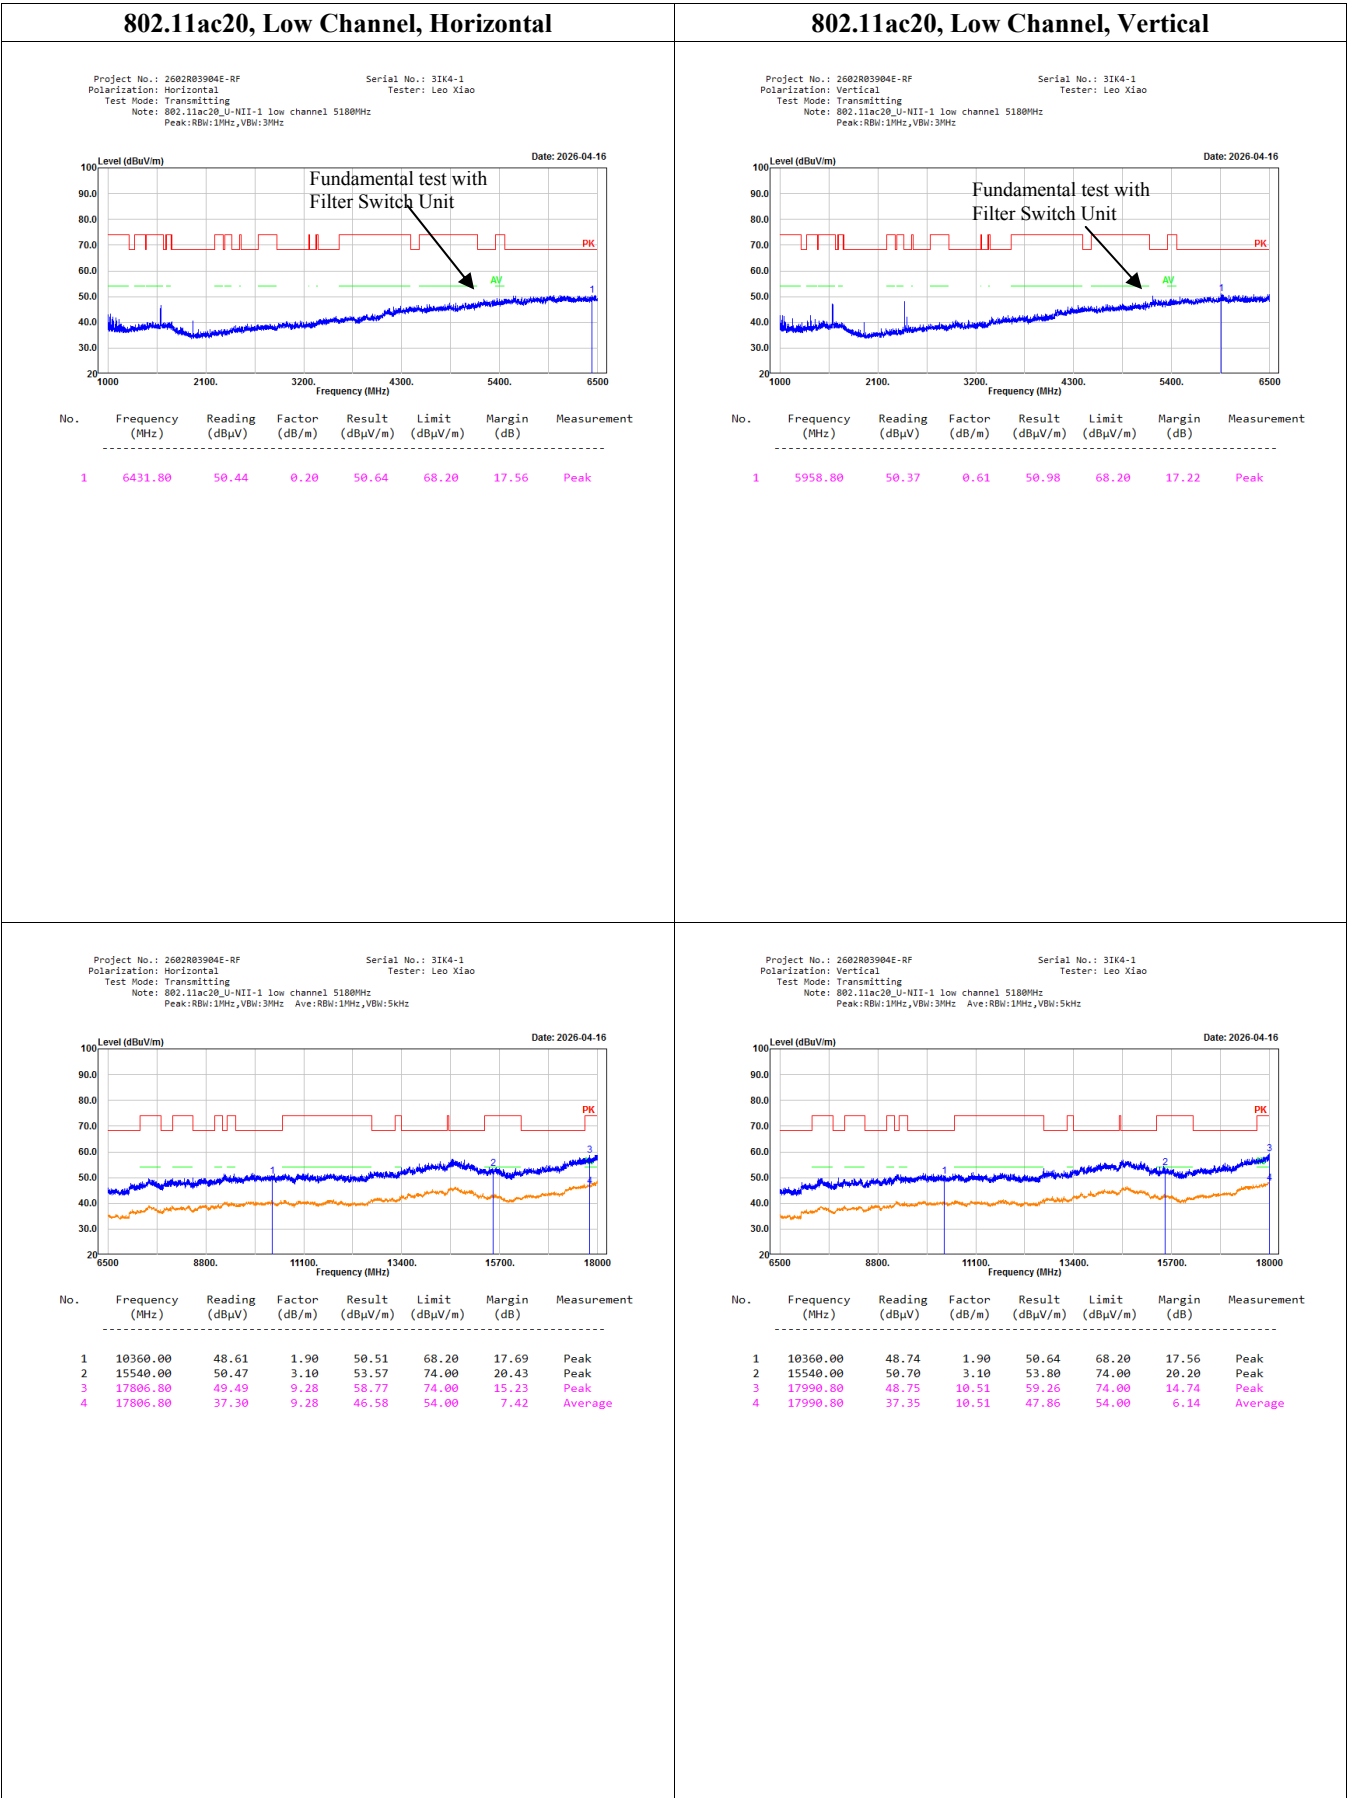


802.11ac20, Middle Channel, Horizontal

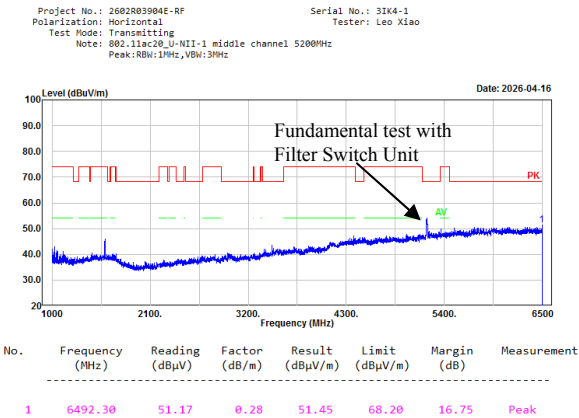




802.11ac20, Middle Channel, Vertical

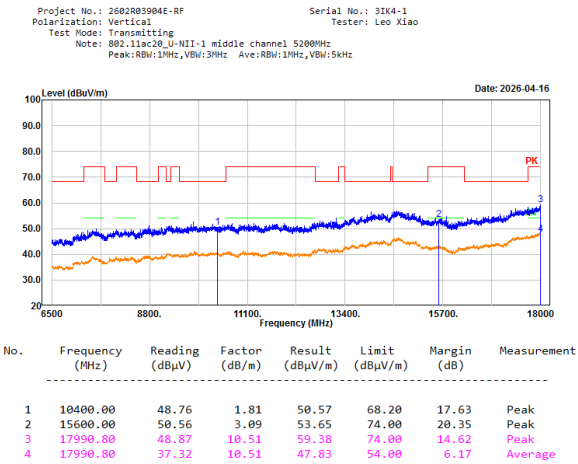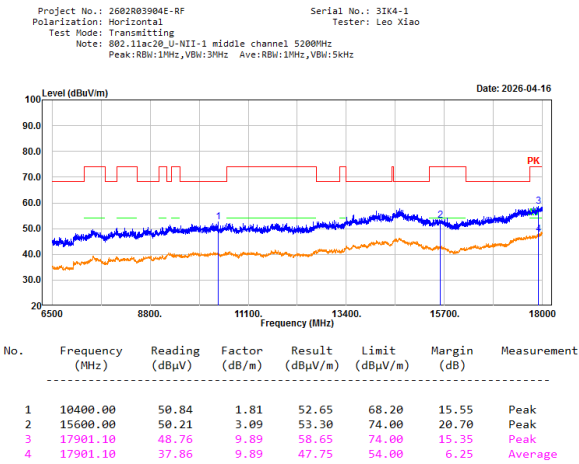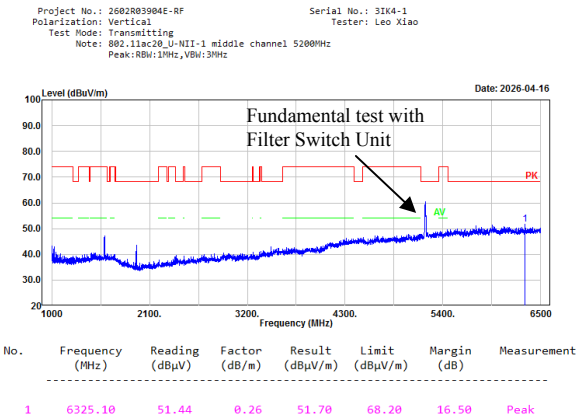

802.11ac20, High Channel, Horizontal

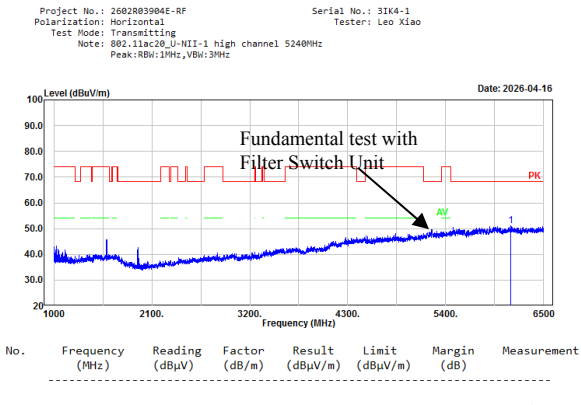

802.11ac20, High Channel, Vertical

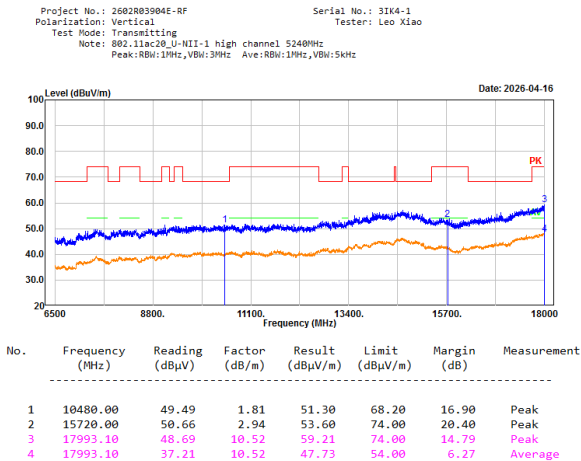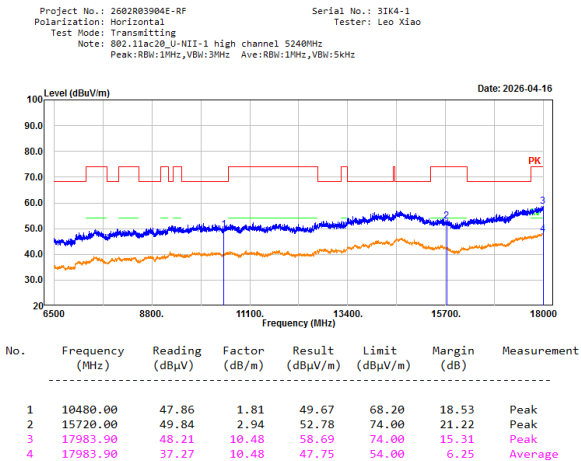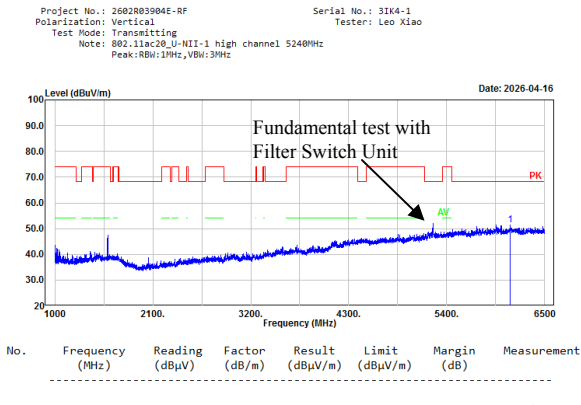

802.11ac40, Low Channel, Horizontal

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Horizontal

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11ac40_U-NII-1 low channel 5190MHz

Peak:RBW:1MHz,VBW:3MHz

Level (dBuV/m)

Fundamental test with Filter Switch Unit

Frequency (MHz)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6107.30	51.20	0.29	51.49	68.20	16.71	Peak

802.11ac40, Low Channel, Vertical

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Vertical

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11ac40_U-NII-1 low channel 5190MHz

Peak:RBW:1MHz,VBW:3MHz

Level (dBuV/m)

Fundamental test with Filter Switch Unit

Frequency (MHz)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5999.50	50.40	0.67	51.07	68.20	17.13	Peak

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Horizontal

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11ac40_U-NII-1 low channel 5190MHz

Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Level (dBuV/m)

Frequency (MHz)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10380.00	49.53	1.80	51.33	68.20	16.87	Peak
2	15570.00	51.03	3.09	54.12	74.00	19.88	Peak
3	17965.50	48.53	10.26	58.79	74.00	15.21	Peak
4	17965.50	37.45	10.26	47.71	54.00	6.29	Average

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Vertical

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11ac40_U-NII-1 low channel 5190MHz

Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Level (dBuV/m)

Frequency (MHz)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10380.00	49.06	1.80	50.86	68.20	17.34	Peak
2	15570.00	50.28	3.09	53.37	74.00	20.63	Peak
3	17974.70	48.97	10.37	59.34	74.00	14.66	Peak
4	17974.70	37.29	10.37	47.66	54.00	6.34	Average

802.11ac40, High Channel, Horizontal

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Horizontal

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11ac40_U-NII-1 high channel 5230MHz

Peak:RBW:1MHz,VBW:3MHz

Level (dBuV/m)

Fundamental test with Filter Switch Unit

Date: 2026-04-16

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5952.20	50.93	0.59	51.52	68.20	16.68	Peak

802.11ac40, High Channel, Vertical

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Vertical

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11ac40_U-NII-1 high channel 5230MHz

Peak:RBW:1MHz,VBW:3MHz

Level (dBuV/m)

Fundamental test with Filter Switch Unit

Date: 2026-04-16

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6300.90	50.97	0.25	51.22	68.20	16.98	Peak

802.11ac40, High Channel, Horizontal

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Horizontal

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11ac40_U-NII-1 high channel 5230MHz

Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Level (dBuV/m)

Date: 2026-04-16

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10460.00	48.46	1.81	50.27	68.20	17.93	Peak
2	15690.00	50.62	2.93	53.55	74.00	20.45	Peak
3	17944.80	49.19	10.09	59.28	74.00	14.72	Peak
4	17944.80	37.25	10.09	47.34	54.00	6.66	Average

802.11ac40, High Channel, Vertical

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Vertical

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11ac40_U-NII-1 high channel 5230MHz

Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Level (dBuV/m)

Date: 2026-04-16

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10460.00	48.70	1.81	50.51	68.20	17.69	Peak
2	15690.00	50.13	2.93	53.06	74.00	20.94	Peak
3	17979.30	48.65	10.43	59.08	74.00	14.92	Peak
4	17979.30	36.65	10.43	47.08	54.00	6.92	Average

802.11ac80, Middle Channel, Horizontal

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Horizontal

Test Mode: Transmitting

Note: 802.11ac80_U-NII-1 middle channel 5210MHz

Peak:RBW:1MHz,VBW:3MHz

2026-04-16

Level (dBuV/m)

Fundamental test with Filter Switch Unit

AV

PK

Frequency (MHz)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5934.60	50.38	0.57	50.95	68.20	17.25	Peak

802.11ac80, Middle Channel, Vertical

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Vertical

Test Mode: Transmitting

Note: 802.11ac80_U-NII-1 middle channel 5210MHz

Peak:RBW:1MHz,VBW:3MHz

2026-04-16

Level (dBuV/m)

Fundamental test with Filter Switch Unit

AV

PK

Frequency (MHz)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6116.10	50.60	0.19	50.79	68.20	17.41	Peak

802.11ac80, Middle Channel, Horizontal

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Horizontal

Test Mode: Transmitting

Note: 802.11ac80_U-NII-1 middle channel 5210MHz

Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

2026-04-16

Level (dBuV/m)

1

2

3

PK

Frequency (MHz)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10420.00	48.51	1.83	50.34	68.20	17.86	Peak
2	15630.00	50.47	3.06	53.53	74.00	20.47	Peak
3	17960.90	49.18	10.20	59.38	74.00	14.62	Peak
4	17960.90	37.26	10.20	47.46	54.00	6.54	Average

802.11ac80, Middle Channel, Vertical

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Vertical

Test Mode: Transmitting

Note: 802.11ac80_U-NII-1 middle channel 5210MHz

Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

2026-04-16

Level (dBuV/m)

1

2

3

PK

Frequency (MHz)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10420.00	49.30	1.83	51.13	68.20	17.07	Peak
2	15630.00	50.82	3.06	53.88	74.00	20.12	Peak
3	17993.10	48.38	10.52	58.90	74.00	15.10	Peak
4	17993.10	36.63	10.52	47.15	54.00	6.85	Average

5250-5350MHz:

Project No.: 2602R03904E-RF

Serial No.: 31K4-1

Polarization: Horizontal

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11a_U-NII-2A low channel 5260MHz

Peak:RBW:1MHz,VBW:3MHz

Level (dBuV/m)

Fundamental test with Filter Switch Unit

PK

AV

Frequency (MHz)

2026-04-16

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5990.70	50.22	0.65	50.87	68.20	17.33	Peak

Project No.: 2602R03904E-RF

Serial No.: 31K4-1

Polarization: Vertical

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11a_U-NII-2A low channel 5260MHz

Peak:RBW:1MHz,VBW:3MHz

Level (dBuV/m)

Fundamental test with Filter Switch Unit

PK

AV

Frequency (MHz)

2026-04-16

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6461.50	50.51	0.13	50.64	68.20	17.56	Peak

Project No.: 2602R03904E-RF

Serial No.: 31K4-1

Polarization: Horizontal

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11a_U-NII-2A low channel 5260MHz

Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Level (dBuV/m)

PK

Frequency (MHz)

2026-04-16

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10520.00	48.86	1.87	50.73	68.20	17.47	Peak
2	15780.00	49.87	2.80	52.67	74.00	21.33	Peak
3	17914.90	50.59	9.85	60.44	74.00	13.56	Peak
4	17914.90	37.39	9.85	47.24	54.00	6.76	Average

Project No.: 2602R03904E-RF

Serial No.: 31K4-1

Polarization: Vertical

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11a_U-NII-2A low channel 5260MHz

Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Level (dBuV/m)


PK

Frequency (MHz)




2026-04-16

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10520.00	49.44	1.87	51.31	68.20	16.89	Peak
2	15780.00	49.44	2.80	52.24	74.00	21.76	Peak
3	17995.40	49.18	10.52	59.70	74.00	14.30	Peak
4	17995.40	37.35	10.52	47.87	54.00	6.13	Average

802.11a, Middle Channel, Horizontal

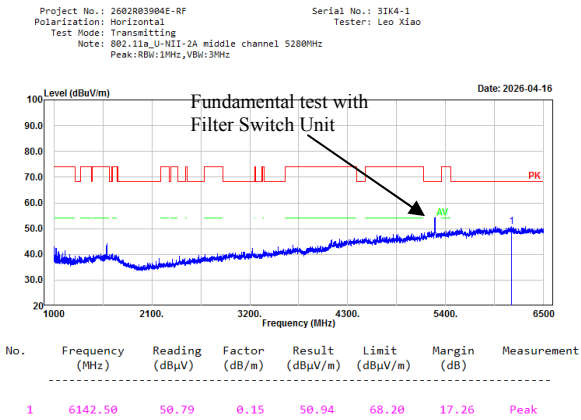


802.11a, Middle Channel, Vertical

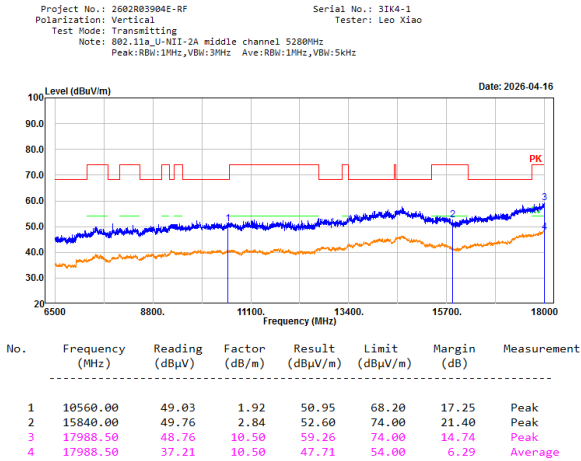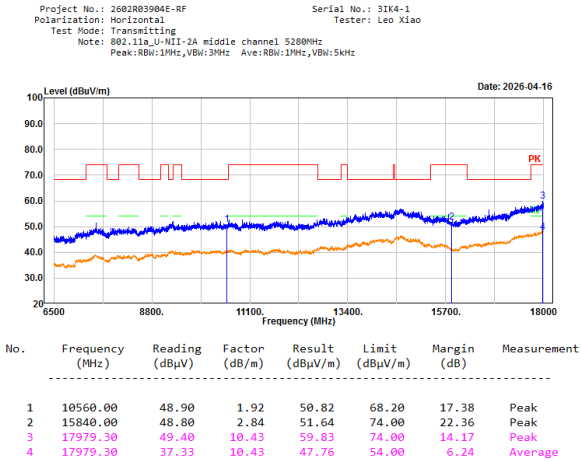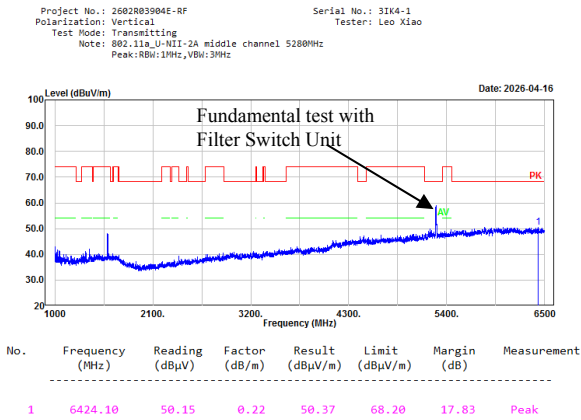

802.11a, High Channel, Horizontal

Project No.: 2602R03904E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-2A high channel 5320MHz
Peak: RBW:1MHz, VBW:30Hz

Serial No.: 31K4-1
Tester: Leo Xiao

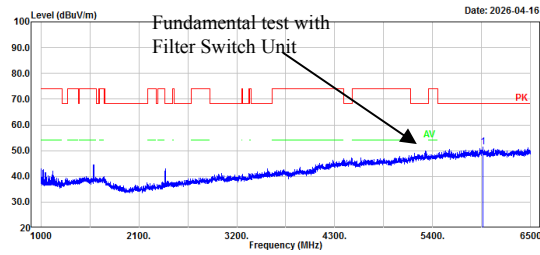


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5962.10	50.68	0.61	51.29	68.20	16.91	Peak

802.11a, High Channel, Vertical

Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-2A high channel 5320MHz
Peak: RBW:1MHz, VBW:30Hz


Serial No.: 31K4-1
Tester: Leo Xiao

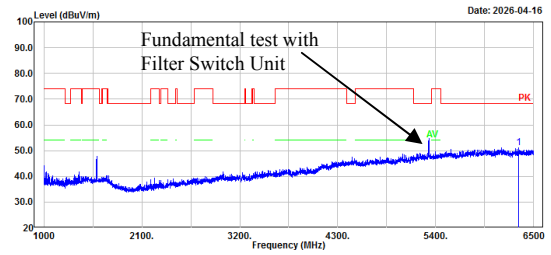

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6333.90	50.75	0.38	51.13	68.20	17.07	Peak

Project No.: 2602R03904E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-2A high channel 5320MHz
Peak: RBW:1MHz, VBW:30Hz Ave: RBW:1MHz, VBW:5kHz


Serial No.: 31K4-1
Tester: Leo Xiao

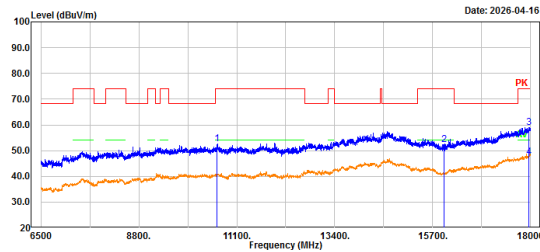

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10640.00	50.71	1.97	52.68	74.00	21.32	Peak
2	15960.00	49.56	2.69	52.25	74.00	21.75	Peak
3	17956.30	48.75	10.15	58.90	74.00	15.10	Peak
4	17956.30	37.37	10.15	47.52	54.00	6.48	Average

Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-2A high channel 5320MHz
Peak: RBW:1MHz, VBW:30Hz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 31K4-1
Tester: Leo Xiao

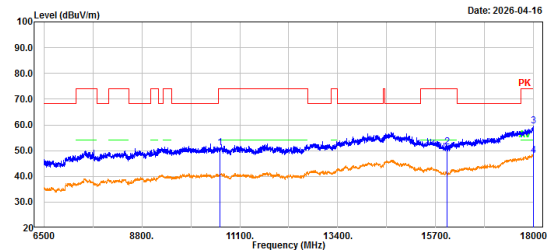


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10640.00	49.25	1.97	51.22	74.00	22.78	Peak
2	15960.00	48.85	2.69	51.54	74.00	22.46	Peak
3	17995.40	49.09	10.52	59.61	74.00	14.39	Peak
4	17995.40	37.43	10.52	47.95	54.00	6.05	Average

802.11ac20, Low Channel, Horizontal

Project No.: 2602R03904E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2A low channel 5260MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 3IK4-1
Tester: Leo Xiao

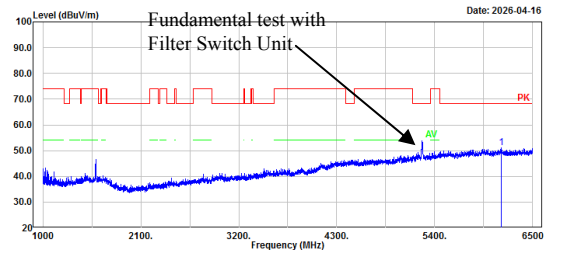


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6143.60	51.05	0.16	51.21	68.20	16.99	Peak

802.11ac20, Low Channel, Vertical

Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2A low channel 5260MHz
Peak: RBW:1MHz, VBW:3MHz


Serial No.: 3IK4-1
Tester: Leo Xiao

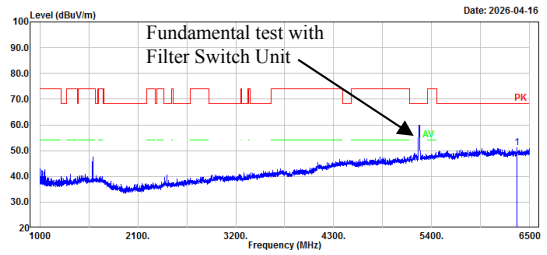

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6354.80	50.86	0.24	51.10	68.20	17.10	Peak

Project No.: 2602R03904E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2A low channel 5260MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz


Serial No.: 3IK4-1
Tester: Leo Xiao

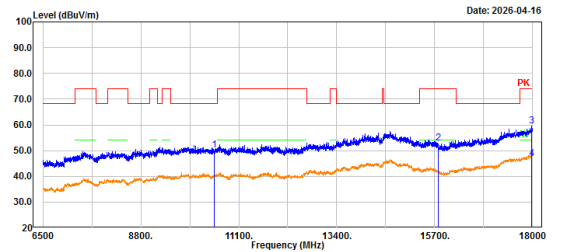

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10520.00	48.19	1.87	50.06	68.20	18.14	Peak
2	15780.00	50.15	2.80	52.95	74.00	21.05	Peak
3	17967.80	49.13	10.28	59.41	74.00	14.59	Peak
4	17967.80	36.69	10.28	46.97	54.00	7.03	Average

Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2A low channel 5260MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz


Serial No.: 3IK4-1
Tester: Leo Xiao

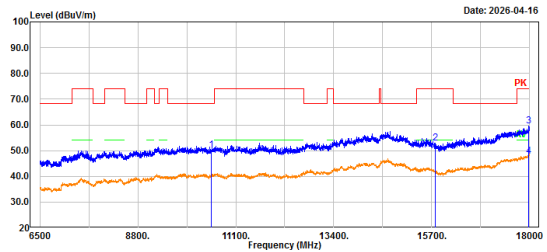




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	10520.00	48.40	1.87	50.27	68.20	17.93	Peak
2	15780.00	50.03	2.80	52.83	74.00	21.17	Peak
3	17979.30	49.23	10.43	59.66	74.00	14.34	Peak
4	17979.30	37.25	10.43	47.68	54.00	6.32	Average

802.11ac20, Middle Channel, Horizontal				802.11ac20, Middle Channel, Vertical																																																																																			
Project No.: 2602R03904E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11ac20_U-NII-2A middle channel 5280MHz Peak:RBW:1MHz,VBW:3MHz		Serial No.: 3IK4-1 Tester: Leo Xiao		Project No.: 2602R03904E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11ac20_U-NII-2A middle channel 5280MHz Peak:RBW:1MHz,VBW:3MHz		Serial No.: 3IK4-1 Tester: Leo Xiao																																																																																	
Level (dBuV/m) Fundamental test with Filter Switch Unit Date: 2026-04-16 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>6141.40</td><td>51.05</td><td>0.15</td><td>51.20</td><td>68.20</td><td>17.00</td><td>Peak</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	6141.40	51.05	0.15	51.20	68.20	17.00	Peak	Level (dBuV/m) Fundamental test with Filter Switch Unit Date: 2026-04-16 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>6146.90</td><td>50.82</td><td>0.17</td><td>50.99</td><td>68.20</td><td>17.21</td><td>Peak</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	6146.90	50.82	0.17	50.99	68.20	17.21	Peak																																																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																
1	6141.40	51.05	0.15	51.20	68.20	17.00	Peak																																																																																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																
1	6146.90	50.82	0.17	50.99	68.20	17.21	Peak																																																																																
Project No.: 2602R03904E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11ac20_U-NII-2A middle channel 5280MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz Serial No.: 3IK4-1 Tester: Leo Xiao Level (dBuV/m) Date: 2026-04-16 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>10560.00</td><td>49.22</td><td>1.92</td><td>51.14</td><td>68.20</td><td>17.06</td><td>Peak</td></tr><tr><td>2</td><td>15840.00</td><td>49.01</td><td>2.84</td><td>51.85</td><td>74.00</td><td>22.15</td><td>Peak</td></tr><tr><td>3</td><td>17990.80</td><td>49.23</td><td>10.51</td><td>59.74</td><td>74.00</td><td>14.26</td><td>Peak</td></tr><tr><td>4</td><td>17990.80</td><td>37.39</td><td>10.51</td><td>47.90</td><td>54.00</td><td>6.10</td><td>Average</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	10560.00	49.22	1.92	51.14	68.20	17.06	Peak	2	15840.00	49.01	2.84	51.85	74.00	22.15	Peak	3	17990.80	49.23	10.51	59.74	74.00	14.26	Peak	4	17990.80	37.39	10.51	47.90	54.00	6.10	Average	Project No.: 2602R03904E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11ac20_U-NII-2A middle channel 5280MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz Serial No.: 3IK4-1 Tester: Leo Xiao Level (dBuV/m) Date: 2026-04-16 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>10560.00</td><td>49.33</td><td>1.92</td><td>51.25</td><td>68.20</td><td>16.95</td><td>Peak</td></tr><tr><td>2</td><td>15840.00</td><td>49.44</td><td>2.84</td><td>52.28</td><td>74.00</td><td>21.72</td><td>Peak</td></tr><tr><td>3</td><td>17974.70</td><td>49.25</td><td>10.37</td><td>59.62</td><td>74.00</td><td>14.38</td><td>Peak</td></tr><tr><td>4</td><td>17974.70</td><td>37.29</td><td>10.37</td><td>47.66</td><td>54.00</td><td>6.34</td><td>Average</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	10560.00	49.33	1.92	51.25	68.20	16.95	Peak	2	15840.00	49.44	2.84	52.28	74.00	21.72	Peak	3	17974.70	49.25	10.37	59.62	74.00	14.38	Peak	4	17974.70	37.29	10.37	47.66	54.00	6.34	Average
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																
1	10560.00	49.22	1.92	51.14	68.20	17.06	Peak																																																																																
2	15840.00	49.01	2.84	51.85	74.00	22.15	Peak																																																																																
3	17990.80	49.23	10.51	59.74	74.00	14.26	Peak																																																																																
4	17990.80	37.39	10.51	47.90	54.00	6.10	Average																																																																																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																
1	10560.00	49.33	1.92	51.25	68.20	16.95	Peak																																																																																
2	15840.00	49.44	2.84	52.28	74.00	21.72	Peak																																																																																
3	17974.70	49.25	10.37	59.62	74.00	14.38	Peak																																																																																
4	17974.70	37.29	10.37	47.66	54.00	6.34	Average																																																																																


802.11ac20, High Channel, Horizontal

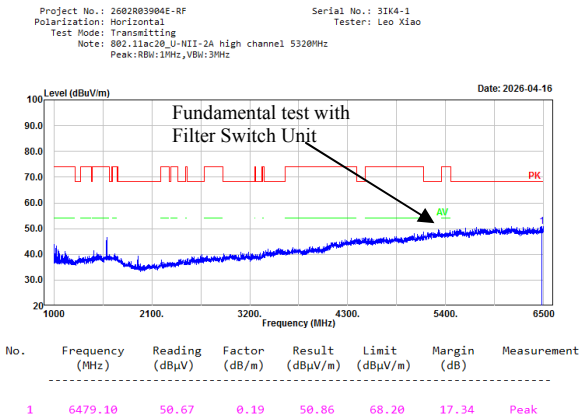




802.11ac20, High Channel, Vertical

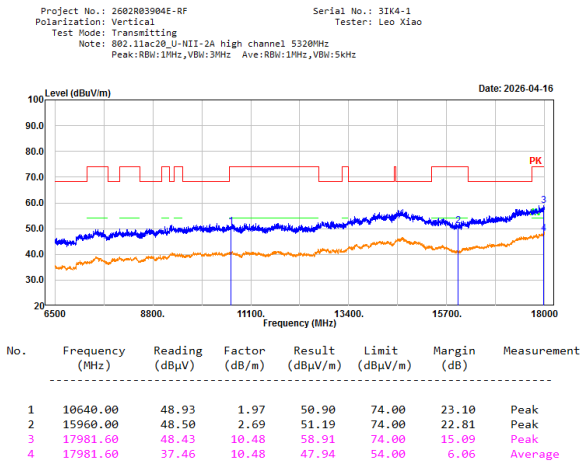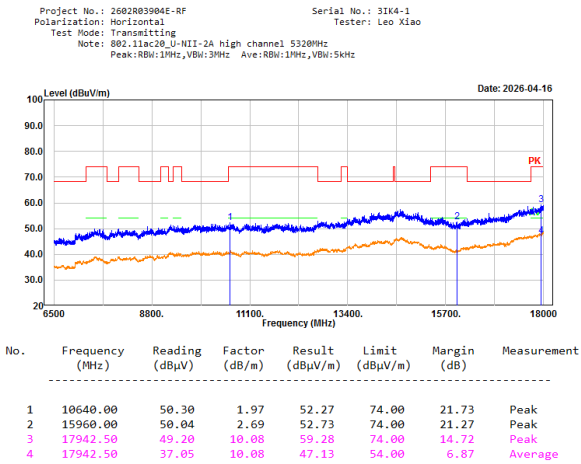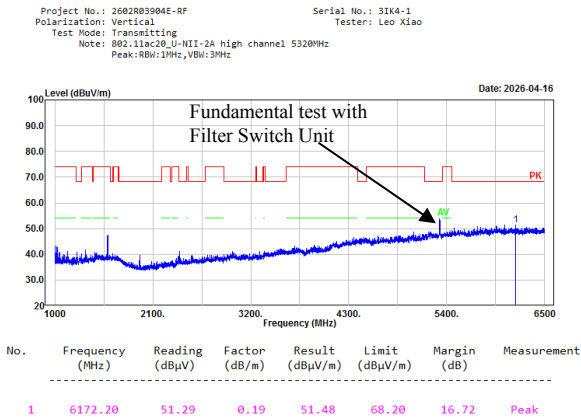


802.11ac40, Low Channel, Horizontal

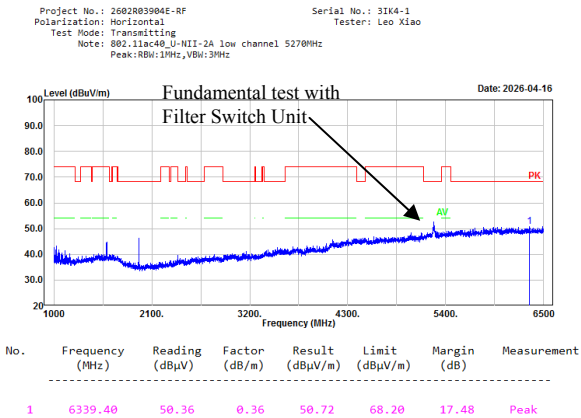




802.11ac40, Low Channel, Vertical

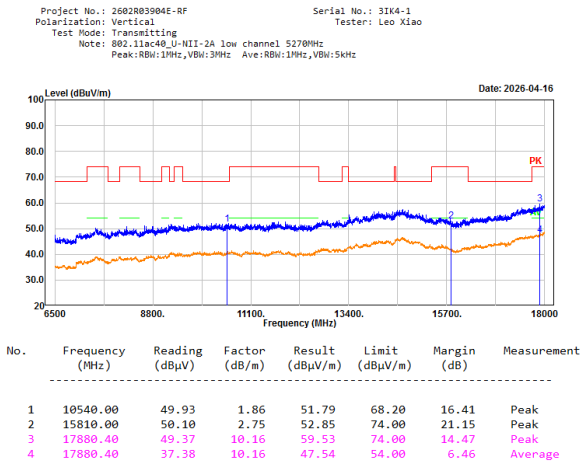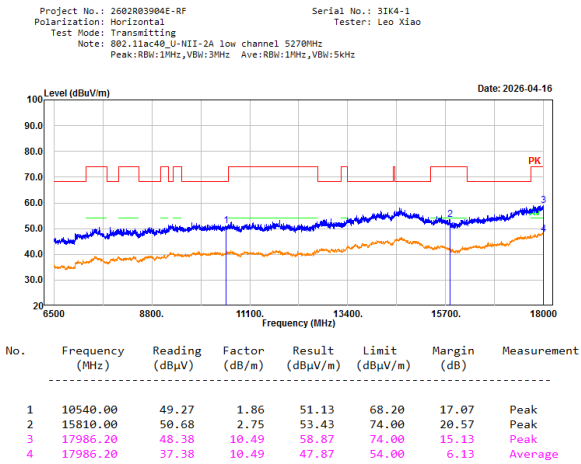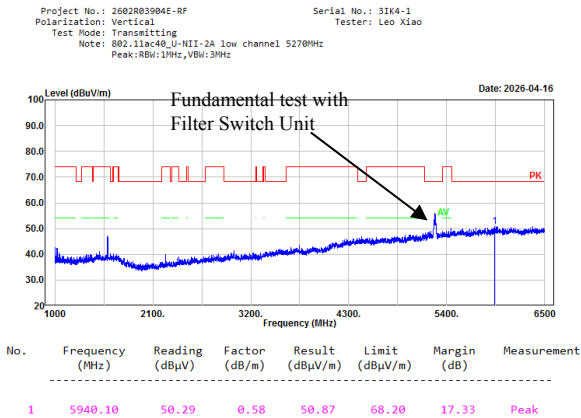


802.11ac40, High Channel, Horizontal

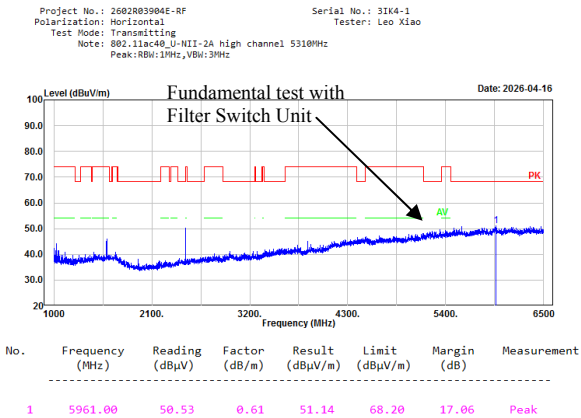




802.11ac40, High Channel, Vertical

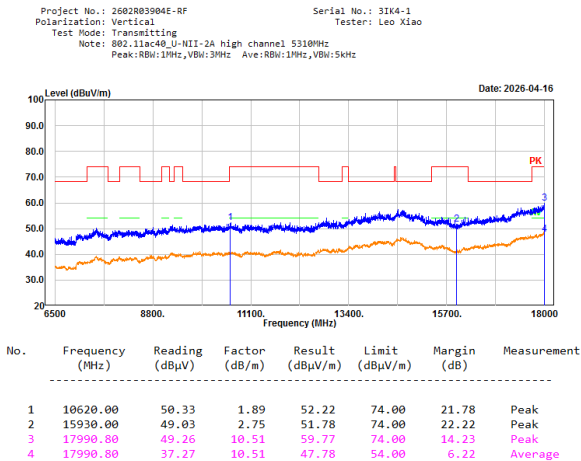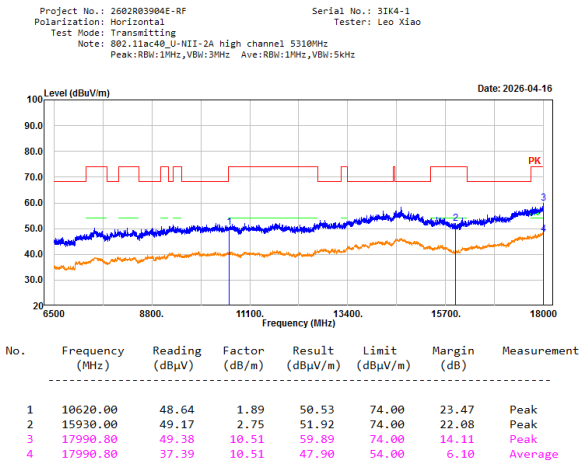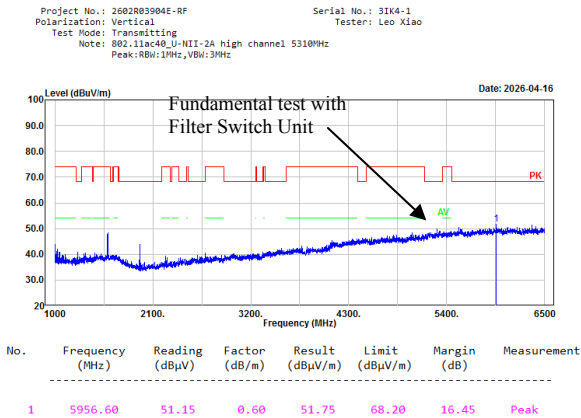

802.11ac80, Middle Channel, Horizontal

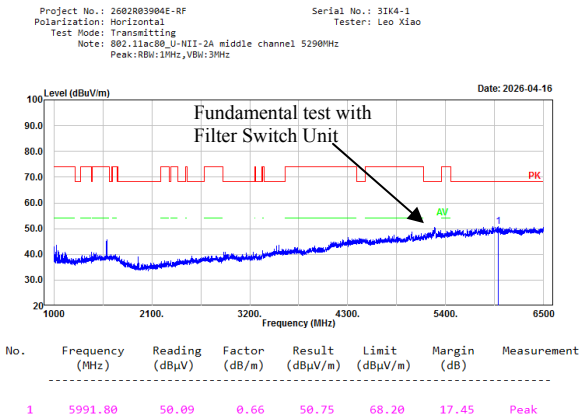

802.11ac80, Middle Channel, Vertical

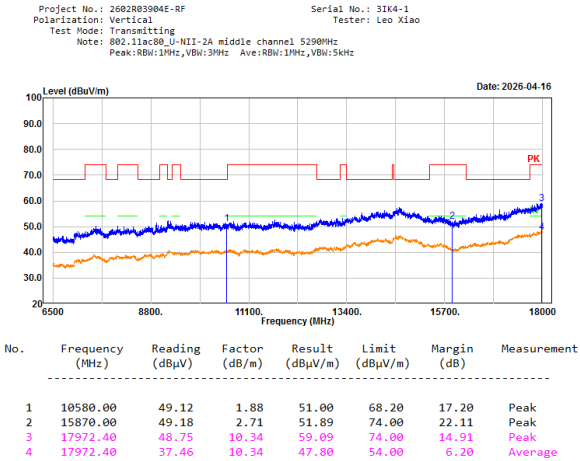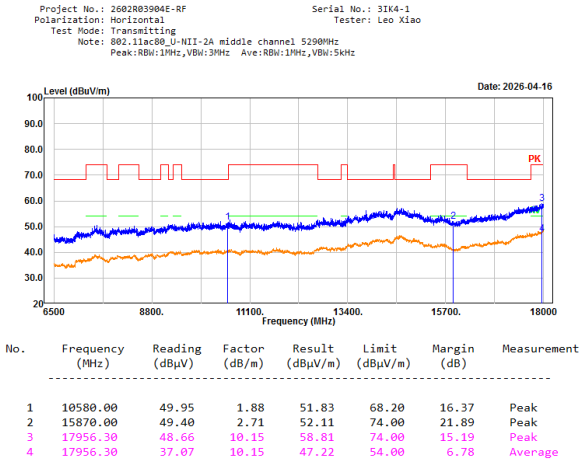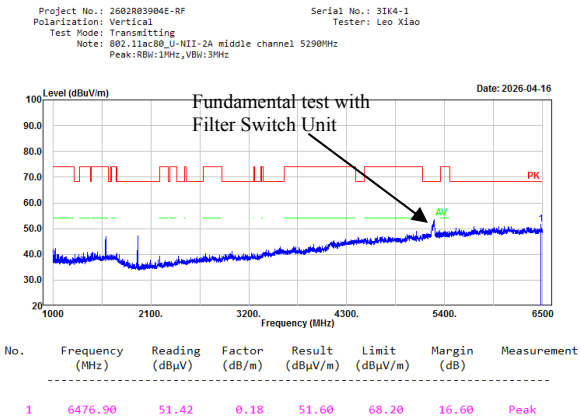


5470-5725MHz:

802.11a, Low Channel, Horizontal				802.11a, Low Channel, Vertical											
Project No.: 2602R03904E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11a_U-NII-2C low channel 5500MHz Peak:RBW:1MHz,VBW:3MHz		Serial No.: 3IK4-1 Tester: Leo Xiao		Project No.: 2602R03904E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11a_U-NII-2C low channel 5500MHz Peak:RBW:1MHz,VBW:3MHz		Serial No.: 3IK4-1 Tester: Leo Xiao									
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6489.00	50.80	0.26	51.06	68.20	17.14	Peak	1	6099.60	51.17	0.21	51.38	68.20	16.82	Peak




Project No.: 2602R03904E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11a_U-NII-2C low channel 5500MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz		Serial No.: 3IK4-1 Tester: Leo Xiao		Project No.: 2602R03904E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11a_U-NII-2C low channel 5500MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz		Serial No.: 3IK4-1 Tester: Leo Xiao									
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11000.00	48.56	2.22	50.78	74.00	23.22	Peak	1	11000.00	49.56	2.22	51.78	74.00	22.22	Peak
2	16500.00	49.47	3.71	53.18	68.20	15.02	Peak	2	16500.00	50.36	3.71	54.07	68.20	14.13	Peak
3	17859.70	49.69	9.33	59.02	74.00	14.98	Peak	3	17983.90	48.72	10.48	59.20	74.00	14.80	Peak
4	17859.70	37.77	9.33	47.10	54.00	6.90	Average	4	17983.90	37.09	10.48	47.57	54.00	6.43	Average

802.11a, Middle Channel, Horizontal							802.11a, Middle Channel, Vertical																																																																																						
Project No.: 2602R03904E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11a_U-NII-2C middle channel 5600MHz Peak:RBW:1MHz,VBW:3MHz				Serial No.: 3IK4-1 Tester: Leo Xiao			Project No.: 2602R03904E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11a_U-NII-2C middle channel 5600MHz Peak:RBW:1MHz,VBW:3MHz				Serial No.: 3IK4-1 Tester: Leo Xiao																																																																																		
Level (dBuV/m) Fundamental test with Filter Switch Unit Date: 2026-04-16 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>5953.30</td><td>50.32</td><td>0.59</td><td>50.91</td><td>68.20</td><td>17.29</td><td>Peak</td></tr></table>							No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	5953.30	50.32	0.59	50.91	68.20	17.29	Peak	Level (dBuV/m) Fundamental test with Filter Switch Unit Date: 2026-04-16 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>5940.10</td><td>50.28</td><td>0.58</td><td>50.86</td><td>68.20</td><td>17.34</td><td>Peak</td></tr></table>							No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	5940.10	50.28	0.58	50.86	68.20	17.34	Peak																																																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																						
1	5953.30	50.32	0.59	50.91	68.20	17.29	Peak																																																																																						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																						
1	5940.10	50.28	0.58	50.86	68.20	17.34	Peak																																																																																						
Project No.: 2602R03904E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11a_U-NII-2C middle channel 5600MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz Serial No.: 3IK4-1 Tester: Leo Xiao Level (dBuV/m) Date: 2026-04-16 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>11200.00</td><td>48.48</td><td>2.26</td><td>50.74</td><td>74.00</td><td>23.26</td><td>Peak</td></tr><tr><td>2</td><td>16800.00</td><td>49.11</td><td>4.67</td><td>53.78</td><td>68.20</td><td>14.42</td><td>Peak</td></tr><tr><td>3</td><td>17970.10</td><td>48.32</td><td>10.31</td><td>58.63</td><td>74.00</td><td>15.37</td><td>Peak</td></tr><tr><td>4</td><td>17970.10</td><td>36.98</td><td>10.31</td><td>47.29</td><td>54.00</td><td>6.71</td><td>Average</td></tr></table>							No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	11200.00	48.48	2.26	50.74	74.00	23.26	Peak	2	16800.00	49.11	4.67	53.78	68.20	14.42	Peak	3	17970.10	48.32	10.31	58.63	74.00	15.37	Peak	4	17970.10	36.98	10.31	47.29	54.00	6.71	Average	Project No.: 2602R03904E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11a_U-NII-2C middle channel 5600MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz Serial No.: 3IK4-1 Tester: Leo Xiao Level (dBuV/m) Date: 2026-04-16 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>11200.00</td><td>49.69</td><td>2.26</td><td>51.95</td><td>74.00</td><td>22.05</td><td>Peak</td></tr><tr><td>2</td><td>16800.00</td><td>49.14</td><td>4.67</td><td>53.81</td><td>68.20</td><td>14.39</td><td>Peak</td></tr><tr><td>3</td><td>17974.70</td><td>48.13</td><td>10.37</td><td>58.50</td><td>74.00</td><td>15.50</td><td>Peak</td></tr><tr><td>4</td><td>17974.70</td><td>36.64</td><td>10.37</td><td>47.01</td><td>54.00</td><td>6.99</td><td>Average</td></tr></table>							No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	11200.00	49.69	2.26	51.95	74.00	22.05	Peak	2	16800.00	49.14	4.67	53.81	68.20	14.39	Peak	3	17974.70	48.13	10.37	58.50	74.00	15.50	Peak	4	17974.70	36.64	10.37	47.01	54.00	6.99	Average
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																						
1	11200.00	48.48	2.26	50.74	74.00	23.26	Peak																																																																																						
2	16800.00	49.11	4.67	53.78	68.20	14.42	Peak																																																																																						
3	17970.10	48.32	10.31	58.63	74.00	15.37	Peak																																																																																						
4	17970.10	36.98	10.31	47.29	54.00	6.71	Average																																																																																						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																						
1	11200.00	49.69	2.26	51.95	74.00	22.05	Peak																																																																																						
2	16800.00	49.14	4.67	53.81	68.20	14.39	Peak																																																																																						
3	17974.70	48.13	10.37	58.50	74.00	15.50	Peak																																																																																						
4	17974.70	36.64	10.37	47.01	54.00	6.99	Average																																																																																						


802.11a, High Channel, Horizontal

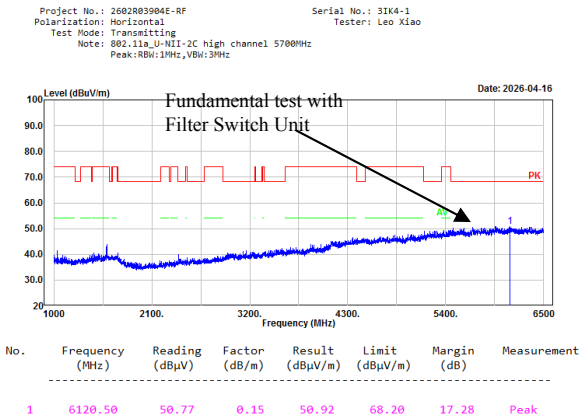




802.11a, High Channel, Vertical

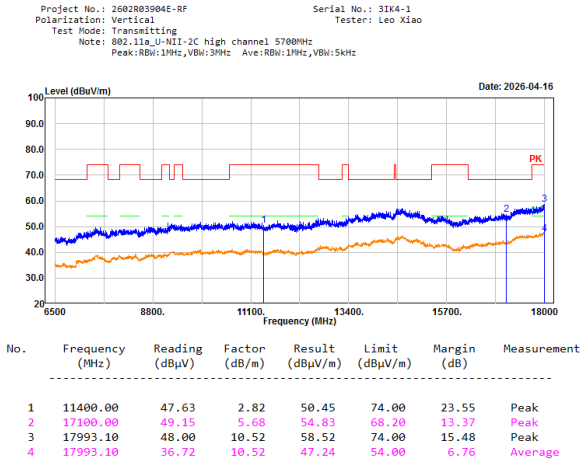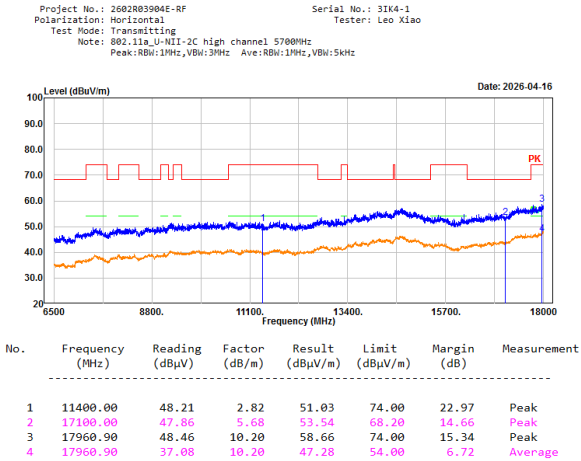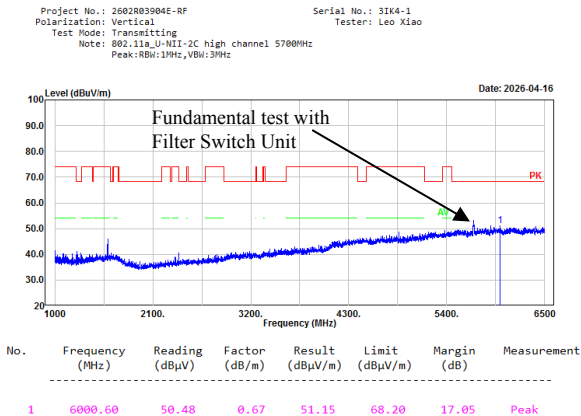


802.11ac20, Low Channel, Horizontal

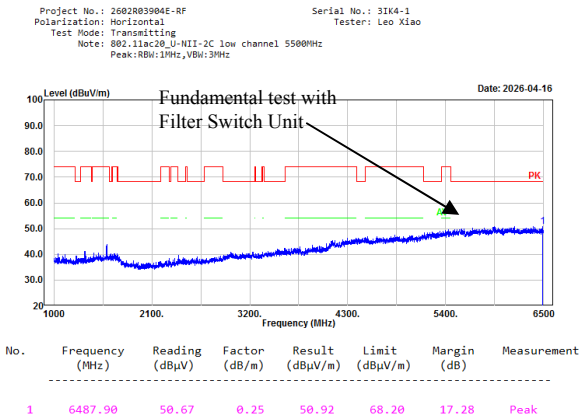




802.11ac20, Low Channel, Vertical

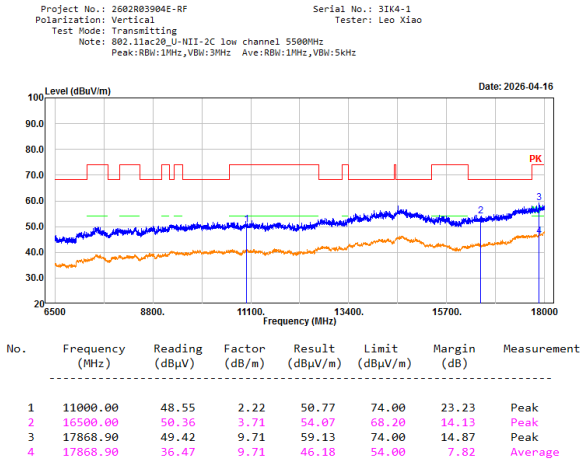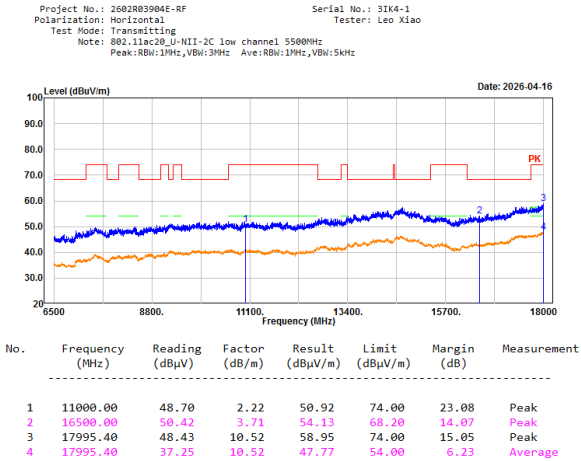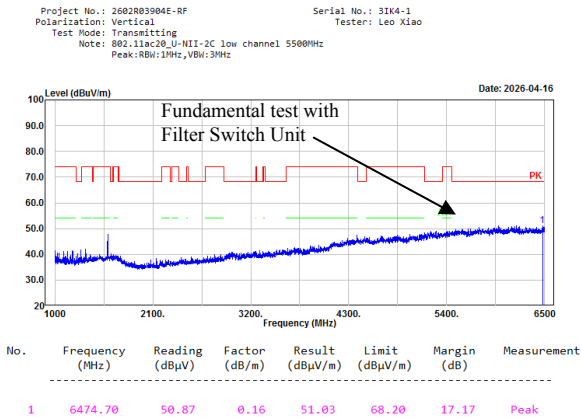


802.11ac20, Middle Channel, Horizontal

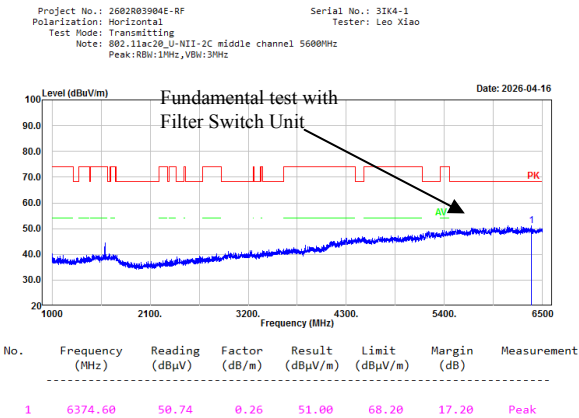




802.11ac20, Middle Channel, Vertical

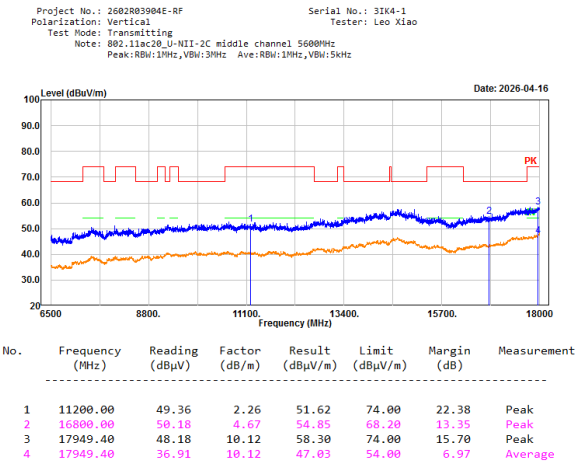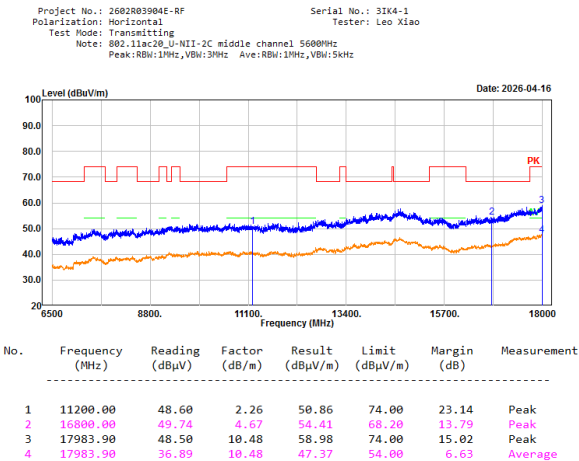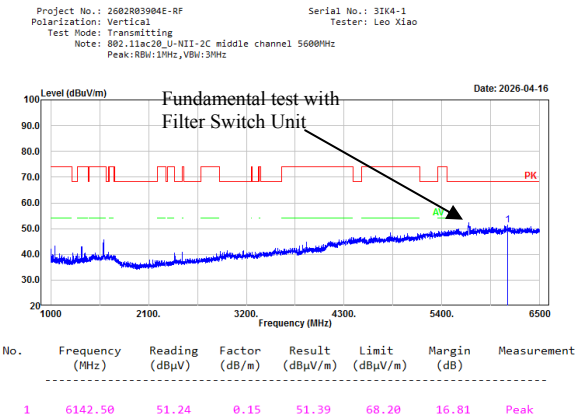

802.11ac20, High Channel, Horizontal

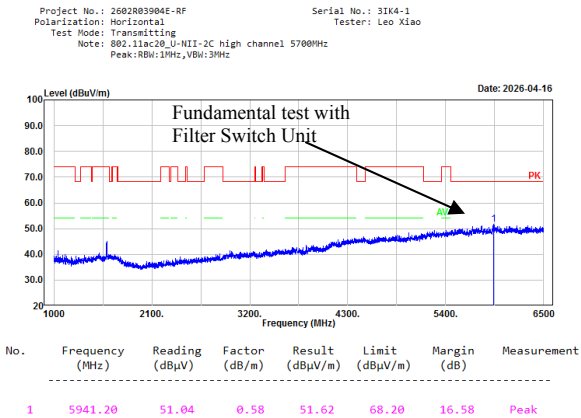

802.11ac20, High Channel, Vertical

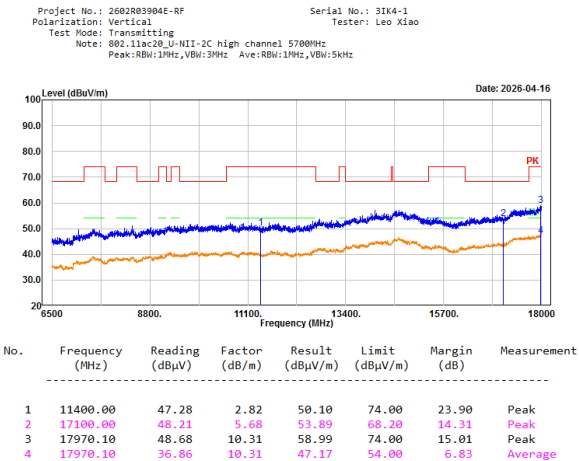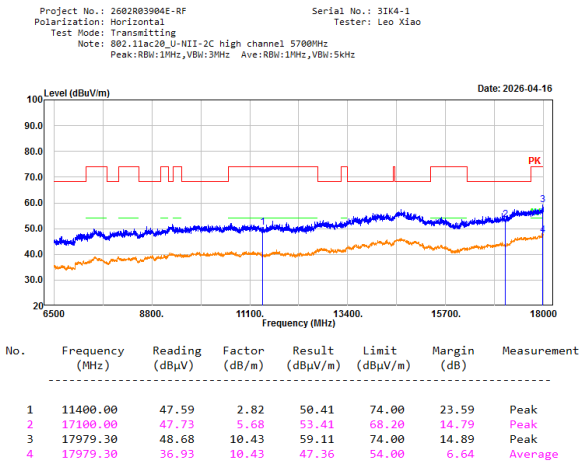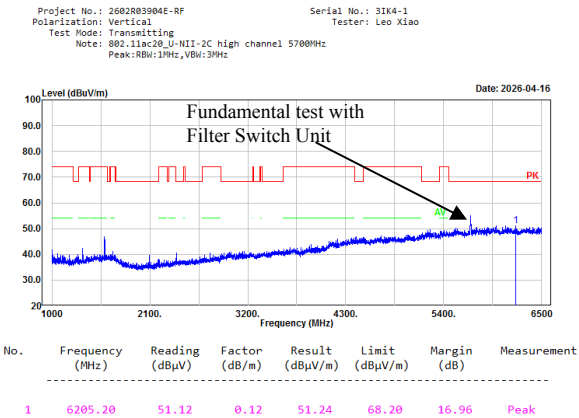

802.11ac40, Low Channel, Horizontal

Project No.: 2602R03904E-RF

Serial No.: 31K4-1

Polarization: Horizontal

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11ac40_U-NII-2C low channel 5510MHz

Peak:RBW:1MHz,VBW:3MHz

Level (dBuV/m)

Fundamental test with Filter Switch Unit

Date: 2026-04-16

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6415.30	50.20	0.31	50.51	68.20	17.69	Peak

802.11ac40, Low Channel, Vertical

Project No.: 2602R03904E-RF

Serial No.: 31K4-1

Polarization: Vertical

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11ac40_U-NII-2C low channel 5510MHz

Peak:RBW:1MHz,VBW:3MHz

Level (dBuV/m)

Fundamental test with Filter Switch Unit

Date: 2026-04-16

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6482.40	50.86	0.22	51.08	68.20	17.12	Peak

802.11ac40, Low Channel, Horizontal

Project No.: 2602R03904E-RF

Serial No.: 31K4-1

Polarization: Horizontal

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11ac40_U-NII-2C low channel 5510MHz

Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Level (dBuV/m)

Date: 2026-04-16

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11020.00	49.36	2.15	51.51	74.00	22.49	Peak
2	16530.00	49.99	3.64	53.63	68.20	14.57	Peak
3	17981.60	48.04	10.48	58.52	74.00	15.48	Peak
4	17981.60	37.20	10.48	47.68	54.00	6.32	Average

802.11ac40, Low Channel, Vertical

Project No.: 2602R03904E-RF

Serial No.: 31K4-1

Polarization: Vertical

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11ac40_U-NII-2C low channel 5510MHz

Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Level (dBuV/m)

Date: 2026-04-16

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11020.00	49.01	2.15	51.16	74.00	22.84	Peak
2	16530.00	50.00	3.64	53.64	68.20	14.56	Peak
3	17967.80	48.30	10.28	58.58	74.00	15.42	Peak
4	17967.80	36.69	10.28	46.97	54.00	7.03	Average

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Horizontal

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11ac40_U-NII-2C middle channel 5590MHz

Peak:RBW:1MHz,VBW:3MHz

Fundamental test with Filter Switch Unit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5935.70	50.64	0.57	51.21	68.20	16.99	Peak

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Vertical

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11ac40_U-NII-2C middle channel 5590MHz

Peak:RBW:1MHz,VBW:3MHz

Fundamental test with Filter Switch Unit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6475.80	51.39	0.17	51.56	68.20	16.64	Peak

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Horizontal

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11ac40_U-NII-2C middle channel 5590MHz

Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11180.00	48.74	2.29	51.03	74.00	22.97	Peak
2	16770.00	49.49	4.51	54.00	68.20	14.20	Peak
3	17995.40	48.58	10.52	59.10	74.00	14.90	Peak
4	17995.40	37.04	10.52	47.56	54.00	6.44	Average

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Vertical

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11ac40_U-NII-2C middle channel 5590MHz

Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11180.00	49.03	2.29	51.32	74.00	22.68	Peak
2	16770.00	49.38	4.51	53.89	68.20	14.31	Peak
3	17988.50	47.63	10.50	58.13	74.00	15.87	Peak
4	17988.50	37.06	10.50	47.56	54.00	6.44	Average


802.11ac40, High Channel, Horizontal							802.11ac40, High Channel, Vertical																																																																																						
Project No.: 2602R03904E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11ac40_U-NII-2C high channel 5670MHz Peak:RBW:1MHz,VBW:3MHz				Serial No.: 3IK4-1 Tester: Leo Xiao			Project No.: 2602R03904E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11ac40_U-NII-2C high channel 5670MHz Peak:RBW:1MHz,VBW:3MHz				Serial No.: 3IK4-1 Tester: Leo Xiao																																																																																		
Level (dBuV/m) Fundamental test with Filter Switch Unit Date: 2026-04-16 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>5956.60</td><td>50.35</td><td>0.60</td><td>50.95</td><td>68.20</td><td>17.25</td><td>Peak</td></tr></table>							No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	5956.60	50.35	0.60	50.95	68.20	17.25	Peak	Level (dBuV/m) Fundamental test with Filter Switch Unit Date: 2026-04-16 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>6343.80</td><td>50.64</td><td>0.36</td><td>51.00</td><td>68.20</td><td>17.20</td><td>Peak</td></tr></table>							No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	6343.80	50.64	0.36	51.00	68.20	17.20	Peak																																																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																						
1	5956.60	50.35	0.60	50.95	68.20	17.25	Peak																																																																																						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																						
1	6343.80	50.64	0.36	51.00	68.20	17.20	Peak																																																																																						
Project No.: 2602R03904E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11ac40_U-NII-2C high channel 5670MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz Serial No.: 3IK4-1 Tester: Leo Xiao Date: 2026-04-16 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>11340.00</td><td>48.29</td><td>2.57</td><td>50.86</td><td>74.00</td><td>23.14</td><td>Peak</td></tr><tr><td>2</td><td>17010.00</td><td>49.35</td><td>5.50</td><td>54.85</td><td>68.20</td><td>13.35</td><td>Peak</td></tr><tr><td>3</td><td>17993.10</td><td>47.90</td><td>10.52</td><td>58.42</td><td>74.00</td><td>15.58</td><td>Peak</td></tr><tr><td>4</td><td>17993.10</td><td>37.16</td><td>10.52</td><td>47.68</td><td>54.00</td><td>6.32</td><td>Average</td></tr></table>							No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	11340.00	48.29	2.57	50.86	74.00	23.14	Peak	2	17010.00	49.35	5.50	54.85	68.20	13.35	Peak	3	17993.10	47.90	10.52	58.42	74.00	15.58	Peak	4	17993.10	37.16	10.52	47.68	54.00	6.32	Average	Project No.: 2602R03904E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11ac40_U-NII-2C high channel 5670MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz Serial No.: 3IK4-1 Tester: Leo Xiao Date: 2026-04-16 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>11340.00</td><td>48.53</td><td>2.57</td><td>51.10</td><td>74.00</td><td>22.90</td><td>Peak</td></tr><tr><td>2</td><td>17010.00</td><td>48.92</td><td>5.50</td><td>54.42</td><td>68.20</td><td>13.78</td><td>Peak</td></tr><tr><td>3</td><td>17990.80</td><td>47.68</td><td>10.51</td><td>58.19</td><td>74.00</td><td>15.81</td><td>Peak</td></tr><tr><td>4</td><td>17990.80</td><td>36.59</td><td>10.51</td><td>47.10</td><td>54.00</td><td>6.90</td><td>Average</td></tr></table>							No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	11340.00	48.53	2.57	51.10	74.00	22.90	Peak	2	17010.00	48.92	5.50	54.42	68.20	13.78	Peak	3	17990.80	47.68	10.51	58.19	74.00	15.81	Peak	4	17990.80	36.59	10.51	47.10	54.00	6.90	Average
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																						
1	11340.00	48.29	2.57	50.86	74.00	23.14	Peak																																																																																						
2	17010.00	49.35	5.50	54.85	68.20	13.35	Peak																																																																																						
3	17993.10	47.90	10.52	58.42	74.00	15.58	Peak																																																																																						
4	17993.10	37.16	10.52	47.68	54.00	6.32	Average																																																																																						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																																																						
1	11340.00	48.53	2.57	51.10	74.00	22.90	Peak																																																																																						
2	17010.00	48.92	5.50	54.42	68.20	13.78	Peak																																																																																						
3	17990.80	47.68	10.51	58.19	74.00	15.81	Peak																																																																																						
4	17990.80	36.59	10.51	47.10	54.00	6.90	Average																																																																																						

802.11ac80, Low Channel, Horizontal

Project No.: 2602R03904E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac80_U-NII-2C low channel 5530MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 31K4-1
Tester: Leo Xiao

Date: 2026-04-16

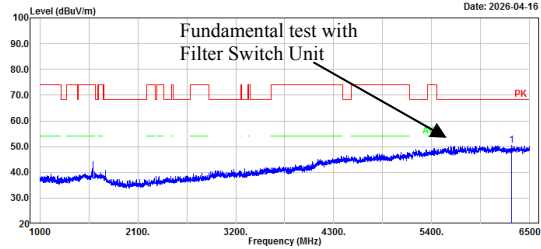


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6298.70	50.12	0.28	50.40	68.20	17.80	Peak

802.11ac80, Low Channel, Vertical

Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac80_U-NII-2C low channel 5530MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 31K4-1
Tester: Leo Xiao

Date: 2026-04-16

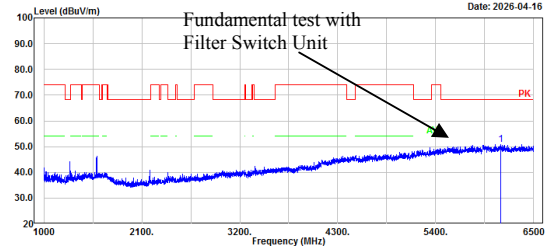


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6132.60	50.66	0.10	50.76	68.20	17.44	Peak

Project No.: 2602R03904E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac80_U-NII-2C low channel 5530MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 31K4-1
Tester: Leo Xiao

Date: 2026-04-16

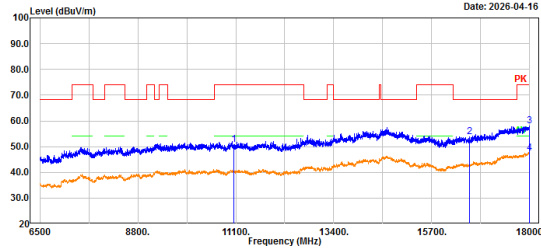


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11060.00	48.59	2.20	50.79	74.00	23.21	Peak
2	16590.00	49.82	4.04	53.86	68.20	14.34	Peak
3	17990.80	47.52	10.51	58.03	74.00	15.97	Peak
4	17990.80	36.82	10.51	47.33	54.00	6.67	Average

Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac80_U-NII-2C low channel 5530MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 31K4-1
Tester: Leo Xiao

Date: 2026-04-16

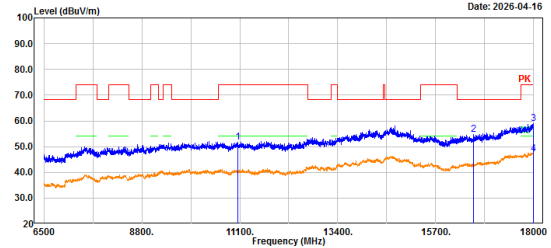

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11060.00	49.49	2.20	51.69	74.00	22.31	Peak
2	16590.00	50.73	4.04	54.77	68.20	13.43	Peak
3	17995.40	48.39	10.52	58.91	74.00	15.09	Peak
4	17995.40	36.68	10.52	47.20	54.00	6.80	Average

802.11ac80, High Channel, Horizontal							
Project No.: 2602R03904E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11ac80_U-NII-2C high channel 5610MHz Peak:RBW:1MHz,VBW:3MHz				Serial No.: 31K4-1 Tester: Leo Xiao			
Date: 2026-04-16							
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5961.00	50.80	0.61	51.41	68.20	16.79	Peak

802.11ac80, High Channel, Vertical							
Project No.: 2602R03904E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11ac80_U-NII-2C high channel 5610MHz Peak:RBW:1MHz,VBW:3MHz				Serial No.: 31K4-1 Tester: Leo Xiao			
Date: 2026-04-16							
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6350.40	50.22	0.29	50.51	68.20	17.69	Peak

Project No.: 2602R03904E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11ac80_U-NII-2C high channel 5610MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz				Serial No.: 31K4-1 Tester: Leo Xiao			
Date: 2026-04-16							
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11220.00	49.40	2.28	51.68	74.00	22.32	Peak
2	16830.00	50.47	4.74	55.21	68.20	12.99	Peak
3	17990.80	47.86	10.51	58.37	74.00	15.63	Peak
4	17990.80	36.27	10.51	46.78	54.00	7.22	Average


Project No.: 2602R03904E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11ac80_U-NII-2C high channel 5610MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz				Serial No.: 31K4-1 Tester: Leo Xiao			
Date: 2026-04-16							
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11220.00	49.44	2.28	51.72	74.00	22.28	Peak
2	16830.00	49.85	4.74	54.59	68.20	13.61	Peak
3	17974.70	48.89	10.37	59.26	74.00	14.74	Peak
4	17974.70	36.64	10.37	47.01	54.00	6.99	Average

5725-5850MHz:




802.11a, Low Channel, Horizontal				802.11a, Low Channel, Vertical											
Project No.: 2602R03904E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11a_U-NII-3 low channel 5745MHz Peak: RBW:1MHz,VBW:3MHz		Serial No.: 3IK4-1 Tester: Leo Xiao		Project No.: 2602R03904E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11a_U-NII-3 low channel 5745MHz Peak: RBW:1MHz,VBW:3MHz		Serial No.: 3IK4-1 Tester: Leo Xiao									
Level (dBuV/m) 100 90.0 80.0 70.0 60.0 50.0 40.0 30.0 20 100021003200430054006500 Frequency (MHz) Fundamental test with Filter Switch Unit PK AV 1				Level (dBuV/m) 100 90.0 80.0 70.0 60.0 50.0 40.0 30.0 20 100021003200430054006500 Frequency (MHz) Fundamental test with Filter Switch Unit PK AV 1											
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5996.20	50.64	0.67	51.31	68.20	16.89	Peak	1	6324.00	51.02	0.24	51.26	68.20	16.94	Peak

Project No.: 2602R03904E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11a_U-NII-3 low channel 5745MHz Peak: RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz		Serial No.: 3IK4-1 Tester: Leo Xiao		Project No.: 2602R03904E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11a_U-NII-3 low channel 5745MHz Peak: RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz		Serial No.: 3IK4-1 Tester: Leo Xiao									
Level (dBuV/m) 100 90.0 80.0 70.0 60.0 50.0 40.0 30.0 20 6500880011100134001570018000 Frequency (MHz) PK 1 2 3				Level (dBuV/m) 100 90.0 80.0 70.0 60.0 50.0 40.0 30.0 20 6500880011100134001570018000 Frequency (MHz) PK 1 2 3											
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11490.00	48.55	2.54	51.09	74.00	22.91	Peak	1	11490.00	47.69	2.54	50.23	74.00	23.77	Peak
2	17235.00	49.48	6.19	55.67	68.20	12.53	Peak	2	17235.00	49.40	6.19	55.59	68.20	12.61	Peak
3	17979.30	48.63	10.43	59.06	74.00	14.94	Peak	3	17983.90	48.60	10.48	59.08	74.00	14.92	Peak
4	17979.30	37.32	10.43	47.75	54.00	6.25	Average	4	17983.90	37.07	10.48	47.55	54.00	6.45	Average

802.11a, Middle Channel, Horizontal

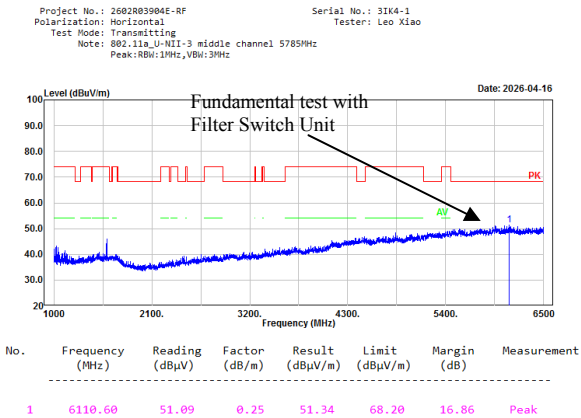

802.11a, Middle Channel, Vertical

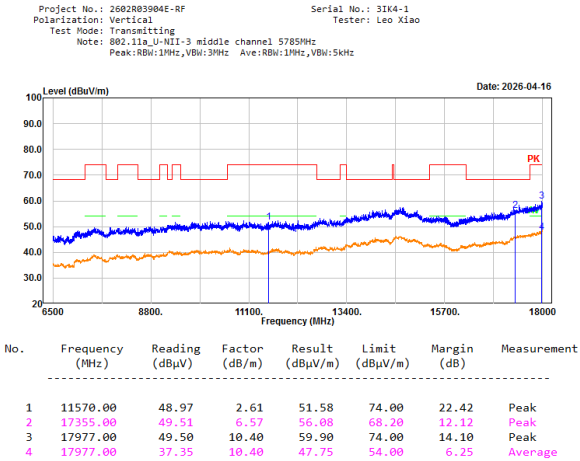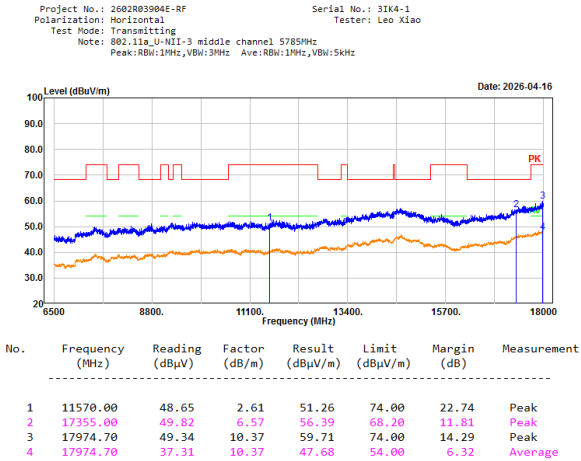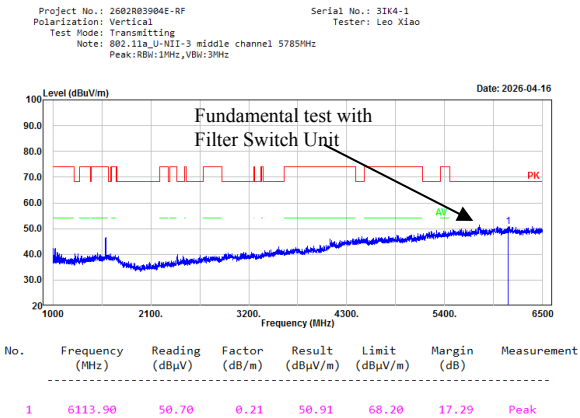

802.11a, High Channel, Horizontal

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Horizontal

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11a_U-NII-3 high channel 5825MHz

Peak:RBW:1MHz,VBW:3MHz

Level (dBuV/m)

Fundamental test with Filter Switch Unit

Date: 2026-04-16

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6142.50	50.73	0.15	50.88	68.20	17.32	Peak

802.11a, High Channel, Vertical

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Vertical

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11a_U-NII-3 high channel 5825MHz

Peak:RBW:1MHz,VBW:3MHz

Level (dBuV/m)

Fundamental test with Filter Switch Unit

Date: 2026-04-16

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6095.20	51.37	0.17	51.54	68.20	16.66	Peak

802.11a, High Channel, Horizontal

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Horizontal

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11a_U-NII-3 high channel 5825MHz

Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Level (dBuV/m)

Date: 2026-04-16

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11650.00	49.45	2.64	52.09	74.00	21.91	Peak
2	17475.00	49.82	7.07	56.89	68.20	11.31	Peak
3	17993.10	48.95	10.52	59.47	74.00	14.53	Peak
4	17993.10	37.36	10.52	47.88	54.00	6.12	Average

802.11a, High Channel, Vertical

Project No.: 2602R03904E-RF

Serial No.: 3IK4-1

Polarization: Vertical

Tester: Leo Xiao

Test Mode: Transmitting

Note: 802.11a_U-NII-3 high channel 5825MHz


Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Level (dBuV/m)




Date: 2026-04-16

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11650.00	49.66	2.64	52.30	74.00	21.70	Peak
2	17475.00	50.48	7.07	57.55	68.20	10.65	Peak
3	17972.40	48.95	10.34	59.29	74.00	14.71	Peak
4	17972.40	37.28	10.34	47.62	54.00	6.38	Average


802.11ac20, Low Channel, Horizontal

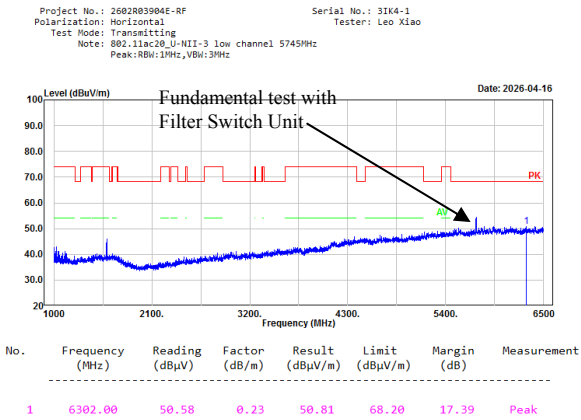




802.11ac20, Low Channel, Vertical

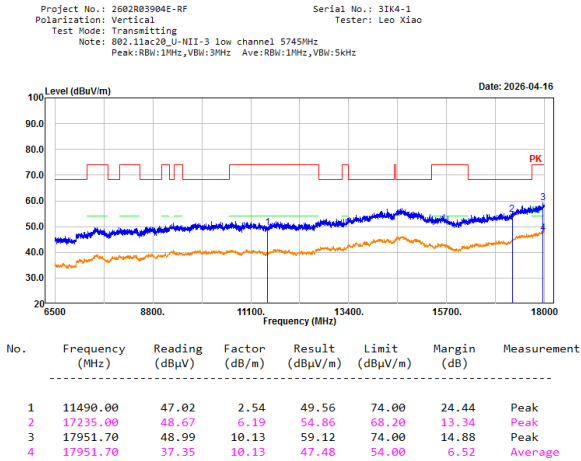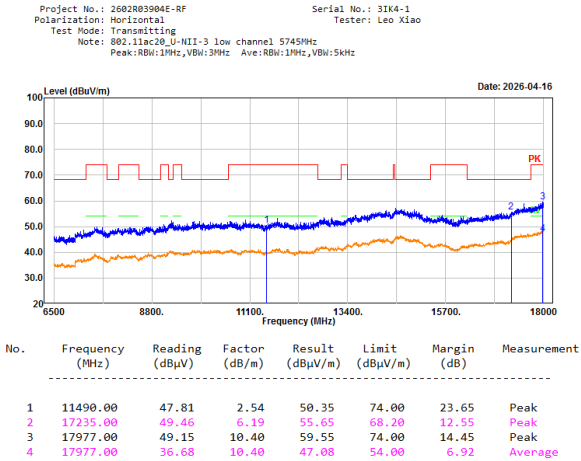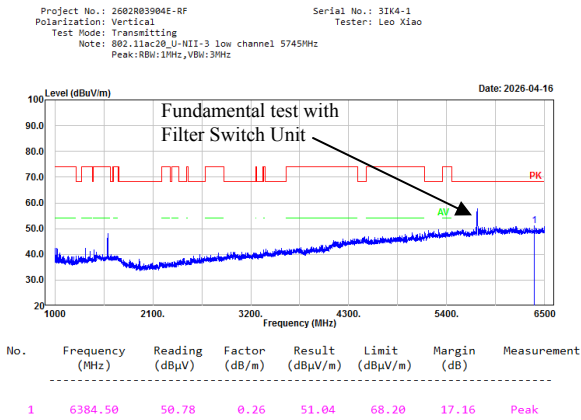


802.11ac20, Middle Channel, Horizontal

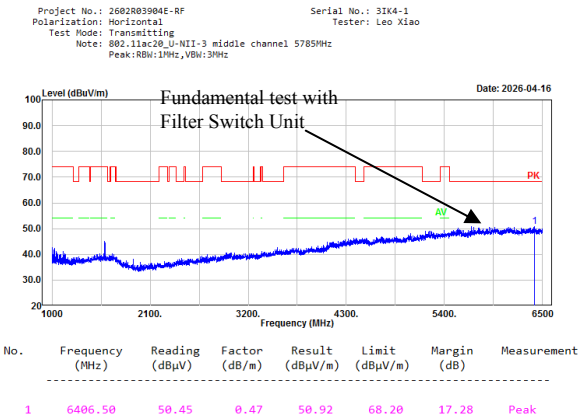




802.11ac20, Middle Channel, Vertical

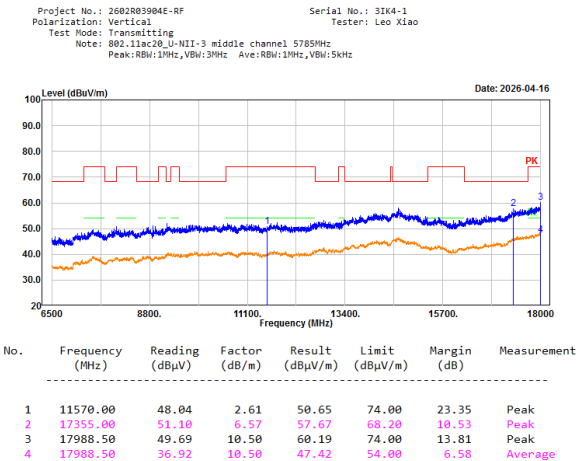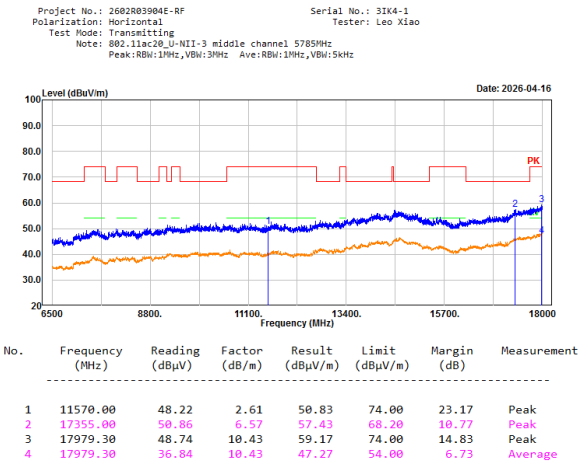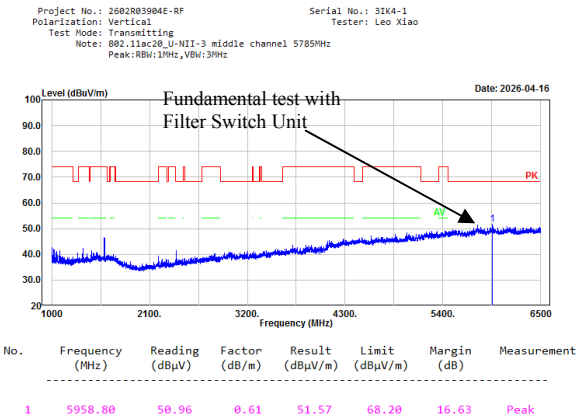


802.11ac20, High Channel, Horizontal

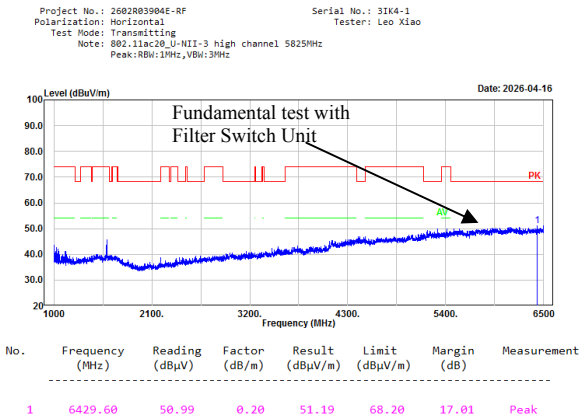




802.11ac20, High Channel, Vertical

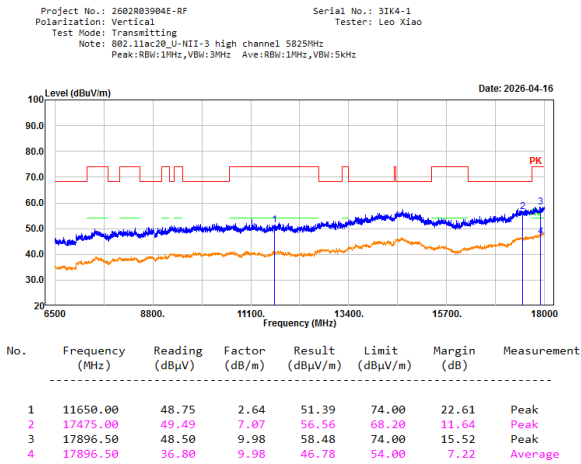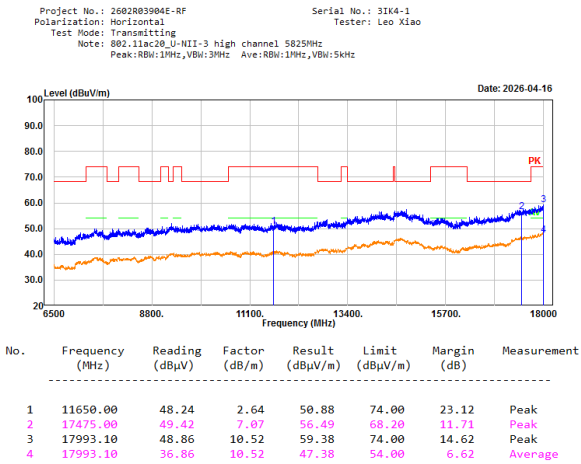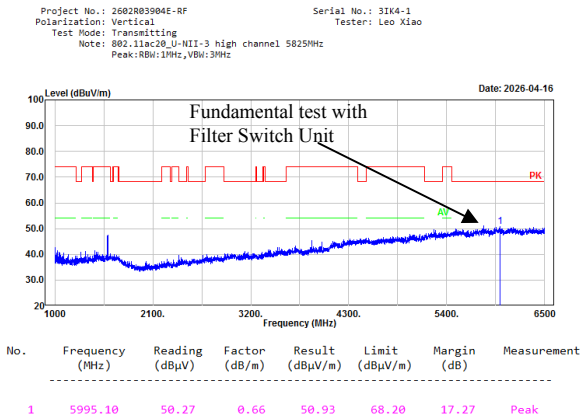


802.11ac40, Low Channel, Horizontal

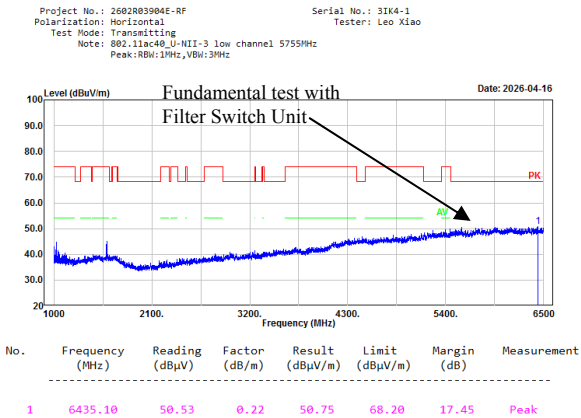




802.11ac40, Low Channel, Vertical

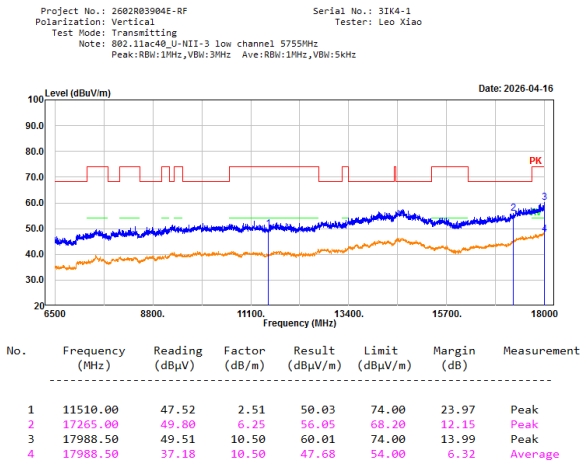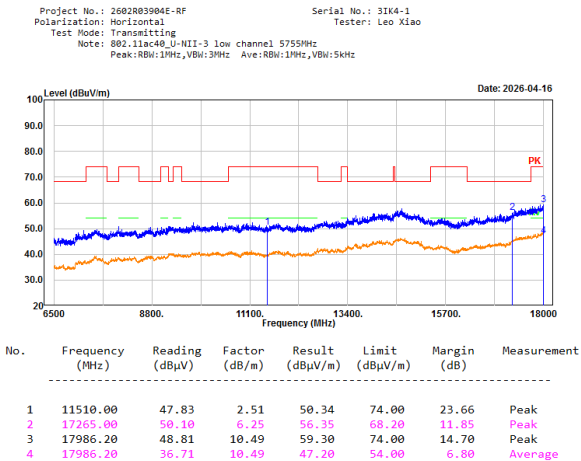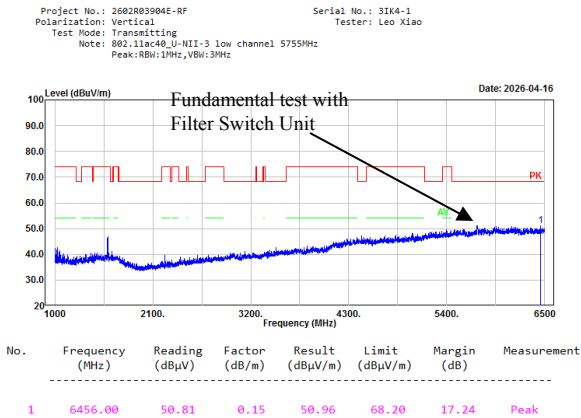

802.11ac40, High Channel, Horizontal

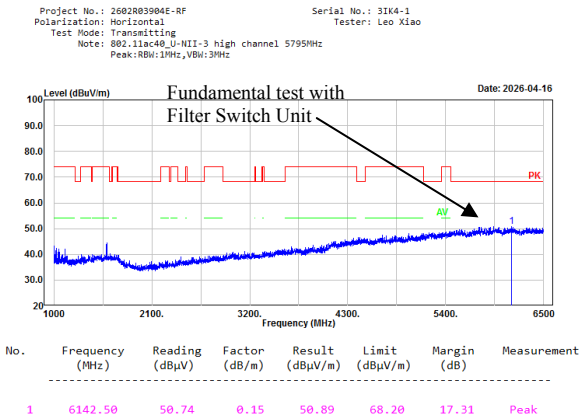

802.11ac40, High Channel, Vertical

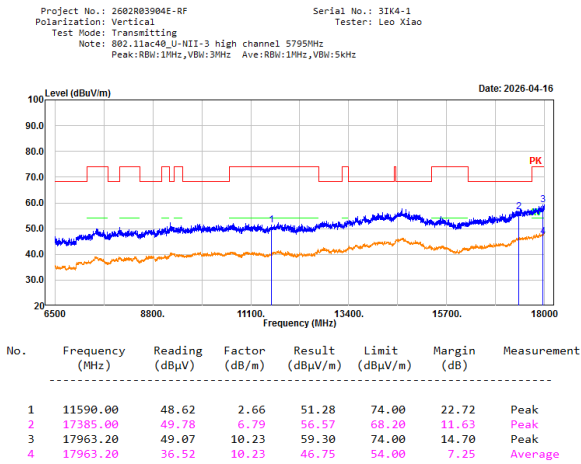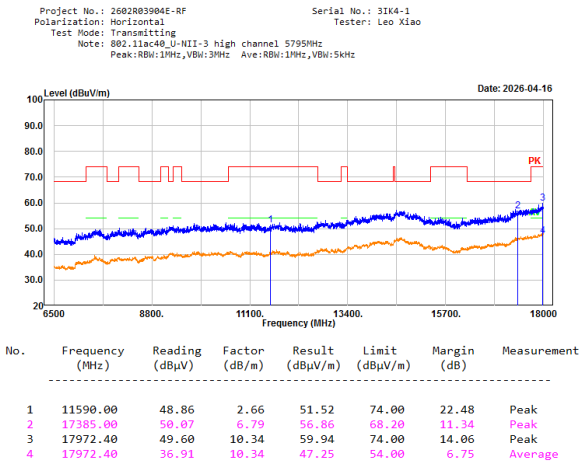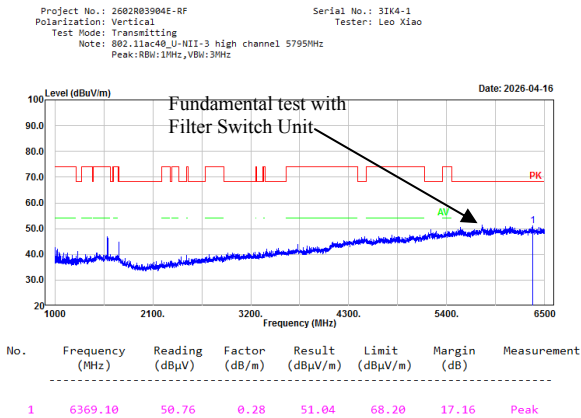

802.11ac80, Middle Channel, Horizontal							
Project No.: 2602R03904E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11ac80_U-NII-3 middle channel 5775MHz Peak:RBW:1MHz,VBW:3MHz				Serial No.: 3IK4-1 Tester: Leo Xiao			
Date: 2026-04-16							
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6371.30	50.94	0.27	51.21	68.20	16.99	Peak

802.11ac80, Middle Channel, Vertical							
Project No.: 2602R03904E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11ac80_U-NII-3 middle channel 5775MHz Peak:RBW:1MHz,VBW:3MHz				Serial No.: 3IK4-1 Tester: Leo Xiao			
Date: 2026-04-16							
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	6328.40	50.62	0.32	50.94	68.20	17.26	Peak


802.11ac80, Middle Channel, Horizontal							
Project No.: 2602R03904E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11ac80_U-NII-3 middle channel 5775MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz				Serial No.: 3IK4-1 Tester: Leo Xiao			
Date: 2026-04-16							
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11550.00	48.00	2.52	50.52	74.00	23.48	Peak
2	17325.00	49.62	6.51	56.13	68.20	12.07	Peak
3	17995.40	47.83	10.52	58.35	74.00	15.65	Peak
4	17995.40	36.73	10.52	47.25	54.00	6.75	Average

802.11ac80, Middle Channel, Vertical							
Project No.: 2602R03904E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11ac80_U-NII-3 middle channel 5775MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz				Serial No.: 3IK4-1 Tester: Leo Xiao			
Date: 2026-04-16							
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	11550.00	47.98	2.52	50.50	74.00	23.50	Peak
2	17325.00	50.24	6.51	56.75	68.20	11.45	Peak
3	17951.70	48.59	10.13	58.72	74.00	15.28	Peak
4	17951.70	36.62	10.13	46.75	54.00	7.25	Average


18GHz-40GHz:

No Emission was detected in the range 18-40GHz, test was performed on the mode and channel which with the maximum power.

802.11a mode 5320MHz, Horizontal

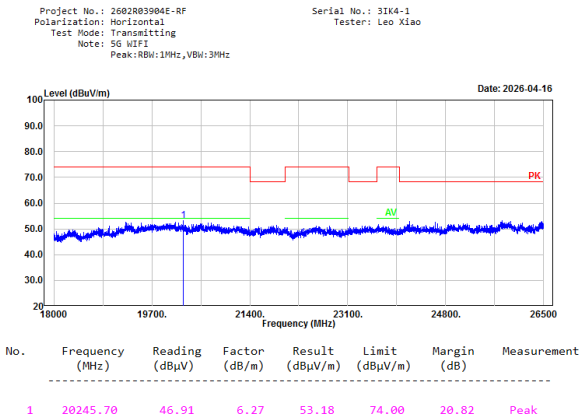


802.11a mode 5320MHz, Vertical

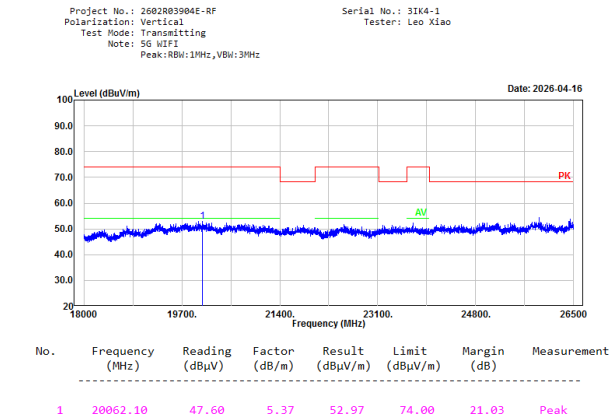


Project No.: 2602R03904E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 5G WiFi
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3IK4-1
Tester: Leo Xiao

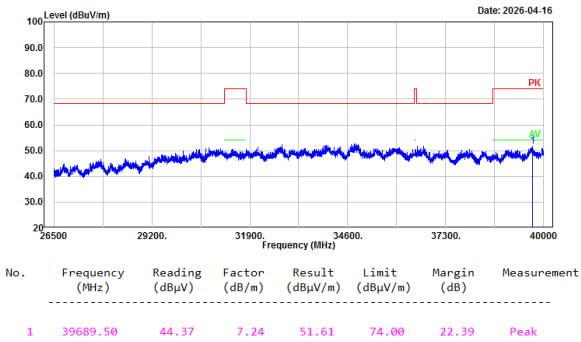

Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 5G WiFi
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3IK4-1
Tester: Leo Xiao

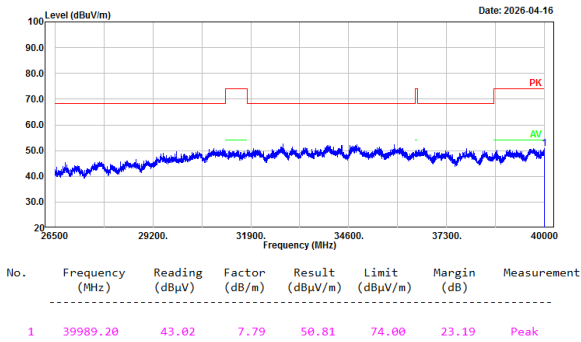


Test plots for Bandedge:
5150-5250MHz:

802.11a, Low Channel, Bandedge, Horizontal	802.11a, Low Channel, Bandedge, Vertical																																															
Project No.: 2602R03904E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11a_U-NII-1 low channel 5180MHz Peak:RBW:1MHz,VBW:30Hz Ave:RBW:1MHz,VBW:5kHz Serial No.: 31K4-1 Tester: Leo Xiao Date: 2026-04-16 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>5150.00</td><td>55.16</td><td>3.00</td><td>58.16</td><td>74.00</td><td>15.84</td><td>Peak</td></tr><tr><td>2</td><td>5150.00</td><td>38.20</td><td>3.00</td><td>41.20</td><td>54.00</td><td>12.80</td><td>Average</td></tr></table> Project No.: 2602R03904E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11a_U-NII-1 low channel 5180MHz Peak:RBW:1MHz,VBW:30Hz Ave:RBW:1MHz,VBW:5kHz Serial No.: 31K4-1 Tester: Leo Xiao Date: 2026-04-16 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>5150.00</td><td>58.39</td><td>3.00</td><td>61.39</td><td>74.00</td><td>12.61</td><td>Peak</td></tr><tr><td>2</td><td>5150.00</td><td>38.22</td><td>3.00</td><td>41.22</td><td>54.00</td><td>12.78</td><td>Average</td></tr></table>	No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	5150.00	55.16	3.00	58.16	74.00	15.84	Peak	2	5150.00	38.20	3.00	41.20	54.00	12.80	Average	No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	5150.00	58.39	3.00	61.39	74.00	12.61	Peak	2	5150.00	38.22	3.00	41.22	54.00	12.78	Average
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																									
1	5150.00	55.16	3.00	58.16	74.00	15.84	Peak																																									
2	5150.00	38.20	3.00	41.20	54.00	12.80	Average																																									
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																									
1	5150.00	58.39	3.00	61.39	74.00	12.61	Peak																																									
2	5150.00	38.22	3.00	41.22	54.00	12.78	Average																																									
802.11a, High Channel, Bandedge, Horizontal	802.11a,High Channel, Bandedge, Vertical																																															
Project No.: 2602R03904E-RF Polarization: Horizontal Test Mode: Transmitting Note: 802.11a_U-NII-1 high channel 5240MHz Peak:RBW:1MHz,VBW:30Hz Ave:RBW:1MHz,VBW:5kHz Serial No.: 31K4-1 Tester: Leo Xiao Date: 2026-04-16 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>5350.00</td><td>51.14</td><td>3.36</td><td>54.50</td><td>74.00</td><td>19.50</td><td>Peak</td></tr><tr><td>2</td><td>5350.00</td><td>37.33</td><td>3.36</td><td>40.69</td><td>54.00</td><td>13.31</td><td>Average</td></tr></table> Project No.: 2602R03904E-RF Polarization: Vertical Test Mode: Transmitting Note: 802.11a_U-NII-1 high channel 5240MHz Peak:RBW:1MHz,VBW:30Hz Ave:RBW:1MHz,VBW:5kHz Serial No.: 31K4-1 Tester: Leo Xiao Date: 2026-04-16 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>5350.00</td><td>51.23</td><td>3.36</td><td>54.59</td><td>74.00</td><td>19.41</td><td>Peak</td></tr><tr><td>2</td><td>5350.00</td><td>37.31</td><td>3.36</td><td>40.67</td><td>54.00</td><td>13.33</td><td>Average</td></tr></table>	No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	5350.00	51.14	3.36	54.50	74.00	19.50	Peak	2	5350.00	37.33	3.36	40.69	54.00	13.31	Average	No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	5350.00	51.23	3.36	54.59	74.00	19.41	Peak	2	5350.00	37.31	3.36	40.67	54.00	13.33	Average
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																									
1	5350.00	51.14	3.36	54.50	74.00	19.50	Peak																																									
2	5350.00	37.33	3.36	40.69	54.00	13.31	Average																																									
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																									
1	5350.00	51.23	3.36	54.59	74.00	19.41	Peak																																									
2	5350.00	37.31	3.36	40.67	54.00	13.33	Average																																									

802.11ac20, Low Channel, Bandedge, Horizontal

Project No.: 2602R03904E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-1 low channel 5180MHz
Peak: RBW:1MHz, VBN:3MHz Ave:RBW:1MHz, VBN:5kHz

Serial No.: 3IK4-1
Tester: Leo Xiao

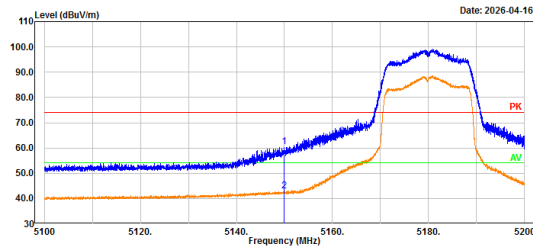


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5150.00	57.56	3.00	60.56	74.00	13.44	Peak
2	5150.00	39.85	3.00	42.85	54.00	11.15	Average

802.11ac20, Low Channel, Bandedge, Vertical

Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-1 low channel 5180MHz
Peak: RBW:1MHz, VBN:3MHz Ave:RBW:1MHz, VBN:5kHz

Serial No.: 3IK4-1
Tester: Leo Xiao

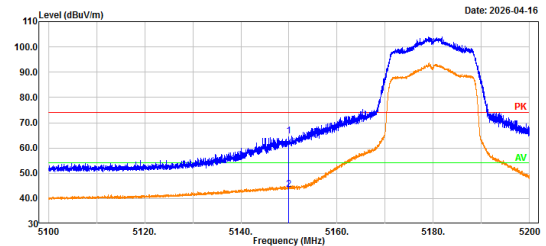


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5150.00	61.72	3.00	64.72	74.00	9.28	Peak
2	5150.00	40.60	3.00	43.60	54.00	10.40	Average

802.11ac20, High Channel, Bandedge, Horizontal

Project No.: 2602R03904E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-1 high channel 5240MHz
Peak: RBW:1MHz, VBN:3MHz Ave:RBW:1MHz, VBN:5kHz

Serial No.: 3IK4-1
Tester: Leo Xiao

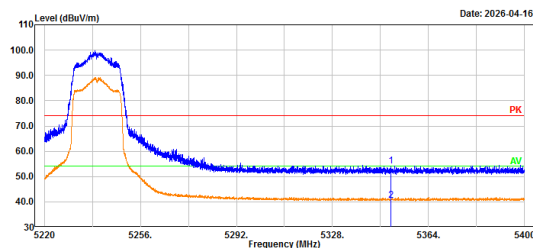


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	50.75	3.36	54.11	74.00	19.89	Peak
2	5350.00	37.23	3.36	40.59	54.00	13.41	Average

802.11ac20, High Channel, Bandedge, Vertical


Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-1 high channel 5240MHz
Peak: RBW:1MHz, VBN:3MHz Ave:RBW:1MHz, VBN:5kHz

Serial No.: 3IK4-1
Tester: Leo Xiao

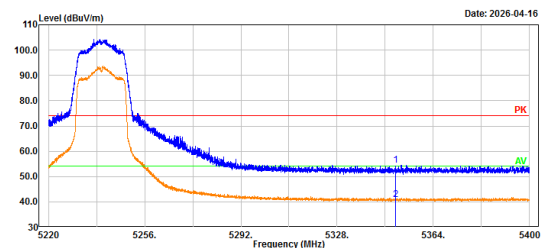


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5350.00	51.11	3.36	54.47	74.00	19.53	Peak
2	5350.00	37.37	3.36	40.73	54.00	13.27	Average


802.11ac40, Low Channel, Bandedge, Horizontal

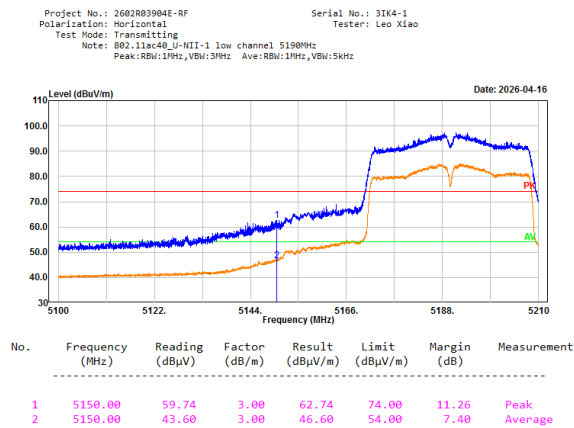


802.11ac40, Low Channel, Bandedge, Vertical

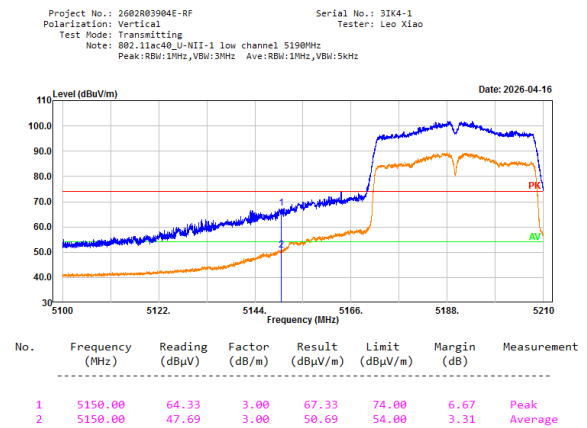

802.11ac40, High Channel, Bandedge, Horizontal

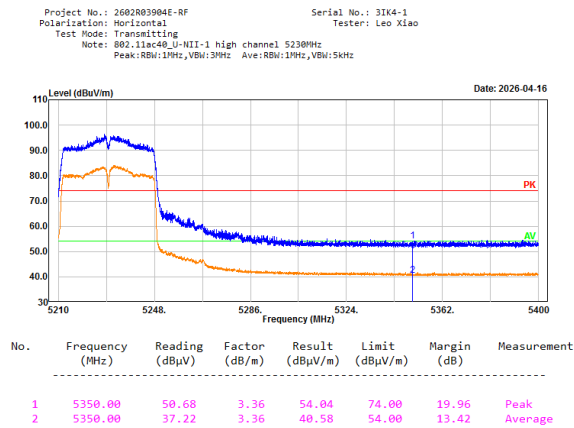


802.11ac40, High Channel, Bandedge, Vertical

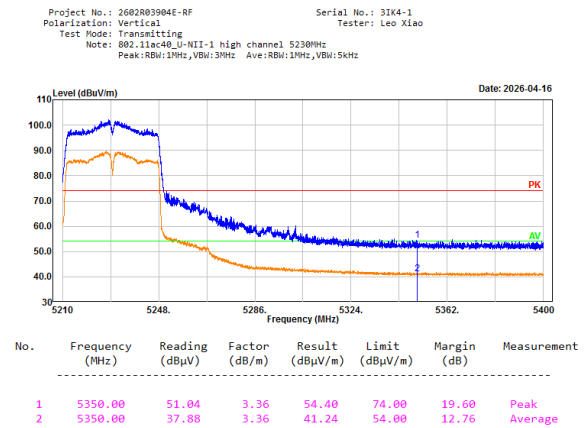

802.11ac80,Middle Channel, Bandedge, Horizontal


Project No.: 2602R03904E-RF
Polarization: Horizontal
Test Mode: Transmitting
Serial No.: 3IK4-1
Tester: Leo Xiao
Note: 802.11ac80_U-NII-1 middle channel 5210MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

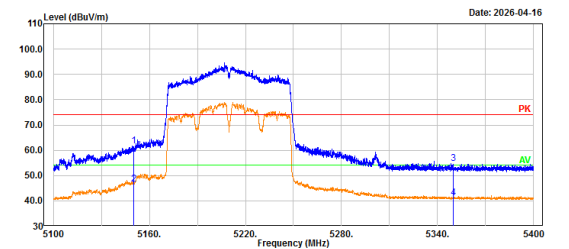

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5150.00	58.58	3.00	61.58	74.00	12.42	Peak
2	5150.00	43.54	3.00	46.54	54.00	7.46	Average
3	5350.00	51.29	3.36	54.65	74.00	19.35	Peak
4	5350.00	37.89	3.36	41.25	54.00	12.75	Average

802.11ac80, Middle Channel, Bandedge, Vertical


Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Serial No.: 3IK4-1
Tester: Leo Xiao
Note: 802.11ac80_U-NII-1 middle channel 5210MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

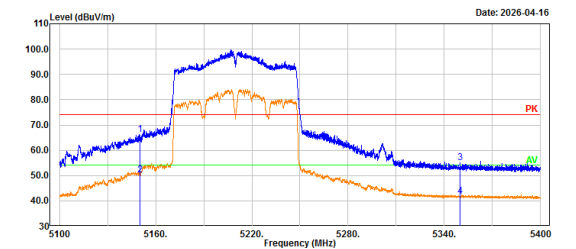


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5150.00	63.26	3.00	66.26	74.00	7.74	Peak
2	5150.00	47.29	3.00	50.29	54.00	3.71	Average
3	5350.00	51.79	3.36	55.15	74.00	18.85	Peak
4	5350.00	38.29	3.36	41.65	54.00	12.35	Average

5250-5350MHz:


802.11a,Low Channel, Bandedge, Horizontal

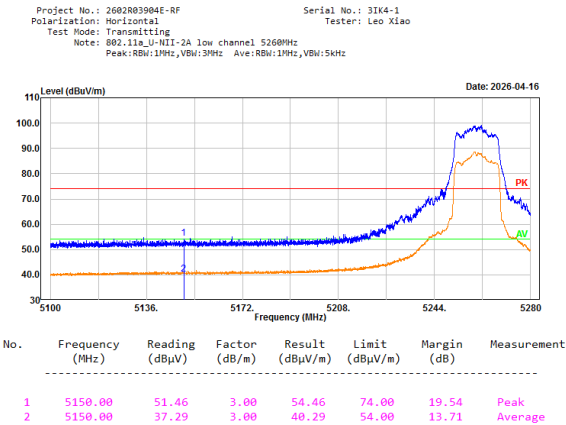


802.11a,Low Channel, Bandedge, Vertical

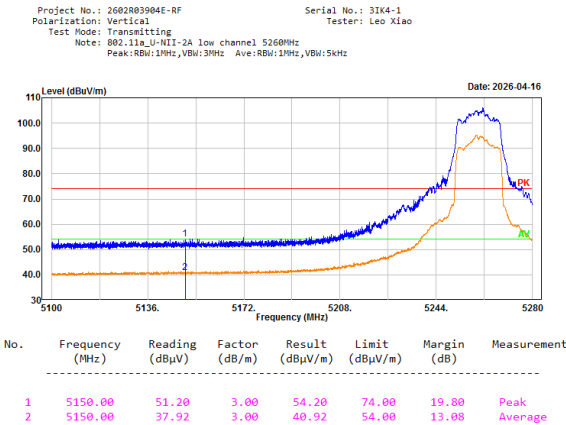


802.11a,High Channel, Bandedge, Horizontal

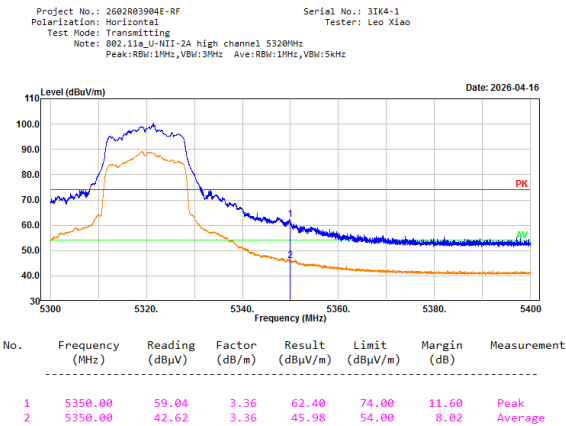


802.11a,High Channel, Bandedge, Vertical

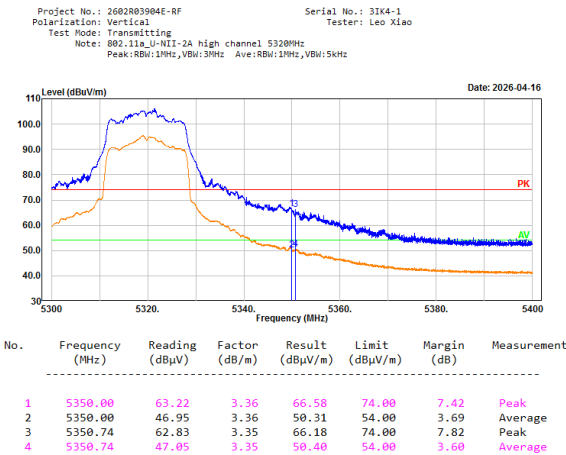


802.11ac20, Low Channel, Bandedge, Horizontal

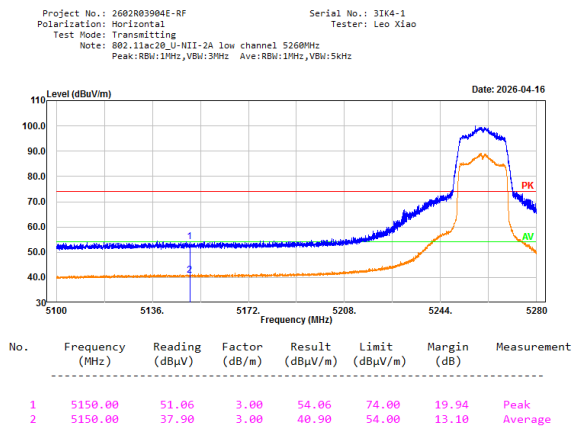


802.11ac20,Low Channel, Bandedge, Vertical

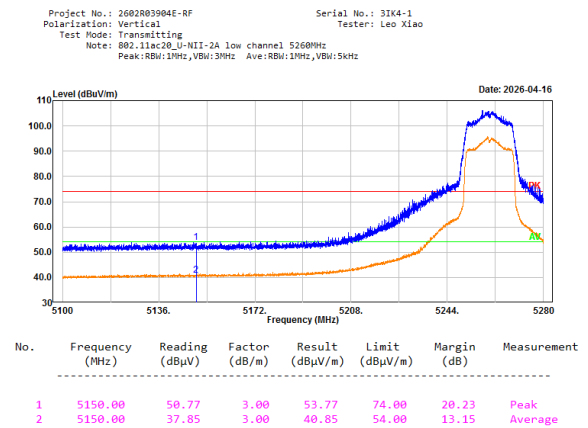


802.11ac20,High Channel, Bandedge, Horizontal

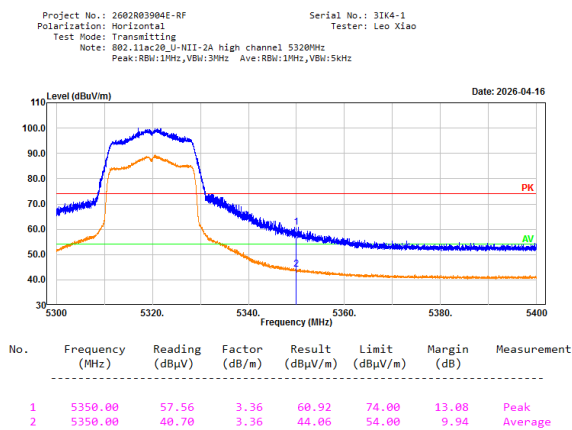


802.11ac20,High Channel, Bandedge, Vertical

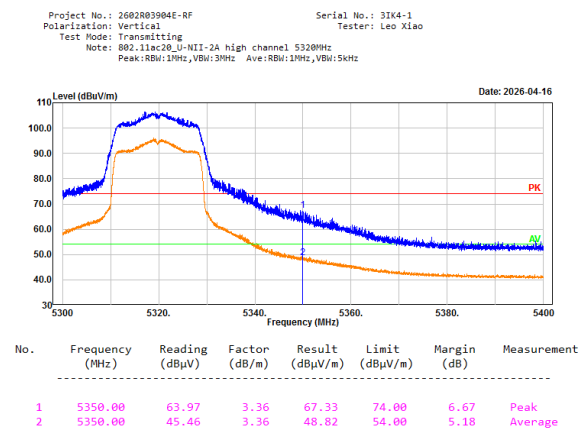


802.11ac40,Low Channel, Bandedge, Horizontal

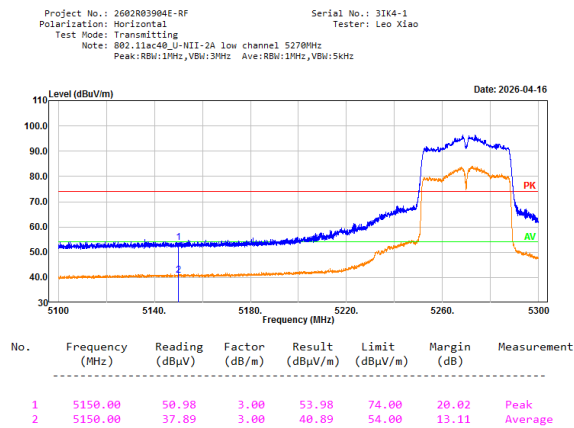


802.11ac40,Low Channel, Bandedge, Vertical

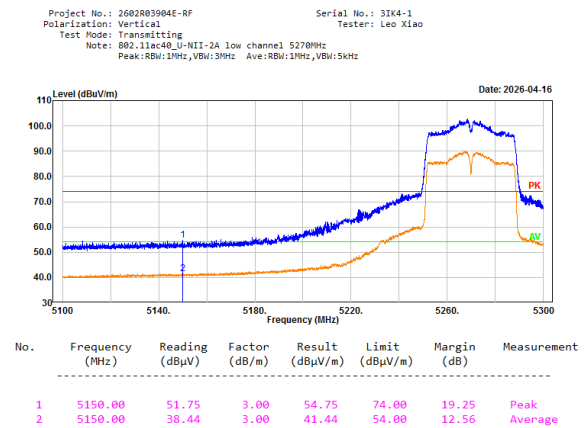

802.11ac40,High Channel, Bandedge, Horizontal

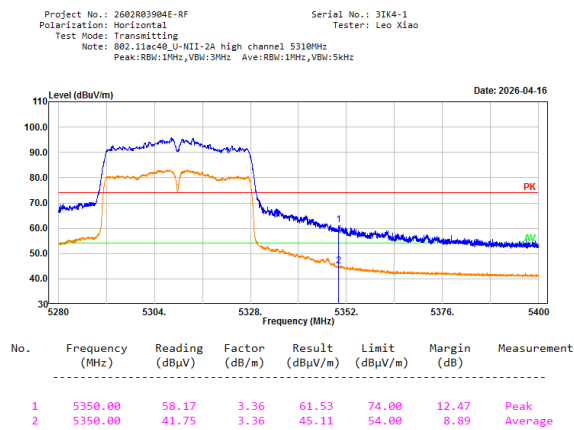


802.11ac40,High Channel, Bandedge, Vertical

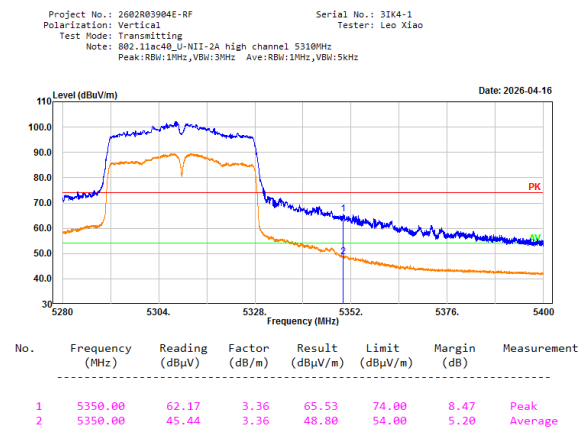

802.11ac80,Middle Channel, Bandedge, Horizontal

Project No.: 2602R03904E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac80_U-NII-2A middle channel 5280MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 3IK4-1
Tester: Leo Xiao

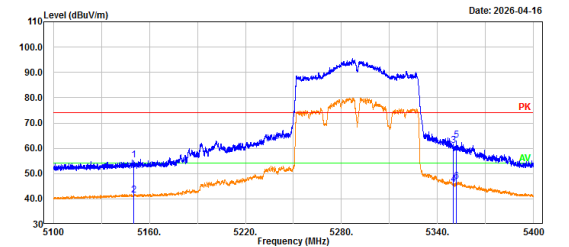


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5150.00	52.21	3.00	55.21	74.00	18.79	Peak
2	5150.00	38.53	3.00	41.53	54.00	12.47	Average
3	5350.00	57.80	3.36	61.16	74.00	12.84	Peak
4	5350.00	42.46	3.36	45.82	54.00	8.18	Average
5	5351.88	59.80	3.36	63.16	74.00	10.84	Peak
6	5351.88	43.49	3.36	46.85	54.00	7.15	Average

802.11ac80, Middle Channel, Bandedge, Vertical

Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac80_U-NII-2A middle channel 5280MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 3IK4-1
Tester: Leo Xiao

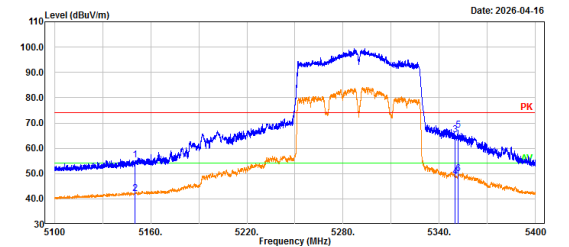

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5150.00	52.26	3.00	55.26	74.00	18.74	Peak
2	5150.00	38.95	3.00	41.95	54.00	12.05	Average
3	5350.00	61.88	3.36	65.24	74.00	8.76	Peak
4	5350.00	45.31	3.36	48.67	54.00	5.33	Average
5	5351.64	63.88	3.36	67.24	74.00	6.76	Peak
6	5351.64	46.68	3.36	50.04	54.00	3.96	Average


5470-5725MHz:

802.11a,Low Channel, Bandedge, Horizontal Project No.: 2602R03904E-RF Serial No.: 31K4-1 Polarization: Horizontal Tester: Leo Xiao Test Mode: Transmitting Note: 802.11a_U-NII-2C low channel 5500MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz Level (dBuV/m) 110 90.0 80.0 70.0 60.0 50.0 40.0 30 5400 5424 5448 5472 5496 5520 Frequency (MHz) Date: 2026-04-16 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>5460.00</td><td>52.19</td><td>3.59</td><td>55.78</td><td>74.00</td><td>18.22</td><td>Peak</td></tr><tr><td>2</td><td>5460.00</td><td>38.04</td><td>3.59</td><td>41.63</td><td>54.00</td><td>12.37</td><td>Average</td></tr><tr><td>3</td><td>5470.00</td><td>55.59</td><td>3.63</td><td>59.22</td><td>68.20</td><td>8.98</td><td>Peak</td></tr></table>	No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	5460.00	52.19	3.59	55.78	74.00	18.22	Peak	2	5460.00	38.04	3.59	41.63	54.00	12.37	Average	3	5470.00	55.59	3.63	59.22	68.20	8.98	Peak	802.11a,Low Channel, Bandedge, Vertical Project No.: 2602R03904E-RF Serial No.: 31K4-1 Polarization: Vertical Tester: Leo Xiao Test Mode: Transmitting Note: 802.11a_U-NII-2C low channel 5500MHz Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz Level (dBuV/m) 110 90.0 80.0 70.0 60.0 50.0 40.0 30 5400 5424 5448 5472 5496 5520 Frequency (MHz) Date: 2026-04-16 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>5460.00</td><td>56.09</td><td>3.59</td><td>59.68</td><td>74.00</td><td>14.32</td><td>Peak</td></tr><tr><td>2</td><td>5460.00</td><td>40.23</td><td>3.59</td><td>43.82</td><td>54.00</td><td>10.18</td><td>Average</td></tr><tr><td>3</td><td>5470.00</td><td>61.30</td><td>3.63</td><td>64.93</td><td>68.20</td><td>3.27</td><td>Peak</td></tr></table>	No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	5460.00	56.09	3.59	59.68	74.00	14.32	Peak	2	5460.00	40.23	3.59	43.82	54.00	10.18	Average	3	5470.00	61.30	3.63	64.93	68.20	3.27	Peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																										
1	5460.00	52.19	3.59	55.78	74.00	18.22	Peak																																																										
2	5460.00	38.04	3.59	41.63	54.00	12.37	Average																																																										
3	5470.00	55.59	3.63	59.22	68.20	8.98	Peak																																																										
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																										
1	5460.00	56.09	3.59	59.68	74.00	14.32	Peak																																																										
2	5460.00	40.23	3.59	43.82	54.00	10.18	Average																																																										
3	5470.00	61.30	3.63	64.93	68.20	3.27	Peak																																																										
802.11a, High Channel, Bandedge, Horizontal Project No.: 2602R03904E-RF Serial No.: 31K4-1 Polarization: Horizontal Tester: Leo Xiao Test Mode: Transmitting Note: 802.11a_U-NII-2C high channel 5700MHz Peak:RBW:1MHz,VBW:3MHz Level (dBuV/m) 110 90.0 80.0 70.0 60.0 50.0 40.0 30 5680 5704 5728 5752 5776 5800 Frequency (MHz) Date: 2026-04-16 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>5725.00</td><td>53.73</td><td>4.07</td><td>57.80</td><td>68.20</td><td>10.40</td><td>Peak</td></tr></table>	No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	5725.00	53.73	4.07	57.80	68.20	10.40	Peak	802.11a,High Channel, Bandedge, Vertical Project No.: 2602R03904E-RF Serial No.: 31K4-1 Polarization: Vertical Tester: Leo Xiao Test Mode: Transmitting Note: 802.11a_U-NII-2C high channel 5700MHz Peak:RBW:1MHz,VBW:3MHz Level (dBuV/m) 110 90.0 80.0 70.0 60.0 50.0 40.0 30 5680 5704 5728 5752 5776 5800 Frequency (MHz) Date: 2026-04-16 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Measurement</th></tr><tr><td>1</td><td>5725.00</td><td>58.31</td><td>4.07</td><td>62.38</td><td>68.20</td><td>5.82</td><td>Peak</td></tr></table>	No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement	1	5725.00	58.31	4.07	62.38	68.20	5.82	Peak																																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																										
1	5725.00	53.73	4.07	57.80	68.20	10.40	Peak																																																										
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement																																																										
1	5725.00	58.31	4.07	62.38	68.20	5.82	Peak																																																										

802.11ac20, Low Channel, Bandedge, Horizontal

Project No.: 2602R03904E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2C low channel 5500MHz
Peak: RBW:1MHz, VBN:3MHz Ave:RBW:1MHz, VBN:5kHz

Serial No.: 3IK4-1
Tester: Leo Xiao

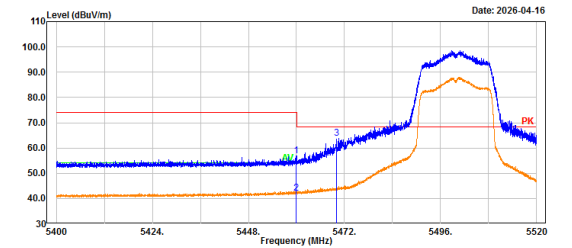


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5460.00	53.27	3.59	56.86	74.00	17.14	Peak
2	5460.00	38.36	3.59	41.95	54.00	12.05	Average
3	5470.00	60.31	3.63	63.94	68.20	4.26	Peak

802.11ac20, Low Channel, Bandedge, Vertical

Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2C low channel 5500MHz
Peak: RBW:1MHz, VBN:3MHz Ave:RBW:1MHz, VBN:5kHz

Serial No.: 3IK4-1
Tester: Leo Xiao

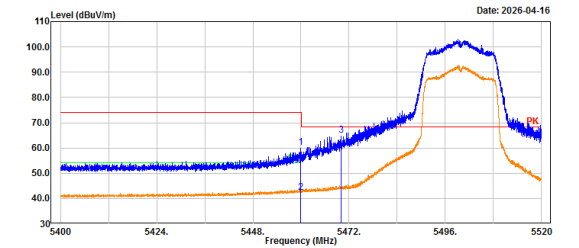


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5460.00	56.60	3.59	60.19	74.00	13.81	Peak
2	5460.00	38.72	3.59	42.31	54.00	11.69	Average
3	5470.00	61.27	3.63	64.90	68.20	3.30	Peak

802.11ac20, High Channel, Bandedge, Horizontal

Project No.: 2602R03904E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2C high channel 5700MHz
Peak: RBW:1MHz, VBN:3MHz

Serial No.: 3IK4-1
Tester: Leo Xiao

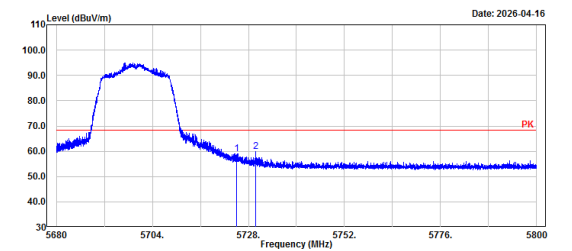


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5725.00	54.91	4.07	58.98	68.20	9.22	Peak
2	5729.90	55.74	4.08	59.82	68.20	8.38	Peak

802.11ac20, High Channel, Bandedge, Vertical


Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-2C high channel 5700MHz
Peak: RBW:1MHz, VBN:3MHz

Serial No.: 3IK4-1
Tester: Leo Xiao

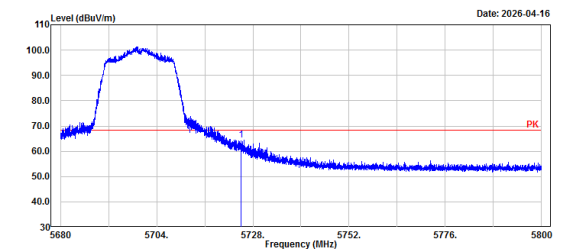


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5725.00	60.29	4.07	64.36	68.20	3.84	Peak


802.11ac40,Low Channel, Bandedge, Horizontal

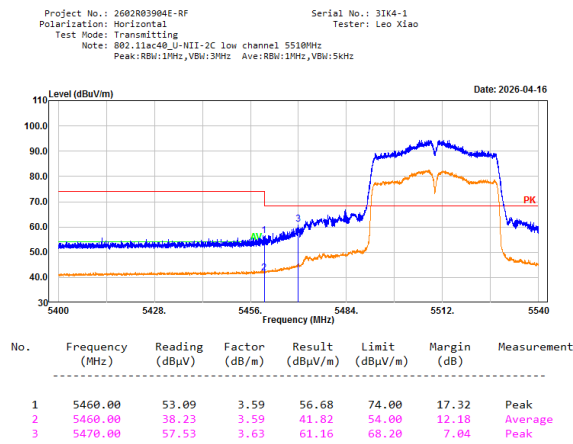


802.11ac40,Low Channel, Bandedge, Vertical

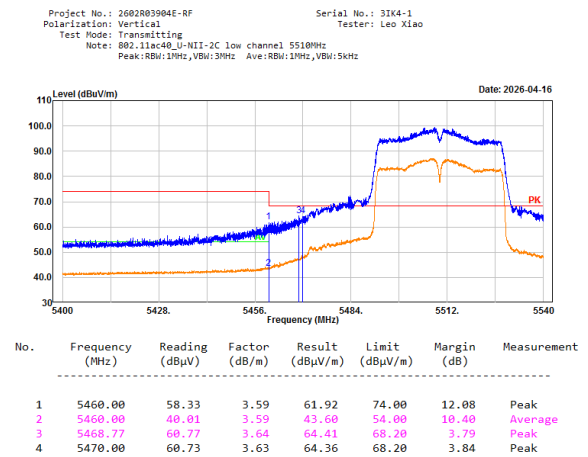

802.11ac40, High Channel, Bandedge, Horizontal

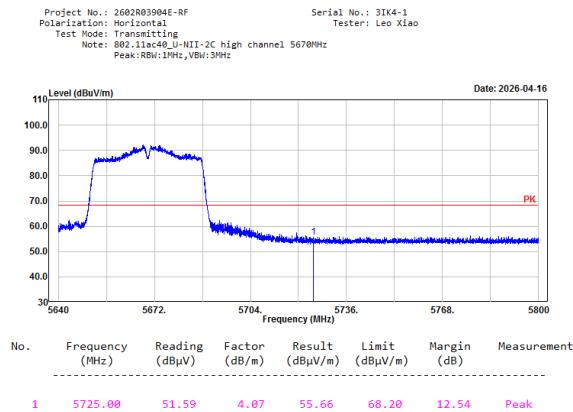


802.11ac40,High Channel, Bandedge, Vertical

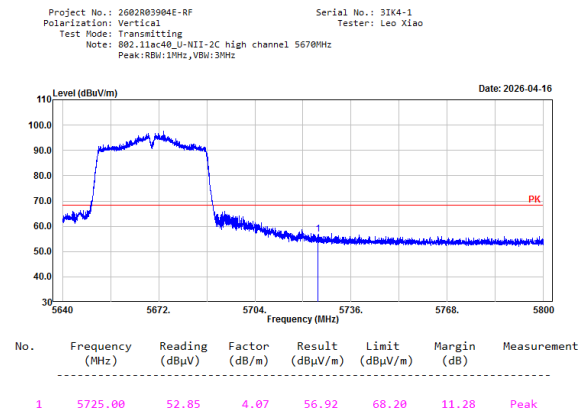

802.11ac80, Low Channel, Bandedge, Horizontal

Project No.: 2602R03904E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac80_U-NII-2C low channel 5530MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 3IK4-1
Tester: Leo Xiao

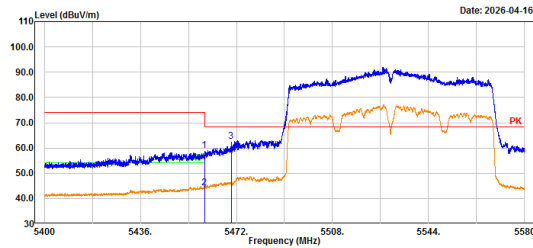


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5460.00	55.34	3.59	58.93	74.00	15.07	Peak
2	5460.00	40.63	3.59	44.22	54.00	9.78	Average
3	5470.00	59.11	3.63	62.74	68.20	5.46	Peak

802.11ac80, Low Channel, Bandedge, Vertical

Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac80_U-NII-2C low channel 5530MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 3IK4-1
Tester: Leo Xiao

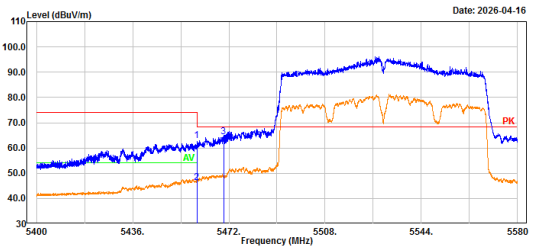


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5460.00	59.38	3.59	62.97	74.00	11.03	Peak
2	5460.00	42.78	3.59	46.37	54.00	7.63	Average
3	5470.00	60.90	3.63	64.53	68.20	3.67	Peak

802.11ac80,High Channel, Bandedge, Horizontal

Project No.: 2602R03904E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac80_U-NII-2C high channel 5610MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3IK4-1
Tester: Leo Xiao

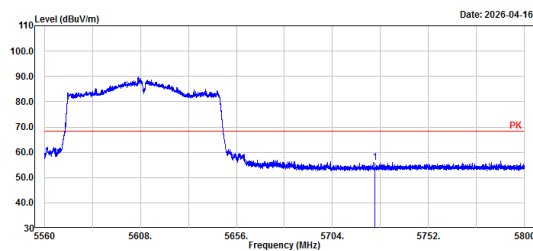


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5725.00	51.76	4.07	55.83	68.20	12.37	Peak

802.11ac80,High Channel, Bandedge, Vertical

Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac80_U-NII-2C high channel 5610MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 3IK4-1
Tester: Leo Xiao

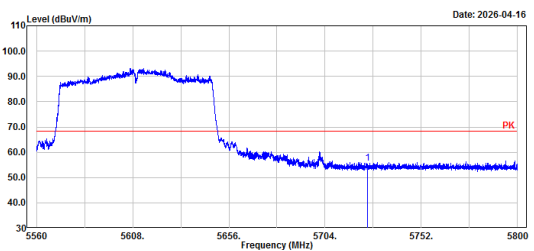

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5725.00	51.53	4.07	55.60	68.20	12.60	Peak


5725-5850MHz:

802.11a,Low Channel, Bandedge, Horizontal

Project No.: 2602R03904E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-3 low channel 5745MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 31K4-1
Tester: Leo Xiao

Date: 2026-04-16

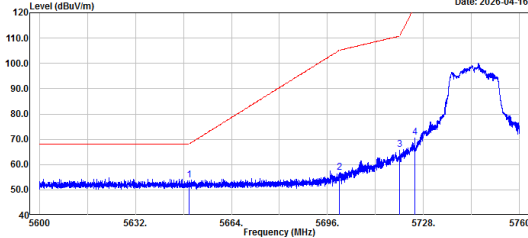


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	50.00	3.98	53.98	68.20	14.22	Peak
2	5700.00	52.94	4.04	56.98	105.20	48.22	Peak
3	5720.00	61.87	4.06	65.93	110.80	44.87	Peak
4	5725.00	66.76	4.07	70.83	122.20	51.37	Peak

802.11a,Low Channel, Bandedge, Vertical

Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-3 low channel 5745MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 31K4-1
Tester: Leo Xiao

Date: 2026-04-16

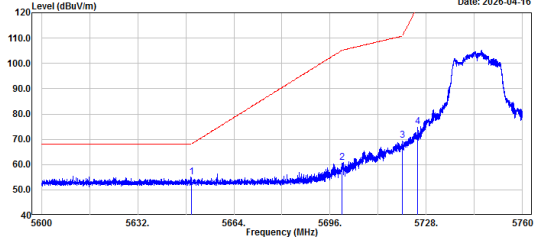


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5650.00	51.11	3.98	55.09	68.20	13.11	Peak
2	5700.00	56.70	4.04	60.74	105.20	44.46	Peak
3	5720.00	65.58	4.06	69.64	110.80	41.16	Peak
4	5725.00	71.01	4.07	75.08	122.20	47.12	Peak

802.11a,High Channel, Bandedge, Horizontal

Project No.: 2602R03904E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-3 high channel 5825MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 31K4-1
Tester: Leo Xiao

Date: 2026-04-16

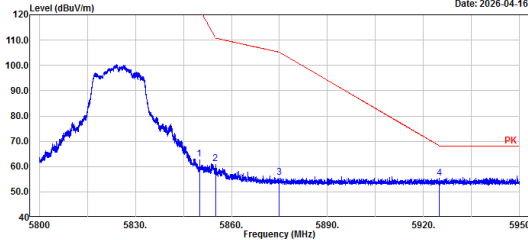


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5850.00	58.76	4.27	63.03	122.20	59.17	Peak
2	5855.00	56.69	4.29	60.98	110.80	49.82	Peak
3	5875.00	51.34	4.33	55.67	105.20	49.53	Peak
4	5925.00	50.92	4.36	55.28	68.20	12.92	Peak

802.11a,High Channel, Bandedge, Vertical

Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-3 high channel 5825MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 31K4-1
Tester: Leo Xiao

Date: 2026-04-16

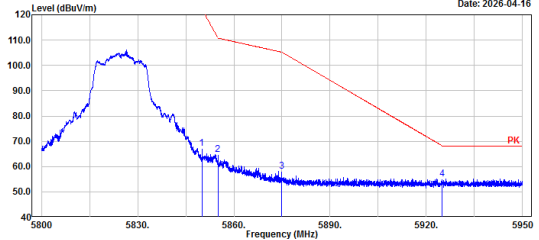


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement
1	5850.00	62.95	4.27	67.22	122.20	54.98	Peak
2	5855.00	60.33	4.29	64.62	110.80	46.18	Peak
3	5875.00	53.64	4.33	57.97	105.20	47.23	Peak
4	5925.00	50.74	4.36	55.10	68.20	13.10	Peak

802.11ac20,Low Channel, Bandedge, Horizontal

Project No.: 2602R03904E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-3 low channel 5745MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 3IK4-1
Tester: Leo Xiao

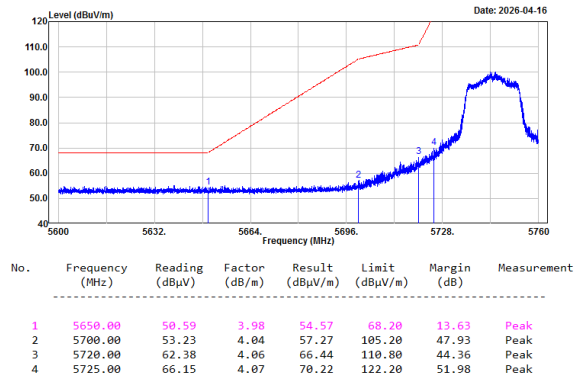

802.11ac20,Low Channel, Bandedge, Vertical

Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-3 low channel 5745MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 3IK4-1
Tester: Leo Xiao

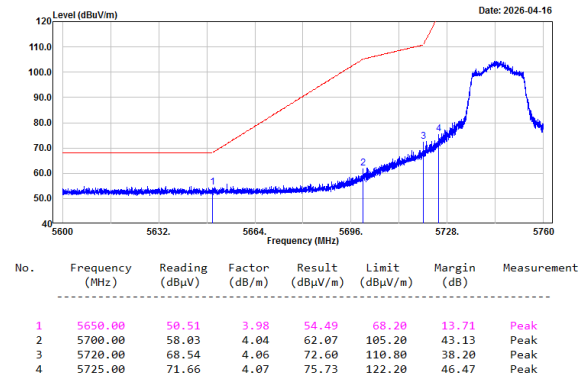

802.11ac20,High Channel, Bandedge, Horizontal

Project No.: 2602R03904E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11ac20_U-NII-3 high channel 5825MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 3IK4-1
Tester: Leo Xiao

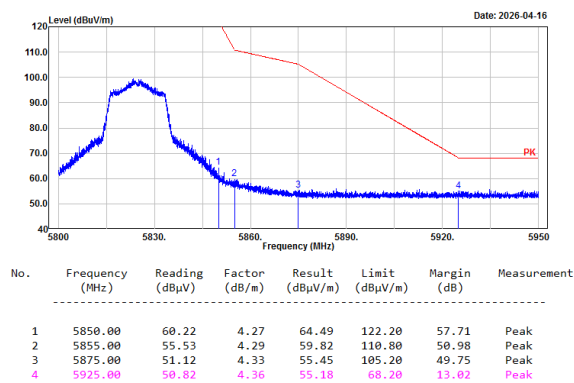


802.11ac20, High Channel, Bandedge, Vertical

Project No.: 2602R03904E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11ac20_U-NII-3 high channel 5825MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 3IK4-1
Tester: Leo Xiao

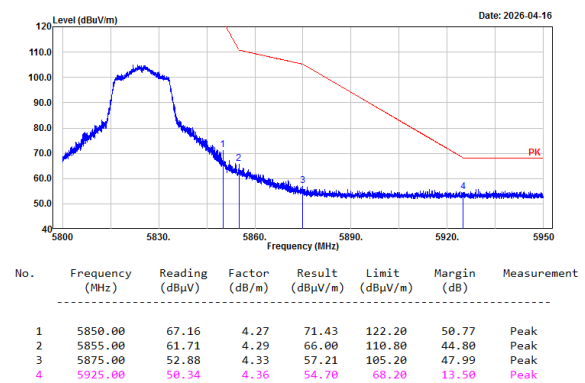


802.11ac40,Low Channel, Bandedge, Horizontal

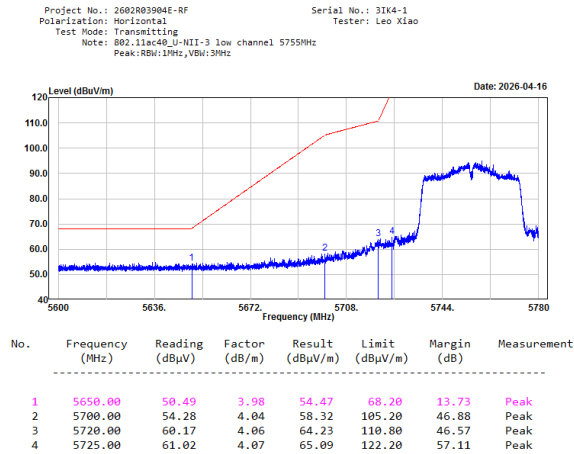


802.11ac40,Low Channel, Bandedge, Vertical

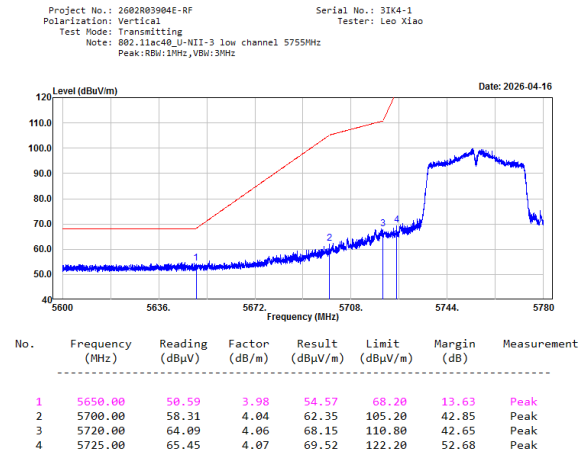

802.11ac40,High Channel, Bandedge, Horizontal

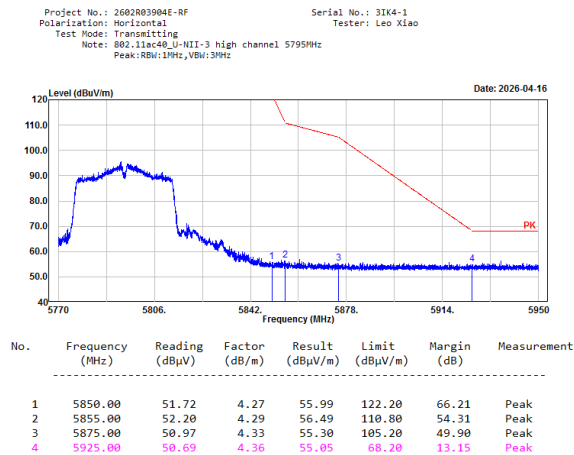


802.11ac40,High Channel, Bandedge, Vertical

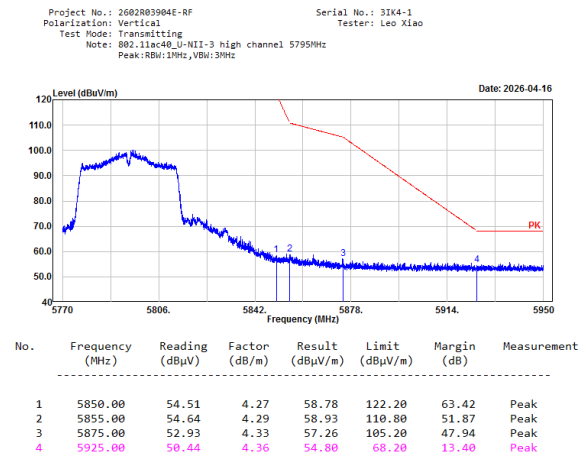


802.11ac80, Middle Channel, Bandedge,
Horizontal

Project No.: 2602R03904E-RF Serial No.: 3IK4-1
Polarization: Horizontal Tester: Leo Xiao
Test Mode: Transmitting
Note: 802.11ac80_U-NII-3 middle channel 5775MHz
Peak:RBW:1MHz,VBW:3MHz

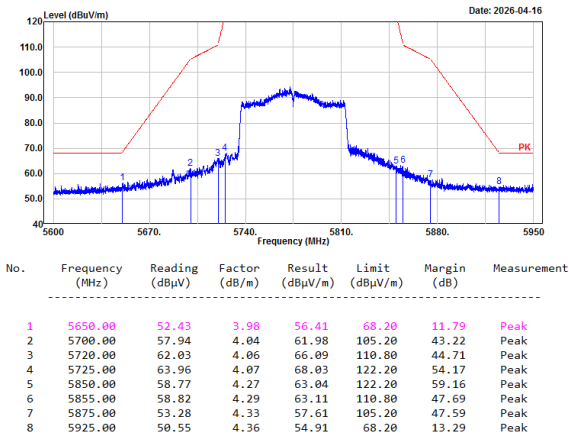

802.11ac80, Middle Channel, Bandedge,
Vertical

Project No.: 2602R03904E-RF Serial No.: 3IK4-1
Polarization: Vertical Tester: Leo Xiao
Test Mode: Transmitting
Note: 802.11ac80_U-NII-3 middle channel 5775MHz
Peak:RBW:1MHz,VBW:3MHz

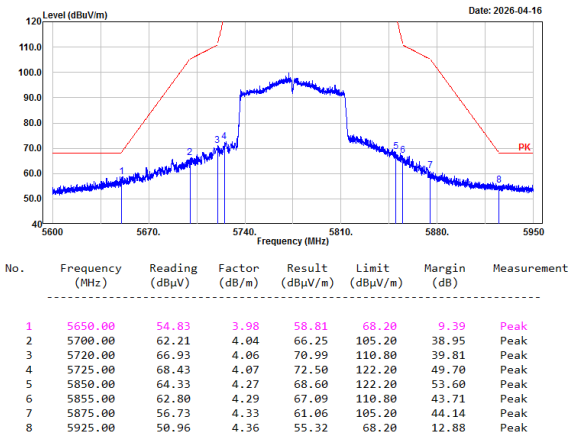

5.3 26dB attenuated below the channel power

Test Information:

Serial No.:	3IK4-2	Test Date:	2026/05/19
Test Site:	RF	Test Mode:	Transmitting
Tester:	Colin Yang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.1	Relative Humidity: (%)	57	ATM Pressure: (kPa)	100.3
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Coaxial Attenuator	10dB	F-08-EM512	2025/06/06	2026/06/05
R&S	Spectrum Analyzer	FSV40	101589	2025/07/28	2026/07/27
JD	Test Software	JD Auto Test System	V1.0	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

5150-5250MHz


802.11a_5180MHz

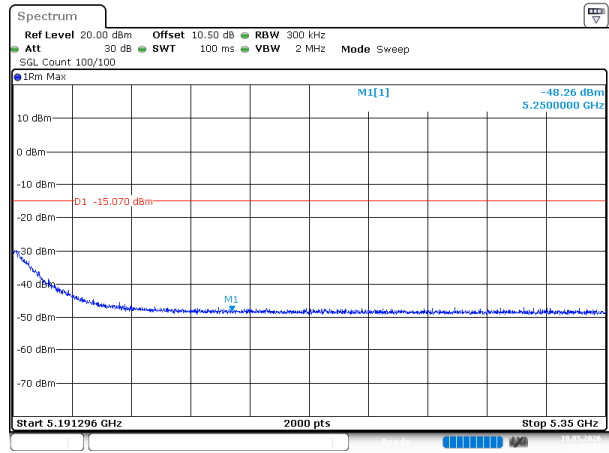


802.11a_5200MHz

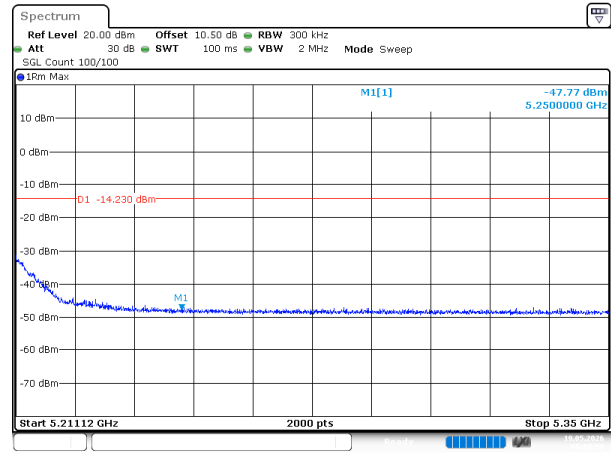


802.11a_5240MHz

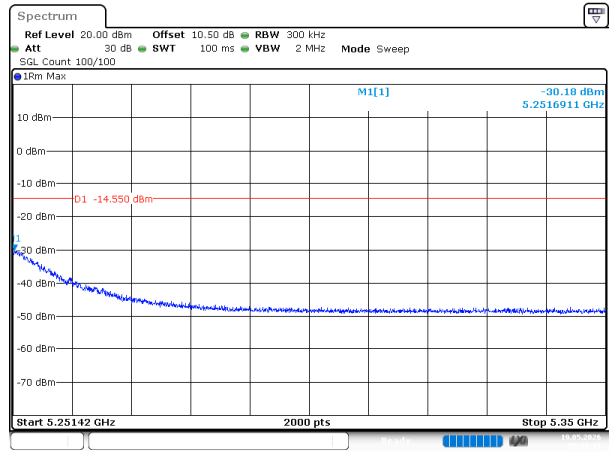


802.11ac20_5180MHz

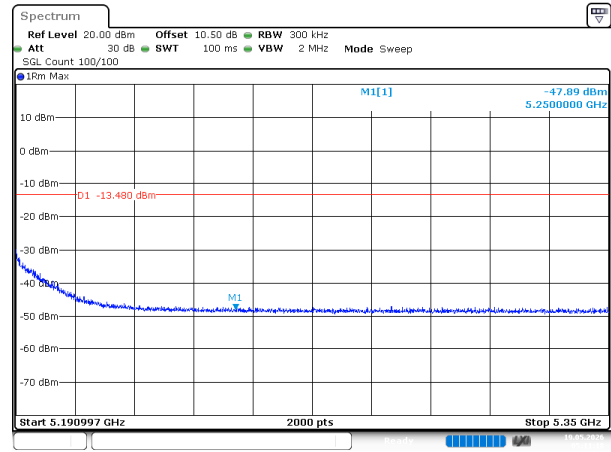


802.11ac20_5200MHz

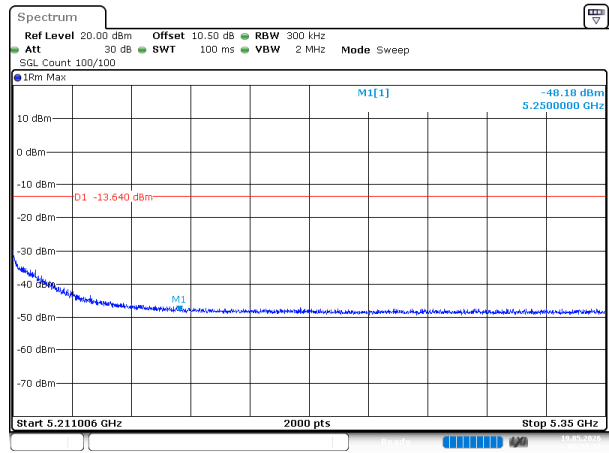

802.11ac20_5240MHz

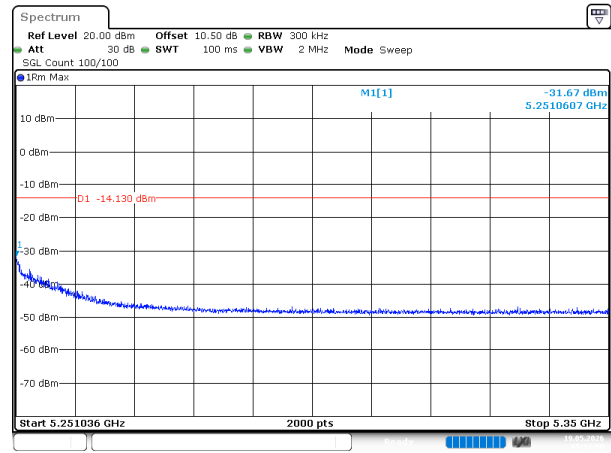


802.11ac40_5190MHz

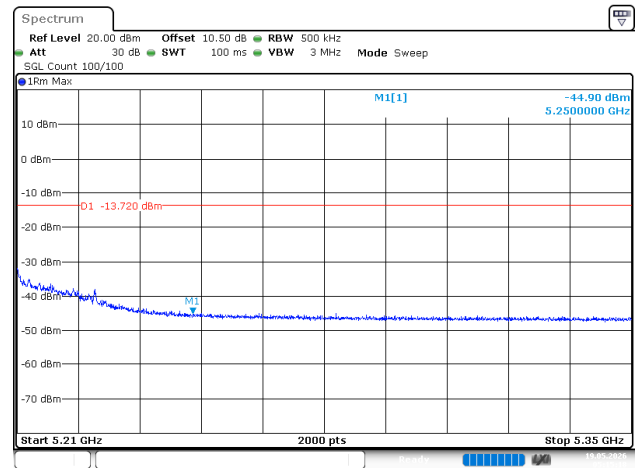


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:15:18

802.11ac40_5230MHz

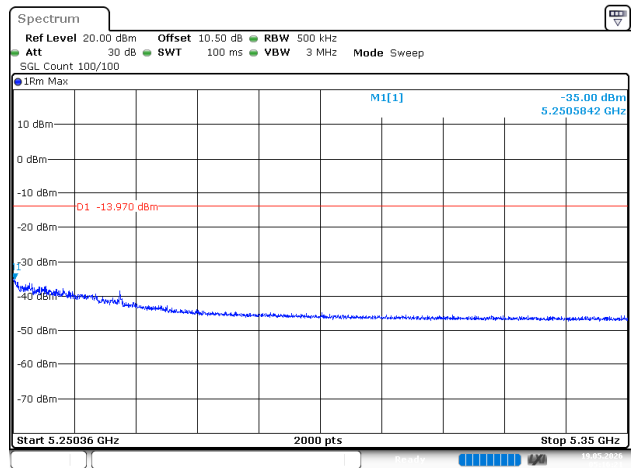

ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:16:21

802.11ac80_5210MHz

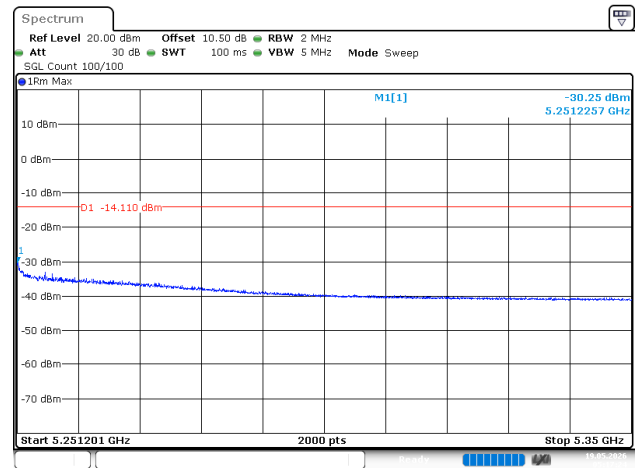

ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:17:24

5.4 Emission Bandwidth

Test Information:

Serial No.:	3IK4-2	Test Date:	2026/04/23~2026/5/19
Test Site:	RF	Test Mode:	Transmitting
Tester:	Colin Yang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23~25.1	Relative Humidity: (%)	55~57	ATM Pressure: (kPa)	100.2~100.3
----------------------	---------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Coaxial Attenuator	10dB	F-08-EM512	2025/06/06	2026/06/05
R&S	Spectrum Analyzer	FSV40	101589	2025/07/28	2026/07/27
JD	Test Software	JD Auto Test System	V1.0	N/A	N/A

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

26dB Emission Bandwidth
5150-5250MHz

Mode	Test Frequency (MHz)	Result (MHz)
802.11a	5180	25.461
	5200	25.188
	5240	25.739
802.11ac20	5180	21.599
	5200	21.752
	5240	21.617
802.11ac40	5190	40
	5230	40.120
802.11ac80	5210	82.402

5250-5350MHz

Mode	Test Frequency (MHz)	Result (MHz)
802.11a	5260	35.358
	5280	33.160
	5320	38.477
802.11ac20	5260	22.307
	5280	21.892
	5320	22.119
802.11ac40	5270	40.721
	5310	40
802.11ac80	5290	90.330

5470-5725MHz


Mode	Test Frequency (MHz)	Result (MHz)
802.11a	5500	21.702
	5600	21.702
	5700	21.588
	5720	21.453
802.11ac20	5500	21.566
	5600	21.520
	5700	21.682
	5720	21.626
802.11ac40	5510	40.120
	5590	40
	5670	39.880
	5710	40
802.11ac80	5530	81.922
	5610	82.162
	5690	82.162

6dB Emission Bandwidth**5725-5850MHz**


Mode	Test Frequency (MHz)	Result (MHz)	Limit (MHz)	Verdict
802.11a	5745	15.265	0.5	Pass
	5785	15.265	0.5	Pass
	5825	15.265	0.5	Pass
802.11ac20	5745	15.666	0.5	Pass
	5785	15.265	0.5	Pass
	5825	16.066	0.5	Pass
802.11ac40	5755	35.435	0.5	Pass
	5795	35.536	0.5	Pass
802.11ac80	5775	75.676	0.5	Pass

5150-5250MHz


802.11a_5180MHz

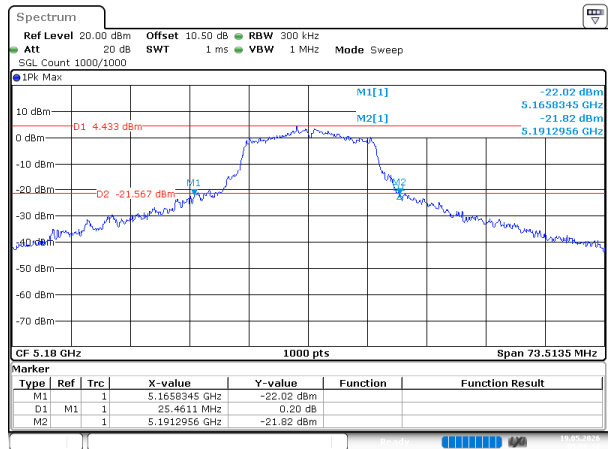


802.11a_5200MHz

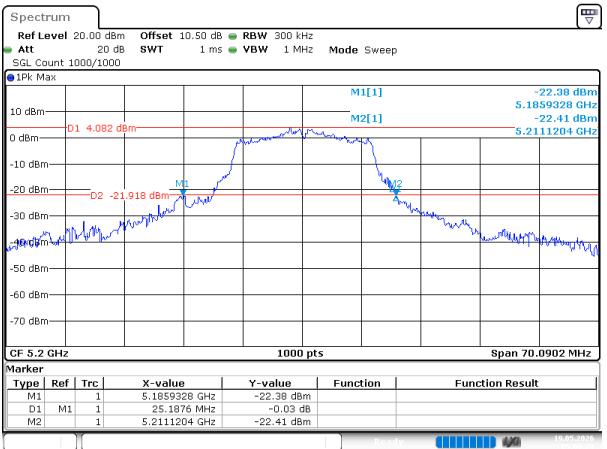


802.11a_5240MHz

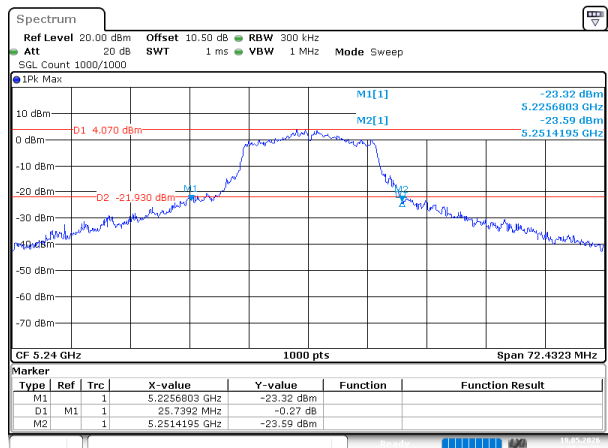


802.11ac20_5180MHz

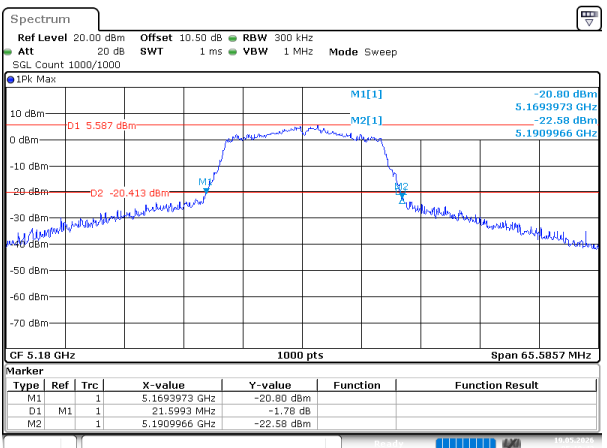


802.11ac20_5200MHz

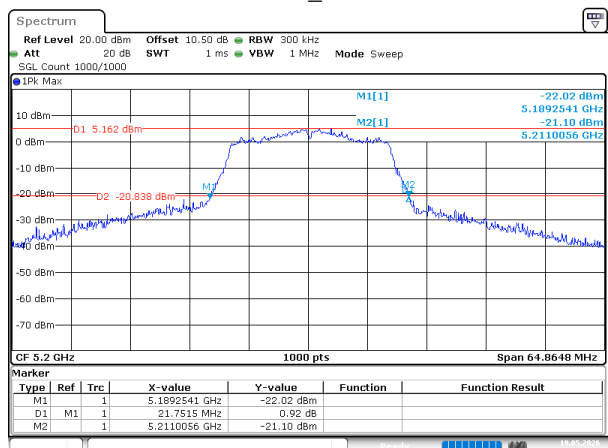

802.11ac20_5240MHz

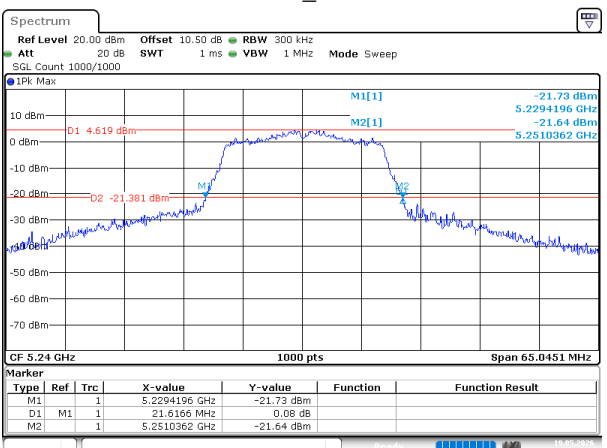


802.11ac40_5190MHz

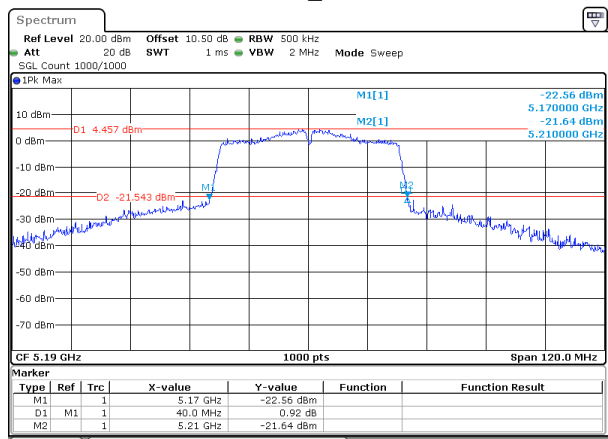

ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:14:40


802.11ac40_5230MHz

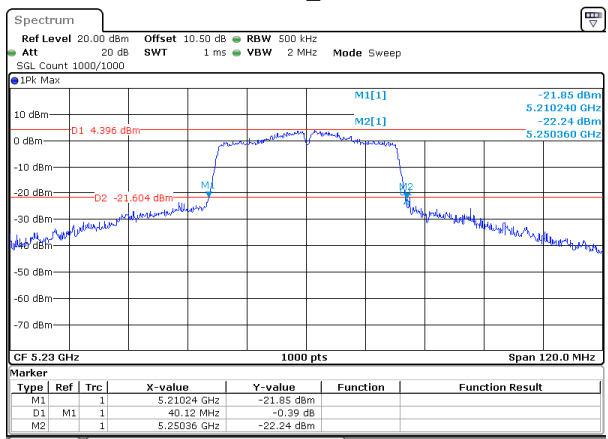

ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:15:41


5250-5350MHz

802.11ac80_5210MHz

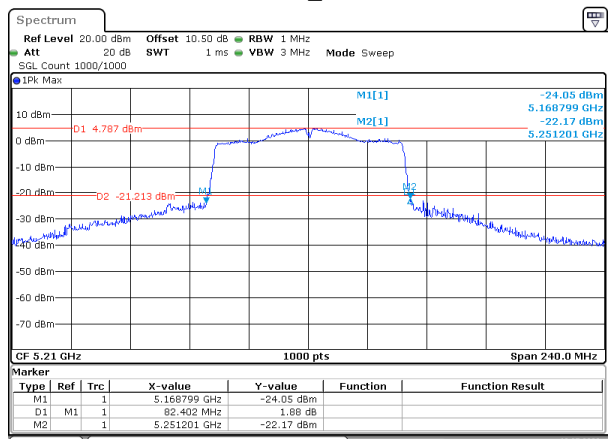


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:16:57

802.11a_5260MHz

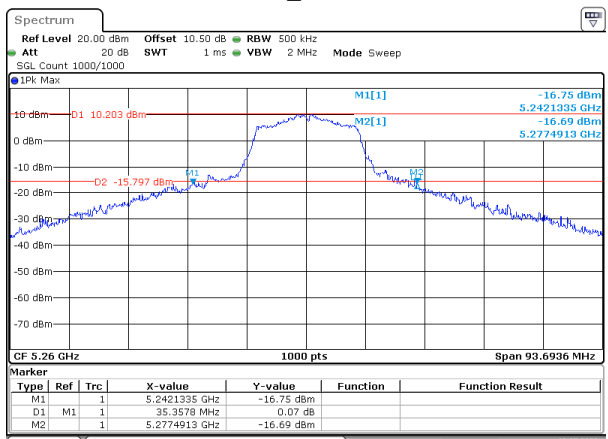


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:32:41

802.11a_5280MHz

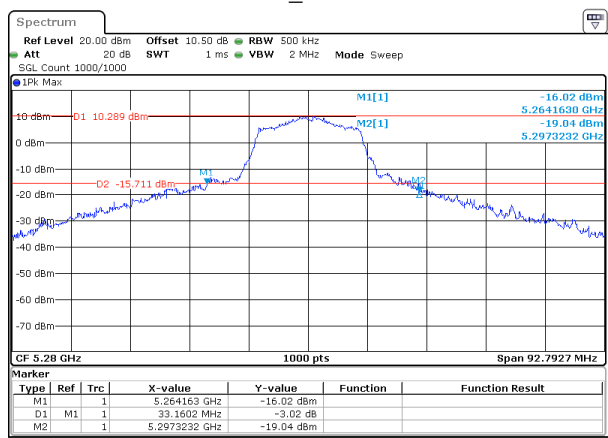


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:33:18

802.11a_5320MHz

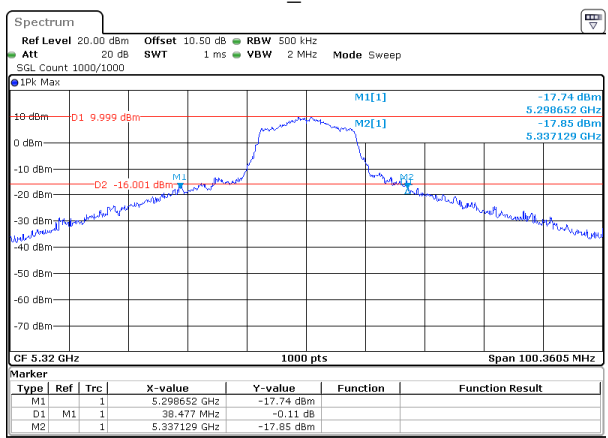


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:33:55

802.11ac20_5260MHz

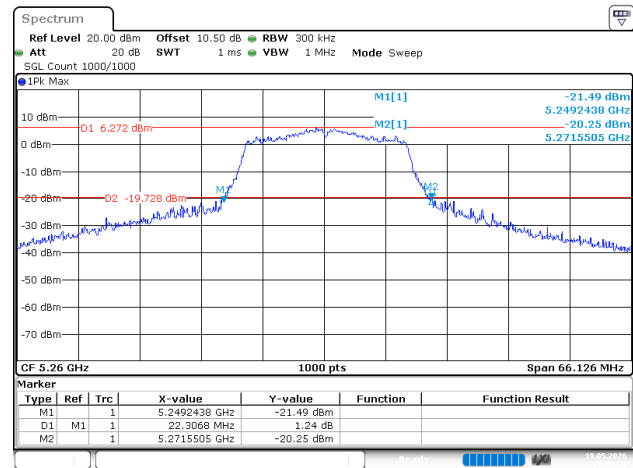


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:27:56

802.11ac20_5280MHz

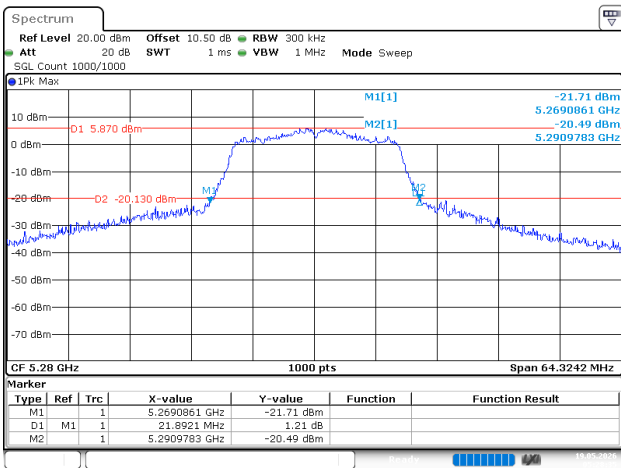


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:28:35

802.11ac20_5320MHz

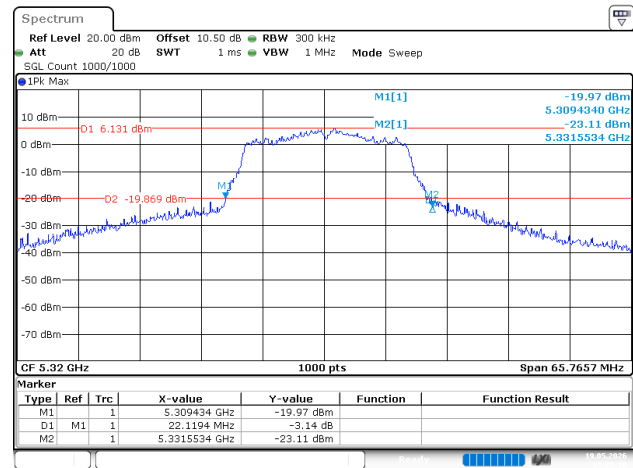


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:29:10

802.11ac40_5270MHz

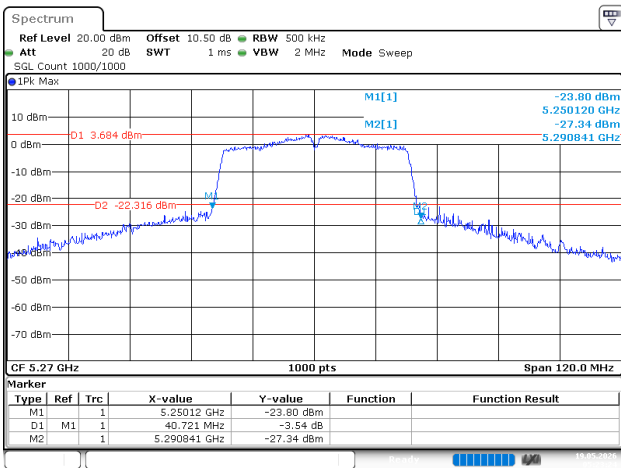


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:23:24

802.11ac40_5310MHz

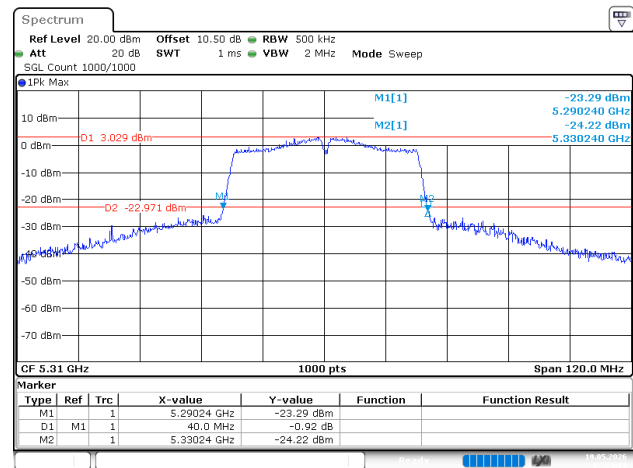

ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:24:00


802.11ac80_5290MHz

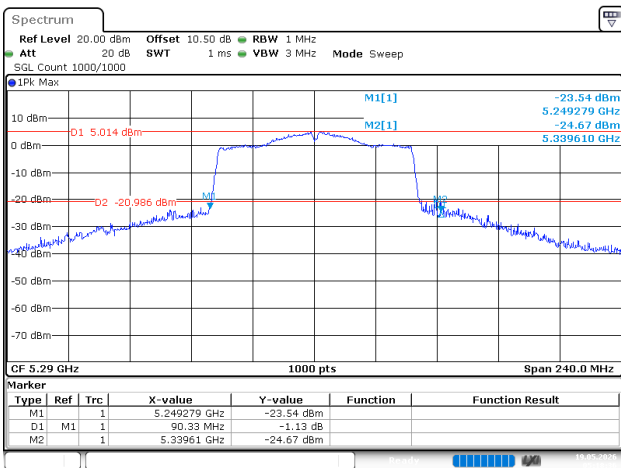

ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:18:36


5470-5725MHz

802.11a_5500MHz

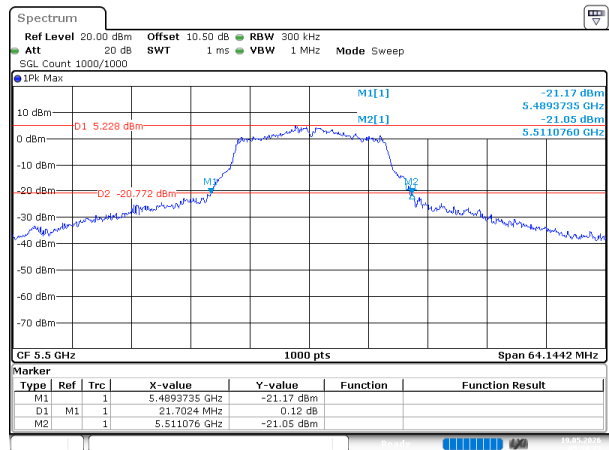


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:34:23

802.11a_5600MHz

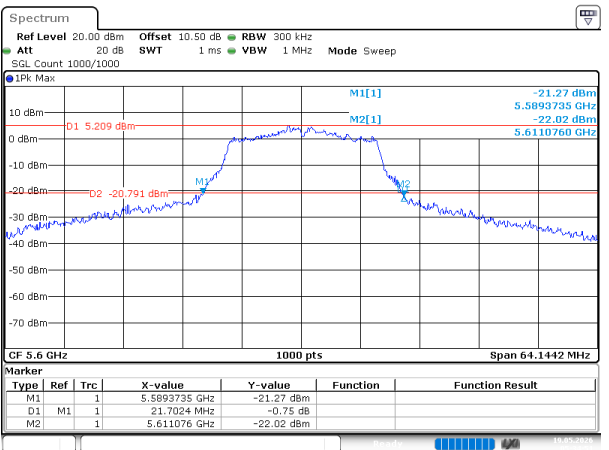


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:34:51

802.11a_5700MHz

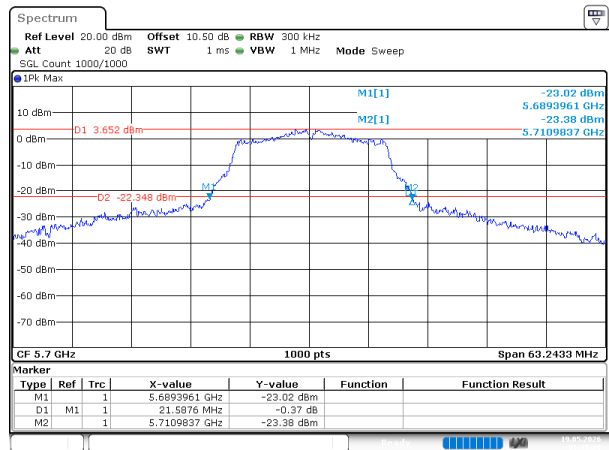


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:35:21

802.11a_5720MHz

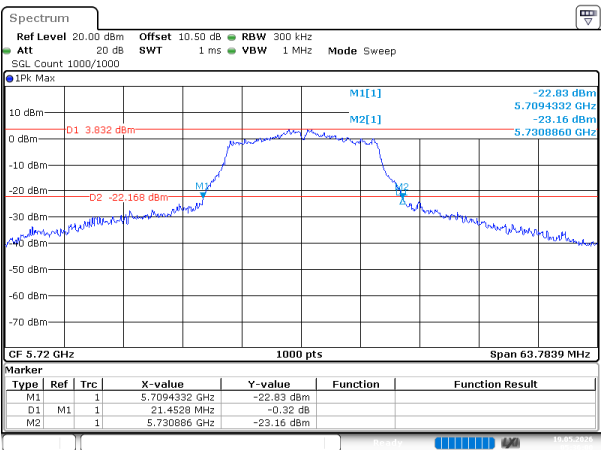


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:36:00

802.11ac20_5500MHz

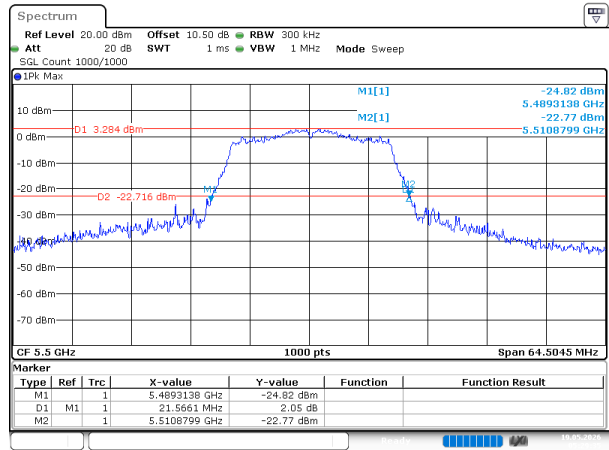


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:29:35

802.11ac20_5600MHz

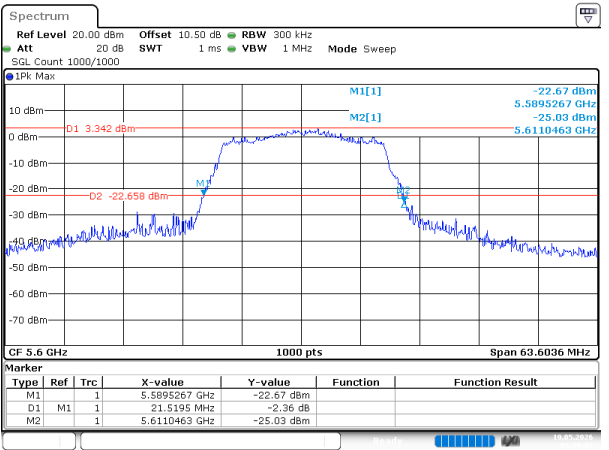


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:30:02

802.11ac20_5700MHz

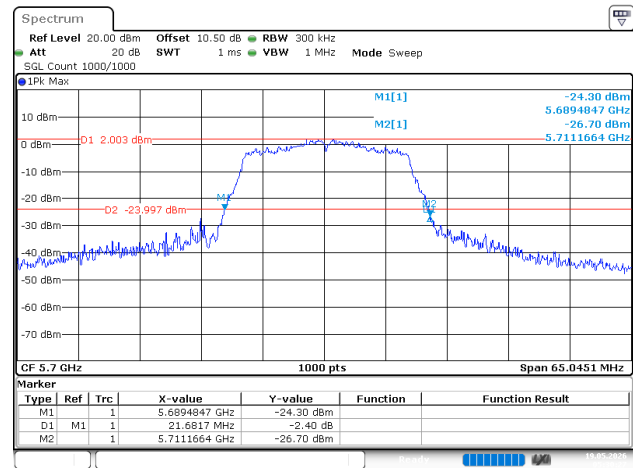


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:30:27

802.11ac20_5720MHz

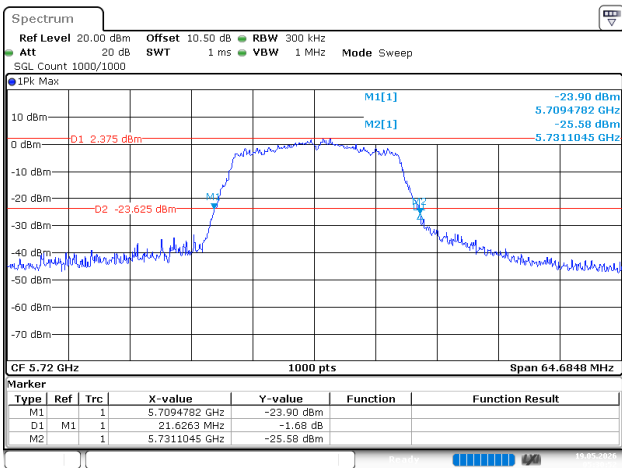


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:30:52

802.11ac40_5510MHz

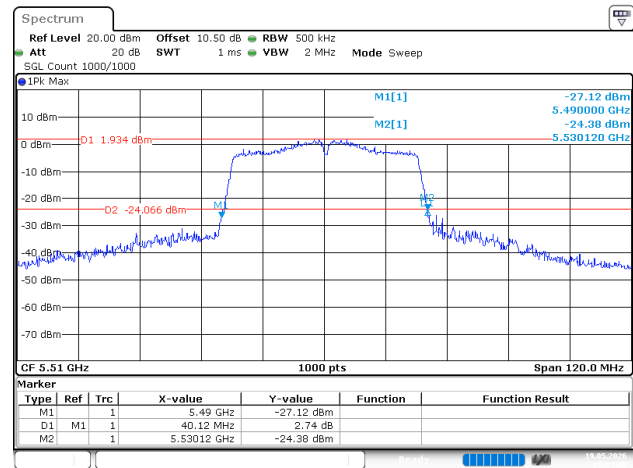


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:24:47

802.11ac40_5590MHz

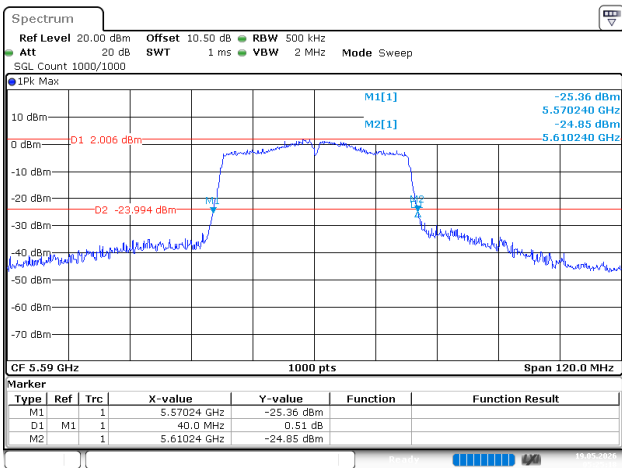


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:25:18

802.11ac40_5670MHz

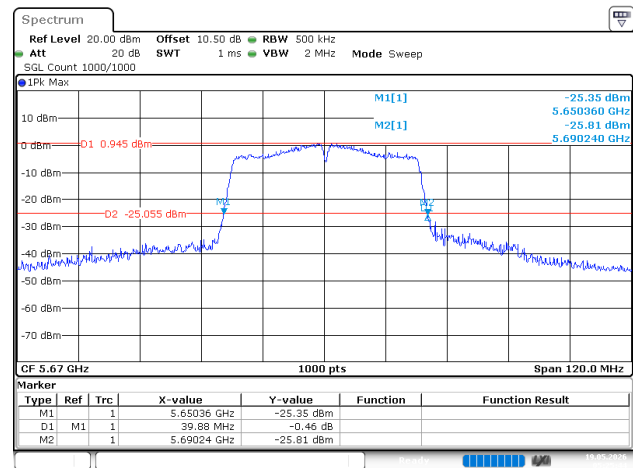


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:25:44

802.11ac40_5710MHz

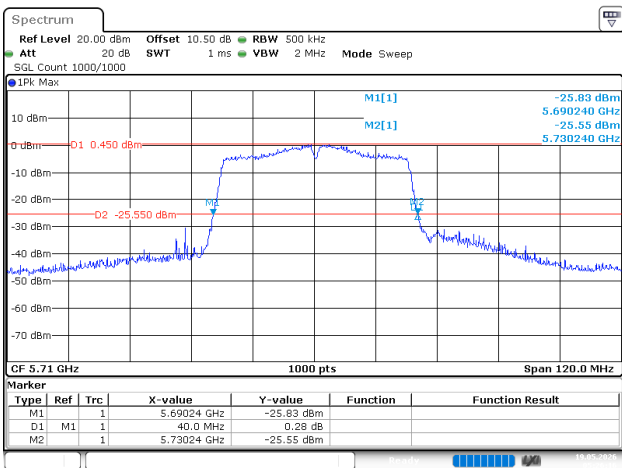


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 19.MAY.2026 05:26:16

802.11ac80_5530MHz

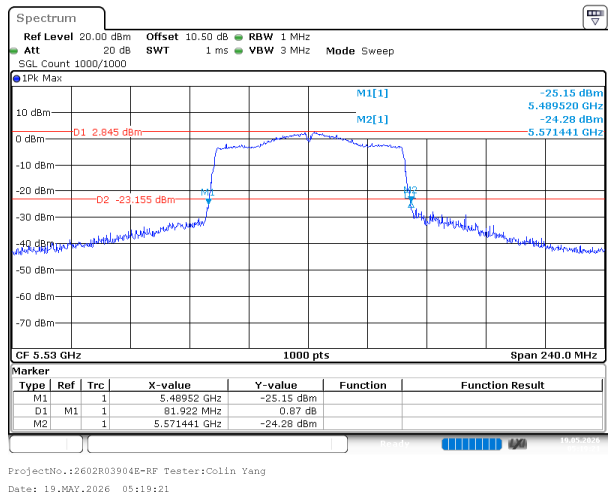


802.11ac80_5610MHz

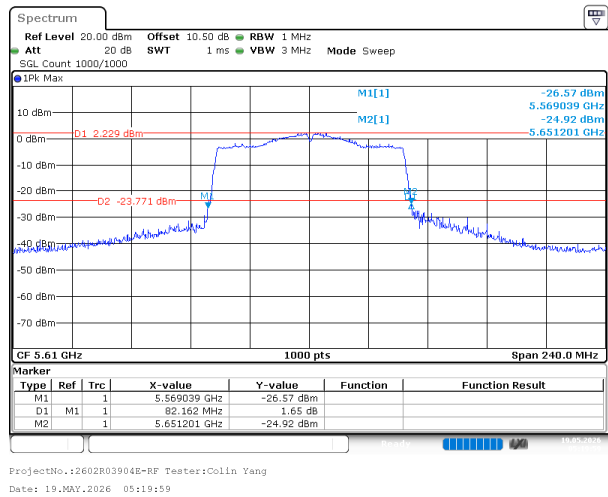


5725-5850MHz


802.11ac80_5690MHz

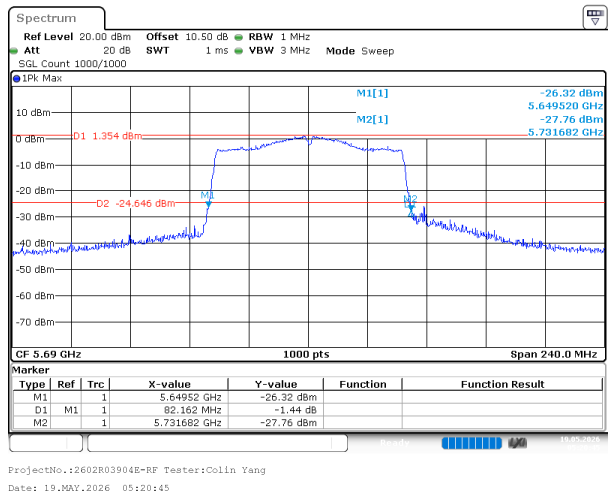


802.11a_5745MHz

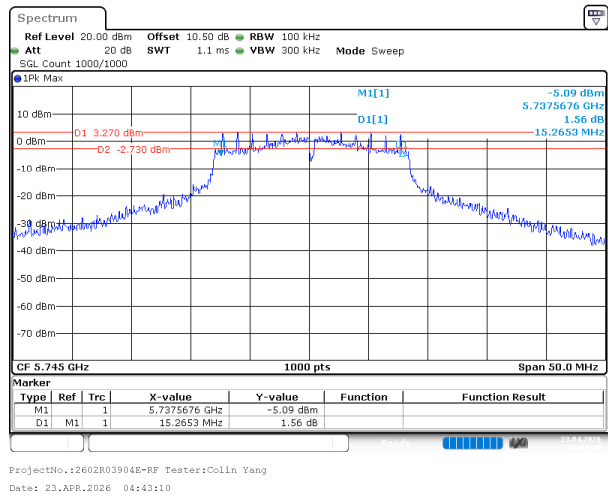


802.11a_5785MHz

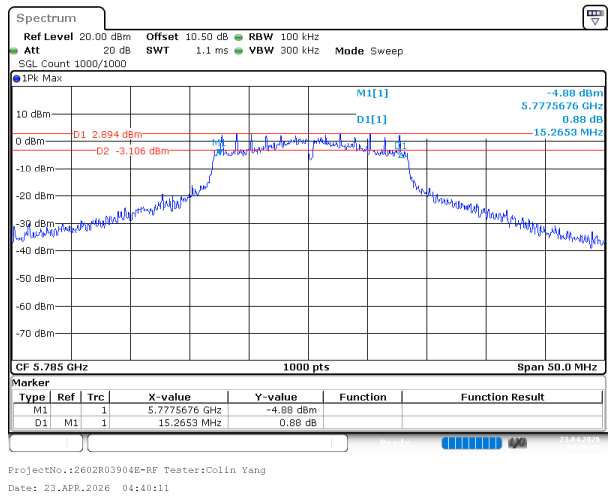

802.11a_5825MHz

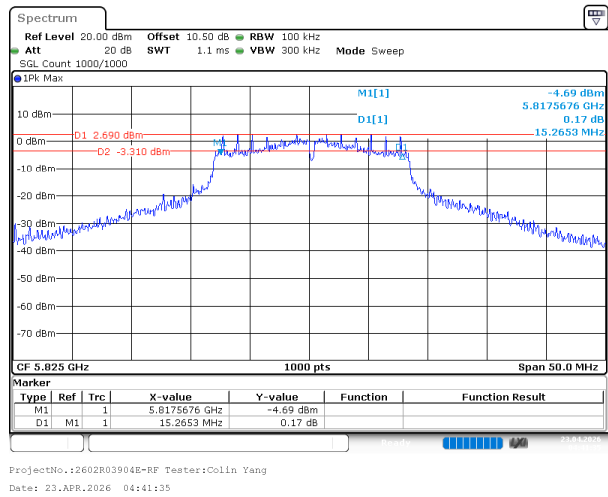


802.11ac20_5745MHz

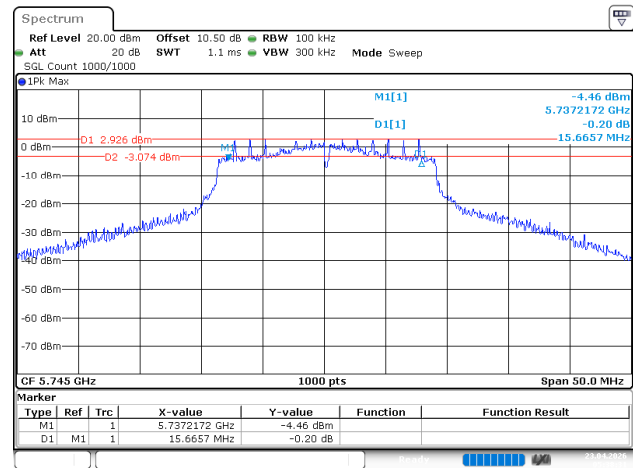


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 23.APR.2026 05:38:31

802.11ac20_5785MHz

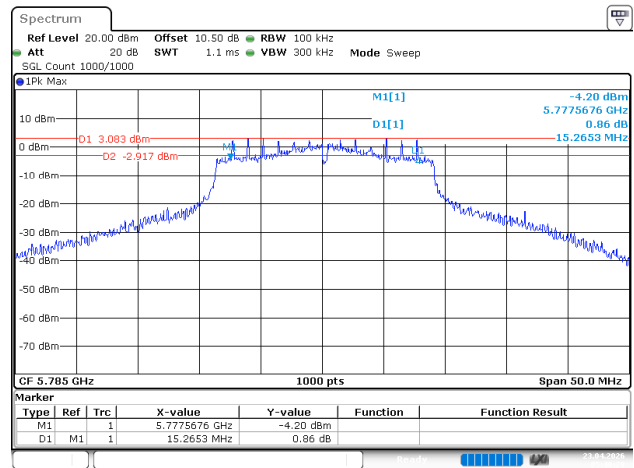


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 23.APR.2026 05:40:30

802.11ac20_5825MHz

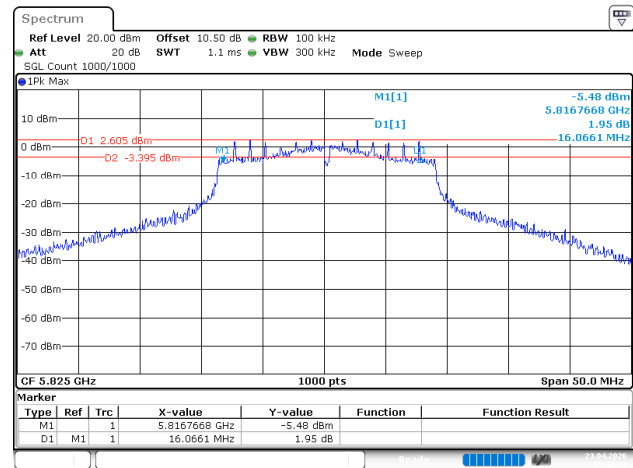


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 23.APR.2026 05:41:41

802.11ac40_5755MHz

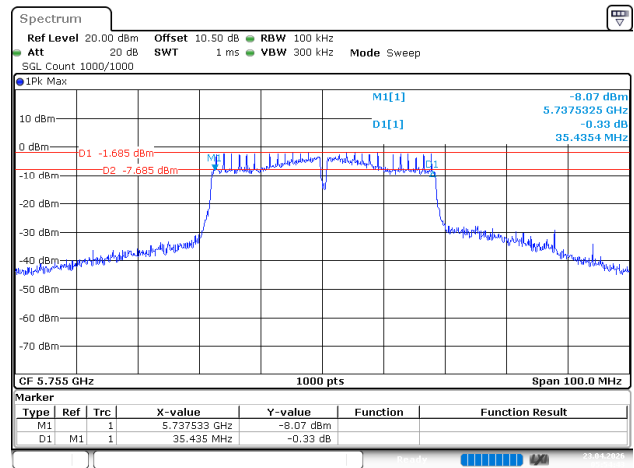


ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 23.APR.2026 05:54:44

802.11ac40_5795MHz

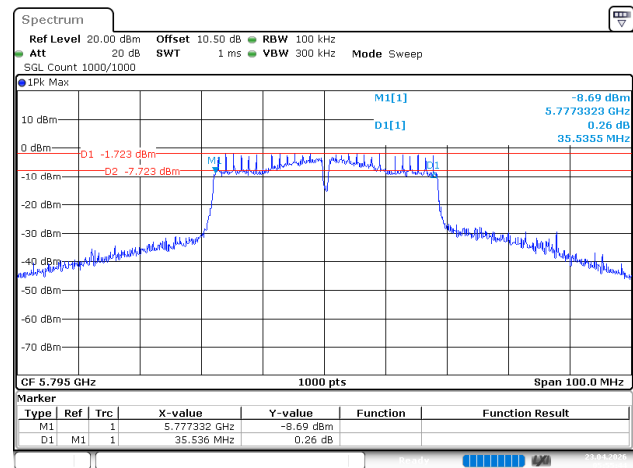

ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 23.APR.2026 05:55:45

802.11ac80_5775MHz

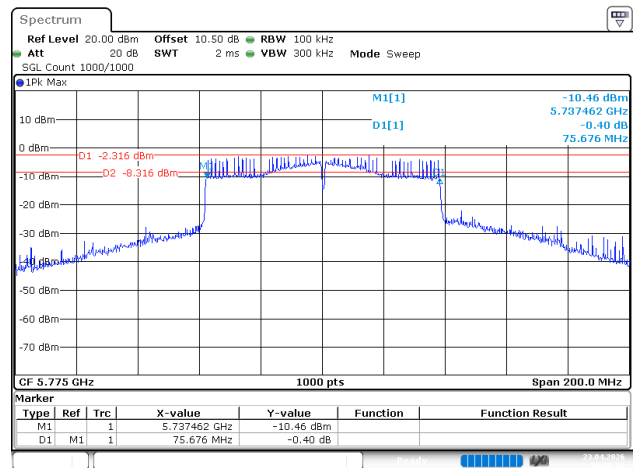

ProjectNo.:2602R03904E-RF Tester:Colin Yang
Date: 23.APR.2026 06:06:29

5.5 99% Occupied Bandwidth

Test Information:

Serial No.:	3IK4-2	Test Date:	2026/04/23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Colin Yang	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	23	Relative Humidity: (%)	55	ATM Pressure: (kPa)	100.2
----------------------	----	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Coaxial Attenuator	10dB	F-08-EM512	2025/06/06	2026/06/05
R&S	Spectrum Analyzer	FSV40	101589	2025/07/28	2026/07/27
JD	Test Software	JD Auto Test System	V1.0	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:**5150-5250MHz**

Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11a	5180	17
	5200	16.950
	5240	16.850
802.11ac20	5180	17.800
	5200	17.800
	5240	17.750
802.11ac40	5190	36.500
	5230	36.500
802.11ac80	5210	75.400

Note:

The 99% Occupied Bandwidth have not fall into the band 5250-5350MHz, please refer to the test plots of 99% Occupied Bandwidth.

5250-5350MHz

Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11a	5260	17.900
	5280	17.750
	5320	17.650
802.11ac20	5260	17.850
	5280	17.850
	5320	17.800
802.11ac40	5270	36.300
	5310	36.300
802.11ac80	5290	75.600

5470-5725MHz

Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11a	5500	16.800
	5600	16.900
	5700	16.700
	5720	16.650
802.11ac20	5500	17.700
	5600	17.750
	5700	17.700
	5720	17.750
802.11ac40	5510	36.200
	5590	36.200
	5670	36.200
	5710	36.200
802.11ac80	5530	75.400
	5610	75.400
	5690	75.400

5725-5850MHz

Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11a	5745	17.600
	5785	17.700
	5825	17.650
802.11ac20	5745	18.100
	5785	18.350
	5825	18.100
802.11ac40	5755	36.400
	5795	36.500
802.11ac80	5775	76.600

Note:

The 99% Occupied Bandwidth have not fall into the band 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.