




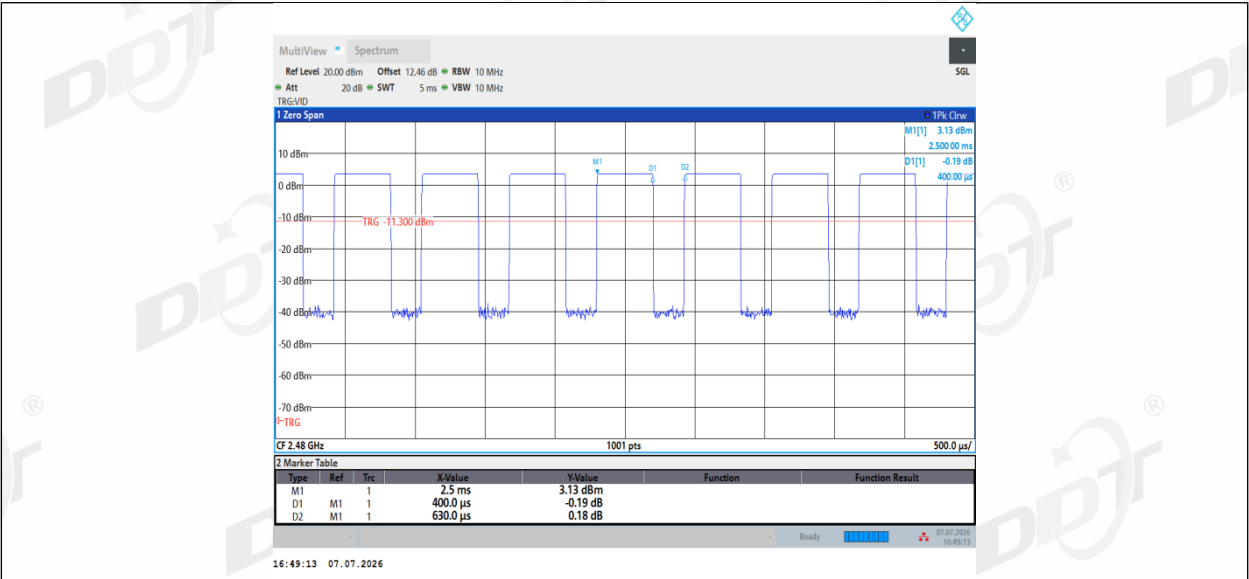


BLE_2M_Ant1_2404

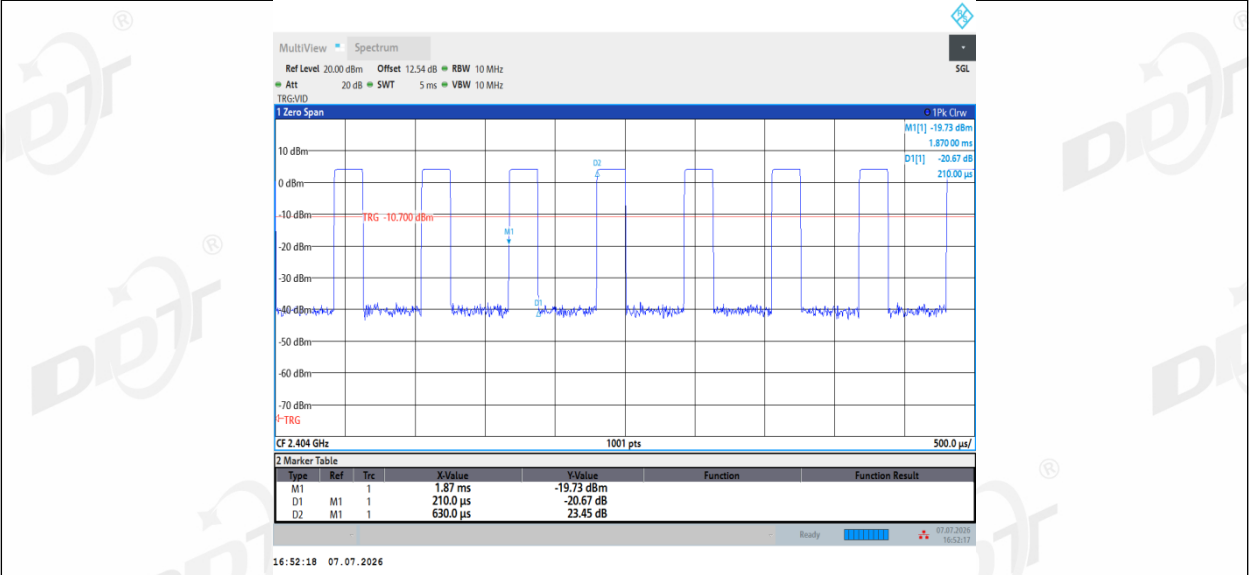

BLE_2M_Ant1_2440

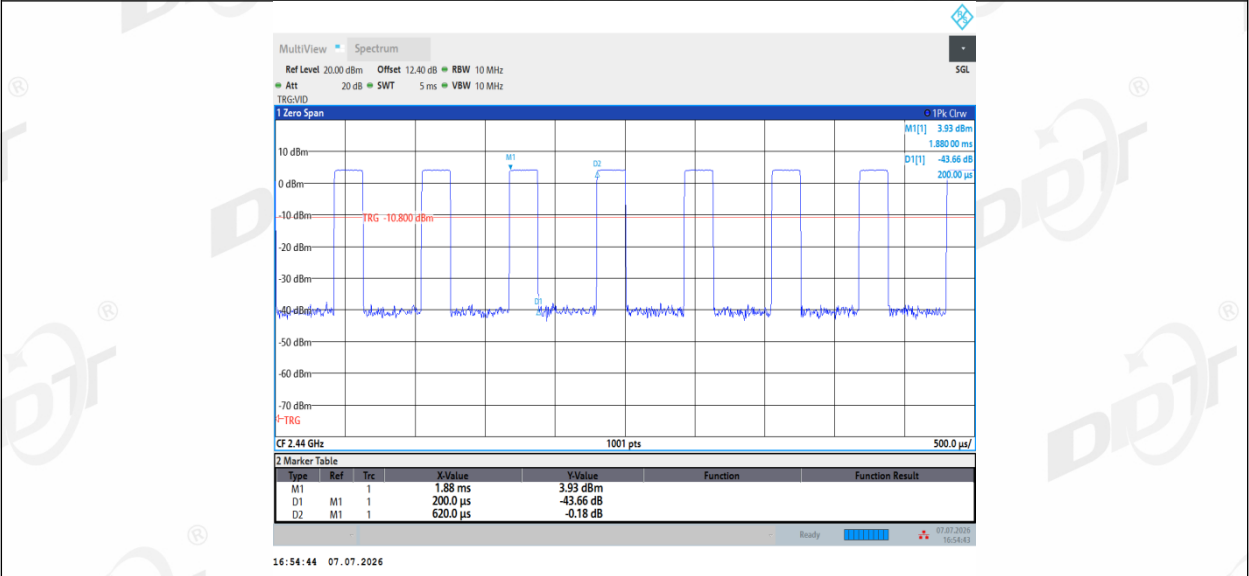

BLE_2M_Ant1_2478

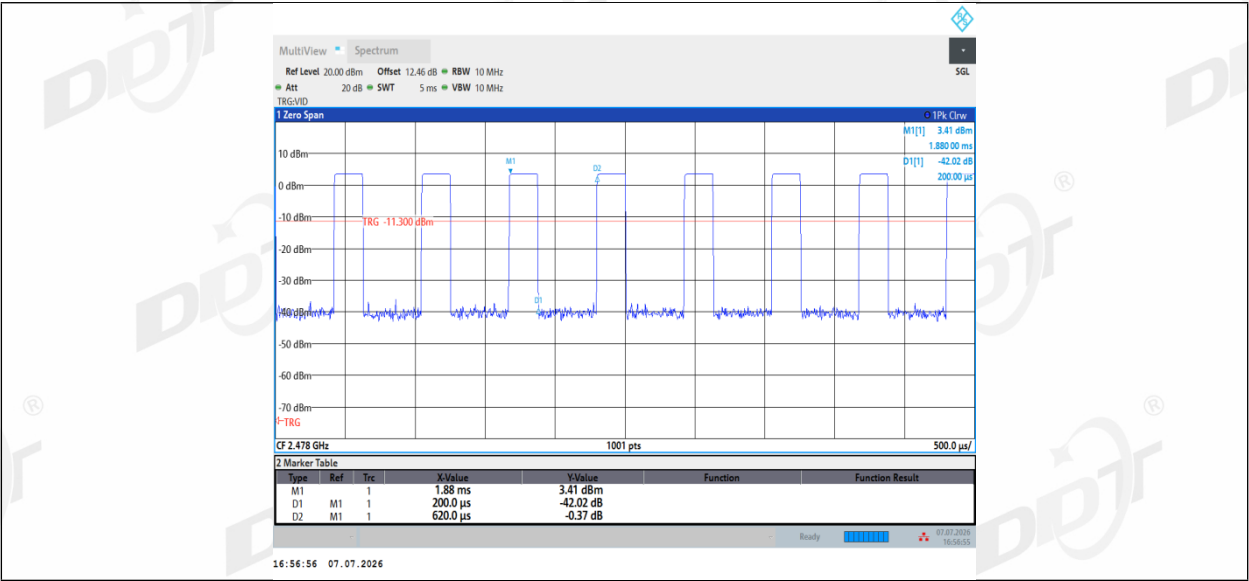

11. Antenna Requirements

11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

11.2. Result


The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.


12. Radiated Emission

12.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2027/02/27
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2027/07/10
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2027/07/10
Pre-amplifier	SONOMA	310N	DDT-ZC01969	2027/06/25
Radiation disturbance fully automated test software	Tonscend	JS32-RE (V5.0.0)	DDT-ZC02739	/
RF cable	Zhongke Junchuang	JCTB510-NJW-NJW-0.6M	DDT-ZC04595	2026/10/10
RF cable	Zhongke Junchuang	Z805UF-NJ-NJ-3M	DDT-ZC05590	2026/10/10
RF cable	Zhongke Junchuang	Z805UF-NJ-NJ-10M	DDT-ZC05591	2026/10/10
Band Reject Filter Group	Tonscend	JS0806-F	DDT-ZC05733	/
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC05922	2027/01/06
Broadband Preamplifier	HPX	BP-01G-18G	DDT-ZC05923	2027/01/06
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2027/03/05
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
Signal & Spectrum analyzer	R&S	FSV40-N	DDT-ZC04979	2027/07/10
SPECTRUM ANALYZER	R&S	FSU26	DDT-ZC00236	2027/06/25
RF Cable	Tonscend	7+1+1+0.5+0.5m	DDT-ZC05978	2027/01/29
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2027/02/27
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-1M	DDT-ZC03802	2026/10/10
Radiation disturbance fully automated test software	Tonscend	JS-RE&RSE (V5.0.0)	DDT-ZC06466	/

12.2. Block diagram of test setup

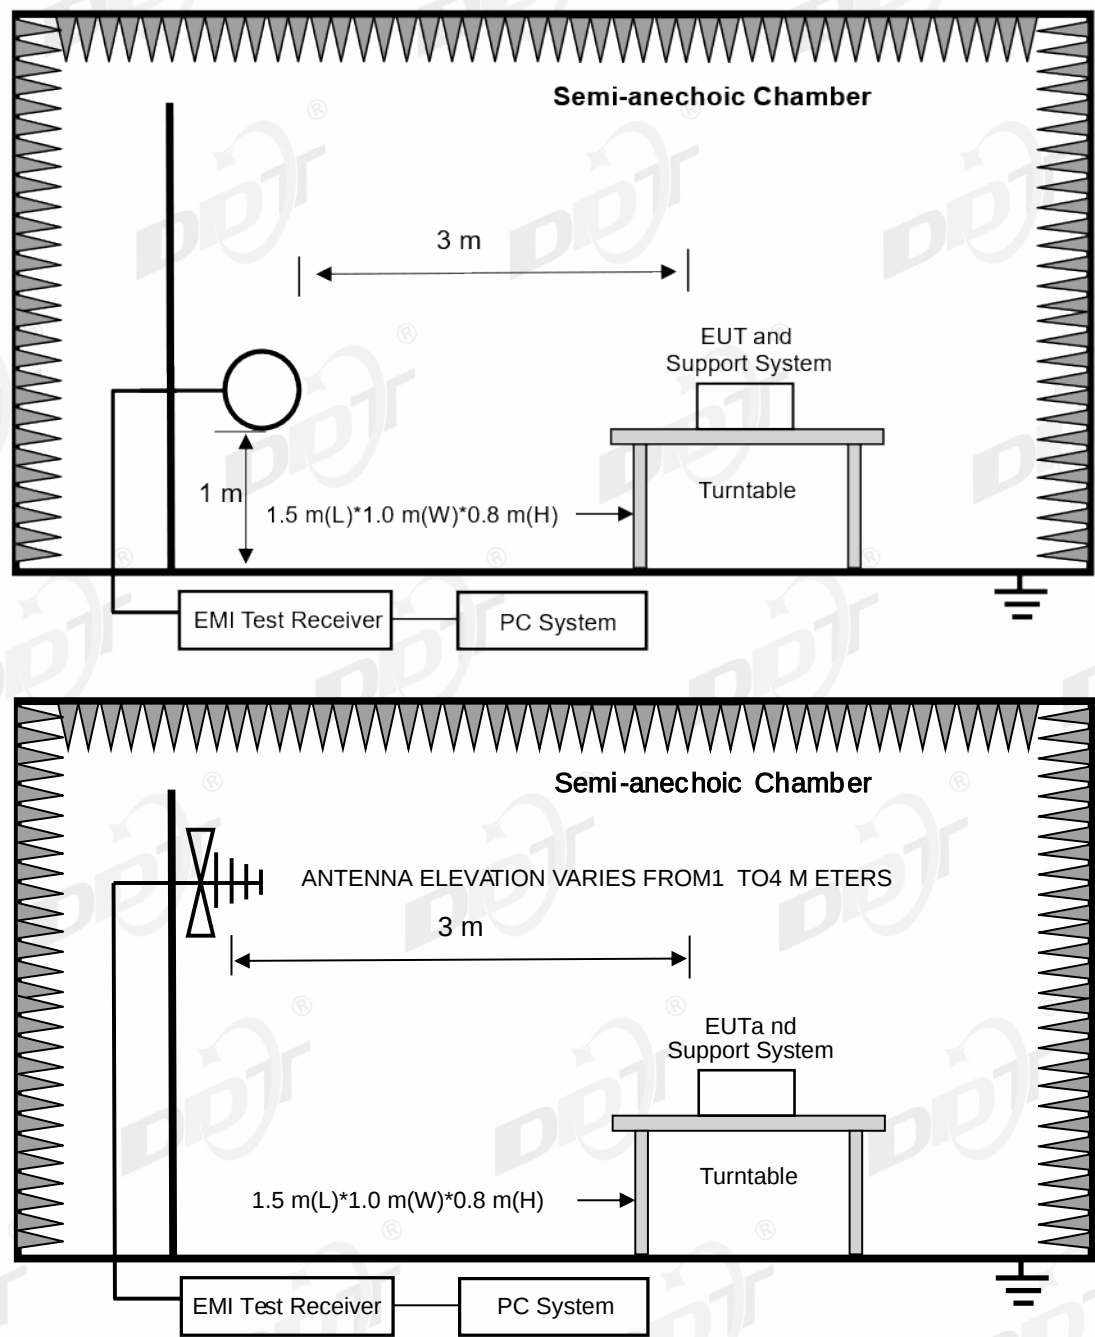

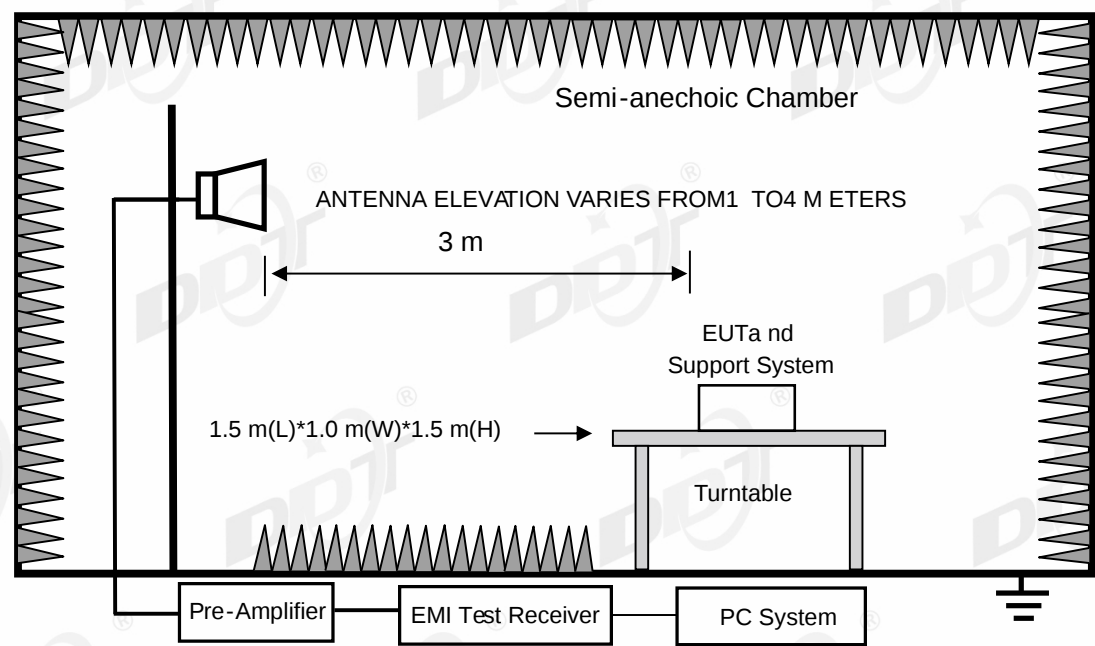

12.3. Limits

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

²Above 38.6

RSS-Gen section 8.10 Restricted frequency bands*

MHz	MHz	MHz	GHz
0.090-0.110	12.51975-12.52025	240-285	3.5-4.4
0.495-0.505	12.57675-12.57725	322-335.4	4.5-5.15
2.1735-2.1905	13.36-13.41	399.9-410	5.35-5.46
3.020-3.026	16.42-16.423	608-614	7.25-7.75
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.5
4.1772&4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.2072&4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
			Above 38.6

* Certain frequency bands listed in table and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(2) FCC 15.209 Limit & RSS-Gen section 8.9 Limit

FREQUENCY	DISTANCE	FIELD STRENGTHS LIMIT	
MHz	Meters	uV/m	dBuV/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 dBuV/m(Peak)	
		54.0 dBuV/m(Average)	

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dBuV/m}) = \text{Limit}_{30m}(\text{dBuV/m}) + 40\log(30m/3m)$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

12.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

12.5. Test procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna(1 GHz-18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna(18 GHz-40 GHz)	1 m

According to ANSI C63.10 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30 MHz, the trilog Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10 clause 4.1.5.2.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.

(9) According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

(10) For 30 MHz ~ 25 GHz: (Scan with all mode, the worst case is reported)

(11) For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in worst mode.

12.6. Test result

PASS. (See below detailed test result)

12.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-03

Tested By:

Li Xiongbin

Test Mode:

BLE1M 2402MHz TX mode

Power Supply:

Battery

Condition:

Temp:21.9°C;Humi:55.7%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26060830-5E\FCC Below 1G\1

Memo:

Sample Number:S26060830-016

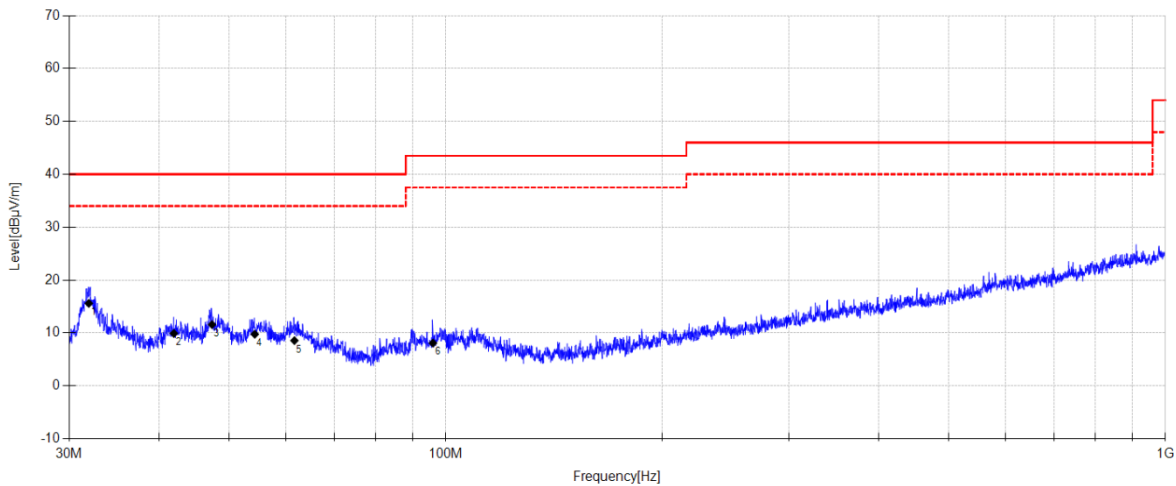


Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31.932	33.21	10.86	3.81	15.58	40.00	24.42	QP	Horizontal
2	41.916	25.19	13.07	3.93	9.89	40.00	30.11	QP	Horizontal
3	47.354	26.58	13.33	3.96	11.57	40.00	28.43	QP	Horizontal
4	54.293	24.83	13.20	4.01	9.74	40.00	30.26	QP	Horizontal
5	61.639	24.23	12.53	4.08	8.54	40.00	31.46	QP	Horizontal
6	96.009	24.9	11.19	4.28	8.07	43.50	35.43	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-03 **Tested By:** Li Xiongbin
Test Mode: BLE1M 2402MHz TX mode **Power Supply:** Battery
Condition: Temp:21.9°C;Humi:55.7% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26060830-5E\FCC Below 1G\2
Memo: Sample Number:S26060830-016

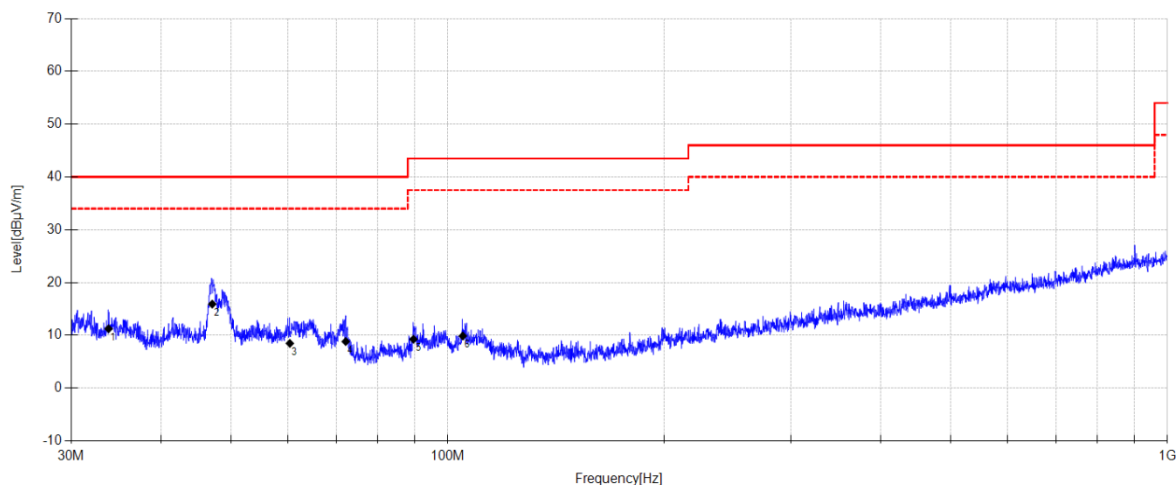**Final Data List**


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	33.798	28.48	11.22	3.83	11.23	40.00	28.77	QP	Vertical
2	47.090	30.87	13.38	3.96	15.91	40.00	24.09	QP	Vertical
3	60.356	24.3	12.40	4.06	8.46	40.00	31.54	QP	Vertical
4	72.173	27.49	9.45	4.17	8.81	40.00	31.19	QP	Vertical
5	89.633	27.86	9.44	4.25	9.25	43.50	34.25	QP	Vertical
6	104.951	26.28	11.55	4.33	9.86	43.50	33.64	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-03 **Tested By:** Li Xiongbin
Test Mode: BLE2M 2404MHz TX mode **Power Supply:** Battery
Condition: Temp:21.9°C;Humi:55.7% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26060830-5E\FCC Below 1G\3
Memo: Sample Number:S26060830-016

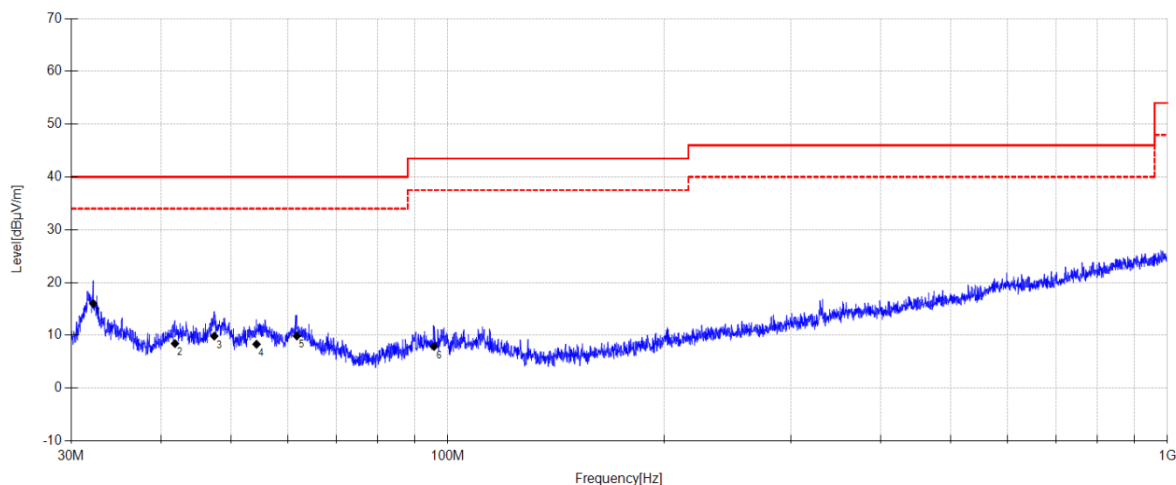**Final Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	32.179	33.59	10.90	3.81	16.00	40.00	24.00	QP	Horizontal
2	41.798	23.77	13.02	3.93	8.42	40.00	31.58	QP	Horizontal
3	47.388	24.85	13.32	3.96	9.83	40.00	30.17	QP	Horizontal
4	54.255	23.37	13.22	4.01	8.30	40.00	31.70	QP	Horizontal
5	61.726	25.53	12.55	4.08	9.86	40.00	30.14	QP	Horizontal
6	95.740	24.95	10.94	4.28	7.87	43.50	35.63	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-03

Tested By:

Li Xiongbín

Test Mode:

BLE2M 2404MHz TX mode

Power Supply:

Battery

Condition:

Temp:21.9°C;Humi:55.7%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26060830-5E\FCC Below 1G\4

Memo:

Sample Number:S26060830-016

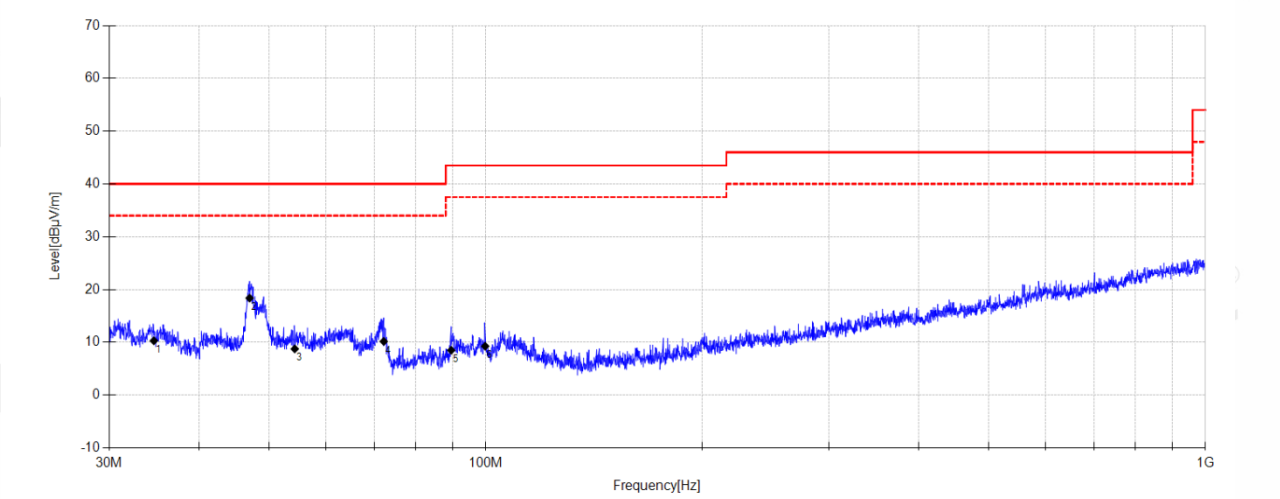


Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	34.589	27.44	11.30	3.84	10.28	40.00	29.72	QP	Vertical
2	46.991	33.31	13.40	3.96	18.37	40.00	21.63	QP	Vertical
3	54.293	23.83	13.20	4.01	8.74	40.00	31.26	QP	Vertical
4	72.173	28.84	9.45	4.17	10.16	40.00	29.84	QP	Vertical
5	89.570	27.13	9.40	4.25	8.48	43.50	35.02	QP	Vertical
6	99.854	25.34	11.91	4.30	9.25	43.50	34.25	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-06-25 **Tested By:** Li Xiongbin
Test Mode: TX BLE2M 2404MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26060830-5E\FCC ABOVE 1G BLE\9
Memo: Sample Number:S26060830-017 Power Setting:5

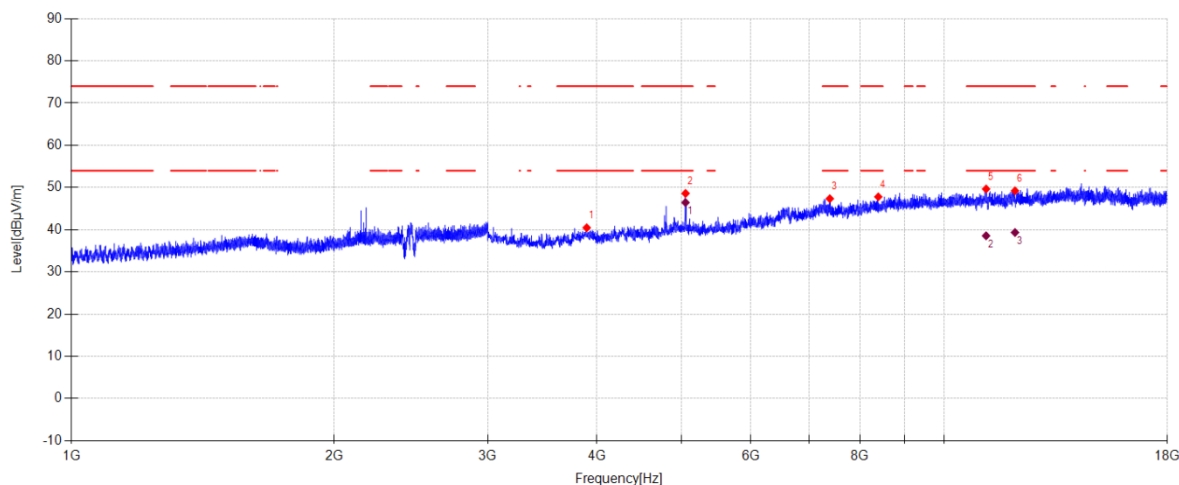**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3892.500	48.93	31.59	-40.05	40.47	74.00	33.53	PK	Horizontal
2	5052.000	54.93	34.00	-40.33	48.60	74.00	25.40	PK	Horizontal
3	7390.500	49.01	37.24	-38.90	47.35	74.00	26.65	PK	Horizontal
4	8398.500	48.24	38.10	-38.55	47.79	74.00	26.21	PK	Horizontal
5	11161.500	45.22	39.82	-35.38	49.66	74.00	24.34	PK	Horizontal
6	12045.000	44.13	39.85	-34.76	49.22	74.00	24.78	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5052.000	52.77	34.00	-40.33	46.44	54.00	7.56	AV	Horizontal
2	11161.500	34.12	39.82	-35.38	38.56	54.00	15.44	AV	Horizontal
3	12045.000	34.26	39.85	-34.76	39.35	54.00	14.65	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-06-25 **Tested By:** Li Xiongbin
Test Mode: TX BLE2M 2404MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26060830-5E\FCC ABOVE 1G BLE\10
Memo: Sample Number:S26060830-017 Power Setting:5

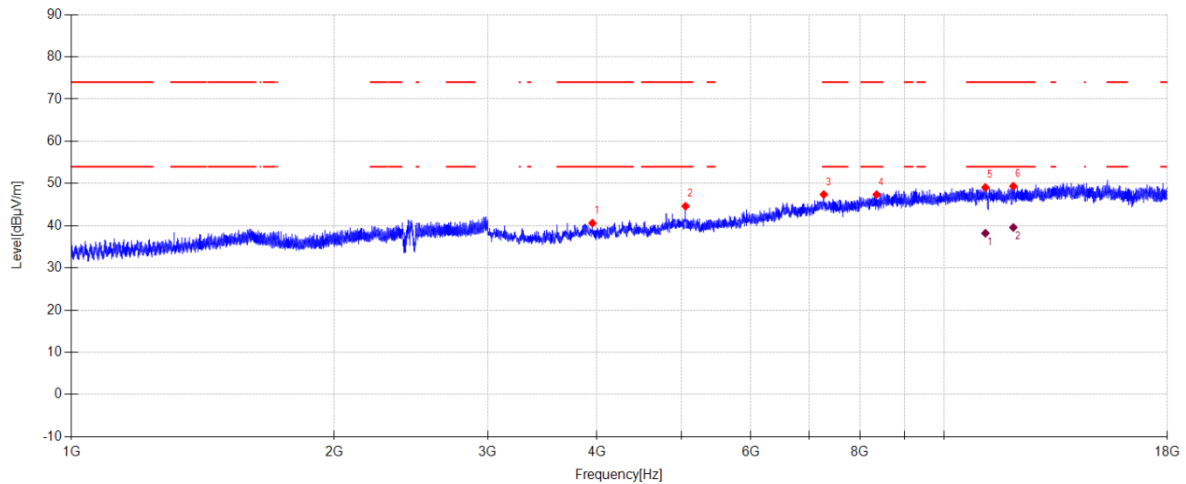**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3952.500	49.22	31.70	-40.32	40.60	74.00	33.40	PK	Vertical
2	5052.000	50.95	34.00	-40.33	44.62	74.00	29.38	PK	Vertical
3	7275.000	48.84	37.75	-39.19	47.40	74.00	26.60	PK	Vertical
4	8361.000	47.76	38.02	-38.40	47.38	74.00	26.62	PK	Vertical
5	11140.500	44.64	39.78	-35.36	49.06	74.00	24.94	PK	Vertical
6	11992.500	44.20	39.79	-34.63	49.36	74.00	24.64	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	11140.500	33.80	39.78	-35.36	38.22	54.00	15.78	AV	Vertical
2	11992.500	34.42	39.79	-34.63	39.58	54.00	14.42	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-06-25 **Tested By:** Li Xiongbin
Test Mode: TX BLE2M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26060830-5E\FCC ABOVE 1G BLE\11
Memo: Sample Number:S26060830-017 Power Setting:5

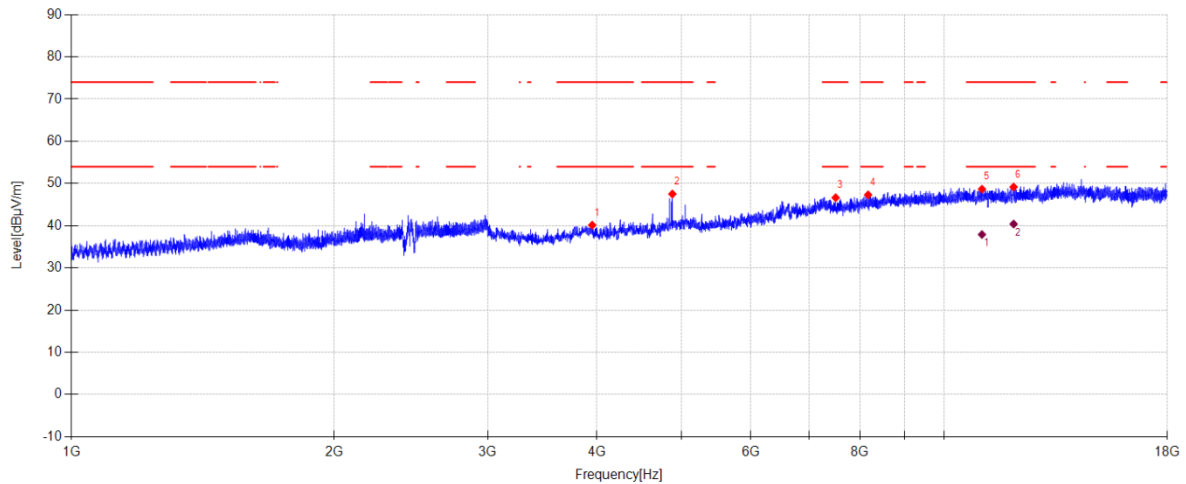**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3949.500	48.73	31.70	-40.30	40.13	74.00	33.87	PK	Horizontal
2	4879.500	54.45	33.46	-40.40	47.51	74.00	26.49	PK	Horizontal
3	7506.000	48.52	37.10	-38.98	46.64	74.00	27.36	PK	Horizontal
4	8176.500	47.71	37.90	-38.30	47.31	74.00	26.69	PK	Horizontal
5	11040.000	44.18	39.70	-35.21	48.67	74.00	25.33	PK	Horizontal
6	12001.500	44.00	39.80	-34.63	49.17	74.00	24.83	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	11040.000	33.42	39.70	-35.21	37.91	54.00	16.09	AV	Horizontal
2	12001.500	35.23	39.80	-34.63	40.40	54.00	13.60	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-06-25Tested By:Li Xiongbin

Test Mode:TX BLE2M 2440MHz ModePower Supply:Battery

Condition:Temp:24.7°C;Humi:49.6%Test Site:4# Fully Anechoic Room

File Path:d:\ts\2026 fcc report date\Q26060830-5E\FCC ABOVE 1G BLE\12

Memo:Sample Number:S26060830-017 Power Setting:5

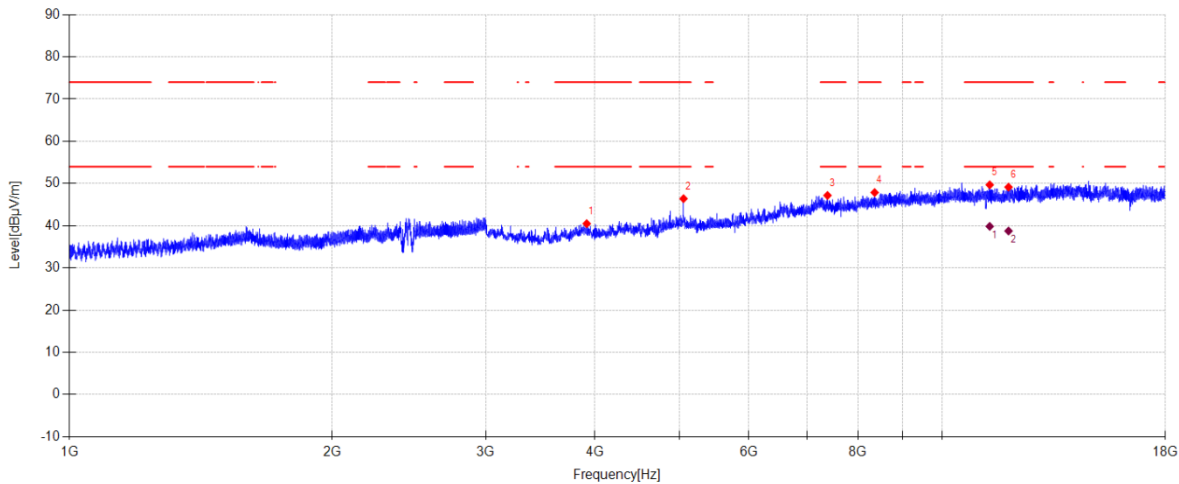


Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3913.500	48.96	31.63	-40.10	40.49	74.00	33.51	PK	Vertical
2	5052.000	52.74	34.00	-40.33	46.41	74.00	27.59	PK	Vertical
3	7384.500	48.83	37.26	-38.92	47.17	74.00	26.83	PK	Vertical
4	8362.500	48.23	38.03	-38.40	47.86	74.00	26.14	PK	Vertical
5	11328.000	45.12	40.00	-35.44	49.68	74.00	24.32	PK	Vertical
6	11904.000	44.21	39.61	-34.68	49.14	74.00	24.86	PK	Vertical

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	11328.000	35.28	40.00	-35.44	39.84	54.00	14.16	AV	Vertical
2	11904.000	33.82	39.61	-34.68	38.75	54.00	15.25	AV	Vertical

Note:
1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-06-25 **Tested By:** Li Xiongbin
Test Mode: TX BLE2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26060830-5E\FCC ABOVE 1G BLE\13
Memo: Sample Number:S26060830-017 Power Setting:5

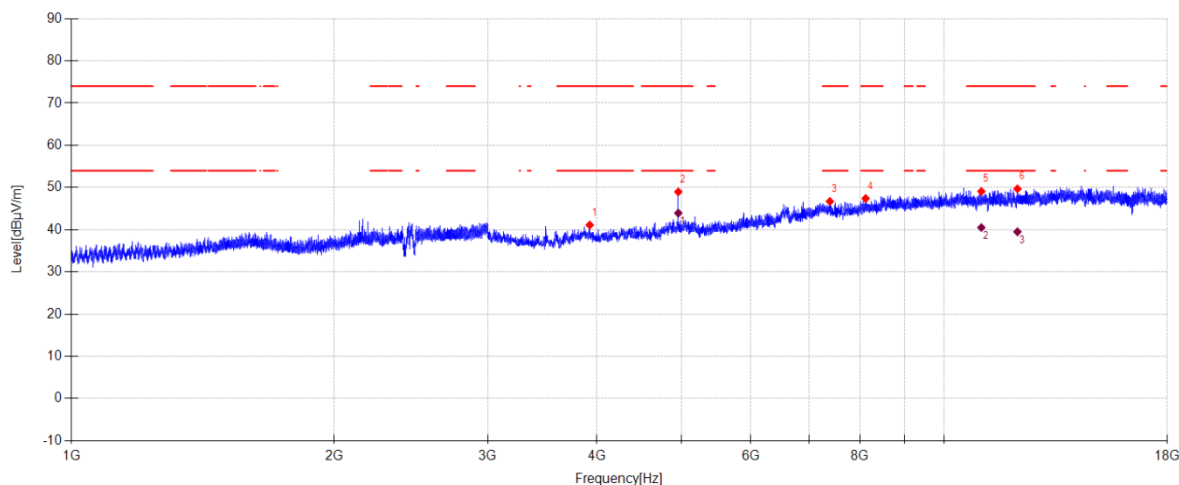**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3924.000	49.62	31.65	-40.16	41.11	74.00	32.89	PK	Horizontal
2	4956.000	55.76	33.72	-40.51	48.97	74.00	25.03	PK	Horizontal
3	7392.000	48.38	37.23	-38.90	46.71	74.00	27.29	PK	Horizontal
4	8122.500	47.93	37.90	-38.43	47.40	74.00	26.60	PK	Horizontal
5	11022.000	44.55	39.70	-35.18	49.07	74.00	24.93	PK	Horizontal
6	12123.000	44.71	39.90	-34.93	49.68	74.00	24.32	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4956.297	50.73	33.72	-40.51	43.94	54.00	10.06	AV	Horizontal
2	11022.000	36.00	39.70	-35.18	40.52	54.00	13.48	AV	Horizontal
3	12123.000	34.54	39.90	-34.93	39.51	54.00	14.49	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-06-25 **Tested By:** Li Xiongbin
Test Mode: TX BLE2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26060830-5E\FCC ABOVE 1G BLE\14
Memo: Sample Number:S26060830-017 Power Setting:5

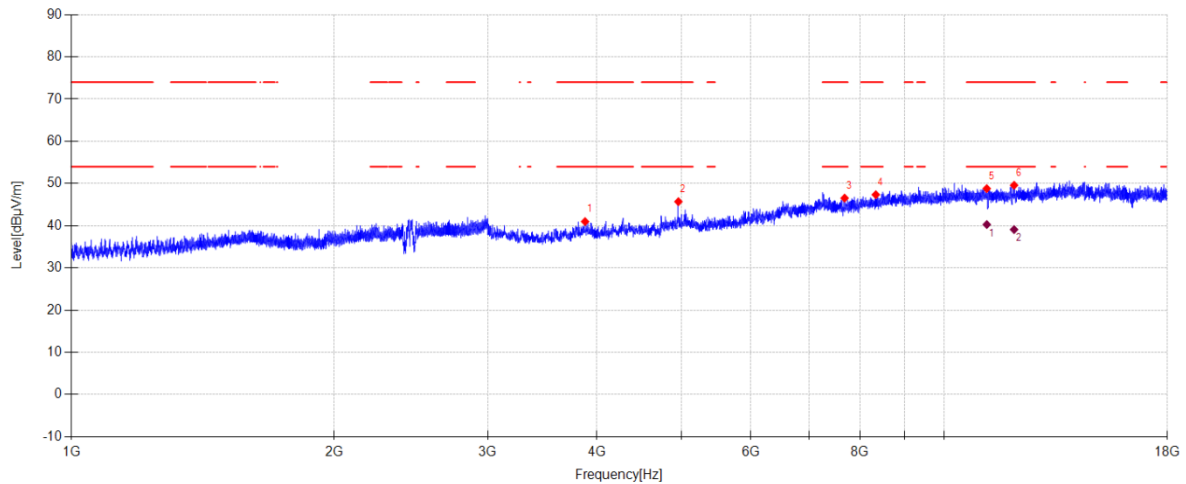**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3876.000	49.53	31.55	-40.10	40.98	74.00	33.02	PK	Vertical
2	4957.500	52.48	33.73	-40.51	45.70	74.00	28.30	PK	Vertical
3	7684.500	48.06	37.30	-38.81	46.55	74.00	27.45	PK	Vertical
4	8344.500	47.68	38.00	-38.33	47.35	74.00	26.65	PK	Vertical
5	11181.000	44.33	39.86	-35.40	48.79	74.00	25.21	PK	Vertical
6	12016.500	44.44	39.82	-34.68	49.58	74.00	24.42	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	11181.000	35.82	39.86	-35.40	40.28	54.00	13.72	AV	Vertical
2	12016.500	33.95	39.82	-34.68	39.09	54.00	14.91	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-25

Tested By:

Li Xiongbín

Test Mode:

TX BLE1M 2480MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26060830-5E\FCC ABOVE 1G BLE\15

Memo:

Sample Number:S26060830-017 Power Setting:5

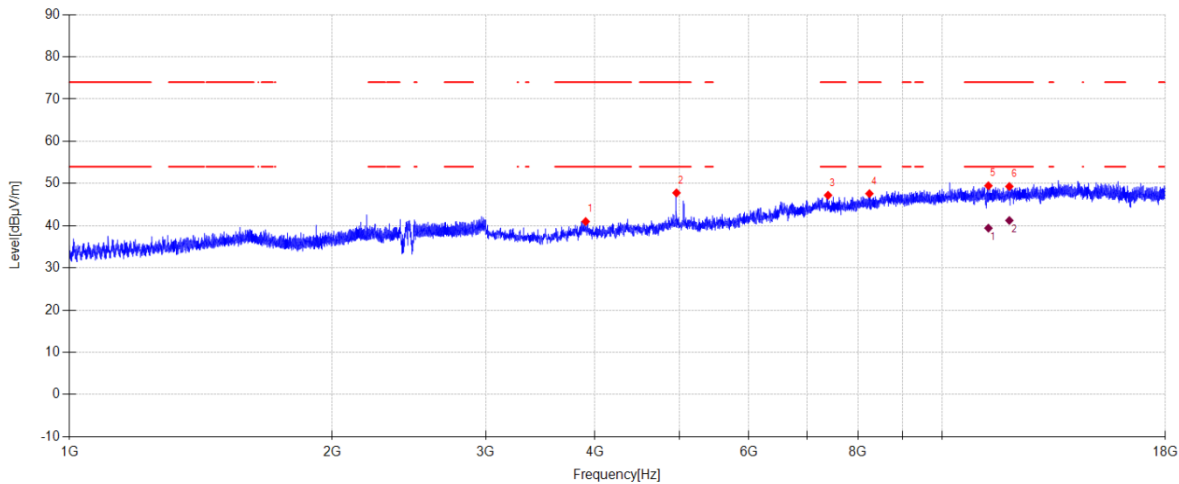

Suspected Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3903.000	49.43	31.61	-40.05	40.99	74.00	33.01	PK	Horizontal
2	4959.000	54.55	33.74	-40.51	47.78	74.00	26.22	PK	Horizontal
3	7395.000	48.88	37.22	-38.89	47.21	74.00	26.79	PK	Horizontal
4	8248.500	47.89	37.90	-38.19	47.60	74.00	26.40	PK	Horizontal
5	11289.000	44.91	39.99	-35.43	49.47	74.00	24.53	PK	Horizontal
6	11929.500	44.31	39.66	-34.67	49.30	74.00	24.70	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	11289.000	34.87	39.99	-35.43	39.43	54.00	14.57	AV	Horizontal
2	11929.500	36.25	39.66	-34.67	41.24	54.00	12.76	AV	Horizontal


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-06-25 **Tested By:** Li Xiongbn
Test Mode: TX BLE1M 2480MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26060830-5E\FCC ABOVE 1G BLE\16
Memo: Sample Number:S26060830-017 Power Setting:5

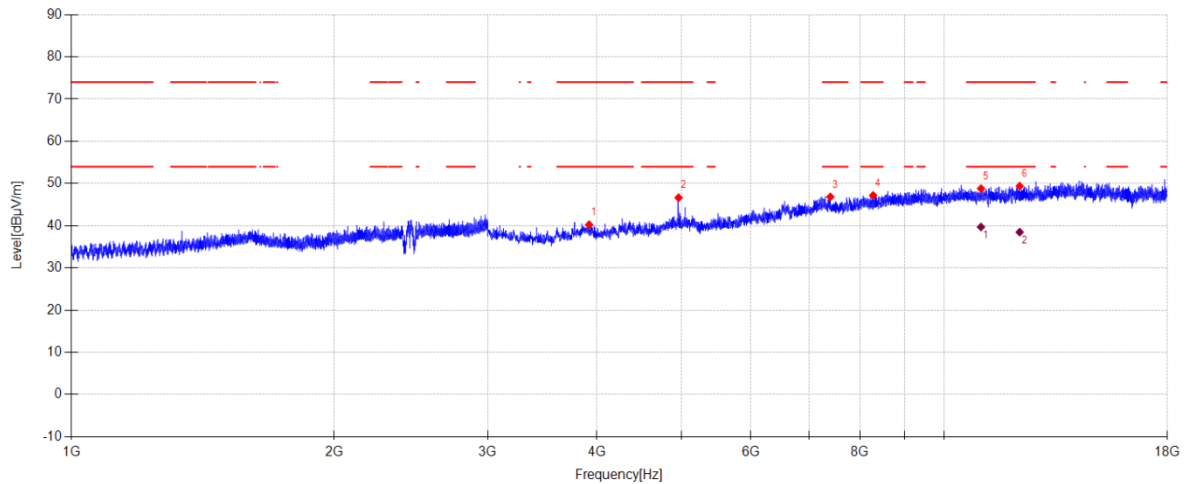**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3918.000	48.72	31.64	-40.13	40.23	74.00	33.77	PK	Vertical
2	4960.500	53.42	33.74	-40.52	46.64	74.00	27.36	PK	Vertical
3	7401.000	48.50	37.20	-38.88	46.82	74.00	27.18	PK	Vertical
4	8284.500	47.37	37.97	-38.16	47.18	74.00	26.82	PK	Vertical
5	11011.500	44.26	39.70	-35.16	48.80	74.00	25.20	PK	Vertical
6	12195.000	44.45	39.90	-34.97	49.38	74.00	24.62	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	11011.500	35.16	39.70	-35.16	39.70	54.00	14.30	AV	Vertical
2	12195.000	33.55	39.90	-34.97	38.48	54.00	15.52	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-25

Tested By:

Li Xiongbín

Test Mode:

TX BLE1M 2440MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26060830-5E\FCC ABOVE 1G BLE\17

Memo:

Sample Number:S26060830-017 Power Setting:5

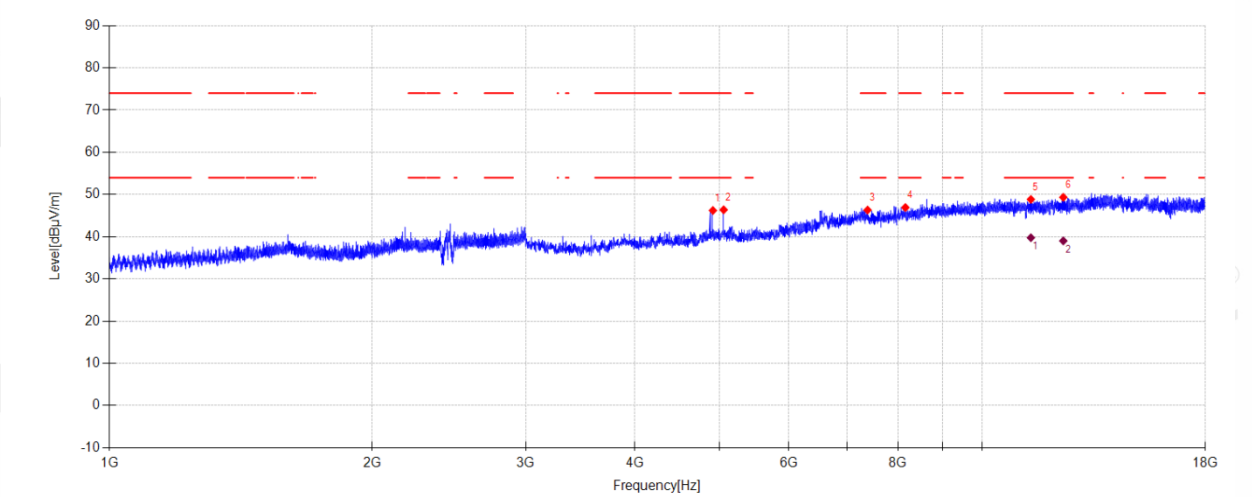

Suspected Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4912.500	53.09	33.55	-40.42	46.22	74.00	27.78	PK	Horizontal
2	5053.500	52.70	34.00	-40.33	46.37	74.00	27.63	PK	Horizontal
3	7386.000	47.97	37.26	-38.91	46.32	74.00	27.68	PK	Horizontal
4	8160.000	47.36	37.90	-38.34	46.92	74.00	27.08	PK	Horizontal
5	11362.500	44.30	40.00	-35.46	48.84	74.00	25.16	PK	Horizontal
6	12376.500	44.52	39.72	-34.90	49.34	74.00	24.66	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	11362.500	35.22	40.00	-35.46	39.76	54.00	14.24	AV	Horizontal
2	12376.500	34.19	39.72	-34.90	39.01	54.00	14.99	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-25

Tested By:

Li Xiongbín

Test Mode:

TX BLE1M 2440MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26060830-5E\FCC ABOVE 1G BLE\18

Memo:

Sample Number:S26060830-017 Power Setting:5

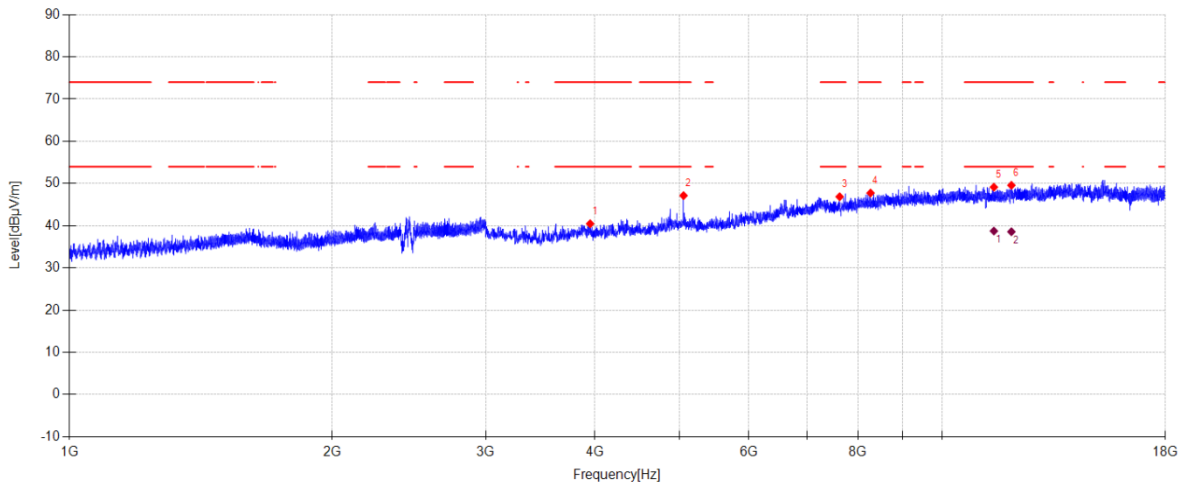

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3949.500	49.07	31.70	-40.30	40.47	74.00	33.53	PK	Vertical
2	5052.000	53.46	34.00	-40.33	47.13	74.00	26.87	PK	Vertical
3	7624.500	48.42	37.25	-38.80	46.87	74.00	27.13	PK	Vertical
4	8272.500	47.97	37.95	-38.17	47.75	74.00	26.25	PK	Vertical
5	11452.500	44.71	39.90	-35.47	49.14	74.00	24.86	PK	Vertical
6	11994.000	44.41	39.79	-34.63	49.57	74.00	24.43	PK	Vertical

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	11452.500	34.31	39.90	-35.47	38.74	54.00	15.26	AV	Vertical
2	11994.000	33.41	39.79	-34.63	38.57	54.00	15.43	AV	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-06-25 **Tested By:** Li Xiongbin
Test Mode: TX BLE1M 2402MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26060830-5E\FCC ABOVE 1G BLE\19
Memo: Sample Number:S26060830-017 Power Setting:5

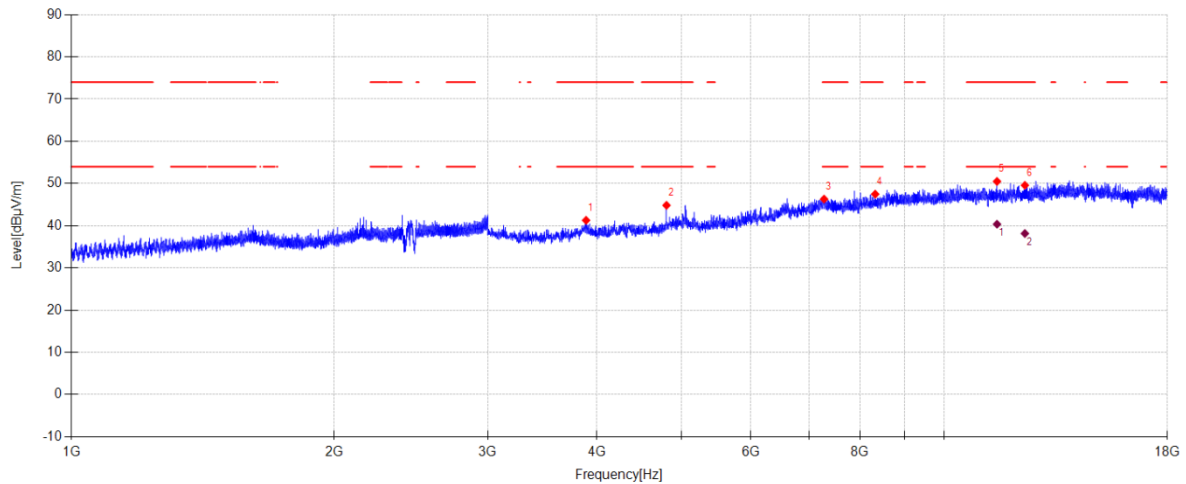**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3886.500	49.78	31.57	-40.07	41.28	74.00	32.72	PK	Horizontal
2	4804.500	52.03	33.22	-40.42	44.83	74.00	29.17	PK	Horizontal
3	7279.500	47.75	37.74	-39.18	46.31	74.00	27.69	PK	Horizontal
4	8331.000	47.75	38.00	-38.27	47.48	74.00	26.52	PK	Horizontal
5	11487.000	46.13	39.83	-35.46	50.50	74.00	23.50	PK	Horizontal
6	12363.000	44.75	39.74	-34.91	49.58	74.00	24.42	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	11487.000	35.99	39.83	-35.46	40.36	54.00	13.64	AV	Horizontal
2	12363.000	33.32	39.74	-34.91	38.15	54.00	15.85	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-06-25 **Tested By:** Li Xiongbin
Test Mode: TX BLE1M 2402MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26060830-5E\FCC ABOVE 1G BLE\20
Memo: Sample Number:S26060830-017 Power Setting:5

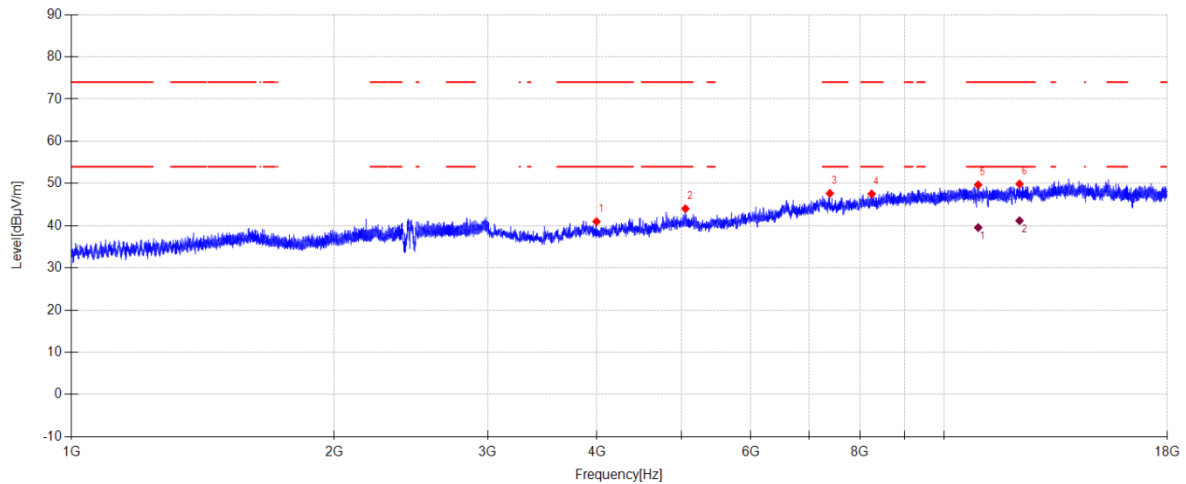**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3994.500	49.92	31.61	-40.55	40.98	74.00	33.02	PK	Vertical
2	5050.500	50.38	34.00	-40.34	44.04	74.00	29.96	PK	Vertical
3	7392.000	49.33	37.23	-38.90	47.66	74.00	26.34	PK	Vertical
4	8253.000	47.82	37.91	-38.19	47.54	74.00	26.46	PK	Vertical
5	10930.500	45.16	39.84	-35.32	49.68	74.00	24.32	PK	Vertical
6	12190.500	44.96	39.90	-34.97	49.89	74.00	24.11	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	10930.500	35.04	39.84	-35.32	39.56	54.00	14.44	AV	Vertical
2	12190.500	36.26	39.90	-34.97	41.19	54.00	12.81	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-25

Tested By:

Li Xiongbín

Test Mode:

TX BLE1M 2402MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26060830-5E\FCC ABOVE 1G BLE\21

Memo:

Sample Number:S26060830-017 Power Setting:5

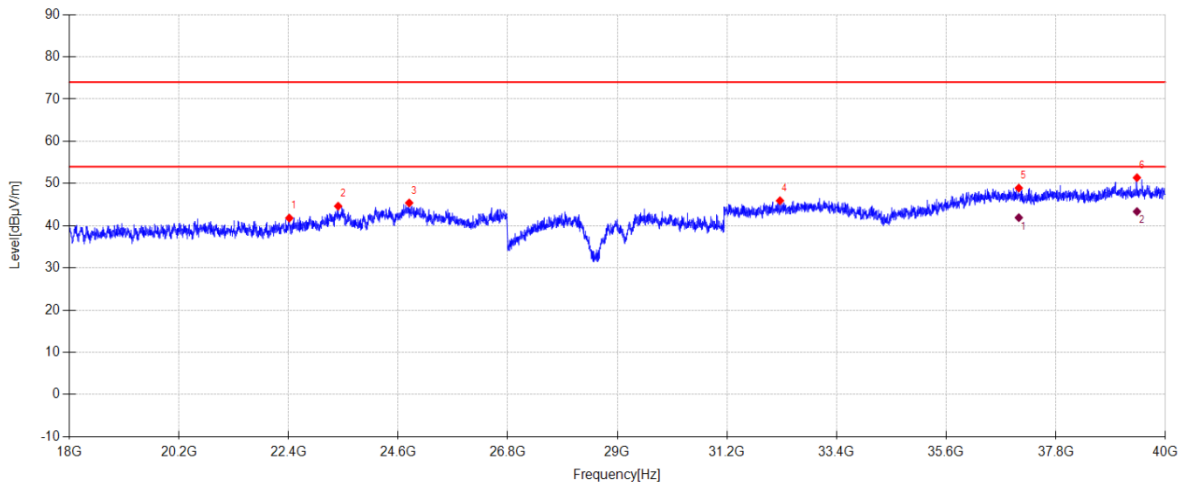

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	22415.578	50.15	38.83	4.15	41.81	74.00	32.19	PK	Horizontal
2	23395.922	51.68	39.22	4.66	44.63	74.00	29.37	PK	Horizontal
3	24822.122	51.07	39.51	4.71	45.40	74.00	28.60	PK	Horizontal
4	32264.681	47.24	41.31	5.25	45.93	74.00	28.07	PK	Horizontal
5	37058.967	49.37	42.96	5.92	48.93	74.00	25.07	PK	Horizontal
6	39430.595	49.09	46.24	6.64	51.38	74.00	22.62	PK	Horizontal

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	37058.967	42.35	42.96	5.92	41.91	54.00	12.09	AV	Horizontal
2	39430.595	41.07	46.24	6.64	43.36	54.00	10.64	AV	Horizontal


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-06-25 **Tested By:** Li Xiongbin
Test Mode: TX BLE1M 2402MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 report date\Q26060830-5E\FCC ABOVE 1G BLE\22
Memo: Sample Number:S26060830-017 Power Setting:5

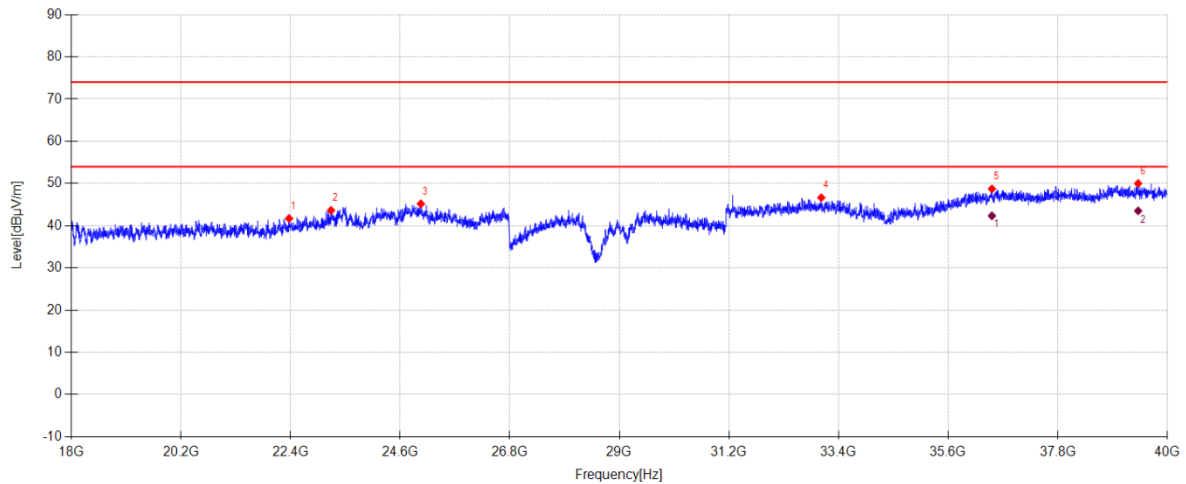**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	22369.918	50.06	38.80	4.16	41.71	74.00	32.29	PK	Vertical
2	23213.283	50.94	39.26	4.59	43.63	74.00	30.37	PK	Vertical
3	25015.505	50.68	39.60	4.75	45.19	74.00	28.81	PK	Vertical
4	33054.328	47.68	41.62	5.38	46.64	74.00	27.36	PK	Vertical
5	36478.818	48.70	42.85	6.42	48.73	74.00	25.27	PK	Vertical
6	39414.479	47.71	46.23	6.64	50.02	74.00	23.98	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36478.818	42.31	42.85	6.42	42.34	54.00	11.66	AV	Vertical
2	39414.479	41.21	46.23	6.64	43.52	54.00	10.48	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-25

Tested By:

Li Xiongbín

Test Mode:

TX BLE1M 2440MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26060830-5E\FCC ABOVE 1G BLE\23

Memo:

Sample Number:S26060830-017 Power Setting:5

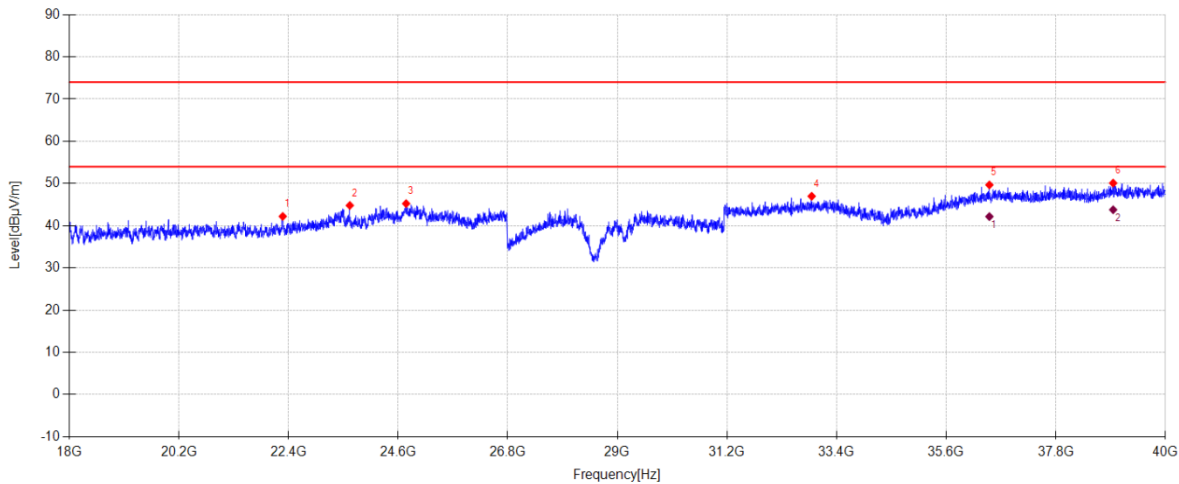

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	22283.970	50.61	38.73	4.17	42.21	74.00	31.79	PK	Horizontal
2	23629.593	51.61	39.17	4.64	44.80	74.00	29.20	PK	Horizontal
3	24760.347	50.97	39.48	4.70	45.24	74.00	28.76	PK	Horizontal
4	32901.233	48.03	41.56	5.32	46.98	74.00	27.02	PK	Horizontal
5	36468.075	49.65	42.85	6.40	49.67	74.00	24.33	PK	Horizontal
6	38952.509	47.68	45.81	6.51	50.10	74.00	23.90	PK	Horizontal

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36468.075	42.15	42.85	6.40	42.17	54.00	11.83	AV	Horizontal
2	38952.509	41.36	45.81	6.51	43.78	54.00	10.22	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-06-25Tested By:Li Xiongbin

Test Mode:TX BLE1M 2440MHz ModePower Supply:Battery

Condition:Temp:24.7°C;Humi:49.6%Test Site:4# Fully Anechoic Room

File Path:d:\ts\2026 report date\Q26060830-5E\FCC ABOVE 1G BLE\24

Memo:Sample Number:S26060830-017 Power Setting:5

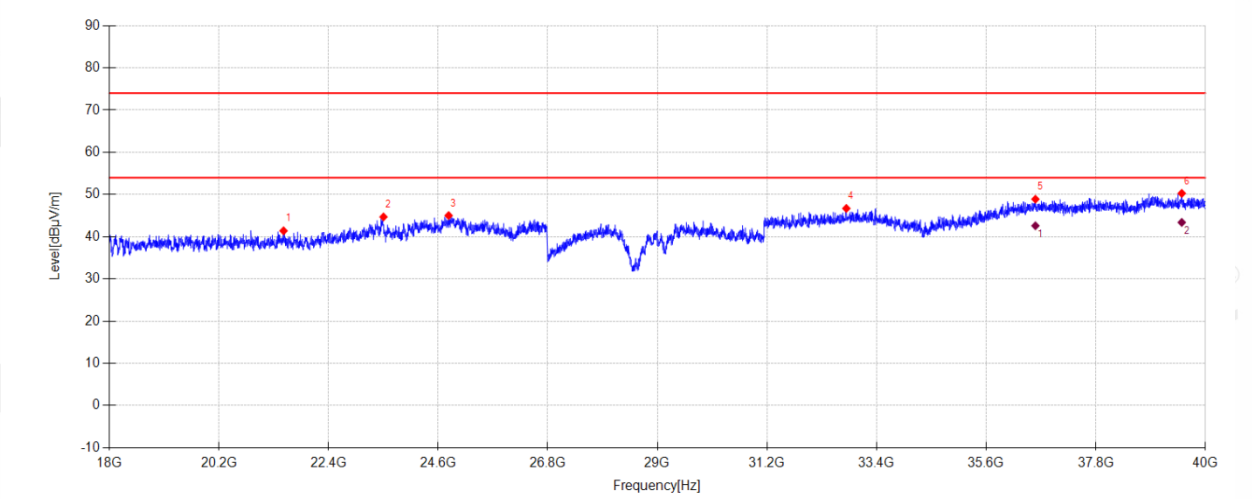

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	21497.009	49.93	38.45	3.90	41.39	74.00	32.61	PK	Vertical
2	23503.357	51.58	39.20	4.70	44.69	74.00	29.31	PK	Vertical
3	24811.378	50.69	39.51	4.71	45.01	74.00	28.99	PK	Vertical
4	32793.798	47.84	41.52	5.27	46.71	74.00	27.29	PK	Vertical
5	36588.939	48.91	42.86	6.38	48.89	74.00	25.11	PK	Vertical
6	39527.286	48.05	46.32	6.63	50.27	74.00	23.73	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36588.939	42.62	42.86	6.38	42.60	54.00	11.40	AV	Vertical
2	39527.286	41.17	46.32	6.63	43.39	54.00	10.61	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-25

Tested By:

Li Xiongbín

Test Mode:

TX BLE1M 2480MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26060830-5E\FCC ABOVE 1G BLE\25

Memo:

Sample Number:S26060830-017 Power Setting:5

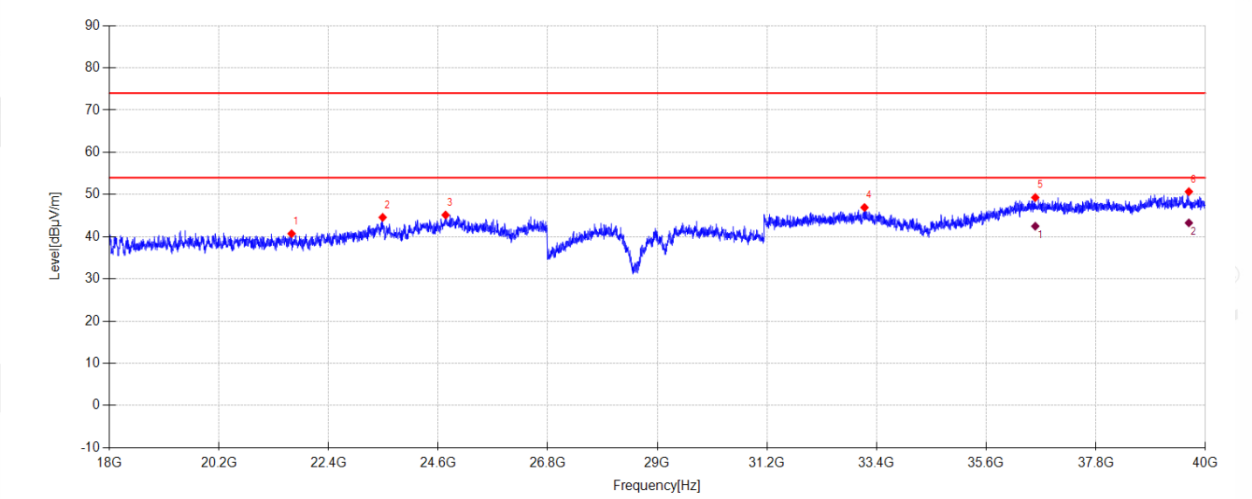

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	21658.161	49.25	38.47	4.00	40.72	74.00	33.28	PK	Horizontal
2	23487.242	51.49	39.20	4.70	44.58	74.00	29.42	PK	Horizontal
3	24749.603	50.90	39.47	4.69	45.14	74.00	28.86	PK	Horizontal
4	33159.077	48.09	41.66	5.41	46.93	74.00	27.07	PK	Horizontal
5	36586.253	49.31	42.86	6.38	49.29	74.00	24.71	PK	Horizontal
6	39669.637	48.65	46.44	6.52	50.67	74.00	23.33	PK	Horizontal

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36586.253	42.51	42.86	6.38	42.49	54.00	11.51	AV	Horizontal
2	39669.637	41.26	46.44	6.52	43.28	54.00	10.72	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-06-25Tested By:Li Xiongbin

Test Mode:TX BLE1M 2480MHz ModePower Supply:Battery

Condition:Temp:24.7°C;Humi:49.6%Test Site:4# Fully Anechoic Room

File Path:d:\ts\2026 report date\Q26060830-5E\FCC ABOVE 1G BLE\26

Memo:Sample Number:S26060830-017 Power Setting:5

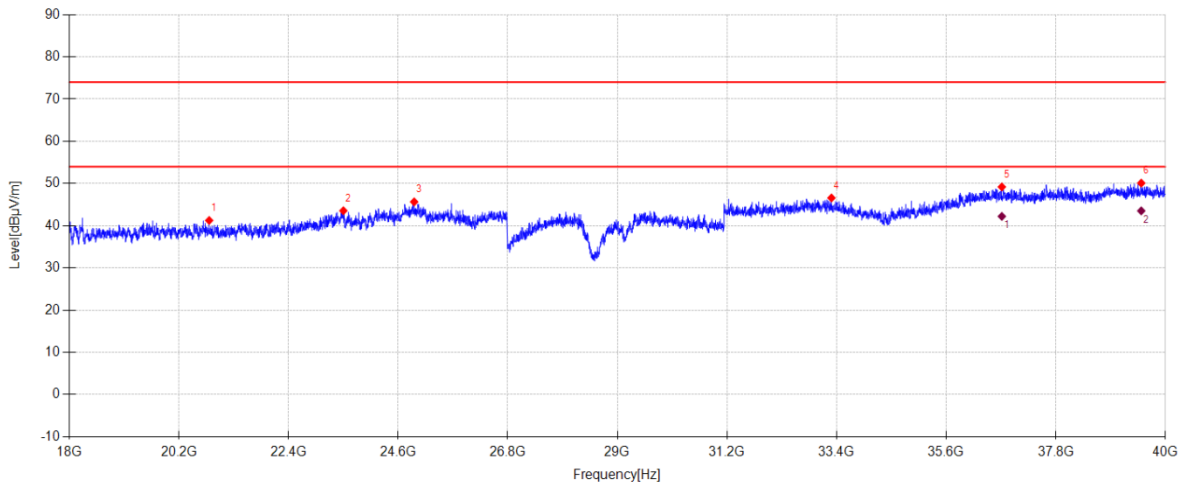

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	20806.739	49.54	38.34	3.74	41.25	74.00	32.75	PK	Vertical
2	23500.671	50.44	39.20	4.70	43.55	74.00	30.45	PK	Vertical
3	24921.499	51.23	39.56	4.73	45.66	74.00	28.34	PK	Vertical
4	33298.743	47.88	41.72	5.46	46.58	74.00	27.42	PK	Vertical
5	36717.861	49.33	42.87	6.27	49.19	74.00	24.81	PK	Vertical
6	39516.543	47.85	46.31	6.64	50.09	74.00	23.91	PK	Vertical

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36717.861	42.35	42.87	6.27	42.21	54.00	11.79	AV	Vertical
2	39516.543	41.28	46.31	6.64	43.52	54.00	10.48	AV	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-06-25 **Tested By:** Li Xiongbin
Test Mode: TX BLE2M 2404MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 report date\Q26060830-5E\FCC ABOVE 1G BLE\27
Memo: Sample Number:S26060830-017 Power Setting:5

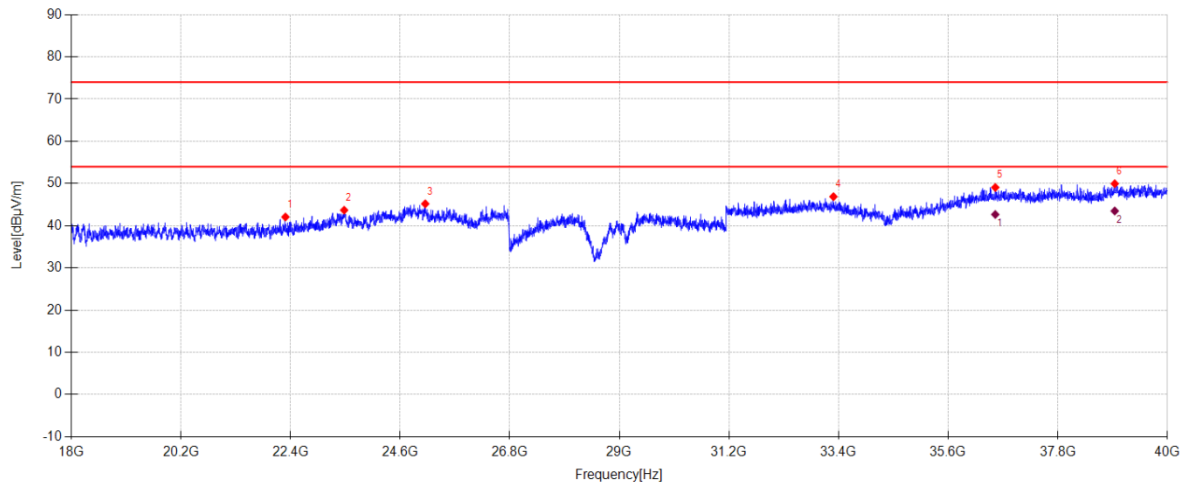**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	22297.400	50.46	38.74	4.17	42.07	74.00	31.93	PK	Horizontal
2	23476.499	50.61	39.20	4.69	43.68	74.00	30.32	PK	Horizontal
3	25104.139	50.71	39.57	4.77	45.19	74.00	28.81	PK	Horizontal
4	33298.743	48.18	41.72	5.46	46.88	74.00	27.12	PK	Horizontal
5	36545.965	49.06	42.85	6.41	49.07	74.00	24.93	PK	Horizontal
6	38944.451	47.56	45.79	6.50	49.96	74.00	24.04	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36545.965	42.65	42.85	6.41	42.66	54.00	11.34	AV	Horizontal
2	38944.451	41.09	45.79	6.50	43.49	54.00	10.51	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-06-25Tested By:Li Xiongbin

Test Mode:TX BLE2M 2404MHz ModePower Supply:Battery

Condition:Temp:24.7°C;Humi:49.6%Test Site:4# Fully Anechoic Room

File Path:d:\ts\2026 report date\Q26060830-5E\FCC ABOVE 1G BLE\28

Memo:Sample Number:S26060830-017 Power Setting:5

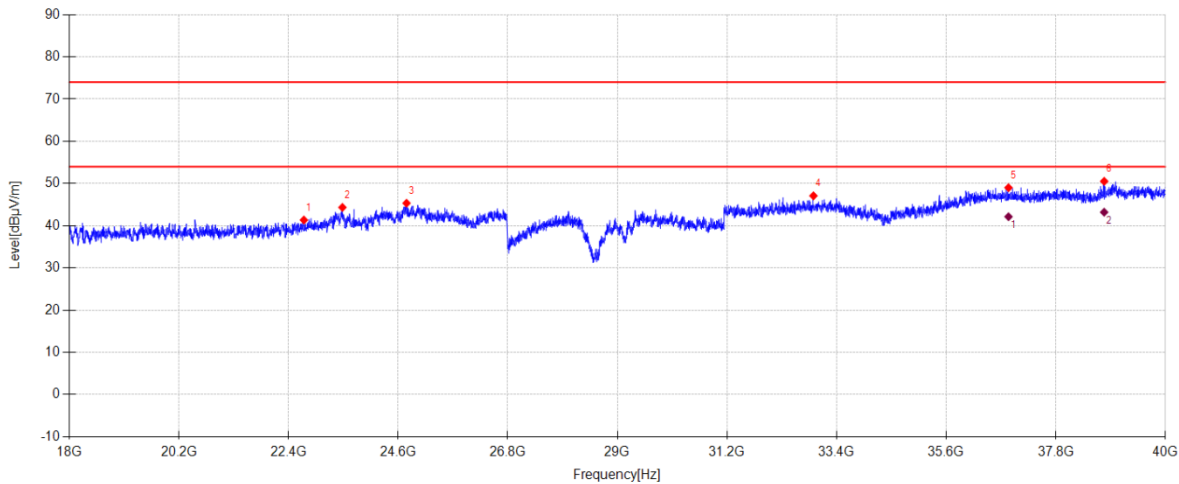

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	22708.338	49.37	39.07	4.29	41.35	74.00	32.65	PK	Vertical
2	23481.870	51.26	39.20	4.69	44.34	74.00	29.66	PK	Vertical
3	24768.404	51.07	39.48	4.70	45.34	74.00	28.66	PK	Vertical
4	32936.149	48.11	41.57	5.33	47.08	74.00	26.92	PK	Vertical
5	36852.155	49.27	42.89	6.16	49.01	74.00	24.99	PK	Vertical
6	38772.555	48.59	45.45	6.23	50.53	74.00	23.47	PK	Vertical

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36852.155	42.39	42.89	6.16	42.13	54.00	11.87	AV	Vertical
2	38772.555	41.26	45.45	6.23	43.20	54.00	10.80	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-25

Tested By:

Li Xiongbín

Test Mode:

TX BLE2M 2440MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26060830-5E\FCC ABOVE 1G BLE\29

Memo:

Sample Number:S26060830-017 Power Setting:5

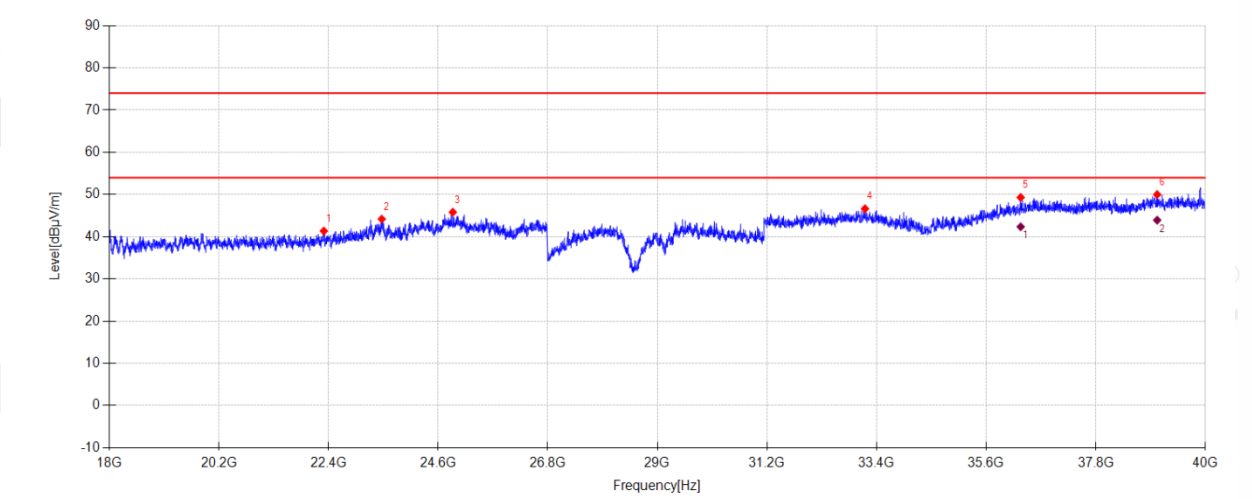

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	22305.457	49.74	38.74	4.17	41.35	74.00	32.65	PK	Horizontal
2	23468.441	51.11	39.21	4.69	44.18	74.00	29.82	PK	Horizontal
3	24894.640	51.40	39.55	4.73	45.81	74.00	28.19	PK	Horizontal
4	33167.135	47.78	41.67	5.42	46.63	74.00	27.37	PK	Horizontal
5	36293.493	49.53	42.83	6.15	49.31	74.00	24.69	PK	Horizontal
6	39033.085	47.46	45.93	6.59	49.99	74.00	24.01	PK	Horizontal

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36293.493	42.57	42.83	6.15	42.35	54.00	11.65	AV	Horizontal
2	39033.085	41.39	45.93	6.59	43.92	54.00	10.08	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-25

Tested By:

Li Xiongbín

Test Mode:

TX BLE2M 2440MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26060830-5E\FCC ABOVE 1G BLE\30

Memo:

Sample Number:S26060830-017 Power Setting:5

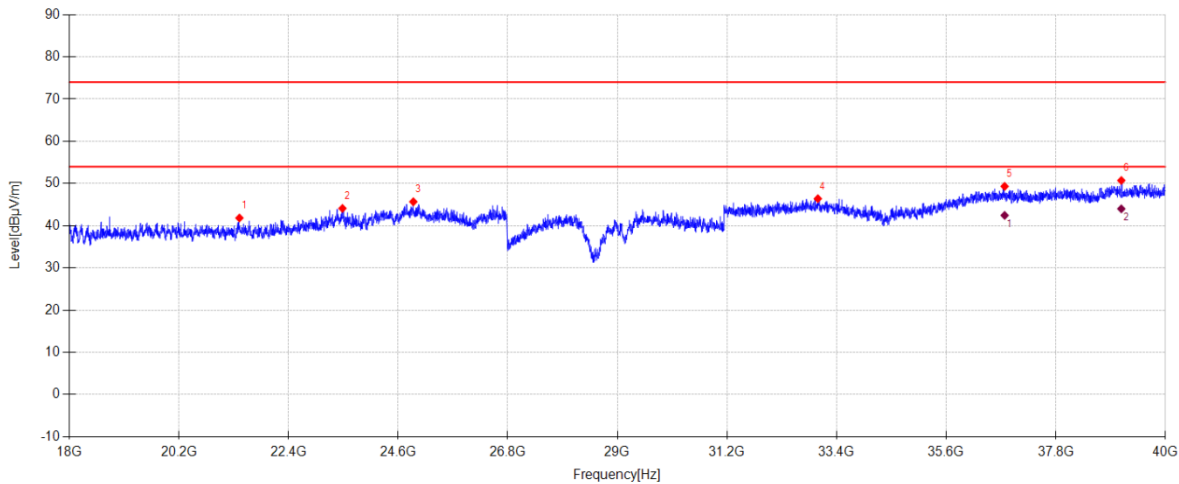

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	21413.747	50.36	38.44	3.86	41.83	74.00	32.17	PK	Vertical
2	23481.870	51.03	39.20	4.69	44.11	74.00	29.89	PK	Vertical
3	24905.384	51.27	39.55	4.73	45.68	74.00	28.32	PK	Vertical
4	33024.783	47.41	41.61	5.37	46.41	74.00	27.59	PK	Vertical
5	36774.264	49.51	42.88	6.23	49.33	74.00	24.67	PK	Vertical
6	39116.347	48.24	45.99	6.60	50.72	74.00	23.28	PK	Vertical


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36774.264	42.63	42.88	6.23	42.45	54.00	11.55	AV	Vertical
2	39116.347	41.52	45.99	6.60	44.00	54.00	10.00	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-06-25 **Tested By:** Li Xiongbin
Test Mode: TX BLE2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 report date\Q26060830-5E\FCC ABOVE 1G BLE\31
Memo: Sample Number:S26060830-017 Power Setting:5

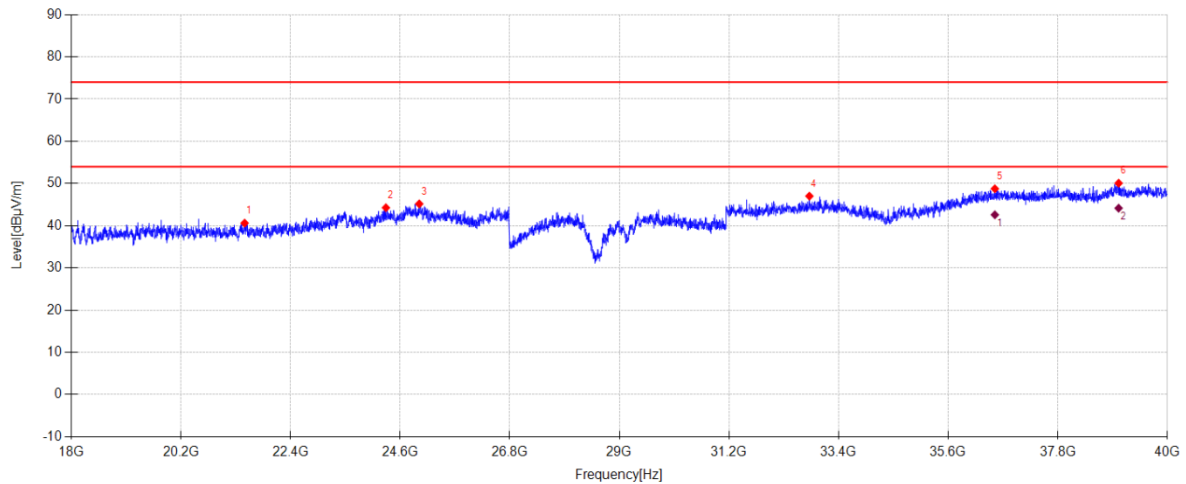**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	21478.208	49.15	38.45	3.89	40.62	74.00	33.38	PK	Horizontal
2	24314.492	50.48	39.26	4.58	44.27	74.00	29.73	PK	Horizontal
3	24983.274	50.69	39.59	4.75	45.18	74.00	28.82	PK	Horizontal
4	32815.285	48.12	41.53	5.28	47.01	74.00	26.99	PK	Horizontal
5	36537.907	48.74	42.85	6.42	48.76	74.00	25.24	PK	Horizontal
6	39022.342	47.53	45.92	6.59	50.07	74.00	23.93	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36537.907	42.57	42.85	6.42	42.59	54.00	11.41	AV	Horizontal
2	39022.342	41.62	45.92	6.59	44.16	54.00	9.84	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-25

Tested By:

Li Xiongbín

Test Mode:

TX BLE2M 2478MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26060830-5E\FCC ABOVE 1G BLE\32

Memo:

Sample Number:S26060830-017 Power Setting:5

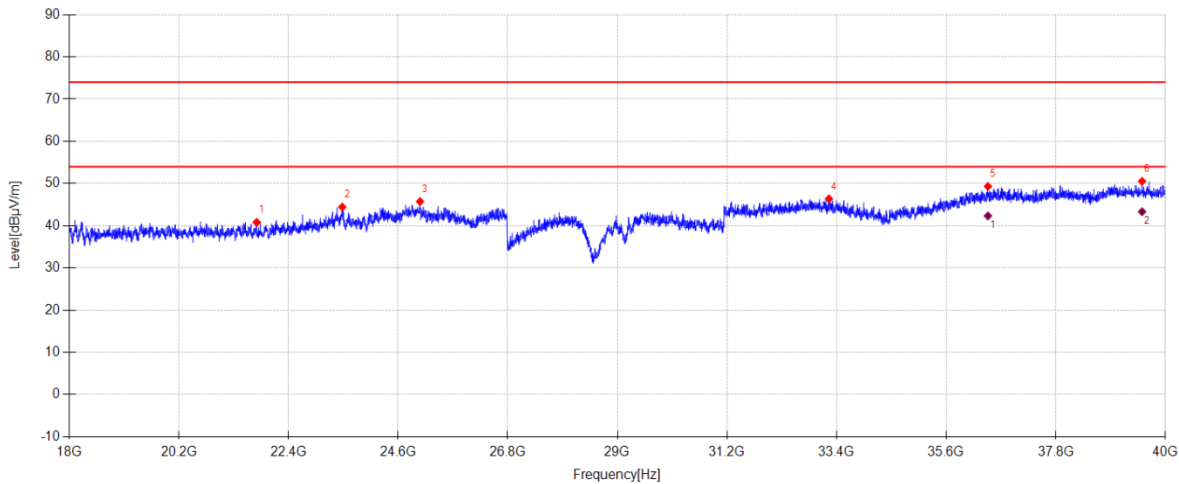

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	21760.225	49.35	38.48	4.06	40.82	74.00	33.18	PK	Vertical
2	23479.184	51.36	39.20	4.69	44.43	74.00	29.57	PK	Vertical
3	25039.678	51.23	39.59	4.76	45.73	74.00	28.27	PK	Vertical
4	33247.711	47.62	41.70	5.44	46.37	74.00	27.63	PK	Vertical
5	36438.530	49.35	42.84	6.36	49.32	74.00	24.68	PK	Vertical
6	39532.658	48.30	46.33	6.63	50.52	74.00	23.48	PK	Vertical

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36438.530	42.35	42.84	6.36	42.32	54.00	11.68	AV	Vertical
2	39532.658	41.09	46.33	6.63	43.31	54.00	10.69	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

13. Band Edge Compliance

13.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Band Reject Filter Group	Tonscend	JS0806-F	DDT-ZC05733	/
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC05922	2027/01/06
Broadband Preamplifier	HPX	BP-01G-18G	DDT-ZC05923	2027/01/06
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2027/03/05
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
Signal & Spectrum analyzer	R&S	FSV40-N	DDT-ZC04979	2027/07/10
SPECTRUM ANALYZER	R&S	FSU26	DDT-ZC00236	2027/06/25
RF Cable	Tonscend	7+1+1+0.5+0.5m	DDT-ZC05978	2027/01/29
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2027/02/27
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-1M	DDT-ZC03802	2026/10/10
Radiation disturbance fully automated test software	Tonscend	JS-RE&RSE (V5.0.0)	DDT-ZC06466	/

13.2. Block diagram of test setup

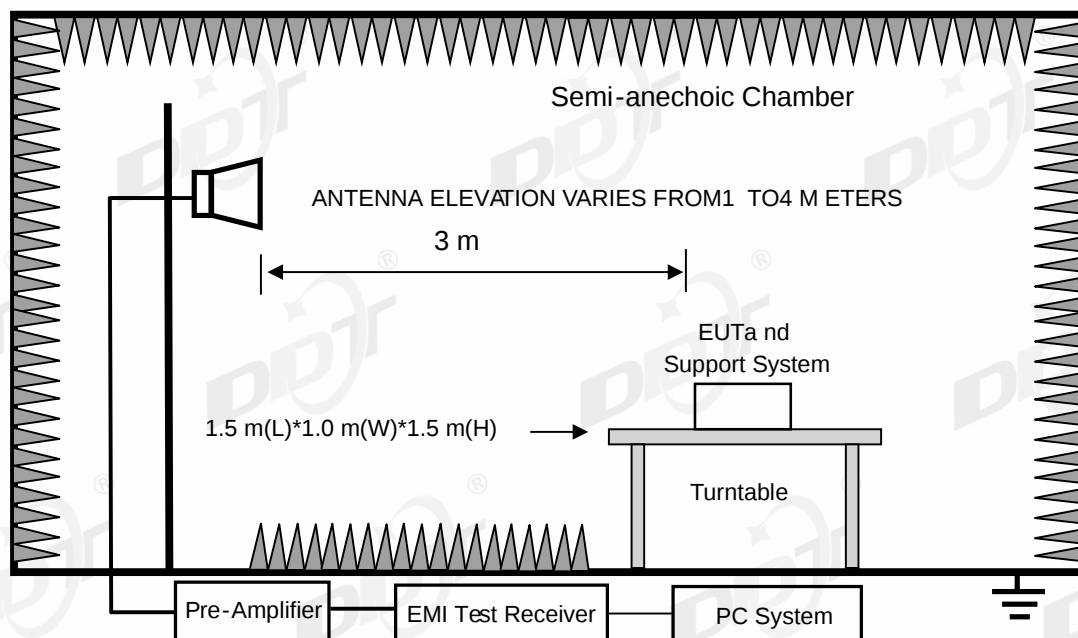

13.3. Limits

All restriction band should comply with 15.209 and RSS-Gen section 8.9 limits, other emission should be at least 20 dB below the fundamental.

13.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

13.5. Test procedure

Same with Radiated Emission except change investigated frequency range.

Remark: All restriction band have been tested, and only the worst case is shown in report.

13.6. Test result

PASS. (See below detailed test result)

13.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-25

Tested By:

Li Xiongbin

Test Mode:

TX BLE1M 2402MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26060830-5E\FCC ABOVE 1G BLE\1

Memo:

Sample Number:S26060830-017 Power Setting:5

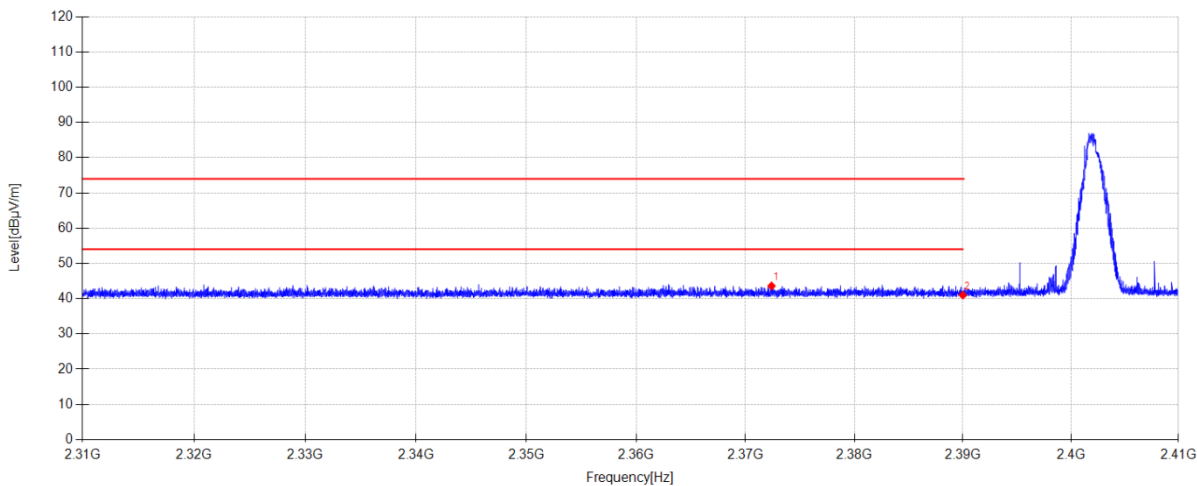

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2372.390	44.14	28.14	-28.67	43.61	74.00	30.39	PK	Horizontal
2	2390.000	41.46	28.18	-28.63	41.01	74.00	32.99	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-25

Tested By:

Li Xiongbín

Test Mode:

TX BLE1M 2402MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26060830-5E\FCC ABOVE 1G BLE\2

Memo:

Sample Number:S26060830-017 Power Setting:5

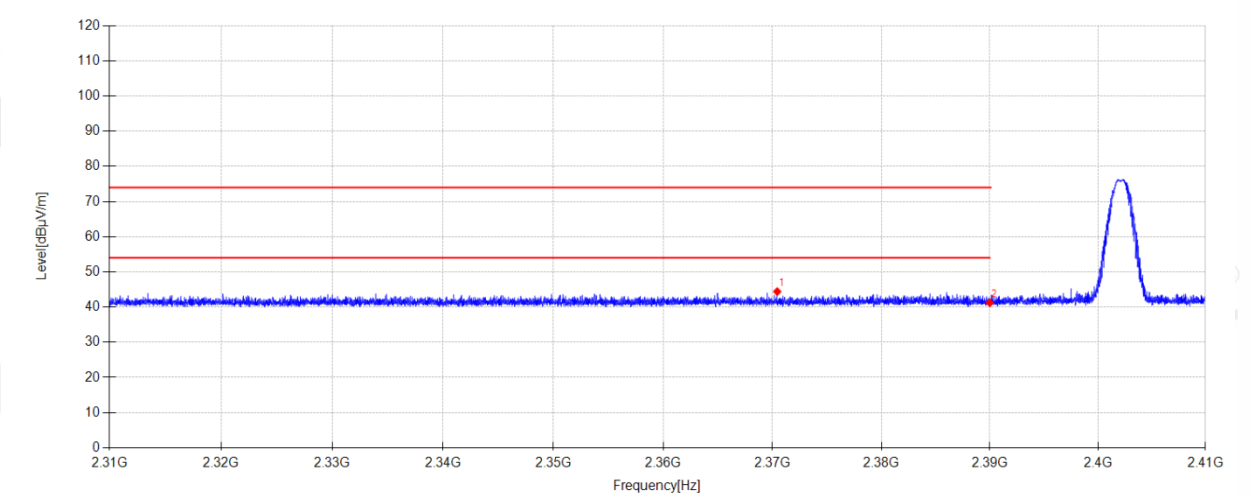

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2370.430	44.95	28.14	-28.68	44.41	74.00	29.59	PK	Vertical
2	2390.000	41.66	28.18	-28.63	41.21	74.00	32.79	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-25

Tested By:

Li Xiongbín

Test Mode:

TX BLE1M 2480MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26060830-5E\FCC ABOVE 1G BLE\3

Memo:

Sample Number:S26060830-017 Power Setting:5

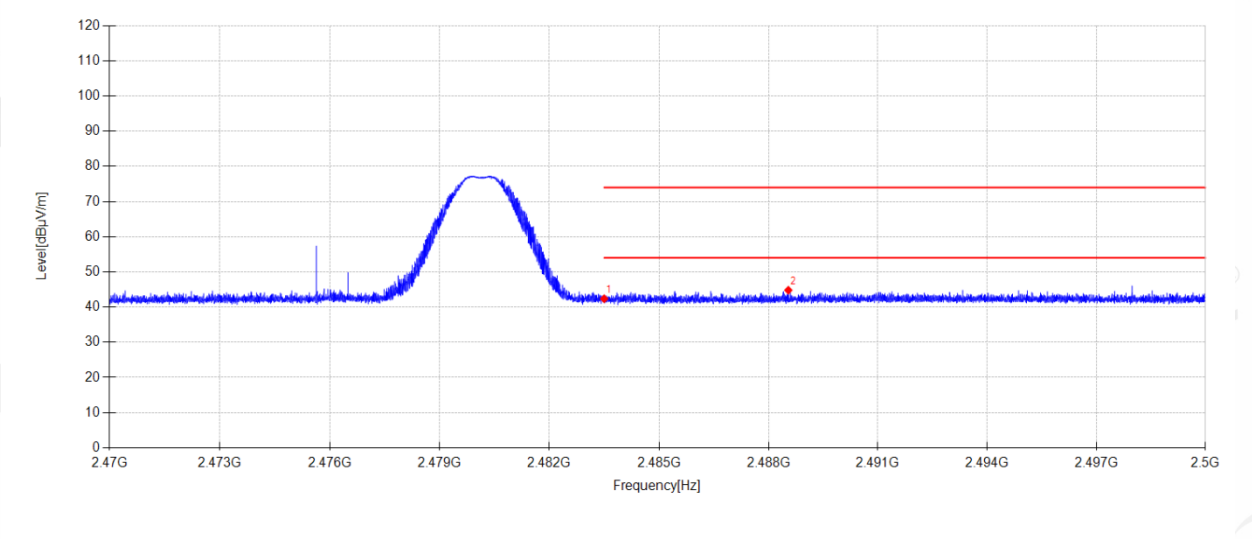

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	42.49	28.60	-28.72	42.37	74.00	31.63	PK	Horizontal
2	2488.543	44.90	28.63	-28.73	44.80	74.00	29.20	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-25

Tested By:

Li Xiongbin

Test Mode:

TX BLE1M 2480MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26060830-5E\FCC ABOVE 1G BLE\4

Memo:

Sample Number:S26060830-017 Power Setting:5

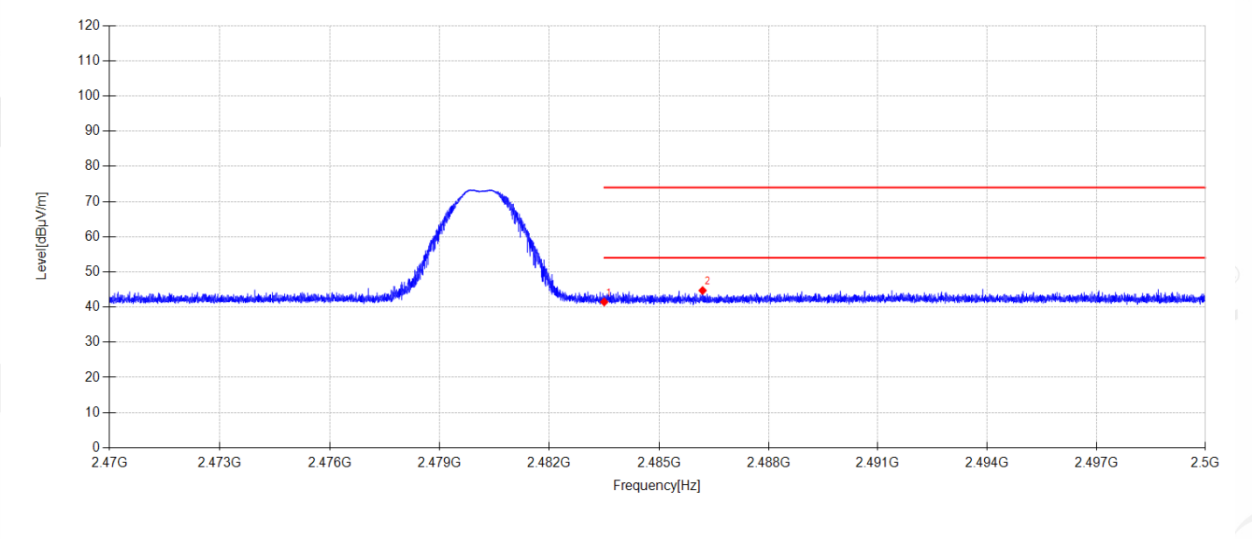

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	41.59	28.60	-28.72	41.47	74.00	32.53	PK	Vertical
2	2486.194	44.81	28.62	-28.72	44.71	74.00	29.29	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-25

Tested By:

Li Xiongbín

Test Mode:

TX BLE2M 2478MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26060830-5E\FCC ABOVE 1G BLE\5

Memo:

Sample Number:S26060830-017 Power Setting:5

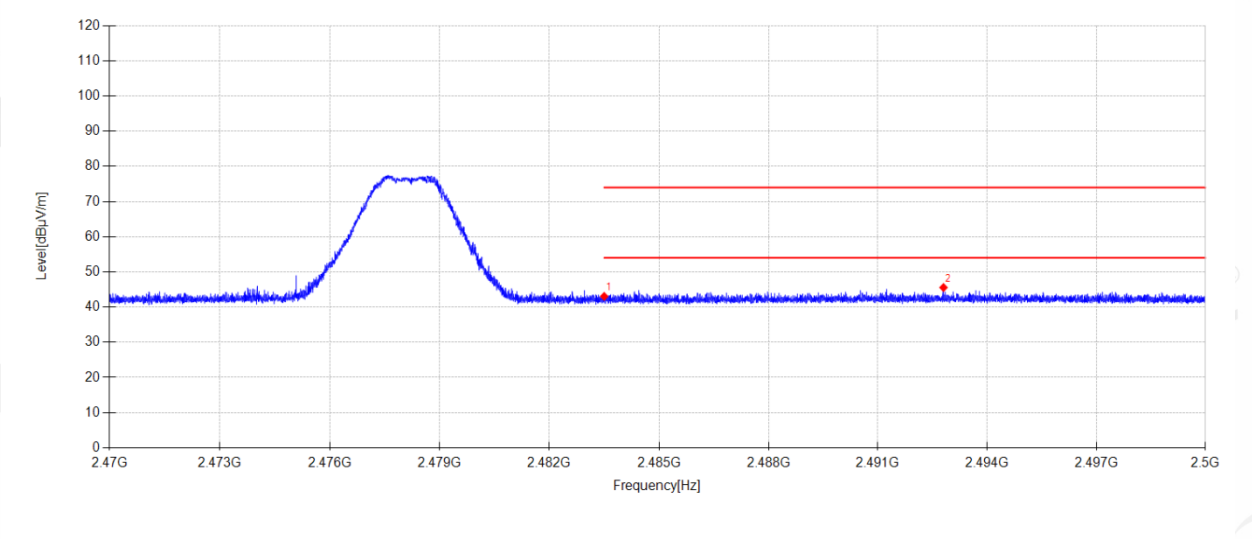

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	43.16	28.60	-28.72	43.04	74.00	30.96	PK	Horizontal
2	2492.800	45.62	28.66	-28.73	45.55	74.00	28.45	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-25

Tested By:

Li Xiongbín

Test Mode:

TX BLE2M 2478MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26060830-5E\FCC ABOVE 1G BLE\6

Memo:

Sample Number:S26060830-017 Power Setting:5

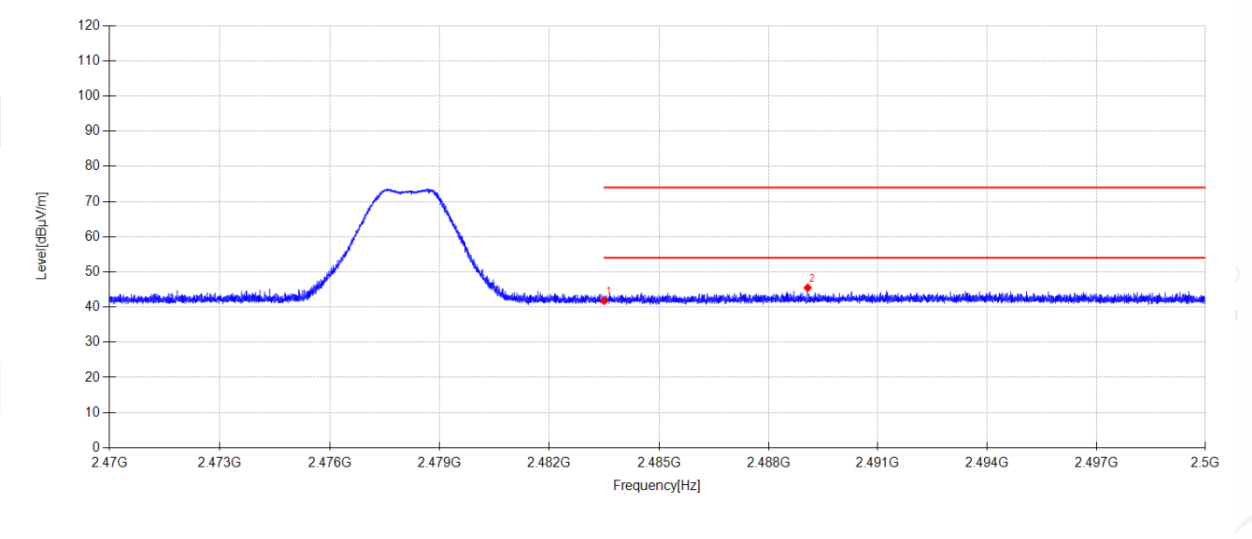

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	41.94	28.60	-28.72	41.82	74.00	32.18	PK	Vertical
2	2489.074	45.58	28.63	-28.73	45.48	74.00	28.52	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-25

Tested By:

Li Xiongbín

Test Mode:

TX BLE2M 2404MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26060830-5E\FCC ABOVE 1G BLE\7

Memo:

Sample Number:S26060830-017 Power Setting:5

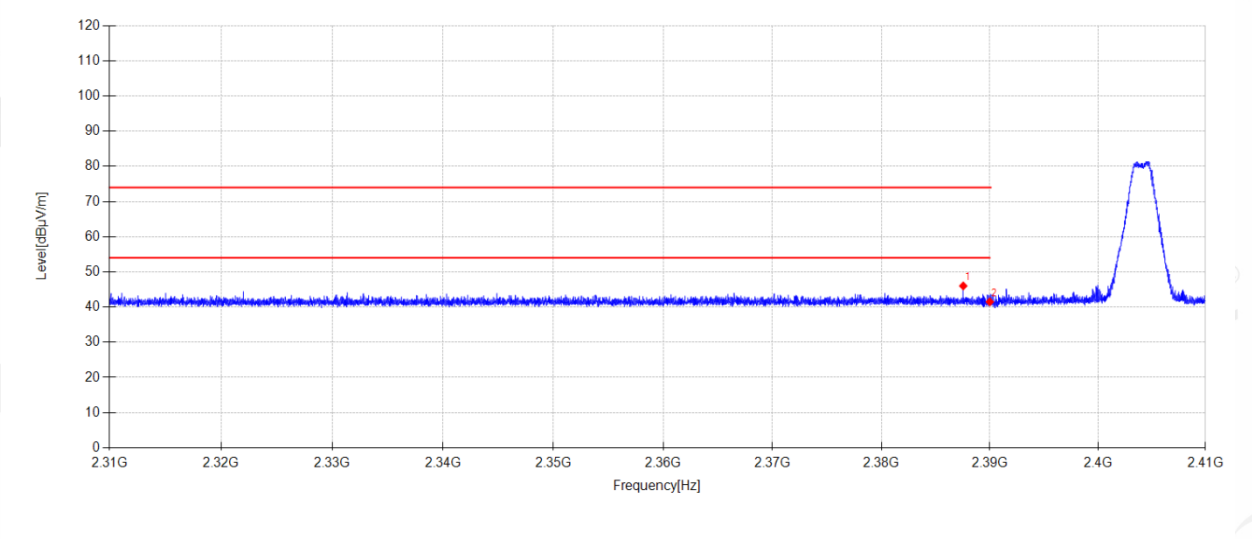

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.550	46.47	28.18	-28.64	46.01	74.00	27.99	PK	Horizontal
2	2390.000	41.94	28.18	-28.63	41.49	74.00	32.51	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-25

Tested By:

Li Xiongbín

Test Mode:

TX BLE2M 2404MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26060830-5E\FCC ABOVE 1G BLE\8

Memo:

Sample Number:S26060830-017 Power Setting:5

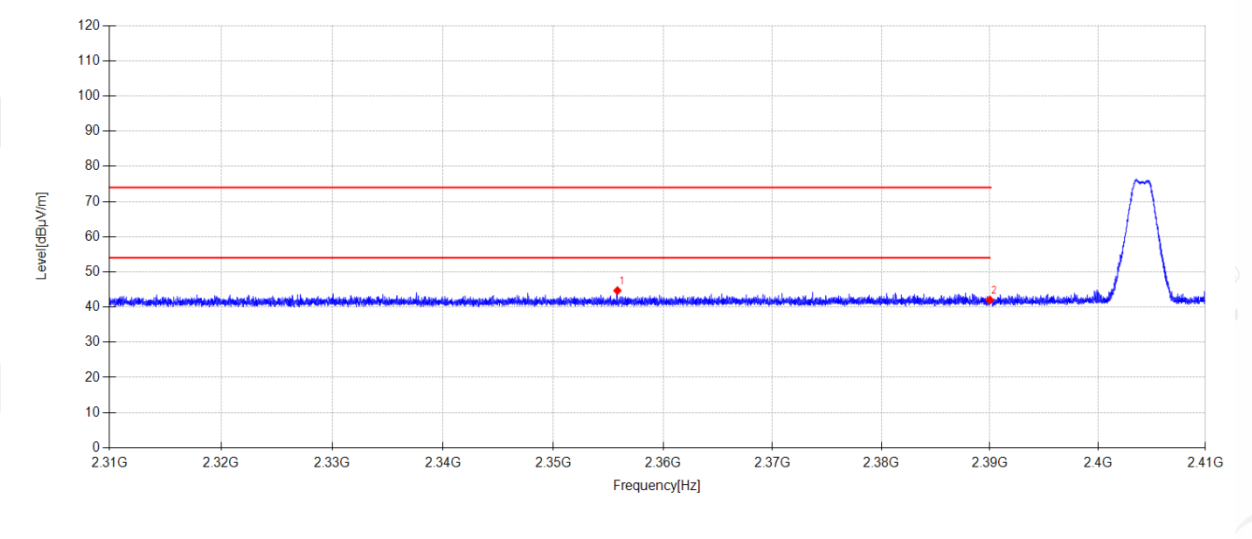

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2355.830	45.28	28.11	-28.71	44.68	74.00	29.32	PK	Vertical
2	2390.000	42.49	28.18	-28.63	42.04	74.00	31.96	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

14. Power Line Conducted Emissions

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
/	/	/	/	/

14.2. Block diagram of test setup

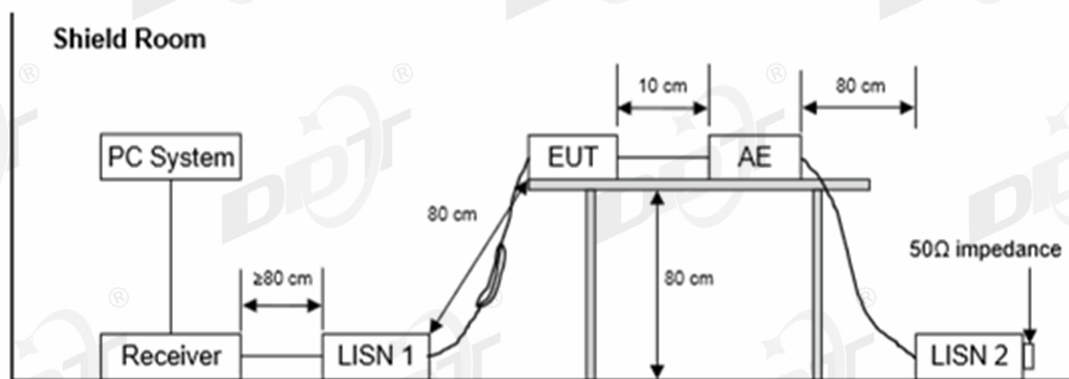

14.3. Limits

Frequency	Quasi-Peak Level	Average Level
	dB(μV)	dB(μV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

14.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

14.6. Test result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: "----" means Peak detection; "----" means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

14.7. Test data

Not Applicable

Conducted limits are not required for devices which only employ battery power for operation.

16. Photos of the EUT

Please refer to DDT-Q26060830-6E appendix I

-----End Report-----