



RF EXPOSURE REPORT

Applicant	:	Nimble For Good, PBC.
Address of Applicant	:	1008 Brioso Drive Costa Mesa, CA 92627
Manufacturer	:	Nimble For Good, PBC.
Address of Manufacturer	:	1008 Brioso Drive Costa Mesa, CA 92627
Equipment under Test	:	Podium 3in1 wireless charger
Model No.	:	NB-WP-3N1Q2
FCC ID	:	2AZIO-PODIUM3N1V2
Test Standard(s)	:	FCC CFR 47 part1, 1.1307(b), 1.1310; KDB680106 D01v04
Report No.	:	DDT-RE25071419-1E04
Issue Date	:	2025/11/14
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

1.	General Test Information.....	5
1.1.	Description of EUT	5
1.2.	Accessories of EUT	5
1.3.	Test laboratory	5
2.	RF Exposure evaluation for FCC	6
2.1.	Test equipment.....	6
2.2.	Block diagram of test setup	6
2.3.	Limits	6
2.4.	Assistant equipment used for test	7
2.5.	Test procedure	7
2.6.	Test result.....	8
3.	Test Setup Photograph	10

Test Report Declare

Applicant	:	Nimble For Good, PBC.
Address of Applicant	:	1008 Brioso Drive Costa Mesa, CA 92627
Equipment under Test	:	Podium 3in1 wireless charger
Model No.	:	NB-WP-3N1Q2
Manufacturer	:	Nimble For Good, PBC.
Address of Manufacturer	:	1008 Brioso Drive Costa Mesa, CA 92627

Test Standard Used:

FCC CFR 47 part1, 1.1307(b), 1.1310; KDB680106 D01v04

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE25071419-1E04		
Date of Receipt:	2025/09/18	Date of Test:	2025/09/18~2025/10/25

Created: Johnson Huang	Reviewed: Tiger Mo	Approved: Damon Hu
		
2025/11/14	2025/11/14	2025/11/14

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
V0	Initial issue	2025/11/14	Damon Hu

1. General Test Information

1.1. Description of EUT

EUT Name	:	Podium 3in1 wireless charger
Model Number	:	NB-WP-3N1Q2
Difference of model number	:	/
EUT Function Description	:	Please reference user manual of this device
Power Supply	:	5V=3A, 9V=3A, 12V=3A, 15V=3A from USB cable
Hardware Version	:	V1.0
Software Version	:	V1.0

Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual.

1.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
/	/	/	/

1.3. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048


VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2. RF Exposure evaluation for FCC

2.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Electric and Magnetic field probe-Analyze	Narda	EHP 200A	180ZX40239	2026/01/12

2.2. Block diagram of test setup

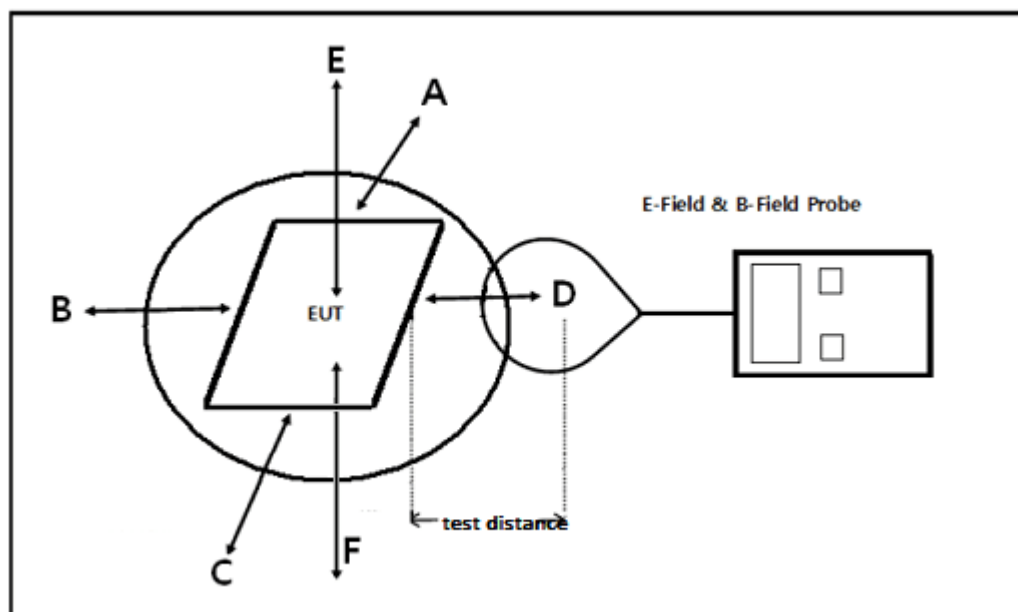

2.3. Limits

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

According KDB 680106 D01: RF Exposure Wireless Charging Apps v03r01.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz * = Plane-wave equivalent power density

2.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

2.5. Test procedure

- The RF exposure test was performed in shielded chamber.
- The measurement probe was placed at test distance 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit.
- The measurement probe used to search of highest strength.
- The highest emission level was recorded and compared with limit as soon as measurement of each points(A, B, C, D, E) were completed.
- The EUT were measured according to the dictates of KDB 680106 D01 RF Exposure Wireless Charging Appv04.

2.6. Test result

Test mode for Podium 3in1 wireless charger:

For mode 1: Tx mode 111-147kHz ANT1 (5W load, 7.5W load, 10W load)

For mode 2: Tx mode 111-147kHz, 360kHz ANT2 (5W load, 7.5W load, 10W load, 25W load)

For mode 3: Tx mode 326kHz, 1.778MHz ANT3 (Watch) All test modes were pre-tested, but we only recorded the worst case in this report. The ANT2 worst frequency of is 120.8 kHz, and the ANT3 worst frequency of is 326 kHz.

ANT1:

E-Filed Strength at 20 cm from the edges surrounding the EUT (V/m)

Test Position	Probe Measure Result(V/m)			Limits Test (V/m)
	5W	7.5W	10W	
A	0.3160	0.3164	0.3078	614
B	0.6437	0.9808	1.2521	614
C	0.7903	1.2984	1.6554	614
D	0.7820	0.9770	1.1213	614
E	0.6638	0.9739	1.4872	614

H-Filed Strength at 20 cm from the edges surrounding the EUT and 20 cm Above the top surface (A/m)

Test Position	Probe Measure Result(A/m)			Limits Test (A/m)
	5W	7.5W	10W	
A	0.0940	0.1326	0.1408	1.63
B	0.0581	0.0562	0.0807	1.63
C	0.0604	0.0647	0.1110	1.63
D	0.0911	0.1017	0.1032	1.63
E	0.1291	0.2444	0.3663	1.63

ANT2:

Test Position	Probe Measure Result(V/m)			Limits Test (V/m)
	5W	10W	25W	
A	0.4386	0.5997	0.3459	614
B	0.5958	0.8558	0.7903	614
C	0.4846	0.7732	0.3160	614
D	0.4926	0.7405	0.3270	614
E	0.5097	0.6574	1.1512	614

Test Position	Probe Measure Result(A/m)			Limits Test (A/m)
	5W	10W	25W	
A	0.0578	0.0543	0.0543	1.63
B	0.0578	0.0702	0.0616	1.63
C	0.0577	0.0859	0.0543	1.63
D	0.0597	0.0615	0.0543	1.63
E	0.0575	0.1140	0.0560	1.63

ANT3:

Test Position	Probe Measure Result(V/m)			Limits Test (V/m)
	Full Load	intermediate charge	Zero charge	
A	0.3160	0.3300	0.3326	614
B	0.3078	0.3326	0.4403	614
C	0.3086	0.3160	0.3160	614
D	0.3078	0.3086	0.3168	614
E	0.3078	0.3078	0.3255	614

Test Position	Probe Measure Result(A/m)			Limits Test (A/m)
	Full Load	intermediate charge	Zero charge	
A	0.0578	0.0560	0.0560	1.63
B	0.0578	0.0543	0.0560	1.63
C	0.0560	0.0562	0.0563	1.63
D	0.0548	0.0548	0.0563	1.63
E	0.0569	0.0580	0.0543	1.63

For the worst case ANT1+ ANT2+ ANT3:

Test Position	Probe Measure Result(V/m)				Limits Test (V/m)
	ANT1	ANT2	ANT3	Simultaneous	
A	0.3078	0.3459	0.3326	0.9863	614
B	1.2521	0.7903	0.4403	2.4827	614
C	1.6554	0.3160	0.3160	2.2874	614
D	1.1213	0.3270	0.3168	1.7651	614
E	1.4872	1.1512	0.3255	2.9639	614

Test Position	Probe Measure Result(A/m)				Limits Test (A/m)
	ANT1	ANT2	ANT3	Simultaneous	
A	0.1408	0.0543	0.0560	0.2511	1.63
B	0.0807	0.0702	0.0543	0.2052	1.63
C	0.1110	0.0859	0.0562	0.2531	1.63
D	0.1032	0.0615	0.0548	0.2195	1.63
E	0.3663	0.1140	0.0580	0.5383	1.63