FCC TEST REPORT

FCC ID:2AZRG-2021S7MAX

Product	:	Robotic Vaccum Cleaner
Model Name	:	S7 MAX
Brand	:	SMARTAI
Report No.	:	PTC21061102602E-FC01

Prepared for

ShenZhen Dipusi Electronic Technology Co.LTD

R3-A, No.018, Gaoxin South 7th Road, Yuehai Street, Nanshan, Shenzhen

Prepared by

Precise Testing & Certification Co., Ltd

Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

1 TEST RESULT CERTIFICATION

Applicant's name	:	ShenZhen Dipusi Electronic Technology Co.LTD
Address	:	R3-A, No.018, Gaoxin South 7th Road, Yuehai Street, Nanshan, Shenzhen
Manufacture's name	:	ShenZhen Dipusi Electronic Technology Co.LTD
Address	:	R3-A, No.018, Gaoxin South 7th Road, Yuehai Street, Nanshan, Shenzhen
Product name	:	Robotic Vaccum Cleaner
Model name	:	S7 MAX
Standards	:	FCC CFR47 Part 15 Section 15.247
Test procedure	:	ANSI C63.10:2013
Test Date	:	Jul. 03, 2021 to Aug. 18, 2021
Date of Issue	:	Aug. 18, 2021
Test Result	:	Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.
This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

Leo Yang / Engineer

Technical Manager:

Chris Du / Manager

Contents

Page

1 TEST RESULT CERTIFICATION **2**

2 TEST SUMMARY **5**

3 GENERAL INFORMATION **6**

3.1 GENERAL DESCRIPTION OF E.U.T. 6

3.2 CHANNEL LIST 7

3.3 TEST SITE 10

4 EQUIPMENT DURING TEST **11**

4.1 EQUIPMENTS LIST 11

4.2 MEASUREMENT UNCERTAINTY 13

4.3 DESCRIPTION OF SUPPORT UNITS 14

5 CONDUCTED EMISSION **15**

5.1 E.U.T. OPERATION 15

5.2 EUT SETUP 15

5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 16

5.4 MEASUREMENT PROCEDURE 16

5.5 CONDUCTED EMISSION LIMIT 16

5.6 MEASUREMENT DESCRIPTION 16

5.7 CONDUCTED EMISSION TEST RESULT 16

6 RADIATED SPURIOUS EMISSIONS **19**

6.1 EUT OPERATION 19

6.2 TEST SETUP 20

6.3 SPECTRUM ANALYZER SETUP 21

6.4 TEST PROCEDURE 22

6.5 SUMMARY OF TEST RESULTS 23

7 CONDUCTED SPURIOUS EMISSION **30**

7.1 TEST PROCEDURE 30

7.2 TEST RESULT 30

8 BAND EDGE MEASUREMENT **32**

8.1 TEST PROCEDURE 32

8.2 TEST RESULT 33

9 6DB BANDWIDTH MEASUREMENT.....36

9.1 TEST PROCEDURE.....36

9.2 TEST RESULT.....36

10 MAXIMUM PEAK OUTPUT POWER.....42

10.1 TEST PROCEDURE.....42

10.2 TEST RESULT.....42

11 POWER SPECTRAL DENSITY.....43

11.1 TEST PROCEDURE.....43

11.2 TEST RESULT.....43

12 ANTENNA APPLICATION.....49

12.1 ANTENNA REQUIREMENT.....49

12.2 RESULT.....49

13 TEST SETUP.....50

14 EUT PHOTOS.....52

2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious Emission	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3)	PASS
Power Spectral Density	15.247(e)	PASS
Antenna Requirement	15.203	PASS
Remark: N/A: Not Applicable		

3 General Information

3.1 General Description of E.U.T.

Product Name	:	Robotic Vaccum Cleaner
Model Name	:	S7 MAX
Additional model		S1,S3,S5,S9
Specification	:	802.11b/g/n HT20
Operation Frequency	:	2412-2462MHz for 802.11b/g;/ n(HT20)
Number of Channel	:	11 channels for 802.11b/g; n(HT20)
Type of Modulation	:	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Antenna installation	:	PCB antenna
Antenna Gain	:	3 dBi
Power supply	:	Adapter model:YJS024W-1901000U Input：AC100-240V 50/60HZ 800mA, DC 19V 1A Adapter model:DBS024A-1901000U Input：AC100-240V 50/60HZ 0.8A, DC 19V 1A Adapter model:YJS015D-1900600U Input：AC120V 60HZ 500mA, DC 19V 600mA Adapter model:GSCU0600S019V12E Input：AC100-240V 50/60HZ 0.5A, DC 19V 0.6A Adapter model:DBS012A-1900600U Input：AC100-240V 50/60HZ 0.35A, DC 19V 0.6A Rated capacity：14.4V 5000mAh Rated capacity：14.4V 2500mAh KA2401A-1901000DE Input: 100-240V ~ 50/60Hz 0.65A Max Output:19.0V DC 1.0A 19.0W
Hardware Version	:	N/A
Software Version	:	N/A

3.2 Channel List

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0;) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 b/g/n (HT20)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Test Frequency and Channel for 802.11 b/g/n (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
/	/	/	/	/	/

The maximum duty cycle as following table:

Test Mode	Duty Cycle(%)
802.11b	100%
802.11g	100%
802.11n(HT20)	100%

Test Plots:

802.11b

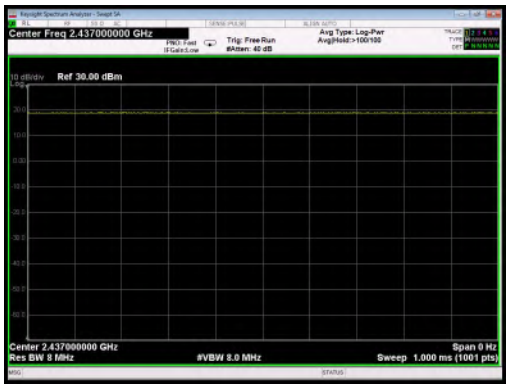

802.11g

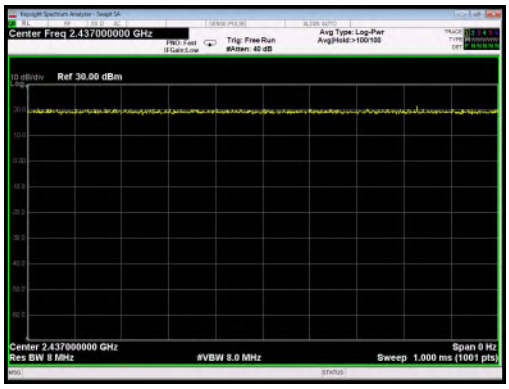

802.11n(HT20)

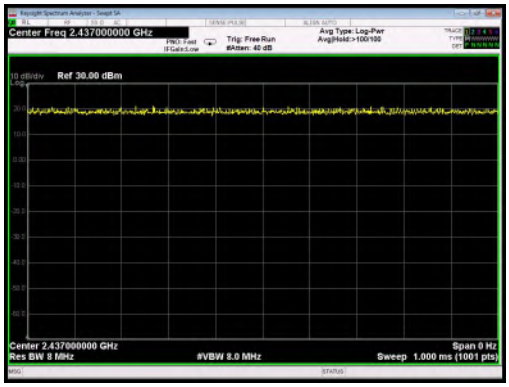
Center Freq 2.437000000 GHz
Trig: Free Run
#Atten: 40 dB
Avg Type: Log-Pwr
Avg|Hold:>100/100
10 dB/div
Ref 30.00 dBm
Center 2.437000000 GHz
Res BW 8 MHz
#VBW 8.0 MHz
Span 0 Hz
Sweep 1.000 ms (1001 pts)

3.3 Test Site

Precise Testing & Certification Co., Ltd

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A-1

4 Equipment During Test

4.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
MXG Signal Analyzer	Agilent	N9020A	SER MY5111038	10Hz-30GHz	Aug. 21, 2021
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Aug. 21, 2021
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Aug. 21, 2021
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Aug. 21, 2021

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 21, 2021
Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	Aug. 21, 2021
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Aug. 21, 2021
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Aug. 21, 2021
Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	Aug. 21, 2021
Spectrum Analyzer	Agilent	E4407B	MY45109572	9KHz-40GHz	Aug. 21, 2021
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Aug. 21, 2021
Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	Aug. 21, 2021
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-181	14GHz-40GHz	Aug. 21, 2021
Amplifier	SCHWARZBECK	BBV 9721	9721-205	18GHz-40GHz	Aug. 21, 2021
Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Aug. 21, 2021
RF Cable	R&S	R204	R21X	1GHz-40GHz	Aug. 21, 2021

Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 19, 2021
Artificial Mains Network	Rohde&Schwarz	ENV216	102453	9KHz-300MHz	Aug. 19, 2021
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-300MHz	Aug. 19, 2021

4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10^{-6}
Bandwidth	± 1.5 x 10^{-6}
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB

4.3 Description of Support Units

Equipment	Model No.	Series No.
N/A	Adapter model:YJS024W-1901000U Input ： AC100-240V 50/60HZ 800mA, DC 19V 1A Adapter model:DBS024A-1901000U Input：AC100-240V 50/60HZ 0.8A, DC 19V 1A Battery：14.4V 5200mAh Adapter model:YJS015D-1900600U Input： AC120V 60HZ 500mA, DC 19V 600mA Adapter model:GSCU0600S019V12E Input：AC100-240V 50/60HZ 0.5A, DC 19V 0.6A Adapter model:DBS012A-1900600U Input：AC100-240V 50/60HZ 0.35A, DC 19V 0.6A KA2401A-1901000DE Input: 100-240V ~ 50/60Hz 0.65A Max Output:19.0V DC 1.0A 19.0W	N/A

5 Conducted Emission

Test Requirement:	:	FCC CFR 47 Part 15 Section 15.207
Test Method	:	ANSI C63.10: 2013
Test Result	:	PASS
Frequency Range	:	150kHz to 30MHz
Class/Severity	:	Class B

5.1 E.U.T. Operation

Operating Environment :

Temperature	:	23.9 °C
Humidity	:	51.4 % RH
Atmospheric Pressure	:	101.21kPa

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

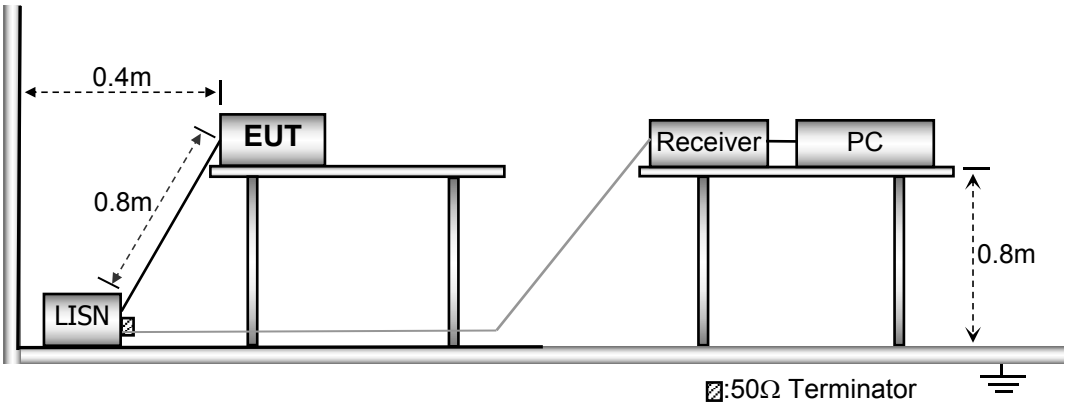

5.3 Test SET-UP (Block Diagram of Configuration)

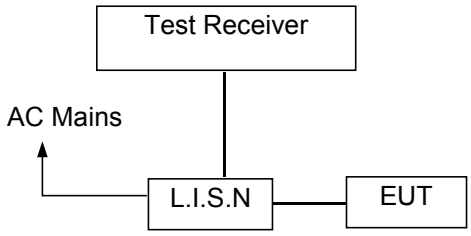

5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.1m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:
1. The lower limit shall apply at the transition frequencies
2.The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.7 Conducted Emission Test Result

Pass.

The six adapters and all modulation modes of 120V240V have been tested. The data of the worst mode YJS024W-1901000U/120V (TX 802.11b low channel) is recorded on the following page, and other modulation methods have not exceeded the limit.

Please refer to the following pages.

Line- AC 120V/60Hz

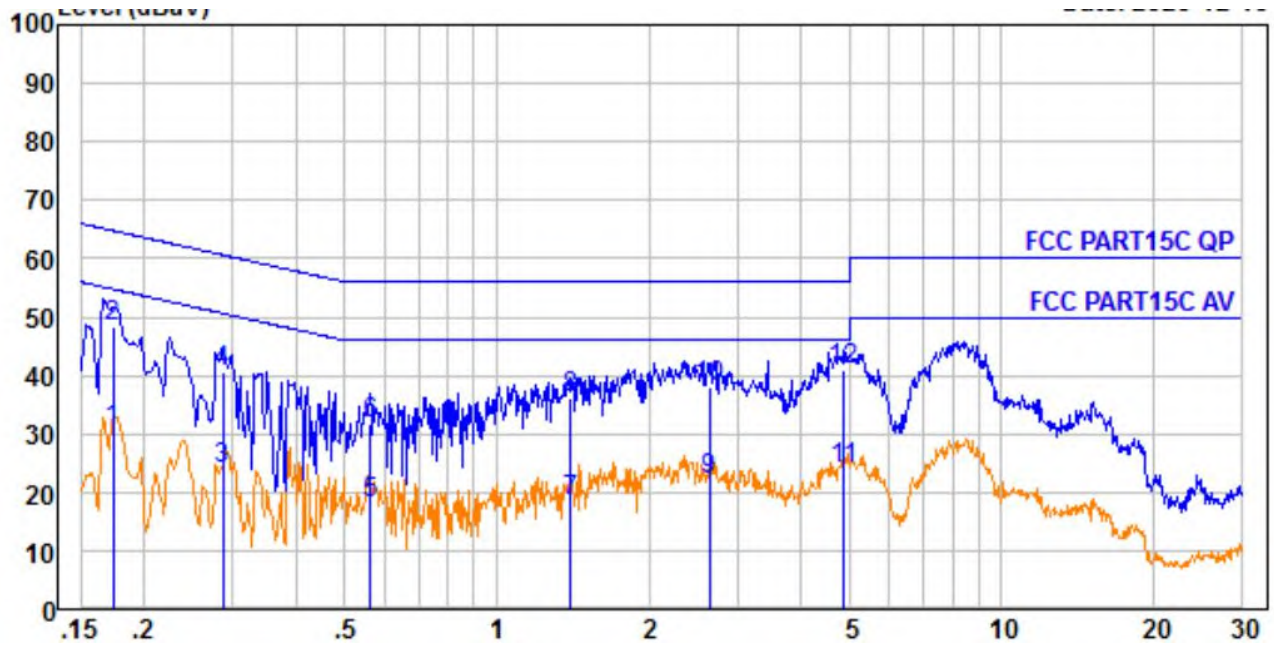

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBμV	Emission Level dBμV	Limit dBμV	Over Limit dB	Remark
1.	0.174	0.24	9.59	20.86	30.69	54.77	-24.08	Average
2.	0.174	0.24	9.59	38.69	48.52	64.77	-16.25	QP
3.	0.286	0.36	9.60	13.95	23.91	50.63	-26.72	Average
4.	0.286	0.36	9.60	30.58	40.54	60.63	-20.09	QP
5.	0.561	0.43	9.61	7.98	18.02	46.00	-27.98	Average
6.	0.561	0.43	9.61	21.68	31.72	56.00	-24.28	QP
7.	1.403	0.46	9.61	8.24	18.31	46.00	-27.69	Average
8.	1.403	0.46	9.61	25.99	36.06	56.00	-19.94	QP
9.	2.636	0.47	9.62	12.12	22.21	46.00	-23.79	Average
10.	2.636	0.47	9.62	28.04	38.13	56.00	-17.87	QP
11.	4.874	0.50	9.67	13.96	24.13	46.00	-21.87	Average
12.	4.874	0.50	9.67	30.82	40.99	56.00	-15.01	QP

Neutral-AC 120V/60Hz

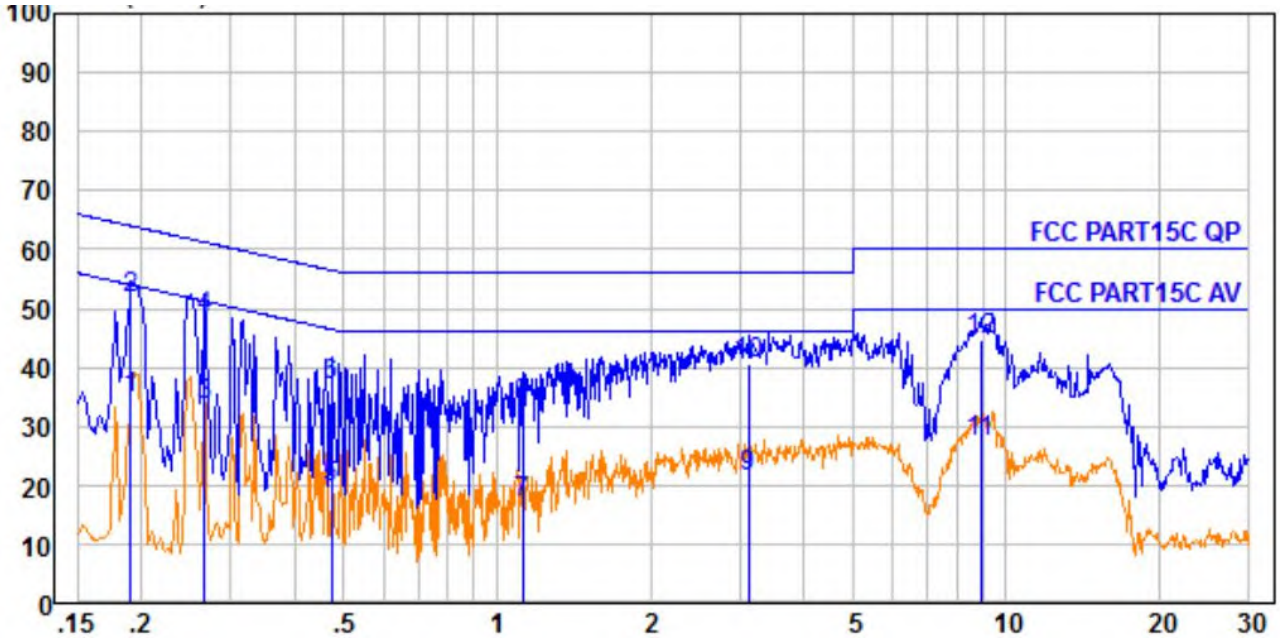

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBμV	Emission Level dBμV	Limit dBμV	Over Limit dB	Remark
1.	0.190	0.27	9.61	24.71	34.59	54.02	-19.43	Average
2.	0.190	0.27	9.61	41.96	51.84	64.02	-12.18	QP
3.	0.266	0.34	9.62	23.55	33.51	51.25	-17.74	Average
4.	0.266	0.34	9.62	38.35	48.31	61.25	-12.94	QP
5.	0.474	0.42	9.63	9.53	19.58	46.45	-26.87	Average
6.	0.474	0.42	9.63	26.80	36.85	56.45	-19.60	QP
7.	1.123	0.46	9.64	6.90	17.00	46.00	-29.00	Average
8.	1.123	0.46	9.64	23.59	33.69	56.00	-22.31	QP
9.	3.123	0.47	9.66	11.12	21.25	46.00	-24.75	Average
10.	3.123	0.47	9.66	30.62	40.75	56.00	-15.25	QP
11.	8.916	0.56	9.79	17.00	27.35	50.00	-22.65	Average
12.	8.916	0.56	9.79	34.14	44.49	60.00	-15.51	QP

6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method : ANSI C63.10:2013

Test Result : PASS

Measurement Distance : 3m

Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation

Operating Environment :

Temperature: : 24.5 °C

Humidity: : 52 % RH

Atmospheric Pressure: : 101.3kPa

Test Voltage : AC 120V 60Hz

6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site

The test setup for emission measurement below 30MHz

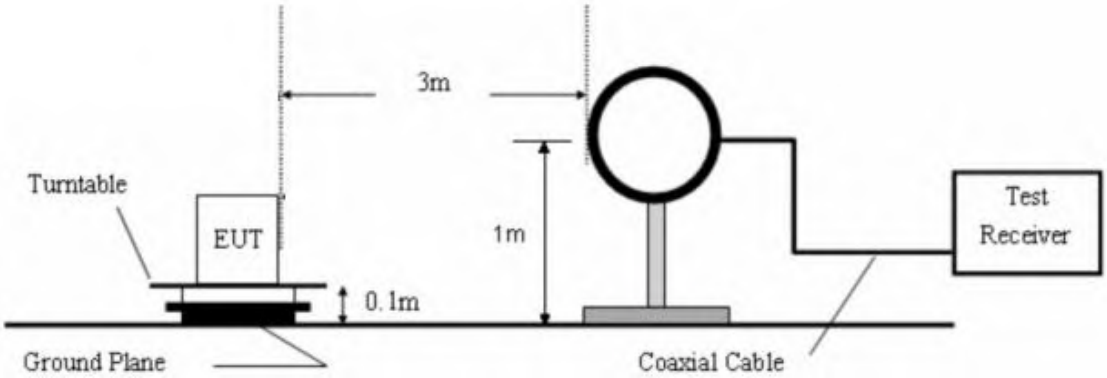

The test setup for emission measurement from 30 MHz to 1 GHz.

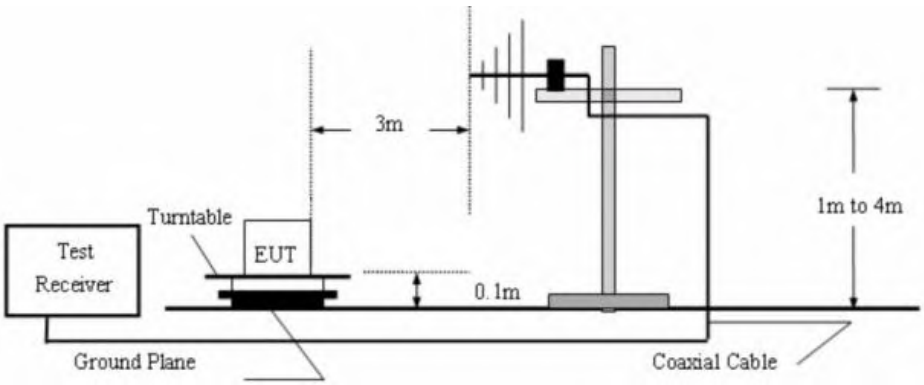

The test setup for emission measurement above 1 GHz

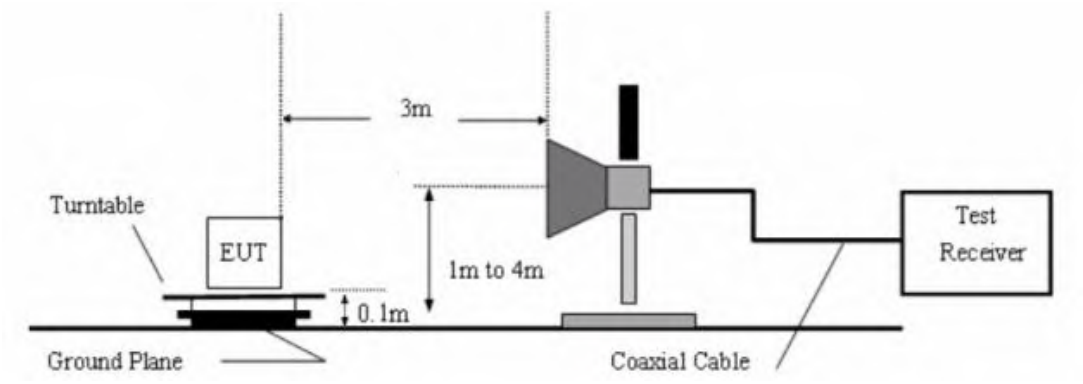

6.3 Spectrum Analyzer Setup

	Frequency	Detector	RBW	VBW	Remark
Receiver Setup	Below 30MHz	--	10kHz	10kHz	--
	30MHz ~ 1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value

6.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.1m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 0.1m above ground plane.

2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.

5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

6. Repeat above procedures until the measurements for all frequencies are complete.

7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room

6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =40log(Specific distance/ test distance)(dB);
Limit line=Specific limits(dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz

All the modulation modes were tested the data of the worst mode (TX 802.11b Low Channel) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following test plots:

Antenna Polarization: Horizontal

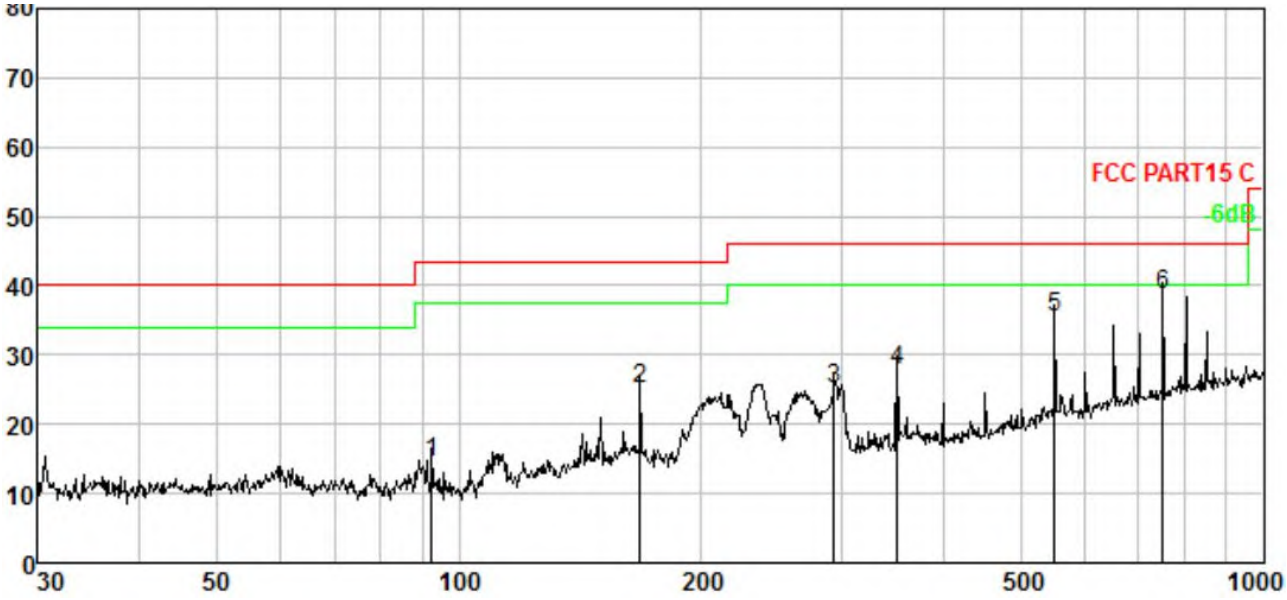

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	92.462	3.14	9.15	32.16	29.98	14.47	43.50	-29.03	QP
2.	167.824	4.16	13.45	37.39	30.03	24.97	43.50	-18.53	QP
3.	293.084	5.12	13.11	37.30	30.30	25.23	46.00	-20.77	QP
4.	350.477	5.43	14.40	38.45	30.53	27.75	46.00	-18.25	QP
5.	550.948	6.20	18.50	41.59	30.96	35.33	46.00	-10.67	QP
6.	750.108	6.74	20.70	42.22	31.13	38.53	46.00	-7.47	QP

Remark:Emission Level=Reading+Cable Loss+ANT Factor-AMP Factor

Antenna Polarization: Vertical

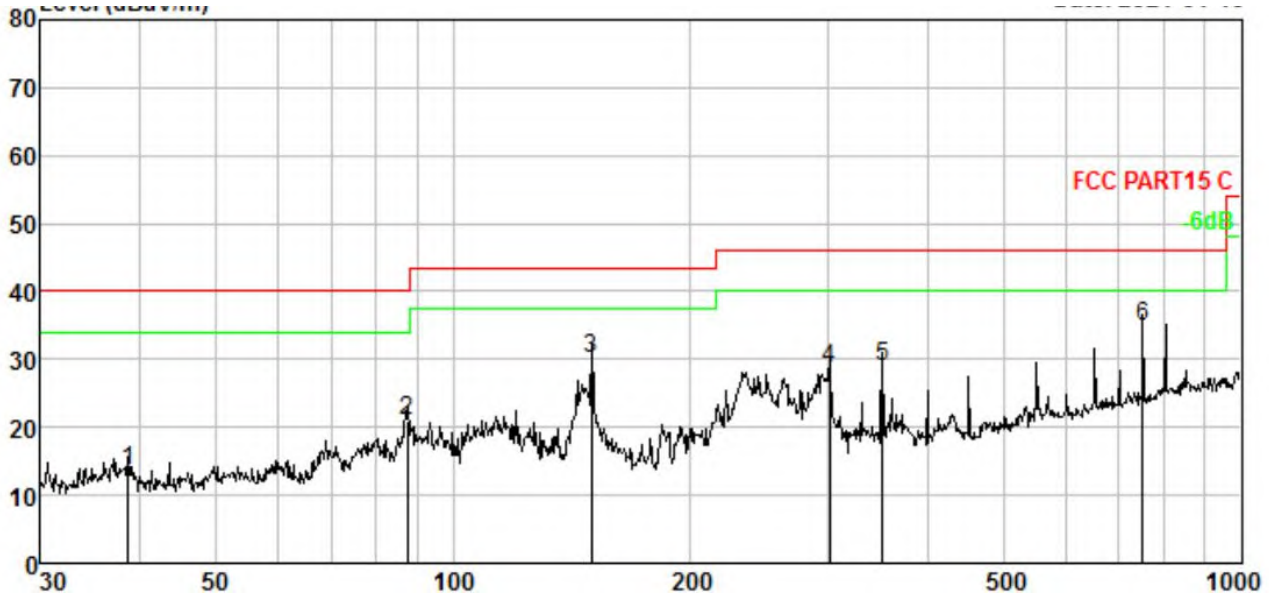

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	38.752	1.64	12.12	29.81	29.91	13.66	40.00	-26.34	QP
2.	87.418	3.04	8.95	39.06	29.98	21.07	40.00	-18.93	QP
3.	150.011	3.97	13.71	42.48	30.02	30.14	43.50	-13.36	QP
4.	300.367	5.16	13.21	40.44	30.32	28.49	46.00	-17.51	QP
5.	350.477	5.43	14.40	39.71	30.53	29.01	46.00	-16.99	QP
6.	750.108	6.74	20.70	38.41	31.13	34.72	46.00	-11.28	QP

Remark:Emission Level=Reading+Cable Loss+ANT Factor-AMP Factor

Test Frequency: From 1GHz to 18GHz

Worst case 802.11b

Test Mode: 2412					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	40.73	32.29	4.10	28.45	48.67	74.00	-25.33	V
7236.00	34.50	35.99	6.22	27.83	48.88	74.00	-25.12	V
9648.00	32.91	38.11	7.83	25.10	53.75	74.00	-20.25	V
4824.00	39.33	32.29	4.10	28.45	47.27	74.00	-26.73	H
7236.00	34.21	35.99	6.22	27.83	48.59	74.00	-25.41	H
9648.00	32.48	38.11	7.83	25.10	53.32	74.00	-20.68	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	29.78	32.29	4.10	28.45	37.72	54.00	-16.28	V
7236.00	23.35	35.99	6.22	27.83	37.73	54.00	-16.27	V
9648.00	23.25	38.11	7.83	25.10	44.09	54.00	-9.91	V
4824.00	28.85	32.29	4.10	28.45	36.79	54.00	-17.21	H
7236.00	22.79	35.99	6.22	27.83	37.17	54.00	-16.83	H
9648.00	22.22	38.11	7.83	25.10	43.06	54.00	-10.94	H

Worst case 802.11b

Test Mode: 2437					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	39.71	32.35	4.12	28.44	47.74	74.00	-26.26	V
7311.00	34.52	36.08	6.30	27.74	49.16	74.00	-24.84	V
9748.00	33.90	38.25	7.91	24.65	55.41	74.00	-18.59	V
4874.00	40.14	32.35	4.12	28.44	48.17	74.00	-25.83	H
7311.00	33.13	36.08	6.30	27.74	47.77	74.00	-26.23	H
9748.00	33.77	38.25	7.91	24.65	55.28	74.00	-18.72	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	30.54	32.35	4.12	28.44	38.57	54.00	-15.43	V
7311.00	22.83	36.08	6.30	27.74	37.47	54.00	-16.53	V
9748.00	23.14	38.25	7.91	24.65	44.65	54.00	-9.35	V
4874.00	30.23	32.35	4.12	28.44	38.26	54.00	-15.74	H
7311.00	22.21	36.08	6.30	27.74	36.85	54.00	-17.15	H
9748.00	23.48	38.25	7.91	24.65	44.99	54.00	-9.01	H

Worst case 802.11b

Test Mode: 2462					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	45.51	32.41	4.14	28.42	53.64	74.00	-20.36	V
7386.00	35.36	36.15	6.36	27.68	50.19	74.00	-23.81	V
9848.00	37.31	38.35	7.97	24.33	59.30	74.00	-14.70	V
4924.00	44.72	32.41	4.14	28.42	52.85	74.00	-21.15	H
7386.00	34.21	36.15	6.36	27.68	49.04	74.00	-24.96	H
9848.00	33.46	38.35	7.97	24.33	55.45	74.00	-18.55	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	36.37	32.41	4.14	28.42	44.50	54.00	-9.50	V
7386.00	25.26	36.15	6.36	27.68	40.09	54.00	-13.91	V
9848.00	25.80	38.35	7.97	24.33	47.79	54.00	-6.21	V
4924.00	35.05	32.41	4.14	28.42	43.18	54.00	-10.82	H
7386.00	23.59	36.15	6.36	27.68	38.42	54.00	-15.58	H
9848.00	22.71	38.35	7.97	24.33	44.70	54.00	-9.30	H

Note:

1. The testing has been conformed to 10*2462MHz=24620MHz.
2. All other emissions more than 30dB below the limit.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
   Emission Level = Reading + Factor
   Margin=Emission Level-Limit
4. X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz
2.4G WiFi (802.11b/g/n)mode have been tested, and the worst result(802.11g) was report as below

Test Mode: 802.11g Low Channel 2412MHz

Test Mode: 802.11g Low Channel 2412MHz									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	Test Value
2390.00	52.74	27.39	2.77	34.01	48.89	74.00	-25.11	H	Peak
2400.00	62.12	27.42	2.78	34.01	58.31	74.00	-15.69	H	
2390.00	54.50	27.39	2.77	34.01	50.65	74.00	-23.35	V	
2400.00	64.22	27.42	2.78	34.01	60.41	74.00	-13.59	V	
2390.00	39.19	27.39	2.77	34.01	35.34	54.00	-18.66	H	Average
2400.00	47.60	27.42	2.78	34.01	43.79	54.00	-10.21	H	
2390.00	41.10	27.39	2.77	34.01	37.25	54.00	-16.75	V	
2400.00	48.81	27.42	2.78	34.01	45.00	54.00	-9.00	V	

Test Mode: 802.11g High Channel 2462MHz

Test Mode: 802.11g High Channel 2462MHz									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	Test Value
2483.50	53.87	27.70	2.84	34.03	50.38	74.00	-23.62	H	Peak
2500.00	49.35	27.75	2.86	34.03	45.93	74.00	-28.07	H	
2483.50	56.35	27.70	2.84	34.03	52.86	74.00	-21.14	V	
2500.00	52.06	27.75	2.86	34.03	48.64	74.00	-25.36	V	
2483.50	39.72	27.70	2.84	34.03	36.23	54.00	-17.77	H	Average
2500.00	35.61	27.75	2.86	34.03	32.19	54.00	-21.81	H	
2483.50	41.77	27.70	2.84	34.03	38.28	54.00	-15.72	V	
2500.00	37.54	27.75	2.86	34.03	34.12	54.00	-19.88	V	

Test Frequency: From 18GHz to 25GHz

The measurements were more than 20dB below the limit and not reported.

7 Conducted Spurious Emission

Test Requirement	:	FCC CFR47 Part 15 Section 15.247
Test Method	:	ANSI C63.10:2013
Test Limit	:	Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

7.2 Test Result

802.11 b

Low Channel Worstcase mode

802.11 g

Low Channel Worstcase mode

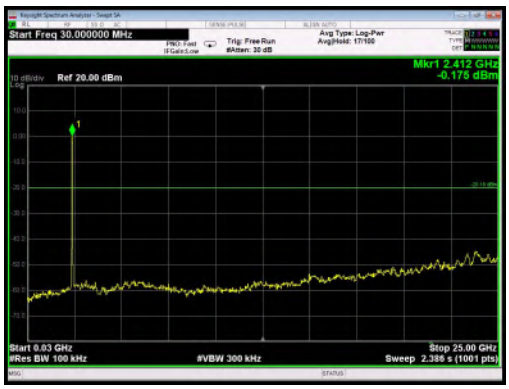

802.11 HT20

Low Channel Worstcase mode

8 Band Edge Measurement

Test Requirement	:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method	:	ANSI C63.10:2013
Test Limit	:	Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

8.2 Test Result

802.11b

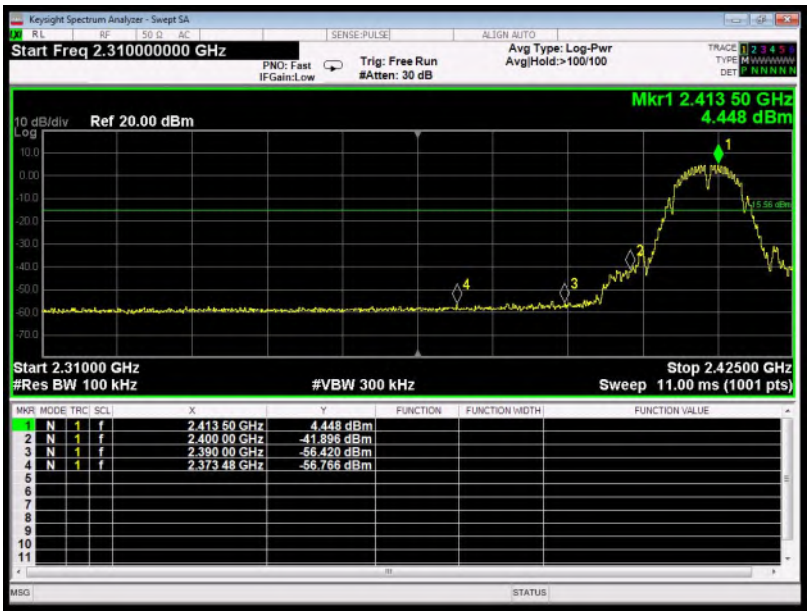

802.11g

Keysight Spectrum Analyzer - Swept SA
Start Freq 2.310000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 30 dB
Avg Type: Log-Pwr
Avg|Hold:>100/100
Mkr1 2.413 27 GHz
0.635 dBm
10 dB/div
Ref 20.00 dBm
Start 2.31000 GHz
#Res BW 100 kHz
#VBW 300 kHz
Stop 2.42500 GHz
Sweep 11.00 ms (1001 pts)
1 N 1 f 2.413 27 GHz 0.635 dBm
2 N 1 f 2.400 00 GHz -32.665 dBm
3 N 1 f 2.390 00 GHz -41.529 dBm
4 N 1 f 2.373 48 GHz -55.827 dBm

Keysight Spectrum Analyzer - Swept SA
Start Freq 2.450000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 30 dB
Avg Type: Log-Pwr
Avg|Hold:>100/100
Mkr1 2.463 25 GHz
1.349 dBm
10 dB/div
Ref 20.00 dBm
Start 2.45000 GHz
#Res BW 100 kHz
#VBW 300 kHz
Stop 2.50000 GHz
Sweep 4.800 ms (1001 pts)
1 N 1 f 2.463 25 GHz 1.349 dBm
2 N 1 f 2.483 50 GHz -44.329 dBm
3 N 1 f 2.488 85 GHz -49.158 dBm

802.11n-H20

Keysight Spectrum Analyzer - Swept SA
Start Freq 2.310000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 30 dB
Avg Type: Log-Pwr
Avg|Hold:>100/100
Mkr1 2.413 27 GHz
0.635 dBm
10 dB/div
Ref 20.00 dBm
Start 2.31000 GHz
#Res BW 100 kHz
#VBW 300 kHz
Stop 2.42500 GHz
Sweep 11.00 ms (1001 pts)
1 N 1 f 2.413 27 GHz 0.635 dBm
2 N 1 f 2.400 00 GHz -30.111 dBm
3 N 1 f 2.390 00 GHz -39.489 dBm
4 N 1 f 2.373 48 GHz -53.678 dBm

Keysight Spectrum Analyzer - Swept SA
Start Freq 2.450000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 30 dB
Avg Type: Log-Pwr
Avg|Hold:>100/100
Mkr1 2.455 75 GHz
1.346 dBm
10 dB/div
Ref 20.00 dBm
Start 2.45000 GHz
#Res BW 100 kHz
#VBW 300 kHz
Stop 2.50000 GHz
Sweep 4.800 ms (1001 pts)
1 N 1 f 2.455 75 GHz 1.346 dBm
2 N 1 f 2.483 50 GHz -43.887 dBm
3 N 1 f 2.488 85 GHz -49.244 dBm

9 6dB Bandwidth Measurement

Test Requirement	:	FCC CFR47 Part 15 Section 15.247
Test Method	:	ANSI C63.10:2013
Test Limit		Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

9.2 Test Result

Modulation	Bandwidth(MHz)			Limit
	Low Channel	Middle Channel	High Channel	
802.11b	8.601	8.571	8.597	≥500kHz
802.11g	16.37	16.37	16.39	≥500kHz
802.11n-HT20	17.62	17.62	17.62	≥500kHz

802.11b Low Channel

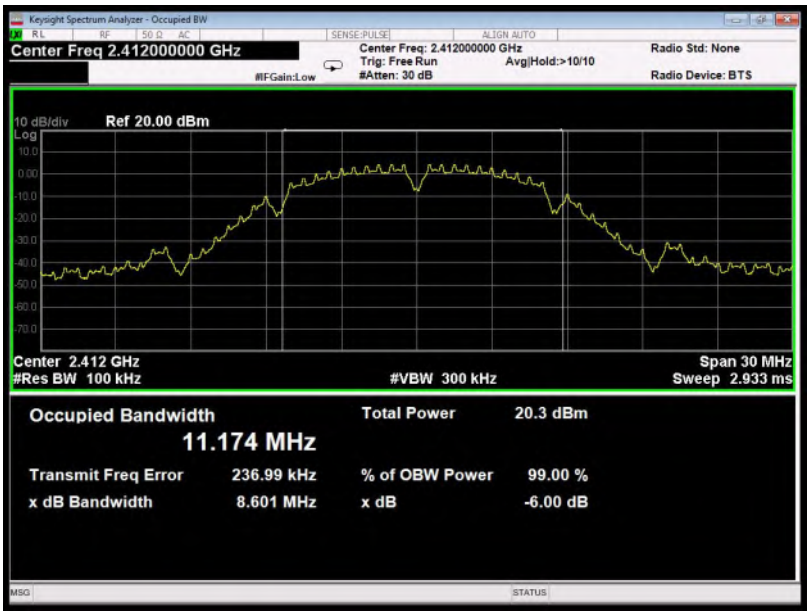

802.11b Middle Channel

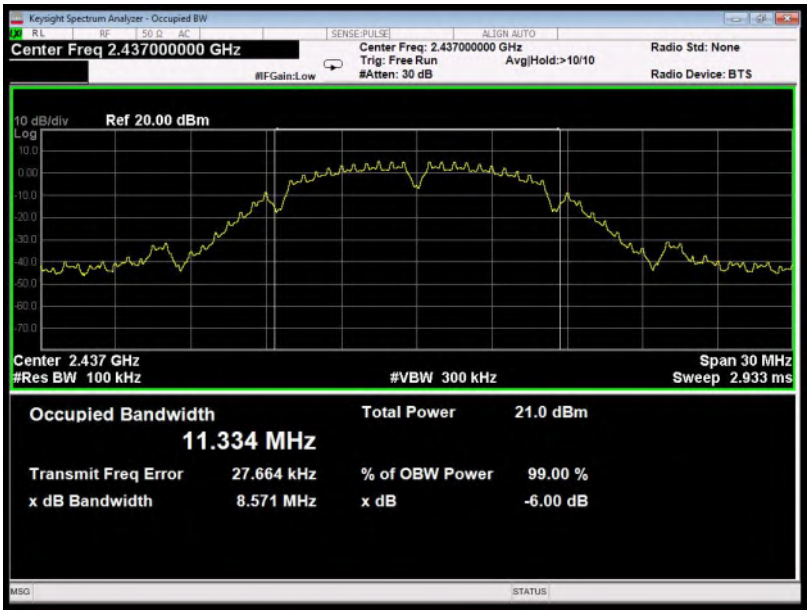

802.11b High Channel

802.11g Low Channel

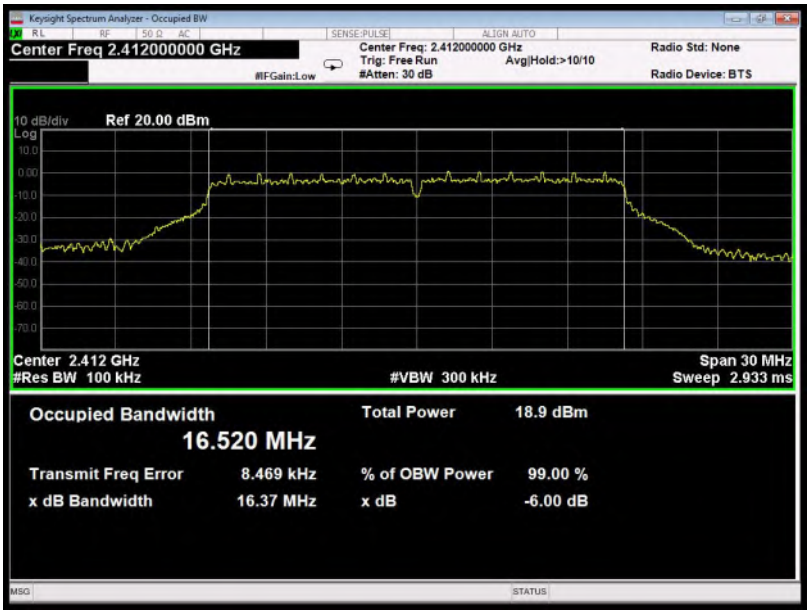

802.11g Middle Channel

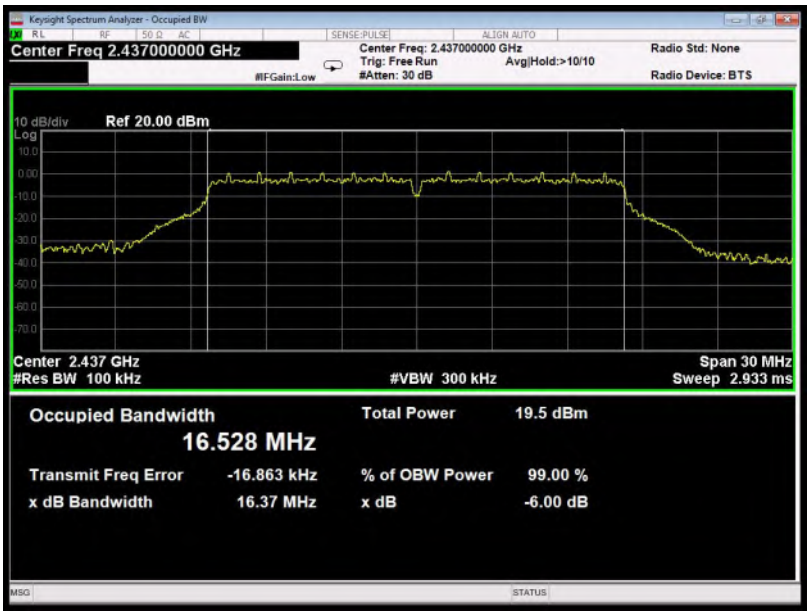

802.11g High Channel

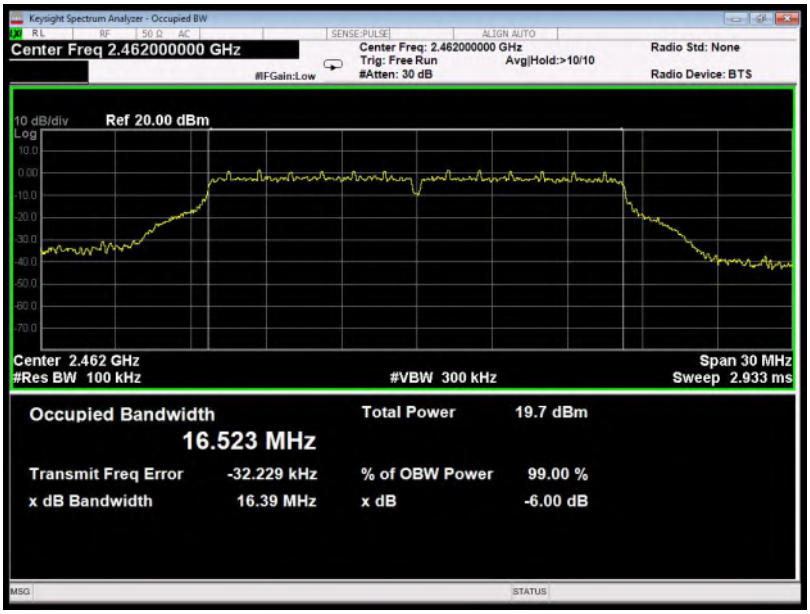

802.11n-HT20 Low Channel

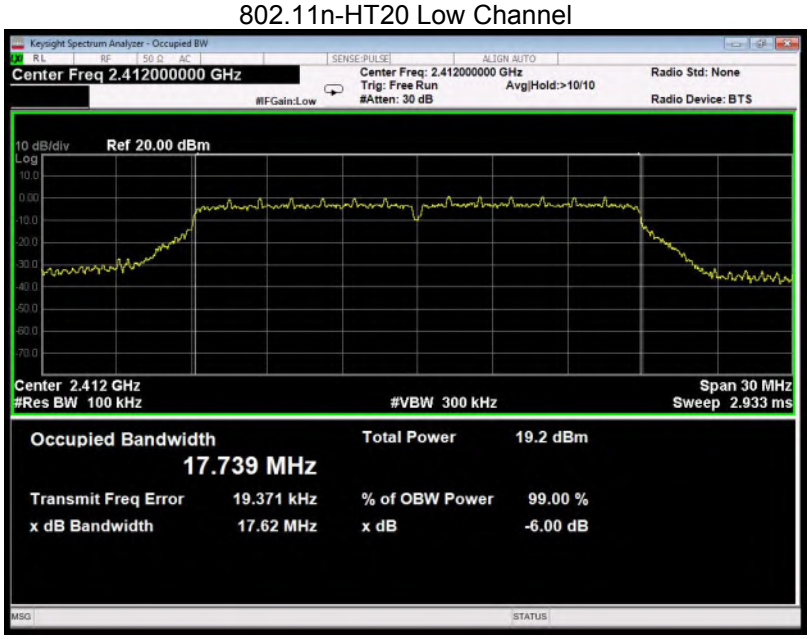

802.11n-HT20 Middle Channel

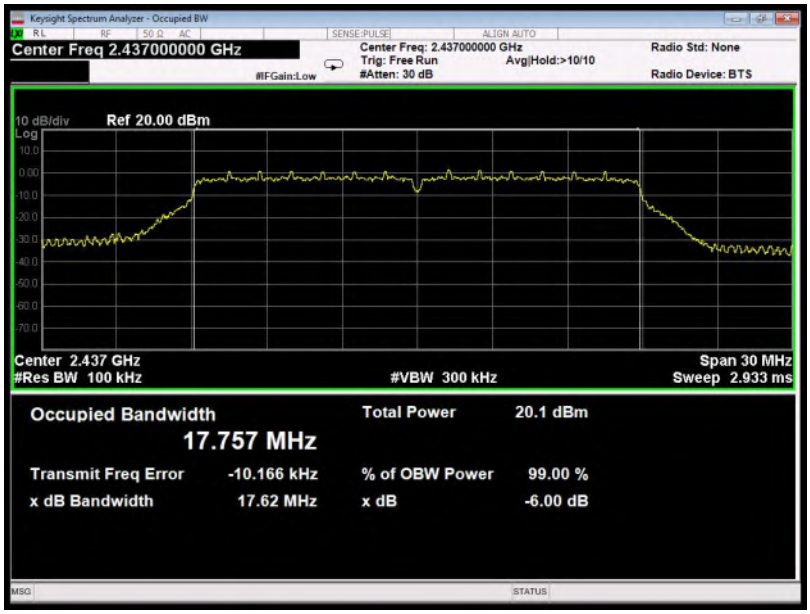

802.11n-HT20 High Channel

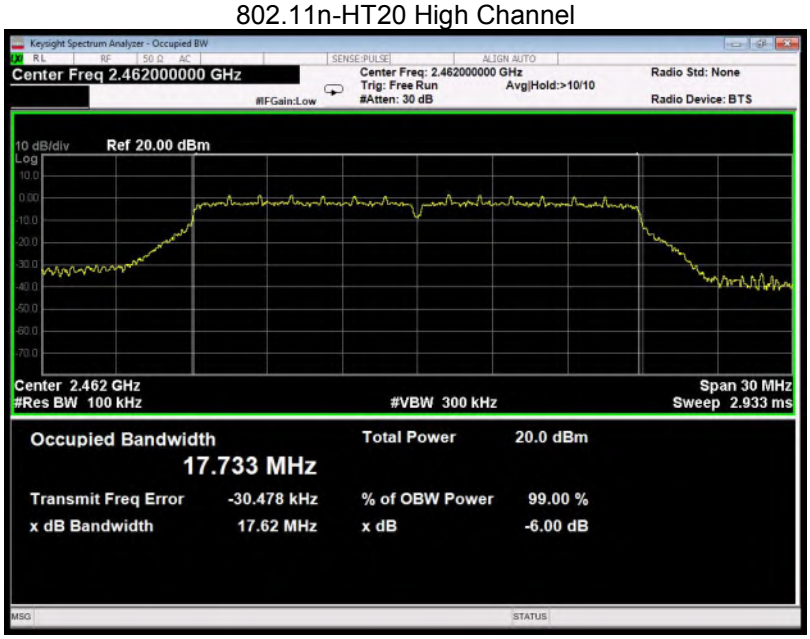

10 Maximum Peak Output Power

Test Requirement	:	FCC CFR47 Part 15 Section 15.247
Test Method	:	ANSI C63.10:2013
Test Limit	:	Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

10.1 Test Procedure

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 15.247 Meas Guidance v05 section 8.3.1.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

10.2 Test Result

Modulation	Maximum Peak Output Power (dBm)			Limit
	Low Channel	Middle Channel	High Channel	
802.11b	16.69	17.33	17.66	1W(30dBm)
802.11g	18.89	19.34	19.54	1W(30dBm)
802.11n-HT20	19.15	20.22	19.92	1W(30dBm)

11 Power Spectral density

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013

Test Limit : Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

11.1 Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below:
   Center frequency=DTS channel center frequency
   Span = 1.5 times the DTS bandwidth
   RBW = 3KHz, VBW = 10KHz
   Sweep time = auto couple
   Detector = peak
   Trace mode =max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW(no less than 3KHz) and repeat.

11.2 Test Result

Modulation	Power Spectral density（dBm/3kHz）			Limit
	Low Channel	Middle Channel	High Channel	
802.11b	-9.213	-9.881	-9.707	8dBm/3kHz
802.11g	-14.165	-13.183	-11.636	8dBm/3kHz
802.11n-HT20	-13.598	-13.320	-12.824	8dBm/3kHz

802.11b Low Channel

802.11b Middle Channel

802.11b High Channel

802.11g Low Channel

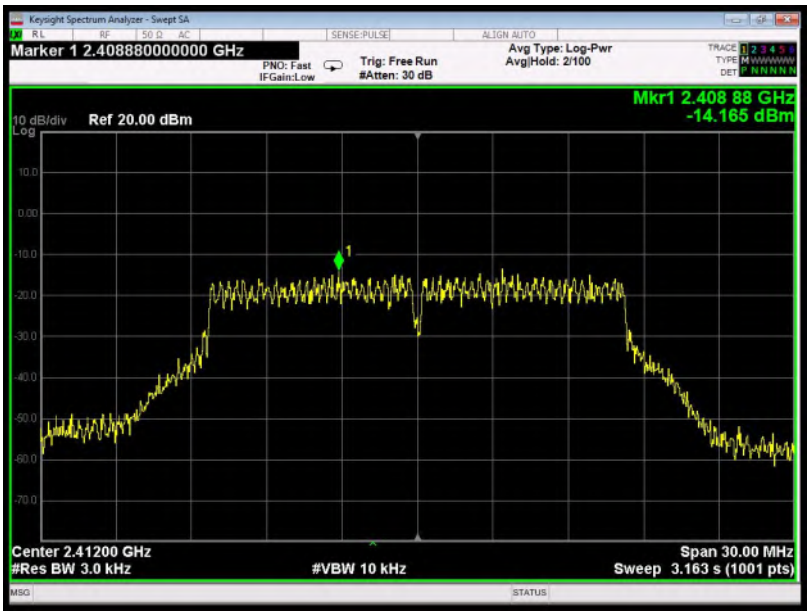

802.11g Middle Channel

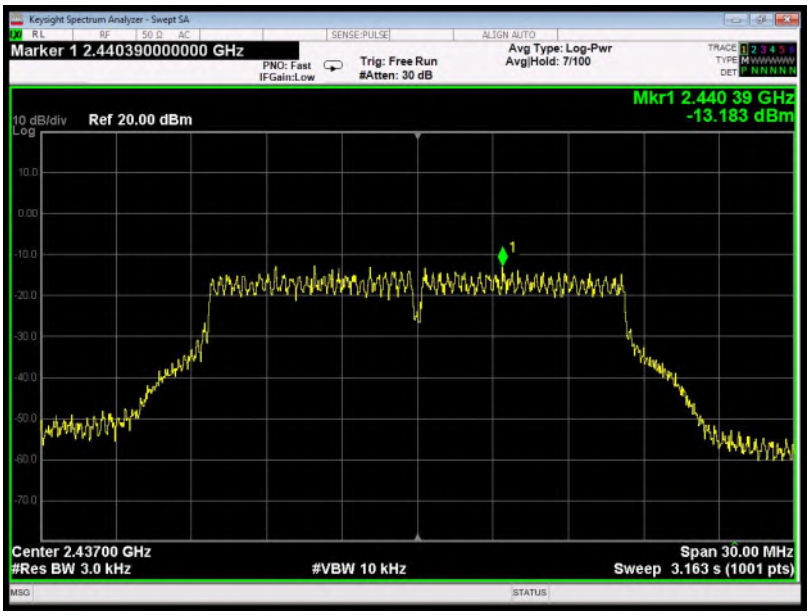

802.11g High Channel

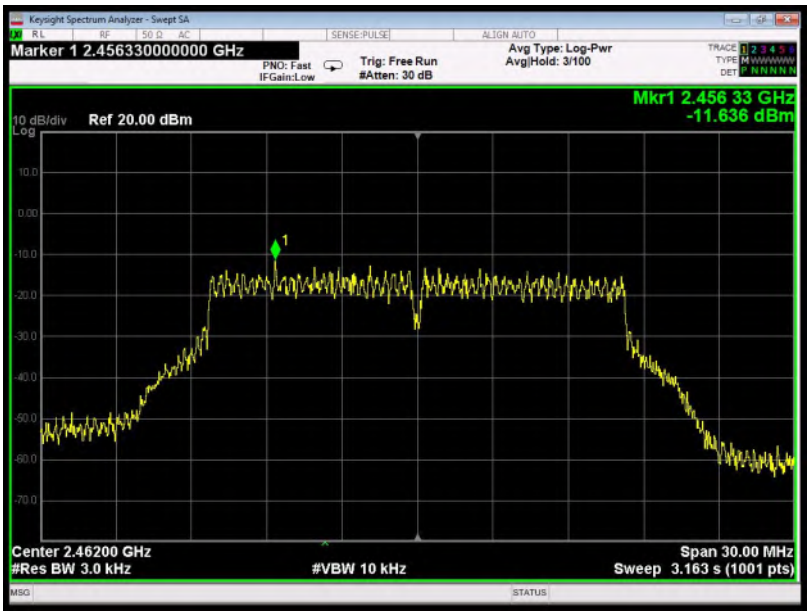

802.11n-HT20 Low Channel

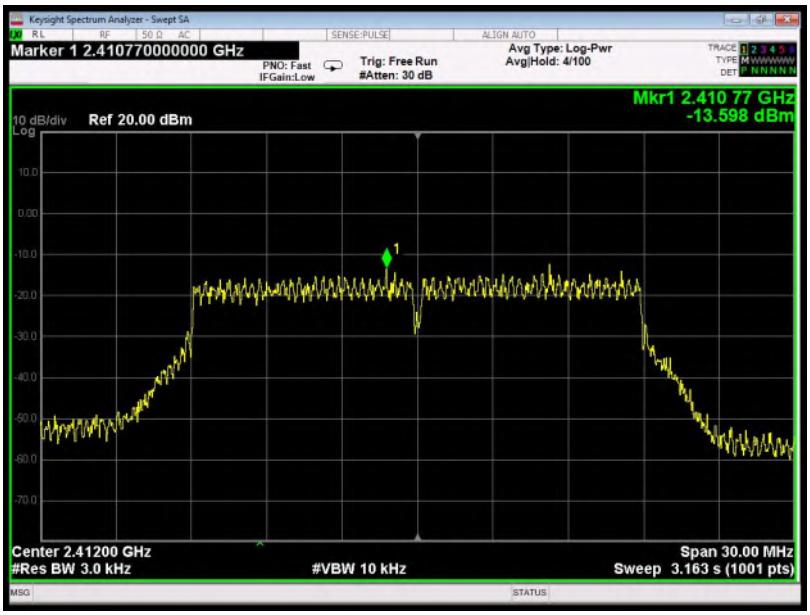

802.11n-HT20 Middle Channel

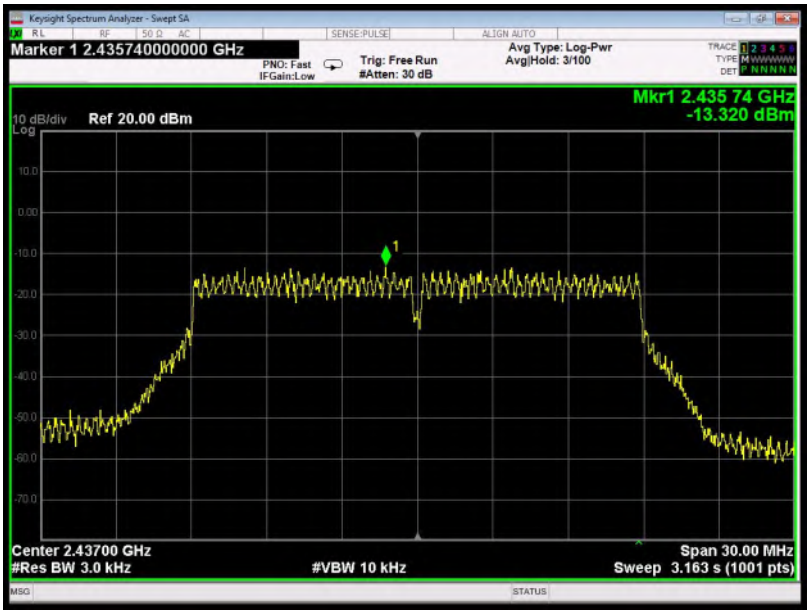

802.11n-HT20 High Channel

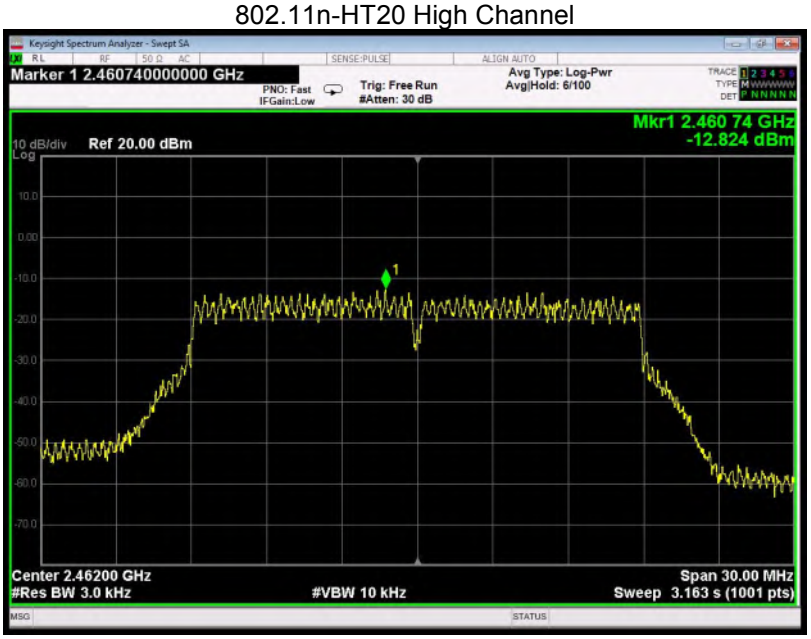

12 Antenna Application

12.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2 Result

The EUT'S antenna, permanent attached antenna,is PCB Antenna. The antenna's gain is 3 dBi and meets the requirement.

13 Test Setup

Conducted Emissions

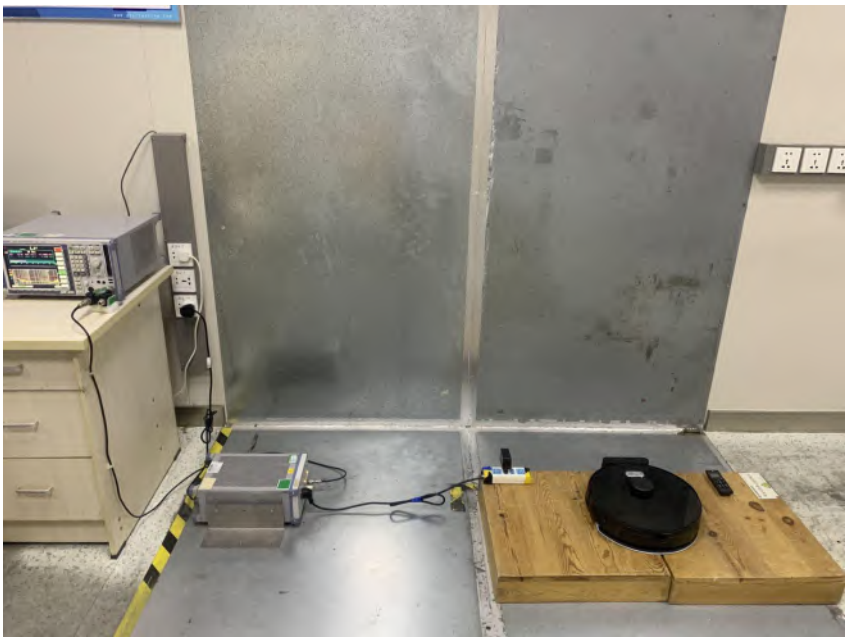

Radiated Spurious Emissions
From 30MHz-1000MHz

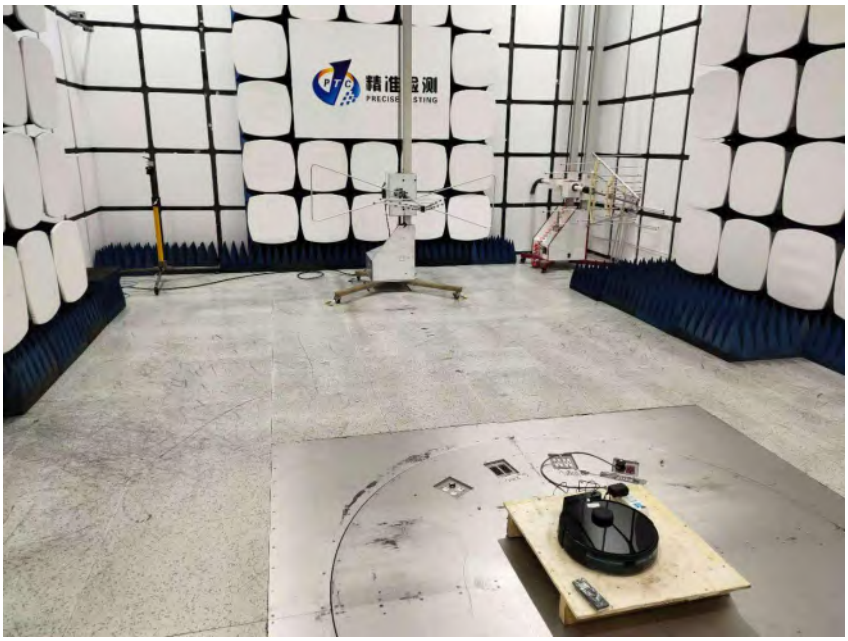

Test frequency from Above 1GHz

14 EUT PHOTOS

SWITCHING POWER SUPPLY
MODEL: YJS024W-1901000U
INPUT: 100-240V~ 50/60Hz 800mA
OUTPUT: 19.0V⎓ 1.0A
LISTED
Dongguan Yingju Power Co.,Ltd.
5219
MADE IN CHINA

Class 2 Power Supply
CAUTION:
RISK OF ELECTRIC SHOCK
DRY LOCATION USE ONLY
ATTENTION:

ATTENTION:
RISQUE DE CHOC ÉLECTRIQUE
UTILISER UNIQUEMENT DANS
UN ENDROIT SEC
FABRIQUÉ EN CHINE
CAUTION:
RISK OF ELECTRIC SHOCK
DRY LOCATION USE ONLY
MADE IN CHINA

AC/DC ADAPTER
CAUTION
attention

AC/DC ADAPTER / CLASS 2 POWER SUPPLY
MODEL:KA2401A-1901000DE
INPUT:100-240V~ 50/60Hz 0.65A Max
OUTPUT:19.0V⎓1.0A 19.0W
CAUTION/ATTENTION:
Shenzhen Keyu Power Supply Technology Co., Ltd.
MADE IN CHINA
DIC:2125
CONFORMS TO UL STD.1310
CERTIFIED TO CSA STD.
C22.2 No.223
Intertek
5012508

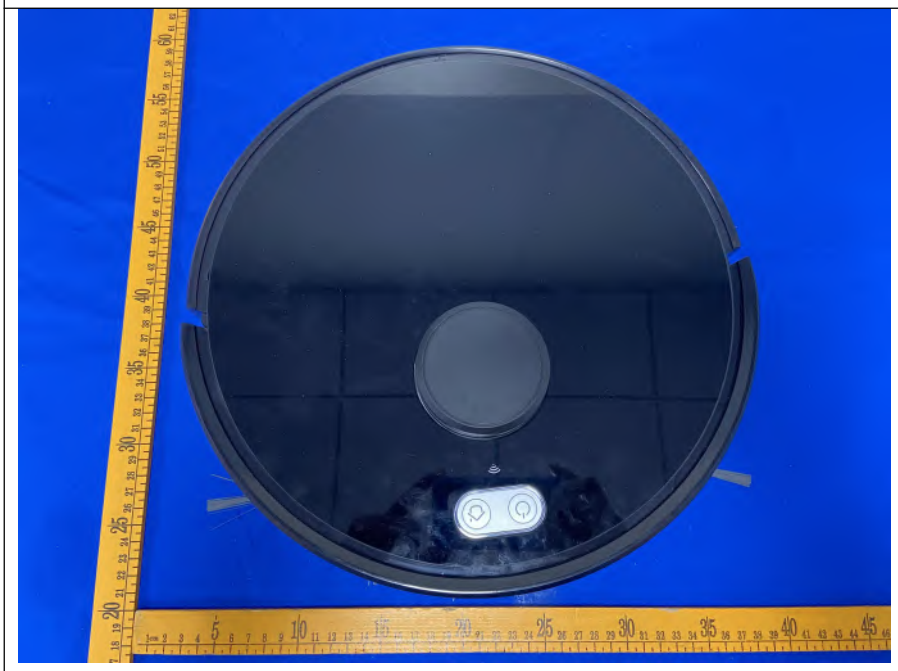

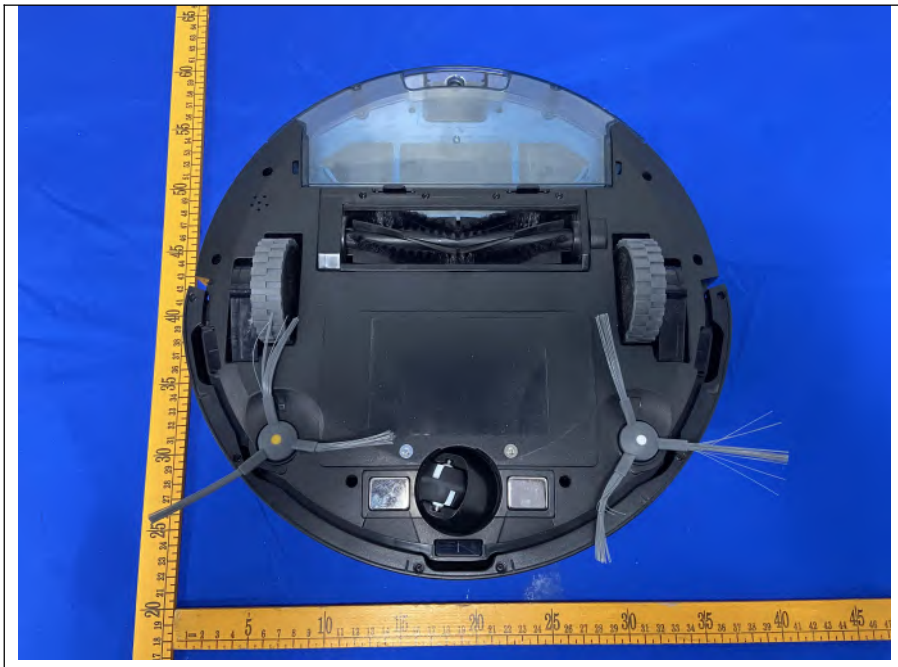

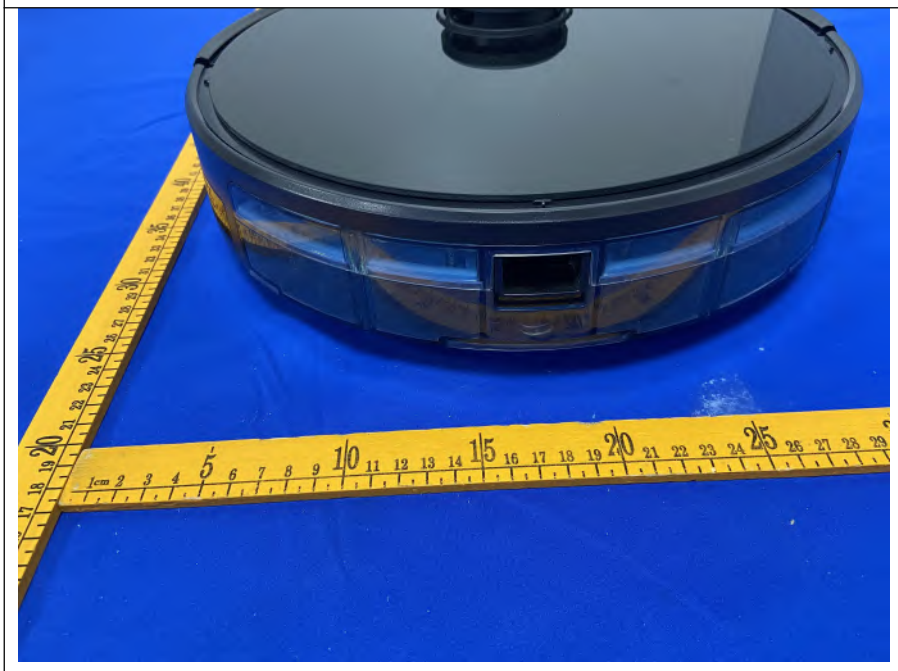

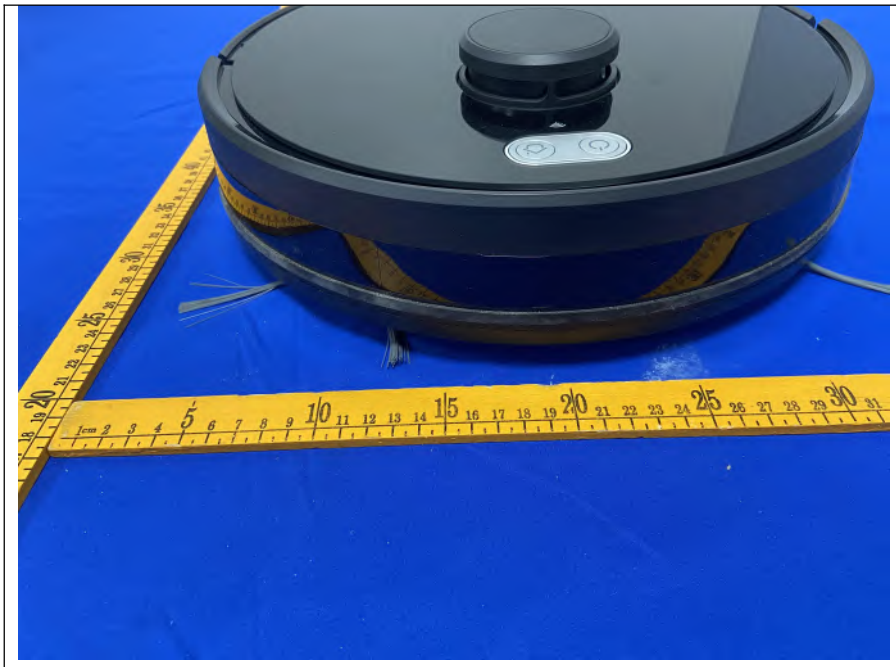

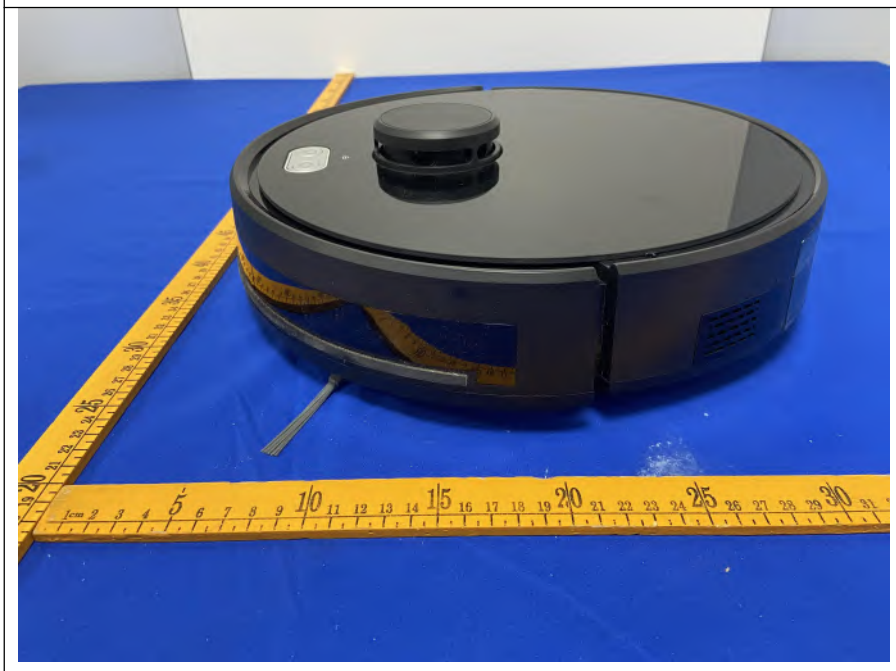

Rechargeable Li-ion Battery/ 锂离子电池
Model/ 型号: SUN-INTE-181
Nominal Voltage/ 额定电压: 14.4V
Max Charge Voltage/ 充电限制电压: 16.8V
Rated Capacity/ 额定容量: 5000mAh 72Wh
Typical Capacity/典型容量: 5200mAh
执行标准: GB 31241-2014
Manufacturer/ 制造商:
Sunwoda Electronic Co., LTD.
欣旺达电子股份有限公司
Made in China/ 中国制造
4INR19/66-2
CAUTION/ 警告
Never put the battery into a fire or disassemble, puncture, drop, crash, or short-circuit the battery.
严禁拆解、刺穿、撞击、
碾压、短路及燃烧电池。
Do not use water-damaged batteries!
电池浸水后禁止使用!
Do not Heat Above 45℃ or Incinerate.
Follow manufacturer's instructions.
Li-ion 00
SWD18120
27005876

Rechargeable Li-ion Battery
Model No: SUN-INTE-172
Typical Capacity: 2600mAh
Rated Capacity: 14.4V 2500mAh 36Wh
Max Voltage: 16.8VDC
Service Phone: 0755-29516888
Sunwoda Electronic Co.,Ltd.
4INR19/66
14.4VDC 2500mAh
XXXX株式会社
Black wire(-) Red wire(+)
Li-ion 00

Rechargeable Li-ion Battery
Model No: SUN-INTE-273
Typical Capacity: 2600mAh
Rated Capacity: 14.4VDC 2500mAh 36Wh
Max Voltage: 16.8VDC
Service Phone: 0755-29516888
Sunwoda Electronic Co.,Ltd.
4INR19/66
Black wire(-) Red wire(+)

CORUN
Black wire(-) Red wire(+)
Type:Li-ion Cylindrical Rechargeable Battery
Date:1901
4INR19/66
Model:INR18650 M26-4S1P
Typical Capacity:2600mAh 14.4V 37.44Wh
Rated Capacity:2500mAh
Manufacturer:CORUN
RECYCLE
1.800.822.8837

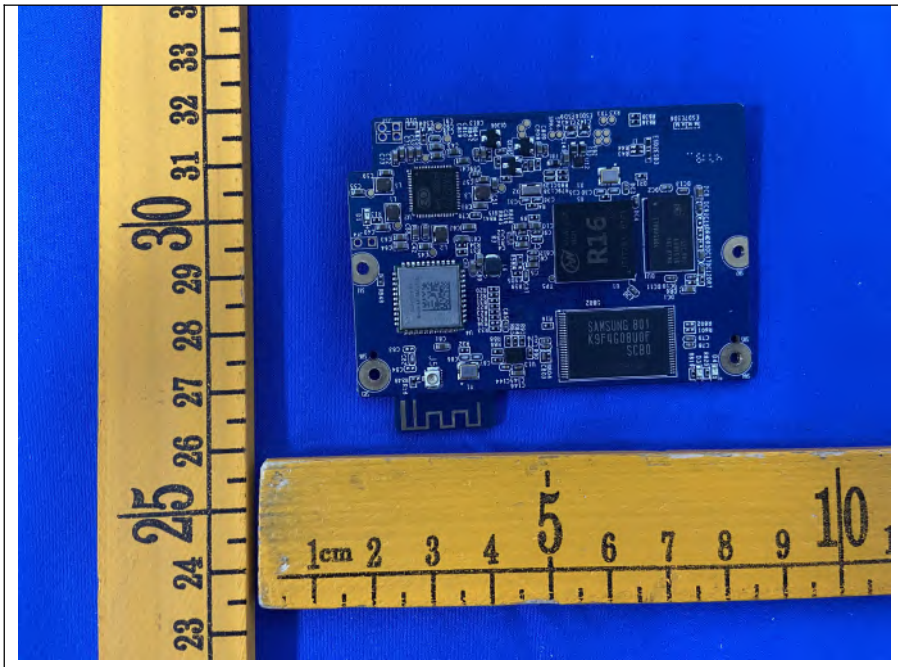

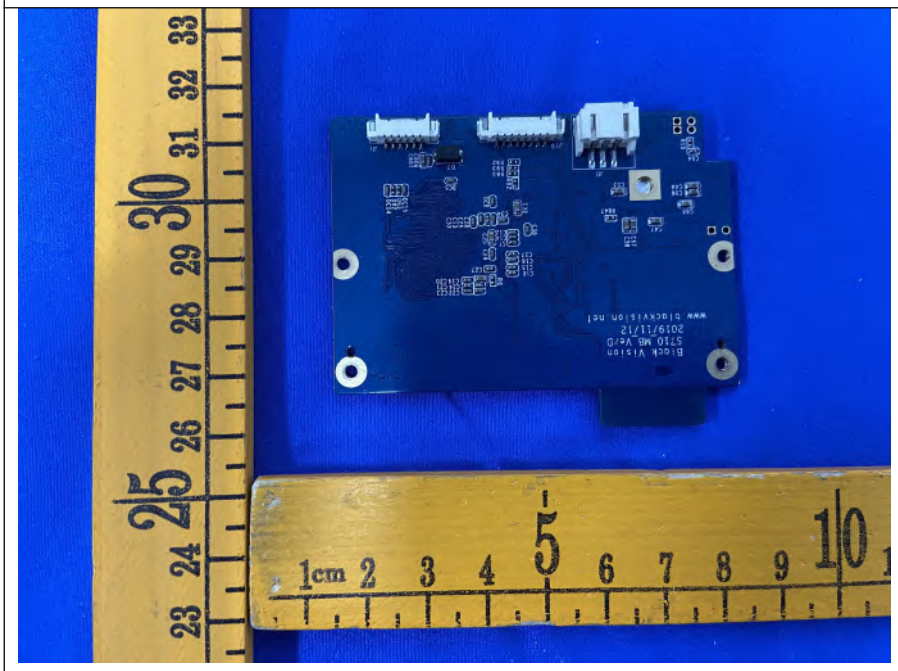

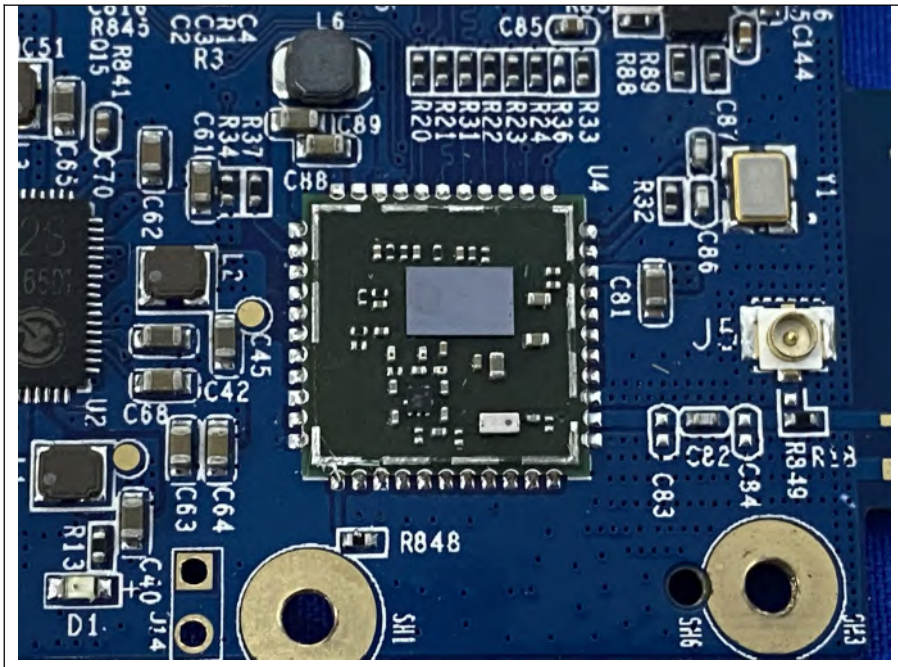
L6
C85
R89
R88
C144
C51
R845
R841
R3
C89
C88
R37
R34
C61
C70
C62
U4
R32
C86
C81
Y1
J5
C45
C42
C68
U2
C63
C64
C82
C83
C84
R849
R13
D1
R848
SH1
SH6

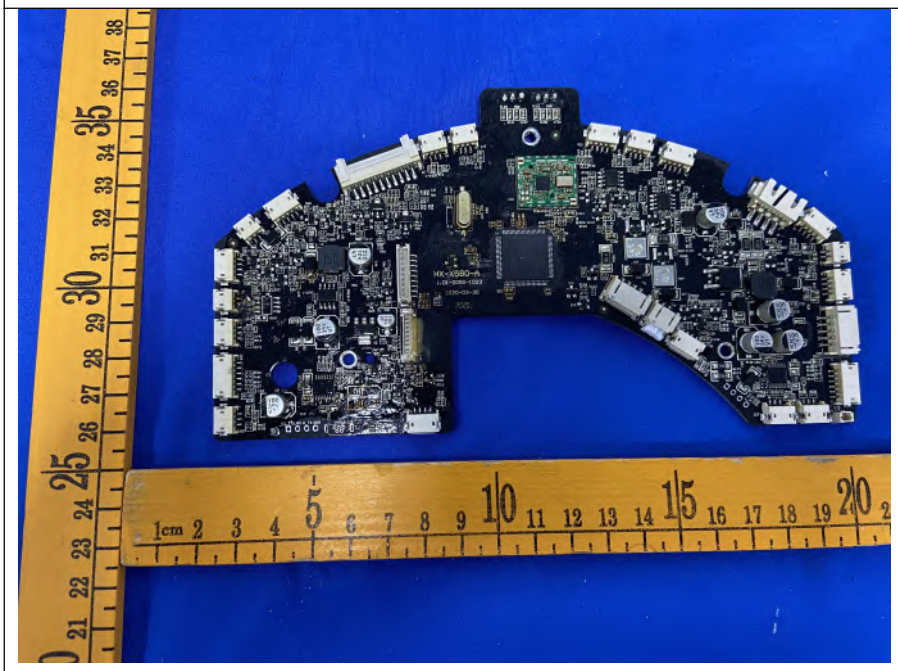

*******THE END REPORT*******