DAELIM TRADING CO., LTD.

DOBIDOS

DAELIM

Installation/user manual including warranty card

www.dltc.co.kr

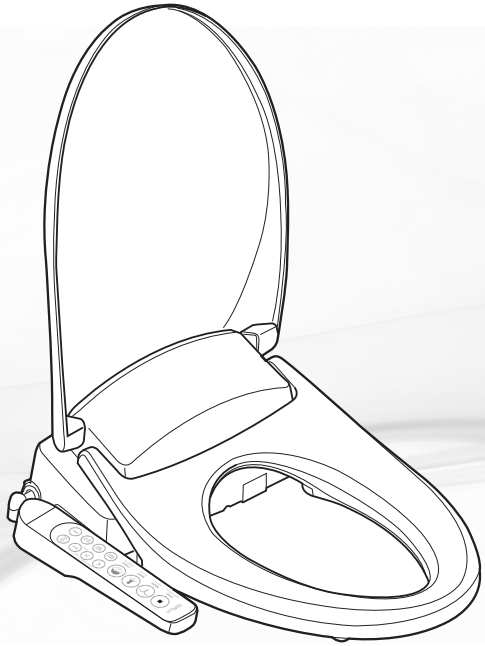

FCC Compliance Statement	2
Safety precautions	3~6
Names of parts	6
Dimensions of toilet	7
Parts	7
Installation guide	8~10
User guide	11~13
Wash	14
When the Product is Not Used for a Long Time	15
Self-diagnosis indication and measures against failure	16~17
Specifications	18
Guarantee	19

- In order to improve the quality of the product, the appearance and specifications are subject to change without prior notice to the consumers.
- Make sure to follow the precautions in the installation and user manual.
- Safety accidents caused by improper use are not the responsibility of the manufacturer. There, please be careful.
- The warranty card is included in the installation manual and the user manual. Please keep it carefully.

FCC COMPLIANCE STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
— Reorient or relocate the receiving antenna.
— Increase the separation between the equipment and receiver.
— Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
— Consult the dealer or an experienced radio/TV technician for help

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Industry Canada:

This device complies with Industry Canada licenceexempt RSS standard(s). Operation is subject to the following two conditions:
(1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Canada, avis d Industrie Canada (IC)

Cet appareil est conforme aux normes RSS exemptes de licenced'Industrie Canada.
Son utilisation est soumise aux deux conditions.
suivantes : (1) cet appareil n'engendre pas d'interférences, et (2) cet appareil doit tolérer tout type d'interférences, notamment les interférences pouvant provoquer une utilisation non désirée del'appareil.

1. Safety precautions

Please follow the precautions for safety.

- Please read the precautions carefully before use.
- The precautions listed here are important for safety. Be sure to follow them.

- Caution signs and their meanings are as follows:

⚠ **Warning**	If the warning is ignored and mishandled, it may result in death or serious injury to the user.
⚠ **Caution**	If the caution is ignored and mishandled, it may result in personal injury or property damage.
⚠ **Danger**	If the caution is ignored and mishandled, it may result in personal injury or property damage.

※ Disclaimer

- Daelim Trading Co., Ltd. (hereinafter, the "Company") shall not be held responsible for any damage caused by earthquake, lightning, storm or flood, fire caused by other than the Company's responsibility, acts of third parties, other accidents, intention or negligence of consumers, misuse, or use under the above conditions.
- The Company shall not be held responsible for any incidental damages (loss of business profits, discontinuation of business, etc.) resulting from the use or inability of this product.
- The Company shall not be held responsible for any damage caused by failure to comply with the details of the installation/user manual

Danger

- Use a nominal 120V and GFCI outlet.
- If the product is used by someone who has difficulty controlling temperature, such as children or the elderly, or with sensitive or weak skin, set the temperature of hot water and toilet seats to "Low". There is a risk of low-temperature burns.
  ※ "Low temperature burn" refers to burns caused by exposure to temperatures above 104°F for a long time.
- Do not place or store the product in a place where it may fall or enter the bathtub.
- Do not soak the product in water.
- If the product is submerged, unplug it immediately and do not touch the water.
- Keep the power cord away from heated surfaces or hot objects.

Caution

- Remove dust and water from the power plug, and plug it firmly into the outlet.
- If there is a malfunction in the product, do not operate it. Unplug the power and call the service center.
- Do not pull the power cord or touch the power plug with wet hands.
- Do not use heavy water or industrial water.
- Never disassemble, repair, or modify the product.
- Keep combustibles, such as cigarettes, away from the product
- Do not bend or crush the hose. It may cause water leakage.
- When cleaning the product, remove the power plug. Spraying a chemical solution directly on the product or using a rough cloth may damage the product.
- Do not insert sharp objects in gaps or hot air outlets or block them with your hands.
- Do not turn the body upside down.
- After installation, make sure that there is no leakage at the water supply connection.
- When not using the product for a long time, drain the water and unplug the power cord. Deteriorated water can cause skin irritation.
- Make sure that the temperature in the bathroom does not drop below zero. There is a risk of freezing. Use a heater to warm the bathroom.
- When lightning strikes, unplug the power cord.
- Connect the product to a properly grounded power outlet.
- Do not press the cover hard as it may damage the product.
- Do not use power supply or wiring equipment that exceeds the specified rating.
- If the power cord is damaged, contact your dealer to replace it.
- Connect the power cord correctly to a 120V outlet.
- This product is not a toy. Don't let children play with it.
- Do not sleep while sitting on this product. Do not use the product if you are drowsy or have taken any medication that accompanies drowsiness.
- This product is not intended for outdoor use. It is for indoor use only.
- Do not pour a large amount of water on this product.
- Do not use a steam cleaner on this product.
- Do not lean on the cover as it may damage the product.
- Do not use an ungrounded outlet or extension cord on the product.
- Make sure to use a properly grounded outlet. If you are not sure or have no grounded outlet or GFCI outlet, contact a qualified electrician.

Caution

- This device is not intended for use by people (including children) who lack physical, sensory, or mental abilities or lack experience and knowledge and cannot use the device safely without supervision or instruction.

  - Do not allow children to play with the device.
- Do not plug multiple electrical appliances into one outlet at the same time.
- Do not install the product in a humid place.
- Do not step on the toilet seat, the toilet seat cover or the main body, or place heavy objects on it.
- Children may fall into the toilet, so please accompany them.
- Do not expose the product to direct sunlight.
- Unplug the power cord before removing the product from the toilet.
- Keep vents free of lint, hair, dust, etc. to allow air to pass through.

2. Names of parts

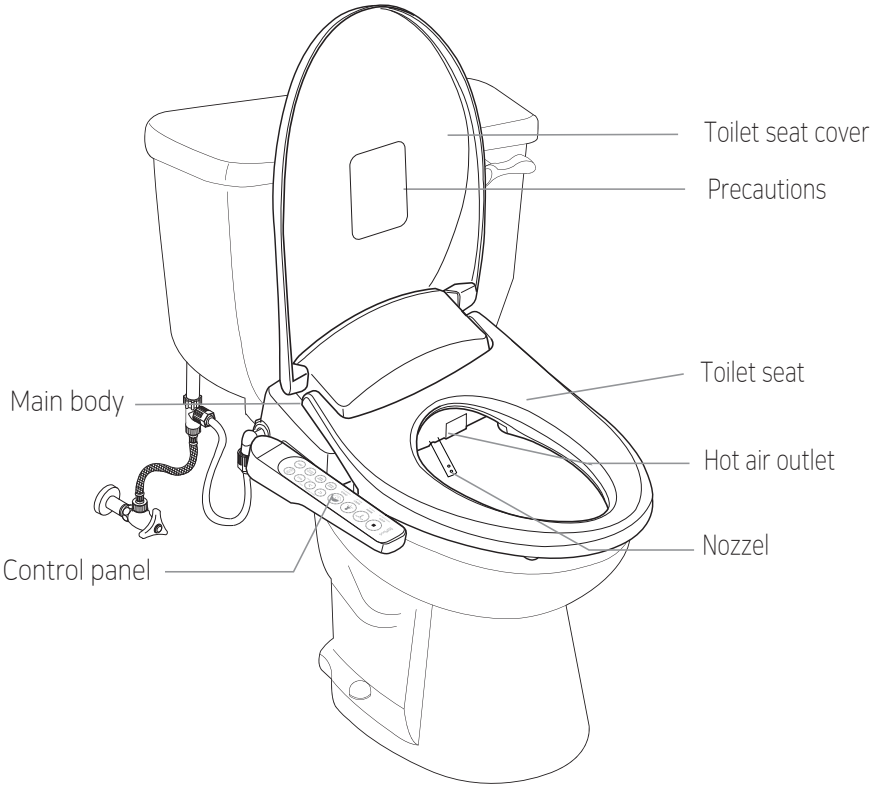

3. Dimensions of toilet

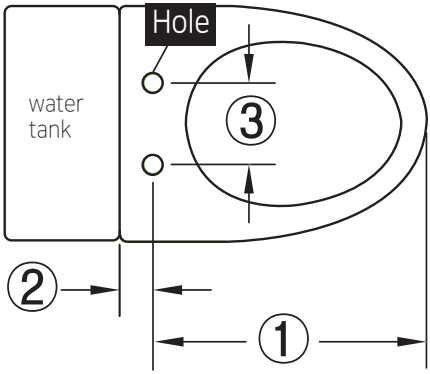

① Toilet length: at least 18.5"
- It must be at least 18.5" long from the center of the hole to the front of the toilet bowl.

② Between water tank and the hole: at least 1.8"
- It must be at least 1.8" long from the rear end of the water tank to the center of the hole (recommended distance: at least 2.4")

③ Distance between the holes: 5.5"~7.8"
- The distance between the centers of the two holes must be 5.5"~7.8".

4. Parts

Read the installation manual carefully to install the product correctly.

Precautions before installation

1. The power is AC 120V/60Hz and the rated power consumption is 1260W. Make sure to wire properly to the power.
2. The length of the power cord is 47.2"/120cm. Please install the outlet in a place where you can install or disassemble the bidet.
3. The water supply pressure ranges from 10 to 106.6psi / 69 to 735kPa. Please use the product in this pressure range.
4. The water supply temperature ranges from 37.5 to 95˚F. Please use the product in this temperature range.
5. The connection hose is 23.6"/60cm long. Place the water supply valve in a place where you can install and disassemble the bidet.
6. After completing the installation of the product, connect the power supply and supply water.

Parts

1. Bidet



2. Fixing parts



Fixing plate



Large fixing bolts
(2EA)

Small fixing bolts
(2EA)

Washer
(2EA)

Large fixing rubber
(2EA)

Small fixing rubber
(2EA)

3. T-connector

Packing
(1EA)

4. Connecting hose
(including packing)

5. Installation/user manual
(including warranty card)

for Remote control model only

6. Remote control / Hanger
(for Remote control model only)



7. Batteries
(3 AAA batteries)



5. Installation guide

1. Connecting T-connector

■ How to connect

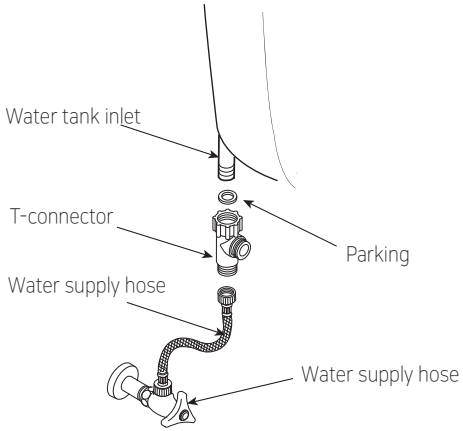

1. Close the water supply valve, and then, disconnect the hose from the water tank (Water may come out when the hose is disconnected, so get the water with a bucket).

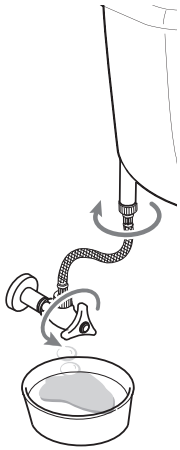

2. Connect the T-connector to the water tank inlet.

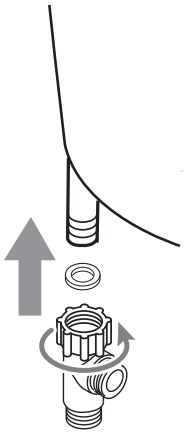

3. Use the existing water supply hose to connect the T-connector with the water supply valve.

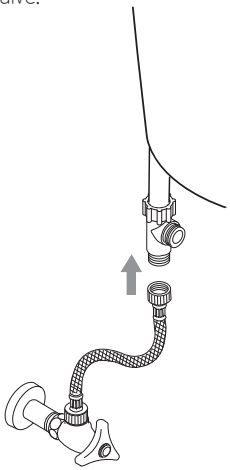

2. How to install a bidet.

■ How to install.

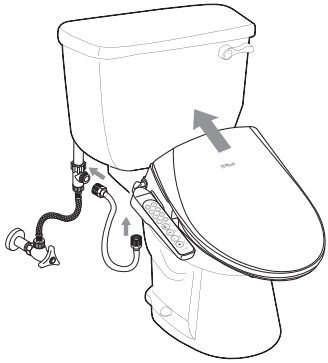

1. Put the fixing rubbers in the toilet bowl in the direction as shown in the figure (Use large rubbers or small rubbers depending on the size of the holes).



2. Place the fixing plate in the toilet bowl holes as shown in the figure.

3. Insert the bracket, washers, and fixing bolts into the toilet closet in order as shown in the figure, and tighten the fixing bolts with a screwdriver.

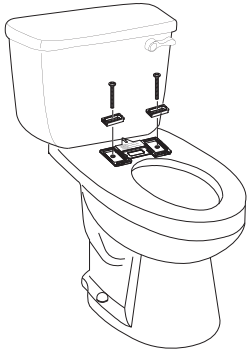

4. Insert the bidet into the groove as shown in the figure and push it in until you hear a "click" sound.

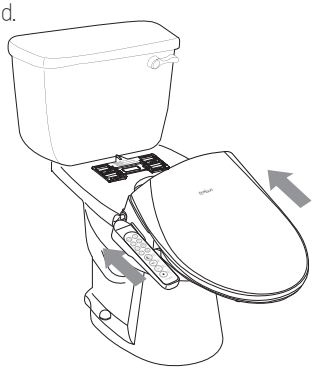

5. Connect the connecting hose inside the bidet with the T-connector and open the water supply valve to check for leaks.



3. How to install a remote control (for remote control models only)

■ How to install a remote control

1. Determine the installation location and remove moisture and debris.
2. Remove the protective double-sided tape from the hanger and attach it to the installation location.

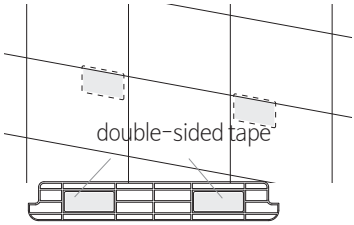

3. Set the remote control to the top of the hanger and then lower it to install.

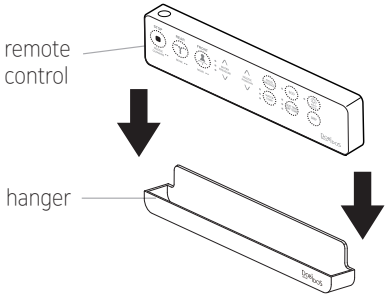

■ How to replace remote control batteries

1. You can remove the batteries easily by pushing a finger into the hole under the hanger.

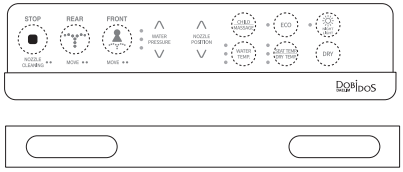

2. Turn the coin in the direction of the arrow and open the cover.

3. Replace 3 AAA batteries with new ones, and insert in the direction of the arrow.
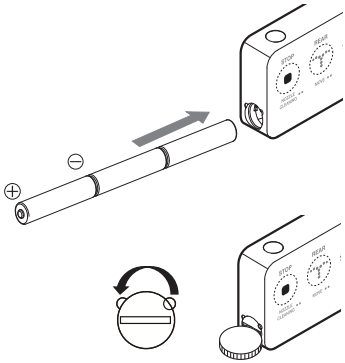
4. Close the cover by turning it in the 1 o'clock direction (Tools other than coins can cause wear when opening and closing the cover).