

Description: 7020 2.4-2.5GHz Chip Antenna**PART NUMBER:** ANT7020LL05R2400A**Features:**

- Size : 7.00x2.00x0.75 mm
- Omni-directional radiation
- Tape & reel automatic mounting
- Reflow process compatible
- RoHS compliant

Applications:

- 2.4 GHz WiFi device
- Bluetooth gadget
- Zigbee device
- ISM band equipment

ELECTRICAL SPECIFICATIONS

Working Frequency	2.45 GHz
Bandwidth	500 MHz(Typ.)
Return Loss	10 dB Max.
Polarization	Linear
Azimuth Beamwidth	Omni-directional
Peak Gain	2.62 dBi (Typ.)
Impedance	50 Ω
Operating Temperature	- 40~105 $^{\circ}\text{C}$
Maximum Power	1 W
Termination	Ni / Sn (Environmentally-Friendly Leadless)
Resistance to Soldering Heats	260 $^{\circ}\text{C}$, 10sec.

NOTE


1. The specification is defined on Pulse evaluation board



Description: 7020 2.4-2.5GHz Chip Antenna

PART NUMBER: ANT7020LL05R2400A

MECHANICAL DRAWING

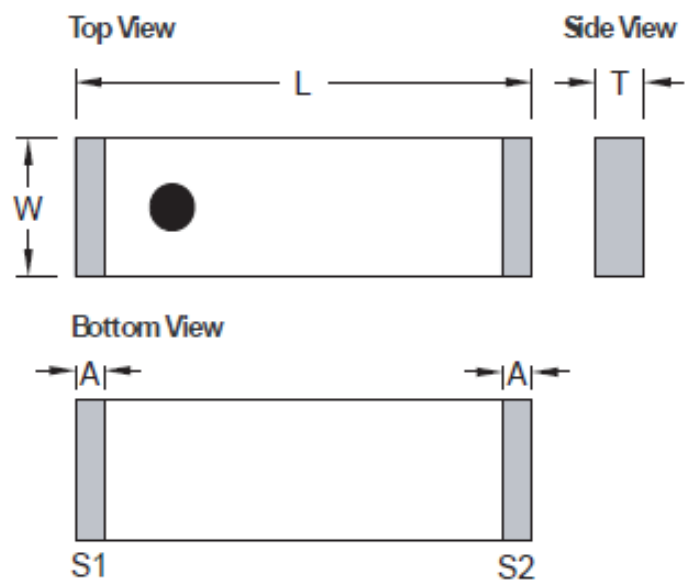

	Dimension
L (mm)	7.00 ± 0.20
W (mm)	2.00 ± 0.20
T (mm)	0.75 ± 0.20
A (mm)	0.45 ± 0.20


Terminal name	Function
S1	Feeding Point
S2	Soldering Point

YNH00120

Description: 7020 2.4-2.5GHz Chip Antenna


PART NUMBER: ANT7020LL05R2400A

REFERENCE DESIGN OF EVALUATION BOARD

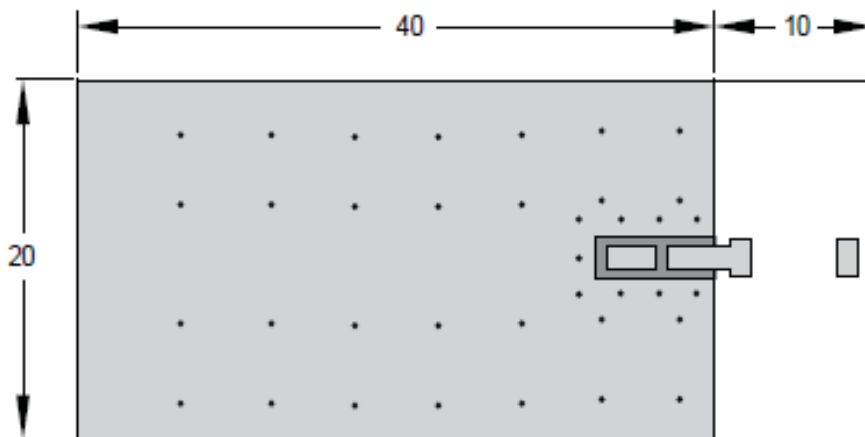

Outlook and dimension of evaluation board

Unit : mm

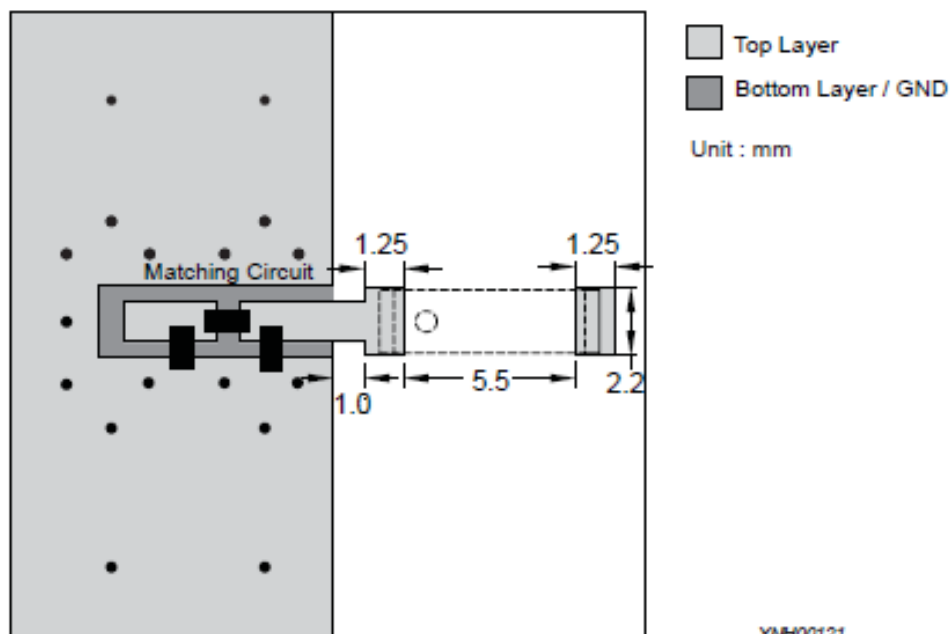


Details of soldering Pad

YNH00121


Description: 7020 2.4-2.5GHz Chip Antenna

PART NUMBER: ANT7020LL05R2400A

REFERENCE DESIGN OF EVALUATION BOARD

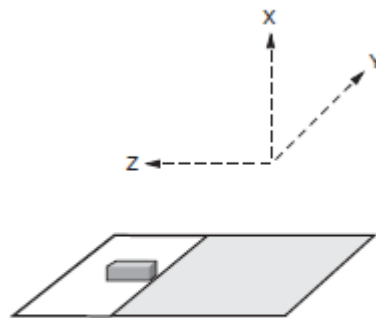

Evaluation board and XYZ direction

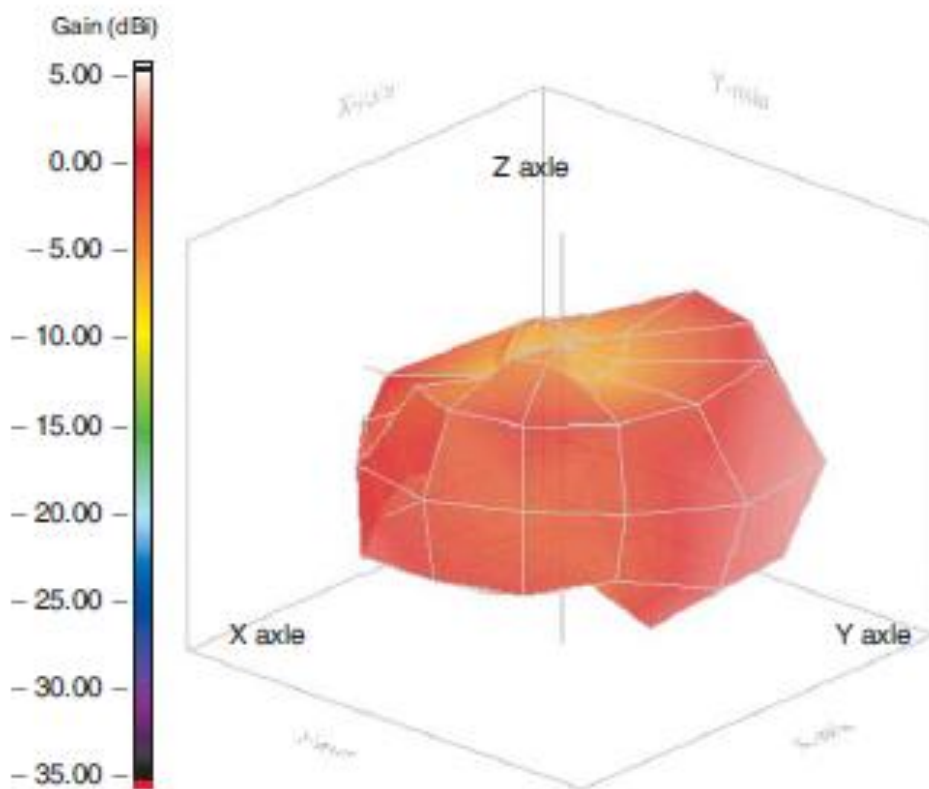

Frequency= 2.45 GHz
Max gain = 2.62 dBi, at (90,120)
MEG (mean effective gain)= -2.28 dBi
Directivity (dB) = 3.67
Efficiency = -1.05 dB, 78.49%


Radiation pattern

YNH00123

Description: 7020 2.4-2.5GHz Chip Antenna

PART NUMBER: ANT7020LL05R2400A

ELECTRICAL PERFORMANCES

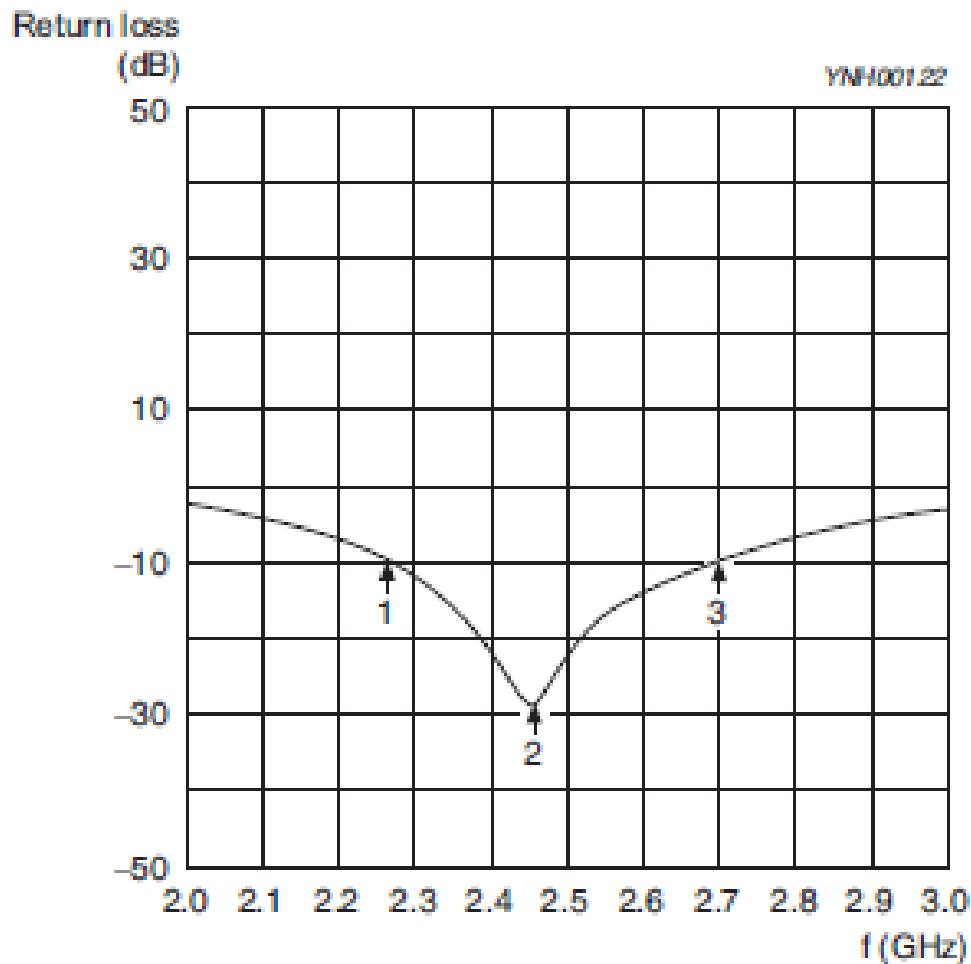

Maker data
2.27GHz, -10dB
2.45GHz, -28.3dB
2.69GHz, -10dB

Return loss

Description: 7020 2.4-2.5GHz Chip Antenna

PART NUMBER: ANT7020LL05R2400A

REVISION HISTORY

Revision	Date	Description
Version 1	Nov. 20, 2020	- New issue