


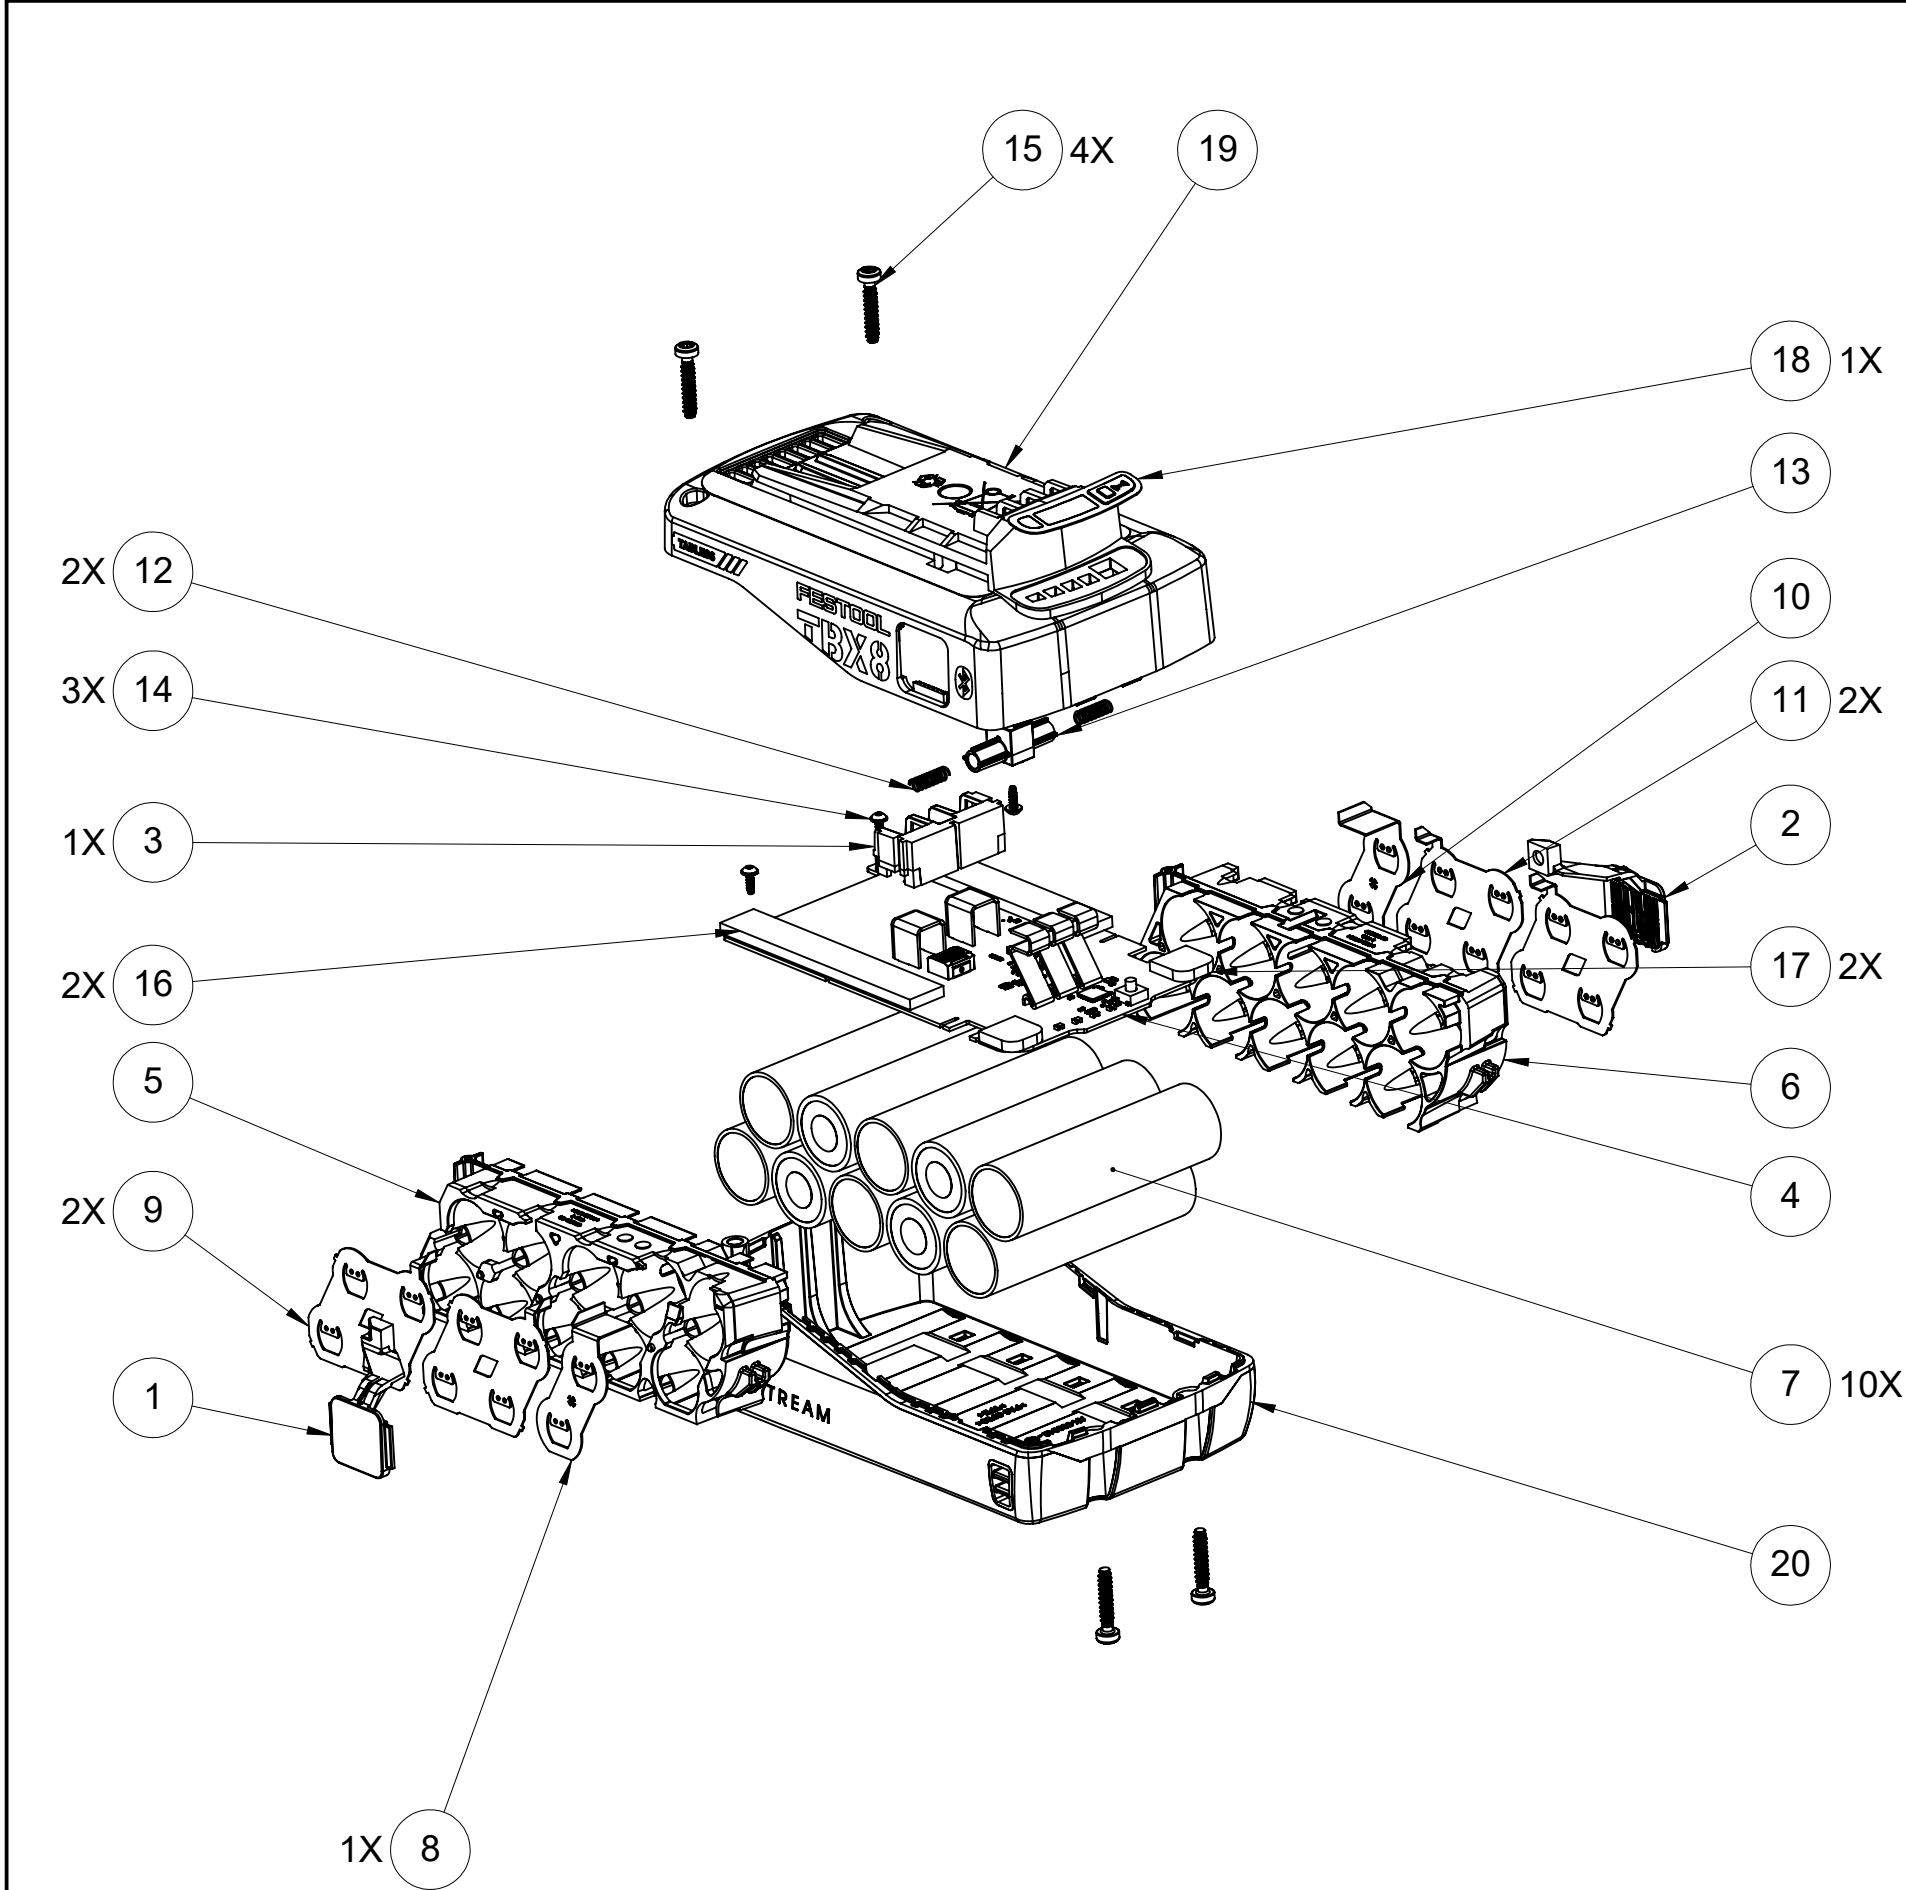

No.	AX	Part number/standard	Description	Q'ty	Notes
1	610920-03	-	Plastic button right	1	-
2	610921-03	-	Plastic button left	1	-
3	612130-03	612131	Retainer (Power-contact holder)	1	-
4	800851-00	11057921f	BMS - BP18 TBX 8 ASI rev. F	1	-
5	618281-05	MŁ_00285	Unovolt cellholder right, 10 cells	1	-
6	618282-05	MŁ_00286	Unovolt cell holder left, 10 cells	1	-
7	613835-00	-	INR21700 40P 3,6V 4 Ah Li-Ionen Nickel-Cobalt-Aluminiumoxid	10	-
8	618250-02	MŁ_00287	Unovolt Connector 01, 2p; 0,4mm	1	-
9	618251-02	-	Unovolt connector 03, 4p; 0,4mm;	2	-
10	618252-02	MŁ_00289	Unovolt coonector 02, 2p; 0,4mm;	1	-
11	618253-02	-	Unovolt Connector 04, 4p; 0,4mm	2	-
12	013379-00	-	Compression spring 3,7x11,5	2	-
13	619252-04	MŁ_00298	Unovolt springs holder	1	-
14	028597-00	-	2x6 Screw for termoplastics KN6038 STSplus	3	-
15	601934-00	-	EJOT DELTA PT WN 5452 35x18	4	-
16	623109-00	-	Insulation tape 12x75mm	2	-
17	623112-00	-	Insulation 13x13x3mm	2	-
18	610923-01	-	LED window MPE25PK / K4533	1	-
19	800041-00	-	Top Housing with tampoprint TBX8	1	-
20	800042-00	-	Unovolt Bottom Housing	1	-
21	800858-01		Rating label; Rev.A; 97x23mm; Festool BP18 TBX 8 ASI; 11224804	1	-
22	800859-01		Warning label; Rev.B; 97x23mm; Festool BP18 TBX 8 ASI; 11156673	1	-

	AX nr 800782-00			Designed by M. Łozowski		Date 25-01-22		
	Material			Drawn by M. Łozowski		Date 18-11-25		
	Description Festool TBX8 ASI 5S2P INR21700 40PL					Released by		
	CAD file MŁ_00443					Weight [g] 985		
Tolerance -			Revision 02	Prototype 02	Size A3	Scale 1:2	Sheet 1 z 1	