Appendix Test Data for BT(BDR/EDR) (Conducted Measurement)

Product Name: Bluetooth Keyboard

Trade Mark: Dexnor

Test Model: Bluetooth Keyboard Dexnor DK002

FCC ID: 2BA3T-DK002

Environmental Conditions

Temperature:	25.5°C
Relative Humidity:	55%
ATM Pressure:	100.0 kPa
Test Engineer:	Anna Hu
Supervised by:	Hugo Chen
NOTE	N/A

Appendix A: 20dB Emission Bandwidth

Test Result

TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	1.017	2401.463	2402.480	---	---
		2441	1.002	2440.493	2441.495	---	---
		2480	1.026	2479.466	2480.492	---	---

Test Graphs

DH5_Ant1_2402

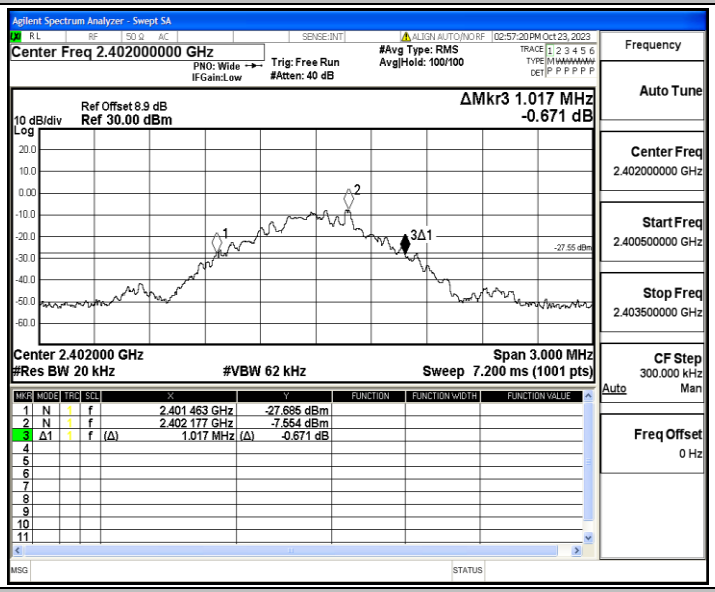

DH5_Ant1_2441

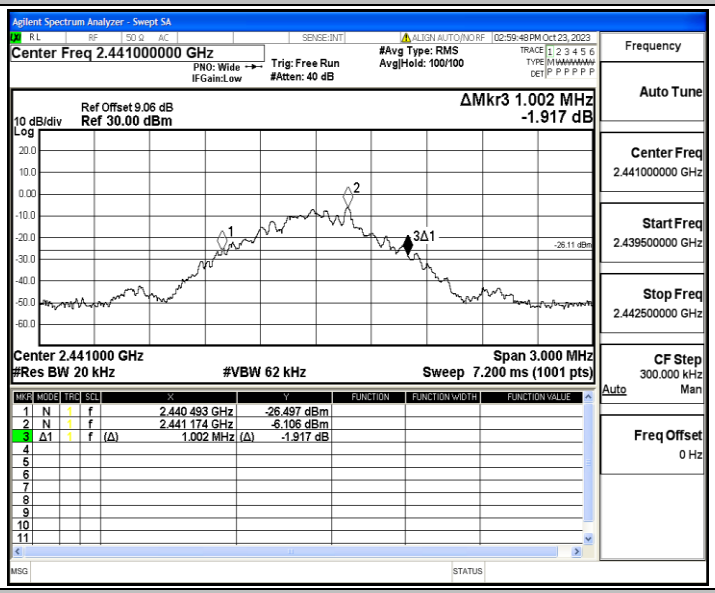

DH5_Ant1_2480

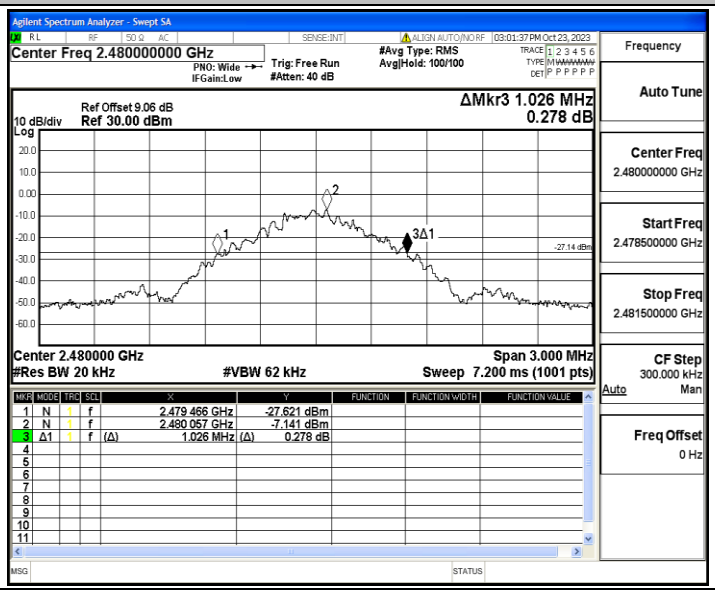

Appendix B: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.92270	2401.5354	2402.4581	---	---
		2441	0.94200	2440.5294	2441.4714	---	---
		2480	0.93079	2479.5365	2480.4673	---	---

Test Graphs

DH5_Ant1_2402

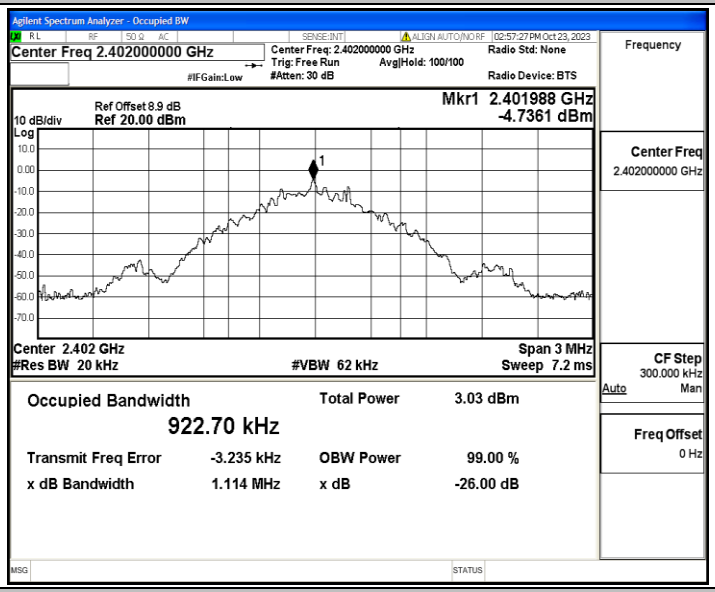

DH5_Ant1_2441

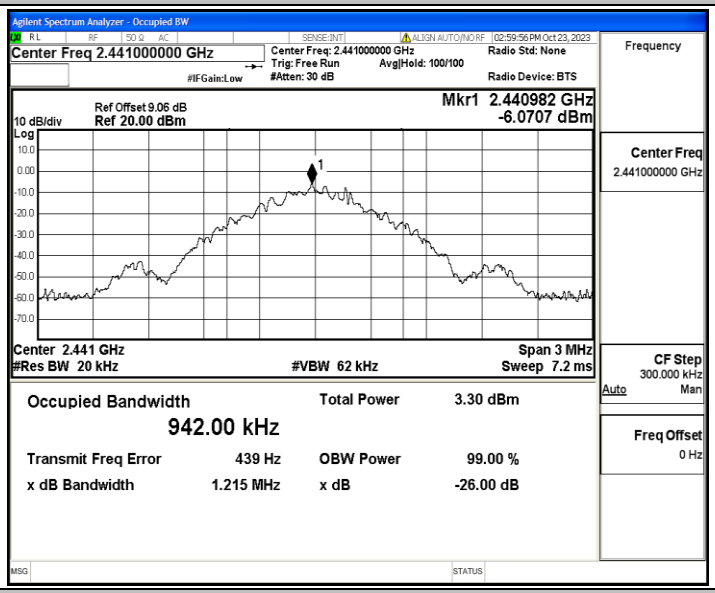

DH5_Ant1_2480

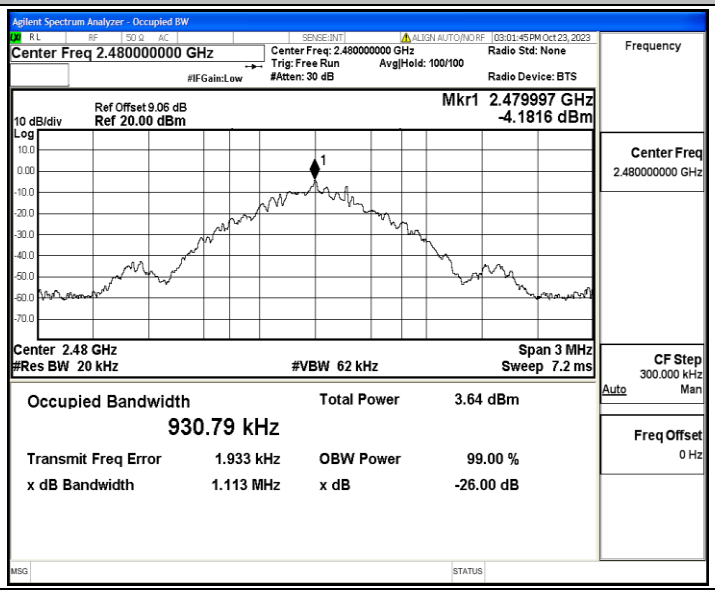

Appendix C: Maximum Peak conducted output power

Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	-3.73	≤20.97	PASS
		2441	-2.73	≤20.97	PASS
		2480	-2.79	≤20.97	PASS

Test Graphs

DH5_Ant1_2402

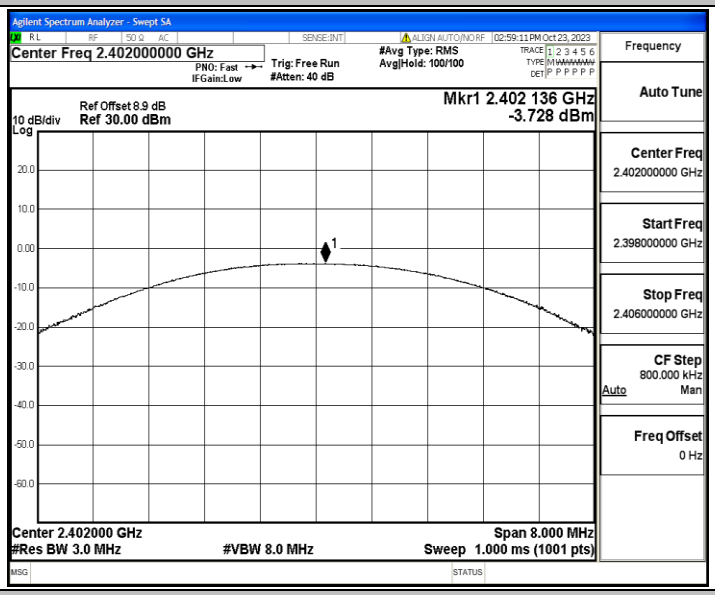

DH5_Ant1_2441

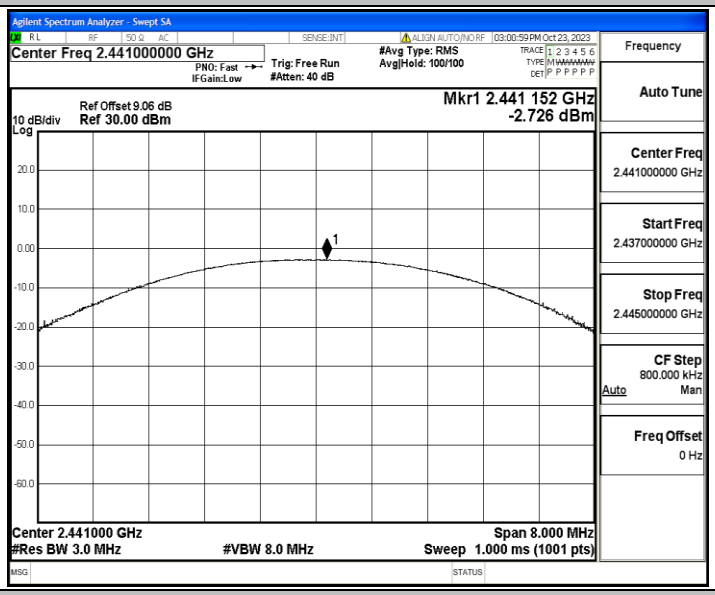

DH5_Ant1_2480

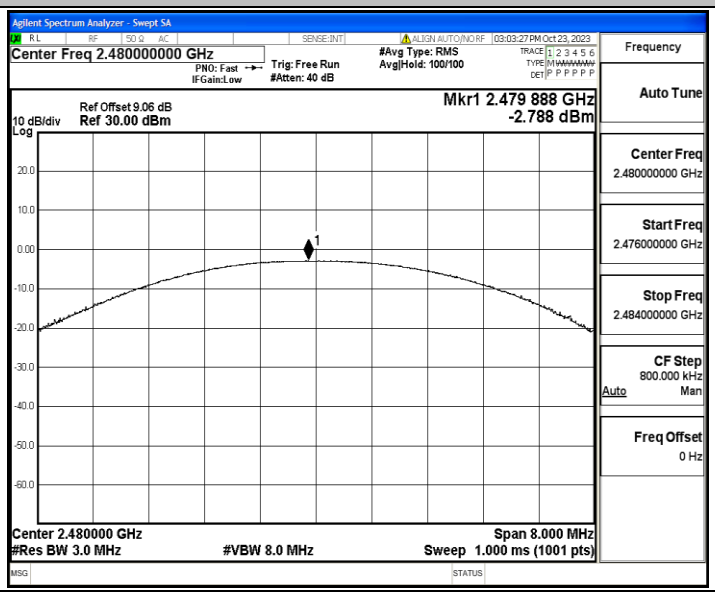

Appendix D: Carrier frequency separation

Test Result

TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.81	≥0.684	PASS

Test Graphs

DH5_Ant1_Hop

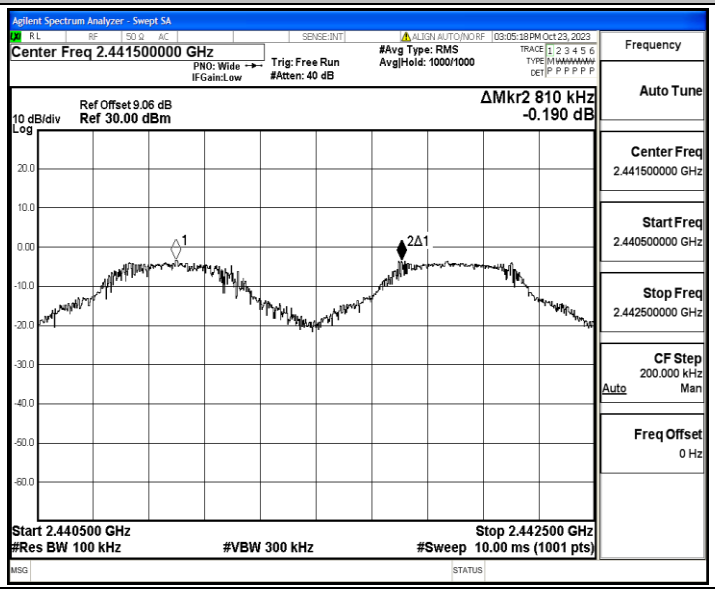

Appendix E: Time of occupancy

Test Result

TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH5	Ant1	Hop	2.940	80	0.235	≤0.4	PASS

Test Graphs

DH5_Ant1_Hop
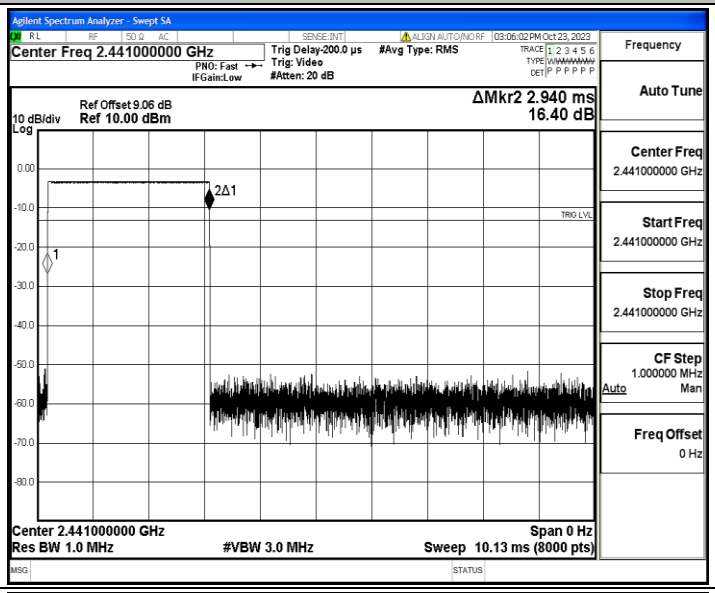
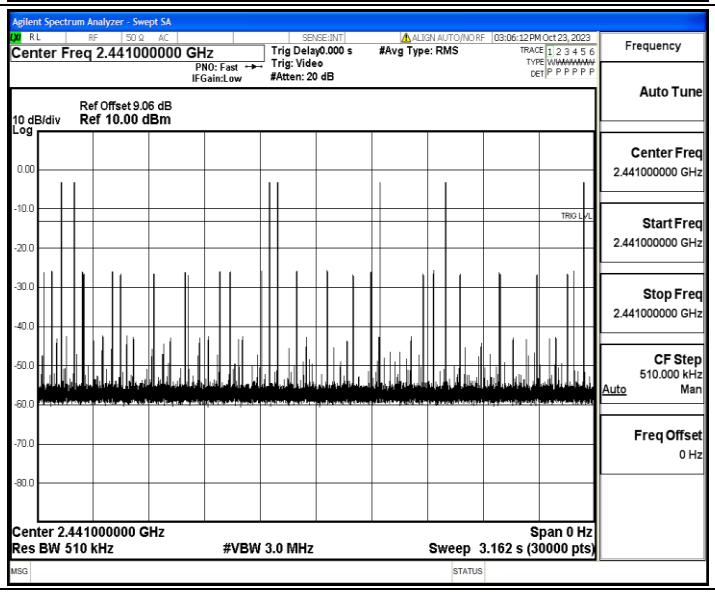

Appendix F: Number of hopping channels

Test Result

TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS

Test Graphs

DH5_Ant1_Hop
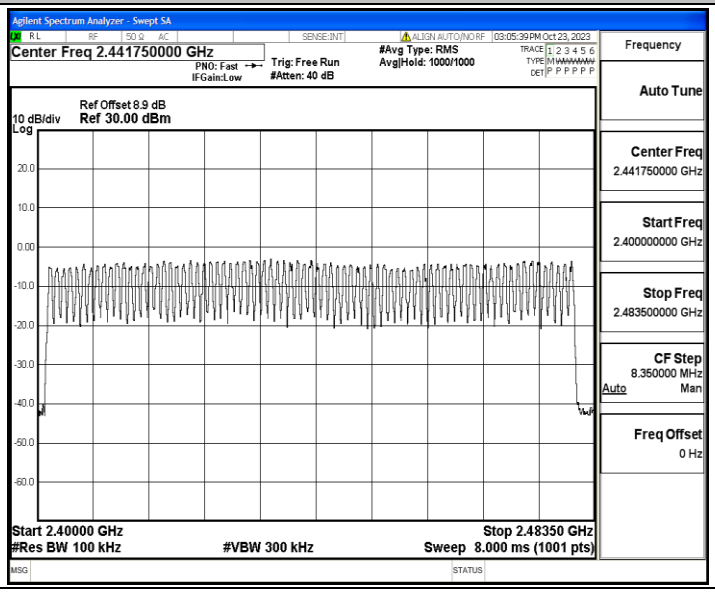

Appendix G: Band edge measurements

Test Result

TestMode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-4.23	-48.37	≤-24.23	PASS
		High	2480	-3.63	-49.63	≤-23.63	PASS
		Low	Hop_2402	-5.66	-50.73	≤-25.66	PASS
		High	Hop_2480	-3.70	-49.02	≤-23.7	PASS

Test Graphs

DH5_Ant1_Low_2402

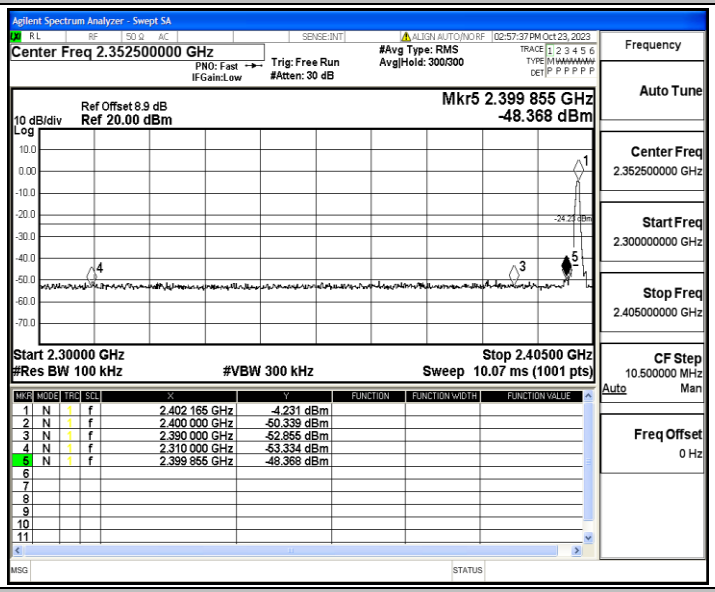

DH5_Ant1_High_2480

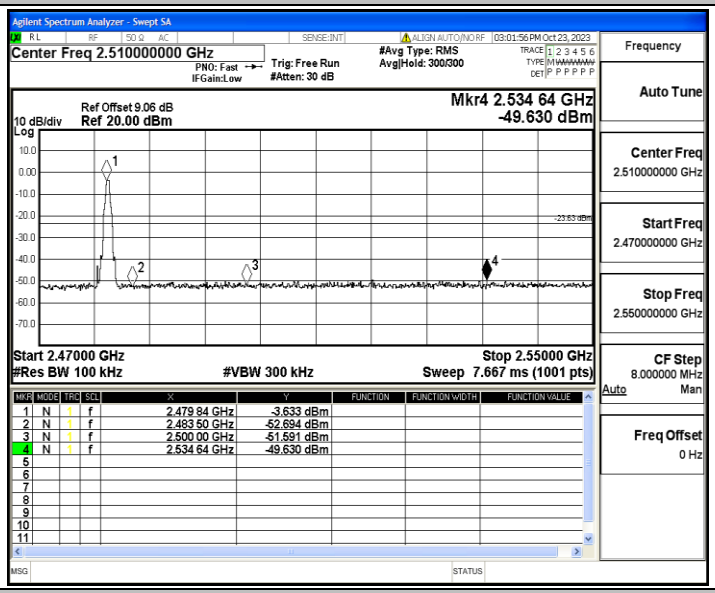

DH5_Ant1_Low_Hop_2402

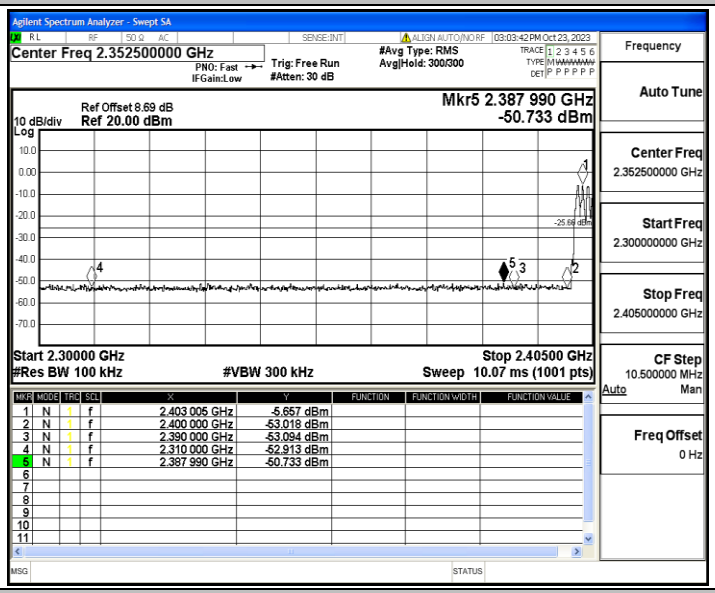

DH5_Ant1_High_Hop_2480

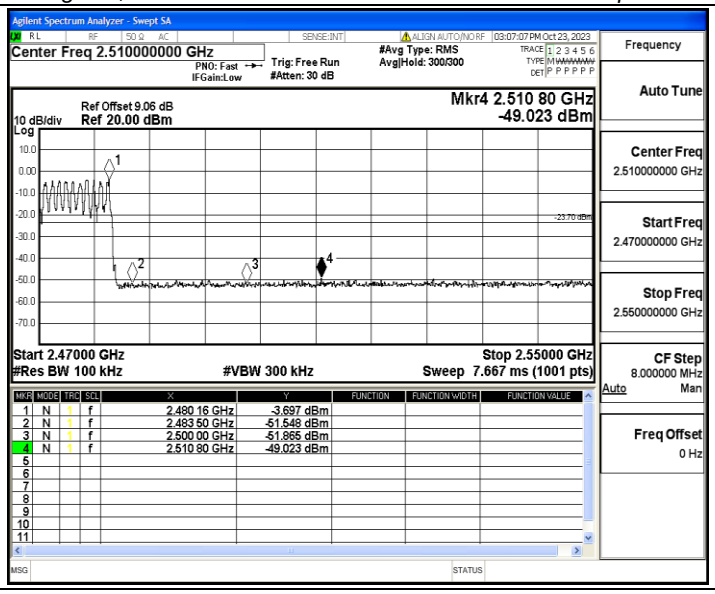
Agilent Spectrum Analyzer - Swept SA
Center Freq 2.510000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 30 dB
#Avg Type: RMS
Avg|Hold: 300/300
03:07:07 PM Oct 23, 2023
Ref Offset 9.06 dB
10 dB/div
Ref 20.00 dBm
Log
Mkr4 2.510 80 GHz
-49.023 dBm
-23.70 dBm
Start 2.47000 GHz
#Res BW 100 kHz
#VBW 300 kHz
Stop 2.55000 GHz
Sweep 7.667 ms (1001 pts)
1 N 1 f 2.480 16 GHz -3.697 dBm
2 N 1 f 2.483 50 GHz -51.548 dBm
3 N 1 f 2.500 00 GHz -51.865 dBm
4 N 1 f 2.510 80 GHz -49.023 dBm
Frequency
Auto Tune
Center Freq
2.510000000 GHz
Start Freq
2.470000000 GHz
Stop Freq
2.550000000 GHz
CF Step
8.000000 MHz
Auto Man
Freq Offset
0 Hz

Appendix H: Conducted Spurious Emission

Test Result

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	-4.32	-4.32	---	PASS
			30~1000	-4.32	-62.53	≤-24.32	PASS
			1000~26500	-4.32	-50.49	≤-24.32	PASS
		2441	Reference	-4.22	-4.22	---	PASS
			30~1000	-4.22	-62.23	≤-24.22	PASS
			1000~26500	-4.22	-50.25	≤-24.22	PASS
		2480	Reference	-4.19	-4.19	---	PASS
			30~1000	-4.19	-62.7	≤-24.19	PASS
			1000~26500	-4.19	-48.95	≤-24.19	PASS

Test Graphs

DH5_Ant1_2402_0~Reference

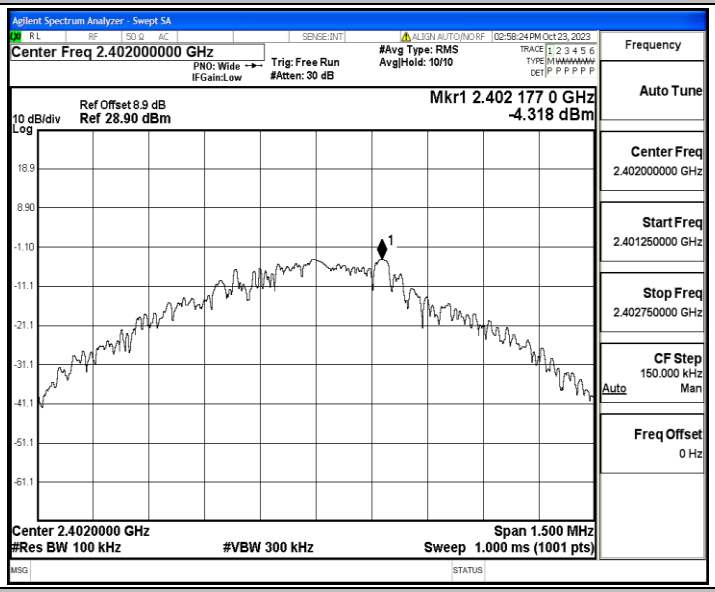

DH5_Ant1_2402_30~1000

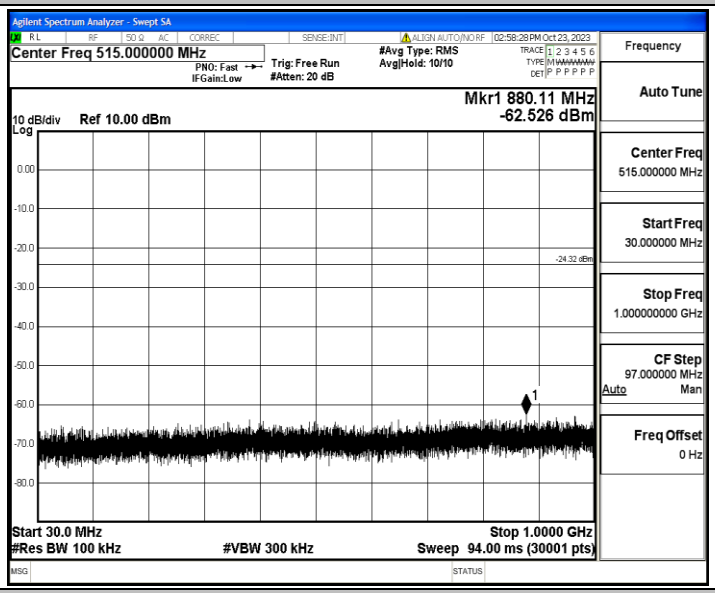

DH5_Ant1_2402_1000~26500

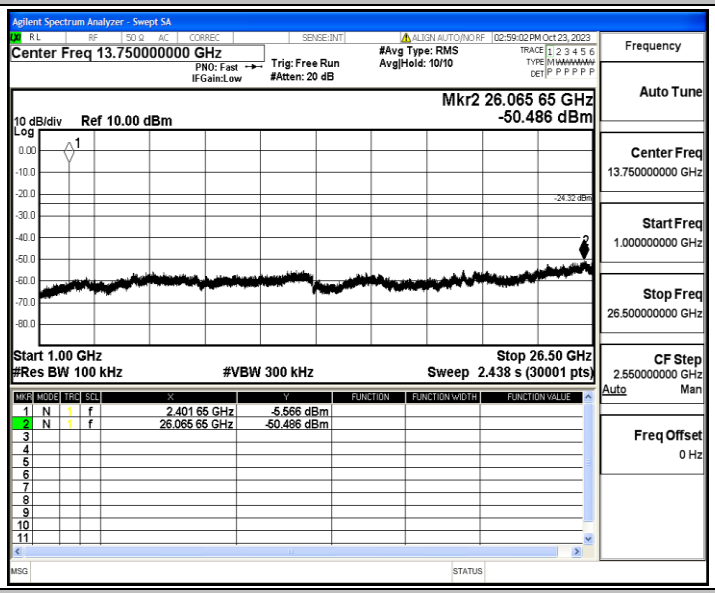

DH5_Ant1_2441_0~Reference

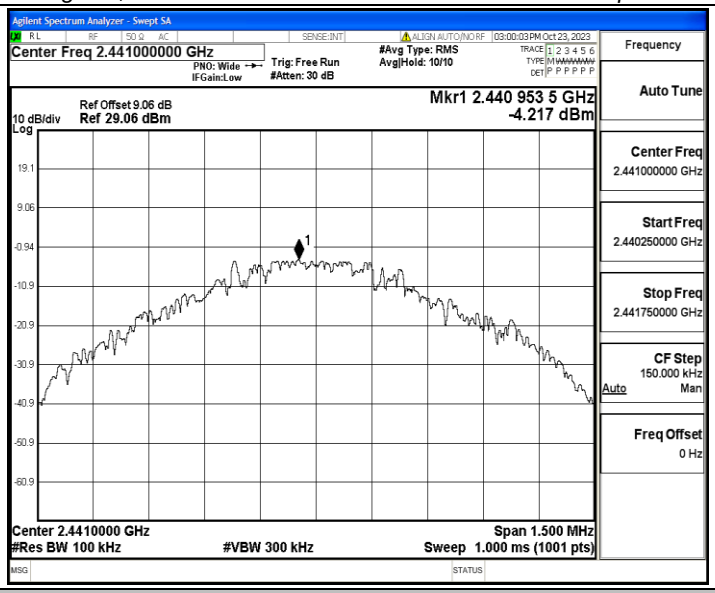

DH5_Ant1_2441_30~1000

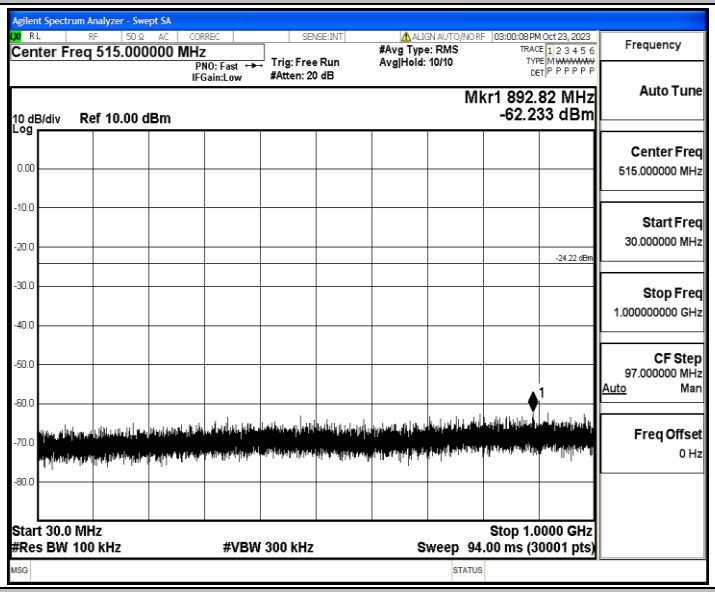

DH5_Ant1_2441_1000~26500

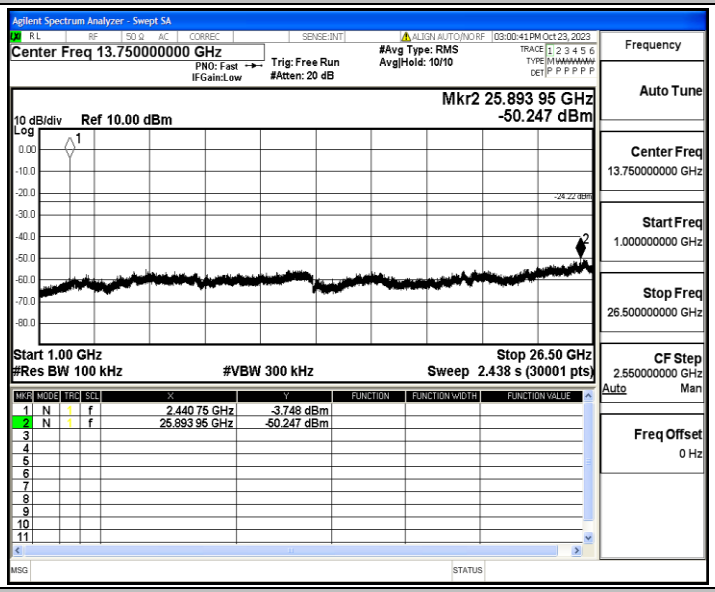

DH5_Ant1_2480_0~Reference

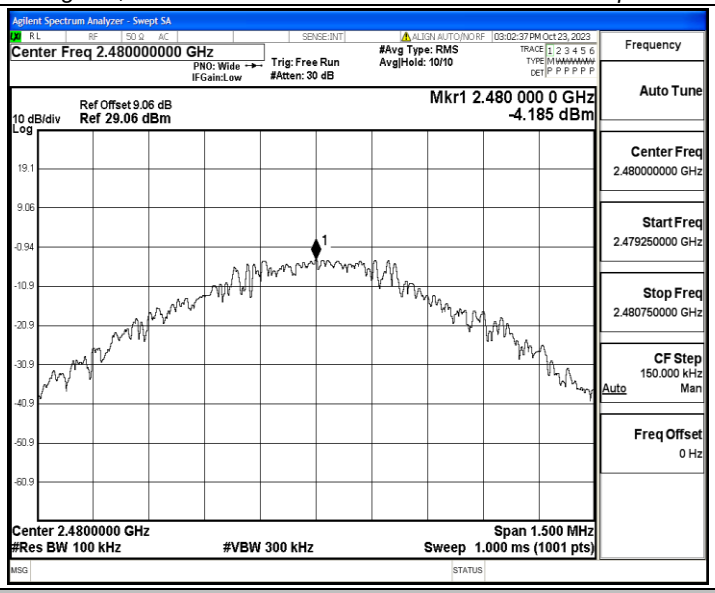

DH5_Ant1_2480_30~1000

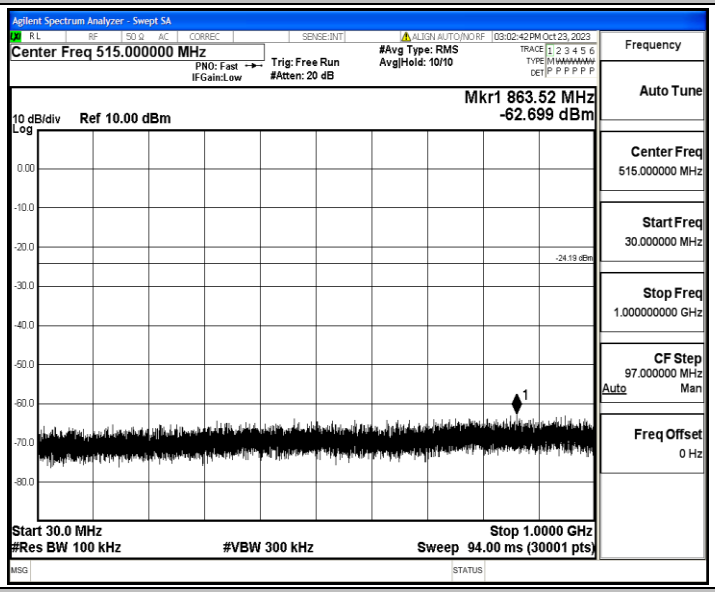

DH5_Ant1_2480_1000~26500

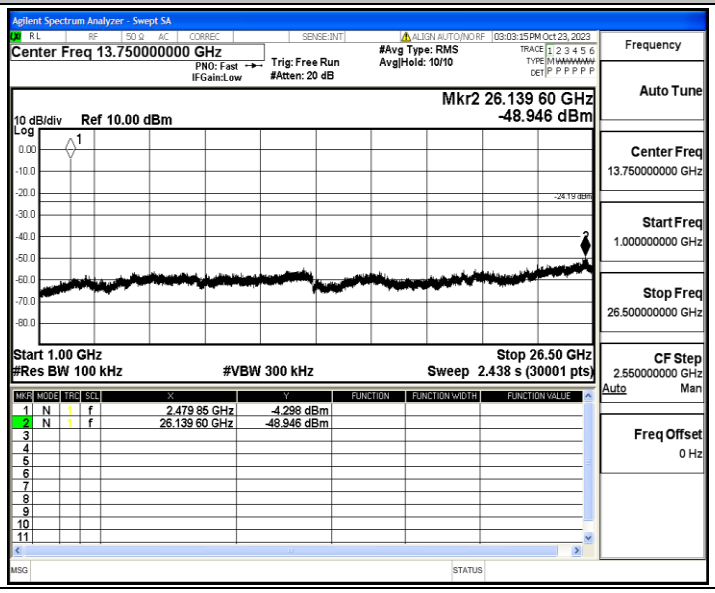

Appendix I: Duty Cycle

Test Result

TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T[kHz]
DH5	Ant1	2402	2.95	3.76	78.46	0.34
		2441	2.94	3.75	78.40	0.34
		2480	2.94	3.75	78.40	0.34

Test Graphs

DH5_Ant1_2402

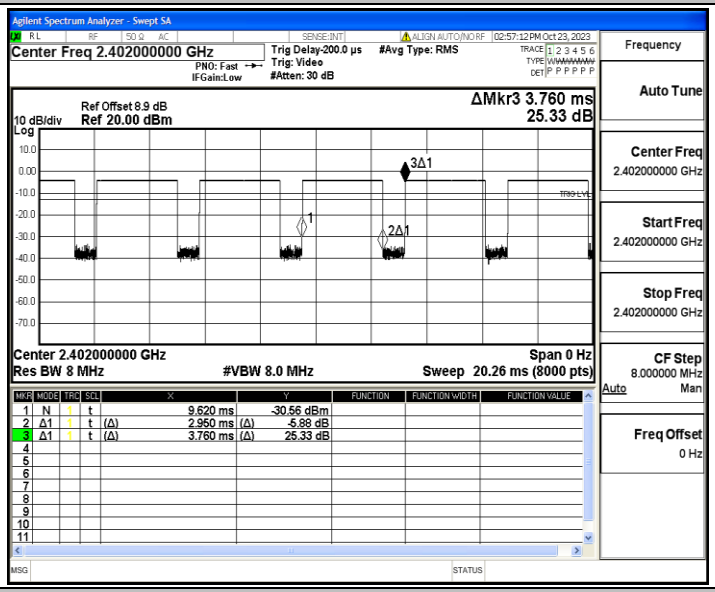

DH5_Ant1_2441

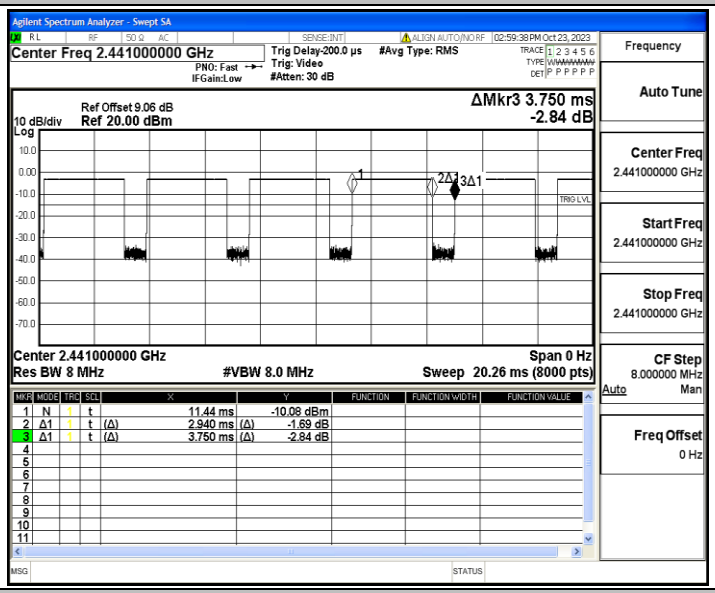

DH5_Ant1_2480

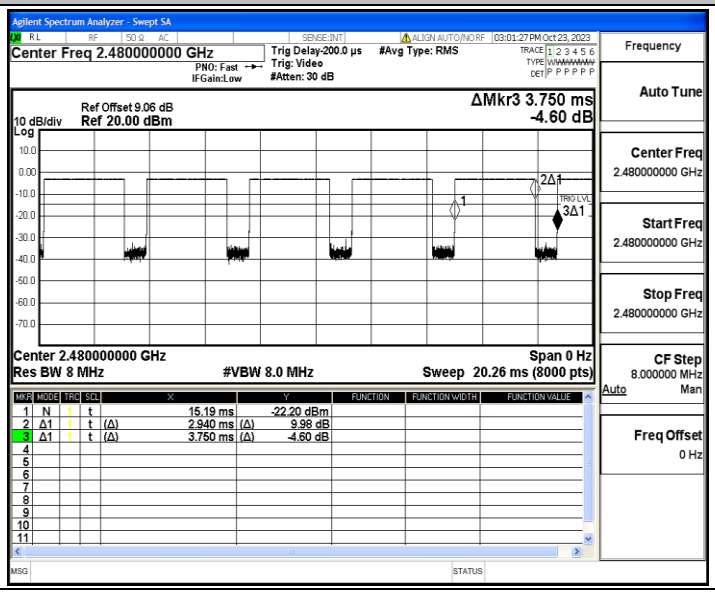

Appendix J: Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Channel	Detector	Freq(MHz)	Result(dBm)	Limit(dBm)	Verdict
DH5	Ant1	Low	2402	AV	2310.000	-49.55	≤-41.20	PASS
				AV	2387.990	-49.13	≤-41.20	PASS
				AV	2390.000	-49.29	≤-41.20	PASS
				Peak	2310.000	-41.53	≤-21.20	PASS
				Peak	2383.370	-39.33	≤-21.20	PASS
				Peak	2390.000	-42.07	≤-21.20	PASS
		High	2480	AV	2483.500	-48.49	≤-41.20	PASS
				AV	2499.600	-48.39	≤-41.20	PASS
				AV	2500.000	-48.57	≤-41.20	PASS
				Peak	2483.500	-41.73	≤-21.20	PASS
				Peak	2485.200	-39.06	≤-21.20	PASS
				Peak	2500.000	-41.18	≤-21.20	PASS

Note：

1. The Antenna Gain is compensated in the graph with 2dBi and Antenna Gain which is Higher.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs

DH5_Ant1_Low_2402_AV

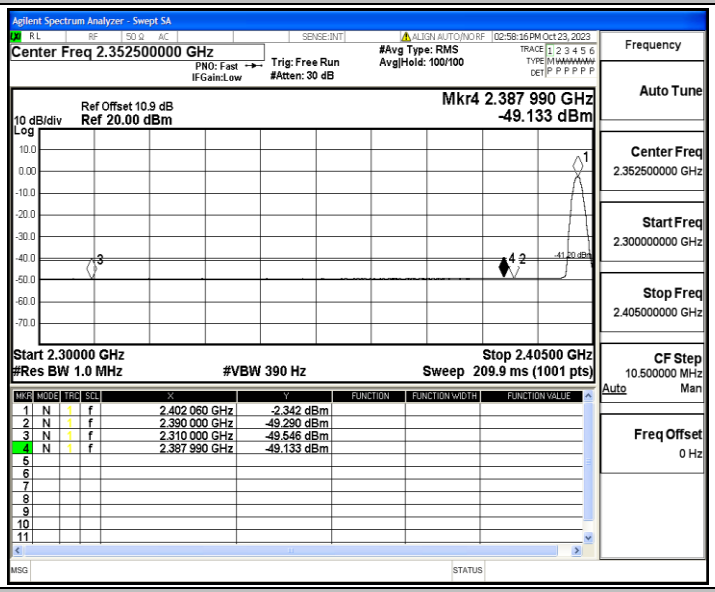

DH5_Ant1_Low_2402_Peak

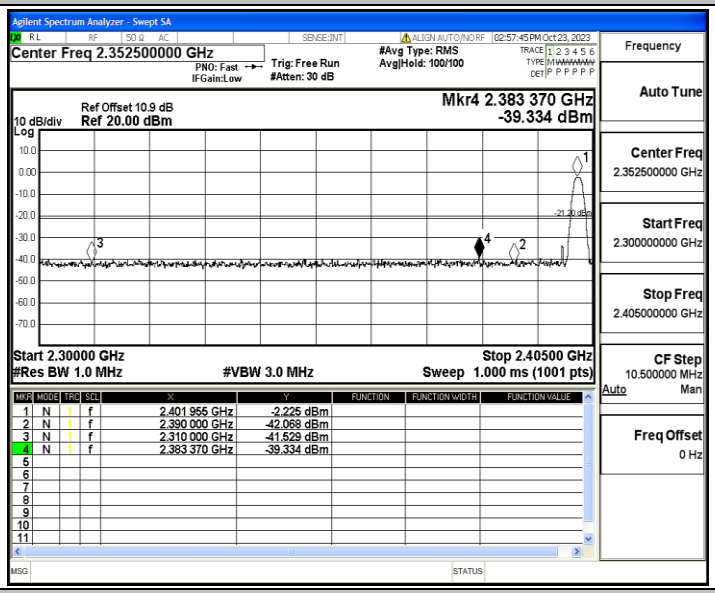

DH5_Ant1_High_2480_AV

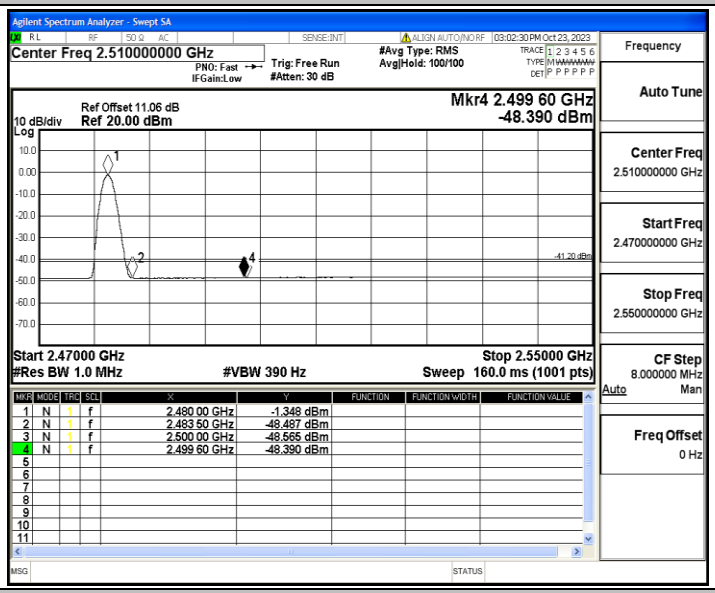

DH5_Ant1_High_2480_Peak

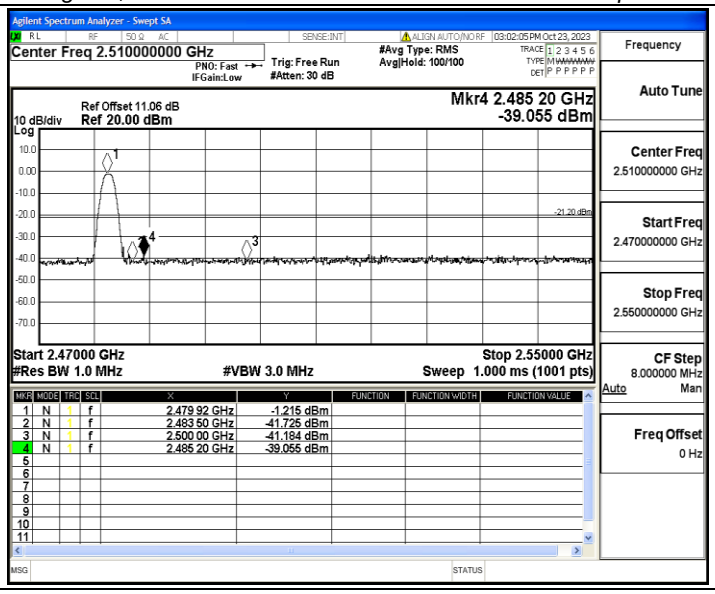
Agilent Spectrum Analyzer - Swept SA
Center Freq 2.510000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 30 dB
#Avg Type: RMS
Avg|Hold: 100/100
03:02:05 PM Oct 23, 2023
Ref Offset 11.06 dB
10 dB/div Ref 20.00 dBm
Log
Mkr4 2.485 20 GHz
-39.055 dBm
-21.20 dBm
Start 2.47000 GHz
#Res BW 1.0 MHz
#VBW 3.0 MHz
Stop 2.55000 GHz
Sweep 1.000 ms (1001 pts)
1 N 1 f 2.479 92 GHz -1.215 dBm
2 N 1 f 2.483 50 GHz -41.725 dBm
3 N 1 f 2.500 00 GHz -41.184 dBm
4 N 1 f 2.485 20 GHz -39.055 dBm
Frequency
Auto Tune
Center Freq
2.510000000 GHz
Start Freq
2.470000000 GHz
Stop Freq
2.550000000 GHz
CF Step
8.000000 MHz
Auto Man
Freq Offset
0 Hz