


## RF TEST REPORT

**Applicant** Thunder Software Technology Co., Ltd.  
**FCC ID** 2BA4NTX11010401  
**Product** Hyllion Drive Processor  
**Brand** HDP  
**Model** HDP  
**Report No.** R2306A0615-R2  
**Issue Date** July 7, 2023

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15E (2022)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.



Prepared by: Xu Ying



Approved by: Xu Kai

---

### TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

## TABLE OF CONTENT

|                                                     |     |
|-----------------------------------------------------|-----|
| 1. Test Laboratory .....                            | 4   |
| 1.1. Notes of the test report.....                  | 4   |
| 1.2. Test facility .....                            | 4   |
| 1.3. Testing Location.....                          | 4   |
| 2. General Description of Equipment under Test..... | 5   |
| 2.1. Applicant and Manufacturer Information.....    | 5   |
| 2.2. General information.....                       | 5   |
| 3. Applied Standards .....                          | 7   |
| 4. Test Configuration .....                         | 8   |
| 5. Test Case Results .....                          | 10  |
| 5.1. Occupied Bandwidth .....                       | 10  |
| 5.2. Average Power Output.....                      | 52  |
| 5.3. Frequency Stability.....                       | 65  |
| 5.4. Power Spectral Density .....                   | 69  |
| 5.5. Unwanted Emission .....                        | 193 |
| 5.6. Conducted Emission .....                       | 275 |
| 6. Main Test Instruments.....                       | 277 |
| ANNEX A: The EUT Appearance .....                   | 278 |
| ANNEX B: Test Setup Photos .....                    | 279 |

## Summary of measurement results

| Number                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Test Case              | Clause in FCC rules | Verdict |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|---------------------|---------|
| 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Average output power   | 15.407(a)           | PASS    |
| 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Occupied bandwidth     | 15.407(e)           | PASS    |
| 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Frequency stability    | 15.407(g)           | PASS    |
| 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Power spectral density | 15.407(a)           | PASS    |
| 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Unwanted Emissions     | 15.407(b)           | PASS    |
| 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Conducted Emissions    | 15.207              | NA      |
| Date of Testing: June 6, 2023 ~ June 29, 2023                                                                                                                                                                                                                                                                                                                                                                                                                     |                        |                     |         |
| Date of Sample Received: June 1, 2023                                                                                                                                                                                                                                                                                                                                                                                                                             |                        |                     |         |
| <p>Note: PASS: The EUT complies with the essential requirements in the standard.</p> <p>FAIL: The EUT does not comply with the essential requirements in the standard.</p> <p>All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.</p> |                        |                     |         |

## 1. Test Laboratory

### 1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### 2.1. Applicant and Manufacturer Information

|                             |                                                                                            |
|-----------------------------|--------------------------------------------------------------------------------------------|
| <b>Applicant</b>            | Thunder Software Technology Co., Ltd.                                                      |
| <b>Applicant address</b>    | ThunderSoft Building, Building 3, No.9 Qinghua Dong Road, Haidian District, Beijing, China |
| <b>Manufacturer</b>         | Thunder Software Technology Co., Ltd.                                                      |
| <b>Manufacturer address</b> | ThunderSoft Building, Building 3, No.9 Qinghua Dong Road, Haidian District, Beijing, China |

### 2.2. General information

| EUT Description                                                                                                                                                                                             |                                                                                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Model                                                                                                                                                                                                       | HDP                                                                                 |
| SN                                                                                                                                                                                                          | B000210                                                                             |
| Hardware Version                                                                                                                                                                                            | 0.3                                                                                 |
| Software Version                                                                                                                                                                                            | HDP-1212-1218-R3                                                                    |
| Power Supply                                                                                                                                                                                                | External power supply                                                               |
| Antenna Type                                                                                                                                                                                                | External Antenna                                                                    |
| Antenna Connector                                                                                                                                                                                           | A permanently attached antenna (meet with the standard FCC Part 15.203 requirement) |
| Antenna Gain                                                                                                                                                                                                | Antenna 1: 2.80 dBi<br>Antenna 2: 2.80 dBi                                          |
| Directional Gain                                                                                                                                                                                            | For Power: 2.80 dBi<br>For PSD: 5.81 dBi                                            |
| Operating Frequency Range(s)                                                                                                                                                                                | U-NII-1: 5150MHz-5250MHz<br>U-NII-2C:5470MHz-5725MHz<br>U-NII-3: 5725MHz -5850MHz   |
| Modulation Type                                                                                                                                                                                             | 802.11a/n (HT20/HT40) : OFDM<br>802.11ac (VHT20/VHT40/VHT80): OFDM                  |
| Max. Output Power                                                                                                                                                                                           | 13.03 dBm                                                                           |
| Testing temperature range                                                                                                                                                                                   | -20 ° C to 50° C                                                                    |
| Operating temperature range                                                                                                                                                                                 | -30 ° C to 70 ° C                                                                   |
| Operating voltage range                                                                                                                                                                                     | 9 V to 16 V                                                                         |
| State DC voltage                                                                                                                                                                                            | 13.5 V                                                                              |
| Note:<br>1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.<br>2. This device support automatically discontinue transmission, while the device is not |                                                                                     |

transmitting any information, the device can automatically discontinue transmission and become standby mode for power saving. The device can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

3. (a) Manufacturers implements security features in any digitally modulated devices capable of operating in any of the U-NII bands, so that third parties are not able to reprogram the device to operate outside the parameters for which the device was certified. The software prevents the user from operating the transmitter with operating frequencies, output power, modulation types or other radio frequency parameters outside those that were approved for the device.

Manufacturers uses means including, but not limited to the use of a private network that allows only authenticated users to download software, electronic signatures in software or coding in hardware that is decoded by software to verify that new software can be legally loaded into a device to meet these requirements and must describe the methods in their application for equipment authorization.

(b) Manufacturers take steps to ensure that DFS functionality cannot be disabled by the operator of the U-NII device.

### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR47 Part 15E (2022)** Unlicensed National Information Infrastructure Devices

**ANSI C63.10-2013**

**Reference standard:**

**KDB 789033 D02 General UNII Test Procedures New Rules v02r01**

**KDB 662911 D01 Multiple Transmitter Output v02r01**

## 4. Test Configuration

### Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

**The test software is used MTS8310 V2.0.0.0**

Worst-case data rates are shown as following table.

| Mode           | Data Rate |           |        |
|----------------|-----------|-----------|--------|
|                | Antenna 1 | Antenna 2 | MIMO   |
| 802.11a        | 6 Mbps    | 6 Mbps    | 6 Mbps |
| 802.11n HT20   | MCS0      | MCS0      | MCS8   |
| 802.11n HT40   | MCS0      | MCS0      | MCS8   |
| 802.11ac VHT20 | MCS0      | MCS0      | MCS0   |
| 802.11ac VHT40 | MCS0      | MCS0      | MCS0   |
| 802.11ac VHT80 | MCS0      | MCS0      | MCS0   |

The worst case Antenna mode for each of the following tests for Wi-Fi:

| Test Cases                     | Antenna 1 | Antenna 2 | MIMO    |
|--------------------------------|-----------|-----------|---------|
| Average conducted output power | O         | O         | O       |
| Occupied bandwidth             | --        | --        | O       |
| Frequency stability            | --        | --        | 802.11a |
| Power Spectral Density         | O         | O         | O       |
| Unwanted Emissions             | --        | --        | O       |
| Conducted Emissions            | --        | --        | --      |
| Note: "O": test all bands      |           |           |         |

According to RF Output power results in chapter 5.2, MIMO was selected as the worst antenna.

# Wireless Technology and Frequency Range

| Wireless Technology                                                                                        |          | Bandwidth | Channel | Frequency |
|------------------------------------------------------------------------------------------------------------|----------|-----------|---------|-----------|
| Wi-Fi                                                                                                      | U-NII-1  | 20 MHz    | 36      | 5180MHz   |
|                                                                                                            |          |           | 40      | 5200MHz   |
|                                                                                                            |          |           | 44      | 5220MHz   |
|                                                                                                            |          |           | 48      | 5240MHz   |
|                                                                                                            |          | 40 MHz    | 38      | 5190MHz   |
|                                                                                                            |          |           | 46      | 5230MHz   |
|                                                                                                            |          | 80 MHz    | 42      | 5210MHz   |
|                                                                                                            | U-NII-2C | 20 MHz    | 100     | 5500MHz   |
|                                                                                                            |          |           | 104     | 5520MHz   |
|                                                                                                            |          |           | 108     | 5540MHz   |
|                                                                                                            |          |           | 112     | 5560MHz   |
|                                                                                                            |          |           | 116     | 5580MHz   |
|                                                                                                            |          |           | 120     | 5600MHz   |
|                                                                                                            |          |           | 124     | 5620MHz   |
|                                                                                                            |          |           | 128     | 5640MHz   |
|                                                                                                            |          |           | 132     | 5660MHz   |
|                                                                                                            |          |           | 136     | 5680MHz   |
|                                                                                                            |          |           | 140     | 5700MHz   |
|                                                                                                            |          |           | 144     | 5720MHz   |
|                                                                                                            |          | 40 MHz    | 102     | 5510MHz   |
|                                                                                                            |          |           | 110     | 5550MHz   |
|                                                                                                            |          |           | 118     | 5590MHz   |
|                                                                                                            |          |           | 126     | 5630MHz   |
|                                                                                                            |          |           | 134     | 5670MHz   |
|                                                                                                            |          |           | 142     | 5710MHz   |
|                                                                                                            |          | 80 MHz    | 106     | 5530MHz   |
|                                                                                                            |          |           | 122     | 5610MHz   |
|                                                                                                            |          |           | 138     | 5690MHz   |
|                                                                                                            | U-NII-3  | 20 MHz    | 149     | 5745MHz   |
|                                                                                                            |          |           | 153     | 5765MHz   |
|                                                                                                            |          |           | 157     | 5785MHz   |
|                                                                                                            |          |           | 161     | 5805MHz   |
|                                                                                                            |          |           | 165     | 5825MHz   |
|                                                                                                            |          | 40 MHz    | 151     | 5755MHz   |
|                                                                                                            |          |           | 159     | 5795MHz   |
|                                                                                                            |          | 80 MHz    | 155     | 5775MHz   |
| Does this device support TPC Function? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No |          |           |         |           |
| Does this device support TDWR Band? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No    |          |           |         |           |

## 5. Test Case Results

### 5.1. Occupied Bandwidth

#### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

#### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable.


For U-NII-1/U-NII-2C, set RBW  $\approx$  1% OCB kHz, VBW  $\geq$  3  $\times$  RBW, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

For U-NII-3, Set RBW = 100 kHz, VBW  $\geq$  3  $\times$  RBW, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

Use the 99 % power bandwidth function of the instrument

#### Test Setup



#### Limits

Rule FCC Part §15.407(e)

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 936$  Hz.

**Test Results:**
**U-NII-1**

| Mode           | Carrier frequency (MHz) | 99% bandwidth (MHz) | Minimum 26 dB bandwidth (MHz) | Conclusion |
|----------------|-------------------------|---------------------|-------------------------------|------------|
| 802.11a        | 5180                    | 16.801              | 21.435                        | PASS       |
|                | 5200                    | 16.841              | 21.164                        | PASS       |
|                | 5240                    | 16.833              | 21.566                        | PASS       |
| 802.11n HT20   | 5180                    | 17.934              | 21.348                        | PASS       |
|                | 5200                    | 17.988              | 21.638                        | PASS       |
|                | 5240                    | 17.897              | 21.388                        | PASS       |
| 802.11n HT40   | 5190                    | 36.301              | 39.786                        | PASS       |
|                | 5230                    | 36.186              | 40.087                        | PASS       |
| 802.11ac VHT20 | 5180                    | 17.955              | 21.429                        | PASS       |
|                | 5200                    | 17.980              | 21.642                        | PASS       |
|                | 5240                    | 17.886              | 21.763                        | PASS       |
| 802.11ac VHT40 | 5190                    | 36.269              | 39.603                        | PASS       |
|                | 5230                    | 36.159              | 39.655                        | PASS       |
| 802.11ac VHT80 | 5210                    | 75.829              | 81.092                        | PASS       |

**U-NII-2C**

| Mode           | Carrier frequency (MHz) | 99% bandwidth (MHz) | Minimum 26 dB bandwidth (MHz) | Conclusion |
|----------------|-------------------------|---------------------|-------------------------------|------------|
| 802.11a        | 5500                    | 16.869              | 21.295                        | PASS       |
|                | 5600                    | 16.839              | 21.401                        | PASS       |
|                | 5700                    | 16.903              | 21.503                        | PASS       |
|                | 5720                    | 16.894              | 21.295                        | PASS       |
| 802.11n HT20   | 5500                    | 17.930              | 21.502                        | PASS       |
|                | 5600                    | 17.904              | 21.340                        | PASS       |
|                | 5700                    | 17.937              | 21.650                        | PASS       |
|                | 5720                    | 17.937              | 21.552                        | PASS       |
| 802.11n HT40   | 5510                    | 36.152              | 40.041                        | PASS       |
|                | 5590                    | 36.259              | 40.100                        | PASS       |
|                | 5670                    | 36.135              | 39.865                        | PASS       |
|                | 5710                    | 36.250              | 39.784                        | PASS       |
| 802.11ac VHT20 | 5500                    | 17.951              | 21.404                        | PASS       |
|                | 5600                    | 17.940              | 21.665                        | PASS       |
|                | 5700                    | 17.960              | 21.519                        | PASS       |
|                | 5720                    | 17.935              | 21.596                        | PASS       |
| 802.11ac VHT40 | 5510                    | 36.201              | 40.296                        | PASS       |

|                |      |        |        |      |
|----------------|------|--------|--------|------|
|                | 5590 | 36.230 | 39.822 | PASS |
|                | 5670 | 36.190 | 39.892 | PASS |
|                | 5710 | 36.187 | 39.902 | PASS |
| 802.11ac VHT80 | 5530 | 75.930 | 81.733 | PASS |
|                | 5610 | 75.989 | 81.710 | PASS |
|                | 5690 | 75.991 | 82.608 | PASS |


### U-NII-3

| Mode           | Carrier frequency (MHz) | 99% bandwidth (MHz) | Minimum 6 dB bandwidth (MHz) | Limit (kHz) | Conclusion |
|----------------|-------------------------|---------------------|------------------------------|-------------|------------|
| 802.11a        | 5720                    | 16.840              | 16.315                       | 500         | PASS       |
|                | 5745                    | 16.890              | 16.319                       | 500         | PASS       |
|                | 5785                    | 16.860              | 16.307                       | 500         | PASS       |
|                | 5825                    | 16.867              | 16.335                       | 500         | PASS       |
| 802.11n HT20   | 5720                    | 17.924              | 17.569                       | 500         | PASS       |
|                | 5745                    | 17.951              | 17.291                       | 500         | PASS       |
|                | 5785                    | 17.908              | 16.889                       | 500         | PASS       |
|                | 5825                    | 17.990              | 17.549                       | 500         | PASS       |
| 802.11n HT40   | 5710                    | 36.272              | 35.163                       | 500         | PASS       |
|                | 5755                    | 36.271              | 35.341                       | 500         | PASS       |
|                | 5795                    | 36.340              | 35.195                       | 500         | PASS       |
| 802.11ac VHT20 | 5720                    | 17.962              | 17.550                       | 500         | PASS       |
|                | 5745                    | 18.000              | 17.253                       | 500         | PASS       |
|                | 5785                    | 17.969              | 17.585                       | 500         | PASS       |
|                | 5825                    | 17.962              | 17.556                       | 500         | PASS       |
| 802.11ac VHT40 | 5710                    | 36.208              | 35.245                       | 500         | PASS       |
|                | 5755                    | 36.243              | 35.468                       | 500         | PASS       |
|                | 5795                    | 36.246              | 35.352                       | 500         | PASS       |
| 802.11ac VHT80 | 5690                    | 75.998              | 75.367                       | 500         | PASS       |
|                | 5775                    | 75.975              | 75.180                       | 500         | PASS       |


99% bandwidth

U-NII-1


OBW 802.11a 5180MHz

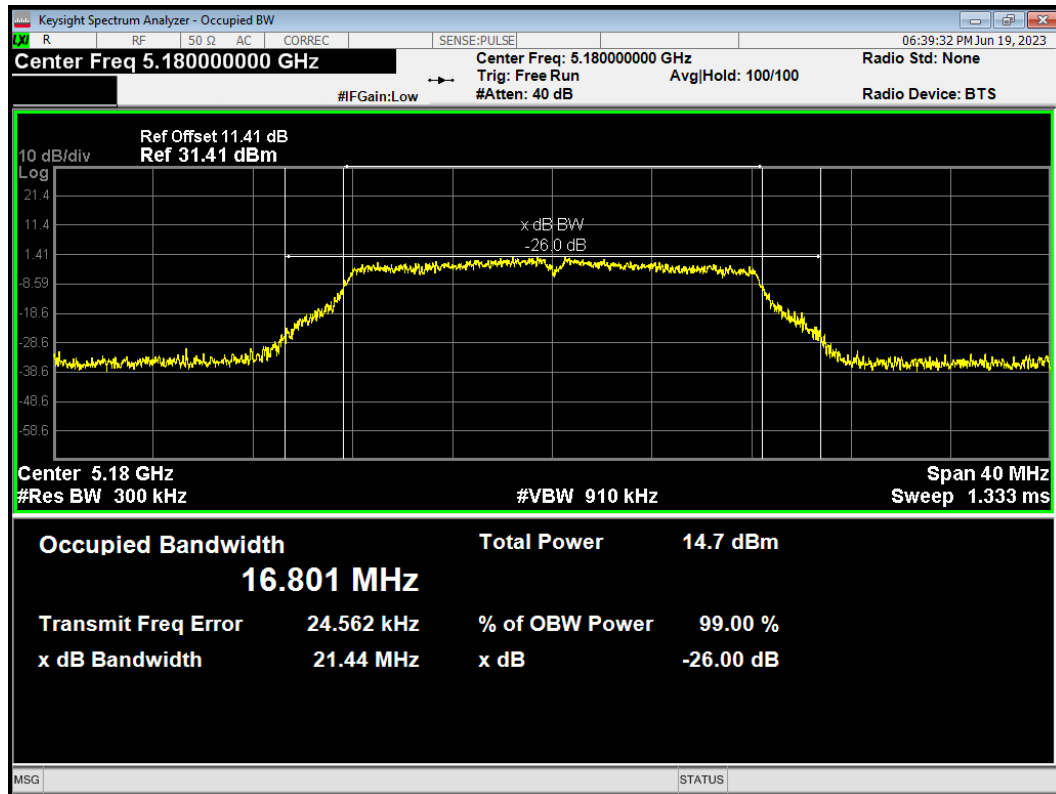


OBW 802.11a 5200MHz

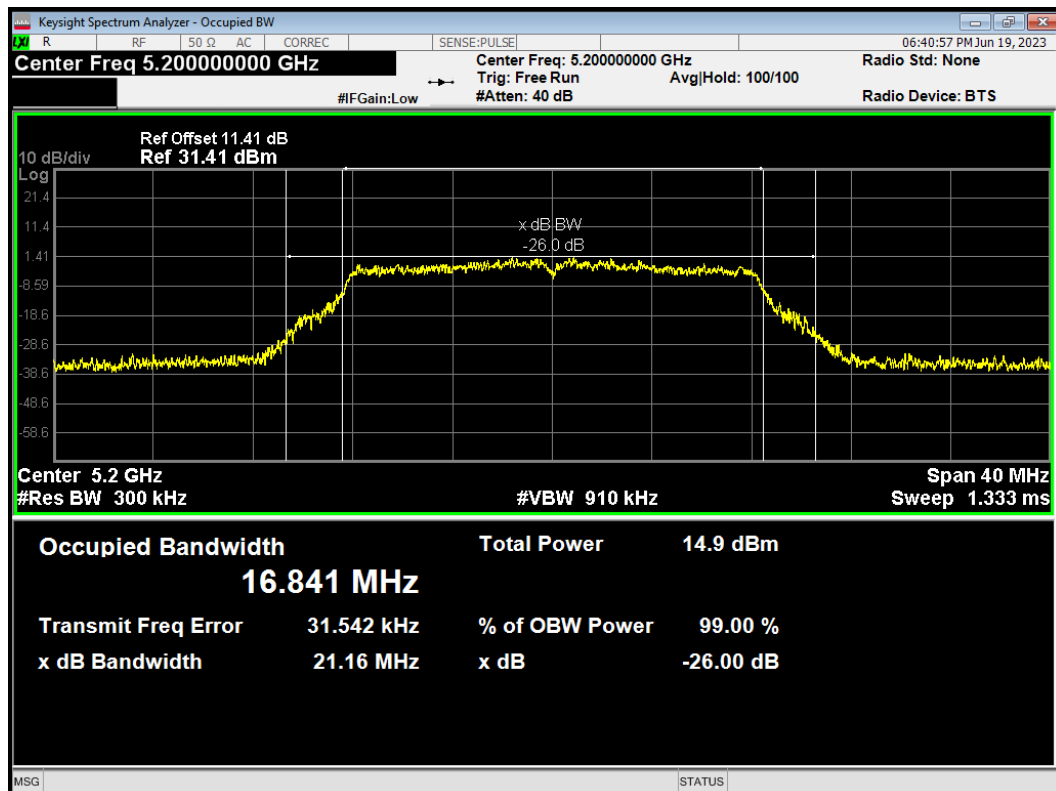


OBW 802.11a 5240MHz

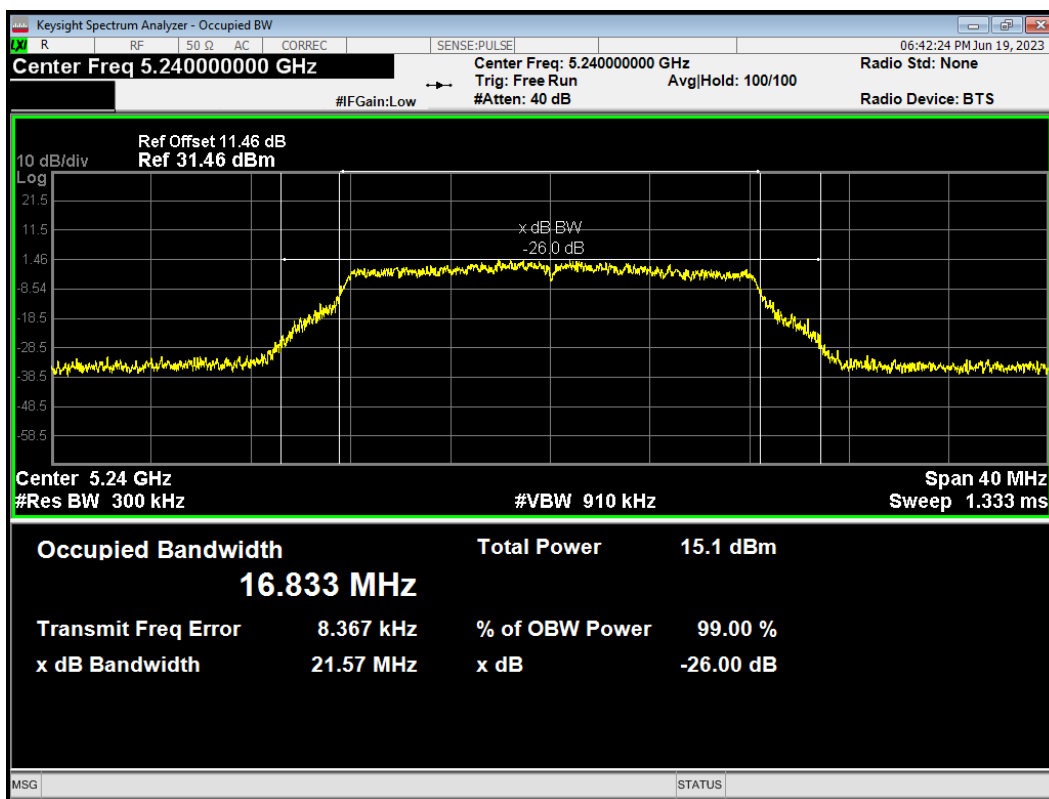


OBW 802.11ac(VHT20) 5180MHz

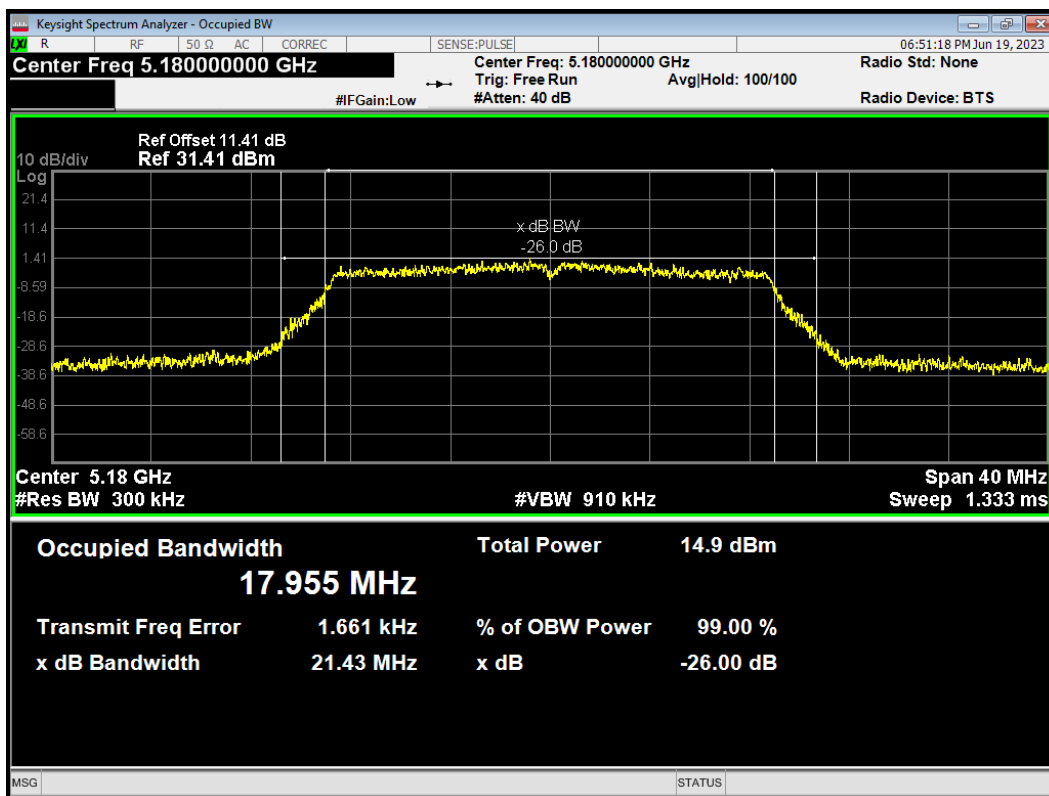


OBW 802.11ac(VHT20) 5200MHz

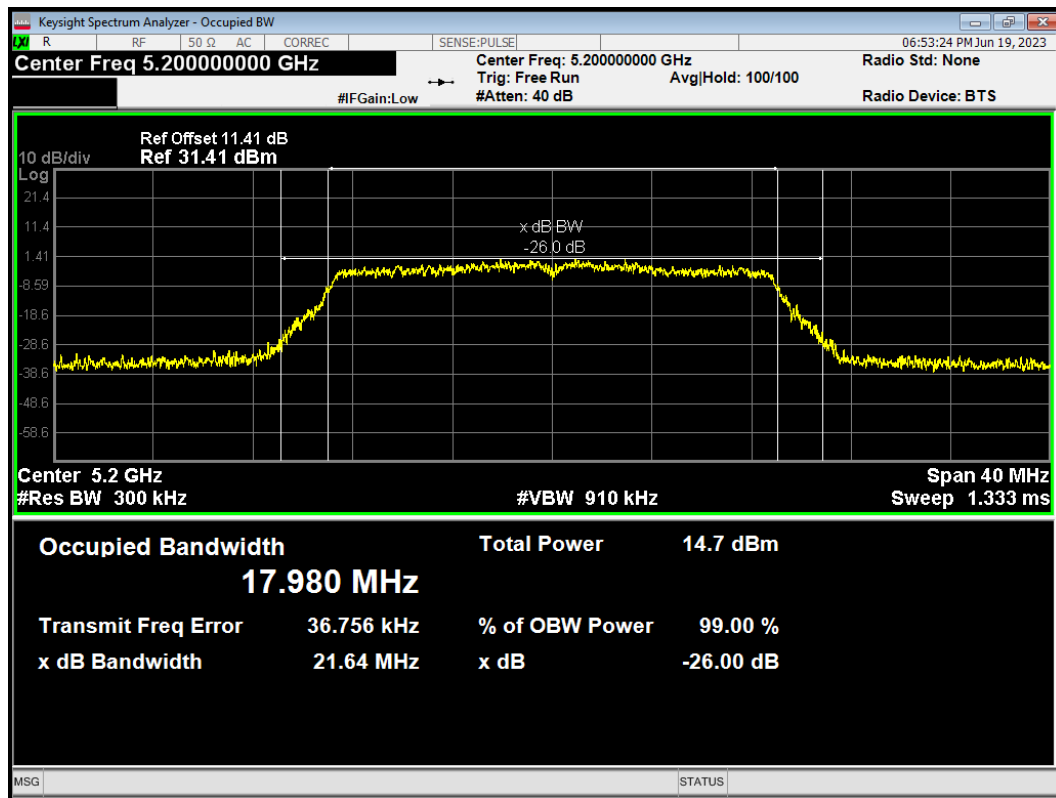


OBW 802.11ac(VHT20) 5240MHz

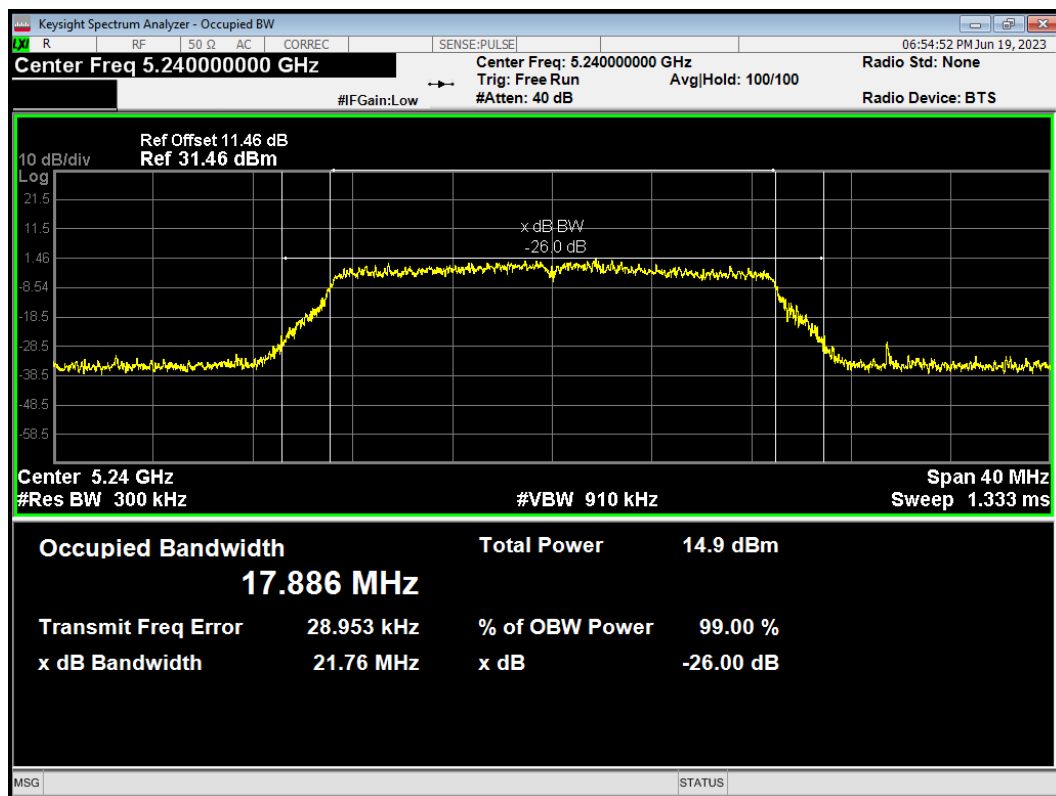


OBW 802.11ac(VHT40) 5190MHz

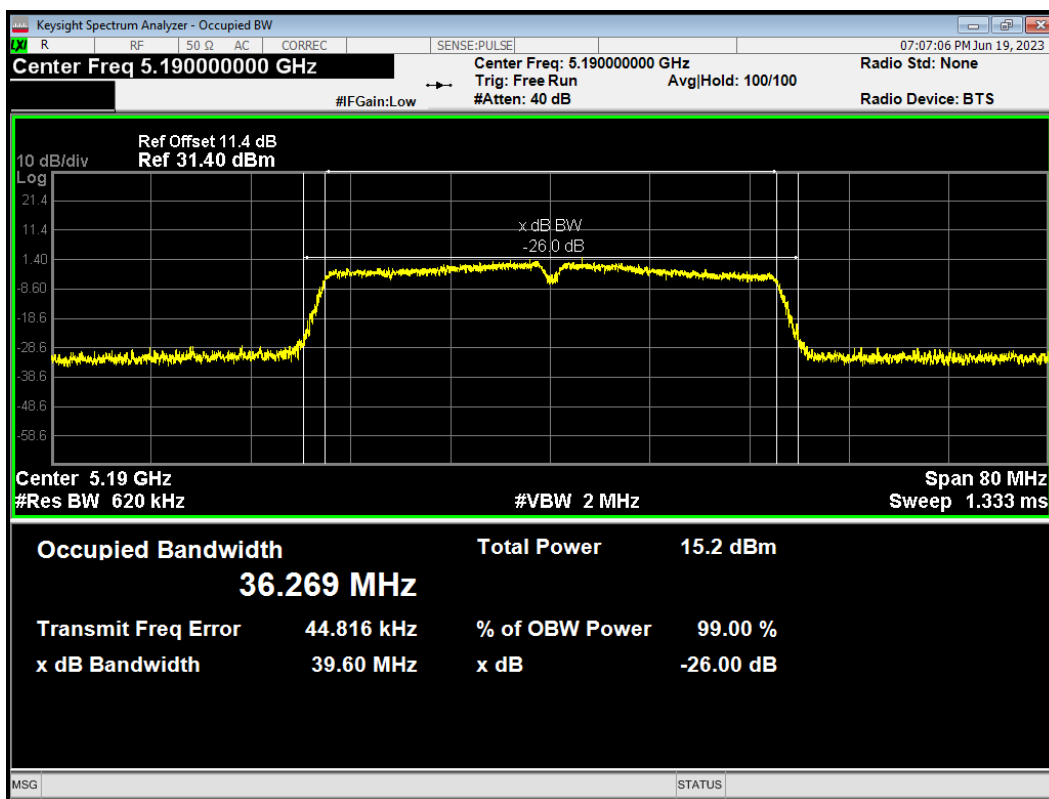


OBW 802.11ac(VHT40) 5230MHz

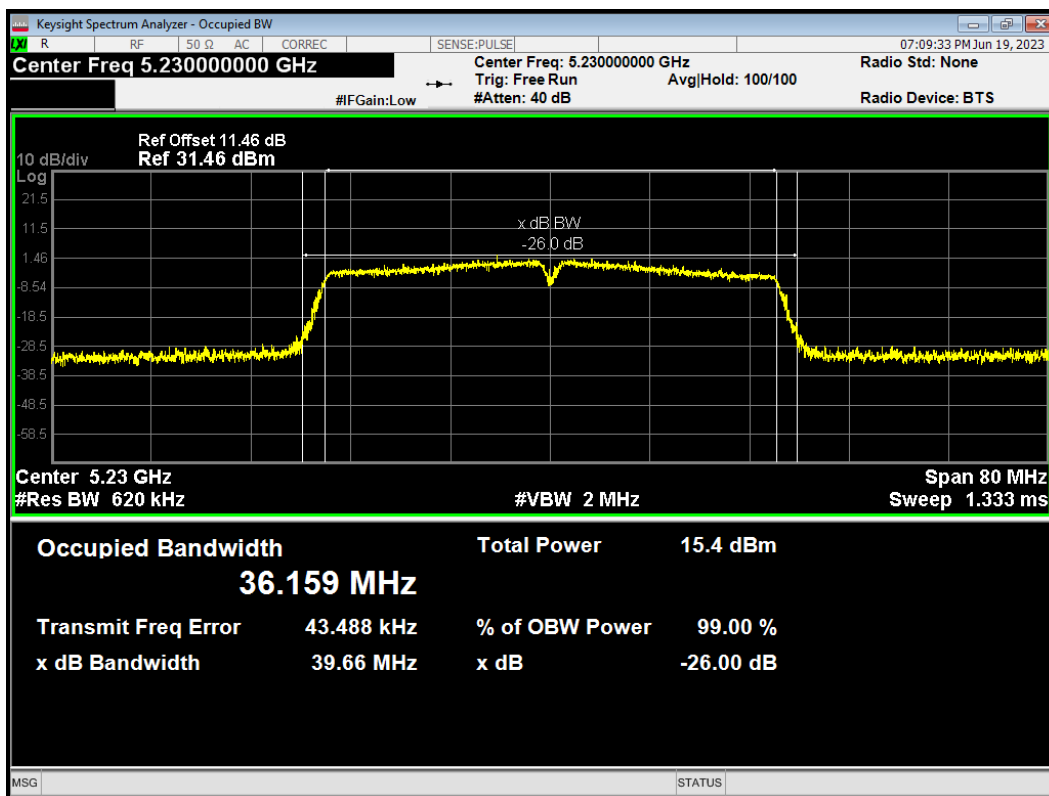


OBW 802.11ac(VHT80) 5210MHz

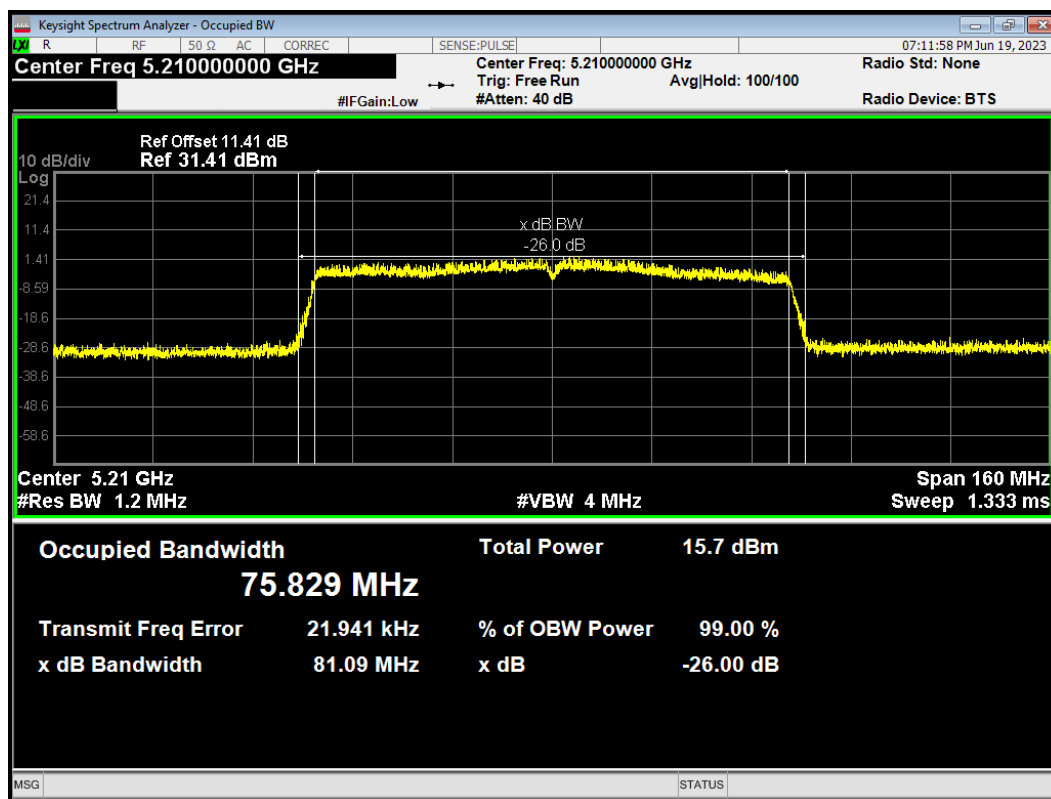


OBW 802.11n(HT20) 5180MHz

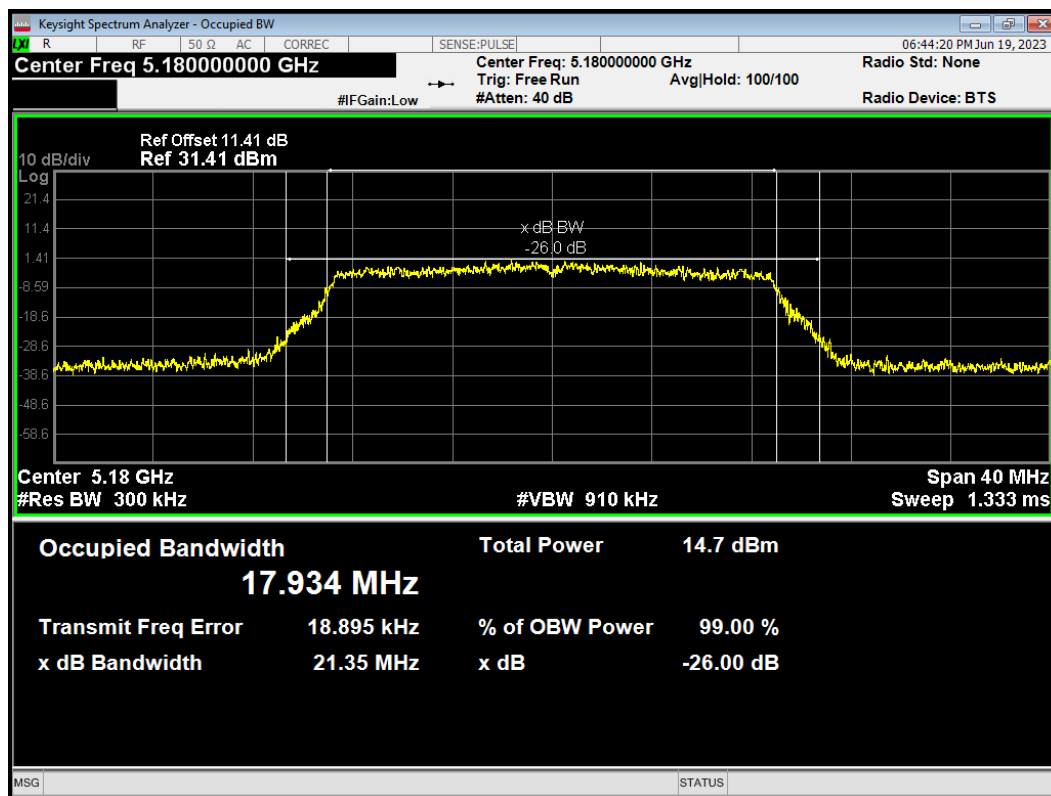


OBW 802.11n(HT20) 5200MHz

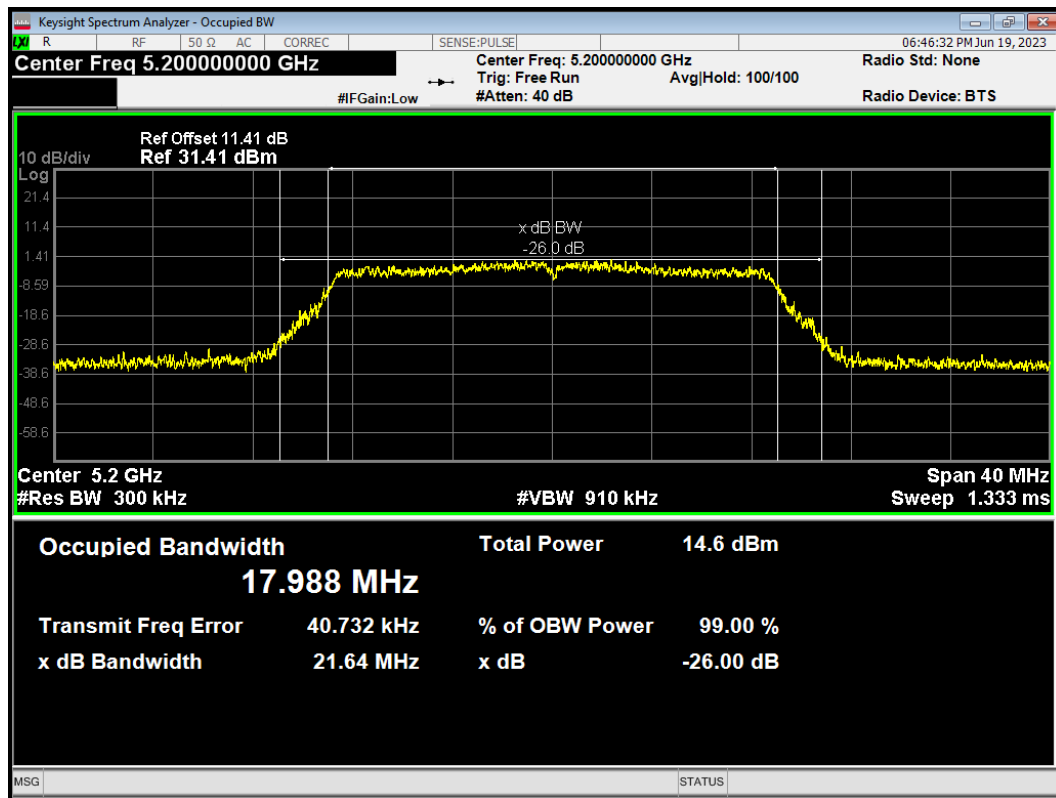


OBW 802.11n(HT20) 5240MHz

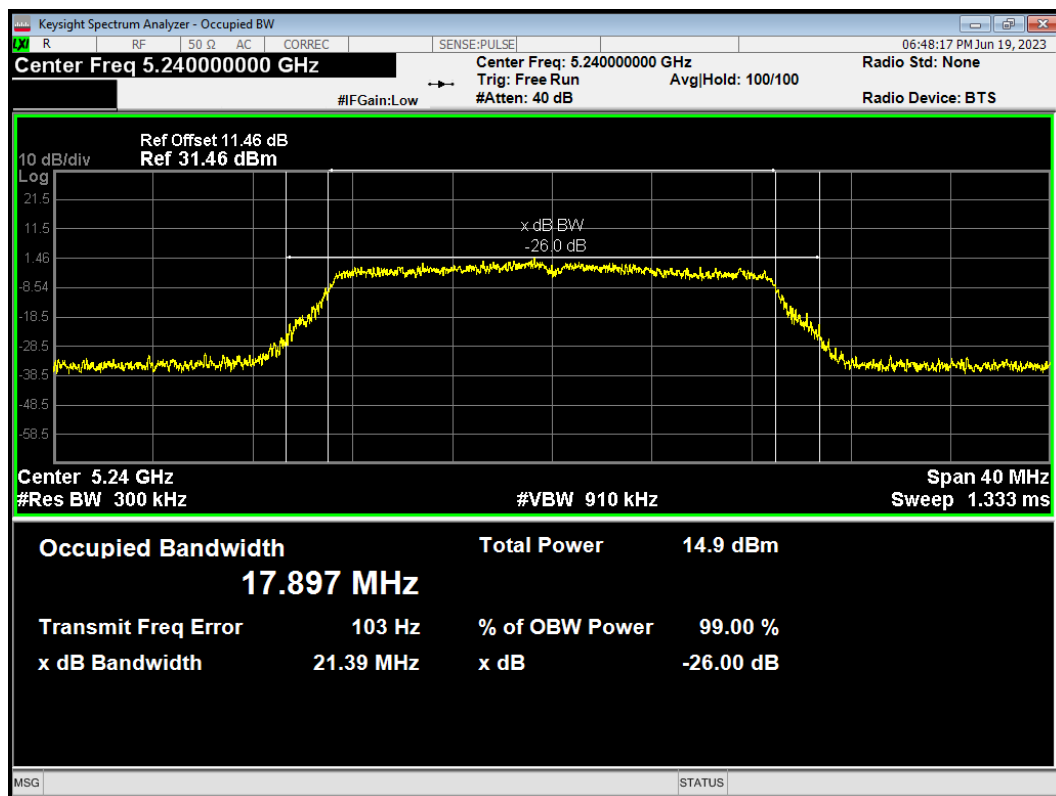

# OBW 802.11n(HT40) 5190MHz

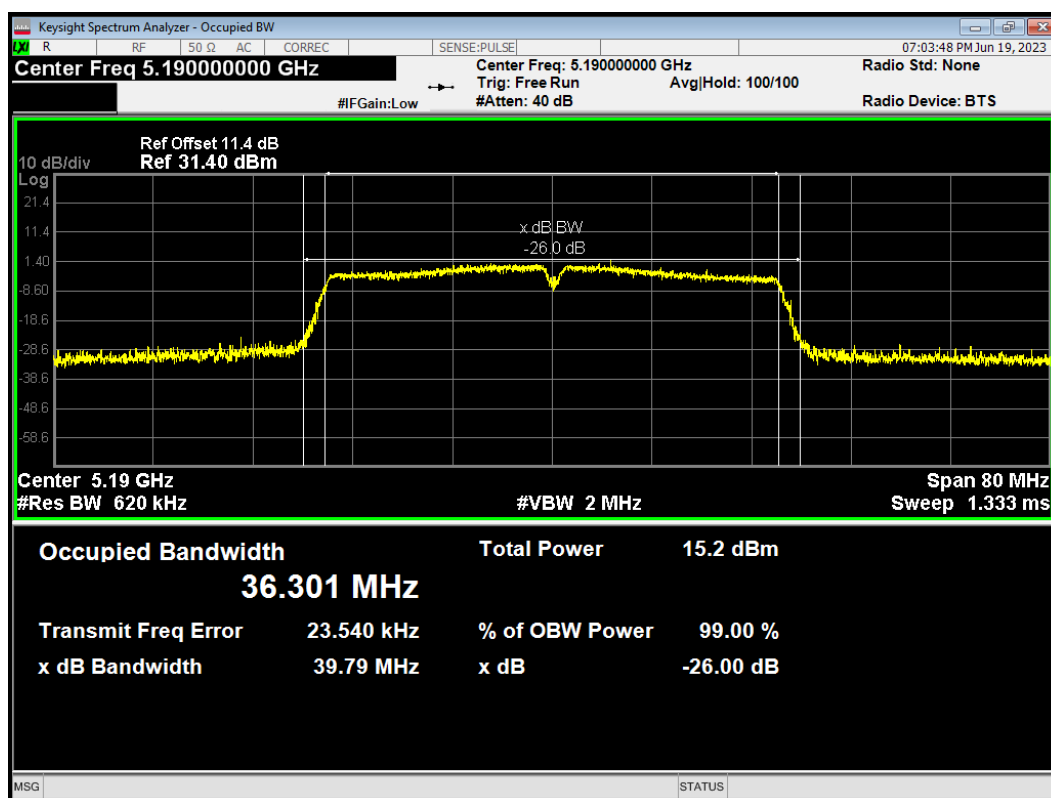


# OBW 802.11n(HT40) 5230MHz

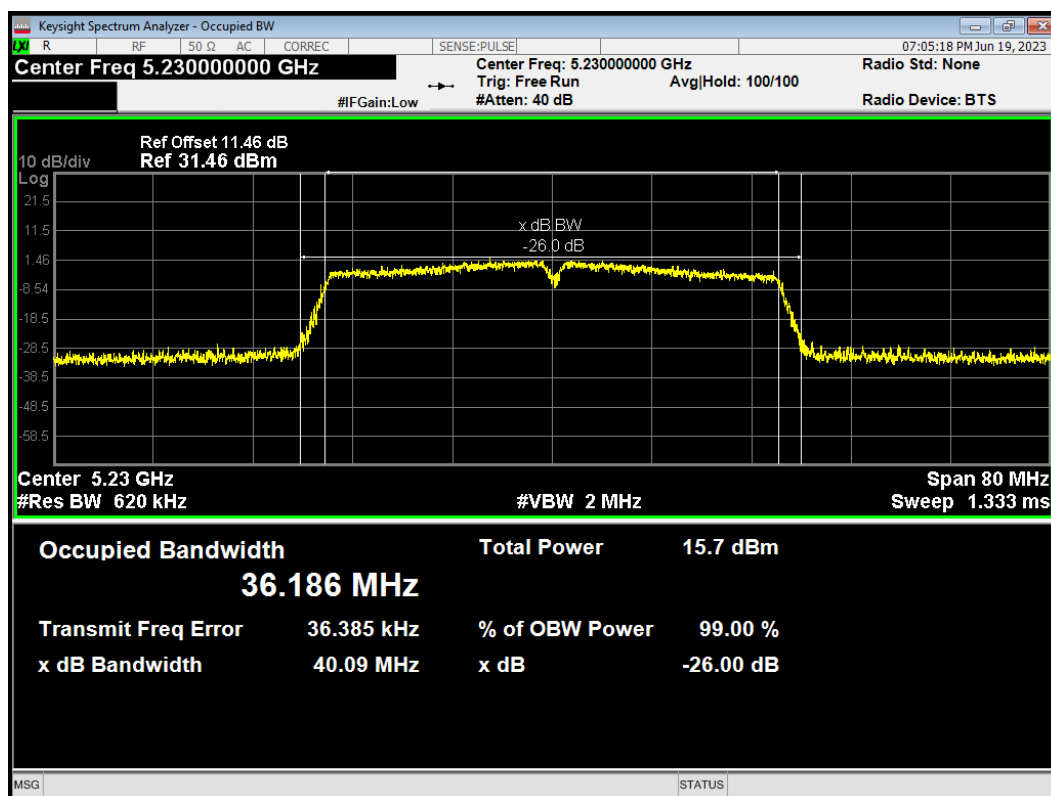


U-NII-2C


OBW 802.11a 5500MHz

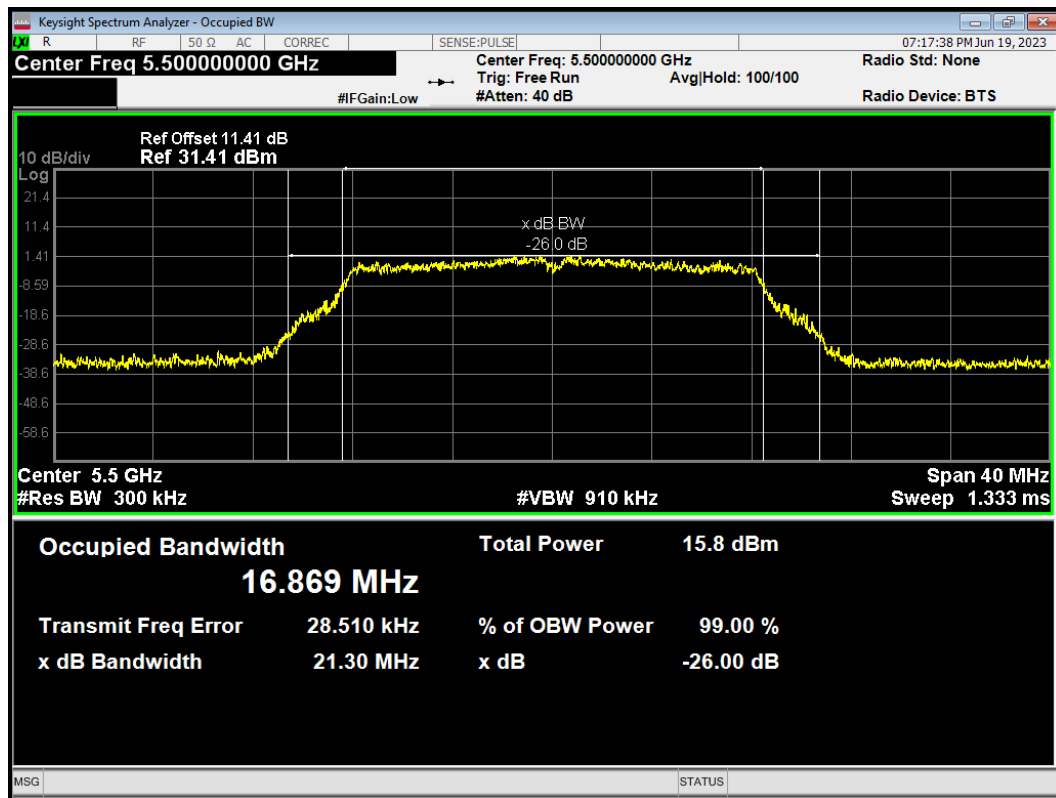


OBW 802.11a 5600MHz

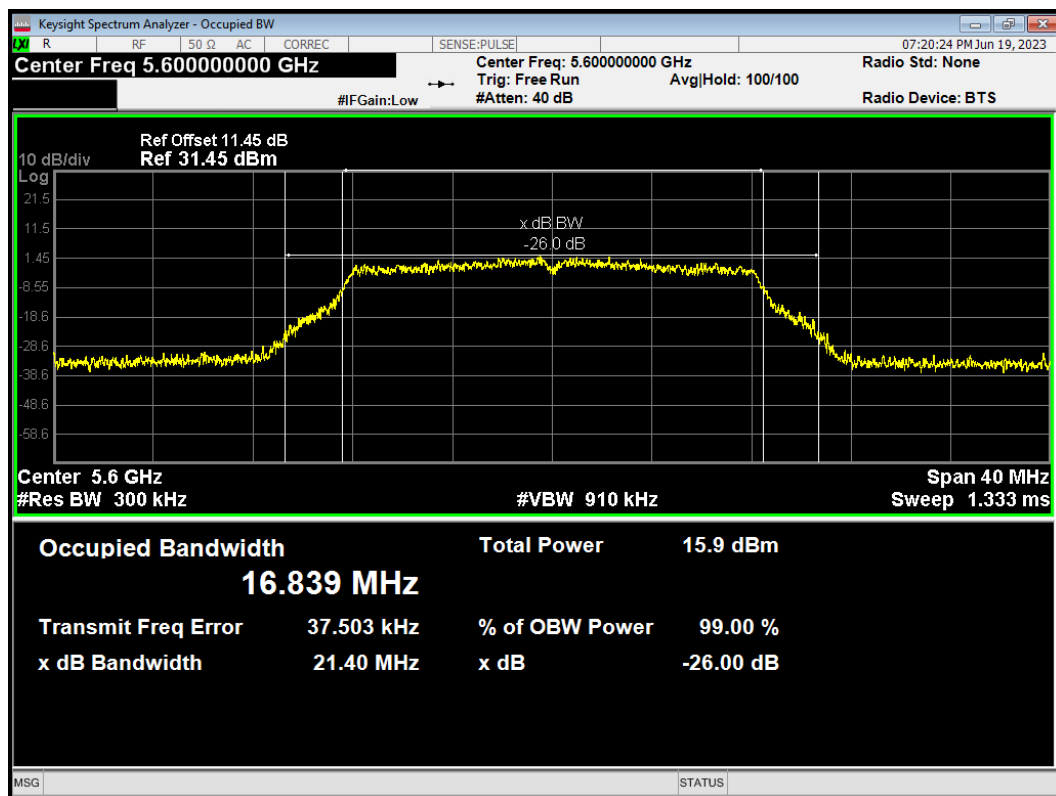


### OBW 802.11a 5700MHz

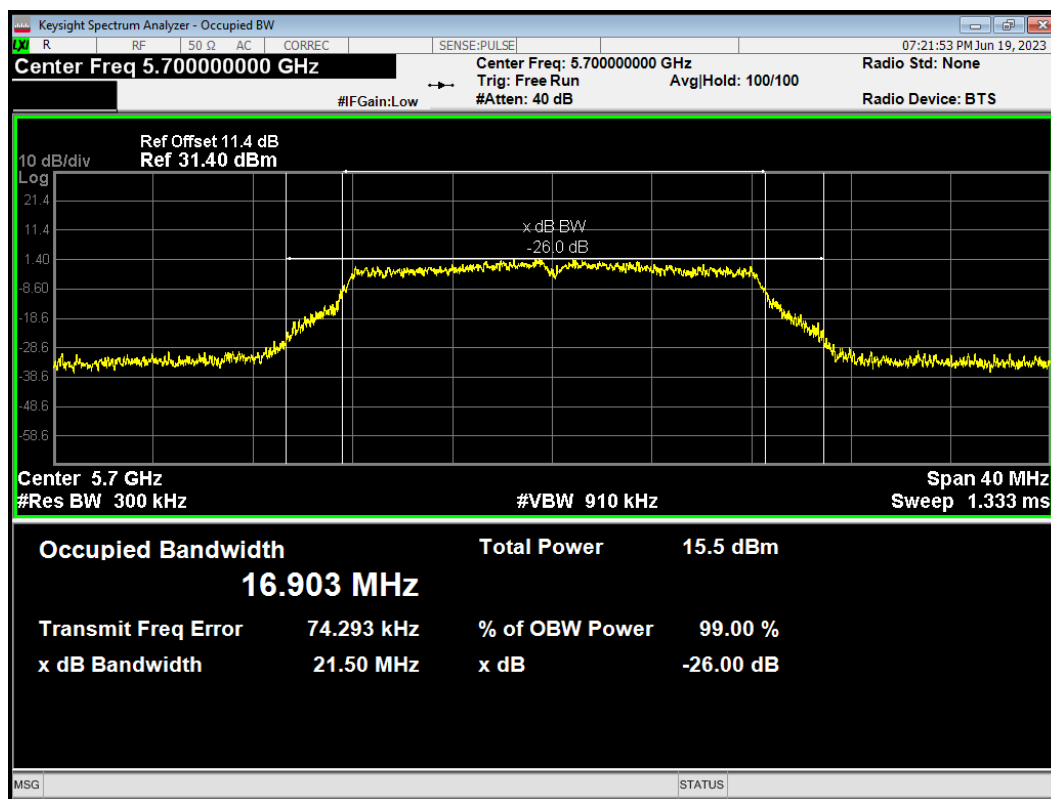


### OBW 802.11a 5720MHz

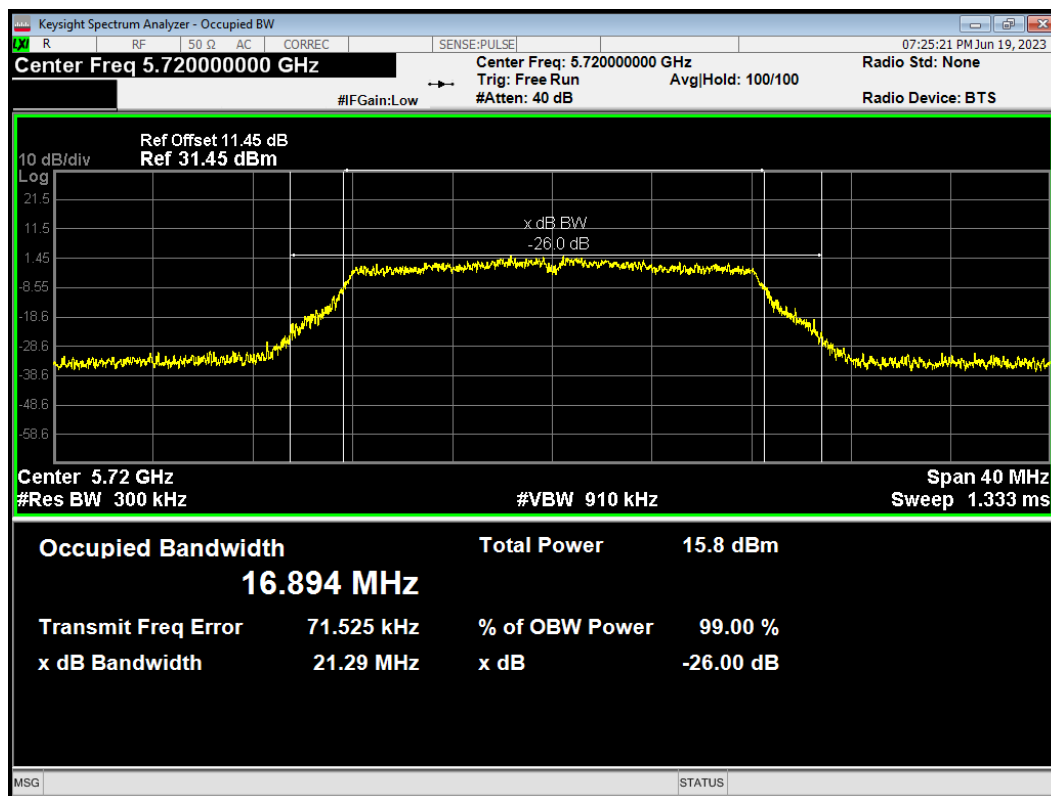


OBW 802.11ac(VHT20) 5500MHz

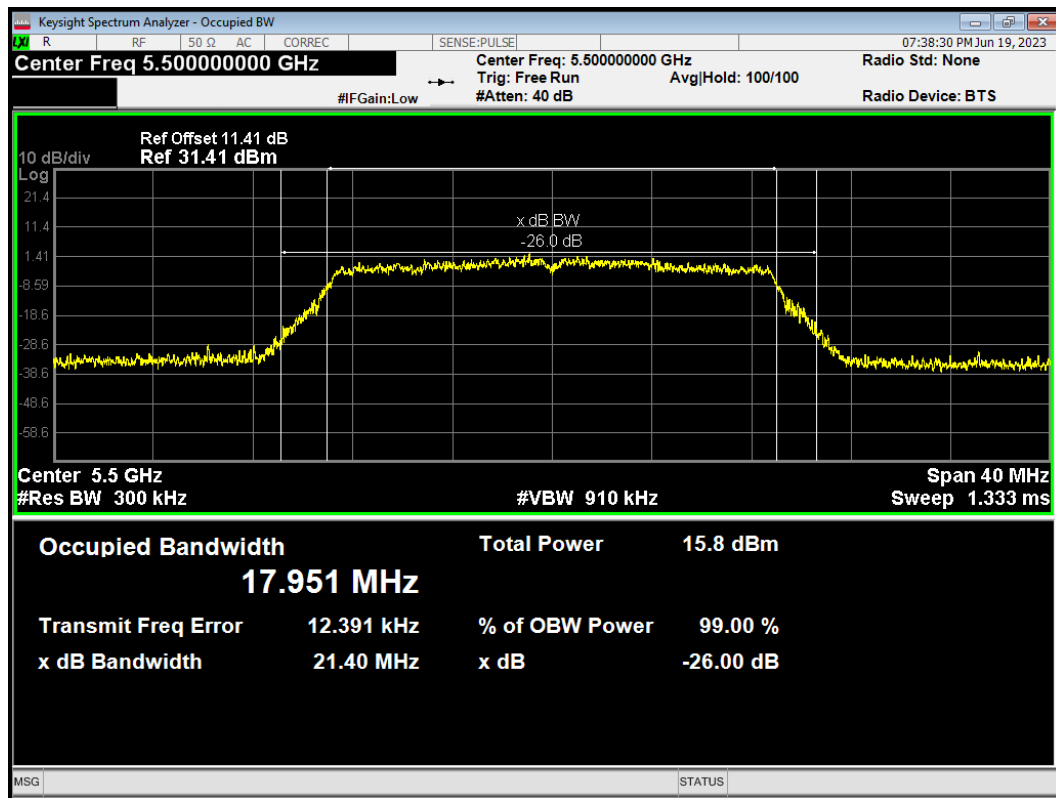


OBW 802.11ac(VHT20) 5600MHz

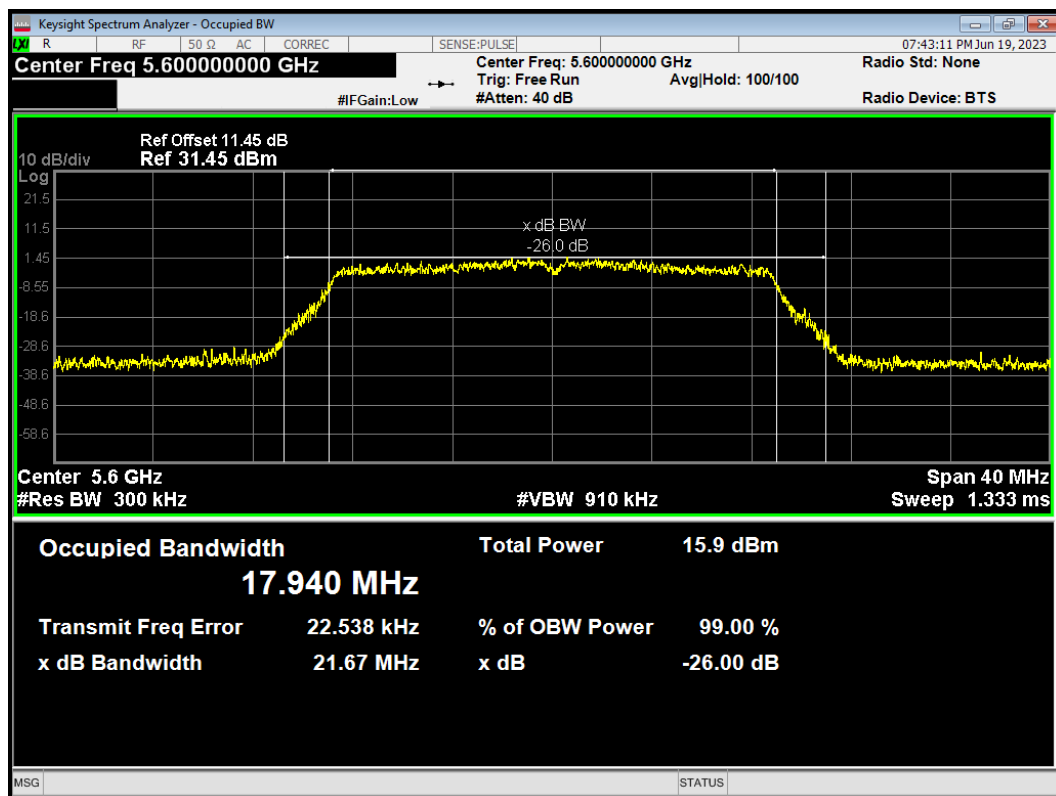


OBW 802.11ac(VHT20) 5700MHz

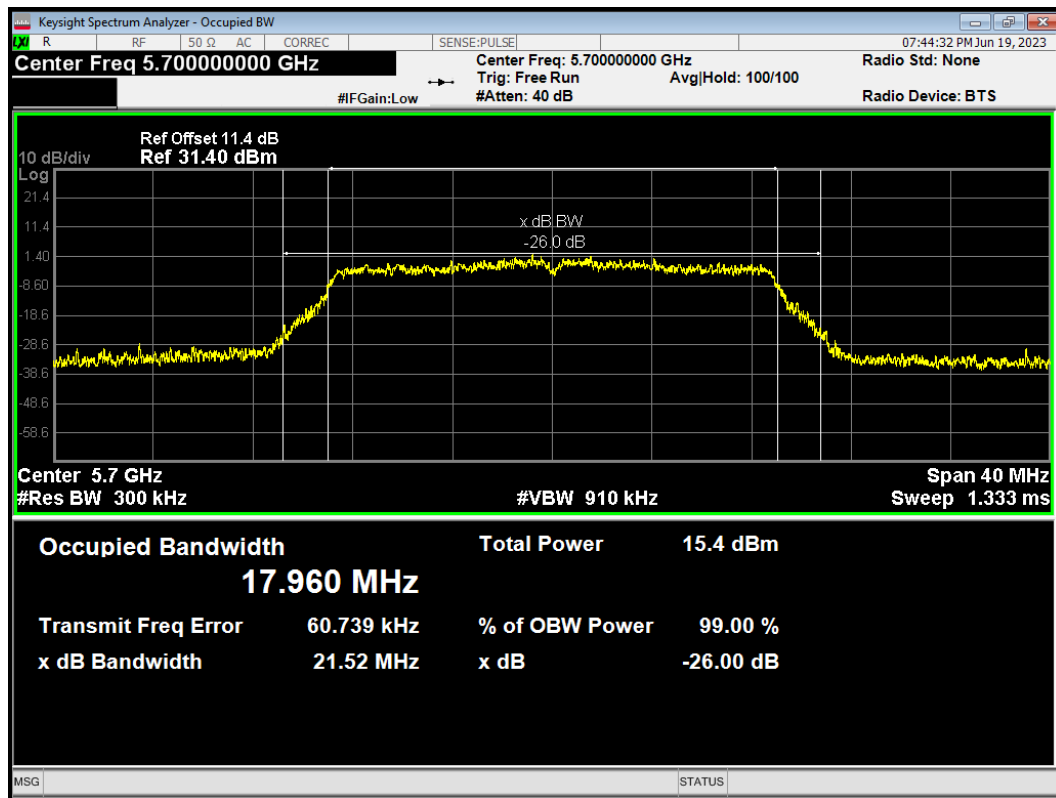


OBW 802.11ac(VHT20) 5720MHz

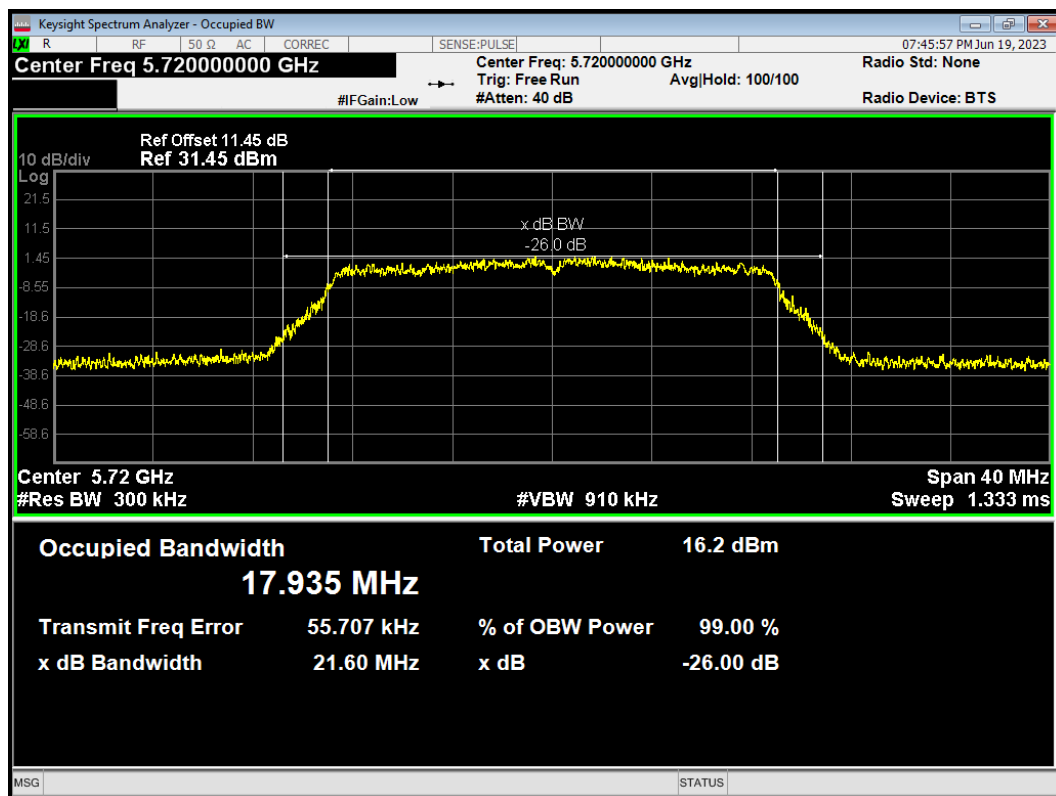


OBW 802.11ac(VHT40) 5510MHz

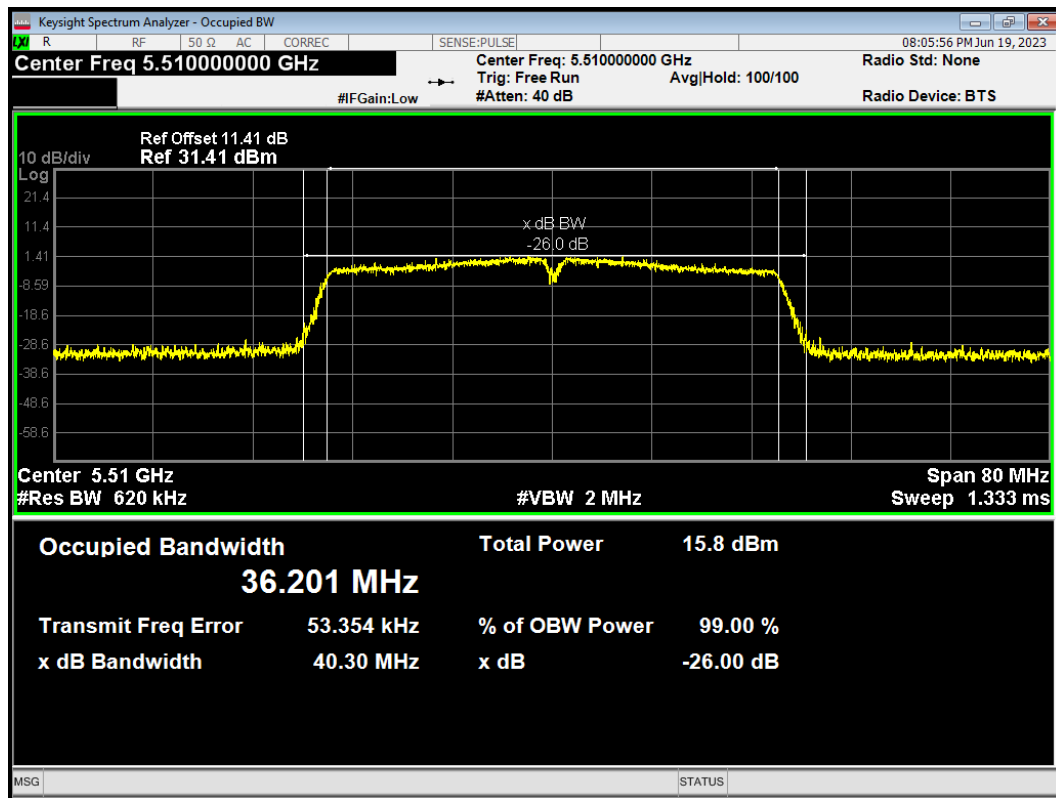


OBW 802.11ac(VHT40) 5590MHz

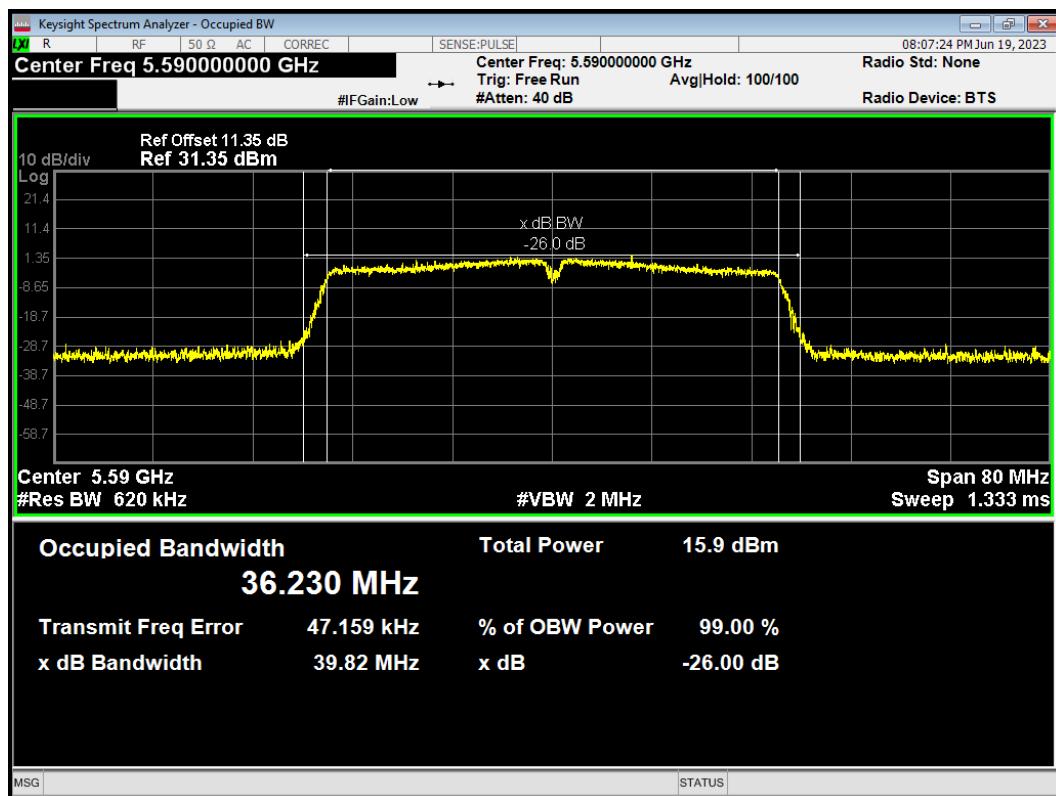


OBW 802.11ac(VHT40) 5670MHz

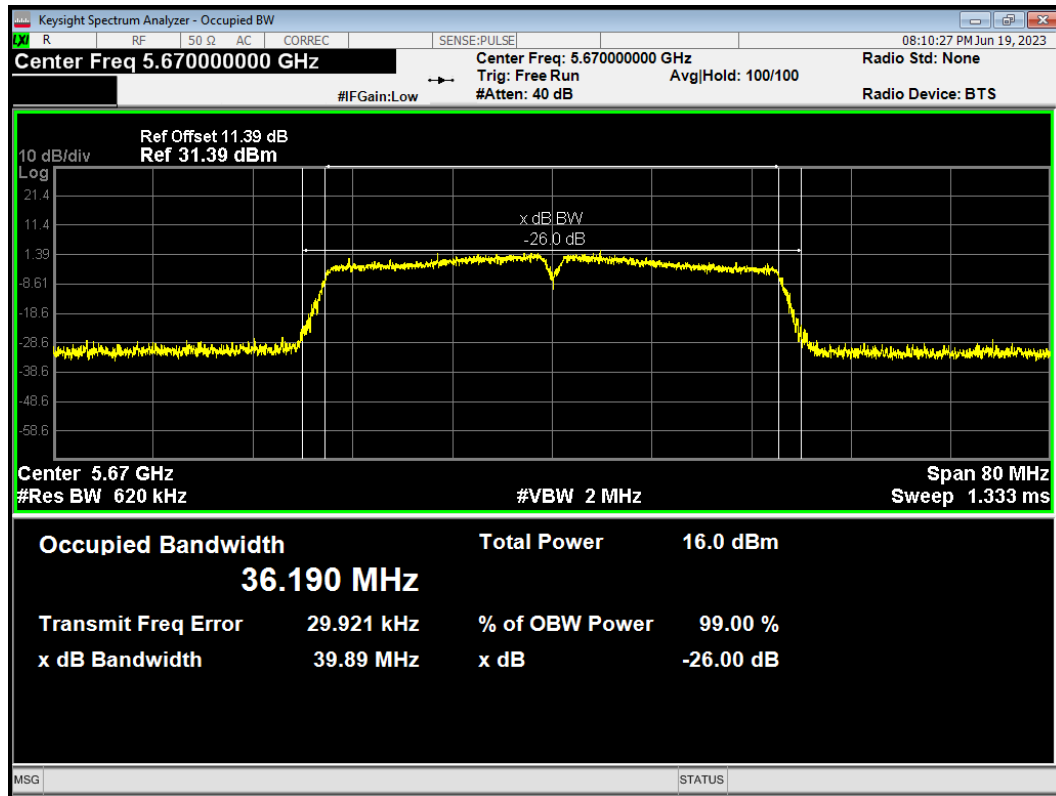


OBW 802.11ac(VHT40) 5710MHz

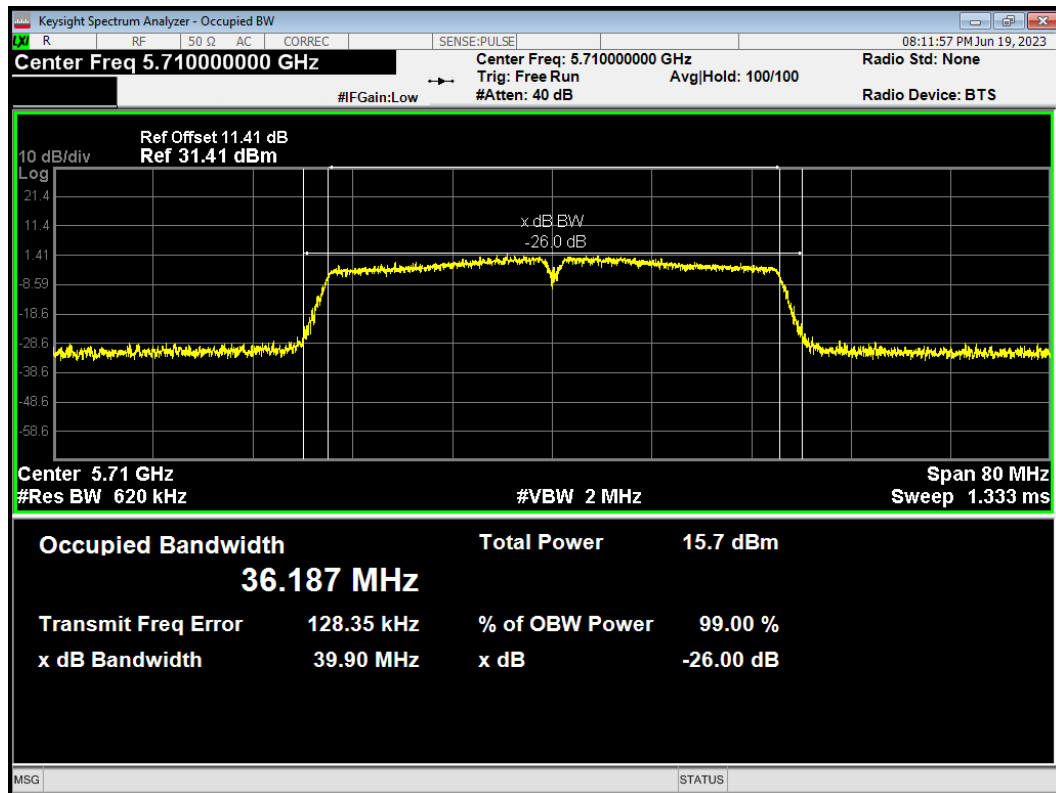


OBW 802.11ac(VHT80) 5530MHz

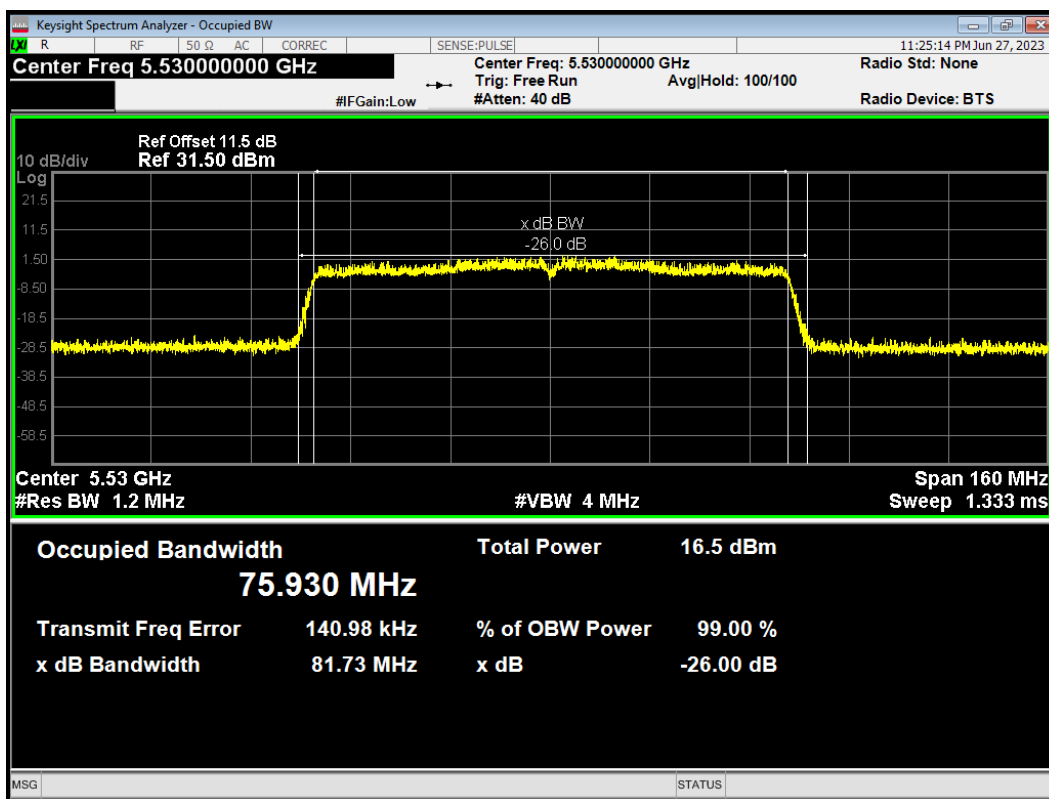


OBW 802.11ac(VHT80) 5610MHz

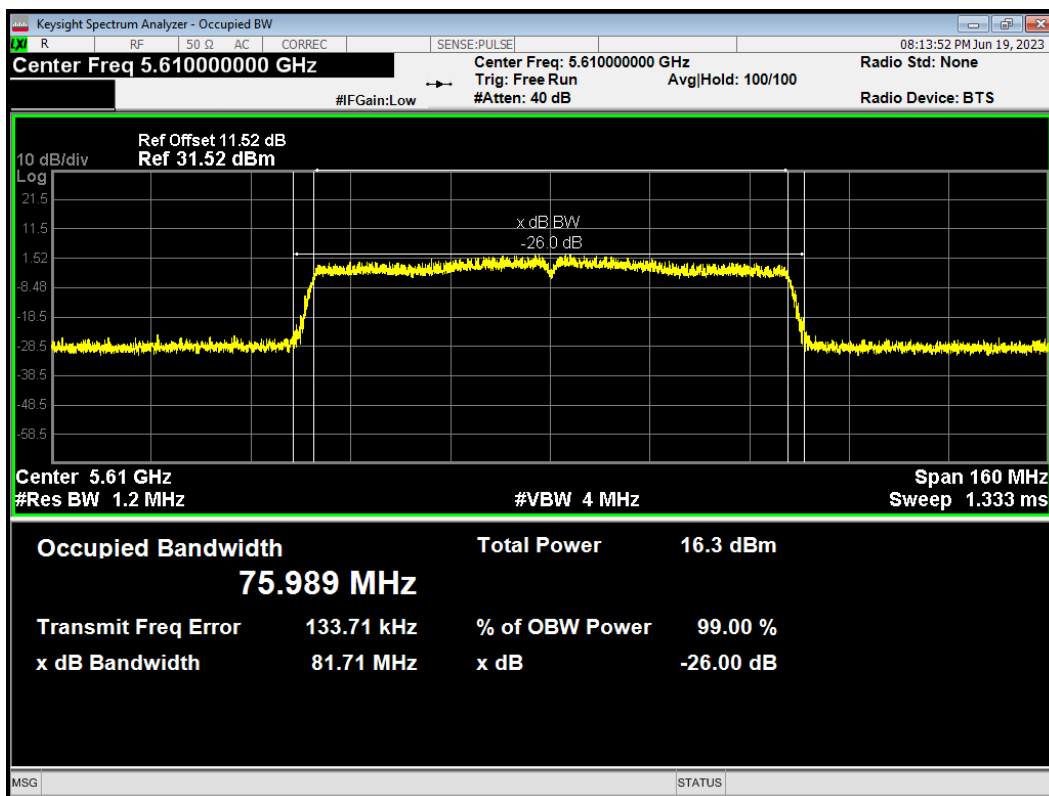


OBW 802.11ac(VHT80) 5690MHz

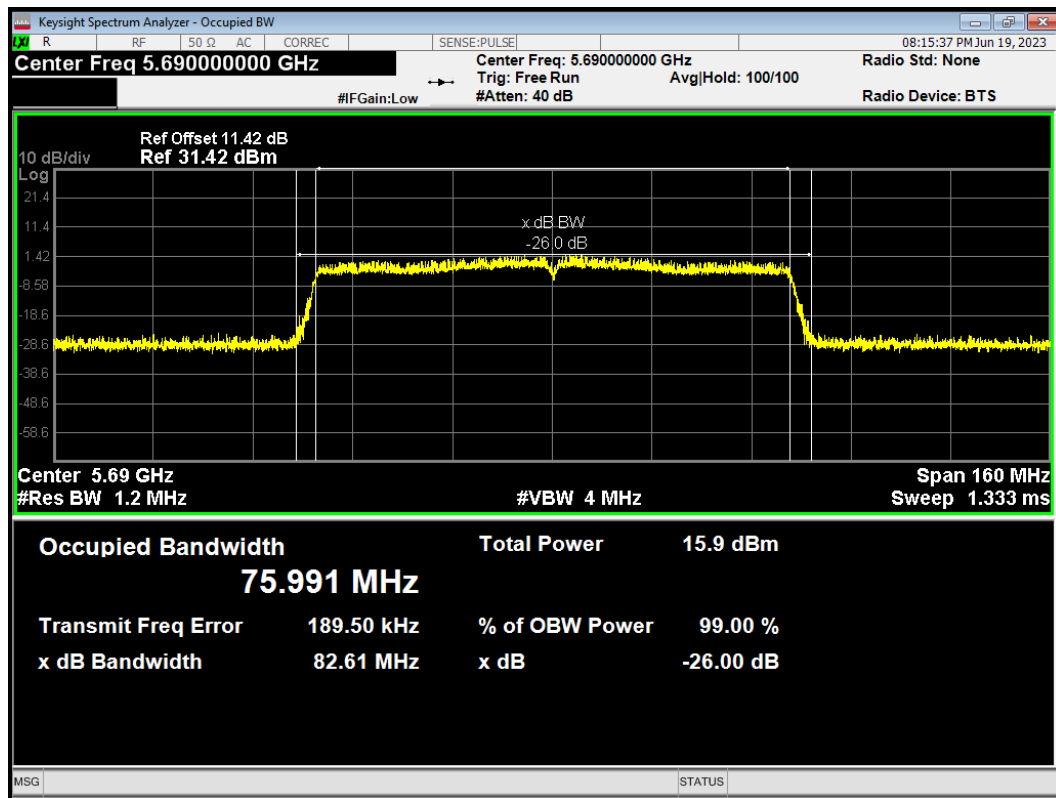


OBW 802.11n(HT20) 5500MHz

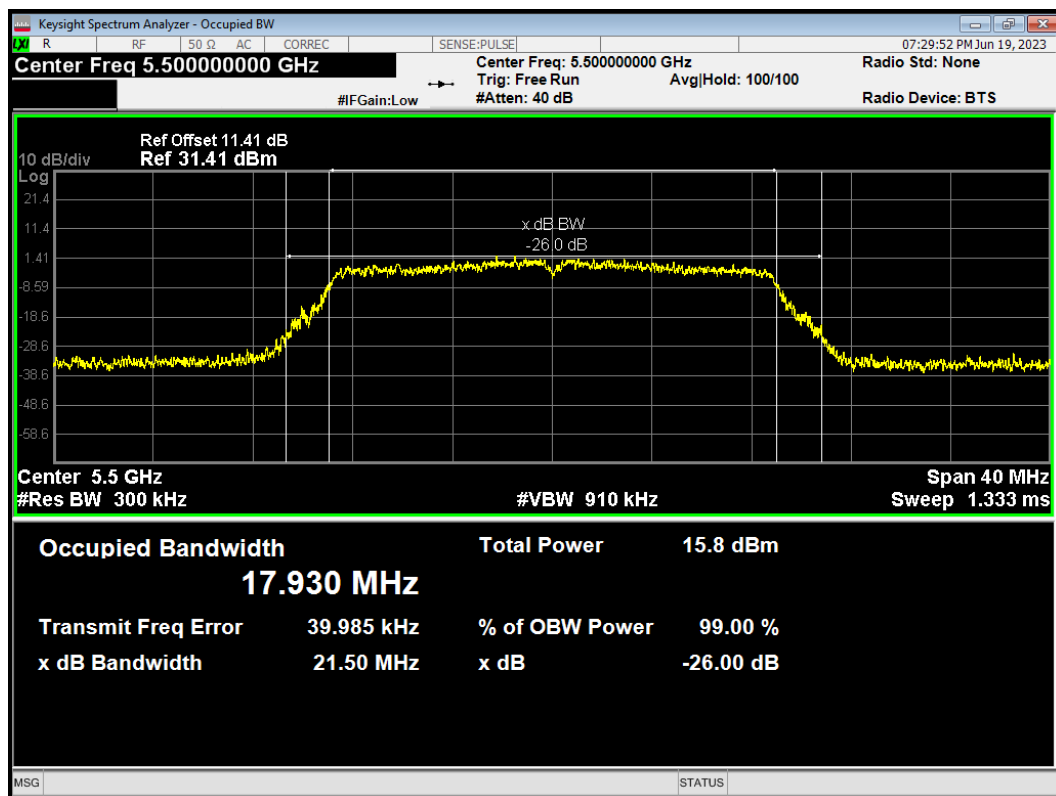


OBW 802.11n(HT20) 5600MHz

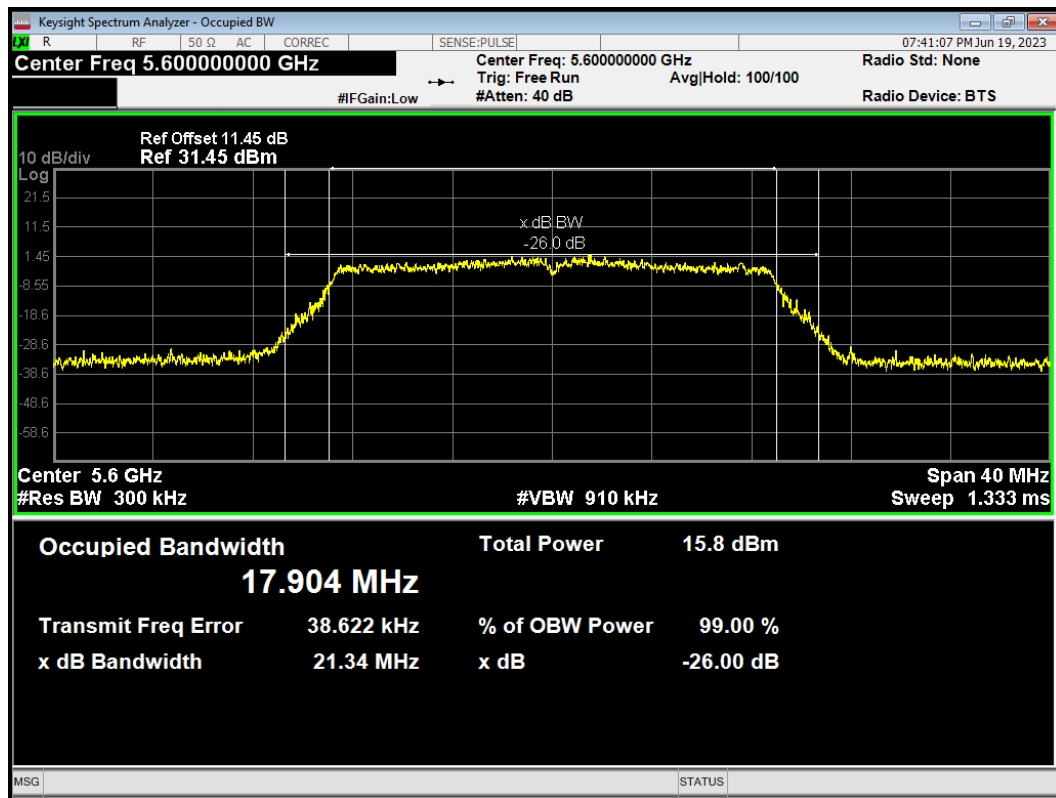


OBW 802.11n(HT20) 5700MHz

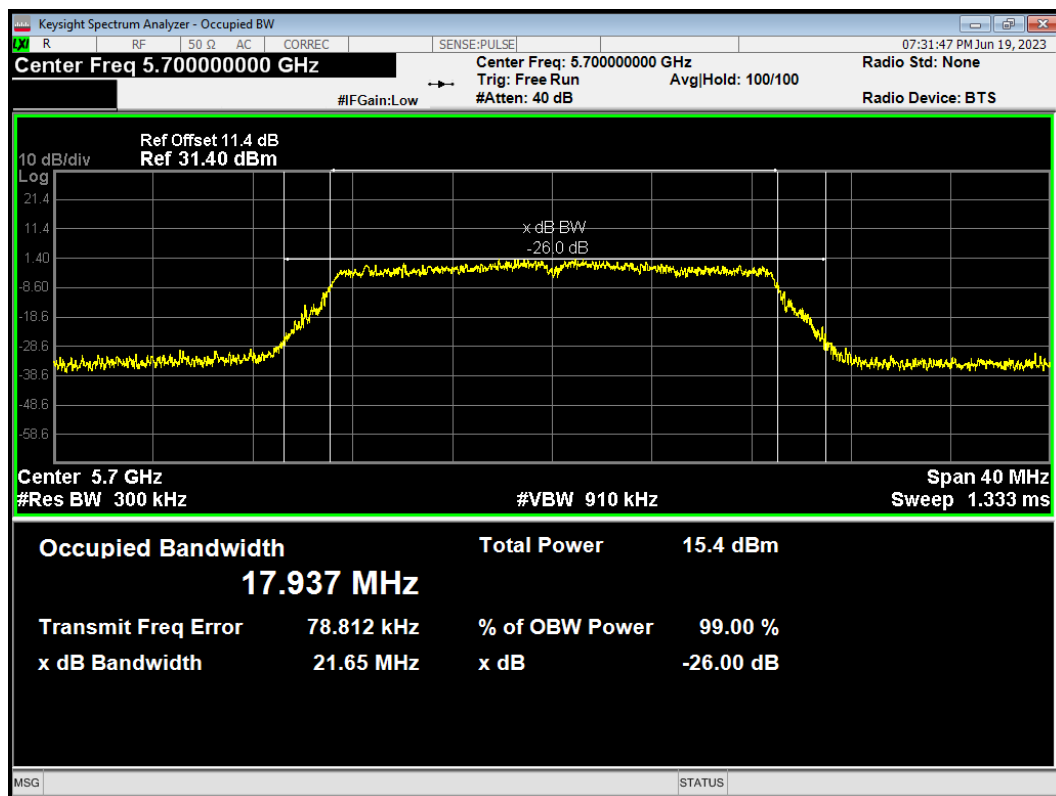


OBW 802.11n(HT20) 5720MHz

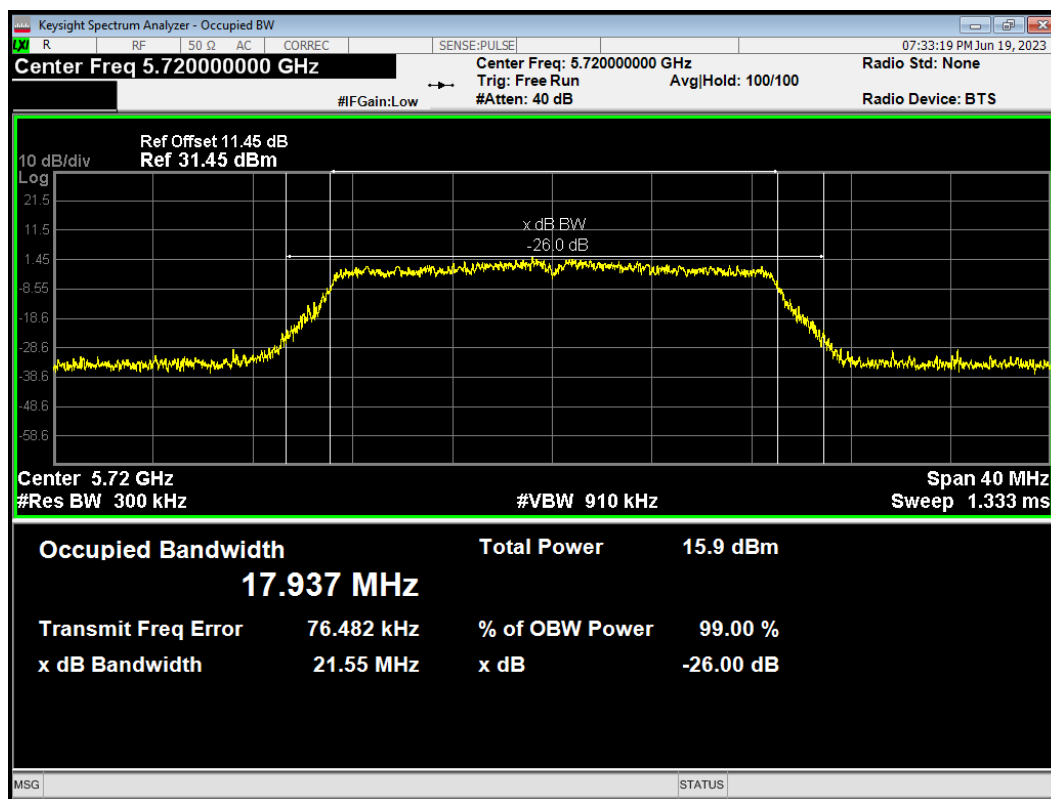


OBW 802.11n(HT40) 5510MHz

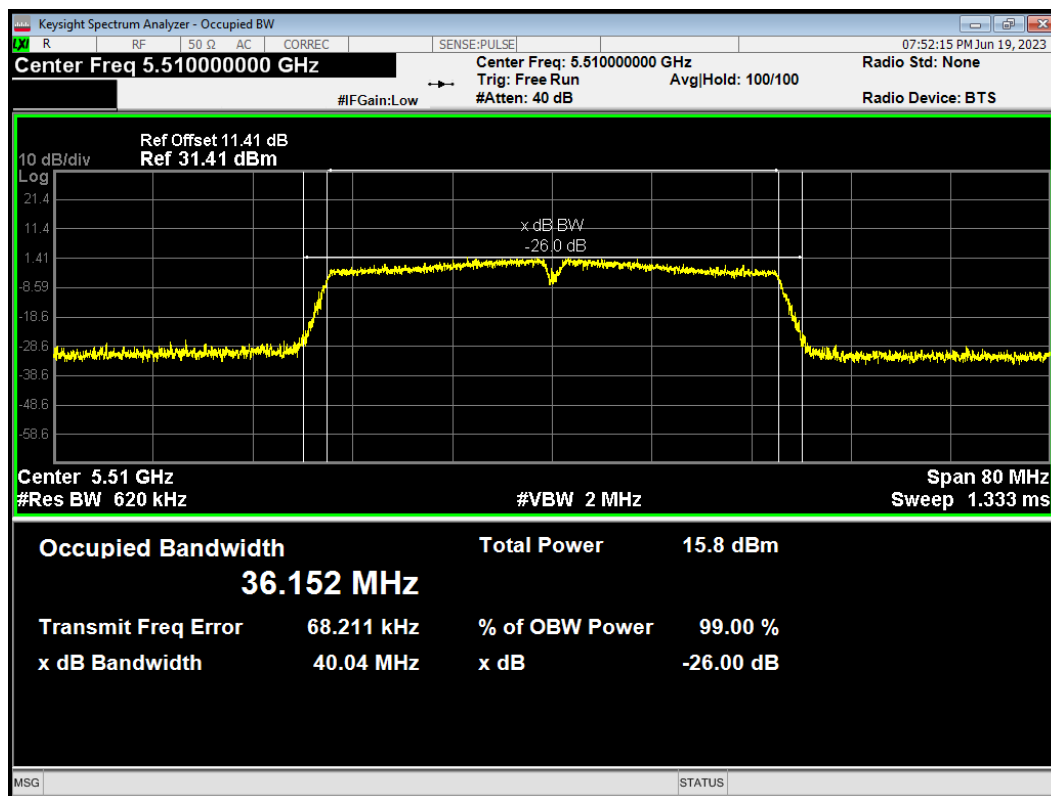


OBW 802.11n(HT40) 5590MHz

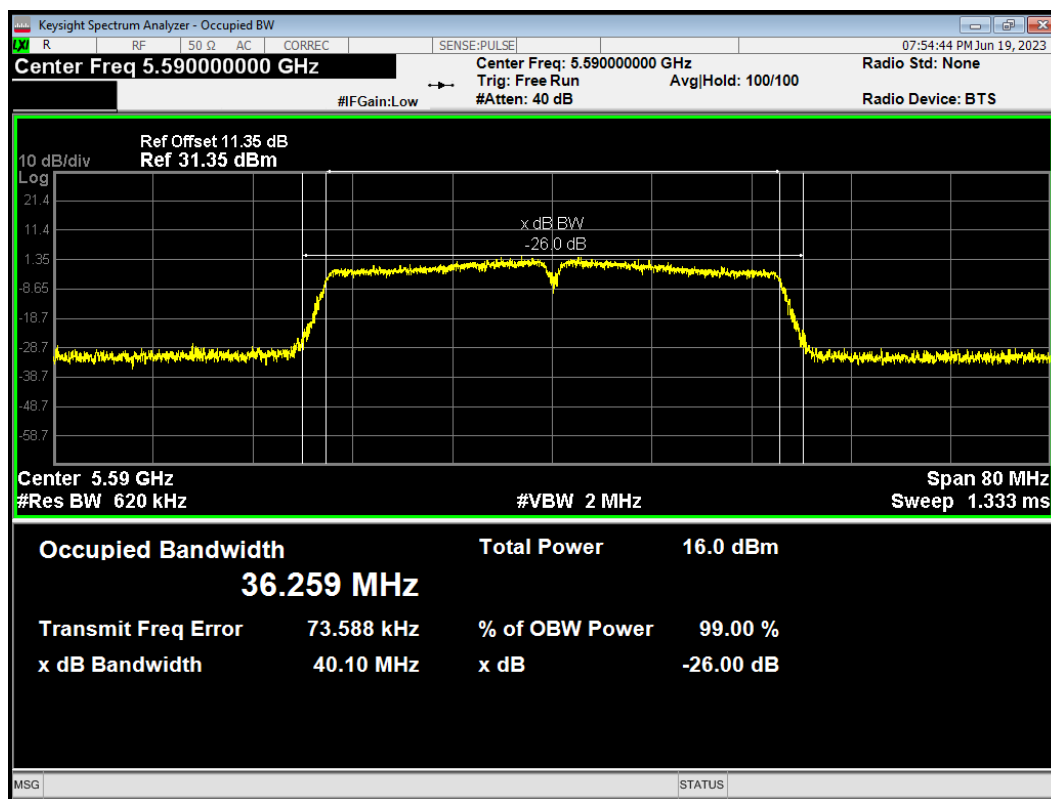

OBW 802.11n(HT40) 5670MHz

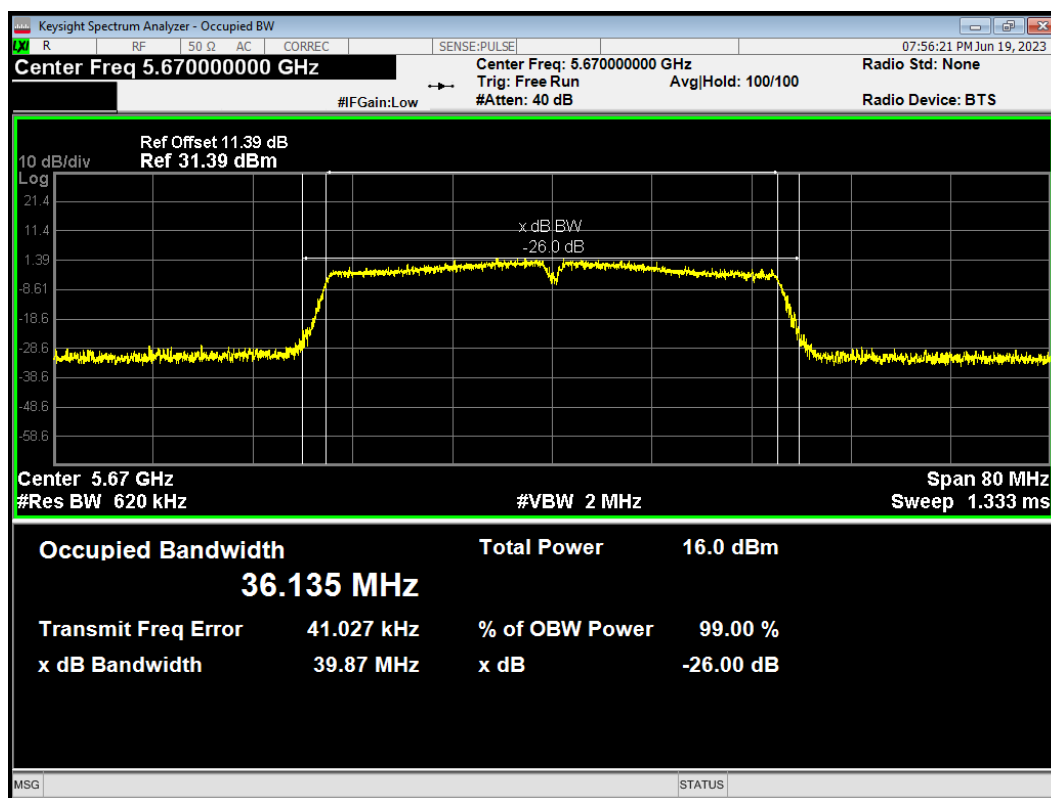


OBW 802.11n(HT40) 5710MHz

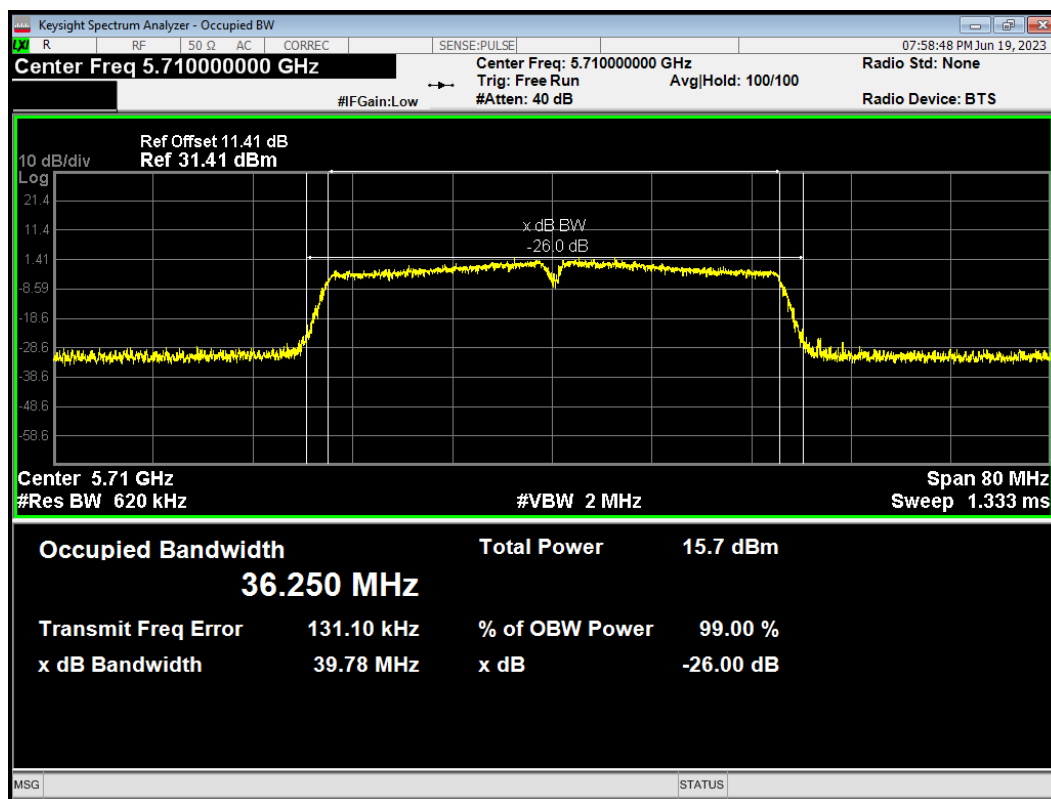


U-NII-3


OBW 802.11a 5720MHz

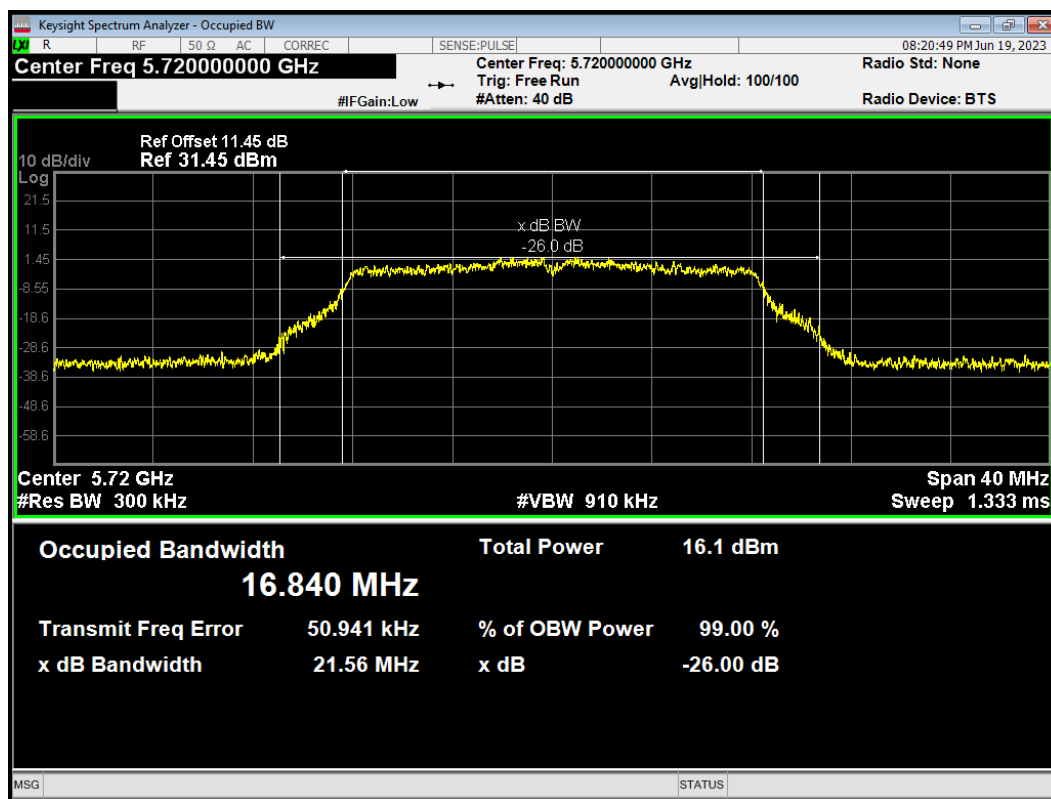


OBW 802.11a 5745MHz

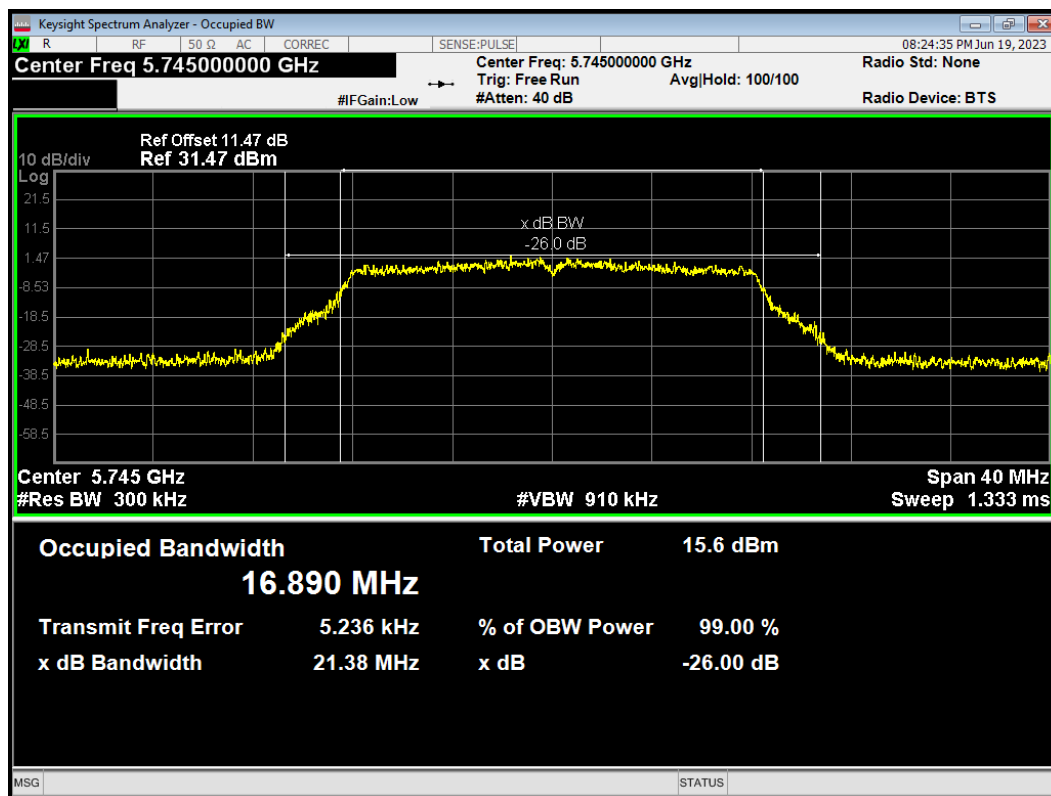


OBW 802.11a 5785MHz

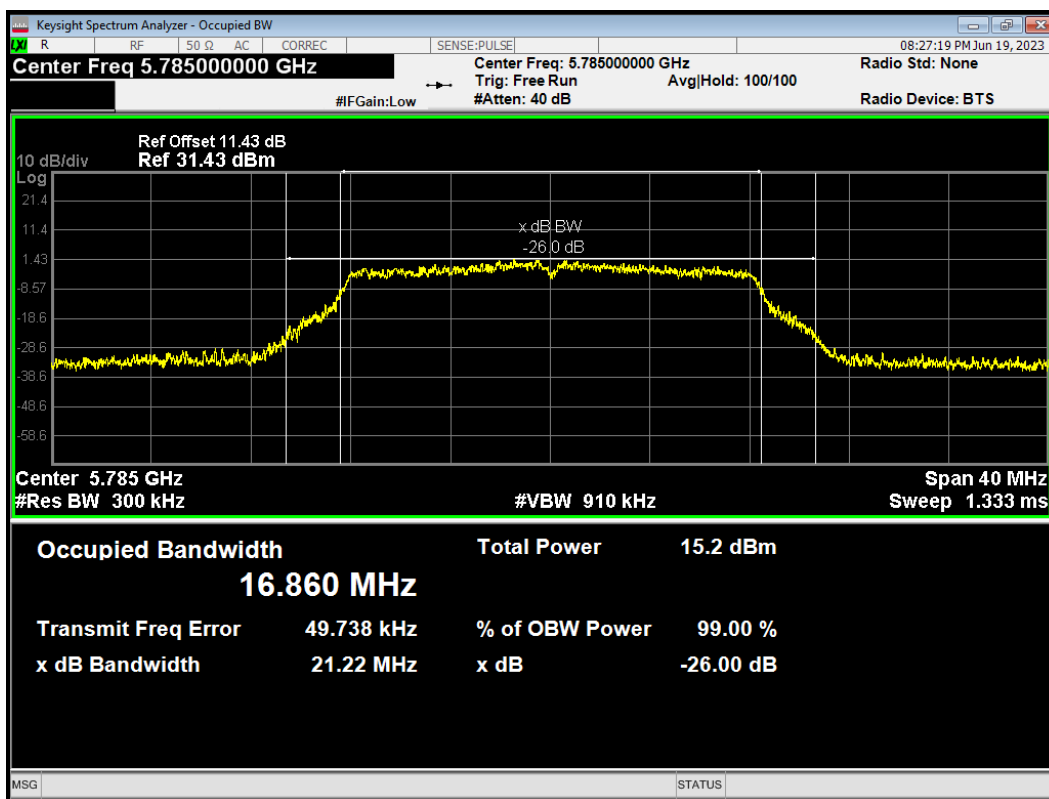


OBW 802.11a 5825MHz

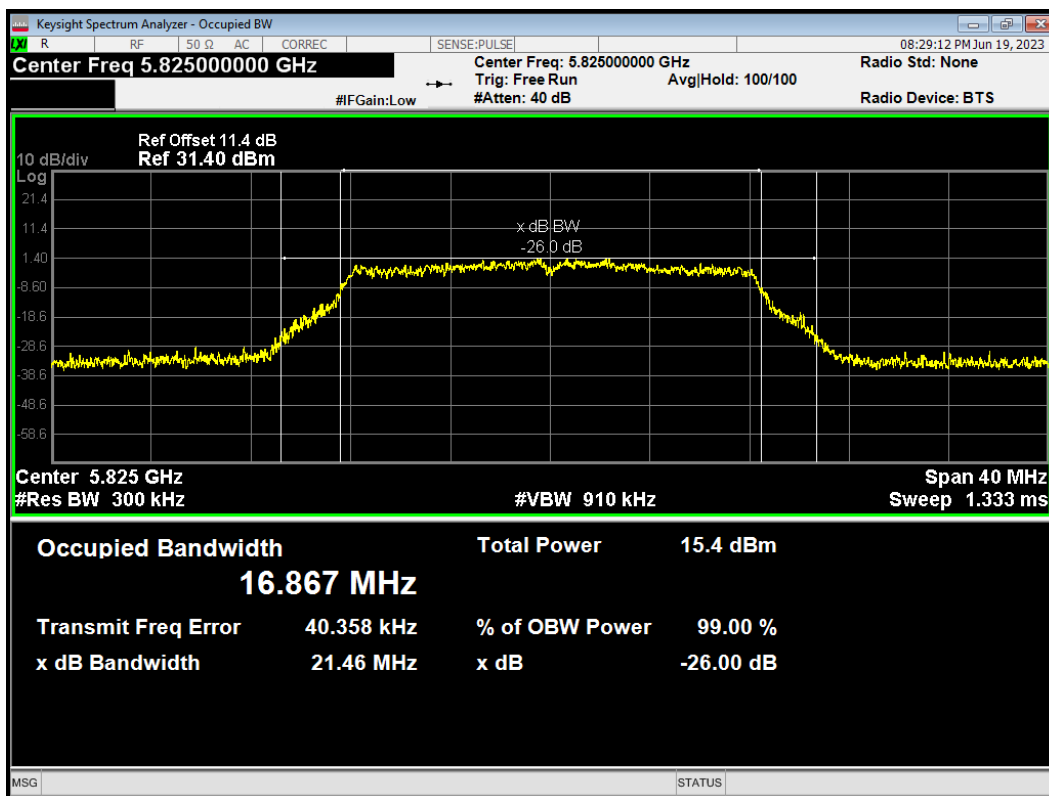


OBW 802.11ac(VHT20) 5720MHz

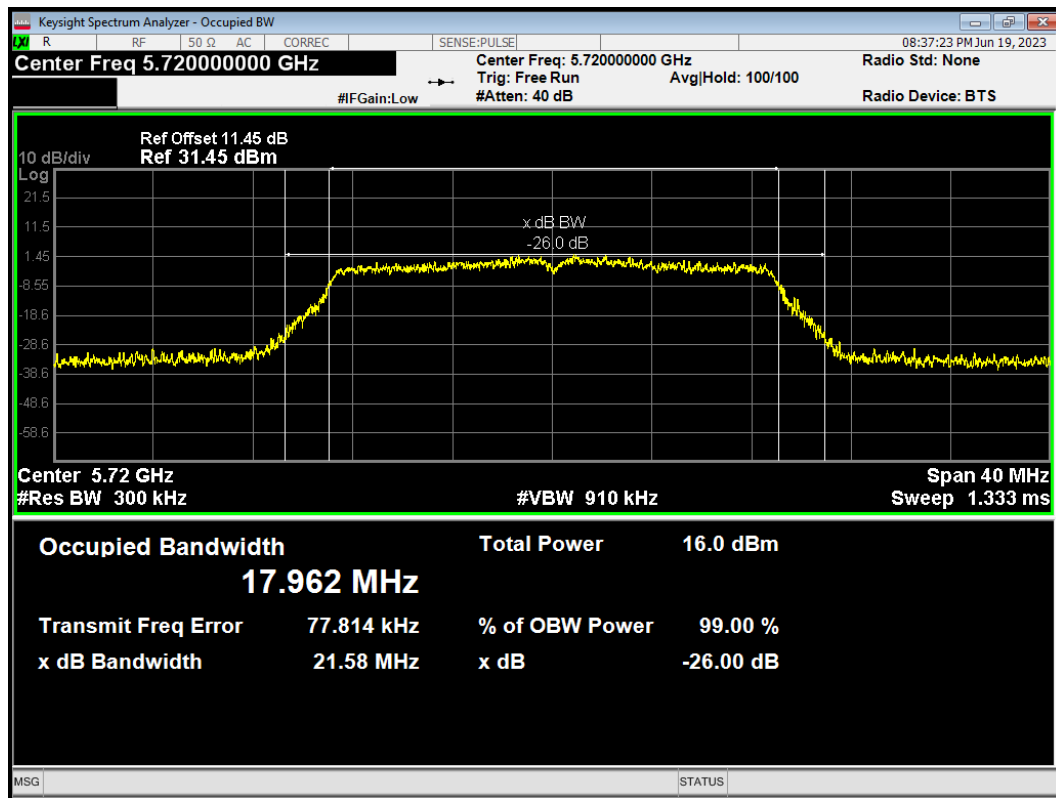


OBW 802.11ac(VHT20) 5745MHz

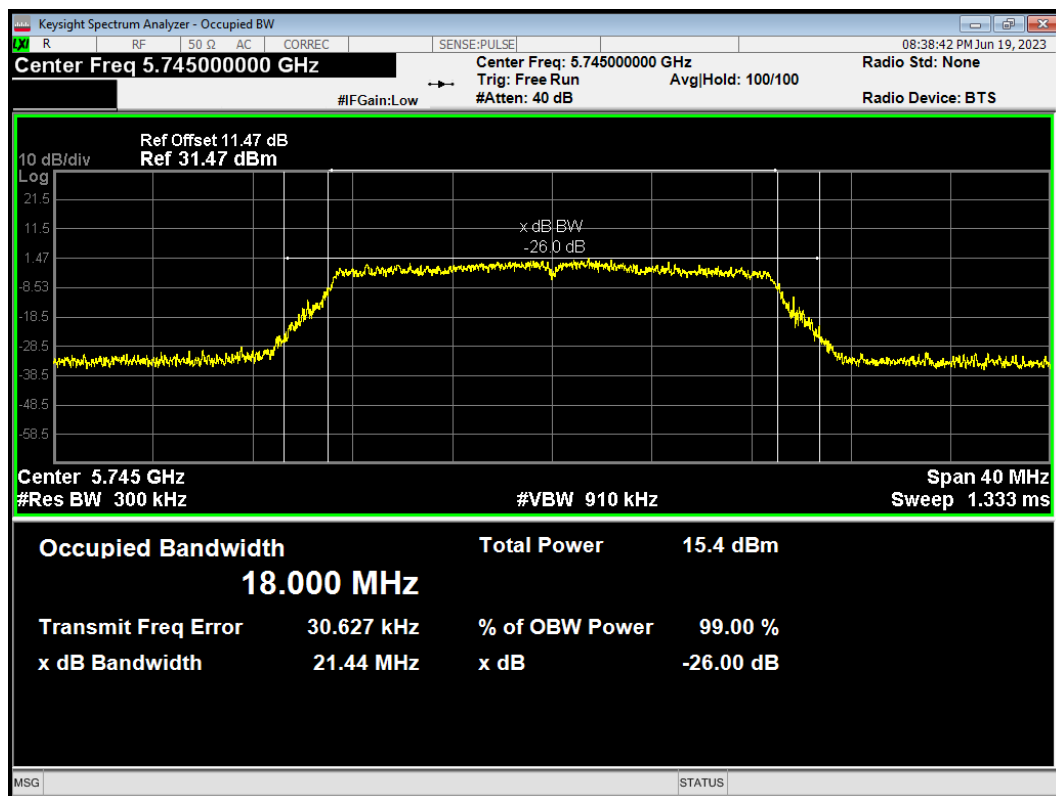


OBW 802.11ac(VHT20) 5785MHz

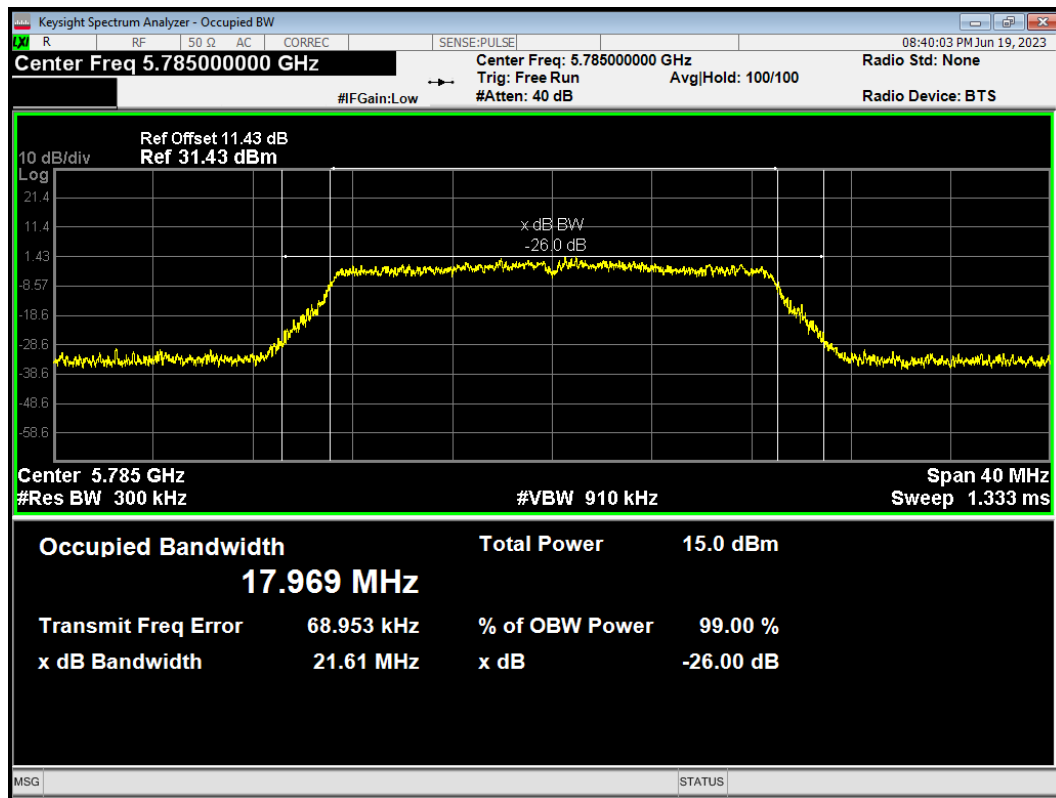


OBW 802.11ac(VHT20) 5825MHz

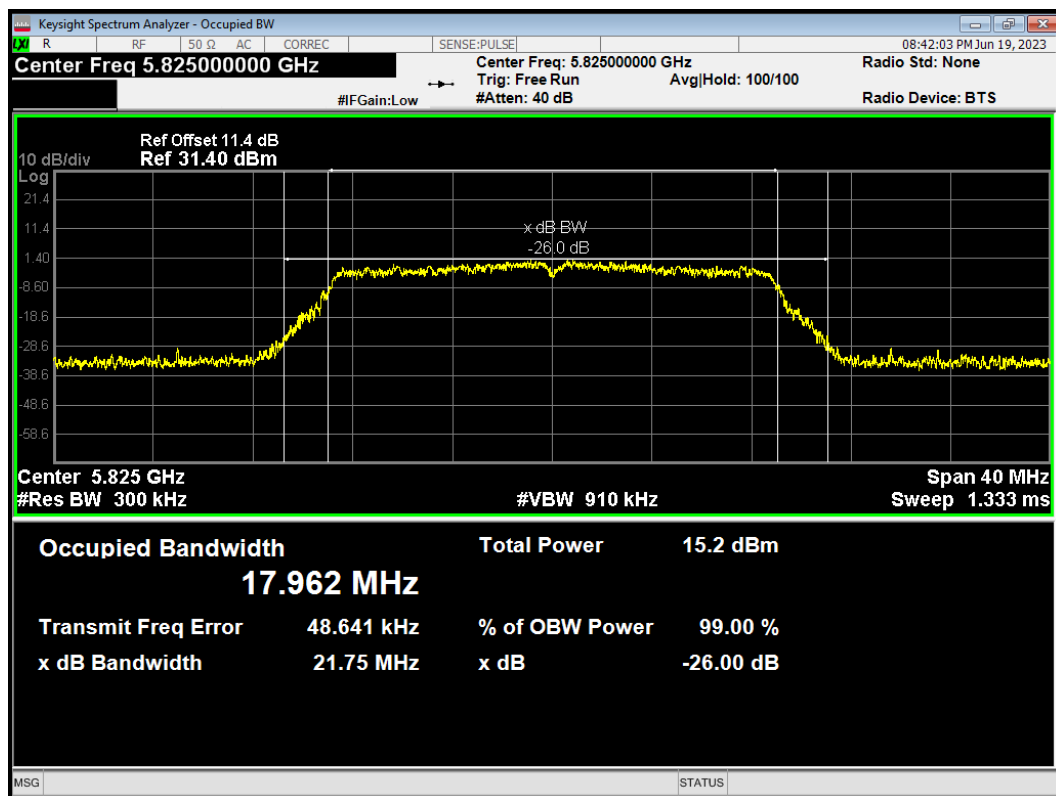


OBW 802.11ac(VHT40) 5710MHz

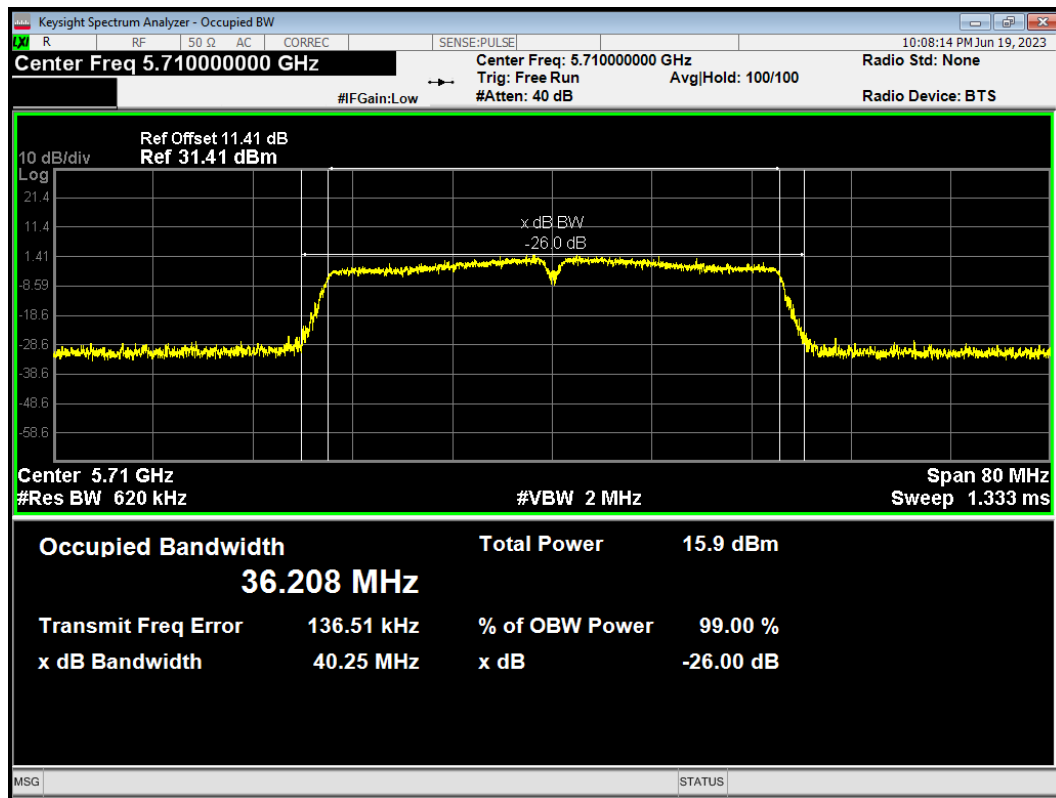


OBW 802.11ac(VHT40) 5755MHz

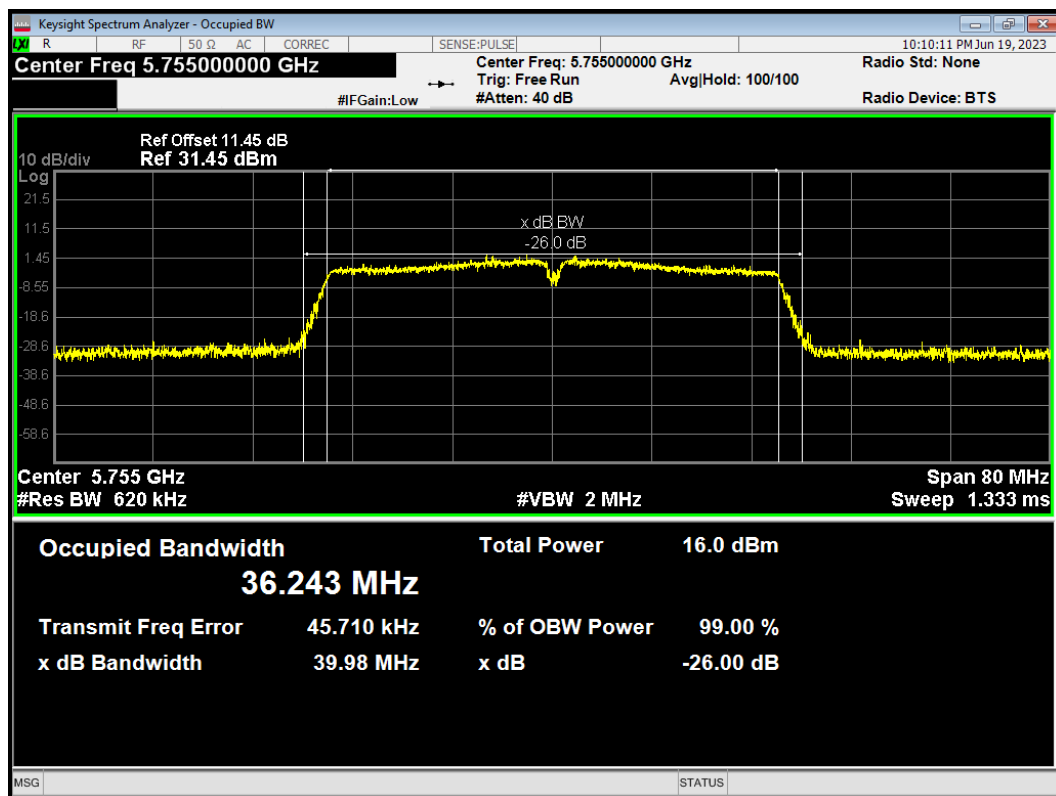


OBW 802.11ac(VHT40) 5795MHz

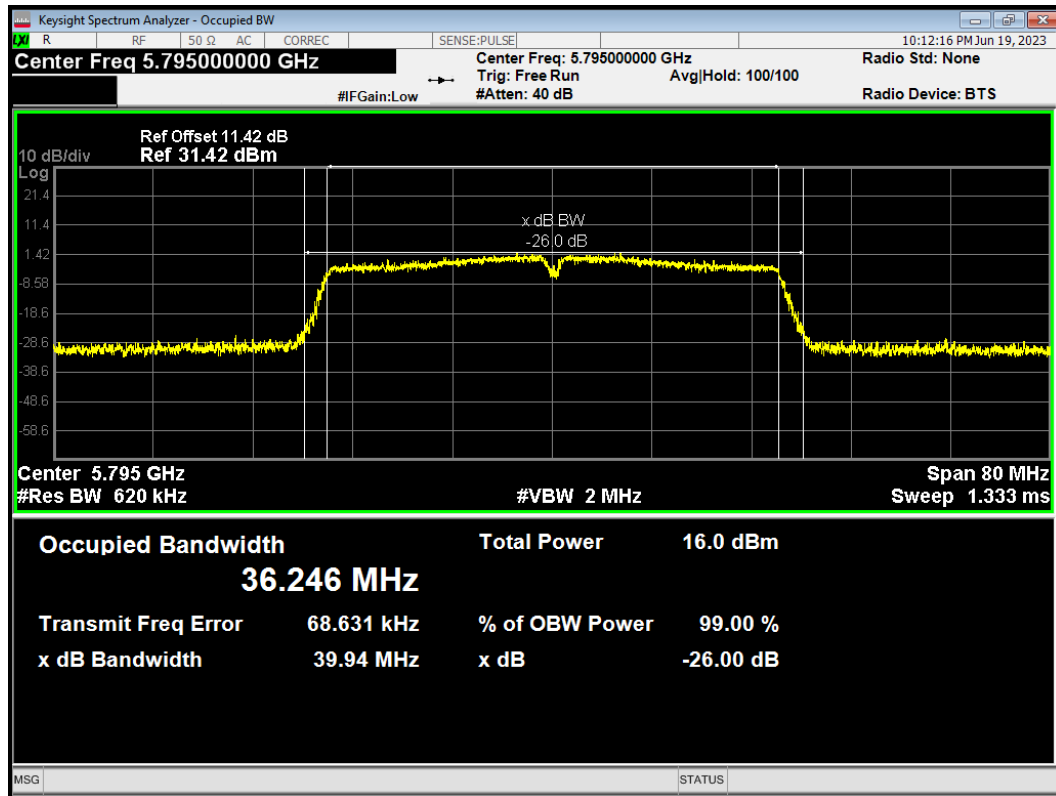


OBW 802.11ac(VHT80) 5690MHz

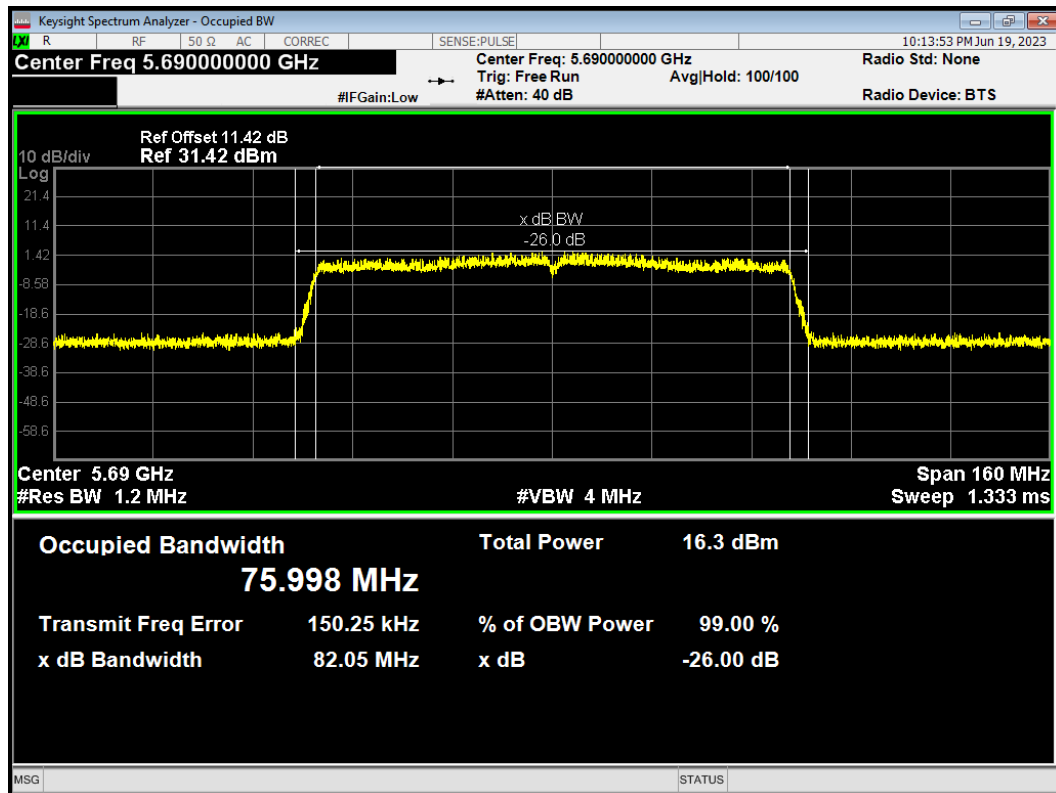


OBW 802.11ac(VHT80) 5775MHz

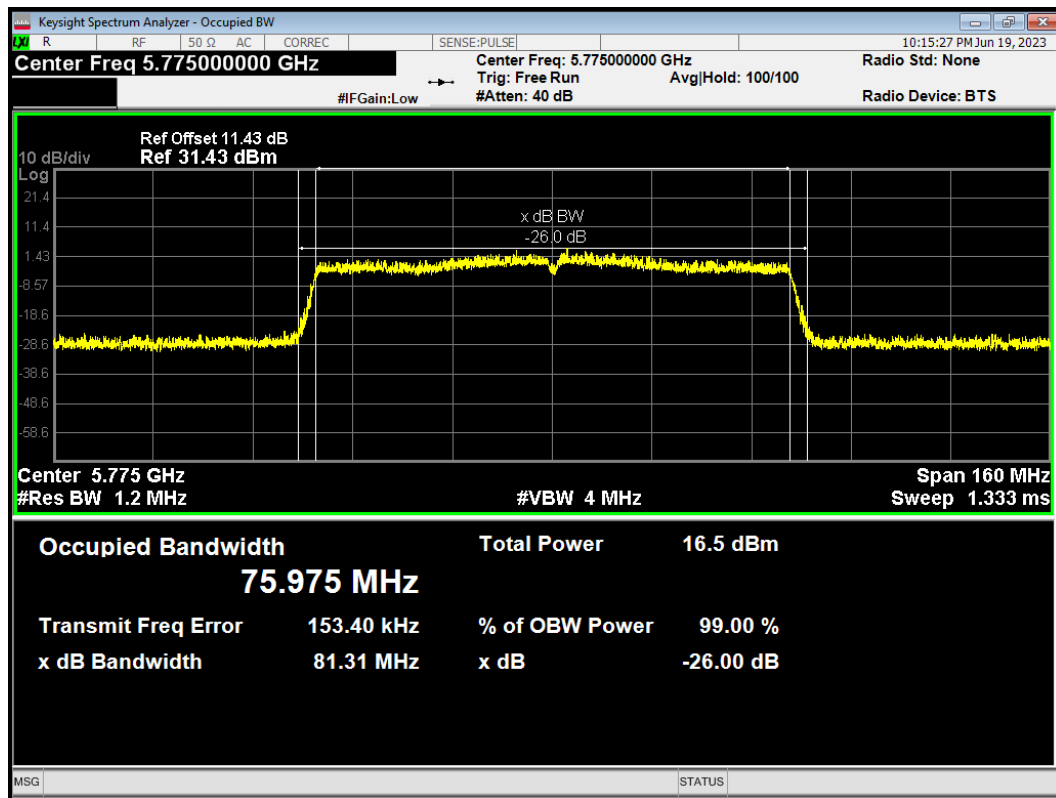


OBW 802.11n(HT20) 5720MHz

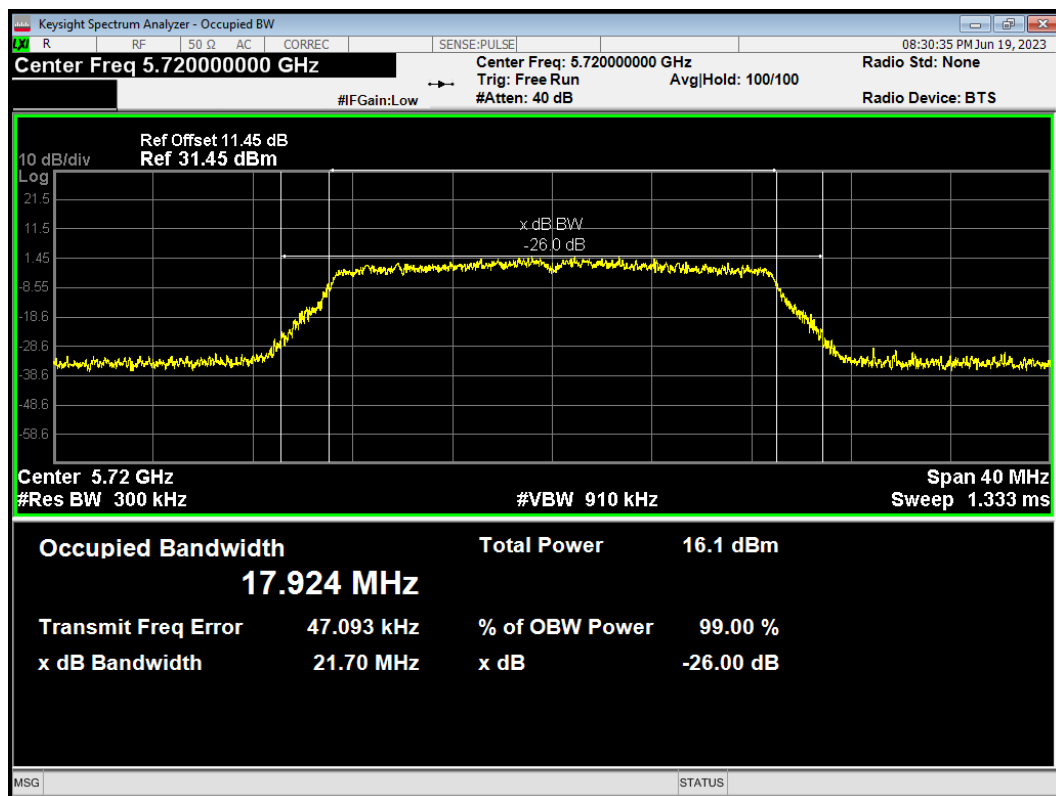


OBW 802.11n(HT20) 5745MHz

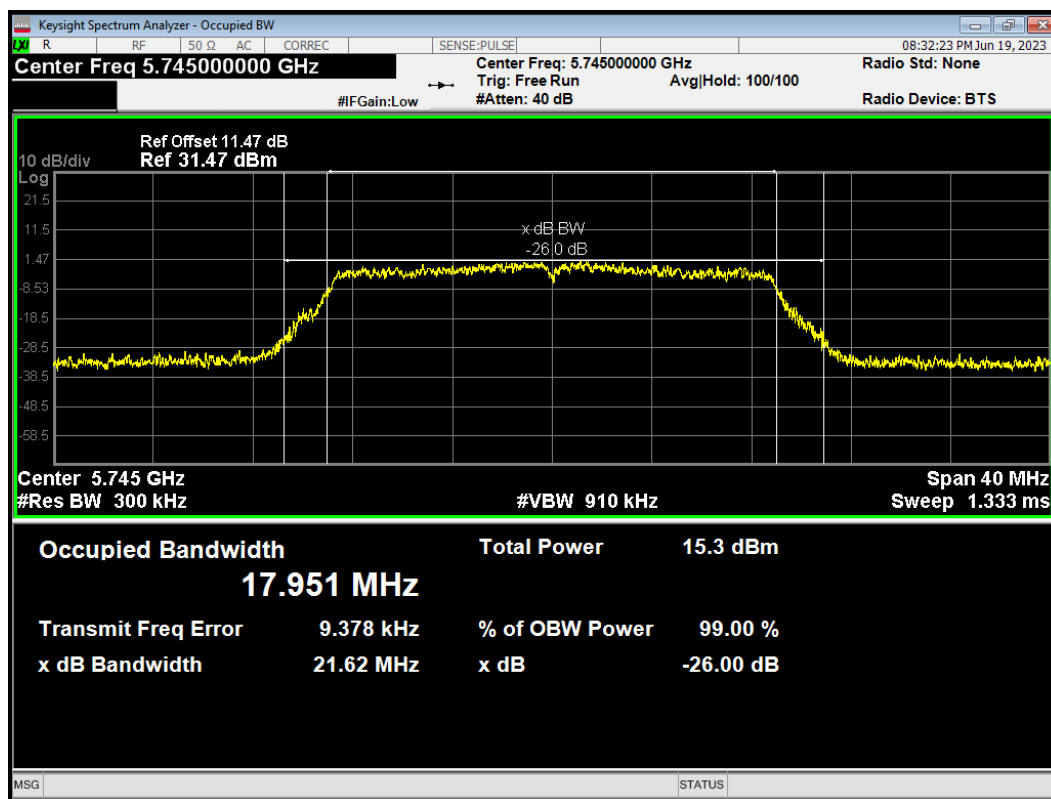


OBW 802.11n(HT20) 5785MHz

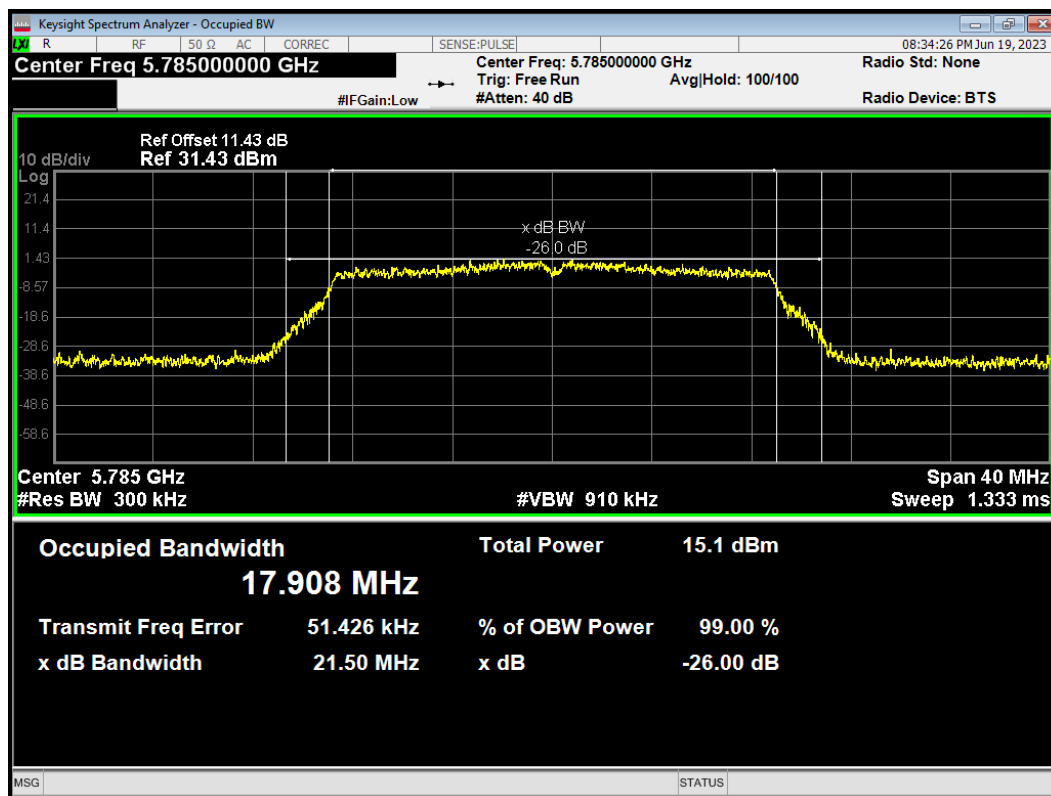


OBW 802.11n(HT20) 5825MHz

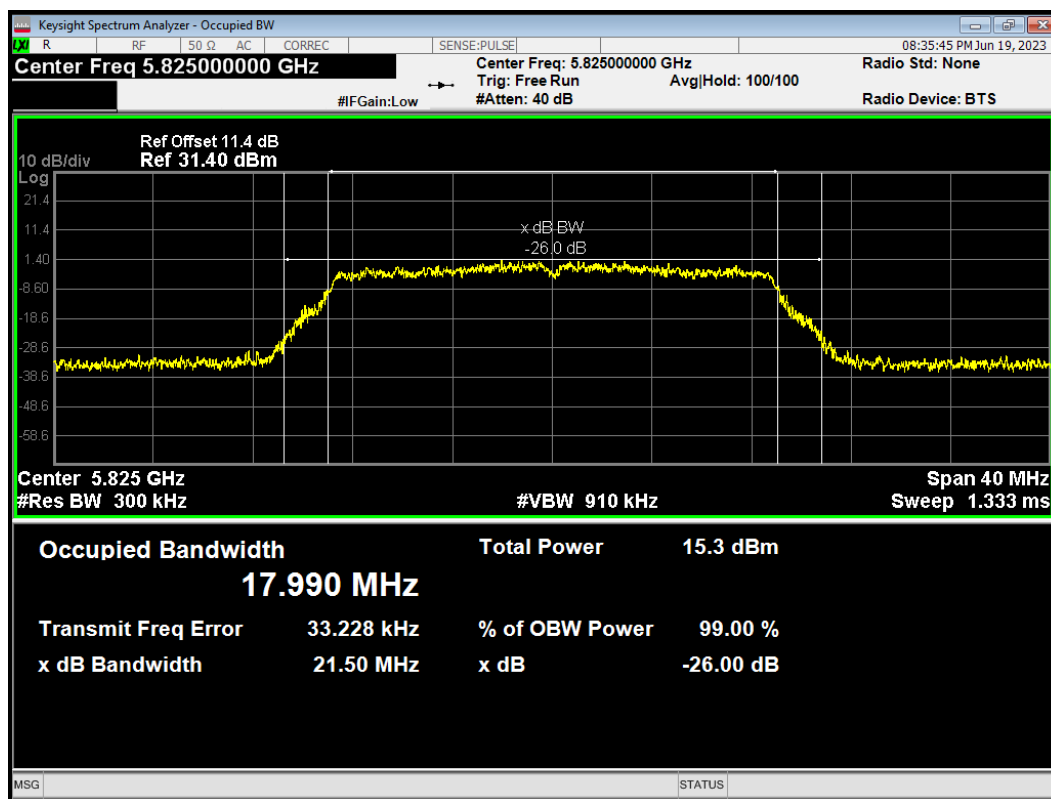


OBW 802.11n(HT40) 5710MHz

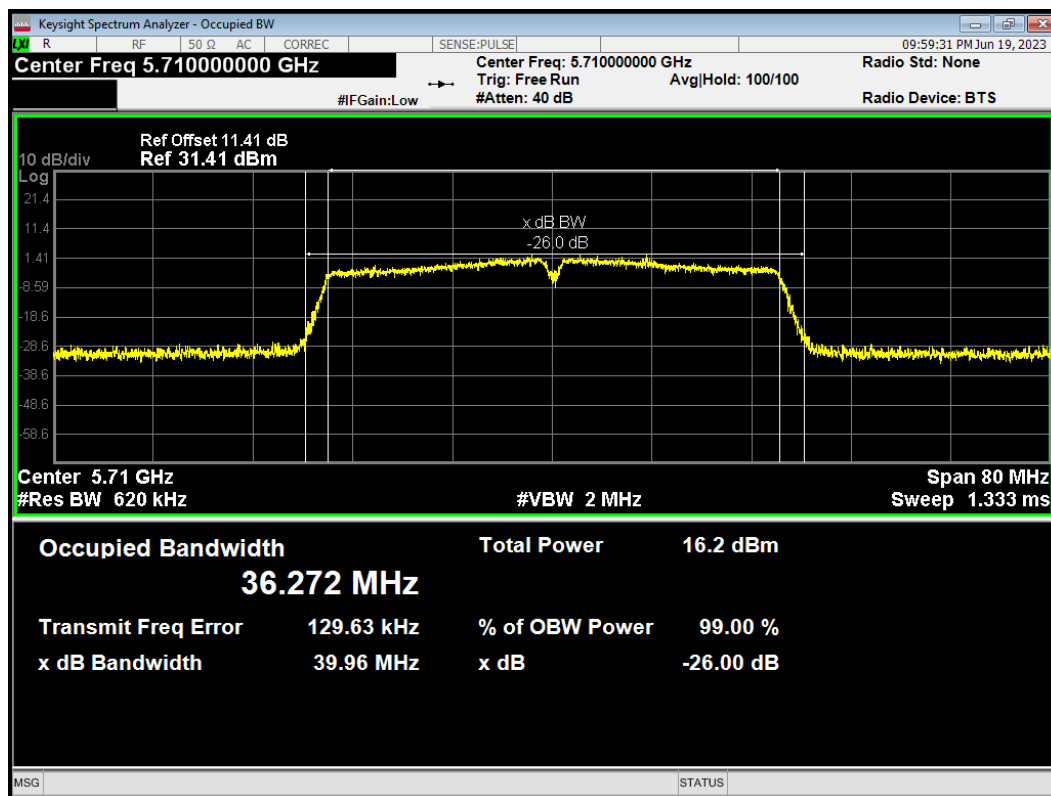

OBW 802.11n(HT40) 5755MHz

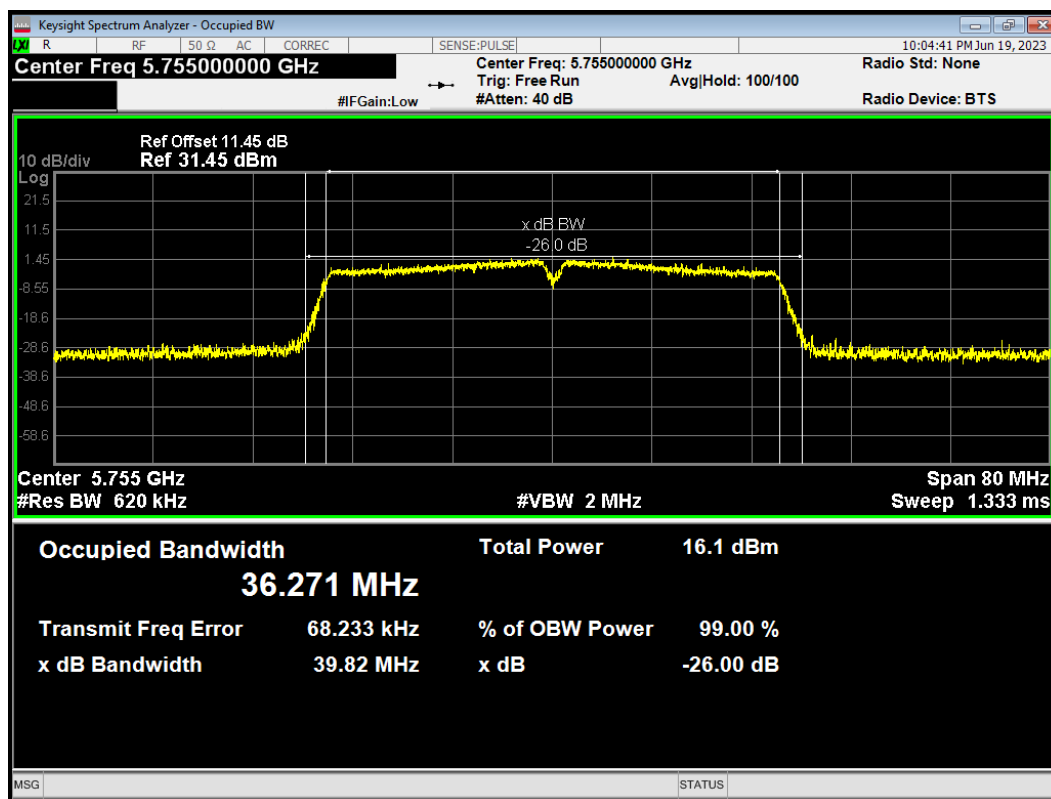


OBW 802.11n(HT40) 5795MHz

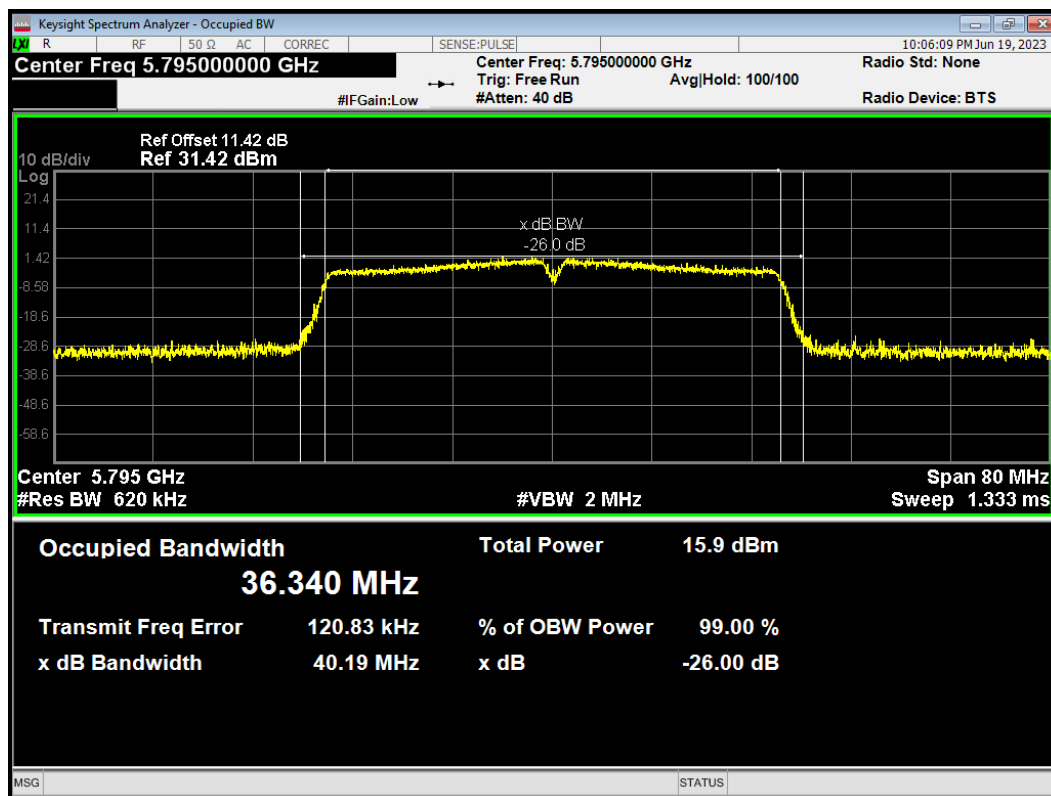


Minimum 6 dB bandwidth

U-NII-3


-6dB Bandwidth 802.11a 5720MHz

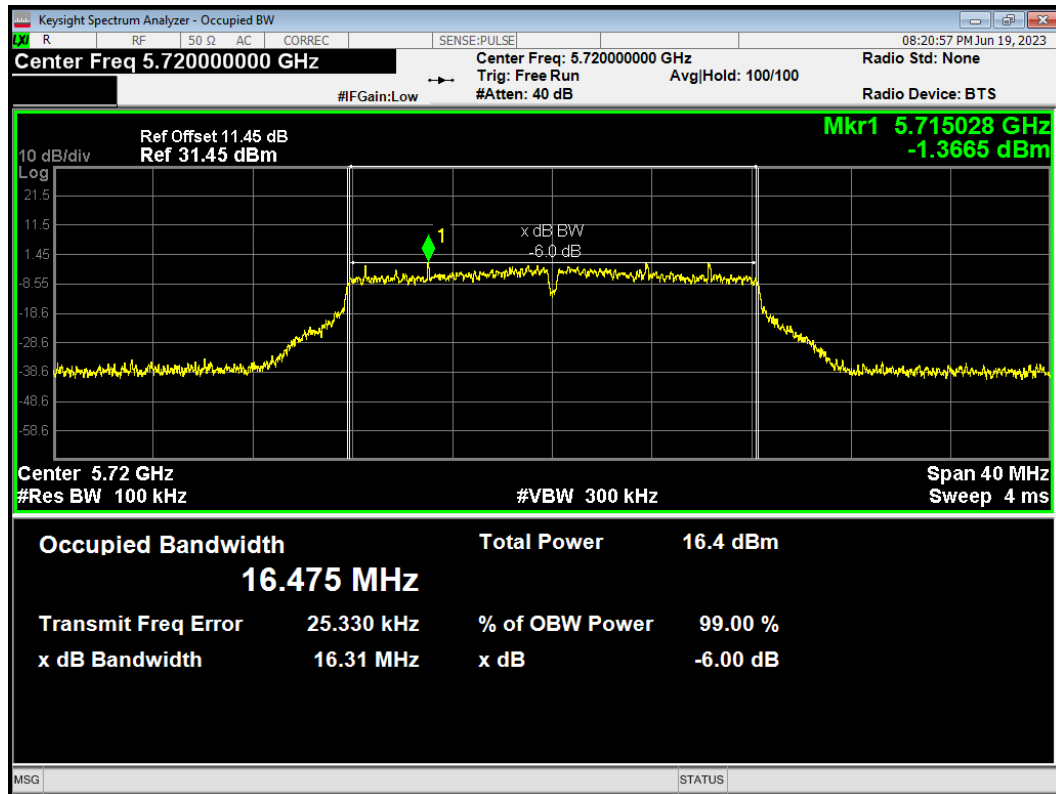


-6dB Bandwidth 802.11a 5745MHz

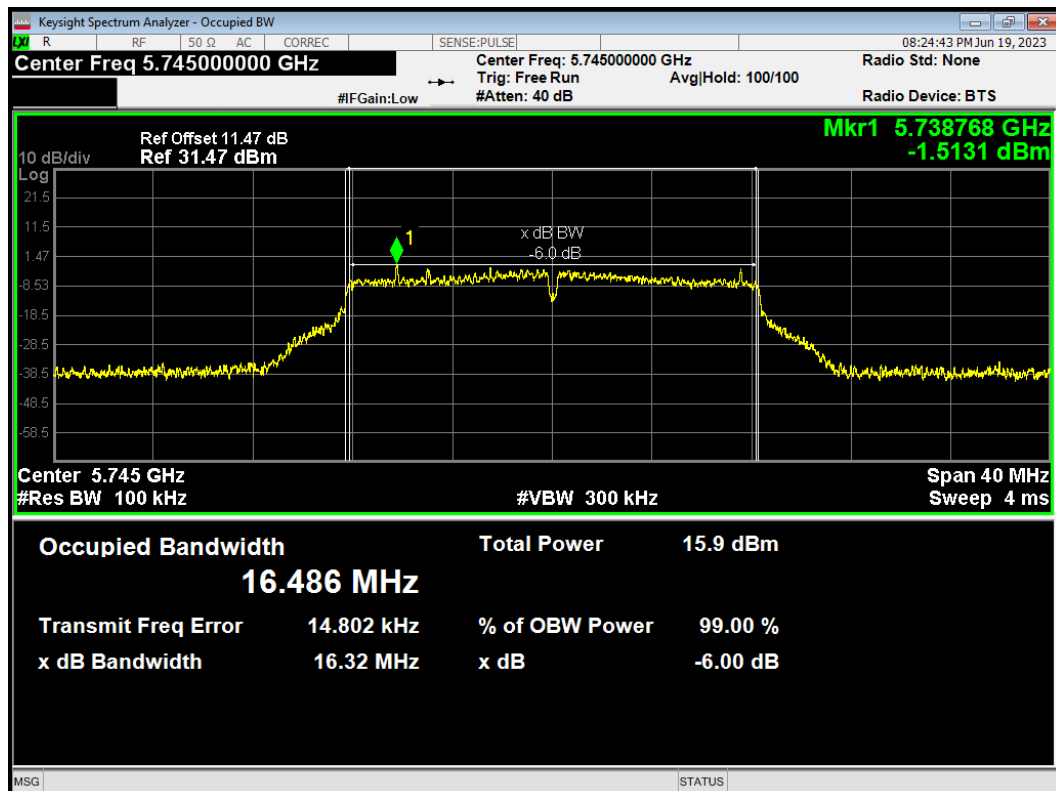


-6dB Bandwidth 802.11a 5785MHz

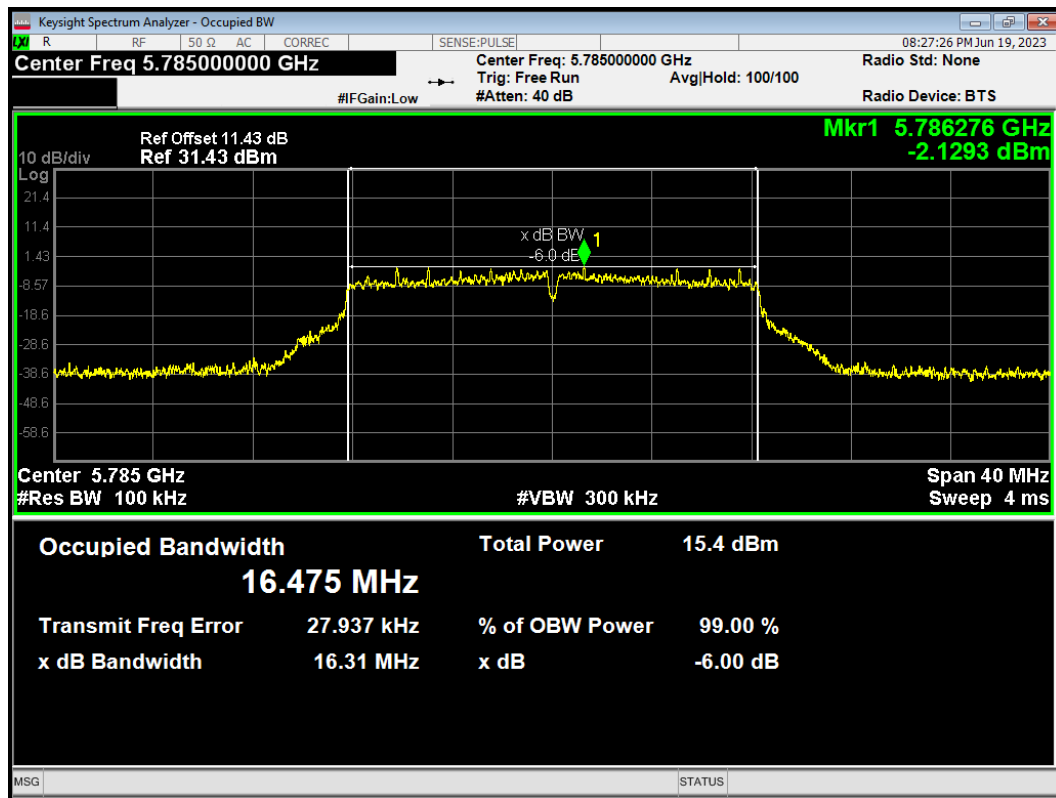


-6dB Bandwidth 802.11a 5825MHz

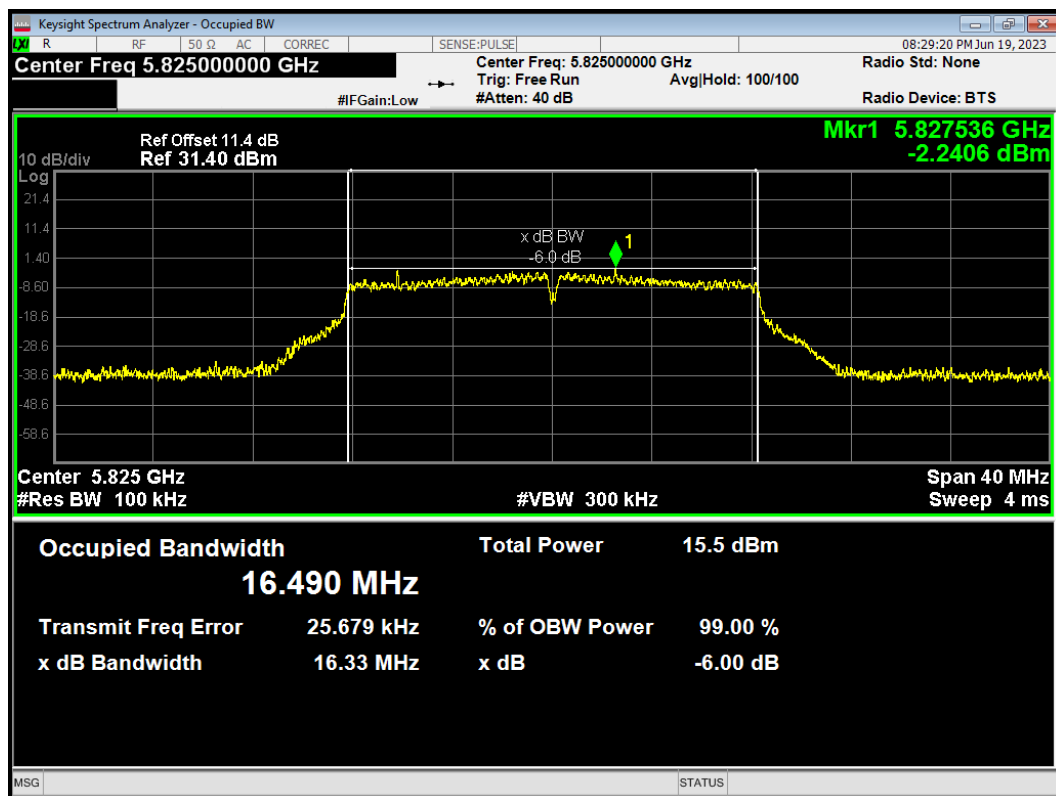


-6dB Bandwidth 802.11ac(VHT20) 5720MHz

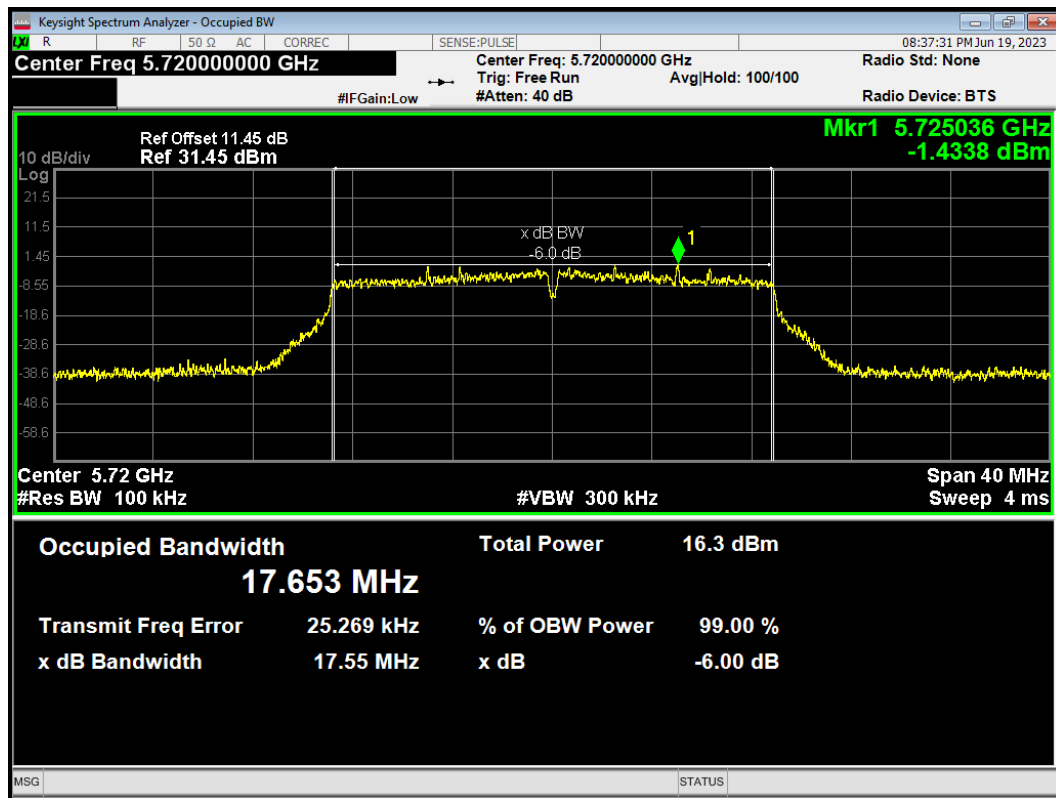


-6dB Bandwidth 802.11ac(VHT20) 5745MHz

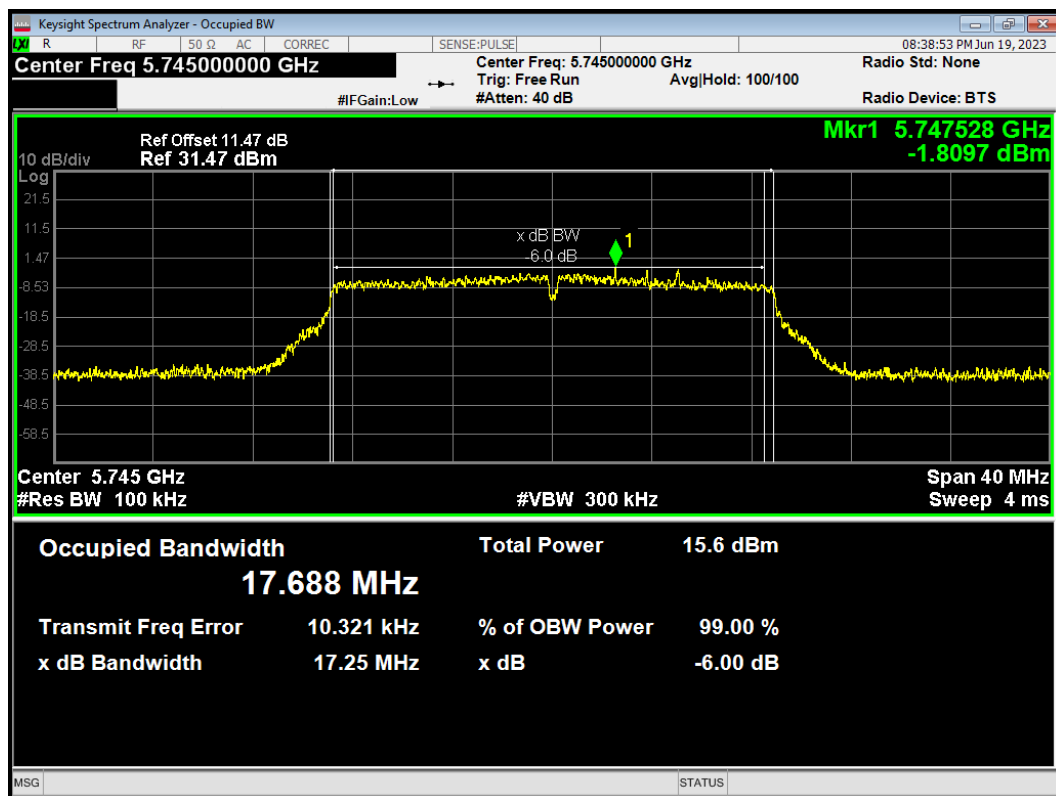


-6dB Bandwidth 802.11ac(VHT20) 5785MHz

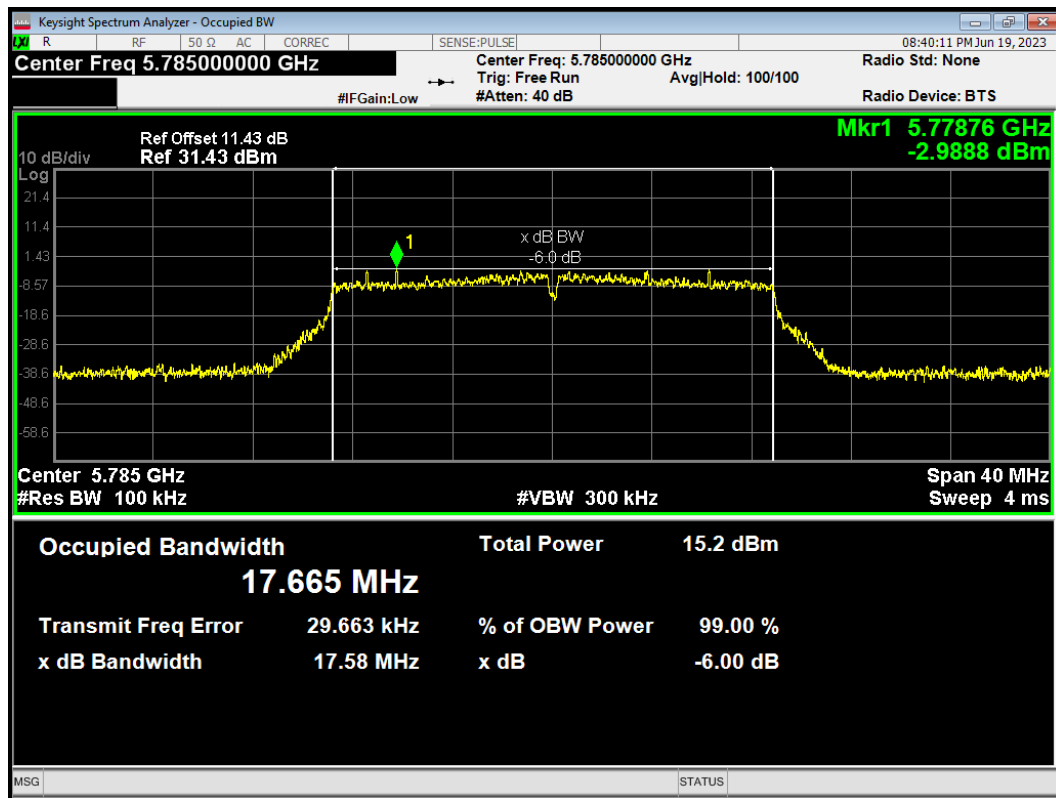


-6dB Bandwidth 802.11ac(VHT20) 5825MHz

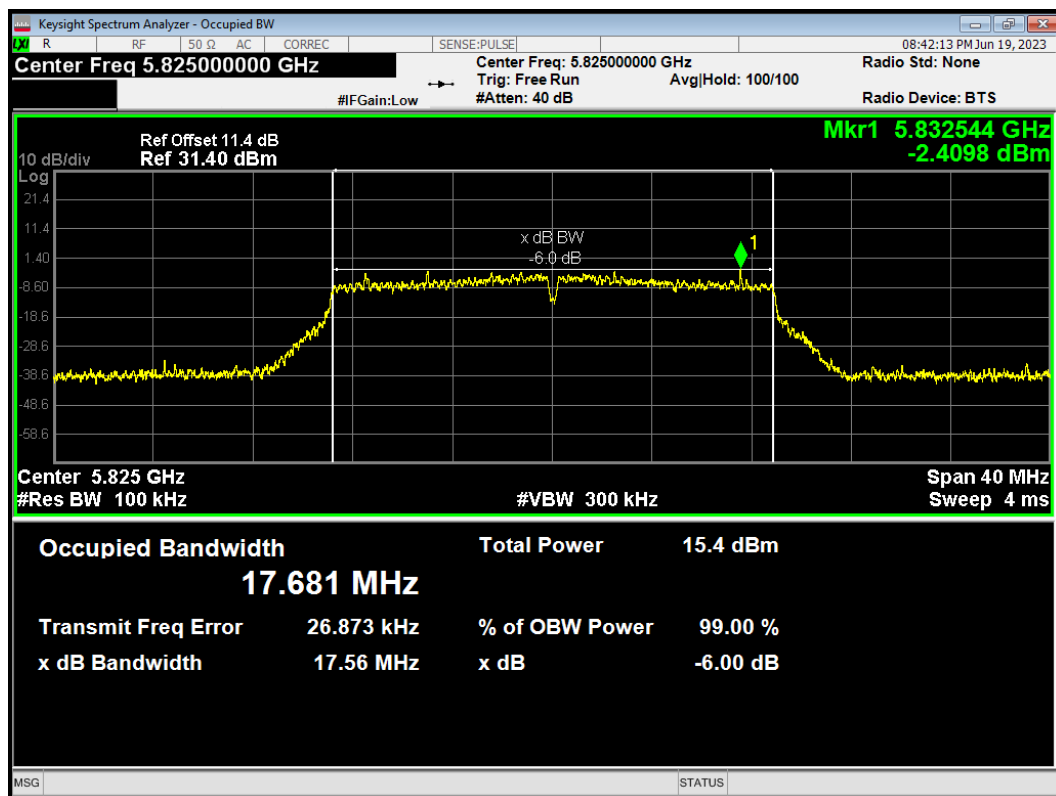


-6dB Bandwidth 802.11ac(VHT40) 5710MHz

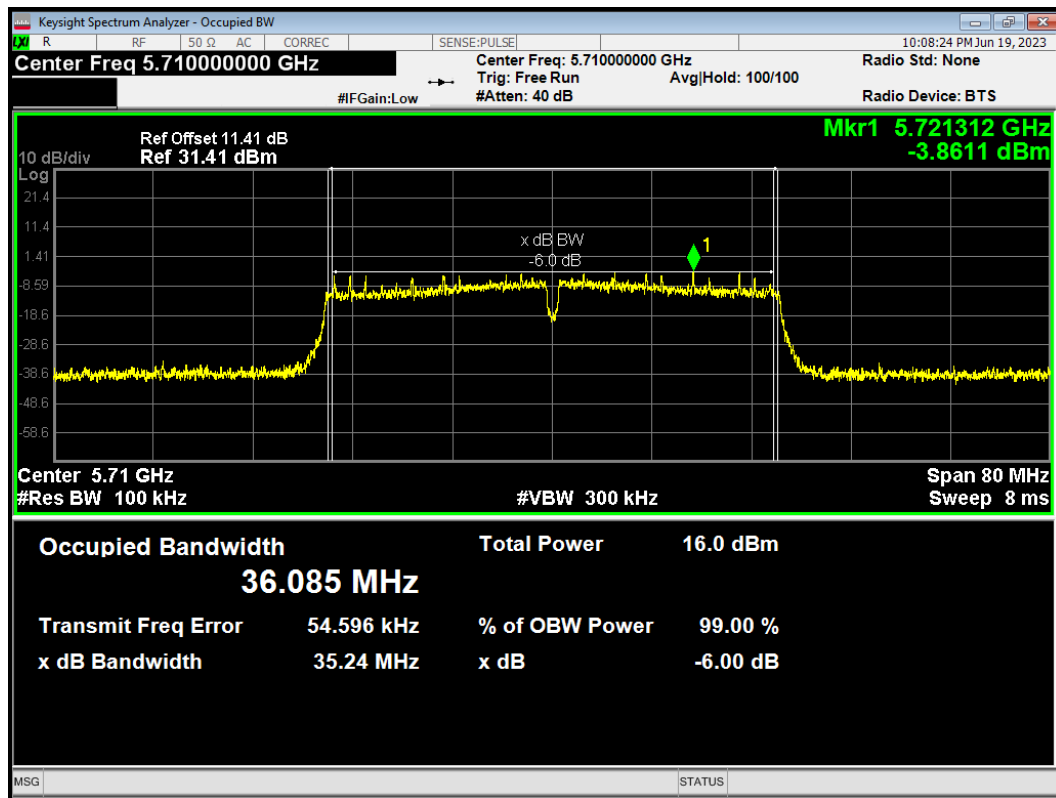


-6dB Bandwidth 802.11ac(VHT40) 5755MHz

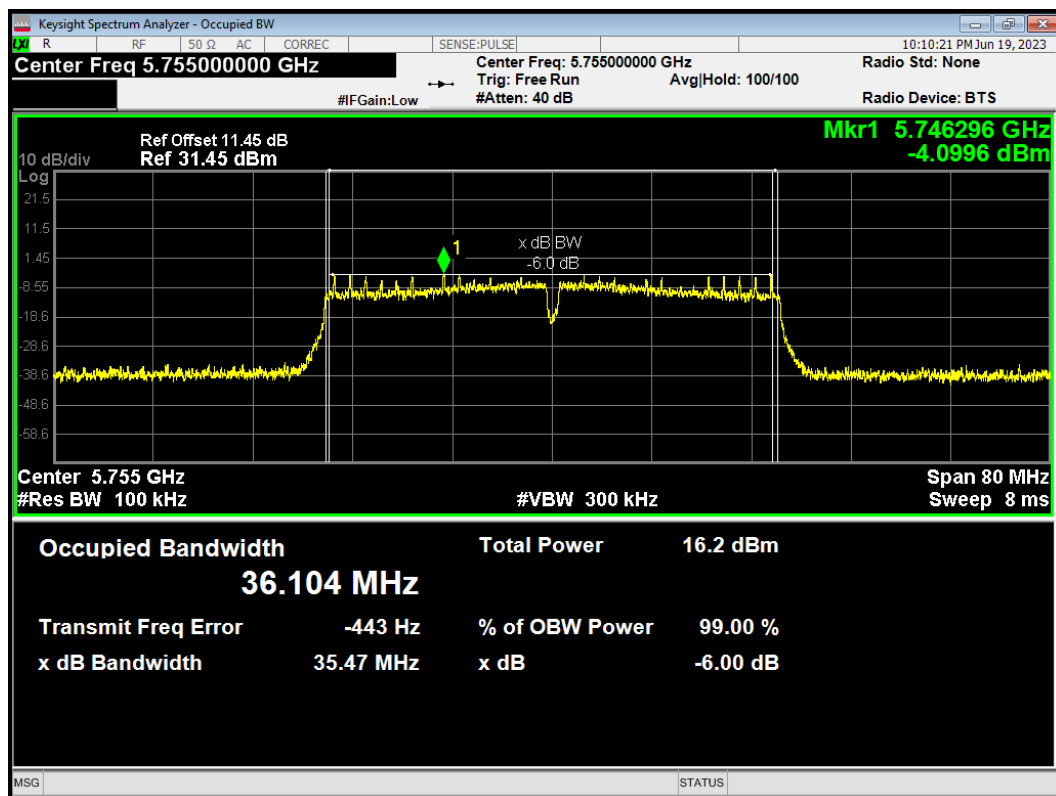


-6dB Bandwidth 802.11ac(VHT40) 5795MHz

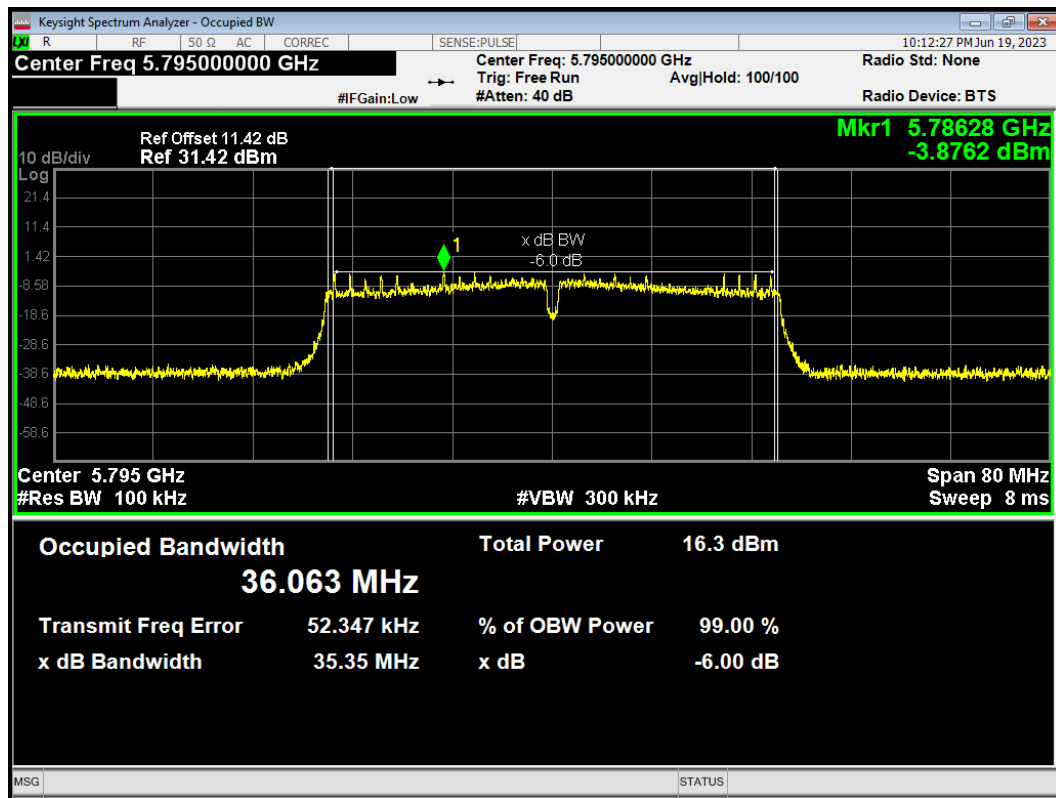


-6dB Bandwidth 802.11ac(VHT80) 5690MHz

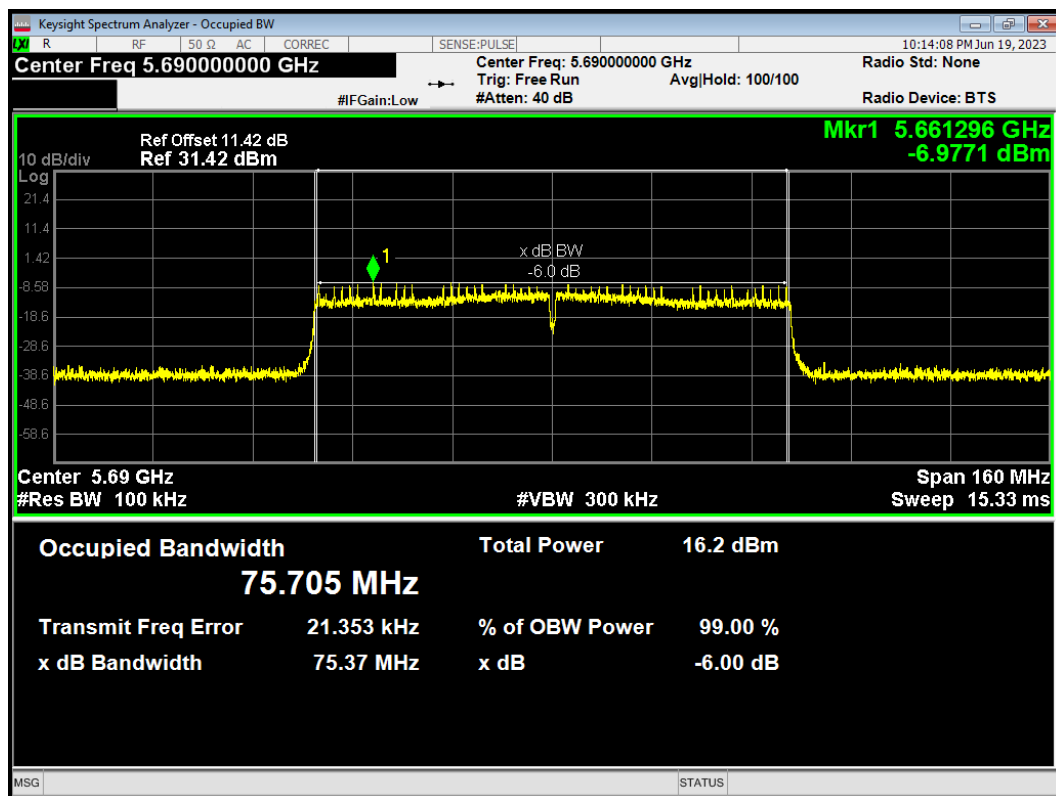


-6dB Bandwidth 802.11ac(VHT80) 5775MHz

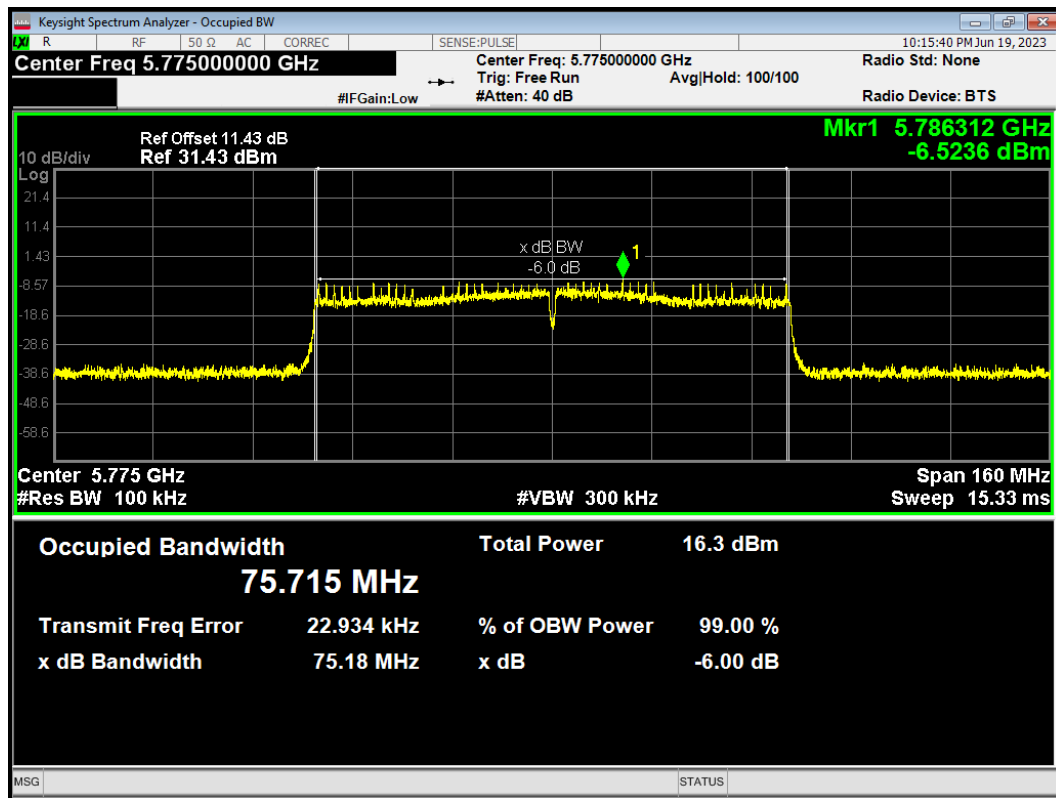


-6dB Bandwidth 802.11n(HT20) 5720MHz

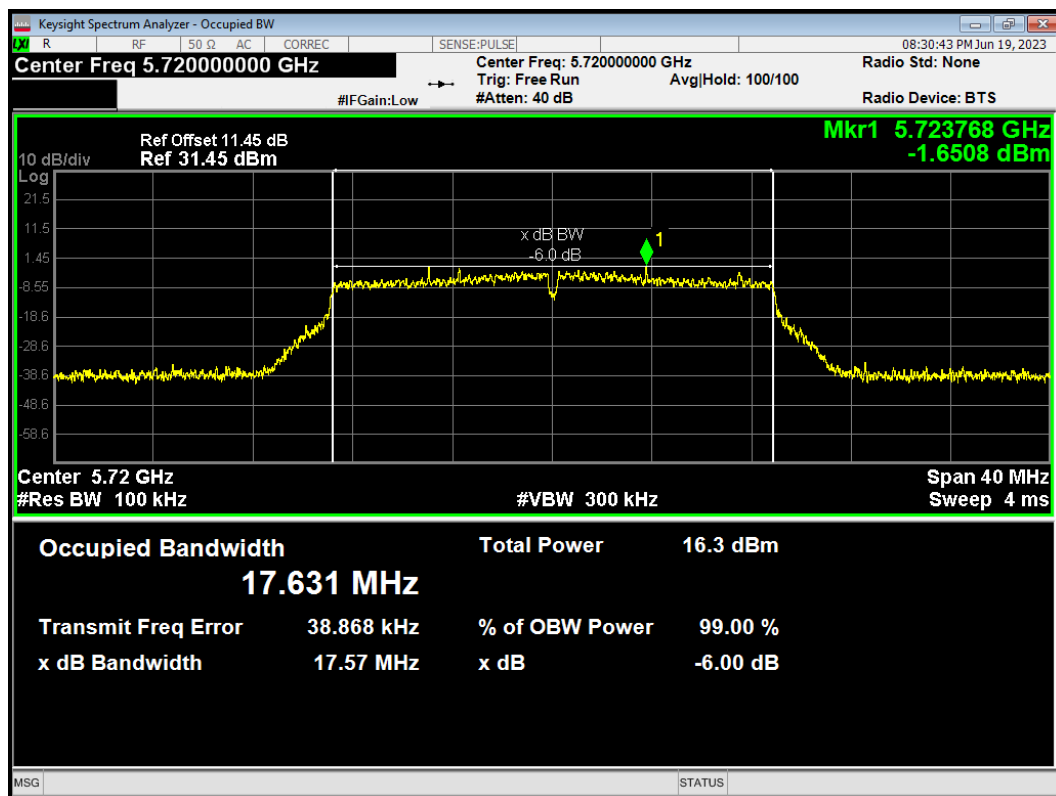


-6dB Bandwidth 802.11n(HT20) 5745MHz

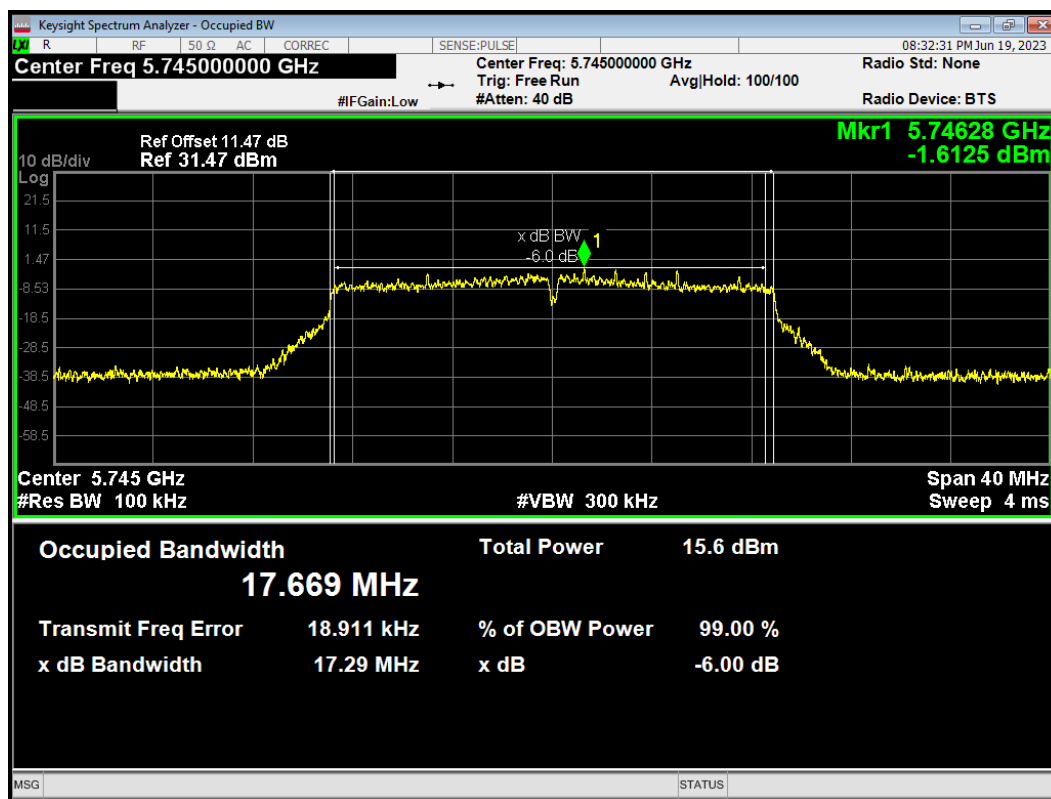


-6dB Bandwidth 802.11n(HT20) 5785MHz

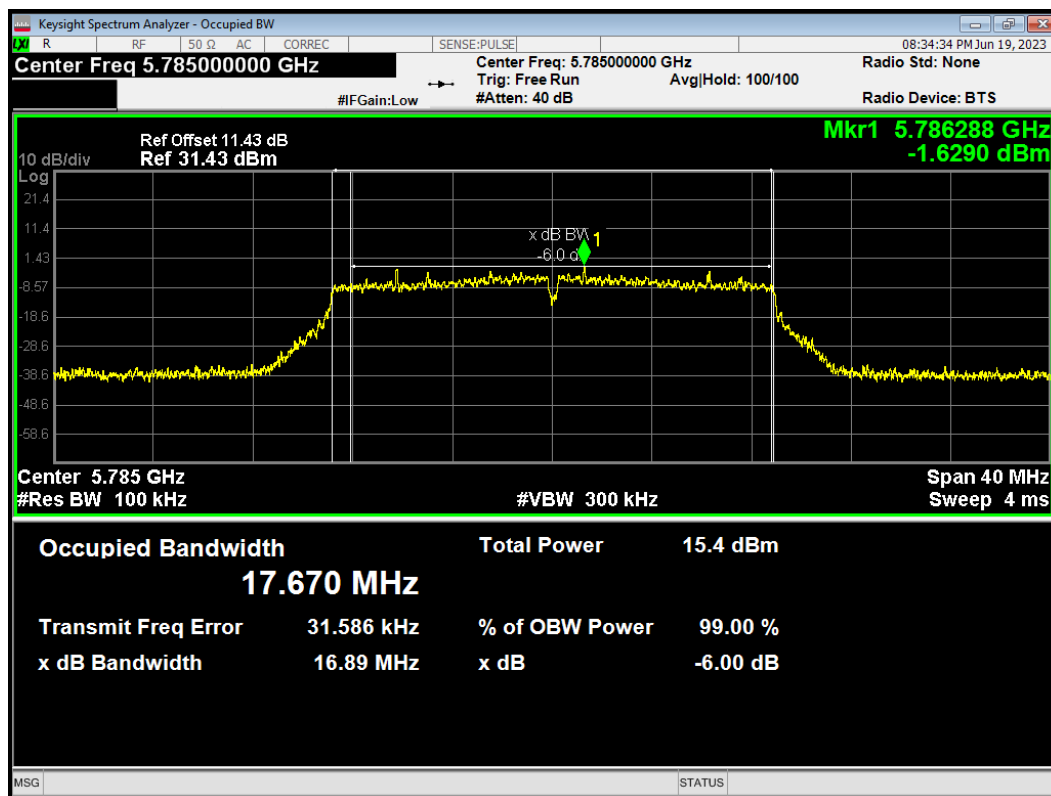


-6dB Bandwidth 802.11n(HT20) 5825MHz

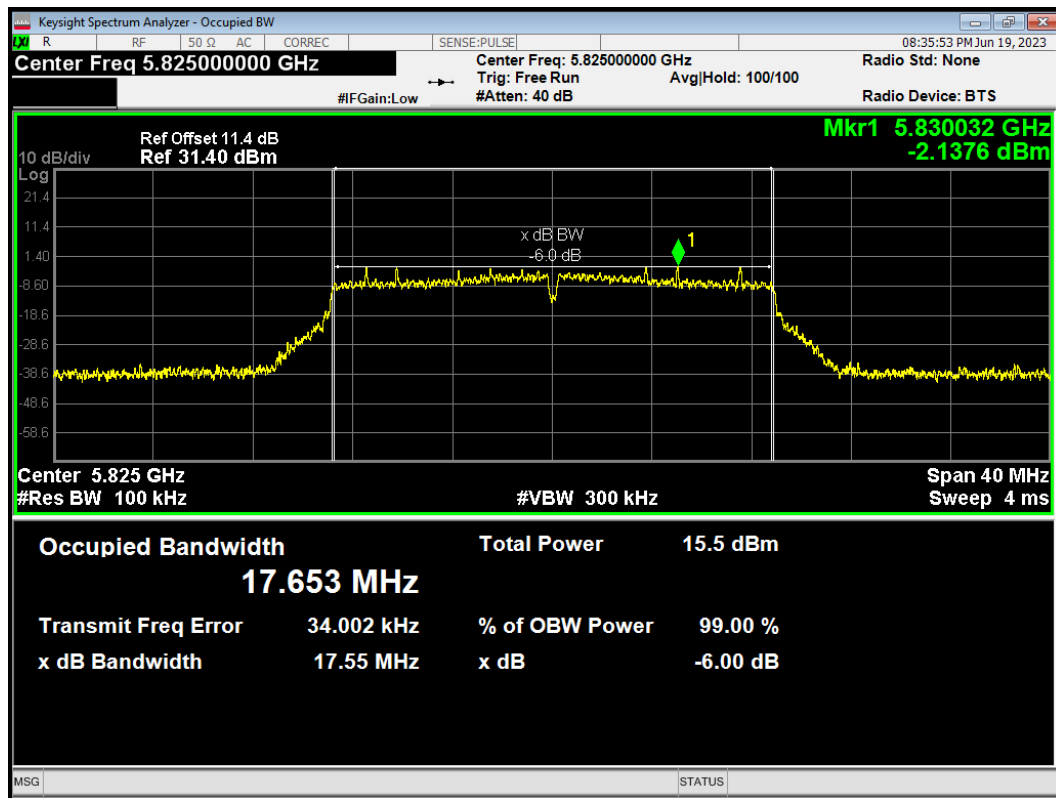


-6dB Bandwidth 802.11n(HT40) 5710MHz

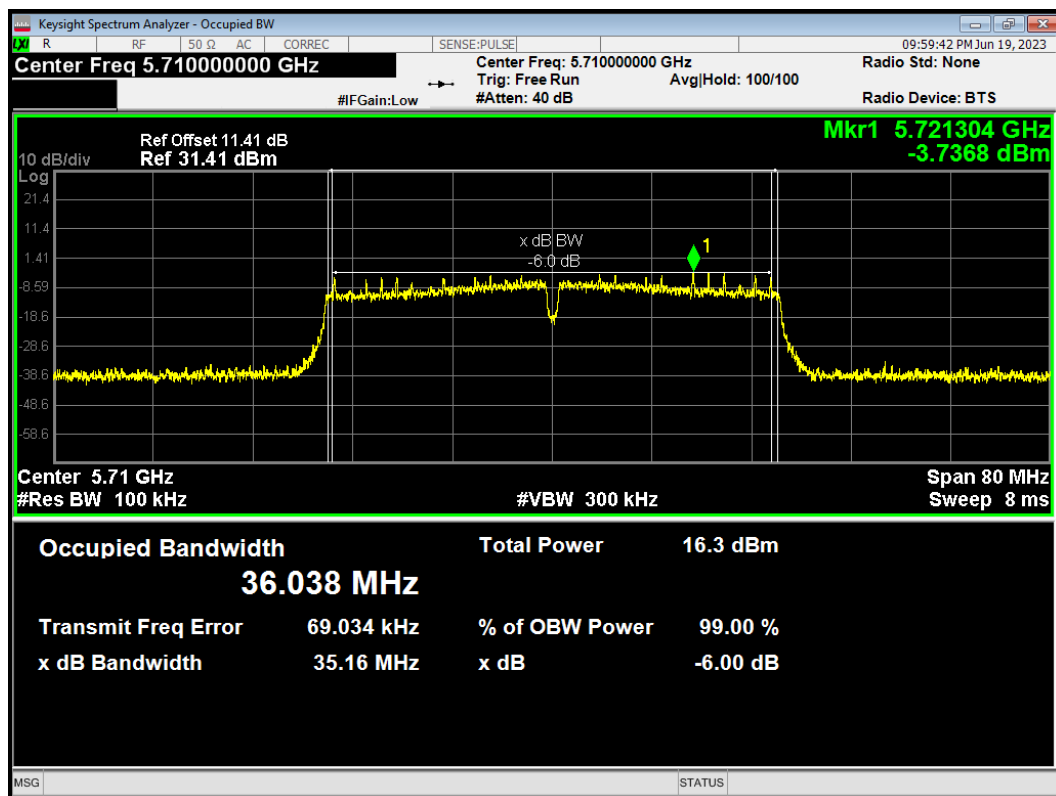

-6dB Bandwidth 802.11n(HT40) 5755MHz

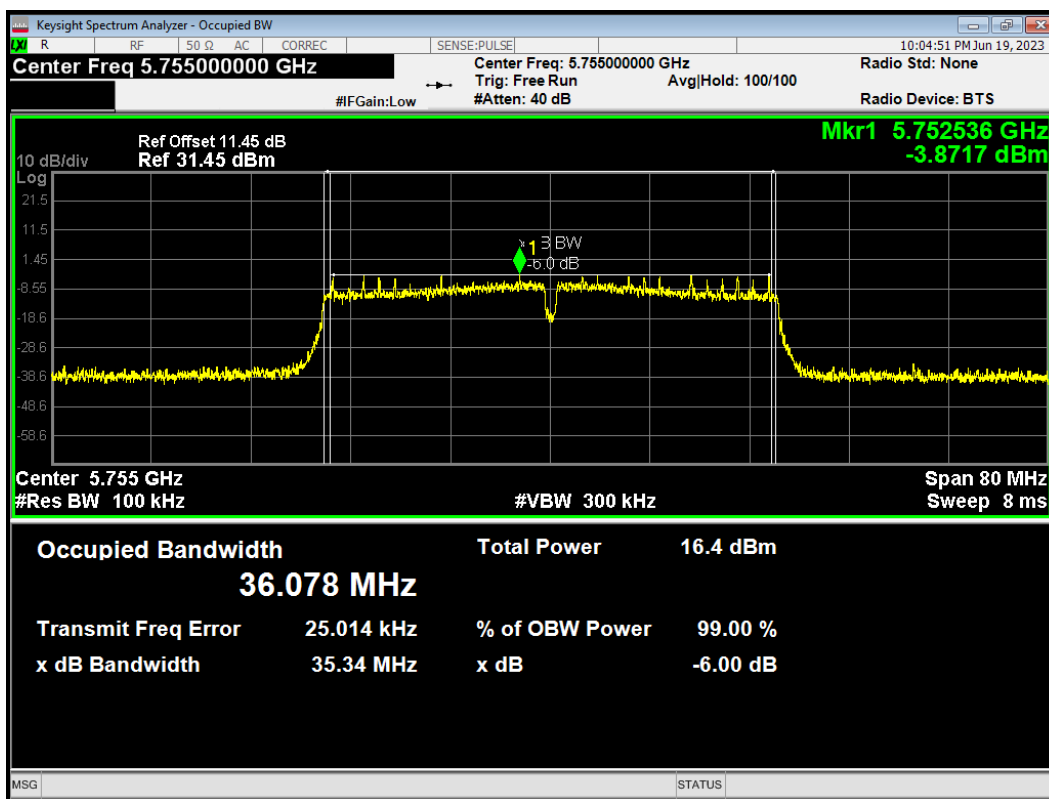

-6dB Bandwidth 802.11n(HT40) 5795MHz

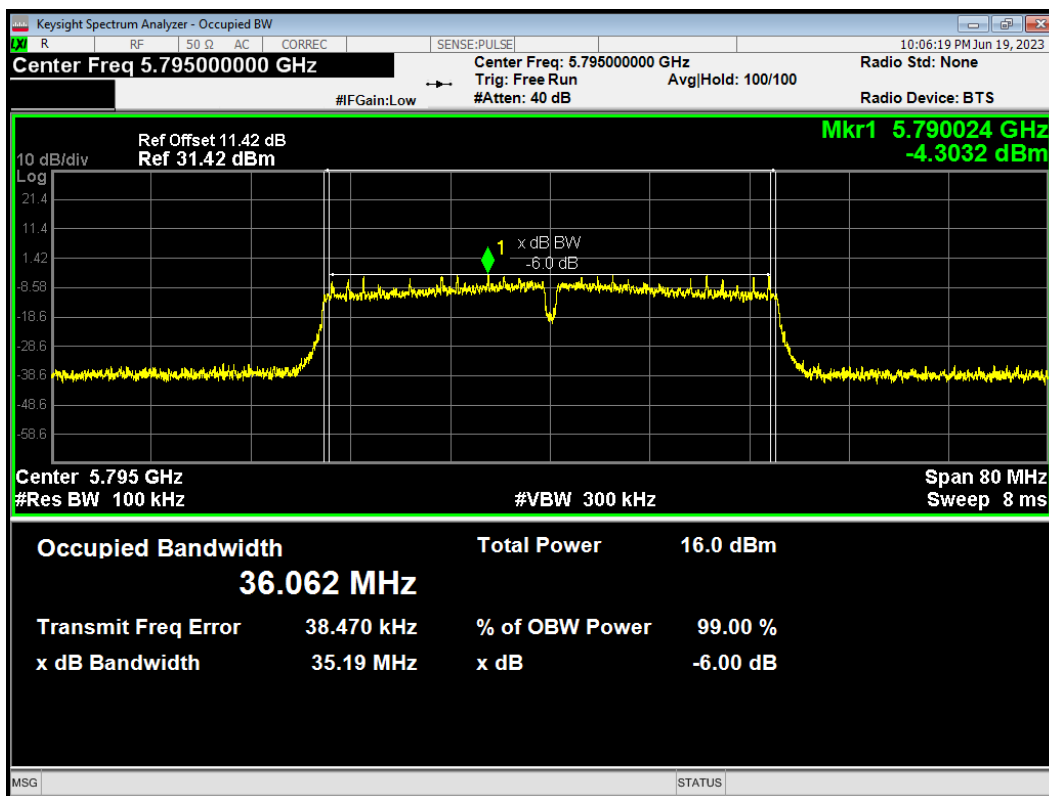

## 5.2. Average Power Output

### Ambient condition


| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Methods of Measurement

During the process of the testing, The EUT was connected to the average power meter through an external attenuator and a known loss cable. The EUT is max power transmission with proper modulation. We use Maximum average Conducted Output Power Level Method in KDB789033 for this test

The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

### Test Setup



### Limits

Rule FCC Part 15.407(a)(1)(2)(3)

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23

dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.44 \text{ dB}$ .

## Test Results

| Mode                                                                           | Duty cycle | Duty cycle correction Factor (dB) |
|--------------------------------------------------------------------------------|------------|-----------------------------------|
| 802.11a                                                                        | 0.934      | 0.30                              |
| 802.11n HT20                                                                   | 0.930      | 0.32                              |
| 802.11n HT40                                                                   | 0.867      | 0.62                              |
| 802.11ac VHT20                                                                 | 0.931      | 0.31                              |
| 802.11ac VHT40                                                                 | 0.868      | 0.61                              |
| 802.11ac VHT80                                                                 | 0.766      | 1.16                              |
| Note: when Duty cycle $\geq 0.98$ , Duty cycle correction Factor not required. |            |                                   |

| SISO Power Index |         |              |                |         |              |                |         |                |
|------------------|---------|--------------|----------------|---------|--------------|----------------|---------|----------------|
| Channel          | 802.11a | 802.11n HT20 | 802.11ac VHT20 | Channel | 802.11n HT40 | 802.11ac VHT40 | Channel | 802.11ac VHT80 |
| CH36             | 12      | 12           | 12             | CH38    | 12           | 12             | CH42    | 12             |
| CH40             | 12      | 12           | 12             | CH46    | 12           | 12             | /       | /              |
| CH48             | 12      | 12           | 12             | /       | /            | /              | /       | /              |
| CH100            | 12      | 12           | 12             | CH102   | 11           | 12             | CH106   | 12             |
| CH120            | 12      | 12           | 12             | CH118   | 12           | 12             | CH122   | 12             |
| CH140            | 12      | 12           | 12             | CH134   | 12           | 12             | CH138   | 12             |
| CH144            | 12      | 12           | 12             | CH142   | 12           | 12             | /       | /              |
| CH149            | 12      | 12           | 12             | CH151   | 12           | 12             | CH155   | 12             |
| CH157            | 12      | 12           | 12             | CH159   | 12           | 12             | /       | /              |
| CH165            | 12      | 12           | 12             | /       | /            | /              | /       | /              |
| MIMO Power Index |         |              |                |         |              |                |         |                |
| Channel          | 802.11a | 802.11n HT20 | 802.11ac VHT20 | Channel | 802.11n HT40 | 802.11ac VHT40 | Channel | 802.11ac VHT80 |
| CH36             | 12      | 12           | 12             | CH38    | 12           | 12             | CH42    | 10             |
| CH40             | 12      | 12           | 12             | CH46    | 12           | 12             | /       | /              |
| CH48             | 12      | 12           | 12             | /       | /            | /              | /       | /              |
| CH100            | 10      | 12           | 12             | CH102   | 9            | 12             | CH106   | 10             |
| CH120            | 12      | 12           | 12             | CH118   | 12           | 12             | CH122   | 12             |
| CH140            | 12      | 12           | 12             | CH134   | 12           | 12             | CH138   | 12             |
| CH144            | 12      | 12           | 12             | CH142   | 12           | 12             | /       | /              |
| CH149            | 12      | 12           | 12             | CH151   | 12           | 12             | CH155   | 12             |
| CH157            | 12      | 12           | 12             | CH159   | 12           | 12             | /       | /              |
| CH165            | 12      | 12           | 12             | /       | /            | /              | /       | /              |

| Test Mode         |                | Channel/Frequency (MHz) | B=26 dB bandwidth (MHz) | Limit 11 dBm + 10 log B (dBm) | Final Limit (dBm) |
|-------------------|----------------|-------------------------|-------------------------|-------------------------------|-------------------|
| U-NII-2C          | 802.11a        | 100/5500                | 21.295                  | 24.28 > 24                    | 24.00             |
|                   |                | 120/5600                | 21.401                  | 24.30 > 24                    | 24.00             |
|                   |                | 140/5700                | 21.503                  | 24.32 > 24                    | 24.00             |
|                   |                | 144/5720                | 21.295                  | 24.28 > 24                    | 24.00             |
|                   | 802.11n HT20   | 100/5500                | 21.502                  | 24.32 > 24                    | 24.00             |
|                   |                | 120/5600                | 21.340                  | 24.29 > 24                    | 24.00             |
|                   |                | 140/5700                | 21.650                  | 24.35 > 24                    | 24.00             |
|                   |                | 144/5720                | 21.552                  | 24.33 > 24                    | 24.00             |
|                   | 802.11n HT40   | 102/5510                | 40.041                  | 27.03 > 24                    | 24.00             |
|                   |                | 118/5590                | 40.100                  | 27.03 > 24                    | 24.00             |
|                   |                | 134/5670                | 39.865                  | 27.01 > 24                    | 24.00             |
|                   |                | 142/5710                | 39.784                  | 27.00 > 24                    | 24.00             |
|                   | 802.11ac VHT20 | 100/5500                | 21.404                  | 24.30 > 24                    | 24.00             |
|                   |                | 120/5600                | 21.665                  | 24.36 > 24                    | 24.00             |
|                   |                | 140/5700                | 21.519                  | 24.33 > 24                    | 24.00             |
|                   |                | 144/5720                | 21.596                  | 24.34 > 24                    | 24.00             |
|                   | 802.11ac VHT40 | 102/5510                | 40.296                  | 27.05 > 24                    | 24.00             |
|                   |                | 118/5590                | 39.822                  | 27.00 > 24                    | 24.00             |
|                   |                | 134/5670                | 39.892                  | 27.01 > 24                    | 24.00             |
|                   |                | 142/5710                | 39.902                  | 27.01 > 24                    | 24.00             |
|                   | 802.11ac VHT80 | 106/5530                | 81.733                  | 30.12 > 24                    | 24.00             |
|                   |                | 122/5610                | 81.710                  | 30.12 > 24                    | 24.00             |
|                   |                | 138/5690                | 82.608                  | 30.17 > 24                    | 24.00             |
| Note: 250mW=24dBm |                |                         |                         |                               |                   |

**SISO Antenna 1**
**U-NII-1**

| Test Mode                                                                                   | Channel/<br>Frequency<br>(MHz) | Average<br>Power<br>Measured<br>(dBm) | Average<br>Power with<br>duty factor<br>(dBm) | Limit<br>(dBm) | Conclusion |
|---------------------------------------------------------------------------------------------|--------------------------------|---------------------------------------|-----------------------------------------------|----------------|------------|
| 802.11a                                                                                     | 36/5180                        | 8.77                                  | 9.07                                          | 24.00          | PASS       |
|                                                                                             | 40/5200                        | 8.96                                  | 9.26                                          | 24.00          | PASS       |
|                                                                                             | 48/5240                        | 9.02                                  | 9.32                                          | 24.00          | PASS       |
| 802.11n HT20                                                                                | 36/5180                        | 8.77                                  | 9.09                                          | 24.00          | PASS       |
|                                                                                             | 40/5200                        | 8.72                                  | 9.04                                          | 24.00          | PASS       |
|                                                                                             | 48/5240                        | 8.81                                  | 9.13                                          | 24.00          | PASS       |
| 802.11n HT40                                                                                | 38/5190                        | 8.61                                  | 9.23                                          | 24.00          | PASS       |
|                                                                                             | 46/5230                        | 9.02                                  | 9.64                                          | 24.00          | PASS       |
| 802.11ac VHT20                                                                              | 36/5180                        | 8.86                                  | 9.17                                          | 24.00          | PASS       |
|                                                                                             | 40/5200                        | 8.66                                  | 8.97                                          | 24.00          | PASS       |
|                                                                                             | 48/5240                        | 8.75                                  | 9.06                                          | 24.00          | PASS       |
| 802.11ac VHT40                                                                              | 38/5190                        | 8.59                                  | 9.20                                          | 24.00          | PASS       |
|                                                                                             | 46/5230                        | 8.82                                  | 9.43                                          | 24.00          | PASS       |
| 802.11ac VHT80                                                                              | 42/5210                        | 8.10                                  | 9.26                                          | 24.00          | PASS       |
| Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor |                                |                                       |                                               |                |            |

## U-NII-2C

| Test Mode                                                                                   | Channel/<br>Frequency<br>(MHz) | Average<br>Power<br>Measured<br>(dBm) | Average<br>Power with<br>duty factor<br>(dBm) | Limit<br>(dBm) | Conclusion |
|---------------------------------------------------------------------------------------------|--------------------------------|---------------------------------------|-----------------------------------------------|----------------|------------|
| 802.11a                                                                                     | 100/5500                       | 9.98                                  | 10.28                                         | 24.00          | PASS       |
|                                                                                             | 120/5600                       | 10.06                                 | 10.36                                         | 24.00          | PASS       |
|                                                                                             | 140/5700                       | 9.61                                  | 9.91                                          | 24.00          | PASS       |
|                                                                                             | 144/5720                       | 9.20                                  | 9.50                                          | 24.00          | PASS       |
| 802.11n HT20                                                                                | 100/5500                       | 9.89                                  | 10.21                                         | 24.00          | PASS       |
|                                                                                             | 120/5600                       | 9.87                                  | 10.19                                         | 24.00          | PASS       |
|                                                                                             | 140/5700                       | 9.59                                  | 9.91                                          | 24.00          | PASS       |
|                                                                                             | 144/5720                       | 8.79                                  | 9.11                                          | 24.00          | PASS       |
| 802.11n HT40                                                                                | 102/5510                       | 8.54                                  | 9.16                                          | 24.00          | PASS       |
|                                                                                             | 118/5590                       | 9.48                                  | 10.10                                         | 24.00          | PASS       |
|                                                                                             | 134/5670                       | 9.44                                  | 10.06                                         | 24.00          | PASS       |
|                                                                                             | 142/5710                       | 8.95                                  | 9.57                                          | 24.00          | PASS       |
| 802.11ac VHT20                                                                              | 100/5500                       | 9.72                                  | 10.03                                         | 24.00          | PASS       |
|                                                                                             | 120/5600                       | 9.95                                  | 10.26                                         | 24.00          | PASS       |
|                                                                                             | 140/5700                       | 9.28                                  | 9.59                                          | 24.00          | PASS       |
|                                                                                             | 144/5720                       | 9.09                                  | 9.40                                          | 24.00          | PASS       |
| 802.11ac VHT40                                                                              | 102/5510                       | 9.38                                  | 9.99                                          | 24.00          | PASS       |
|                                                                                             | 118/5590                       | 9.50                                  | 10.11                                         | 24.00          | PASS       |
|                                                                                             | 134/5670                       | 9.48                                  | 10.09                                         | 24.00          | PASS       |
|                                                                                             | 142/5710                       | 8.90                                  | 9.51                                          | 24.00          | PASS       |
| 802.11ac VHT80                                                                              | 106/5530                       | 8.77                                  | 9.93                                          | 24.00          | PASS       |
|                                                                                             | 122/5610                       | 8.75                                  | 9.91                                          | 24.00          | PASS       |
|                                                                                             | 138/5690                       | 8.22                                  | 9.38                                          | 24.00          | PASS       |
| Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor |                                |                                       |                                               |                |            |

## U-NII-3

| Test Mode                                                                                   | Channel/<br>Frequency<br>(MHz) | Average<br>Power<br>Measured<br>(dBm) | Average<br>Power with<br>duty factor<br>(dBm) | Limit<br>(dBm) | Conclusion |
|---------------------------------------------------------------------------------------------|--------------------------------|---------------------------------------|-----------------------------------------------|----------------|------------|
| 802.11a                                                                                     | 144/5720                       | 2.39                                  | 2.69                                          | 30.00          | PASS       |
|                                                                                             | 149/5745                       | 9.73                                  | 10.03                                         | 30.00          | PASS       |
|                                                                                             | 157/5785                       | 9.31                                  | 9.61                                          | 30.00          | PASS       |
|                                                                                             | 165/5825                       | 9.54                                  | 9.84                                          | 30.00          | PASS       |
| 802.11n HT20                                                                                | 144/5720                       | 2.61                                  | 2.93                                          | 30.00          | PASS       |
|                                                                                             | 149/5745                       | 9.37                                  | 9.69                                          | 30.00          | PASS       |
|                                                                                             | 157/5785                       | 9.08                                  | 9.40                                          | 30.00          | PASS       |
|                                                                                             | 165/5825                       | 9.34                                  | 9.66                                          | 30.00          | PASS       |
| 802.11n HT40                                                                                | 142/5710                       | -1.72                                 | -1.10                                         | 30.00          | PASS       |
|                                                                                             | 151/5755                       | 9.59                                  | 10.21                                         | 30.00          | PASS       |
|                                                                                             | 159/5795                       | 9.38                                  | 10.00                                         | 30.00          | PASS       |
| 802.11ac VHT20                                                                              | 144/5720                       | 2.54                                  | 2.85                                          | 30.00          | PASS       |
|                                                                                             | 149/5745                       | 9.51                                  | 9.82                                          | 30.00          | PASS       |
|                                                                                             | 157/5785                       | 9.05                                  | 9.36                                          | 30.00          | PASS       |
|                                                                                             | 165/5825                       | 9.31                                  | 9.62                                          | 30.00          | PASS       |
| 802.11ac VHT40                                                                              | 142/5710                       | -2.04                                 | -1.43                                         | 30.00          | PASS       |
|                                                                                             | 151/5755                       | 9.50                                  | 10.11                                         | 30.00          | PASS       |
|                                                                                             | 159/5795                       | 9.35                                  | 9.96                                          | 30.00          | PASS       |
| 802.11ac VHT80                                                                              | 138/5690                       | -5.45                                 | -4.29                                         | 30.00          | PASS       |
|                                                                                             | 155/5775                       | 8.88                                  | 10.04                                         | 30.00          | PASS       |
| Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor |                                |                                       |                                               |                |            |

**SISO Antenna 2**
**U-NII-1**

| Test Mode                                                                                   | Channel/<br>Frequency<br>(MHz) | Average<br>Power<br>Measured<br>(dBm) | Average<br>Power with<br>duty factor<br>(dBm) | Limit<br>(dBm) | Conclusion |
|---------------------------------------------------------------------------------------------|--------------------------------|---------------------------------------|-----------------------------------------------|----------------|------------|
| 802.11a                                                                                     | 36/5180                        | 6.86                                  | 7.16                                          | 24.00          | PASS       |
|                                                                                             | 40/5200                        | 6.88                                  | 7.18                                          | 24.00          | PASS       |
|                                                                                             | 48/5240                        | 7.02                                  | 7.32                                          | 24.00          | PASS       |
| 802.11n HT20                                                                                | 36/5180                        | 6.75                                  | 7.07                                          | 24.00          | PASS       |
|                                                                                             | 40/5200                        | 6.77                                  | 7.09                                          | 24.00          | PASS       |
|                                                                                             | 48/5240                        | 6.87                                  | 7.19                                          | 24.00          | PASS       |
| 802.11n HT40                                                                                | 38/5190                        | 6.75                                  | 7.37                                          | 24.00          | PASS       |
|                                                                                             | 46/5230                        | 6.98                                  | 7.60                                          | 24.00          | PASS       |
| 802.11ac VHT20                                                                              | 36/5180                        | 6.83                                  | 7.14                                          | 24.00          | PASS       |
|                                                                                             | 40/5200                        | 6.90                                  | 7.21                                          | 24.00          | PASS       |
|                                                                                             | 48/5240                        | 6.64                                  | 6.95                                          | 24.00          | PASS       |
| 802.11ac VHT40                                                                              | 38/5190                        | 6.58                                  | 7.19                                          | 24.00          | PASS       |
|                                                                                             | 46/5230                        | 6.95                                  | 7.56                                          | 24.00          | PASS       |
| 802.11ac VHT80                                                                              | 42/5210                        | 6.30                                  | 7.46                                          | 24.00          | PASS       |
| Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor |                                |                                       |                                               |                |            |

## U-NII-2C

| Test Mode                                                                                   | Channel/<br>Frequency<br>(MHz) | Average<br>Power<br>Measured<br>(dBm) | Average<br>Power with<br>duty factor<br>(dBm) | Limit<br>(dBm) | Conclusion |
|---------------------------------------------------------------------------------------------|--------------------------------|---------------------------------------|-----------------------------------------------|----------------|------------|
| 802.11a                                                                                     | 100/5500                       | 7.55                                  | 7.85                                          | 24.00          | PASS       |
|                                                                                             | 120/5600                       | 7.73                                  | 8.03                                          | 24.00          | PASS       |
|                                                                                             | 140/5700                       | 7.42                                  | 7.72                                          | 24.00          | PASS       |
|                                                                                             | 144/5720                       | 7.49                                  | 7.79                                          | 24.00          | PASS       |
| 802.11n HT20                                                                                | 100/5500                       | 7.45                                  | 7.77                                          | 24.00          | PASS       |
|                                                                                             | 120/5600                       | 7.63                                  | 7.95                                          | 24.00          | PASS       |
|                                                                                             | 140/5700                       | 7.44                                  | 7.76                                          | 24.00          | PASS       |
|                                                                                             | 144/5720                       | 7.46                                  | 7.78                                          | 24.00          | PASS       |
| 802.11n HT40                                                                                | 102/5510                       | 6.25                                  | 6.87                                          | 24.00          | PASS       |
|                                                                                             | 118/5590                       | 7.22                                  | 7.84                                          | 24.00          | PASS       |
|                                                                                             | 134/5670                       | 7.34                                  | 7.96                                          | 24.00          | PASS       |
|                                                                                             | 142/5710                       | 7.26                                  | 7.88                                          | 24.00          | PASS       |
| 802.11ac VHT20                                                                              | 100/5500                       | 7.56                                  | 7.87                                          | 24.00          | PASS       |
|                                                                                             | 120/5600                       | 7.71                                  | 8.02                                          | 24.00          | PASS       |
|                                                                                             | 140/5700                       | 7.42                                  | 7.73                                          | 24.00          | PASS       |
|                                                                                             | 144/5720                       | 7.21                                  | 7.52                                          | 24.00          | PASS       |
| 802.11ac VHT40                                                                              | 102/5510                       | 6.97                                  | 7.58                                          | 24.00          | PASS       |
|                                                                                             | 118/5590                       | 7.02                                  | 7.63                                          | 24.00          | PASS       |
|                                                                                             | 134/5670                       | 7.40                                  | 8.01                                          | 24.00          | PASS       |
|                                                                                             | 142/5710                       | 7.18                                  | 7.79                                          | 24.00          | PASS       |
| 802.11ac VHT80                                                                              | 106/5530                       | 6.83                                  | 7.99                                          | 24.00          | PASS       |
|                                                                                             | 122/5610                       | 6.82                                  | 7.98                                          | 24.00          | PASS       |
|                                                                                             | 138/5690                       | 6.48                                  | 7.64                                          | 24.00          | PASS       |
| Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor |                                |                                       |                                               |                |            |

## U-NII-3

| Test Mode                                                                                   | Channel/<br>Frequency<br>(MHz) | Average<br>Power<br>Measured<br>(dBm) | Average<br>Power with<br>duty factor<br>(dBm) | Limit<br>(dBm) | Conclusion |
|---------------------------------------------------------------------------------------------|--------------------------------|---------------------------------------|-----------------------------------------------|----------------|------------|
| 802.11a                                                                                     | 144/5720                       | 0.81                                  | 1.11                                          | 30.00          | PASS       |
|                                                                                             | 149/5745                       | 7.81                                  | 8.11                                          | 30.00          | PASS       |
|                                                                                             | 157/5785                       | 7.67                                  | 7.97                                          | 30.00          | PASS       |
|                                                                                             | 165/5825                       | 8.17                                  | 8.47                                          | 30.00          | PASS       |
| 802.11n HT20                                                                                | 144/5720                       | -1.32                                 | -1.00                                         | 30.00          | PASS       |
|                                                                                             | 149/5745                       | 5.05                                  | 5.37                                          | 30.00          | PASS       |
|                                                                                             | 157/5785                       | 4.93                                  | 5.25                                          | 30.00          | PASS       |
|                                                                                             | 165/5825                       | 5.39                                  | 5.71                                          | 30.00          | PASS       |
| 802.11n HT40                                                                                | 142/5710                       | -6.05                                 | -5.43                                         | 30.00          | PASS       |
|                                                                                             | 151/5755                       | 5.43                                  | 6.05                                          | 30.00          | PASS       |
|                                                                                             | 159/5795                       | 5.84                                  | 6.46                                          | 30.00          | PASS       |
| 802.11ac VHT20                                                                              | 144/5720                       | -1.60                                 | -1.29                                         | 30.00          | PASS       |
|                                                                                             | 149/5745                       | 5.47                                  | 5.78                                          | 30.00          | PASS       |
|                                                                                             | 157/5785                       | 5.23                                  | 5.54                                          | 30.00          | PASS       |
|                                                                                             | 165/5825                       | 5.54                                  | 5.85                                          | 30.00          | PASS       |
| 802.11ac VHT40                                                                              | 142/5710                       | -6.32                                 | -5.71                                         | 30.00          | PASS       |
|                                                                                             | 151/5755                       | 5.52                                  | 6.13                                          | 30.00          | PASS       |
|                                                                                             | 159/5795                       | 5.74                                  | 6.35                                          | 30.00          | PASS       |
| 802.11ac VHT80                                                                              | 138/5690                       | -9.54                                 | -8.38                                         | 30.00          | PASS       |
|                                                                                             | 155/5775                       | 4.73                                  | 5.89                                          | 30.00          | PASS       |
| Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor |                                |                                       |                                               |                |            |

# MIMO

## U-NII-1

| Test Mode          | Channel/<br>Frequency<br>(MHz) | MIMO<br>Antenna 1                     |                                               | MIMO<br>Antenna 2                     |                                               | Total<br>Power<br>(dBm) | Limit<br>(dBm) | Conclusion |
|--------------------|--------------------------------|---------------------------------------|-----------------------------------------------|---------------------------------------|-----------------------------------------------|-------------------------|----------------|------------|
|                    |                                | Average<br>Power<br>Measured<br>(dBm) | Average<br>Power with<br>duty factor<br>(dBm) | Average<br>Power<br>Measured<br>(dBm) | Average<br>Power with<br>duty factor<br>(dBm) |                         |                |            |
| U-NII-1<br>802.11a | 36/5180                        | 8.87                                  | 9.17                                          | 7.33                                  | 7.63                                          | 11.48                   | 24.00          | PASS       |
|                    | 40/5200                        | 8.83                                  | 9.13                                          | 7.36                                  | 7.66                                          | 11.46                   | 24.00          | PASS       |
|                    | 48/5240                        | 9.15                                  | 9.45                                          | 6.91                                  | 7.21                                          | 11.48                   | 24.00          | PASS       |
| 802.11n<br>HT20    | 36/5180                        | 8.81                                  | 9.13                                          | 6.85                                  | 7.17                                          | 11.27                   | 24.00          | PASS       |
|                    | 40/5200                        | 8.80                                  | 9.12                                          | 7.22                                  | 7.54                                          | 11.41                   | 24.00          | PASS       |
|                    | 48/5240                        | 8.60                                  | 8.92                                          | 6.40                                  | 6.72                                          | 10.97                   | 24.00          | PASS       |
| 802.11n<br>HT40    | 38/5190                        | 8.64                                  | 9.26                                          | 6.99                                  | 7.61                                          | 11.52                   | 24.00          | PASS       |
|                    | 46/5230                        | 8.63                                  | 9.25                                          | 6.77                                  | 7.39                                          | 11.43                   | 24.00          | PASS       |
| 802.11ac<br>VHT20  | 36/5180                        | 9.01                                  | 9.32                                          | 6.95                                  | 7.26                                          | 11.42                   | 24.00          | PASS       |
|                    | 40/5200                        | 8.92                                  | 9.23                                          | 7.24                                  | 7.55                                          | 11.48                   | 24.00          | PASS       |
|                    | 48/5240                        | 8.95                                  | 9.26                                          | 6.79                                  | 7.10                                          | 11.32                   | 24.00          | PASS       |
| 802.11ac<br>VHT40  | 38/5190                        | 8.55                                  | 9.16                                          | 6.91                                  | 7.52                                          | 11.43                   | 24.00          | PASS       |
|                    | 46/5230                        | 8.58                                  | 9.19                                          | 6.57                                  | 7.18                                          | 11.31                   | 24.00          | PASS       |
| 802.11ac<br>VHT80  | 42/5210                        | 5.84                                  | 7.00                                          | 3.97                                  | 5.13                                          | 9.17                    | 24.00          | PASS       |

Note: 1. For Total Power, according to KDB 662911 D01 Multiple Transmitter Output v02r01 1),

The Total Power =  $10\log(10^{(\text{Power antenna1 in dBm}/10)} + 10^{(\text{Power antenna2 in dBm}/10)})$ .

2. The manufacturer declared the transmitter output signals is CDD mode And  $N_{ss}=1$ . According to KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)(i): If all antennas have the same gain, Directional gain =  $G_{ANT} + \text{Array Gain}$ ,

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5\log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less, for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

So directional gain =  $G_{ANT} + \text{Array Gain} = 2.8 + 0 = 2.8 \text{ dBi} < 6 \text{ dBi}$ . So the power limit is 30dBm.

## U-NII-2C

| Test Mode          | Channel/<br>Frequency<br>(MHz) | MIMO<br>Antenna 1                     |                                               | MIMO<br>Antenna 2                     |                                               | Total<br>Power<br>(dBm) | Limit<br>(dBm) | Conclusion |
|--------------------|--------------------------------|---------------------------------------|-----------------------------------------------|---------------------------------------|-----------------------------------------------|-------------------------|----------------|------------|
|                    |                                | Average<br>Power<br>Measured<br>(dBm) | Average<br>Power with<br>duty factor<br>(dBm) | Average<br>Power<br>Measured<br>(dBm) | Average<br>Power with<br>duty factor<br>(dBm) |                         |                |            |
| U-NII-1<br>802.11a | 100/5500                       | 7.89                                  | 8.19                                          | 5.06                                  | 5.36                                          | 10.01                   | 24.00          | PASS       |
|                    | 120/5600                       | 10.67                                 | 10.97                                         | 8.32                                  | 8.62                                          | 12.96                   | 24.00          | PASS       |
|                    | 140/5700                       | 10.64                                 | 10.94                                         | 8.55                                  | 8.85                                          | 13.03                   | 24.00          | PASS       |
|                    | 144/5720                       | 9.34                                  | 9.64                                          | 7.97                                  | 8.27                                          | 12.02                   | 24.00          | PASS       |
| 802.11n<br>HT20    | 100/5500                       | 9.84                                  | 10.16                                         | 7.07                                  | 7.39                                          | 12.00                   | 24.00          | PASS       |
|                    | 120/5600                       | 10.53                                 | 10.85                                         | 8.13                                  | 8.45                                          | 12.82                   | 24.00          | PASS       |
|                    | 140/5700                       | 10.54                                 | 10.86                                         | 8.40                                  | 8.72                                          | 12.93                   | 24.00          | PASS       |
|                    | 144/5720                       | 9.18                                  | 9.50                                          | 7.70                                  | 8.02                                          | 11.83                   | 24.00          | PASS       |
| 802.11n<br>HT40    | 102/5510                       | 6.90                                  | 7.52                                          | 3.82                                  | 4.44                                          | 9.25                    | 24.00          | PASS       |
|                    | 118/5590                       | 9.66                                  | 10.28                                         | 7.56                                  | 8.18                                          | 12.37                   | 24.00          | PASS       |
|                    | 134/5670                       | 9.36                                  | 9.98                                          | 7.44                                  | 8.06                                          | 12.14                   | 24.00          | PASS       |
|                    | 142/5710                       | 9.69                                  | 10.31                                         | 7.62                                  | 8.24                                          | 12.41                   | 24.00          | PASS       |
| 802.11ac<br>VHT20  | 100/5500                       | 9.86                                  | 10.17                                         | 7.12                                  | 7.43                                          | 12.02                   | 24.00          | PASS       |
|                    | 120/5600                       | 10.55                                 | 10.86                                         | 8.24                                  | 8.55                                          | 12.87                   | 24.00          | PASS       |
|                    | 140/5700                       | 10.42                                 | 10.73                                         | 8.22                                  | 8.53                                          | 12.78                   | 24.00          | PASS       |
|                    | 144/5720                       | 8.94                                  | 9.25                                          | 7.72                                  | 8.03                                          | 11.69                   | 24.00          | PASS       |
| 802.11ac<br>VHT40  | 102/5510                       | 9.54                                  | 10.15                                         | 6.77                                  | 7.38                                          | 11.99                   | 24.00          | PASS       |
|                    | 118/5590                       | 9.66                                  | 10.27                                         | 7.68                                  | 8.29                                          | 12.40                   | 24.00          | PASS       |
|                    | 134/5670                       | 9.39                                  | 10.00                                         | 7.56                                  | 8.17                                          | 12.19                   | 24.00          | PASS       |
|                    | 142/5710                       | 9.62                                  | 10.23                                         | 7.72                                  | 8.33                                          | 12.39                   | 24.00          | PASS       |
| 802.11ac<br>VHT80  | 106/5530                       | 7.53                                  | 8.69                                          | 5.21                                  | 6.37                                          | 10.69                   | 24.00          | PASS       |
|                    | 122/5610                       | 9.22                                  | 10.38                                         | 7.12                                  | 8.28                                          | 12.47                   | 24.00          | PASS       |
|                    | 138/5690                       | 8.77                                  | 9.93                                          | 6.92                                  | 8.08                                          | 12.11                   | 24.00          | PASS       |

Note: 1. For Total Power, according to KDB 662911 D01 Multiple Transmitter Output v02r01 1),

The Total Power =  $10\log(10^{(\text{Power antenna1 in dBm}/10)} + 10^{(\text{Power antenna2 in dBm}/10)})$ .

2. The manufacturer declared the transmitter output signals is CDD mode And  $N_{ss}=1$ . According to KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f(i): If all antennas have the same gain, Directional gain =  $G_{ANT} + \text{Array Gain}$ , For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5\log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less, for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

So directional gain =  $G_{ANT} + \text{Array Gain} = 2.8 + 0 = 2.8 \text{ dBi} < 6 \text{ dBi}$ . So the power limit is 30dBm.

## U-NII-3

| Test Mode          | Channel/<br>Frequency<br>(MHz) | MIMO<br>Antenna 1                     |                                               | MIMO<br>Antenna 2                     |                                               | Total<br>Power<br>(dBm) | Limit<br>(dBm) | Conclusion |
|--------------------|--------------------------------|---------------------------------------|-----------------------------------------------|---------------------------------------|-----------------------------------------------|-------------------------|----------------|------------|
|                    |                                | Average<br>Power<br>Measured<br>(dBm) | Average<br>Power with<br>duty factor<br>(dBm) | Average<br>Power<br>Measured<br>(dBm) | Average<br>Power with<br>duty factor<br>(dBm) |                         |                |            |
| U-NII-1<br>802.11a | 144/5720                       | 2.08                                  | 2.38                                          | 0.17                                  | 0.47                                          | 4.54                    | 30.00          | PASS       |
|                    | 149/5745                       | 9.74                                  | 10.04                                         | 7.80                                  | 8.10                                          | 12.19                   | 30.00          | PASS       |
|                    | 157/5785                       | 10.40                                 | 10.70                                         | 8.10                                  | 8.40                                          | 12.71                   | 30.00          | PASS       |
|                    | 165/5825                       | 9.64                                  | 9.94                                          | 8.50                                  | 8.80                                          | 12.41                   | 30.00          | PASS       |
| 802.11n<br>HT20    | 144/5720                       | 2.45                                  | 2.77                                          | 0.95                                  | 1.27                                          | 5.09                    | 30.00          | PASS       |
|                    | 149/5745                       | 9.78                                  | 10.10                                         | 7.72                                  | 8.04                                          | 12.20                   | 30.00          | PASS       |
|                    | 157/5785                       | 10.01                                 | 10.33                                         | 7.80                                  | 8.12                                          | 12.37                   | 30.00          | PASS       |
|                    | 165/5825                       | 9.59                                  | 9.91                                          | 8.31                                  | 8.63                                          | 12.33                   | 30.00          | PASS       |
| 802.11n<br>HT40    | 142/5710                       | -2.05                                 | -1.43                                         | -4.29                                 | -3.67                                         | 0.60                    | 30.00          | PASS       |
|                    | 151/5755                       | 10.05                                 | 10.67                                         | 8.08                                  | 8.70                                          | 12.80                   | 30.00          | PASS       |
|                    | 159/5795                       | 9.93                                  | 10.55                                         | 8.21                                  | 8.83                                          | 12.78                   | 30.00          | PASS       |
| 802.11ac<br>VHT20  | 144/5720                       | 2.47                                  | 2.78                                          | 0.97                                  | 1.28                                          | 5.10                    | 30.00          | PASS       |
|                    | 149/5745                       | 9.81                                  | 10.12                                         | 7.67                                  | 7.98                                          | 12.19                   | 30.00          | PASS       |
|                    | 157/5785                       | 9.90                                  | 10.21                                         | 7.78                                  | 8.09                                          | 12.29                   | 30.00          | PASS       |
|                    | 165/5825                       | 9.67                                  | 9.98                                          | 8.50                                  | 8.81                                          | 12.44                   | 30.00          | PASS       |
| 802.11ac<br>VHT40  | 142/5710                       | -2.24                                 | -1.63                                         | -4.27                                 | -3.66                                         | 0.48                    | 30.00          | PASS       |
|                    | 151/5755                       | 10.05                                 | 10.66                                         | 7.97                                  | 8.58                                          | 12.75                   | 30.00          | PASS       |
|                    | 159/5795                       | 9.74                                  | 10.35                                         | 8.35                                  | 8.96                                          | 12.72                   | 30.00          | PASS       |
| 802.11ac<br>VHT80  | 138/5690                       | -5.84                                 | -4.68                                         | -7.19                                 | -6.03                                         | -2.29                   | 30.00          | PASS       |
|                    | 155/5775                       | 9.41                                  | 10.57                                         | 7.38                                  | 8.54                                          | 12.68                   | 30.00          | PASS       |

Note: 1. For Total Power, according to KDB 662911 D01 Multiple Transmitter Output v02r01 1),

The Total Power =  $10\log(10^{(\text{Power antenna1 in dBm}/10)} + 10^{(\text{Power antenna2 in dBm}/10)})$ .

2. The manufacturer declared the transmitter output signals is CDD mode And  $N_{ss}=1$ . According to KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f(i): If all antennas have the same gain, Directional gain =  $G_{ANT} + \text{Array Gain}$ , For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less, for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

So directional gain =  $G_{ANT} + \text{Array Gain} = 2.8 + 0 = 2.8 \text{ dBi} < 6 \text{ dBi}$ . So the power limit is 30dBm.

### 5.3. Frequency Stability

#### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

#### Method of Measurement

##### 1. Frequency stability with respect to ambient temperature

- Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT. If possible, a dummy load shall be connected to the EUT because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, then the EUT shall be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn ON the EUT and tune it to one of the number of frequencies shown in 5.6.
- Couple the unlicensed wireless device output to the measuring instrument by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g., 15 cm away), or by connecting a dummy load to the measuring instrument, through an attenuator if necessary.
- Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).
- Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.
- Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
- While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.
- Measure the frequency at each of frequencies specified in 5.6.
- Switch OFF the EUT but do not switch OFF the oscillator heater.
- Lower the chamber temperature by not more than 10°C, and allow the temperature inside the chamber to stabilize.
- Repeat step f) through step i) down to the lowest specified temperature.

##### 2. Frequency stability when varying supply voltage

Unless otherwise specified, these tests shall be made at ambient room temperature (+15°C to +25 °C). An antenna shall be connected to the antenna output terminals of the EUT if possible. If the EUT is equipped with or uses an adjustable-length antenna, then it shall be fully extended.

- Supply the EUT with nominal voltage or install a new or fully charged battery in the EUT. Turn ON the EUT and couple its output to a frequency counter or other frequency-measuring instrument.

- b) Tune the EUT to one of the number of frequencies required in 5.6. Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).
- c) Measure the frequency at each of the frequencies specified in 5.6.
- d) Repeat the above procedure at 85% and 115% of the nominal supply voltage.

**Limit**

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 936\text{Hz}$

## Test Results

| Voltage<br>(V) | Temperature<br>(°C) | U-NII-1 Test Results |             |             |             |
|----------------|---------------------|----------------------|-------------|-------------|-------------|
|                |                     | 5200MHz              |             |             |             |
|                |                     | 1min                 | 2min        | 5min        | 10min       |
| 13.5           | -20                 | 5199.998070          | 5199.994850 | 5199.990027 | 5199.980827 |
| 13.5           | -10                 | 5200.001626          | 5199.986185 | 5199.987737 | 5199.973922 |
| 13.5           | 0                   | 5199.999663          | 5199.985534 | 5199.980965 | 5199.968116 |
| 13.5           | 10                  | 5199.992498          | 5199.978676 | 5199.980013 | 5199.963256 |
| 13.5           | 20                  | 5199.986733          | 5199.971484 | 5199.973882 | 5199.962412 |
| 13.5           | 30                  | 5199.978498          | 5199.971238 | 5199.969930 | 5199.960804 |
| 13.5           | 40                  | 5199.968716          | 5199.964871 | 5199.969347 | 5199.957806 |
| 13.5           | 50                  | 5199.966524          | 5199.964365 | 5199.961244 | 5199.957700 |
| 9              | 20                  | 5199.960955          | 5199.955315 | 5199.959696 | 5199.955382 |
| 16             | 20                  | 5199.953320          | 5199.954650 | 5199.953456 | 5199.952748 |
| Max. ΔMHz      |                     | -0.046680            | -0.045350   | -0.046544   | -0.047252   |
| PPM            |                     | -8.976956            | -8.721113   | -8.950850   | -9.086918   |

| Voltage<br>(V) | Temperature<br>(°C) | U-NII-2C Test Results |             |             |             |
|----------------|---------------------|-----------------------|-------------|-------------|-------------|
|                |                     | 5580MHz               |             |             |             |
|                |                     | 1min                  | 2min        | 5min        | 10min       |
| 13.5           | -20                 | 5579.996785           | 5579.996046 | 5579.993571 | 5579.992344 |
| 13.5           | -10                 | 5579.994755           | 5579.996045 | 5579.991697 | 5579.987378 |
| 13.5           | 0                   | 5579.992246           | 5579.987271 | 5579.982946 | 5579.979694 |
| 13.5           | 10                  | 5579.983196           | 5579.982224 | 5579.973914 | 5579.977828 |
| 13.5           | 20                  | 5579.975666           | 5579.977671 | 5579.968422 | 5579.975631 |
| 13.5           | 30                  | 5579.974926           | 5579.971392 | 5579.960692 | 5579.968725 |
| 13.5           | 40                  | 5579.968048           | 5579.967291 | 5579.956807 | 5579.967145 |
| 13.5           | 50                  | 5579.967172           | 5579.965362 | 5579.955054 | 5579.963770 |
| 9              | 20                  | 5579.960525           | 5579.958994 | 5579.949454 | 5579.954047 |
| 16             | 20                  | 5579.958557           | 5579.950226 | 5579.942498 | 5579.953615 |
| Max. ΔMHz      |                     | -0.041443             | -0.049774   | -0.057502   | -0.046385   |
| PPM            |                     | -7.427032             | -8.920082   | -10.305023  | -8.312813   |

| Voltage<br>(V) | Temperature<br>(°C) | U-NII-3 Test Results |             |             |             |
|----------------|---------------------|----------------------|-------------|-------------|-------------|
|                |                     | 5785MHz              |             |             |             |
|                |                     | 1min                 | 2min        | 5min        | 10min       |
| 13.5           | -20                 | 5784.999875          | 5784.992909 | 5784.983829 | 5784.977442 |
| 13.5           | -10                 | 5784.999819          | 5784.987514 | 5784.976932 | 5784.971350 |
| 13.5           | 0                   | 5784.990762          | 5784.981867 | 5784.975597 | 5784.964268 |
| 13.5           | 10                  | 5784.983960          | 5784.973570 | 5784.968367 | 5784.963200 |
| 13.5           | 20                  | 5784.976975          | 5784.967255 | 5784.961251 | 5784.961590 |
| 13.5           | 30                  | 5784.975048          | 5784.963949 | 5784.960416 | 5784.953722 |
| 13.5           | 40                  | 5784.966065          | 5784.956462 | 5784.950637 | 5784.953432 |
| 13.5           | 50                  | 5784.965345          | 5784.955874 | 5784.945666 | 5784.951160 |
| 9              | 20                  | 5784.955967          | 5784.950028 | 5784.941069 | 5784.941484 |
| 16             | 20                  | 5784.951699          | 5784.947078 | 5784.940959 | 5784.939130 |
| Max. ΔMHz      |                     | -0.048301            | -0.052922   | -0.059041   | -0.060870   |
| PPM            |                     | -8.349394            | -9.148080   | -10.205882  | -10.522075  |

## 5.4. Power Spectral Density

### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Method of Measurement


The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable.

Set RBW = 1MHz, VBW =3MHz for the band 5.150-5.250GHz, 5.470-5.725GHz.

Set RBW = 470kHz, VBW =1.5MHz for the band 5.725-5.850GHz

The conducted PSD is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

### Test setup



### Limits

Rule FCC Part 15.407(a)(1)/ Part 15.407(a)(2) / Part 15.407(a)(3)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

| Frequency Bands/MHz | Limits       |
|---------------------|--------------|
| 5150-5250           | 11dBm/MHz    |
| 5.47-5.725 GHz      | 11dBm/MHz    |
| 5725-5850           | 30dBm/500kHz |

## Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.75\text{dB}$ .

**Test Results:**
**SISO Antenna 1**
**U-NII-1**

| Mode           | Channel/<br>Frequency<br>(MHz) | Read Value<br>(dBm /MHz) | Power Spectral<br>Density<br>(dBm /MHz) | Limit<br>(dBm /MHz) | Conclusion |
|----------------|--------------------------------|--------------------------|-----------------------------------------|---------------------|------------|
| 802.11a        | 36/5180                        | -0.69                    | -0.39                                   | 11                  | PASS       |
|                | 40/5200                        | -0.29                    | 0.01                                    | 11                  | PASS       |
|                | 48/5240                        | -0.20                    | 0.10                                    | 11                  | PASS       |
| 802.11n HT20   | 36/5180                        | -0.82                    | -0.50                                   | 11                  | PASS       |
|                | 40/5200                        | -1.02                    | -0.70                                   | 11                  | PASS       |
|                | 48/5240                        | -0.78                    | -0.46                                   | 11                  | PASS       |
| 802.11n HT40   | 38/5190                        | -3.61                    | -2.99                                   | 11                  | PASS       |
|                | 46/5230                        | -3.46                    | -2.84                                   | 11                  | PASS       |
| 802.11ac VHT20 | 36/5180                        | -0.92                    | -0.61                                   | 11                  | PASS       |
|                | 40/5200                        | -0.85                    | -0.54                                   | 11                  | PASS       |
|                | 48/5240                        | -0.81                    | -0.50                                   | 11                  | PASS       |
| 802.11ac VHT40 | 38/5190                        | -3.89                    | -3.28                                   | 11                  | PASS       |
|                | 46/5230                        | -3.27                    | -2.66                                   | 11                  | PASS       |
| 802.11ac VHT80 | 42/5210                        | -7.73                    | -6.57                                   | 11                  | PASS       |

Note: Power Spectral Density =Read Value+Duty cycle correction factor

**U-NII-2C**

| Mode           | Channel/<br>Frequency<br>(MHz) | Read Value<br>(dBm /MHz) | Power Spectral<br>Density<br>(dBm /MHz) | Limit<br>(dBm /MHz) | Conclusion |
|----------------|--------------------------------|--------------------------|-----------------------------------------|---------------------|------------|
| 802.11a        | 100/5500                       | 0.51                     | 0.81                                    | 11                  | PASS       |
|                | 120/5600                       | 0.58                     | 0.88                                    | 11                  | PASS       |
|                | 140/5700                       | -0.07                    | 0.23                                    | 11                  | PASS       |
|                | 144/5720                       | 0.61                     | 0.91                                    | 11                  | PASS       |
| 802.11n HT20   | 100/5500                       | -0.13                    | 0.19                                    | 11                  | PASS       |
|                | 120/5600                       | 0.14                     | 0.46                                    | 11                  | PASS       |
|                | 140/5700                       | -0.33                    | -0.01                                   | 11                  | PASS       |
|                | 144/5720                       | -0.24                    | 0.08                                    | 11                  | PASS       |
| 802.11n HT40   | 102/5510                       | -3.55                    | -2.93                                   | 11                  | PASS       |
|                | 118/5590                       | -3.15                    | -2.53                                   | 11                  | PASS       |
|                | 134/5670                       | -3.07                    | -2.45                                   | 11                  | PASS       |
|                | 142/5710                       | -3.31                    | -2.69                                   | 11                  | PASS       |
| 802.11ac VHT20 | 100/5500                       | -0.04                    | 0.27                                    | 11                  | PASS       |
|                | 120/5600                       | 0.37                     | 0.68                                    | 11                  | PASS       |

|                |          |       |       |    |      |
|----------------|----------|-------|-------|----|------|
|                | 140/5700 | -0.52 | -0.21 | 11 | PASS |
|                | 144/5720 | 0.21  | 0.52  | 11 | PASS |
| 802.11ac VHT40 | 102/5510 | -2.99 | -2.38 | 11 | PASS |
|                | 118/5590 | -2.82 | -2.21 | 11 | PASS |
|                | 134/5670 | -2.63 | -2.02 | 11 | PASS |
|                | 142/5710 | -3.12 | -2.51 | 11 | PASS |
| 802.11ac VHT80 | 106/5530 | -6.72 | -5.56 | 11 | PASS |
|                | 122/5610 | -7.06 | -5.90 | 11 | PASS |
|                | 138/5690 | -7.81 | -6.65 | 11 | PASS |

Note: Power Spectral Density =Read Value+Duty cycle correction factor

### U-NII-3

| Mode           | Channel/<br>Frequency<br>(MHz) | Read Value<br>(dBm/470kHz) | Power Spectral<br>Density<br>(dBm/500kHz) | Limit<br>(dBm/500kHz) | Conclusion |
|----------------|--------------------------------|----------------------------|-------------------------------------------|-----------------------|------------|
| 802.11a        | 144/5720                       | -4.80                      | -4.23                                     | 30                    | PASS       |
|                | 149/5745                       | -3.13                      | -2.56                                     | 30                    | PASS       |
|                | 157/5785                       | -3.44                      | -2.87                                     | 30                    | PASS       |
|                | 165/5825                       | -3.05                      | -2.48                                     | 30                    | PASS       |
| 802.11n HT20   | 144/5720                       | -5.30                      | -4.71                                     | 30                    | PASS       |
|                | 149/5745                       | -3.64                      | -3.05                                     | 30                    | PASS       |
|                | 157/5785                       | -3.65                      | -3.06                                     | 30                    | PASS       |
|                | 165/5825                       | -3.61                      | -3.02                                     | 30                    | PASS       |
| 802.11n HT40   | 142/5710                       | -9.38                      | -8.49                                     | 30                    | PASS       |
|                | 151/5755                       | -5.98                      | -5.09                                     | 30                    | PASS       |
|                | 159/5795                       | -6.43                      | -5.54                                     | 30                    | PASS       |
| 802.11ac VHT20 | 144/5720                       | -5.29                      | -4.71                                     | 30                    | PASS       |
|                | 149/5745                       | -3.49                      | -2.91                                     | 30                    | PASS       |
|                | 157/5785                       | -3.24                      | -2.66                                     | 30                    | PASS       |
|                | 165/5825                       | -3.60                      | -3.02                                     | 30                    | PASS       |
| 802.11ac VHT40 | 142/5710                       | -9.46                      | -8.58                                     | 30                    | PASS       |
|                | 151/5755                       | -6.56                      | -5.68                                     | 30                    | PASS       |
|                | 159/5795                       | -6.09                      | -5.21                                     | 30                    | PASS       |
| 802.11ac VHT80 | 138/5690                       | -13.04                     | -11.61                                    | 30                    | PASS       |
|                | 155/5775                       | -10.16                     | -8.73                                     | 30                    | PASS       |

Note: PSD=Read Value+Duty cycle correction factor +10\*log(500/470)

**SISO Antenna 2**
**U-NII-1**

| Mode           | Channel/<br>Frequency<br>(MHz) | Read Value<br>(dBm /MHz) | Power Spectral<br>Density<br>(dBm /MHz) | Limit<br>(dBm /MHz) | Conclusion |
|----------------|--------------------------------|--------------------------|-----------------------------------------|---------------------|------------|
| 802.11a        | 36/5180                        | -2.44                    | -2.14                                   | 11                  | PASS       |
|                | 40/5200                        | -2.88                    | -2.58                                   | 11                  | PASS       |
|                | 48/5240                        | -2.59                    | -2.29                                   | 11                  | PASS       |
| 802.11n HT20   | 36/5180                        | -3.22                    | -2.90                                   | 11                  | PASS       |
|                | 40/5200                        | -2.75                    | -2.43                                   | 11                  | PASS       |
|                | 48/5240                        | -2.47                    | -2.15                                   | 11                  | PASS       |
| 802.11n HT40   | 38/5190                        | -5.62                    | -5.00                                   | 11                  | PASS       |
|                | 46/5230                        | -5.42                    | -4.80                                   | 11                  | PASS       |
| 802.11ac VHT20 | 36/5180                        | -3.08                    | -2.77                                   | 11                  | PASS       |
|                | 40/5200                        | -2.86                    | -2.55                                   | 11                  | PASS       |
|                | 48/5240                        | -2.97                    | -2.66                                   | 11                  | PASS       |
| 802.11ac VHT40 | 38/5190                        | -5.94                    | -5.33                                   | 11                  | PASS       |
|                | 46/5230                        | -5.30                    | -4.69                                   | 11                  | PASS       |
| 802.11ac VHT80 | 42/5210                        | -9.18                    | -8.02                                   | 11                  | PASS       |

Note: Power Spectral Density =Read Value+Duty cycle correction factor

**U-NII-2C**

| Mode           | Channel/<br>Frequency<br>(MHz) | Read Value<br>(dBm /MHz) | Power Spectral<br>Density<br>(dBm /MHz) | Limit<br>(dBm /MHz) | Conclusion |
|----------------|--------------------------------|--------------------------|-----------------------------------------|---------------------|------------|
| 802.11a        | 100/5500                       | -2.09                    | -1.79                                   | 11                  | PASS       |
|                | 120/5600                       | -1.84                    | -1.54                                   | 11                  | PASS       |
|                | 140/5700                       | -1.87                    | -1.57                                   | 11                  | PASS       |
|                | 144/5720                       | -0.91                    | -0.61                                   | 11                  | PASS       |
| 802.11n HT20   | 100/5500                       | -2.24                    | -1.92                                   | 11                  | PASS       |
|                | 120/5600                       | -2.24                    | -1.92                                   | 11                  | PASS       |
|                | 140/5700                       | -2.53                    | -2.21                                   | 11                  | PASS       |
|                | 144/5720                       | -1.29                    | -0.97                                   | 11                  | PASS       |
| 802.11n HT40   | 102/5510                       | -6.04                    | -5.42                                   | 11                  | PASS       |
|                | 118/5590                       | -5.18                    | -4.56                                   | 11                  | PASS       |
|                | 134/5670                       | -4.53                    | -3.91                                   | 11                  | PASS       |
|                | 142/5710                       | -4.81                    | -4.19                                   | 11                  | PASS       |
| 802.11ac VHT20 | 100/5500                       | -2.13                    | -1.82                                   | 11                  | PASS       |
|                | 120/5600                       | -2.41                    | -2.10                                   | 11                  | PASS       |
|                | 140/5700                       | -2.27                    | -1.96                                   | 11                  | PASS       |

|                                                                       |          |       |       |    |      |
|-----------------------------------------------------------------------|----------|-------|-------|----|------|
|                                                                       | 144/5720 | -1.51 | -1.20 | 11 | PASS |
| 802.11ac VHT40                                                        | 102/5510 | -5.39 | -4.78 | 11 | PASS |
|                                                                       | 118/5590 | -5.54 | -4.93 | 11 | PASS |
|                                                                       | 134/5670 | -5.13 | -4.52 | 11 | PASS |
|                                                                       | 142/5710 | -5.02 | -4.41 | 11 | PASS |
| 802.11ac VHT80                                                        | 106/5530 | -9.07 | -7.91 | 11 | PASS |
|                                                                       | 122/5610 | -8.97 | -7.81 | 11 | PASS |
|                                                                       | 138/5690 | -9.30 | -8.14 | 11 | PASS |
| Note: Power Spectral Density =Read Value+Duty cycle correction factor |          |       |       |    |      |

### U-NII-3

| Mode                                                                | Channel/<br>Frequency<br>(MHz) | Read Value<br>(dBm/470kHz) | Power Spectral<br>Density<br>(dBm/500kHz) | Limit<br>(dBm/500kHz) | Conclusion |
|---------------------------------------------------------------------|--------------------------------|----------------------------|-------------------------------------------|-----------------------|------------|
| 802.11a                                                             | 144/5720                       | -6.38                      | -5.81                                     | 30                    | PASS       |
|                                                                     | 149/5745                       | -5.29                      | -4.72                                     | 30                    | PASS       |
|                                                                     | 157/5785                       | -4.87                      | -4.30                                     | 30                    | PASS       |
|                                                                     | 165/5825                       | -4.51                      | -3.94                                     | 30                    | PASS       |
| 802.11n HT20                                                        | 144/5720                       | -9.31                      | -8.72                                     | 30                    | PASS       |
|                                                                     | 149/5745                       | -8.02                      | -7.43                                     | 30                    | PASS       |
|                                                                     | 157/5785                       | -8.06                      | -7.47                                     | 30                    | PASS       |
|                                                                     | 165/5825                       | -7.47                      | -6.88                                     | 30                    | PASS       |
| 802.11n HT40                                                        | 142/5710                       | -13.46                     | -12.57                                    | 30                    | PASS       |
|                                                                     | 151/5755                       | -10.55                     | -9.66                                     | 30                    | PASS       |
|                                                                     | 159/5795                       | -10.16                     | -9.27                                     | 30                    | PASS       |
| 802.11ac VHT20                                                      | 144/5720                       | -9.53                      | -8.95                                     | 30                    | PASS       |
|                                                                     | 149/5745                       | -7.77                      | -7.19                                     | 30                    | PASS       |
|                                                                     | 157/5785                       | -7.45                      | -6.87                                     | 30                    | PASS       |
|                                                                     | 165/5825                       | -7.34                      | -6.76                                     | 30                    | PASS       |
| 802.11ac VHT40                                                      | 142/5710                       | -12.31                     | -11.43                                    | 30                    | PASS       |
|                                                                     | 151/5755                       | -10.16                     | -9.28                                     | 30                    | PASS       |
|                                                                     | 159/5795                       | -9.80                      | -8.92                                     | 30                    | PASS       |
| 802.11ac VHT80                                                      | 138/5690                       | -16.90                     | -15.47                                    | 30                    | PASS       |
|                                                                     | 155/5775                       | -13.92                     | -12.49                                    | 30                    | PASS       |
| Note: PSD=Read Value+Duty cycle correction factor +10*log(500/470). |                                |                            |                                           |                       |            |

## MIMO

## U-NII-1

| Mode              | Channel/<br>Frequency<br>(MHz) | Power Spectral Density  |                  |                         |                  |                        | Limit<br>(dBm<br>/MHz) | Conclusion |
|-------------------|--------------------------------|-------------------------|------------------|-------------------------|------------------|------------------------|------------------------|------------|
|                   |                                | Antenna 1               |                  | Antenna 2               |                  | Total PSD<br>(dBm/MHz) |                        |            |
|                   |                                | Read Value<br>(dBm/MHz) | PSD<br>(dBm/MHz) | Read Value<br>(dBm/MHz) | PSD<br>(dBm/MHz) |                        |                        |            |
| 802.11a           | 36/5180                        | -0.75                   | -0.45            | -2.05                   | -1.75            | 1.96                   | 11                     | PASS       |
|                   | 40/5200                        | -0.64                   | -0.34            | -2.06                   | -1.76            | 2.02                   | 11                     | PASS       |
|                   | 48/5240                        | -0.19                   | 0.11             | -2.46                   | -2.16            | 2.13                   | 11                     | PASS       |
| 802.11n<br>HT20   | 36/5180                        | -0.95                   | -0.63            | -2.95                   | -2.63            | 1.49                   | 11                     | PASS       |
|                   | 40/5200                        | -0.73                   | -0.41            | -2.17                   | -1.85            | 1.94                   | 11                     | PASS       |
|                   | 48/5240                        | -1.14                   | -0.82            | -3.17                   | -2.85            | 1.29                   | 11                     | PASS       |
| 802.11n<br>HT40   | 38/5190                        | -4.04                   | -3.42            | -5.42                   | -4.80            | -1.05                  | 11                     | PASS       |
|                   | 46/5230                        | -3.51                   | -2.89            | -5.58                   | -4.96            | -0.79                  | 11                     | PASS       |
| 802.11ac<br>VHT20 | 36/5180                        | -0.85                   | -0.54            | -2.81                   | -2.50            | 1.60                   | 11                     | PASS       |
|                   | 40/5200                        | -0.72                   | -0.41            | -2.26                   | -1.95            | 1.90                   | 11                     | PASS       |
|                   | 48/5240                        | -0.60                   | -0.29            | -2.72                   | -2.41            | 1.79                   | 11                     | PASS       |
| 802.11ac<br>VHT40 | 38/5190                        | -3.77                   | -3.16            | -5.13                   | -4.52            | -0.78                  | 11                     | PASS       |
|                   | 46/5230                        | -3.52                   | -2.91            | -6.01                   | -5.40            | -0.97                  | 11                     | PASS       |
| 802.11ac<br>VHT80 | 42/5210                        | -9.51                   | -8.35            | -10.92                  | -9.76            | -5.99                  | 11                     | PASS       |

Note: 1. Power Spectral Density =Read Value+Duty cycle correction factor

2. For Total PSD, according to KDB 662911 D01 Multiple Transmitter Output v02r01 2)a),

the power spectral density= $10\log(10^{(\text{PSD antenna 1 in dBm/10})}+10^{(\text{PSD antenna 2 in dBm/10})})$

3. The manufacturer declared the transmitter output signals is CDD mode And Nss=1. According to KDB 662911 D01

Multiple Transmitter Output v02r01 F)2)f)(i): If all antennas have the same gain, Directional gain =  $G_{\text{ANT}} + \text{Array Gain}$ ,

For PSD measurements on all devices, Array Gain= $10\log(N_{\text{ant}}/N_{\text{ss}})\text{dB}$ ,

so directional gain= $G_{\text{ANT}}+\text{Array Gain}=2.80+10\log(2/1) = 5.81 < 6 \text{ dBi}$ .

So the PSD limit is 11 dBm.

## U-NII-2C

| Mode              | Channel<br>/Frequency<br>(MHz) | Power Spectral Density  |                  |                         |                  |                        | Limit<br>(dBm<br>/MHz) | Conclusion |
|-------------------|--------------------------------|-------------------------|------------------|-------------------------|------------------|------------------------|------------------------|------------|
|                   |                                | Antenna 1               |                  | Antenna 2               |                  | Total PSD<br>(dBm/MHz) |                        |            |
|                   |                                | Read Value<br>(dBm/MHz) | PSD<br>(dBm/MHz) | Read Value<br>(dBm/MHz) | PSD<br>(dBm/MHz) |                        |                        |            |
| 802.11a           | 100/5500                       | -1.62                   | -1.32            | -4.54                   | -4.24            | 0.47                   | 11                     | PASS       |
|                   | 120/5600                       | 1.20                    | 1.50             | -1.08                   | -0.78            | 3.52                   | 11                     | PASS       |
|                   | 140/5700                       | 1.60                    | 1.90             | -1.05                   | -0.75            | 3.78                   | 11                     | PASS       |
|                   | 144/5720                       | 0.34                    | 0.64             | -0.67                   | -0.37            | 3.17                   | 11                     | PASS       |
| 802.11n<br>HT20   | 100/5500                       | 0.02                    | 0.34             | -2.48                   | -2.16            | 2.28                   | 11                     | PASS       |
|                   | 120/5600                       | 1.04                    | 1.36             | -1.14                   | -0.82            | 3.42                   | 11                     | PASS       |
|                   | 140/5700                       | 1.16                    | 1.48             | -1.29                   | -0.97            | 3.44                   | 11                     | PASS       |
|                   | 144/5720                       | 0.34                    | 0.66             | -1.15                   | -0.83            | 2.99                   | 11                     | PASS       |
| 802.11n<br>HT40   | 102/5510                       | -5.73                   | -5.11            | -8.58                   | -7.96            | -3.29                  | 11                     | PASS       |
|                   | 118/5590                       | -2.69                   | -2.07            | -4.80                   | -4.18            | 0.01                   | 11                     | PASS       |
|                   | 134/5670                       | -3.47                   | -2.85            | -4.93                   | -4.31            | -0.51                  | 11                     | PASS       |
|                   | 142/5710                       | -2.55                   | -1.93            | -4.42                   | -3.80            | 0.25                   | 11                     | PASS       |
| 802.11ac<br>VHT20 | 100/5500                       | 0.07                    | 0.38             | -2.58                   | -2.27            | 2.26                   | 11                     | PASS       |
|                   | 120/5600                       | 0.75                    | 1.06             | -1.56                   | -1.25            | 3.07                   | 11                     | PASS       |
|                   | 140/5700                       | 0.53                    | 0.84             | -1.84                   | -1.53            | 2.83                   | 11                     | PASS       |
|                   | 144/5720                       | 0.20                    | 0.51             | -1.41                   | -1.10            | 2.79                   | 11                     | PASS       |
| 802.11ac<br>VHT40 | 102/5510                       | -3.05                   | -2.44            | -5.82                   | -5.21            | -0.60                  | 11                     | PASS       |
|                   | 118/5590                       | -2.70                   | -2.09            | -4.87                   | -4.26            | -0.03                  | 11                     | PASS       |
|                   | 134/5670                       | -3.01                   | -2.40            | -5.02                   | -4.41            | -0.28                  | 11                     | PASS       |
|                   | 142/5710                       | -2.45                   | -1.84            | -4.37                   | -3.76            | 0.32                   | 11                     | PASS       |
| 802.11ac<br>VHT80 | 106/5530                       | -8.39                   | -7.23            | -10.63                  | -9.47            | -5.20                  | 11                     | PASS       |
|                   | 122/5610                       | -5.81                   | -4.65            | -8.53                   | -7.37            | -2.79                  | 11                     | PASS       |
|                   | 138/5690                       | -6.52                   | -5.36            | -8.92                   | -7.76            | -3.39                  | 11                     | PASS       |

Note: 1. Power Spectral Density =Read Value+Duty cycle correction factor

2. For Total PSD, according to KDB 662911 D01 Multiple Transmitter Output v02r01 2)a),

the power spectral density= $10\log(10^{(\text{PSD antenna 1 in dBm}/10)} + 10^{(\text{PSD antenna 2 in dBm}/10)})$

3. The manufacturer declared the transmitter output signals is CDD mode And Nss=1. According to KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)(i): If all antennas have the same gain, Directional gain =  $G_{\text{ANT}} + \text{Array Gain}$ , For PSD measurements on all devices, Array Gain= $10\log(\text{Nant}/\text{Nss})\text{dB}$ , so directional gain= $G_{\text{ANT}} + \text{Array Gain} = 2.80 + 10\log(2/1) = 5.81 < 6 \text{ dBi}$ .

So the PSD limit is 11dBm

## U-NII-3

| Mode               | Channel/<br>Frequency<br>(MHz) | Power Spectral Density     |                     |                            |                     |                                    | Limit<br>(dBm/<br>500kHz) | Conclusion |
|--------------------|--------------------------------|----------------------------|---------------------|----------------------------|---------------------|------------------------------------|---------------------------|------------|
|                    |                                | Antenna 1                  |                     | Antenna 2                  |                     | Total<br>Power<br>(dBm/<br>500kHz) |                           |            |
|                    |                                | Read Value<br>(dBm/470kHz) | PSD<br>(dBm/500kHz) | Read Value<br>(dBm/470kHz) | PSD<br>(dBm/500kHz) |                                    |                           |            |
| U-NII-3<br>802.11a | 144/5720                       | -5.01                      | -4.44               | -6.42                      | -5.85               | -2.08                              | 30                        | PASS       |
|                    | 149/5745                       | -2.97                      | -2.40               | -4.81                      | -4.24               | -0.21                              | 30                        | PASS       |
|                    | 157/5785                       | -2.59                      | -2.02               | -4.91                      | -4.34               | -0.02                              | 30                        | PASS       |
|                    | 165/5825                       | -2.93                      | -2.36               | -4.23                      | -3.66               | 0.05                               | 30                        | PASS       |
| 802.11n<br>HT20    | 144/5720                       | -5.37                      | -4.78               | -6.88                      | -6.29               | -2.46                              | 30                        | PASS       |
|                    | 149/5745                       | -3.39                      | -2.80               | -5.11                      | -4.52               | -0.57                              | 30                        | PASS       |
|                    | 157/5785                       | -2.75                      | -2.16               | -5.09                      | -4.50               | -0.16                              | 30                        | PASS       |
|                    | 165/5825                       | -3.23                      | -2.64               | -4.34                      | -3.75               | -0.15                              | 30                        | PASS       |
| 802.11n<br>HT40    | 142/5710                       | -9.30                      | -8.41               | -10.77                     | -9.88               | -6.07                              | 30                        | PASS       |
|                    | 151/5755                       | -5.32                      | -4.43               | -7.66                      | -6.77               | -2.43                              | 30                        | PASS       |
|                    | 159/5795                       | -5.56                      | -4.67               | -7.19                      | -6.30               | -2.40                              | 30                        | PASS       |
| 802.11ac<br>VHT20  | 144/5720                       | -5.33                      | -4.75               | -6.72                      | -6.14               | -2.38                              | 30                        | PASS       |
|                    | 149/5745                       | -3.39                      | -2.81               | -5.59                      | -5.01               | -0.76                              | 30                        | PASS       |
|                    | 157/5785                       | -2.93                      | -2.35               | -5.00                      | -4.42               | -0.25                              | 30                        | PASS       |
|                    | 165/5825                       | -3.02                      | -2.44               | -4.50                      | -3.92               | -0.11                              | 30                        | PASS       |
| 802.11ac<br>VHT40  | 142/5710                       | -9.29                      | -8.41               | -10.88                     | -10.00              | -6.12                              | 30                        | PASS       |
|                    | 151/5755                       | -5.91                      | -5.03               | -7.90                      | -7.02               | -2.90                              | 30                        | PASS       |
|                    | 159/5795                       | -5.89                      | -5.01               | -7.40                      | -6.52               | -2.69                              | 30                        | PASS       |
| 802.11ac<br>VHT80  | 138/5690                       | -12.79                     | -11.36              | -15.37                     | -13.94              | -9.45                              | 30                        | PASS       |
|                    | 155/5775                       | -9.62                      | -8.19               | -11.77                     | -10.34              | -6.12                              | 30                        | PASS       |

Note: 1. Power Spectral Density =Read Value+Duty cycle correction factor +10\*log(500/470)


2. For Total PSD, according to KDB 662911 D01 Multiple Transmitter Output v02r01 2)a),  
the power spectral density= $10\log(10^{(\text{PSD antenna 1 in dBm}/10)} + 10^{(\text{PSD antenna 2 in dBm}/10)})$

3. The manufacturer declared the transmitter output signals is CDD mode And Nss=1. According to KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)(i): If all antennas have the same gain, Directional gain =  $G_{\text{ANT}} + \text{Array Gain}$ , For PSD measurements on all devices, Array Gain= $10\log(\text{Nant}/\text{Nss})\text{dB}$ ,  
so directional gain= $G_{\text{ANT}} + \text{Array Gain} = 2.80 + 10\log(2/1) = 5.81 < 6 \text{ dBi}$ .  
So the PSD limit is 30 dBm.


SISO Antenna 1

U-NII-1


PSD 802.11a 5180MHz

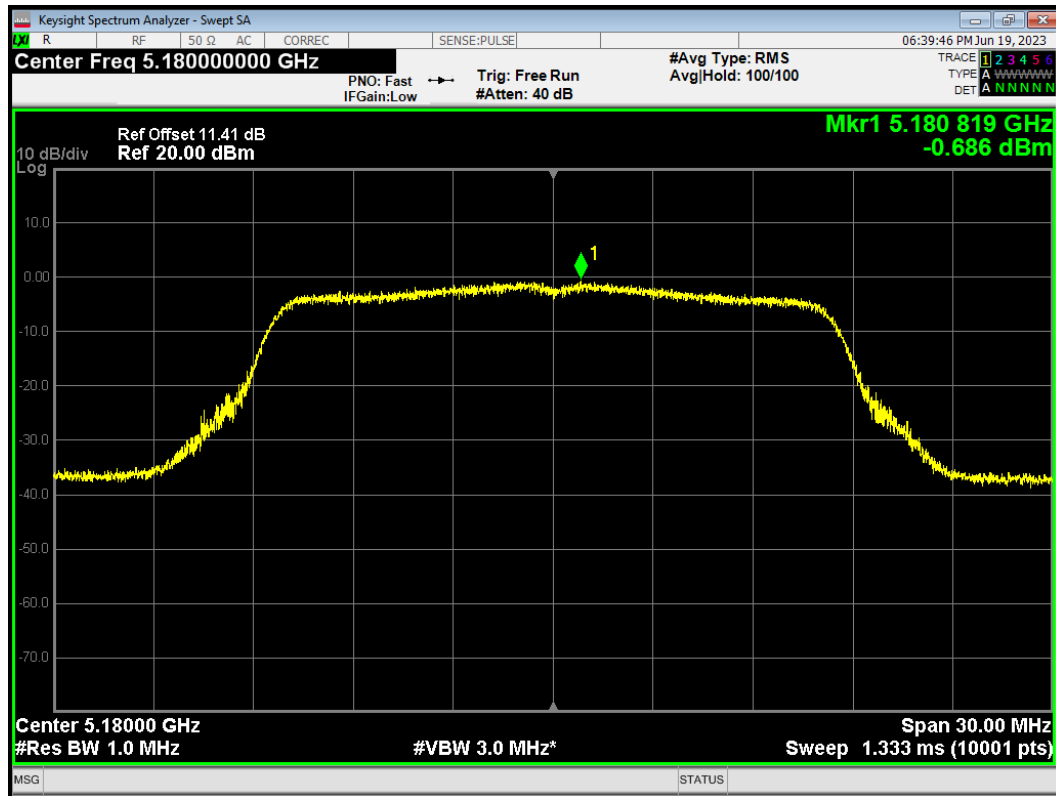


PSD 802.11a 5200MHz

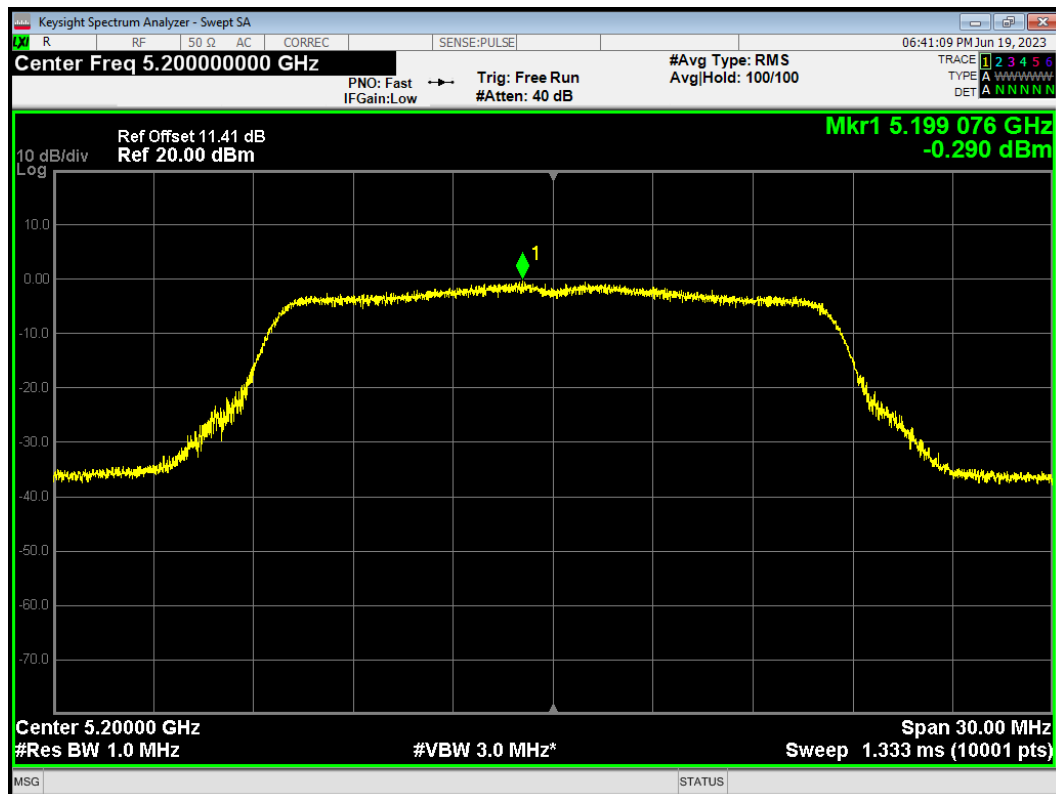


PSD 802.11a 5240MHz

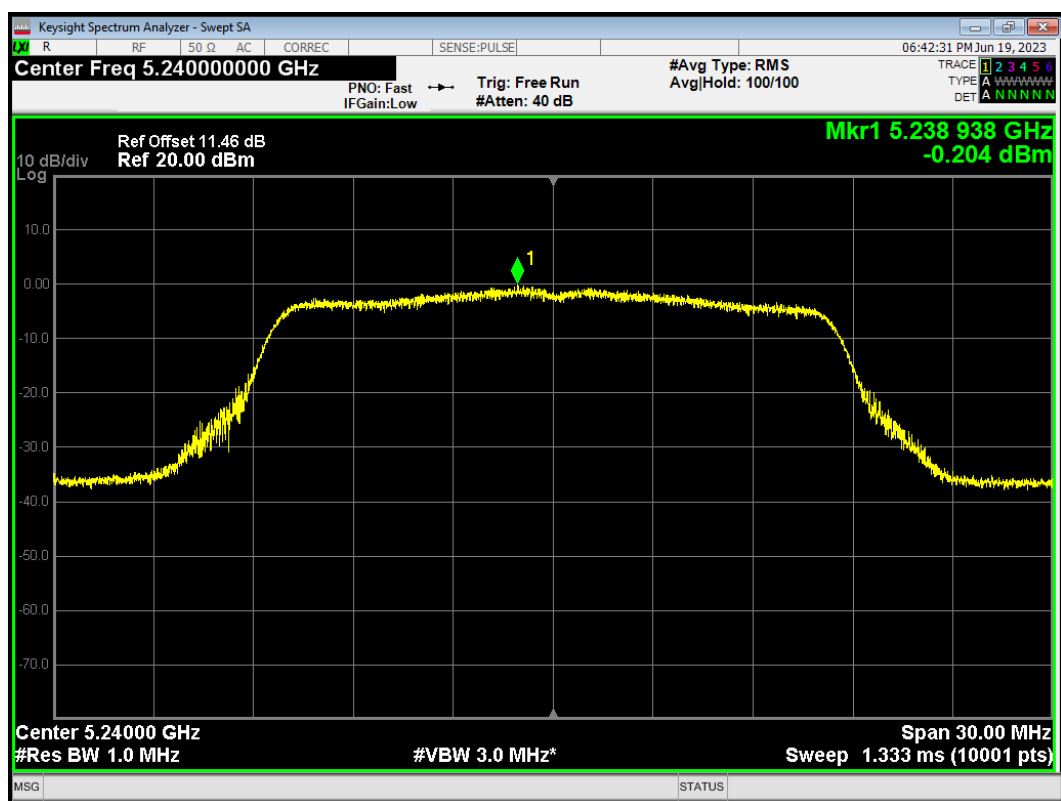


PSD 802.11ac(VHT20) 5180MHz

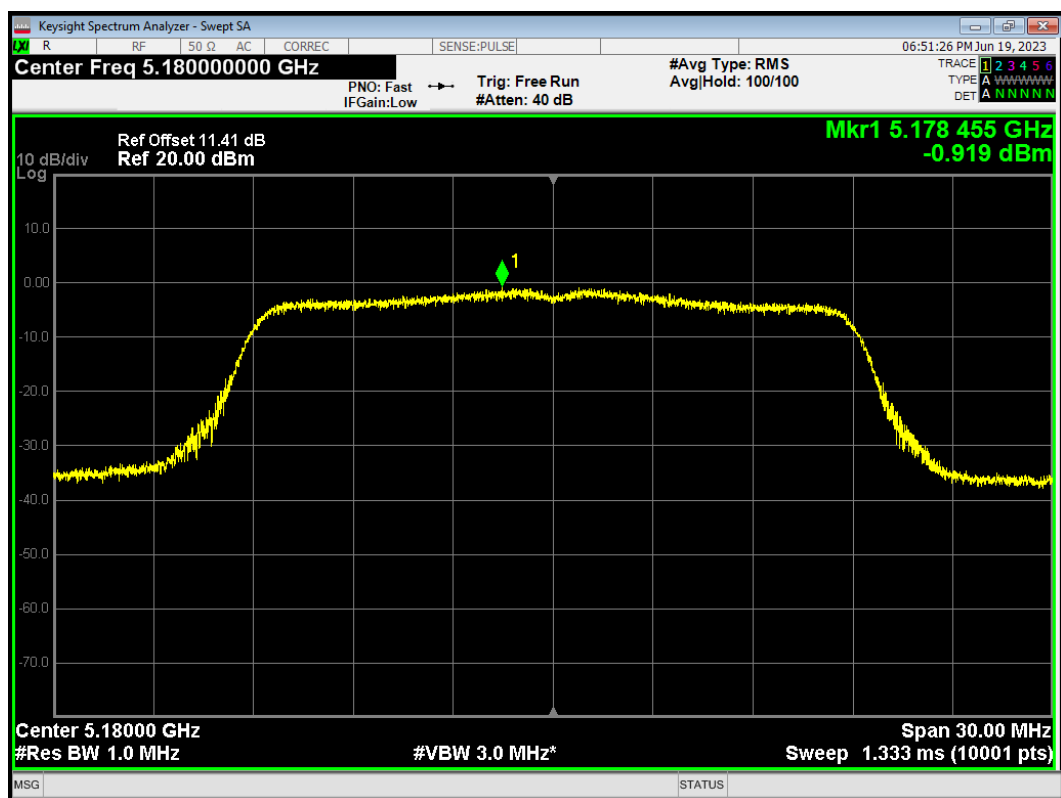


PSD 802.11ac(VHT20) 5200MHz

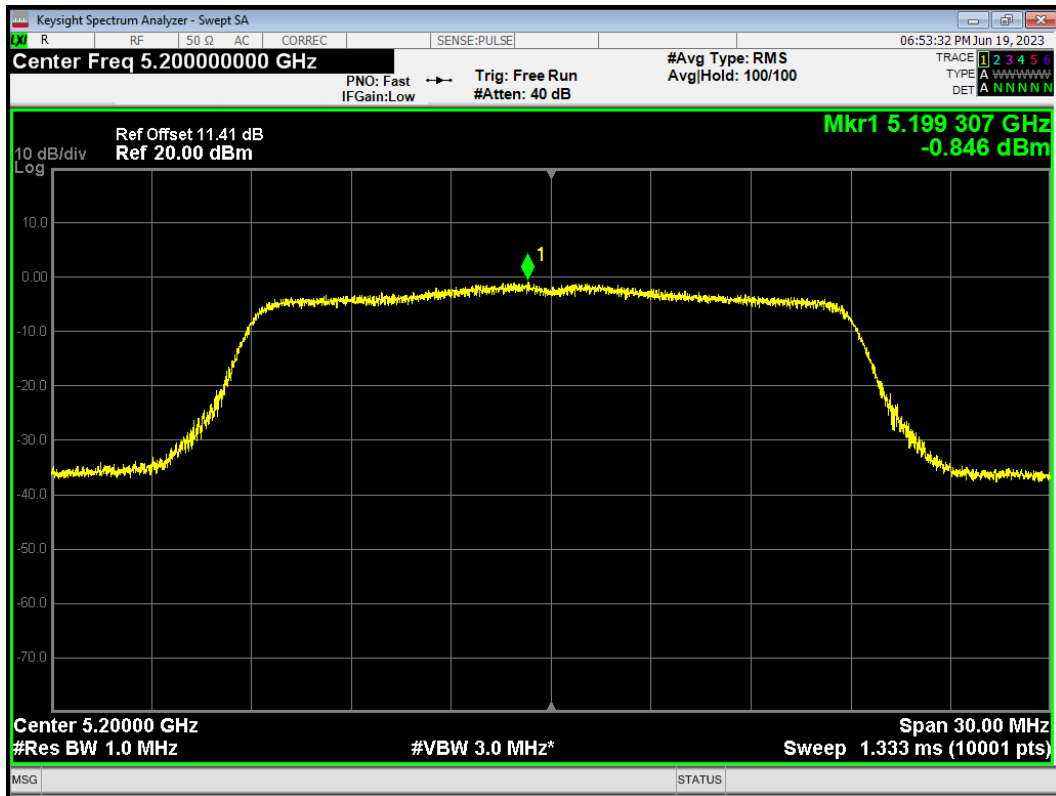


PSD 802.11ac(VHT20) 5240MHz

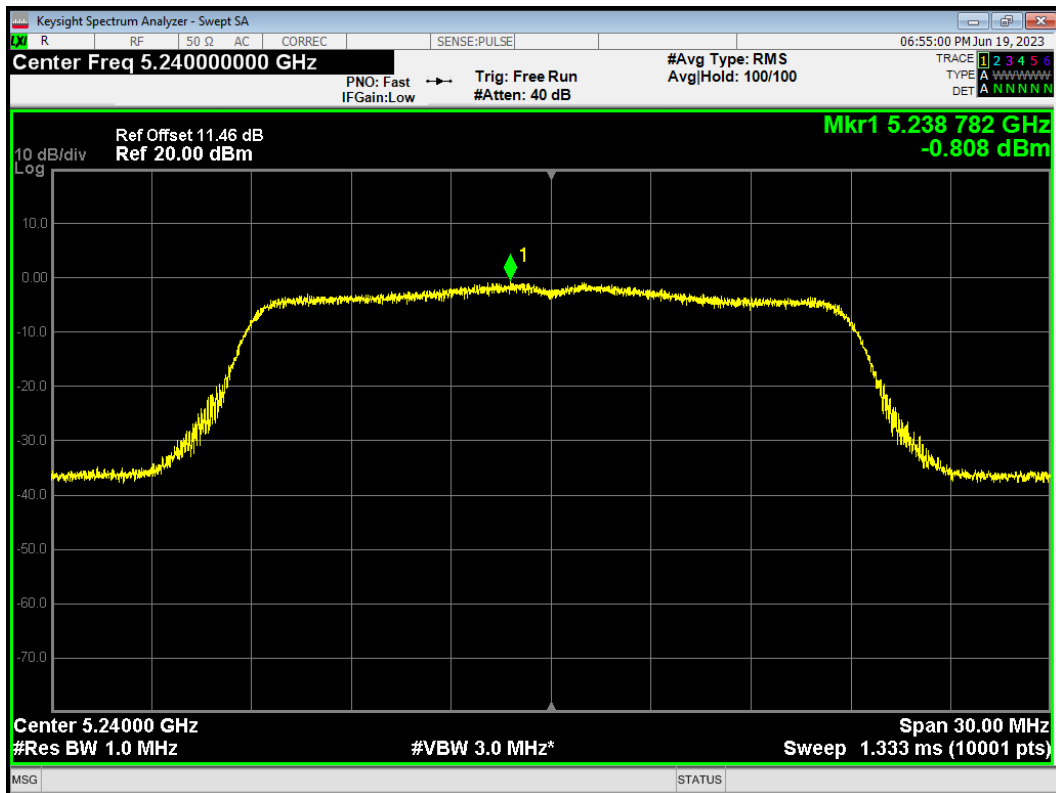


PSD 802.11ac(VHT40) 5190MHz

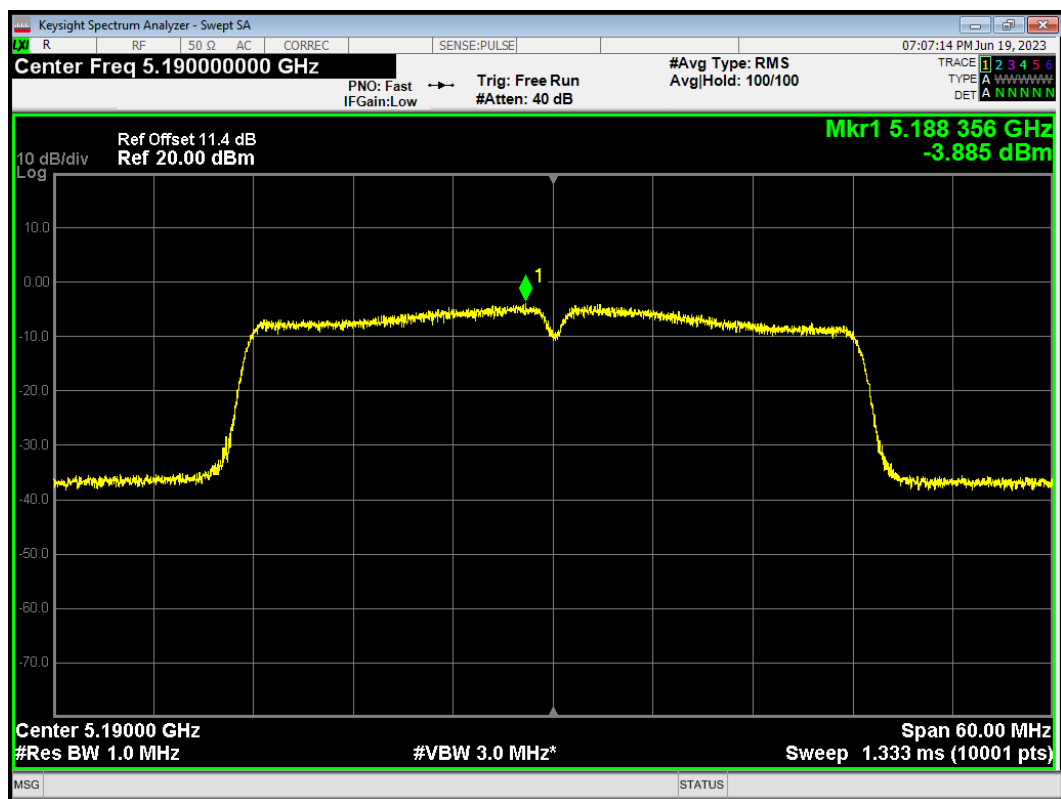


PSD 802.11ac(VHT40) 5230MHz

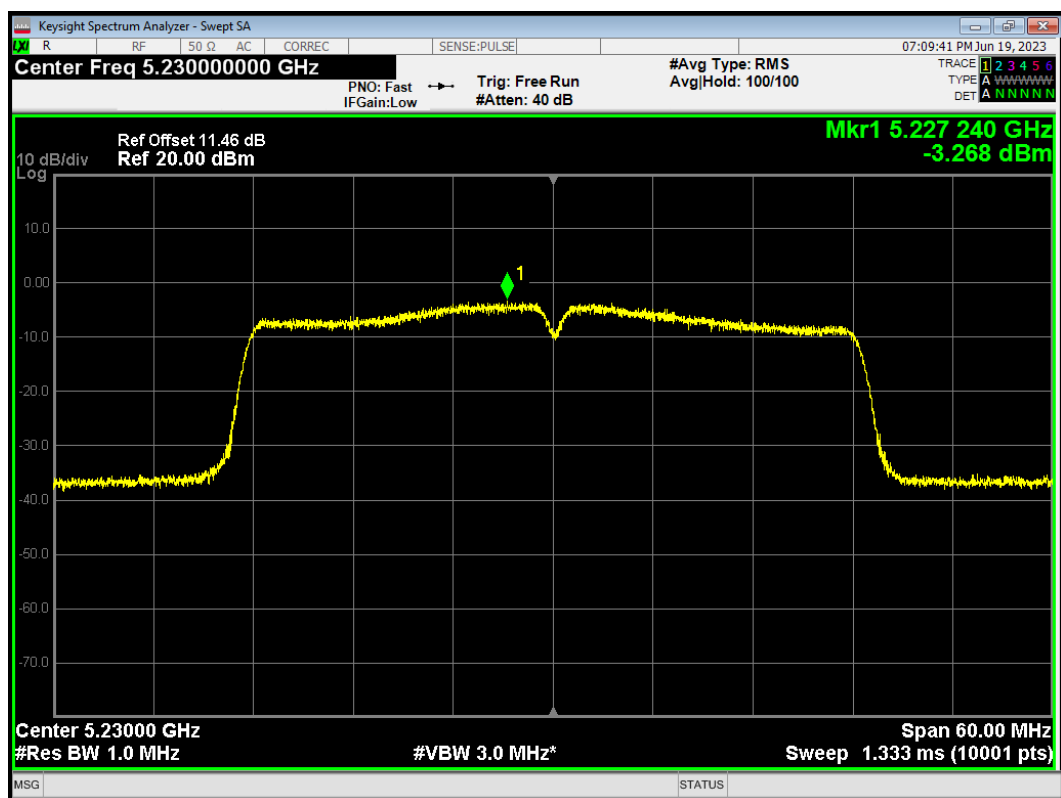


PSD 802.11ac(VHT80) 5210MHz

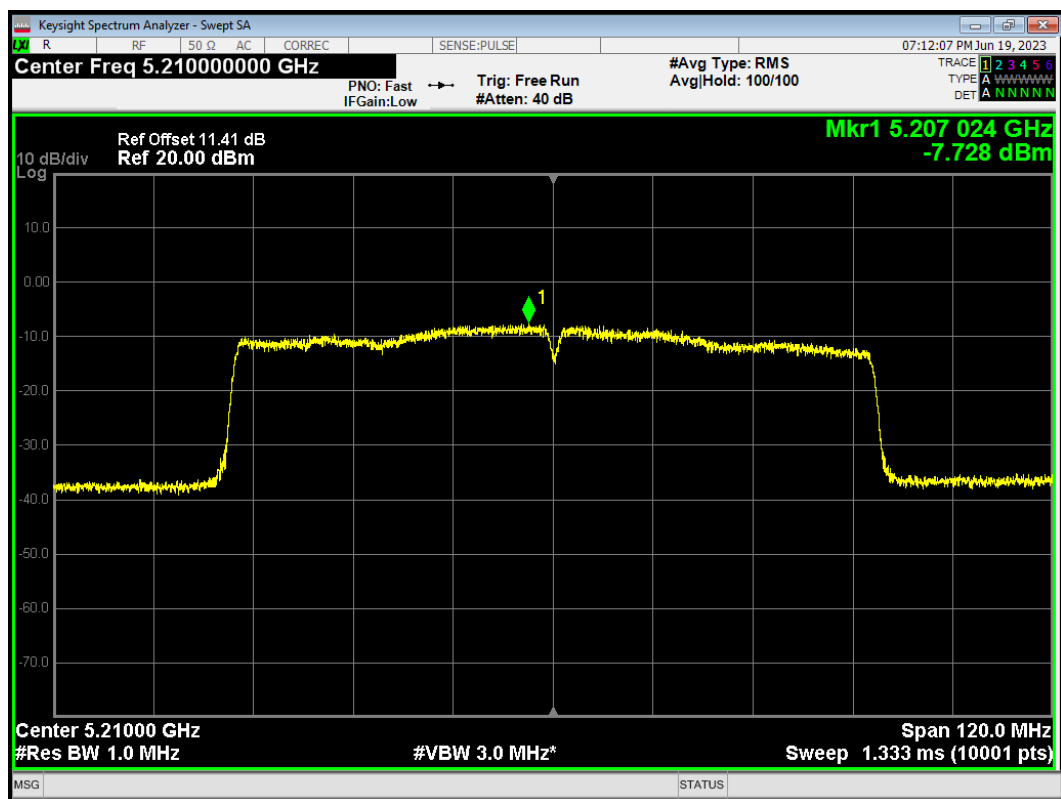


PSD 802.11n(HT20) 5180MHz

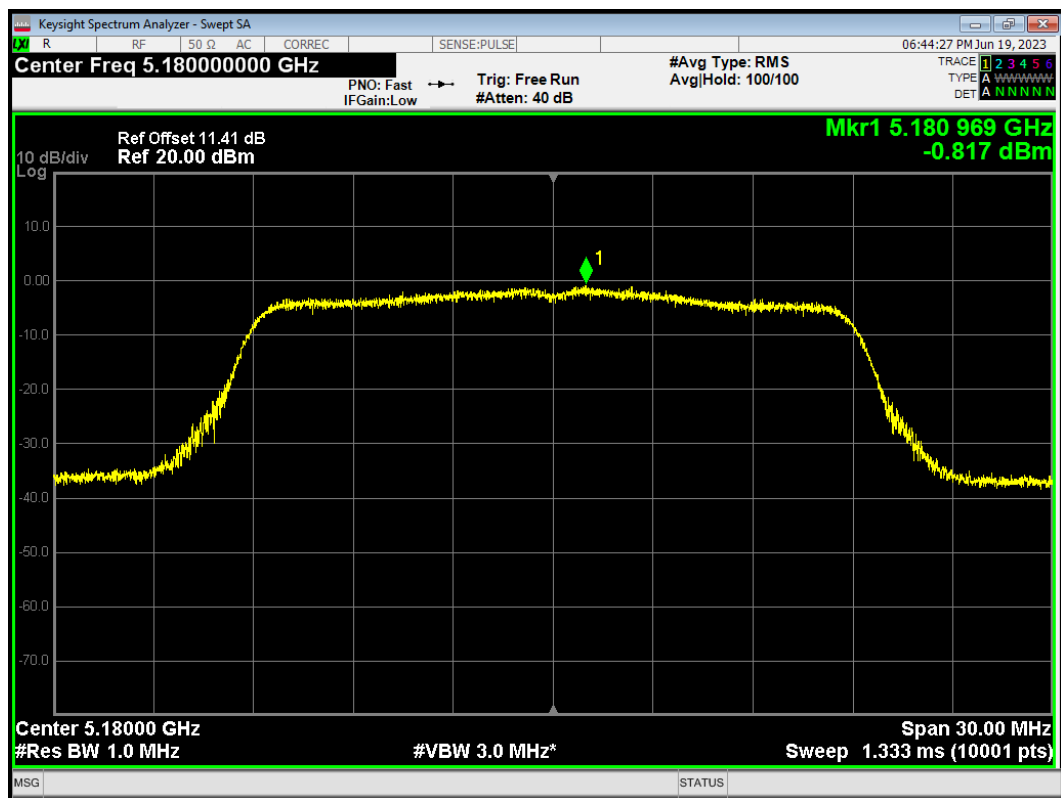


PSD 802.11n(HT20) 5200MHz

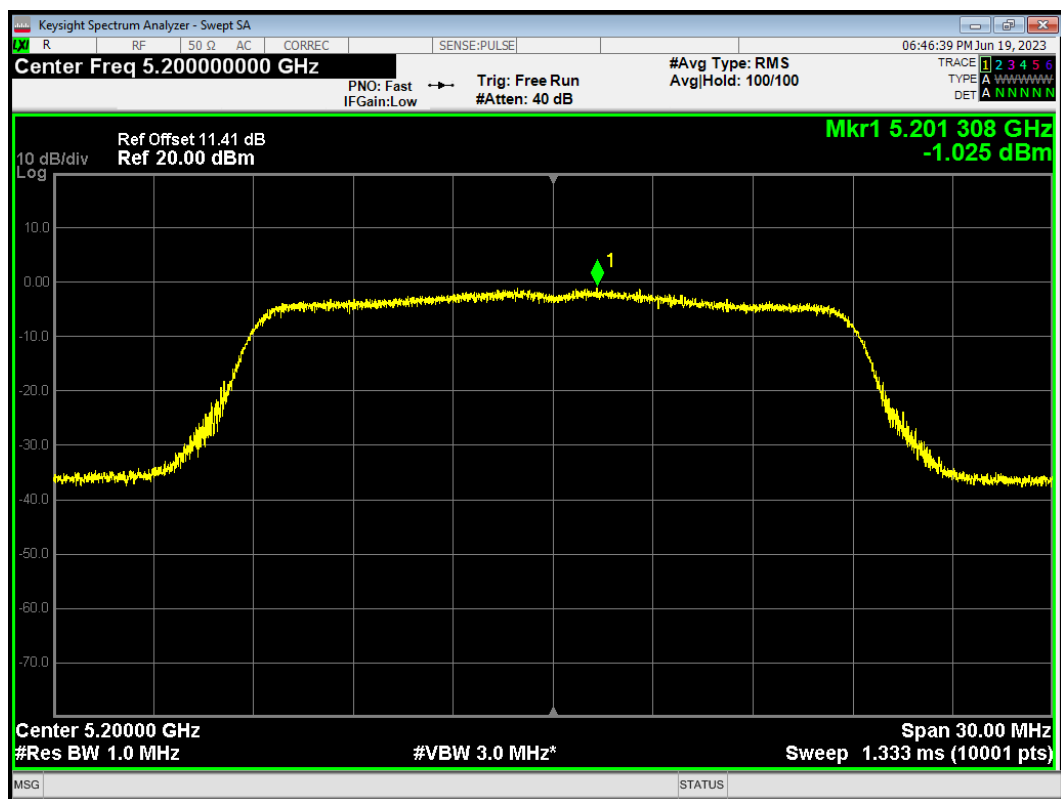


PSD 802.11n(HT20) 5240MHz

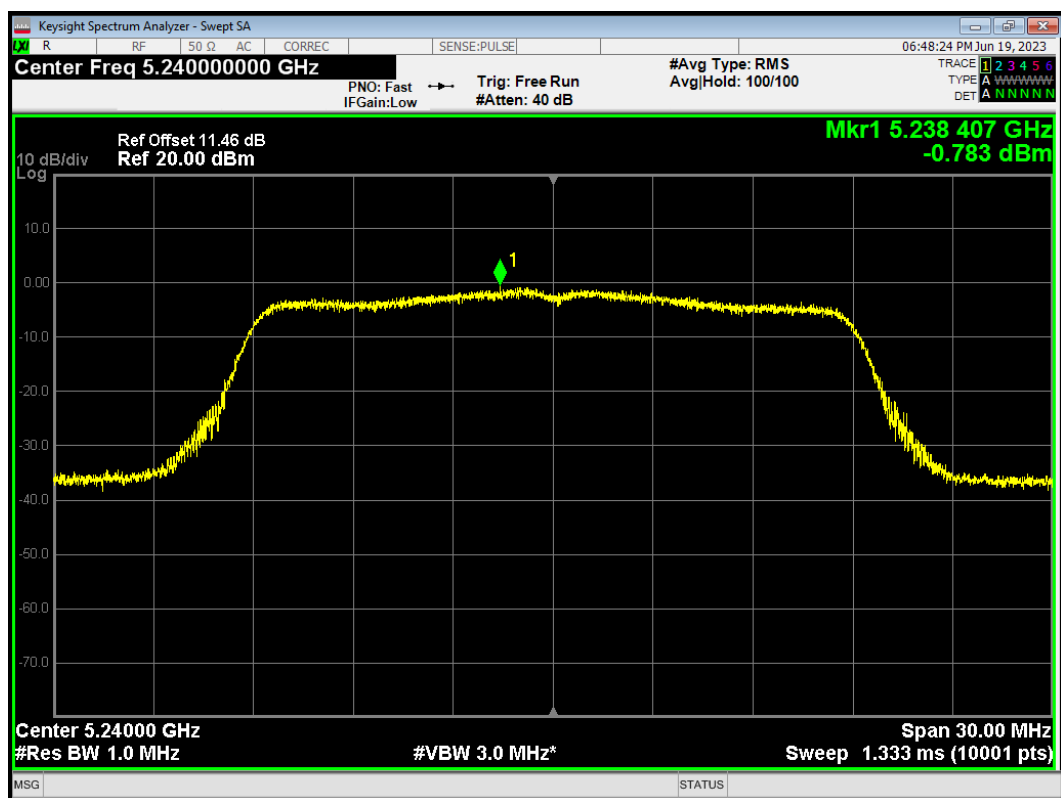

PSD 802.11n(HT40) 5190MHz

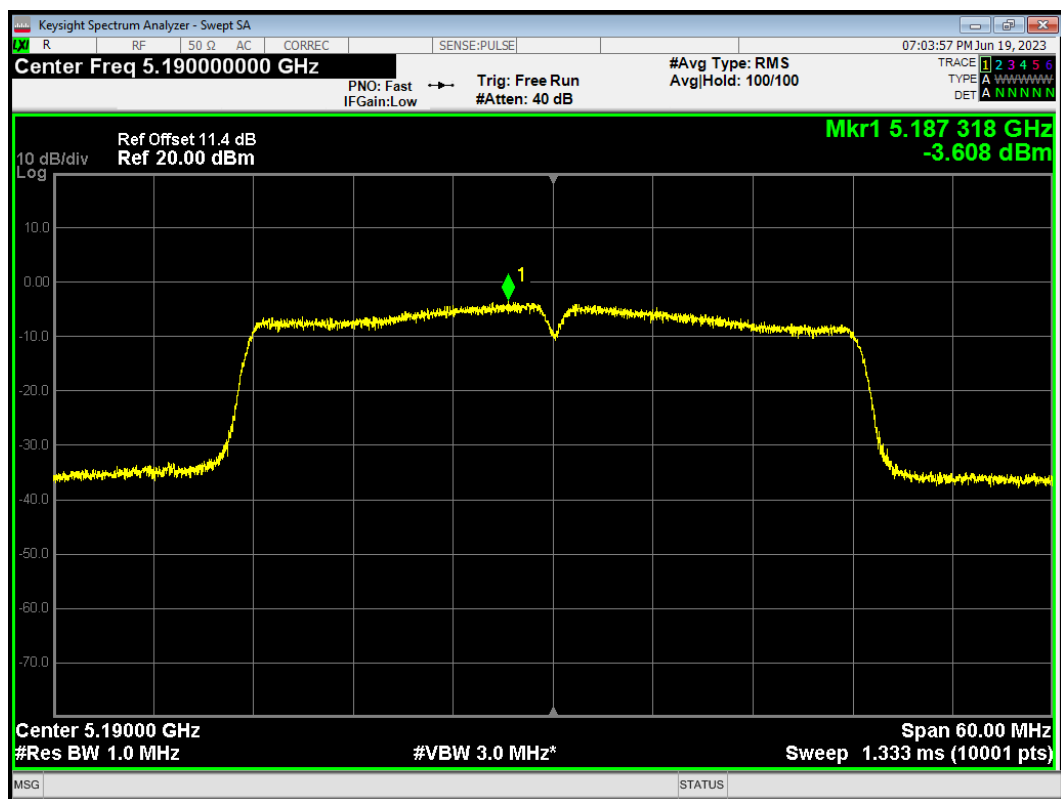


PSD 802.11n(HT40) 5230MHz

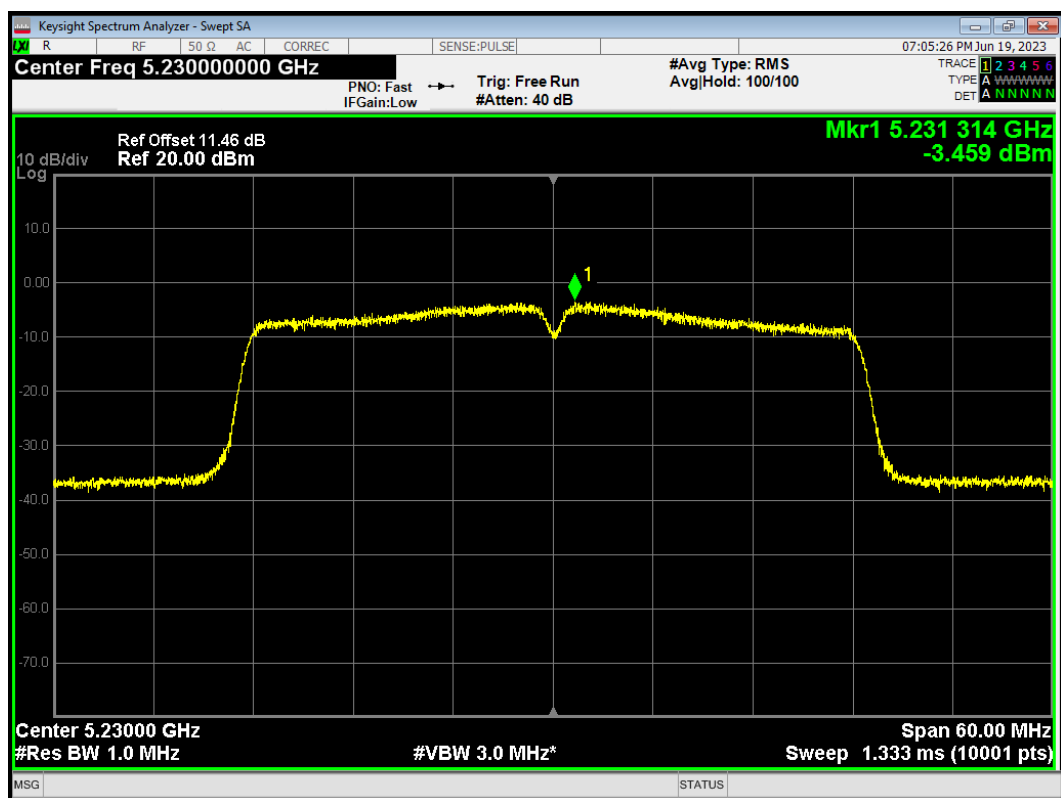


U-NII-2C


PSD 802.11a 5500MHz

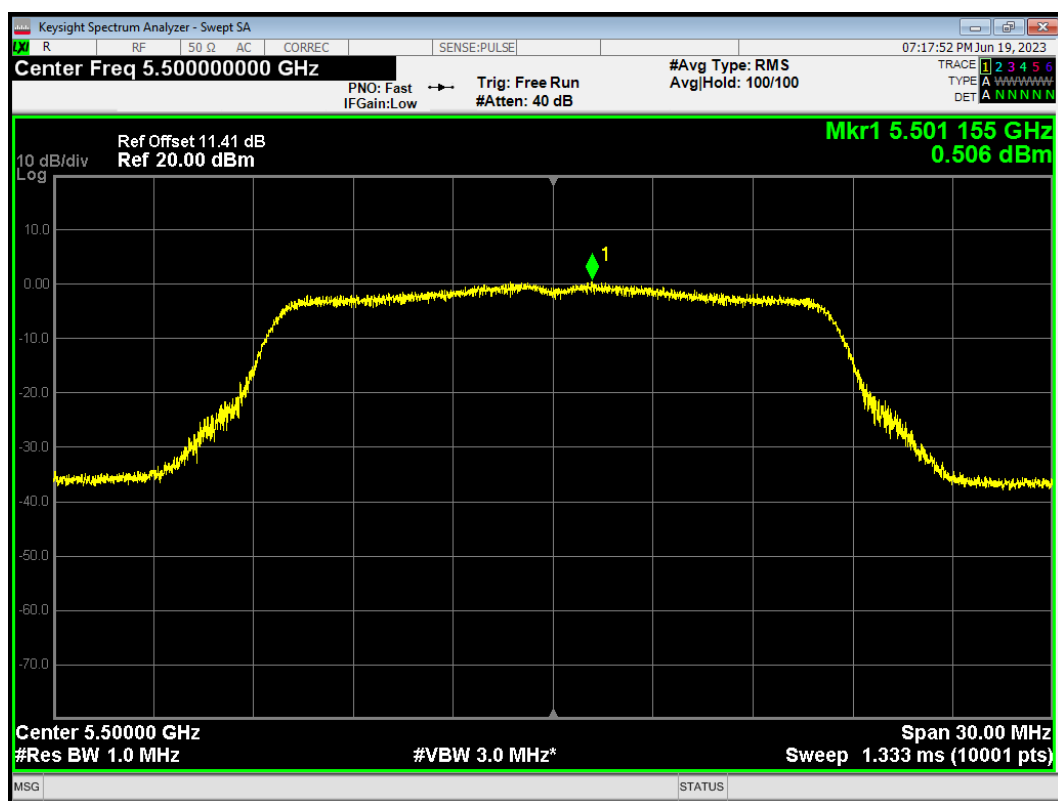


PSD 802.11a 5600MHz

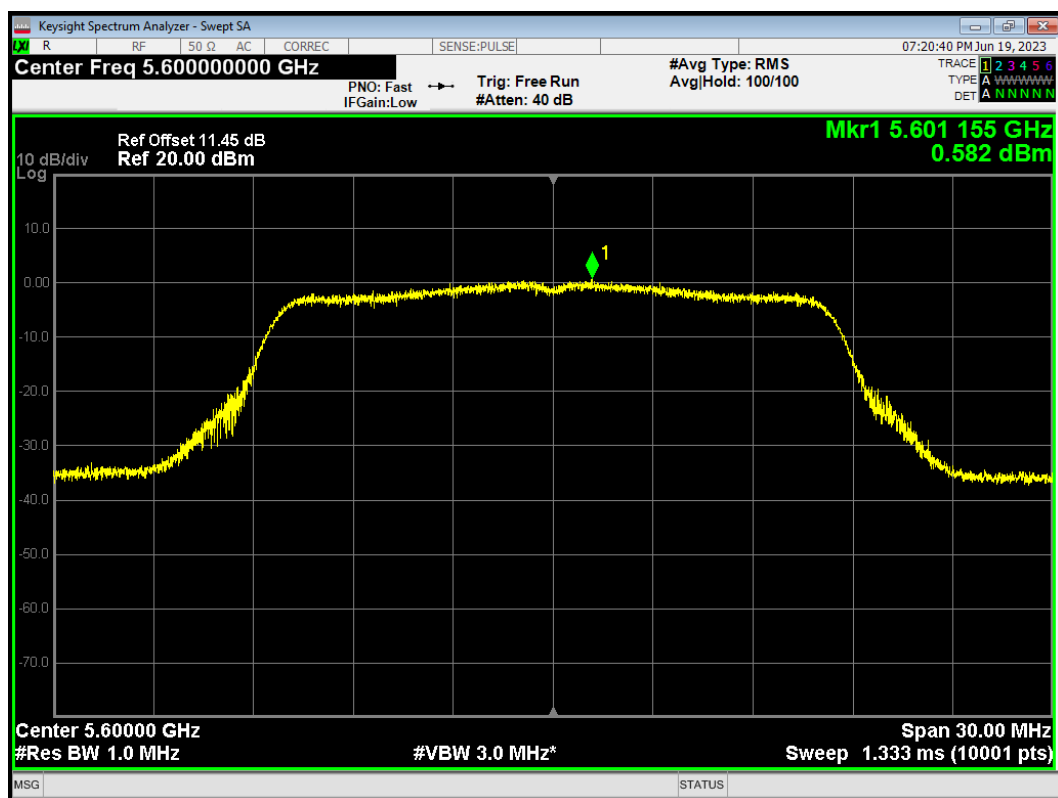


PSD 802.11a 5700MHz

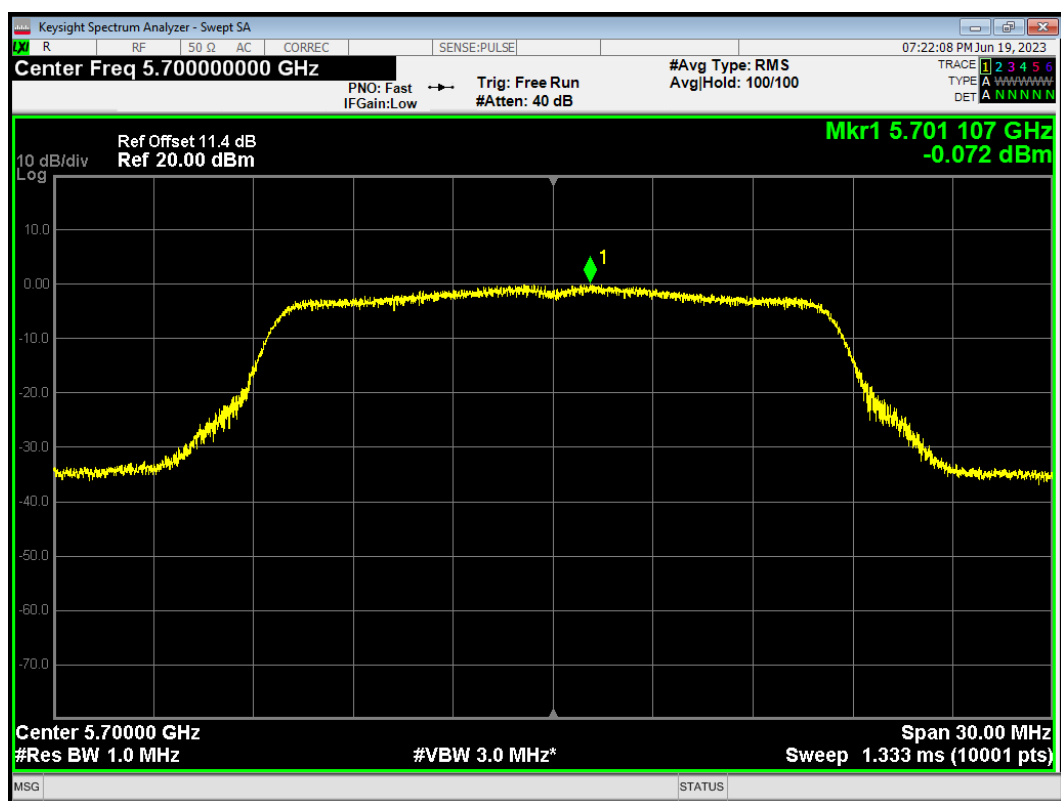


PSD 802.11a 5720MHz

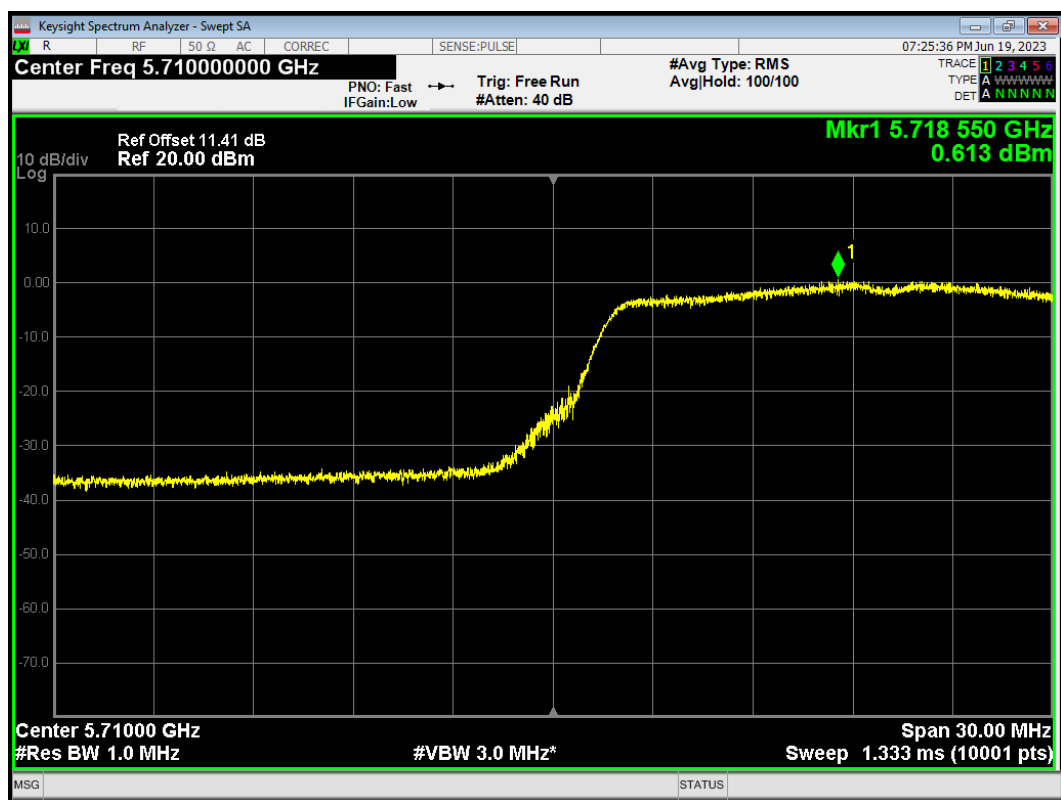


PSD 802.11ac(VHT20) 5500MHz

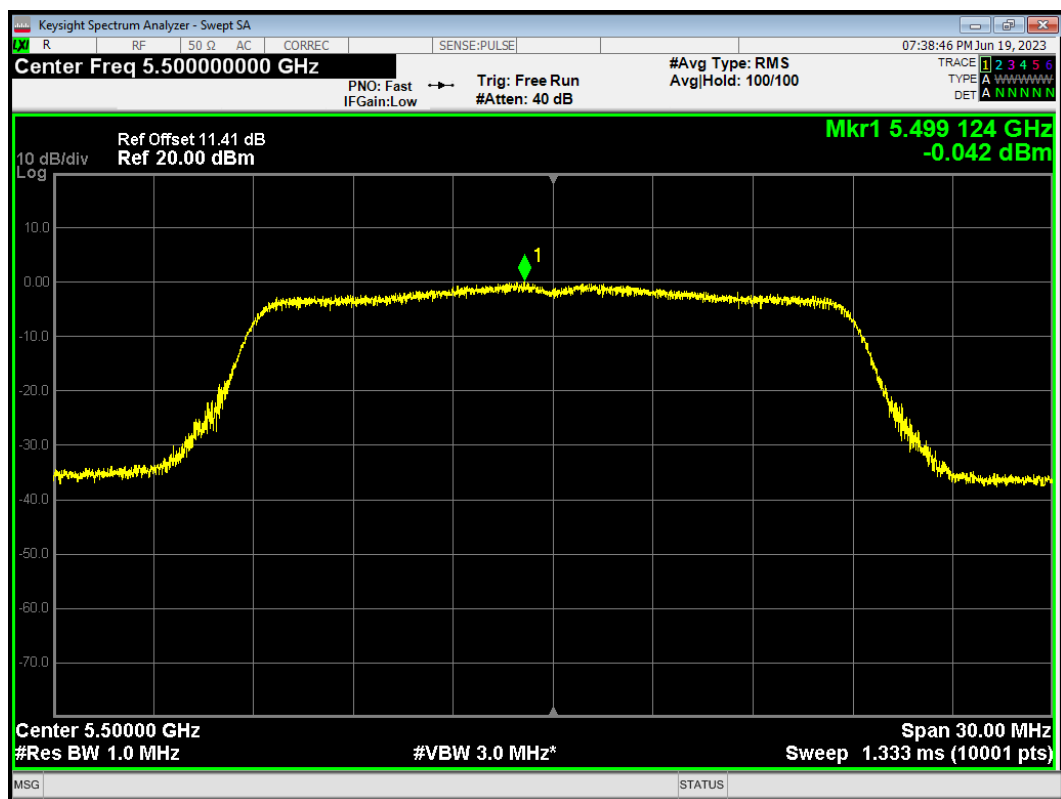


PSD 802.11ac(VHT20) 5600MHz

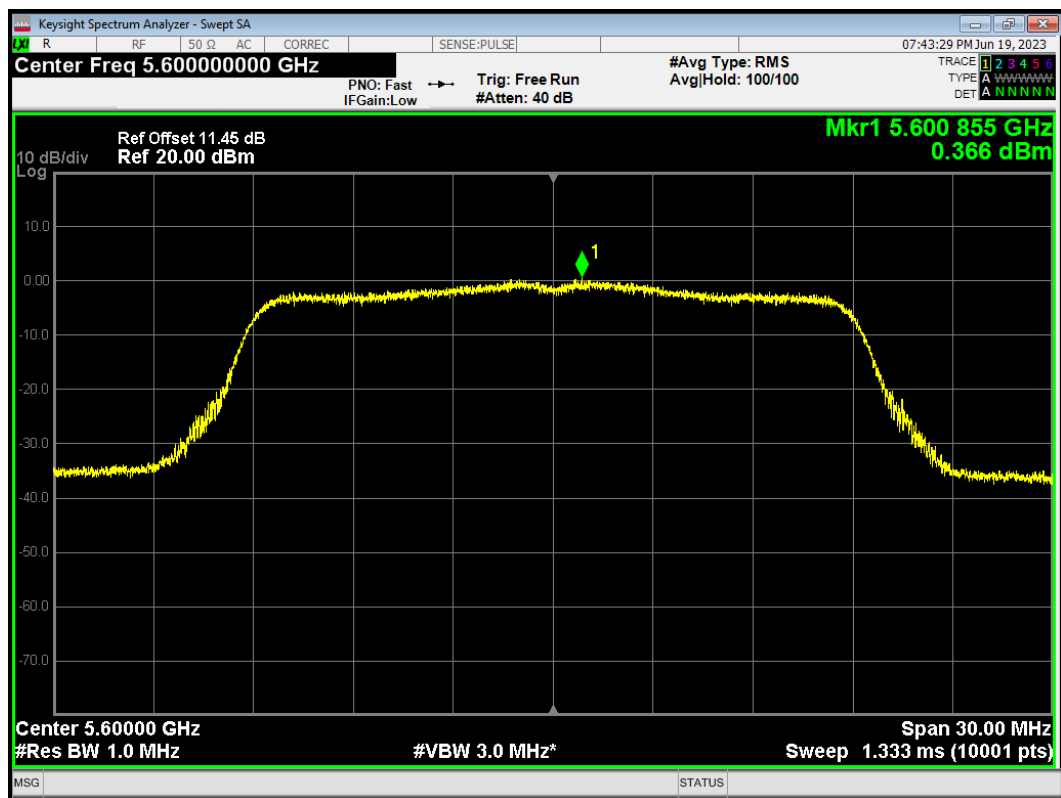


PSD 802.11ac(VHT20) 5700MHz

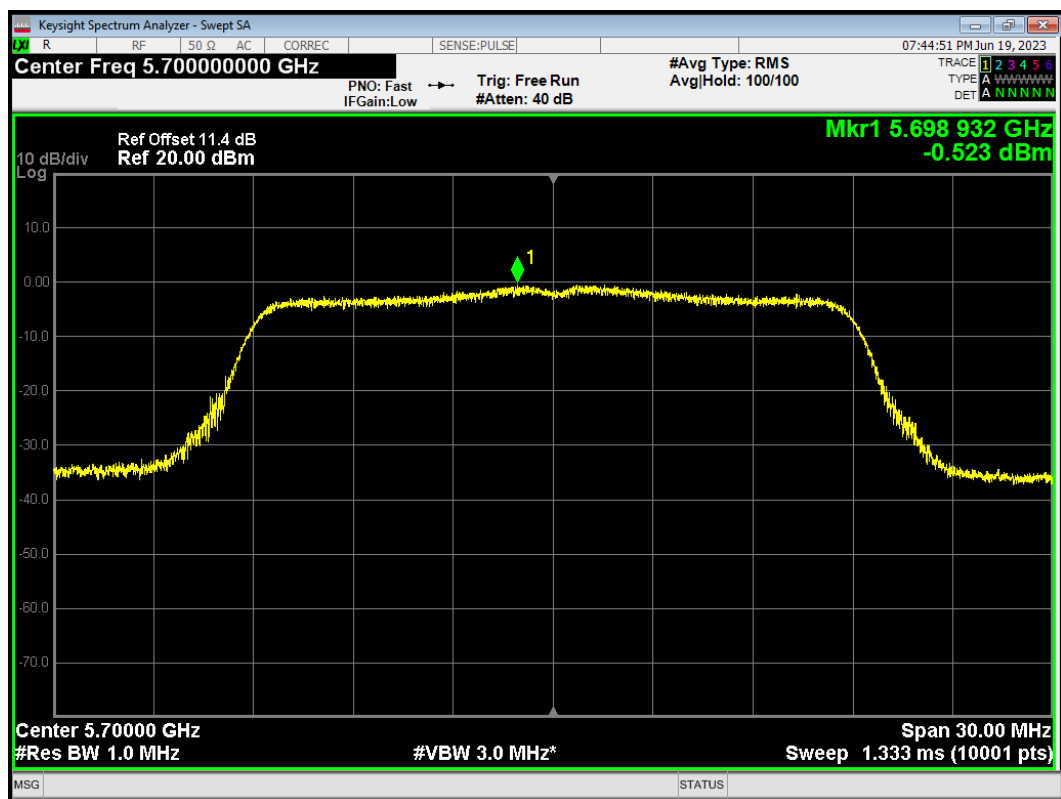


PSD 802.11ac(VHT20) 5720MHz

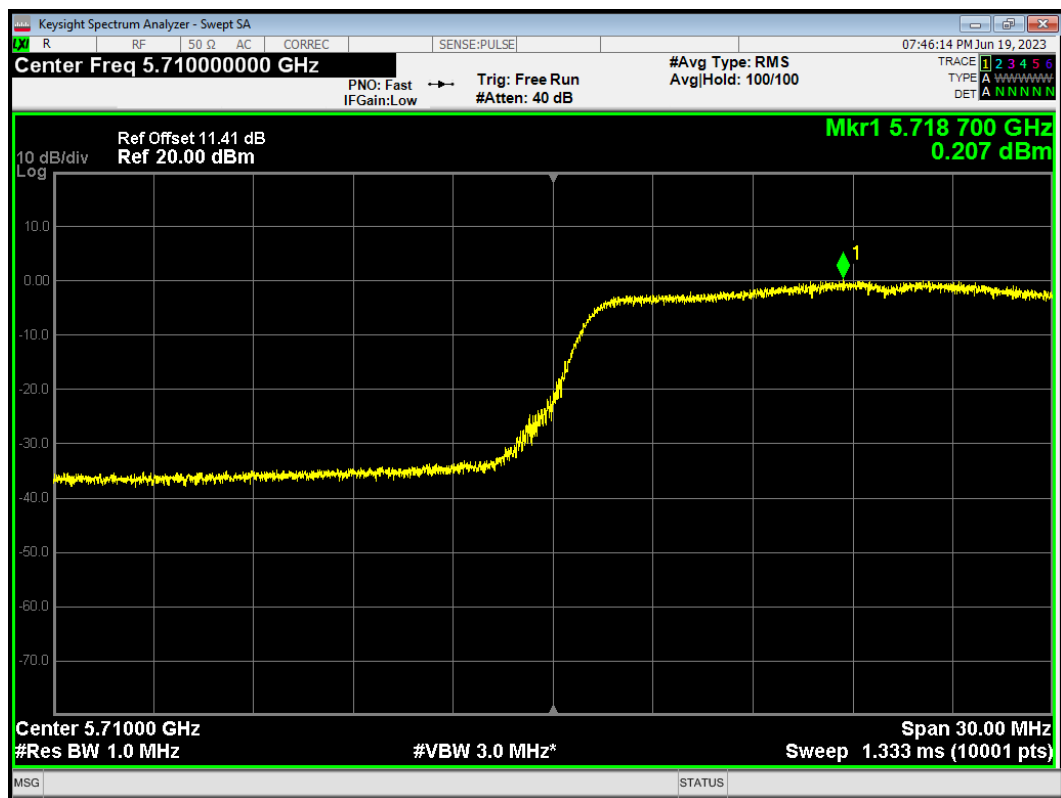


PSD 802.11ac(VHT40) 5510MHz

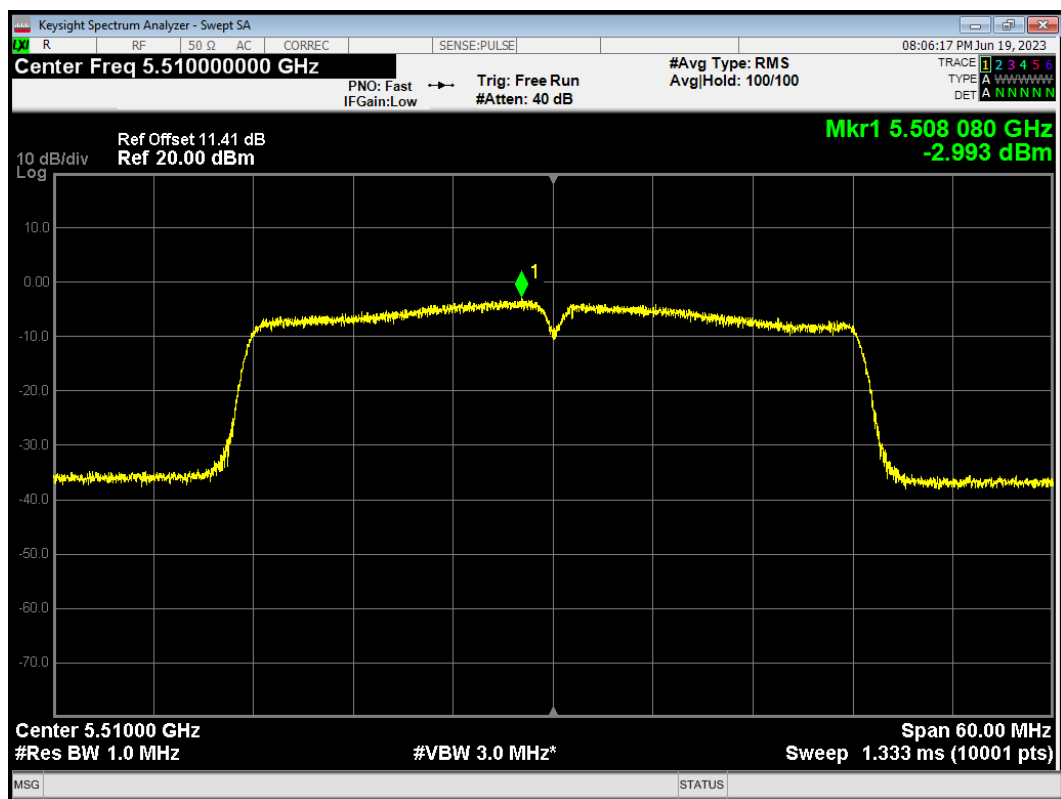


PSD 802.11ac(VHT40) 5590MHz

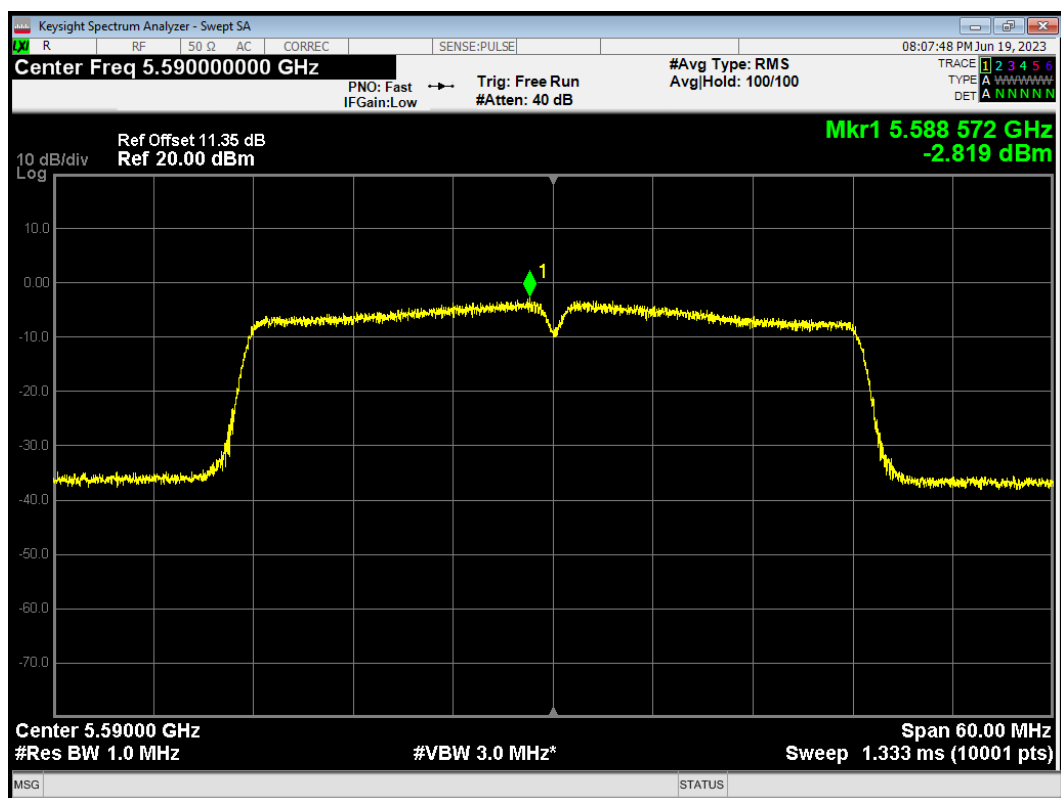


PSD 802.11ac(VHT40) 5670MHz

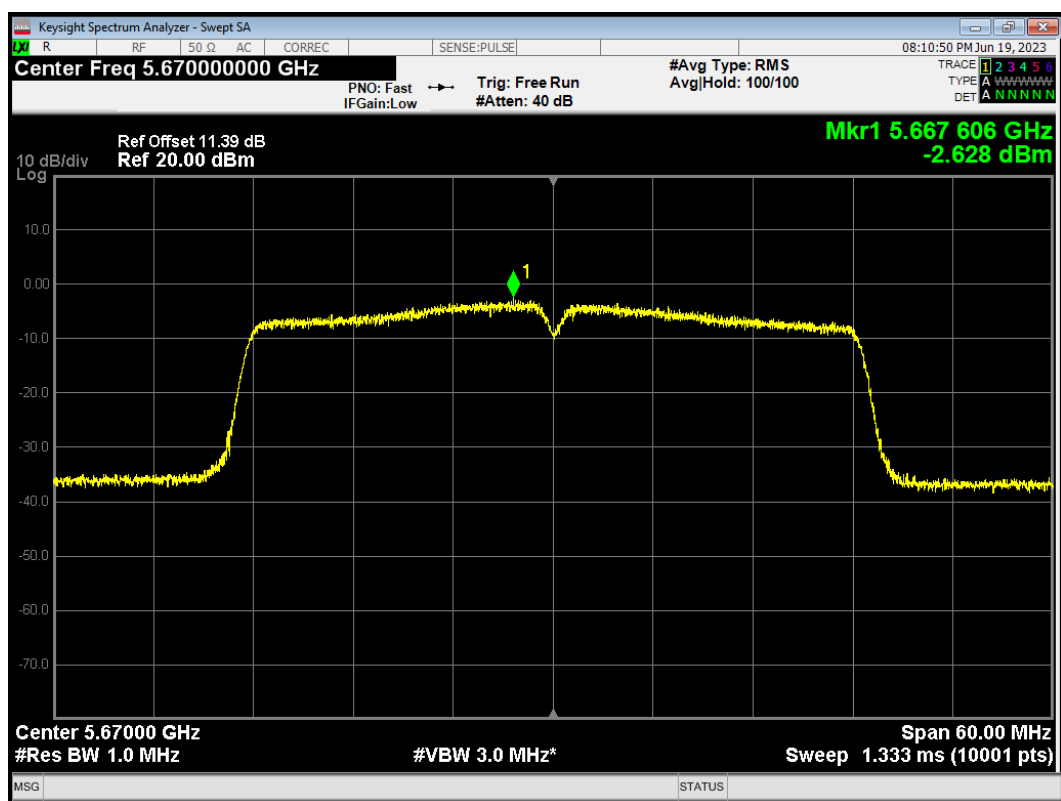


PSD 802.11ac(VHT40) 5710MHz

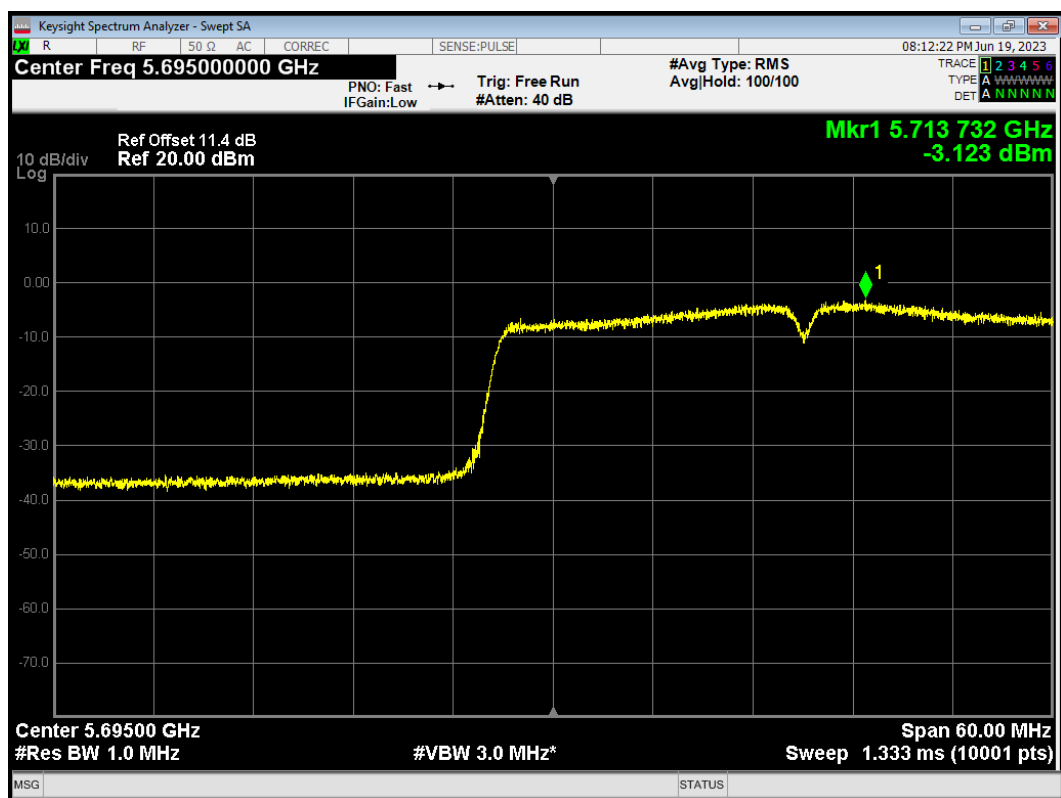


PSD 802.11ac(VHT80) 5530MHz

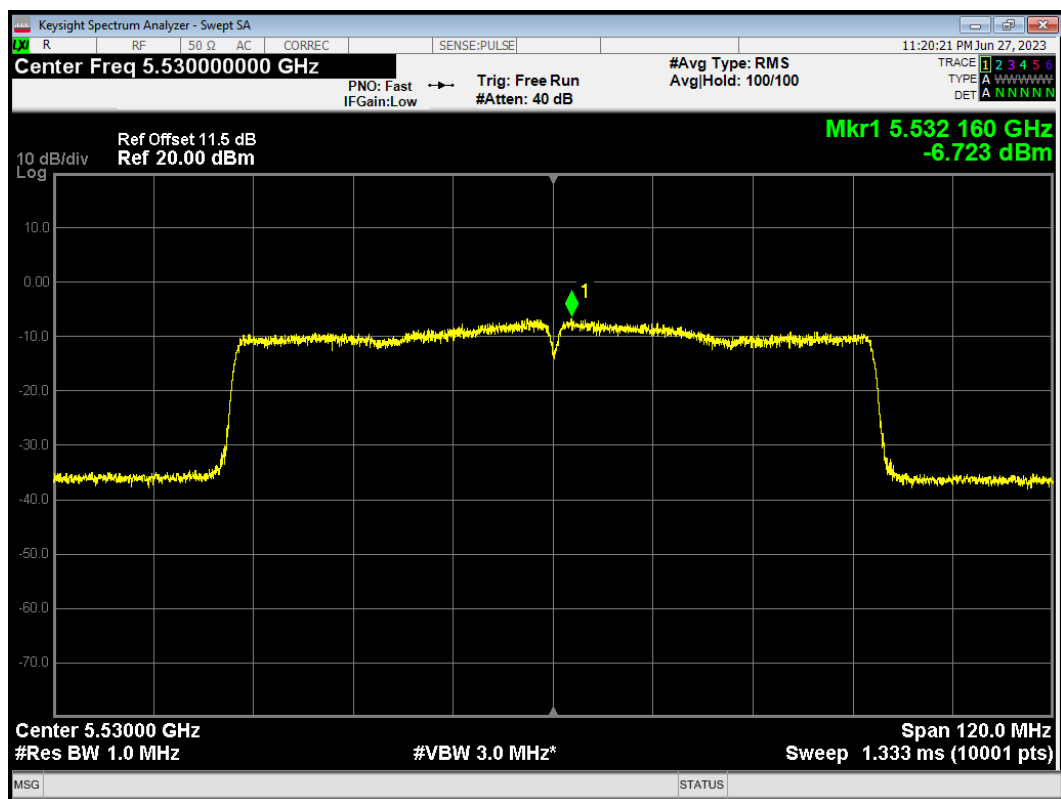


PSD 802.11ac(VHT80) 5610MHz

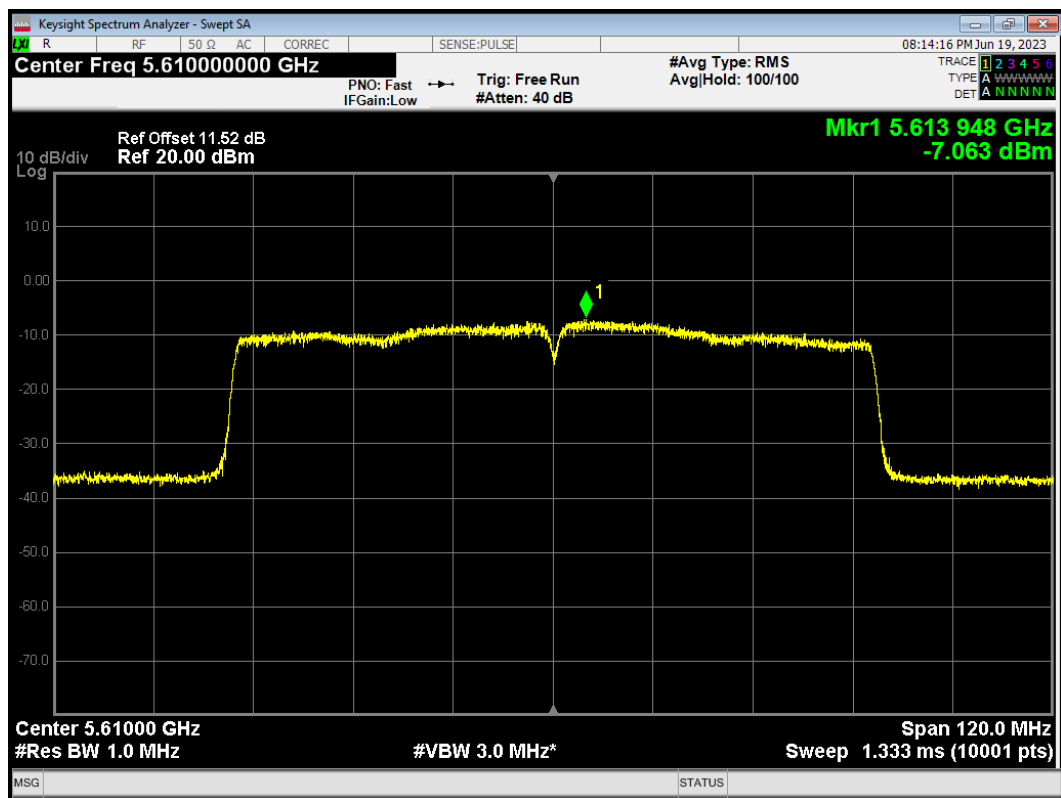


PSD 802.11ac(VHT80) 5690MHz

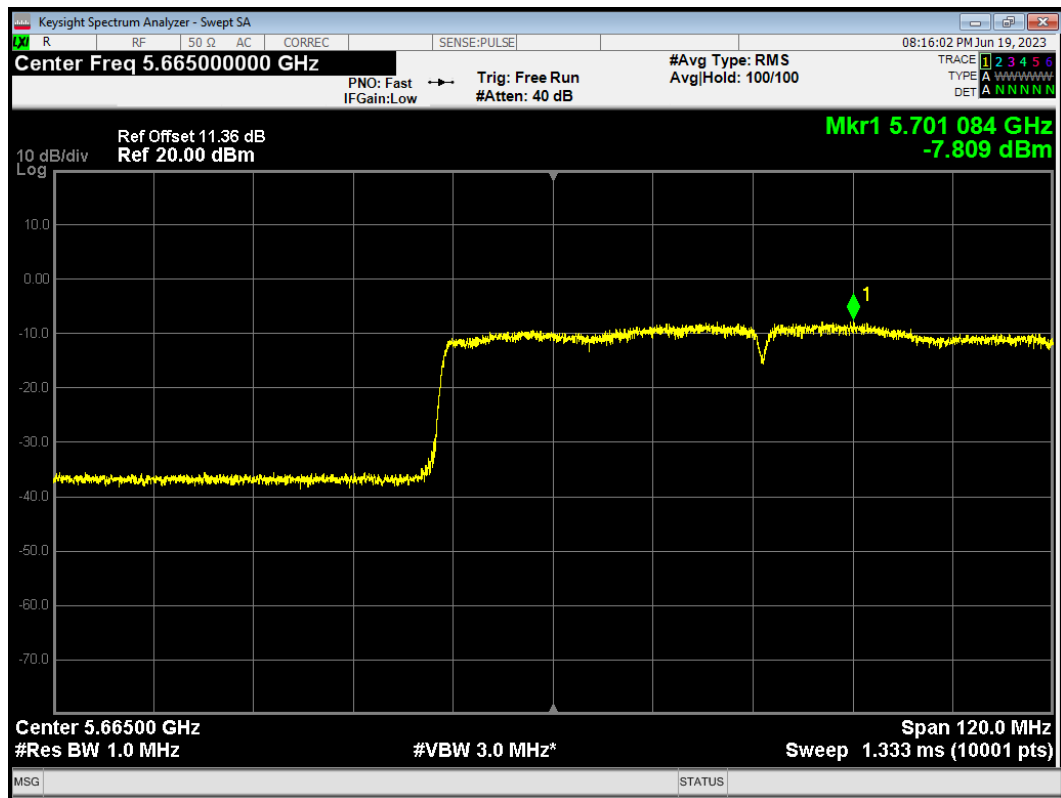


PSD 802.11n(HT20) 5500MHz

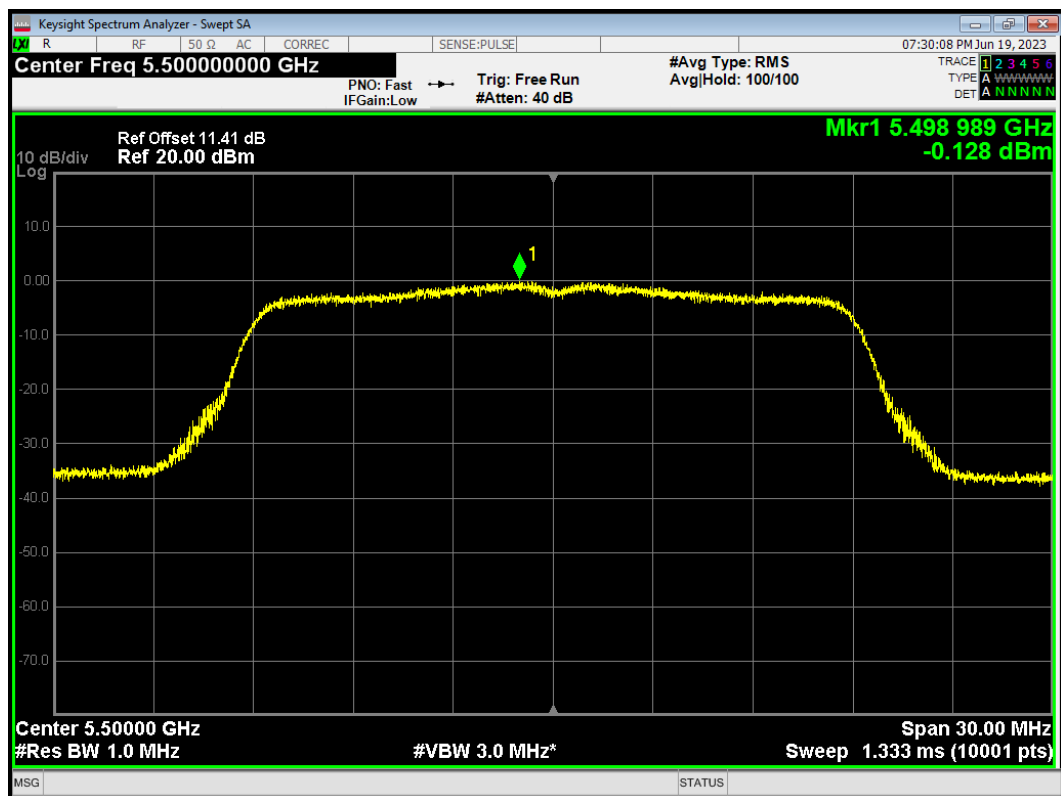


PSD 802.11n(HT20) 5600MHz

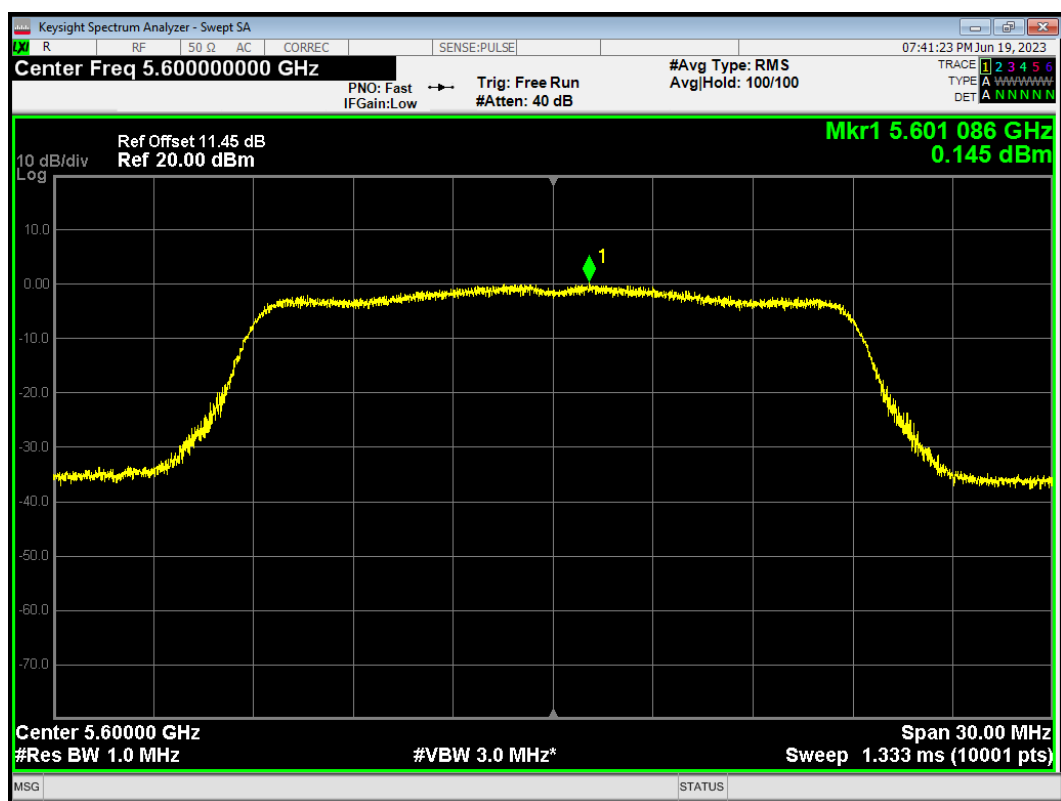


PSD 802.11n(HT20) 5700MHz

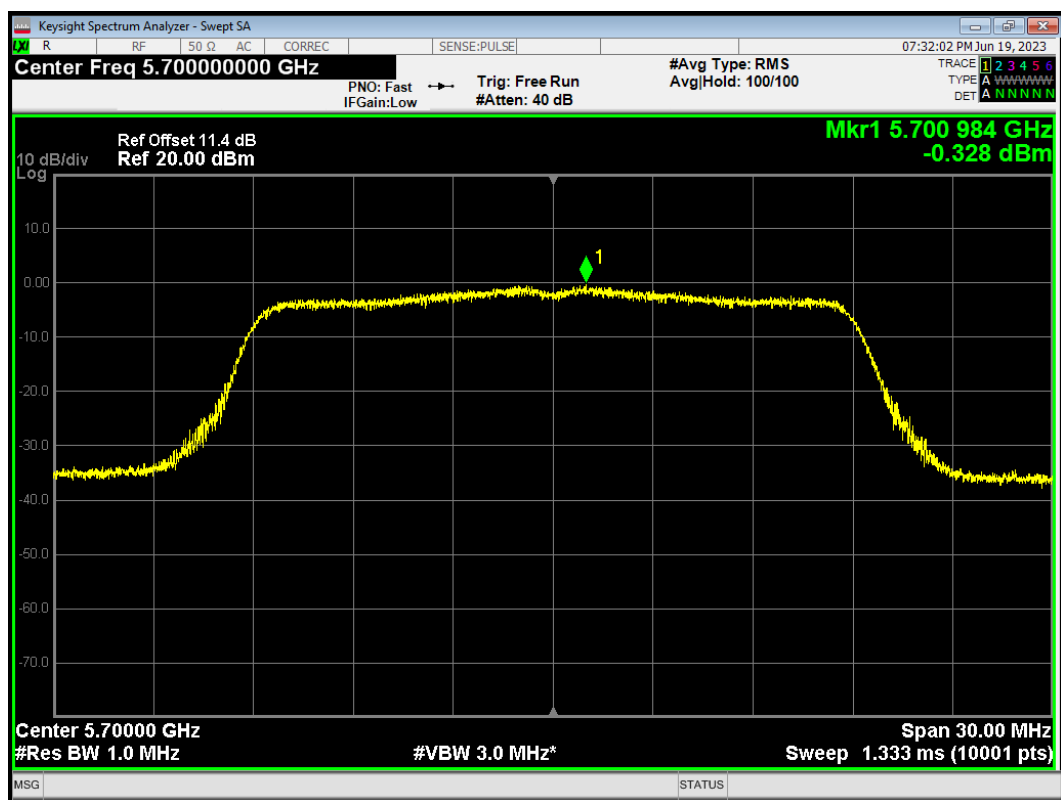


PSD 802.11n(HT20) 5720MHz

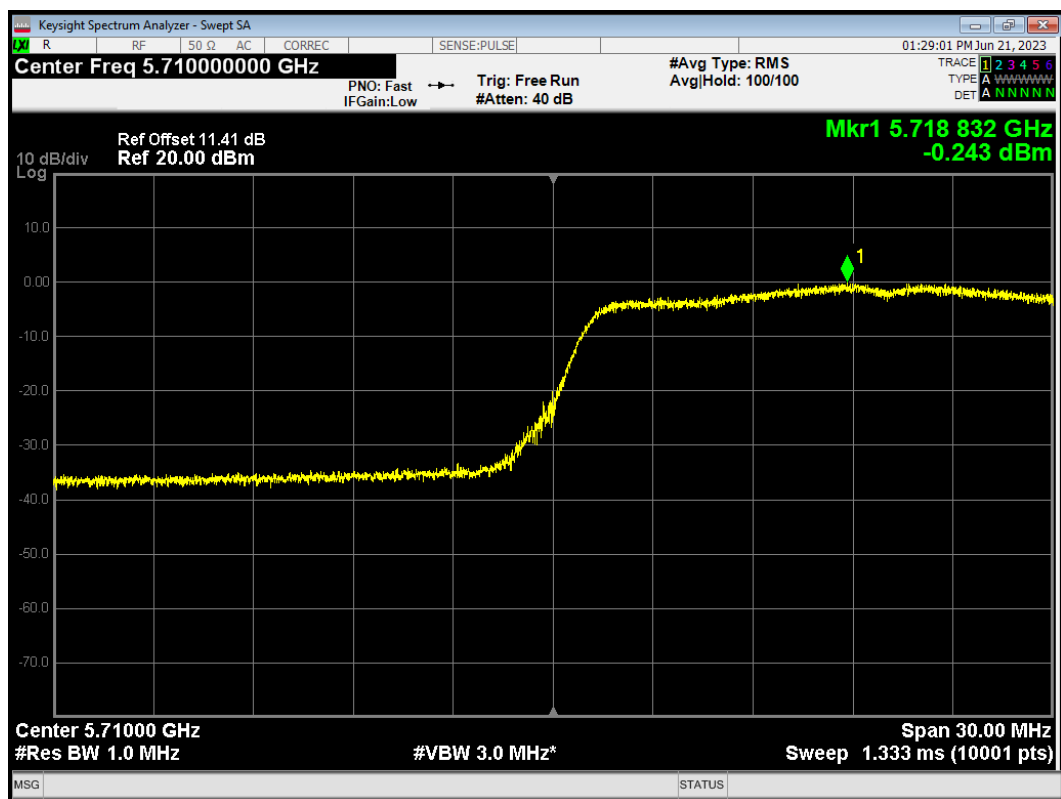


PSD 802.11n(HT40) 5510MHz

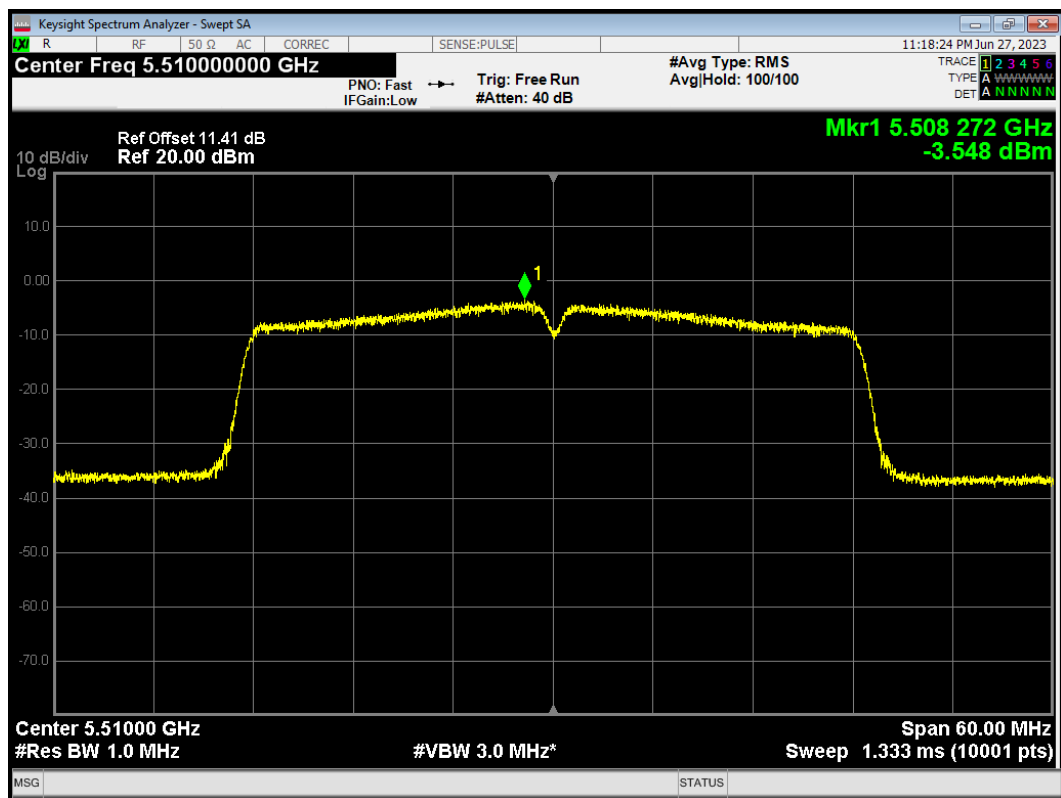


PSD 802.11n(HT40) 5590MHz

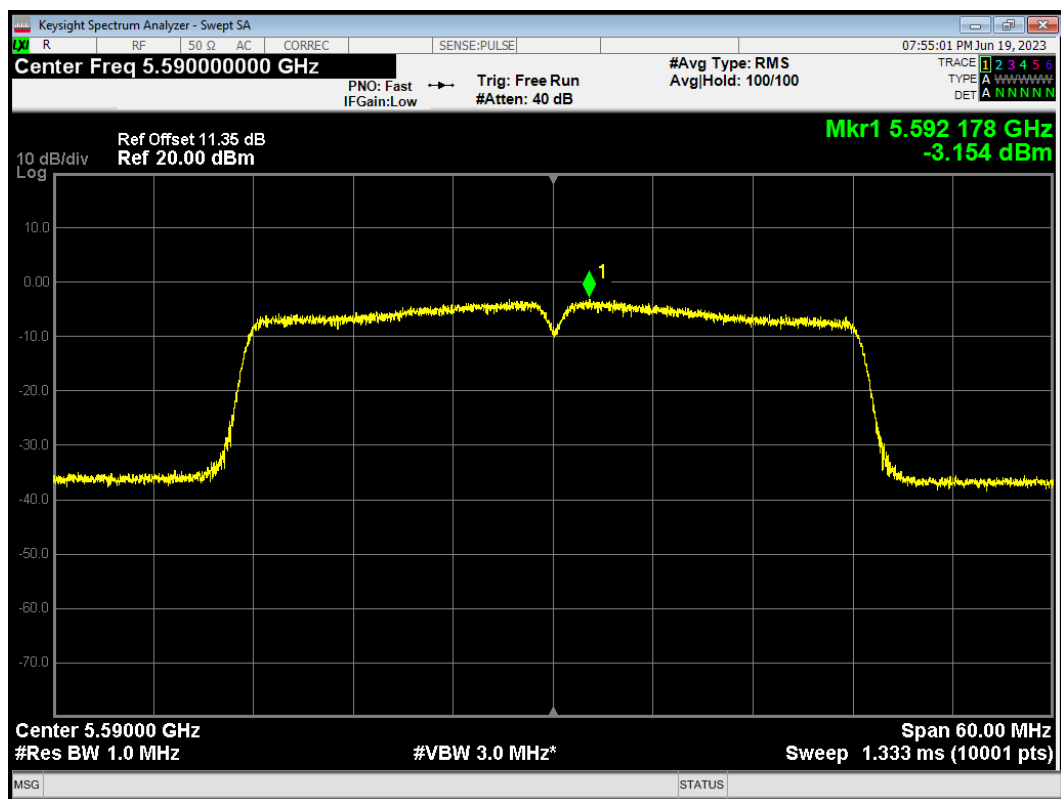

PSD 802.11n(HT40) 5670MHz

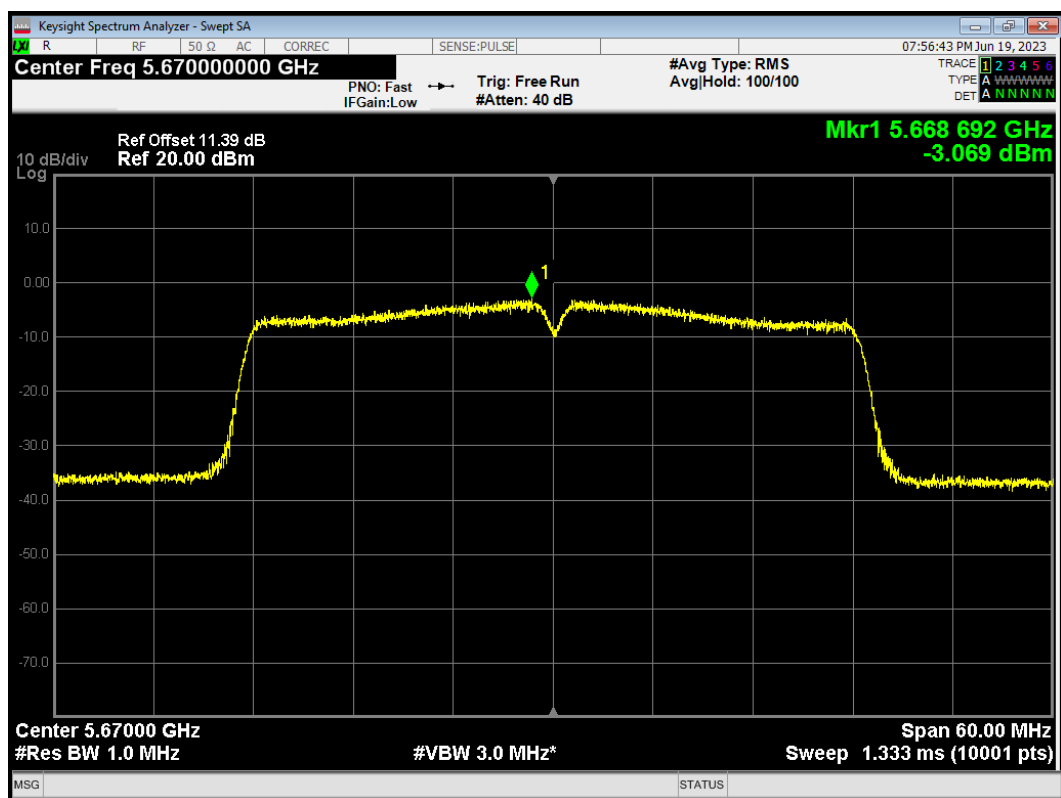


PSD 802.11n(HT40) 5710MHz

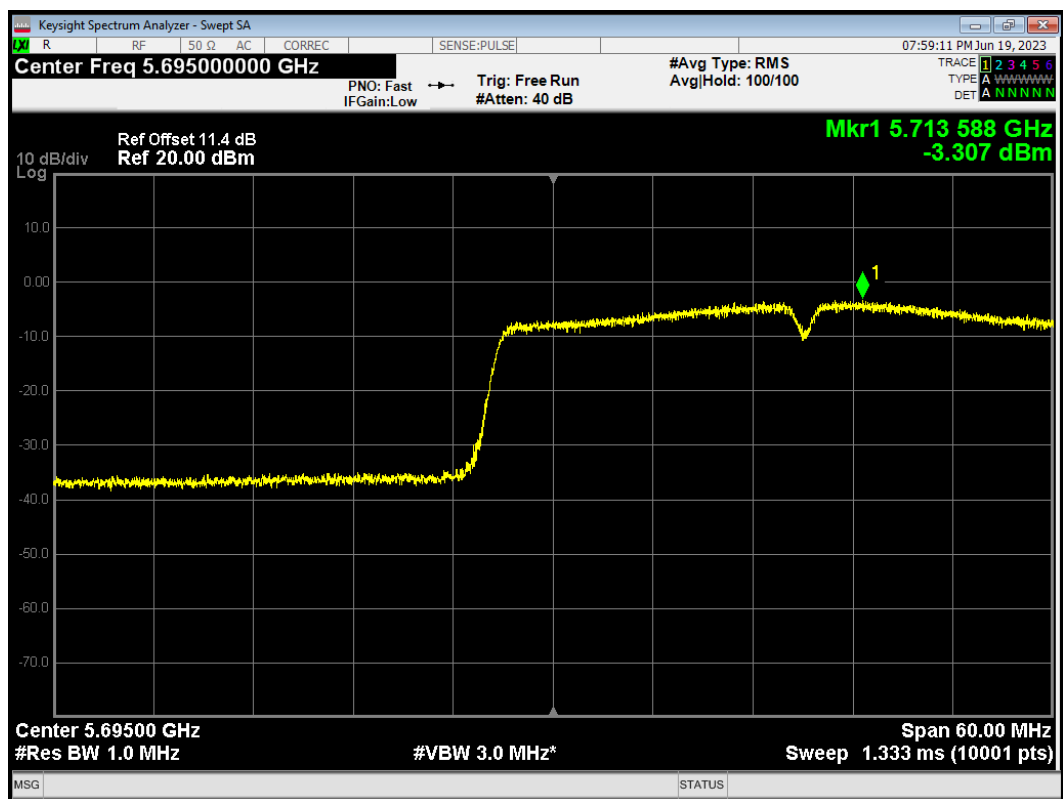


U-NII-3


PSD 802.11a 5720MHz

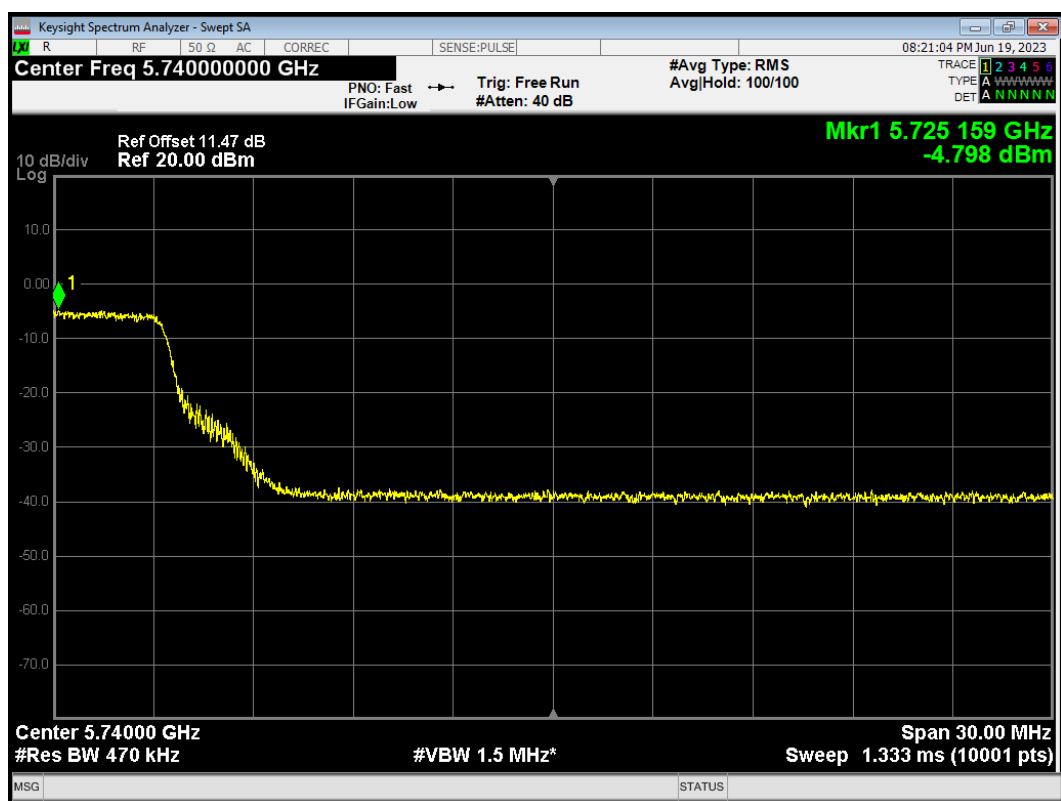


PSD 802.11a 5745MHz

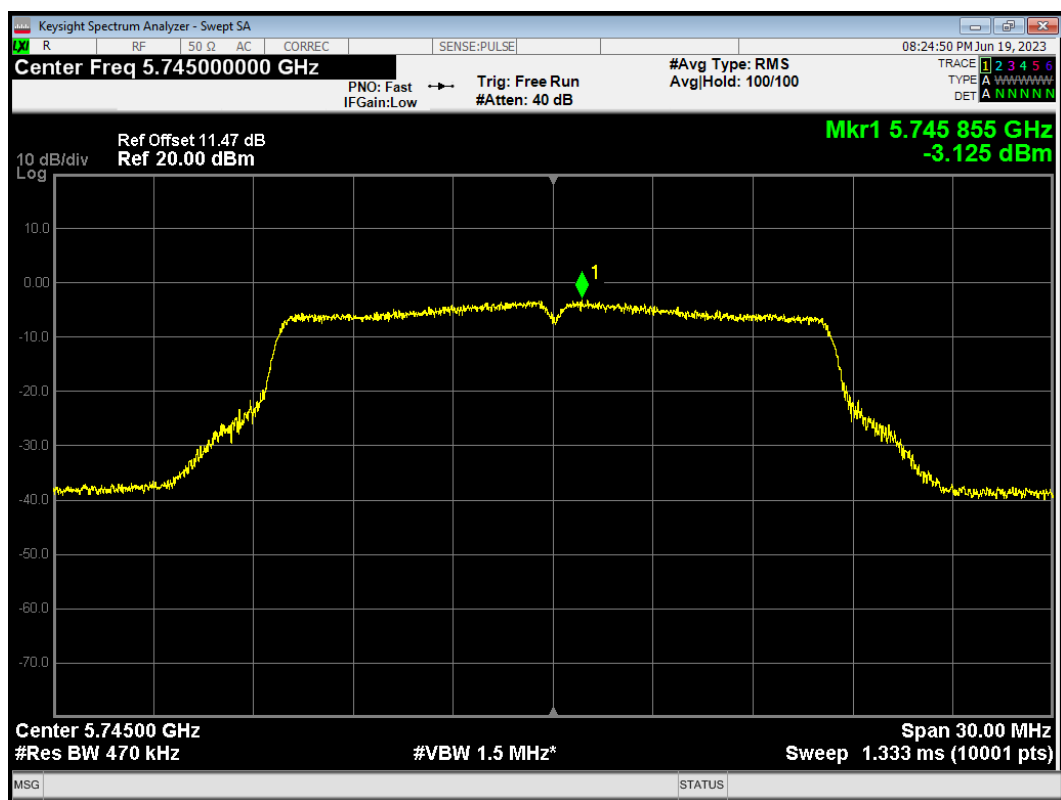


PSD 802.11a 5785MHz

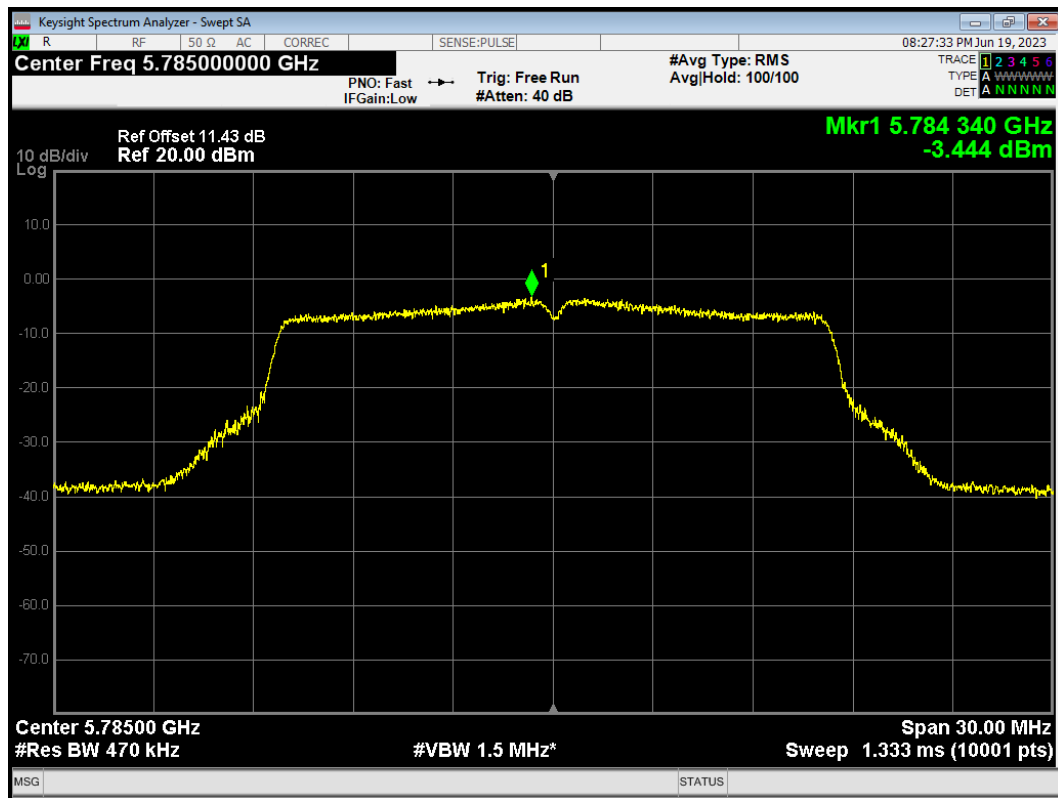


PSD 802.11a 5825MHz

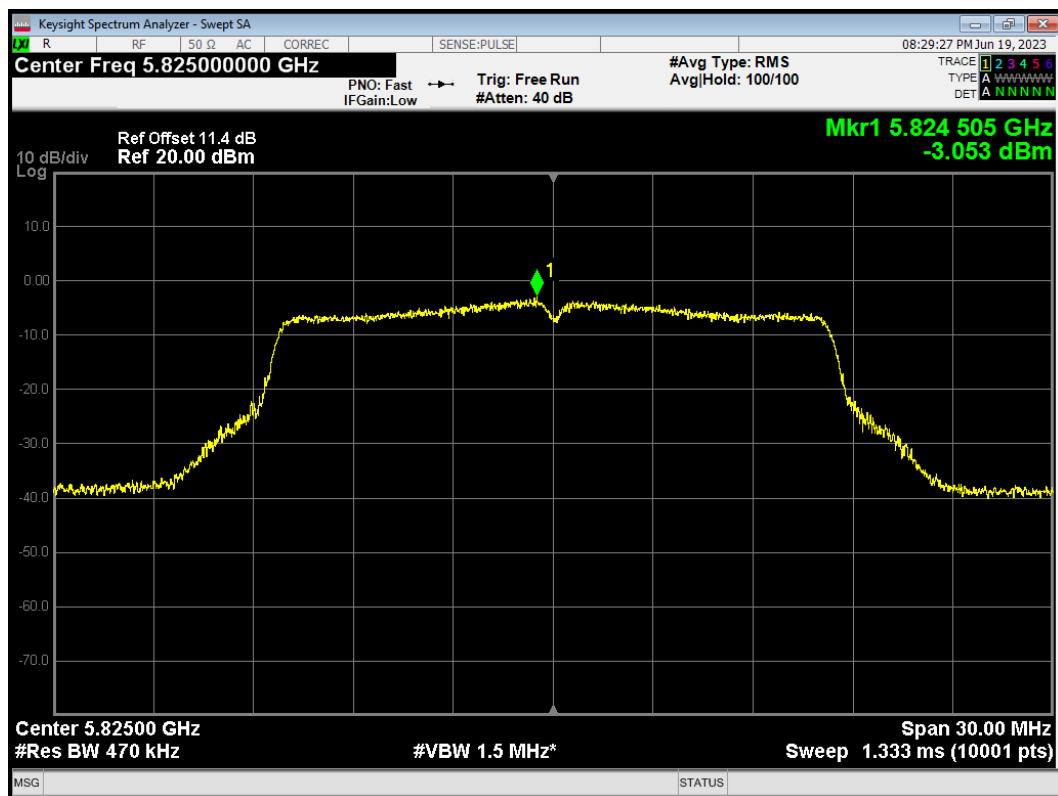


PSD 802.11ac(VHT20) 5720MHz

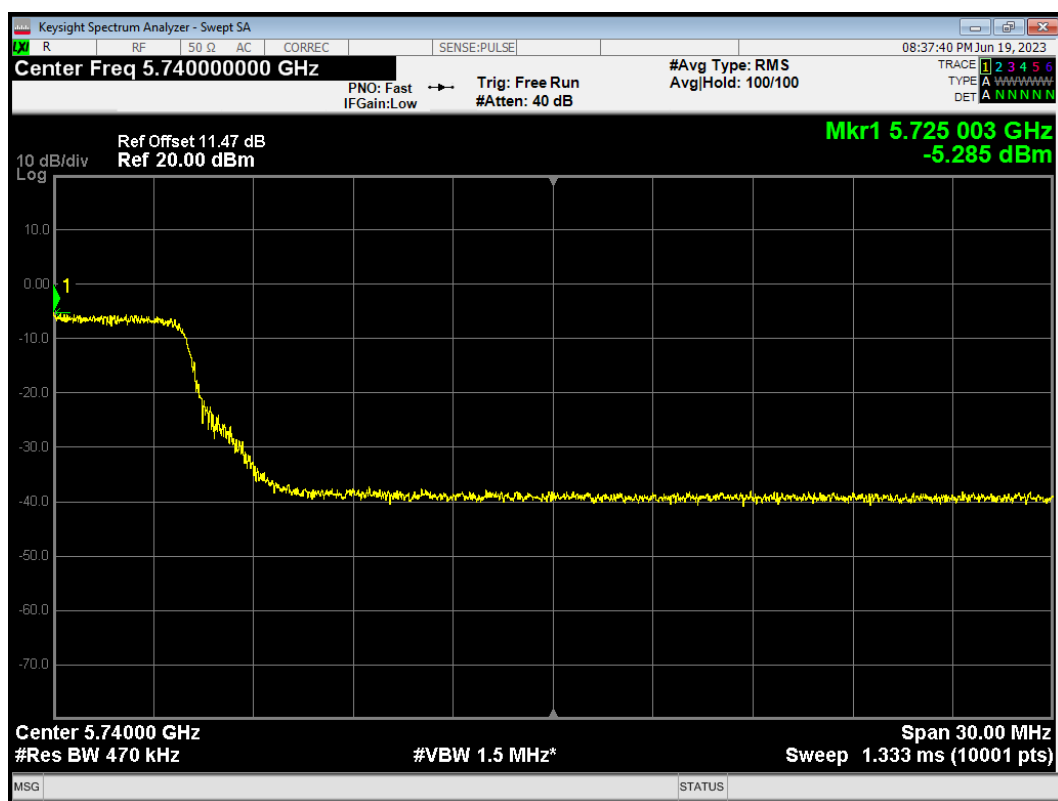


PSD 802.11ac(VHT20) 5745MHz

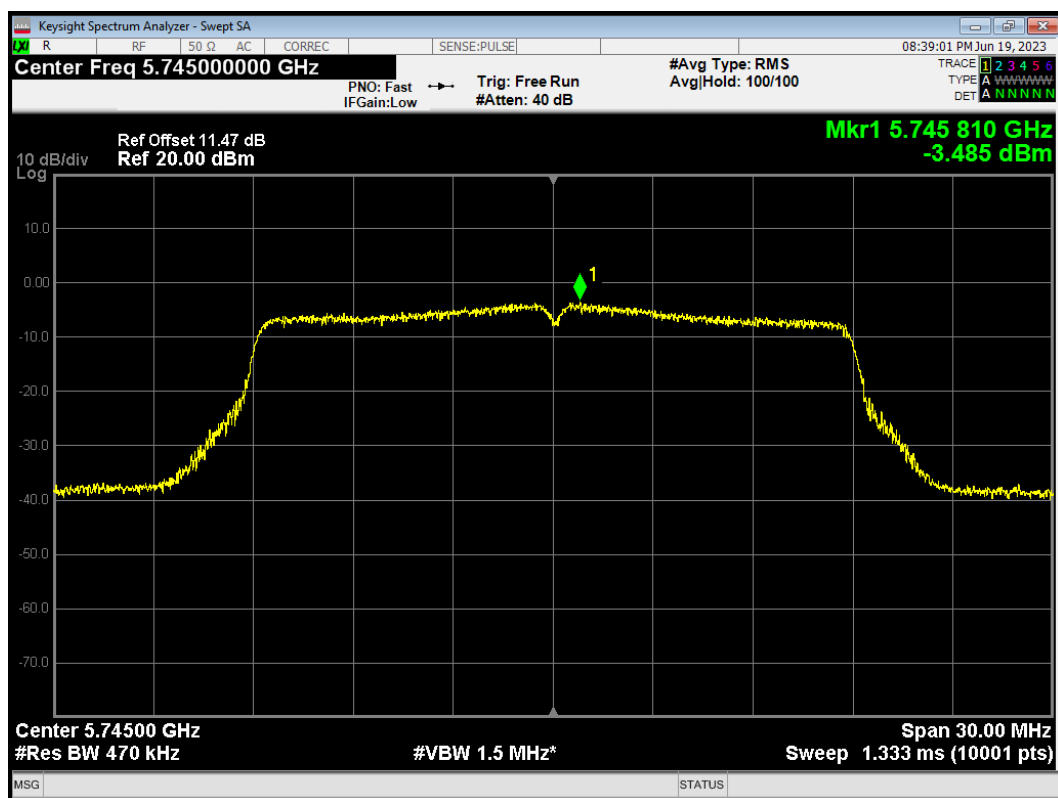


PSD 802.11ac(VHT20) 5785MHz

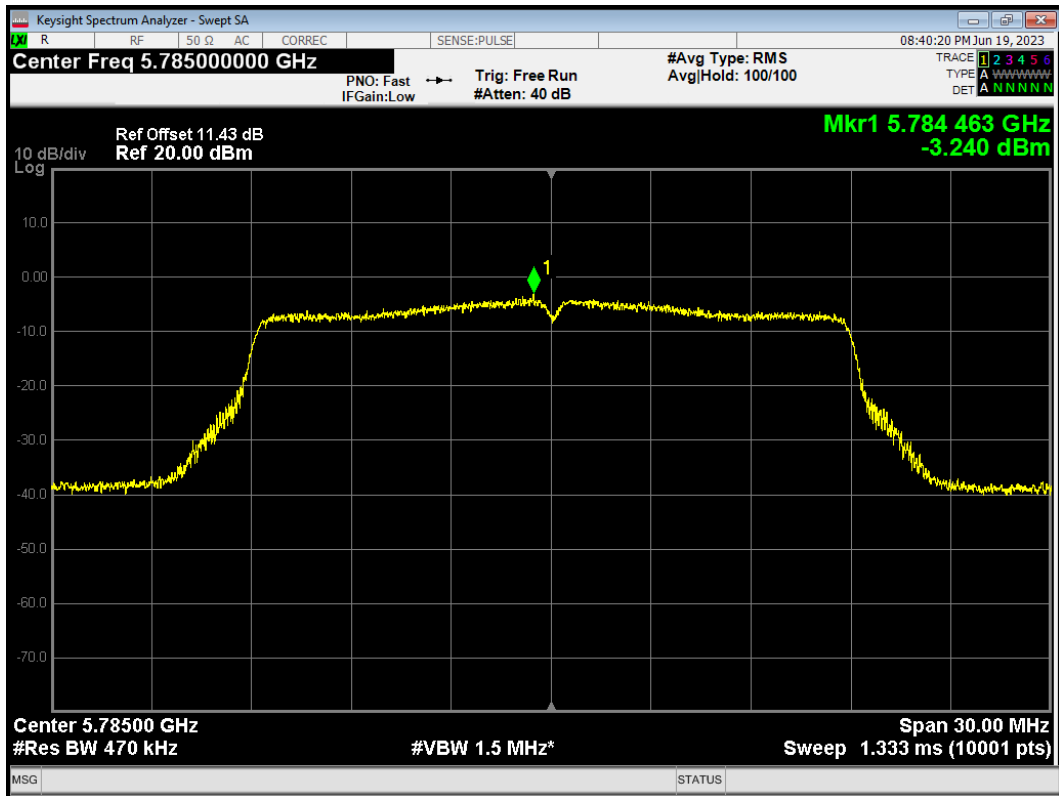


PSD 802.11ac(VHT20) 5825MHz

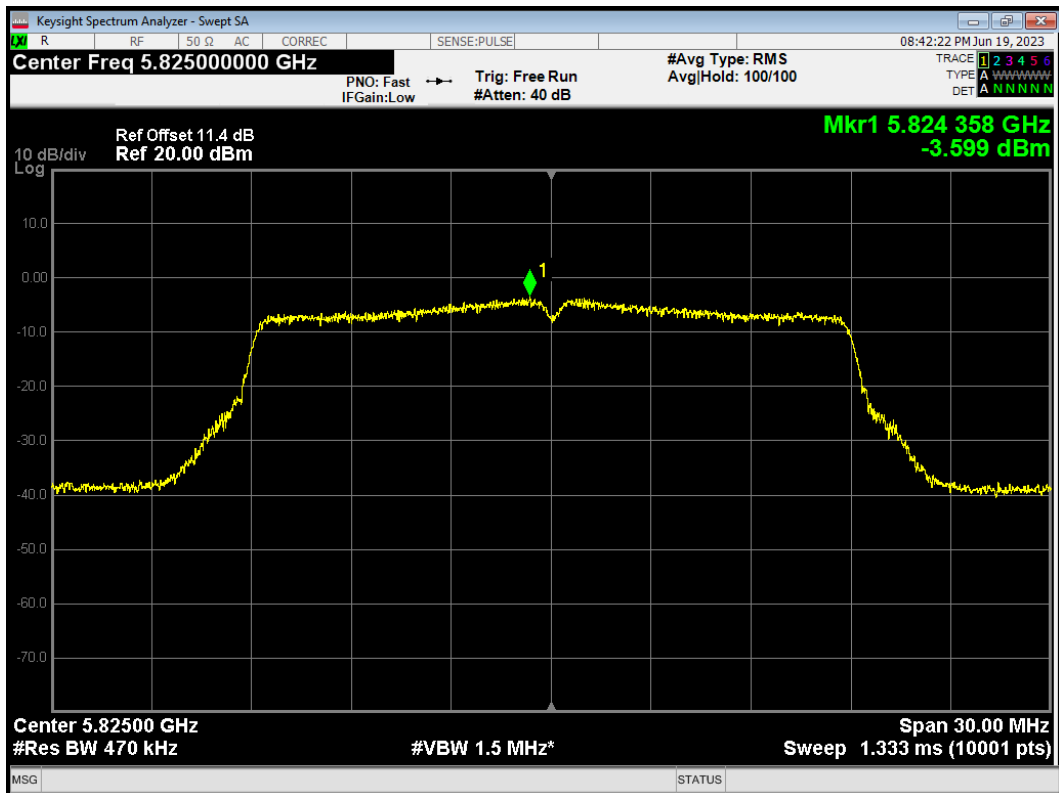


PSD 802.11ac(VHT40) 5710MHz

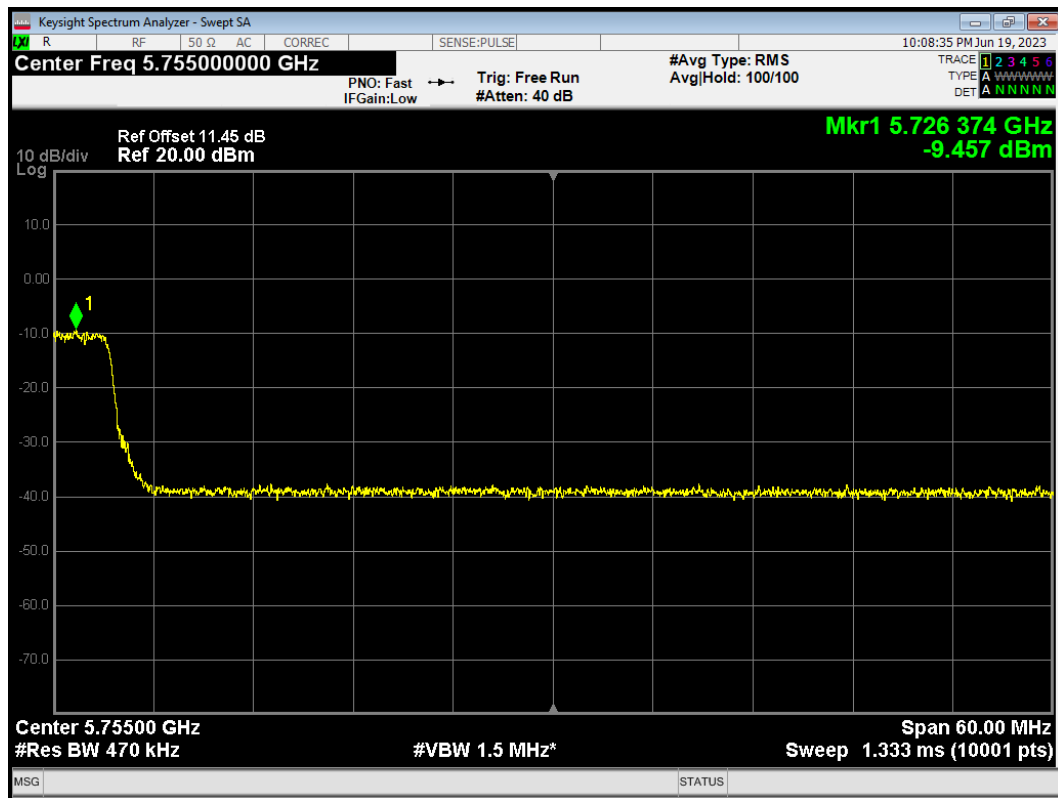


PSD 802.11ac(VHT40) 5755MHz

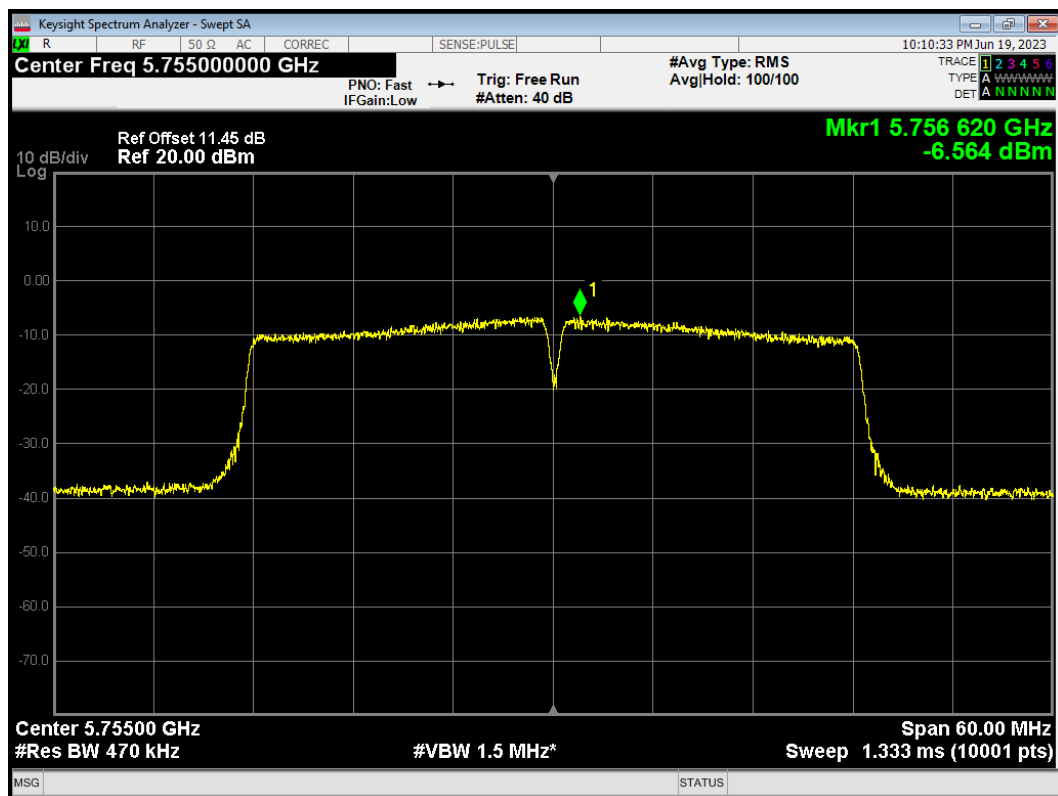


PSD 802.11ac(VHT40) 5795MHz

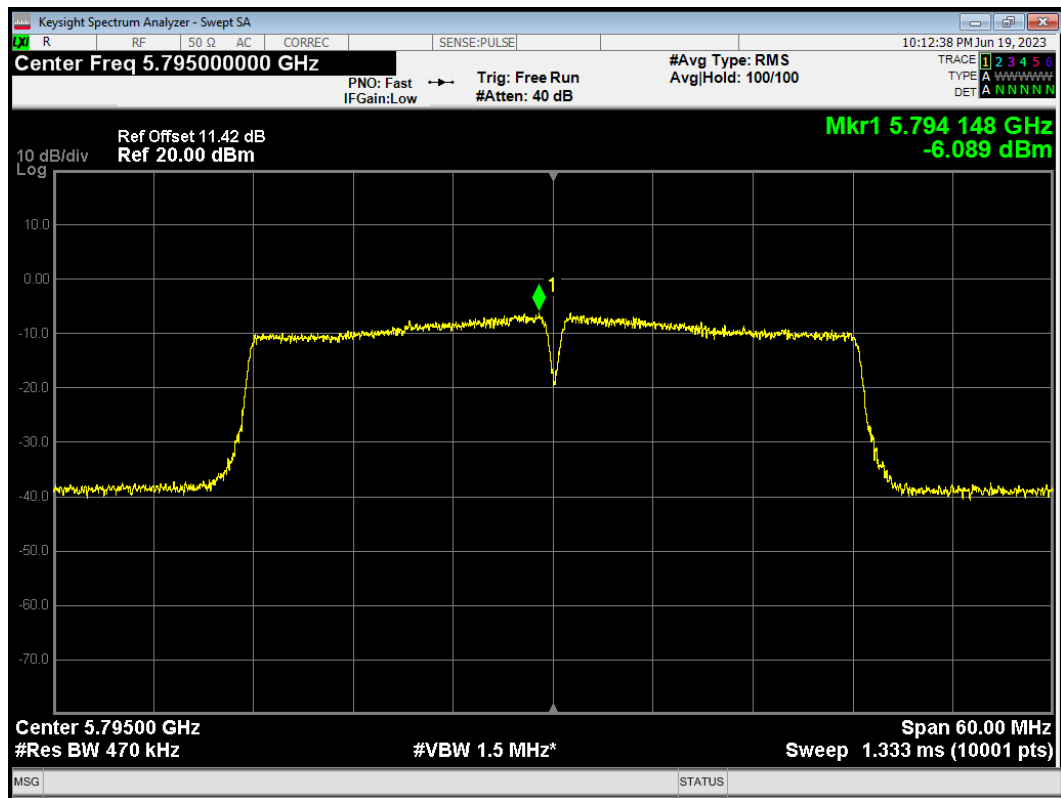


PSD 802.11ac(VHT80) 5690MHz

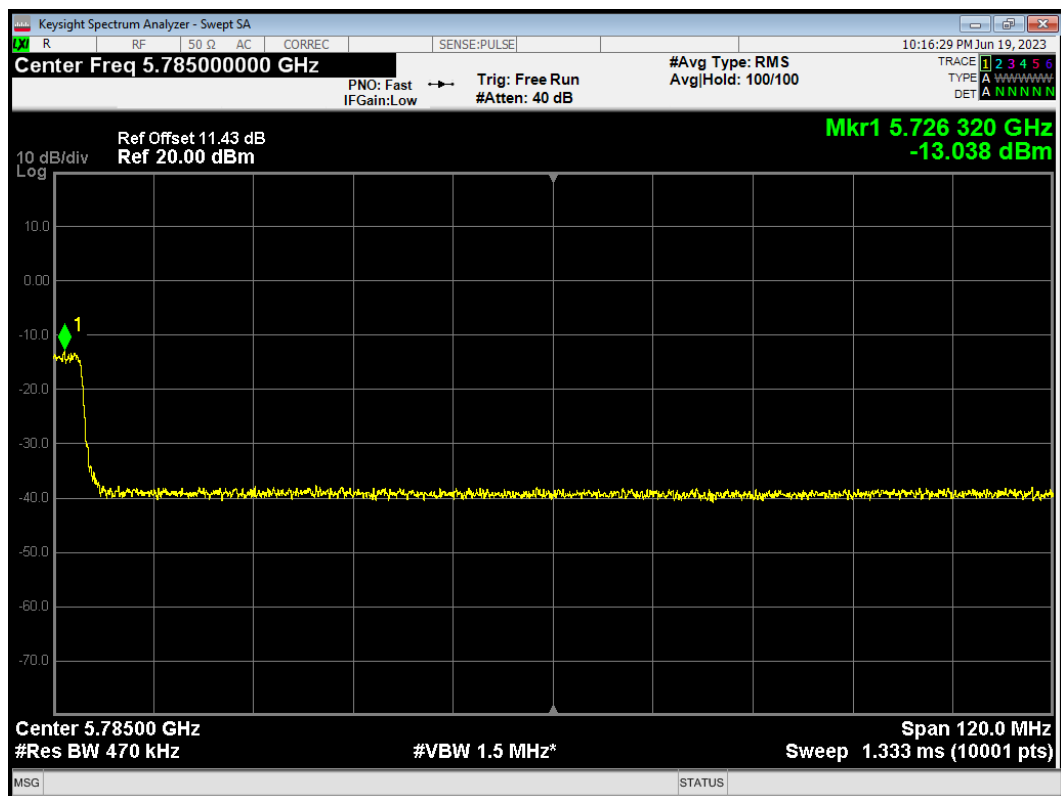


PSD 802.11ac(VHT80) 5775MHz

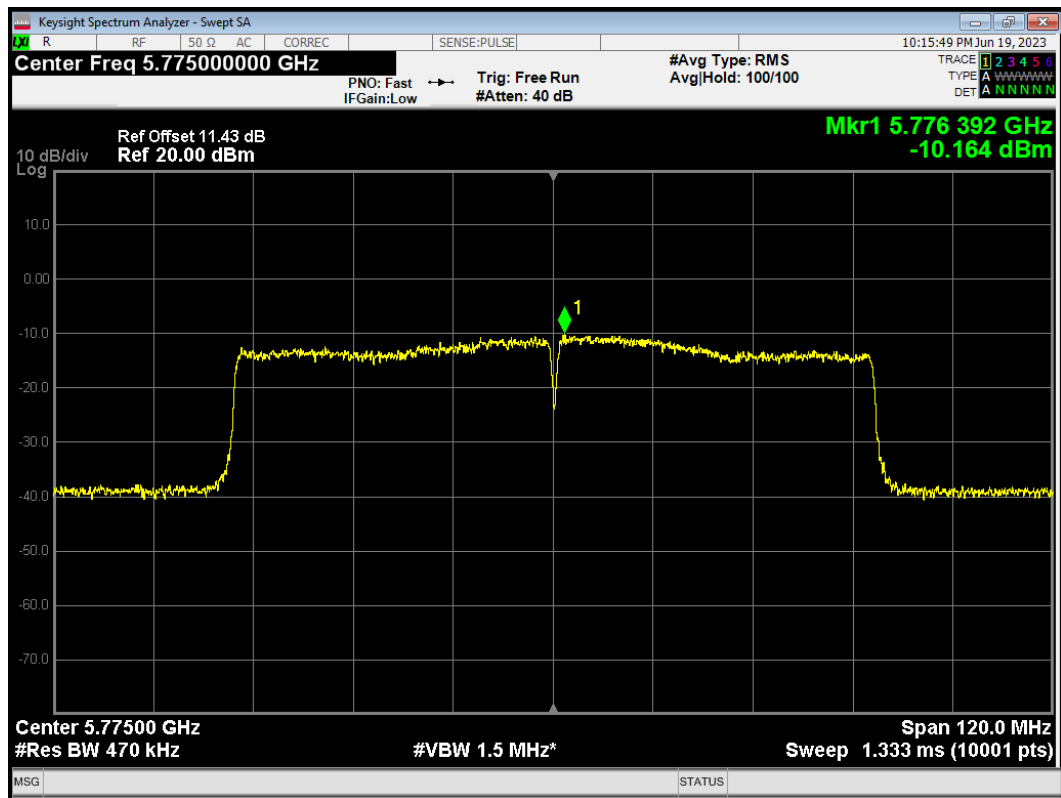


PSD 802.11n(HT20) 5720MHz

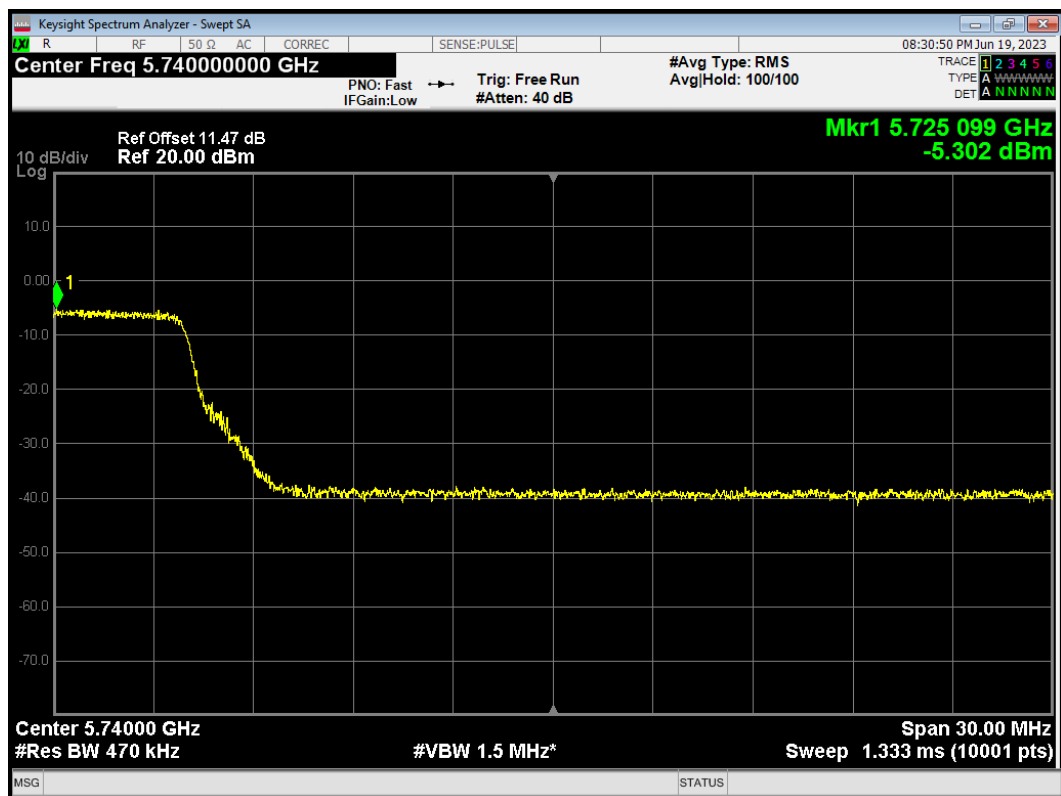


PSD 802.11n(HT20) 5745MHz

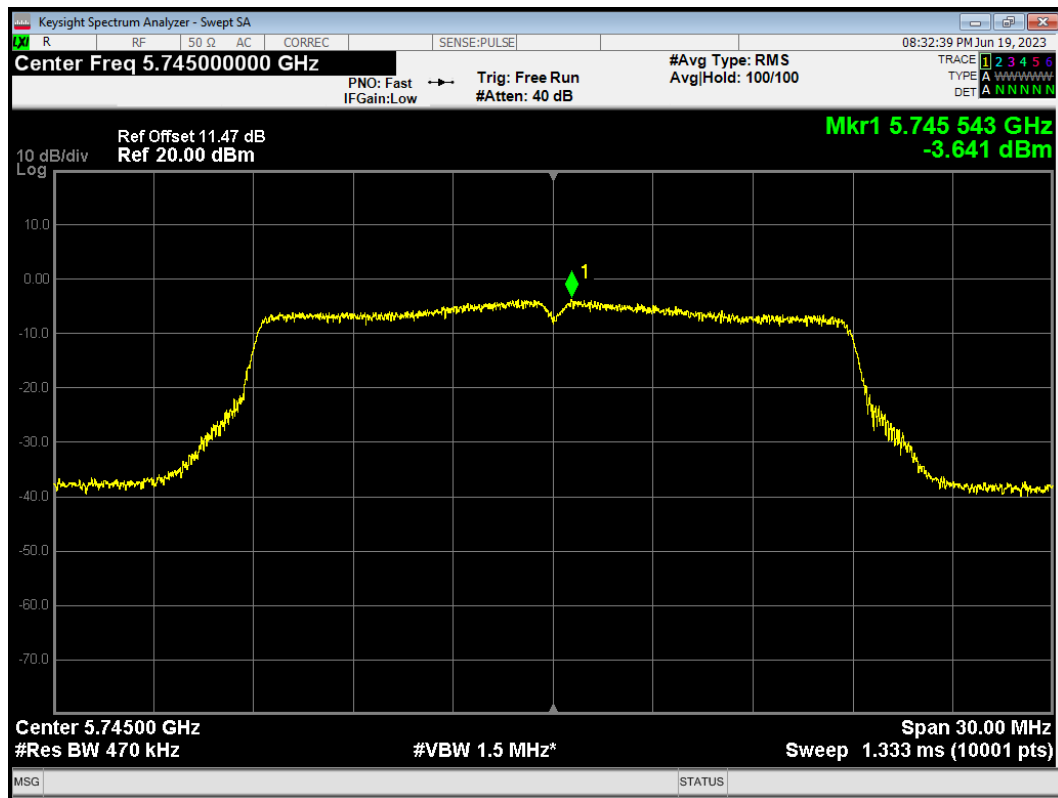


PSD 802.11n(HT20) 5785MHz

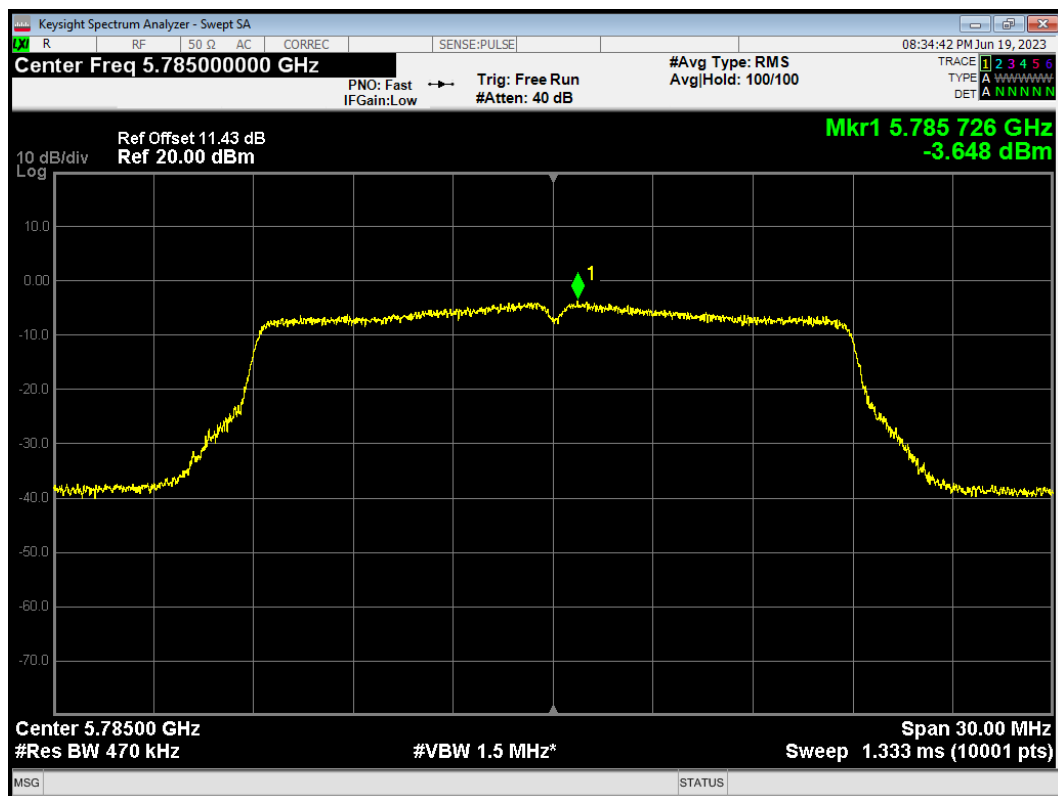


PSD 802.11n(HT20) 5825MHz

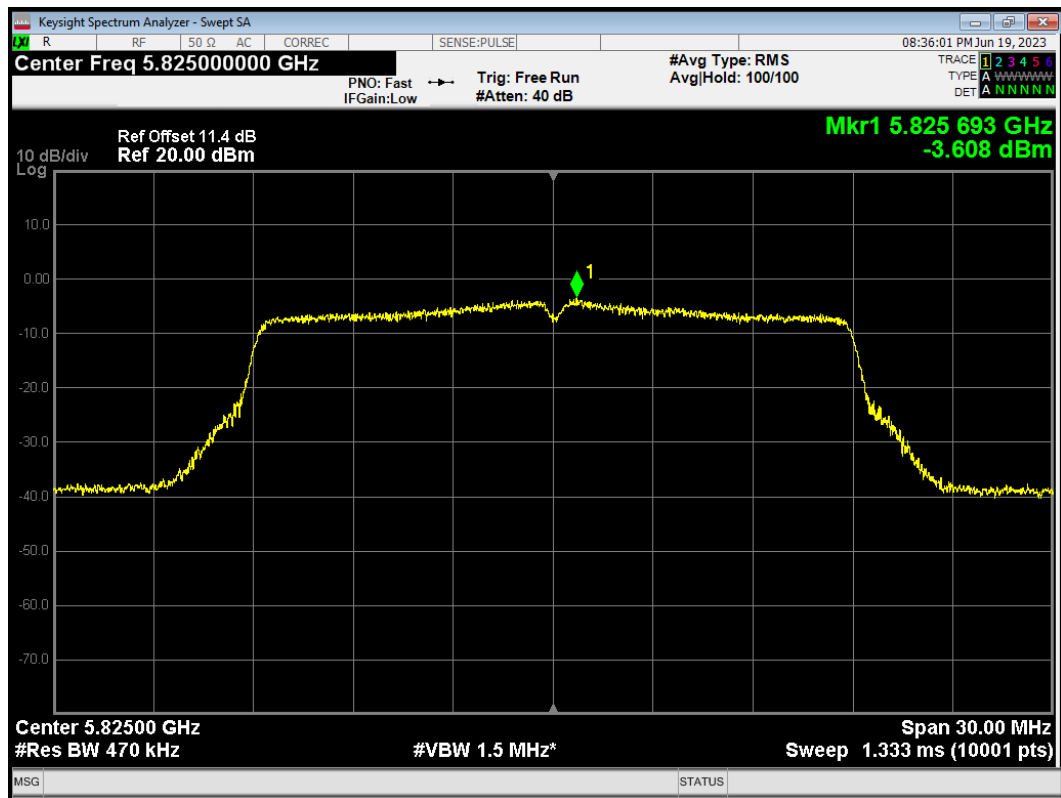


PSD 802.11n(HT40) 5710MHz

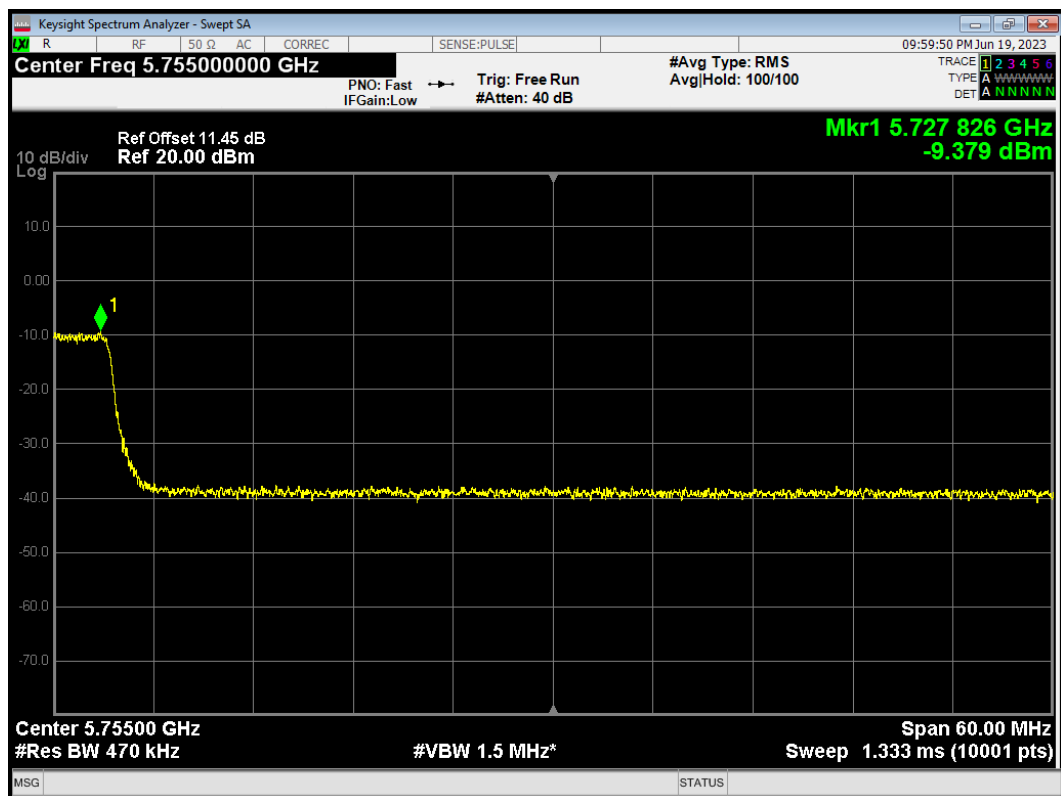

PSD 802.11n(HT40) 5755MHz

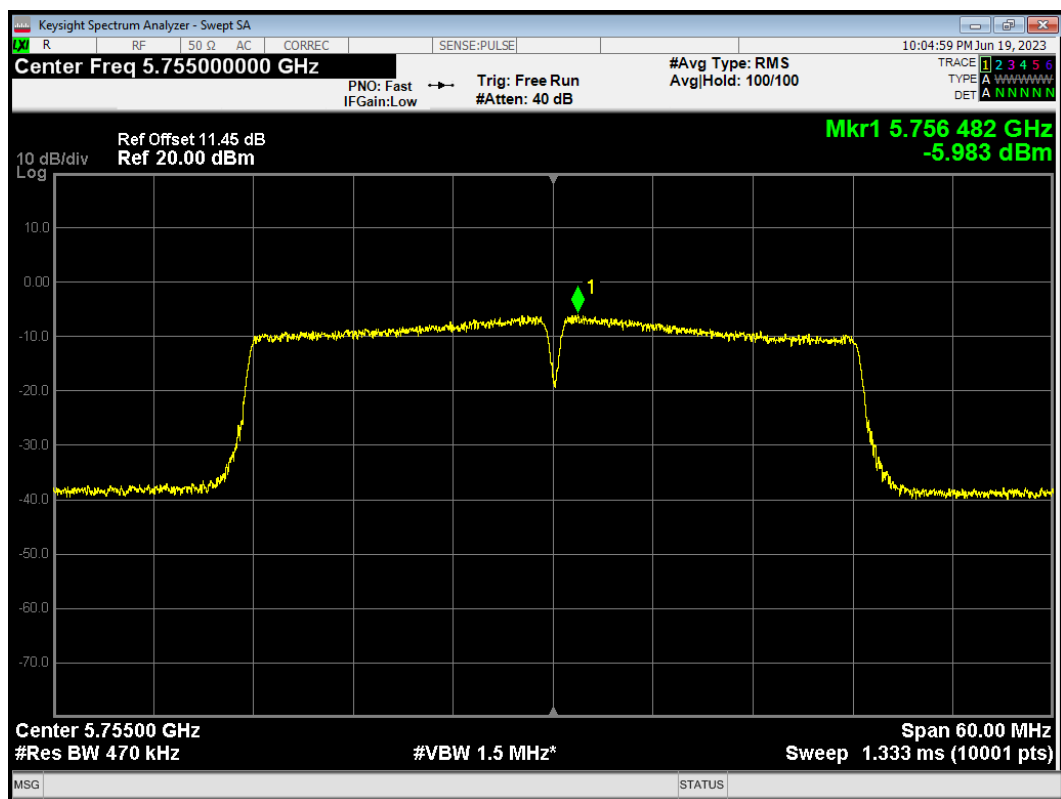


PSD 802.11n(HT40) 5795MHz

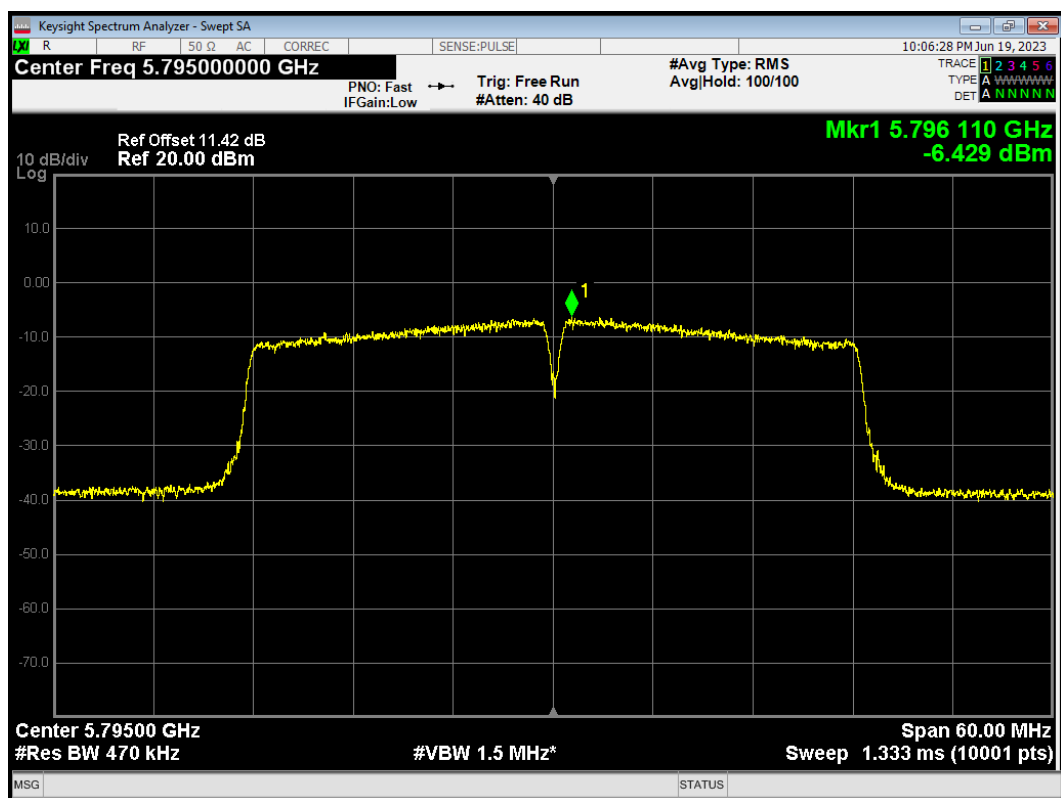


SISO Antenna 2

U-NII-1


PSD 802.11a 5180MHz

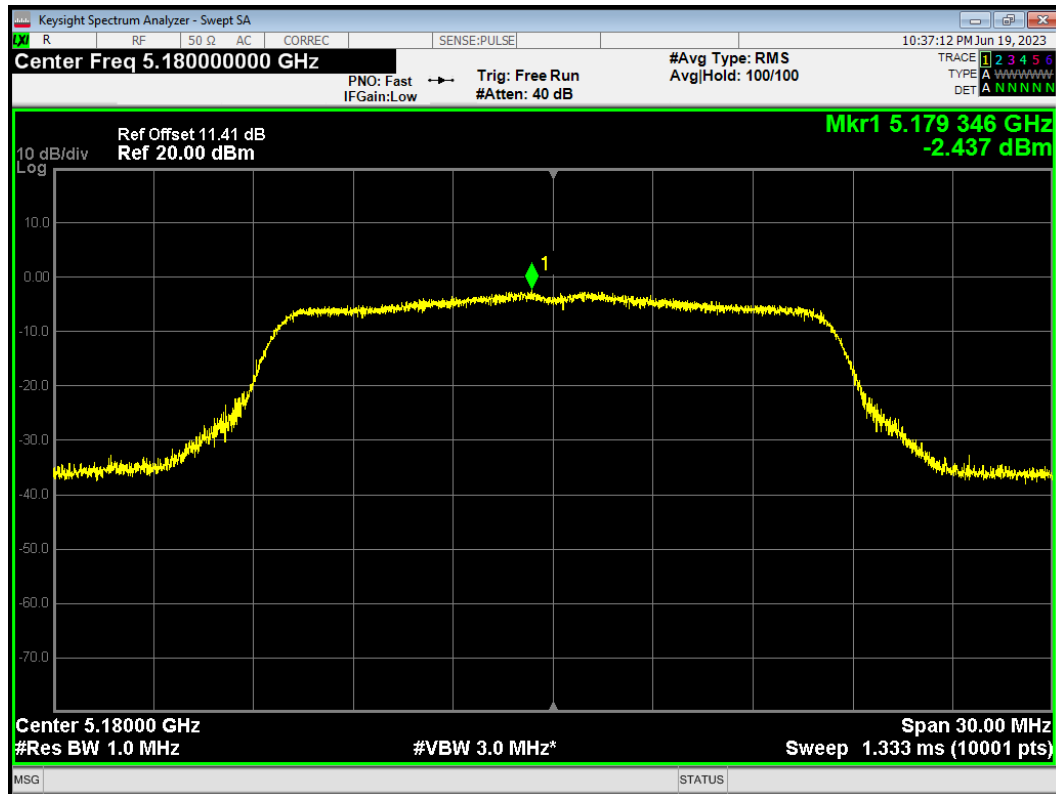


PSD 802.11a 5200MHz

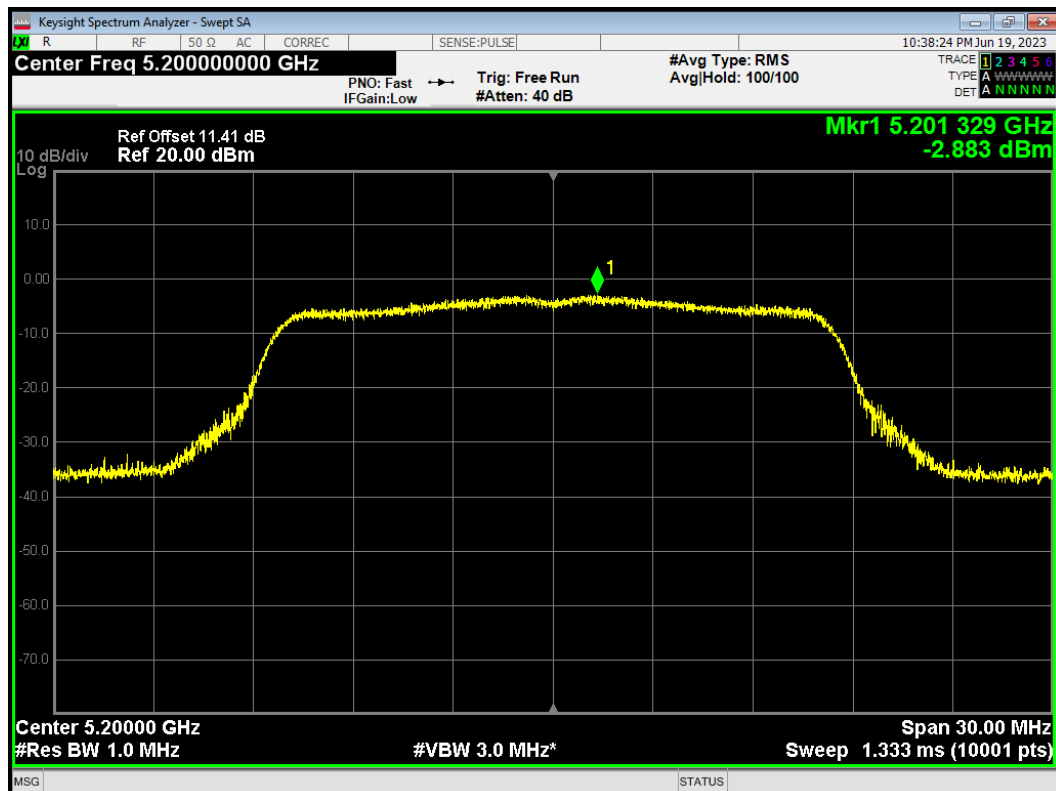


### PSD 802.11a 5240MHz

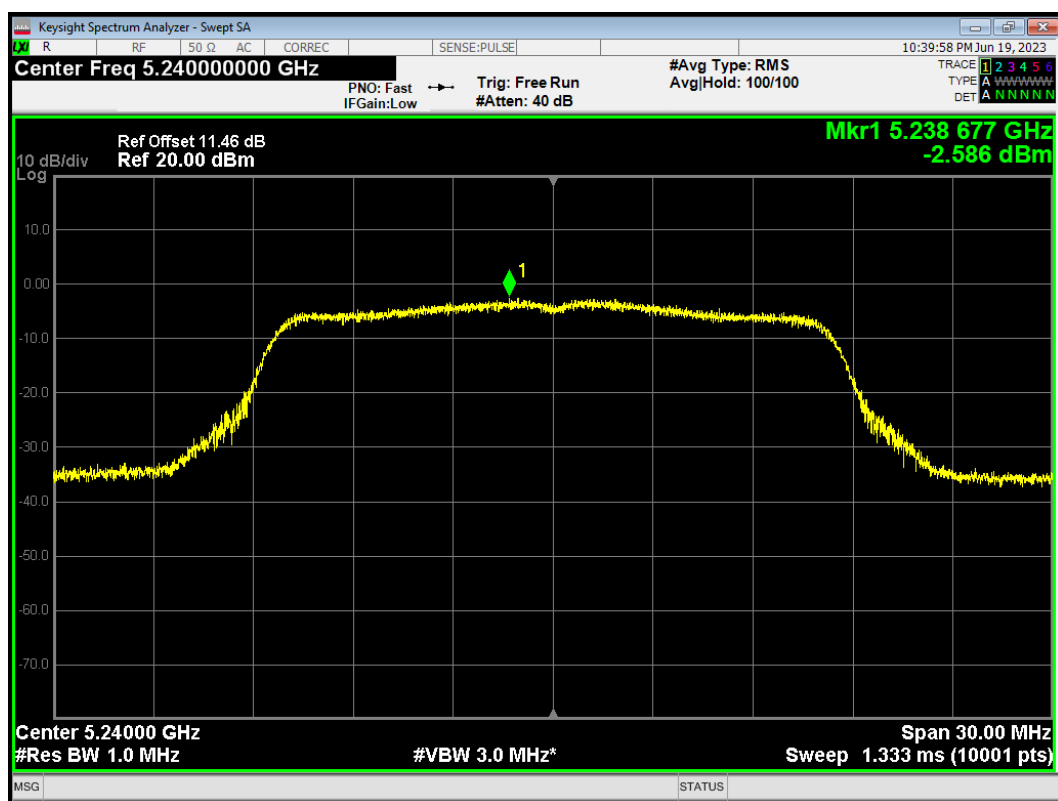


### PSD 802.11ac(VHT20) 5180MHz

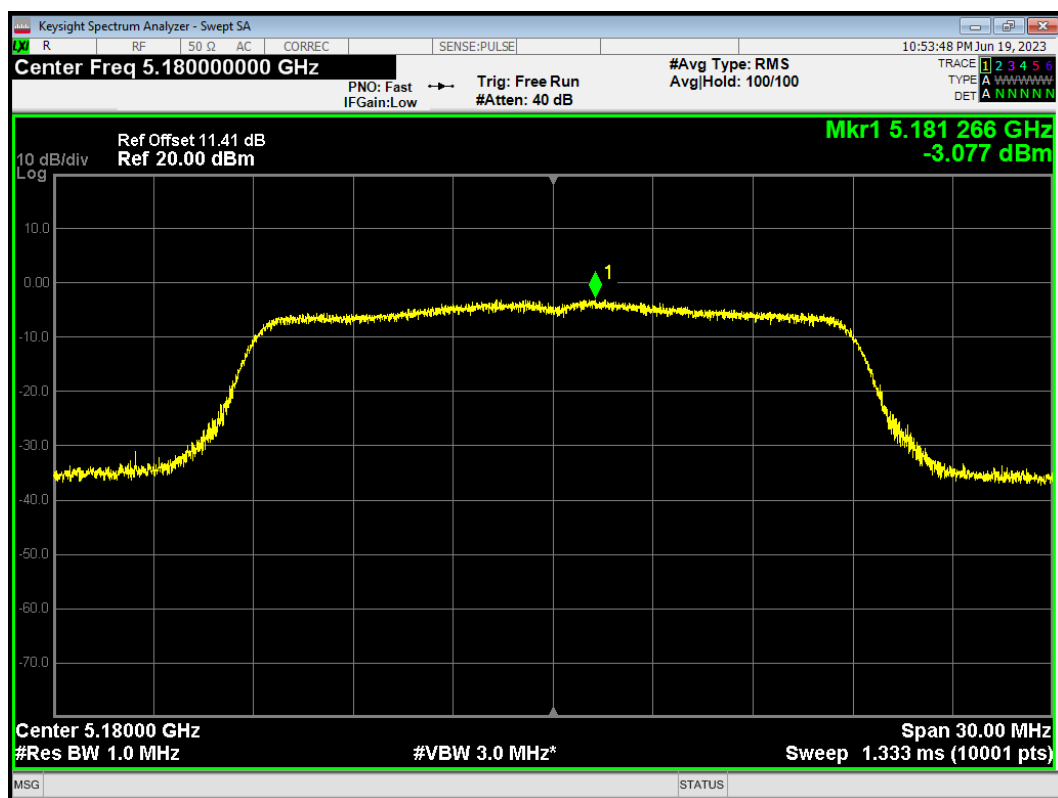


PSD 802.11ac(VHT20) 5200MHz

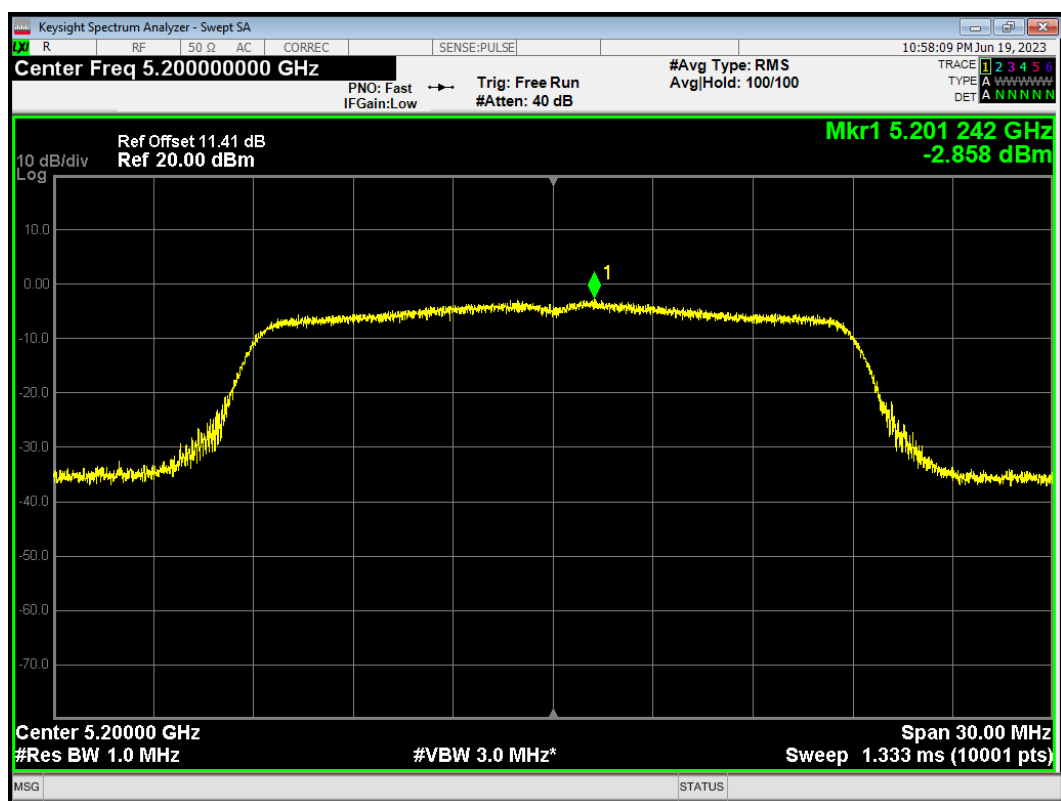


PSD 802.11ac(VHT20) 5240MHz

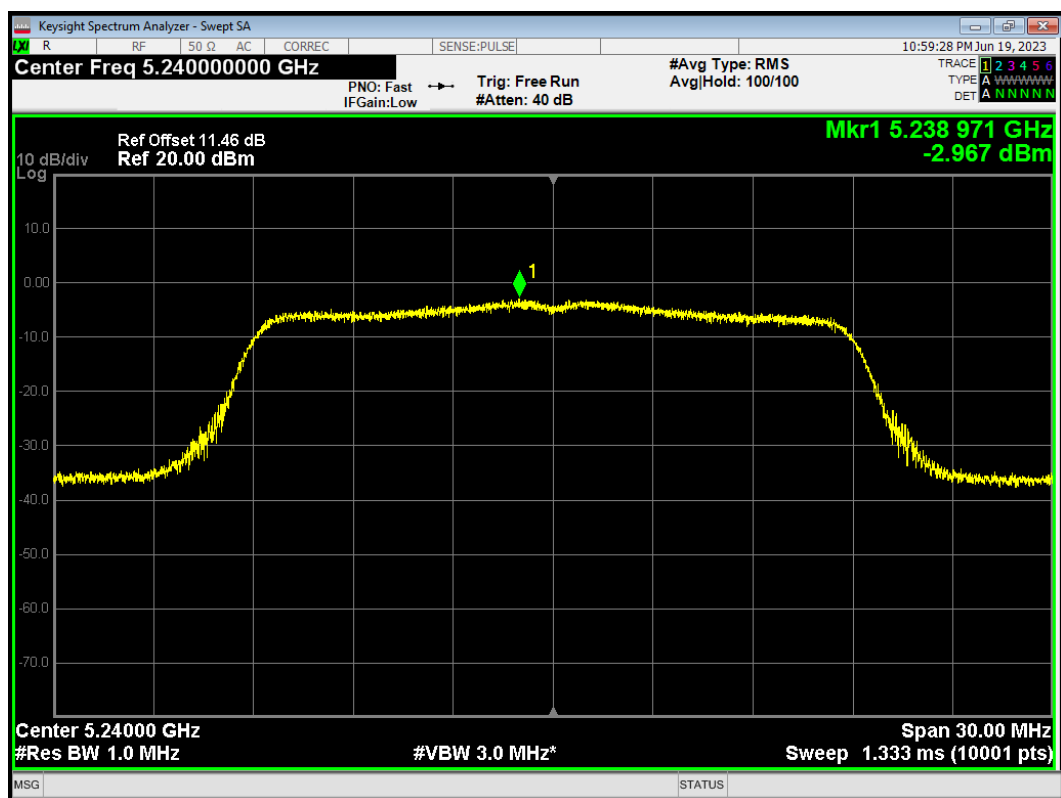


PSD 802.11ac(VHT40) 5190MHz

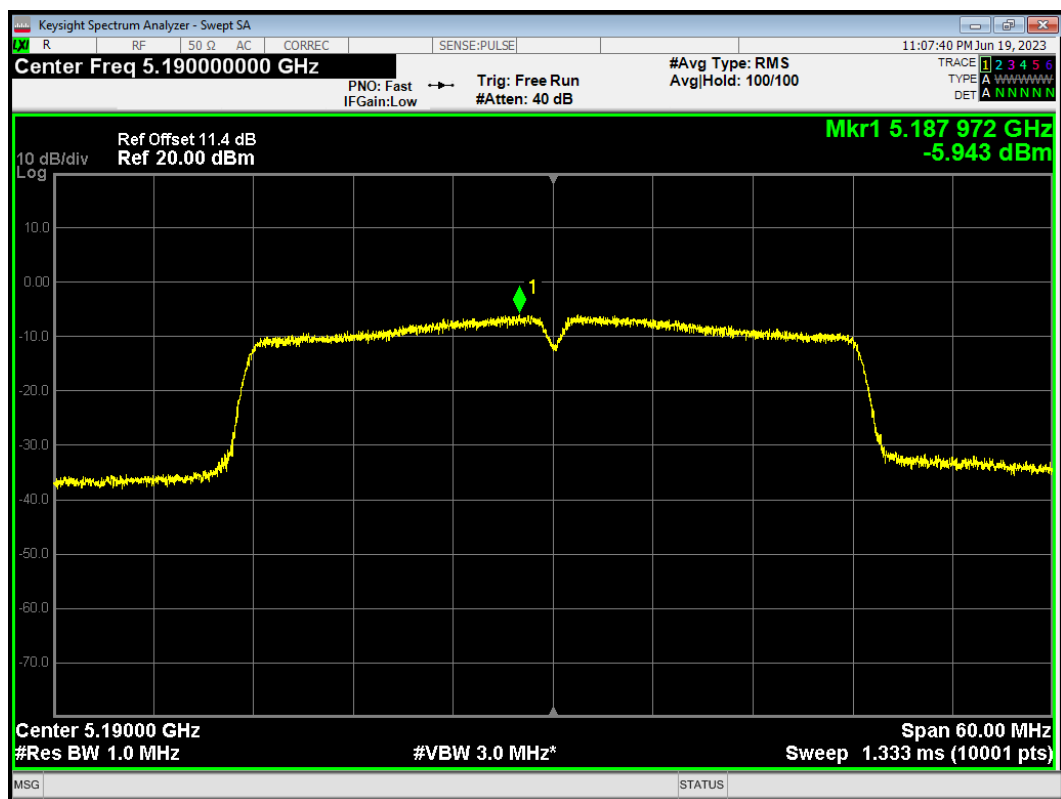


PSD 802.11ac(VHT40) 5230MHz

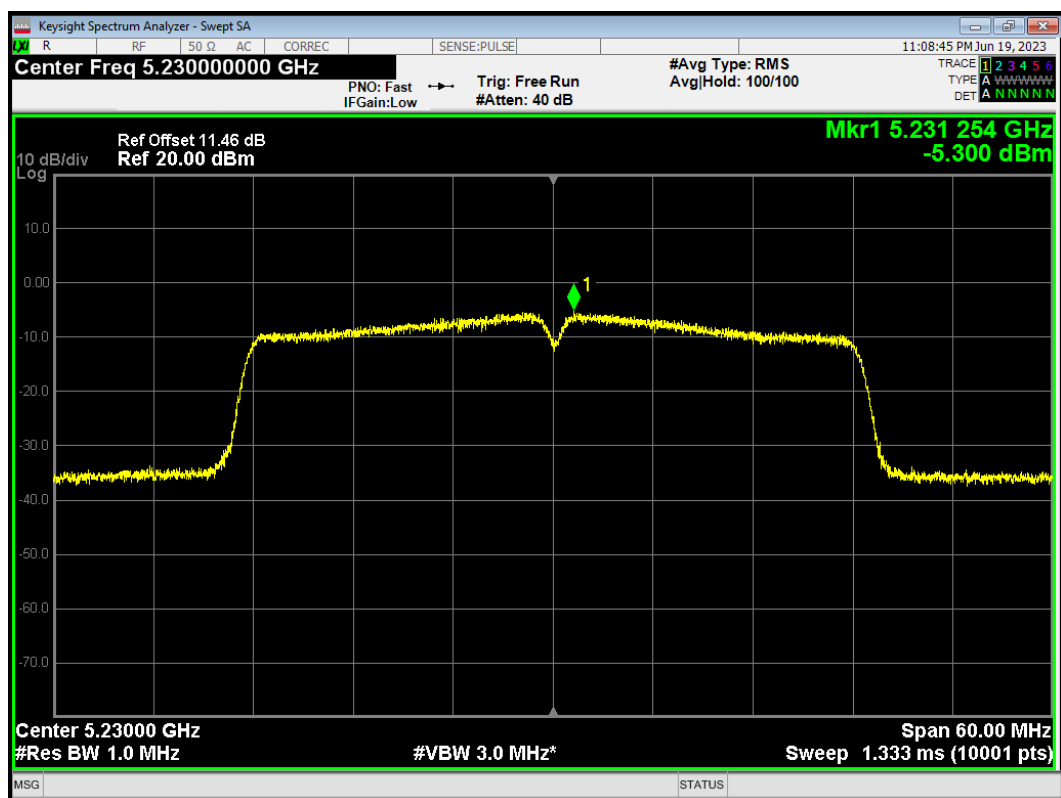


PSD 802.11ac(VHT80) 5210MHz

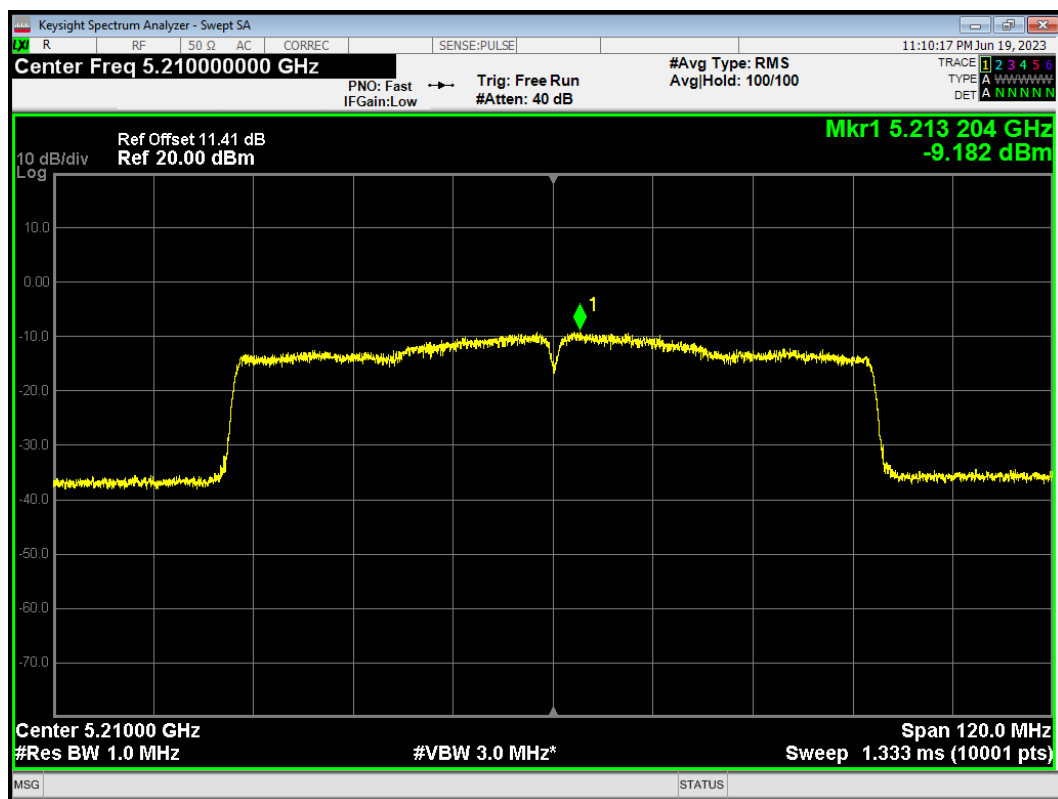


PSD 802.11n(HT20) 5180MHz

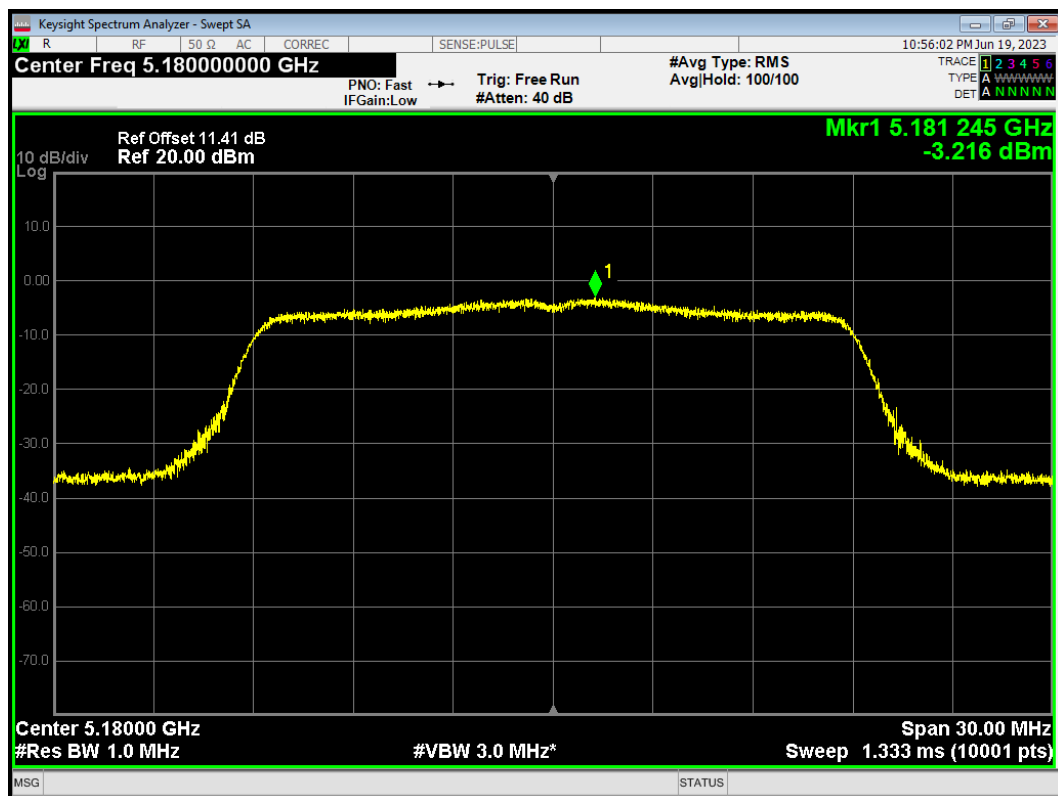


PSD 802.11n(HT20) 5200MHz

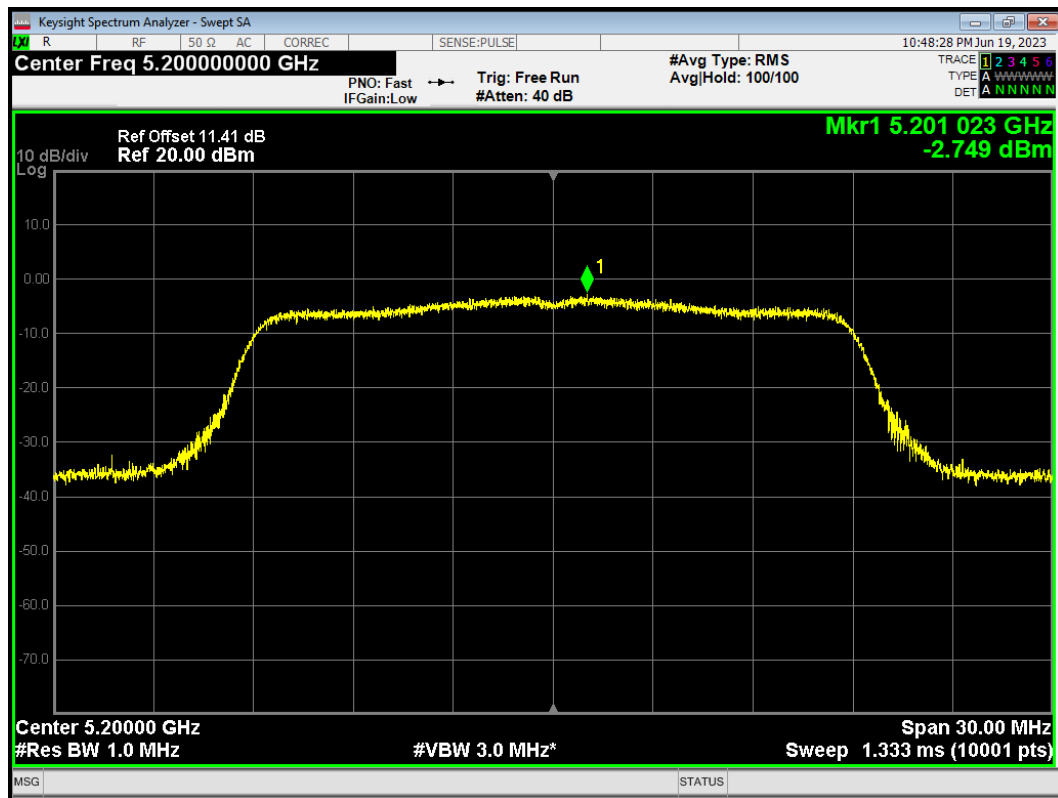


PSD 802.11n(HT20) 5240MHz

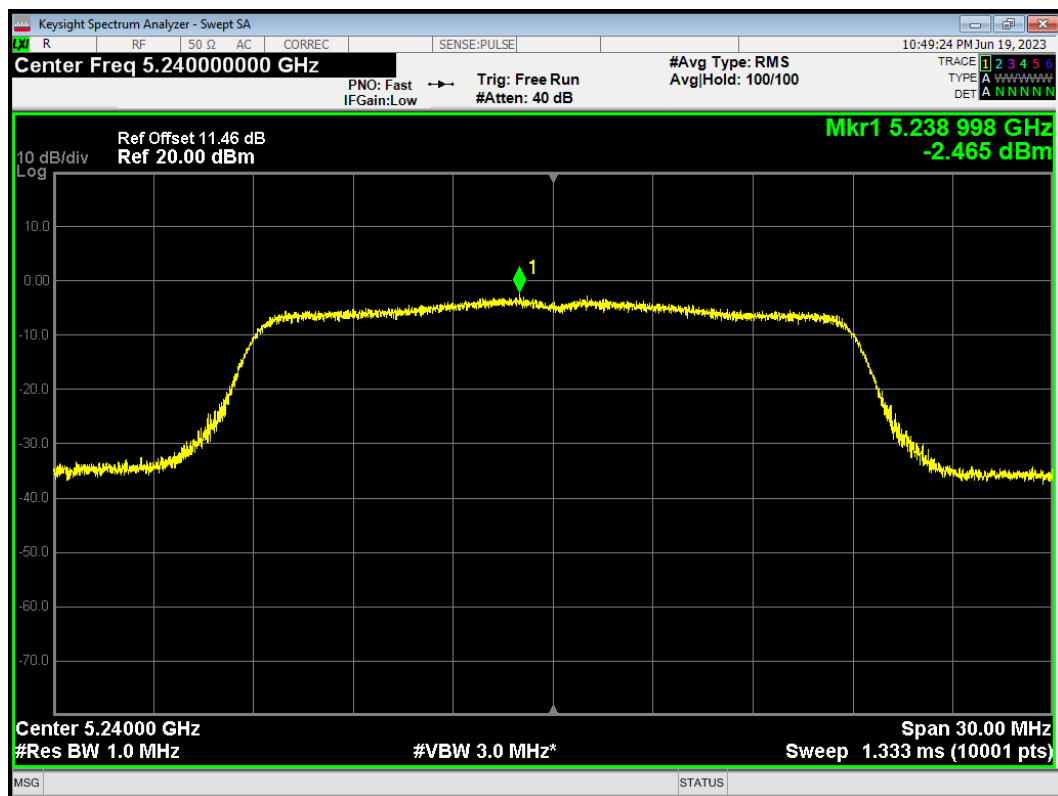

PSD 802.11n(HT40) 5190MHz

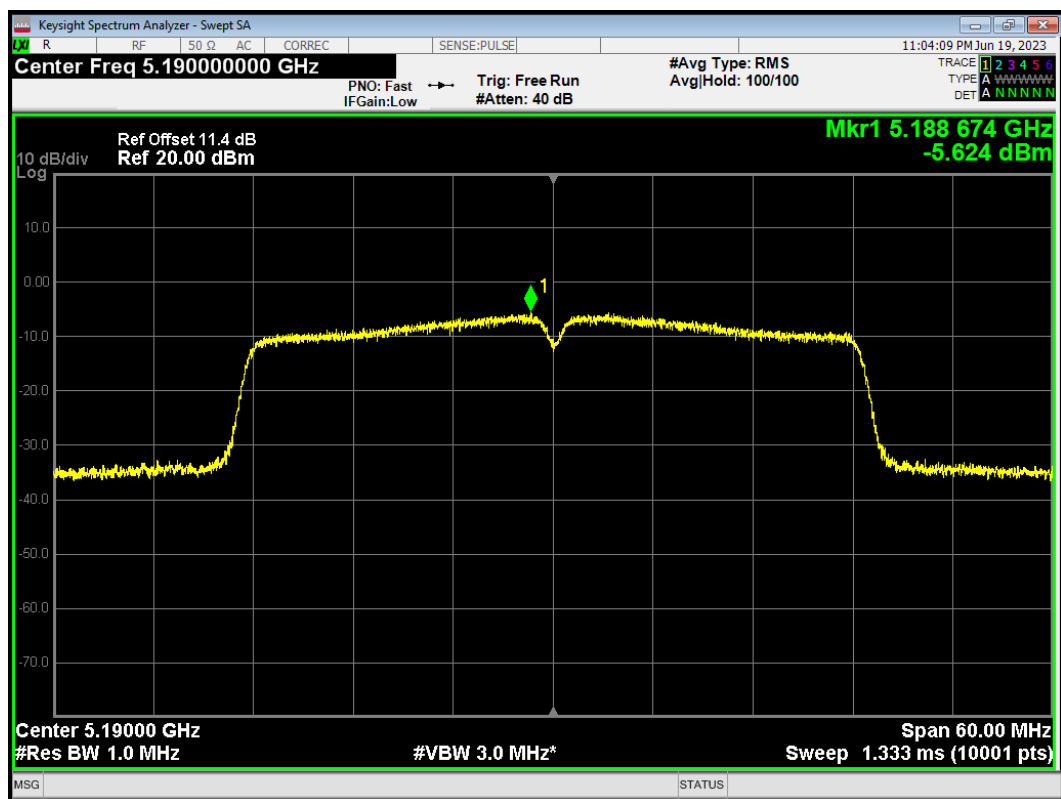


PSD 802.11n(HT40) 5230MHz

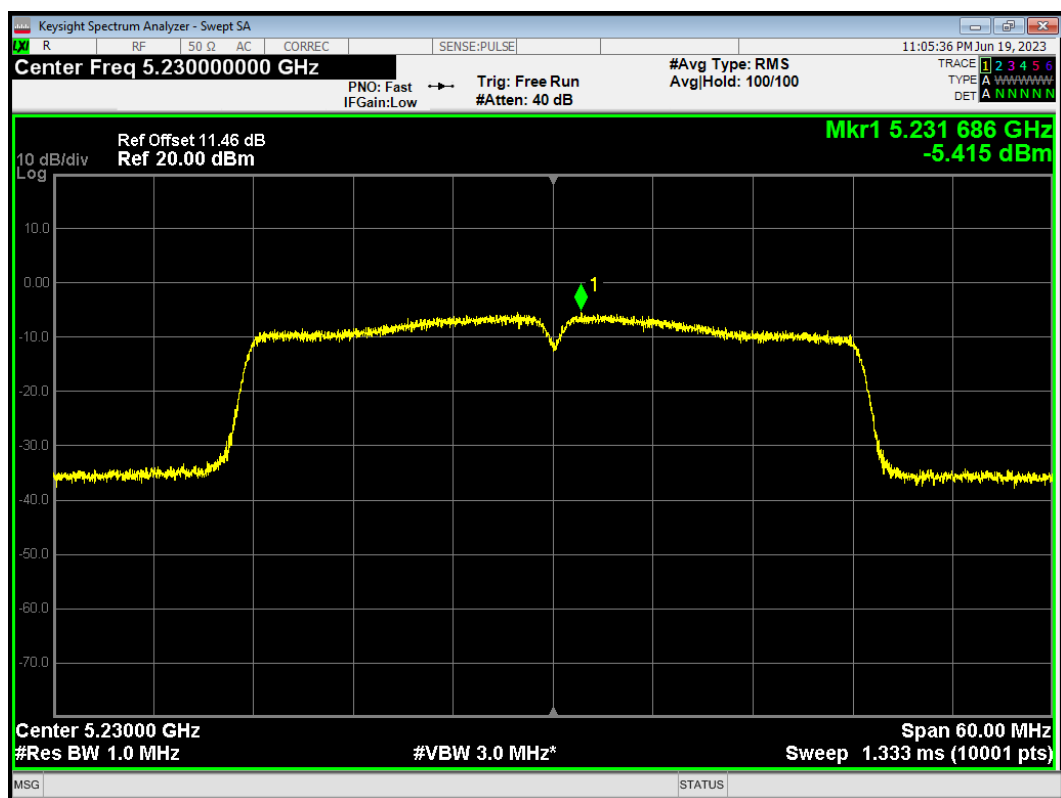


U-NII-2C


PSD 802.11a 5500MHz

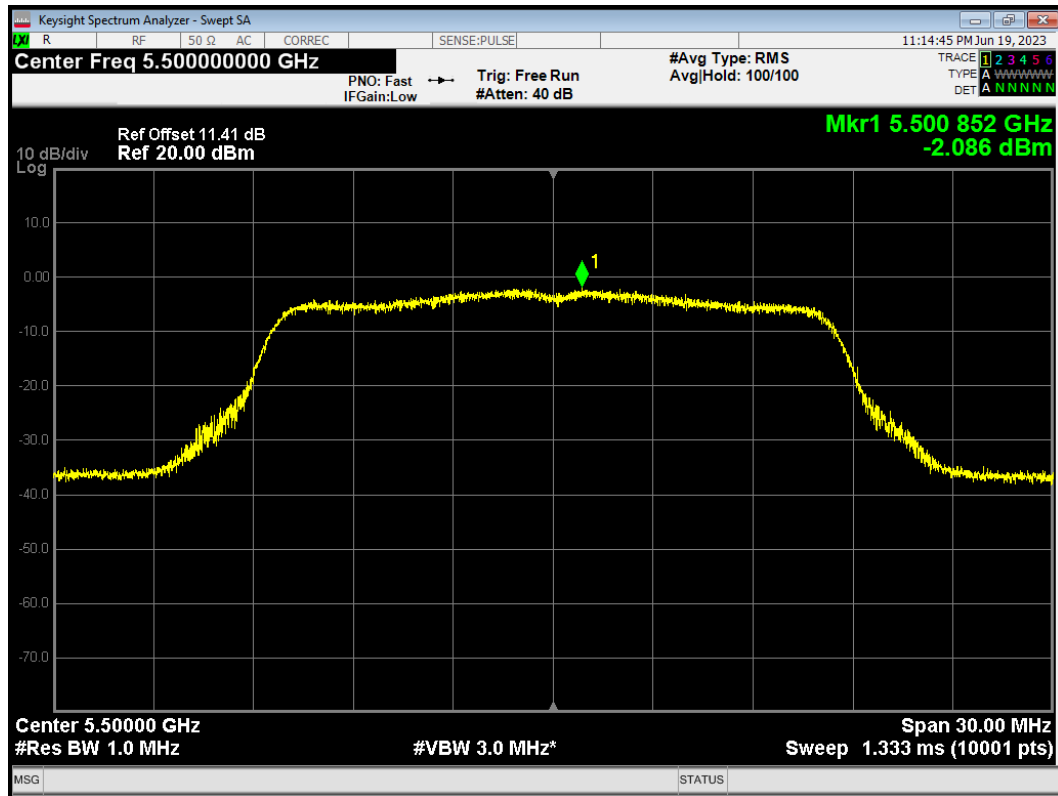


PSD 802.11a 5600MHz

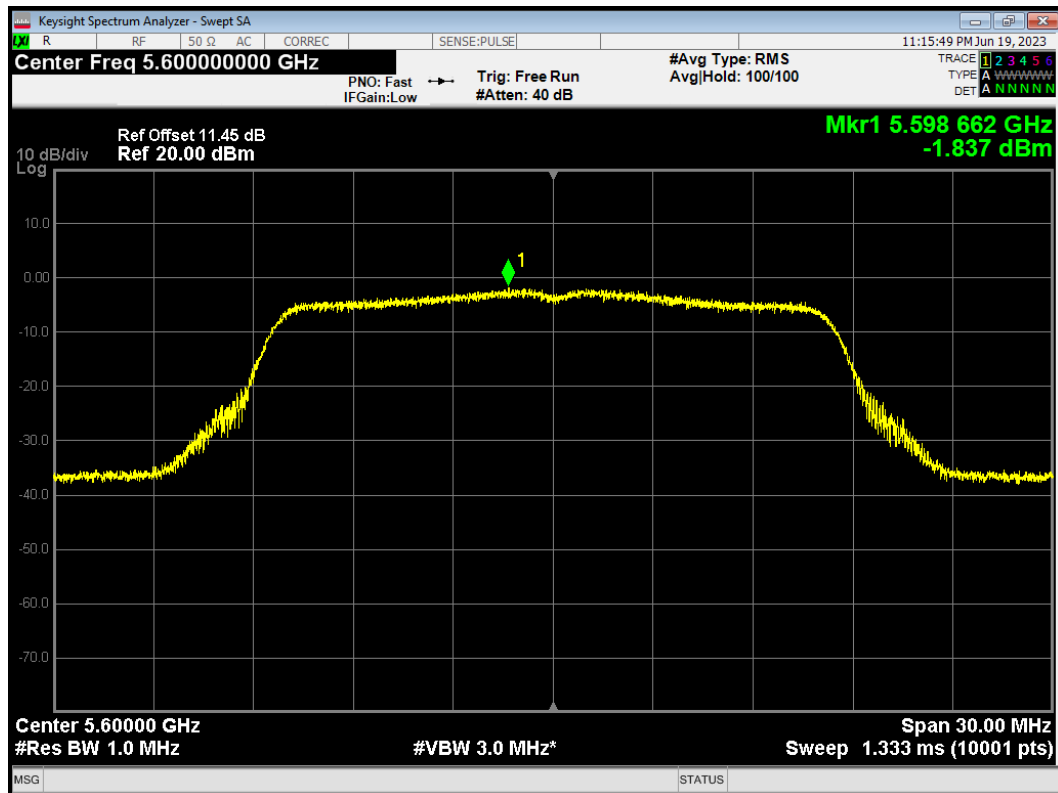


PSD 802.11a 5700MHz

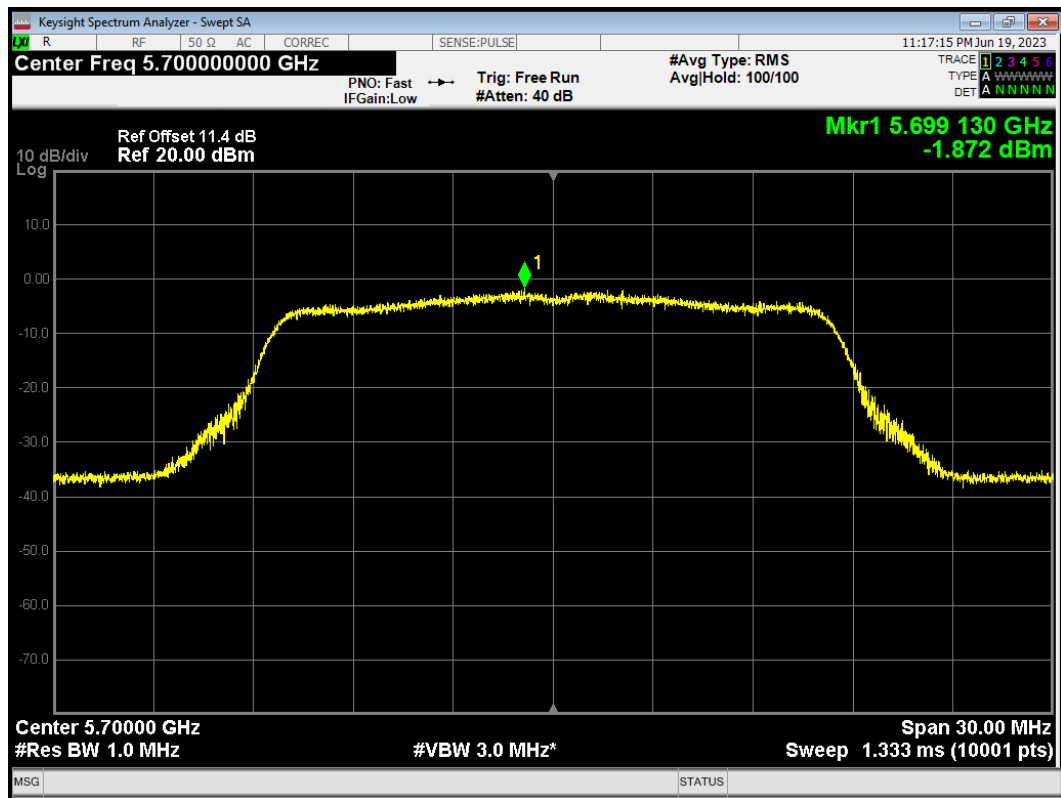


PSD 802.11a 5720MHz

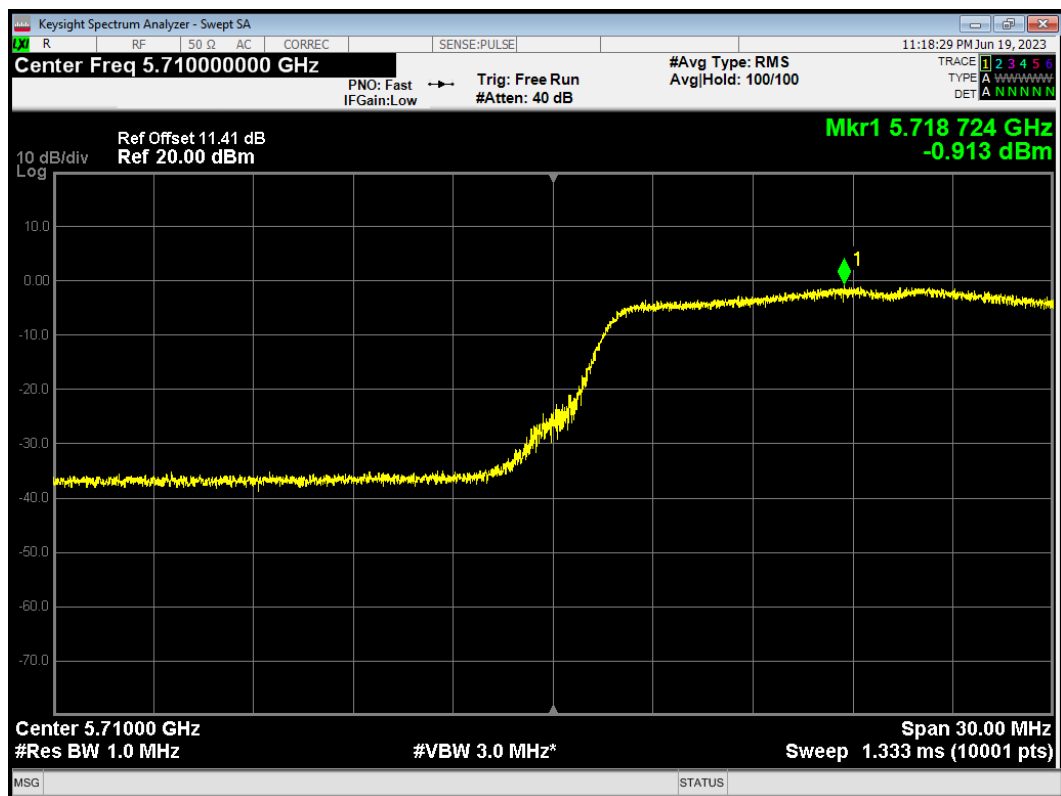


PSD 802.11ac(VHT20) 5500MHz

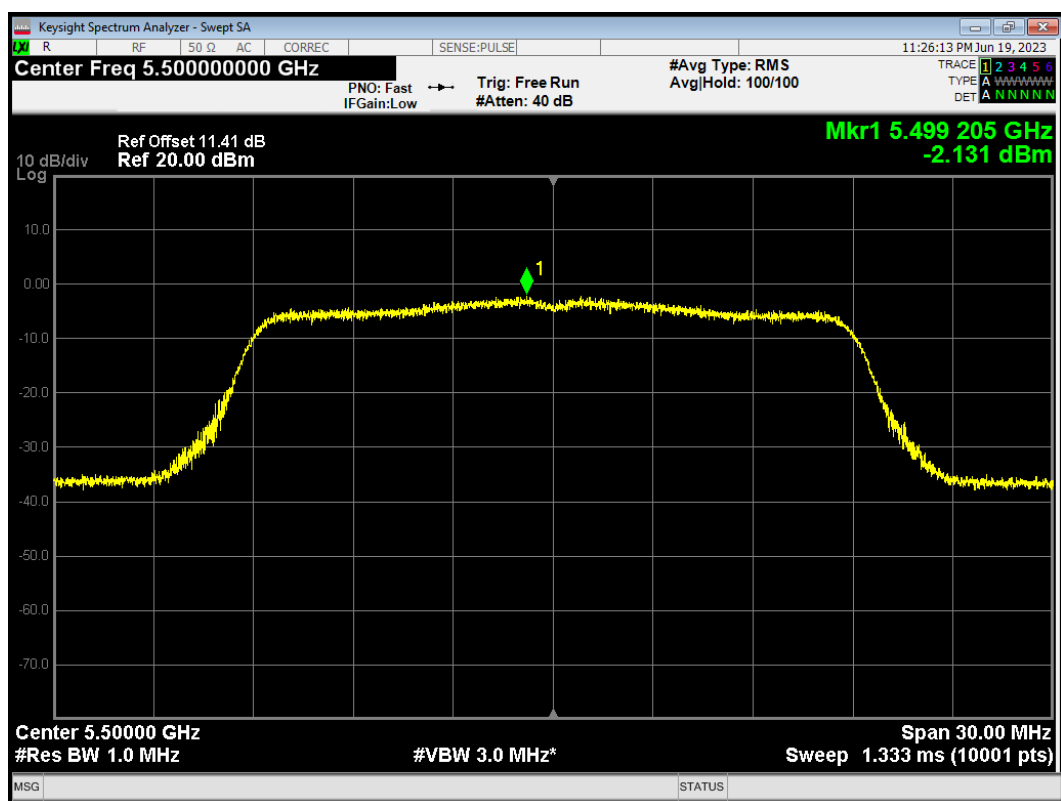


PSD 802.11ac(VHT20) 5600MHz

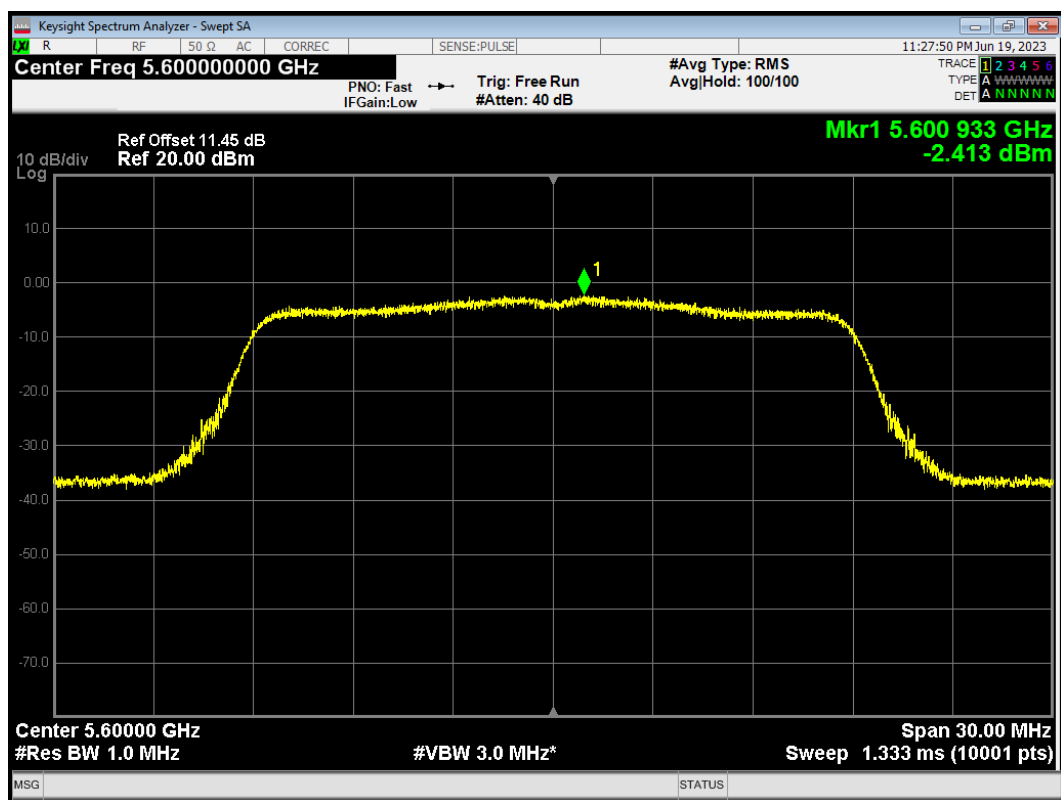


PSD 802.11ac(VHT20) 5700MHz

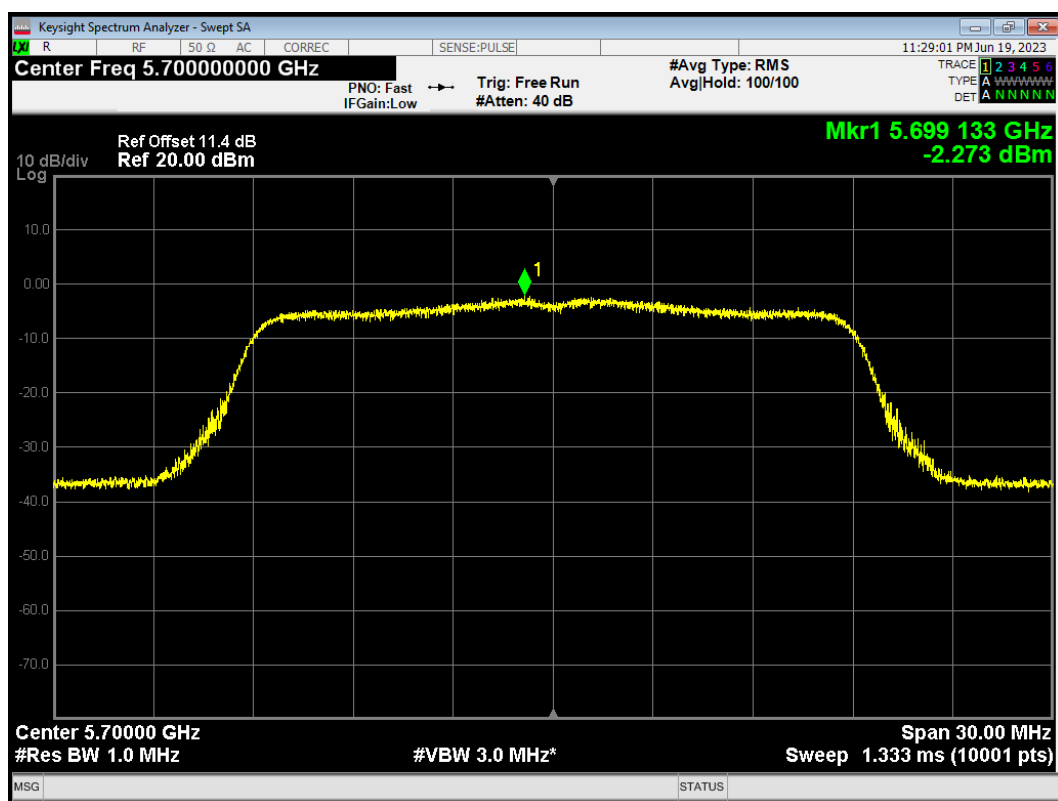


PSD 802.11ac(VHT20) 5720MHz

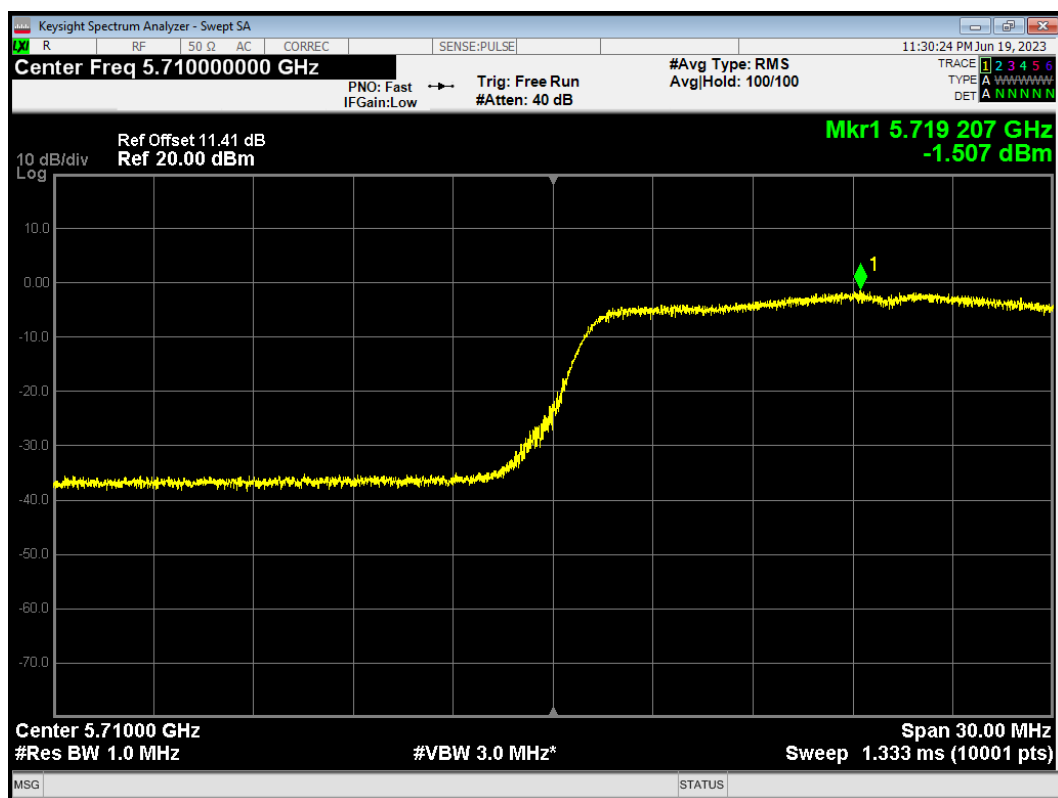


PSD 802.11ac(VHT40) 5510MHz

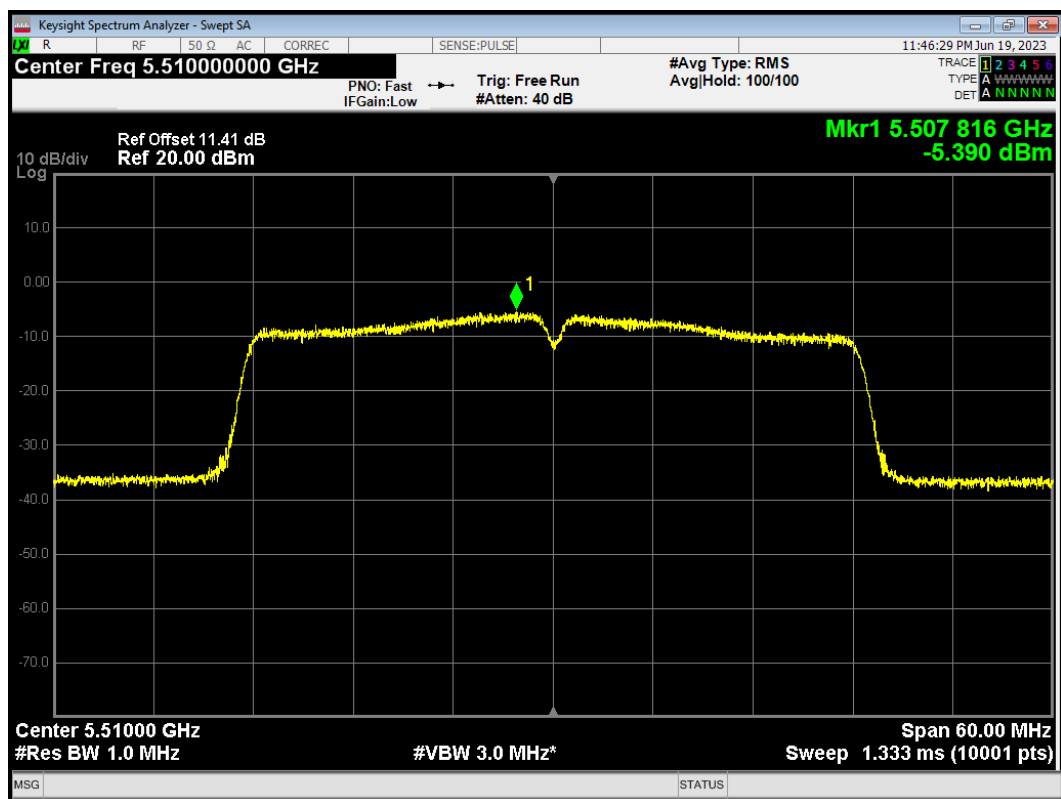


PSD 802.11ac(VHT40) 5590MHz

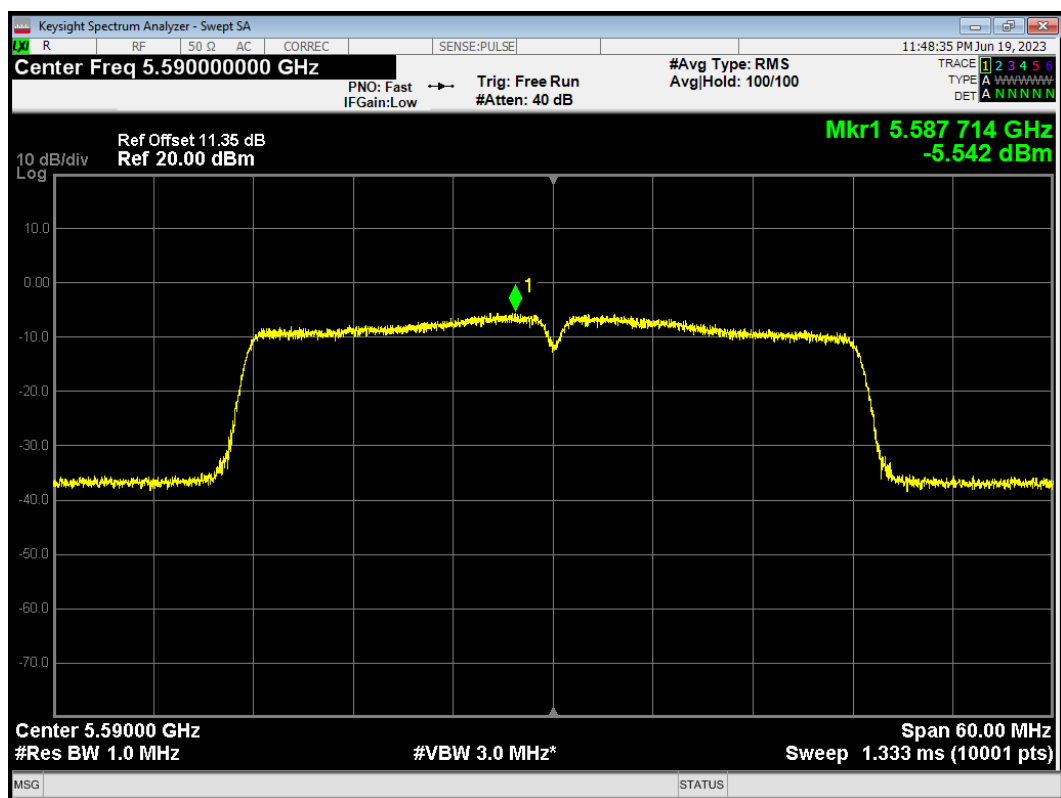


PSD 802.11ac(VHT40) 5670MHz

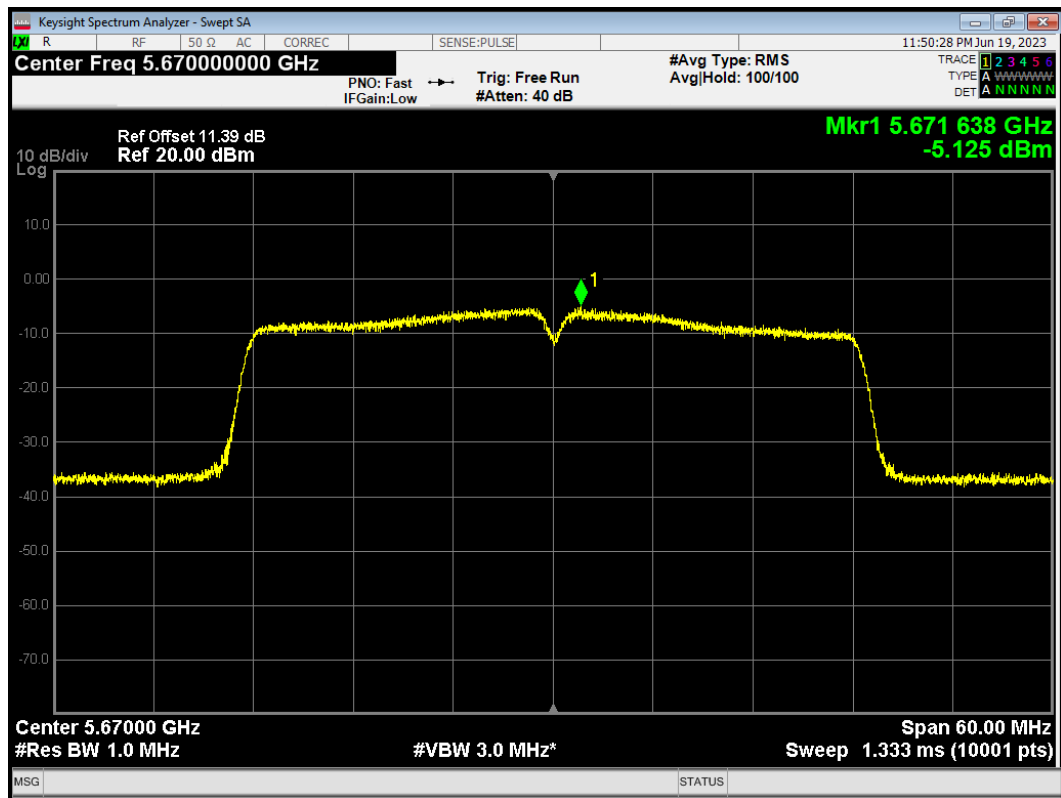


PSD 802.11ac(VHT40) 5710MHz

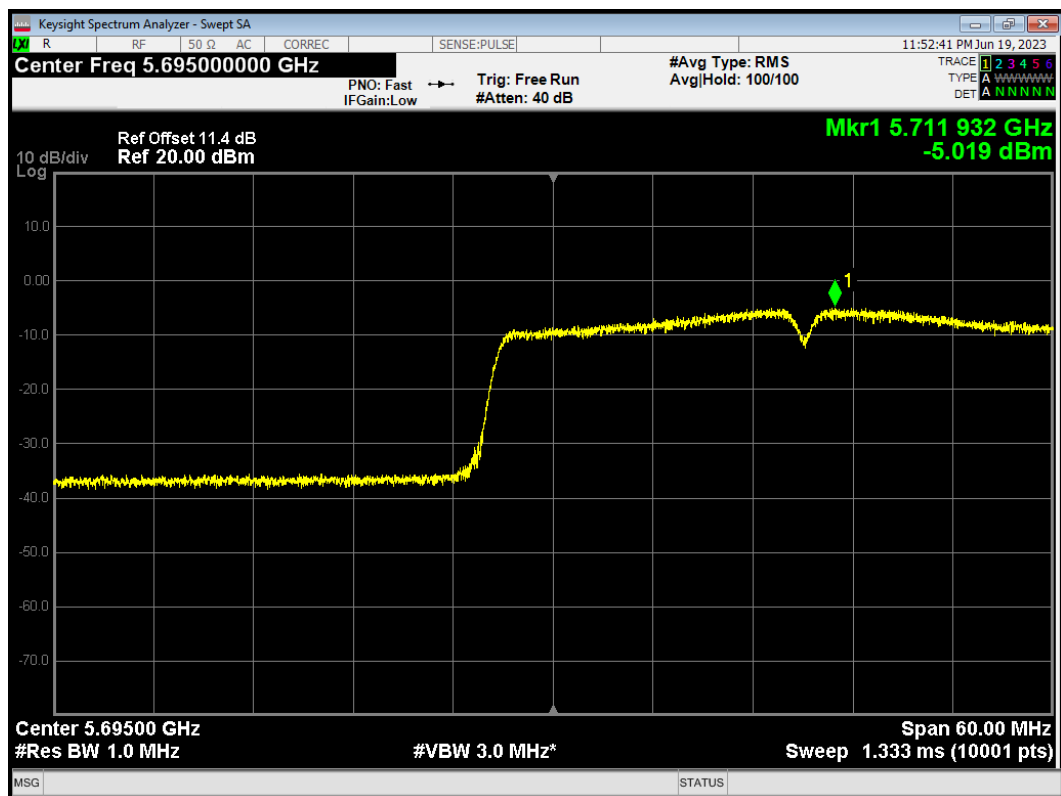


PSD 802.11ac(VHT80) 5530MHz

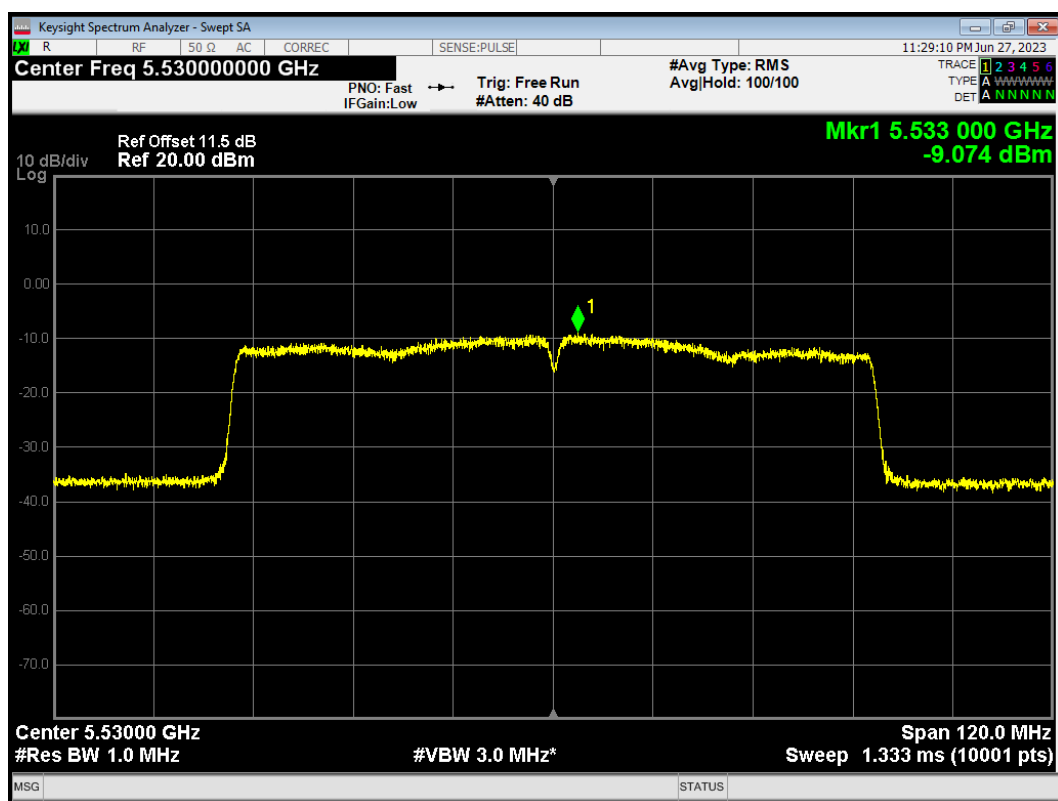


PSD 802.11ac(VHT80) 5610MHz

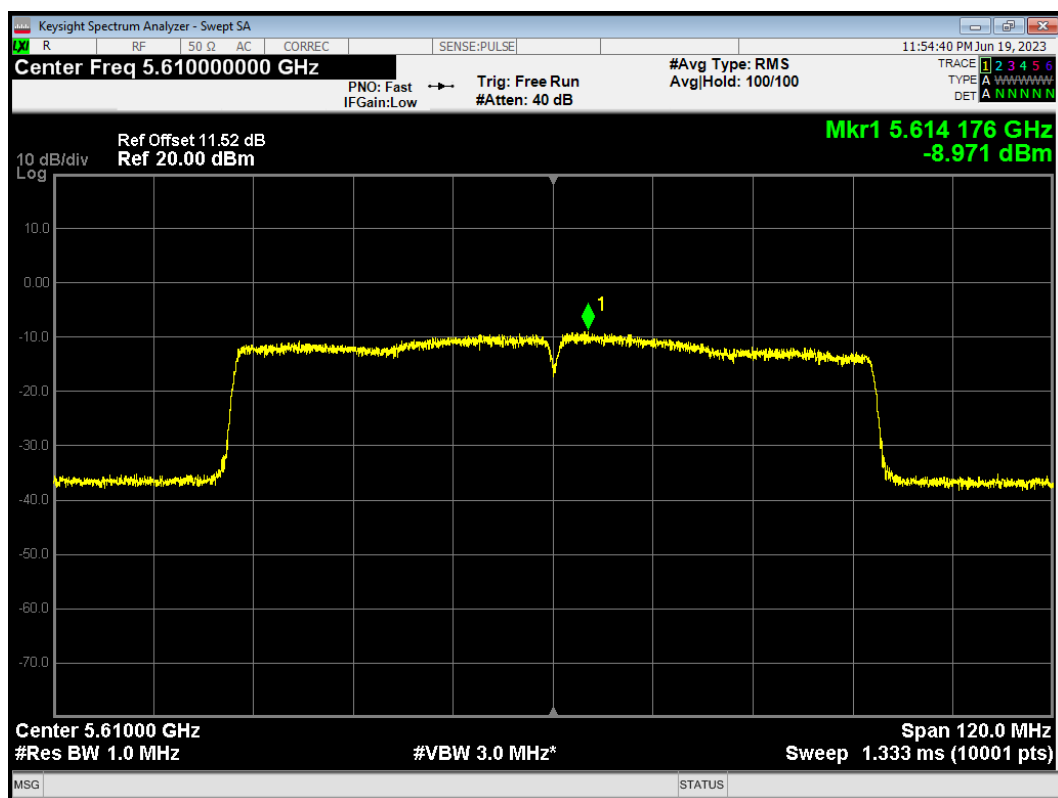


PSD 802.11ac(VHT80) 5690MHz

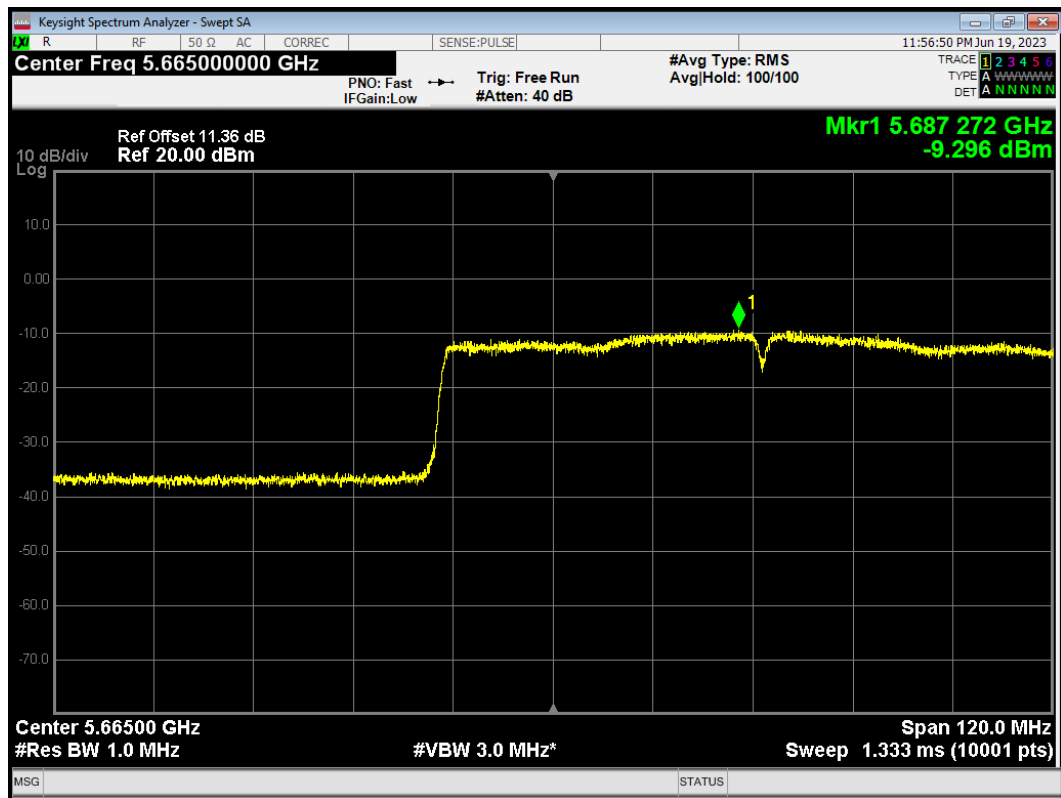


PSD 802.11n(HT20) 5500MHz

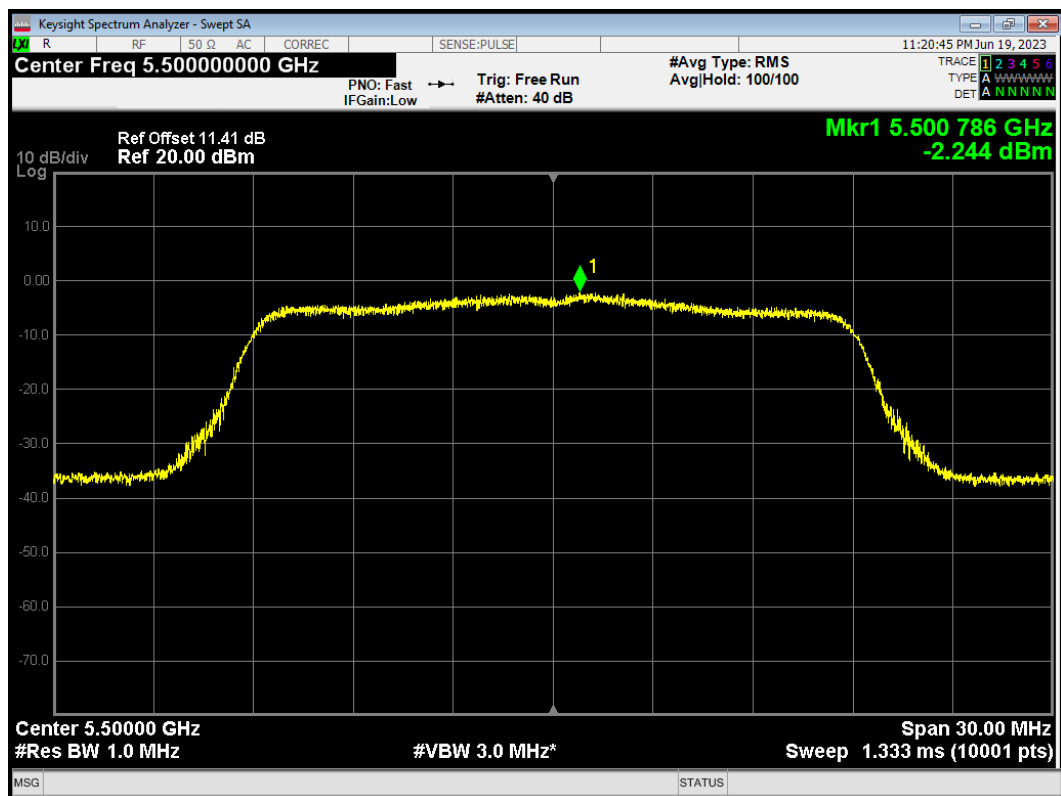


PSD 802.11n(HT20) 5600MHz

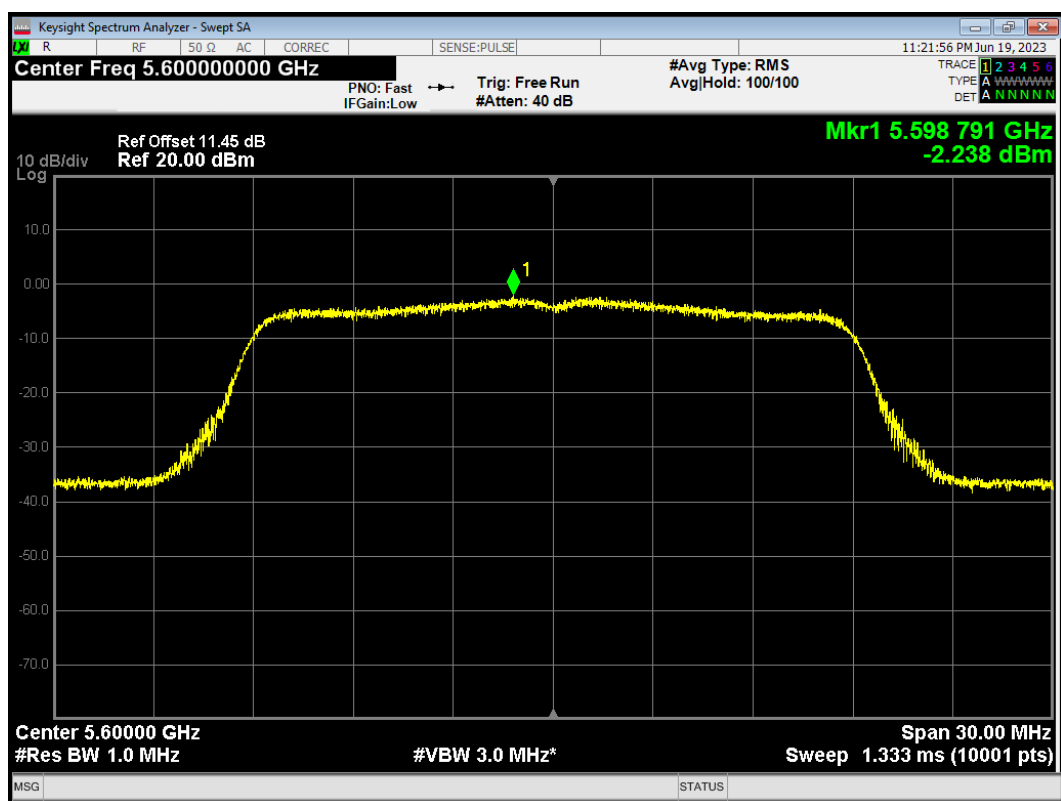


PSD 802.11n(HT20) 5700MHz

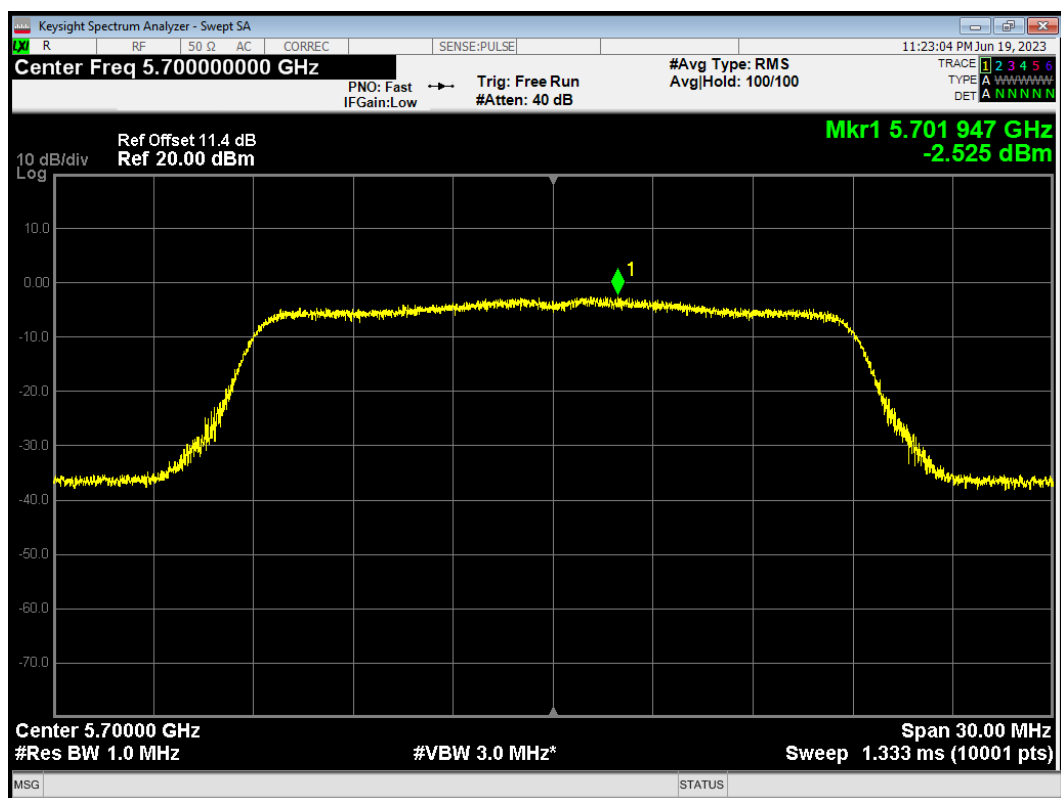


PSD 802.11n(HT20) 5720MHz

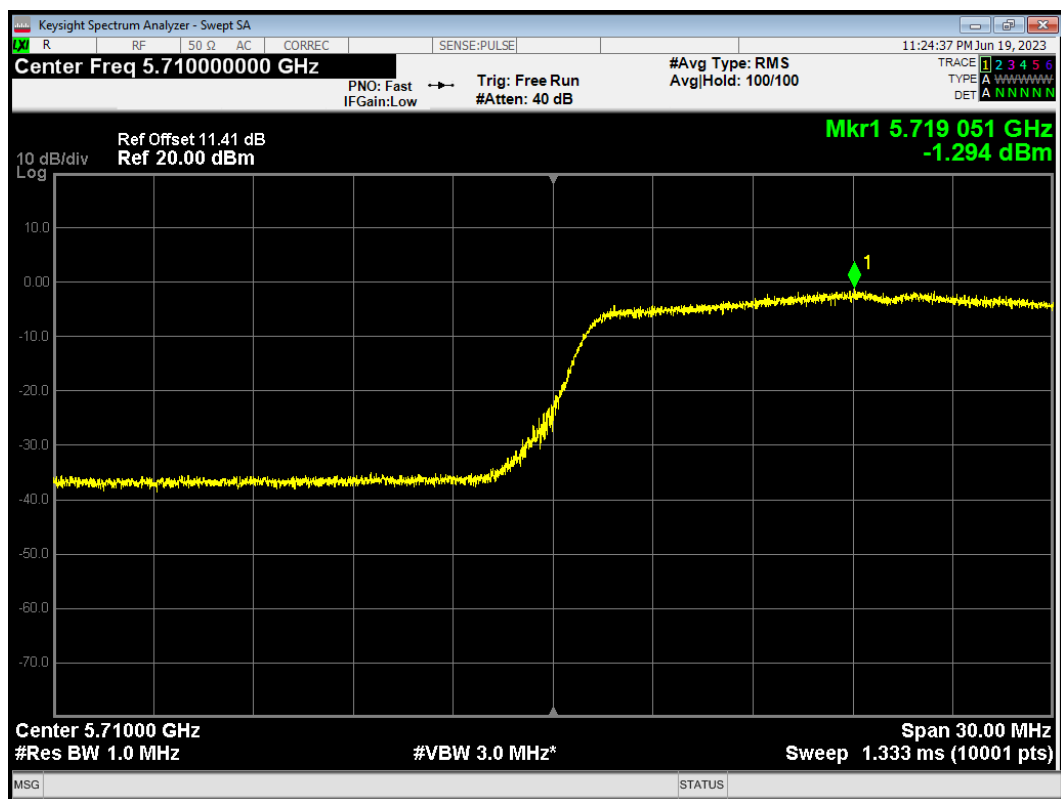


PSD 802.11n(HT40) 5510MHz

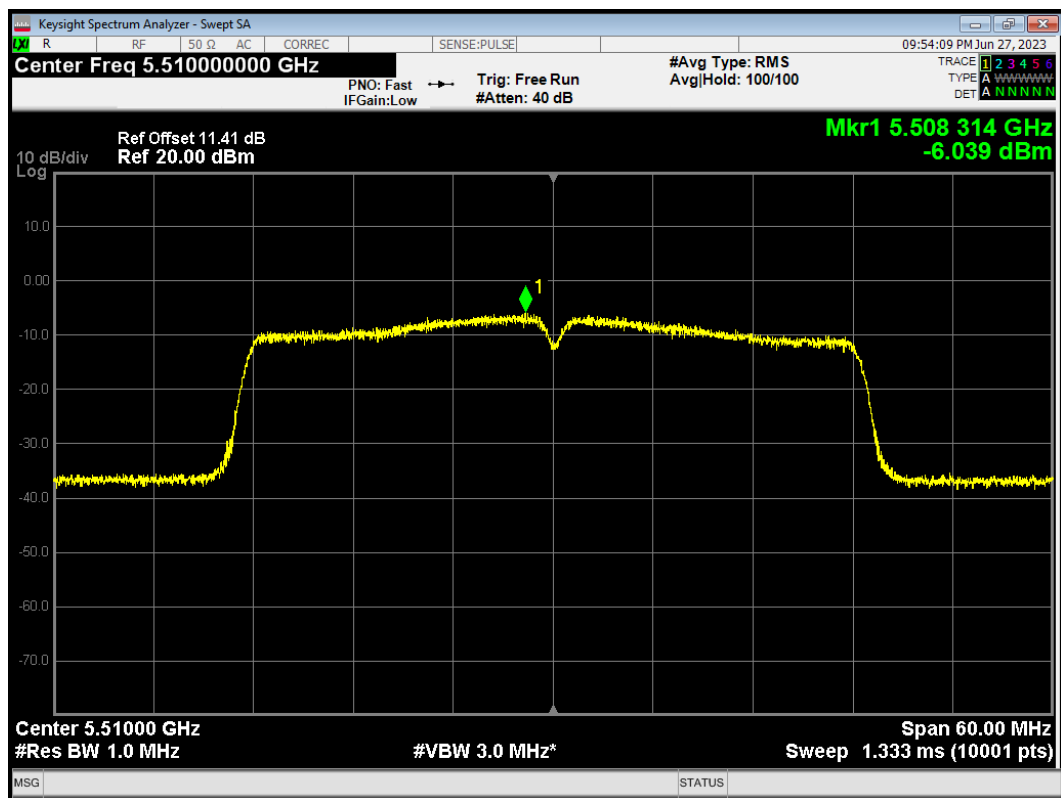


PSD 802.11n(HT40) 5590MHz

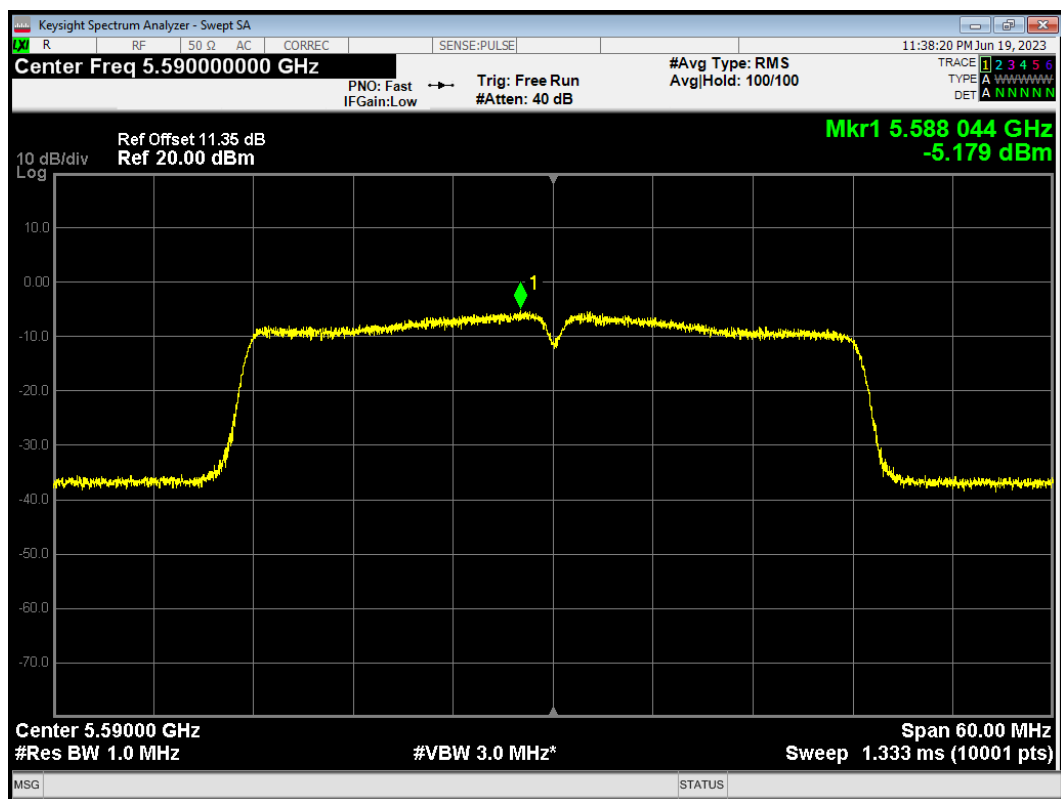

PSD 802.11n(HT40) 5670MHz

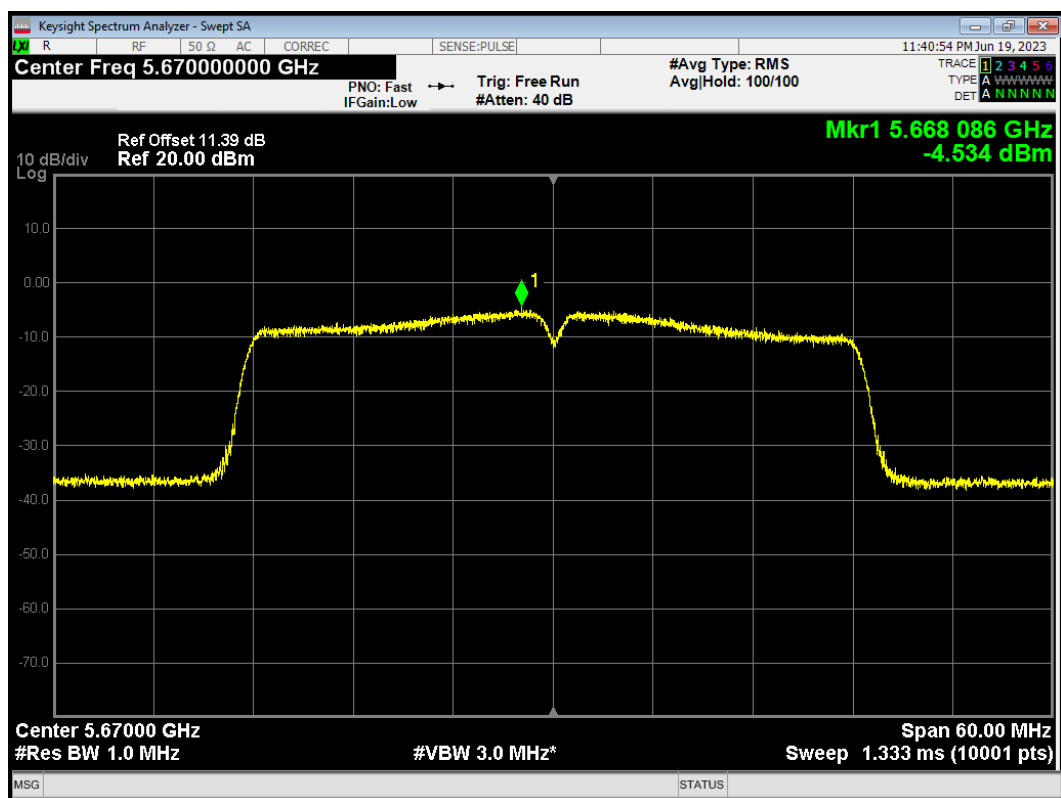


PSD 802.11n(HT40) 5710MHz

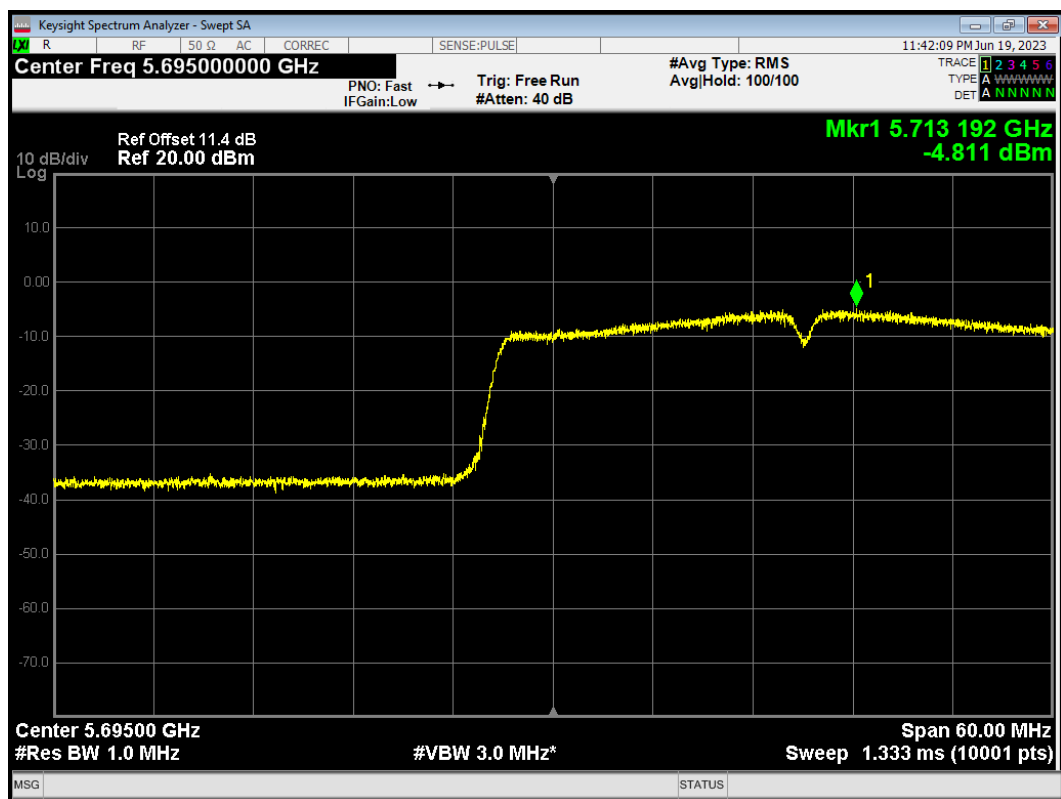


U-NII-3


PSD 802.11a 5720MHz

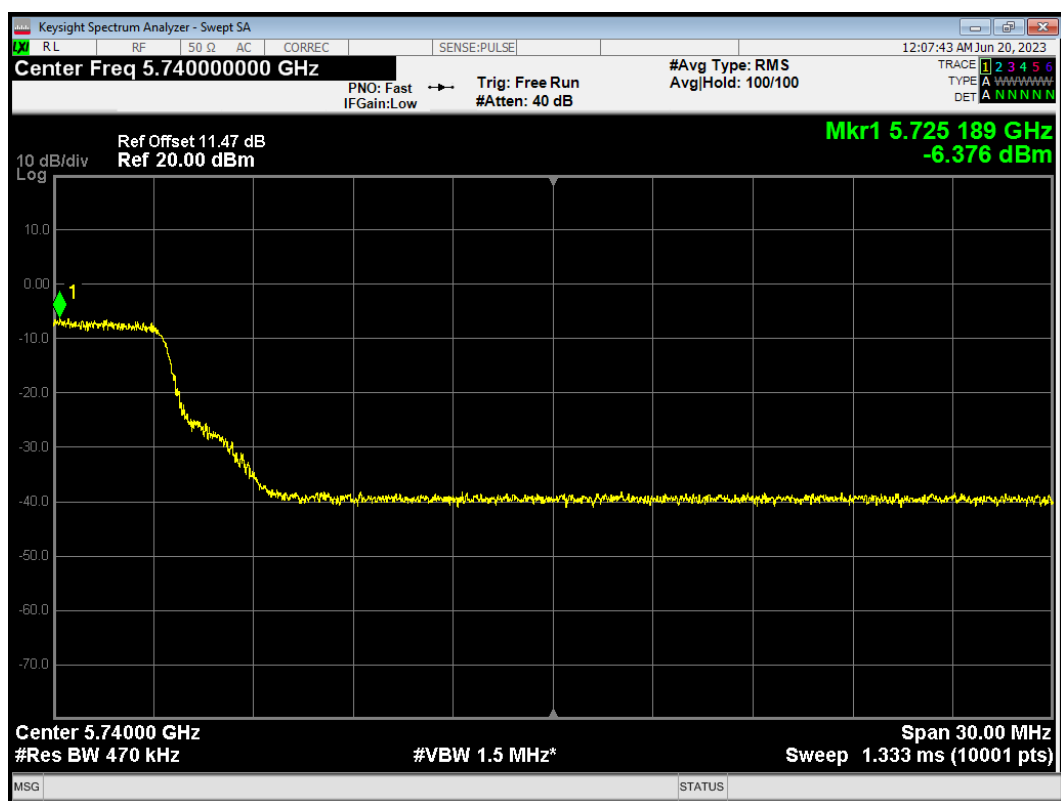


PSD 802.11a 5745MHz

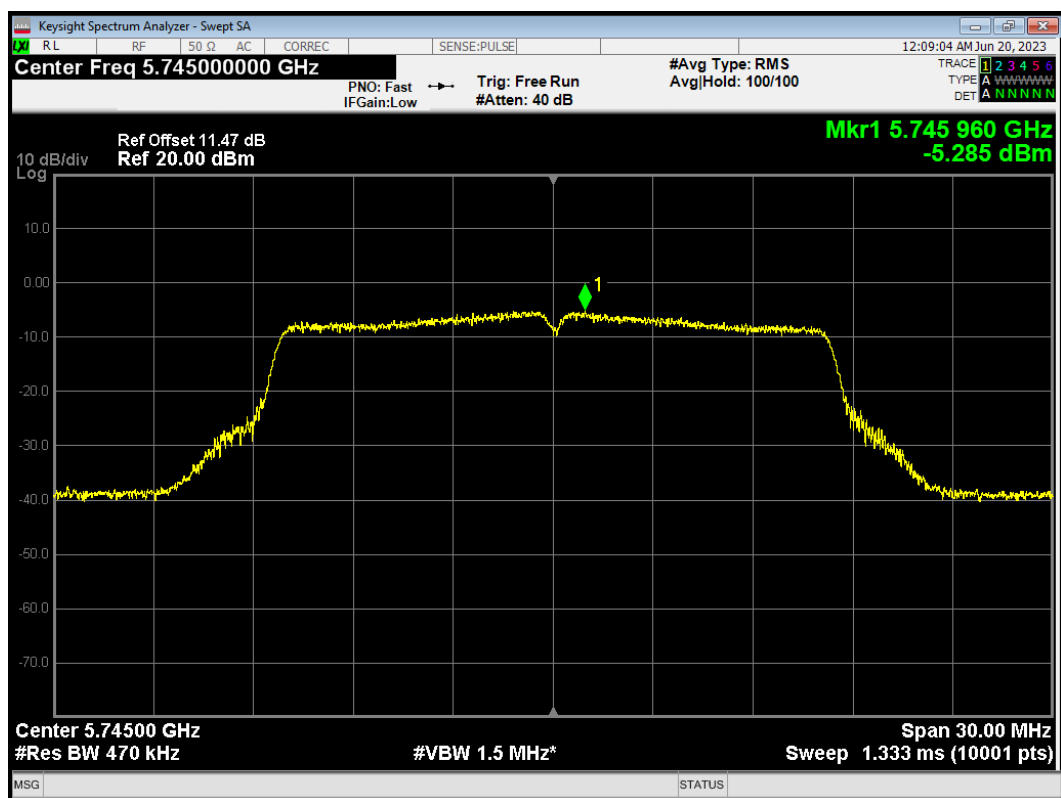


PSD 802.11a 5785MHz

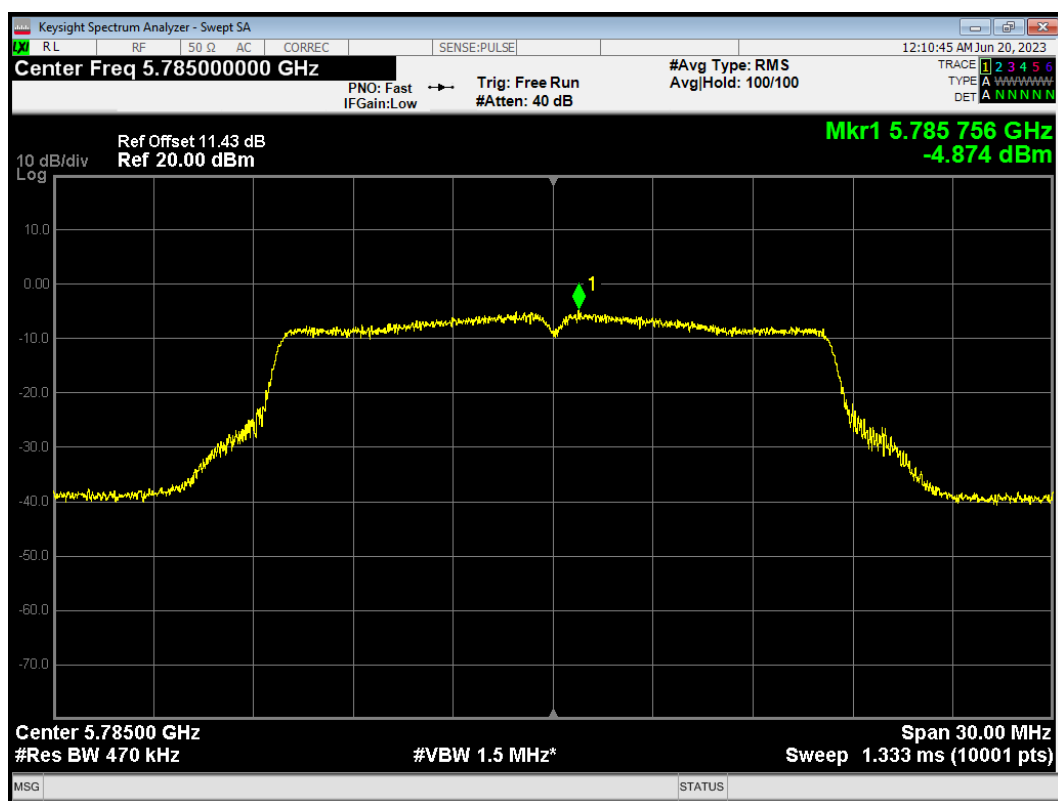


PSD 802.11a 5825MHz

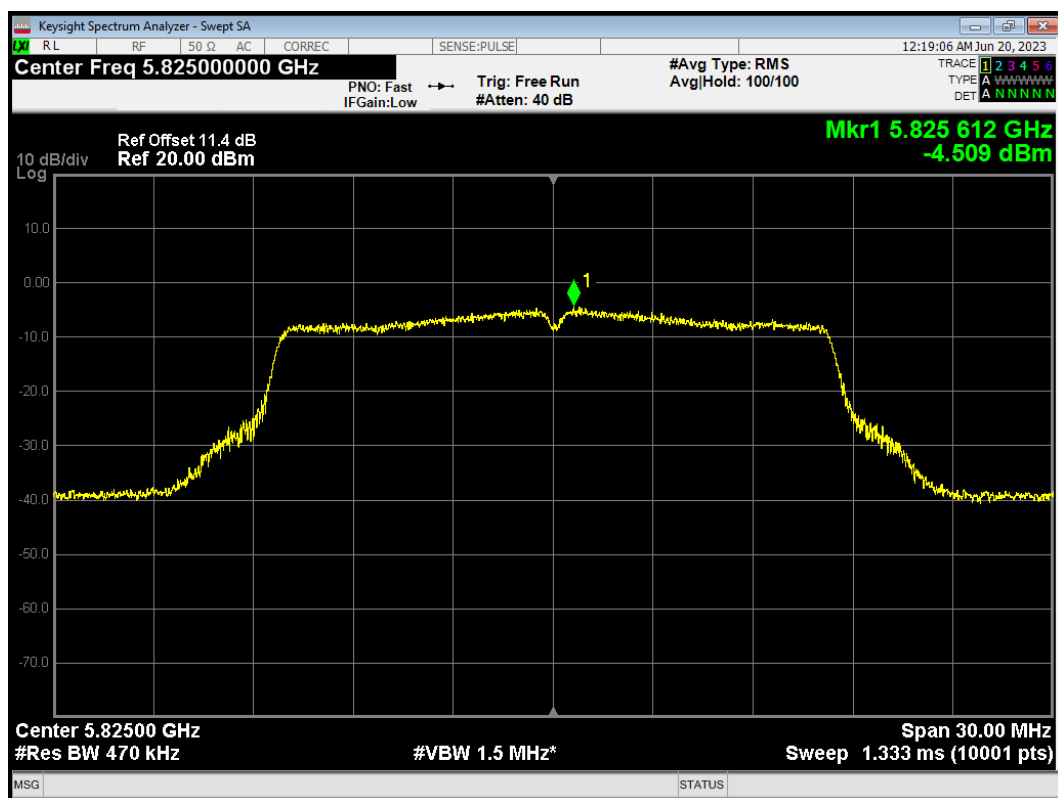


PSD 802.11ac(VHT20) 5720MHz

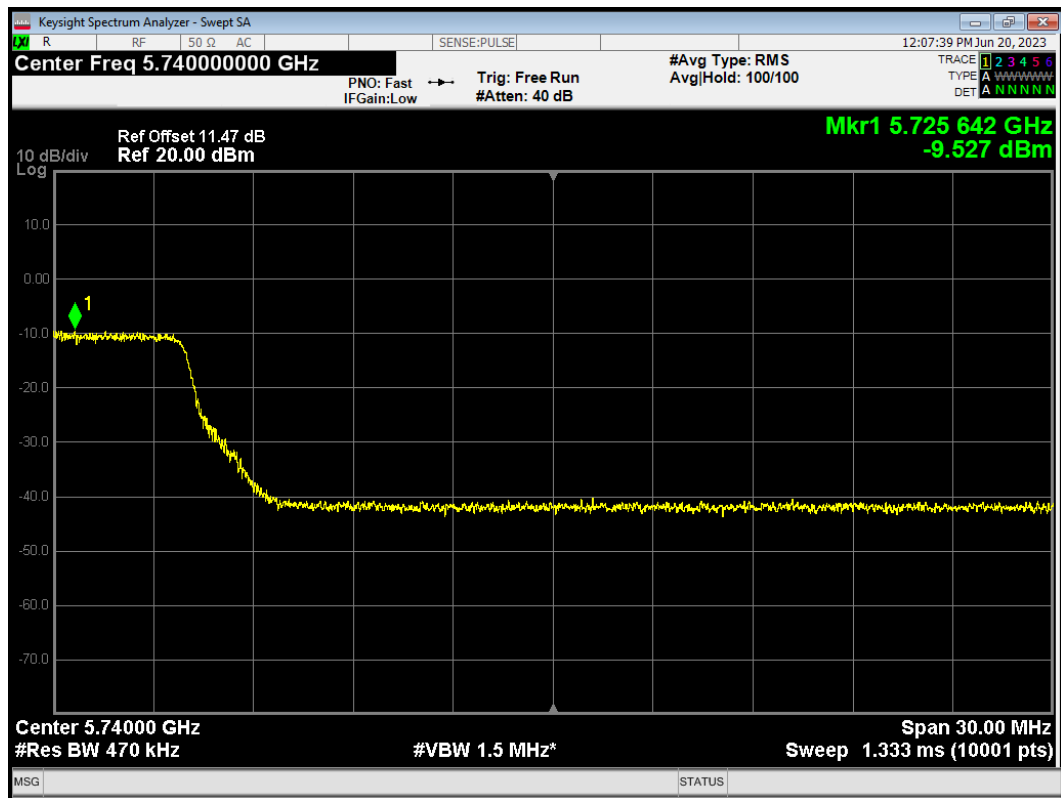


PSD 802.11ac(VHT20) 5745MHz

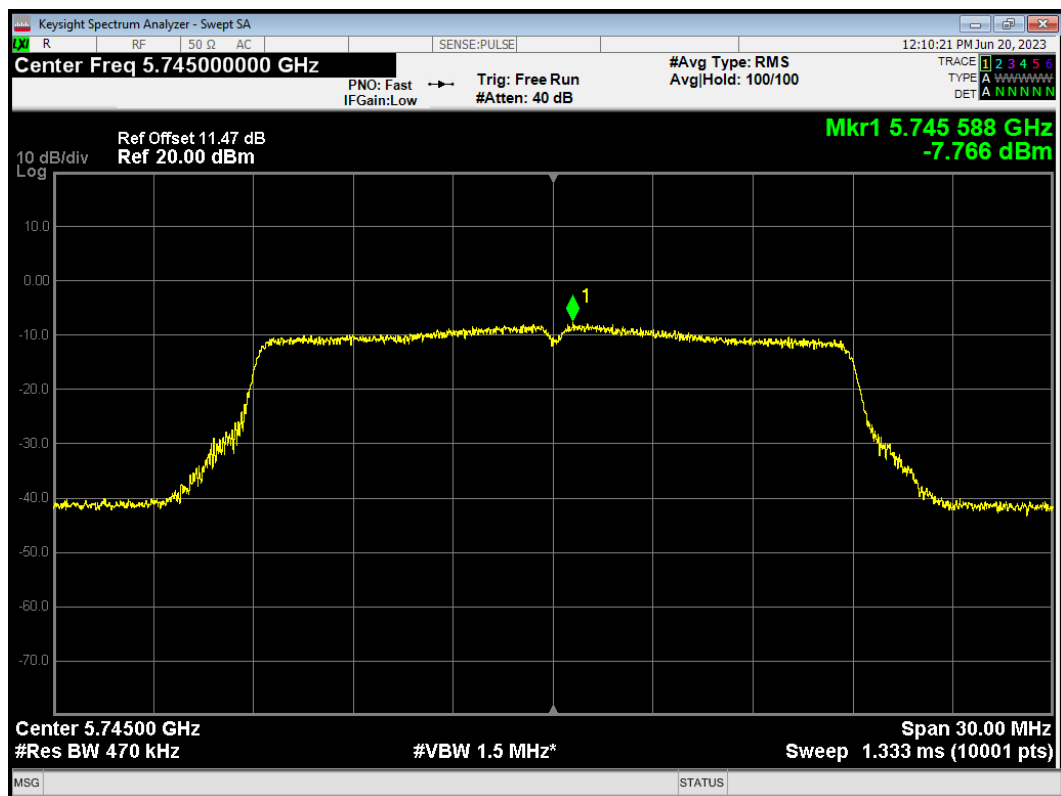


PSD 802.11ac(VHT20) 5785MHz

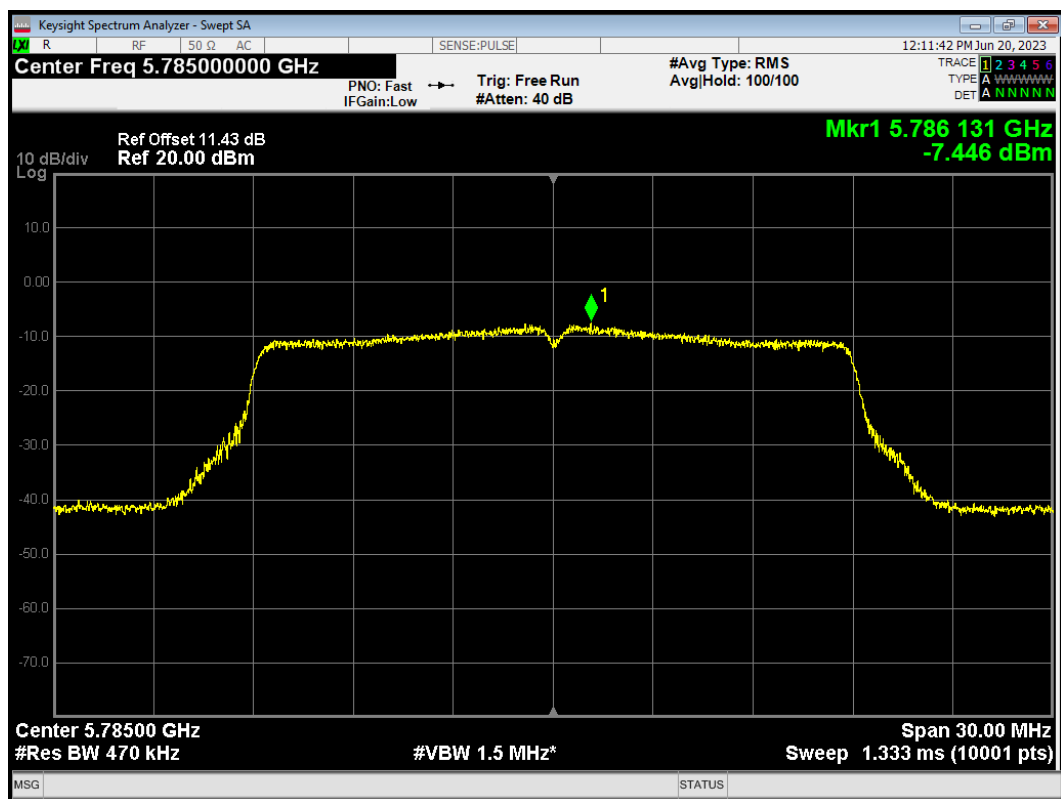

PSD 802.11ac(VHT20) 5825MHz

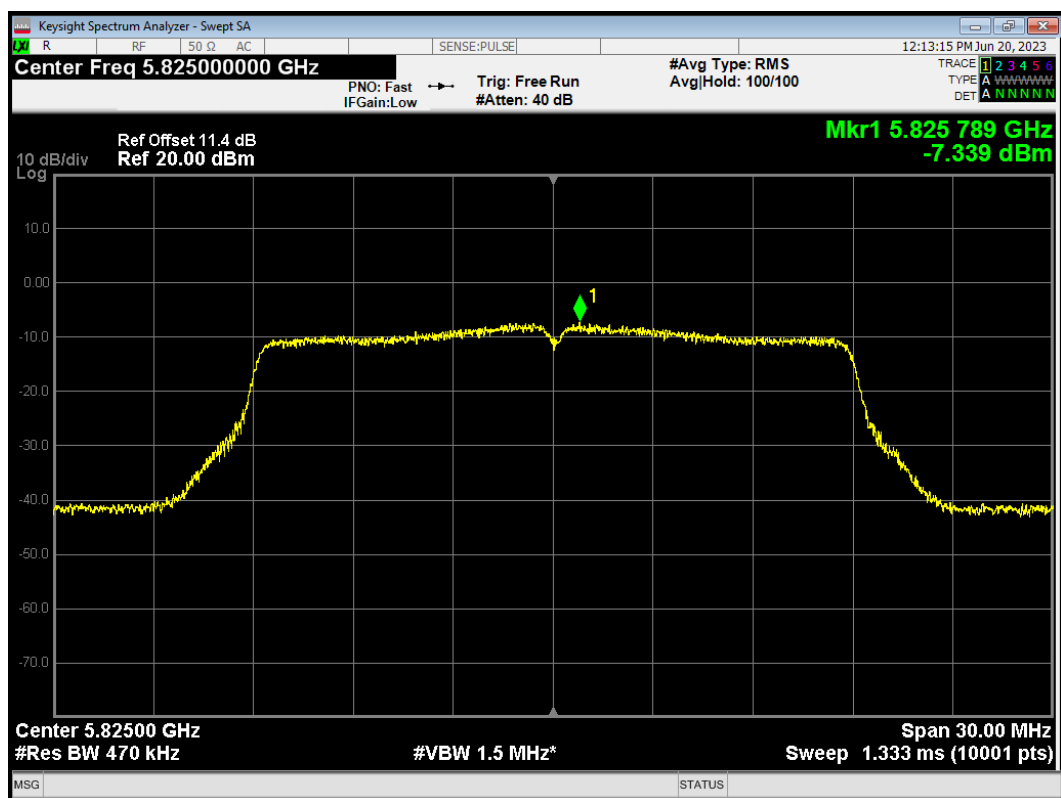

PSD 802.11ac(VHT40) 5710MHz

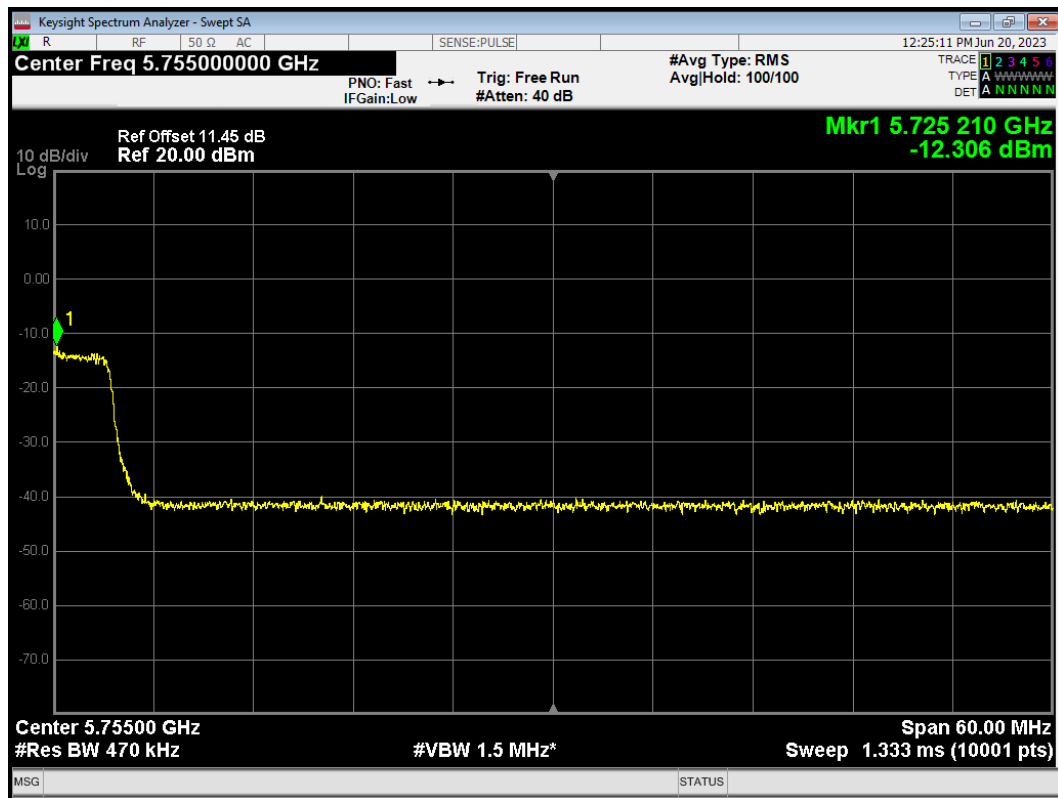

PSD 802.11ac(VHT40) 5755MHz

