

TEST REPORT

Applicant : Shenzhen Atongmu Technology Co., LTD.
Address : Room 605, Office A Dong, Qiaohongsheng Wenhua Chuangyiyuan,
Yintian Gongyequ, Yantian Shequ, Xixiang Jiedao, Baoan Qu,
Shenzhen Shi, Guangdong, 518000, China
Manufacturer : Shenzhen Atongmu Technology Co., LTD.
Address : Room 605, Office A Dong, Qiaohongsheng Wenhua Chuangyiyuan,
Yintian Gongyequ, Yantian Shequ, Xixiang Jiedao, Baoan Qu,
Shenzhen Shi, Guangdong, 518000, China
Product Name : Projector
Model Number : AE261HB
Trademark : 
FCC ID : 2BAAR-AE261
Test Date : Jul. 03, 2026 – Jul. 28, 2026
Date of Report : Jul. 28, 2026
Test Result : This device described above has been tested by NTT, and the test results show that the equipment under test (EUT) is in compliance with the Standard requirements. And it is applicable only to the tested sample identified in the report.


Test Procedure Used:

Standards : FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
KDB 558074 D01 15.247 Meas Guidance v05r02

Prepared by(Test Engineer):
Cindy Qin



Approved(Supervisor):
Ken Wu



Approved(Manager):
Abel Yu



TABLE OF CONTENT

1. General Information	4
1.1. Description of Device (EUT).....	4
1.2. Channel List.....	4
1.3. Summary of test result	5
1.4. Special Accessories and Auxiliary Equipment	5
1.5. Test mode.....	5
1.6. Test configuration	5
1.7. Block Diagram	6
1.8. Test Conditions	6
1.9. Measurement Uncertainty (95% confidence levels, k=2)	6
1.10. Test Facility	7
1.11. Test Equipment.....	8
2. Conducted emission at the mains terminals test	10
2.1. Limit.....	10
2.2. Test Setup	10
2.3. Test Procedure	10
2.4. Test Result	11
3. Radiated Spurious Emissions	13
3.1. Limit.....	13
3.2. Test Setup	14
3.3. Test Procedure	16
3.4. Test Result	17
4. Conducted Spurious Emissions.....	23
4.1. Limit.....	23
4.2. Test Setup	23
4.3. Test Procedure	23
4.4. Test Result	23
5. Band Edge Measurement	24
5.1. Limit.....	24
5.2. Test setup.....	24
5.3. Test Procedure	24
5.4. Test Result	24
6. -6 dB Bandwidth and 99% Bandwidth Measurement.....	25
6.1. Limit.....	25
6.2. Test Setup	25
6.3. Test Procedure	25
6.4. Test Result	25
7. Maximum Peak Output Power.....	26
7.1. Limit.....	26
7.2. Test Setup	26
7.3. Test Procedure	26
7.4. Test Result	26
8. Power Spectral density.....	27
8.1. Limit.....	27
8.2. Test Setup	27
8.3. Test Procedure	27
8.4. Test Result	27
9. Antenna Requirement.....	28
10. TEST SETUP & EUT PHOTOGRAPH	29



Revision History of This Test Report

Report Number	Description	Issued Date
SZNTT26027318E1-3	Initial Issue	2026-07-28

1. General Information

1.1. Description of Device (EUT)

EUT Name	: Projector
Model No.	: AE261HB
Serial Model No.	: AE261HG, AE262HB, AE262HG, AE261FB, AE261FG, AE262FB, AE262FG, AA261HG, AA262HB, AA262HG, AA261FB, AA261FG, AA262FB, AA262FG, AE261HX, AE262HX, AE261HY, AE262HY
Model Difference	: Except for the model number and appearance, all models use the same circuitry and modules.
Power supply	: AC 100~240V 50/60Hz
Operation frequency	: 2412-2462MHz for 802.11b/g/n20; 2422-2452MHz for 802.11n40
Modulation	: 802.11b:(DQPSK, DBPSK, CCK) DSSS 802.11g/n:(64-QAM, 16-QAM, QPSK, BPSK) OFDM
Antenna Type	: Built-in antenna, Maximum Gain is 1.73 dBi
Intend use environment	: Residential, commercial and light industrial environment

1.2. Channel List

Frequency and Channel list for 802.11 b/g/n(HT20/HT40):

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

Test Frequency and Channel for 802.11 b/g/n(HT20/HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	6	2437	11	2462
3	2422	6	2437	9	2452

1.3.Summary of test result

RF PART		
Test Items	Test Requirement	Result
Antenna requirement	FCC part 15.203/15.247 (b)(4)	PASS
AC Power Line Conducted Emission	FCC part 15.207	PASS
Conducted Peak Output Power	FCC part 15.247 (b)(3)	PASS
Channel Bandwidth& 99% OCB	FCC part 15.247 (a)(2)	PASS
Power Spectral Density	FCC part 15.247 (e)	PASS
Band Edge	FCC part 15.247(d)	PASS
Spurious Emission	FCC part 15.205/15.209	PASS
Remark: N/A is an abbreviation for Not Applicable. Measurement Uncertainty is not taken into account for conformity statement		

1.4.Special Accessories and Auxiliary Equipment

Description	Manufacturer	Model No.	Hardware Version	Software Version
USB serial port	/	ZH340	/	/
PC	ASUS	U1	/	/

1.5.Test mode

The special RF test software was used to control EUT work in Continuous WIFI TX mode, and select test channel, wireless mode.

Test mode	Low channel	Middle channel	High channel
802.11b	2412MHz	2437MHz	2462MHz
802.11g	2412MHz	2437MHz	2462MHz
802.11n20	2412MHz	2437MHz	2462MHz
802.11n40	2422MHz	2437MHz	2452MHz


Note: All modes have been tested., Only the worst Data Record in the report

1.6. Test configuration


Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	
Test Software	CMD
Power level setup	Default

1.7.Block Diagram


Conducted Emission



Radiated Emission



RF Conducted Test



1.8.Test Conditions

Category	Normal Conditions	Extreme Conditions
Temperature range	15-35℃	N/A
Humidity range	20-75%	N/A
Pressure range	86-106kPa	N/A
Note: N/A is an abbreviation for Not Applicable.		

1.9.Measurement Uncertainty (95% confidence levels, k=2)

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(9KHz~30MHz)	±4.51dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Remark:When making a conformity declaration based on test results for regulations/standards or specifications,the default is to use Clause 4.2.1of ILAC-G8:09/2019 and the guidelines on decision rules and conformity declaration in IEC Guide 115:2023.	

1.10.Test Facility

Site Description		
Name of Firm	:	Shenzhen NTT Testing Technology Co.,Ltd.
Site Location	:	1B, Building 2, Factory Building & 103, Building 3, Factory Building, Dayang Industrial Park, No.4, Industrial Avenue, Tangwei Community, Fuhai Sub-district, Bao 'an District, Shenzhen City, Guangdong, China
FCC Designation Number	:	CN3446
FCC Test Firm Registration Number	:	129414

1.11.Test Equipment

Conducted Test Site

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	HSRCE944	/	HTEC	2025/4/30	2028/4/29
EMI Test Receiver	ESPI	/	RS	2025/9/8	2026/9/7
LISN	NNLK 8129	00603	Schwarzbeck	2025/9/8	2026/9/7
LISN	NNHV 8123-400	00694	Schwarzbeck	2025/9/8	2026/9/7
LISN	NNHV 8123-400	00680	Schwarzbeck	2025/9/8	2026/9/7
Cable	RG223-1500MM	NA	RG	2025/9/8	2026/9/7

Radiated Test Site(Below 1G and Above 1G)&RF Test Site

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2025/7/24	2028/7/23
EMI Test Receiver	ESCI	101018	RS	2025/9/8	2026/9/7
Amplifi (30MHz-1GHz)	BBV 9718D	00042	SCHWARZBECK	2025/9/8	2026/9/7
Bilog Antenna (30MHz-1GHz)	VULB9168	1858	SCHWARZBECK	2025/9/9	2026/9/8
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHWARZBECK	2025/9/9	2026/9/8
Pream plifier (1GHz-18GHz)	BBV 9718D	0024	SCHWARZBECK	2025/9/8	2026/9/7
Spectrum Analyze (10Hz-40GHz)	FSV 40	100952	Rohde & Schwarz	2025/9/8	2026/9/7
Pream plifier (18GHz-40GHz)	BBV 9721	0056	SCHWARZBECK	2025/9/8	2026/9/7
Double Ridge Guide Horn Antenna (18GHz-40GHz)	SAS-574	588	A.H.System	2025/9/8	2026/9/7
Loop Antenna (9KHz-30MHz)	FMZB1519B	014	SCHWARZBECK	2025/9/8	2026/9/7
Amplifier (9KHz-30MHz)	CVP 9222 C	00109	SCHWARZBECK	2025/9/8	2026/9/7
MXG Signal Analyzer	N9020A	MY505102 02	Agilent	2025/9/8	2026/9/7
MXG Vector Signal Generator	N5182A	MY501400 20	Agilent	2025/9/8	2026/9/7

MXG Analog Signal Generator	N5181A	MY474209 19	Agilent	2025/9/8	2026/9/7
Power Sensor	TR1029-2	512364	Techoy	2025/9/8	2026/9/7
RF Swith	TR1029-1	512364	Techoy	2025/9/8	2026/9/7
Cable	DA800-4000MM	NA	DA	2025/9/8	2026/9/7
Cable	DA800-11000MM	NA	DA	2025/9/8	2026/9/7
High Pass Filter	HXHPF-3G-S	202507220 001	Iuanwei	2025/9/8	2026/9/7

Test software

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ-EMC	Ver.EMC-CON 3A1.1+
2	EMC radiation test system	FALA	EZ-EMC	Ver.FA-03A2 RE+
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

2. Conducted emission at the mains terminals test

2.1.Limit


Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

2.2.Test Setup

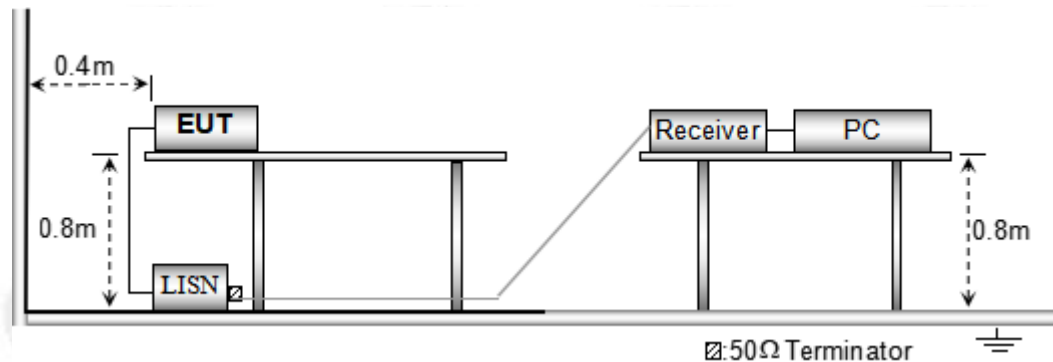


2.3.Test Procedure

1. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
2. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
3. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
4. LISN at least 80 cm from nearest part of EUT chassis.
5. For the actual test configuration, please refer to the related Item - EUT Test Photos.

2.4.Test Result

Conducted Emission At The Mains Terminals Test Data			
Temperature:	25.3℃	Relative Humidity:	54%
Pressure:	1008hPa	Phase :	Line
Test Voltage :	AC 120V/60Hz	Test Mode:	802.11b(CH11)

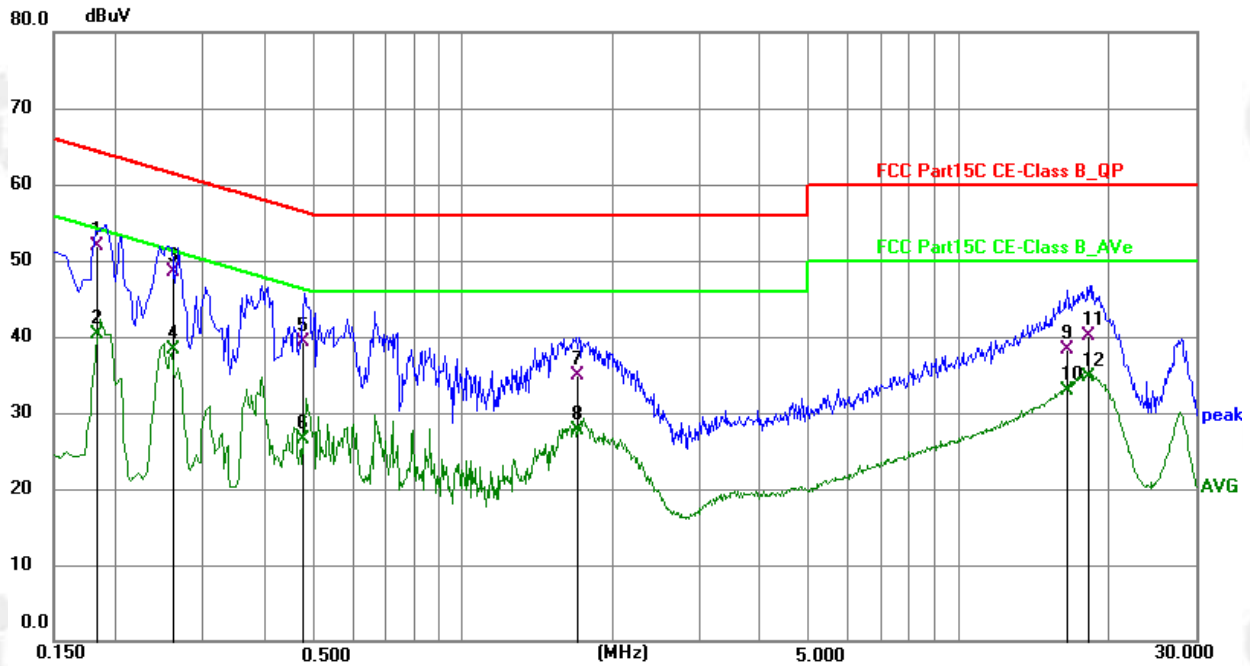


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1 *	0.1842	32.40	19.55	51.95	64.29	-12.34	QP
2	0.1842	20.66	19.55	40.21	54.29	-14.08	AVG
3	0.2604	29.01	19.54	48.55	61.42	-12.87	QP
4	0.2604	18.82	19.54	38.36	51.42	-13.06	AVG
5	0.4770	19.68	19.53	39.21	56.39	-17.18	QP
6	0.4770	6.93	19.53	26.46	46.39	-19.93	AVG
7	1.7071	15.33	19.56	34.89	56.00	-21.11	QP
8	1.7071	8.09	19.56	27.65	46.00	-18.35	AVG
9	16.5711	18.58	19.67	38.25	60.00	-21.75	QP
10	16.5711	13.19	19.67	32.86	50.00	-17.14	AVG
11	18.3518	20.55	19.65	40.20	60.00	-19.80	QP
12	18.3518	15.06	19.65	34.71	50.00	-15.29	AVG

Note:

1. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
2. Margin = Reading level + Correct Factor - Limit
3. All the modes have tested and recorded the worst mode(802.11b) in the report

Conducted Emission At The Mains Terminals Test Data

Temperature:	25.3°C	Relative Humidity:	54%
Pressure:	1008hPa	Phase :	Neutral
Test Voltage :	AC 120V/60Hz	Test Mode:	802.11b(CH11)

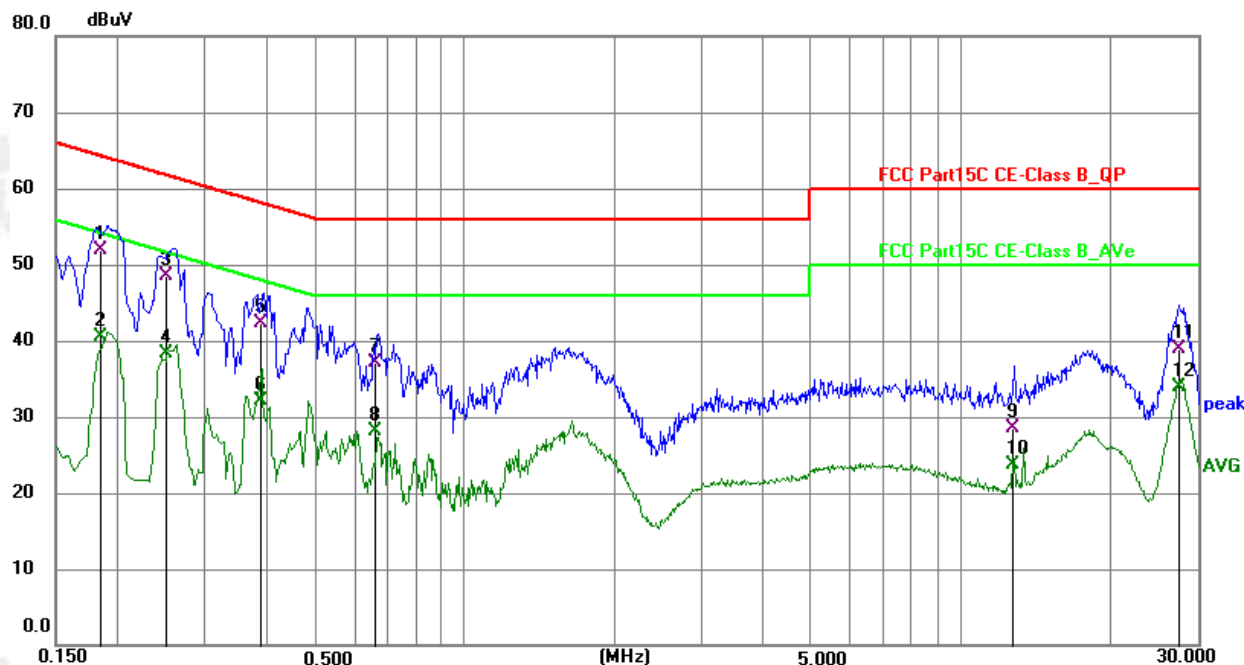

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1 *	0.1846	32.43	19.55	51.98	64.28	-12.30	QP
2	0.1846	20.99	19.55	40.54	54.28	-13.74	AVG
3	0.2509	29.05	19.54	48.59	61.73	-13.14	QP
4	0.2509	18.70	19.54	38.24	51.73	-13.49	AVG
5	0.3881	22.75	19.52	42.27	58.10	-15.83	QP
6	0.3881	12.51	19.52	32.03	48.10	-16.07	AVG
7	0.6626	17.57	19.53	37.10	56.00	-18.90	QP
8	0.6626	8.55	19.53	28.08	46.00	-17.92	AVG
9	12.8082	8.91	19.68	28.59	60.00	-31.41	QP
10	12.8082	4.12	19.68	23.80	50.00	-26.20	AVG
11	27.5652	19.15	19.72	38.87	60.00	-21.13	QP
12	27.5652	14.24	19.72	33.96	50.00	-16.04	AVG

Note:

1. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
2. Margin = Reading level + Correct Factor - Limit
3. All the modes have tested and recorded the worst mode(802.11b) in the report

3. Radiated Spurious Emissions

3.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
 ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
 Test Result: PASS
 Measurement Distance: 3m

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log(2400/F(\text{kHz})) + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log(24000/F(\text{kHz})) + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log(30) + 40$
30 ~ 88	100	3	100	$20\log(100)$
88 ~ 216	150	3	150	$20\log(150)$
216 ~ 960	200	3	200	$20\log(200)$
Above 960	500	3	500	$20\log(500)$


3.2.Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.



The test setup for emission measurement below 30MHz.

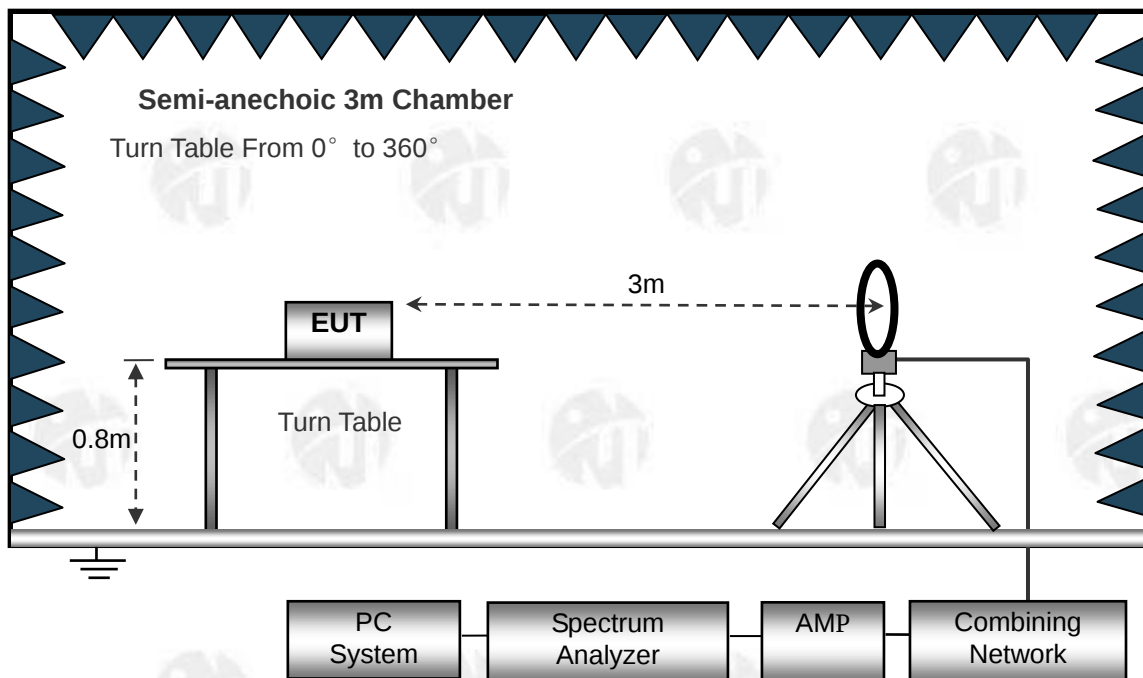

The test setup for emission measurement from 30 MHz to 1 GHz.

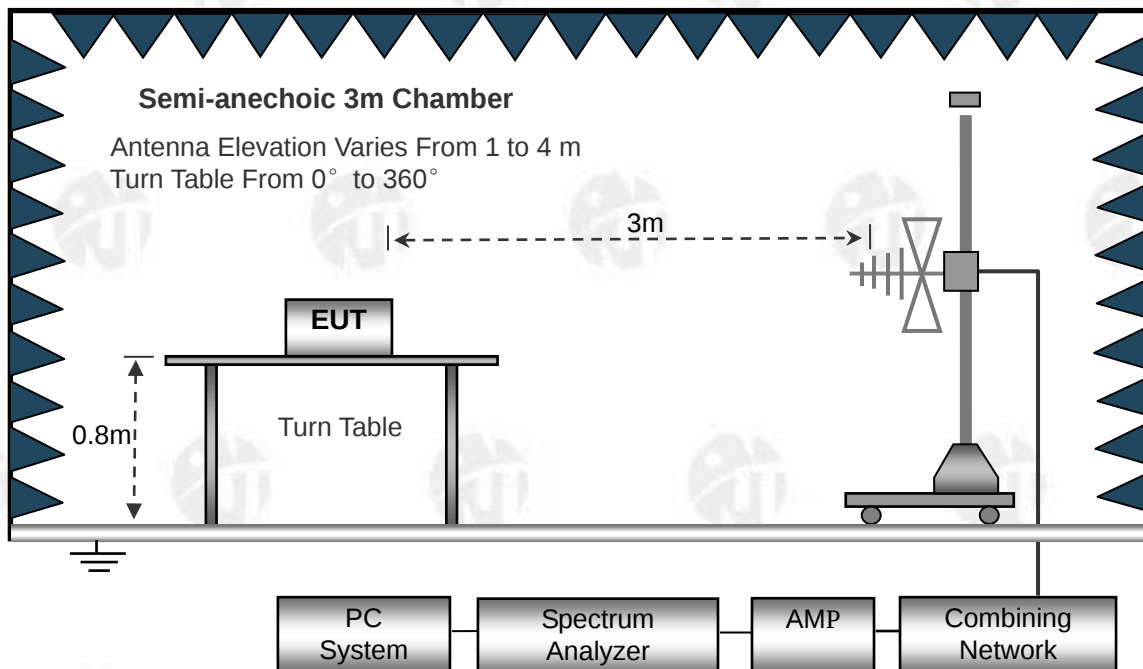

The test setup for emission measurement above 1 GHz.

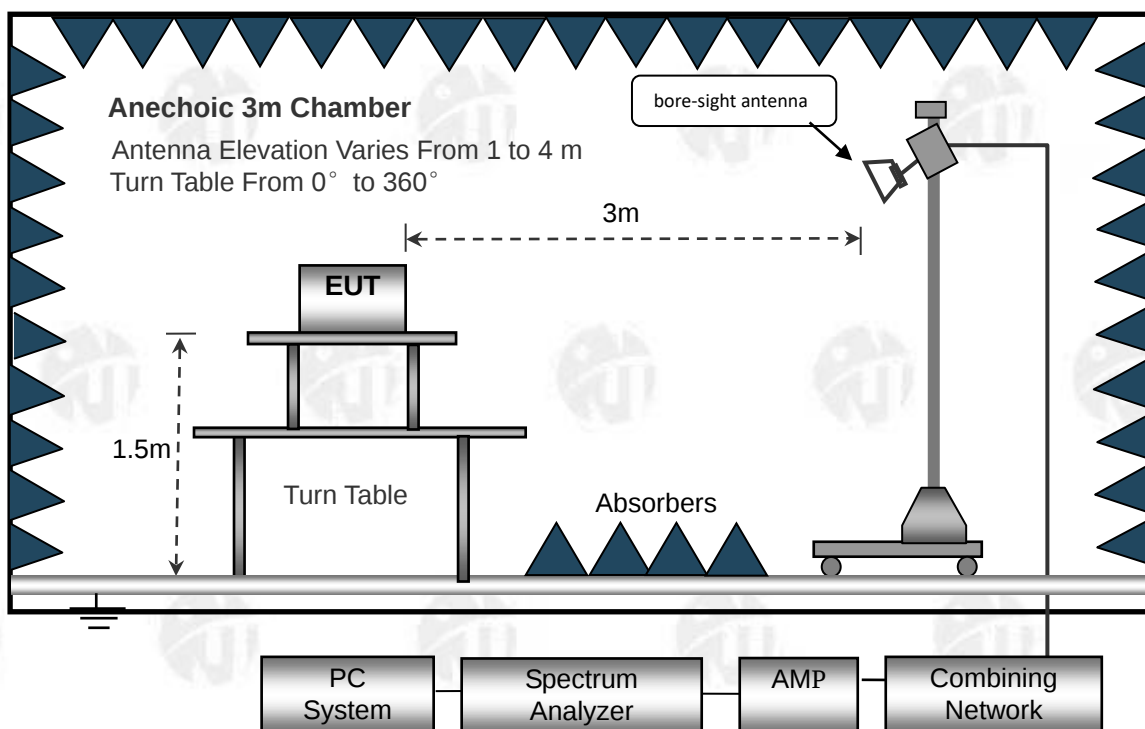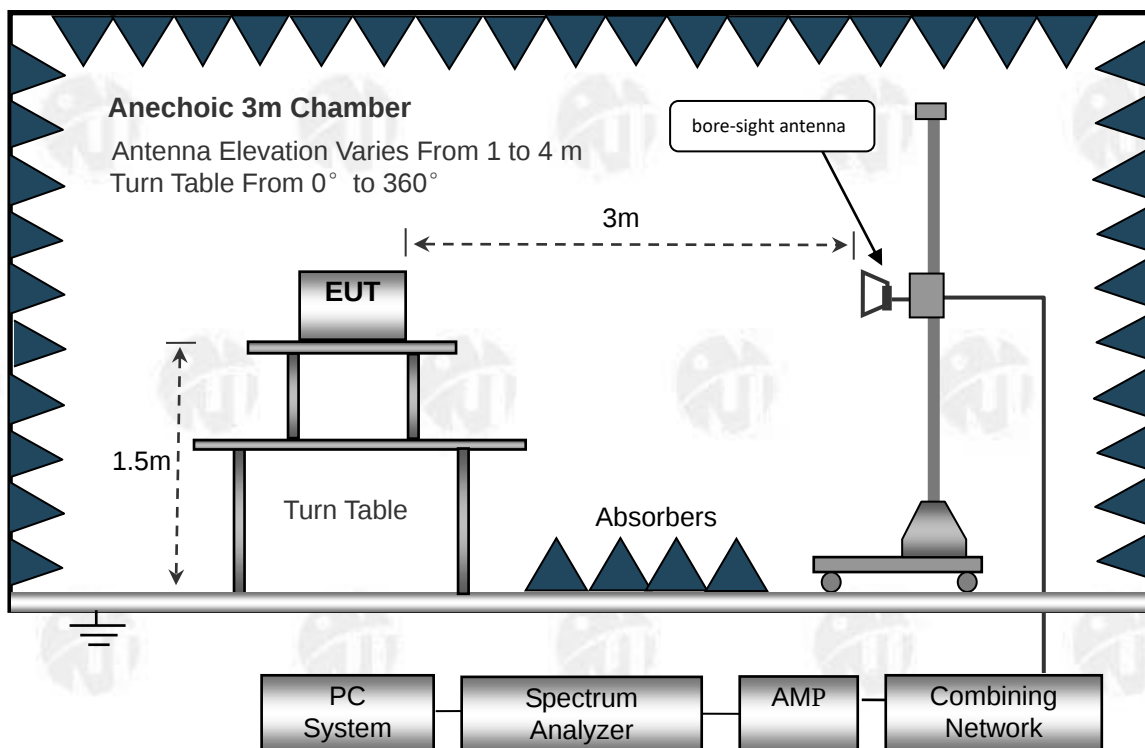

3.3.Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high - pass filter is used during radiated emissions above 1GHz measurement.


3.4.Test Result

Test Frequency: 9KHz~30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 1GHz

Radiation Emission Test Data			
Temperature:	25.3℃	Relative Humidity:	54%
Pressure:	1008hPa	Phase :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode:	802.11b(CH11)

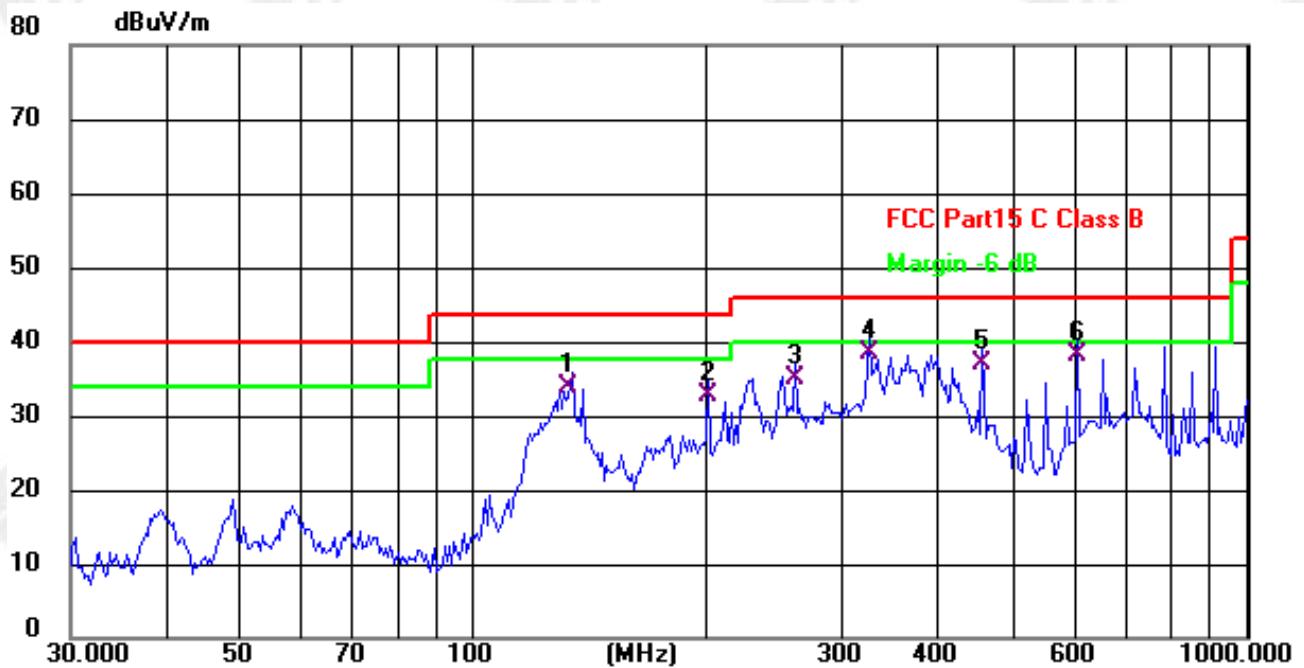

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	133.6184	51.01	-17.11	33.90	43.50	-9.60	QP
2	200.6880	52.29	-19.49	32.80	43.50	-10.70	QP
3	260.1444	52.66	-17.56	35.10	46.00	-10.90	QP
4 *	325.5957	54.20	-15.80	38.40	46.00	-7.60	QP
5	455.9057	49.81	-12.71	37.10	46.00	-8.90	QP
6	603.5390	47.24	-9.14	38.10	46.00	-7.90	QP

Note:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin=Emission Level-Limit

2. All the modes have tested and recorded the worst mode(802.11b) in the report

Radiation Emission Test Data			
Temperature:	25.3°C	Relative Humidity:	54%
Pressure:	1008hPa	Phase :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode:	802.11b(CH11)

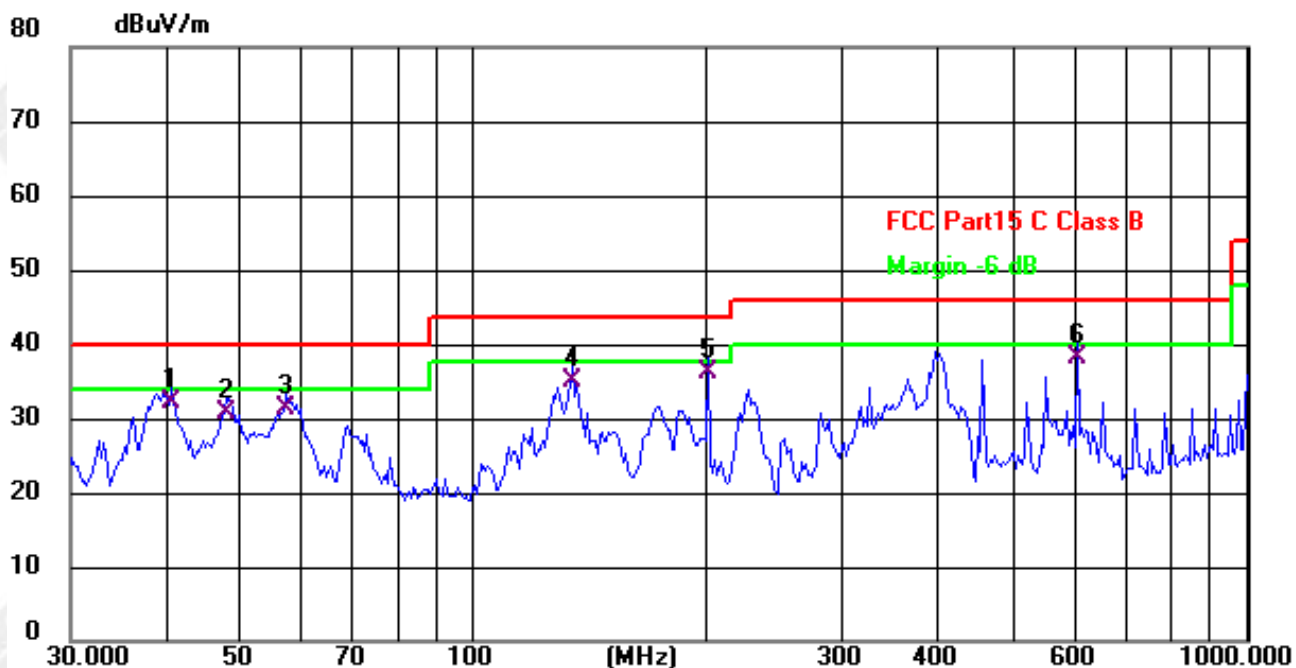

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	40.5591	48.88	-16.78	32.10	40.00	-7.90	QP
2	47.6584	47.91	-17.11	30.80	40.00	-9.20	QP
3	57.1914	48.83	-17.63	31.20	40.00	-8.80	QP
4	133.6186	52.21	-17.11	35.10	43.50	-8.40	QP
5 *	200.6880	55.59	-19.49	36.10	43.50	-7.40	QP
6	603.5390	47.24	-9.14	38.10	46.00	-7.90	QP

Note:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin=Emission Level-Limit

2. All the modes have tested and recorded the worst mode(802.11b) in the report

1GHz~25GHz

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412MHz									
V	4824.00	47.55	34.11	5.04	32.44	50.92	74.00	-23.08	Pk
V	4824.00	37.4	34.11	5.04	32.44	40.77	54.00	-13.23	AV
V	7236.00	41.14	32.57	6.30	35.89	50.76	74.00	-23.24	Pk
V	7236.00	28.94	32.57	6.30	35.89	38.56	54.00	-15.44	AV
V	9648.00	39.68	32.96	7.56	38.40	52.68	74.00	-21.32	Pk
V	9648.00	25.37	32.96	7.56	38.40	38.37	54.00	-15.63	AV
V	12060.00	32.8	32.06	8.92	39.01	48.67	74.00	-25.33	Pk
V	12060.00	21.64	32.06	8.92	39.01	37.51	54.00	-16.49	AV
H	4824.00	47.39	34.11	5.04	32.44	50.76	74.00	-23.24	Pk
H	4824.00	35.86	34.11	5.04	32.44	39.23	54.00	-14.77	AV
H	7236.00	41.24	32.57	6.30	35.89	50.86	74.00	-23.14	Pk
H	7236.00	27.28	32.57	6.30	35.89	36.90	54.00	-17.10	AV
H	9648.00	35.41	32.96	7.56	38.40	48.41	74.00	-25.59	Pk
H	9648.00	24.56	32.96	7.56	38.40	37.56	54.00	-16.44	AV
H	12060.00	37.64	32.06	8.92	39.01	53.51	74.00	-20.49	Pk
H	12060.00	27.15	32.06	8.92	39.01	43.02	54.00	-10.98	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	48.94	34.08	5.08	32.57	52.51	74.00	-21.49	Pk
V	4874.00	37.16	34.08	5.08	32.57	40.73	54.00	-13.27	AV
V	7311.00	46.01	32.62	6.34	35.95	55.68	74.00	-18.32	Pk
V	7311.00	31.89	32.62	6.34	35.95	41.56	54.00	-12.44	AV
V	9748.00	39.85	32.93	7.58	38.40	52.90	74.00	-21.10	Pk
V	9748.00	33.31	32.93	7.58	38.40	46.36	54.00	-7.64	AV
V	12815.00	44.23	31.97	8.89	39.04	60.19	74.00	-13.81	Pk
V	12815.00	29.18	31.97	8.89	39.04	45.14	54.00	-8.86	AV
H	4874.00	47.75	34.08	5.08	32.57	51.32	74.00	-22.68	Pk
H	4874.00	34.80	34.08	5.08	32.57	38.37	54.00	-15.63	AV
H	7311.00	39.38	32.62	6.34	35.95	49.05	74.00	-24.95	Pk
H	7311.00	30.30	32.62	6.34	35.95	39.97	54.00	-14.03	AV
H	9748.00	42.48	32.93	7.58	38.40	55.53	74.00	-18.47	Pk
H	9748.00	29.11	32.93	7.58	38.40	42.16	54.00	-11.84	AV
H	12815.00	36.62	31.97	8.89	39.04	52.58	74.00	-21.42	Pk
H	12815.00	23.65	31.97	8.89	39.04	39.61	54.00	-14.39	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2462MHz									
V	4924.00	46.82	34.05	5.14	32.79	50.70	74.00	-23.30	Pk
V	4924.00	33.51	34.05	5.14	32.79	37.39	54.00	-16.61	AV
V	7386.00	36.65	32.67	6.36	35.99	46.33	74.00	-27.67	Pk
V	7386.00	31.95	32.67	6.36	35.99	41.63	54.00	-12.37	AV
V	9848.00	43.05	32.89	7.59	38.37	56.12	74.00	-17.88	Pk
V	9848.00	29.14	32.89	7.59	38.37	42.21	54.00	-11.79	AV
V	12310.00	34.55	31.88	8.82	39.06	50.55	74.00	-23.45	Pk
V	12310.00	26.68	31.88	8.82	39.06	42.68	54.00	-11.32	AV
H	4924.00	43.18	34.05	5.14	32.79	47.06	74.00	-26.94	Pk
H	4924.00	35.84	34.05	5.14	32.79	39.72	54.00	-14.28	AV
H	7386.00	42.79	32.67	6.36	35.99	52.47	74.00	-21.53	Pk
H	7386.00	29.33	32.67	6.36	35.99	39.01	54.00	-14.99	AV
H	9848.00	38.79	32.89	7.59	38.37	51.86	74.00	-22.14	Pk
H	9848.00	27.43	32.89	7.59	38.37	40.50	54.00	-13.50	AV
H	12310.00	38.90	31.88	8.82	39.06	54.90	74.00	-19.10	Pk
H	12310.00	27.74	31.88	8.82	39.06	43.74	54.00	-10.26	AV

Note: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4.The 1-25GHz range has been tested, and the report only records the worst performance of the 1-18G range.

Radiated Band Emission Measurement:

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
802.11b	Low Channel: 2412MHz									
	H	2390	57.97	35.17	3.48	27.49	53.77	74	-20.23	PK
	H	2390	49.68	35.17	3.48	27.49	45.48	54	-8.52	AV
	H	2400	60.44	35.16	3.49	27.52	56.29	74	-17.71	PK
	H	2400	49.33	35.16	3.49	27.52	45.18	54	-8.82	AV
	V	2390	57.30	35.17	3.48	27.49	53.10	74	-20.9	PK
	V	2390	49.99	35.17	3.48	27.49	45.79	54	-8.21	AV
	V	2400	59.48	35.16	3.49	27.52	55.33	74	-18.67	PK
	V	2400	50.03	35.16	3.49	27.52	45.88	54	-8.12	AV
	High Channel: 2462MHz									
	H	2483.5	58.13	35.11	3.56	27.75	54.33	74	-19.67	PK
	H	2483.5	48.94	35.11	3.56	27.75	45.14	54	-8.86	AV
	H	2500	59.72	35.10	3.57	27.80	55.99	74	-18.01	PK
	H	2500	50.10	35.10	3.57	27.80	46.37	54	-7.63	AV
	V	2483.5	58.07	35.11	3.56	27.75	54.27	74	-19.73	PK
	V	2483.5	49.52	35.11	3.56	27.75	45.72	54	-8.28	AV
	V	2500	58.39	35.10	3.57	27.80	54.66	74	-19.34	PK
	V	2500	49.96	35.10	3.57	27.80	46.23	54	-7.77	AV
802.11g	Low Channel: 2412MHz									
	H	2390	57.42	35.17	3.48	27.49	53.22	74	-20.78	PK
	H	2390	49.55	35.17	3.48	27.49	45.35	54	-8.65	AV
	H	2400	60.41	35.16	3.49	27.52	56.26	74	-17.74	PK
	H	2400	49.39	35.16	3.49	27.52	45.24	54	-8.76	AV
	V	2390	57.73	35.17	3.48	27.49	53.53	74	-20.47	PK
	V	2390	50.02	35.17	3.48	27.49	45.82	54	-8.18	AV
	V	2400	59.39	35.16	3.49	27.52	55.24	74	-18.76	PK
	V	2400	50.10	35.16	3.49	27.52	45.95	54	-8.05	AV
	High Channel: 2462MHz									
	H	2483.5	57.67	35.11	3.56	27.75	53.87	74	-20.13	PK
	H	2483.5	48.64	35.11	3.56	27.75	44.84	54	-9.16	AV
	H	2500	59.70	35.10	3.57	27.80	55.97	74	-18.03	PK
	H	2500	50.02	35.10	3.57	27.80	46.29	54	-7.71	AV
	V	2483.5	58.54	35.11	3.56	27.75	54.74	74	-19.26	PK
	V	2483.5	49.99	35.11	3.56	27.75	46.19	54	-7.81	AV
	V	2500	58.41	35.10	3.57	27.80	54.68	74	-19.32	PK
	V	2500	50.30	35.10	3.57	27.80	46.57	54	-7.43	AV
802.11 n20	Low Channel: 2412MHz									
	H	2390	58.00	35.17	3.48	27.49	53.80	74	-20.2	PK
	H	2390	49.60	35.17	3.48	27.49	45.40	54	-8.6	AV
	H	2400	60.67	35.16	3.49	27.52	56.52	74	-17.48	PK
	H	2400	49.84	35.16	3.49	27.52	45.69	54	-8.31	AV
	V	2390	57.31	35.17	3.48	27.49	53.11	74	-20.89	PK
	V	2390	50.18	35.17	3.48	27.49	45.98	54	-8.02	AV
	V	2400	59.62	35.16	3.49	27.52	55.47	74	-18.53	PK
	V	2400	49.67	35.16	3.49	27.52	45.52	54	-8.48	AV
	High Channel: 2462MHz									
	H	2483.5	57.89	35.11	3.56	27.75	54.09	74	-19.91	PK
	H	2483.5	48.85	35.11	3.56	27.75	45.05	54	-8.95	AV
	H	2500	59.29	35.10	3.57	27.80	55.56	74	-18.44	PK

	H	2500	49.77	35.10	3.57	27.80	46.04	54	-7.96	AV
	V	2483.5	58.26	35.11	3.56	27.75	54.46	74	-19.54	PK
	V	2483.5	49.58	35.11	3.56	27.75	45.78	54	-8.22	AV
	V	2500	58.28	35.10	3.57	27.80	54.55	74	-19.45	PK
	V	2500	50.35	35.10	3.57	27.80	46.62	54	-7.38	AV
802.11 n40	Low Channel 2422MHz									
	H	2390.00	57.89	35.17	3.48	27.49	53.69	74	-20.31	PK
	H	2390.00	49.47	35.17	3.48	27.49	45.27	54	-8.73	AV
	H	2400.00	60.58	35.16	3.49	27.52	56.43	74	-17.57	PK
	H	2400.00	49.60	35.16	3.49	27.52	45.45	54	-8.55	AV
	V	2390.00	57.56	35.17	3.48	27.49	53.36	74	-20.64	PK
	V	2390.00	49.91	35.17	3.48	27.49	45.71	54	-8.29	AV
	V	2400.00	59.39	35.16	3.49	27.52	55.24	74	-18.76	PK
	V	2400.00	49.94	35.16	3.49	27.52	45.79	54	-8.21	AV
	H	2390.00	57.89	35.17	3.48	27.49	53.69	74	-20.31	PK
	High Channel 2452MHz									
	H	2483.50	57.99	35.11	3.56	27.75	54.19	74	-19.81	PK
	H	2483.50	48.51	35.11	3.56	27.75	44.71	54	-9.29	AV
	H	2500.00	59.59	35.10	3.57	27.80	55.86	74	-18.14	PK
	H	2500.00	50.03	35.10	3.57	27.80	46.30	54	-7.7	AV
	V	2483.50	58.10	35.11	3.56	27.75	54.30	74	-19.7	PK
	V	2483.50	49.72	35.11	3.56	27.75	45.92	54	-8.08	AV
	V	2500.00	58.23	35.10	3.57	27.80	54.50	74	-19.5	PK
	V	2500.00	50.25	35.10	3.57	27.80	46.52	54	-7.48	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss - Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4. Conducted Spurious Emissions

4.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247
Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to
C63.10a-2024
Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

4.2.Test Setup



4.3.Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
 2. Set the spectrum analyzer:
 - a) Set instrument center frequency to DTS channel center frequency.
 - b) Set the span to ~ 1.5 times the DTS bandwidth.
 - c) Set the RBW = 100 kHz.
 - d) Set the VBW $\sim [3 \times \text{RBW}]$.
 - e) Detector = peak.
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum PSD level.
- Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

4.4.Test Result

Please see the attachment for data.

5. Band Edge Measurement

5.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;

ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

Test Limit: Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Mode: Transmitting

5.2.Test setup



5.3.Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

5.4.Test Result

Please see the attachment for data.


6. -6 dB Bandwidth and 99% Bandwidth Measurement

6.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

6.2.Test Setup

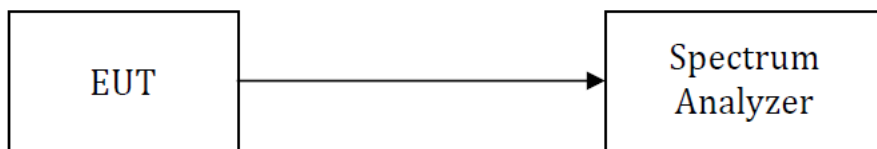

6.3.Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

6.4.Test Result

Please see the attachment for data.

7. Maximum Peak Output Power

7.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02April 2,2019;

ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

7.2.Test Setup



7.3.Test Procedure

KDB 558074 D01 15.247 Meas Guidance v05r02April 2,2019

section 8.3.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW ≥ 3 RBW.
- Set span $\geq 3 \times$ RBW
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

section 8.3.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- Set the RBW = 1% to 5% of the OBW, not to exceed 1 MHz..
- Set the VBW $\geq 3 \times$ RBW
- Set the span $\geq 1.5 \times$ OBW.
- Detector = RMS.
- Sweep time = auto couple.
- trigger = free run..
- Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\geq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Trace average at least 100 traces in power averaging (rms) mode.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

7.4.Test Result

Please see the attachment for data.

8. Power Spectral density

8.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02April 2,2019;

ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS

8.2.Test Setup



8.3.Test Procedure

KDB 558074 D01 15.247 Meas Guidance v05r02April 2,2019

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.

2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.

3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

8.4.Test Result

Please see the attachment for data.



9. Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

This product has an Built-in antenna, and the maximum antenna gain is 1.73 dBi, fulfill the requirement of this section.



10. TEST SETUP & EUT PHOTOGRAPH

Please see the attachment for details.

----- End of Report -----