

Antenna Approval Sheet

For

WIFI-PCB Antenna Project

Customer		Project	WIFI-PCB Antenna
Band	WiFi 2.4GHZ/5GHZ/BT2.4GHZ		
ZC PN	AE003-PA-96		
Version	R:A	Data	2025-7-1

RF	郭鹏飞	ME	黄世华
Checked By			
Confirmed By			
Cust Confirm			

1.Manufacturer information

Company name: Shenzhen Zhongcheng communication products Co., Ltd


Address: 5th floor, building C, Huafeng Industrial Zone, Liuxian Road, 71 District,
Bao' an, Shenzhen

Tel: 0755-29995224

Fax: 0755-27863505

2.Summary of the DUT

Antenna Picture

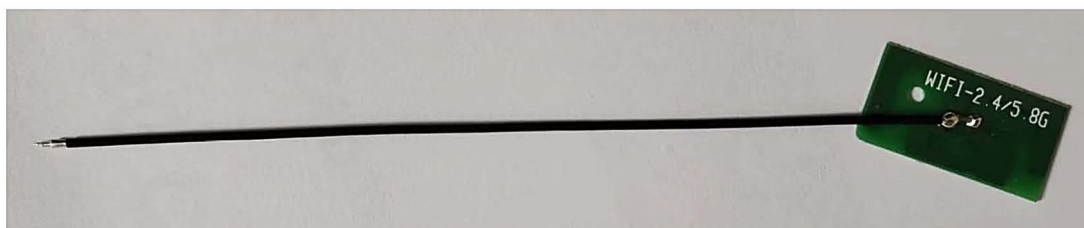

3. Electrical Specification:

Antenna types	Built-in WIFI Antenna
Frequency	2400-2500 MHz, 5150-5350MHZ, 5725-5850MHZ
Impedance	50 Ω
VSWR	< 2.0
Peak Gain	2.4GHZ 1.73dbi, 5.1GHZ 4.31dbi, 5.8GHZ 4.45dbi
Efficiency	>35 %
Antenna Material	PCB+Coaxial line
Connector Type	Soldering

4. Test Condition

4.1	TEST ITEM	TESTING INSTRUMENT	REMARK S
ACTIVE TEST	1. Antenna Gain 2. S.W.R 3. Return Loss 4. Radiation Pattern	1. Network analyzer (R&S ZVL6) 2. Network analyzer (HP 8753D)	

4.2 Matching Circuit The matching circuit was Default

5.1 RF Performance-WIFI Antenna

5.1.1 Passive parameters


Freq. (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Gain (dBi)	0.58	0.66	1.1	1.02	1.17	1.59	0.72	0.08	0.72	1.19	1.73

Freq. (MHz)	5150	5170	5190	5210	5230	5250	5270	5290	5310	5330	5350
Gain (dBi)	3.13	3.45	3.56	4.11	4.31	4.21	4.1	3.82	3.28	3.19	3.04




Freq. (MHz)	5720	5740	5760	5780	5800	5820	5840	5860	5880
Gain (dBi)	2.51	4.45	3.32	4.18	2.54	4.01	1.41	2.47	1.09


5.1.2 S Parameter

Frequency (MHz)	2400	2450	2480
Return Loss (dB)	-20.58	-22.74	-15.39
VSWR	1.63	1.28	1.81

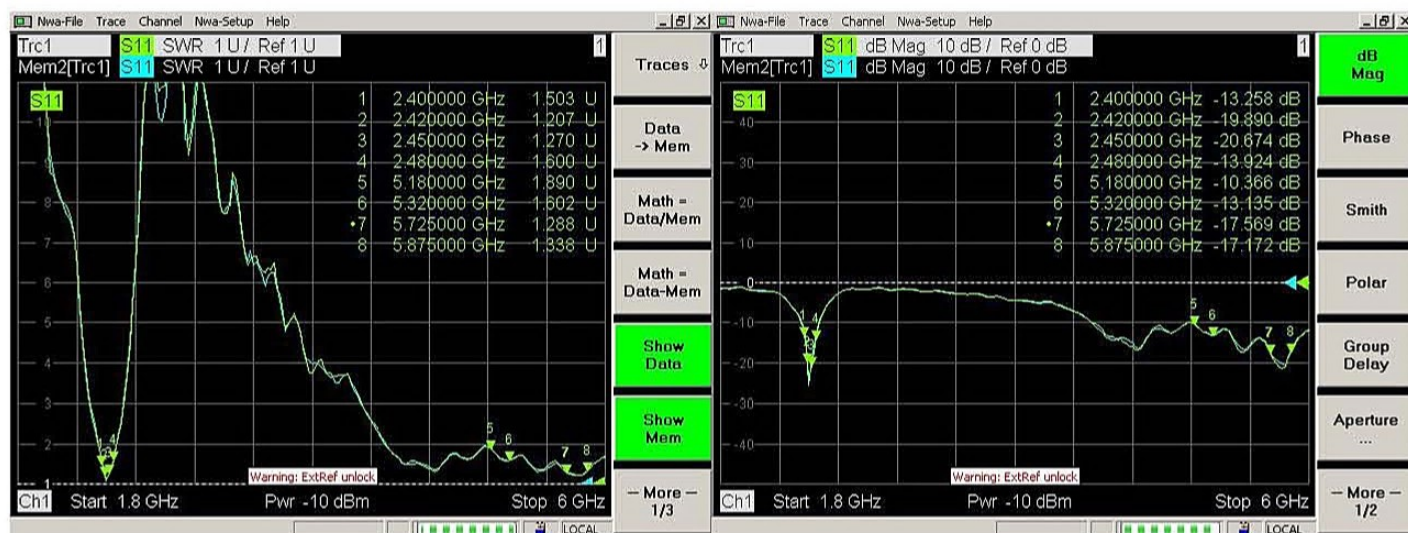


5.1.3 Radiation

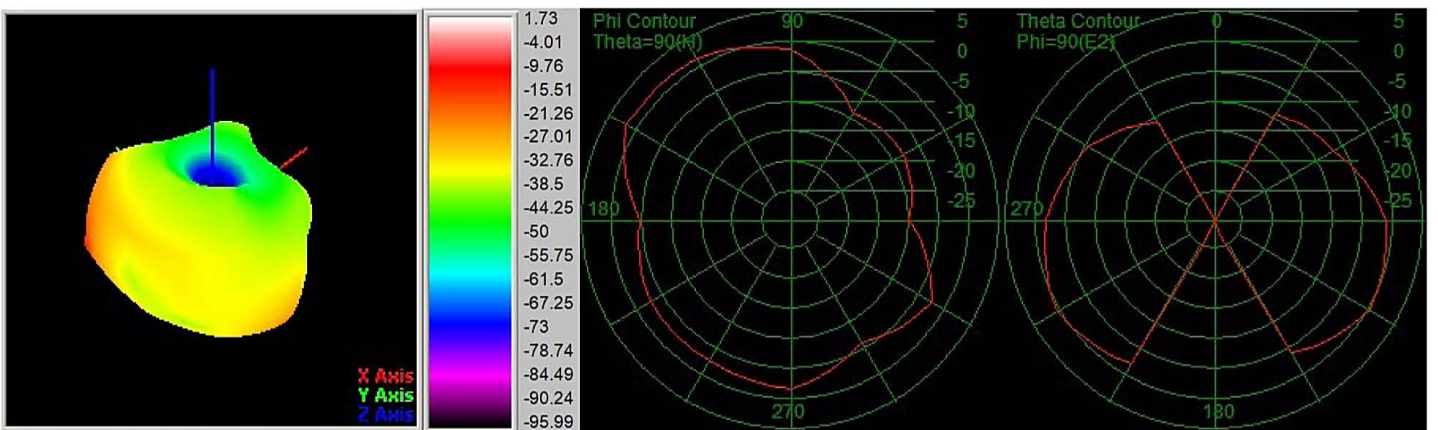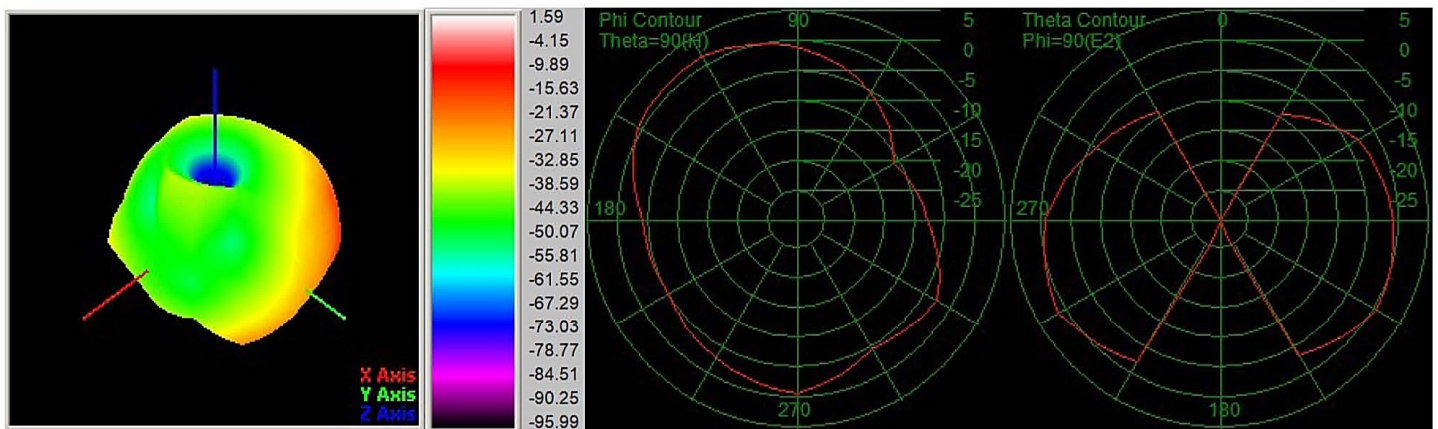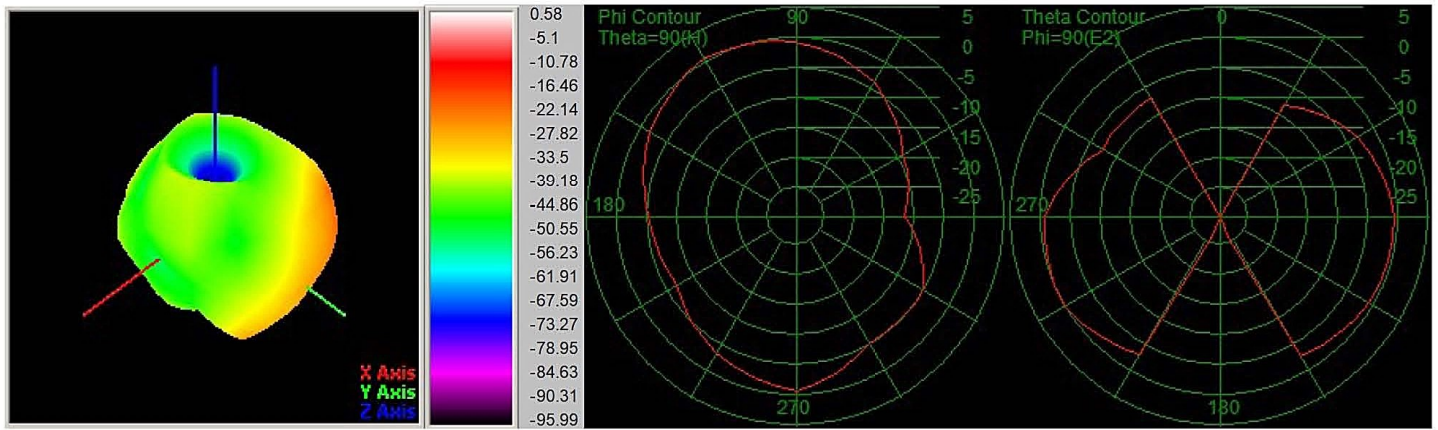

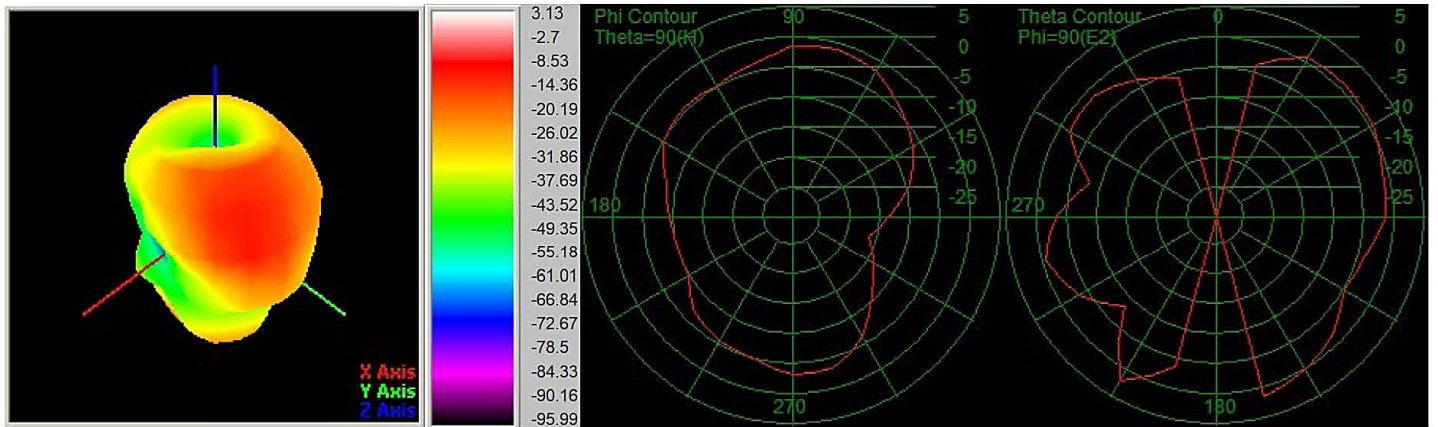


Passive -Freq5150.00MHZ

Gain: 3.13(dBi)

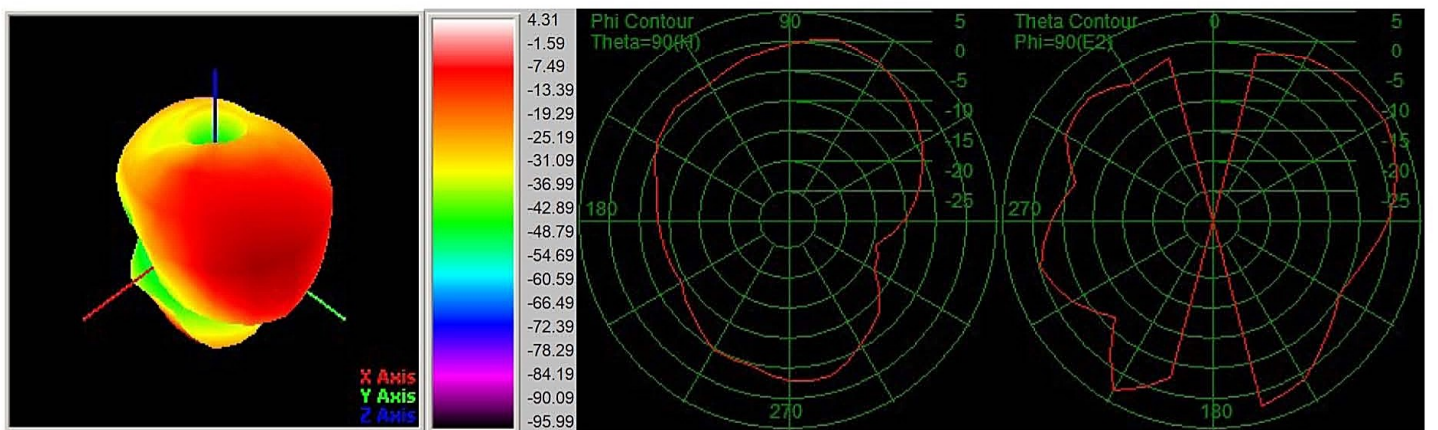




Passive -Freq5230.00MHZ

Gain: 4.31(dBi)

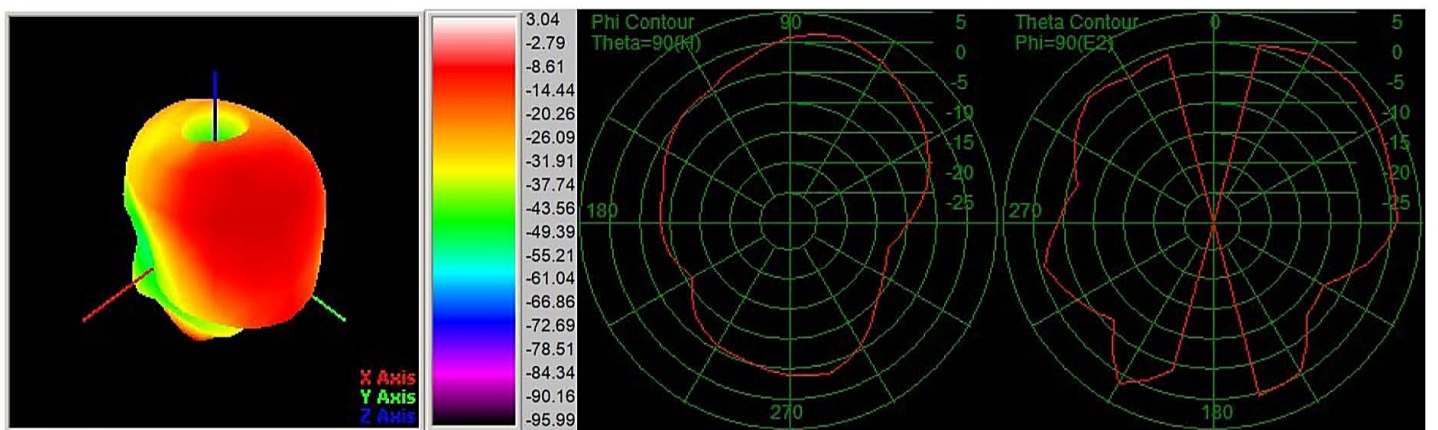

Passive -Freq5350.00MHZ

Gain: 3.04(dBi)

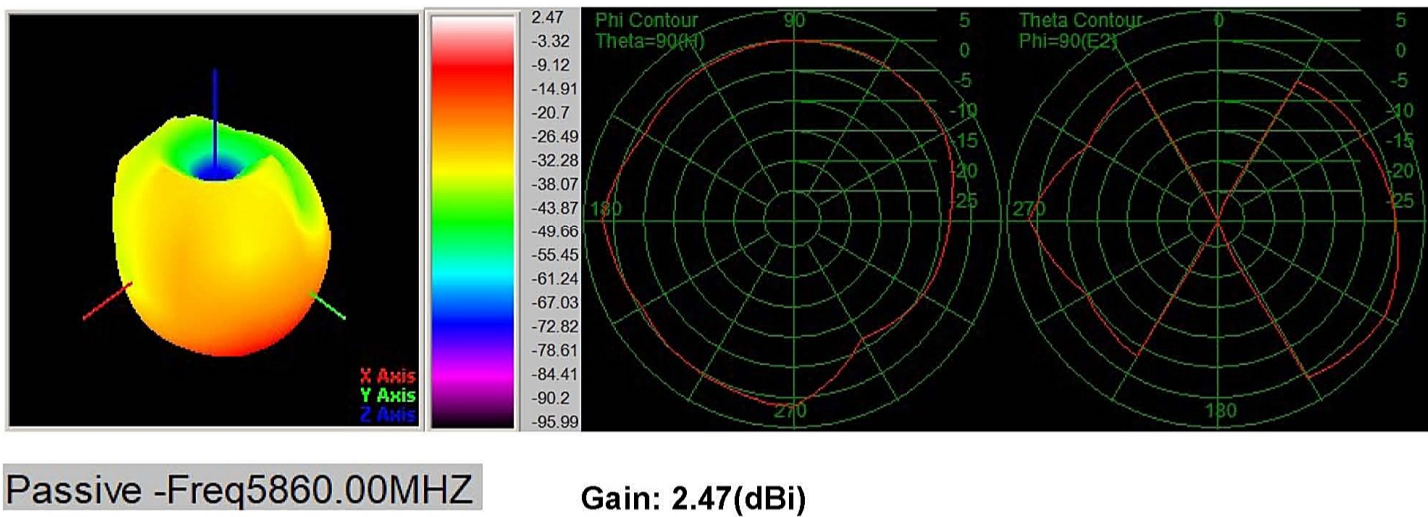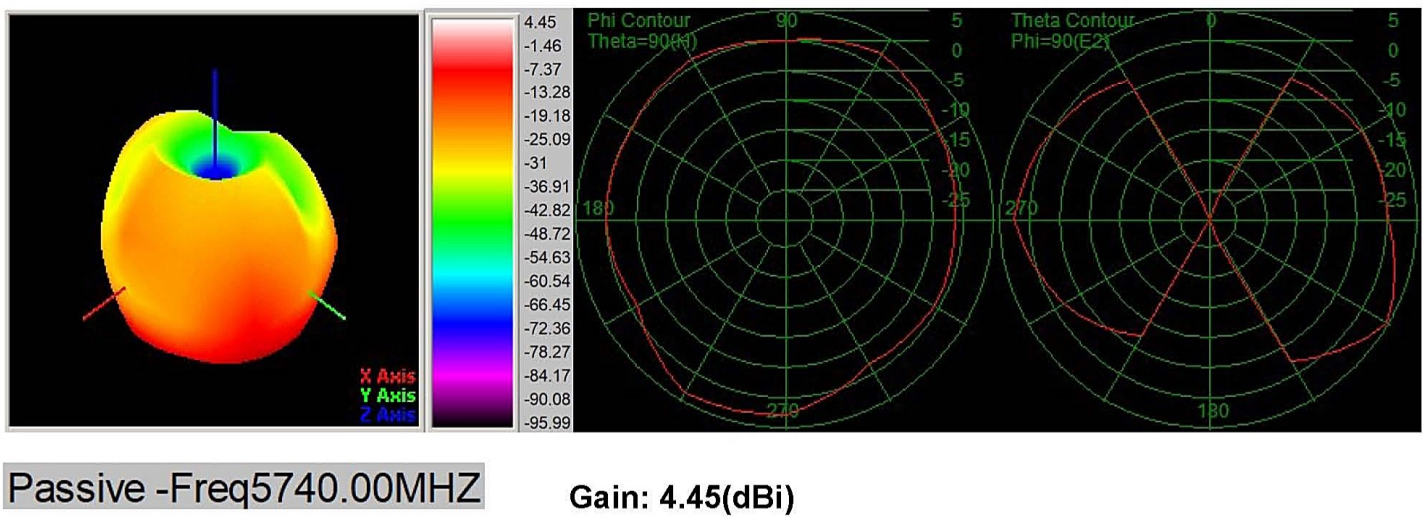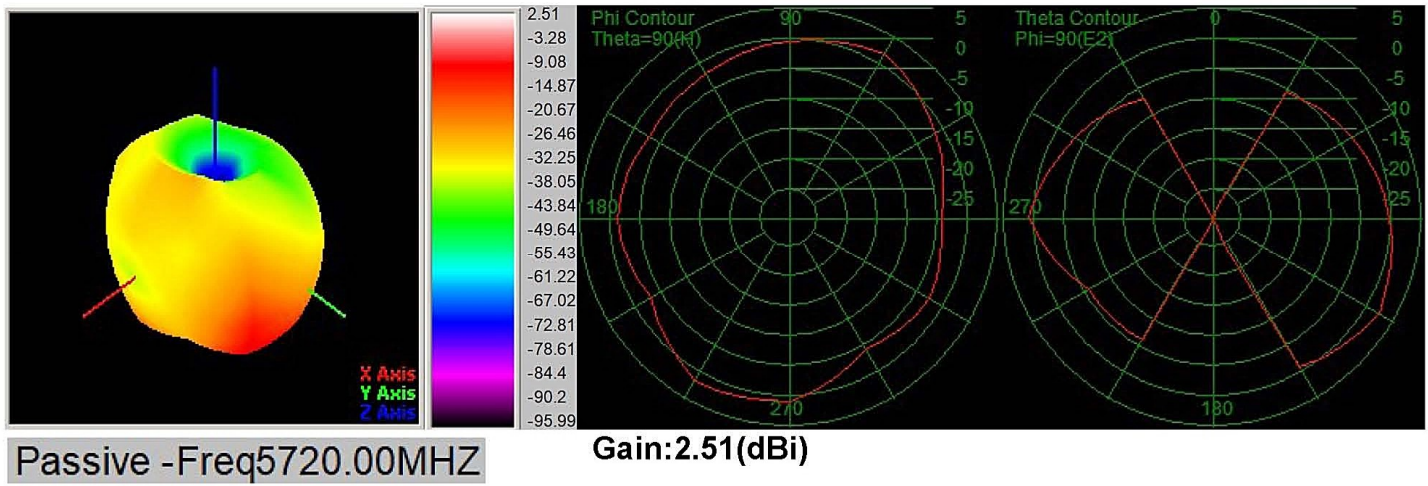

5.2 RF Performance-BT Antenna


5.2.1 Passive parameters

Freq. (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Gain (dBi)	0.58	0.66	1.1	1.02	1.17	1.59	0.72	0.08	0.72	1.19	1.73

5.2.2 S Parameter


Frequency (MHz)	2400	2450	2480
VSWR	1.63	1.28	1.81

5.2.3 Radiation

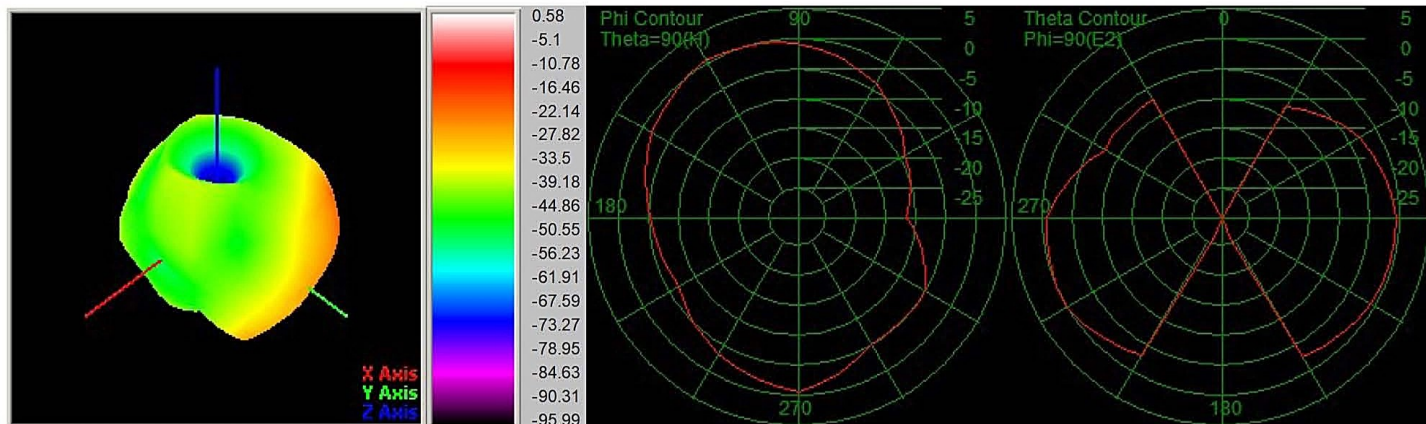


Passive -Freq2400.00MHZ

Gain:0.58(dBi)

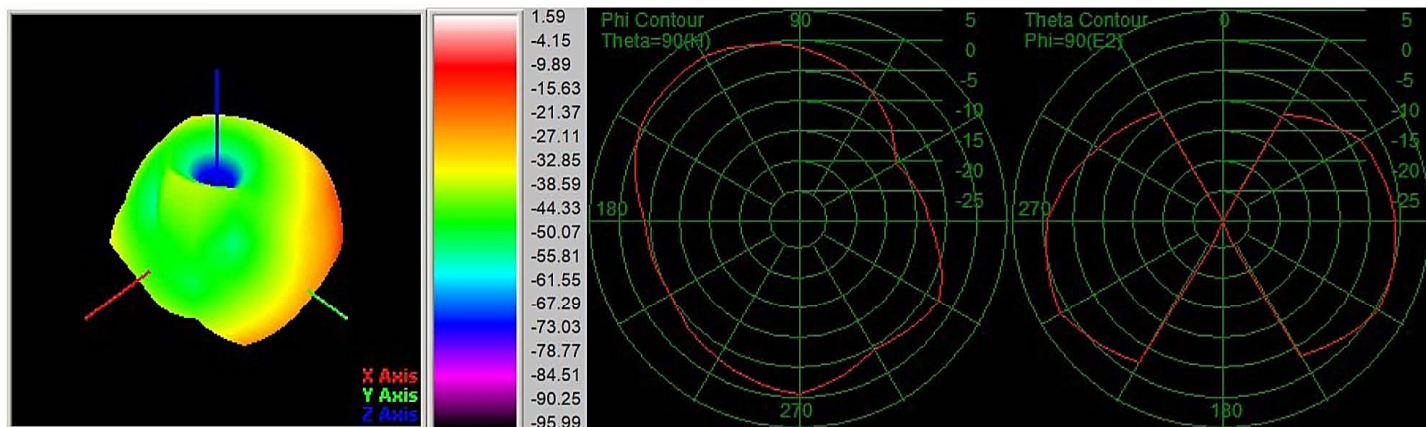

Passive -Freq2450.00MHZ

Gain: 1.59(dBi)

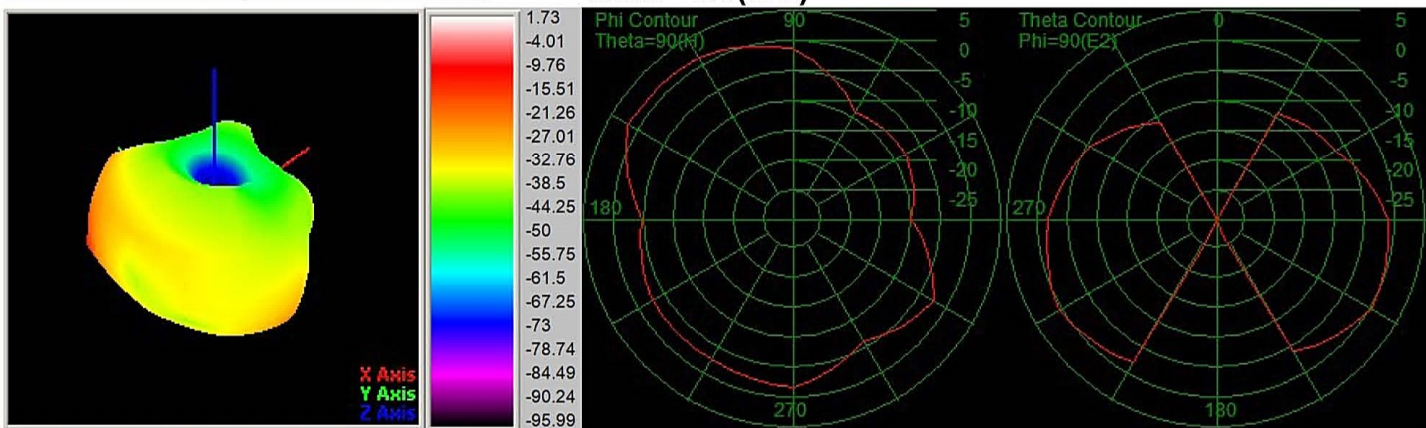

Passive -Freq2500.00MHZ

Gain: 1.73(dBi)

6. ME Drawing for the antenna

