


[TestMode: TX band2 a 5260 channel]; [Polarity: Horizontal]

Radiated Emission Measurement

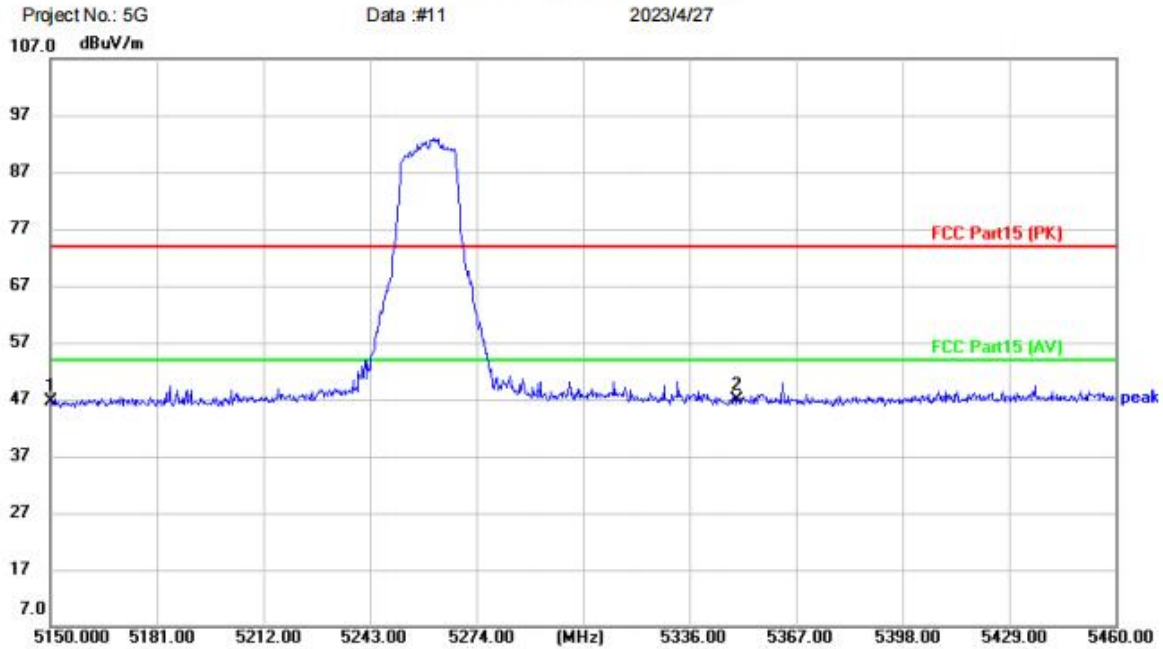


Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Machine entertainment system
M/N: ZH-DT6125-01
Mode: 5G Band2 A TX-L
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	43.04	3.66	46.70	74.00	-27.30	peak	
2	*	5350.000	42.61	4.18	46.79	74.00	-27.21	peak	

Test Result: Pass

[TestMode: TX band2 a 5320 channel]; [Polarity: Vertical]

Radiated Emission Measurement

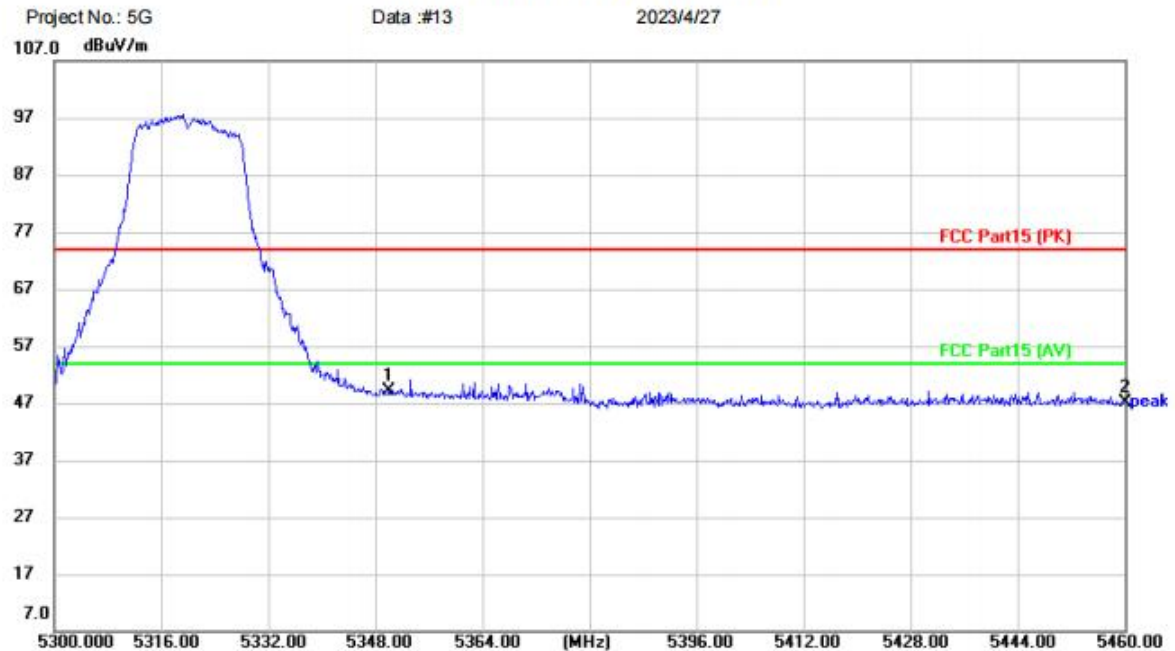


Site Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Machine entertainment system
M/N: ZH-DT6125-01
Mode: 5G Band2 A TX-H
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5350.000	45.03	4.18	49.21	74.00	-24.79	peak	
2		5460.000	42.76	4.48	47.24	74.00	-26.76	peak	

Test Result: Pass

[TestMode: TX band2 a 5320 channel]; [Polarity: Horizontal]

Radiated Emission Measurement

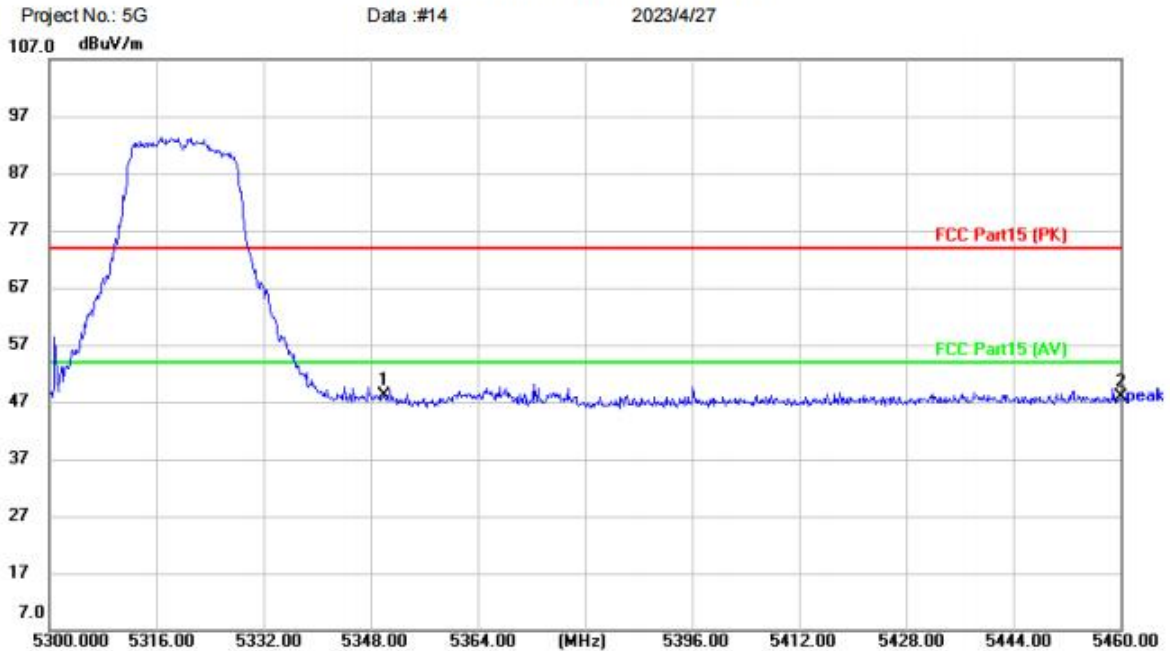


Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Machine entertainment system
M/N: ZH-DT6125-01
Mode: 5G Band2 A TX-H
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5350.000	44.03	4.18	48.21	74.00	-25.79	peak	
2		5460.000	43.34	4.48	47.82	74.00	-26.18	peak	

Test Result: Pass

[TestMode: TX band3 a 5500 channel]; [Polarity: Vertical]

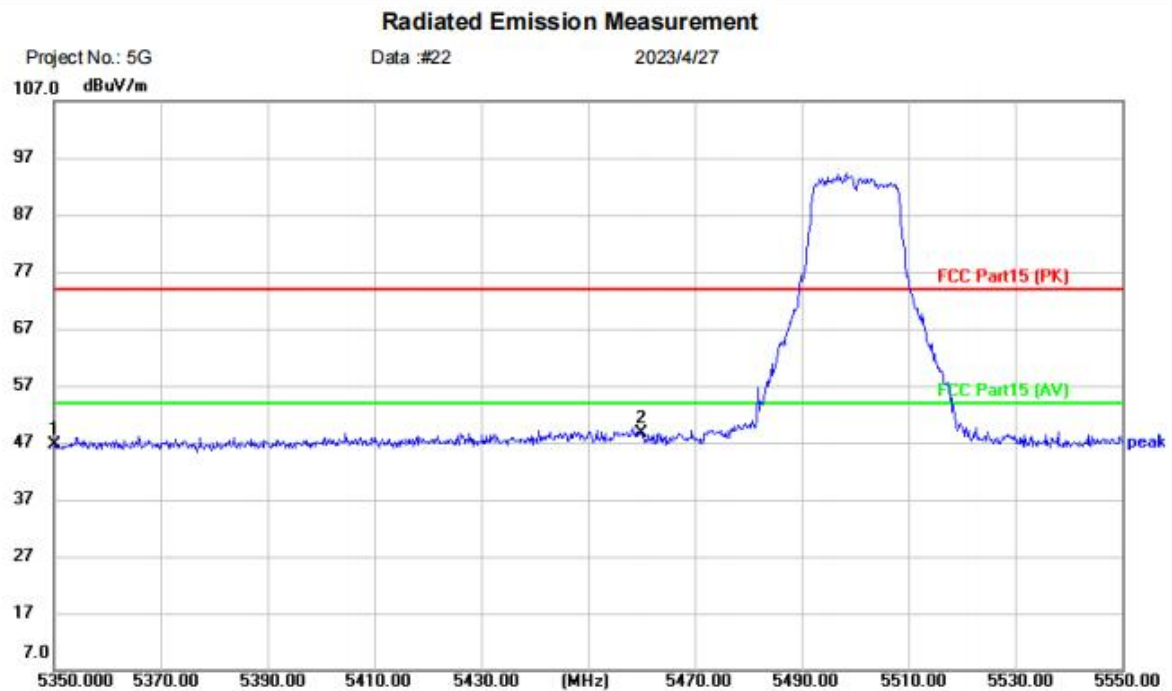


Site: Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Machine entertainment system
M/N: ZH-DT6125-01
Mode: 5G Band3 A TX-L
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	42.35	4.18	46.53	74.00	-27.47	peak	
2	*	5460.000	44.26	4.48	48.74	74.00	-25.26	peak	

Test Result: Pass

[TestMode: TX band3 a 5500 channel]; [Polarity: Horizontal]

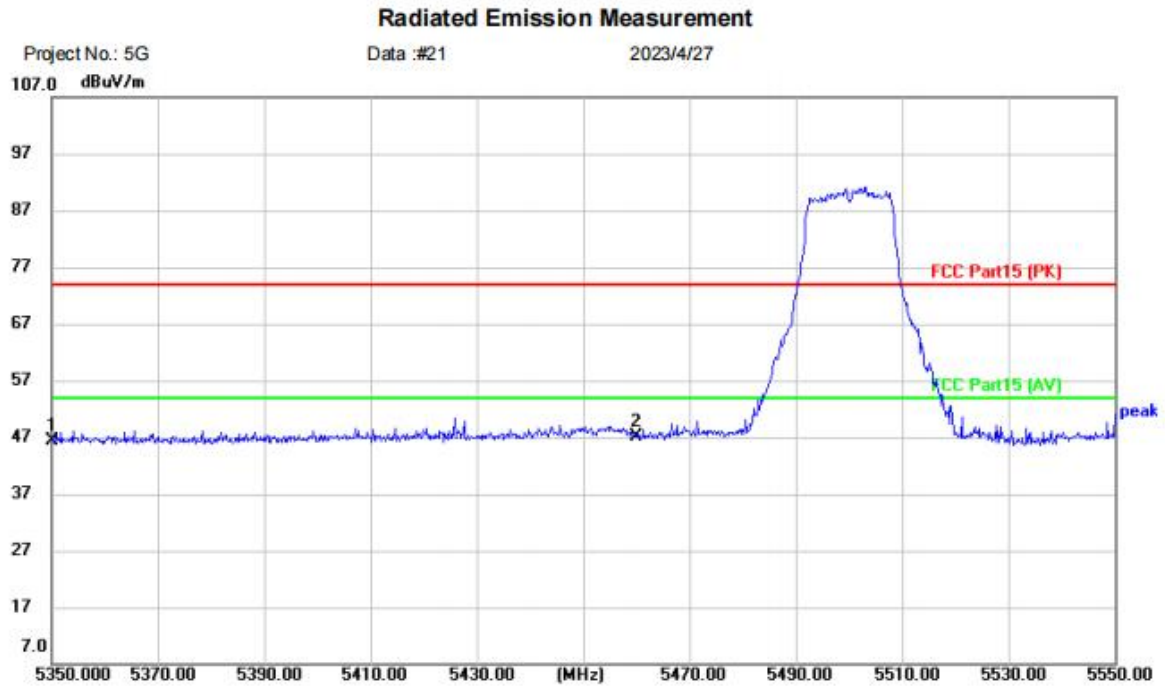


Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Machine entertainment system
M/N: ZH-DT6125-01
Mode: 5G Band3 A TX-L
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	42.19	4.18	46.37	74.00	-27.63	peak	
2	*	5460.000	42.54	4.48	47.02	74.00	-26.98	peak	

Test Result: Pass

[TestMode: TX band3 a 5700 channel]; [Polarity: Horizontal]

Radiated Emission Measurement

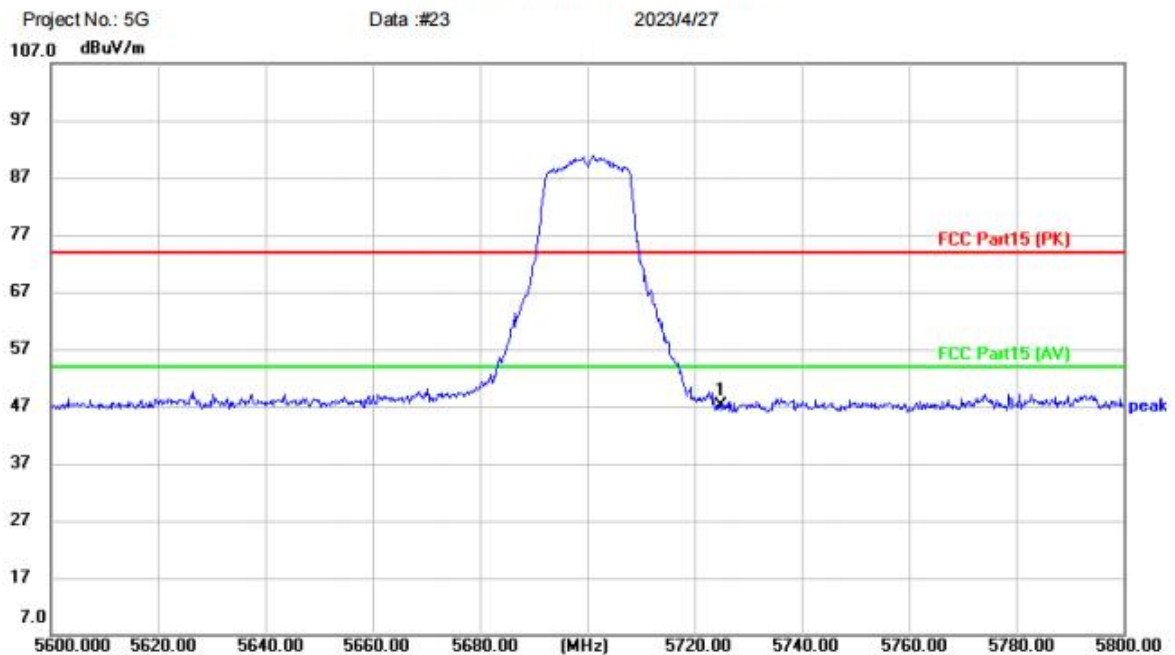


Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Machine entertainment system
M/N: ZH-DT6125-01
Mode: 5G Band3 A TX-H
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5725.000	42.44	4.66	47.10	74.00	-26.90	peak	

Test Result: Pass

[TestMode: TX band3 a 5700 channel]; [Polarity: Vertical]

Radiated Emission Measurement

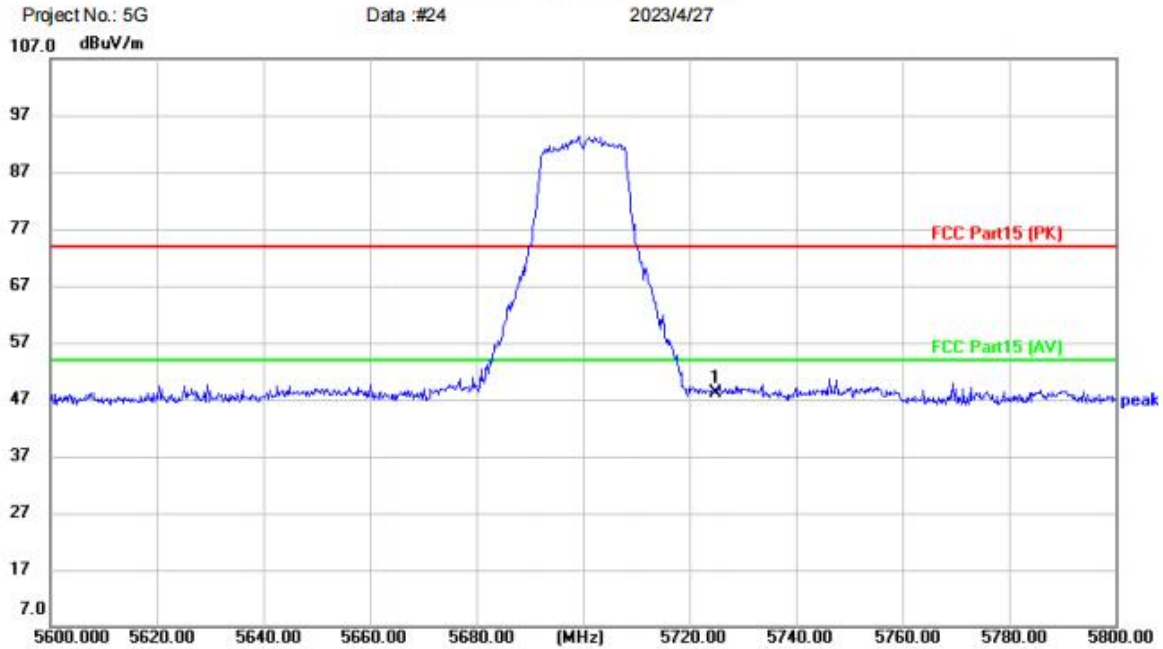


Site Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Machine entertainment system
M/N: ZH-DT6125-01
Mode: 5G Band3 A TX-H
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5725.000	43.56	4.66	48.22	74.00	-25.78	peak	

Test Result: Pass

[TestMode: TX band4 a 5745 channel]; [Polarity: Vertical]

Radiated Emission Measurement

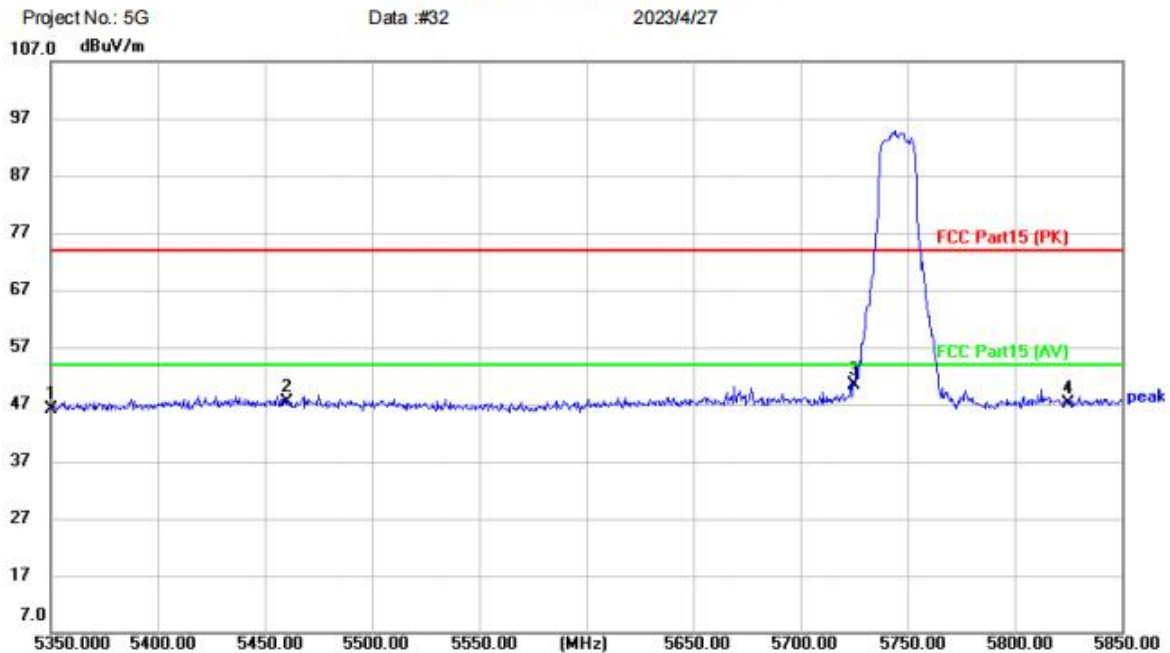


Site Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Machine entertainment system
M/N: ZH-DT6125-01
Mode: 5G Band4 A TX-L
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	41.88	4.18	46.06	74.00	-27.94	peak	
2		5460.000	43.01	4.48	47.49	74.00	-26.51	peak	
3	*	5725.000	45.75	4.66	50.41	74.00	-23.59	peak	
4		5825.000	42.42	4.68	47.10	74.00	-26.90	peak	

Test Result: Pass

[TestMode: TX band4 a 5745 channel]; [Polarity: Horizontal]

Radiated Emission Measurement

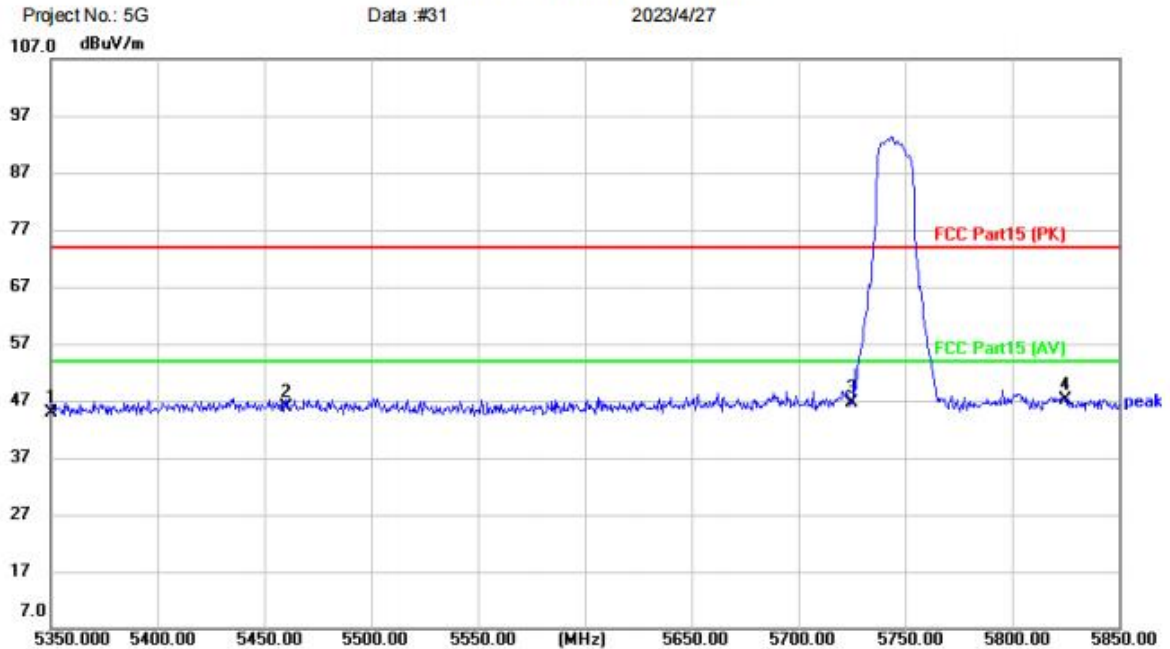


Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Machine entertainment system
M/N: ZH-DT6125-01
Mode: 5G Band4 A TX-L
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	40.82	4.18	45.00	74.00	-29.00	peak	
2		5460.000	41.39	4.48	45.87	74.00	-28.13	peak	
3		5725.000	42.08	4.66	46.74	74.00	-27.26	peak	
4	*	5825.000	42.33	4.68	47.01	74.00	-26.99	peak	

Test Result: Pass

[TestMode: TX band4 a 5825 channel]; [Polarity: Vertical]

Radiated Emission Measurement

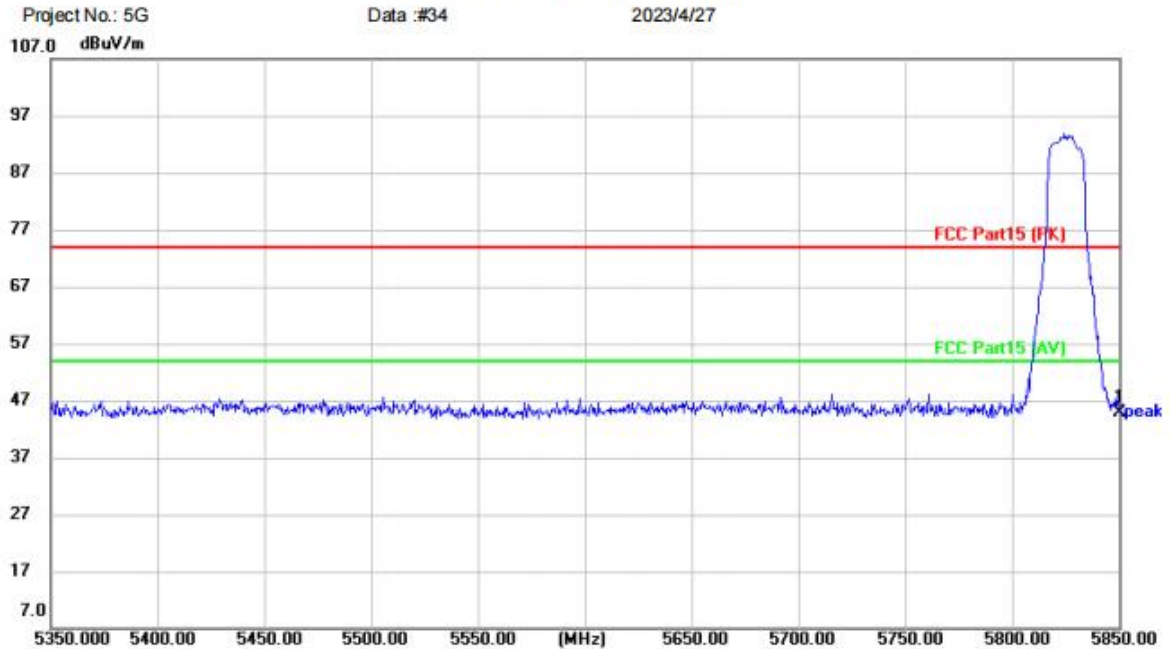


Site Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Machine entertainment system
M/N: ZH-DT6125-01
Mode: 5G Band4 A TX-H
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5850.000	40.31	4.69	45.00	74.00	-29.00	peak	

Test Result: Pass

[TestMode: TX band4 a 5825 channel]; [Polarity: Horizontal]

Radiated Emission Measurement

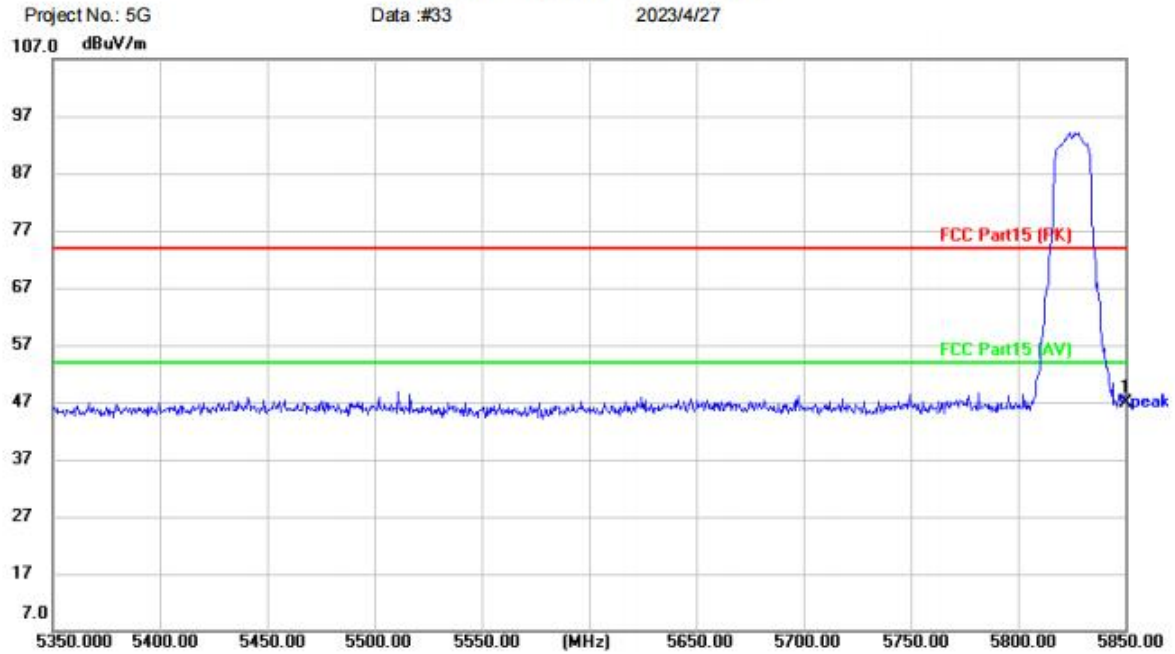

Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Machine entertainment system
M/N: ZH-DT6125-01
Mode: 5G Band4 A TX-H
Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5850.000	42.20	4.69	46.89	74.00	-27.11	peak	

Test Result: Pass

12 RADIATED EMISSIONS

Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	KDB 789033 D02 II G
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

12.1 BLOCK DIAGRAM OF TEST SETUP

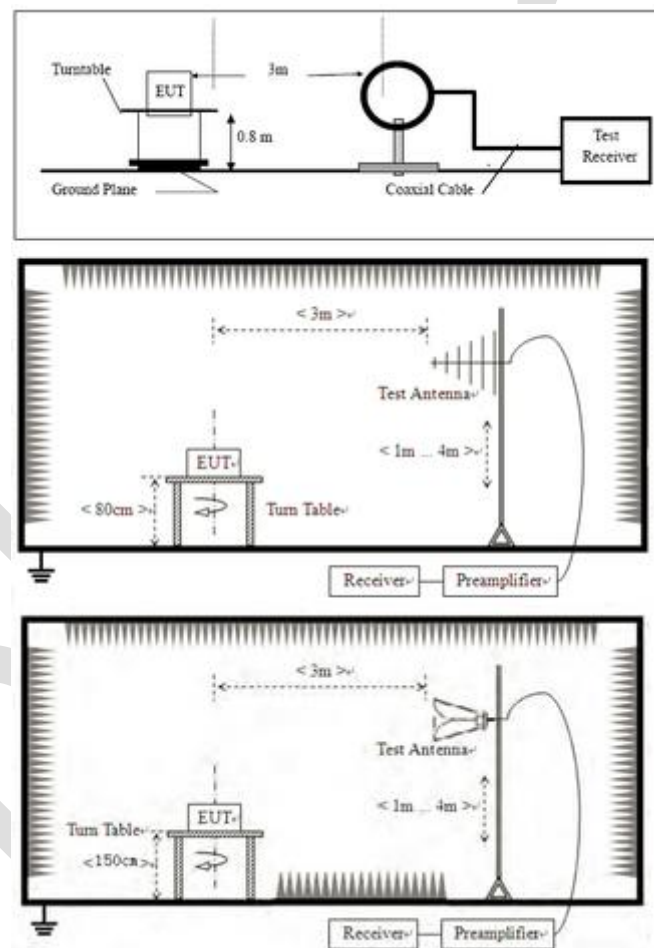

12.2 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest

radiation.


- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- 2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
- 3. Scan from 9kHz to 40GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


12.3 TEST DATA

[TestMode: TX below 1G]; [Polarity: Horizontal]

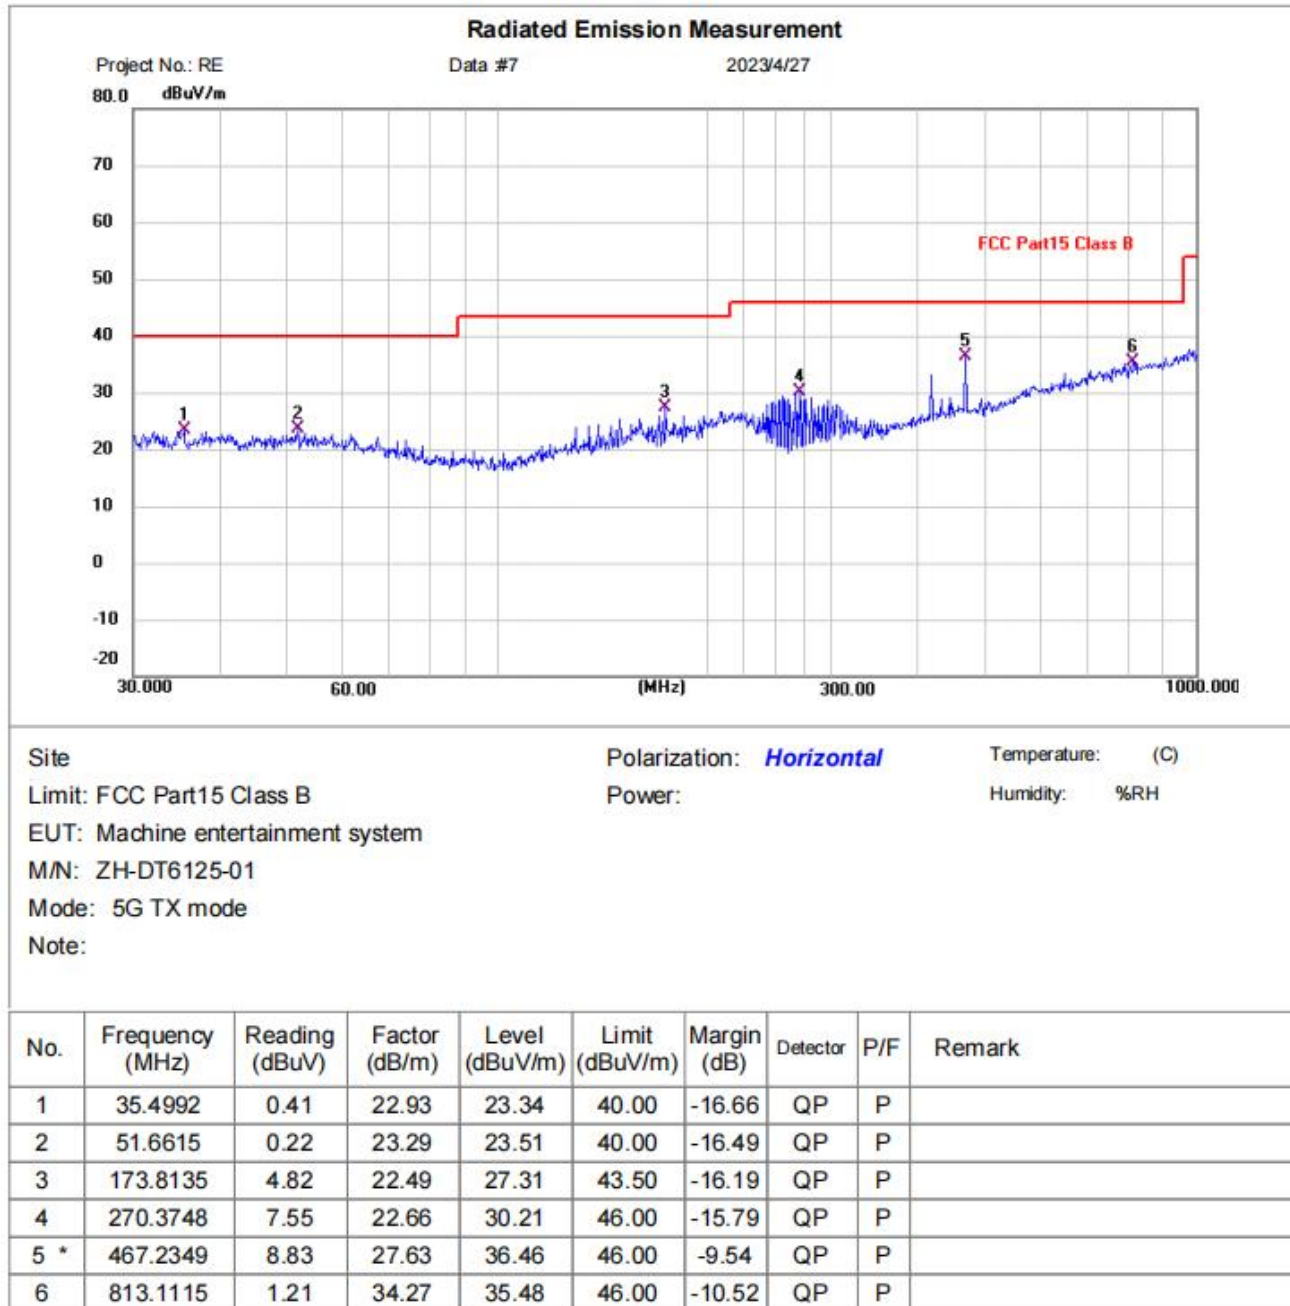

Test Result: Pass


[TestMode: TX below 1G]; [Polarity: Vertical]

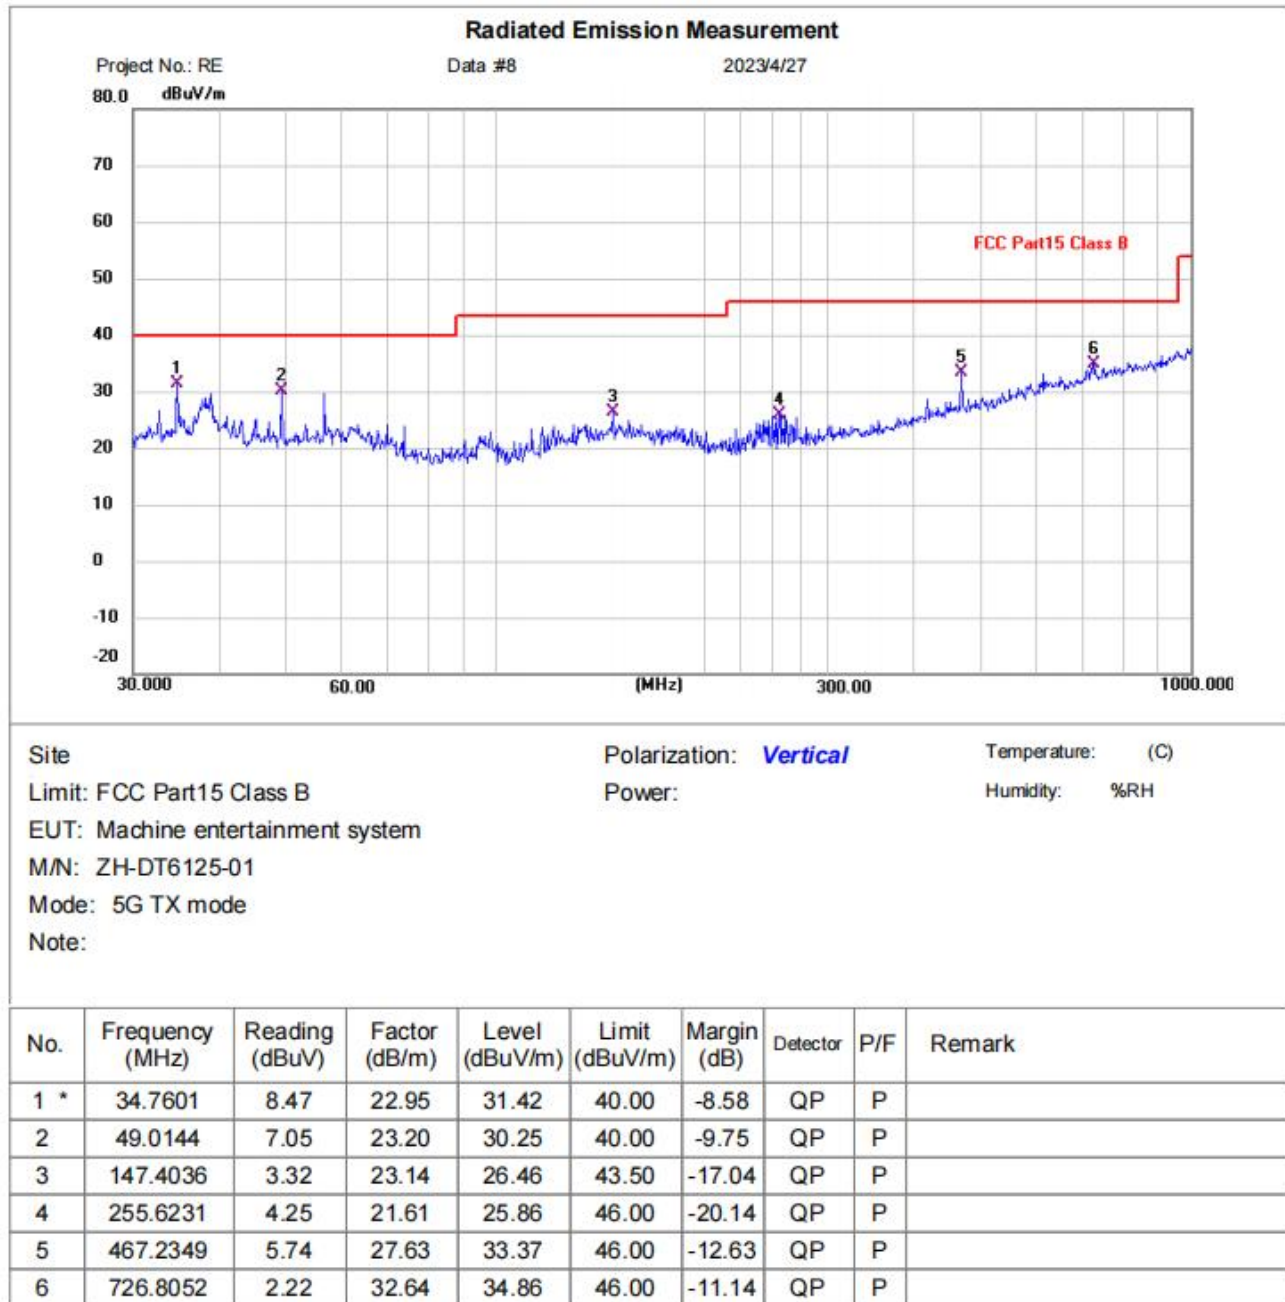

Test Result: Pass

Remark: During the test, pre-scan the 802.11a/n/ac mode, and found the 802.11a mode which it is worse case.

[TestMode: TX band1 a 5180 channel]; [Polarity: Vertical]

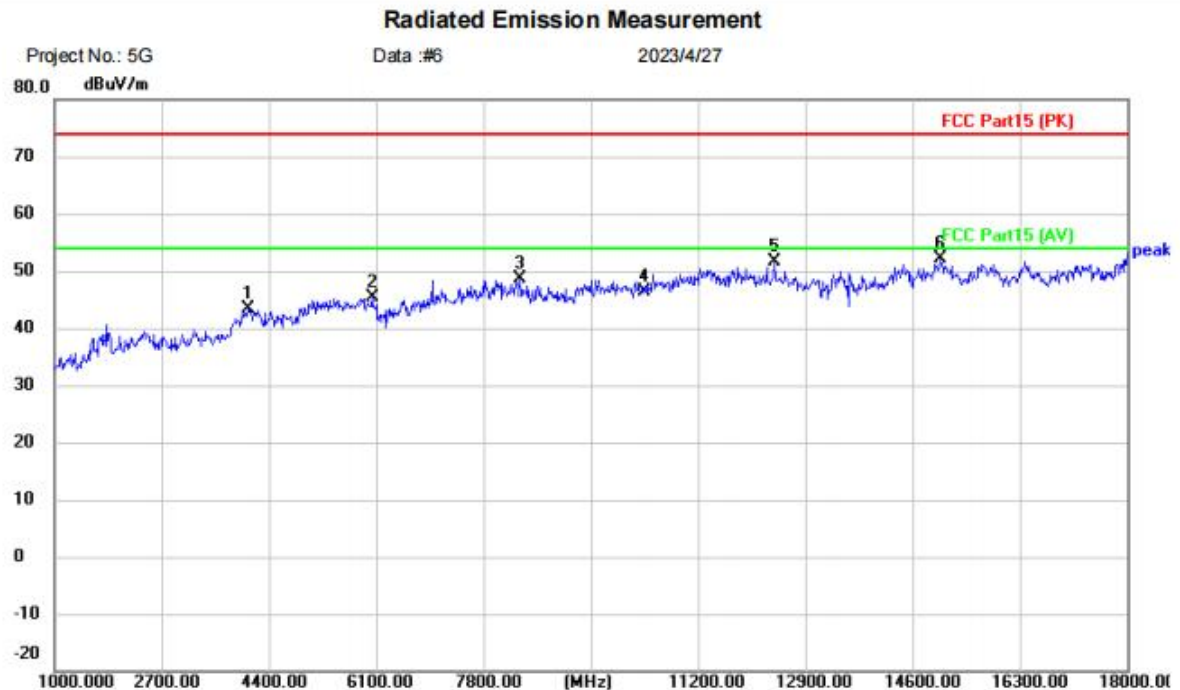

Site Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Machine entertainment system

M/N: ZH-DT6125-01


Mode: 5G Band1 A TX-L

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4060.000	40.90	2.43	43.33	74.00	-30.67	peak	
2		6032.000	41.34	4.04	45.38	74.00	-28.62	peak	
3		8378.000	39.50	9.07	48.57	74.00	-25.43	peak	
4		10360.00	33.88	12.46	46.34	74.00	-27.66	peak	
5		12407.00	37.78	13.88	51.66	74.00	-22.34	peak	
6	*	15042.00	35.92	16.21	52.13	74.00	-21.87	peak	

Test Result: Pass

[TestMode: TX band1 a 5180 channel]; [Polarity: Horizontal]

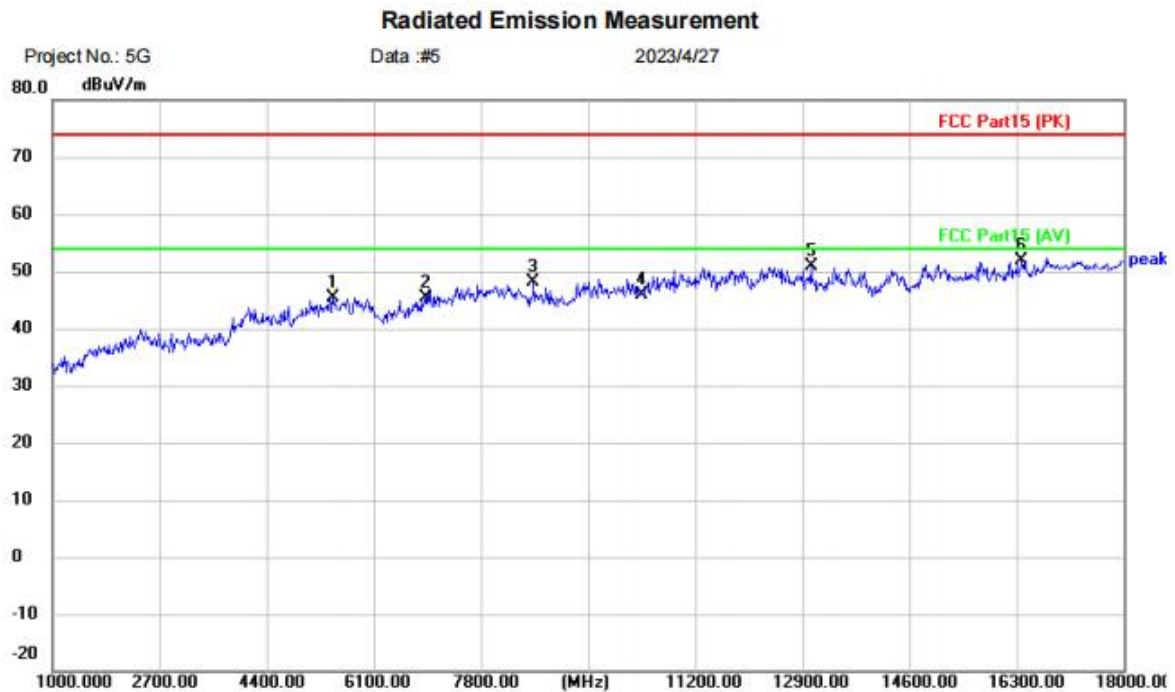


Site: Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Machine entertainment system
M/N: ZH-DT6125-01
Mode: 5G Band1 A TX-L
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5454.000	38.43	6.85	45.28	74.00	-28.72	peak	
2		6916.000	38.13	7.20	45.33	74.00	-28.67	peak	
3		8633.000	38.94	9.18	48.12	74.00	-25.88	peak	
4		10360.00	33.46	12.46	45.92	74.00	-28.08	peak	
5		13036.00	36.99	13.92	50.91	74.00	-23.09	peak	
6	*	16385.00	37.33	14.49	51.82	74.00	-22.18	peak	

Test Result: Pass

[TestMode: TX band1 a 5200 channel]; [Polarity: Horizontal]

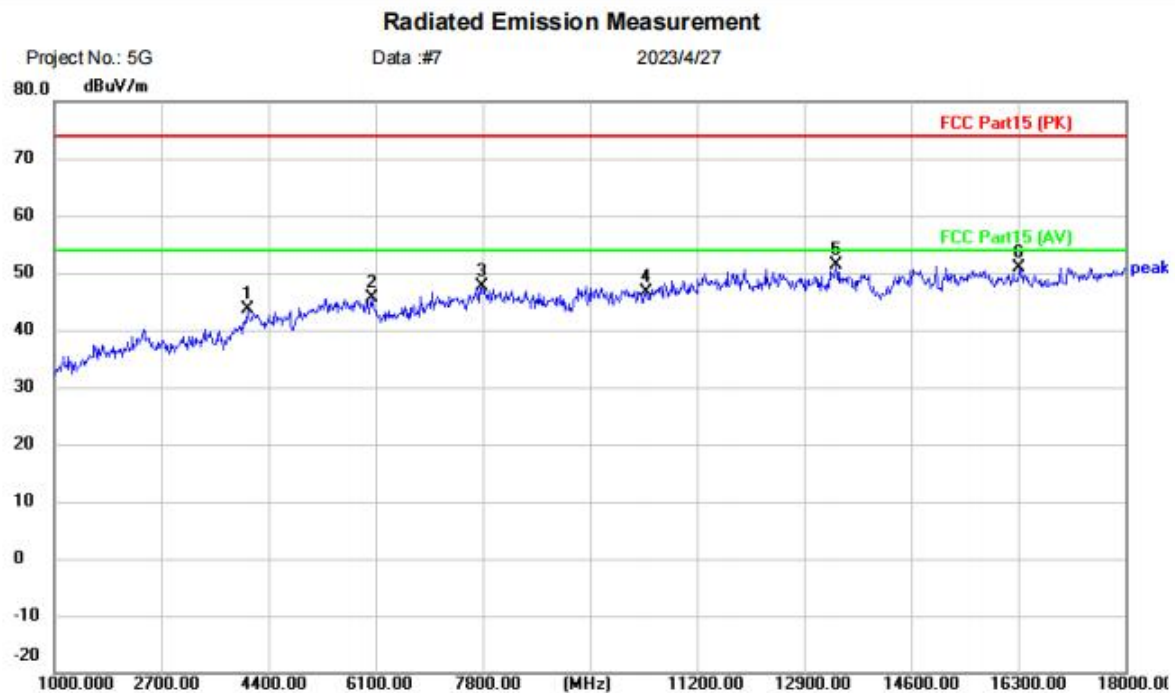

Site: Limit: FCC Part15 (PK) Polarization: **Horizontal** Temperature: (C)

EUT: Machine entertainment system Power: Humidity: %RH

M/N: ZH-DT6125-01


Mode: 5G Band1 A TX-M

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4060.000	41.30	2.43	43.73	74.00	-30.27	peak	
2		6049.000	41.40	4.11	45.51	74.00	-28.49	peak	
3		7783.000	38.94	8.78	47.72	74.00	-26.28	peak	
4		10400.00	34.05	12.52	46.57	74.00	-27.43	peak	
5	*	13410.00	32.23	19.14	51.37	74.00	-22.63	peak	
6		16317.00	36.47	14.45	50.92	74.00	-23.08	peak	

Test Result: Pass

[TestMode: TX band1 a 5200 channel]; [Polarity: Vertical]

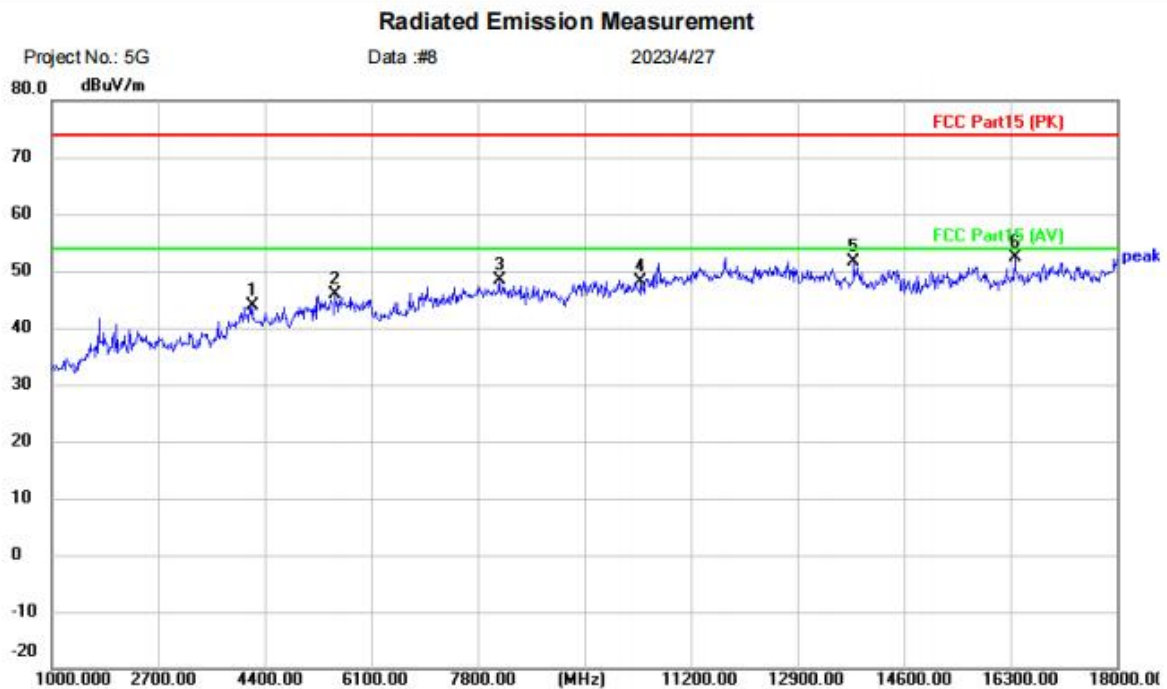


Site: Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Machine entertainment system
M/N: ZH-DT6125-01
Mode: 5G Band1 A TX-M
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4196.000	38.84	5.15	43.99	74.00	-30.01	peak	
2		5522.000	39.08	6.91	45.99	74.00	-28.01	peak	
3		8140.000	39.54	8.96	48.50	74.00	-25.50	peak	
4		10400.00	35.53	12.52	48.05	74.00	-25.95	peak	
5		13801.00	35.95	15.68	51.63	74.00	-22.37	peak	
6	*	16368.00	37.91	14.48	52.39	74.00	-21.61	peak	

Test Result: Pass

[TestMode: TX band1 a 5240 channel]; [Polarity: Vertical]

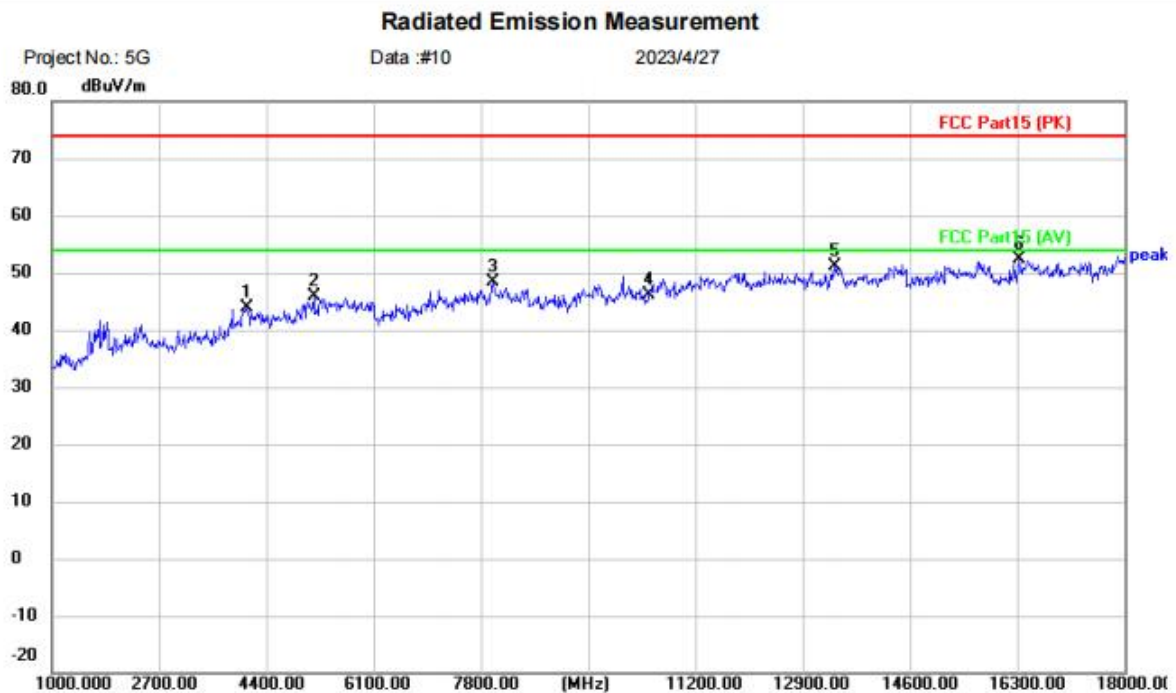

Site: Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Machine entertainment system

M/N: ZH-DT6125-01

Mode: 5G Band1 A TX-H

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4094.000	41.10	2.66	43.76	74.00	-30.24	peak	
2		5148.000	39.97	5.81	45.78	74.00	-28.22	peak	
3		7987.000	39.37	8.90	48.27	74.00	-25.73	peak	
4		10480.00	33.36	12.65	46.01	74.00	-27.99	peak	
5		13410.00	31.88	19.14	51.02	74.00	-22.98	peak	
6	*	16334.00	37.82	14.46	52.28	74.00	-21.72	peak	

Test Result: Pass