TEST REPORT

APPLICANT	:	Sound Extreme Inc.
PRODUCT NAME	:	PULSE28
MODEL NAME	:	SEI-PLS2801
BRAND NAME	:	SOUNDEXTREME BY ECOXGEAR
FCC ID	:	2BADE-SEIPLS2801
STANDARD(S)	:	47 CFR Part 15 Subpart C
RECEIPT DATE	:	2025-07-14
TEST DATE	:	2025-07-18 to 2025-08-14
ISSUE DATE	:	2025-09-12

Edited by: Zeng Xiaoying (Rapporteur)

Approved by: Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn

DIRECTORY

1. Summary of Test Result ····· 4
1.1. Testing Applied Standards ····· 5
1.2. Test Equipment List ····· 6
1.3. Measurement Uncertainty ····· 8
1.4. Testing Laboratory ····· 8
2. General Description ····· 9
2.1. Information of Applicant and Manufacturer ····· 9
2.2. Information of EUT ····· 9
2.3. Channel List of EUT ····· 10
2.4. Test Configuration of EUT ····· 11
2.5. Test Conditions ····· 11
2.6. Test Setup Layout Diagram ····· 11
3. Test Results ····· 14
3.1. Antenna Requirement ····· 14
3.2. Hopping Mechanism ····· 15
3.3. Number of Hopping Frequency ····· 16
3.4. Duty Cycle of Test Signal ····· 17
3.5. Maximum Peak Conducted Output Power ····· 18
3.6. Maximum Average Conducted Output Power ····· 19
3.7. 20 dB Bandwidth ····· 20
3.8. Carried Frequency Separation ····· 21
3.9. Time of Occupancy (Dwell time) ····· 22
3.10. Conducted Spurious Emissions and Band Edge ····· 23
3.11. Conducted Emission ····· 24
3.12. Restricted Frequency Bands ····· 25
3.13. Radiated Emission ····· 26

Annex A Test Data and Result ····· 28

Change History		
Version	**Date**	**Reason for change**
1.0	2025-09-12	First edition

1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	/
2	15.247(a) 15.247(h)	Hopping Mechanism	N/A	N/A	PASS	/
3	15.247(a)	Number of Hopping Frequency	Jul. 25, 2025	Li Yue	PASS	/
4	ANSI C63.10	Duty Cycle	Jul. 25, 2025	Li Yue	PASS	/
5	15.247(b)	Maximum Peak Conducted Output Power	Jul. 25, 2025	Li Yue	PASS	/
6	15.247(b)	Maximum Average Conducted Output Power	Jul. 25, 2025	Li Yue	PASS	/
7	15.247(a)	20dB Bandwidth	Jul. 25, 2025	Li Yue	PASS	/
8	15.247(a)	Carrier Frequency Separation	Jul. 25, 2025	Li Yue	PASS	/
9	15.247(a)	Time of Occupancy (Dwell time)	Jul. 25, 2025	Li Yue	PASS	/
10	15.247(d)	Conducted Spurious Emission and Band Edge	Jul. 25, 2025	Li Yue	PASS	/
11	15.207	Conducted Emission	N/A	N/A$_{Note1}$	N/A	/
12	15.247(d)	Restricted Frequency Bands	Jul. 26, 2025	Wang Deyong	PASS	/
13	15.209, 15.247(d)	Radiated Emission	Jul. 26, 2025 Aug. 14, 2025	Wang Deyong	PASS	/

Note 1: Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power

lines or contain provisions for operation while connected to the AC power lines.

Note 2: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2020 and KDB 558074 D01 v05r02.

Note 3: Any additions, deviation, or exclusions from the method shall be noted in the “Remark”.

1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

• 47 CFR Part 15 Subpart C Radio Frequency Devices

1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analzyer	MY53470836	N9010A	Agilent	2025.01.15	2026.01.14
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
JS32-RE	Tonscend	5.0.0

1.2.3 Radiated Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Signal Analyzer	MY56060145	N9020A	Agilent	2025.05.13	2026.05.12
Test Antenna - Bi-Log	9163-274	VULB 9163	Schwarzbeck	2025.06.28	2026.06.27
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2025.05.16	2026.05.15
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2025.06.20	2026.06.19
Test Antenna – Horn	BBHA9170#773	BBHA9170	Schwarzbeck	2025.06.20	2026.06.19
Preamplifier (10MHz-6GHz)	46732	S10M100L3802	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (2GHz-18GHz)	61171/61172	S020180L3203	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-KK-0.5	Qualwave	2024.09.11	2025.09.10
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-KKF-2	Qualwave	2024.09.11	2025.09.10
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-NN-5	Qualwave	2024.09.11	2025.09.10
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2025.06.21	2028.06.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.11.30	2025.11.29

1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Number of Hopping Frequency	±5%	Confidence levels of 95%
Peak Output Power	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Carrier Frequency Separation	±5%	Confidence levels of 95%
Time of Occupancy (Dwell time)	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525
FCC Designation Number:	CN1192
FCC Test Firm Registration Number:	226174

2. General Description

2.1. Information of Applicant and Manufacturer

Applicant:	Sound Extreme Inc.
Applicant Address:	9212 Fry Road, Suite 105-351, Cypress, TX 77433, United States of America.
Manufacturer:	Xingtel Xiamen Group Co., Ltd.
Manufacturer Address:	Xingtel Building,Chuangxin Road, Torch Hi-Tech Industrial District,Xiamen 3 61006, PR China

2.2. Information of EUT

Product Name:	PULSE28
Sample No.:	3#, 6#
Hardware Version:	BT-385-M-V1.4
Software Version:	BT385_M433SE8AE_70F9
Module Type:	☒BT1; ☐U5 (The product includes two modules.)
Equipment Type:	Bluetooth classic
Bluetooth Version:	5.1
Modulation Type:	FHSS (GFSK(1Mbps), π/4-DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))
Operating Frequency Range:	2402MHz-2480MHz
Antenna Type:	PCB Antenna
Antenna Gain:	0.09dBi

Note 1: The EUT description presented in the report are provided by applicant and/or manufacturer, and the test laboratory is not responsible for the accuracy of the information. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2.3. Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	**2402**	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	**78**	**2480**
19	2421	**39**	**2441**	59	2461		

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT

Test mode is used to control the EUT under the maximum power level during test.

2.5. Test Conditions

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106

2.6. Test Setup Layout Diagram

2.6.1.Conducted Measurement

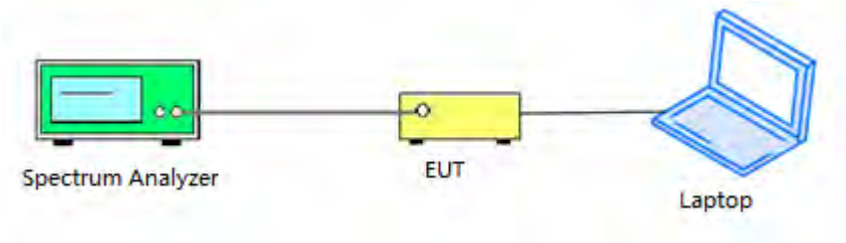

2.6.2.Conducted Emission Measurement

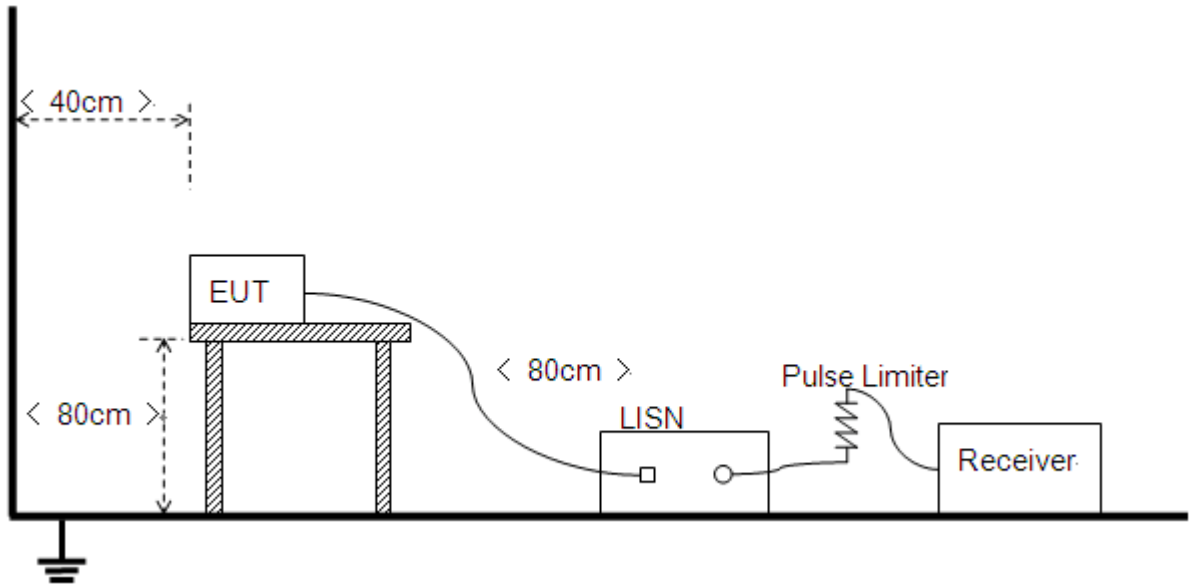

2.6.3.Radiation Measurement

1) For radiated emissions from 9kHz to 30MHz

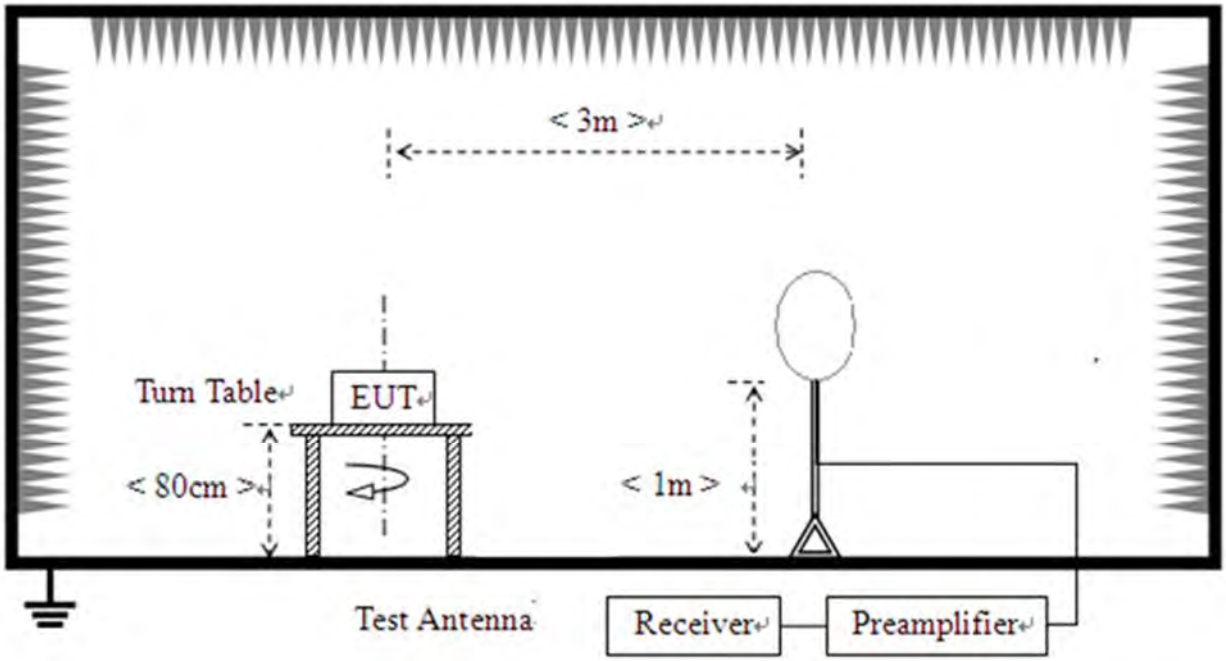

2) For radiated emissions from 30MHz to1GHz

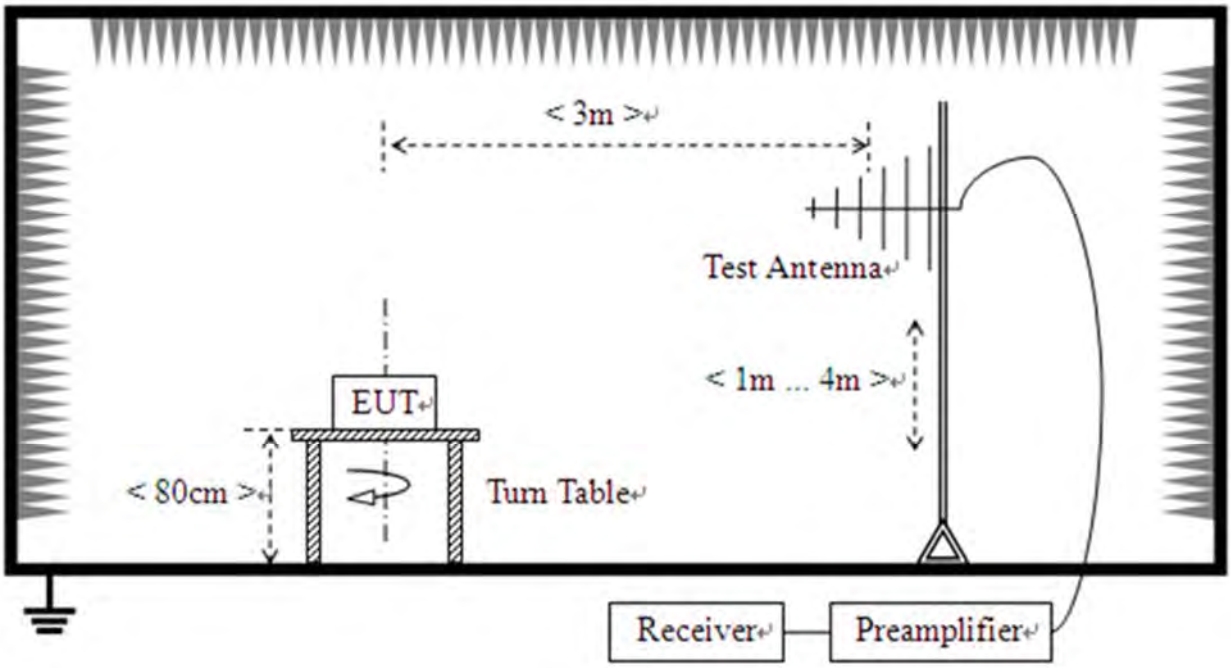

3) For radiated emissions above 1GHz

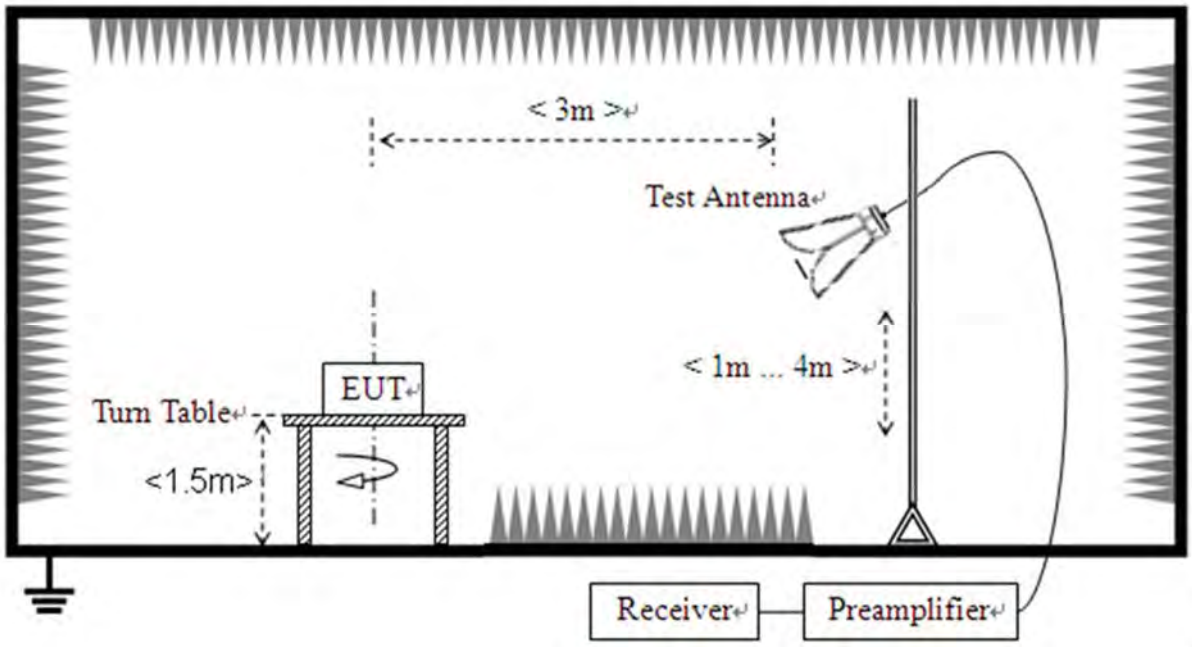

3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

Antenna location	Antenna Type	Coupling Method
☒Internal ☐External	☐FPC Antenna ☐Spring Antenna ☐Ceramic Antenna ☐Integrated Antenna ☐Dipole Antenna ☒PCB Antenna ☐PIFA Antenna ☐ABS Antenna	☐I-PEX Connector ☐SMA Connector ☐RP-SMA Connector ☐Metal Shrapnel ☒Layout

3.2. Hopping Mechanism

3.2.1.Requirement

According to FCC section 15.247(a)(1), a frequency hopping spread spectrum system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

According to FCC section 15.247(h), the incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

3.2.2.Test Result

The hopping mechanism of the EUT is in compliance with the document "***Bluetooth core specification v5.1***".

3.3. Number of Hopping Frequency

3.3.1.Requirement

According to FCC section 15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

3.3.2.Test Procedures

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = the frequency band of operation
RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW ≥ RBW
Sweep = auto
Detector function = peak
Trace = max hold
Allow the trace to stabilize

3.3.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4.Test Result

Refer to Annex A.1 in this report.

3.4. Duty Cycle of Test Signal

3.4.1.Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%).When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e.,no transmitter OFF-time is to be considered).
When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than ±2%; otherwise, the duty cycle is considered to be non constant.

3.4.2.Test Result

Refer to Annex A.2 in this report.

3.5. Maximum Peak Conducted Output Power

3.5.1. Requirement

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

3.5.2. Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

3.5.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.4. Test Result

Refer to Annex A.3 in this report.

3.6. Maximum Average Conducted Output Power

3.6.1.Requirement

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

3.6.2.Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

3.6.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4.Test Result

Refer to Annex A.4 in this report.

3.7. 20 dB Bandwidth

3.7.1.Requirement

According to FCC section 15.247(a)(1), the 20 dB bandwidth is known as the 99% emission bandwidth, or 20 dB bandwidth (10*log1% = 20 dB) taking the total RF output power.

3.7.1.Test Procedures

Use the following spectrum analyzer settings:
Span = between 2 to 5 times the OBW, centered on the test channel
RBW= 1% to 5% of the OBW
VBW ≥ 3 x RBW
Sweep = auto
Detector function = peak
Trace = max hold

3.7.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.3.Test Result

Refer to Annex A.5 in this report.

3.8. Carried Frequency Separation

3.8.1.Requirement

According to FCC section 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

3.8.2.Test Procedures

The EUT must have its hopping function enabled. According to DA 00-705, use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels
Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span
Video (or Average) Bandwidth (VBW) ≥ RBW
Sweep = auto
Detector function = peak
Trace = max hold
Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

3.8.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.8.4.Test Result

Refer to Annex A.6 in this report.

3.9. Time of Occupancy (Dwell time)

3.9.1.Requirement

According to FCC section 15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

3.9.2.Test Procedures

Normal Mode:
DH1: Dwell time equal to Pulse time (ms) *(1600 / 2 /79)*31.6 Millisecond DH3: Dwell time equal to Pulse time (ms) * (1600 /4 /79) *31.6 Millisecond DH5: Dwell time equal to Pulse Time (ms)* (1600 / 6 /79) *31.6 Millisecond
AFH Mode:
DH1: Dwell time equal to Pulse time (ms) *(800 / 2 /20)*(0.4*20) Millisecond DH3: Dwell time equal to Pulse time (ms) * (800 / 4 /20)*(0.4*20) Millisecond DH5: Dwell time equal to Pulse Time (ms)* (800 / 6 /20)*(0.4*20) Millisecond.

3.9.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.9.4.Test Result

Refer to Annex A.7 in this report.

3.10. Conducted Spurious Emissions and Band Edge

3.10.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.10.2.Test Procedures

Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz
VBW ≥ RBW
Sweep = auto
Detector function = peak
Trace = max hold
Allow the trace to stabilize.

3.10.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.10.4.Test Result

Refer to Annex A.8 and A.9 in this report.

3.11. Conducted Emission

3.11.1.Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μH/50Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dBμV)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.11.2.Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10.

3.11.3.Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.11.4.Test Result

This test case does not apply this kind of EUT.

3.12. Restricted Frequency Bands

3.12.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.12.2.Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.
For the Test Antenna:
Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
Span = wide enough to fully capture the emission being measured
RBW = 1 MHz for f ≥ 1GHz, 100 kHz for f < 1GHz
VBW = 3 MHz
Sweep = auto
Detector function = peak/average
Trace = max hold
Allow the trace to stabilize

3.12.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.12.4.Test Result

Refer to Annex A.10 in this report.

3.13. Radiated Emission

3.13.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
Note2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).

3.13.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz.The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.13.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.13.4.Test Result

Refer to Annex A.11 in this report.

Annex A Test Data and Result

A.1. Number of Hopping Frequency

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass

Test Graphs

Hopping No. NVNT 1-DH5 2441MHz Ant1

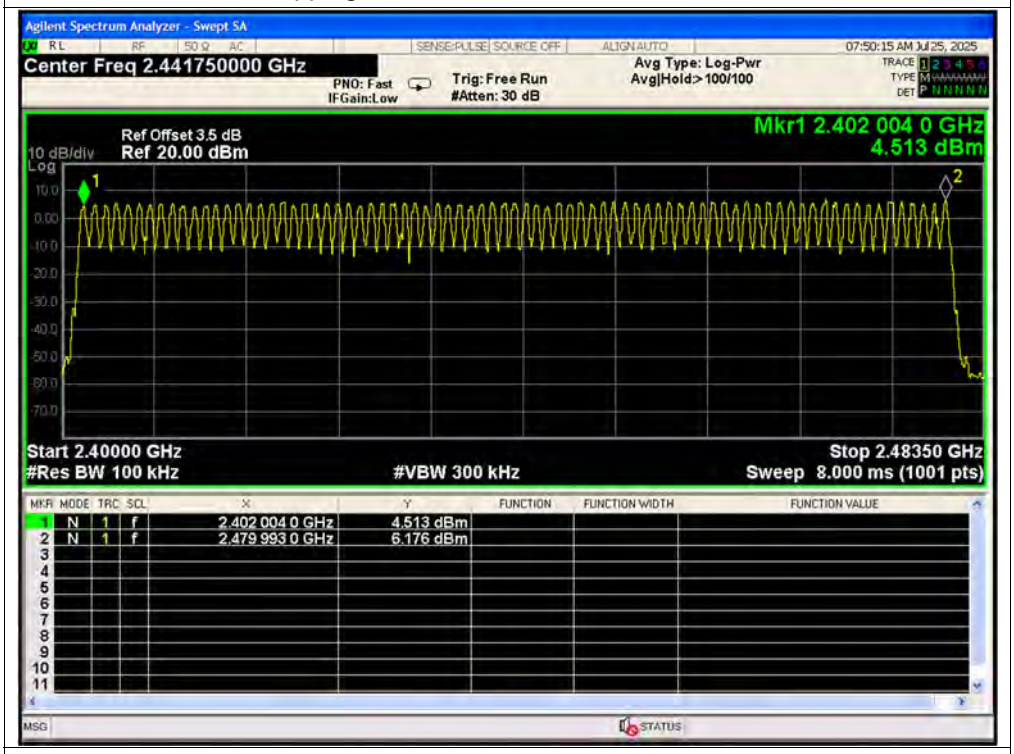

Hopping No. NVNT 2-DH5 2441MHz Ant1

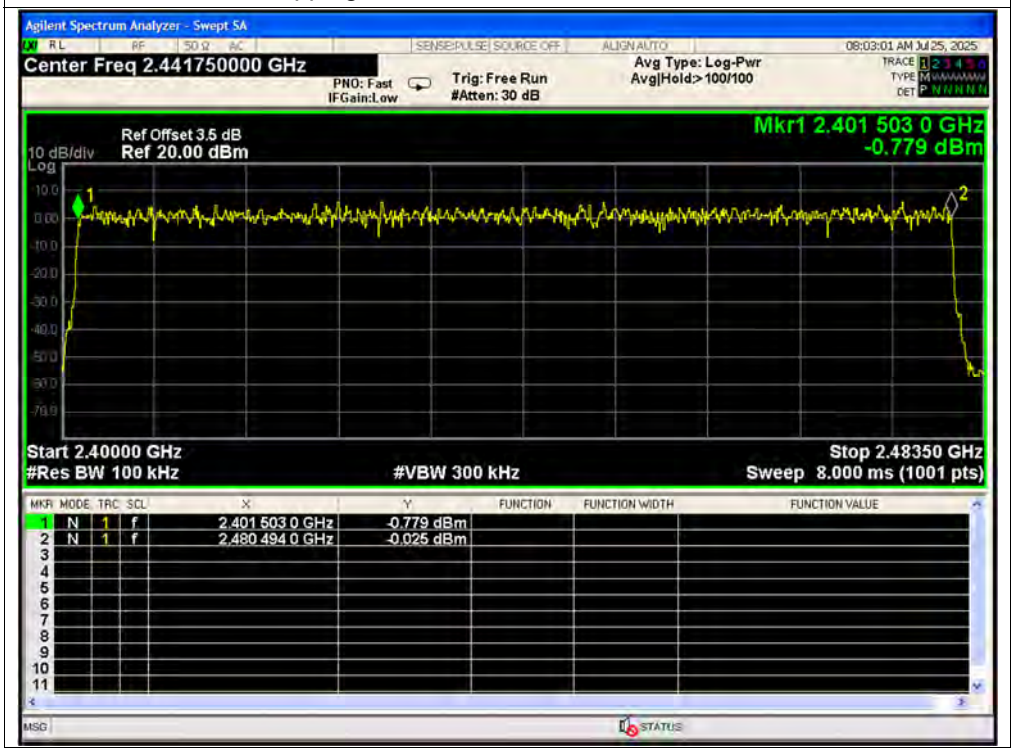

Hopping No. NVNT 3-DH5 2441MHz Ant1

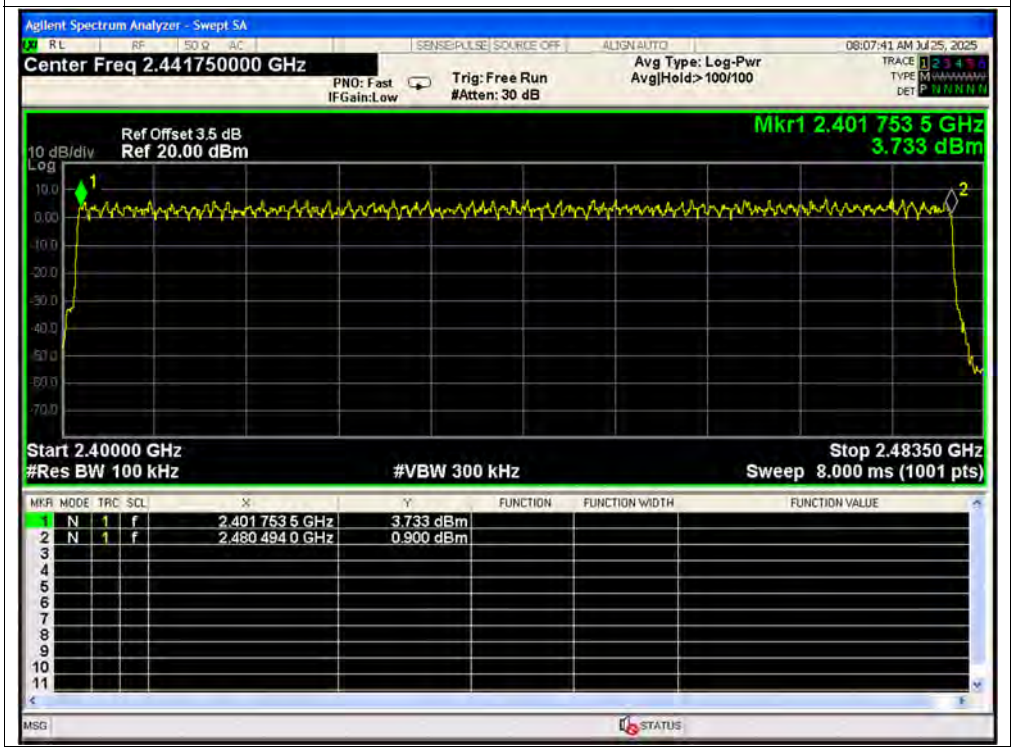

A.2. Duty Cycle of Test Signal

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	1-DH5	2402	Ant1	77.12	1.13	0.35
NVNT	1-DH5	2441	Ant1	77.12	1.13	0.35
NVNT	1-DH5	2480	Ant1	77.12	1.13	0.35
NVNT	2-DH5	2402	Ant1	77.28	1.12	0.35
NVNT	2-DH5	2441	Ant1	77.28	1.12	0.35
NVNT	2-DH5	2480	Ant1	77.31	1.12	0.34
NVNT	3-DH5	2402	Ant1	77.33	1.12	0.34
NVNT	3-DH5	2441	Ant1	77.33	1.12	0.34
NVNT	3-DH5	2480	Ant1	77.31	1.12	0.34

Test Graphs

Duty Cycle NVNT 1-DH5 2402MHz Ant1

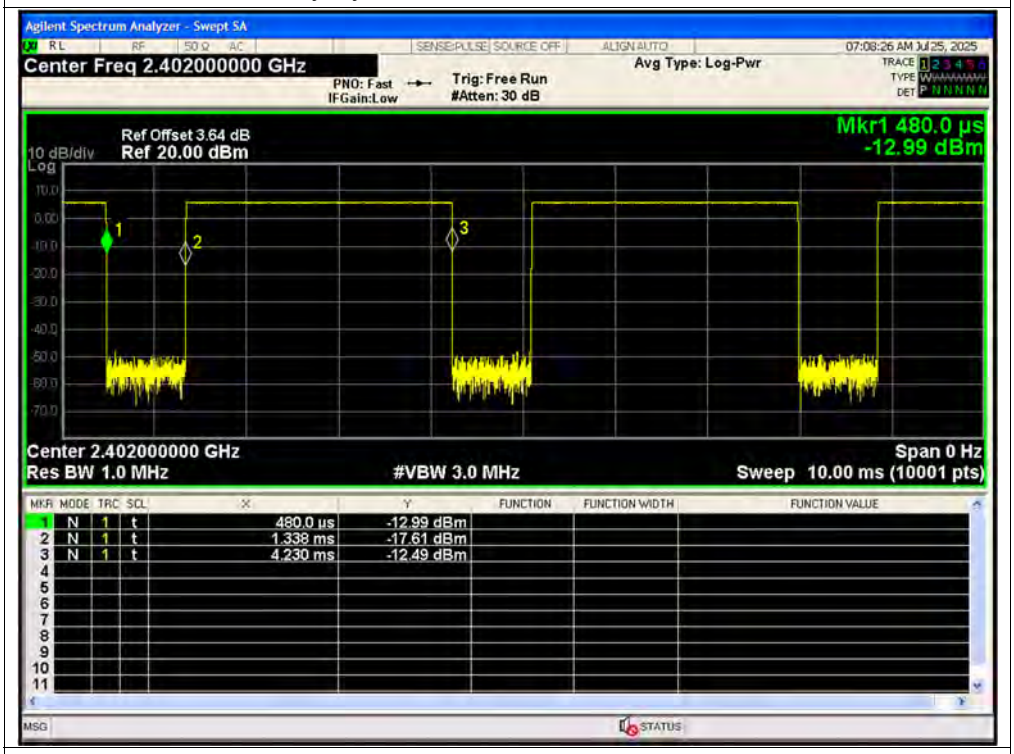

Duty Cycle NVNT 1-DH5 2441MHz Ant1

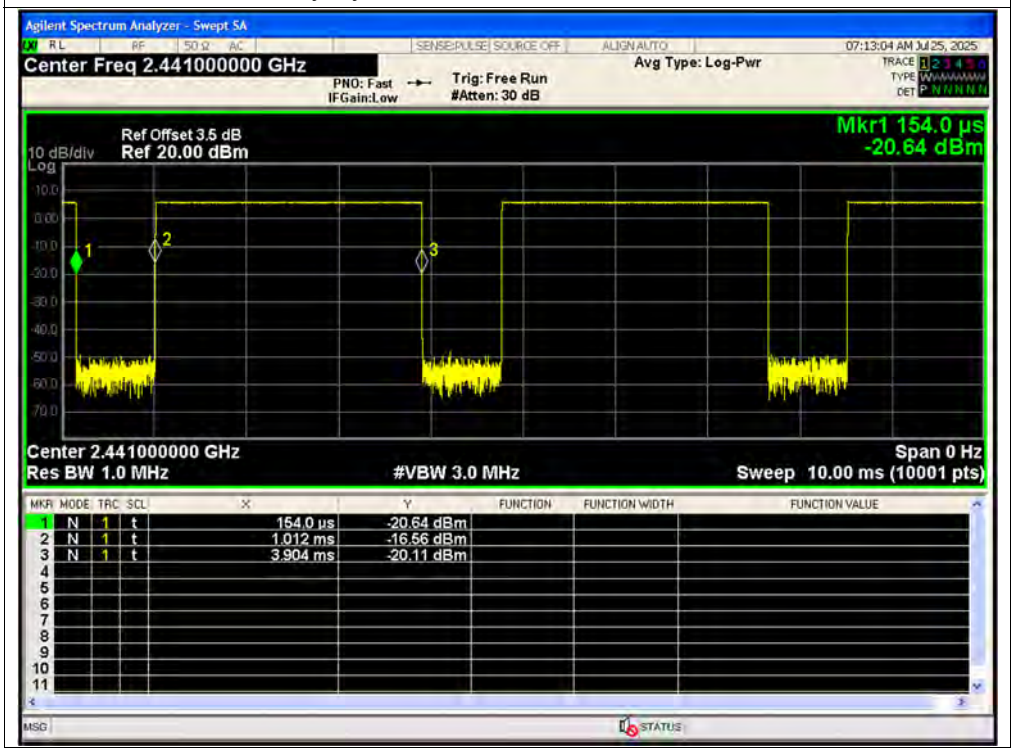

Duty Cycle NVNT 1-DH5 2480MHz Ant1

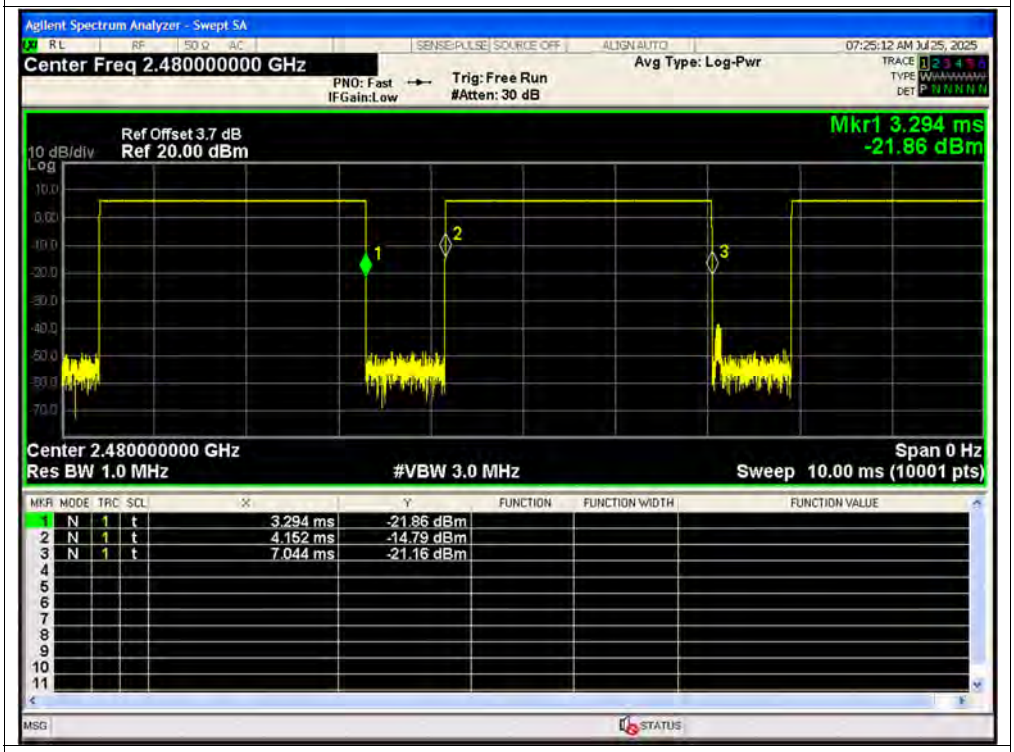

Duty Cycle NVNT 2-DH5 2402MHz Ant1

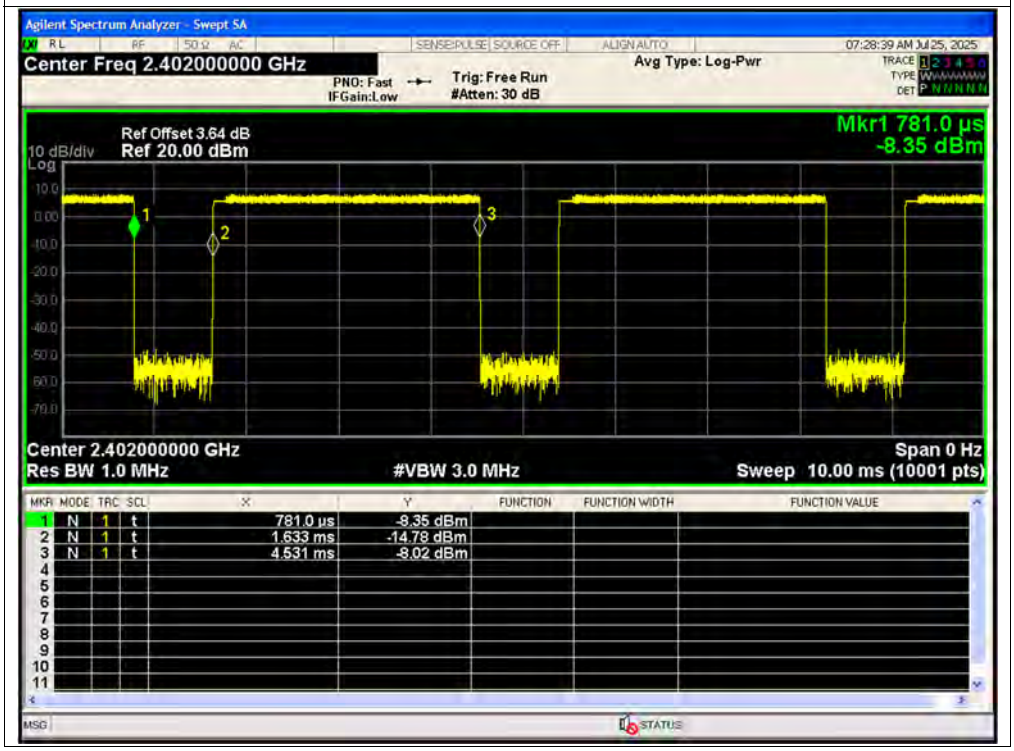

Duty Cycle NVNT 2-DH5 2441MHz Ant1

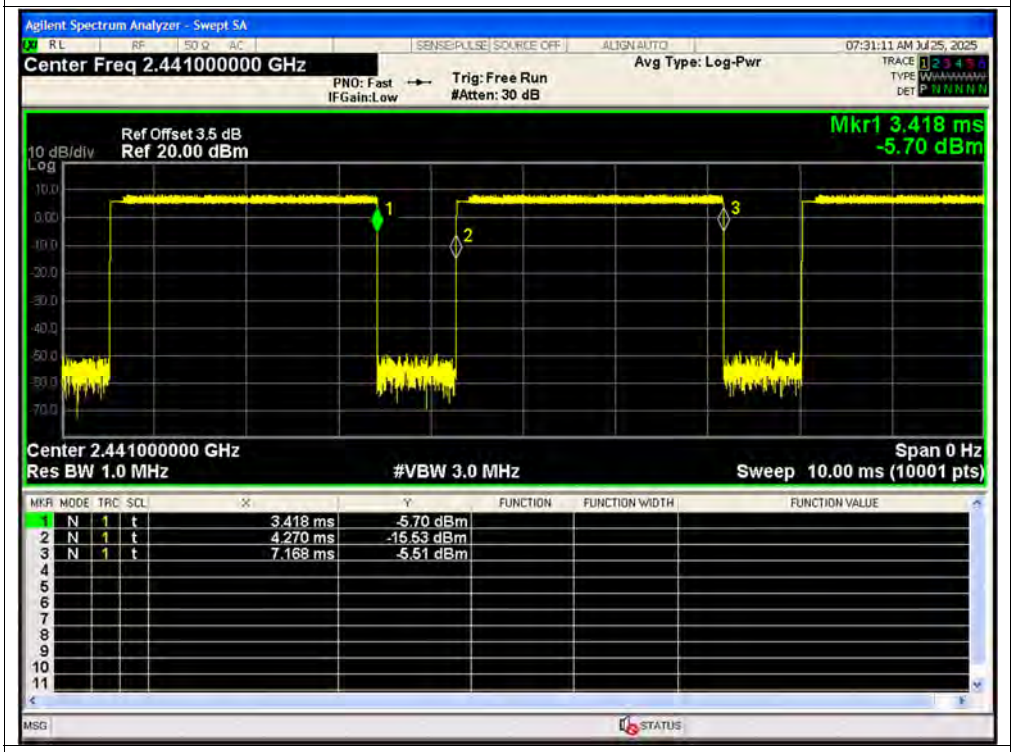

Duty Cycle NVNT 2-DH5 2480MHz Ant1

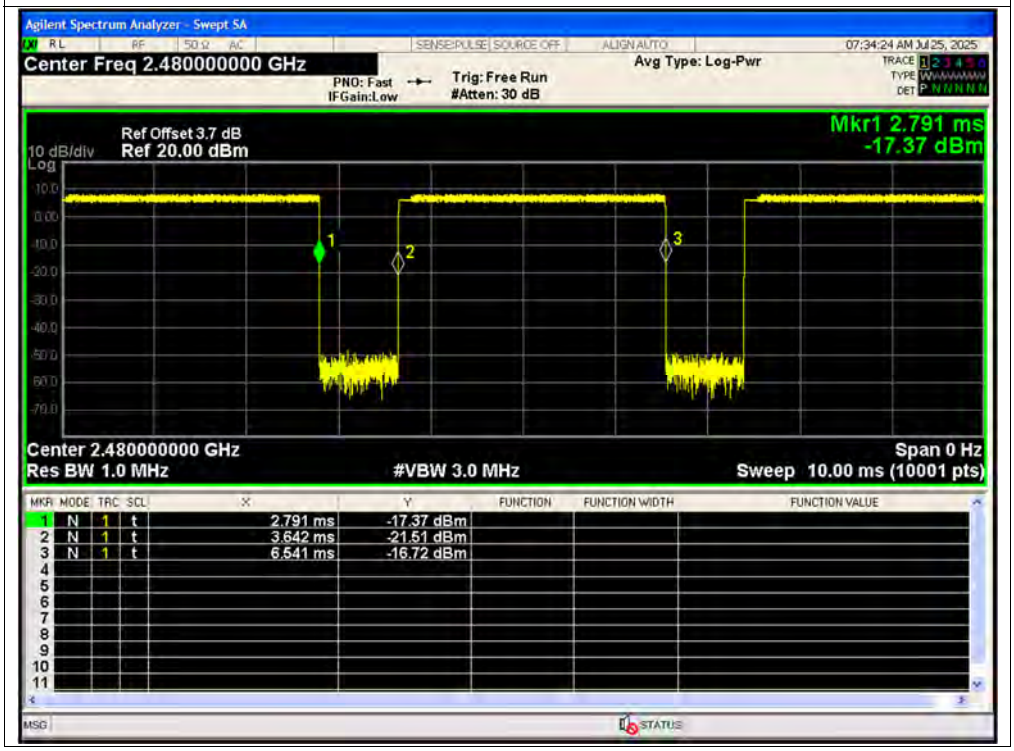

Duty Cycle NVNT 3-DH5 2402MHz Ant1

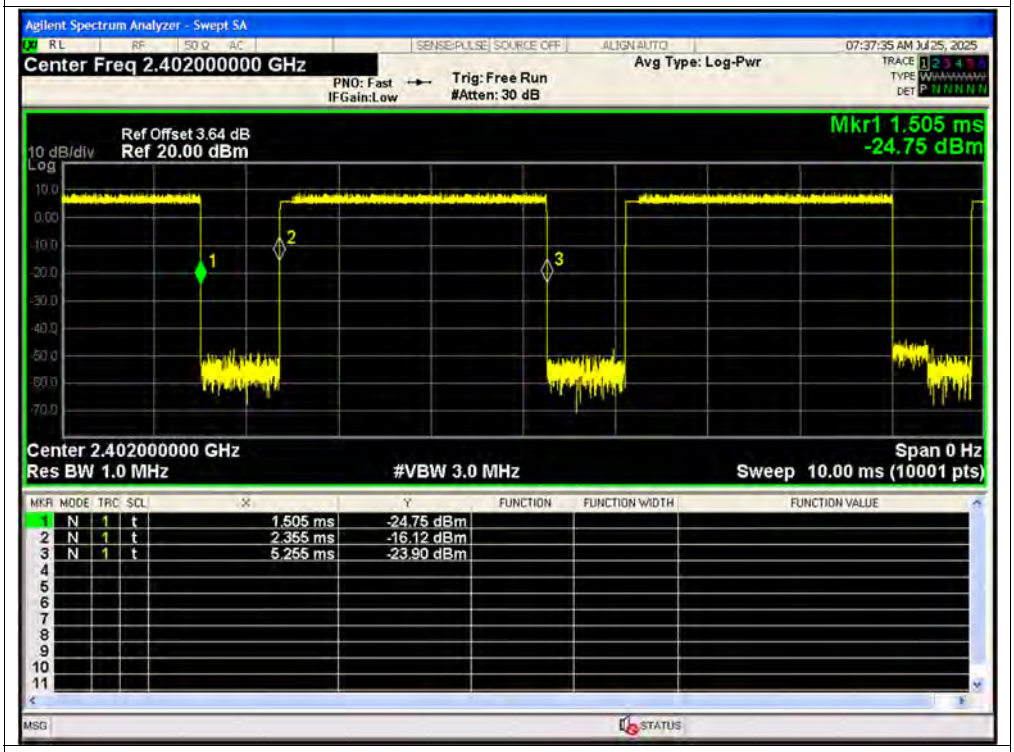

Duty Cycle NVNT 3-DH5 2441MHz Ant1

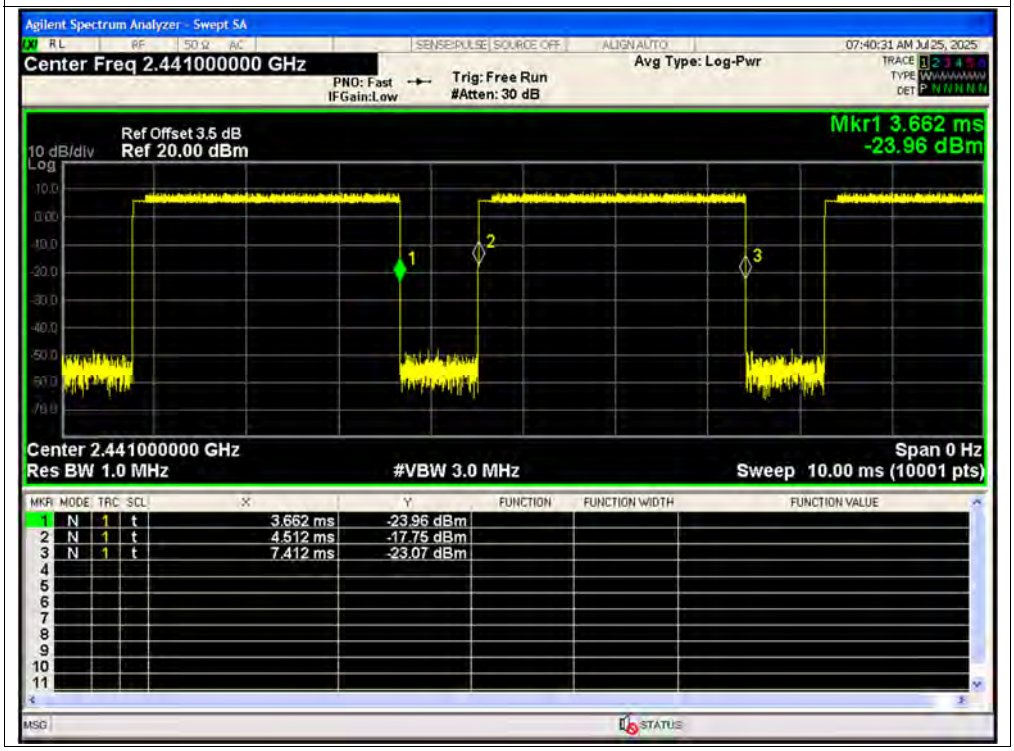

Duty Cycle NVNT 3-DH5 2480MHz Ant1

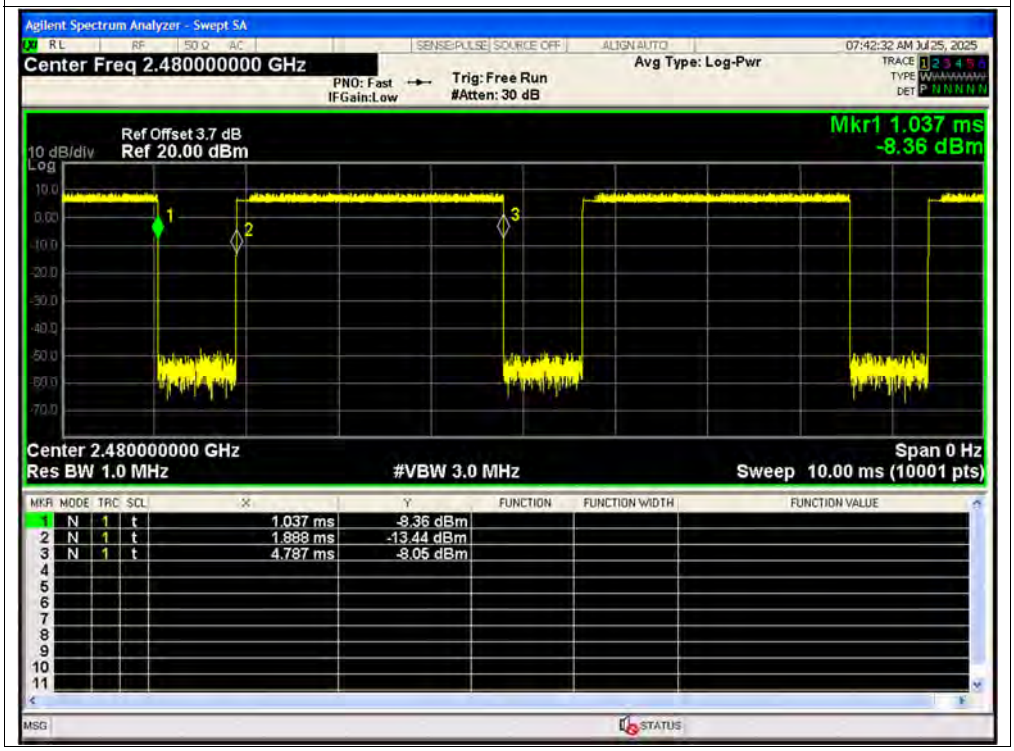

A.3. Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	6.15	0	6.15	0.00412	30	Pass
NVNT	1-DH5	2441	Ant1	6.13	0	6.13	0.0041	30	Pass
NVNT	1-DH5	2480	Ant1	6.41	0	6.41	0.00438	30	Pass
NVNT	2-DH5	2402	Ant1	8.48	0	8.48	0.00705	30	Pass
NVNT	2-DH5	2441	Ant1	8.54	0	8.54	0.00714	30	Pass
NVNT	2-DH5	2480	Ant1	8.62	0	8.62	0.00728	30	Pass
NVNT	3-DH5	2402	Ant1	9.29	0	9.29	0.00849	30	Pass
NVNT	3-DH5	2441	Ant1	9.24	0	9.24	0.00839	30	Pass
NVNT	3-DH5	2480	Ant1	9.29	0	9.29	0.00849	30	Pass

Test Graphs

Peak Power NVNT 1-DH5 2402MHz Ant1

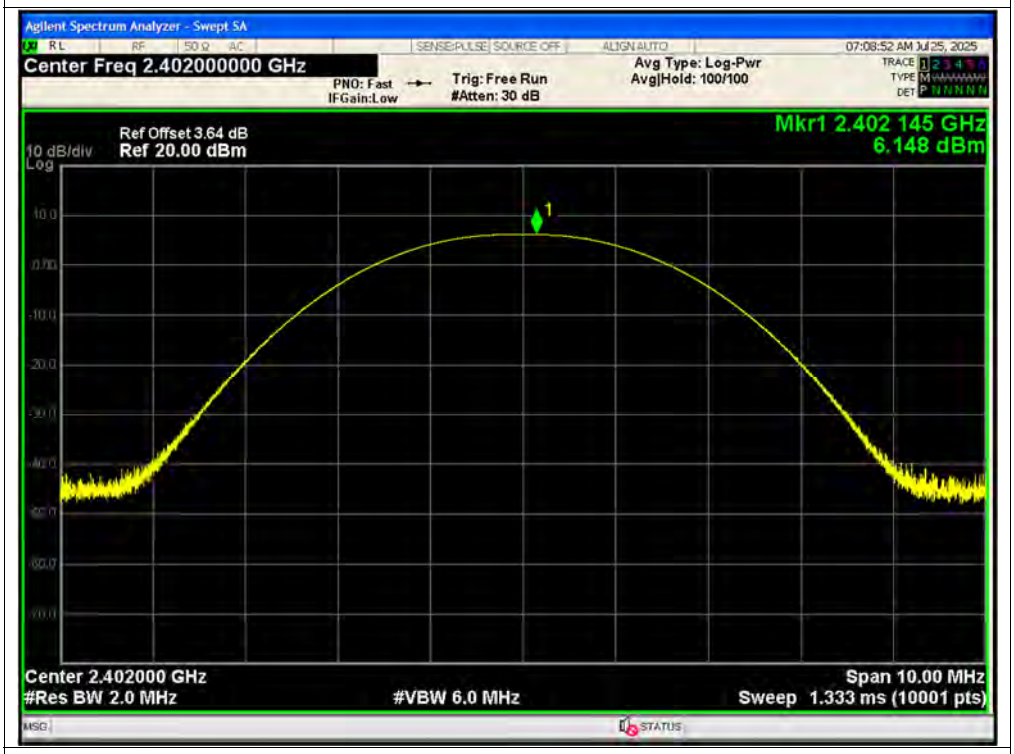

Peak Power NVNT 1-DH5 2441MHz Ant1

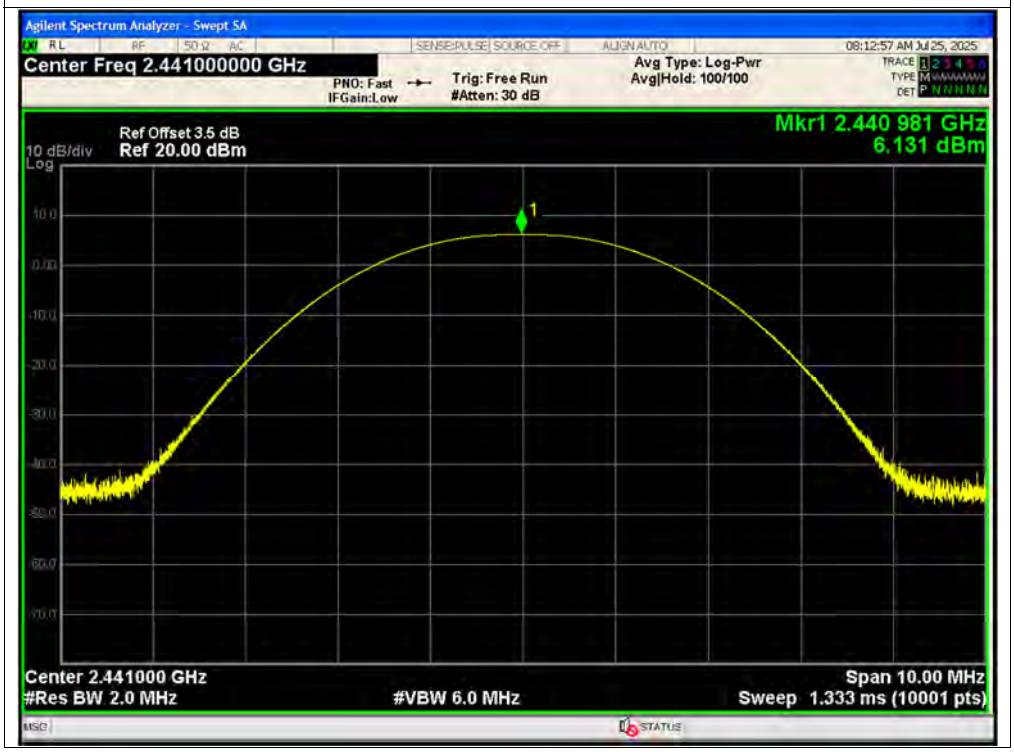

Peak Power NVNT 1-DH5 2480MHz Ant1

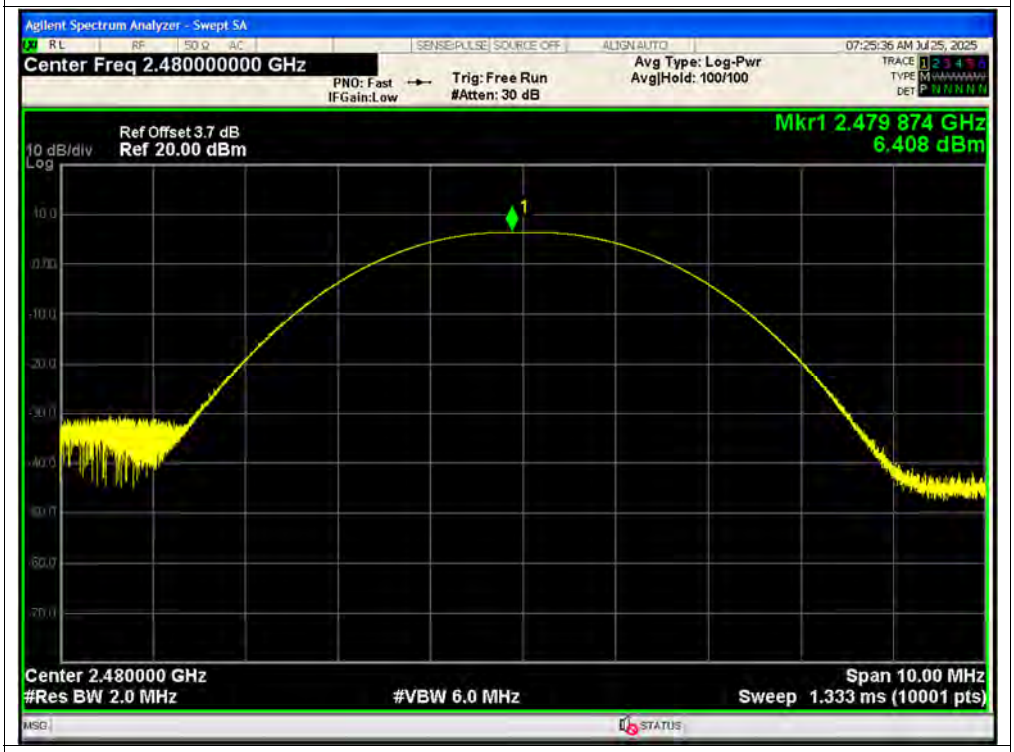

Peak Power NVNT 2-DH5 2402MHz Ant1

Peak Power NVNT 2-DH5 2441MHz Ant1

Peak Power NVNT 2-DH5 2480MHz Ant1

Peak Power NVNT 3-DH5 2402MHz Ant1

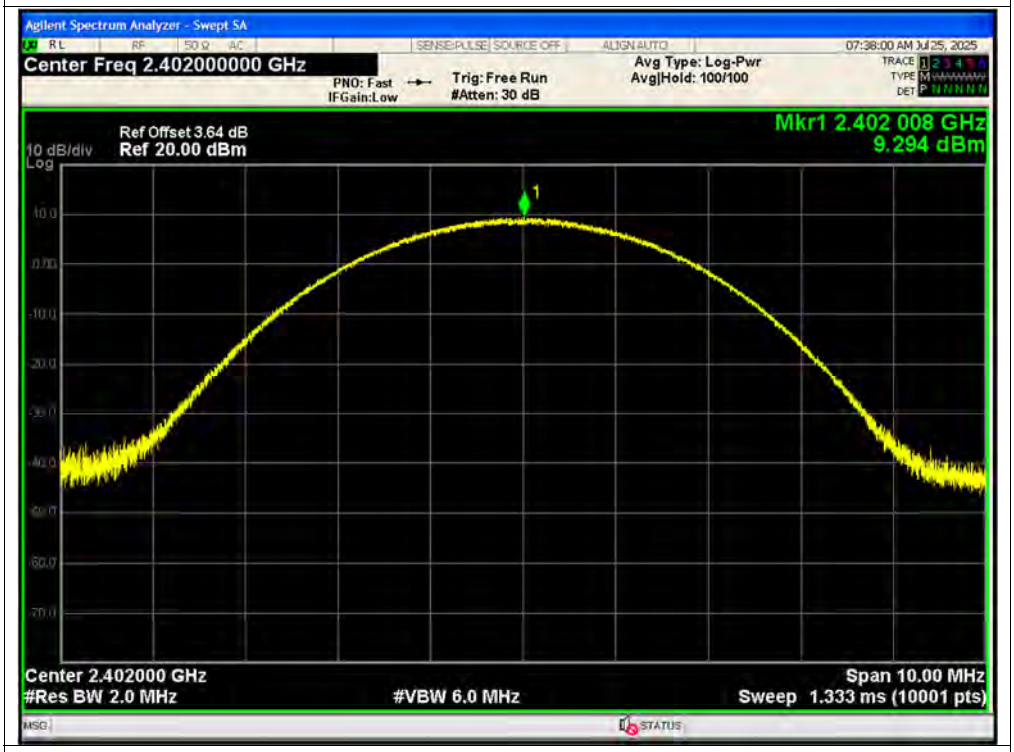

Peak Power NVNT 3-DH5 2441MHz Ant1

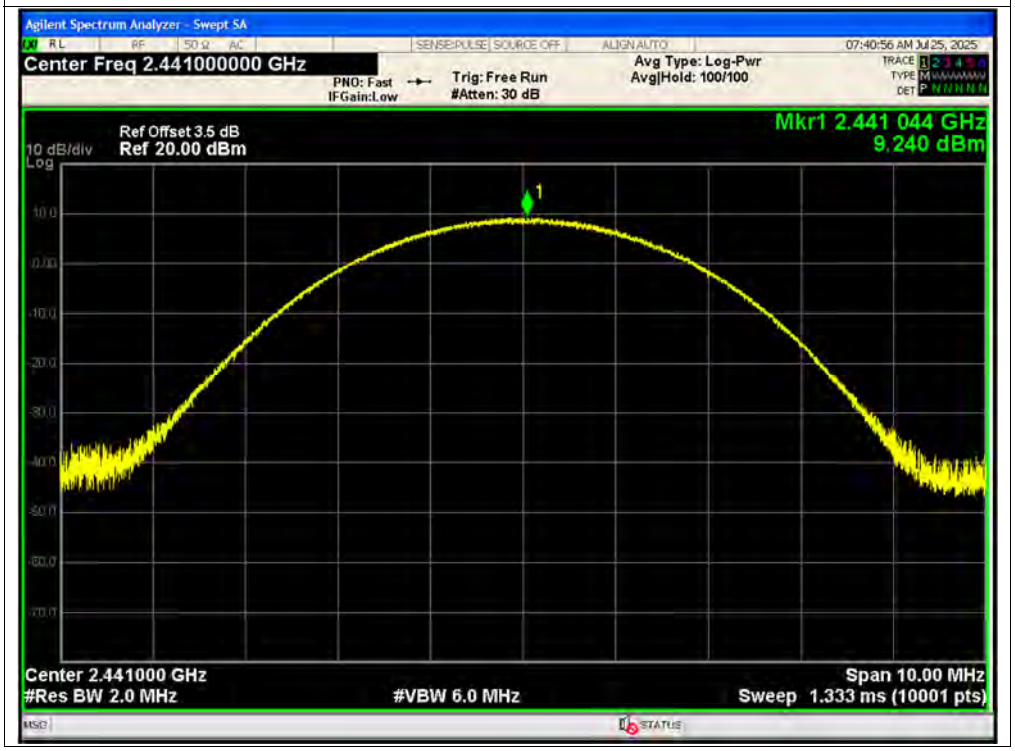

Peak Power NVNT 3-DH5 2480MHz Ant1

A.4. Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	4.88	1.13	6.01	0.00399	30	Pass
NVNT	1-DH5	2441	Ant1	5.09	1.13	6.22	0.00419	30	Pass
NVNT	1-DH5	2480	Ant1	5.13	1.13	6.26	0.00423	30	Pass
NVNT	2-DH5	2402	Ant1	4.66	1.12	5.78	0.00378	30	Pass
NVNT	2-DH5	2441	Ant1	4.87	1.12	5.99	0.00397	30	Pass
NVNT	2-DH5	2480	Ant1	4.88	1.12	6	0.00398	30	Pass
NVNT	3-DH5	2402	Ant1	4.65	1.12	5.77	0.00378	30	Pass
NVNT	3-DH5	2441	Ant1	4.89	1.12	6.01	0.00399	30	Pass
NVNT	3-DH5	2480	Ant1	5.23	1.12	6.35	0.00432	30	Pass

Test Graphs

Average Power NVNT 1-DH5 2402MHz Ant1

Average Power NVNT 1-DH5 2441MHz Ant1

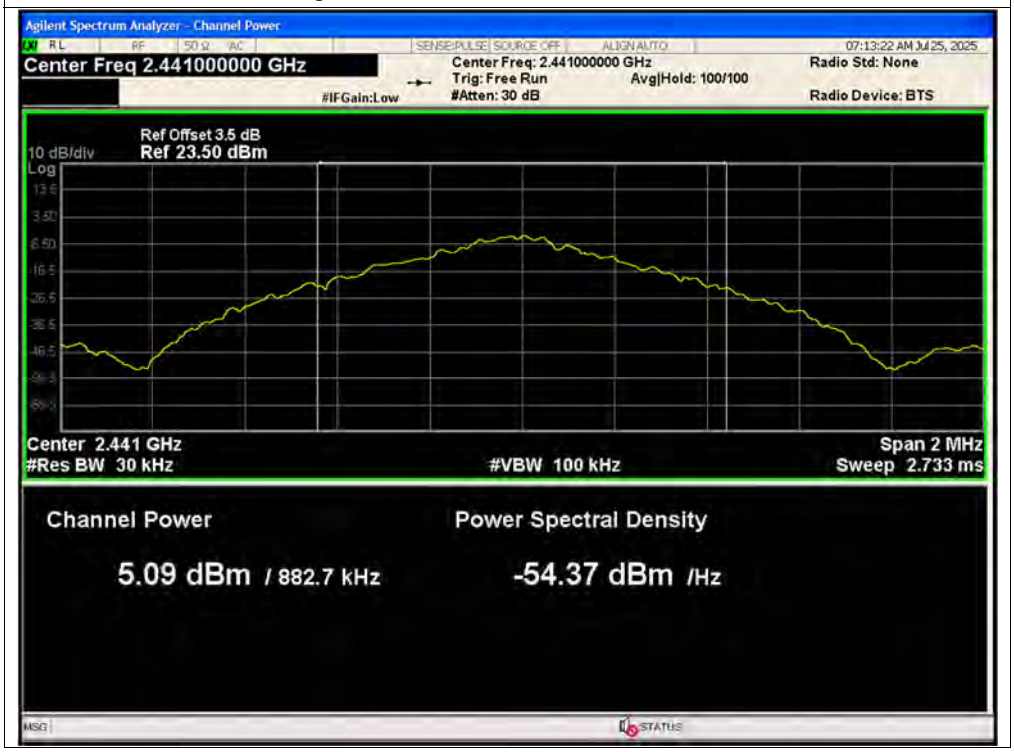

Average Power NVNT 1-DH5 2480MHz Ant1

Average Power NVNT 2-DH5 2402MHz Ant1

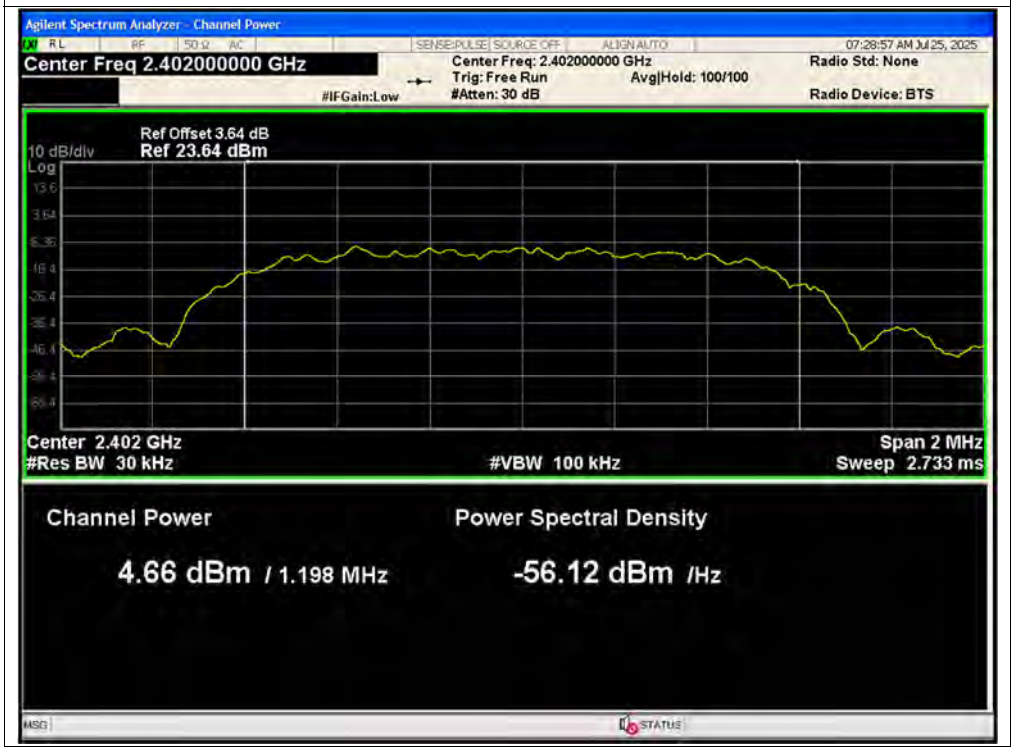

Average Power NVNT 2-DH5 2441MHz Ant1

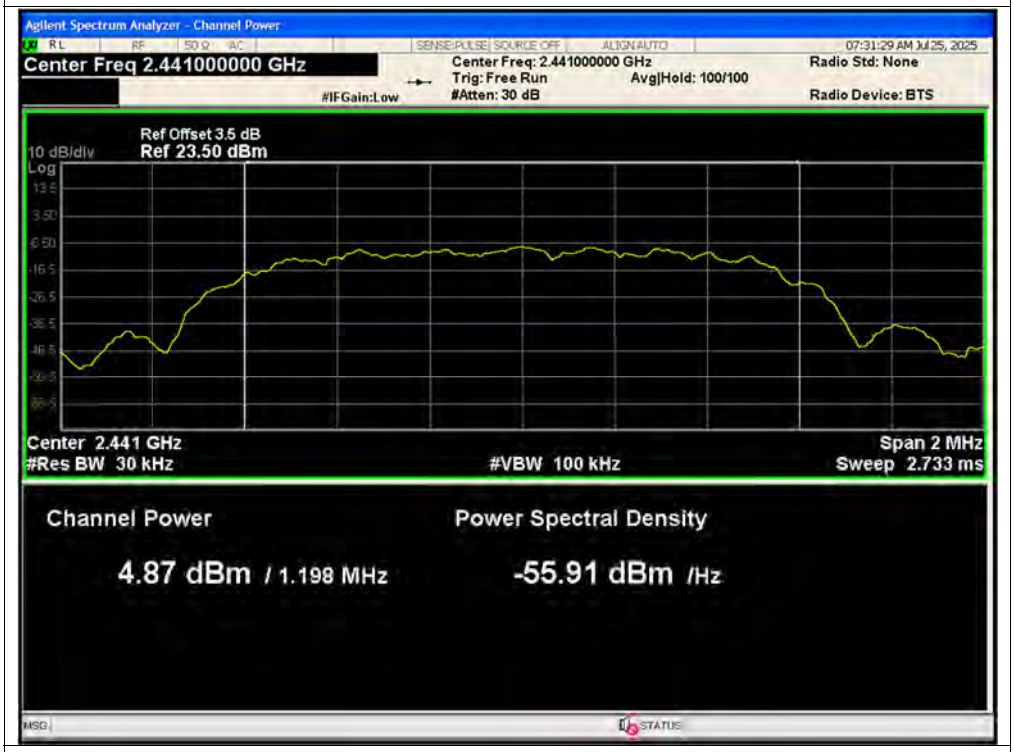

Average Power NVNT 2-DH5 2480MHz Ant1

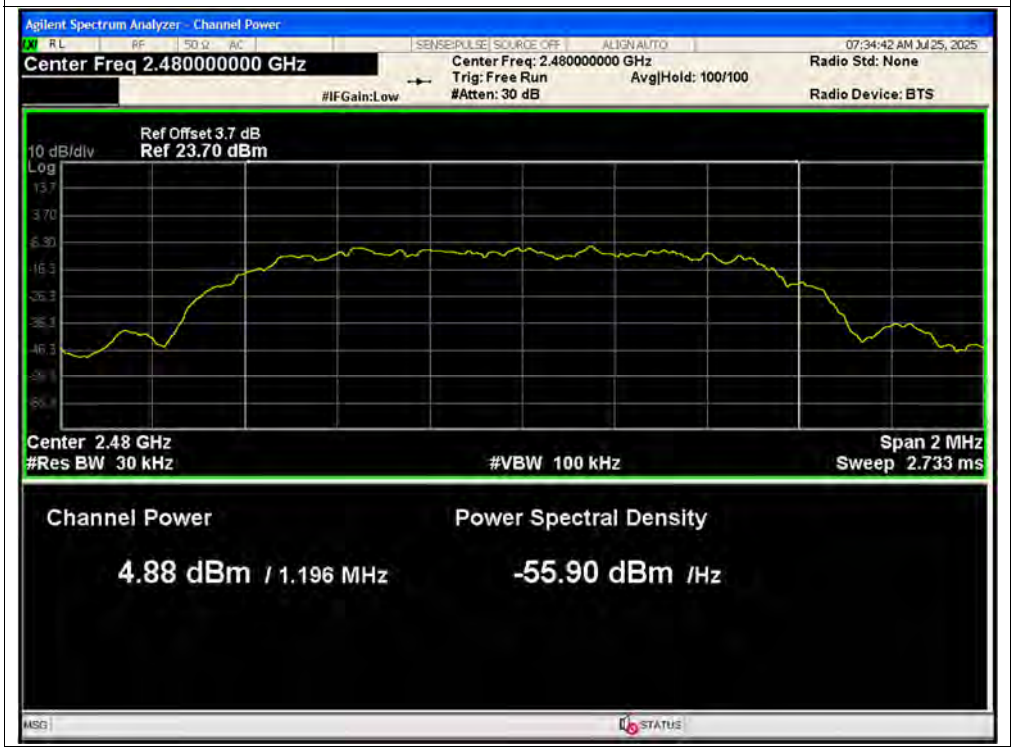

Average Power NVNT 3-DH5 2402MHz Ant1

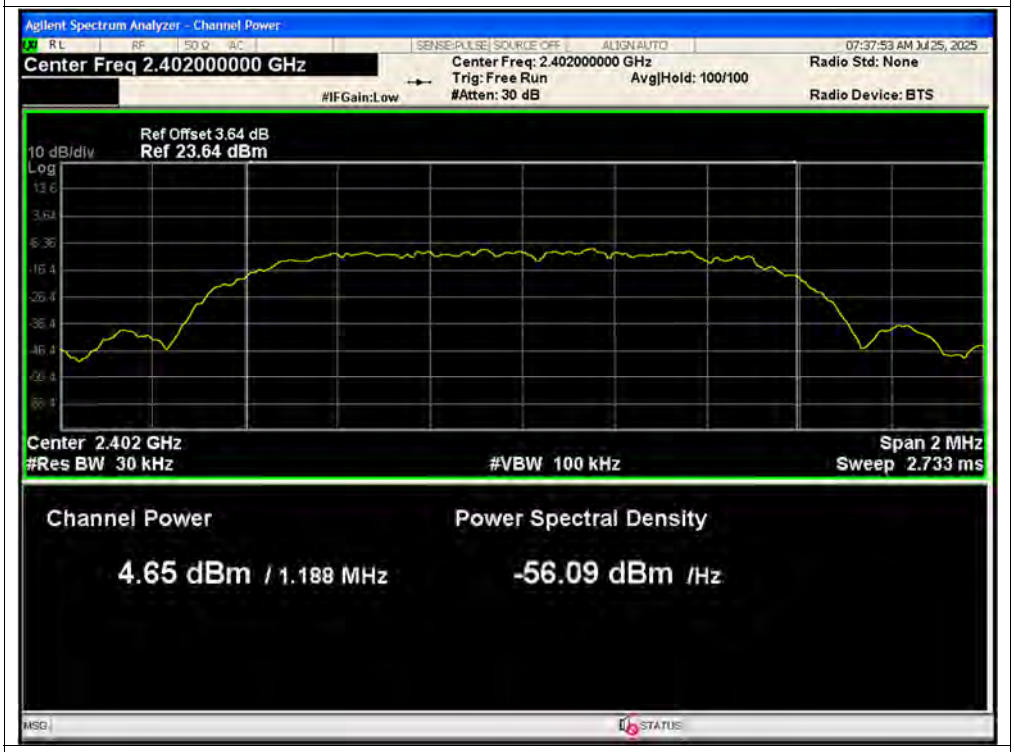

Average Power NVNT 3-DH5 2441MHz Ant1

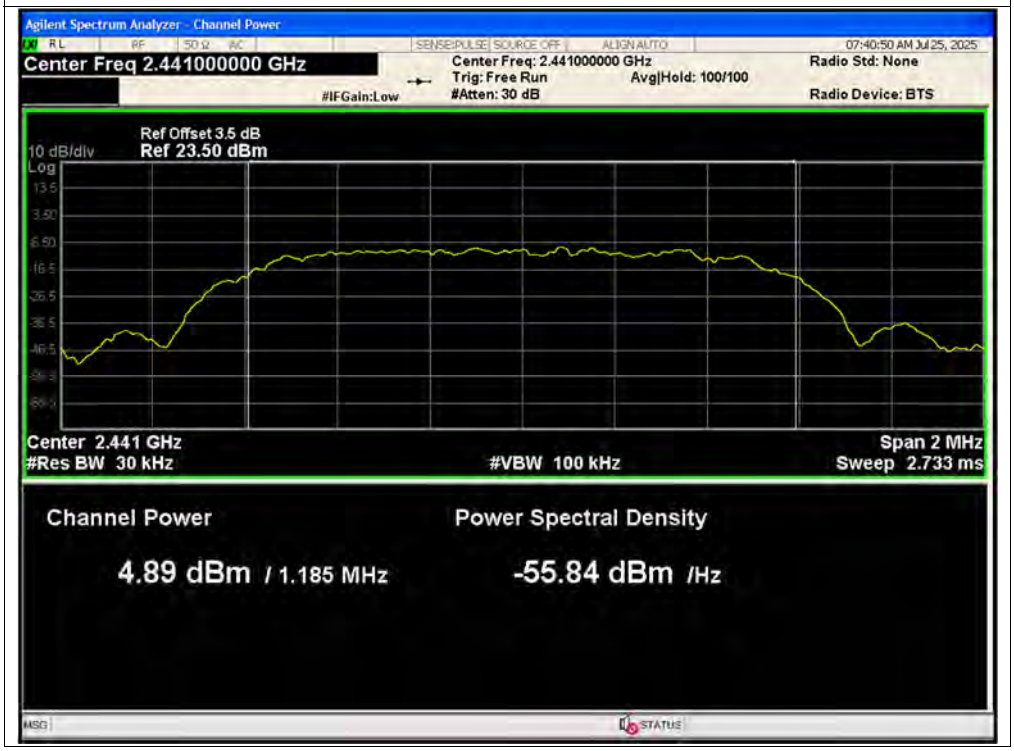

Average Power NVNT 3-DH5 2480MHz Ant1

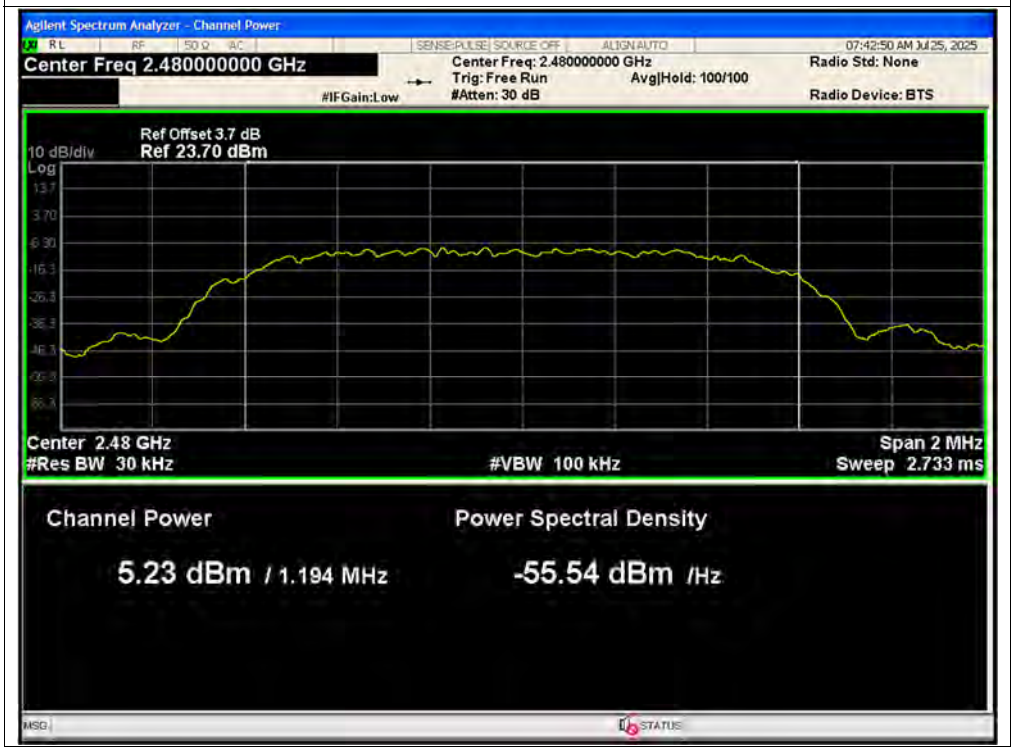

A.5. 20 dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)
NVNT	1-DH5	2402	Ant1	0.9542
NVNT	1-DH5	2441	Ant1	0.9585
NVNT	1-DH5	2480	Ant1	0.9556
NVNT	2-DH5	2402	Ant1	1.332
NVNT	2-DH5	2441	Ant1	1.328
NVNT	2-DH5	2480	Ant1	1.335
NVNT	3-DH5	2402	Ant1	1.305
NVNT	3-DH5	2441	Ant1	1.301
NVNT	3-DH5	2480	Ant1	1.31

Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1

-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1

-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

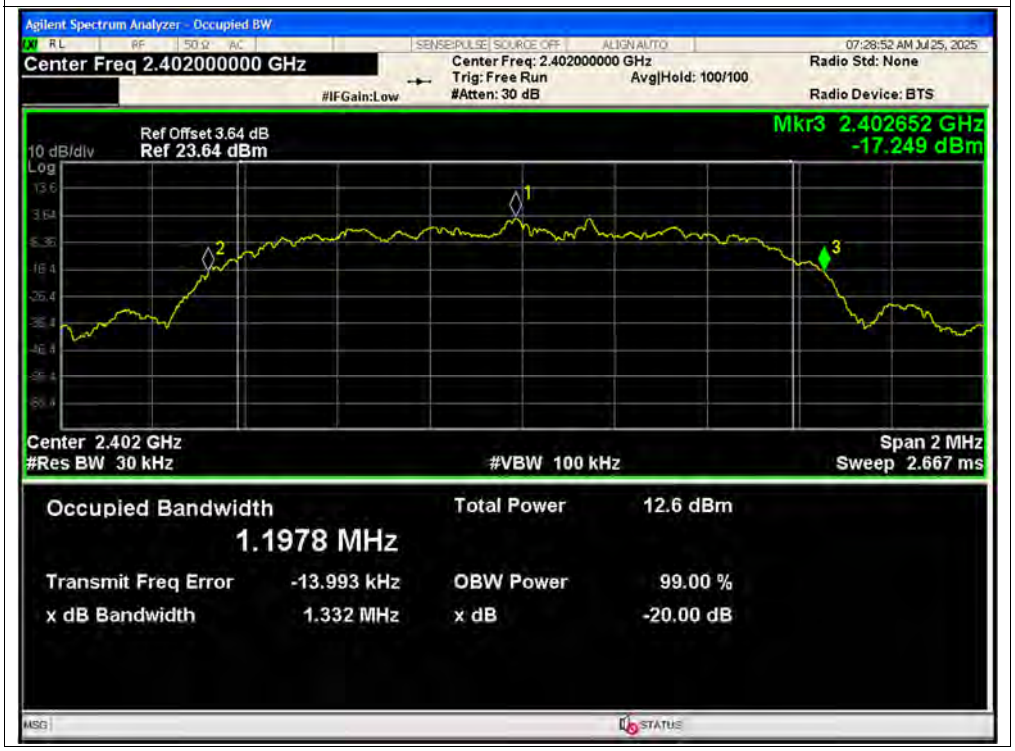

-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

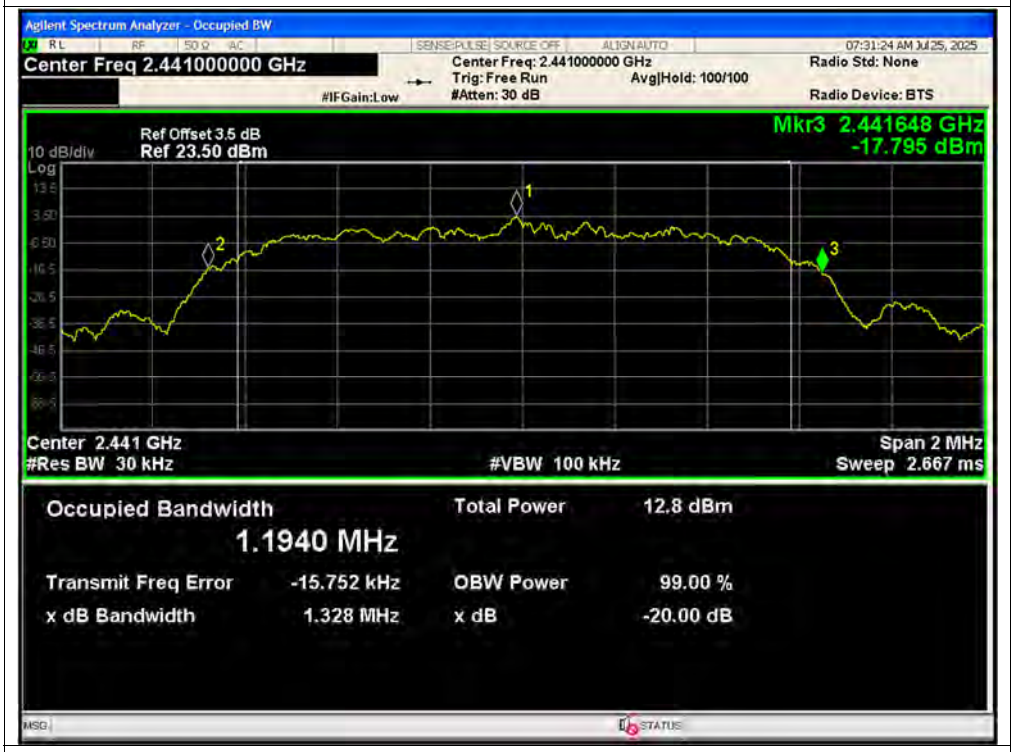

-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

-20dB Bandwidth NVNT 3-DH5 2480MHz Ant1

A.6. Carried Frequency Separation

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2440.99	2441.984	0.994	0.639	Pass
NVNT	2-DH5	Ant1	2440.992	2441.982	0.99	0.885	Pass
NVNT	3-DH5	Ant1	2440.978	2441.99	1.012	0.867	Pass

Test Graphs

CFS NVNT 1-DH5 2441MHz Ant1

CFS NVNT 2-DH5 2441MHz Ant1

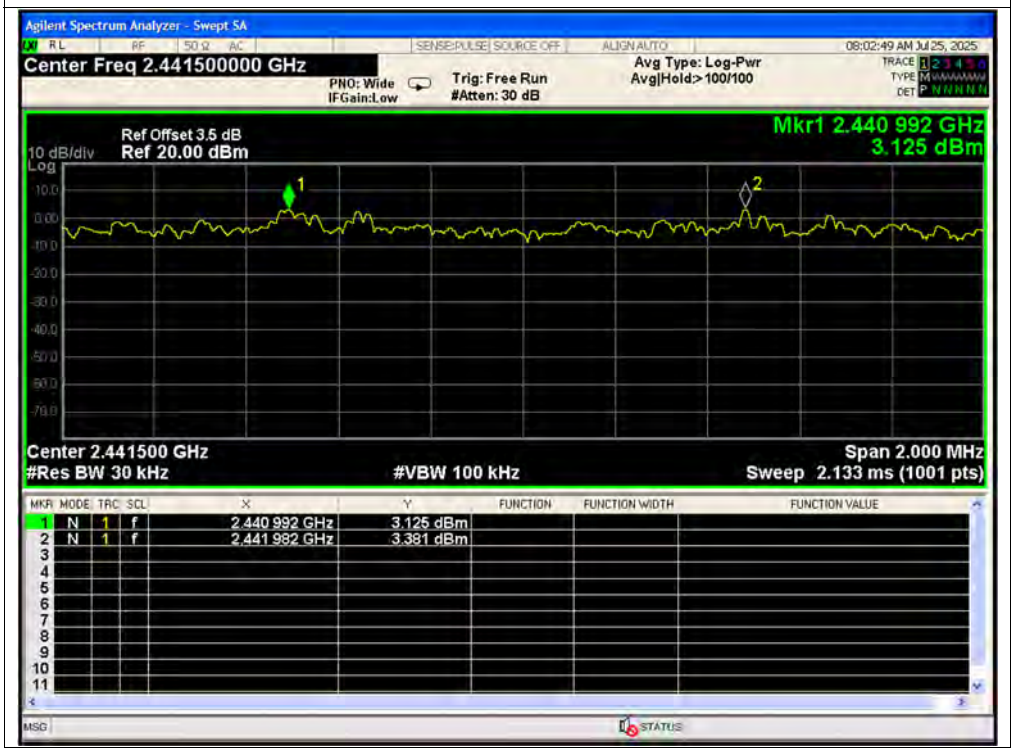

CFS NVNT 3-DH5 2441MHz Ant1

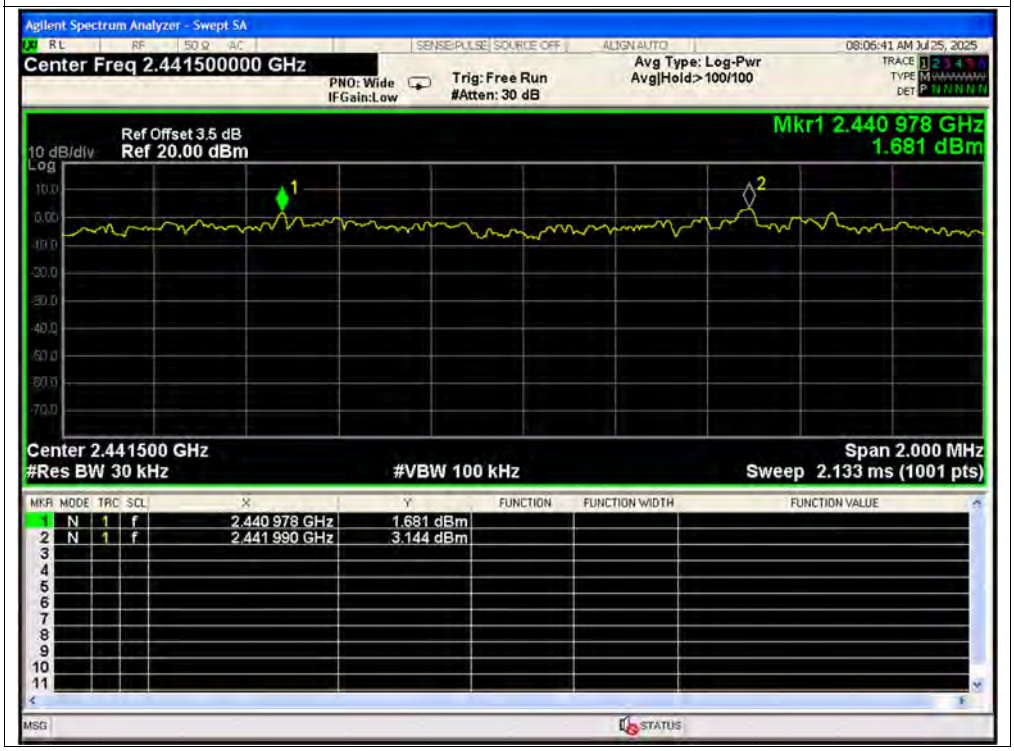

A.7. Time of Occupancy (Dwell time)

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH5	2441	Ant1	2.885	305.81	106	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.881	305.386	106	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.887	308.909	107	31600	400	Pass

Test Graphs

Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

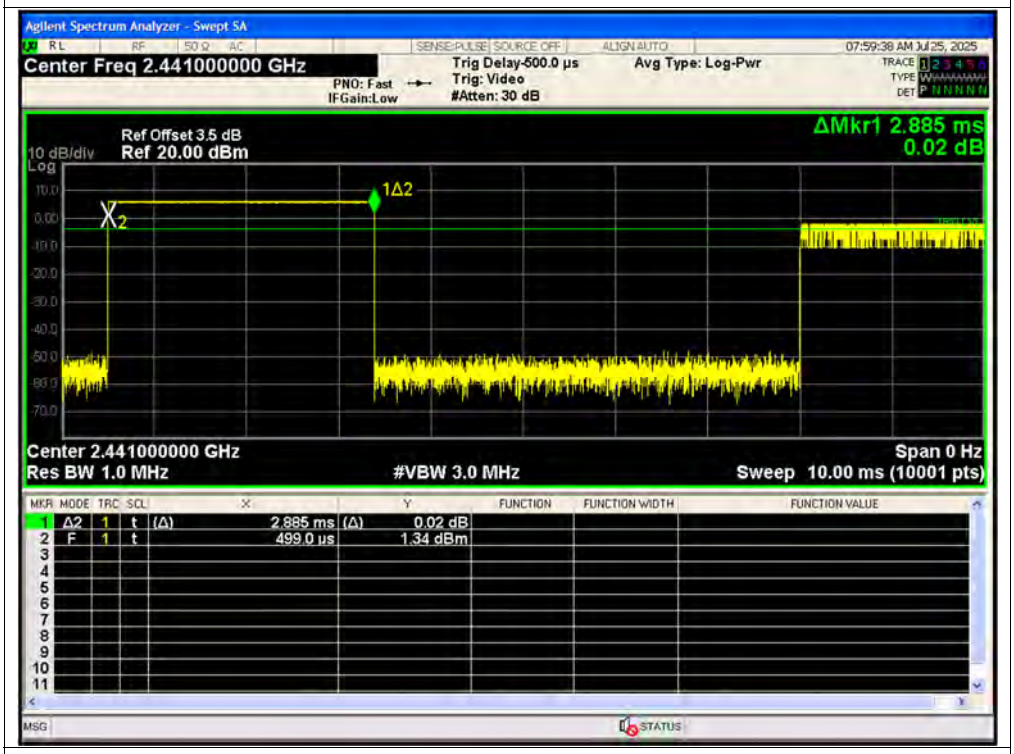

Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

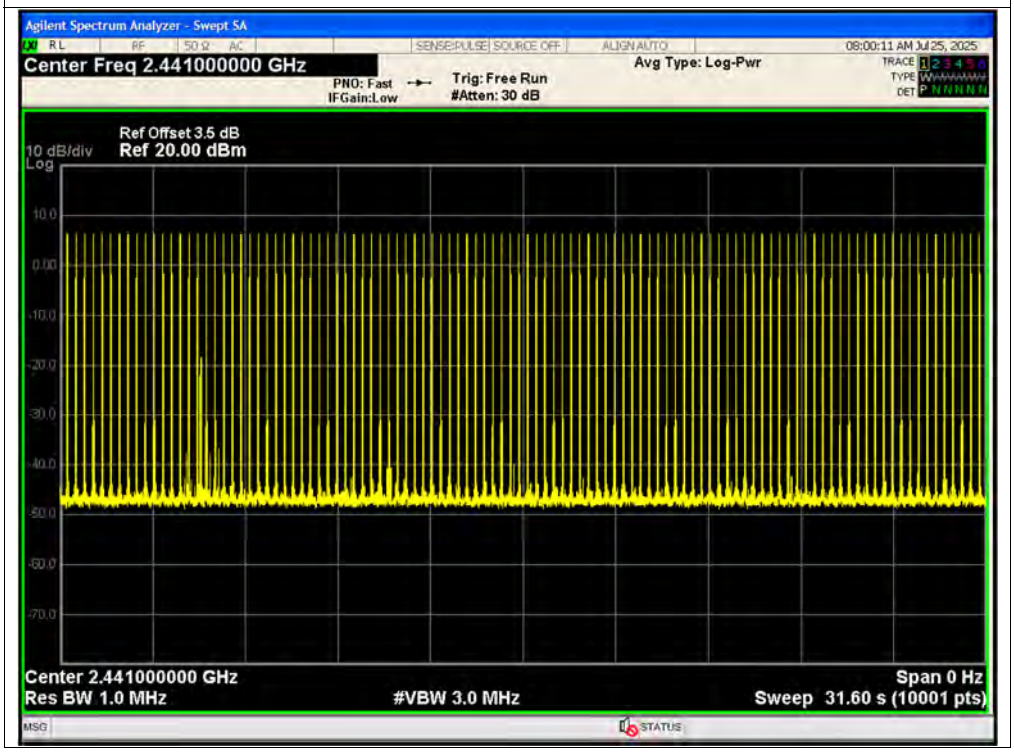

Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

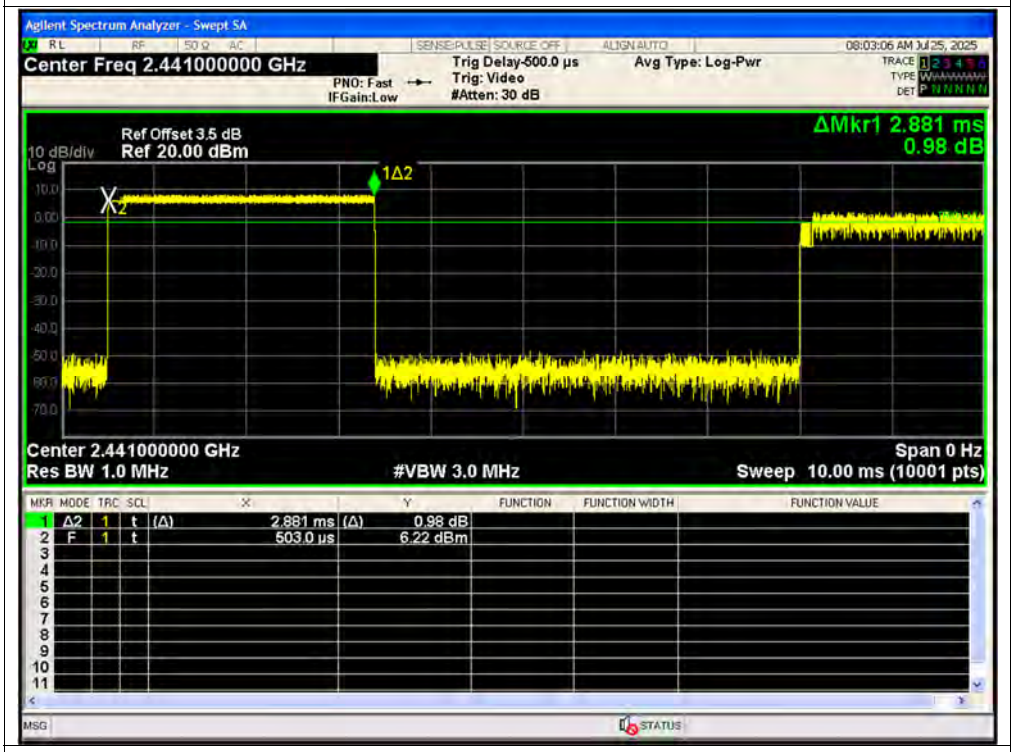

Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

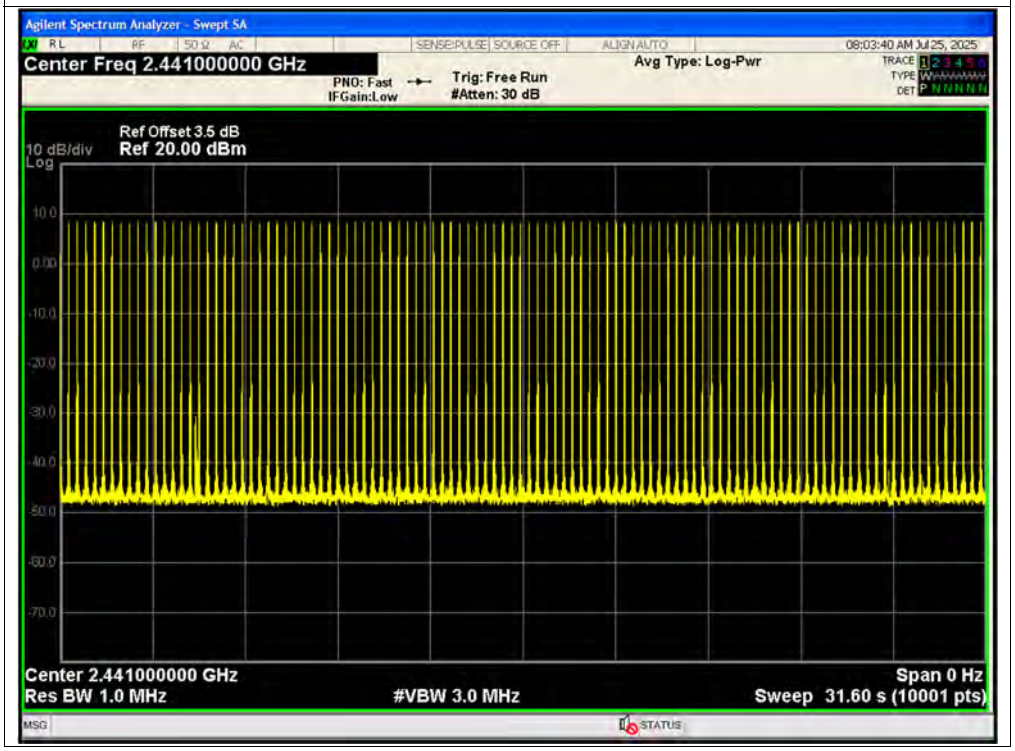

Dwell NVNT 3-DH5 2441MHz Ant1 One Burst

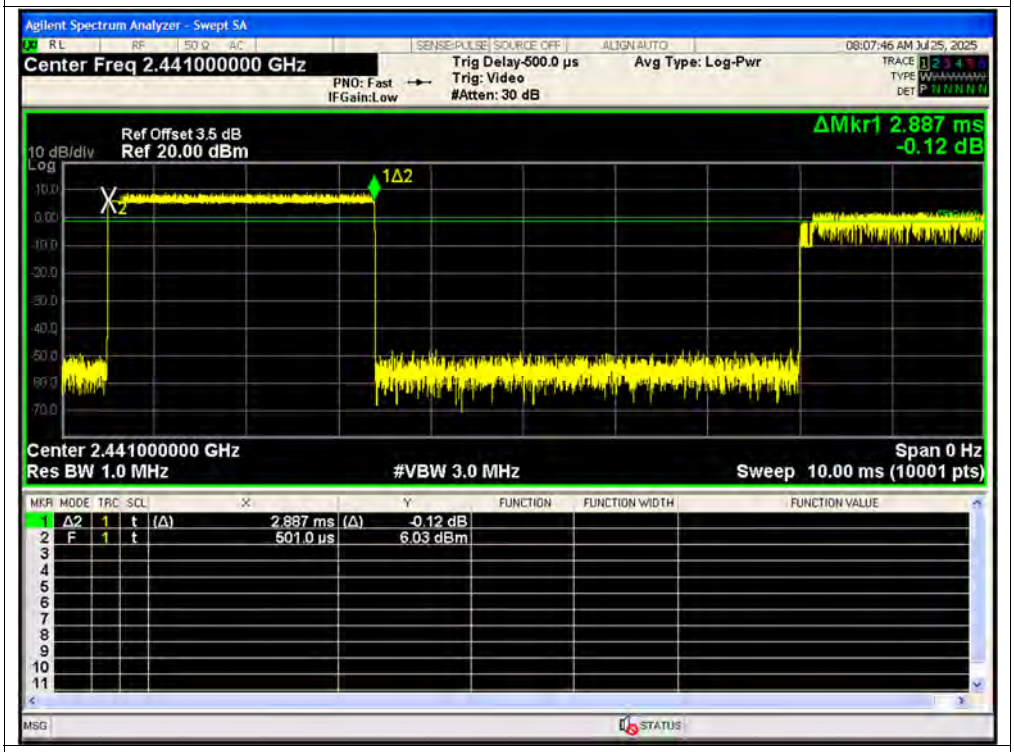

Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

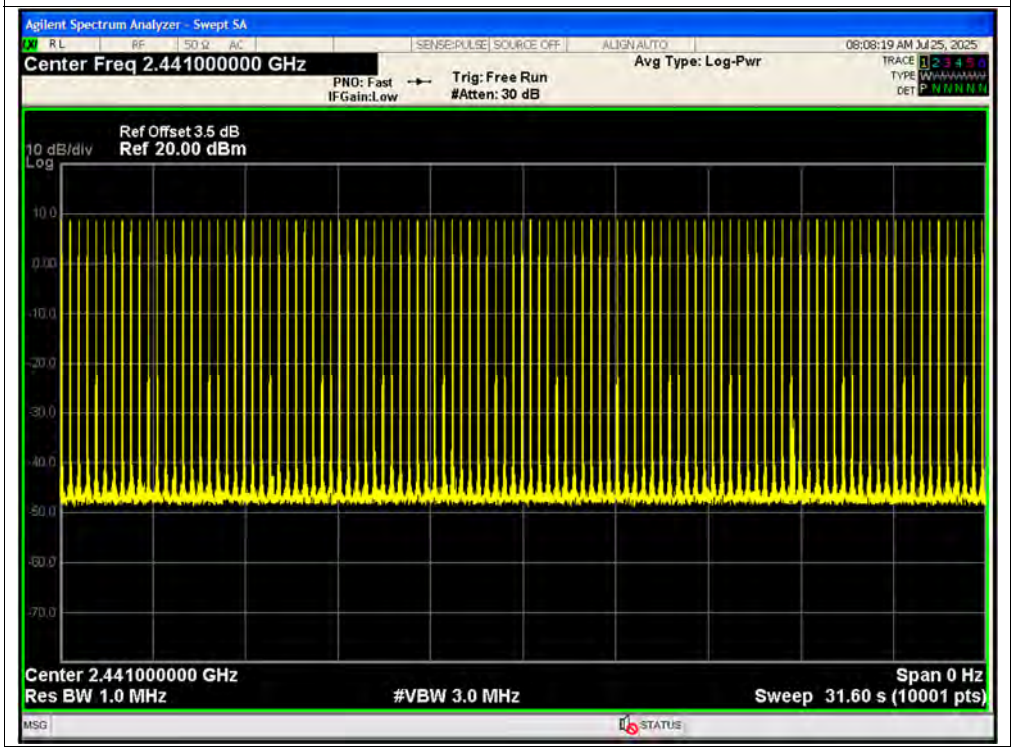

A.8. Conducted Spurious Emissions

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-51.45	-20	Pass
NVNT	1-DH5	2441	Ant1	-50.11	-20	Pass
NVNT	1-DH5	2480	Ant1	-49.97	-20	Pass
NVNT	2-DH5	2402	Ant1	-49.18	-20	Pass
NVNT	2-DH5	2441	Ant1	-50.94	-20	Pass
NVNT	2-DH5	2480	Ant1	-49.2	-20	Pass
NVNT	3-DH5	2402	Ant1	-52.06	-20	Pass
NVNT	3-DH5	2441	Ant1	-50.3	-20	Pass
NVNT	3-DH5	2480	Ant1	-50.01	-20	Pass

Test Graphs

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

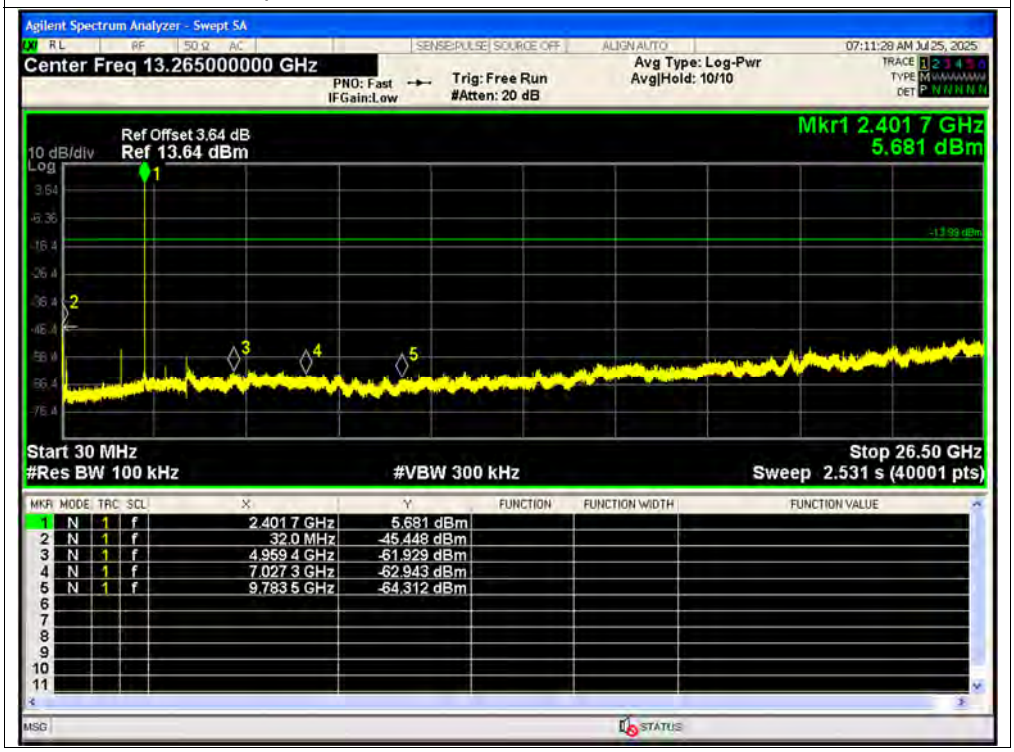

Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref

Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

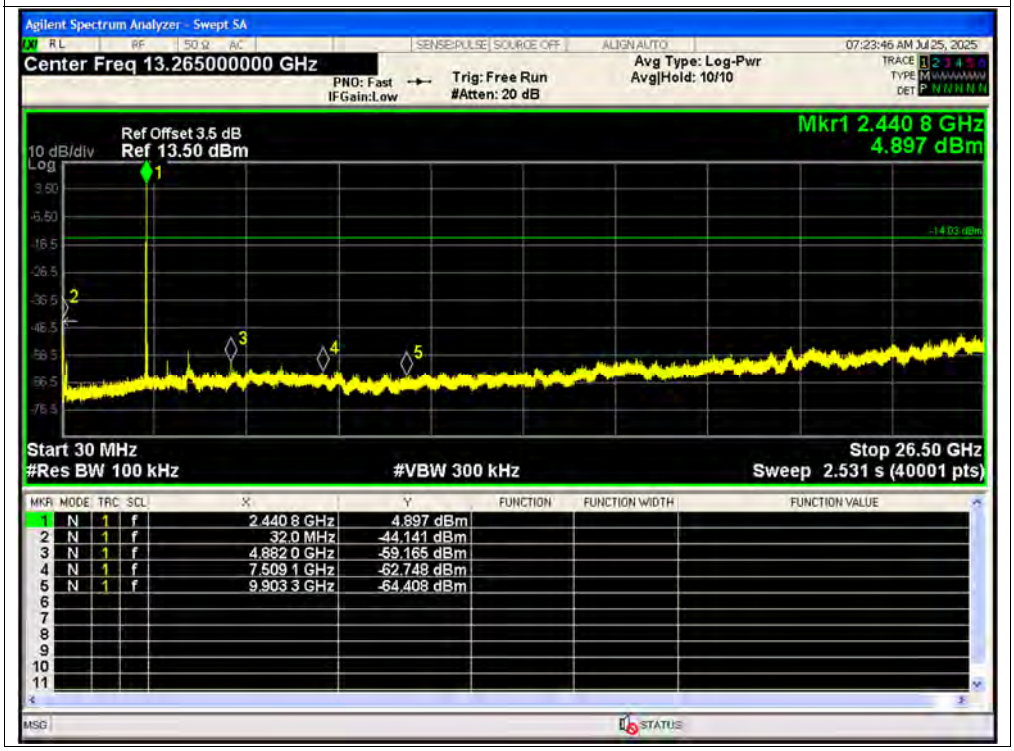

Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

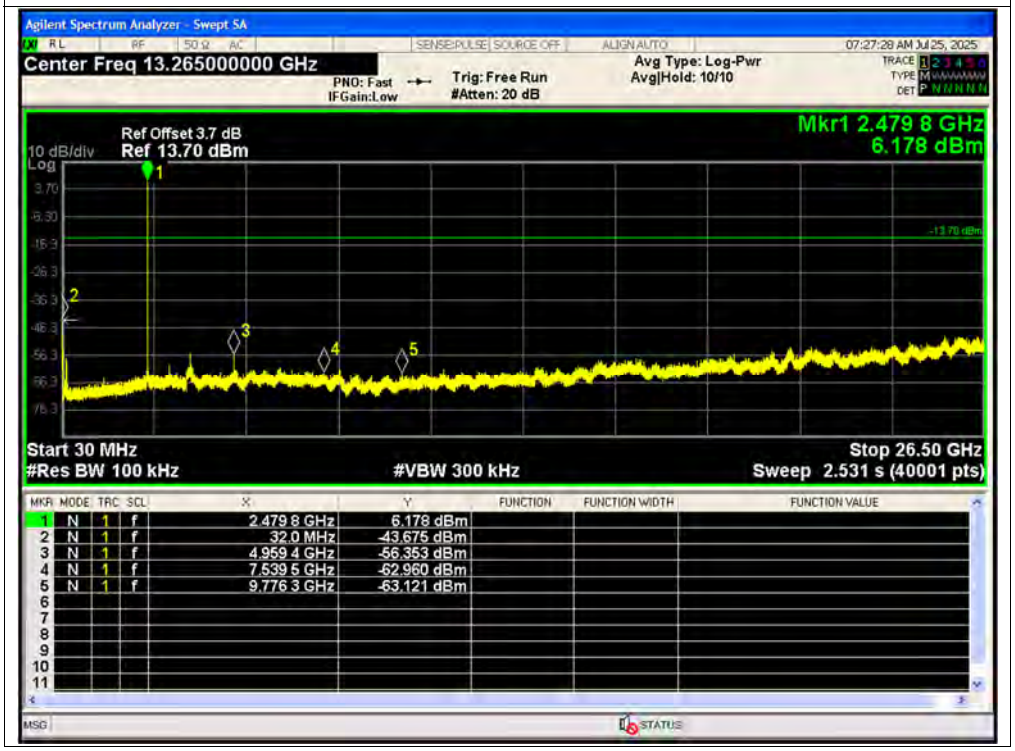

Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

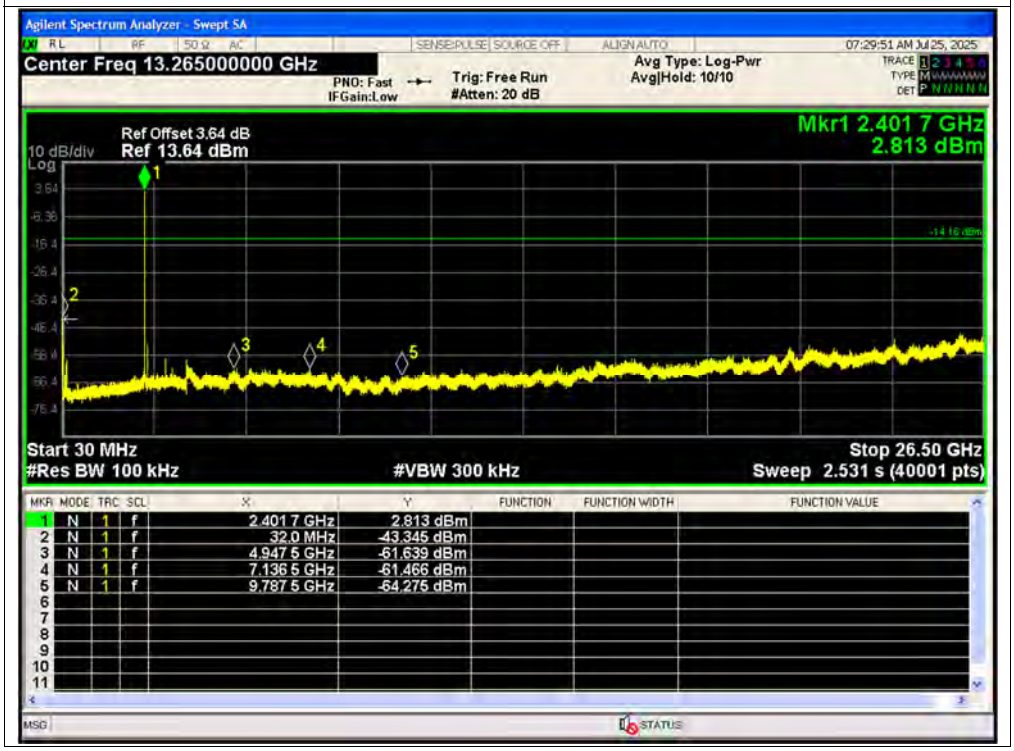

Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

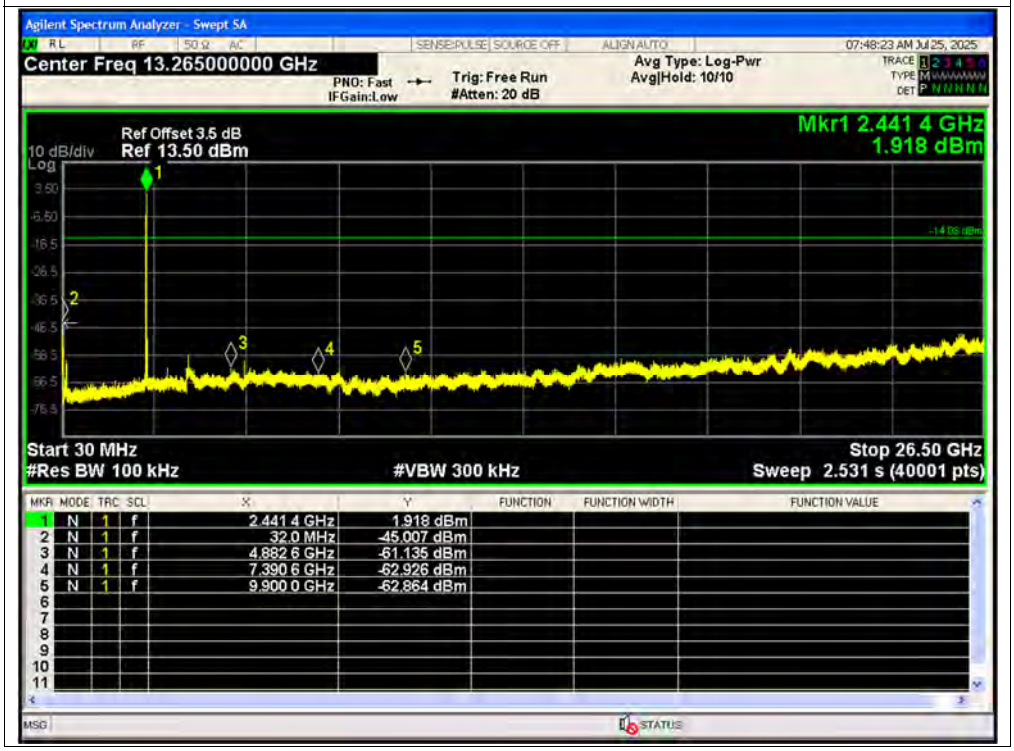

Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref

Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

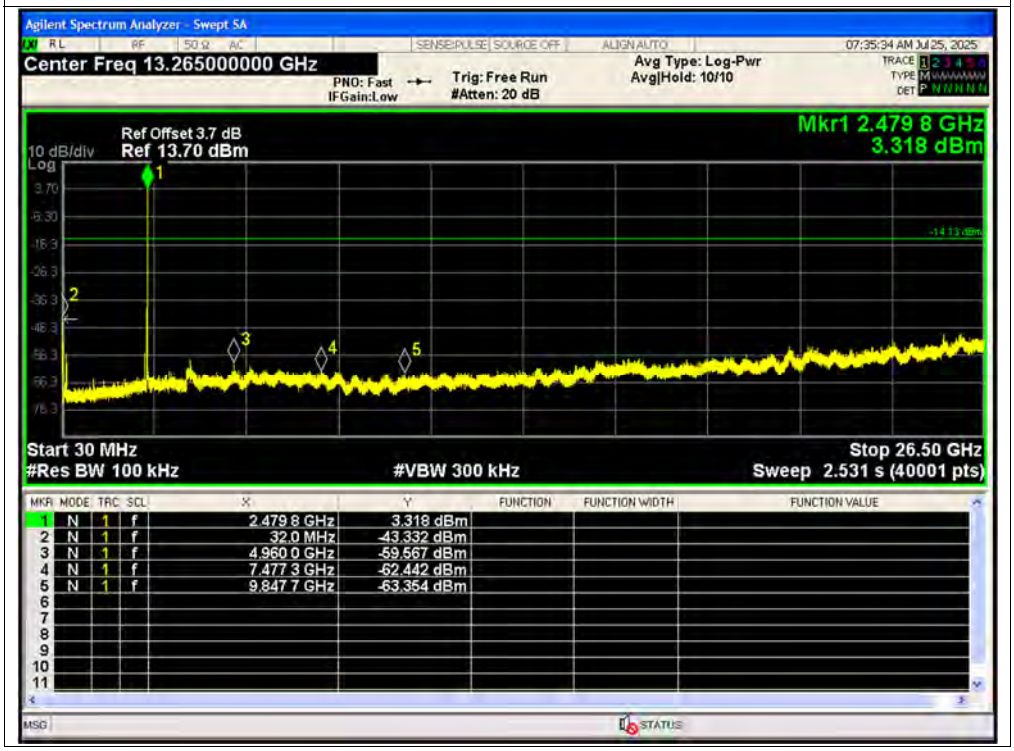

Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

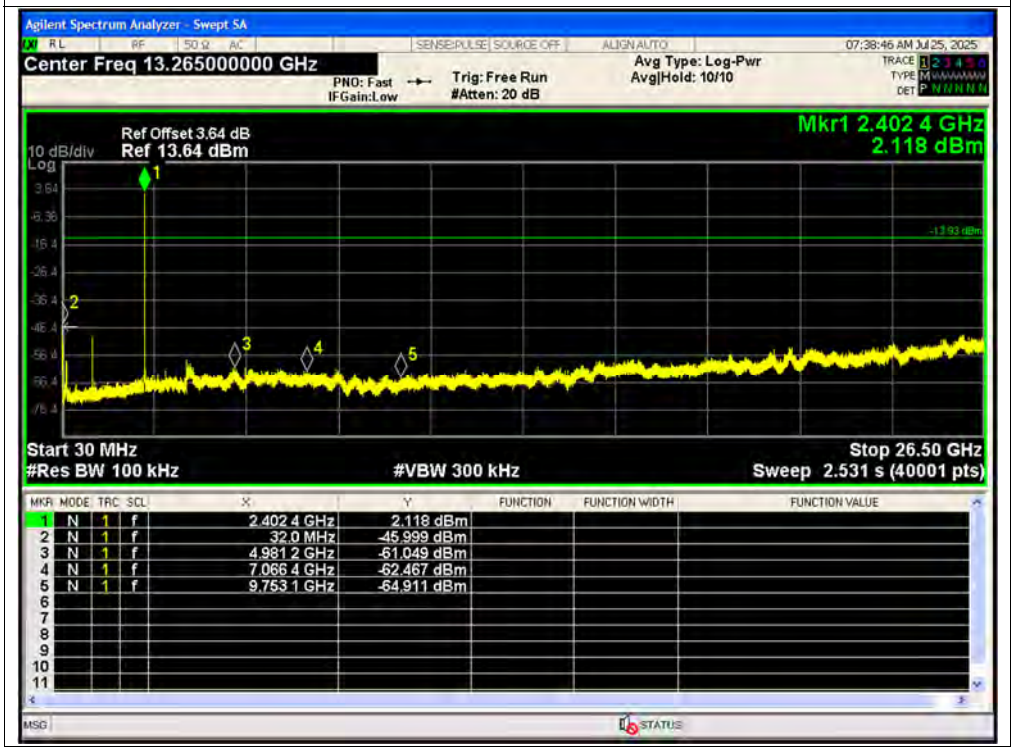

Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref

Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

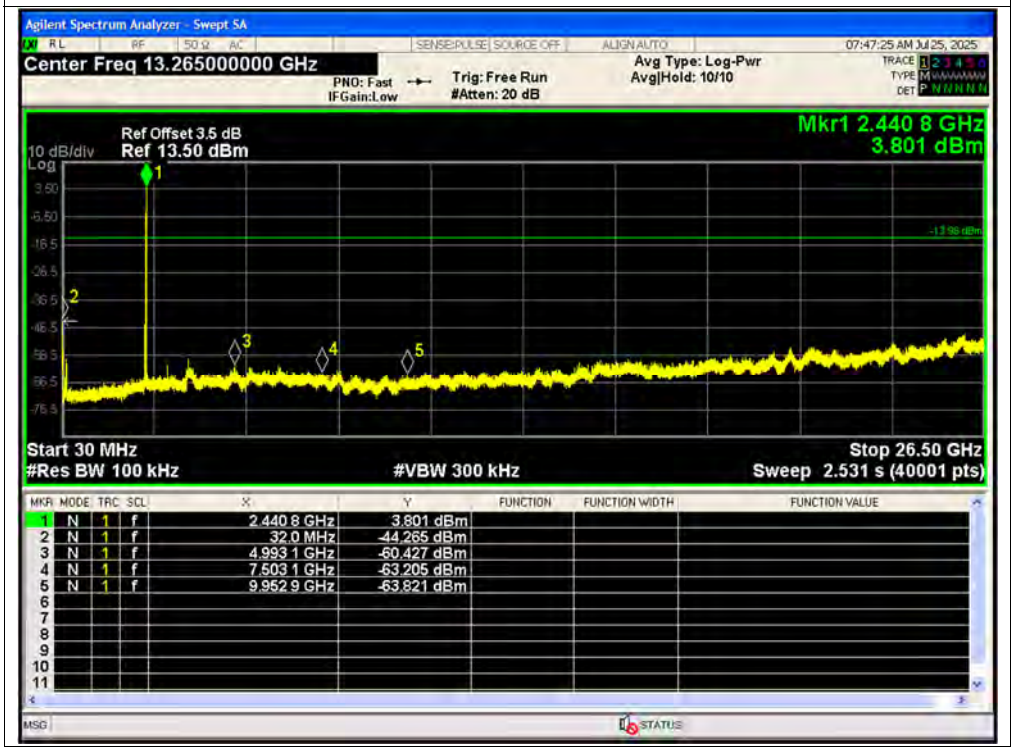

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

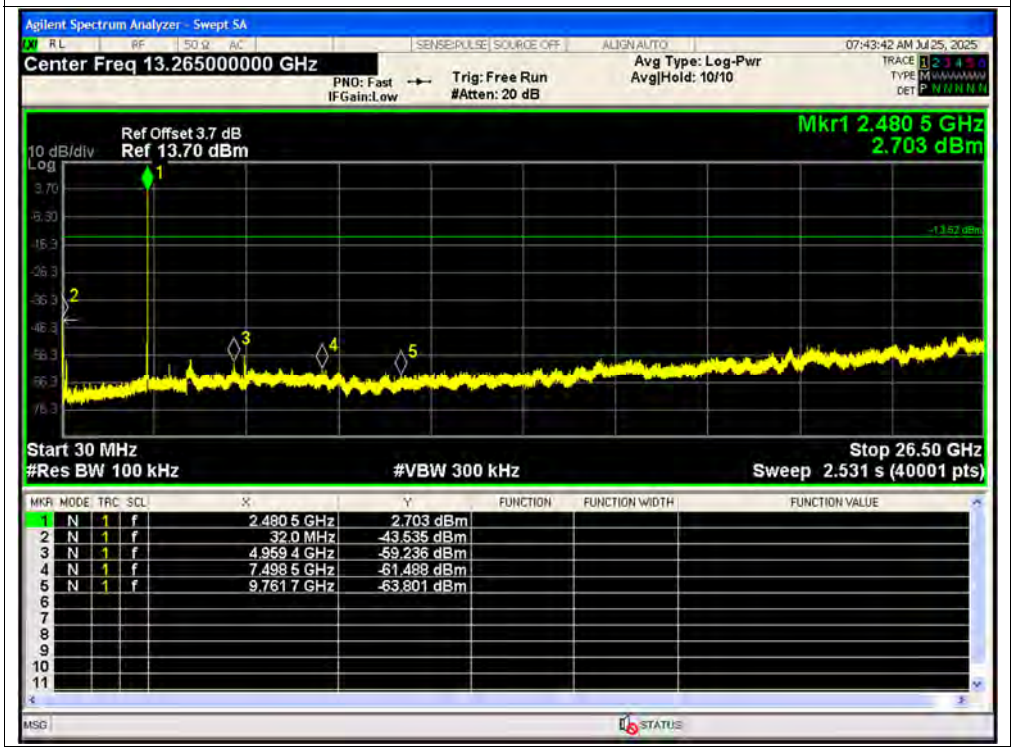

A.9. Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-57.76	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-57.58	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-52.71	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-55.82	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-53.54	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-59.39	-20	Pass
NVNT	1-DH5	2402	Ant1	Hopping	-60.91	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-61.71	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-60.14	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-59.02	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-60.88	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-59.93	-20	Pass

Test Graphs

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

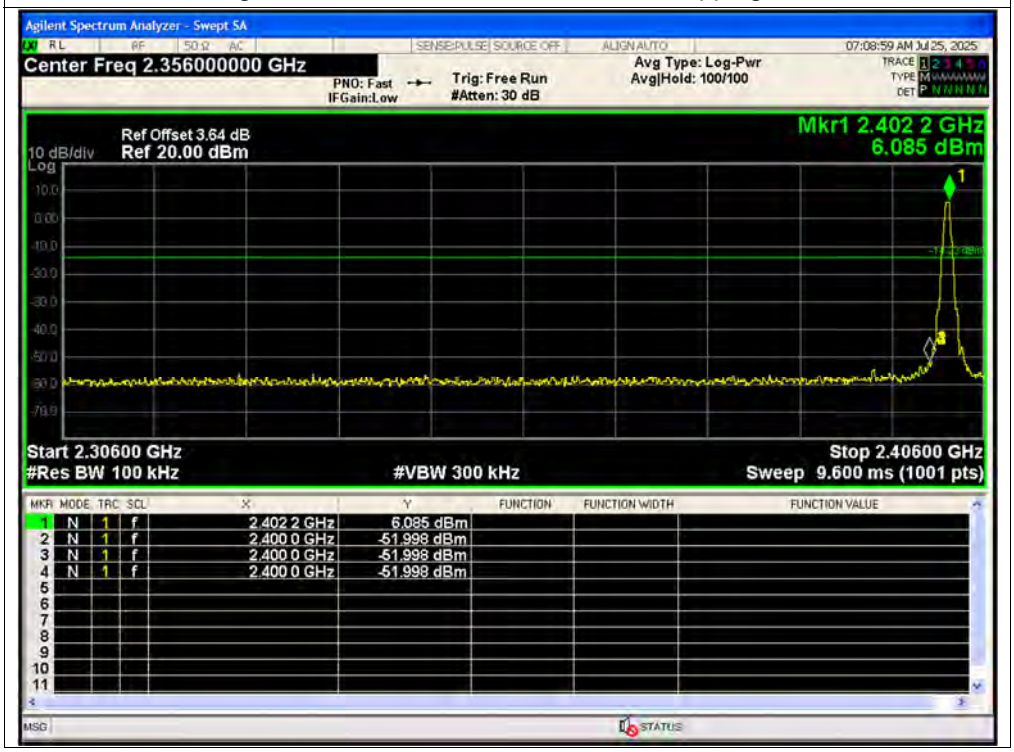

Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

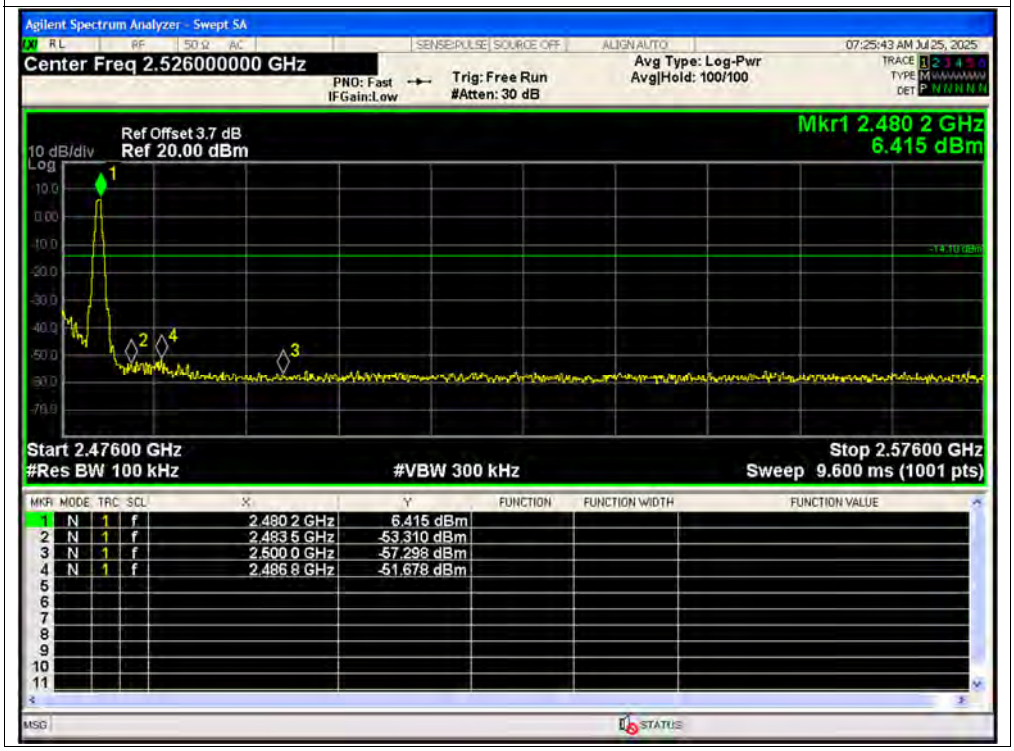

Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

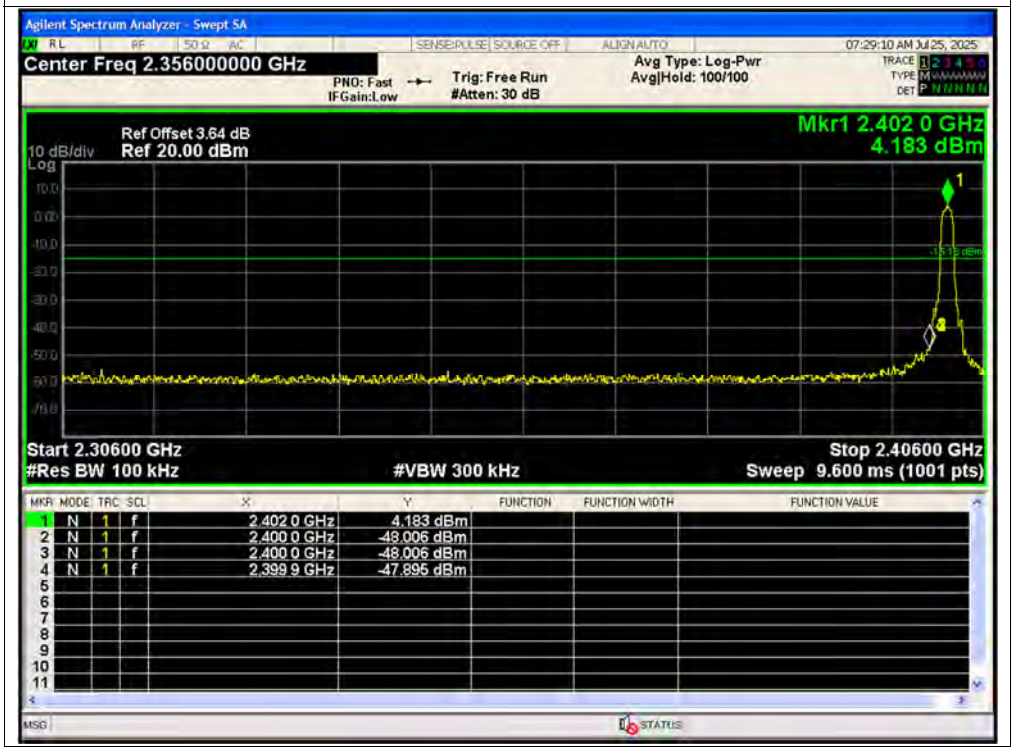

Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

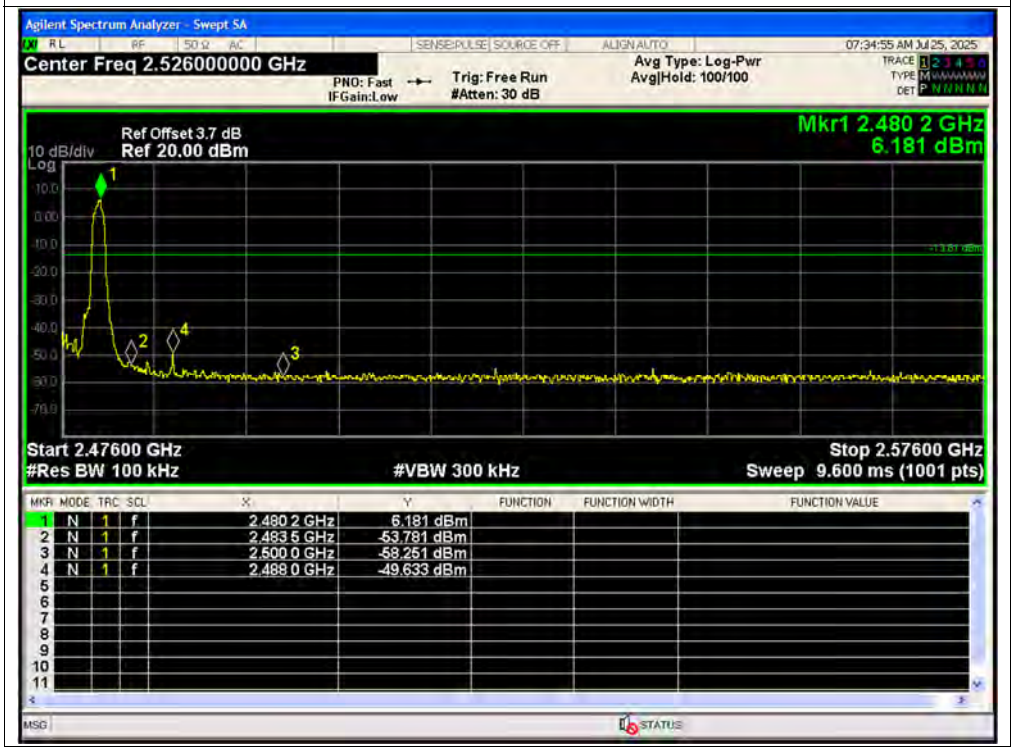

Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref

Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

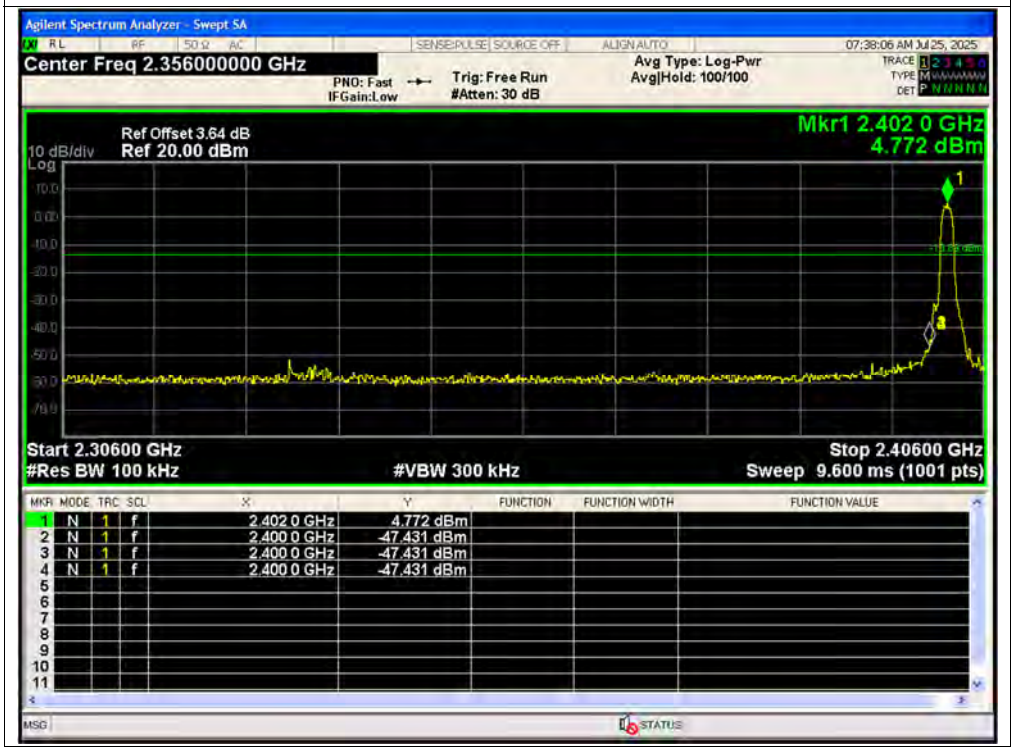

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

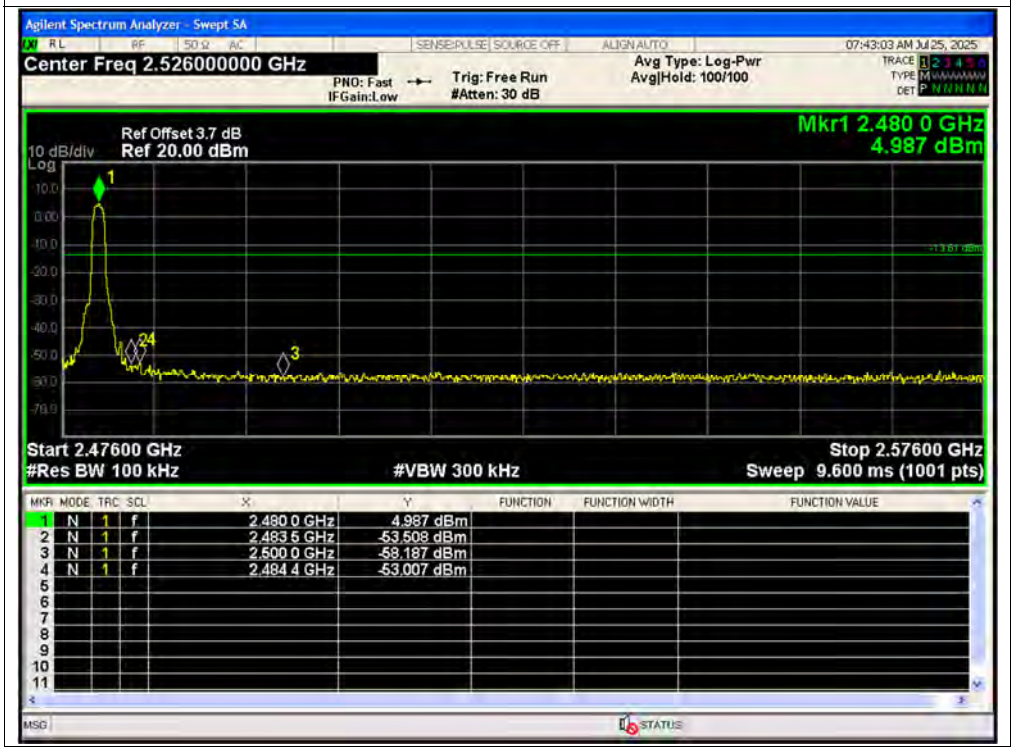

Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

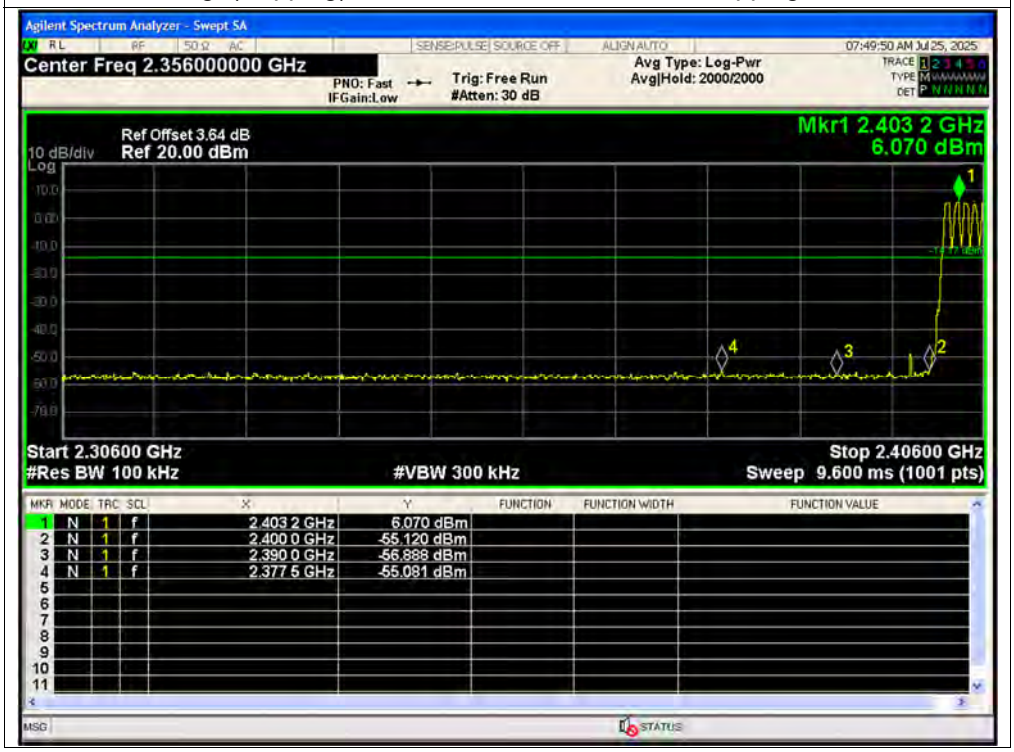

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

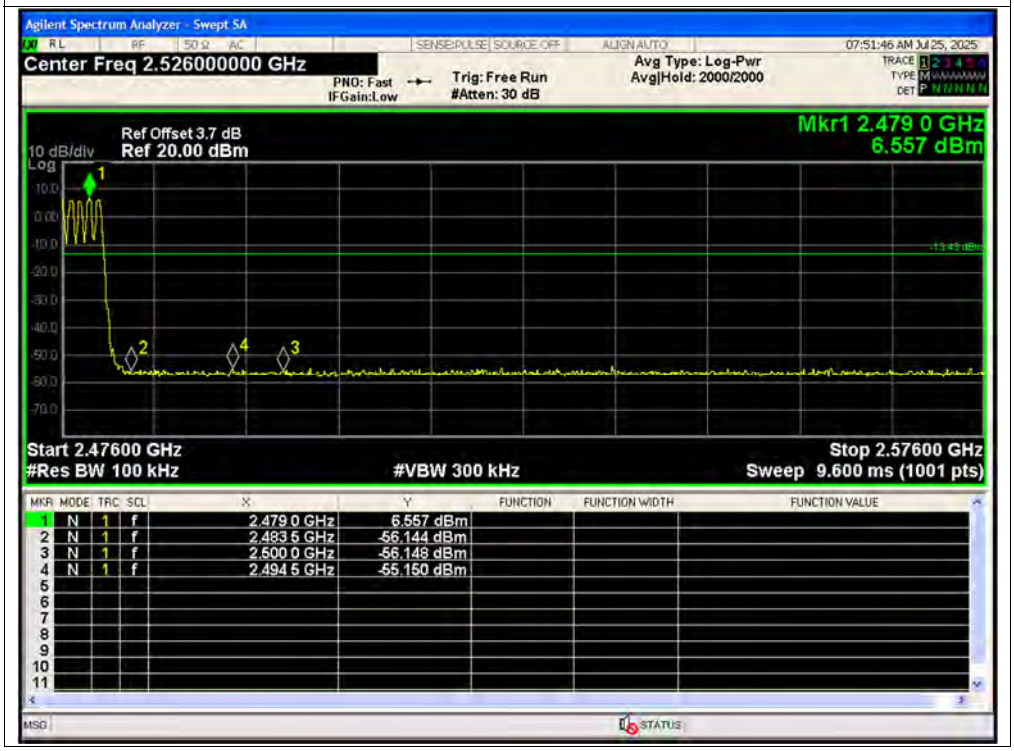

Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref

Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

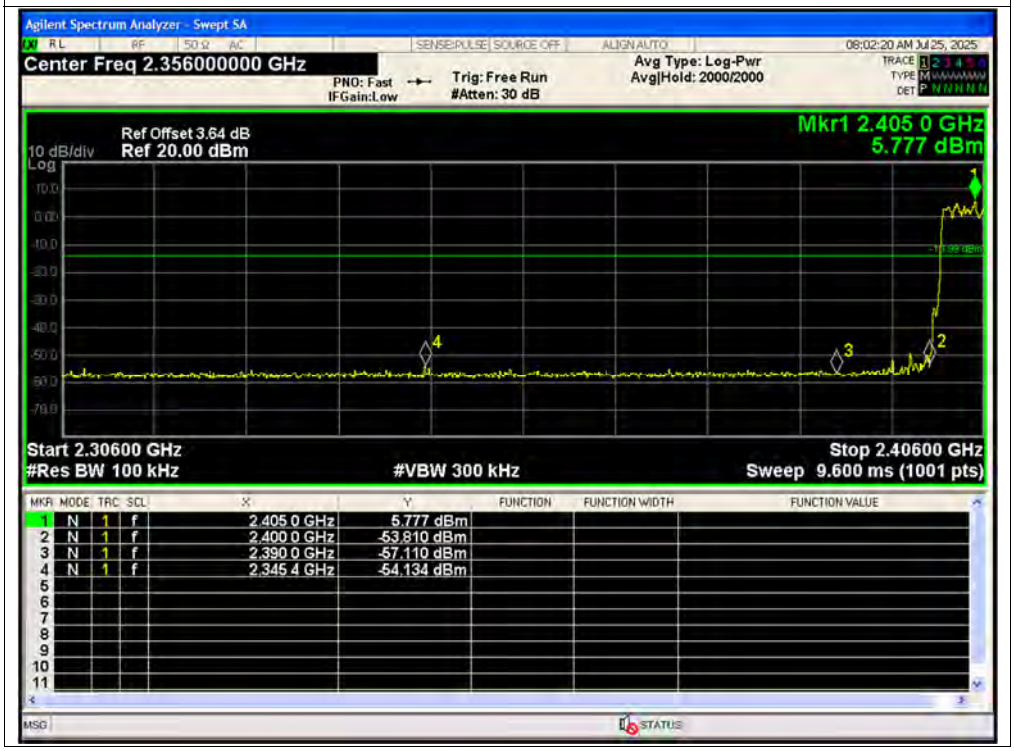

Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref

Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

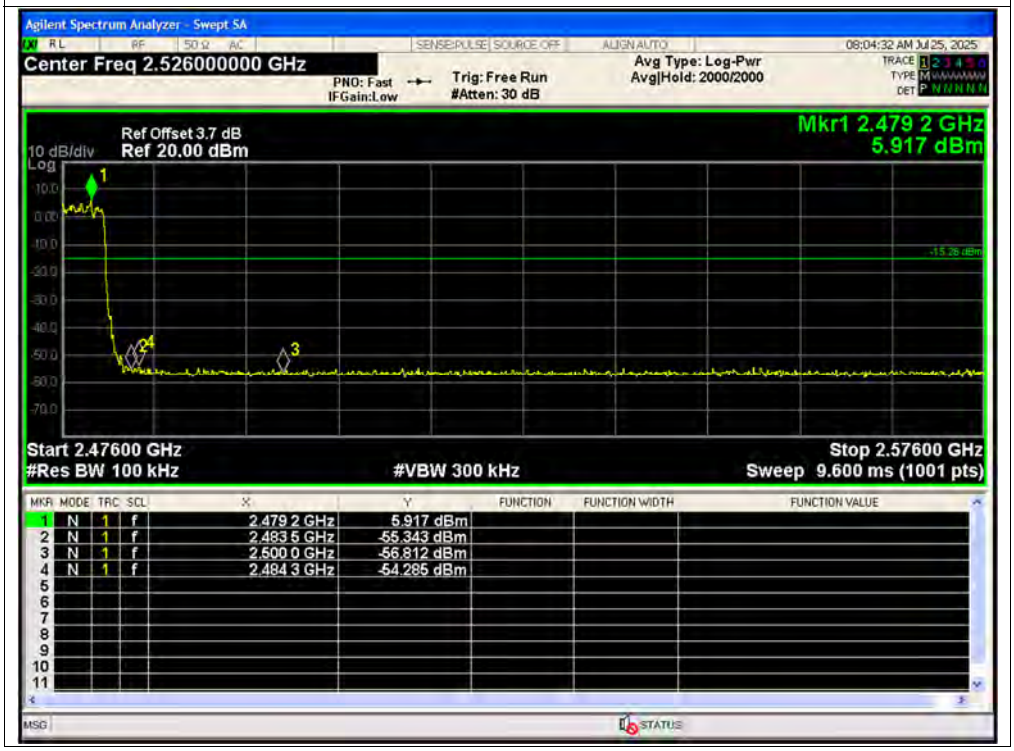

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

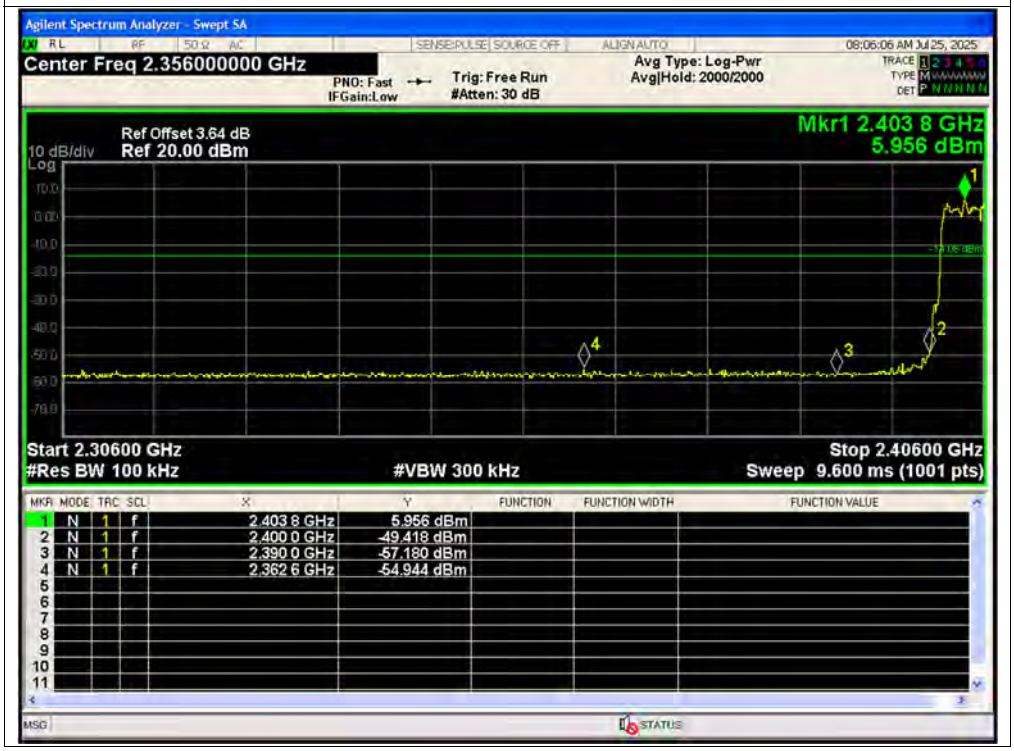

Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref

Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission

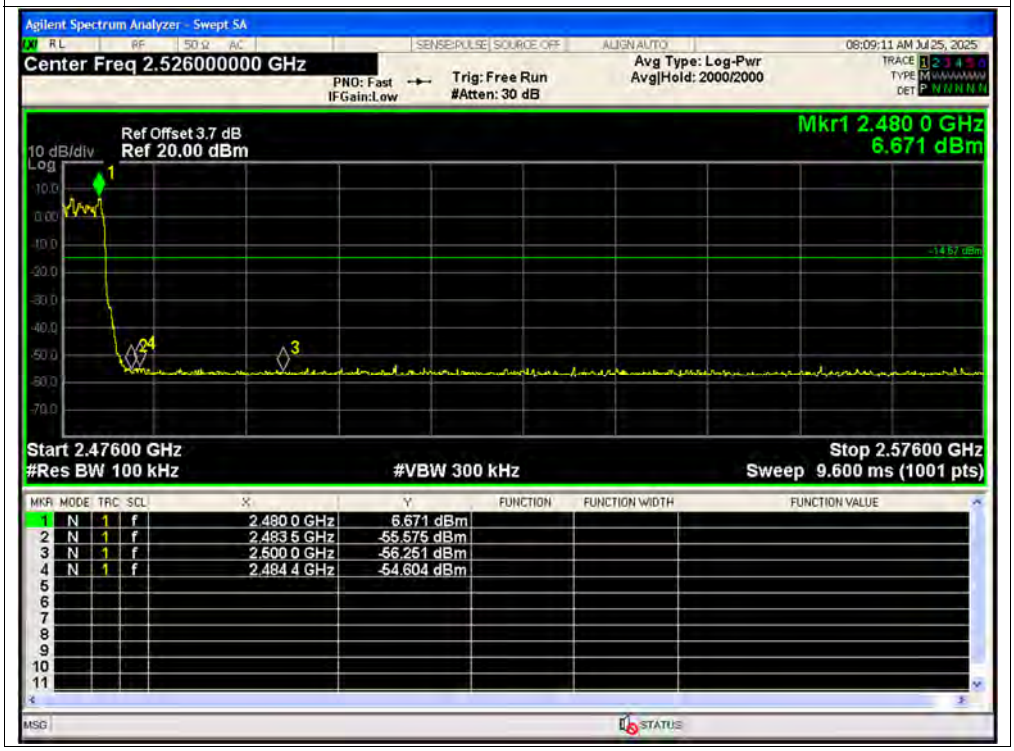

A.10. Restricted Frequency Bands

Note 1: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (Vertical) was recorded in this test report.

Note 2: All test modes were considered and evaluated respectively by performing full test, only the worst data were recorded.

GFSK Mode

Plot for Channel 0

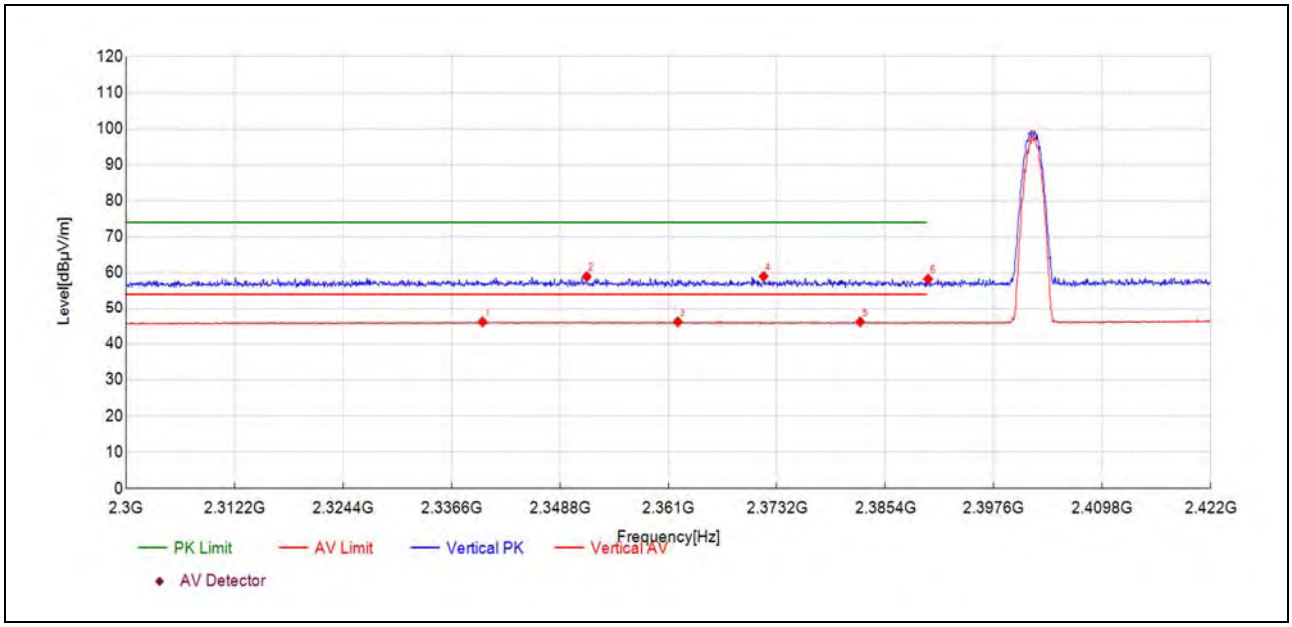

Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict
2340.10	8.8	46.12	37.370	54.00	7.88	249	AV	PASS
2351.81	21.5	58.94	37.460	74.00	15.06	70	PK	PASS
2362.07	8.6	46.11	37.470	54.00	7.89	349	AV	PASS
2371.71	21.6	59.02	37.470	74.00	14.98	258	PK	PASS
2382.57	8.6	46.10	37.480	54.00	7.90	5	AV	PASS
2390.20	20.8	58.27	37.490	-	-	75	PK	NA

Plot for Channel 78

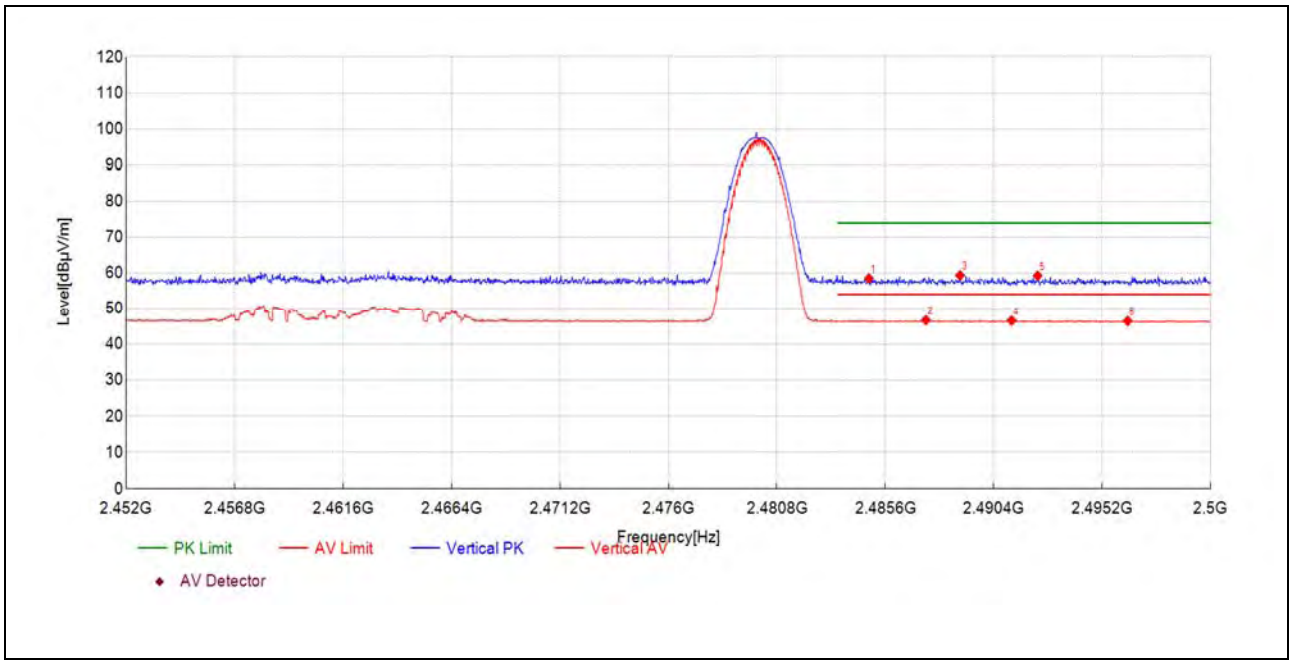

Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict
2484.87	20.3	58.53	38.270	74.00	15.47	3	PK	PASS
2487.39	8.4	46.70	38.270	54.00	7.30	78	AV	PASS
2488.91	21.1	59.37	38.260	74.00	14.63	103	PK	PASS
2491.19	8.3	46.60	38.270	54.00	7.40	93	AV	PASS
2492.34	21.0	59.28	38.260	74.00	14.72	236	PK	PASS
2496.33	8.2	46.48	38.250	54.00	7.52	112	AV	PASS

8-DPSK Mode

Plot for Channel 0

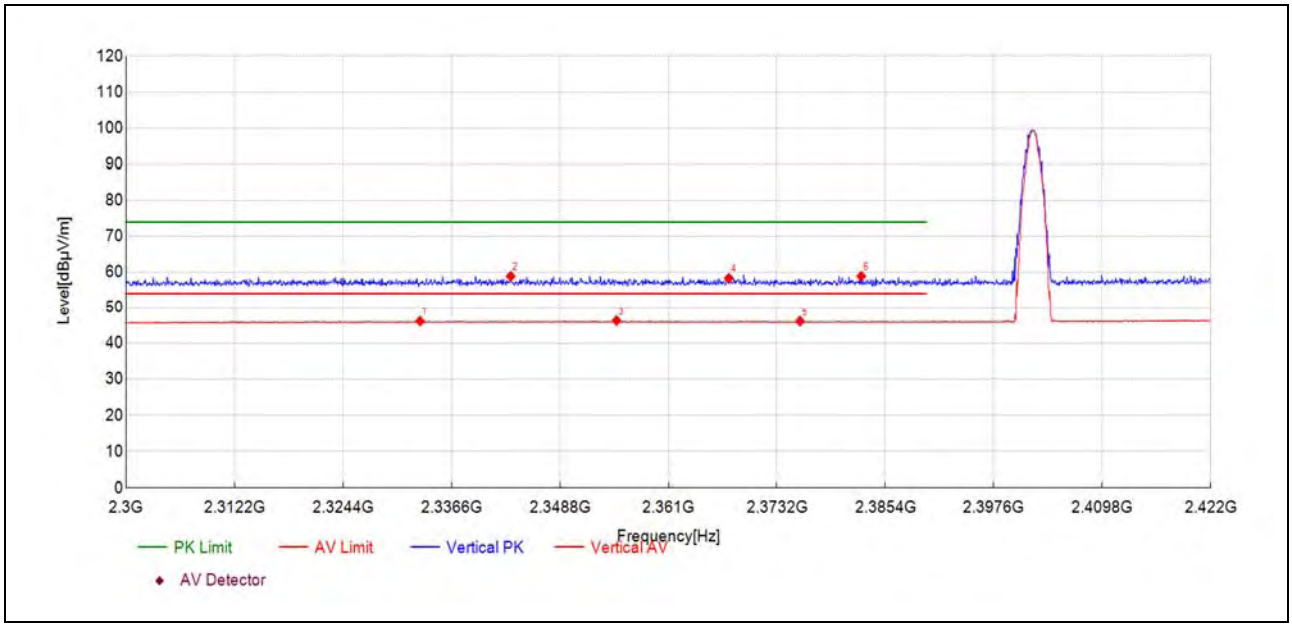

Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict
2333.08	8.9	46.16	37.300	54.00	7.84	207	AV	PASS
2343.27	21.5	58.89	37.400	74.00	15.11	5	PK	PASS
2355.17	8.8	46.28	37.460	54.00	7.72	14	AV	PASS
2367.80	20.9	58.35	37.470	74.00	15.65	141	PK	PASS
2375.80	8.7	46.13	37.480	54.00	7.87	188	AV	PASS
2382.70	21.4	58.92	37.480	74.00	15.08	274	PK	PASS

Plot for Channel 78

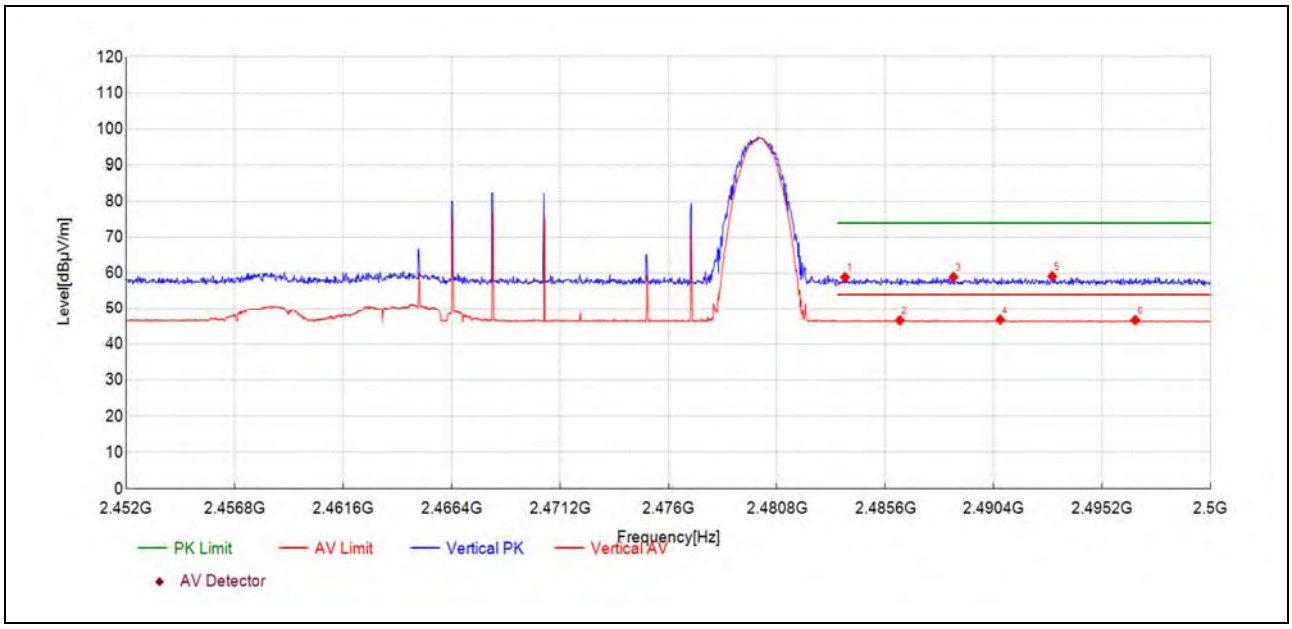

Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict
2483.82	20.6	58.87	38.270	74.00	15.13	148	PK	PASS
2486.24	8.4	46.63	38.280	54.00	7.37	181	AV	PASS
2488.62	20.7	58.93	38.270	74.00	15.07	5	PK	PASS
2490.68	8.5	46.78	38.270	54.00	7.22	360	AV	PASS
2492.99	20.9	59.12	38.260	74.00	14.88	247	PK	PASS
2496.66	8.4	46.67	38.250	54.00	7.33	196	AV	PASS

A.11. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

E [dBμV/m] $=U_R + A_T + A_{Factor}$ [dB]; $A_T = L_{Cable\ loss}$ [dB]$-G_{preamp}$ [dB]

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note 4: All test modes were considered and evaluated respectively by performing full test, only the worst data were recorded.

GFSK Mode

Plot for Channel 0

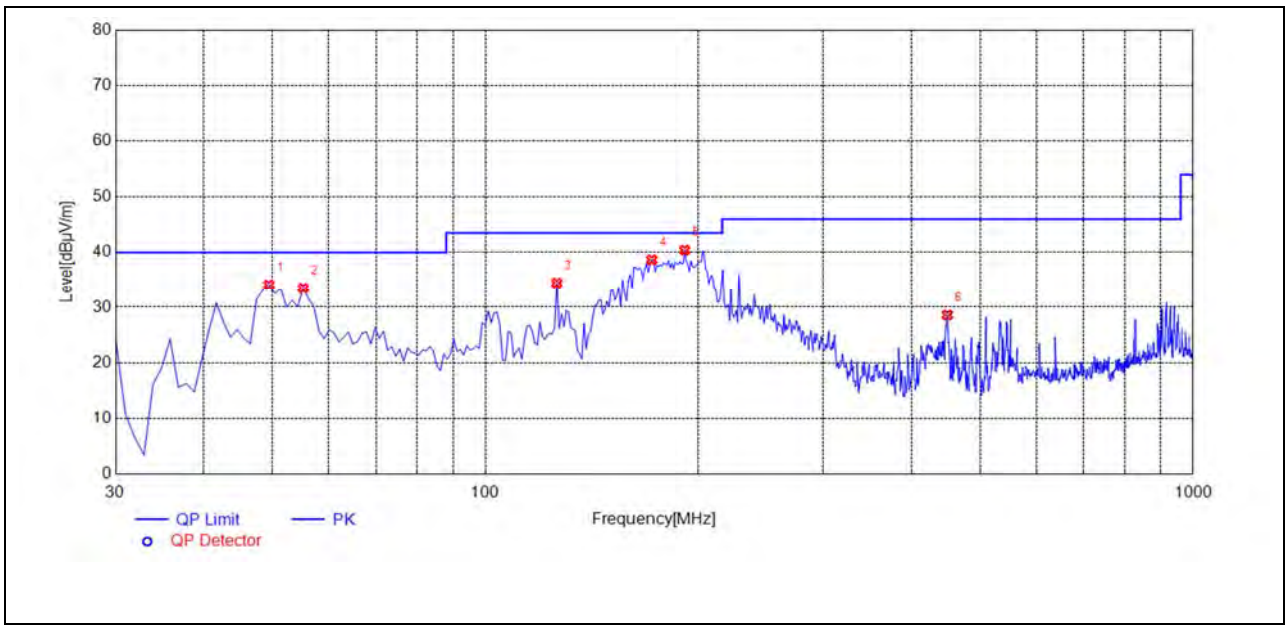

(Antenna Horizontal, 30MHz to 1GHz)

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
49.4194	34.09	-29.49	40.00	5.91	150	343	Horizontal	PASS
55.2452	33.47	-28.97	40.00	6.53	150	10	Horizontal	PASS
126.1261	34.42	-32.70	43.50	9.08	150	10	Horizontal	PASS
171.7618	38.66	-33.69	43.50	4.84	150	343	Horizontal	PASS
191.1812	40.41	-32.90	43.50	3.09	150	147	Horizontal	PASS
449.4595	28.56	-24.81	46.00	17.44	150	321	Horizontal	PASS

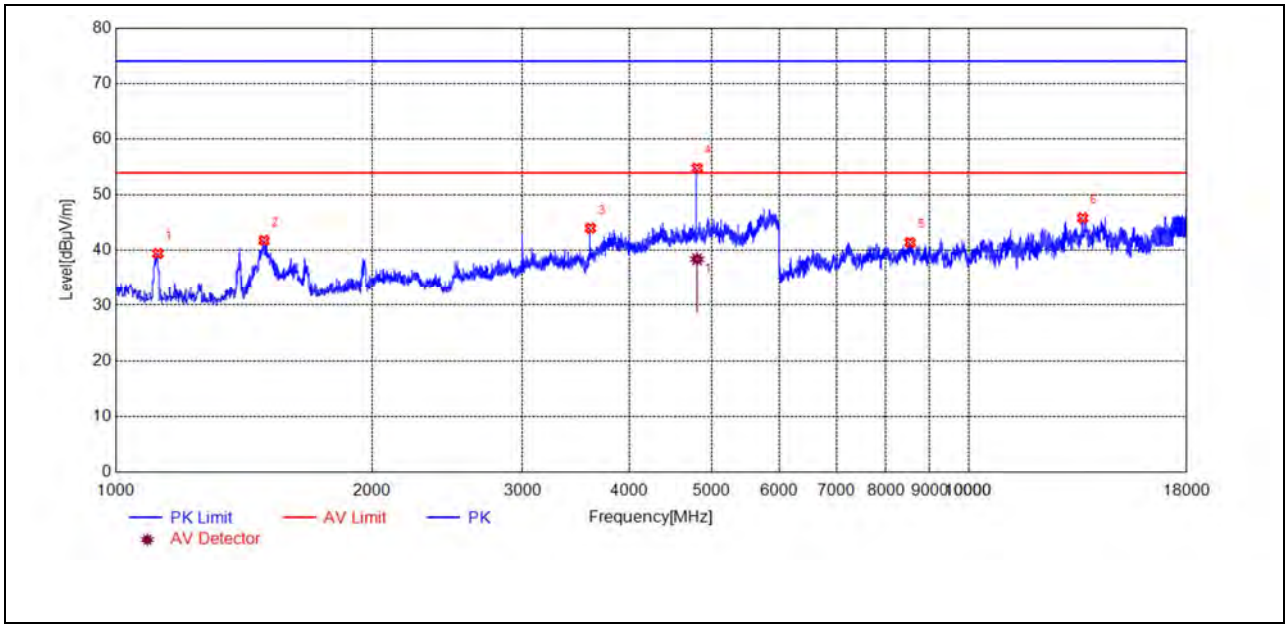

(Antenna Horizontal, 1GHz to 18GHz)

Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1121.0242	39.45	-24.44	74.00	34.55	150	203	Horizontal	PASS
1493.0986	41.82	-23.08	74.00	32.18	150	292	Horizontal	PASS
3602.5205	44.03	-15.71	74.00	29.97	150	172	Horizontal	PASS
4803.7608	54.84	-10.54	74.00	19.16	150	212	Horizontal	PASS
8534.9070	41.45	-1.38	74.00	32.55	150	257	Horizontal	PASS
13599.9200	45.88	7.66	74.00	28.12	150	317	Horizontal	PASS

Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
4803.6599	-10.54	38.43	54.00	15.57	150	213	Horizontal	PASS

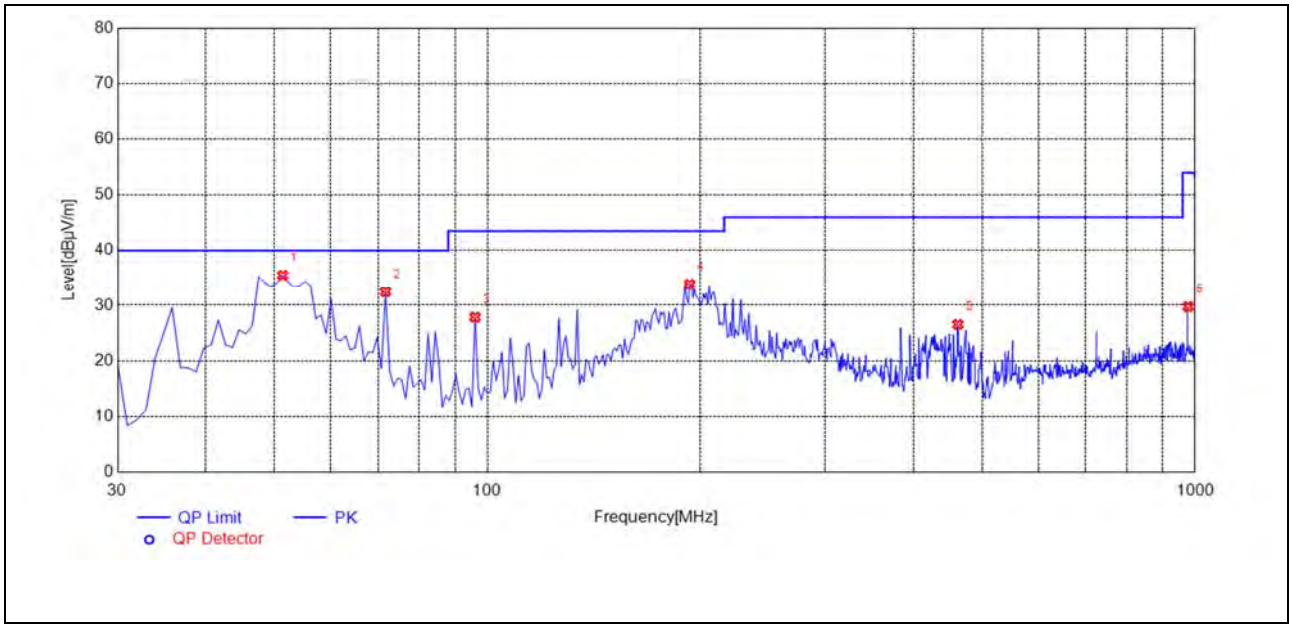

(Antenna Vertical, 30MHz to 1GHz)

Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
51.3614	35.49	-28.71	40.00	4.51	150	68	Vertical	PASS
71.7518	32.43	-32.07	40.00	7.57	150	61	Vertical	PASS
96.0260	27.83	-31.58	43.50	15.67	150	293	Vertical	PASS
193.1231	33.86	-32.73	43.50	9.64	150	68	Vertical	PASS
462.0821	26.52	-24.27	46.00	19.48	150	257	Vertical	PASS
977.6677	29.72	-17.88	54.00	24.28	150	25	Vertical	PASS

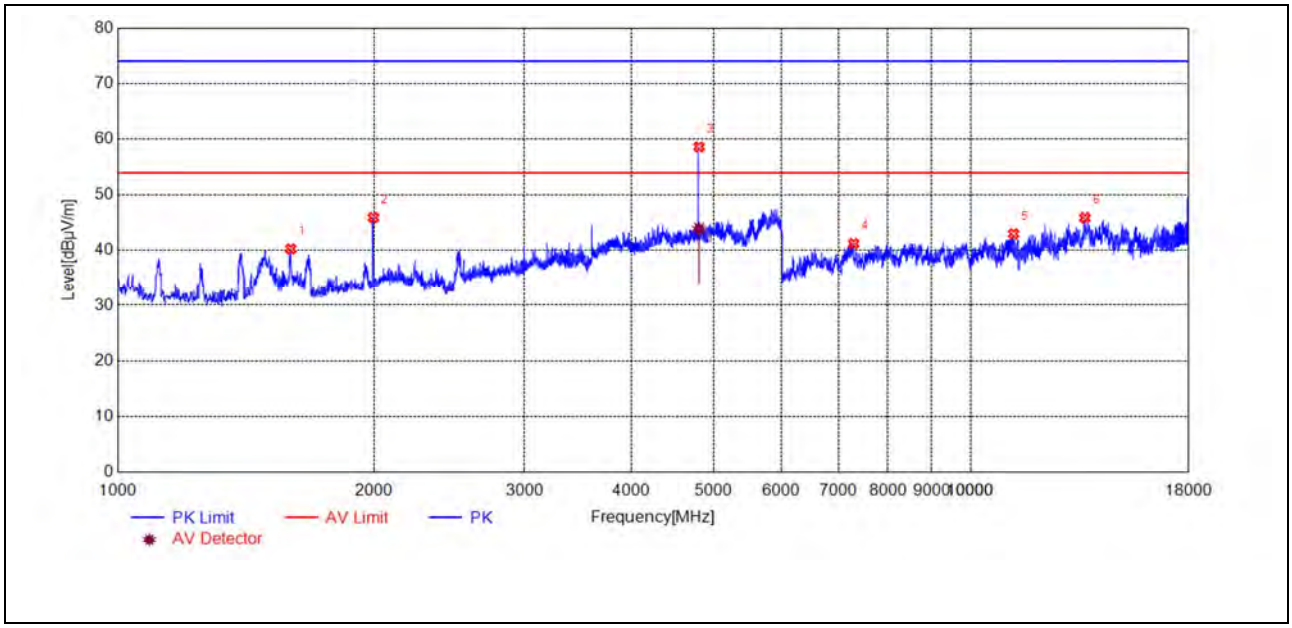

(Antenna Vertical, 1GHz to 18GHz)

Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1596.1192	40.28	-23.17	74.00	33.72	150	272	Vertical	PASS
1995.1990	45.94	-21.85	74.00	28.06	150	272	Vertical	PASS
4803.7608	58.55	-10.54	74.00	15.45	150	132	Vertical	PASS
7291.4583	41.25	-3.28	74.00	32.75	150	18	Vertical	PASS
11225.8452	43.00	3.90	74.00	31.00	150	168	Vertical	PASS
13609.5219	45.91	7.13	74.00	28.09	150	88	Vertical	PASS

Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
4803.7176	-10.54	43.91	54.00	10.09	150	132	Vertical	PASS

Plot for Channel 39

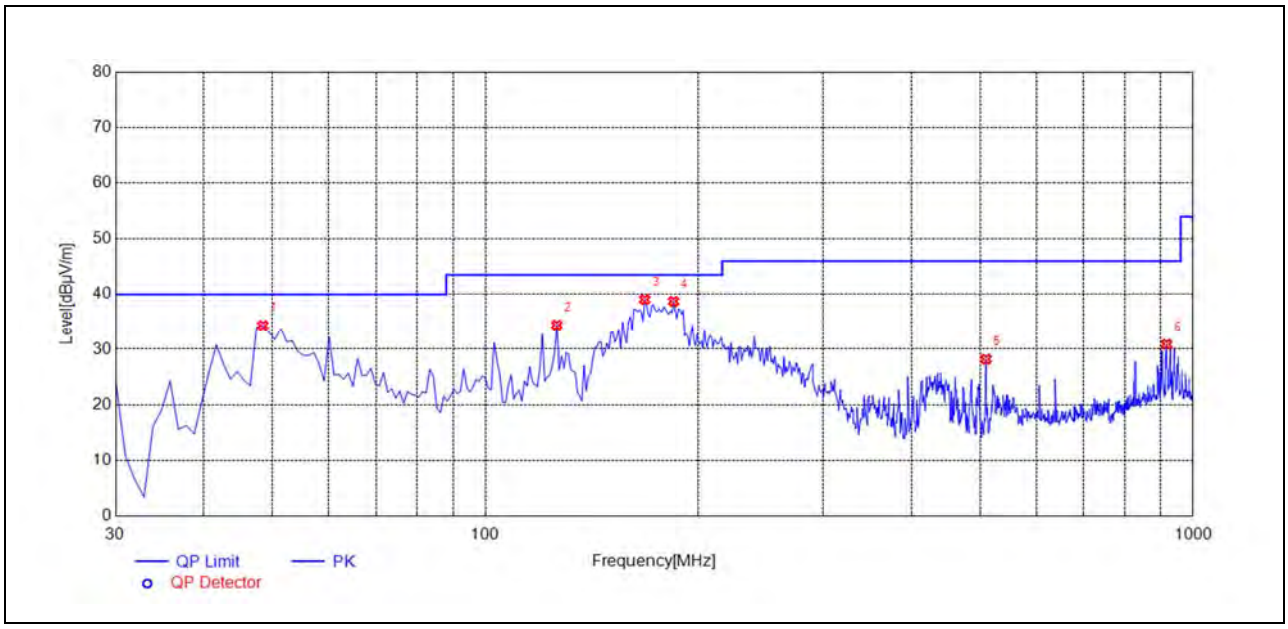

(Antenna Horizontal, 30MHz to 1GHz)

Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
48.4484	34.35	-29.56	40.00	5.65	150	10	Horizontal	PASS
126.1261	34.42	-32.70	43.50	9.08	150	10	Horizontal	PASS
167.8779	39.06	-33.74	43.50	4.44	150	10	Horizontal	PASS
184.3844	38.74	-32.73	43.50	4.76	150	24	Horizontal	PASS
509.6597	28.17	-25.14	46.00	17.83	150	169	Horizontal	PASS
917.4675	30.86	-18.00	46.00	15.14	150	321	Horizontal	PASS

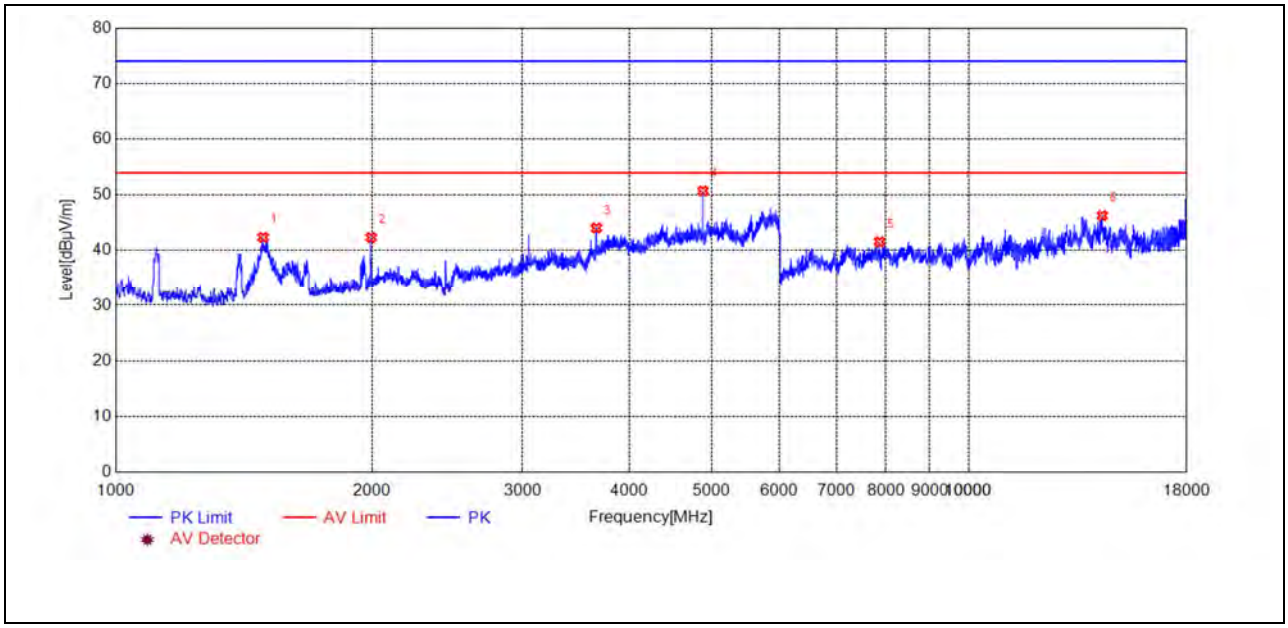

(Antenna Horizontal, 1GHz to 18GHz)

Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1489.0978	42.38	-23.15	74.00	31.62	150	293	Horizontal	PASS
1994.1988	42.35	-21.86	74.00	31.65	150	3	Horizontal	PASS
3661.5323	44.08	-16.34	74.00	29.92	150	103	Horizontal	PASS
4881.7764	50.74	-11.07	74.00	23.26	150	213	Horizontal	PASS
7860.3721	41.57	-2.85	74.00	32.43	150	118	Horizontal	PASS
14336.8674	46.28	7.58	74.00	27.72	150	238	Horizontal	PASS

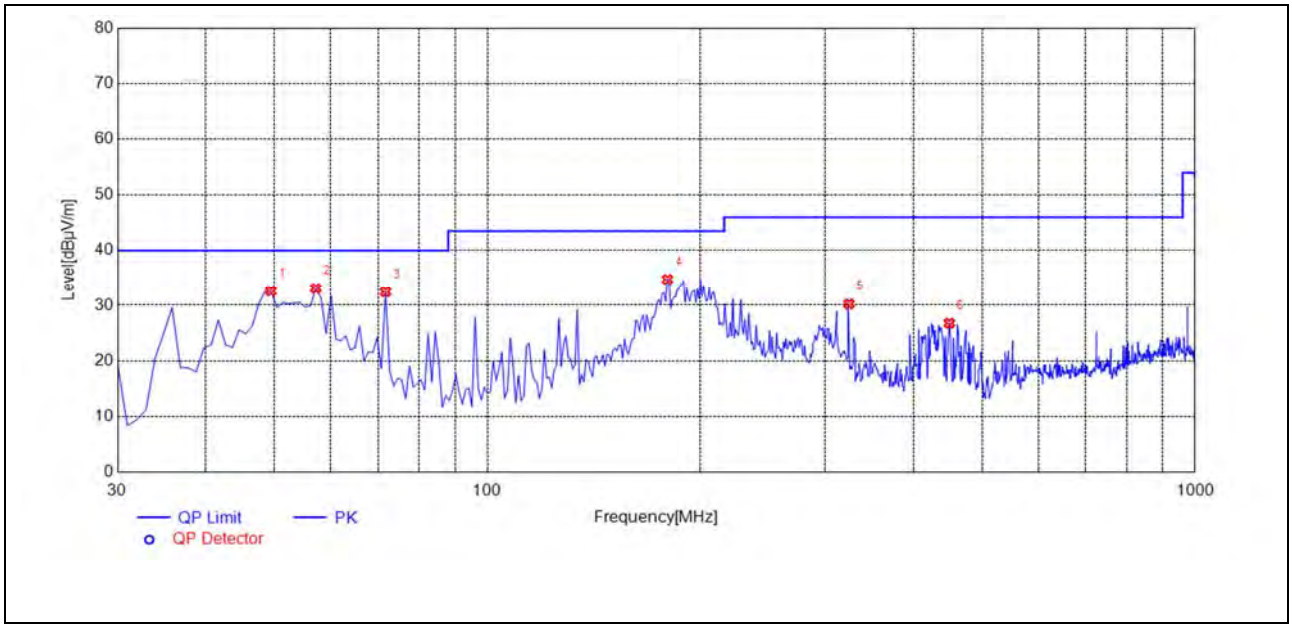

(Antenna Vertical, 30MHz to 1GHz)

Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
49.4194	32.55	-29.49	40.00	7.45	150	97	Vertical	PASS
57.1872	33.06	-28.98	40.00	6.94	150	75	Vertical	PASS
71.7518	32.43	-32.07	40.00	7.57	150	61	Vertical	PASS
179.5295	34.73	-33.34	43.50	8.77	150	61	Vertical	PASS
324.2042	30.21	-28.59	46.00	15.79	150	25	Vertical	PASS
449.4595	26.74	-24.81	46.00	19.26	150	250	Vertical	PASS

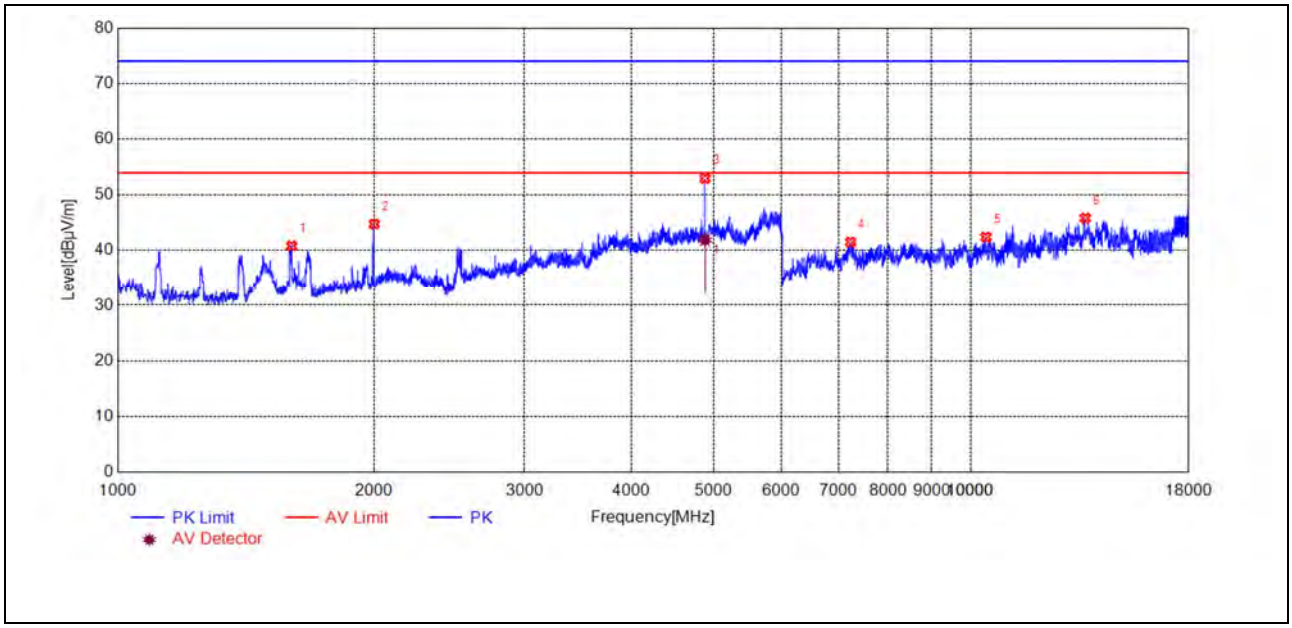

(Antenna Vertical, 1GHz to 18GHz)

Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1600.1200	40.83	-23.09	74.00	33.17	150	262	Vertical	PASS
1999.1998	44.77	-21.80	74.00	29.23	150	222	Vertical	PASS
4881.7764	52.99	-11.07	74.00	21.01	150	182	Vertical	PASS
7229.0458	41.53	-2.76	74.00	32.47	150	178	Vertical	PASS
10419.2839	42.42	2.45	74.00	31.58	150	280	Vertical	PASS
13621.5243	45.86	6.47	74.00	28.14	150	248	Vertical	PASS

Freq. [MHz]	Factor [dB]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
4882.1133	-11.08	41.90	54.00	12.10	150	187	Vertical	PASS

Plot for Channel 78

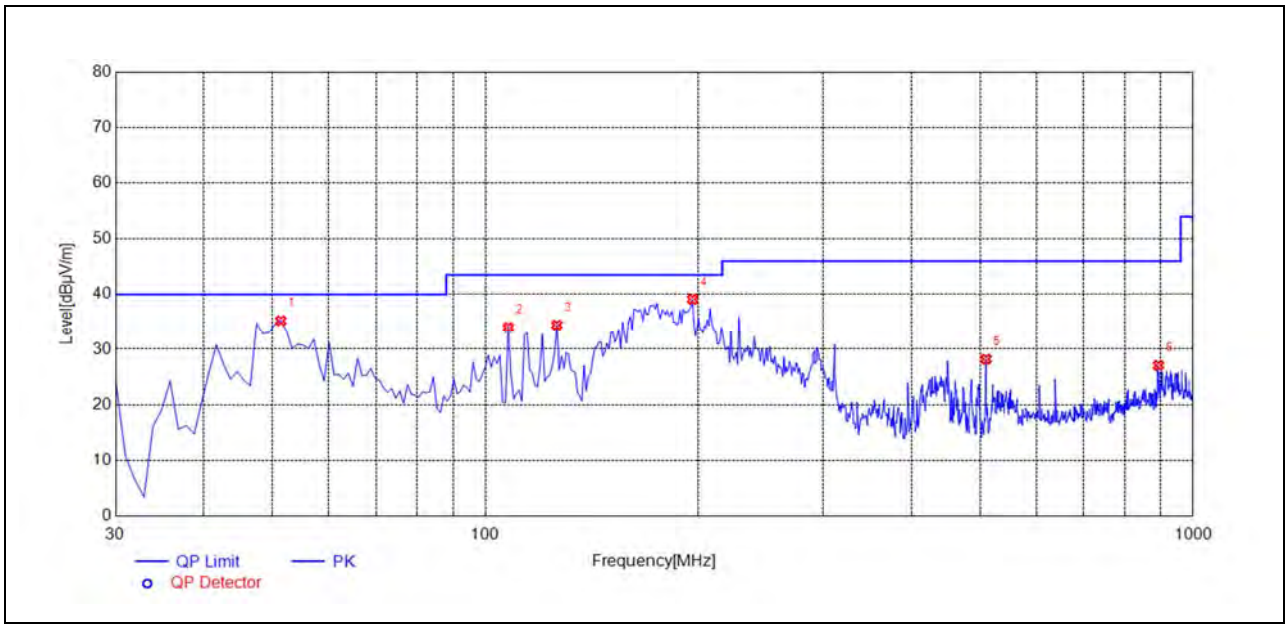

(Antenna Horizontal, 30MHz to 1GHz)

Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
51.3614	35.22	-28.71	40.00	4.78	150	10	Horizontal	PASS
107.6777	33.97	-30.69	43.50	9.53	150	10	Horizontal	PASS
126.1261	34.42	-32.70	43.50	9.08	150	10	Horizontal	PASS
196.0360	39.09	-31.98	43.50	4.41	150	133	Horizontal	PASS
509.6597	28.17	-25.14	46.00	17.83	150	169	Horizontal	PASS
893.1932	27.06	-18.53	46.00	18.94	150	321	Horizontal	PASS

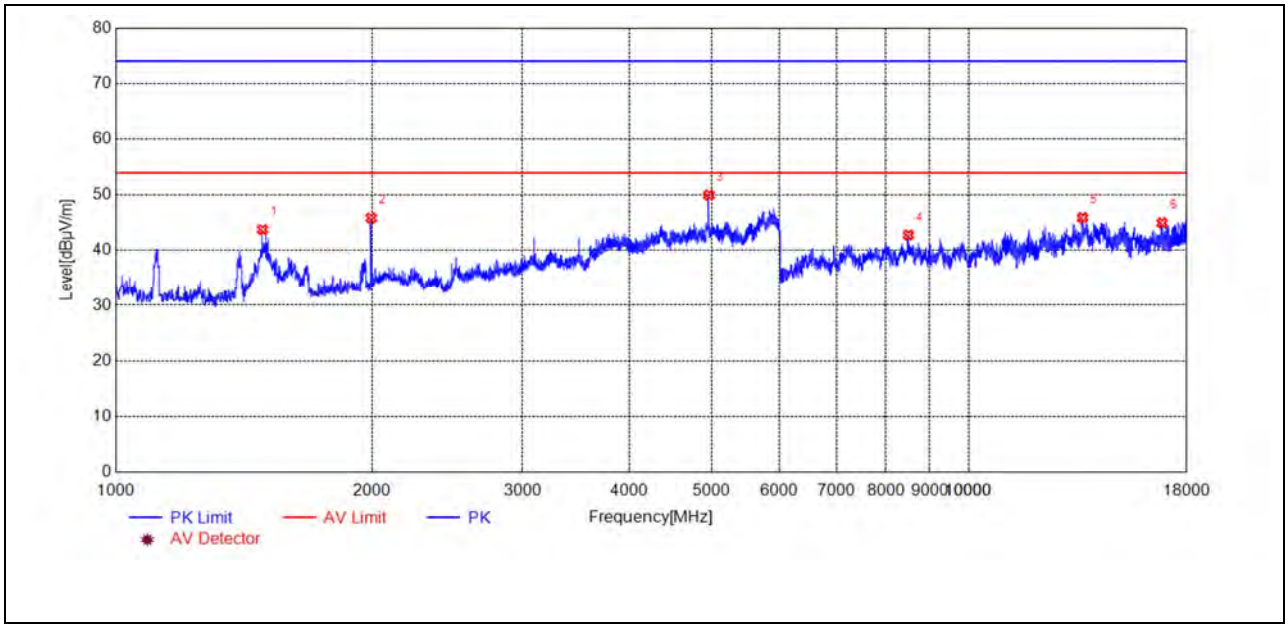

(Antenna Horizontal, 1GHz to 18GHz)

Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1487.0974	43.77	-23.18	74.00	30.23	150	309	Horizontal	PASS
1994.1988	45.87	-21.86	74.00	28.13	150	320	Horizontal	PASS
4959.7920	50.01	-9.63	74.00	23.99	150	210	Horizontal	PASS
8496.4993	42.80	-1.57	74.00	31.20	150	212	Horizontal	PASS
13597.5195	45.93	7.53	74.00	28.07	150	182	Horizontal	PASS
16847.7696	45.00	8.17	74.00	29.00	150	163	Horizontal	PASS

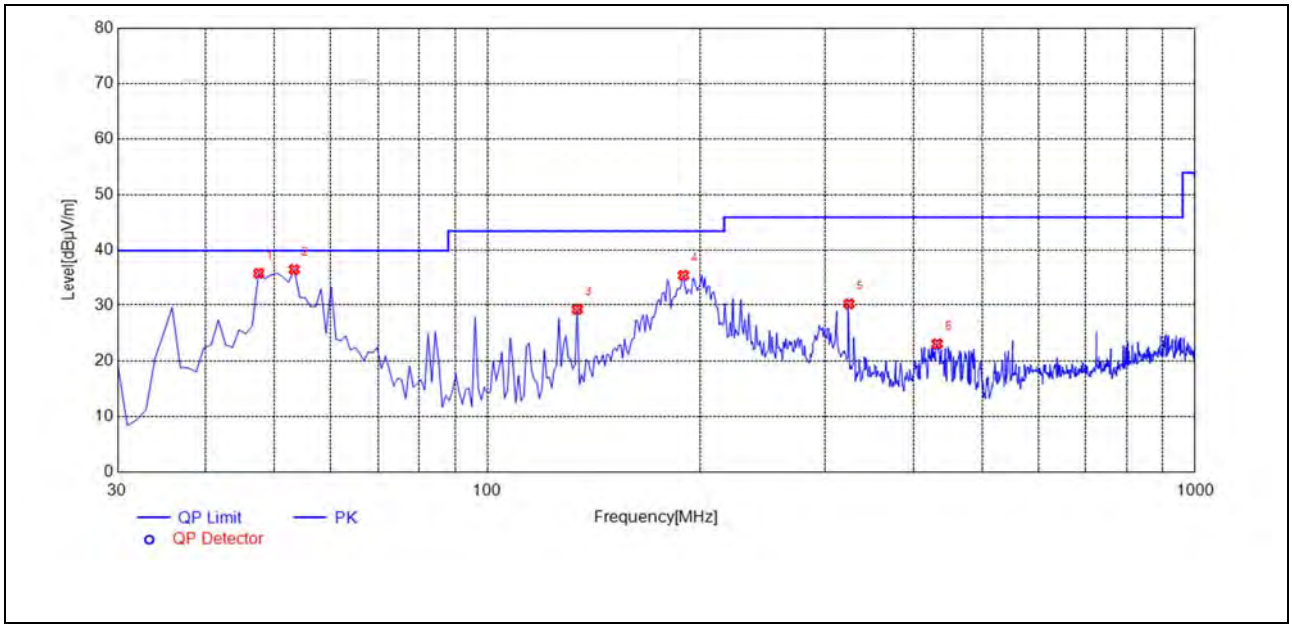

(Antenna Vertical, 30MHz to 1GHz)

Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
47.4775	35.87	-29.75	40.00	4.13	150	104	Vertical	PASS
53.3033	36.56	-28.68	40.00	3.44	150	61	Vertical	PASS
133.8939	29.23	-33.59	43.50	14.27	150	242	Vertical	PASS
189.2392	35.53	-33.11	43.50	7.97	150	97	Vertical	PASS
324.2042	30.21	-28.59	46.00	15.79	150	25	Vertical	PASS
431.9820	23.03	-25.23	46.00	22.97	150	61	Vertical	PASS

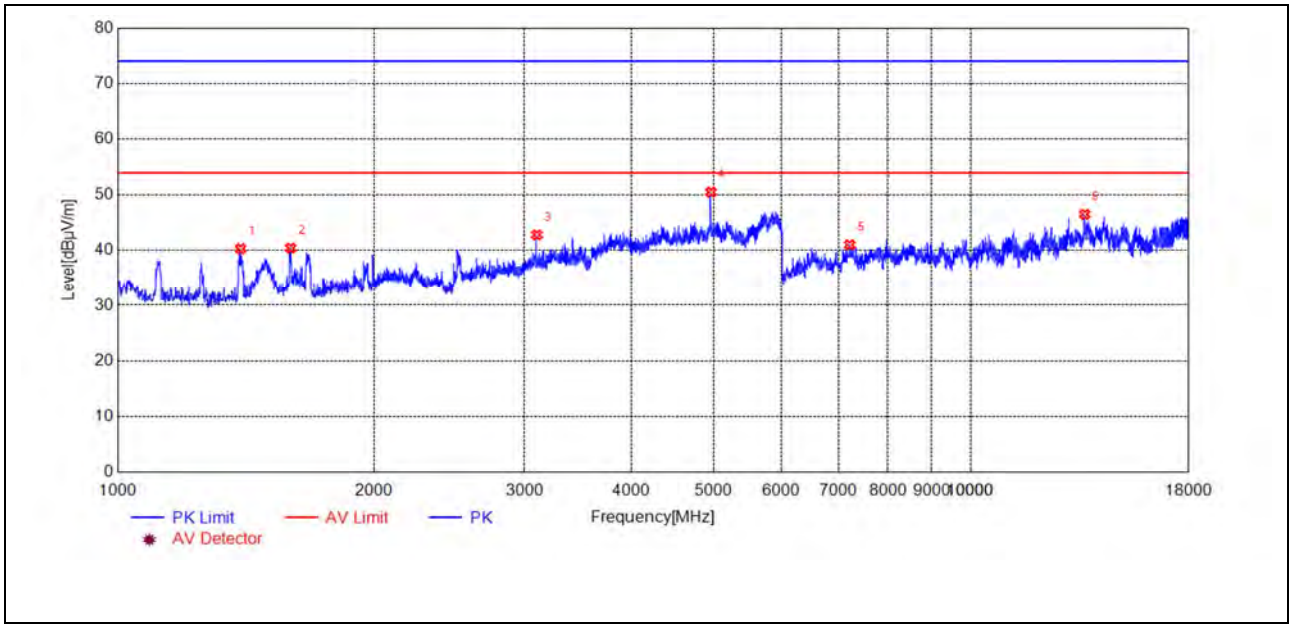

(Antenna Vertical, 1GHz to 18GHz)

Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1394.0788	40.32	-24.80	74.00	33.68	150	297	Vertical	PASS
1596.1192	40.44	-23.17	74.00	33.56	150	277	Vertical	PASS
3100.4201	42.82	-16.99	74.00	31.18	150	77	Vertical	PASS
4959.7920	50.53	-9.63	74.00	23.47	150	208	Vertical	PASS
7212.2424	41.04	-2.90	74.00	32.96	150	273	Vertical	PASS
13602.3205	46.53	7.53	74.00	27.47	150	323	Vertical	PASS

END OF REPORT