

Shenzhen Anwei Wireless Technology Co., LTD

2nd Floor, East Block, Building 5, Yifenghua Industrial Park, Huaning
Road, Dalang, Longhua New District, Shenzhen, Guangdong Province

test report



TEST REPORT

PCB Antenna


catalogue

1. Project profile.....	1
2. VSWR.....	2
3. Dark room test results.....	3
1. Apple picture.....	4
2. Direction diagram.....	5
4. conclusion.....	6

1. Project profile

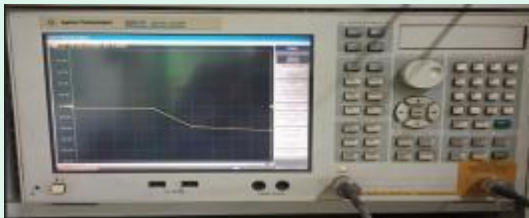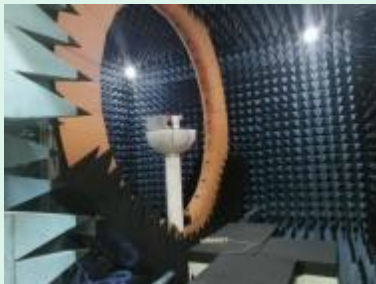product name	Ontology board antenna		
Frequency and Antenna material	service frequency		material quality
	Single frequency point	2450 MHz	PCB on board
Test requirements	Single-frequency point body antenna passive test		
measuring and test instruments	brand	Agilent Network analyzer	
	model	E5071C	
	brand	Dark Room SATIMO-24 (3D)	


2. VSWR

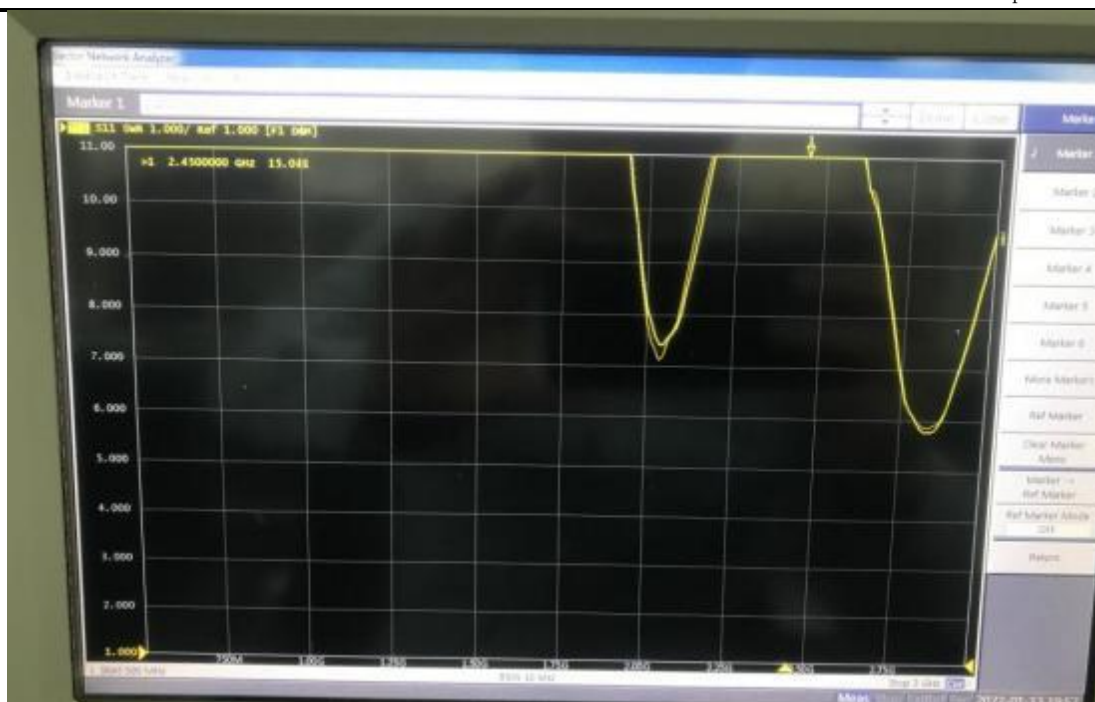

3. Dark Room Test Results (Passive Result)


Model	Frequency(MHz)	Efficiency(%)	Gain(dbi)	VSWR
/	2450	11.98	-3.89	15

1.13D Apple Figure Pattern Plots of Passive

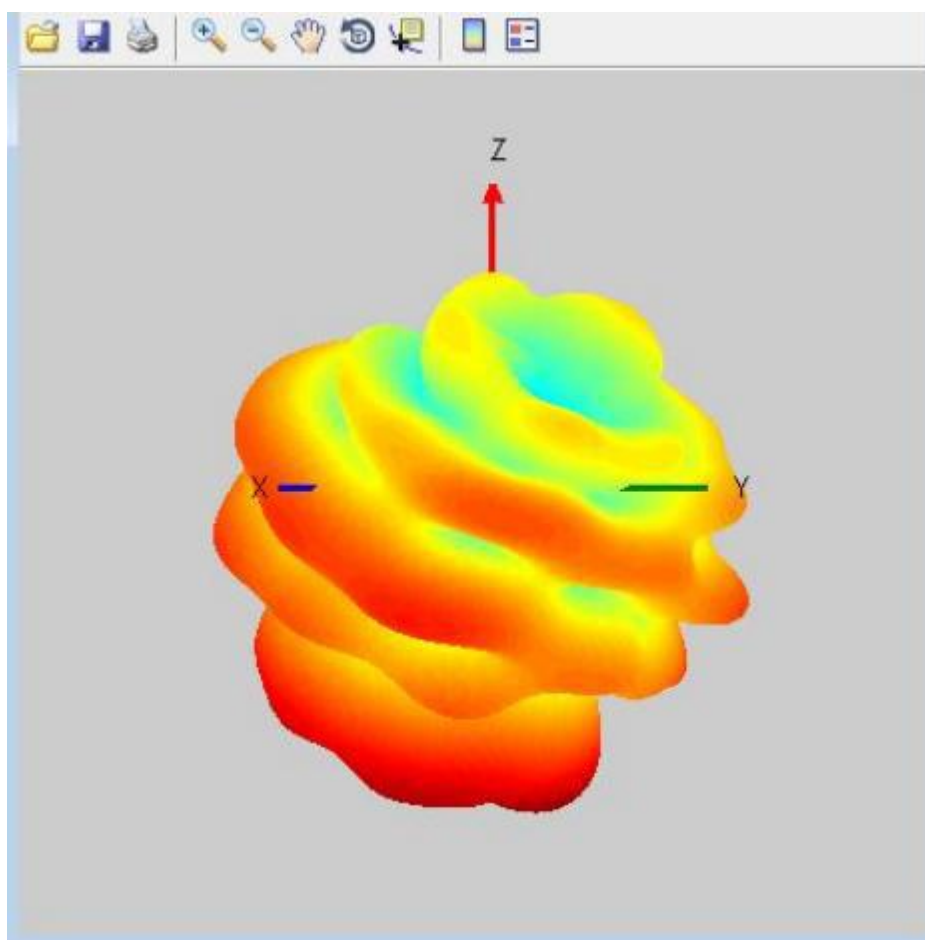


3D -2450MHz

1.2 Direction Figure 2D Pattern Plots of Passive

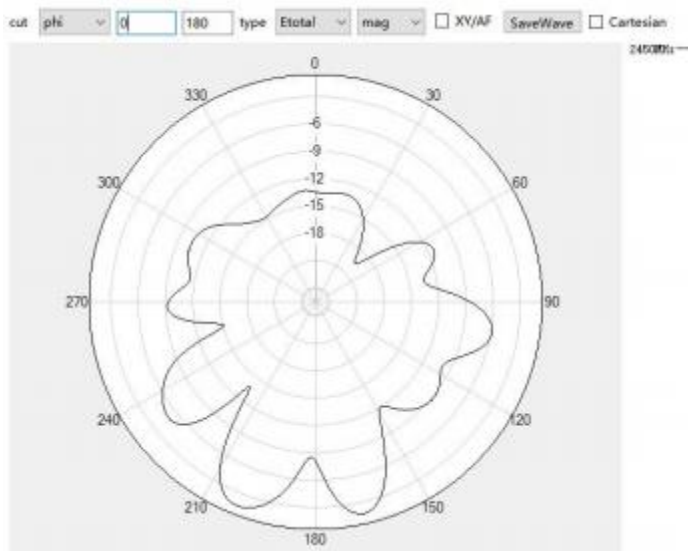


2450MHz -E1

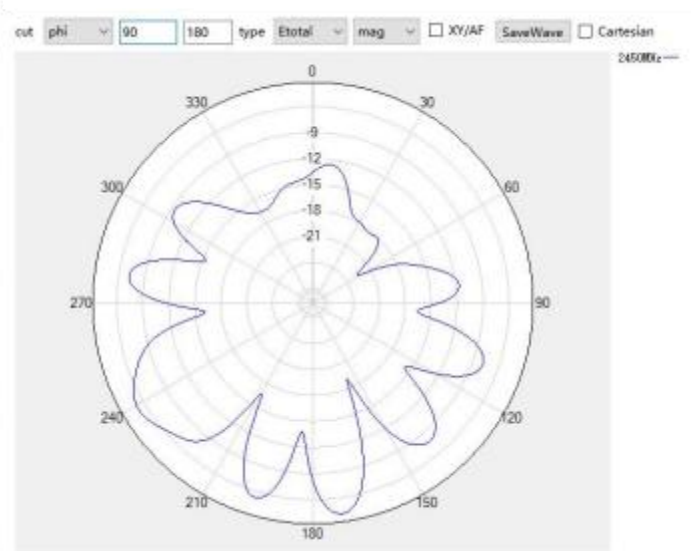

2450MHz -E2

4. conclusion

This report is based on the antenna performance measured in the final version of the antenna.

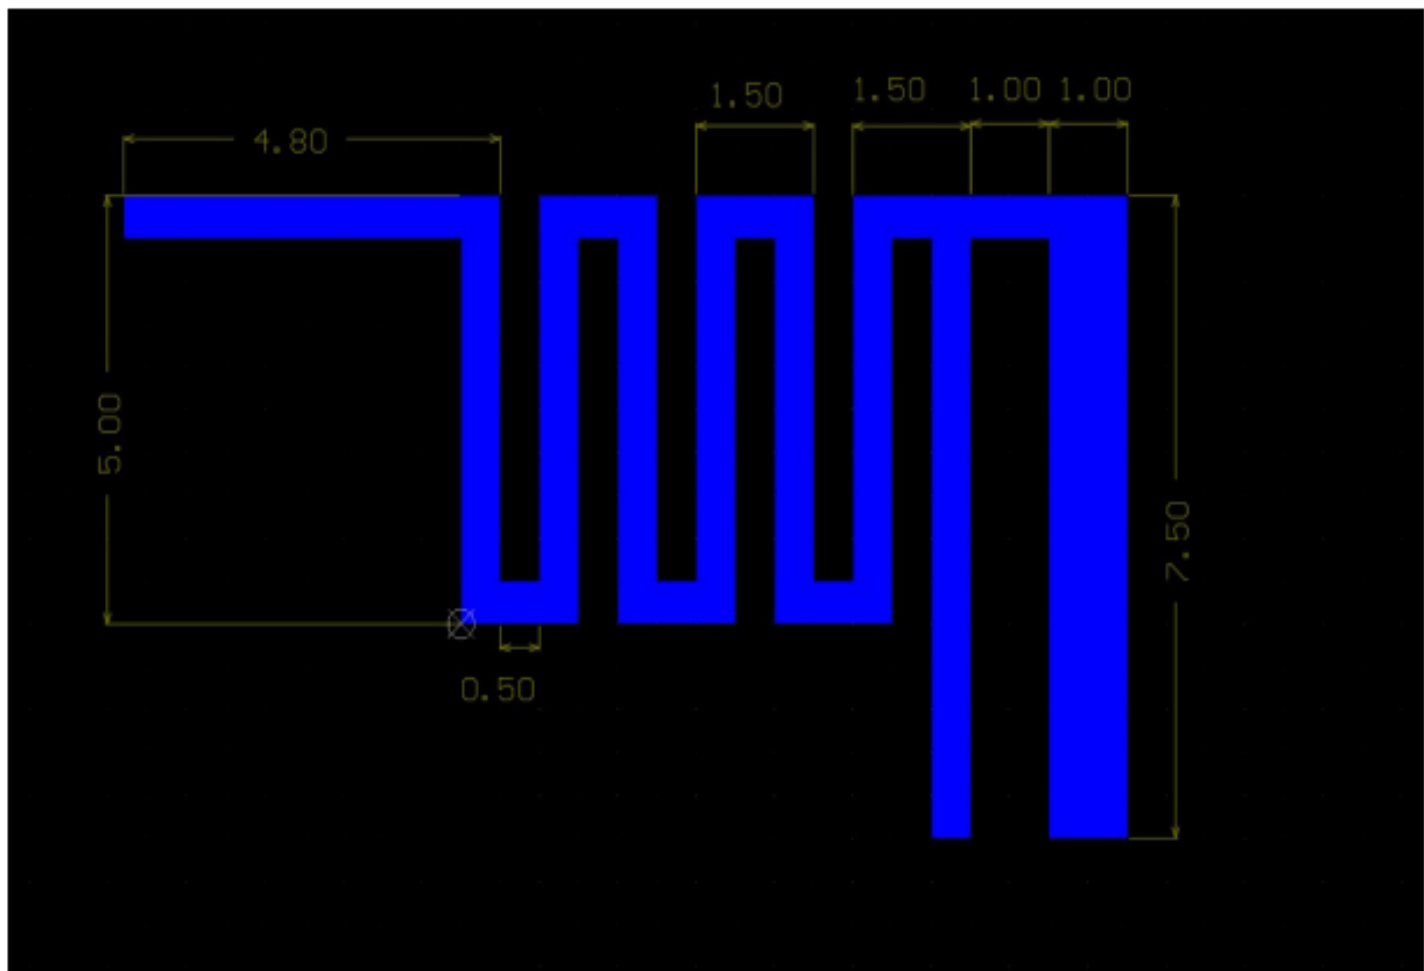

Test Mode:	Mode 1	Polarization:	Horizontal	MAX Gain:	-3.89
Angle of Turn Table (°)	SG Output Level (dBm)	2450MHz Reading Level (dBm)	2450MHz Substitution Level (dBm)	2450MHz Cable Loss (dBi)	2450MHz Antenna Gain (dBi)
0	-20	-47.20	8.00	1.00	-18.20
15	-20	-45.30	8.00	1.00	-16.30
30	-20	-45.10	8.00	1.00	-16.10
45	-20	-39.96	8.00	1.00	-10.96
60	-20	-47.58	8.00	1.00	-18.58
75	-20	-35.25	8.00	1.00	-6.25
90	-20	-32.90	8.00	1.00	-3.89
105	-20	-40.37	8.00	1.00	-11.37
120	-20	-35.11	8.00	1.00	-6.11
135	-20	-43.48	8.00	1.00	-14.48
150	-20	-36.87	8.00	1.00	-7.87
165	-20	-40.01	8.00	1.00	-11.01
180	-20	-40.49	8.00	1.00	-11.49
195	-20	-41.97	8.00	1.00	-12.97
210	-20	-43.84	8.00	1.00	-14.84
225	-20	-52.96	8.00	1.00	-23.96
240	-20	-52.05	8.00	1.00	-23.05
255	-20	-51.85	8.00	1.00	-22.85
270	-20	-46.59	8.00	1.00	-17.59
285	-20	-52.44	8.00	1.00	-23.44
300	-20	-50.87	8.00	1.00	-21.87
315	-20	-47.28	8.00	1.00	-18.28
330	-20	-48.06	8.00	1.00	-19.06
345	-20	-47.17	8.00	1.00	-18.17
360	-20	-47.20	8.00	1.00	-18.20

Horizontal at 2450MHz

