

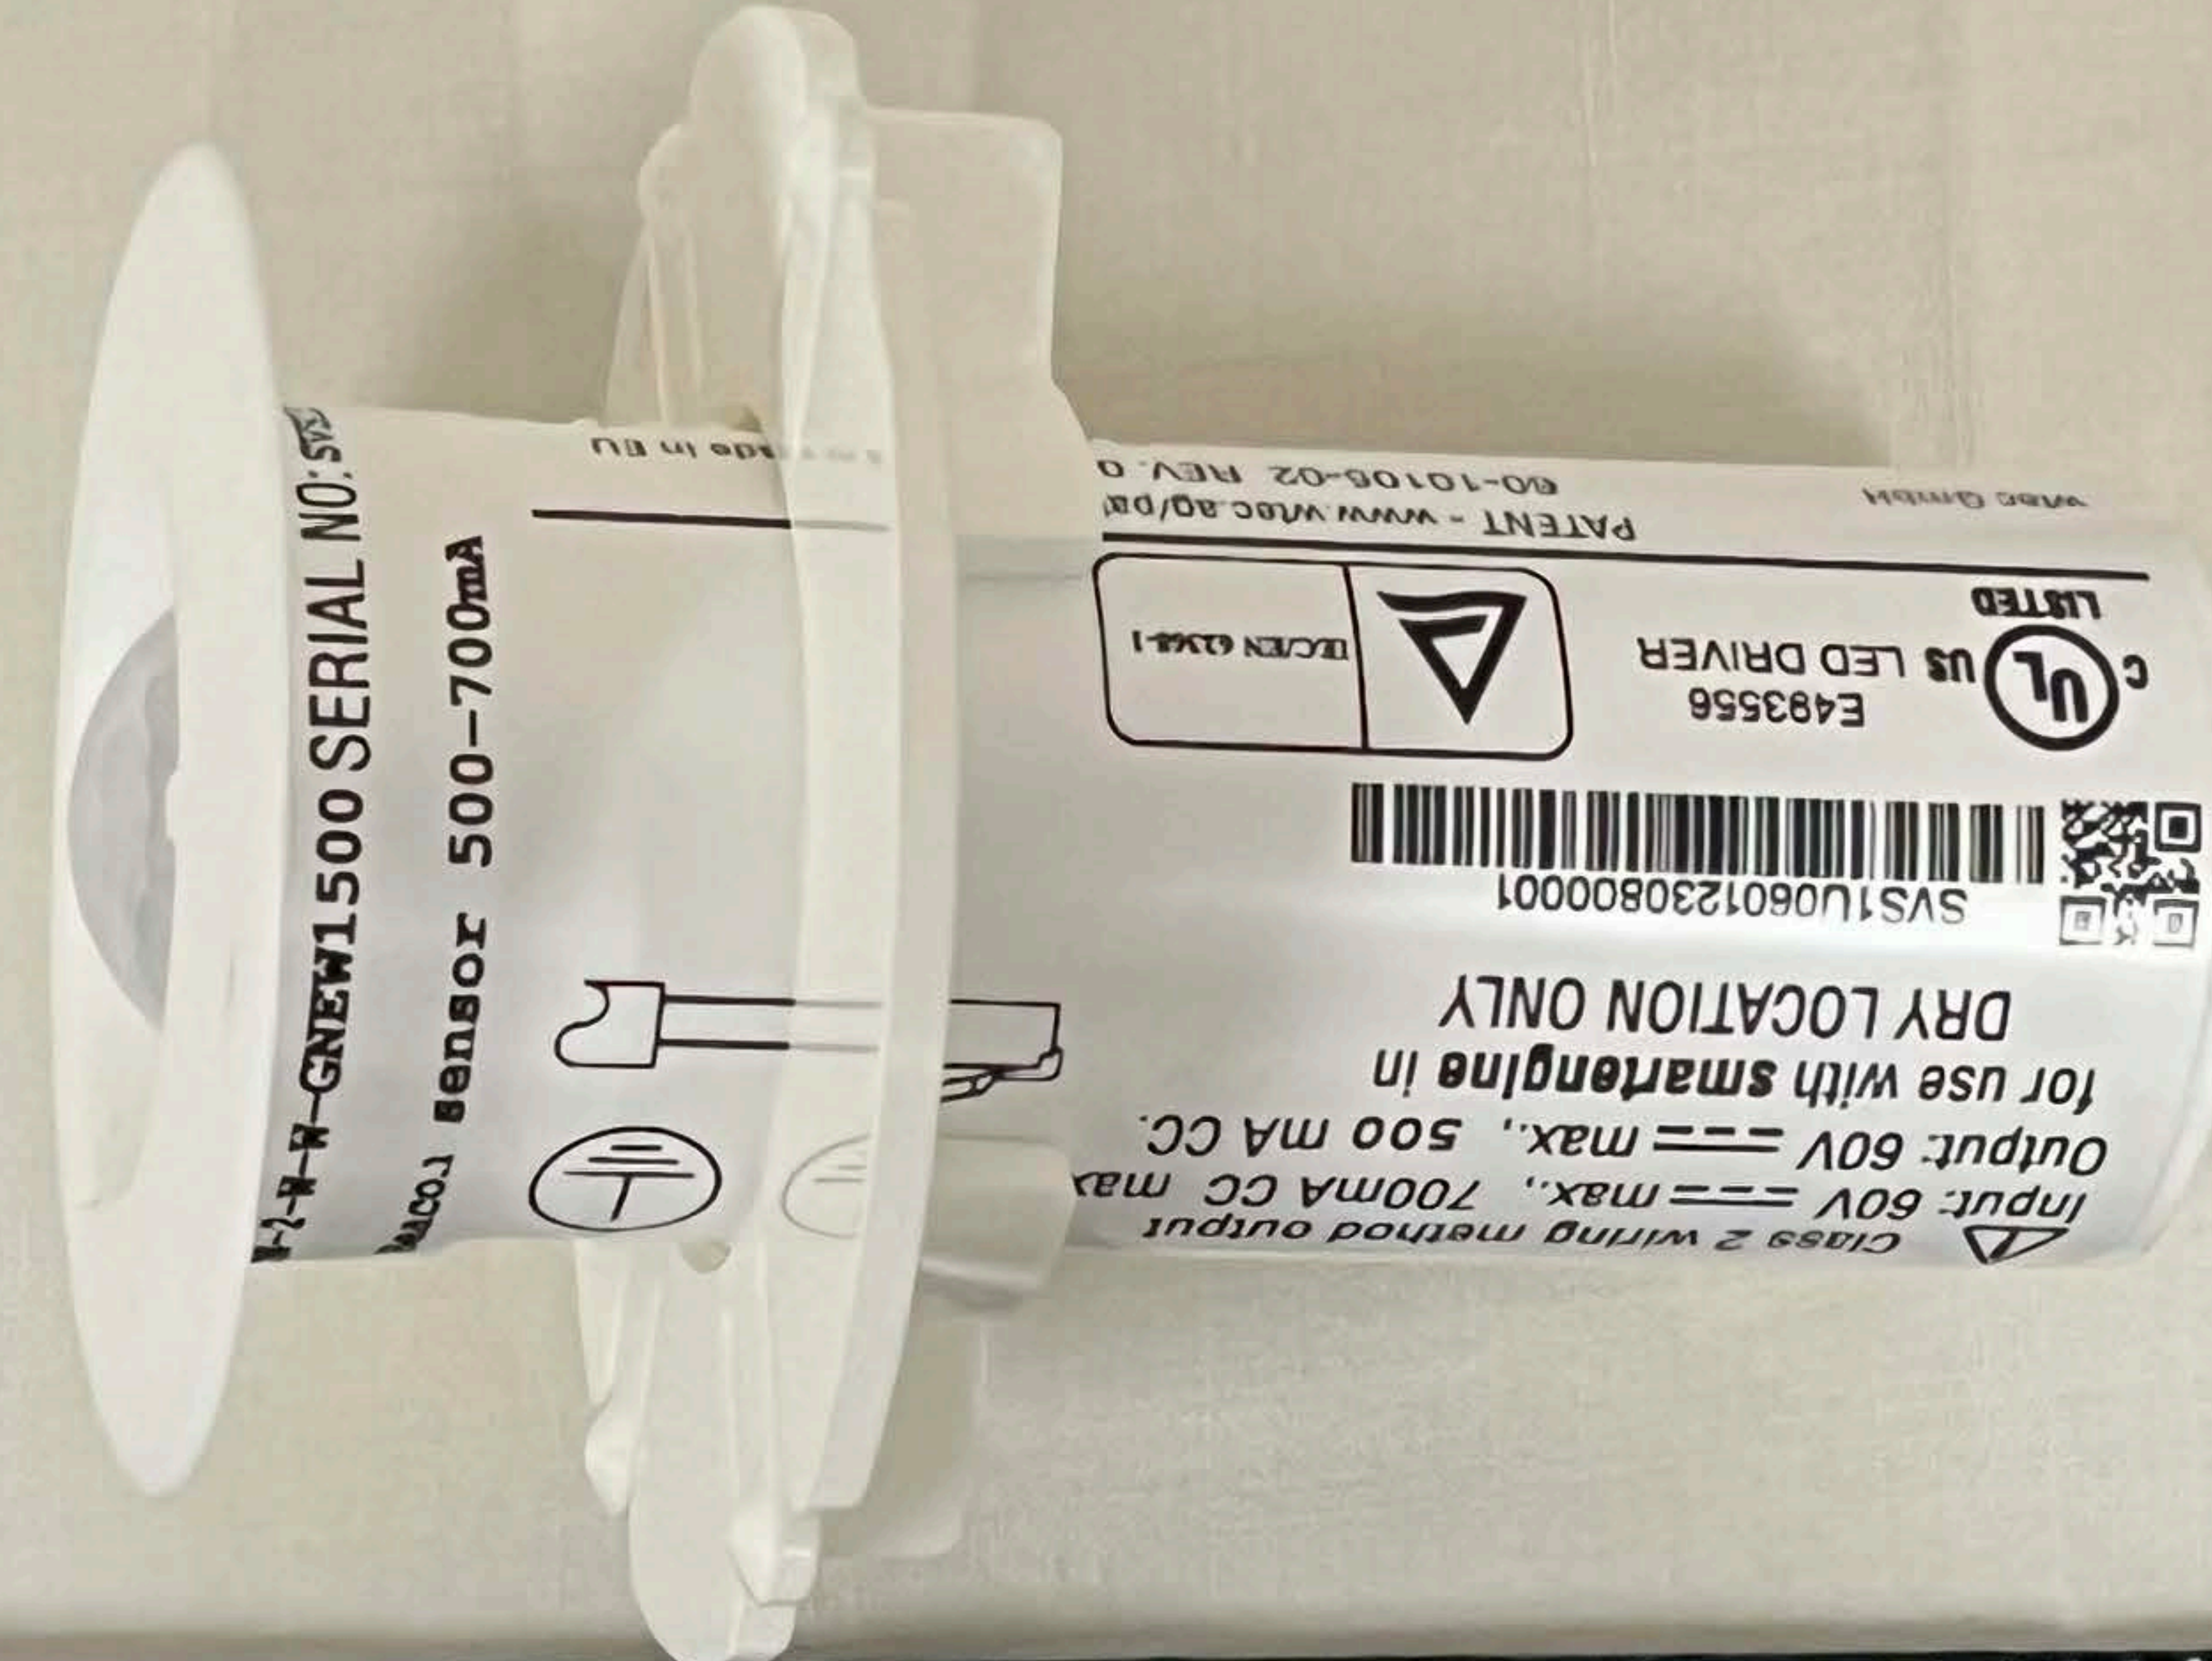


PMN: SSEN-2-W-W



Class 2 wiring method output
Input: 60V == max., 700mA CC max.
Output: 60V == max., 500 mA CC.
for use with *smartenging* in
DRY LOCATION ONLY
SVS1U0601230800001
E493556
US LED DRIVER
LISTED
PATENT - WWW.WAC.AQ/DAT
60-10100-02 REV. 0
www.wac.com
GNEW1500 SERIAL NO: 505
Micro sensor 500-700mA
Made in EU

PMN: SSEN-2-W-W



PMN: SSEN-2-W-W



PMN: SSEN-2-W-W

