



Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5755 MHz		
Polarization:	Vertical		
Remark:			

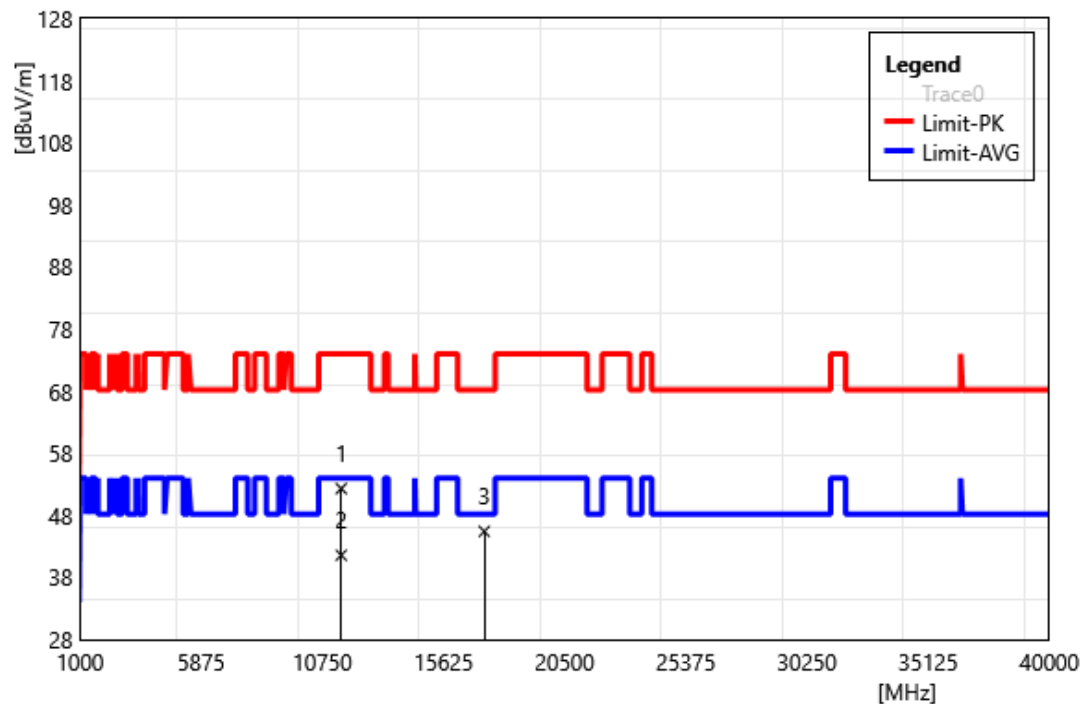


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11510.00	52.29	0.02	52.31	74.00	-21.69	PEAK
2	11510.00	41.55	0.02	41.57	54.00	-12.43	AVG
3	17265.00	44.54	0.87	45.41	68.20	-22.79	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5795 MHz		
Polarization:	Horizontal		
Remark:			

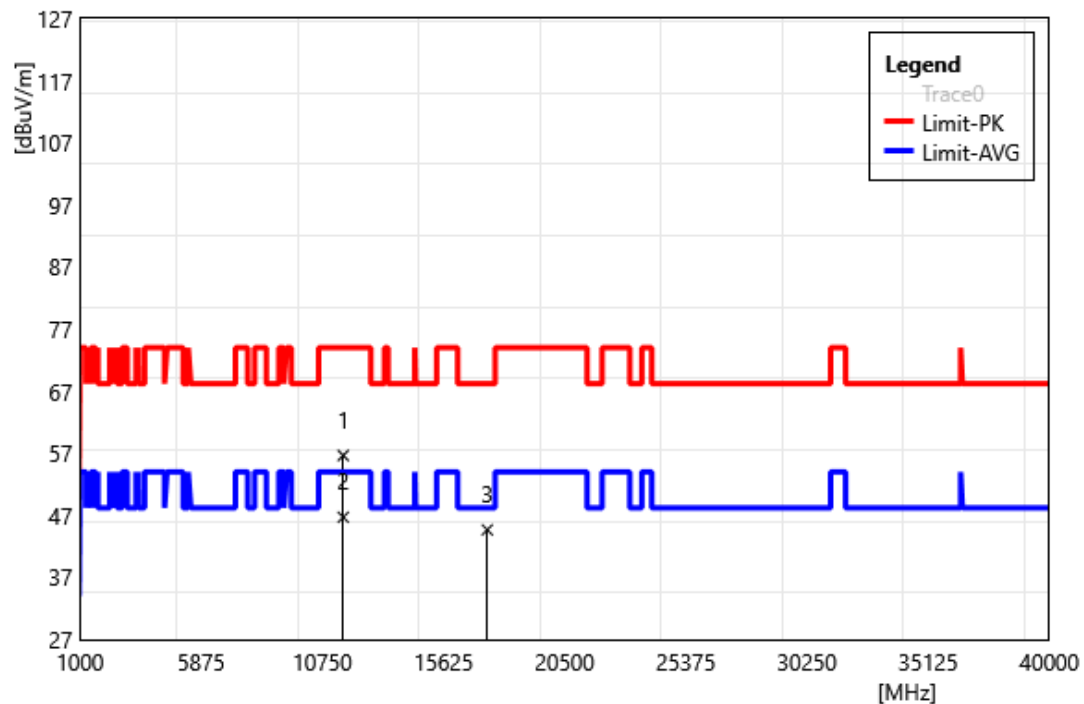


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11590.00	55.82	0.83	56.65	74.00	-17.35	PEAK
2	11590.00	45.88	0.83	46.71	54.00	-7.29	AVG
3	17385.00	43.61	1.06	44.67	68.20	-23.53	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5795 MHz		
Polarization:	Vertical		
Remark:			

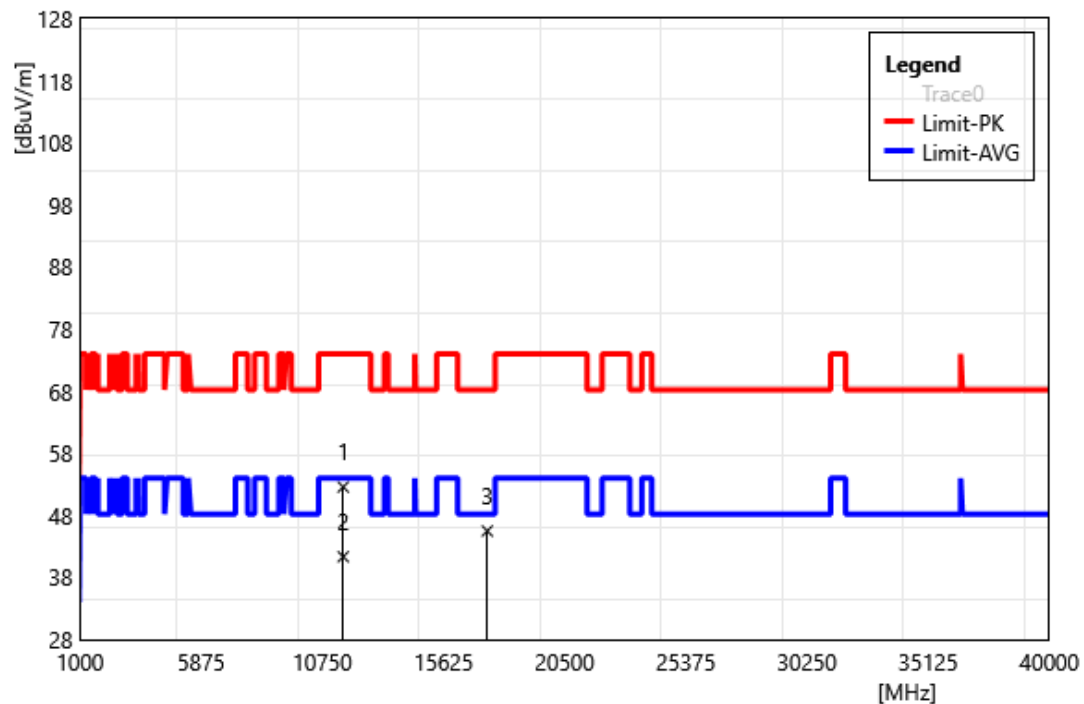


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11590.00	51.74	0.83	52.57	74.00	-21.43	PEAK
2	11590.00	40.50	0.83	41.33	54.00	-12.67	AVG
3	17385.00	44.41	1.06	45.47	68.20	-22.73	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

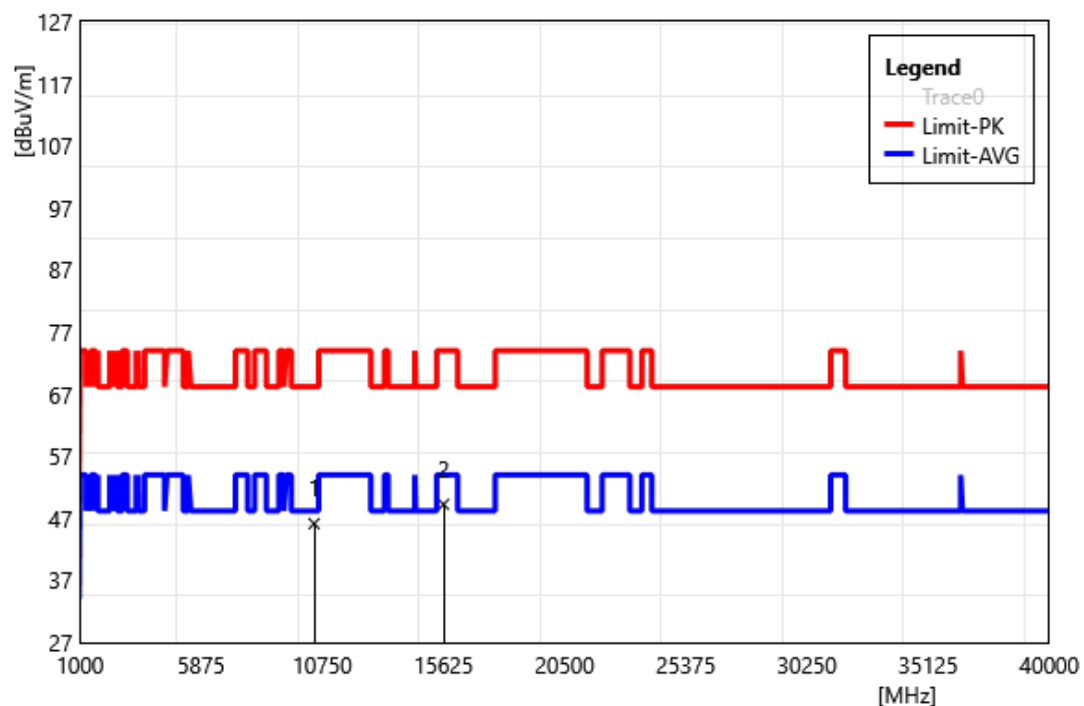


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10420.00	45.92	0.23	46.15	68.20	-22.05	PEAK
2	15630.00	44.23	5.02	49.25	74.00	-24.75	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

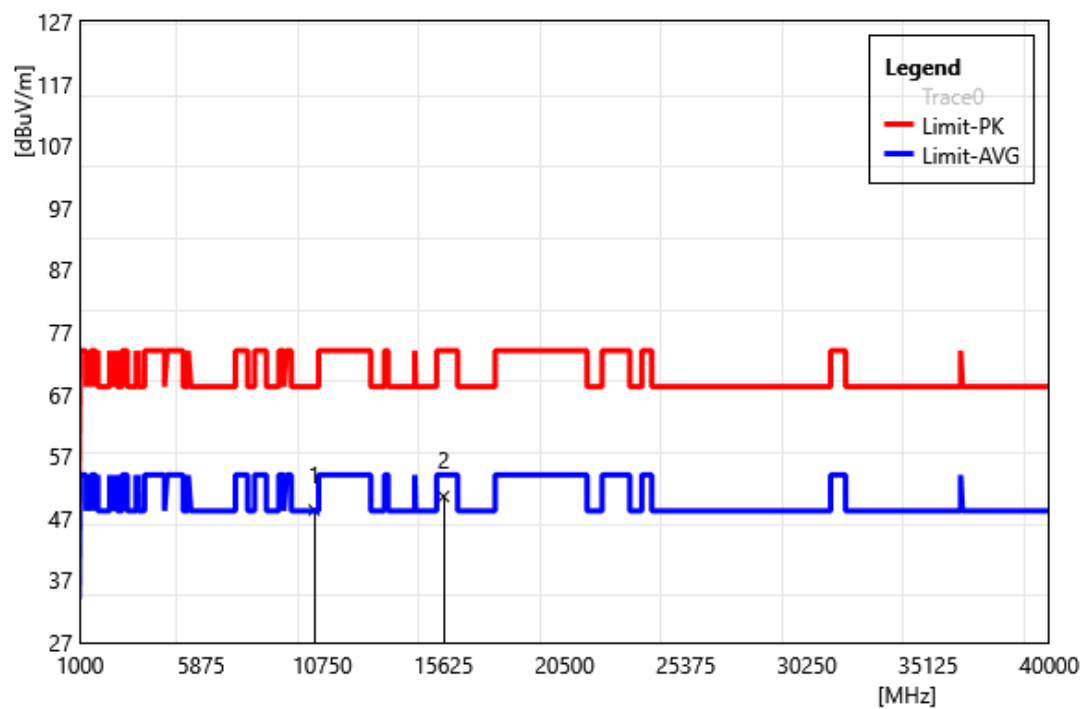


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10420.00	48.11	0.23	48.34	68.20	-19.86	PEAK
2	15630.00	45.49	5.02	50.51	74.00	-23.49	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5775		
	MHz		
Polarization:	Horizontal		
Remark:			

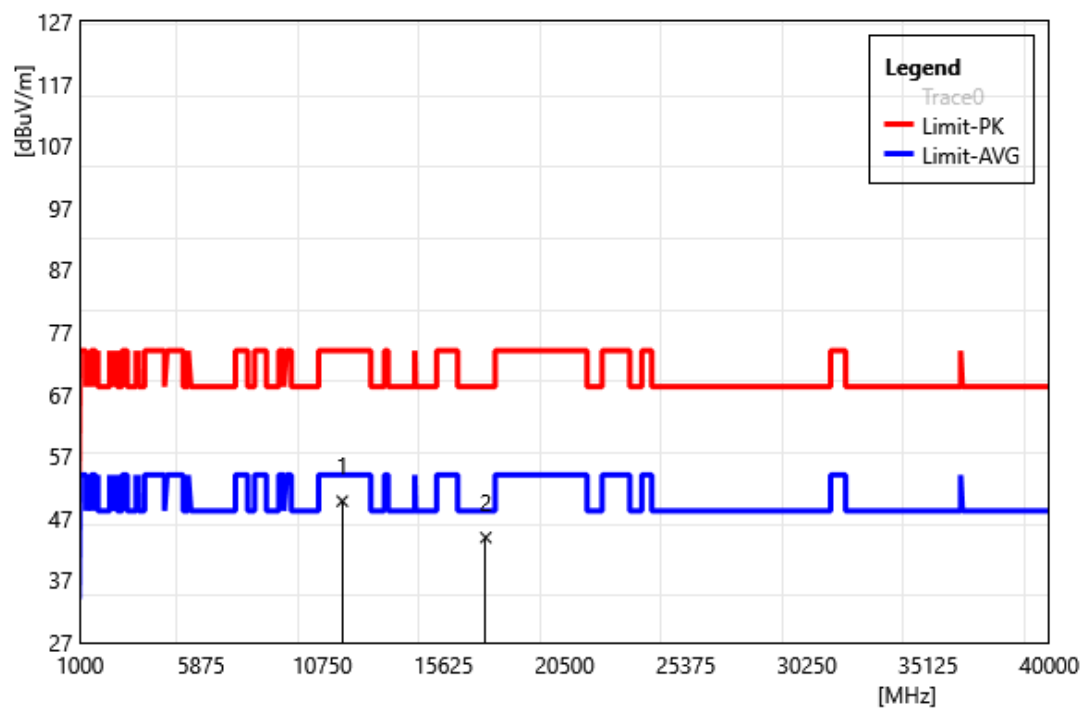


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11550.00	49.34	0.43	49.77	74.00	-24.23	PEAK
2	17325.00	43.14	0.77	43.91	68.20	-24.29	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5775		
	MHz		
Polarization:	Vertical		
Remark:			

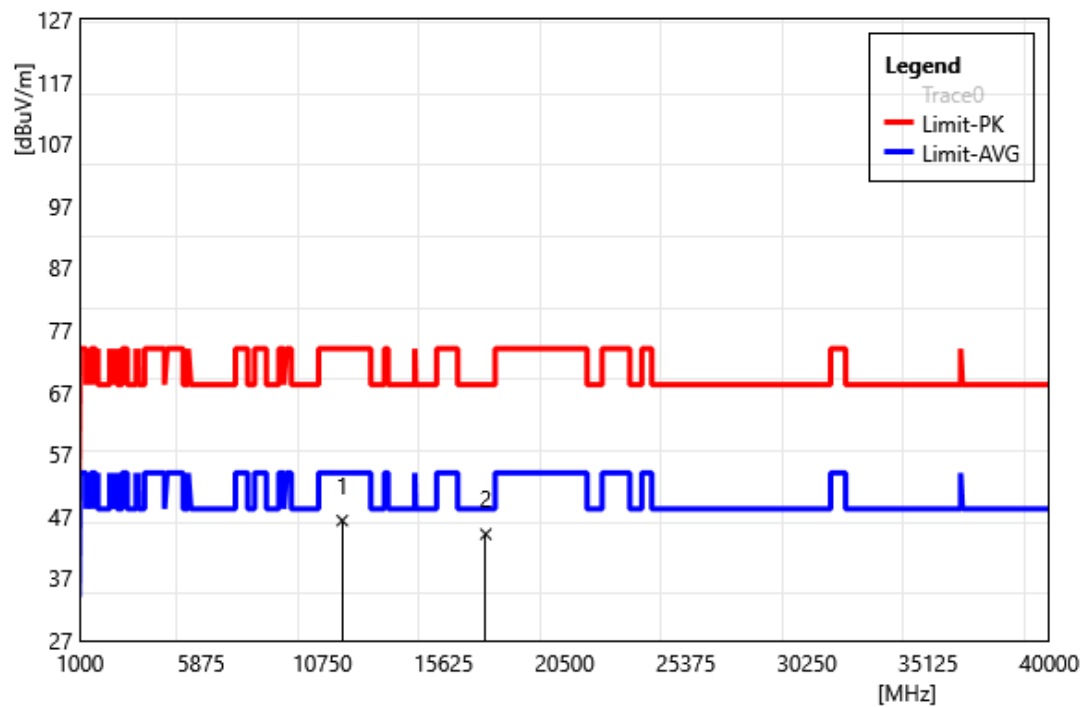


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11550.00	45.88	0.43	46.31	74.00	-27.69	PEAK
2	17325.00	43.36	0.77	44.13	68.20	-24.07	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5180		
	MHz		
Polarization:	Horizontal		
Remark:			

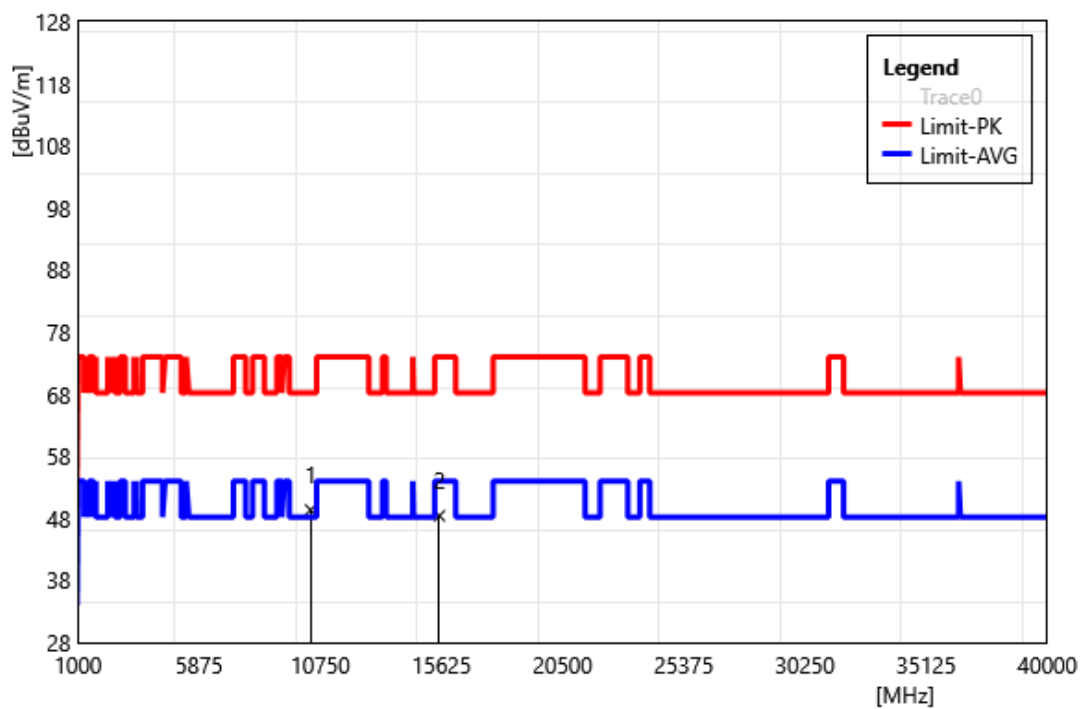


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10360.00	48.89	0.45	49.34	68.20	-18.86	PEAK
2	15540.00	43.97	4.44	48.41	74.00	-25.59	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5180		
	MHz		
Polarization:	Vertical		
Remark:			

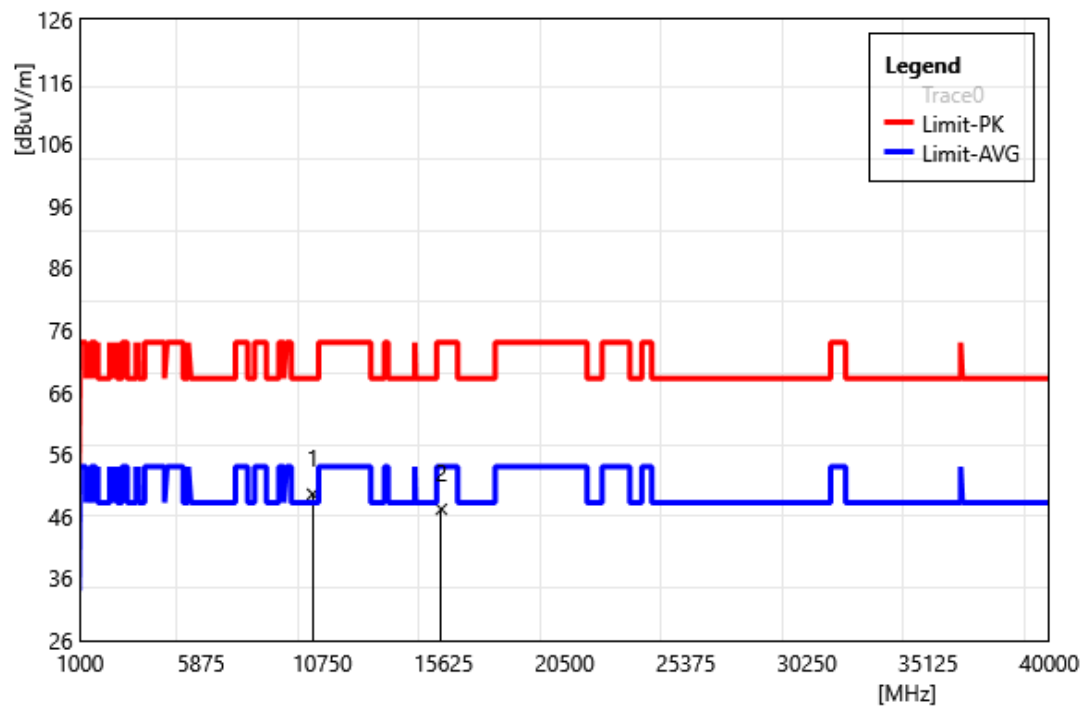


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10360.00	49.12	0.45	49.57	68.20	-18.63	PEAK
2	15540.00	42.70	4.44	47.14	74.00	-26.86	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5200		
	MHz		
Polarization:	Horizontal		
Remark:			

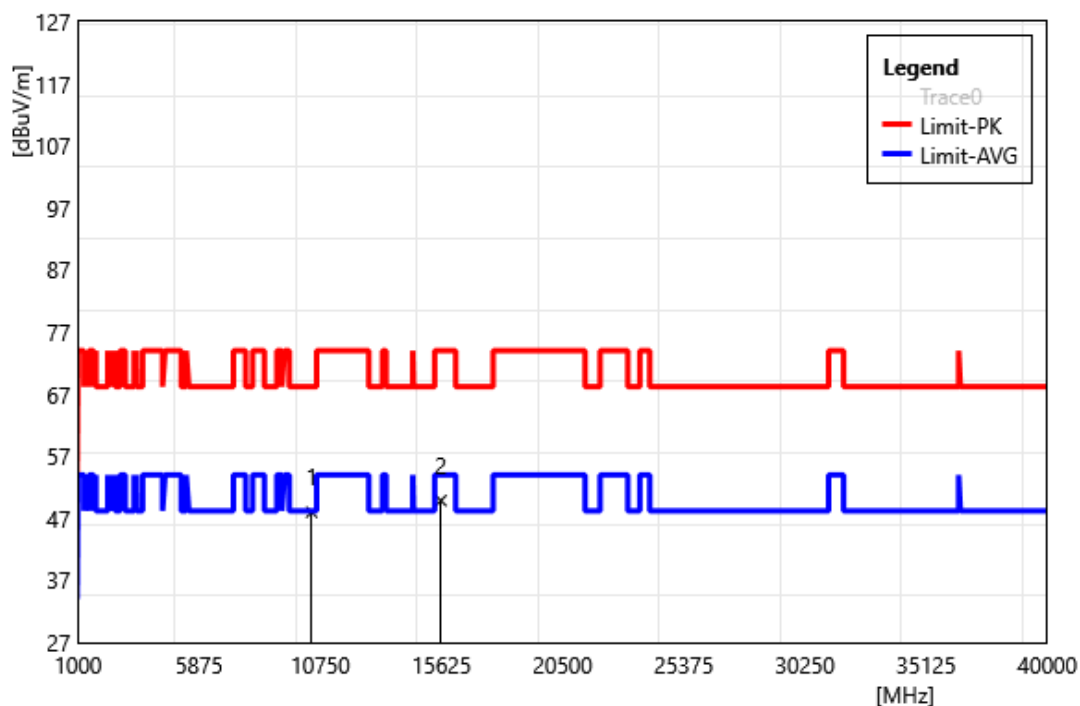


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10400.00	47.54	0.46	48.00	68.20	-20.20	PEAK
2	15600.00	44.60	5.26	49.86	74.00	-24.14	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5200		
	MHz		
Polarization:	Vertical		
Remark:			

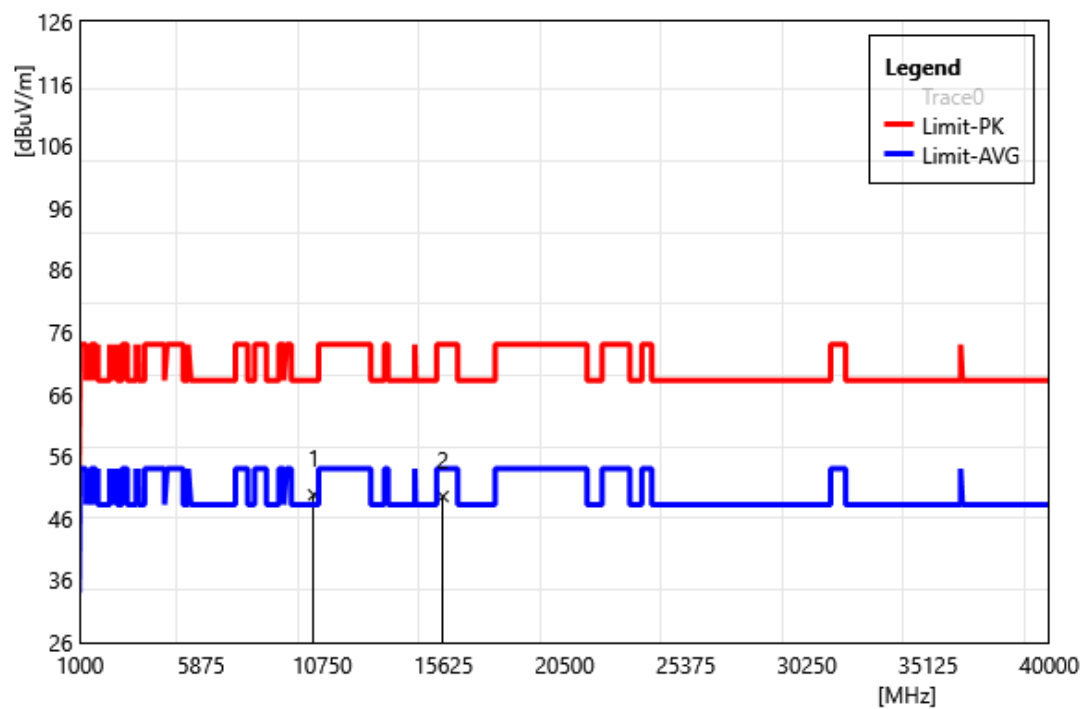


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10400.00	49.34	0.46	49.80	68.20	-18.40	PEAK
2	15600.00	44.26	5.26	49.52	74.00	-24.48	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5240		
	MHz		
Polarization:	Horizontal		
Remark:			

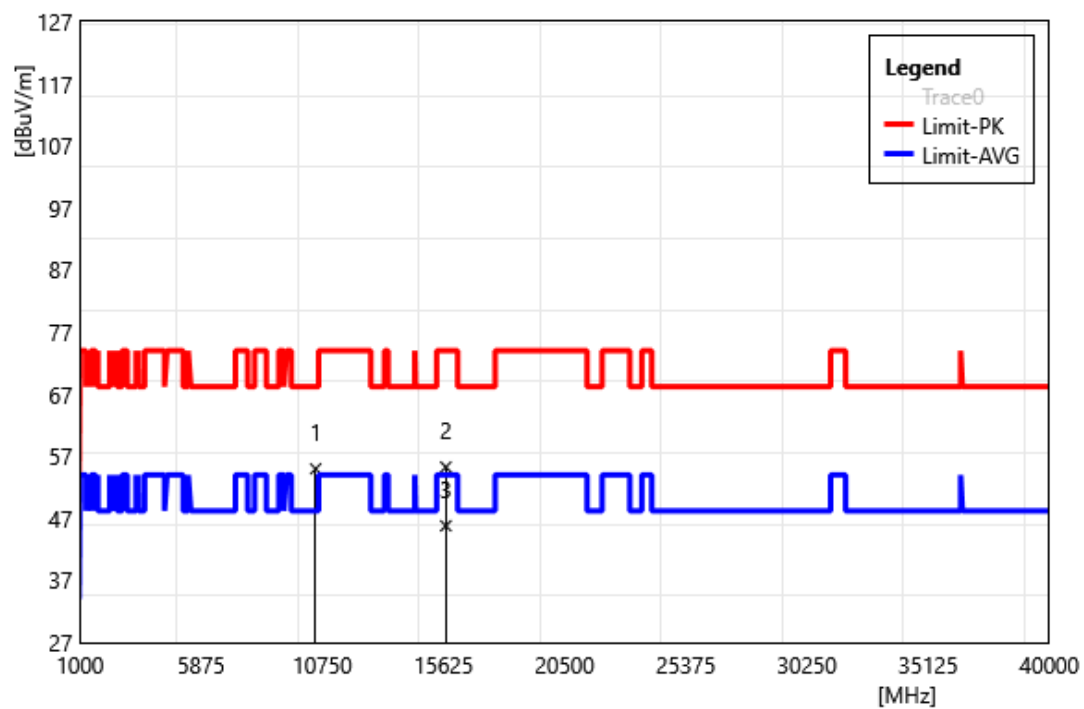


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10480.00	55.41	-0.44	54.97	68.20	-13.23	PEAK
2	15720.00	50.85	4.41	55.26	74.00	-18.74	PEAK
3	15720.00	41.38	4.41	45.79	54.00	-8.21	AVG

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5240		
	MHz		
Polarization:	Vertical		
Remark:			

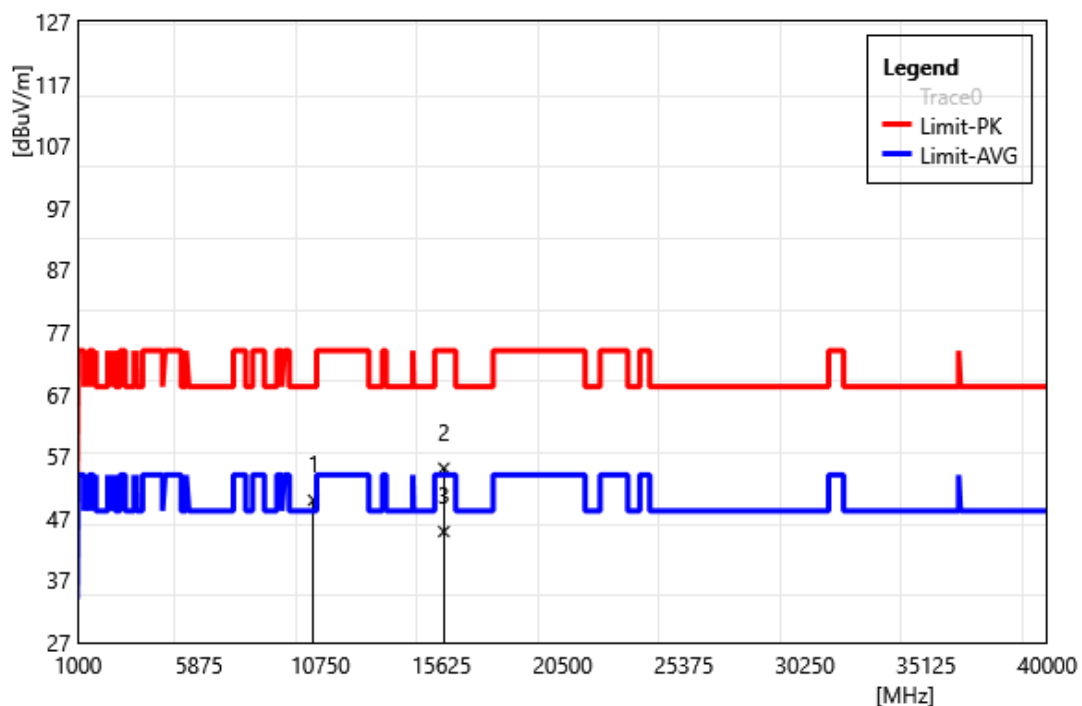


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10480.00	50.37	-0.44	49.93	68.20	-18.27	PEAK
2	15720.00	50.67	4.41	55.08	74.00	-18.92	PEAK
3	15720.00	40.46	4.41	44.87	54.00	-9.13	AVG

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5745		
	MHz		
Polarization:	Horizontal		
Remark:			

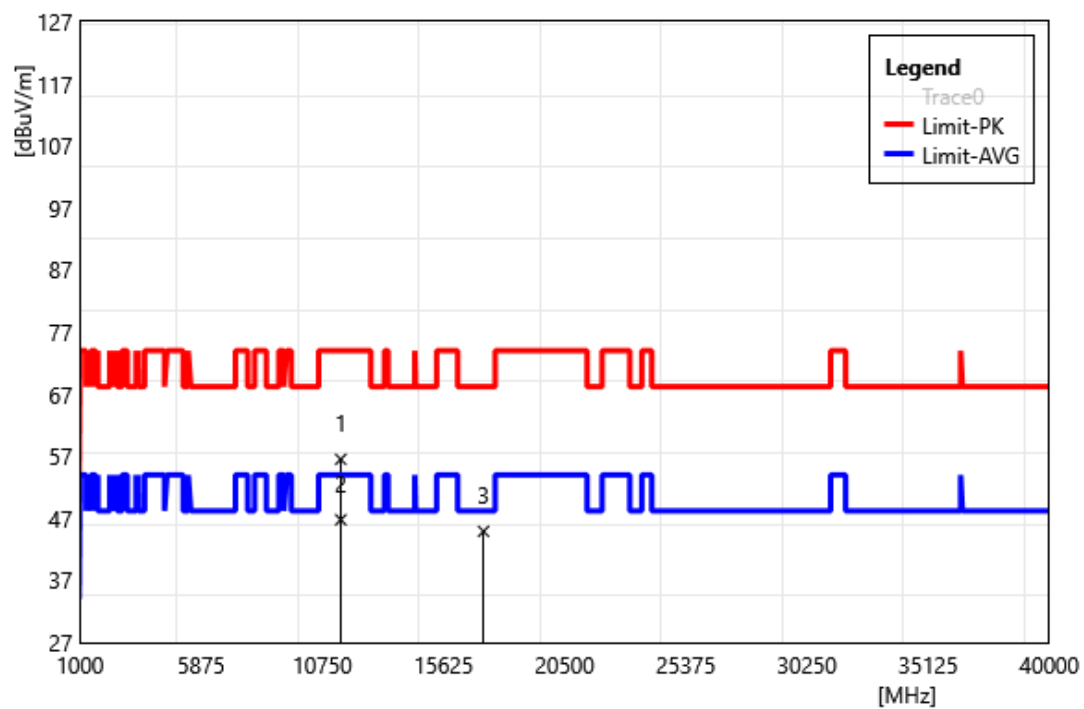


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11490.00	56.67	-0.16	56.51	74.00	-17.49	PEAK
2	11490.00	46.93	-0.16	46.77	54.00	-7.23	AVG
3	17235.00	43.86	1.05	44.91	68.20	-23.29	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5745		
	MHz		
Polarization:	Vertical		
Remark:			

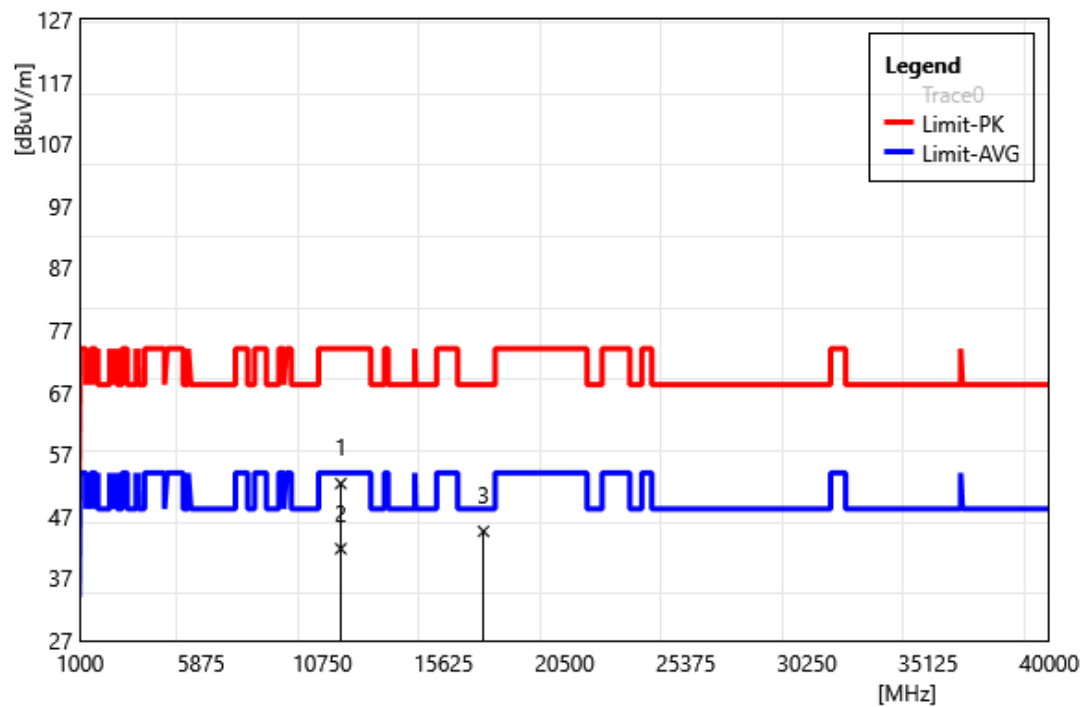


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11490.00	52.44	-0.16	52.28	74.00	-21.72	PEAK
2	11490.00	41.95	-0.16	41.79	54.00	-12.21	AVG
3	17235.00	43.54	1.05	44.59	68.20	-23.61	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5785		
	MHz		
Polarization:	Horizontal		
Remark:			

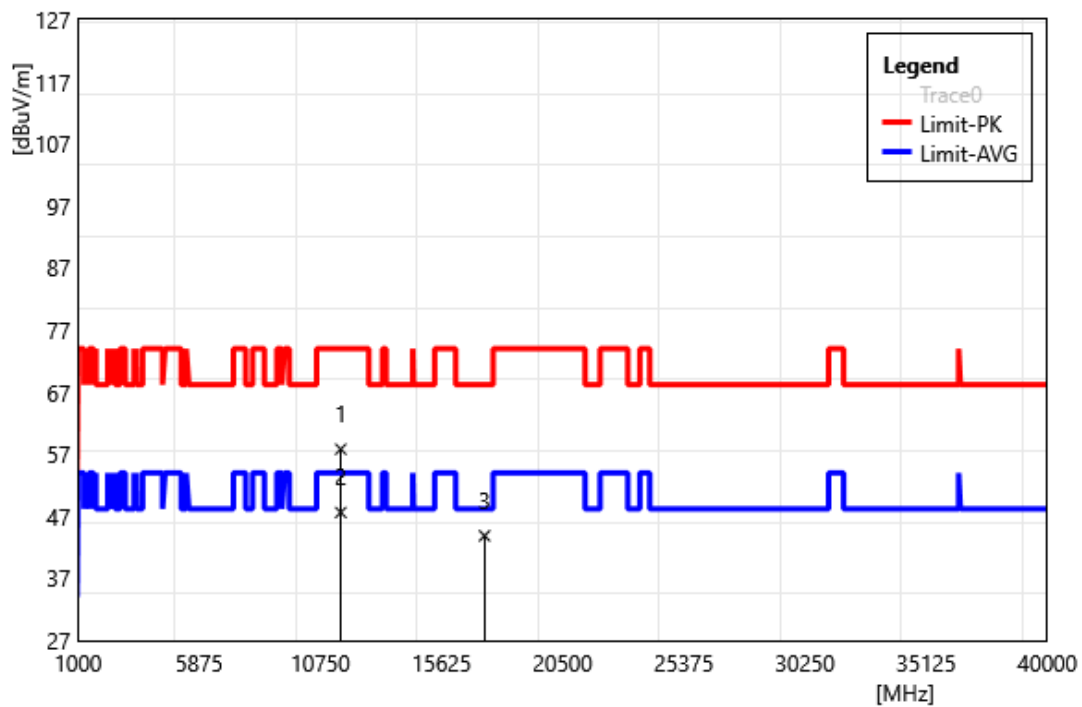


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11570.00	57.18	0.63	57.81	74.00	-16.19	PEAK
2	11570.00	46.99	0.63	47.62	54.00	-6.38	AVG
3	17355.00	42.95	0.92	43.87	68.20	-24.33	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5785		
	MHz		
Polarization:	Vertical		
Remark:			

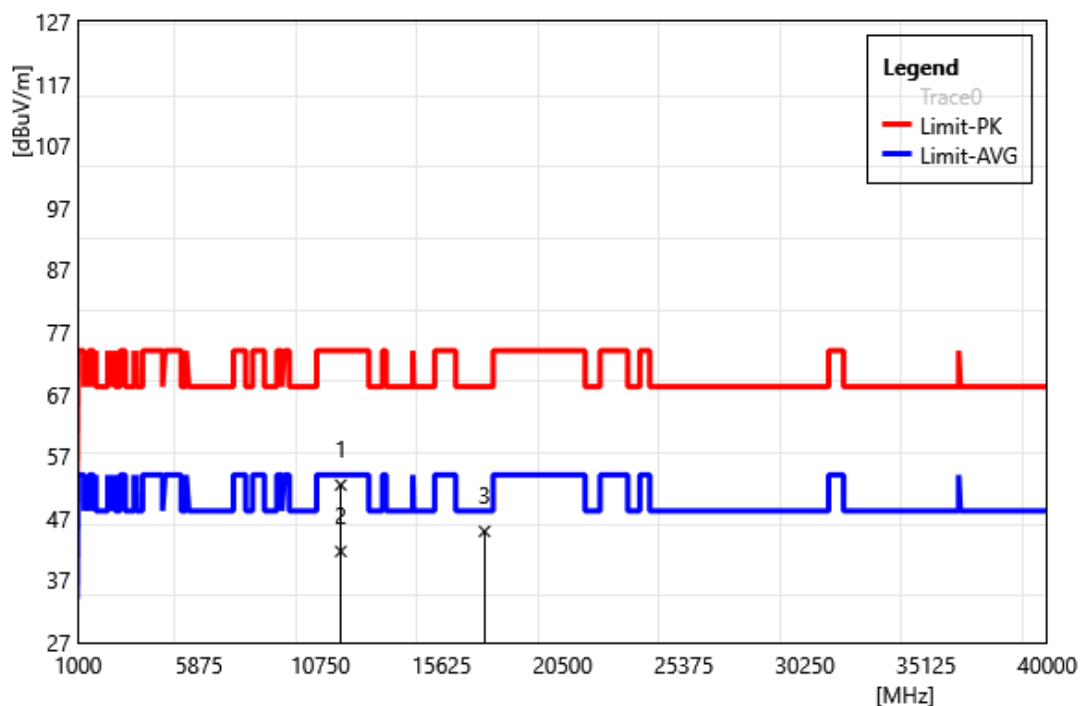


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11570.00	51.74	0.63	52.37	74.00	-21.63	PEAK
2	11570.00	41.05	0.63	41.68	54.00	-12.32	AVG
3	17355.00	43.98	0.92	44.90	68.20	-23.30	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5825		
	MHz		
Polarization:	Horizontal		
Remark:			

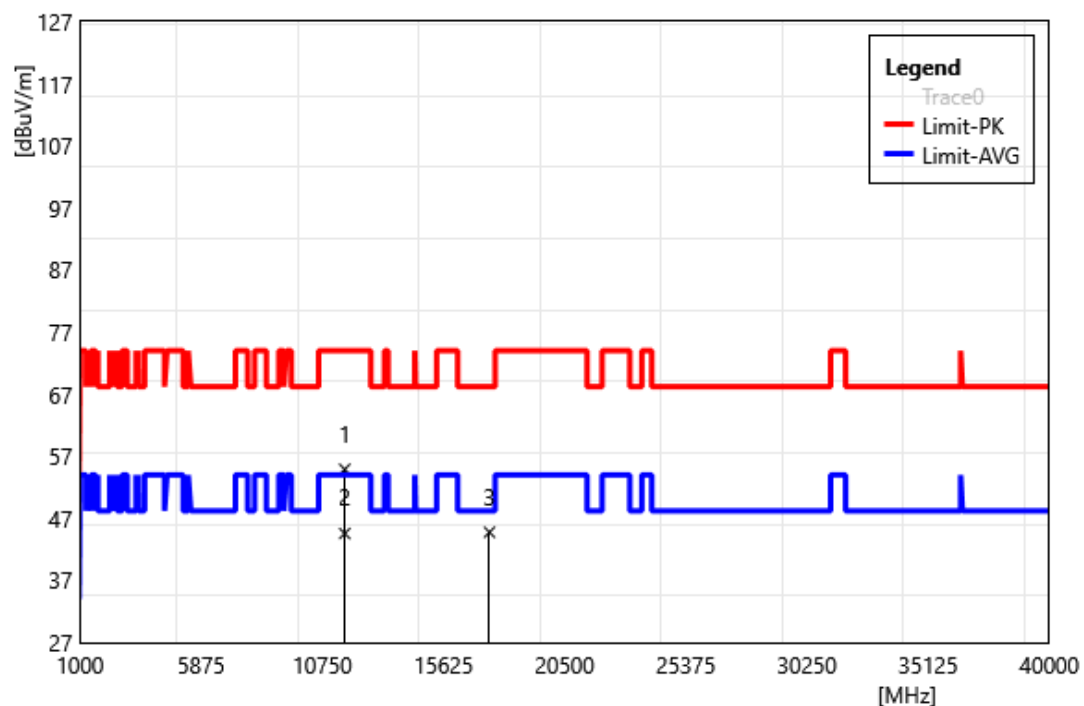


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11650.00	54.05	0.85	54.90	74.00	-19.10	PEAK
2	11650.00	43.71	0.85	44.56	54.00	-9.44	AVG
3	17475.00	42.41	2.35	44.76	68.20	-23.44	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5825		
	MHz		
Polarization:	Vertical		
Remark:			

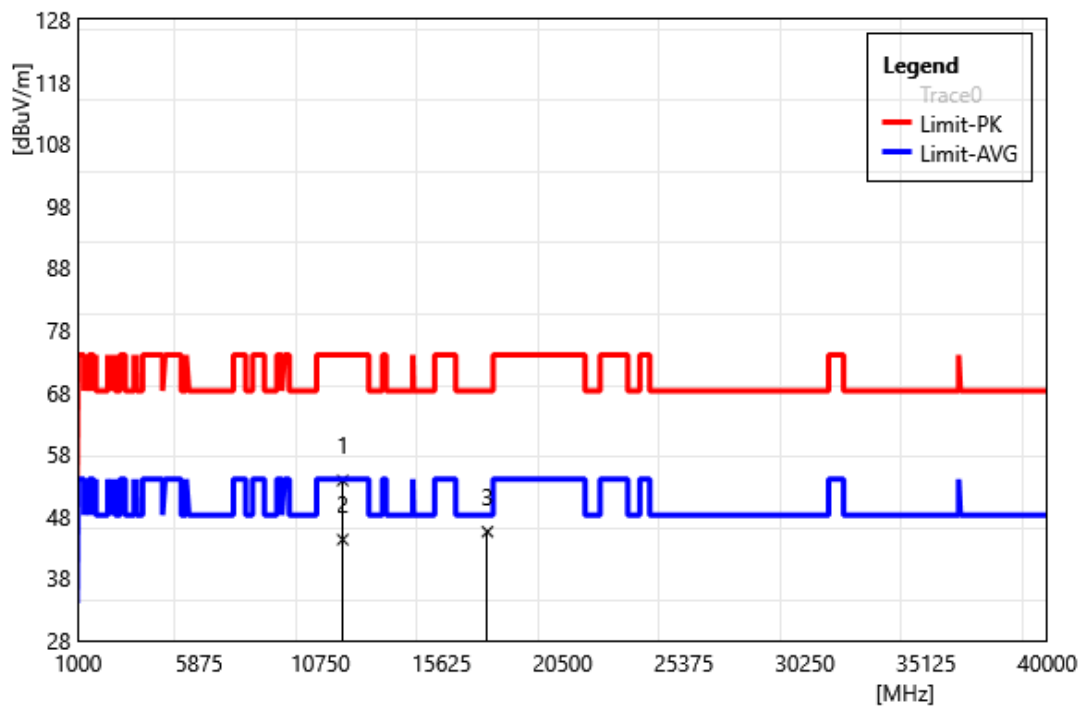


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11650.00	52.92	0.85	53.77	74.00	-20.23	PEAK
2	11650.00	43.41	0.85	44.26	54.00	-9.74	AVG
3	17475.00	43.17	2.35	45.52	68.20	-22.68	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

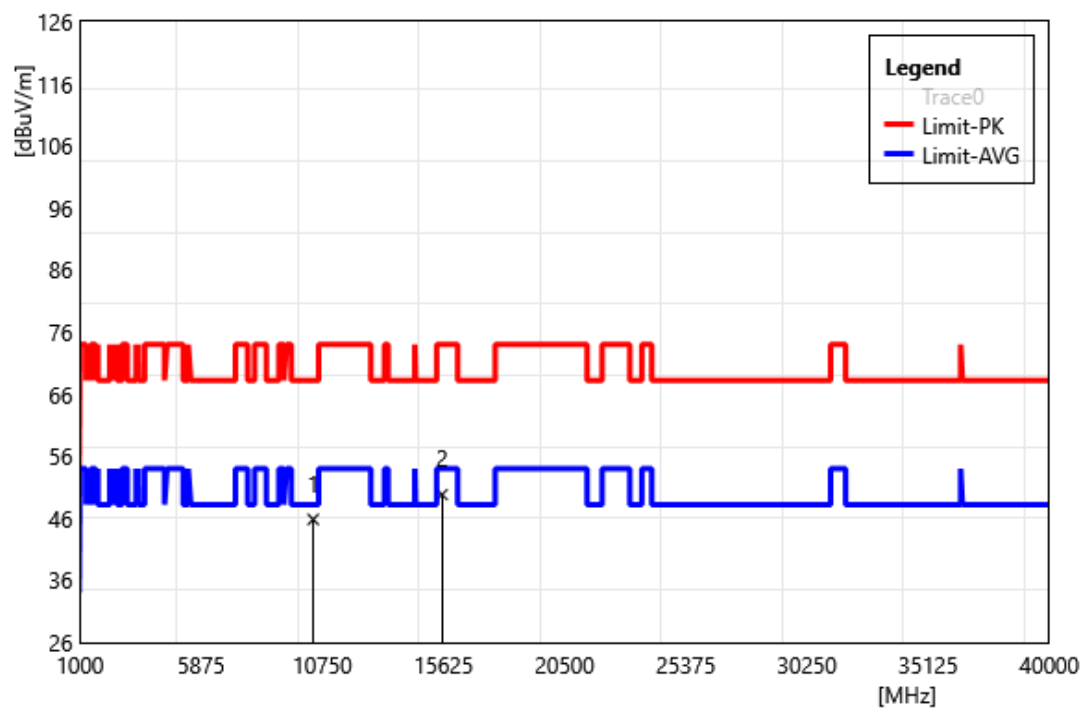


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10380.00	45.37	0.46	45.83	68.20	-22.37	PEAK
2	15570.00	44.97	4.85	49.82	74.00	-24.18	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

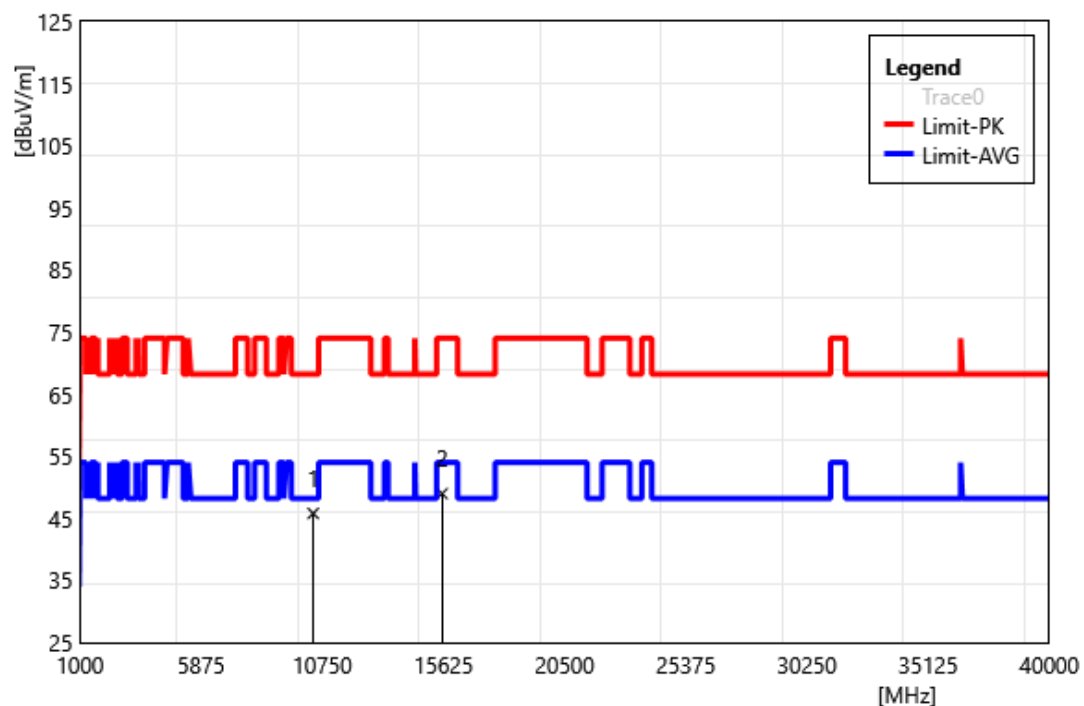


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10380.00	45.34	0.46	45.80	68.20	-22.40	PEAK
2	15570.00	44.13	4.85	48.98	74.00	-25.02	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5230		
	MHz		
Polarization:	Horizontal		
Remark:			

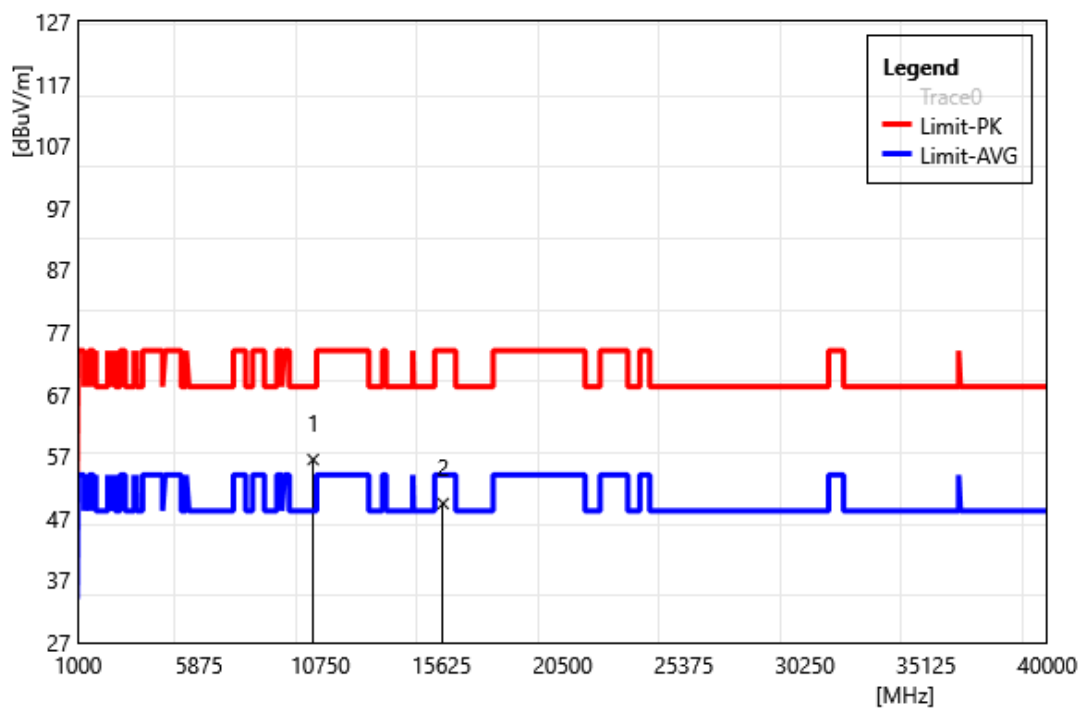


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10460.00	56.68	-0.21	56.47	68.20	-11.73	PEAK
2	15690.00	44.83	4.55	49.38	74.00	-24.62	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

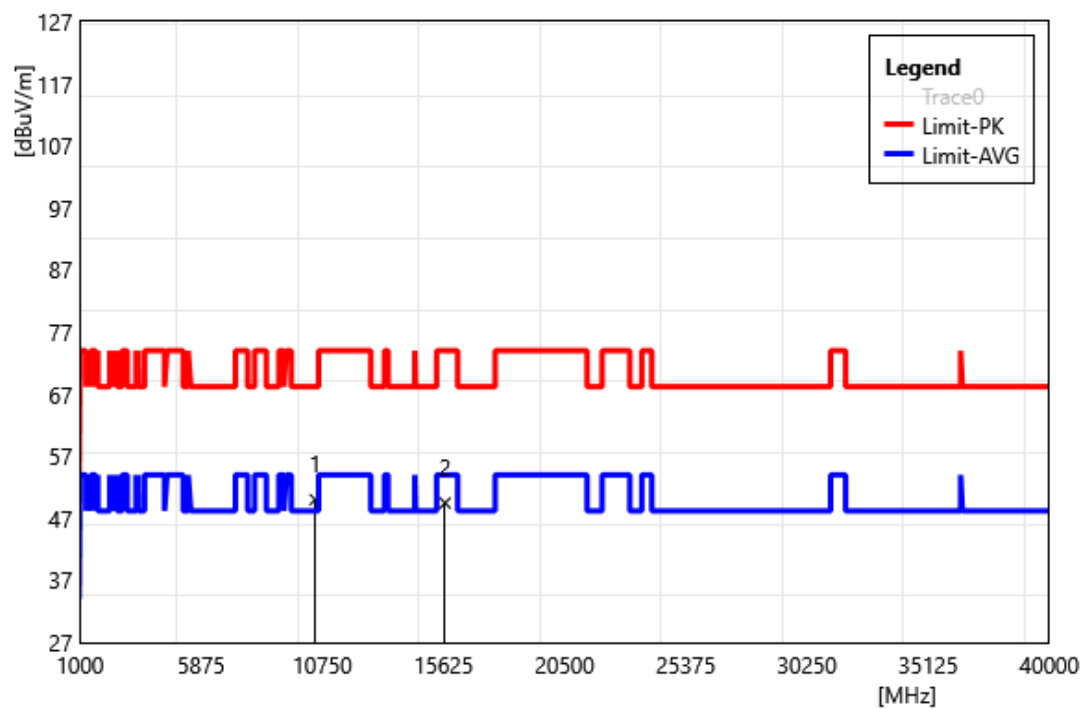


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10460.00	50.23	-0.21	50.02	68.20	-18.18	PEAK
2	15690.00	44.92	4.55	49.47	74.00	-24.53	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5755		
	MHz		
Polarization:	Horizontal		
Remark:			

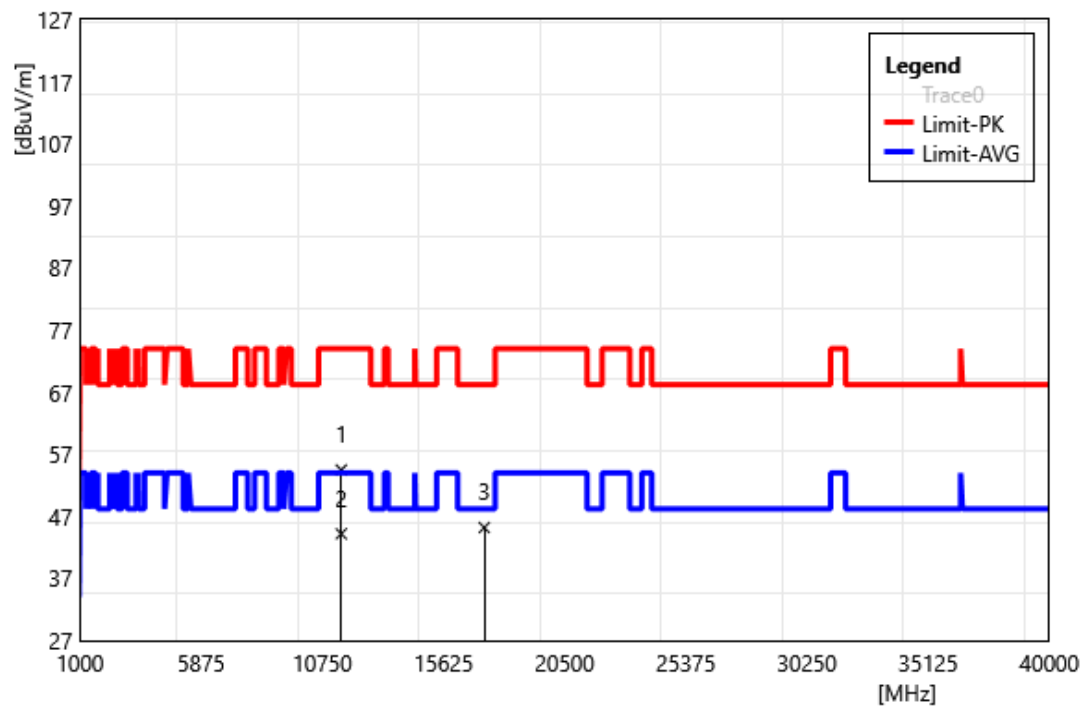


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11510.00	54.45	0.02	54.47	74.00	-19.53	PEAK
2	11510.00	44.17	0.02	44.19	54.00	-9.81	AVG
3	17265.00	44.33	0.87	45.20	68.20	-23.00	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5755		
	MHz		
Polarization:	Vertical		
Remark:			

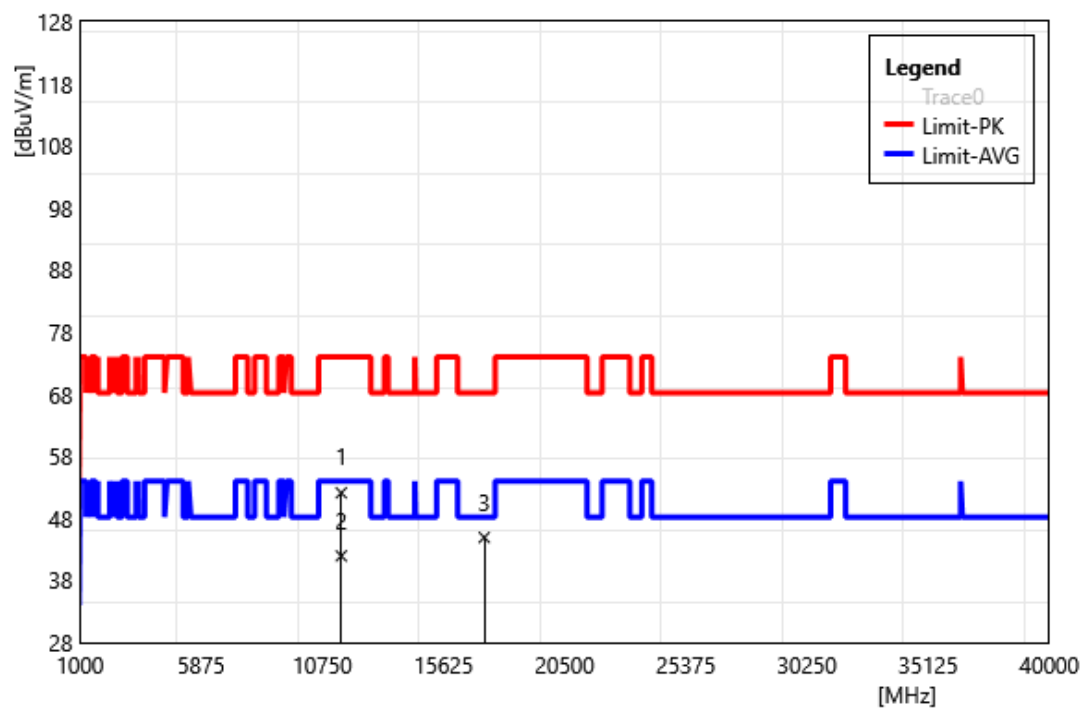


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11510.00	52.09	0.02	52.11	74.00	-21.89	PEAK
2	11510.00	41.93	0.02	41.95	54.00	-12.05	AVG
3	17265.00	44.05	0.87	44.92	68.20	-23.28	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5795		
	MHz		
Polarization:	Horizontal		
Remark:			

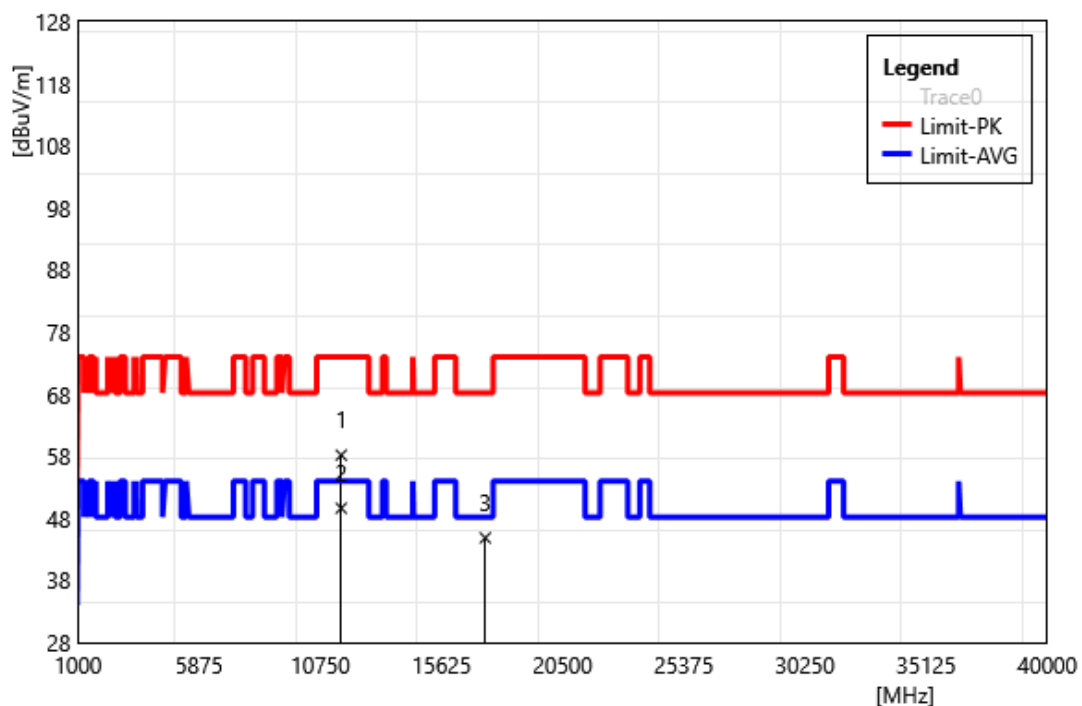


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11590.00	57.36	0.83	58.19	74.00	-15.81	PEAK
2	11590.00	48.79	0.83	49.62	54.00	-4.38	AVG
3	17385.00	43.80	1.06	44.86	68.20	-23.34	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5795		
	MHz		
Polarization:	Vertical		
Remark:			

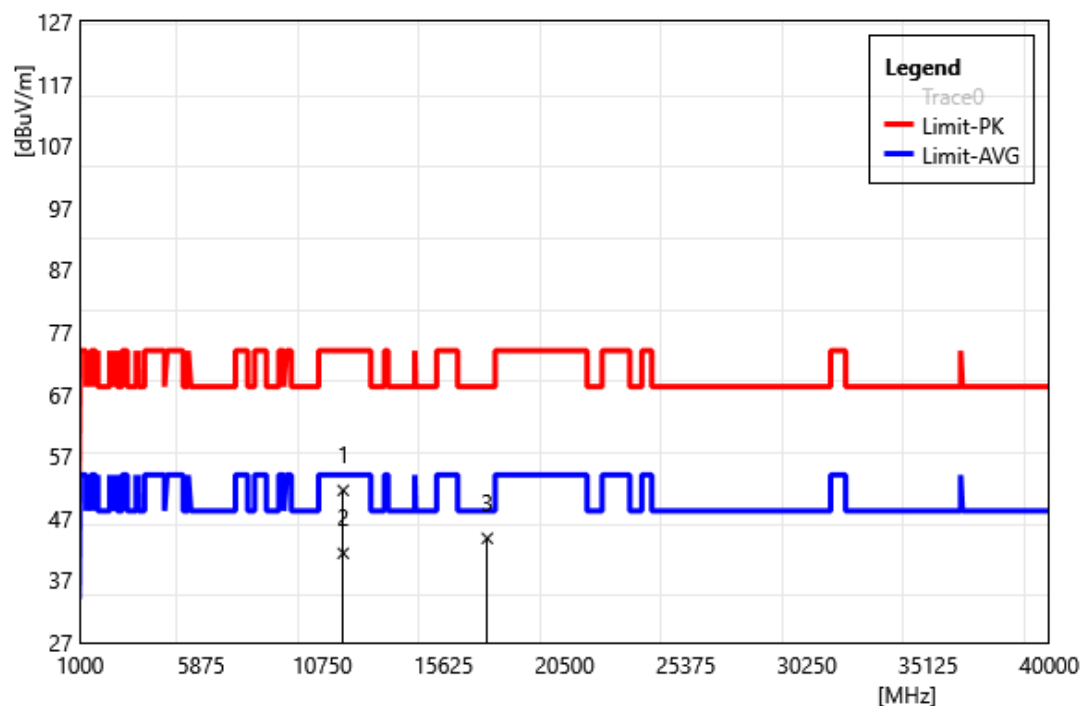


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11590.00	50.67	0.83	51.50	74.00	-22.50	PEAK
2	11590.00	40.54	0.83	41.37	54.00	-12.63	AVG
3	17385.00	42.73	1.06	43.79	68.20	-24.41	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

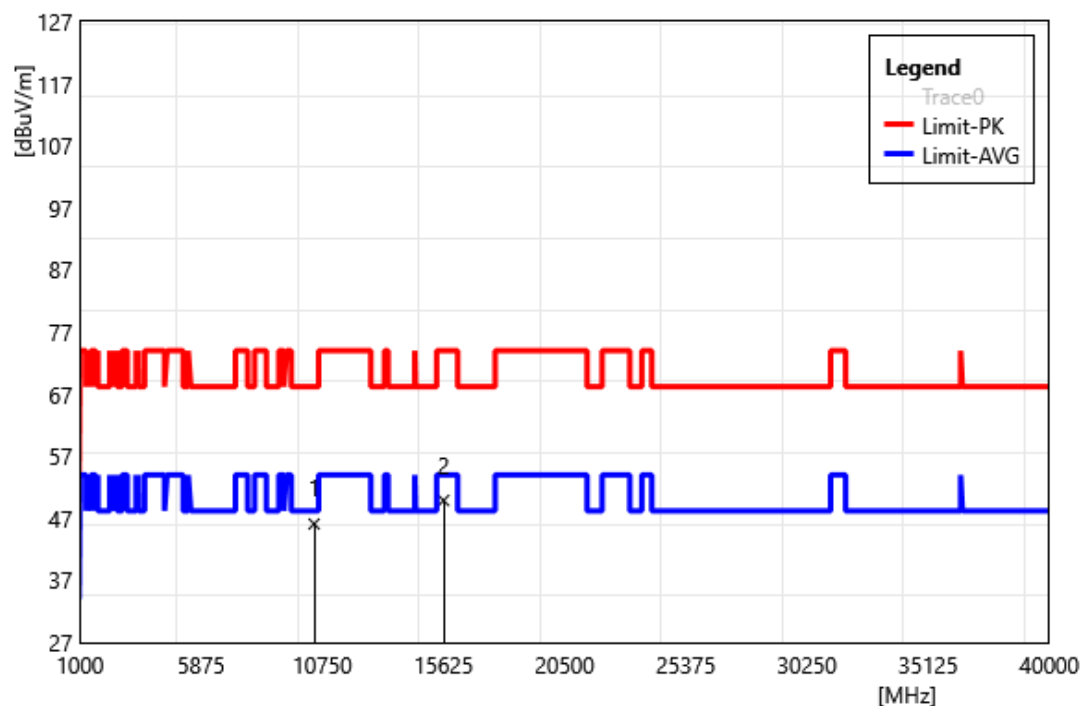


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10420.00	45.87	0.23	46.10	68.20	-22.10	PEAK
2	15630.00	44.86	5.02	49.88	74.00	-24.12	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

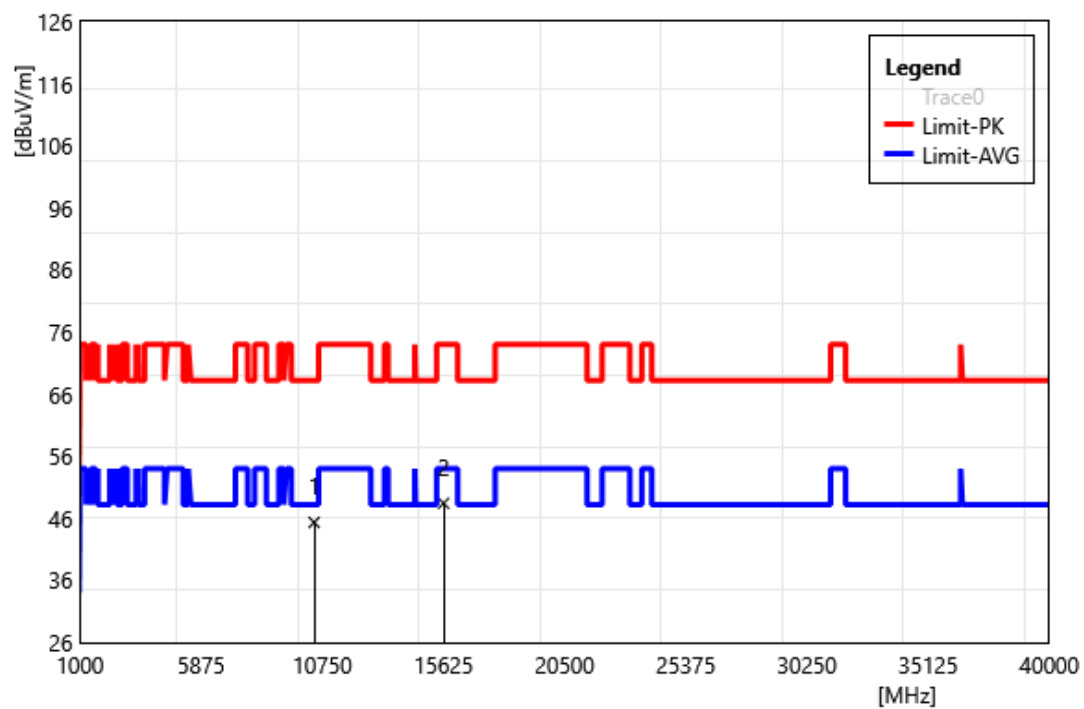


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10420.00	45.12	0.23	45.35	68.20	-22.85	PEAK
2	15630.00	43.41	5.02	48.43	74.00	-25.57	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5775		
	MHz		
Polarization:	Horizontal		
Remark:			

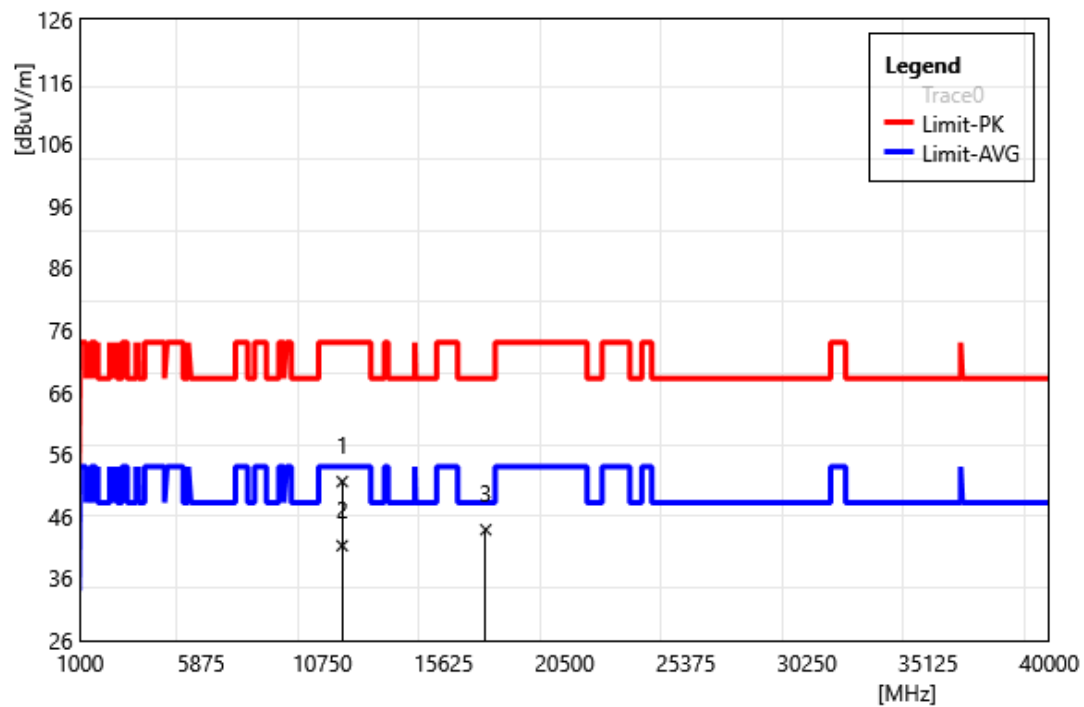

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11550.00	51.16	0.43	51.59	74.00	-22.41	PEAK
2	11550.00	40.84	0.43	41.27	54.00	-12.73	AVG
3	17325.00	43.08	0.77	43.85	68.20	-24.35	PEAK

Test Site:	96604 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5775		
	MHz		
Polarization:	Vertical		
Remark:			

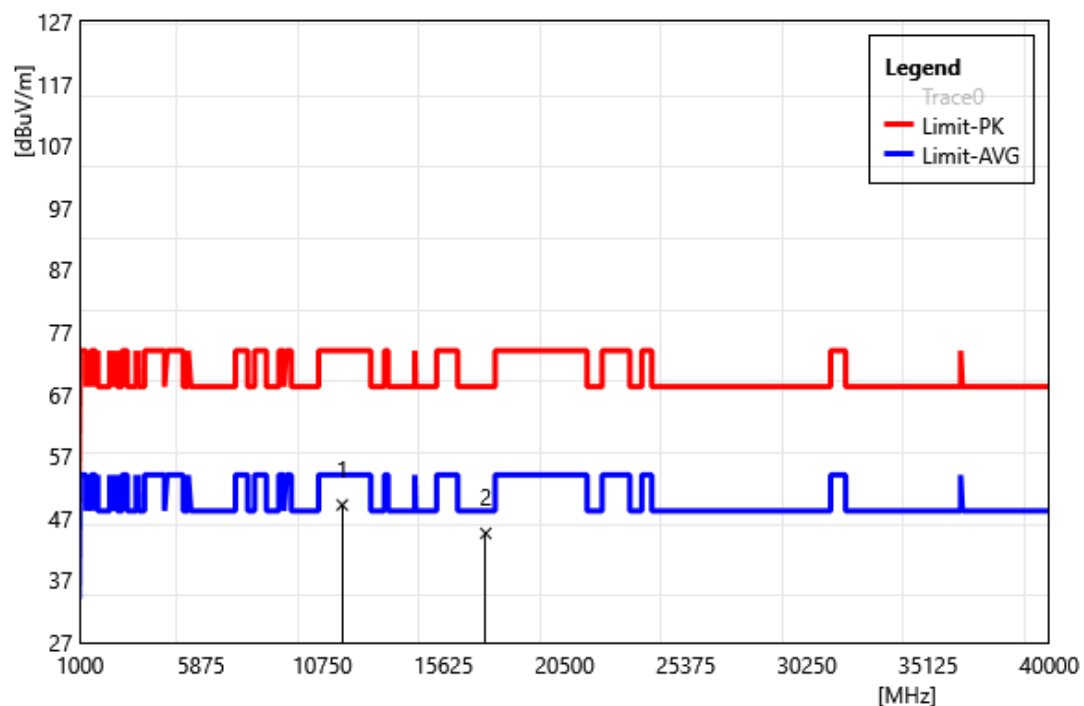


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11550.00	48.73	0.43	49.16	74.00	-24.84	PEAK
2	17325.00	43.81	0.77	44.58	68.20	-23.62	PEAK

Band Edge


SISO - Peak

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11a 5180 MHz		
Polarization:	Horizontal		
Remark:			

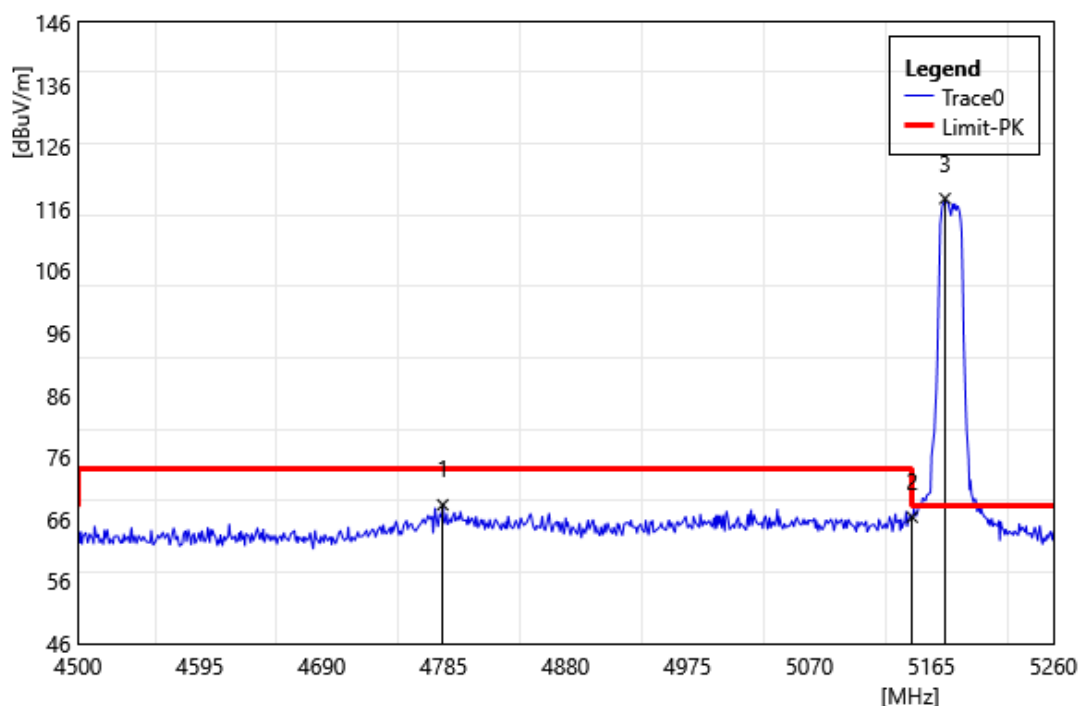


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4784.24	70.27	-1.93	68.34	74.00	-5.66	PEAK
2	5150.00	69.58	-3.22	66.36	74.00	-7.64	PEAK
3	5175.64	120.77	-3.11	117.66	68.20	49.46	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11a 5180 MHz		
Polarization:	Vertical		
Remark:			

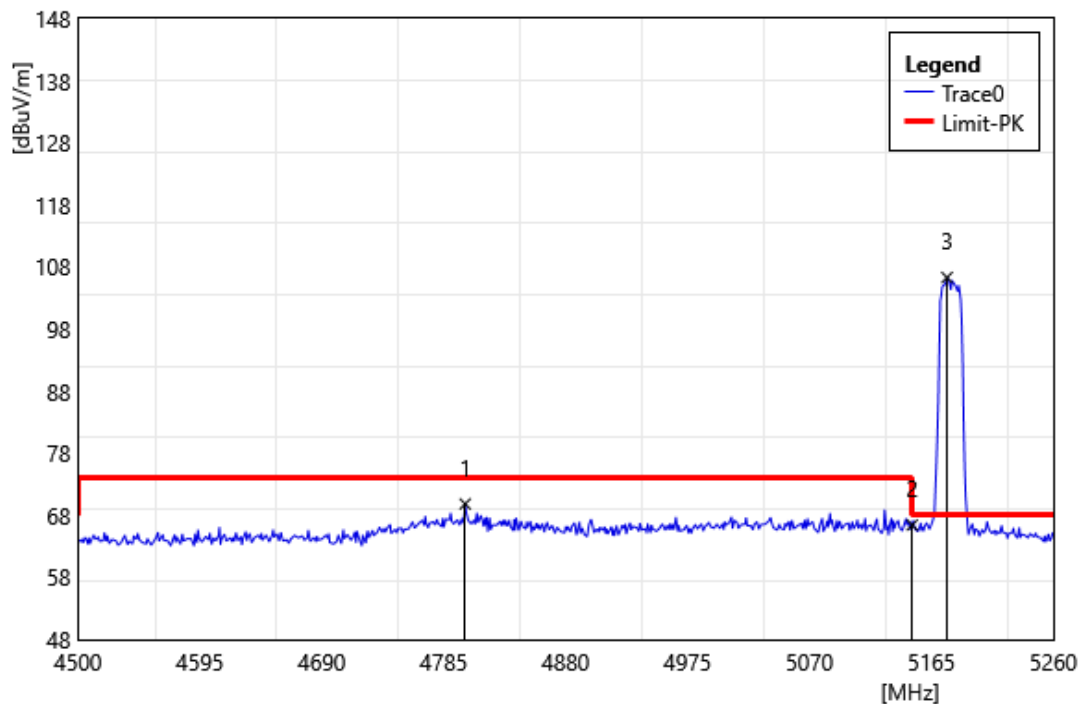


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4801.72	71.28	-1.45	69.84	74.00	-4.17	PEAK
2	5150.00	69.67	-3.22	66.45	74.00	-7.55	PEAK
3	5177.16	109.42	-3.11	106.31	68.20	38.11	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11a 5240 MHz		
Polarization:	Horizontal		
Remark:			

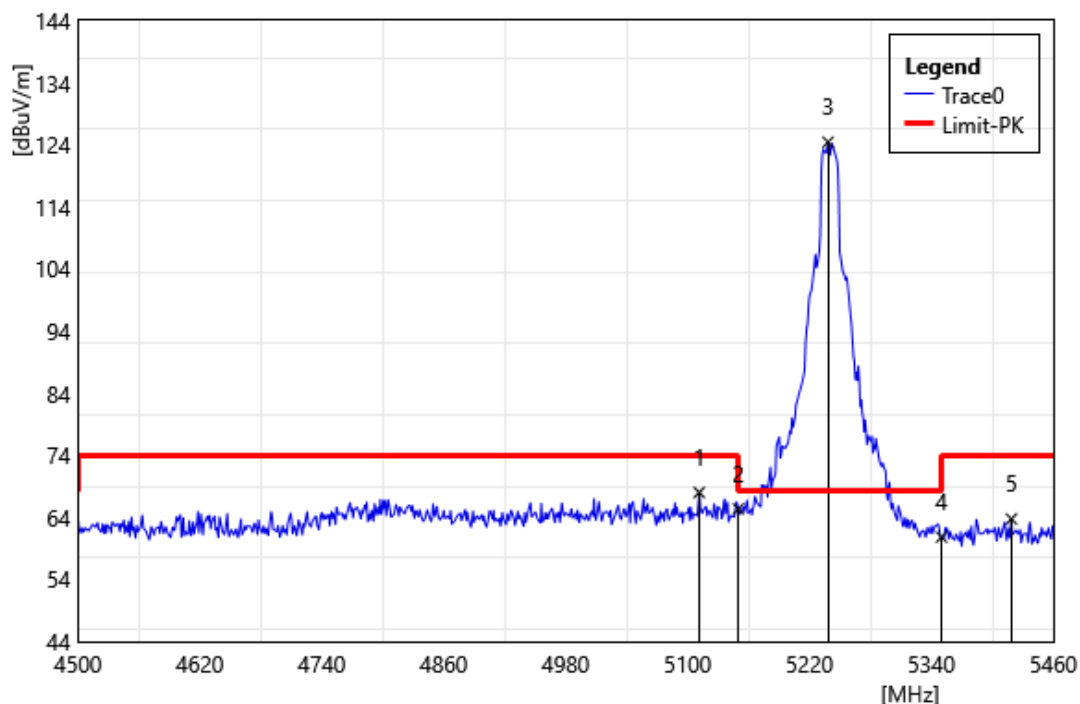


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5111.52	71.31	-3.30	68.01	74.00	-5.99	PEAK
2	5150.00	68.58	-3.22	65.36	74.00	-8.64	PEAK
3	5238.24	127.76	-3.33	124.43	68.20	56.23	PEAK
4	5350.00	64.90	-4.08	60.82	74.00	-13.18	PEAK
5	5418.72	67.91	-4.17	63.74	74.00	-10.26	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11a 5240 MHz		
Polarization:	Vertical		
Remark:			

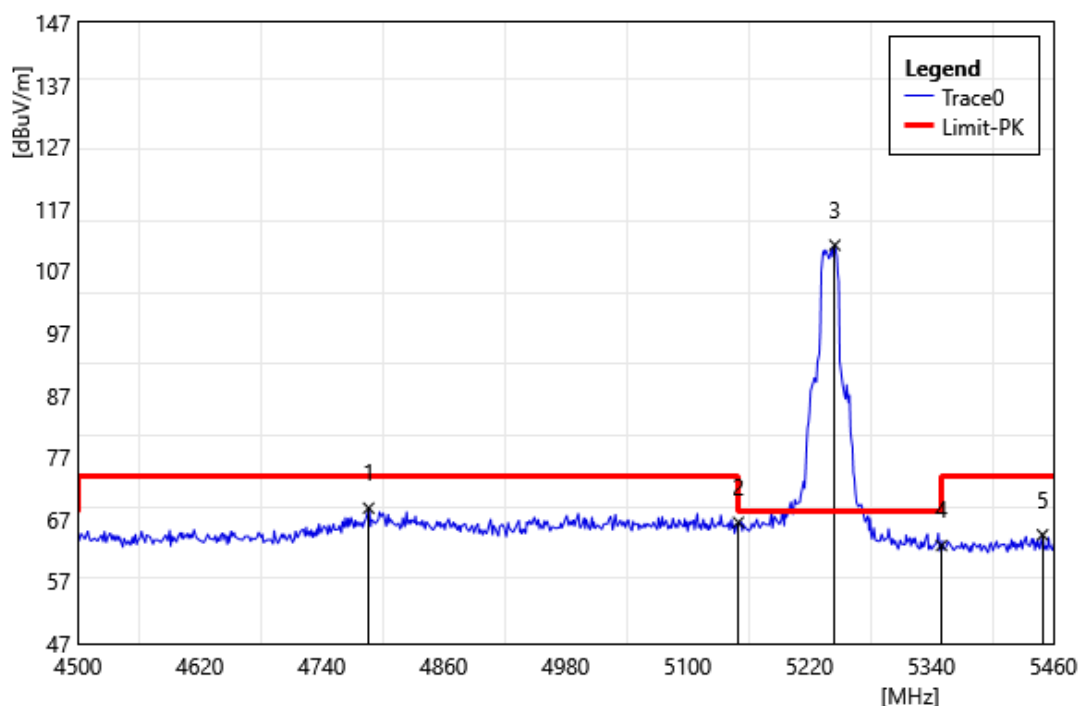


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4786.08	70.68	-1.88	68.80	74.00	-5.20	PEAK
2	5150.00	69.72	-3.22	66.50	74.00	-7.50	PEAK
3	5244.96	114.53	-3.37	111.16	68.20	42.96	PEAK
4	5350.00	66.86	-4.08	62.78	74.00	-11.22	PEAK
5	5449.44	68.58	-4.08	64.50	74.00	-9.50	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11a 5745 MHz		
Polarization:	Horizontal		
Remark:			

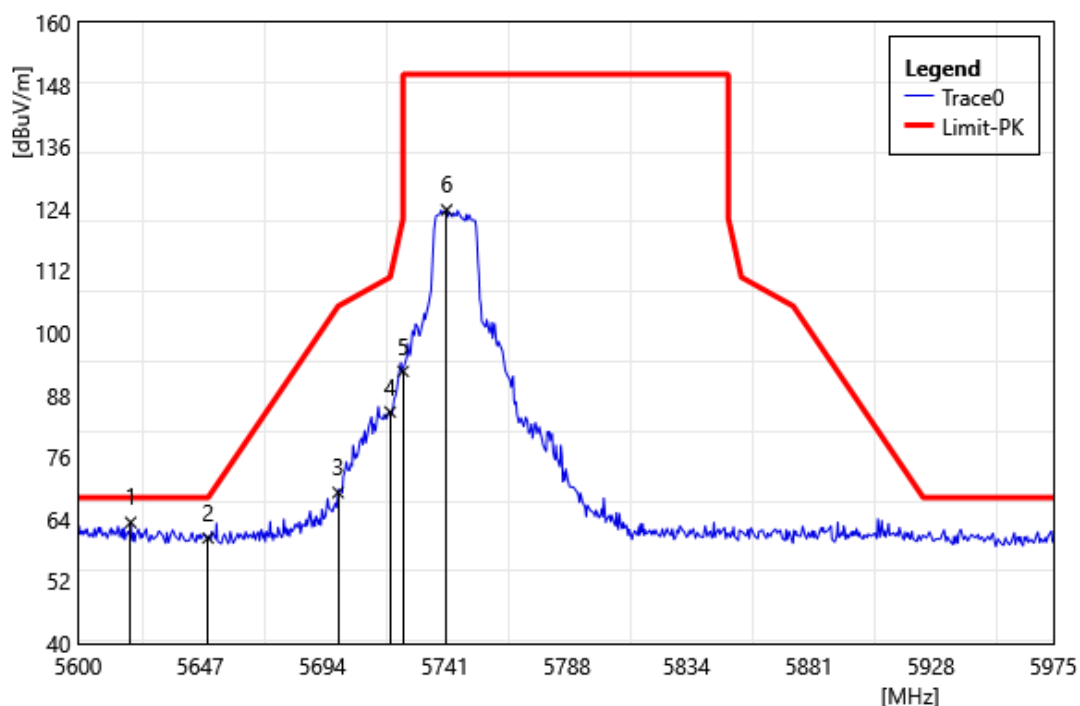


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5620.25	66.58	-3.17	63.41	68.20	-4.79	PEAK
2	5650.00	63.66	-3.27	60.39	68.20	-7.81	PEAK
3	5700.00	72.62	-3.44	69.18	105.20	-36.02	PEAK
4	5720.00	88.03	-3.28	84.75	110.80	-26.05	PEAK
5	5725.00	95.84	-3.23	92.61	150.00	-57.39	PEAK
6	5741.75	126.90	-3.10	123.80	150.00	-26.20	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11a 5745 MHz		
Polarization:	Vertical		
Remark:			

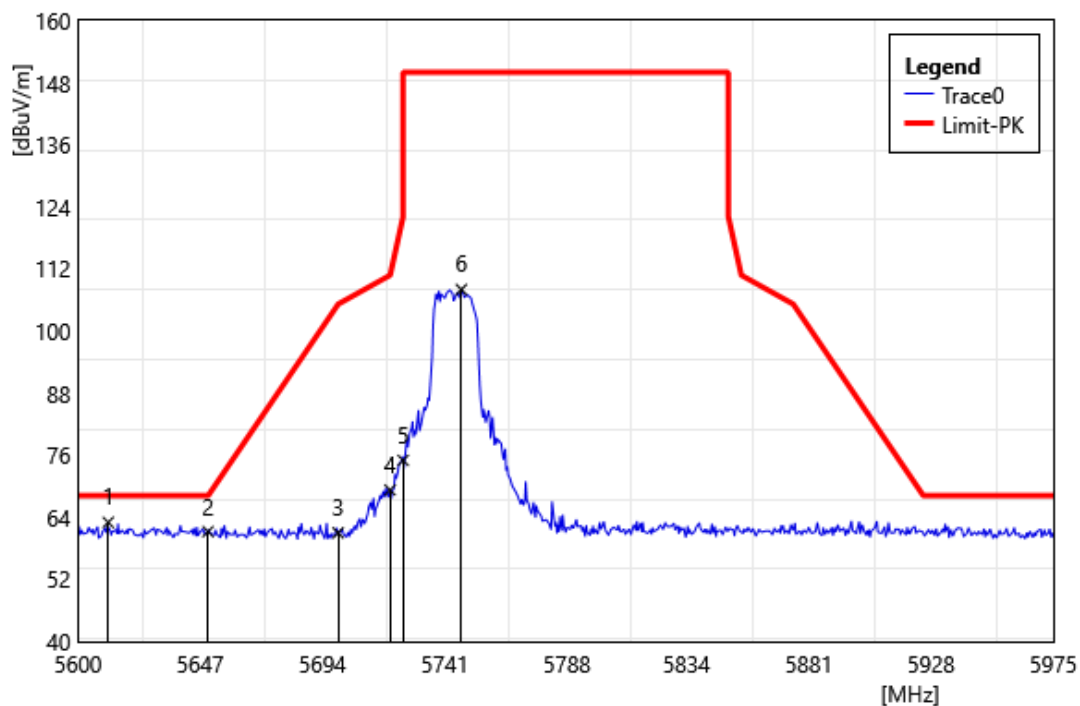


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5611.63	66.18	-3.14	63.04	68.20	-5.16	PEAK
2	5650.00	64.51	-3.27	61.24	68.20	-6.96	PEAK
3	5700.00	64.44	-3.44	61.00	105.20	-44.20	PEAK
4	5720.00	72.57	-3.28	69.29	110.80	-41.51	PEAK
5	5725.00	78.25	-3.23	75.02	150.00	-74.98	PEAK
6	5747.38	111.08	-3.06	108.02	150.00	-41.98	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11a 5825 MHz		
Polarization:	Horizontal		
Remark:			

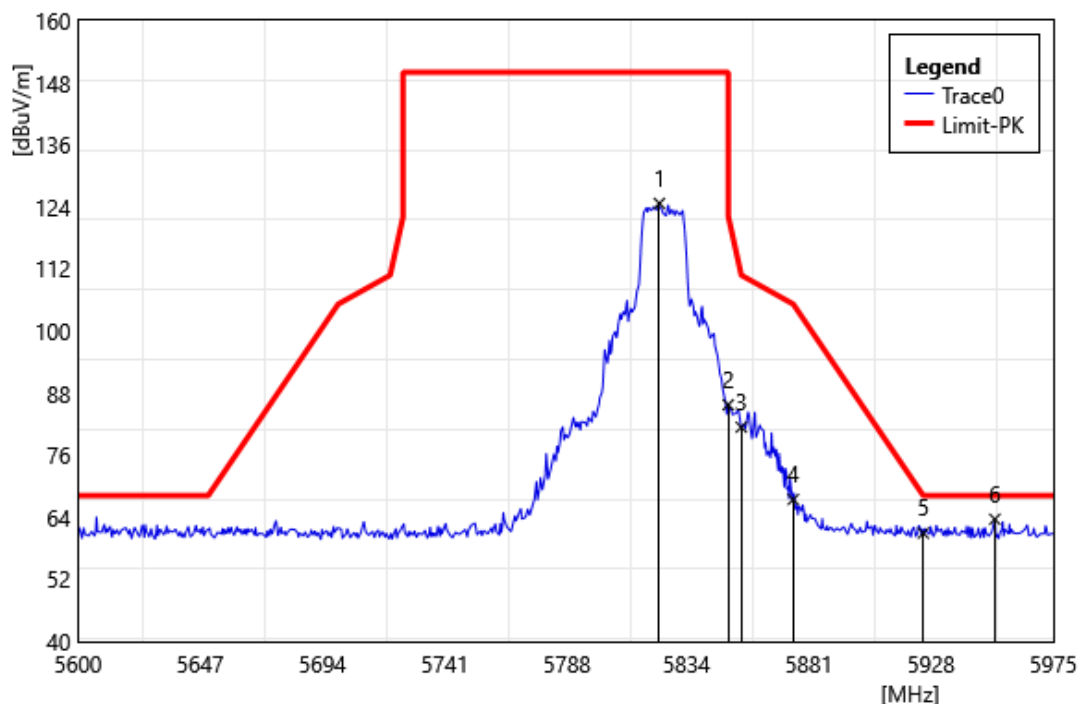


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5823.50	127.22	-2.55	124.67	150.00	-25.33	PEAK
2	5850.00	88.32	-2.57	85.75	122.20	-36.45	PEAK
3	5855.00	84.03	-2.61	81.42	110.80	-29.38	PEAK
4	5875.00	70.21	-2.75	67.46	105.20	-37.74	PEAK
5	5925.00	64.07	-3.12	60.95	68.20	-7.25	PEAK
6	5952.50	66.99	-3.35	63.64	68.20	-4.56	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11a 5825 MHz		
Polarization:	Vertical		
Remark:			

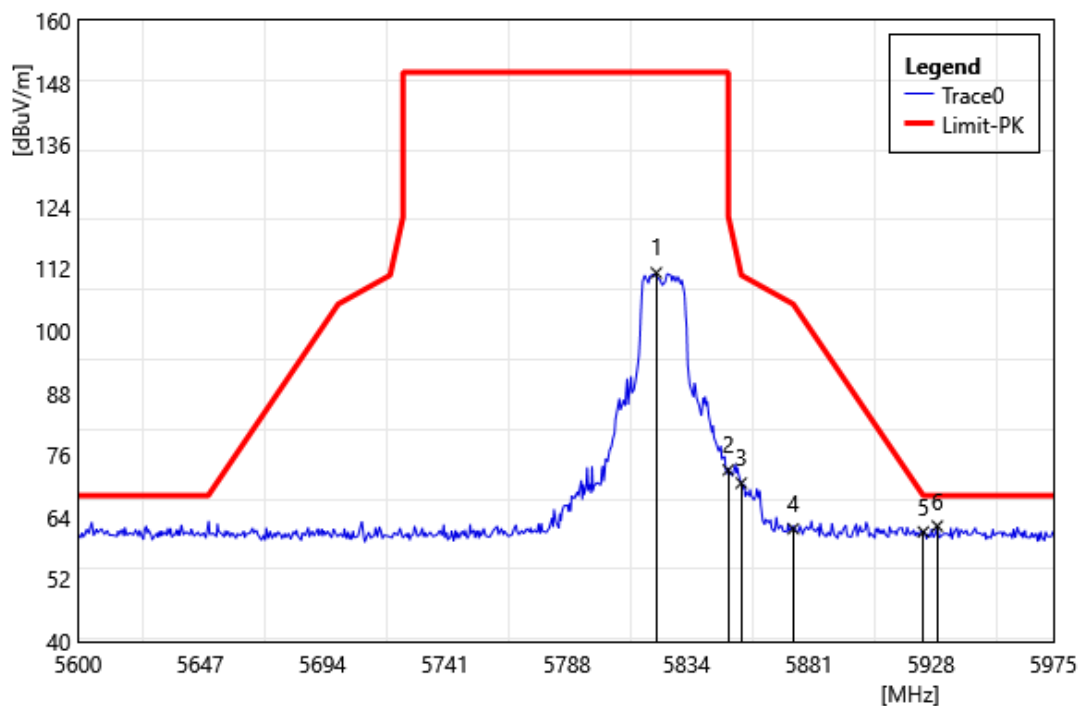


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5822.38	113.81	-2.55	111.26	150.00	-38.74	PEAK
2	5850.00	75.73	-2.57	73.16	122.20	-49.04	PEAK
3	5855.00	73.21	-2.61	70.60	110.80	-40.20	PEAK
4	5875.00	64.53	-2.75	61.78	105.20	-43.42	PEAK
5	5925.00	64.30	-3.12	61.18	68.20	-7.02	PEAK
6	5930.38	65.49	-3.17	62.32	68.20	-5.88	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5180 MHz		
Polarization:	Horizontal		
Remark:			

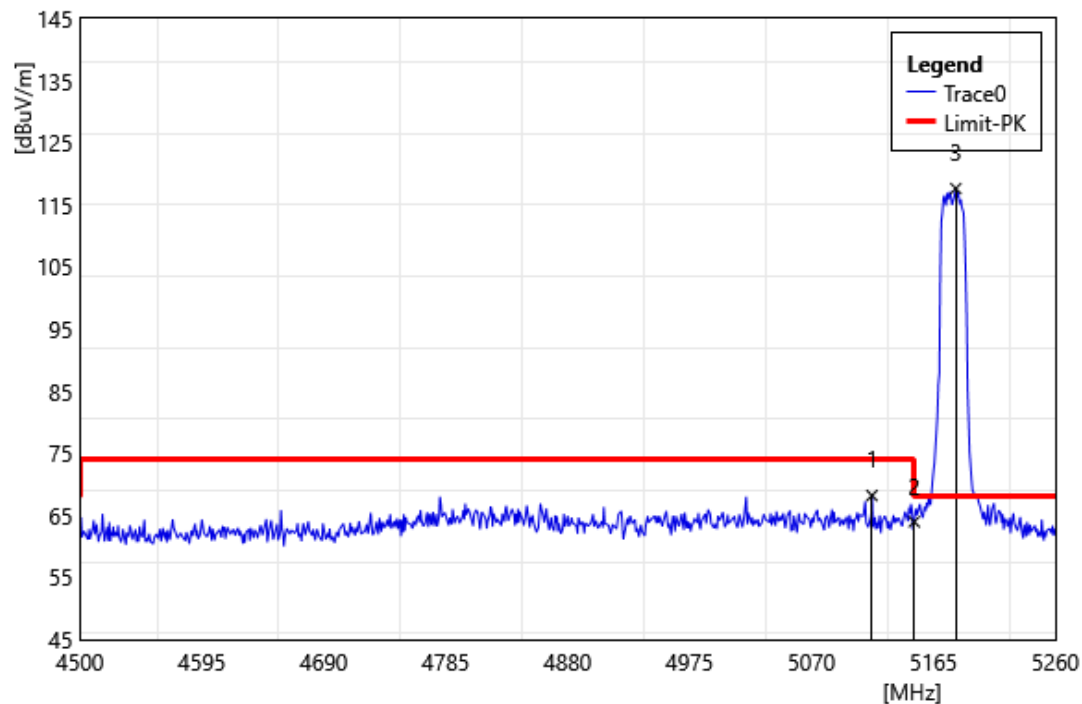


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5117.12	71.48	-3.29	68.20	74.00	-5.81	PEAK
2	5150.00	67.18	-3.22	63.96	74.00	-10.04	PEAK
3	5182.48	120.72	-3.09	117.63	68.20	49.43	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5180 MHz		
Polarization:	Vertical		
Remark:			

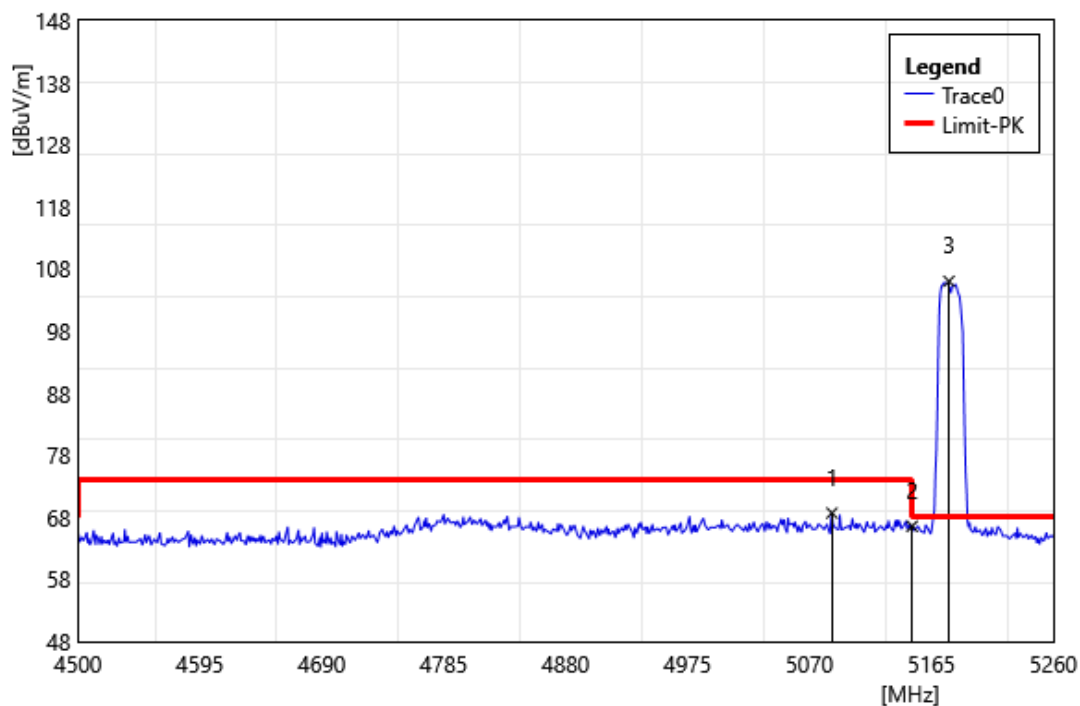


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5087.48	71.96	-3.27	68.69	74.00	-5.31	PEAK
2	5150.00	69.78	-3.22	66.56	74.00	-7.44	PEAK
3	5178.68	109.10	-3.09	106.01	68.20	37.81	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5240 MHz		
Polarization:	Horizontal		
Remark:			

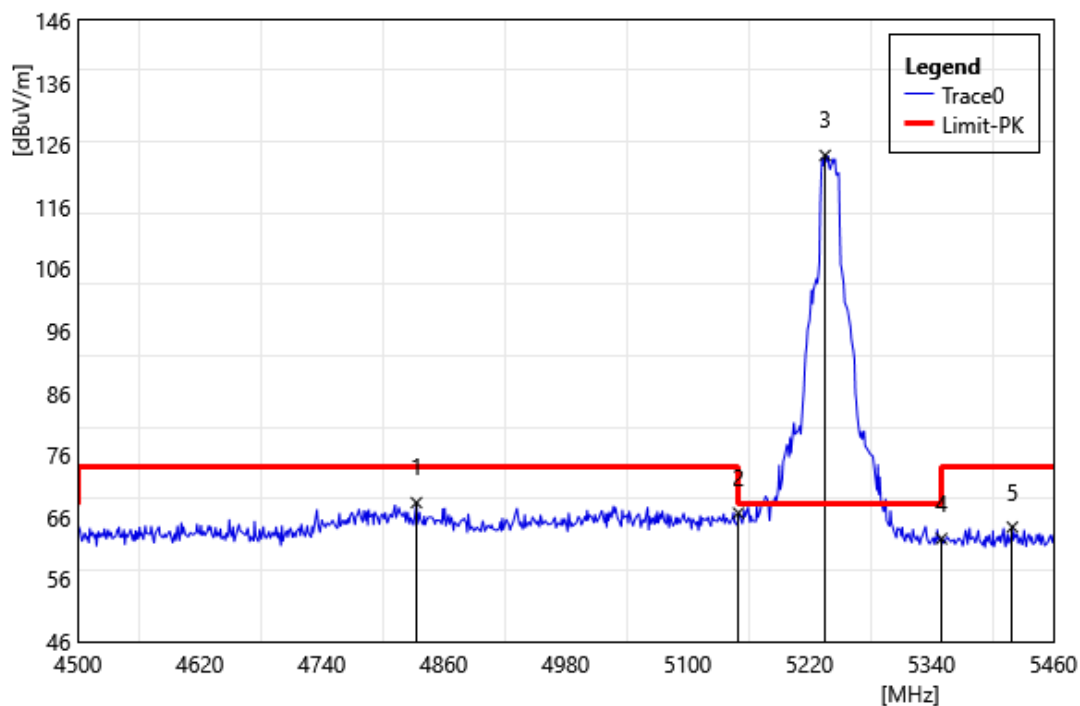


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4833.12	70.25	-1.89	68.36	74.00	-5.64	PEAK
2	5150.00	69.92	-3.22	66.70	74.00	-7.30	PEAK
3	5235.36	127.58	-3.29	124.29	68.20	56.09	PEAK
4	5350.00	66.64	-4.08	62.56	74.00	-11.44	PEAK
5	5419.68	68.59	-4.17	64.42	74.00	-9.58	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5240 MHz		
Polarization:	Vertical		
Remark:			

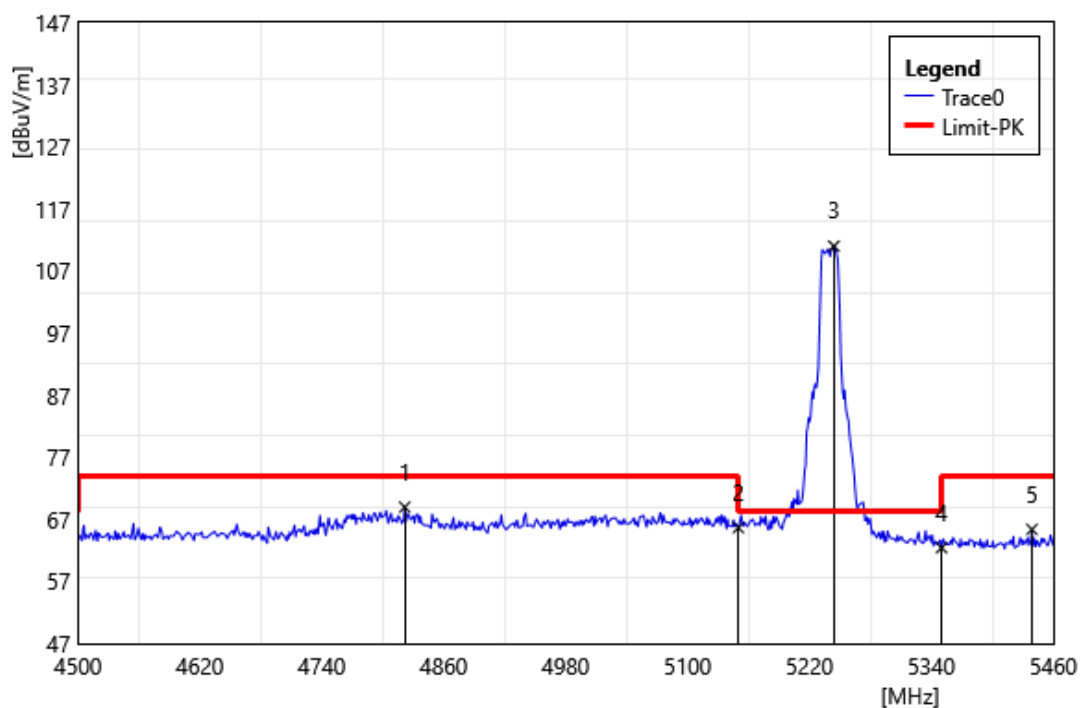


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4821.60	70.70	-1.73	68.98	74.00	-5.03	PEAK
2	5150.00	68.89	-3.22	65.67	74.00	-8.33	PEAK
3	5244.00	114.35	-3.36	110.99	68.20	42.79	PEAK
4	5350.00	66.50	-4.08	62.42	74.00	-11.58	PEAK
5	5438.88	69.50	-4.11	65.39	74.00	-8.61	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5745 MHz		
Polarization:	Horizontal		
Remark:			

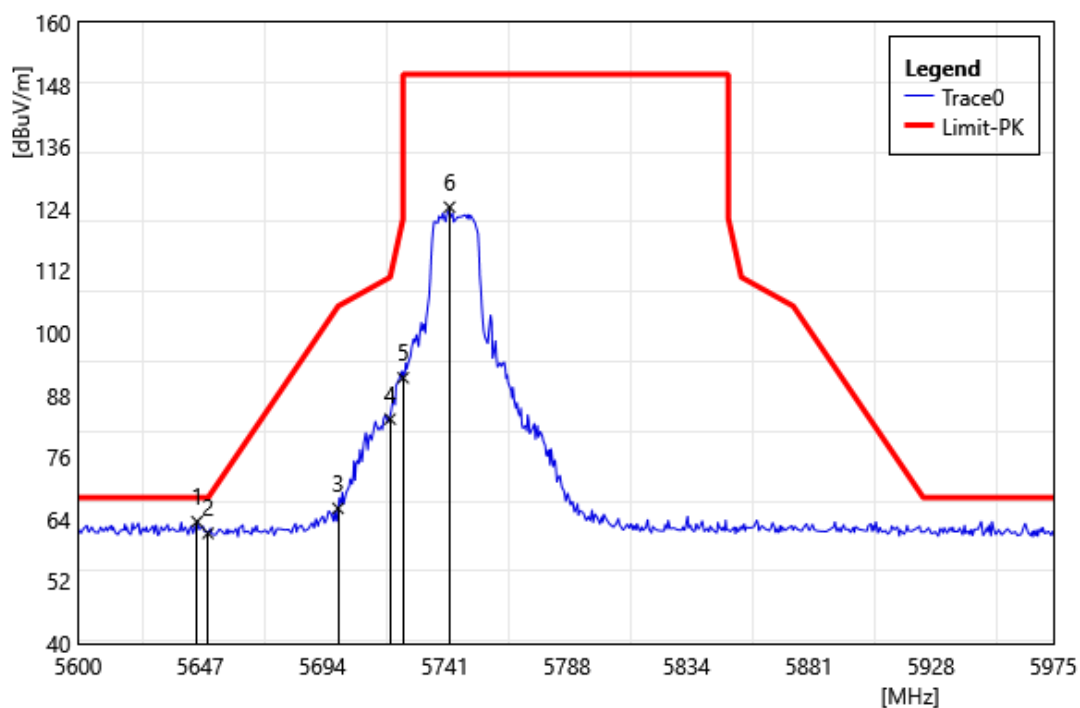


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5645.75	66.82	-3.26	63.56	68.20	-4.64	PEAK
2	5650.00	64.57	-3.27	61.30	68.20	-6.90	PEAK
3	5700.00	69.57	-3.44	66.13	105.20	-39.07	PEAK
4	5720.00	86.65	-3.28	83.37	110.80	-27.43	PEAK
5	5725.00	94.58	-3.23	91.35	150.00	-58.65	PEAK
6	5742.88	127.44	-3.09	124.35	150.00	-25.66	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5745 MHz		
Polarization:	Vertical		
Remark:			

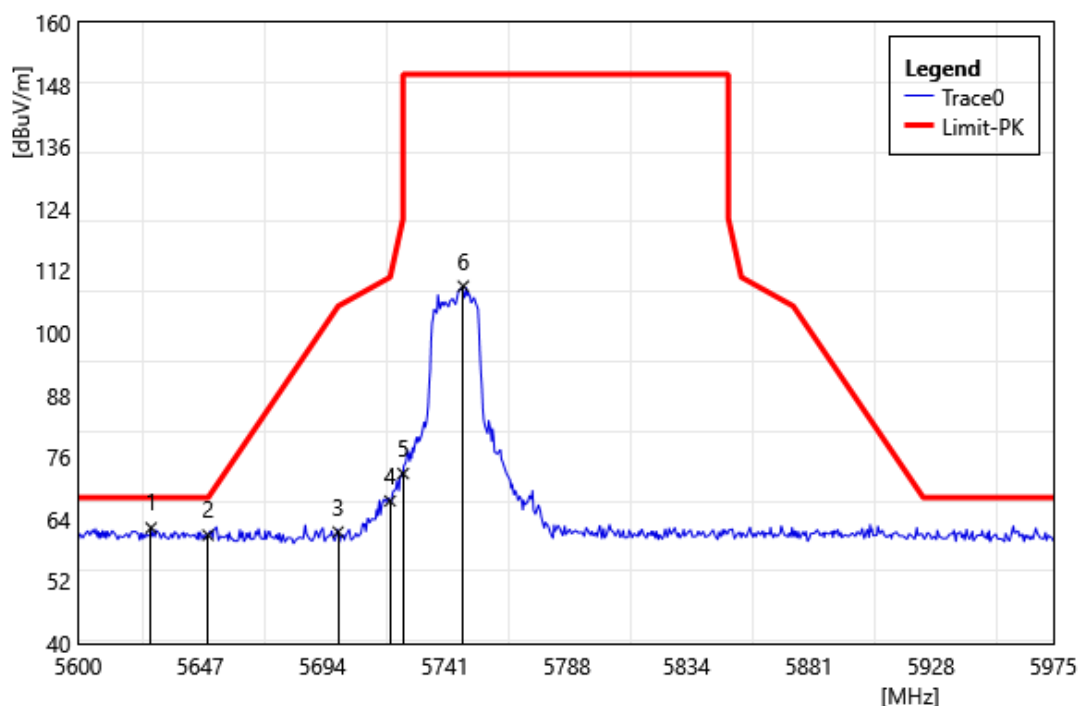


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5628.13	65.54	-3.19	62.35	68.20	-5.85	PEAK
2	5650.00	64.22	-3.27	60.95	68.20	-7.25	PEAK
3	5700.00	65.00	-3.44	61.56	105.20	-43.64	PEAK
4	5720.00	70.83	-3.28	67.55	110.80	-43.25	PEAK
5	5725.00	76.08	-3.23	72.85	150.00	-77.15	PEAK
6	5748.13	112.11	-3.05	109.06	150.00	-40.94	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5825 MHz		
Polarization:	Horizontal		
Remark:			

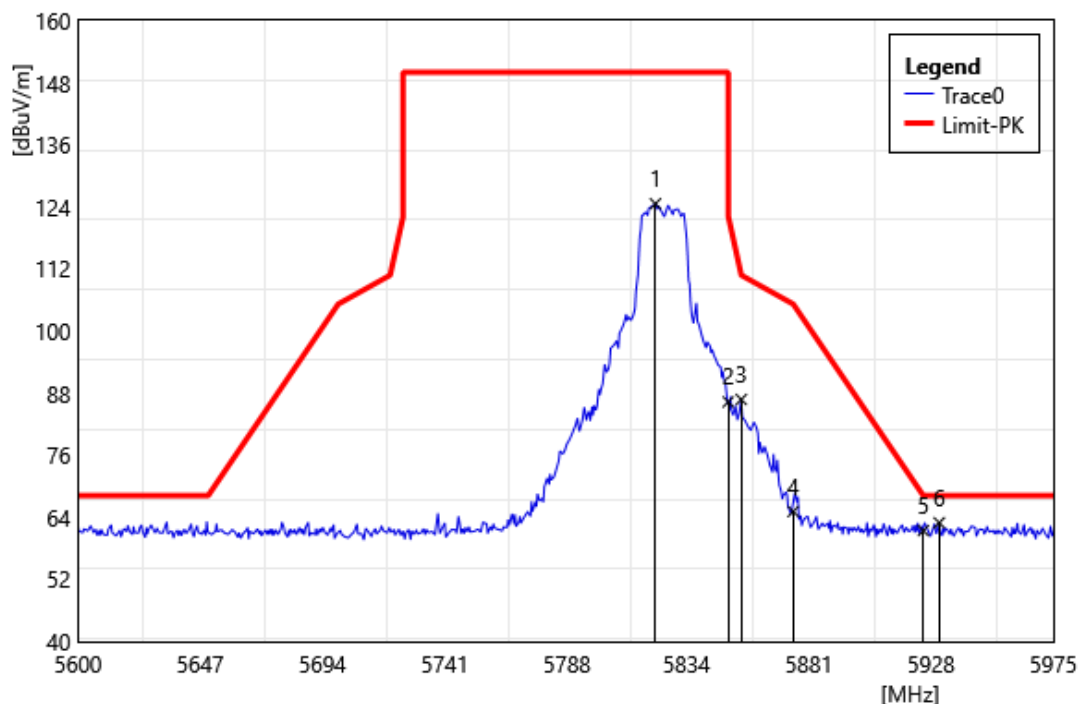


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5822.00	127.16	-2.54	124.62	150.00	-25.38	PEAK
2	5850.00	88.86	-2.57	86.29	122.20	-35.91	PEAK
3	5855.00	89.39	-2.61	86.78	110.80	-24.02	PEAK
4	5875.00	67.87	-2.75	65.12	105.20	-40.08	PEAK
5	5925.00	64.56	-3.12	61.44	68.20	-6.76	PEAK
6	5931.13	66.12	-3.17	62.95	68.20	-5.25	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5825 MHz		
Polarization:	Vertical		
Remark:			

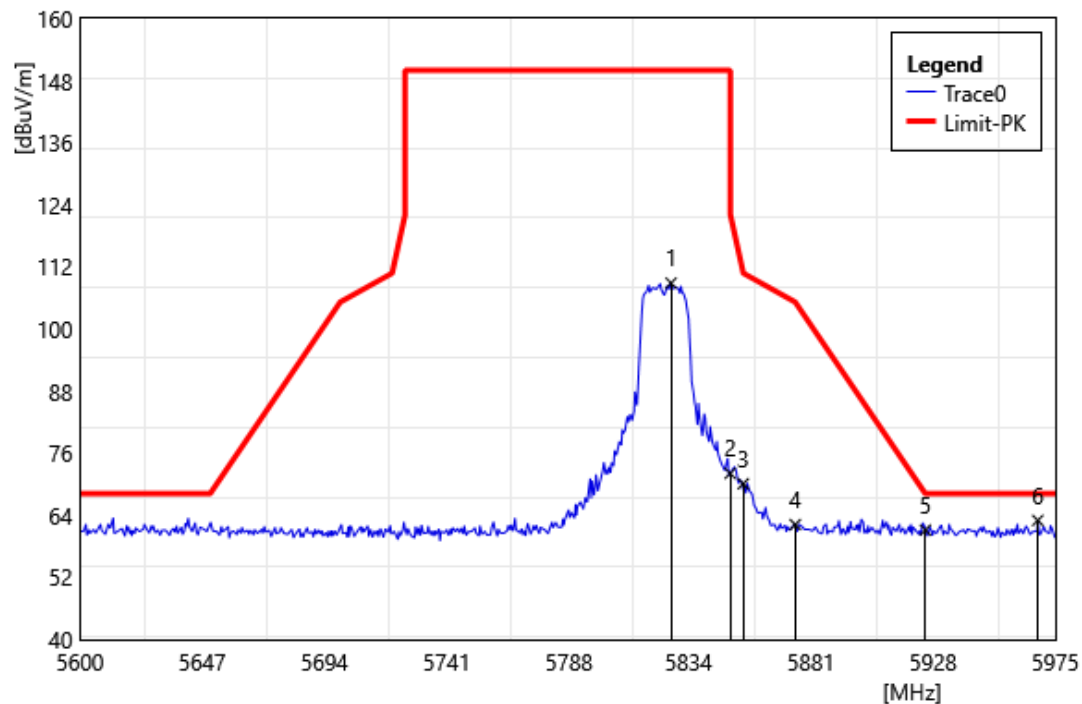


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5827.25	111.44	-2.55	108.89	150.00	-41.11	PEAK
2	5850.00	74.67	-2.57	72.10	122.20	-50.10	PEAK
3	5855.00	72.72	-2.61	70.11	110.80	-40.69	PEAK
4	5875.00	64.96	-2.75	62.21	105.20	-42.99	PEAK
5	5925.00	64.28	-3.12	61.16	68.20	-7.04	PEAK
6	5968.25	66.51	-3.49	63.02	68.20	-5.18	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5190 MHz		
Polarization:	Horizontal		
Remark:			

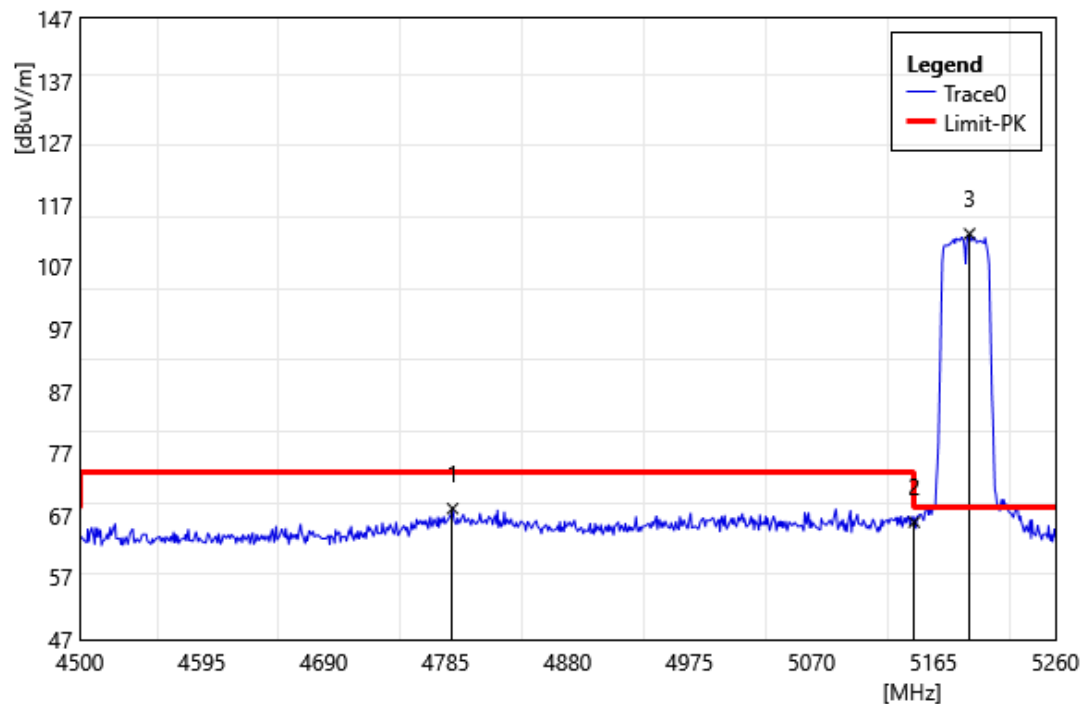


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4790.32	69.82	-1.74	68.08	74.00	-5.92	PEAK
2	5150.00	69.13	-3.22	65.91	74.00	-8.09	PEAK
3	5193.12	115.37	-3.03	112.34	68.20	44.14	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5190 MHz		
Polarization:	Vertical		
Remark:			

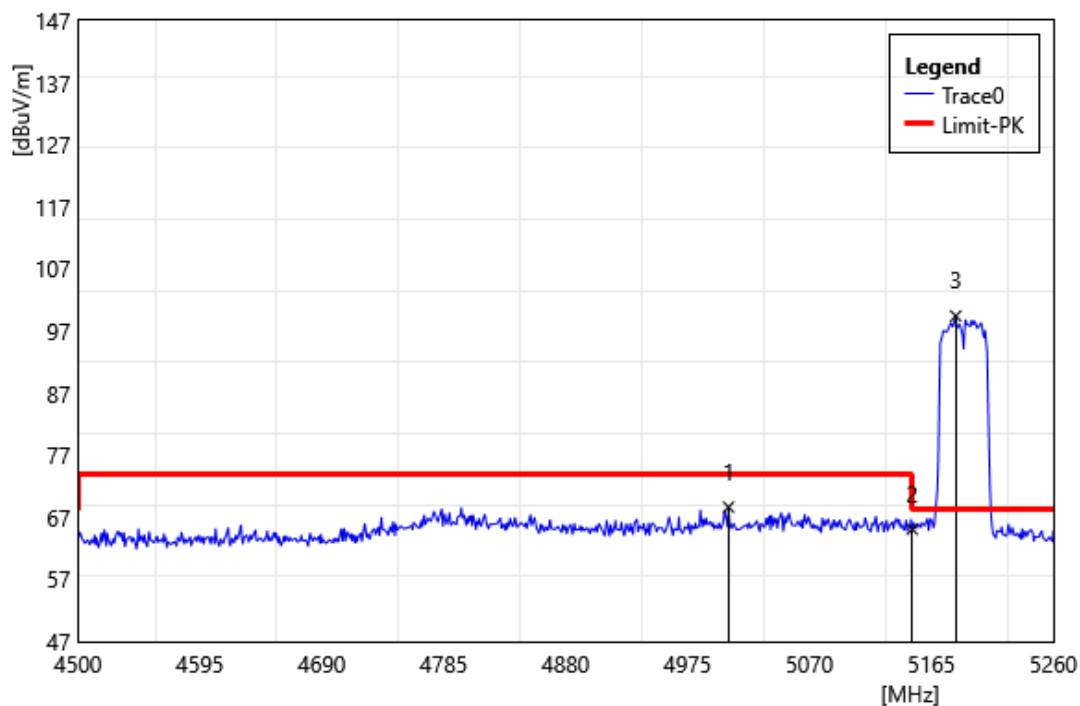


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5006.92	71.45	-2.81	68.64	74.00	-5.36	PEAK
2	5150.00	68.31	-3.22	65.09	74.00	-8.91	PEAK
3	5184.00	102.51	-3.07	99.44	68.20	31.24	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5230 MHz		
Polarization:	Horizontal		
Remark:			

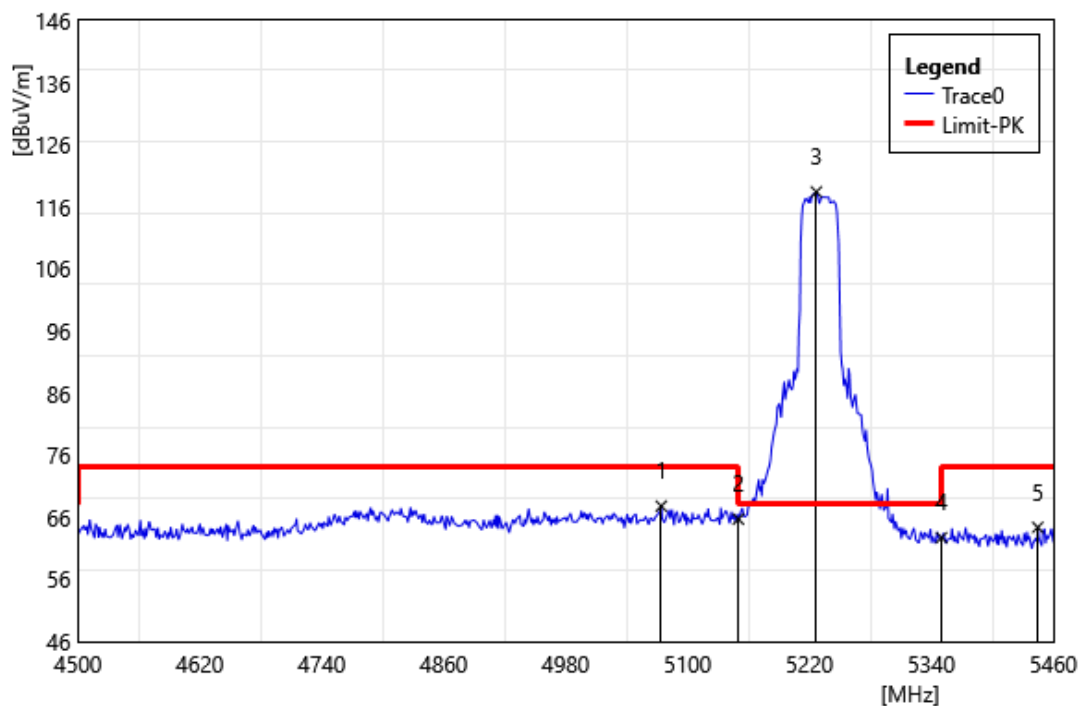


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5074.08	71.02	-3.21	67.81	74.00	-6.19	PEAK
2	5150.00	68.93	-3.22	65.71	74.00	-8.29	PEAK
3	5226.72	121.65	-3.22	118.43	68.20	50.23	PEAK
4	5350.00	66.81	-4.08	62.73	74.00	-11.27	PEAK
5	5444.64	68.47	-4.09	64.38	74.00	-9.62	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5230 MHz		
Polarization:	Vertical		
Remark:			

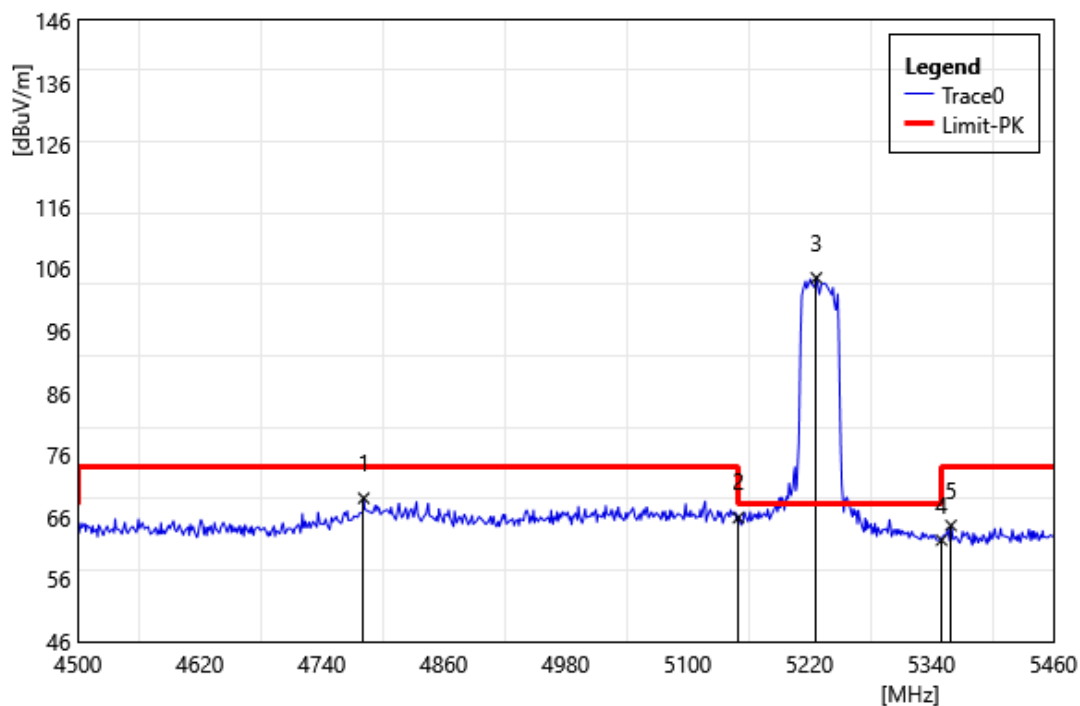


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4781.28	71.10	-2.02	69.08	74.00	-4.92	PEAK
2	5150.00	69.16	-3.22	65.94	74.00	-8.06	PEAK
3	5226.72	107.78	-3.22	104.56	68.20	36.36	PEAK
4	5350.00	66.41	-4.08	62.33	74.00	-11.67	PEAK
5	5359.20	68.79	-4.10	64.69	74.00	-9.31	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5755 MHz		
Polarization:	Horizontal		
Remark:			

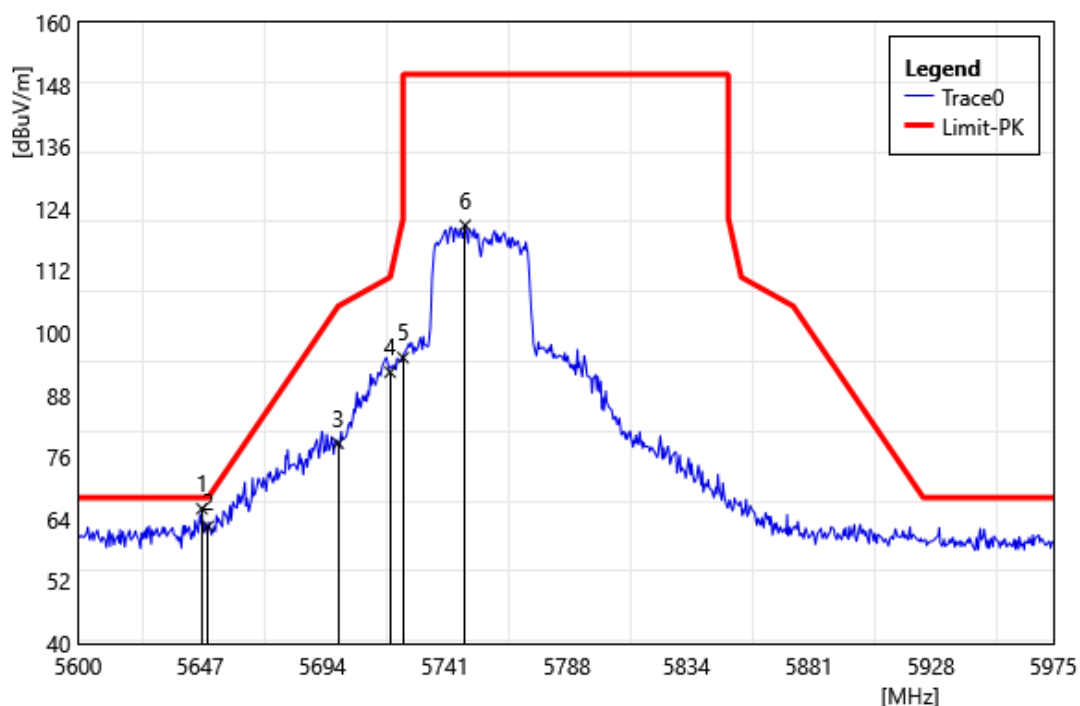


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5647.63	69.31	-3.26	66.05	68.20	-2.15	PEAK
2	5650.00	65.92	-3.27	62.65	68.20	-5.55	PEAK
3	5700.00	82.14	-3.44	78.70	105.20	-26.50	PEAK
4	5720.00	95.72	-3.28	92.44	110.80	-18.36	PEAK
5	5725.00	98.48	-3.23	95.25	150.00	-54.75	PEAK
6	5748.88	123.87	-3.04	120.83	150.00	-29.17	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5755 MHz		
Polarization:	Vertical		
Remark:			

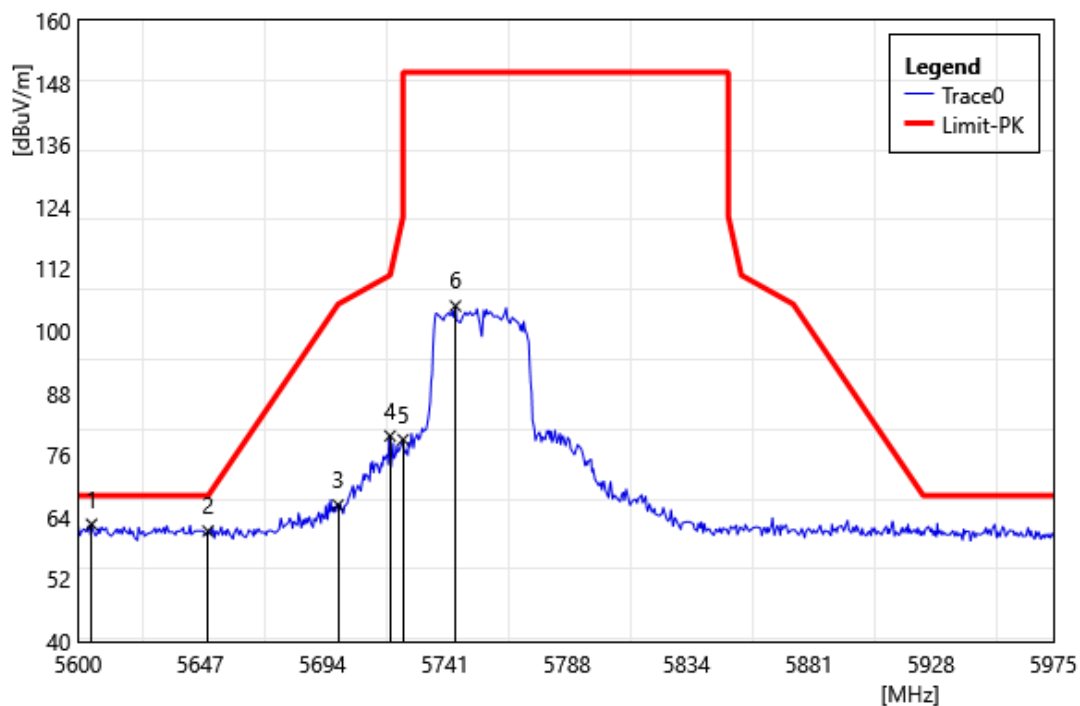


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5605.25	65.78	-3.12	62.66	68.20	-5.54	PEAK
2	5650.00	64.63	-3.27	61.36	68.20	-6.84	PEAK
3	5700.00	69.81	-3.44	66.37	105.20	-38.83	PEAK
4	5720.00	83.02	-3.28	79.74	110.80	-31.06	PEAK
5	5725.00	82.26	-3.23	79.03	150.00	-70.97	PEAK
6	5745.13	107.92	-3.08	104.84	150.00	-45.16	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5795 MHz		
Polarization:	Horizontal		
Remark:			

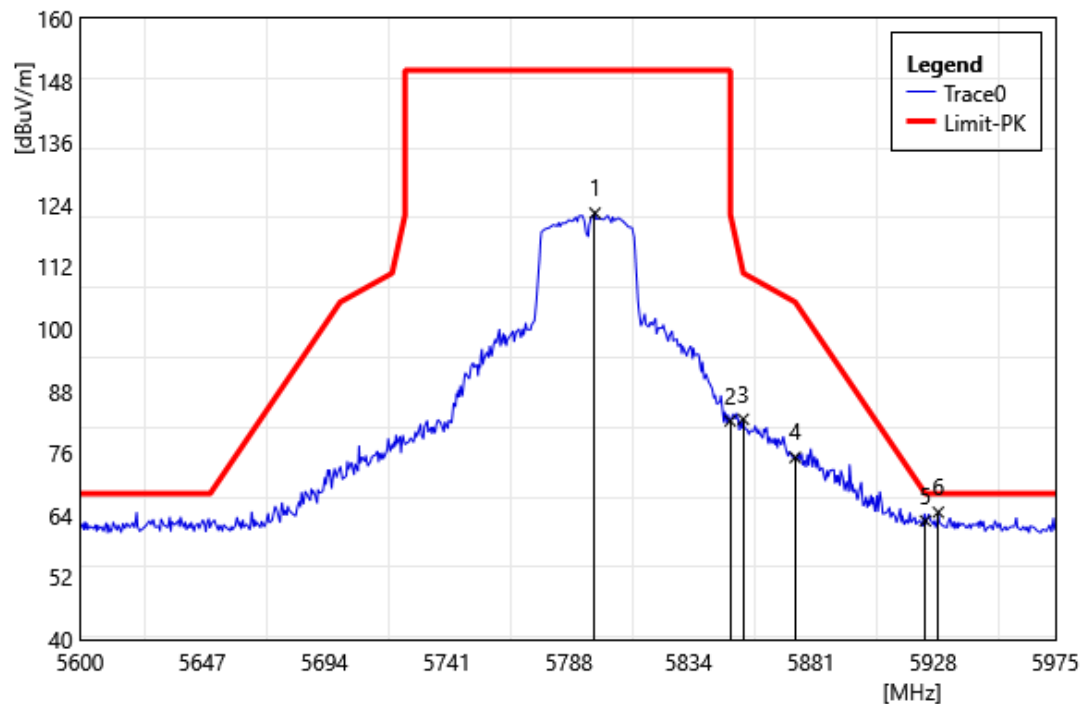


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5798.00	124.95	-2.55	122.40	150.00	-27.60	PEAK
2	5850.00	84.83	-2.57	82.26	122.20	-39.94	PEAK
3	5855.00	85.18	-2.61	82.57	110.80	-28.23	PEAK
4	5875.00	77.95	-2.75	75.20	105.20	-30.00	PEAK
5	5925.00	66.05	-3.12	62.93	68.20	-5.27	PEAK
6	5930.00	67.77	-3.17	64.60	68.20	-3.60	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5795 MHz		
Polarization:	Vertical		
Remark:			

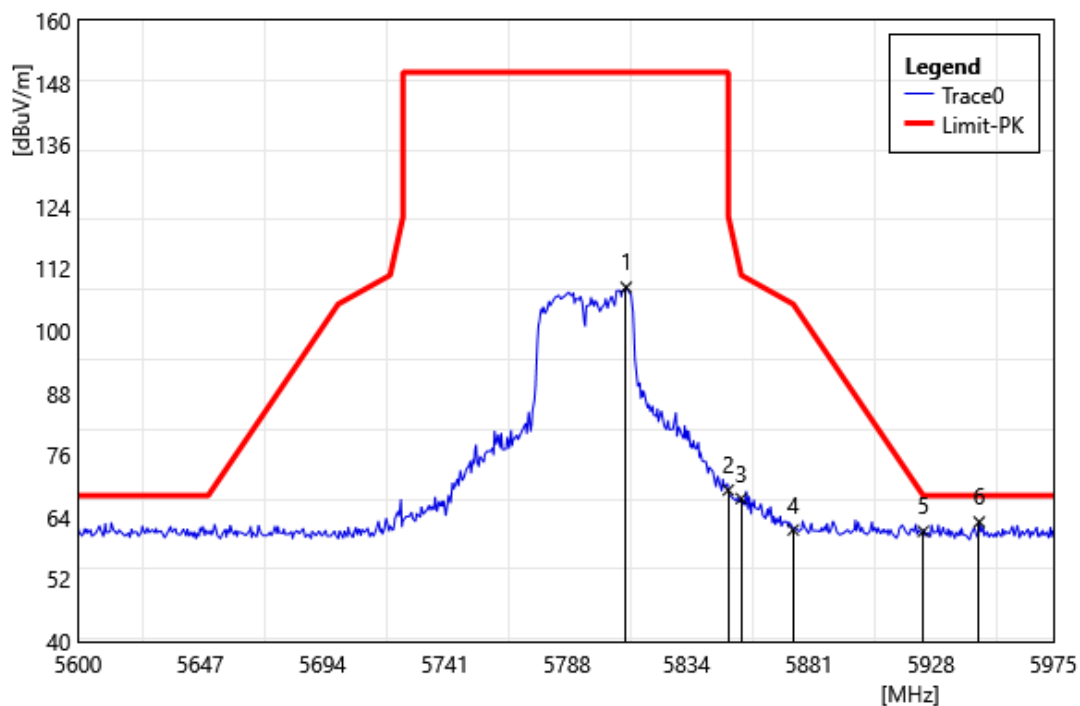


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5810.75	110.99	-2.54	108.45	150.00	-41.55	PEAK
2	5850.00	71.84	-2.57	69.27	122.20	-52.93	PEAK
3	5855.00	70.24	-2.61	67.63	110.80	-43.17	PEAK
4	5875.00	64.33	-2.75	61.58	105.20	-43.62	PEAK
5	5925.00	64.41	-3.12	61.29	68.20	-6.91	PEAK
6	5946.50	66.41	-3.31	63.10	68.20	-5.10	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

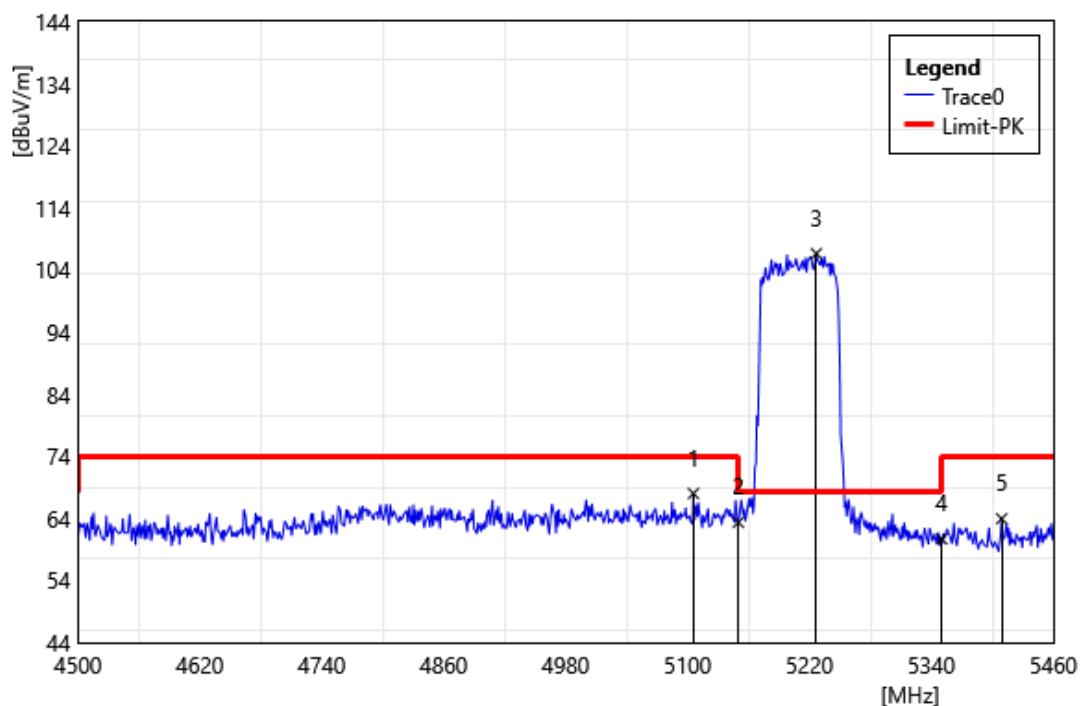


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5105.76	71.33	-3.32	68.01	74.00	-5.99	PEAK
2	5150.00	66.57	-3.22	63.35	74.00	-10.65	PEAK
3	5226.72	109.84	-3.22	106.62	68.20	38.42	PEAK
4	5350.00	64.76	-4.08	60.68	74.00	-13.32	PEAK
5	5409.12	68.14	-4.20	63.94	74.00	-10.06	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

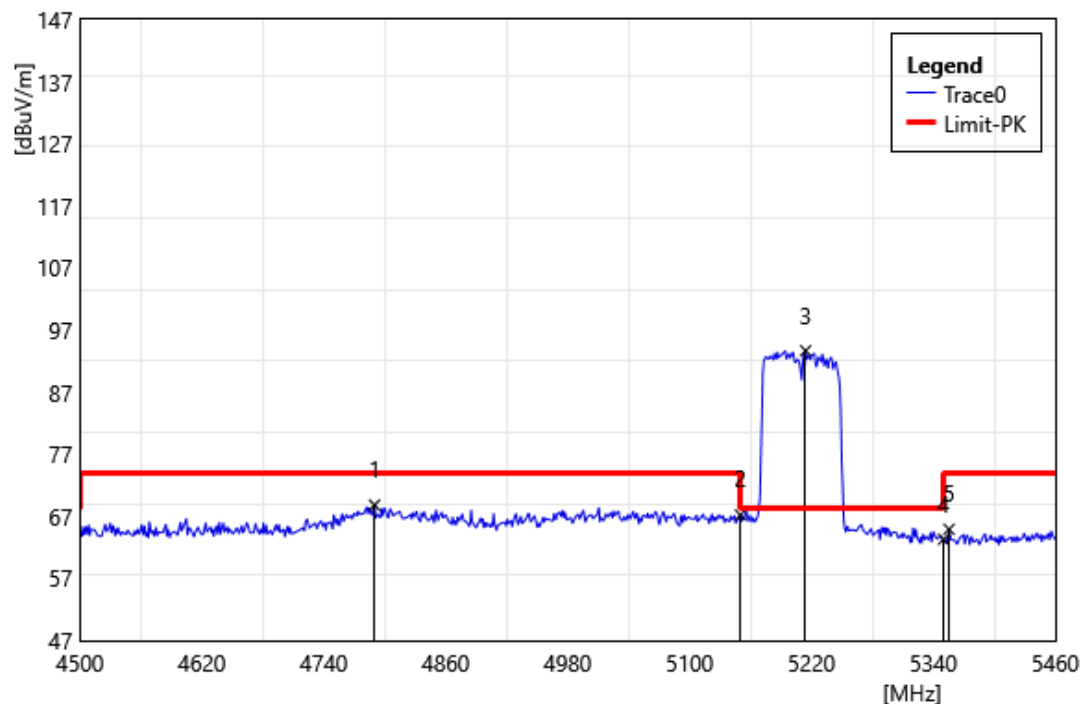

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4789.92	70.57	-1.75	68.82	74.00	-5.18	PEAK
2	5150.00	70.45	-3.22	67.23	74.00	-6.77	PEAK
3	5214.24	96.79	-3.12	93.67	68.20	25.47	PEAK
4	5350.00	67.38	-4.08	63.30	74.00	-10.70	PEAK
5	5355.36	69.03	-4.10	64.93	74.00	-9.07	PEAK


Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5775		
	MHz		
Polarization:	Horizontal		
Remark:			

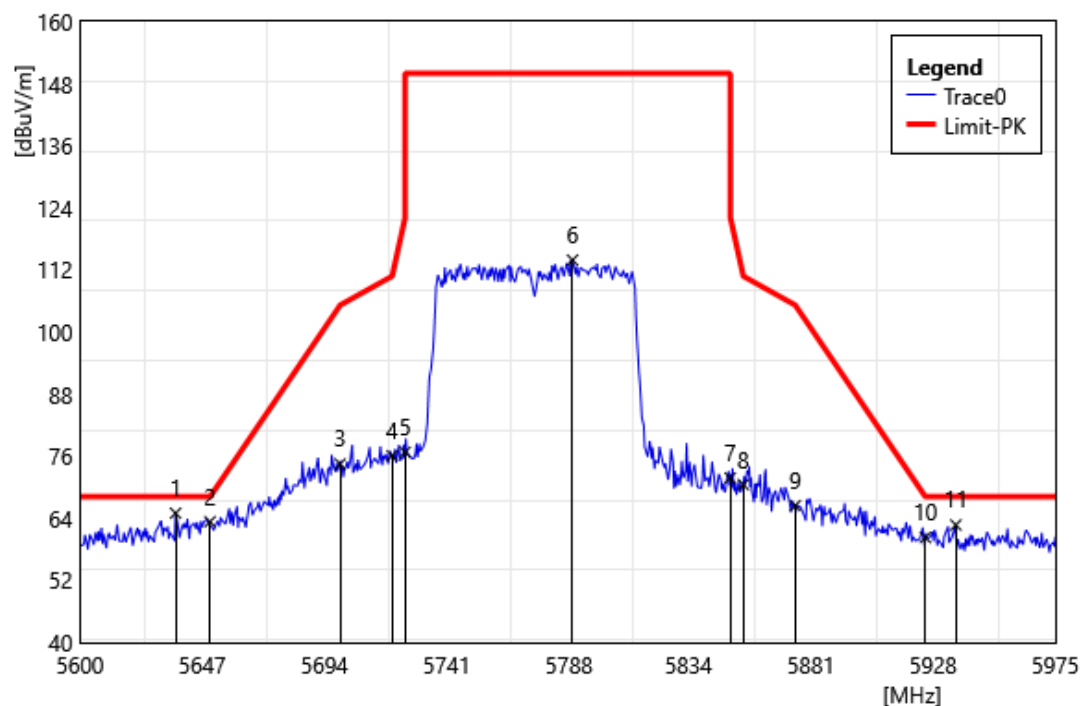

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5775 MHz		
Polarization:	Horizontal		
Remark:			

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5636.75	68.23	-3.23	65.00	68.20	-3.20	PEAK
2	5650.00	66.63	-3.27	63.36	68.20	-4.84	PEAK
3	5700.00	77.94	-3.44	74.50	105.20	-30.70	PEAK
4	5720.00	79.38	-3.28	76.10	110.80	-34.70	PEAK
5	5725.00	80.02	-3.23	76.79	150.00	-73.21	PEAK
6	5789.38	116.55	-2.63	113.92	150.00	-36.08	PEAK
7	5850.00	74.39	-2.57	71.82	122.20	-50.38	PEAK
8	5855.00	73.13	-2.61	70.52	110.80	-40.28	PEAK
9	5875.00	69.20	-2.75	66.45	105.20	-38.75	PEAK
10	5925.00	63.42	-3.12	60.30	68.20	-7.90	PEAK
11	5936.75	65.95	-3.23	62.72	68.20	-5.48	PEAK


Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5775		
	MHz		
Polarization:	Vertical		
Remark:			

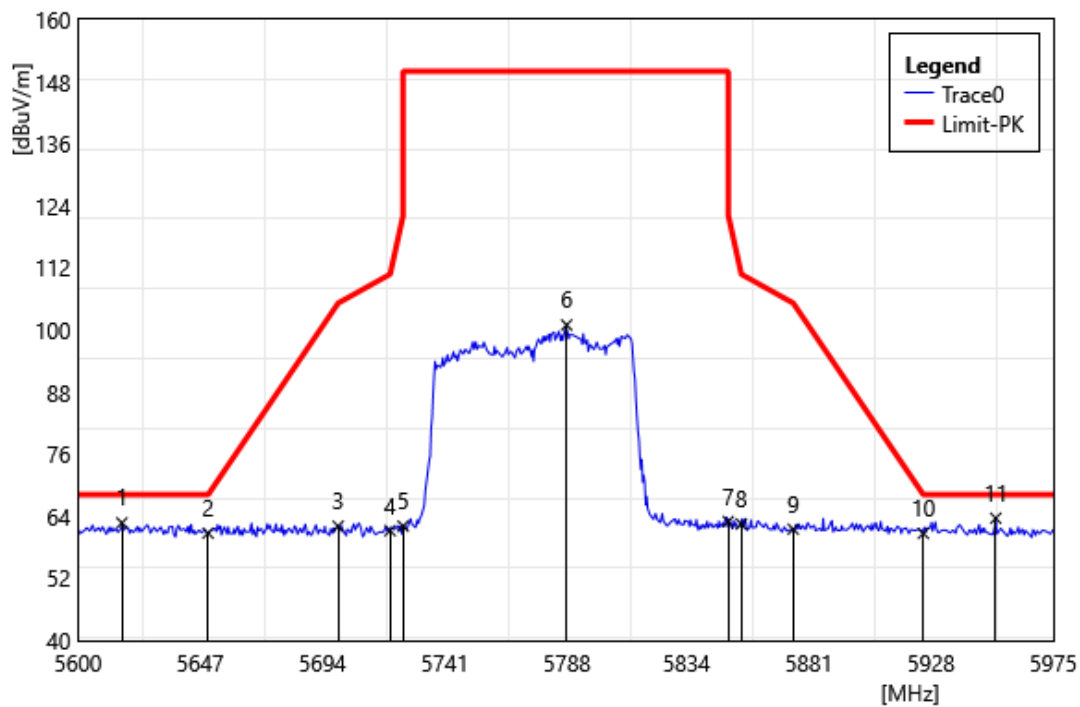

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5775 MHz		
Polarization:	Vertical		
Remark:			


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5616.88	65.90	-3.16	62.74	68.20	-5.46	PEAK
2	5650.00	64.01	-3.27	60.74	68.20	-7.46	PEAK
3	5700.00	65.54	-3.44	62.10	105.20	-43.10	PEAK
4	5720.00	64.52	-3.28	61.24	110.80	-49.56	PEAK
5	5725.00	65.33	-3.23	62.10	150.00	-87.90	PEAK
6	5787.88	103.63	-2.65	100.98	150.00	-49.02	PEAK
7	5850.00	65.57	-2.57	63.00	122.20	-59.20	PEAK
8	5855.00	65.13	-2.61	62.52	110.80	-48.28	PEAK
9	5875.00	64.27	-2.75	61.52	105.20	-43.68	PEAK
10	5925.00	63.82	-3.12	60.70	68.20	-7.50	PEAK
11	5952.88	67.02	-3.36	63.66	68.20	-4.55	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5180		
	MHz		
Polarization:	Horizontal		
Remark:			

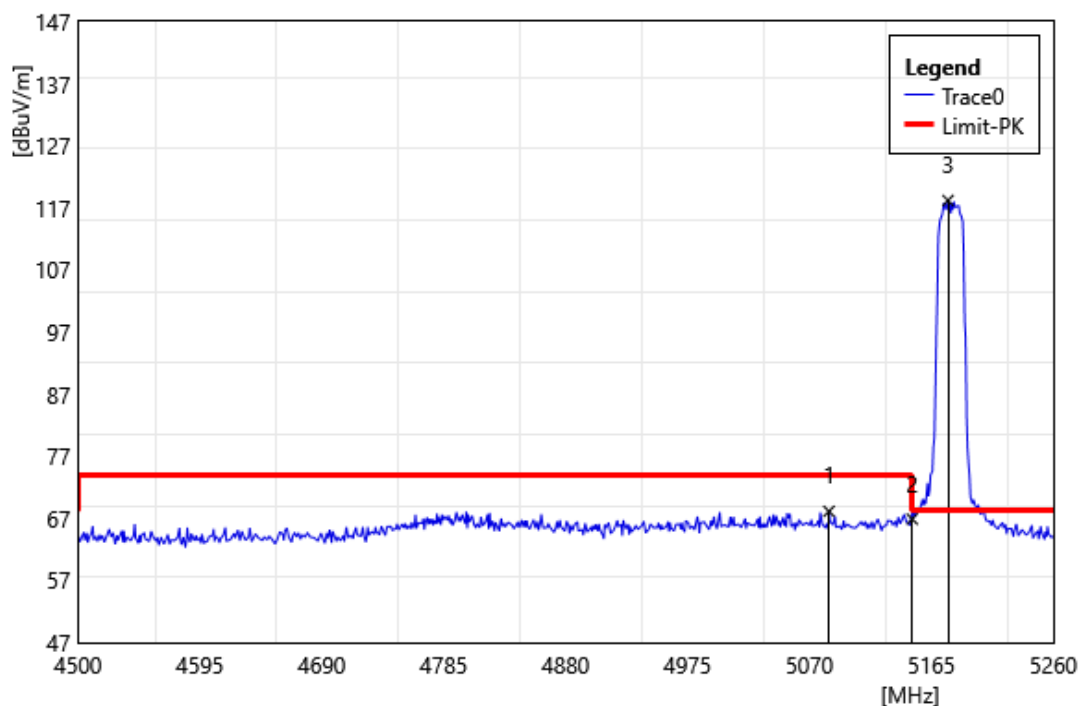


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5085.20	71.39	-3.26	68.13	74.00	-5.87	PEAK
2	5150.00	70.11	-3.22	66.89	74.00	-7.11	PEAK
3	5177.92	121.30	-3.10	118.20	68.20	50.00	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5180		
	MHz		
Polarization:	Vertical		
Remark:			

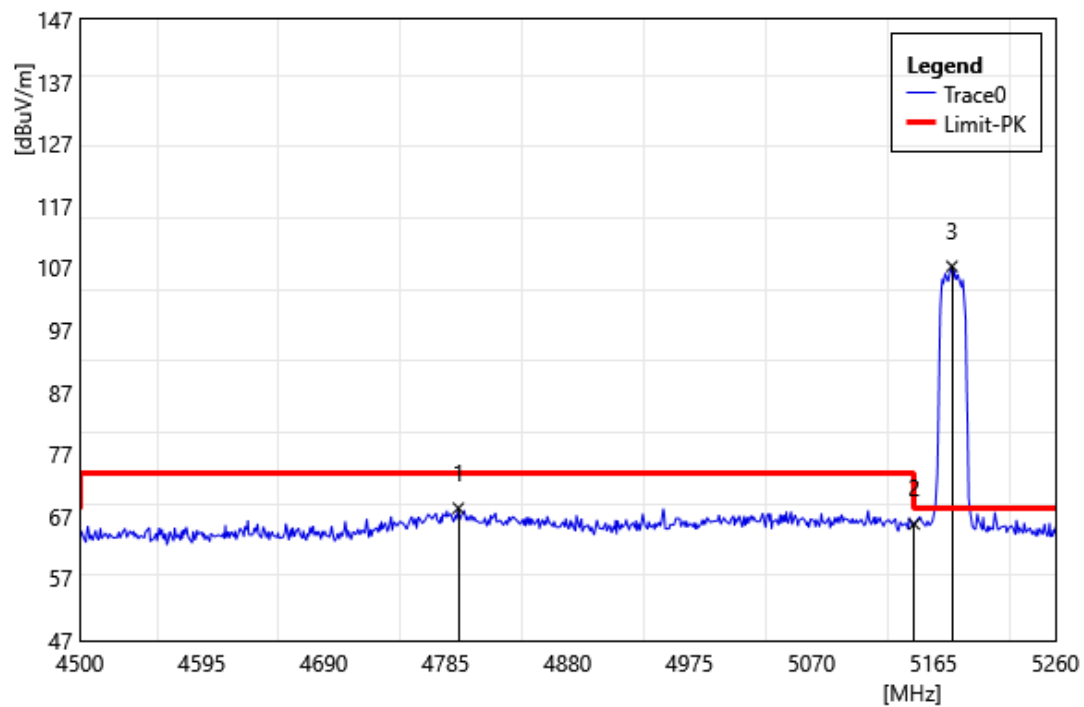


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4794.88	69.91	-1.60	68.31	74.00	-5.69	PEAK
2	5150.00	68.98	-3.22	65.76	74.00	-8.24	PEAK
3	5179.44	110.37	-3.10	107.27	68.20	39.07	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5240		
	MHz		
Polarization:	Horizontal		
Remark:			

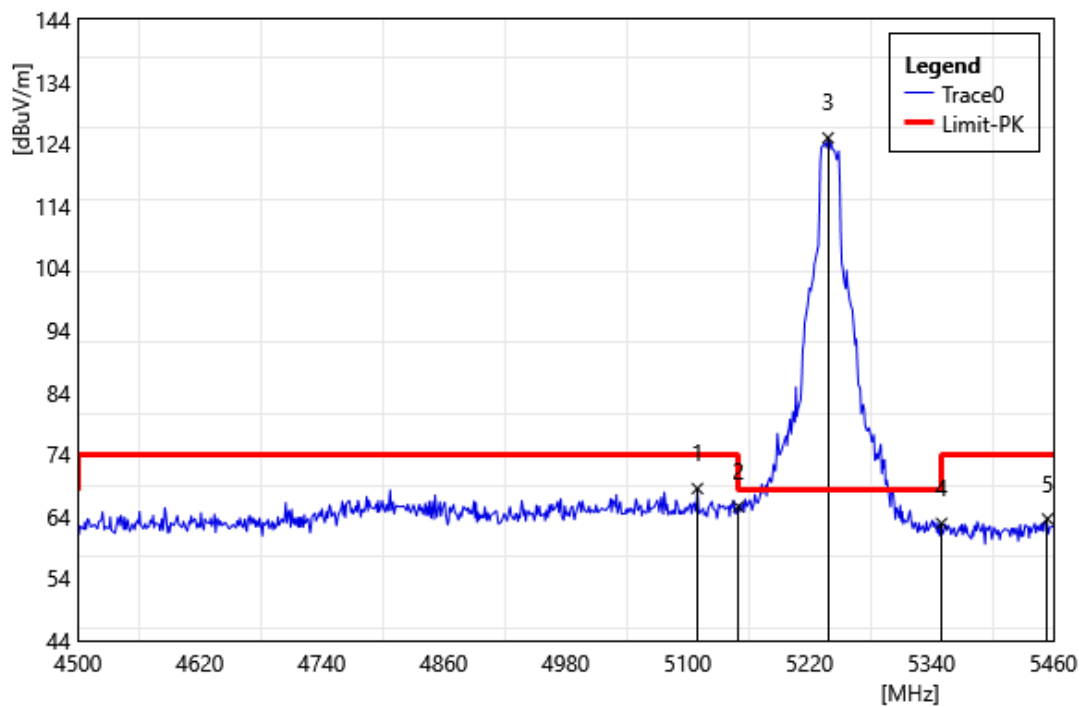


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5109.60	71.79	-3.31	68.48	74.00	-5.52	PEAK
2	5150.00	68.79	-3.22	65.57	74.00	-8.43	PEAK
3	5238.24	128.28	-3.33	124.95	68.20	56.75	PEAK
4	5350.00	66.95	-4.08	62.87	74.00	-11.13	PEAK
5	5454.24	67.67	-4.09	63.58	74.00	-10.42	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5240		
	MHz		
Polarization:	Vertical		
Remark:			

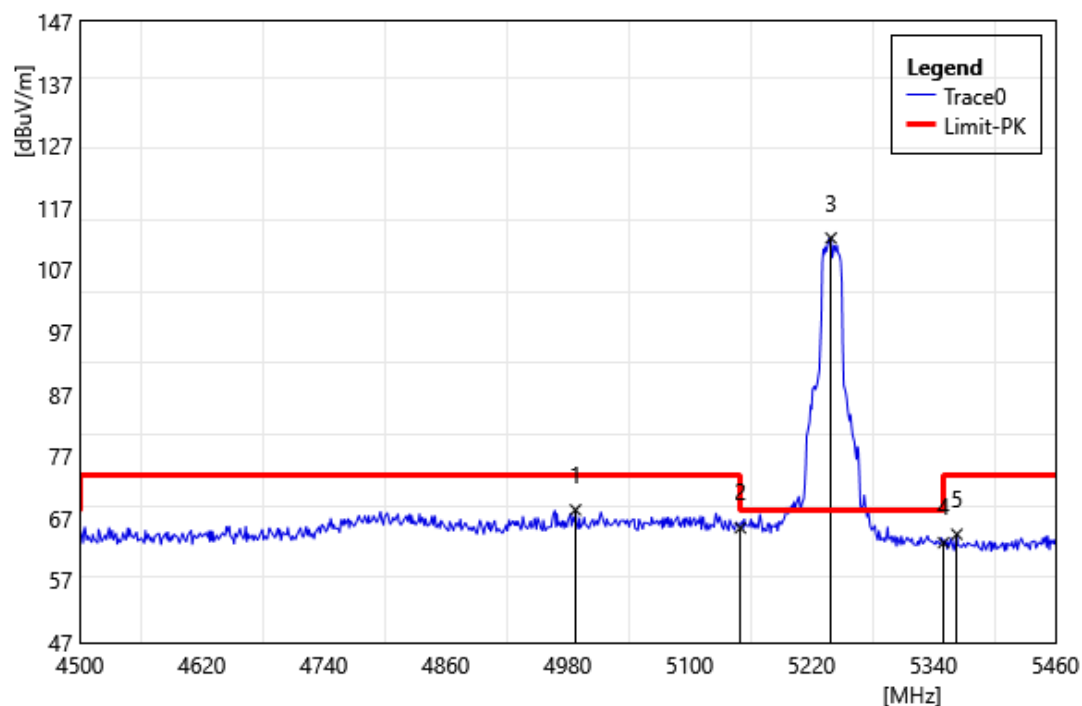


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4987.68	71.17	-2.81	68.36	74.00	-5.64	PEAK
2	5150.00	68.68	-3.22	65.46	74.00	-8.54	PEAK
3	5239.20	115.46	-3.33	112.13	68.20	43.93	PEAK
4	5350.00	67.16	-4.08	63.08	74.00	-10.92	PEAK
5	5363.04	68.56	-4.12	64.44	74.00	-9.56	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5745		
	MHz		
Polarization:	Horizontal		
Remark:			

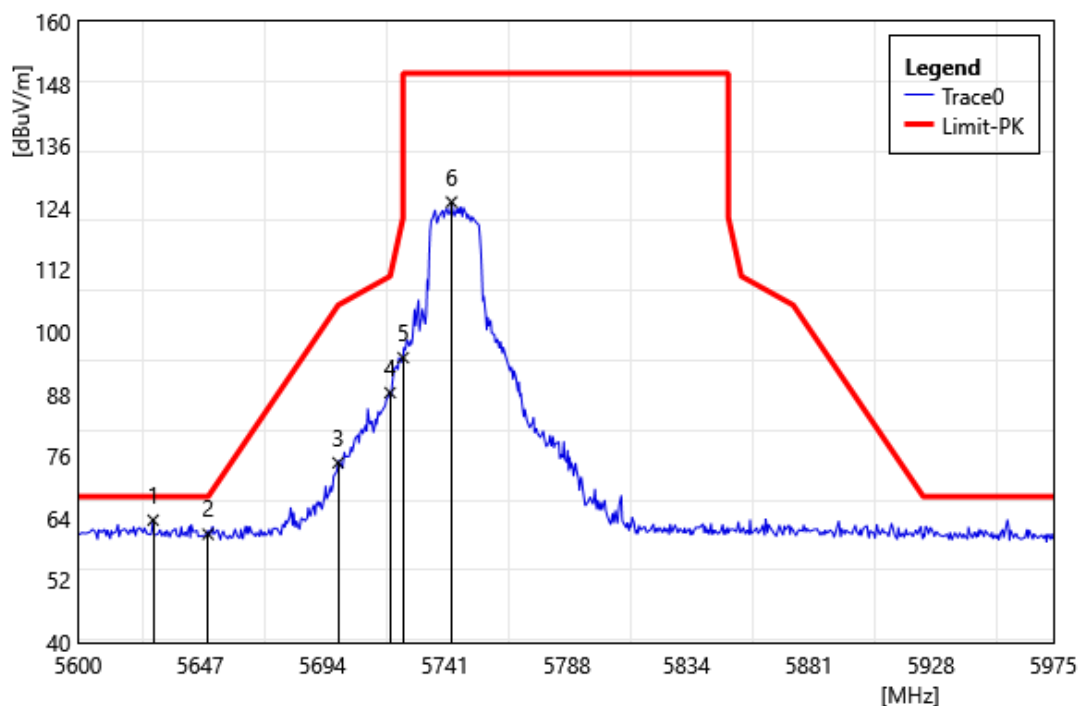


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5628.88	66.84	-3.20	63.65	68.20	-4.56	PEAK
2	5650.00	64.21	-3.27	60.94	68.20	-7.26	PEAK
3	5700.00	78.18	-3.44	74.74	105.20	-30.46	PEAK
4	5720.00	91.56	-3.28	88.28	110.80	-22.52	PEAK
5	5725.00	98.28	-3.23	95.05	150.00	-54.95	PEAK
6	5743.63	128.23	-3.09	125.14	150.00	-24.87	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5745		
	MHz		
Polarization:	Vertical		
Remark:			

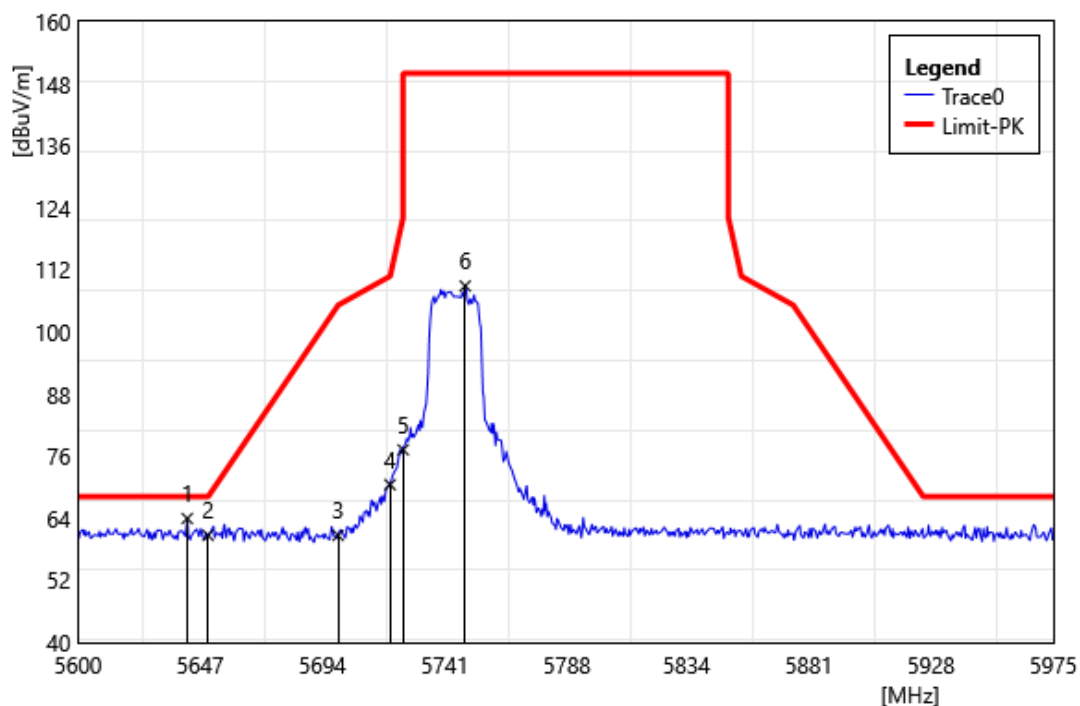


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5642.00	67.21	-3.24	63.97	68.20	-4.23	PEAK
2	5650.00	63.97	-3.27	60.70	68.20	-7.50	PEAK
3	5700.00	64.14	-3.44	60.70	105.20	-44.50	PEAK
4	5720.00	73.79	-3.28	70.51	110.80	-40.29	PEAK
5	5725.00	80.48	-3.23	77.25	150.00	-72.75	PEAK
6	5748.88	111.95	-3.04	108.91	150.00	-41.09	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5825		
	MHz		
Polarization:	Horizontal		
Remark:			

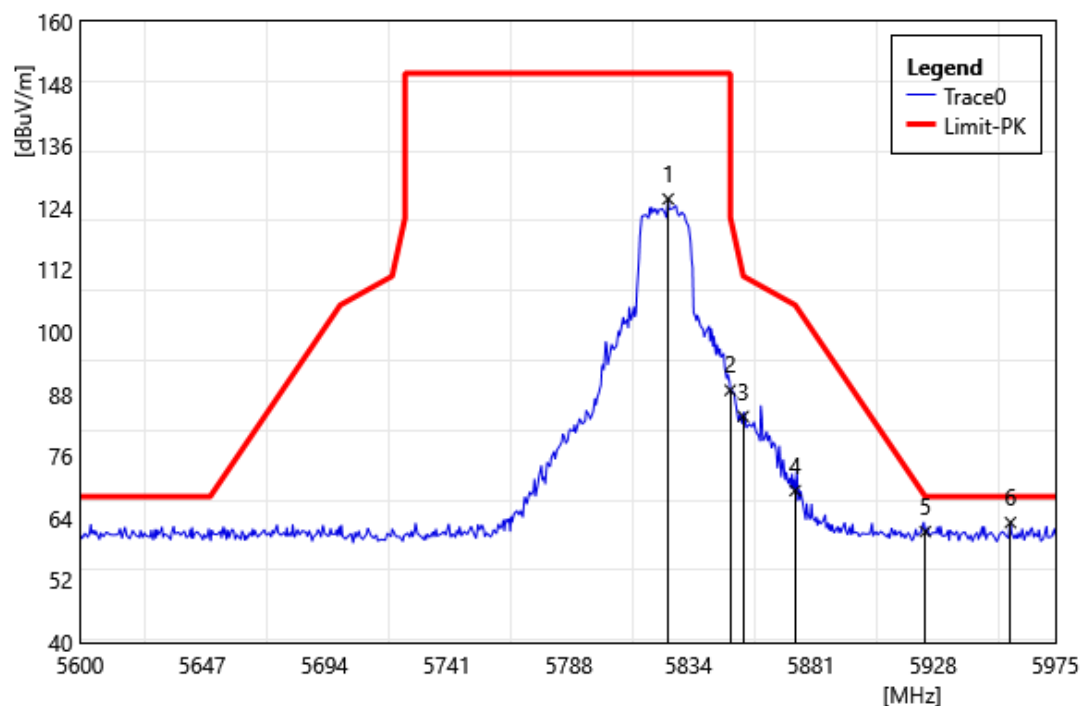


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5826.13	128.28	-2.56	125.72	150.00	-24.28	PEAK
2	5850.00	91.33	-2.57	88.76	122.20	-33.44	PEAK
3	5855.00	86.32	-2.61	83.71	110.80	-27.09	PEAK
4	5875.00	72.10	-2.75	69.35	105.20	-35.85	PEAK
5	5925.00	64.56	-3.12	61.44	68.20	-6.76	PEAK
6	5957.75	66.58	-3.40	63.18	68.20	-5.02	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5825		
	MHz		
Polarization:	Vertical		
Remark:			

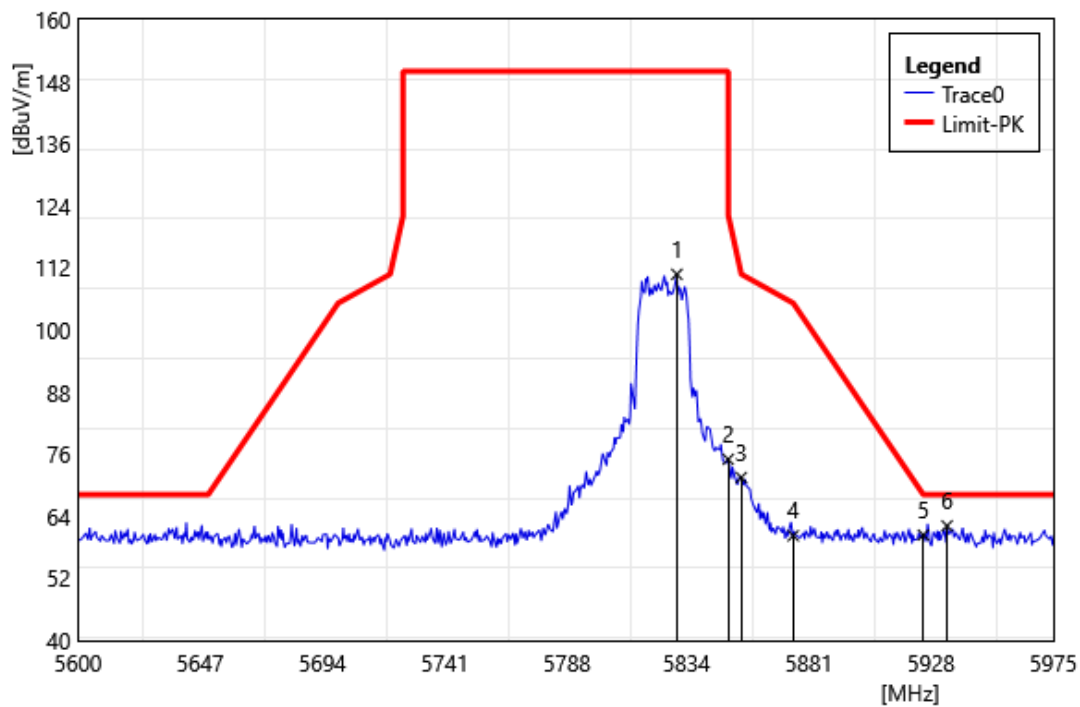


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5830.25	113.33	-2.55	110.78	150.00	-39.22	PEAK
2	5850.00	77.60	-2.57	75.03	122.20	-47.17	PEAK
3	5855.00	74.11	-2.61	71.50	110.80	-39.30	PEAK
4	5875.00	63.01	-2.75	60.26	105.20	-44.94	PEAK
5	5925.00	63.52	-3.12	60.40	68.20	-7.80	PEAK
6	5934.13	65.37	-3.20	62.17	68.20	-6.03	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

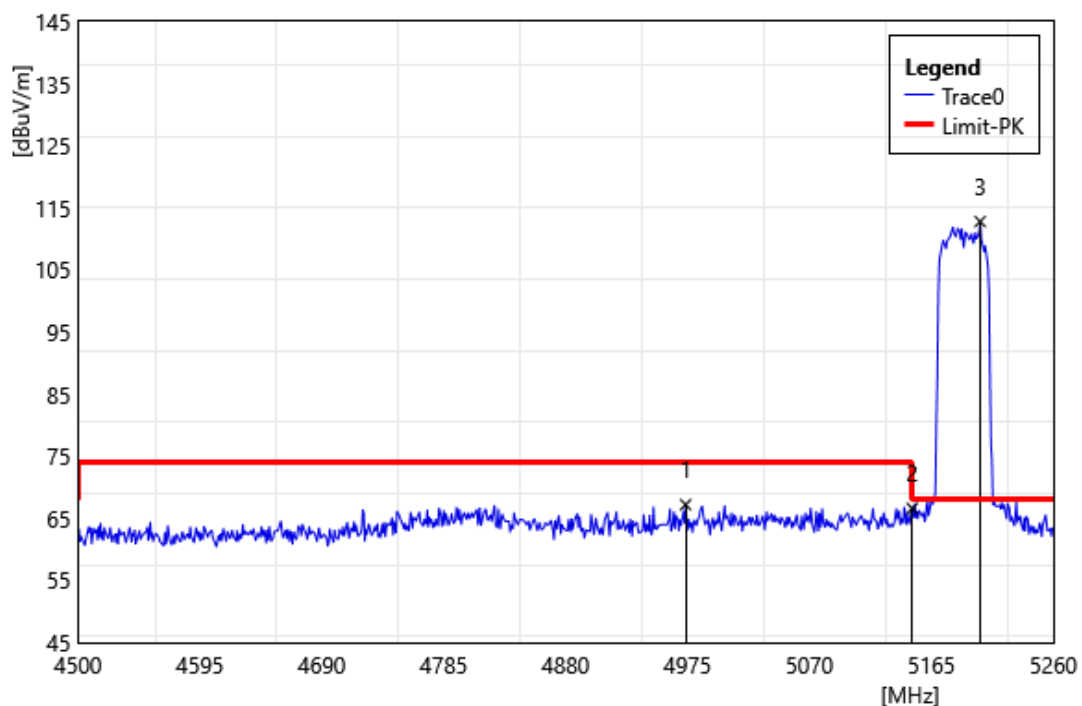


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4973.48	70.06	-2.86	67.20	74.00	-6.80	PEAK
2	5150.00	69.81	-3.22	66.59	74.00	-7.41	PEAK
3	5203.00	115.83	-3.03	112.80	68.20	44.60	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

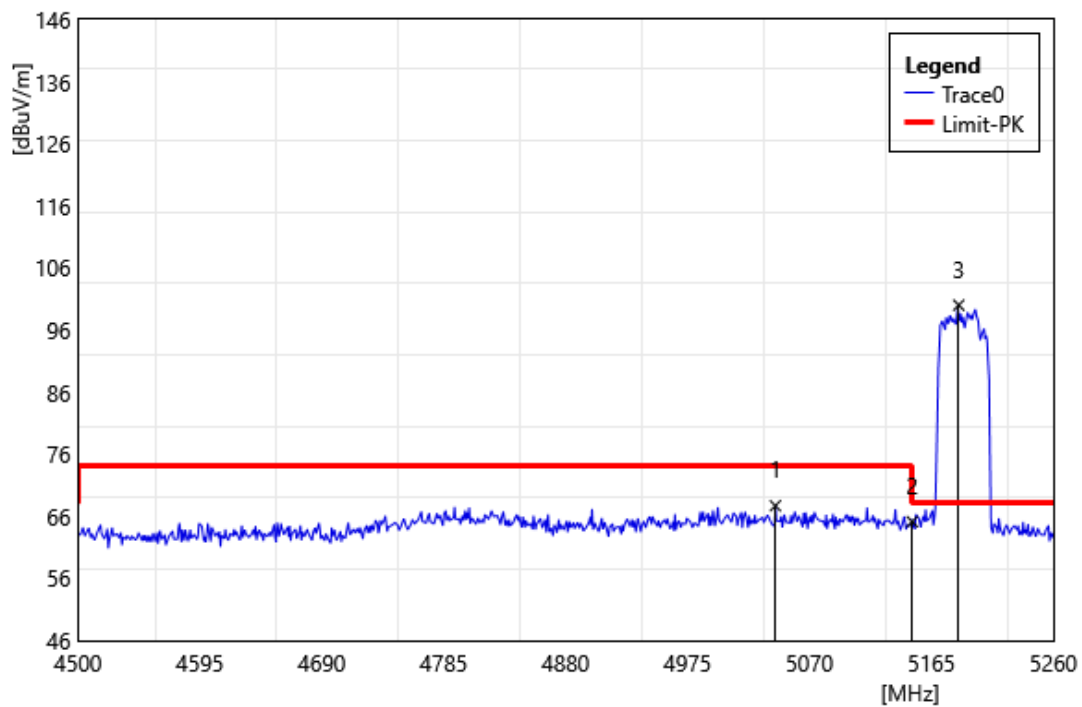


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5043.40	70.77	-3.06	67.71	74.00	-6.29	PEAK
2	5150.00	68.37	-3.22	65.15	74.00	-8.85	PEAK
3	5186.28	103.08	-3.07	100.01	68.20	31.81	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5230		
	MHz		
Polarization:	Horizontal		
Remark:			

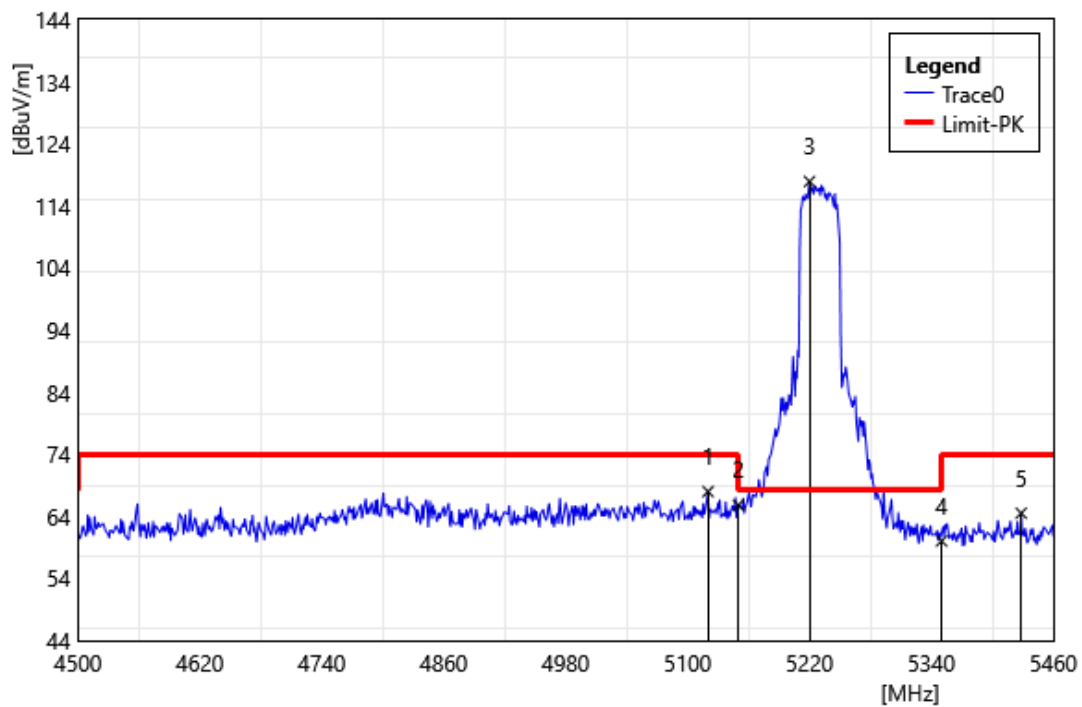


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5120.16	71.27	-3.28	67.99	74.00	-6.01	PEAK
2	5150.00	69.03	-3.22	65.81	74.00	-8.19	PEAK
3	5220.00	121.10	-3.17	117.93	68.20	49.73	PEAK
4	5350.00	64.10	-4.08	60.02	74.00	-13.98	PEAK
5	5428.32	68.64	-4.14	64.50	74.00	-9.50	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

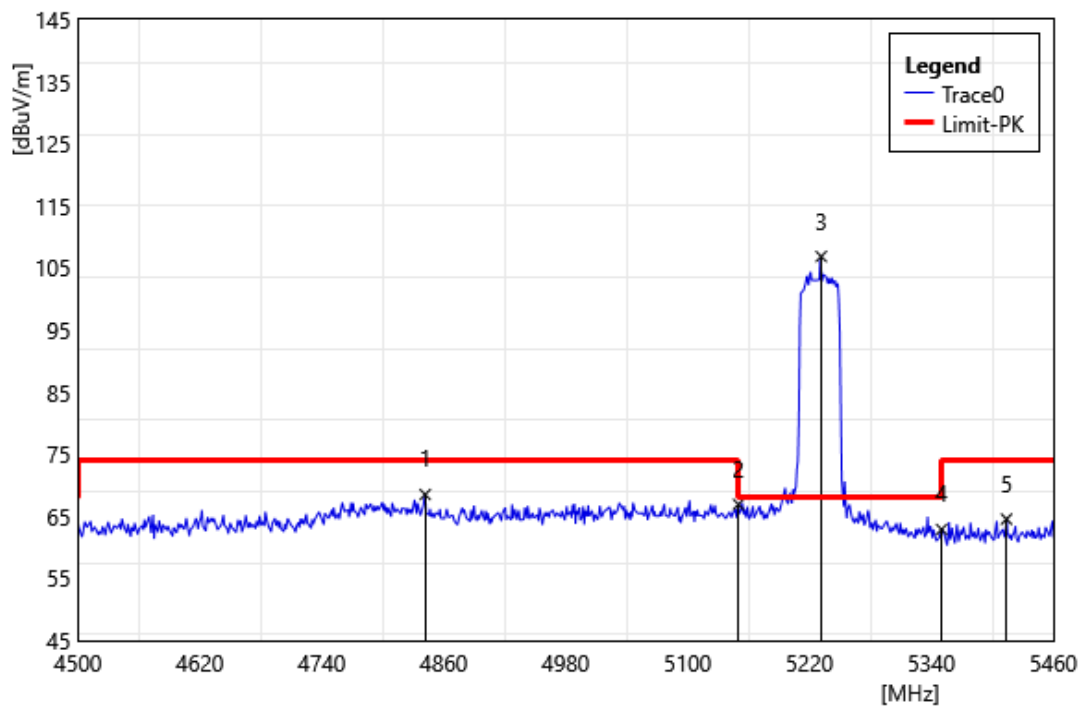


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4841.76	70.52	-2.00	68.52	74.00	-5.48	PEAK
2	5150.00	70.15	-3.22	66.93	74.00	-7.07	PEAK
3	5231.52	110.12	-3.27	106.85	68.20	38.65	PEAK
4	5350.00	66.97	-4.08	62.89	74.00	-11.11	PEAK
5	5413.92	68.74	-4.19	64.55	74.00	-9.45	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5755		
	MHz		
Polarization:	Horizontal		
Remark:			

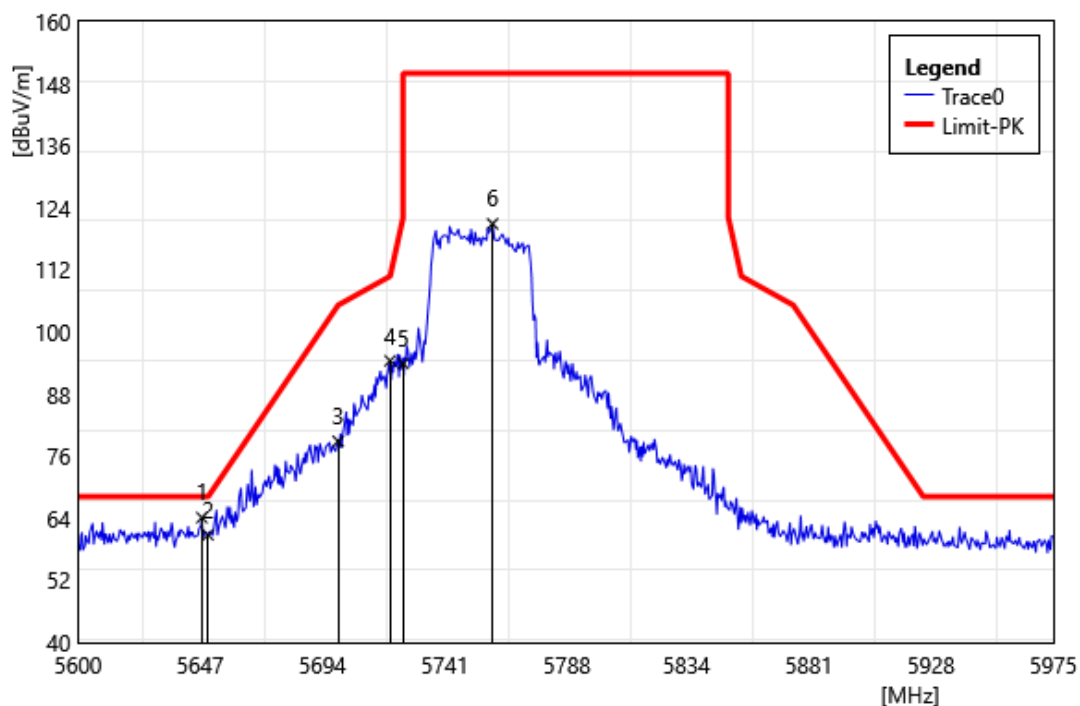


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5647.63	67.40	-3.26	64.14	68.20	-4.06	PEAK
2	5650.00	64.09	-3.27	60.82	68.20	-7.38	PEAK
3	5700.00	82.34	-3.44	78.90	105.20	-26.30	PEAK
4	5720.00	97.72	-3.28	94.44	110.80	-16.36	PEAK
5	5725.00	97.15	-3.23	93.92	150.00	-56.08	PEAK
6	5759.38	123.86	-2.94	120.92	150.00	-29.08	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5755		
	MHz		
Polarization:	Vertical		
Remark:			

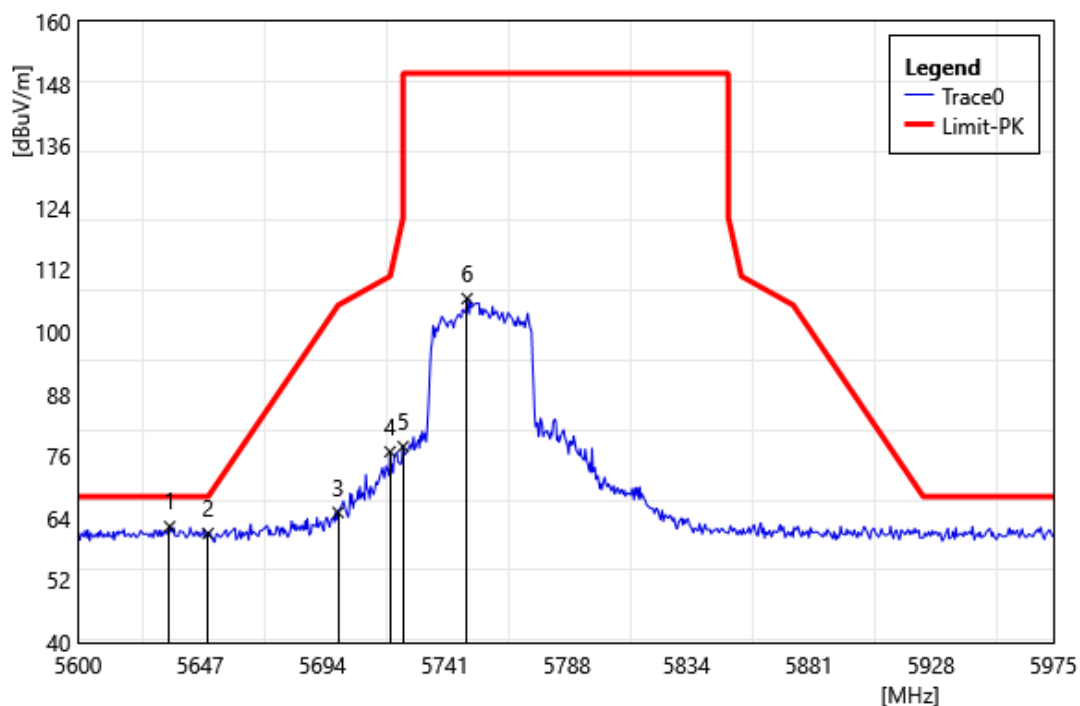


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5635.25	65.62	-3.23	62.39	68.20	-5.81	PEAK
2	5650.00	64.36	-3.27	61.09	68.20	-7.11	PEAK
3	5700.00	68.59	-3.44	65.15	105.20	-40.05	PEAK
4	5720.00	80.15	-3.28	76.87	110.80	-33.93	PEAK
5	5725.00	81.11	-3.23	77.88	150.00	-72.12	PEAK
6	5749.63	109.51	-3.04	106.48	150.00	-43.53	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5795		
	MHz		
Polarization:	Horizontal		
Remark:			

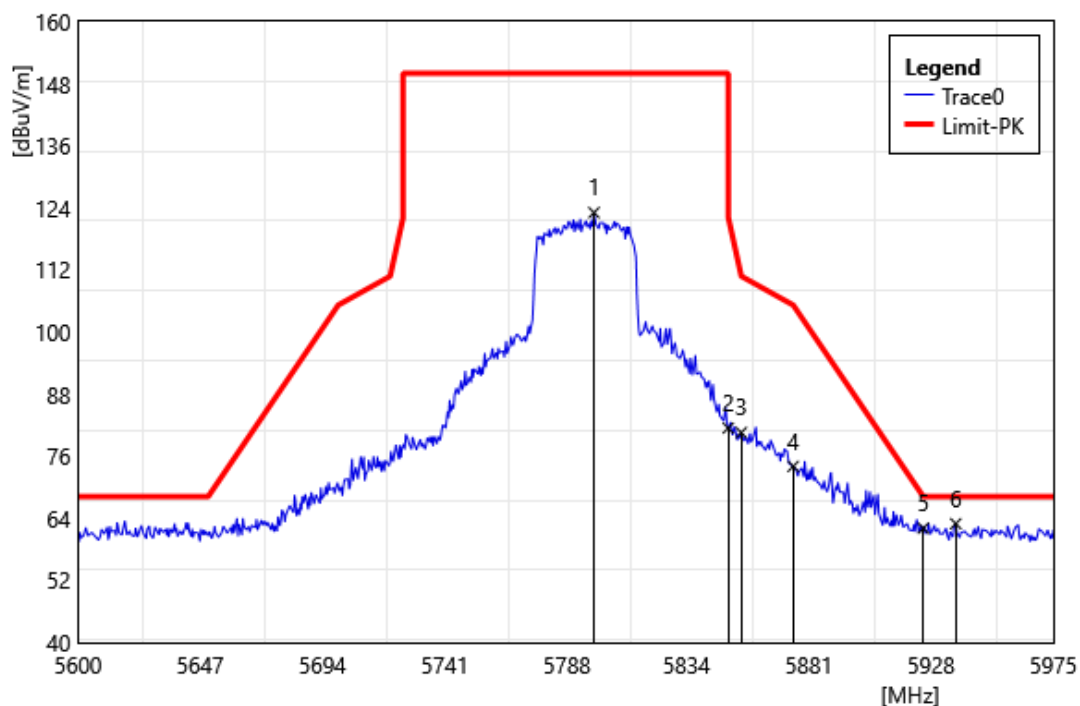


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5798.38	125.64	-2.55	123.09	150.00	-26.91	PEAK
2	5850.00	84.02	-2.57	81.45	122.20	-40.75	PEAK
3	5855.00	83.19	-2.61	80.58	110.80	-30.22	PEAK
4	5875.00	76.80	-2.75	74.05	105.20	-31.15	PEAK
5	5925.00	65.22	-3.12	62.10	68.20	-6.10	PEAK
6	5937.50	66.19	-3.23	62.96	68.20	-5.24	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5795		
	MHz		
Polarization:	Vertical		
Remark:			

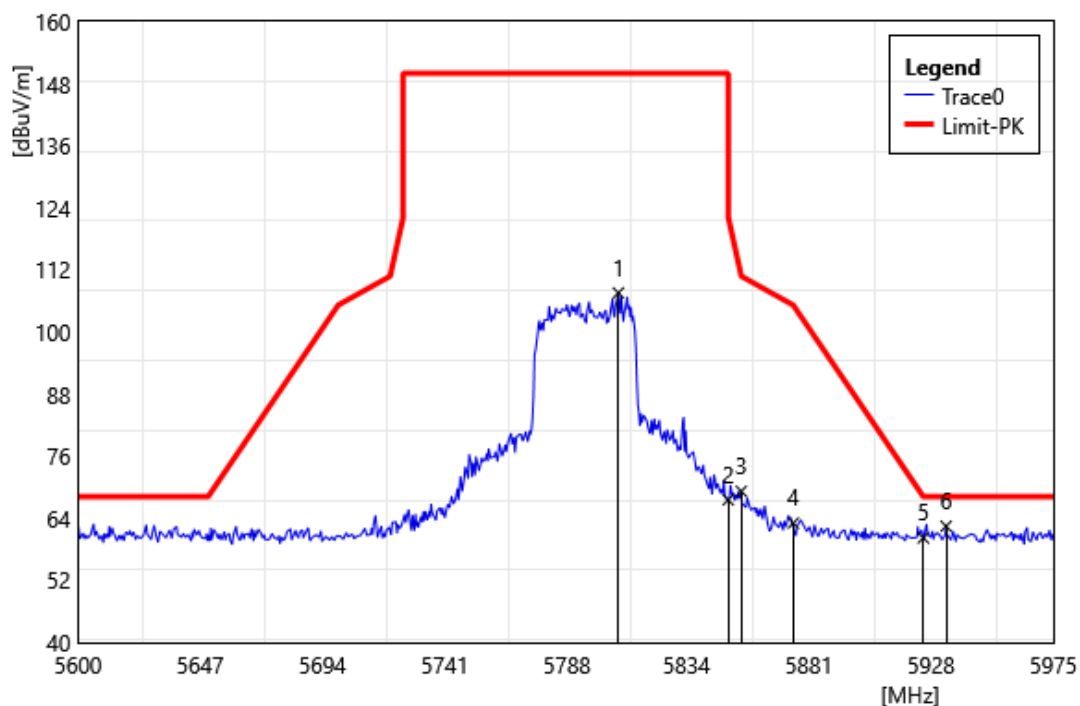


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5807.75	110.13	-2.54	107.59	150.00	-42.41	PEAK
2	5850.00	70.14	-2.57	67.57	122.20	-54.63	PEAK
3	5855.00	71.84	-2.61	69.23	110.80	-41.57	PEAK
4	5875.00	65.83	-2.75	63.08	105.20	-42.12	PEAK
5	5925.00	63.34	-3.12	60.22	68.20	-7.98	PEAK
6	5933.75	65.68	-3.19	62.49	68.20	-5.71	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

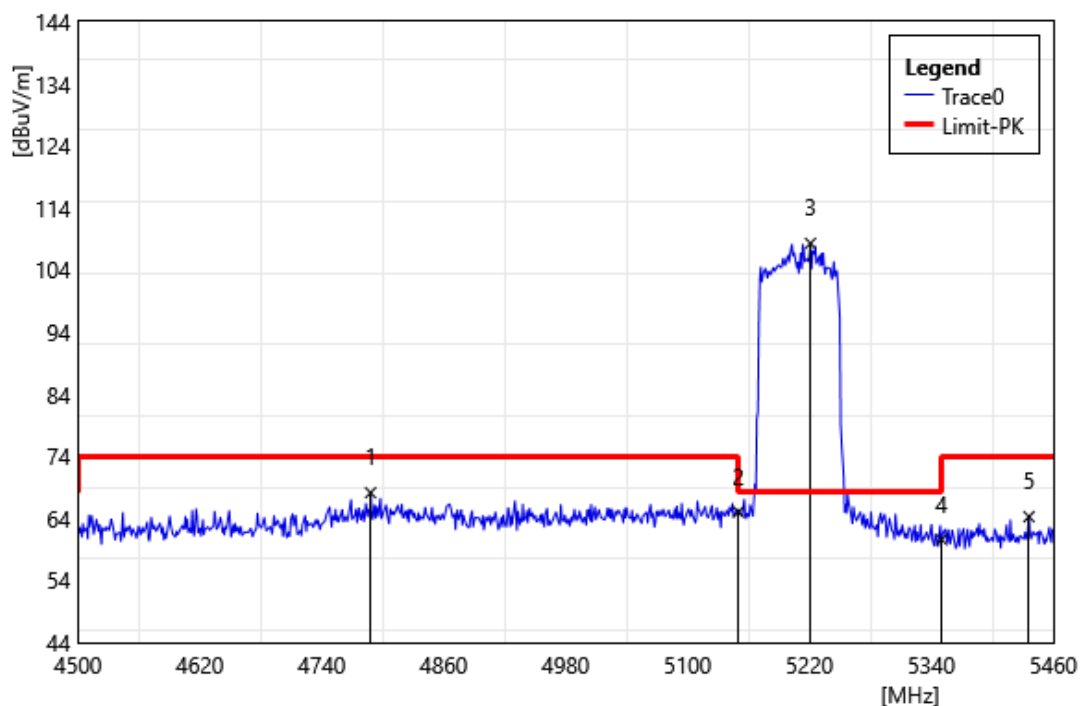


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4788.00	69.95	-1.81	68.14	74.00	-5.86	PEAK
2	5150.00	68.24	-3.22	65.02	74.00	-8.98	PEAK
3	5220.96	111.48	-3.19	108.29	68.20	40.09	PEAK
4	5350.00	64.66	-4.08	60.58	74.00	-13.42	PEAK
5	5436.00	68.38	-4.12	64.26	74.00	-9.74	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

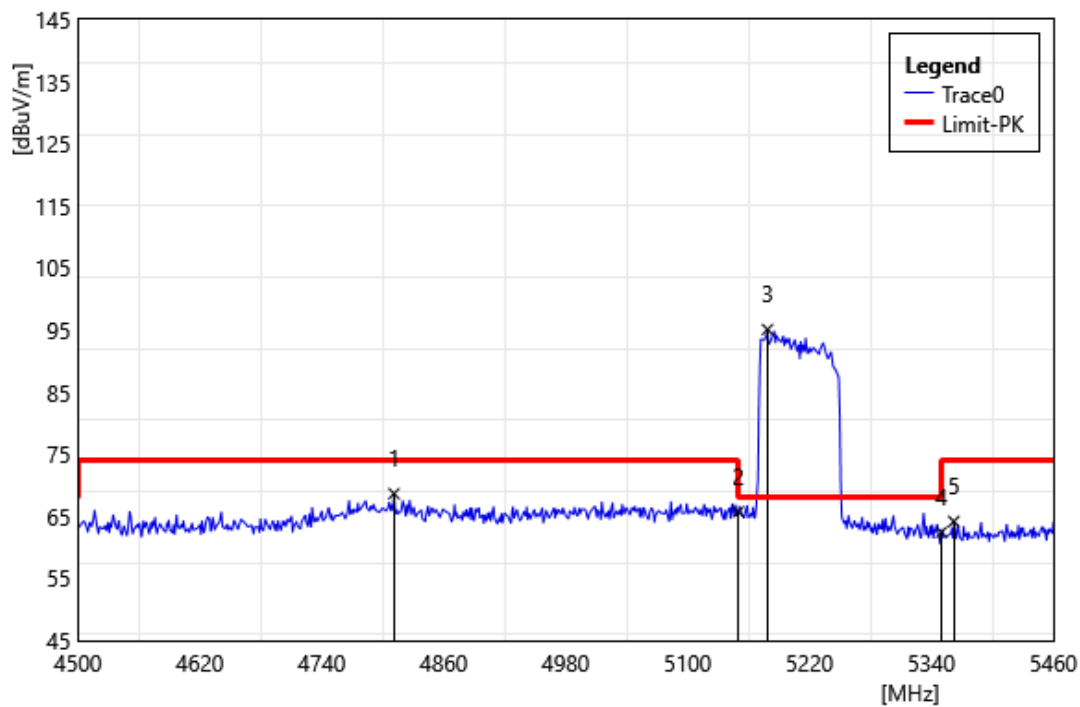

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4811.04	70.24	-1.59	68.65	74.00	-5.35	PEAK
2	5150.00	68.95	-3.22	65.73	74.00	-8.27	PEAK
3	5178.72	98.18	-3.09	95.09	68.20	26.89	PEAK
4	5350.00	66.52	-4.08	62.44	74.00	-11.56	PEAK
5	5362.08	68.29	-4.11	64.18	74.00	-9.82	PEAK


Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5775		
	MHz		
Polarization:	Horizontal		
Remark:			

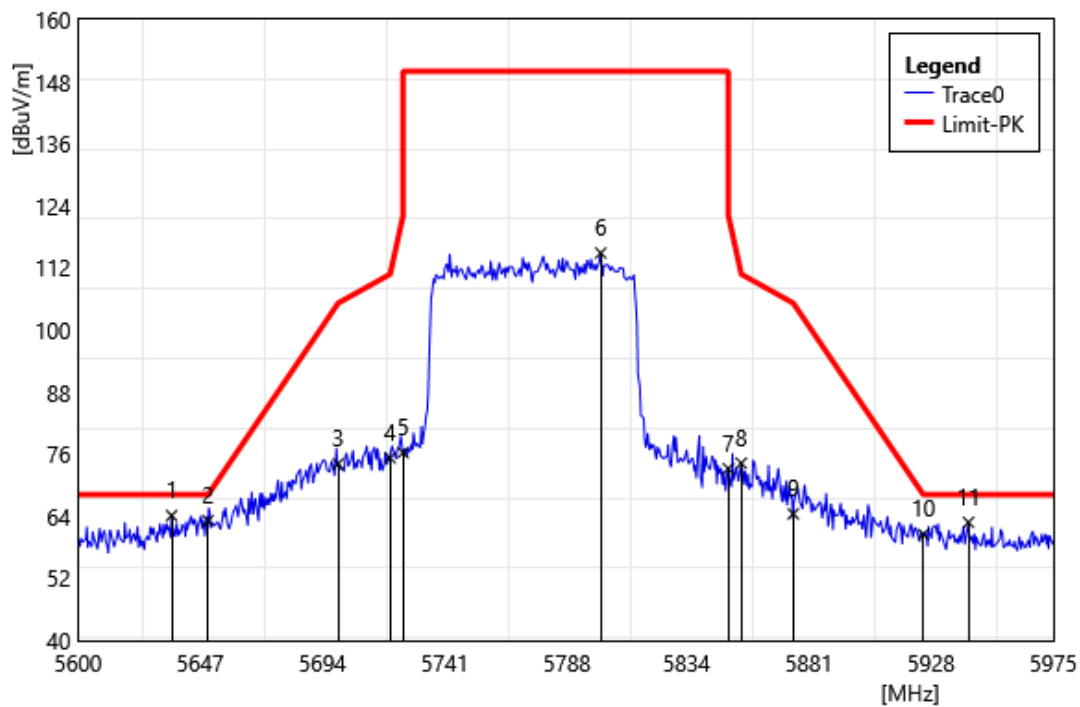

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5775 MHz		
Polarization:	Horizontal		
Remark:			

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5636.00	67.38	-3.23	64.15	68.20	-4.05	PEAK
2	5650.00	66.42	-3.27	63.15	68.20	-5.05	PEAK
3	5700.00	77.58	-3.44	74.14	105.20	-31.06	PEAK
4	5720.00	78.57	-3.28	75.29	110.80	-35.51	PEAK
5	5725.00	79.55	-3.23	76.32	150.00	-73.68	PEAK
6	5801.00	117.41	-2.53	114.88	150.00	-35.12	PEAK
7	5850.00	75.81	-2.57	73.24	122.20	-48.96	PEAK
8	5855.00	76.90	-2.61	74.29	110.80	-36.51	PEAK
9	5875.00	67.24	-2.75	64.49	105.20	-40.71	PEAK
10	5925.00	63.66	-3.12	60.54	68.20	-7.66	PEAK
11	5942.38	66.10	-3.27	62.83	68.20	-5.37	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5775		
	MHz		
Polarization:	Vertical		
Remark:			

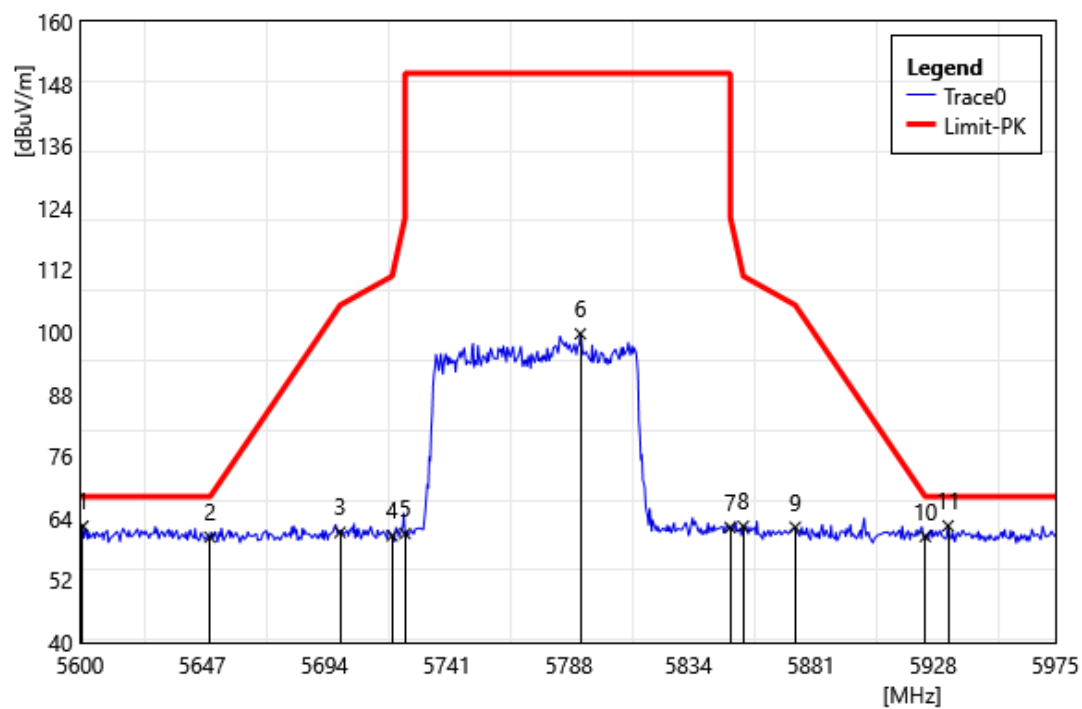


Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5775 MHz		
Polarization:	Vertical		
Remark:			

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5601.13	65.58	-3.10	62.48	68.20	-5.72	PEAK
2	5650.00	63.63	-3.27	60.36	68.20	-7.84	PEAK
3	5700.00	64.72	-3.44	61.28	105.20	-43.92	PEAK
4	5720.00	63.91	-3.28	60.63	110.80	-50.17	PEAK
5	5725.00	64.30	-3.23	61.07	150.00	-88.93	PEAK
6	5792.38	102.28	-2.61	99.67	150.00	-50.33	PEAK
7	5850.00	64.80	-2.57	62.23	122.20	-59.97	PEAK
8	5855.00	65.06	-2.61	62.45	110.80	-48.35	PEAK
9	5875.00	65.04	-2.75	62.29	105.20	-42.91	PEAK
10	5925.00	63.63	-3.12	60.51	68.20	-7.69	PEAK
11	5933.75	65.75	-3.19	62.56	68.20	-5.64	PEAK


SISO - Average

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11a 5180 MHz		
Polarization:	Horizontal		
Remark:			

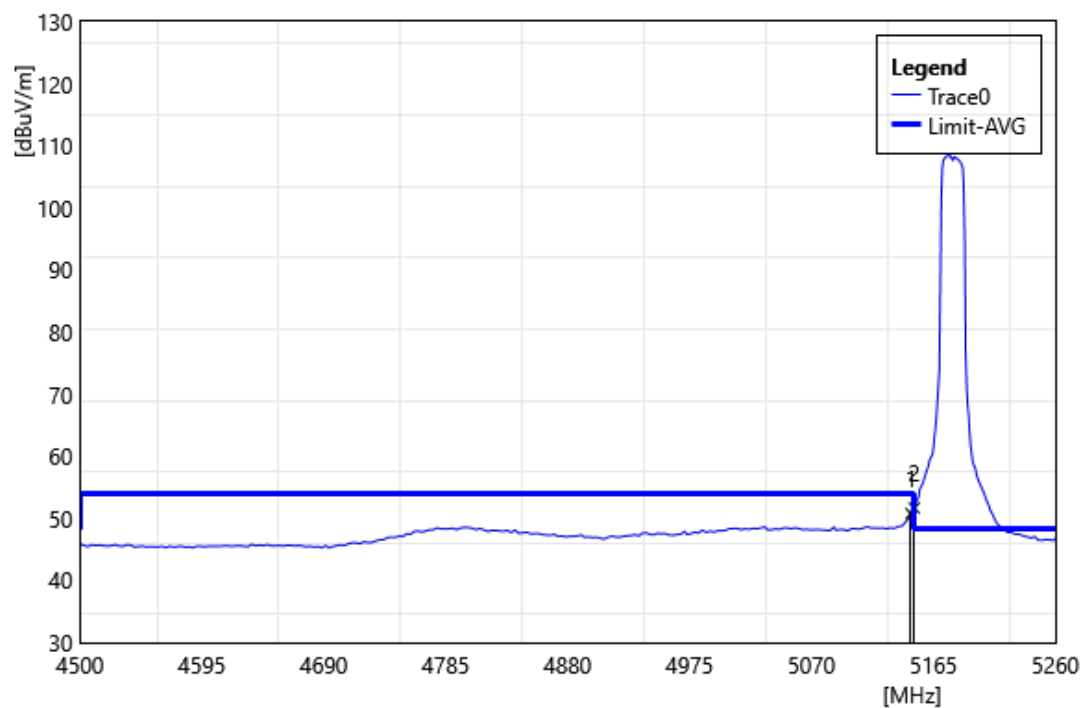


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	53.99	-3.23	50.76	54.00	-3.24	AVG
2	5150.00	54.88	-3.22	51.66	54.00	-2.34	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11a 5180 MHz		
Polarization:	Vertical		
Remark:			

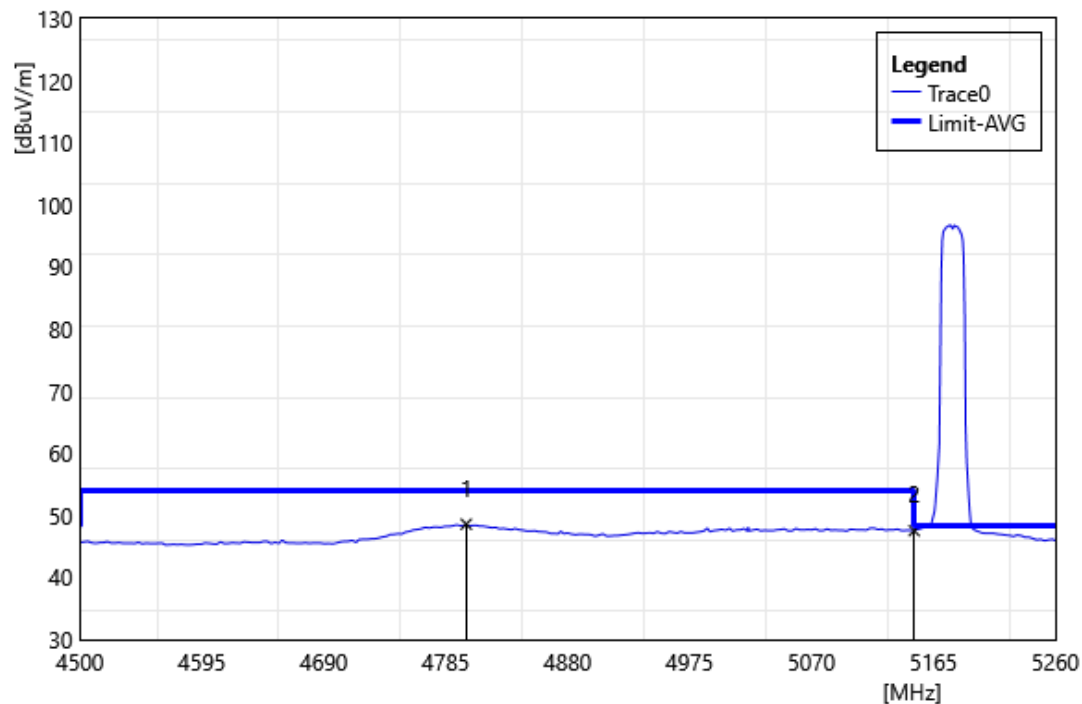


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4800.96	50.04	-1.45	48.59	54.00	-5.42	AVG
2	5150.00	50.75	-3.22	47.53	54.00	-6.47	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11a 5240 MHz		
Polarization:	Horizontal		
Remark:			

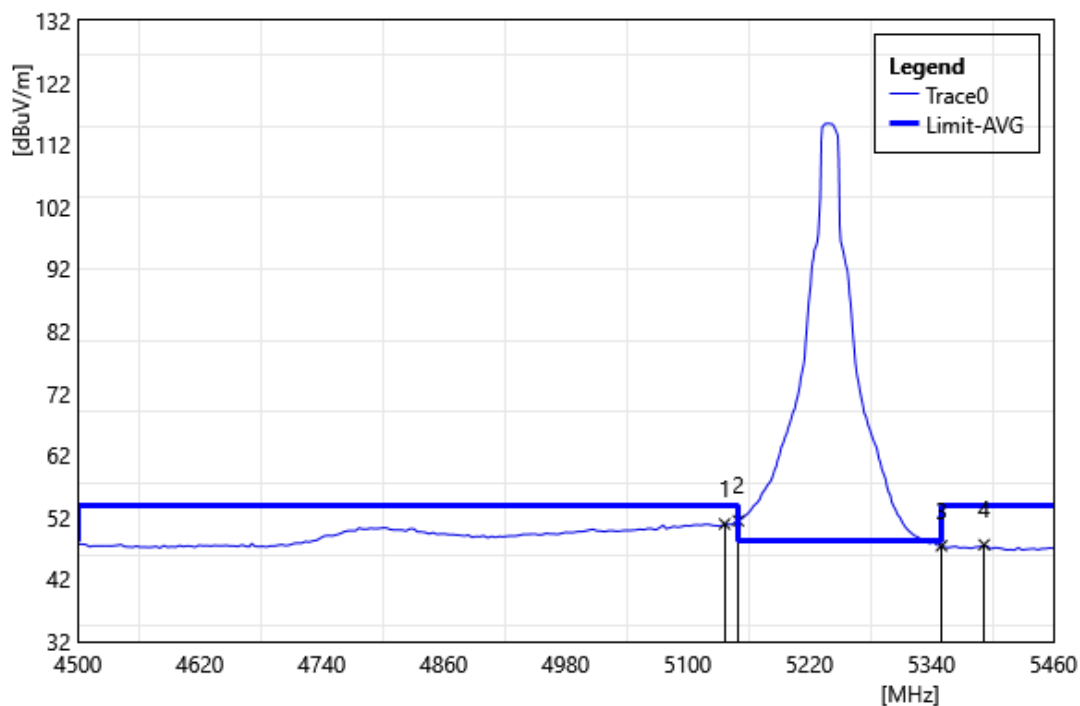


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5136.48	54.18	-3.25	50.93	54.00	-3.07	AVG
2	5150.00	54.67	-3.22	51.45	54.00	-2.55	AVG
3	5350.00	51.50	-4.08	47.42	54.00	-6.58	AVG
4	5391.84	51.79	-4.21	47.58	54.00	-6.42	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11a 5240 MHz		
Polarization:	Vertical		
Remark:			

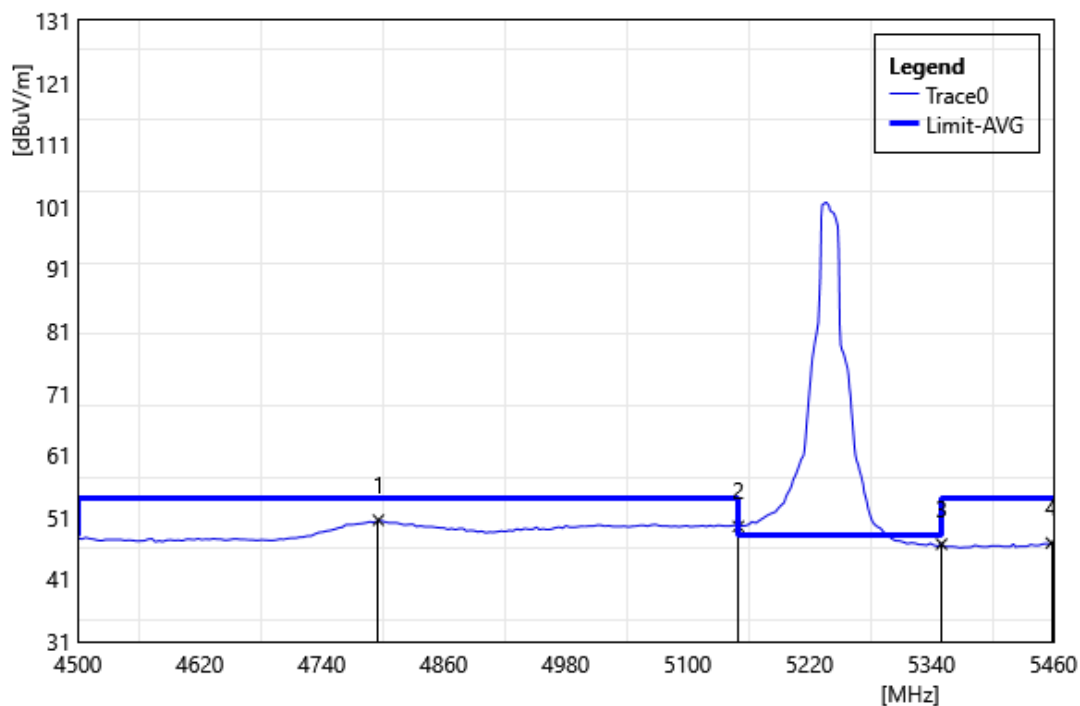


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4795.68	52.13	-1.57	50.56	54.00	-3.44	AVG
2	5150.00	52.77	-3.22	49.55	54.00	-4.45	AVG
3	5350.00	50.76	-4.08	46.68	54.00	-7.32	AVG
4	5458.08	50.96	-4.09	46.87	54.00	-7.13	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5180 MHz		
Polarization:	Horizontal		
Remark:			

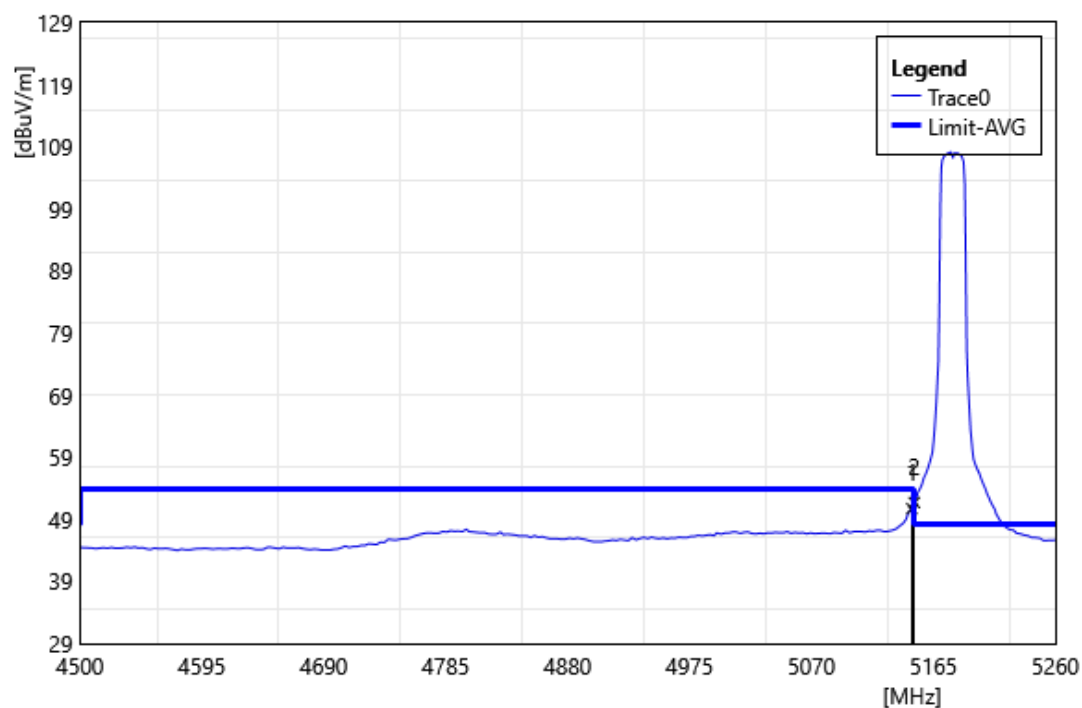


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5148.28	53.97	-3.23	50.74	54.00	-3.26	AVG
2	5150.00	54.93	-3.22	51.71	54.00	-2.29	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5180 MHz		
Polarization:	Vertical		
Remark:			

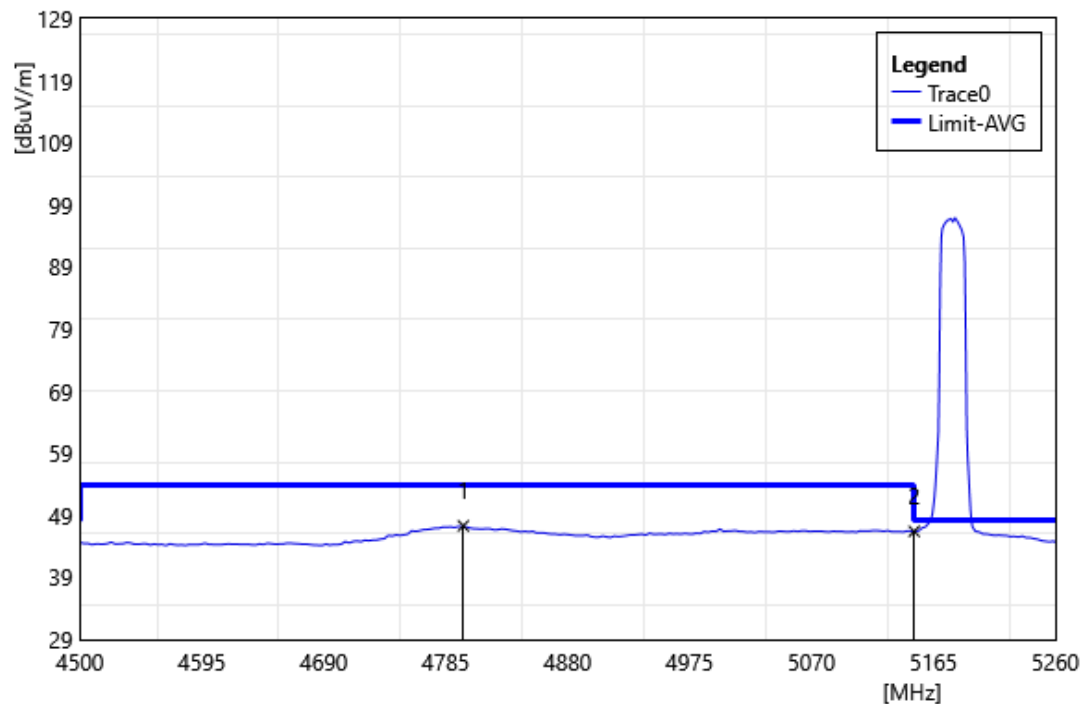


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4798.68	48.79	-1.48	47.31	54.00	-6.69	AVG
2	5150.00	49.64	-3.22	46.42	54.00	-7.58	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5240 MHz		
Polarization:	Horizontal		
Remark:			

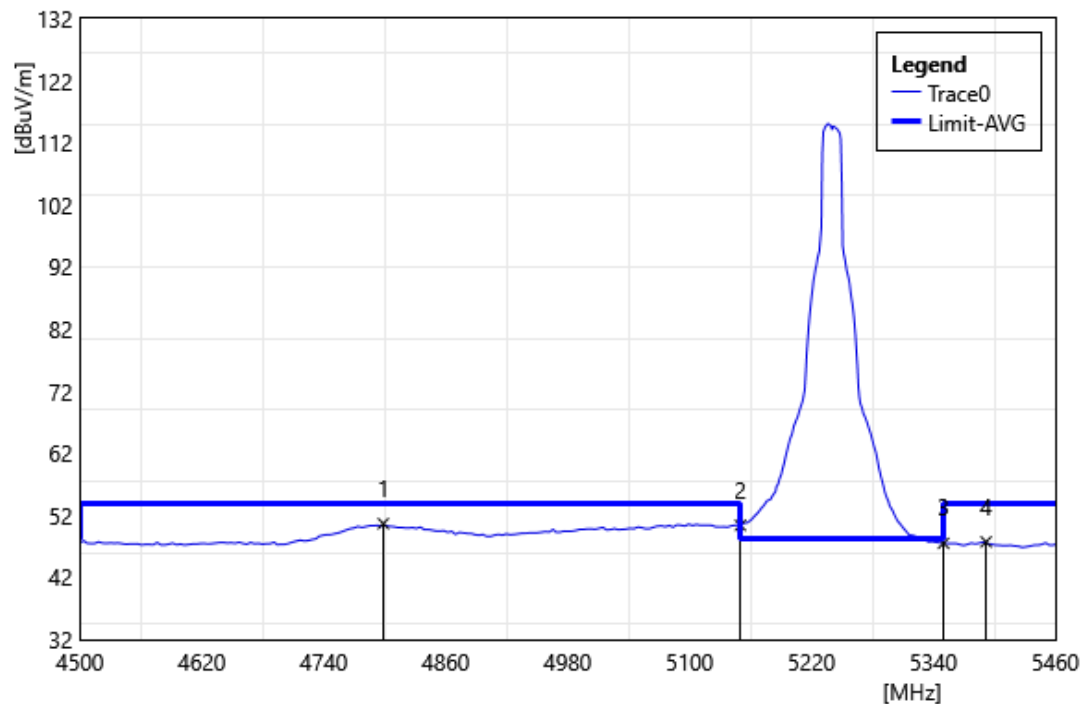


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4798.56	52.15	-1.48	50.67	54.00	-3.33	AVG
2	5150.00	53.62	-3.22	50.40	54.00	-3.60	AVG
3	5350.00	51.59	-4.08	47.51	54.00	-6.49	AVG
4	5391.84	51.94	-4.21	47.73	54.00	-6.27	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5240 MHz		
Polarization:	Vertical		
Remark:			

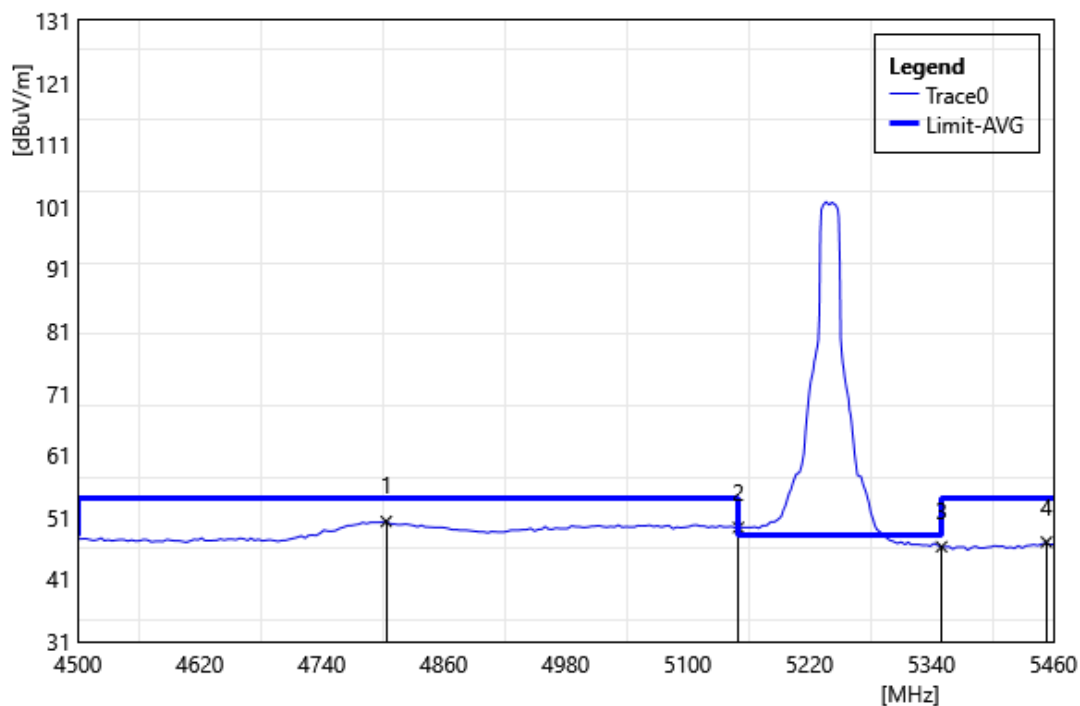


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4803.36	51.82	-1.48	50.34	54.00	-3.66	AVG
2	5150.00	52.59	-3.22	49.37	54.00	-4.63	AVG
3	5350.00	50.34	-4.08	46.26	54.00	-7.74	AVG
4	5453.28	51.10	-4.08	47.02	54.00	-6.98	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5190 MHz		
Polarization:	Horizontal		
Remark:			

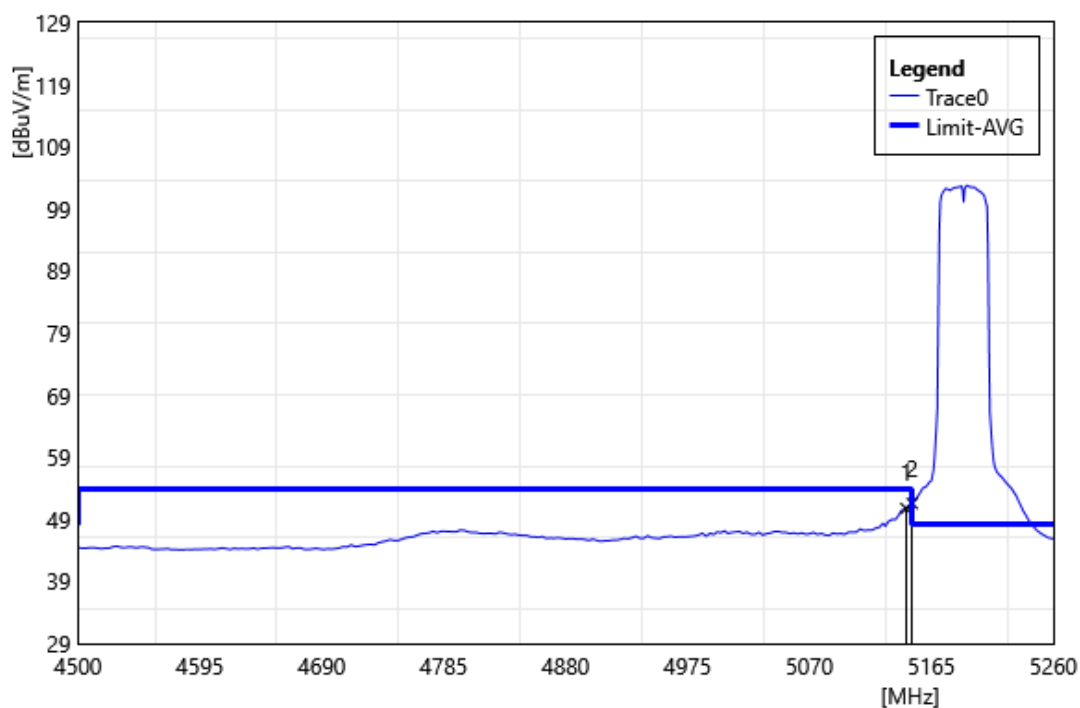


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.24	53.97	-3.23	50.74	54.00	-3.26	AVG
2	5150.00	54.78	-3.22	51.56	54.00	-2.44	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5190 MHz		
Polarization:	Vertical		
Remark:			

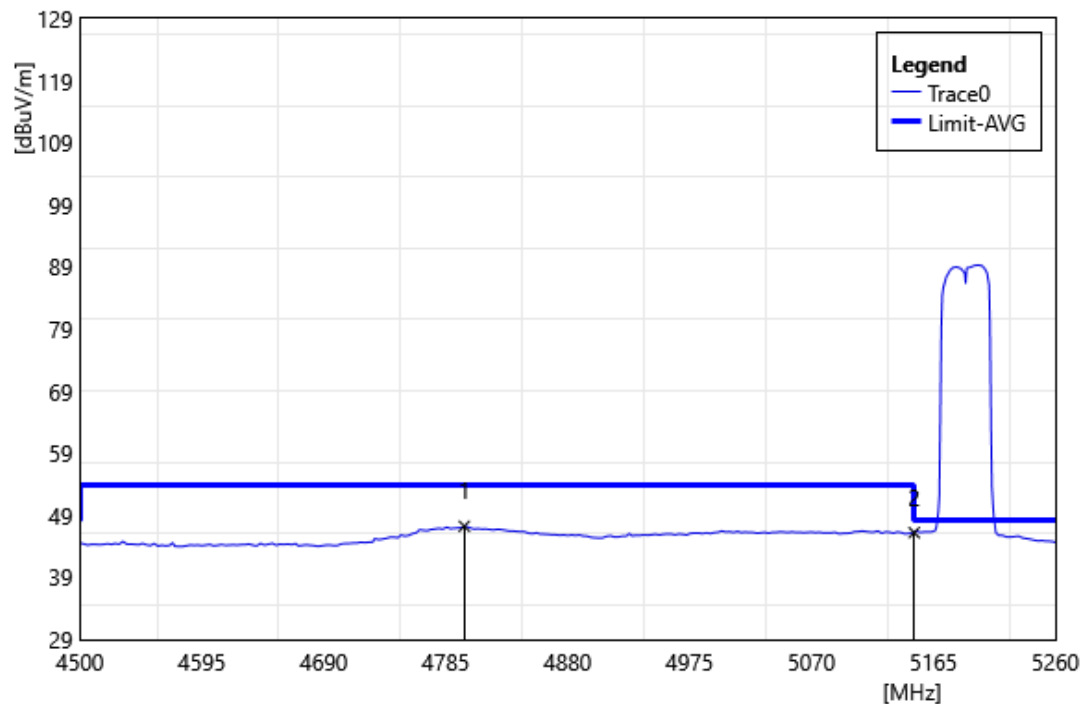


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4799.44	48.68	-1.45	47.24	54.00	-6.77	AVG
2	5150.00	49.44	-3.22	46.22	54.00	-7.78	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5230 MHz		
Polarization:	Horizontal		
Remark:			

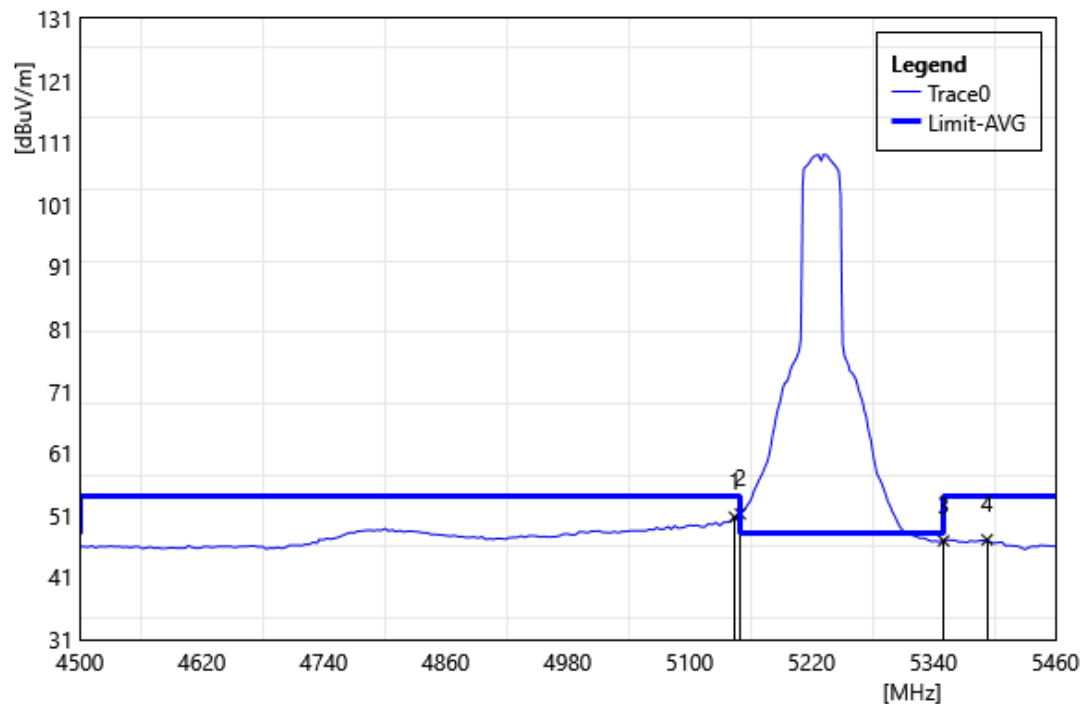


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5144.16	53.96	-3.23	50.73	54.00	-3.27	AVG
2	5150.00	54.45	-3.22	51.23	54.00	-2.77	AVG
3	5350.00	50.99	-4.08	46.91	54.00	-7.09	AVG
4	5392.80	51.26	-4.20	47.07	54.00	-6.94	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5230 MHz		
Polarization:	Vertical		
Remark:			

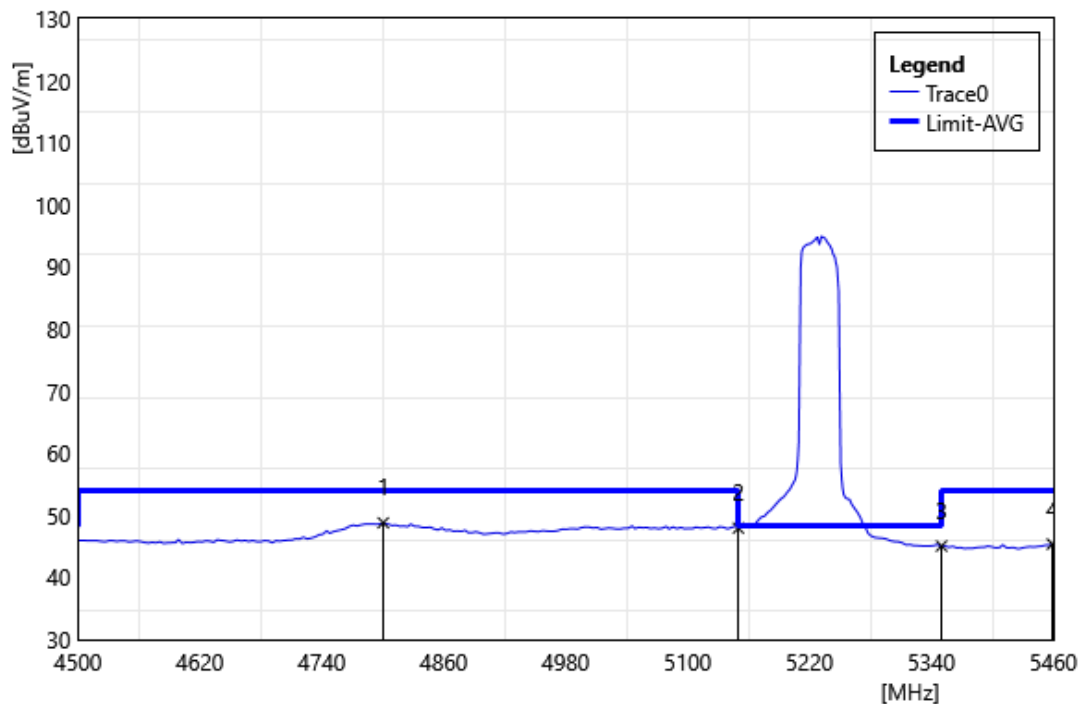


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4800.48	50.24	-1.44	48.80	54.00	-5.20	AVG
2	5150.00	51.18	-3.22	47.96	54.00	-6.04	AVG
3	5350.00	49.14	-4.08	45.06	54.00	-8.94	AVG
4	5459.04	49.45	-4.09	45.36	54.00	-8.64	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

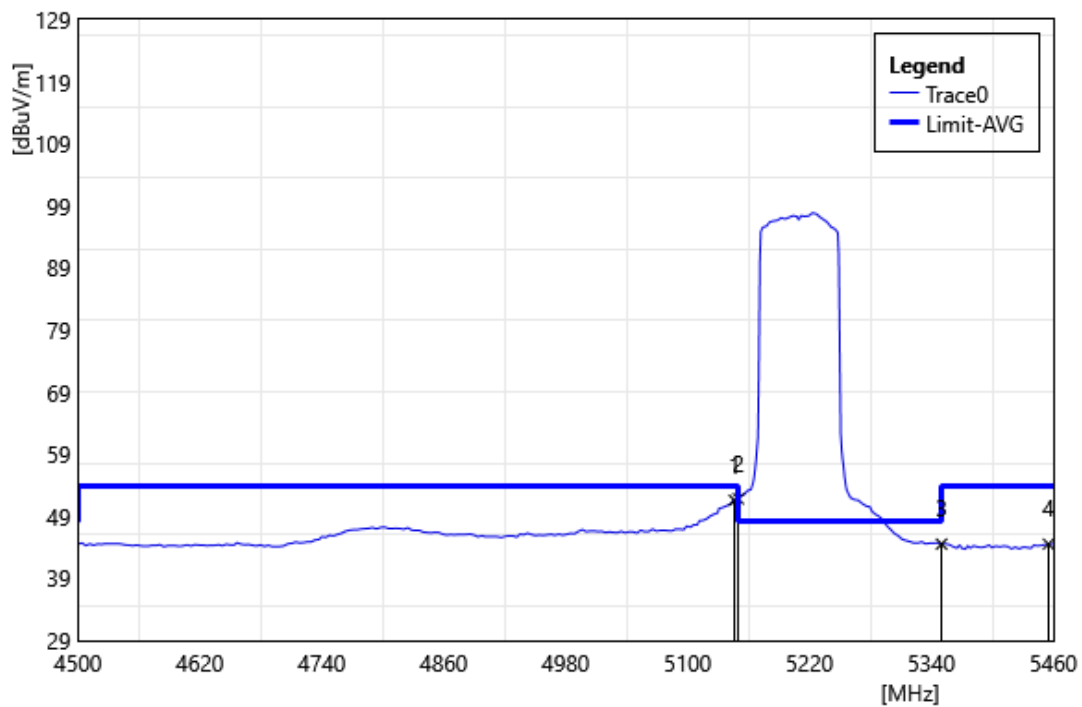


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.08	54.82	-3.23	51.59	54.00	-2.41	AVG
2	5150.00	55.05	-3.22	51.83	54.00	-2.17	AVG
3	5350.00	48.61	-4.08	44.53	54.00	-9.47	AVG
4	5455.20	48.62	-4.09	44.53	54.00	-9.47	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

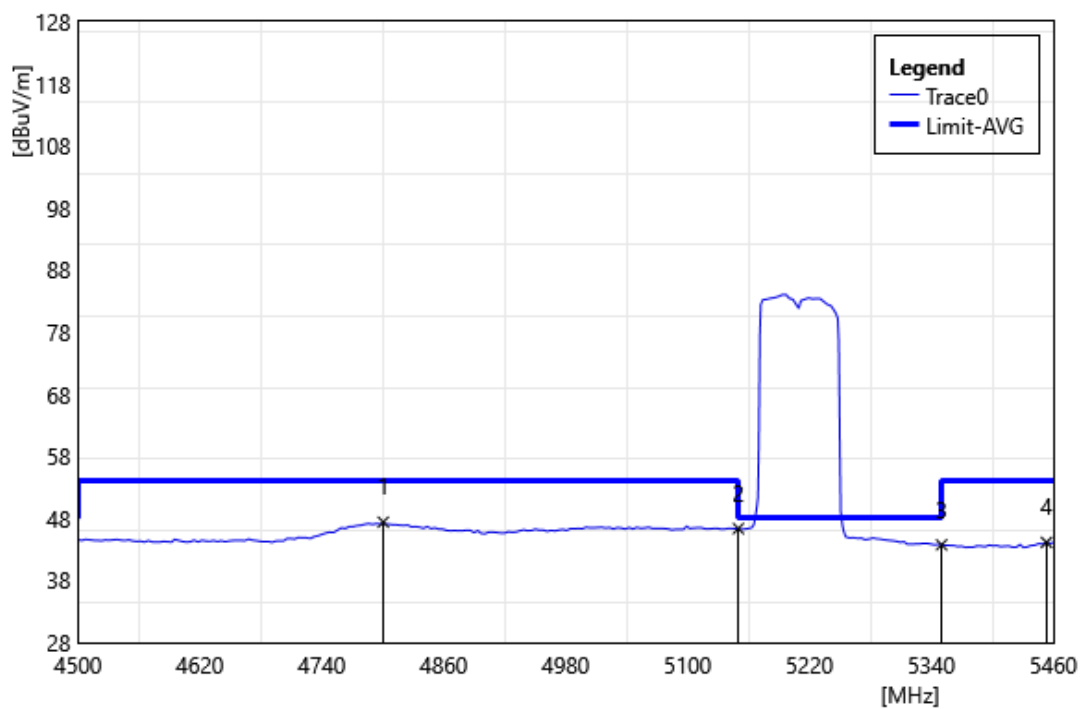


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4800.48	48.83	-1.44	47.39	54.00	-6.61	AVG
2	5150.00	49.57	-3.22	46.35	54.00	-7.65	AVG
3	5350.00	47.82	-4.08	43.74	54.00	-10.26	AVG
4	5453.28	48.21	-4.08	44.13	54.00	-9.87	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5180		
	MHz		
Polarization:	Horizontal		
Remark:			

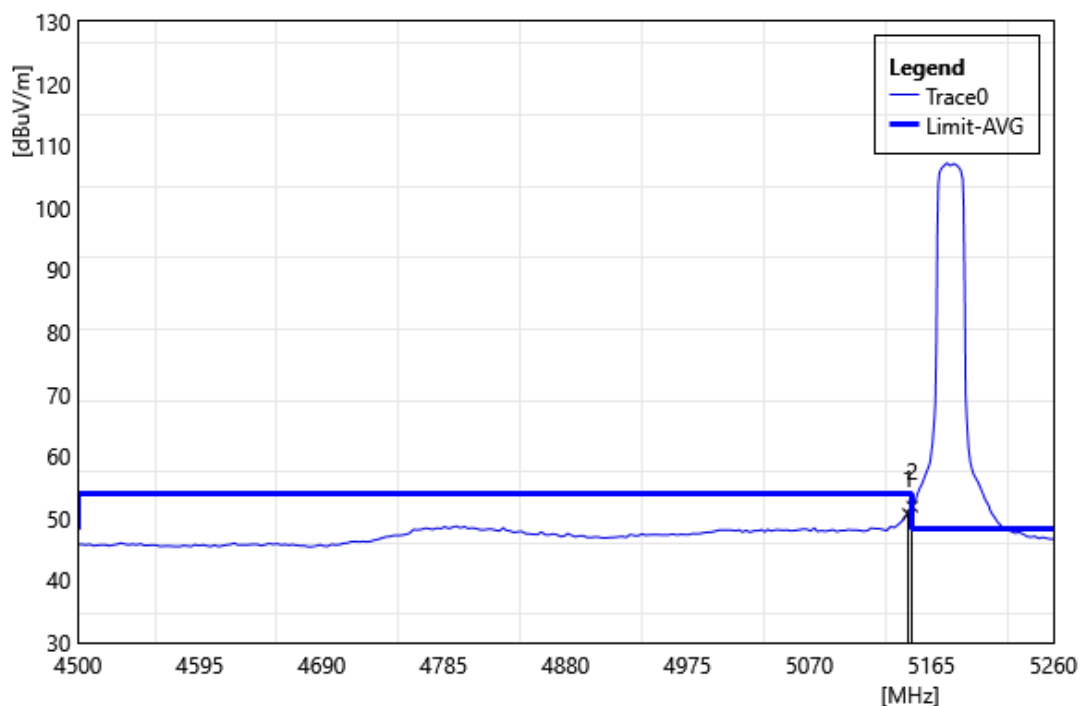

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	53.95	-3.23	50.72	54.00	-3.28	AVG
2	5150.00	55.12	-3.22	51.90	54.00	-2.10	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5180		
	MHz		
Polarization:	Vertical		
Remark:			

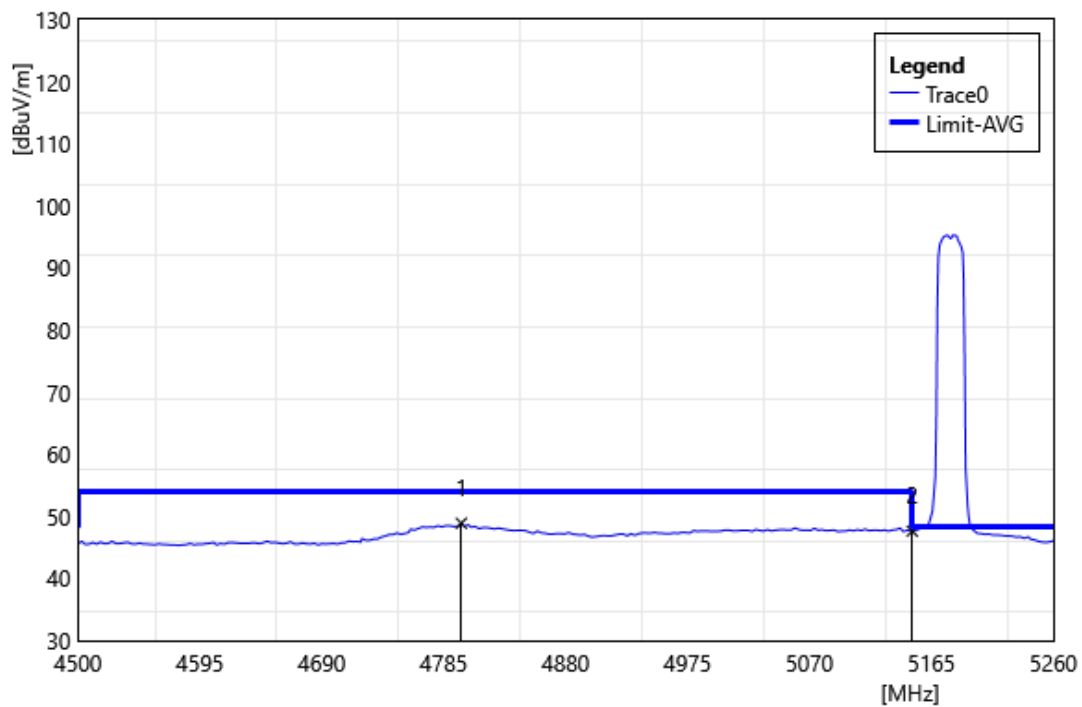

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4798.68	50.37	-1.48	48.89	54.00	-5.11	AVG
2	5150.00	50.85	-3.22	47.63	54.00	-6.37	AVG