



Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5240		
	MHz		
Polarization:	Horizontal		
Remark:			

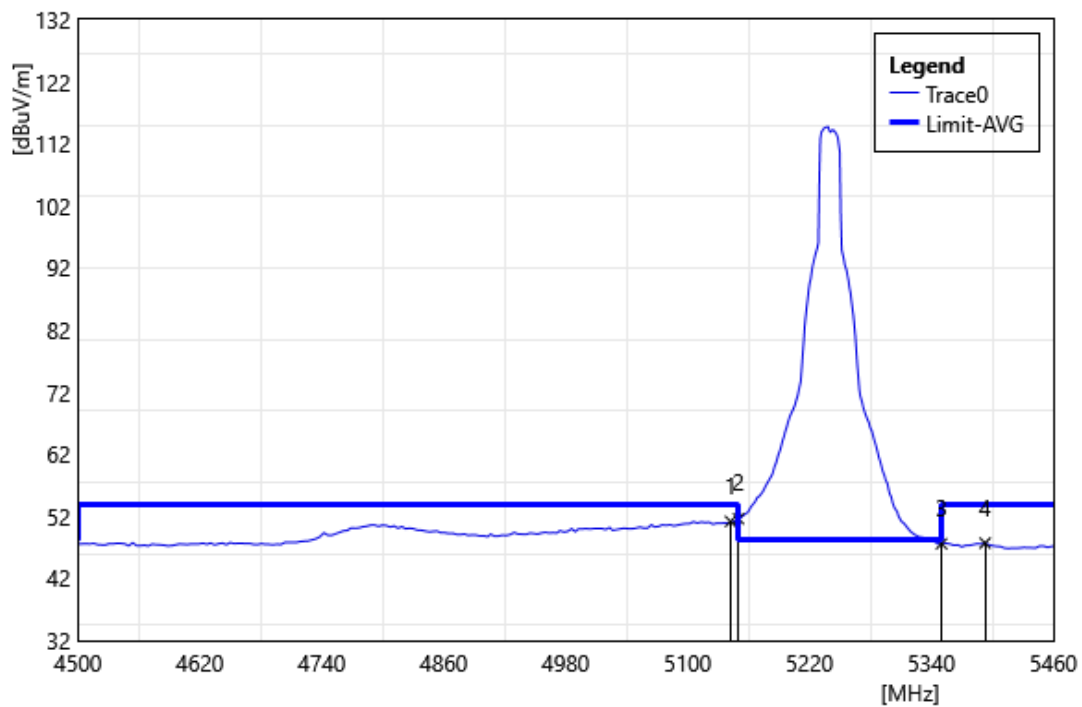


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.24	54.43	-3.24	51.19	54.00	-2.81	AVG
2	5150.00	54.84	-3.22	51.62	54.00	-2.38	AVG
3	5350.00	51.66	-4.08	47.58	54.00	-6.42	AVG
4	5392.80	51.88	-4.20	47.69	54.00	-6.32	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5240		
	MHz		
Polarization:	Vertical		
Remark:			

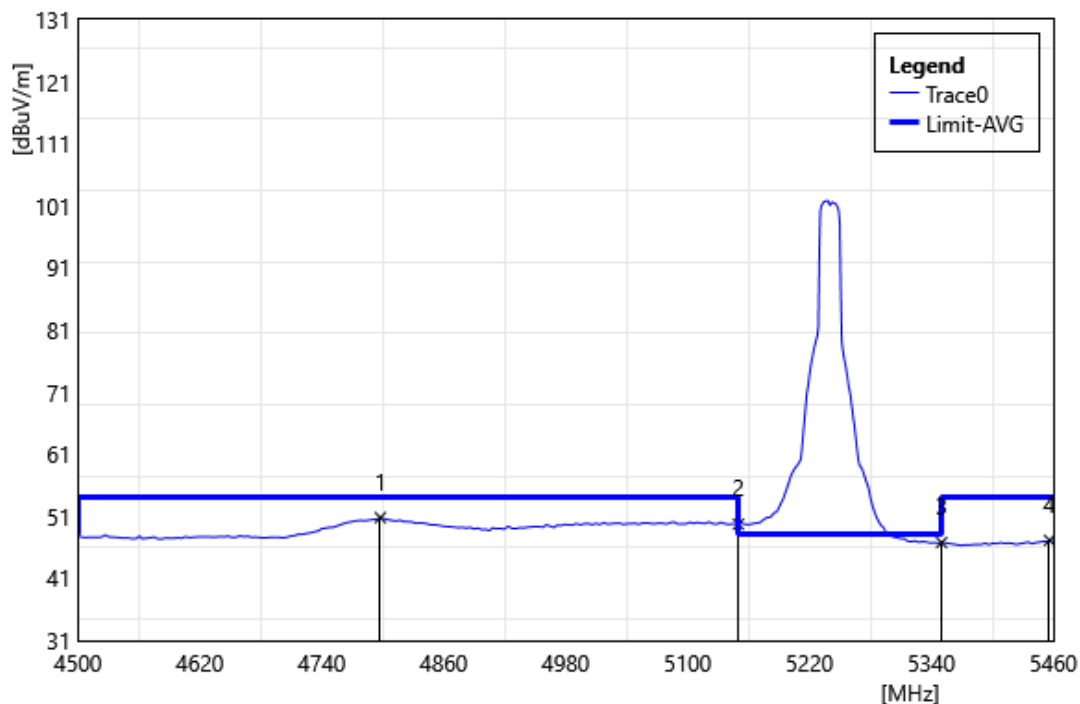


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4797.60	52.31	-1.51	50.80	54.00	-3.20	AVG
2	5150.00	52.95	-3.22	49.73	54.00	-4.27	AVG
3	5350.00	50.87	-4.08	46.79	54.00	-7.21	AVG
4	5456.16	51.24	-4.09	47.15	54.00	-6.85	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

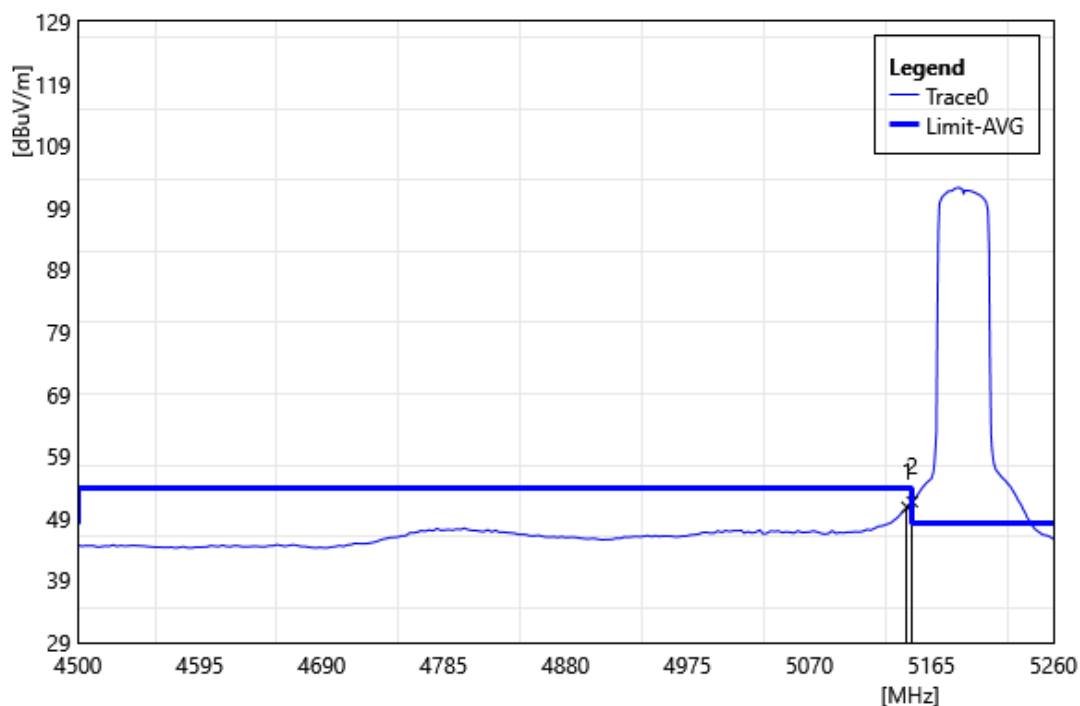


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.00	54.02	-3.23	50.80	54.00	-3.21	AVG
2	5150.00	54.89	-3.22	51.67	54.00	-2.33	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

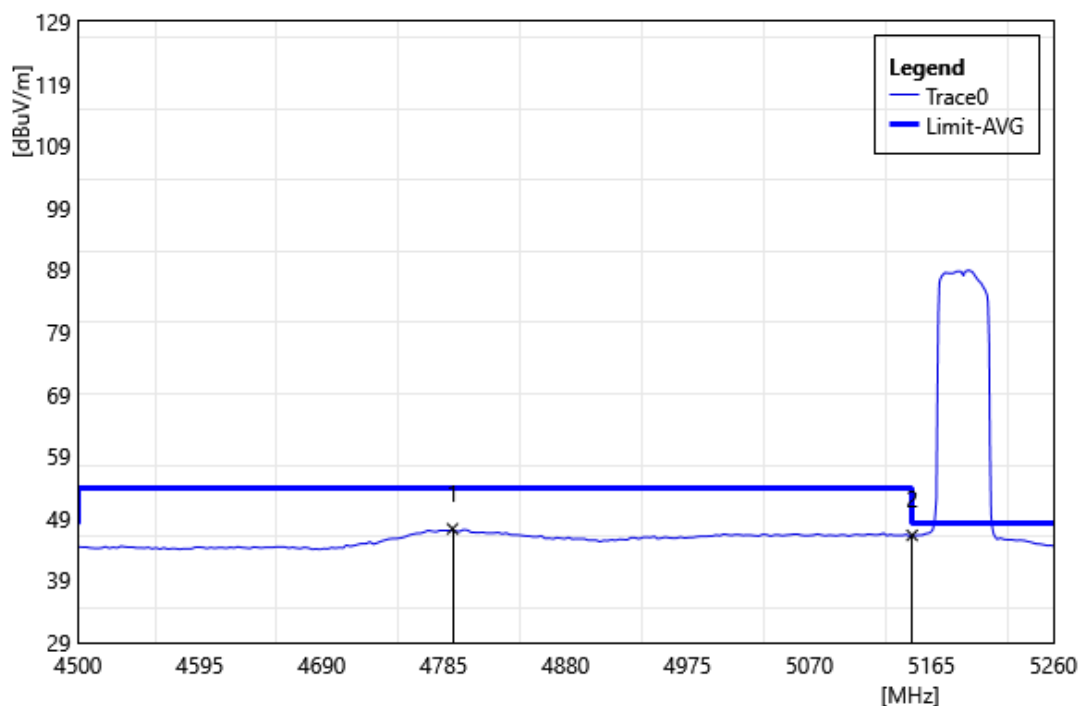


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4791.84	48.99	-1.68	47.31	54.00	-6.69	AVG
2	5150.00	49.48	-3.22	46.26	54.00	-7.74	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5230		
	MHz		
Polarization:	Horizontal		
Remark:			

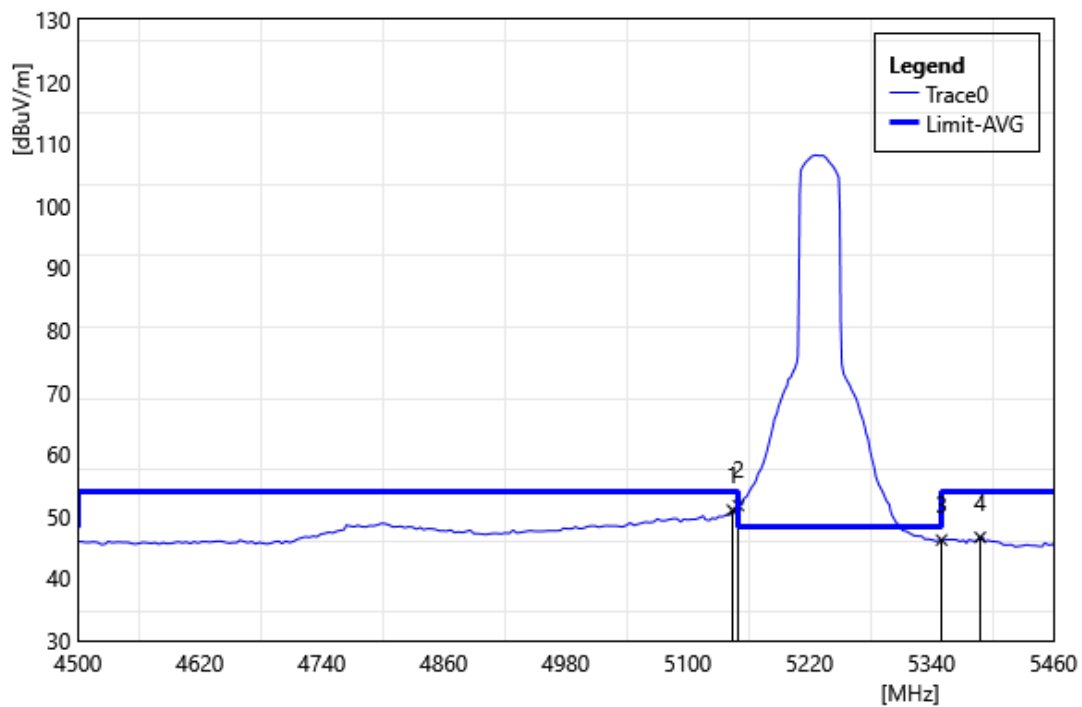


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5144.16	54.23	-3.23	51.00	54.00	-3.00	AVG
2	5150.00	54.95	-3.22	51.73	54.00	-2.27	AVG
3	5350.00	50.26	-4.08	46.18	54.00	-7.82	AVG
4	5388.00	50.81	-4.20	46.61	54.00	-7.39	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

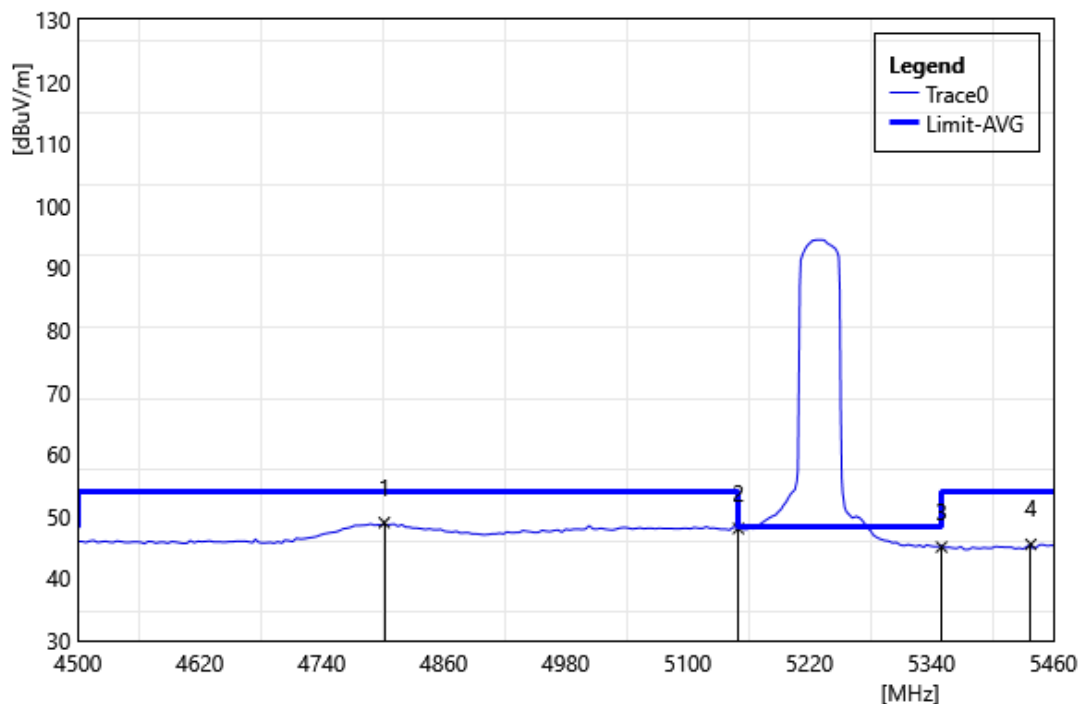


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4801.44	50.42	-1.44	48.98	54.00	-5.02	AVG
2	5150.00	51.27	-3.22	48.05	54.00	-5.95	AVG
3	5350.00	49.14	-4.08	45.06	54.00	-8.94	AVG
4	5437.92	49.61	-4.12	45.49	54.00	-8.51	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

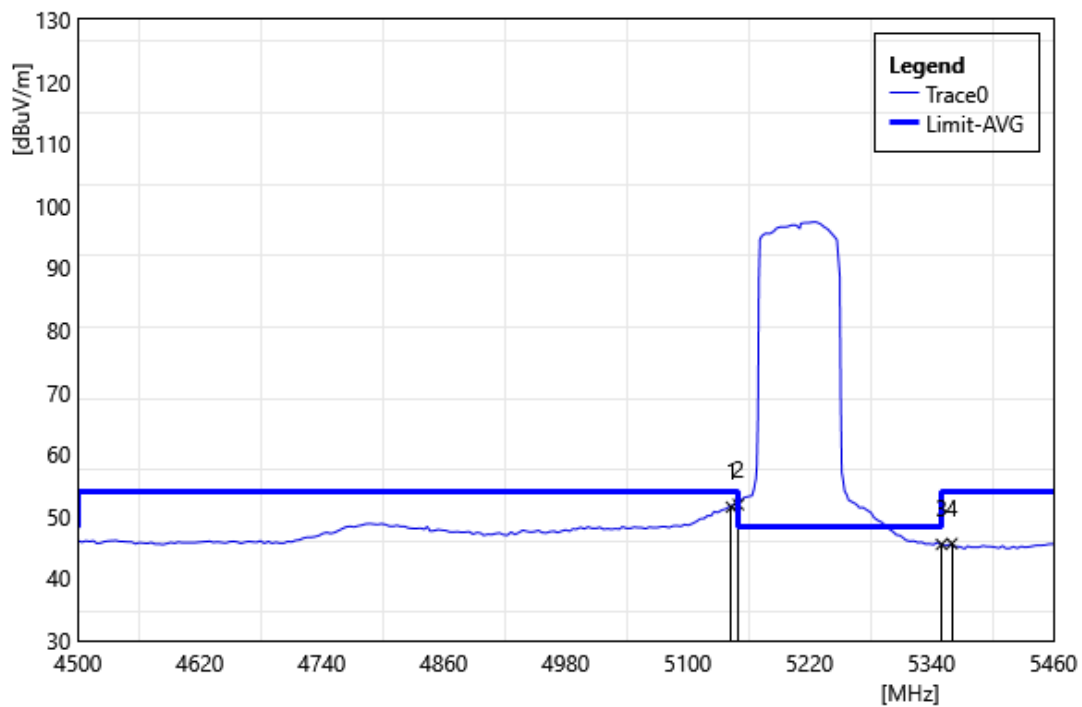

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5143.20	54.71	-3.23	51.48	54.00	-2.52	AVG
2	5150.00	55.12	-3.22	51.90	54.00	-2.10	AVG
3	5350.00	49.57	-4.08	45.49	54.00	-8.51	AVG
4	5360.16	49.73	-4.11	45.62	54.00	-8.38	AVG


Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

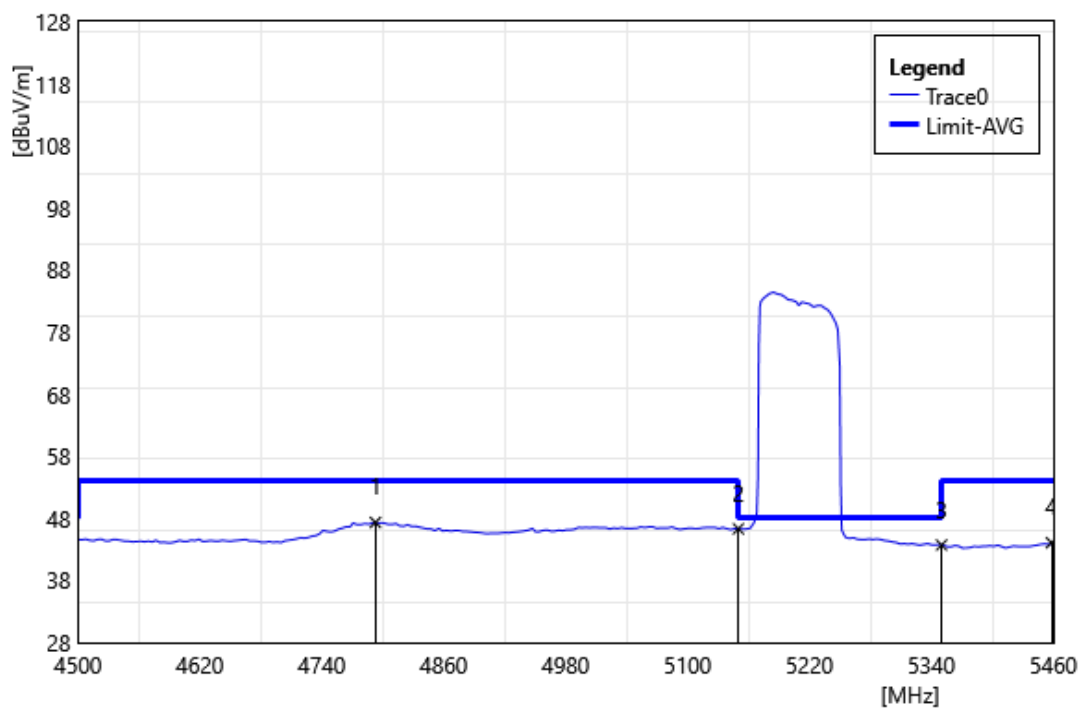

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4792.80	49.01	-1.66	47.35	54.00	-6.65	AVG
2	5150.00	49.53	-3.22	46.31	54.00	-7.69	AVG
3	5350.00	47.79	-4.08	43.71	54.00	-10.29	AVG
4	5458.08	48.16	-4.09	44.07	54.00	-9.93	AVG


MIMO - Peak

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5180 MHz		
Polarization:	Horizontal		
Remark:			

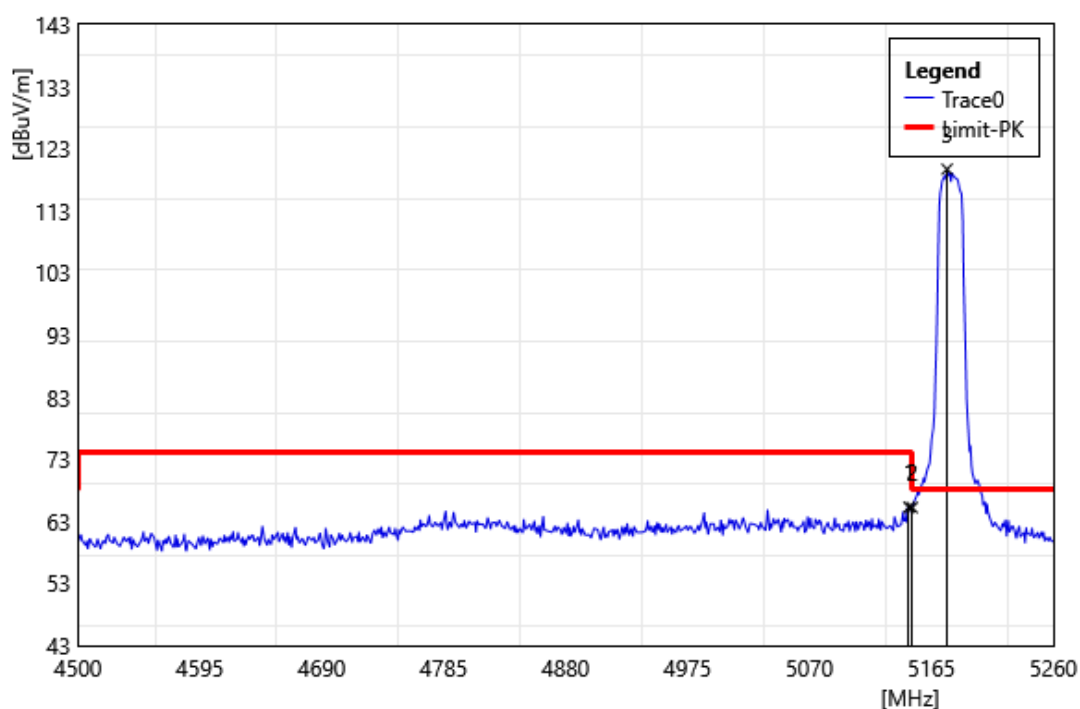


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	68.50	-3.23	65.27	74.00	-8.74	PEAK
2	5150.00	68.44	-3.22	65.22	74.00	-8.78	PEAK
3	5177.16	122.82	-3.11	119.71	68.20	51.51	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5180 MHz		
Polarization:	Vertical		
Remark:			

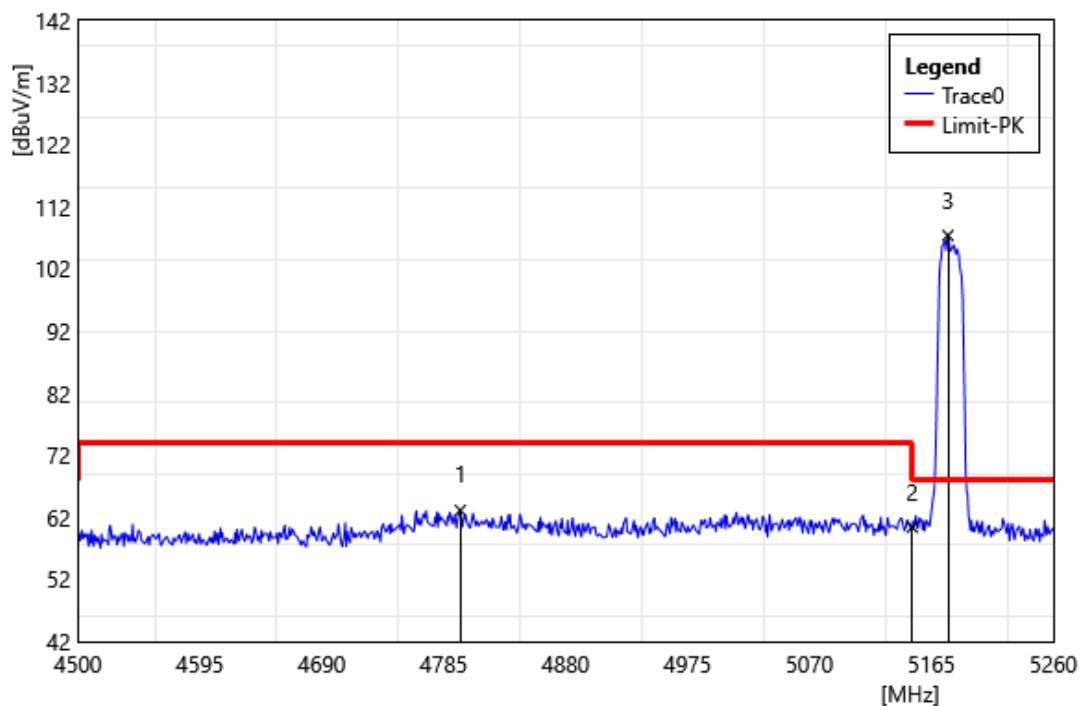


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4797.92	64.62	-1.50	63.12	74.00	-10.88	PEAK
2	5150.00	63.62	-3.22	60.40	74.00	-13.60	PEAK
3	5177.92	110.49	-3.10	107.39	68.20	39.19	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5240 MHz		
Polarization:	Horizontal		
Remark:			

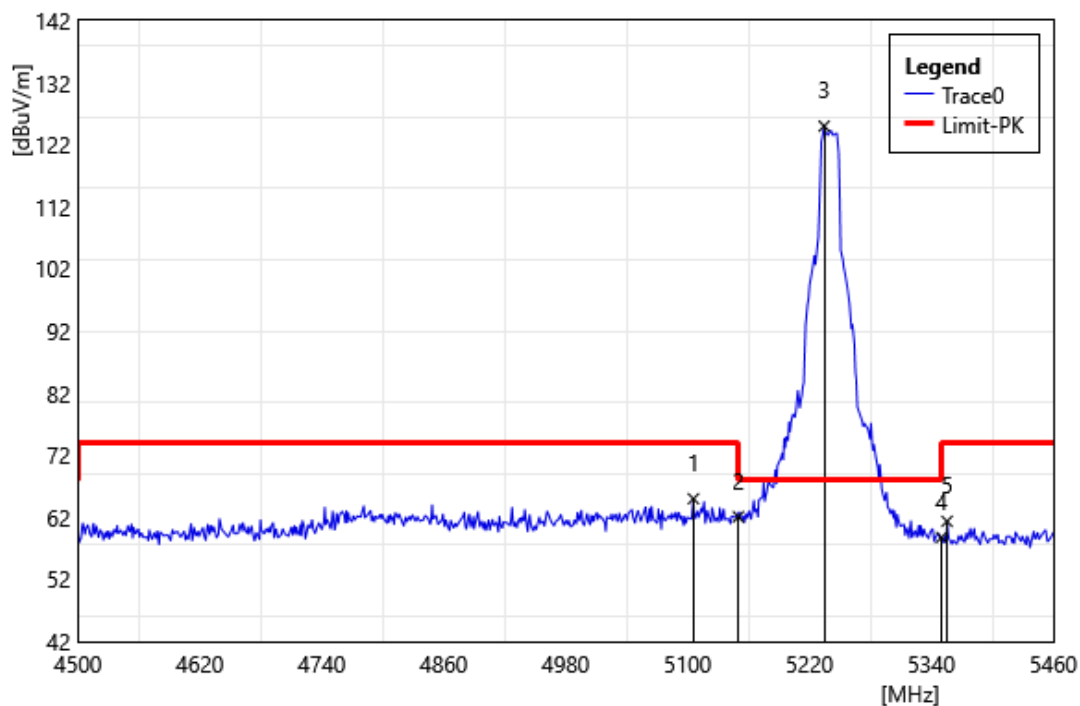


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5105.76	68.32	-3.32	65.00	74.00	-9.00	PEAK
2	5150.00	65.31	-3.22	62.09	74.00	-11.91	PEAK
3	5234.40	128.30	-3.29	125.01	68.20	56.81	PEAK
4	5350.00	62.86	-4.08	58.78	74.00	-15.22	PEAK
5	5355.36	65.46	-4.10	61.36	74.00	-12.64	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5240 MHz		
Polarization:	Vertical		
Remark:			

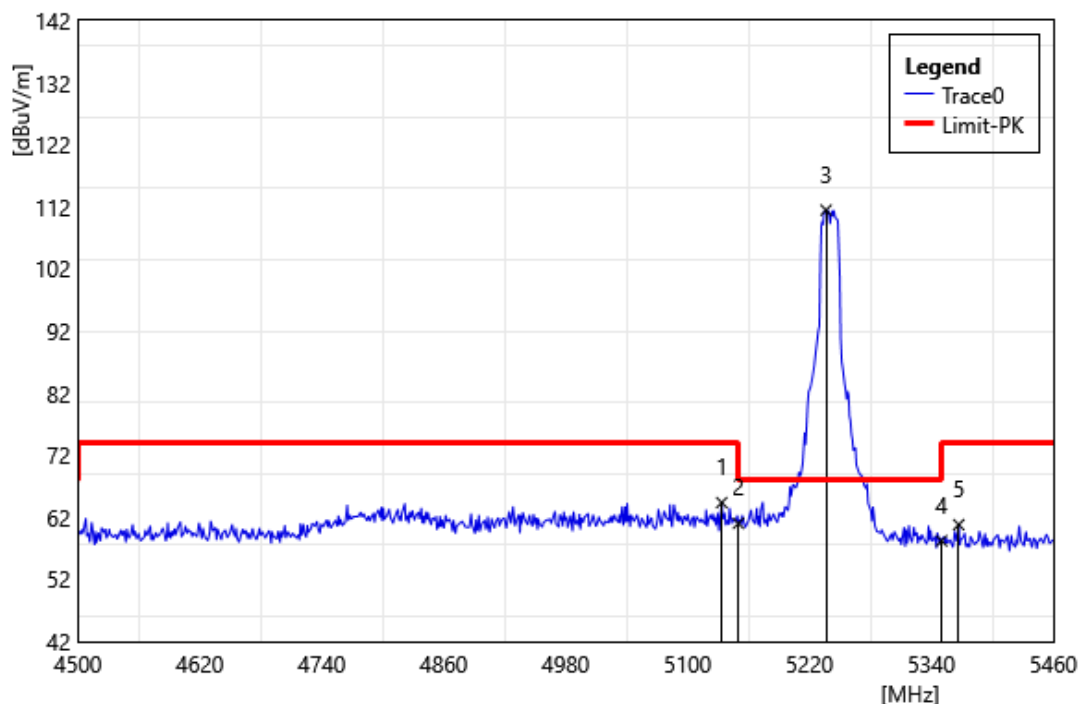


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5133.60	67.63	-3.26	64.37	74.00	-9.63	PEAK
2	5150.00	64.26	-3.22	61.04	74.00	-12.96	PEAK
3	5236.32	114.79	-3.30	111.49	68.20	43.29	PEAK
4	5350.00	62.30	-4.08	58.22	74.00	-15.78	PEAK
5	5366.88	64.94	-4.13	60.81	74.00	-13.19	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5745 MHz		
Polarization:	Horizontal		
Remark:			

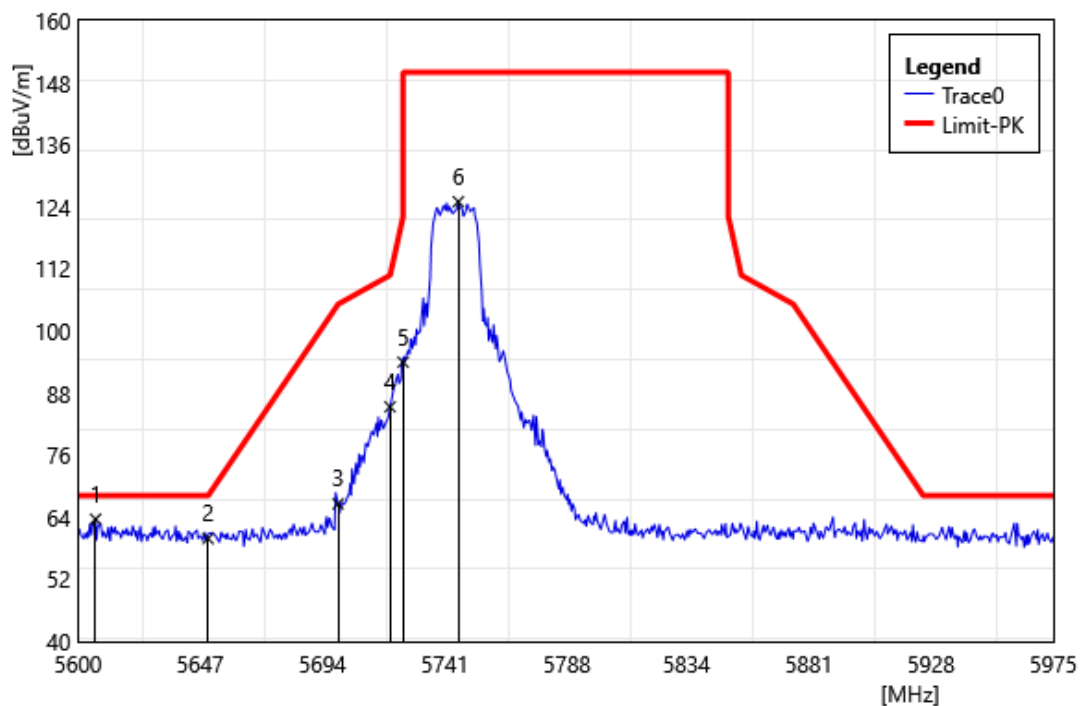


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5606.75	66.78	-3.13	63.66	68.20	-4.55	PEAK
2	5650.00	63.18	-3.27	59.91	68.20	-8.29	PEAK
3	5700.00	70.05	-3.44	66.61	105.20	-38.59	PEAK
4	5720.00	88.64	-3.28	85.36	110.80	-25.44	PEAK
5	5725.00	97.23	-3.23	94.00	150.00	-56.00	PEAK
6	5746.25	128.09	-3.07	125.02	150.00	-24.98	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5745 MHz		
Polarization:	Vertical		
Remark:			

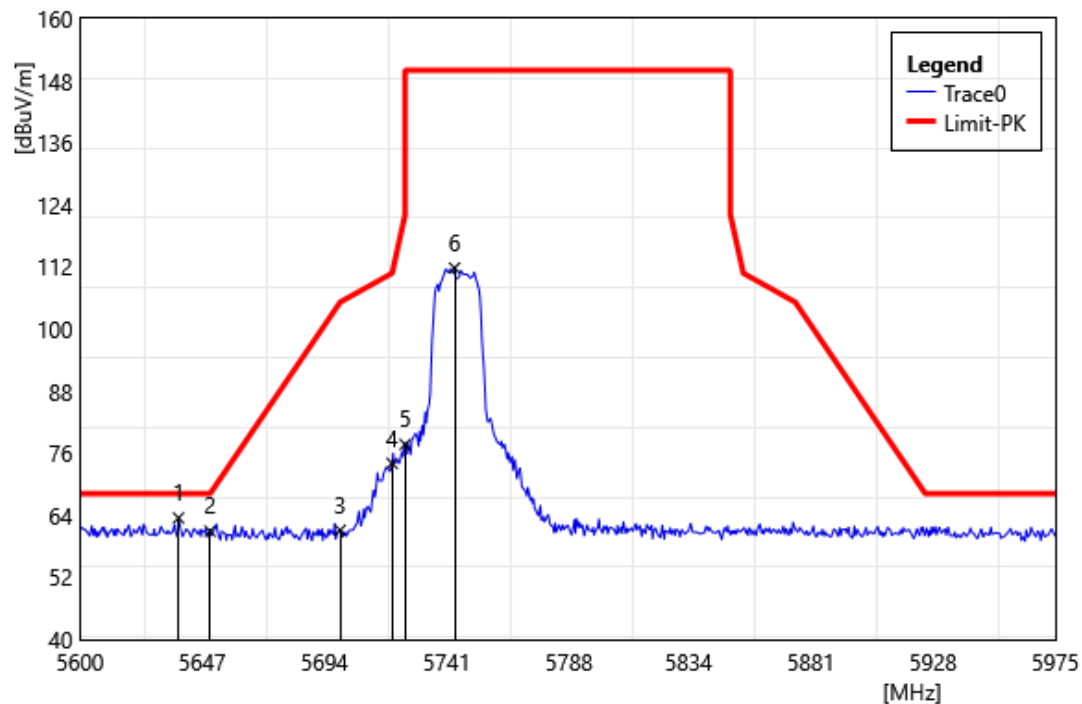


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5637.88	66.73	-3.23	63.50	68.20	-4.70	PEAK
2	5650.00	64.22	-3.27	60.95	68.20	-7.25	PEAK
3	5700.00	64.57	-3.44	61.13	105.20	-44.07	PEAK
4	5720.00	77.32	-3.28	74.04	110.80	-36.76	PEAK
5	5725.00	80.94	-3.23	77.71	150.00	-72.29	PEAK
6	5744.00	114.88	-3.08	111.80	150.00	-38.20	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5825 MHz		
Polarization:	Horizontal		
Remark:			

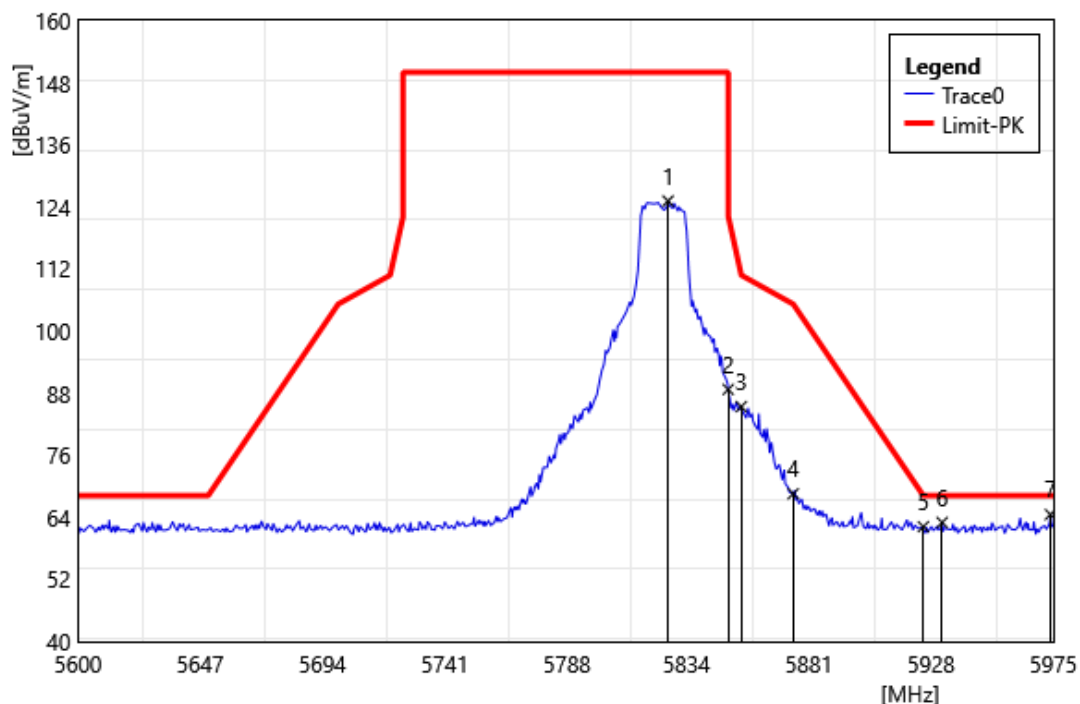


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5826.88	127.68	-2.55	125.14	150.00	-24.87	PEAK
2	5850.00	91.30	-2.57	88.73	122.20	-33.47	AVG
3	5855.00	88.01	-2.61	85.40	110.80	-25.40	AVG
4	5875.00	71.31	-2.75	68.56	105.20	-36.64	PEAK
5	5925.00	65.31	-3.12	62.19	68.20	-6.01	PEAK
6	5932.25	66.21	-3.18	63.03	68.20	-5.17	AVG
7	5973.88	68.07	-3.53	64.54	68.20	-3.66	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5825 MHz		
Polarization:	Vertical		
Remark:			

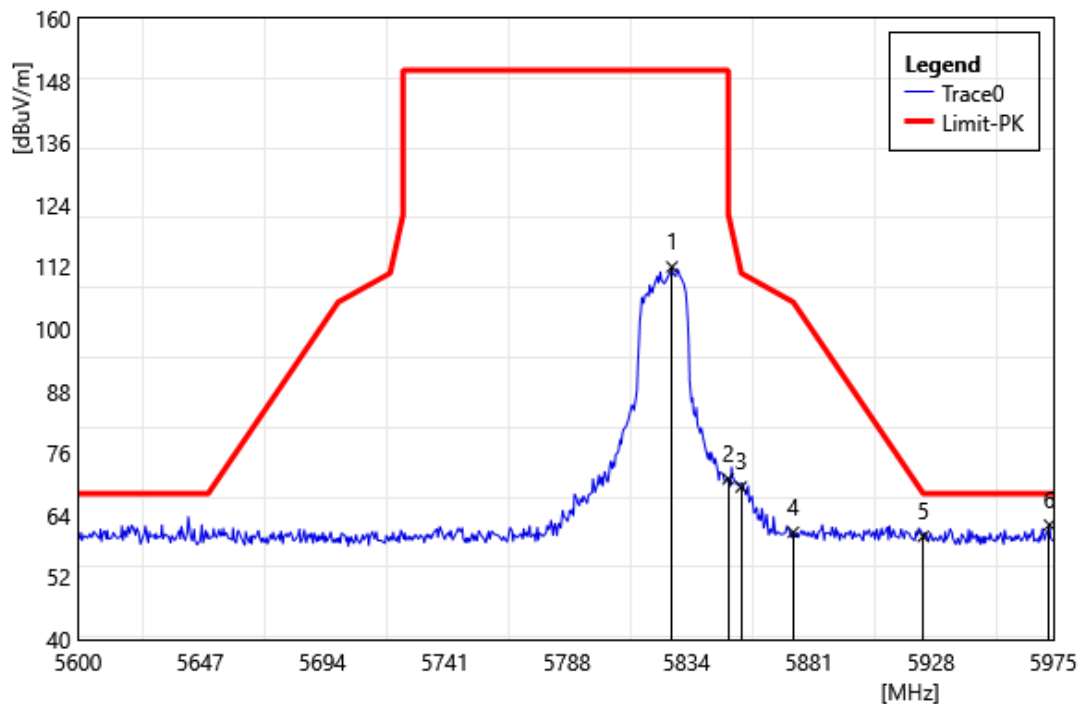


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5828.38	114.56	-2.56	112.00	150.00	-38.00	PEAK
2	5850.00	73.60	-2.57	71.03	122.20	-51.17	PEAK
3	5855.00	72.10	-2.61	69.49	110.80	-41.31	PEAK
4	5875.00	63.48	-2.75	60.73	105.20	-44.47	PEAK
5	5925.00	63.06	-3.12	59.94	68.20	-8.26	PEAK
6	5973.50	65.66	-3.53	62.13	68.20	-6.07	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5190 MHz		
Polarization:	Horizontal		
Remark:			

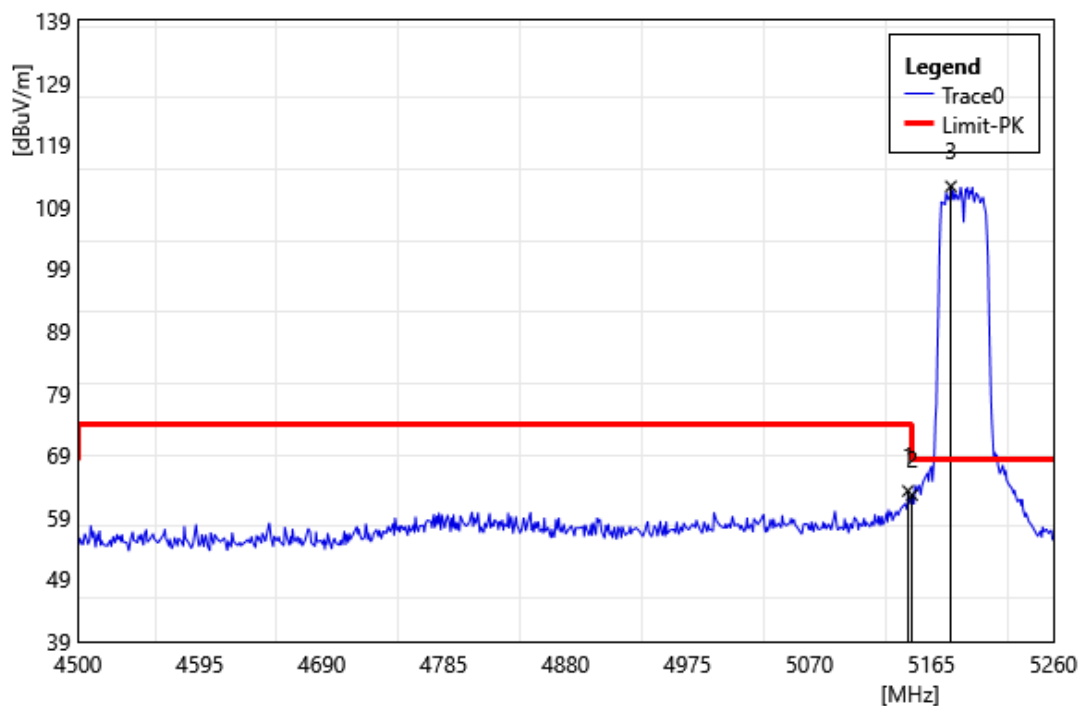


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	66.49	-3.23	63.26	74.00	-10.74	PEAK
2	5150.00	65.80	-3.22	62.58	74.00	-11.42	PEAK
3	5180.20	115.41	-3.10	112.31	68.20	44.11	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5190 MHz		
Polarization:	Vertical		
Remark:			

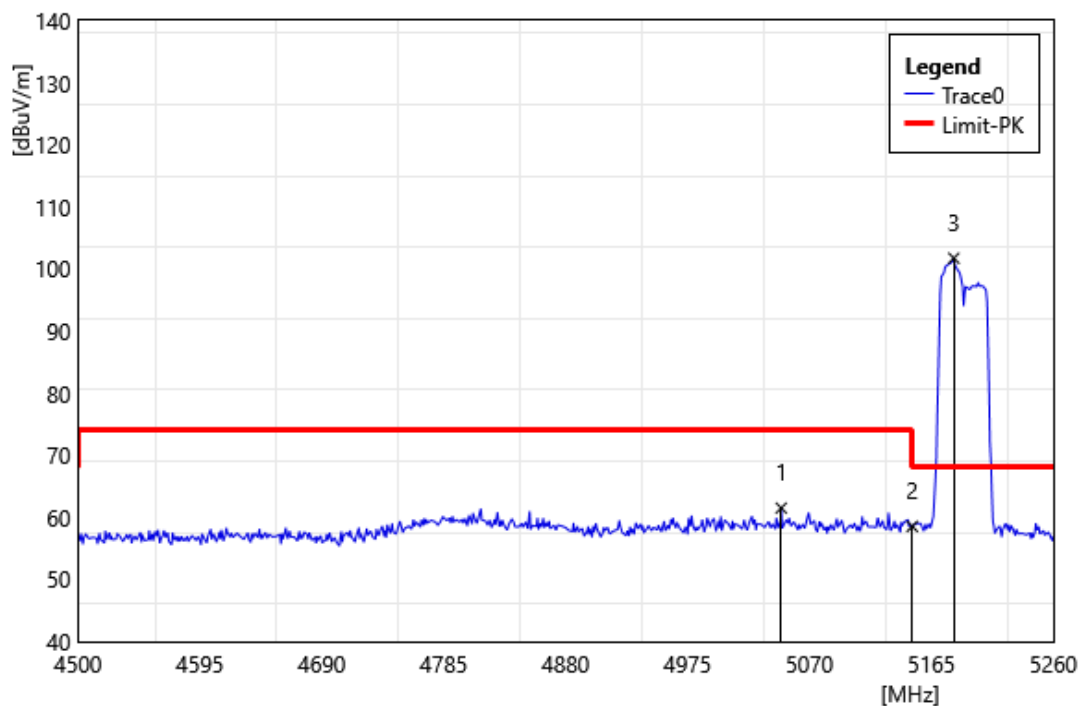


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5047.96	64.58	-3.09	61.49	74.00	-12.51	PEAK
2	5150.00	61.77	-3.22	58.55	74.00	-15.45	PEAK
3	5182.48	104.82	-3.09	101.73	68.20	33.53	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5230 MHz		
Polarization:	Horizontal		
Remark:			

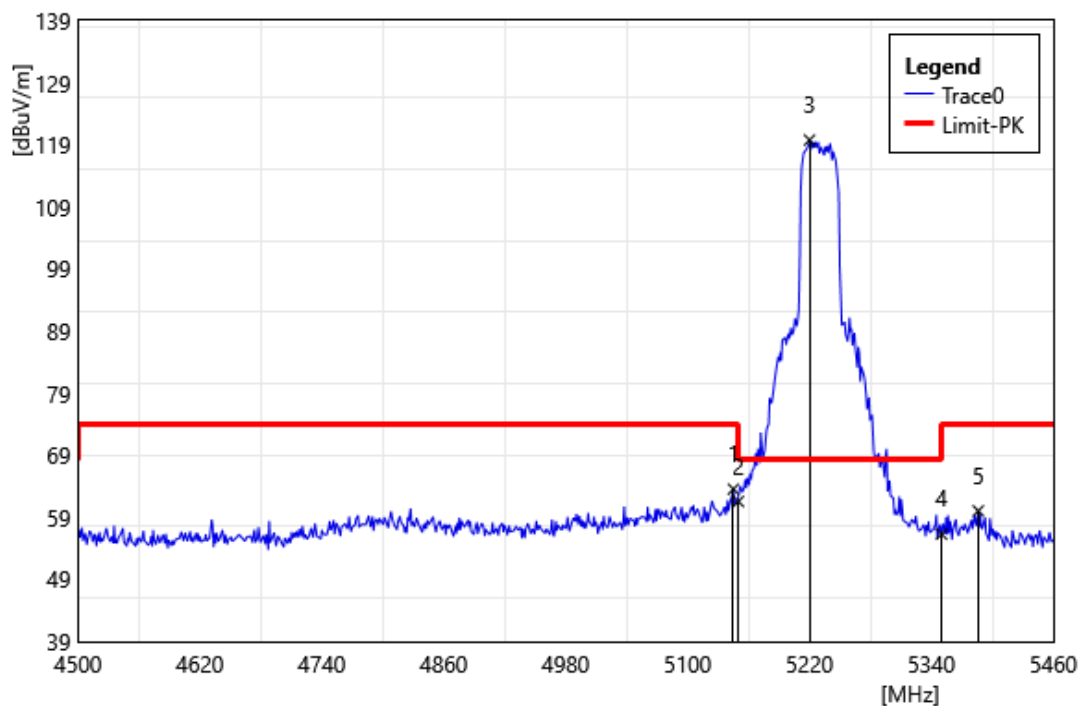


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.12	66.77	-3.23	63.54	74.00	-10.46	PEAK
2	5150.00	64.77	-3.22	61.55	74.00	-12.45	PEAK
3	5220.00	122.94	-3.17	119.77	68.20	51.57	PEAK
4	5350.00	60.37	-4.08	56.29	74.00	-17.71	PEAK
5	5386.08	64.23	-4.18	60.05	74.00	-13.95	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5230 MHz		
Polarization:	Vertical		
Remark:			

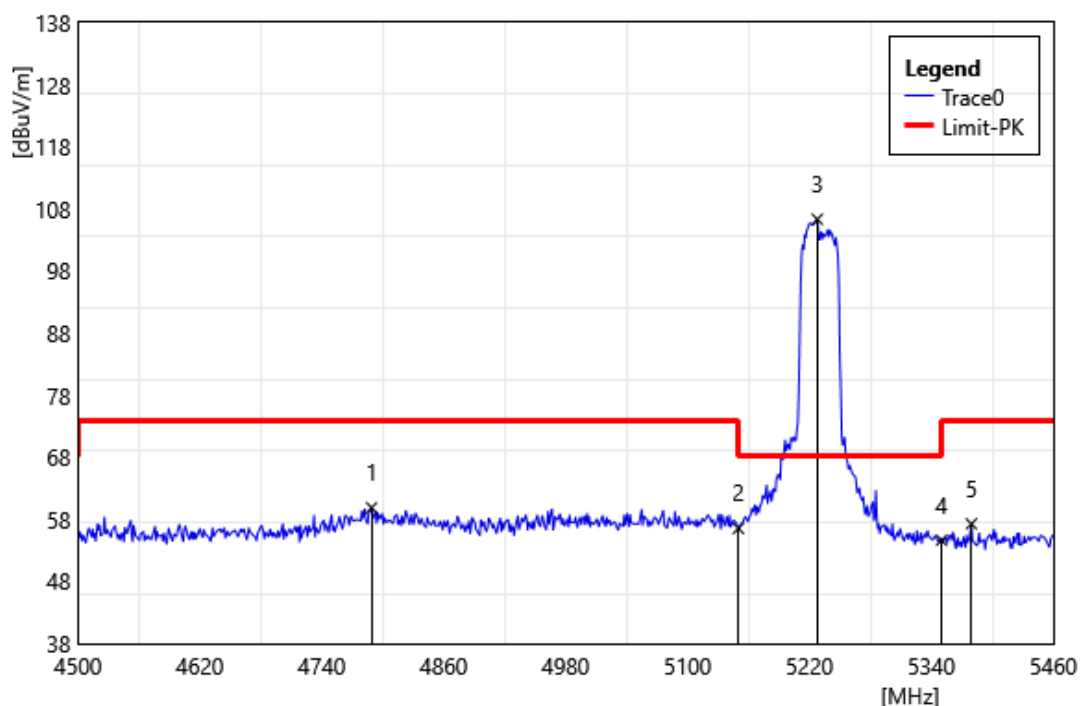


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4788.96	61.64	-1.78	59.86	74.00	-14.14	PEAK
2	5150.00	59.75	-3.22	56.53	74.00	-17.47	PEAK
3	5227.68	109.56	-3.23	106.33	68.20	38.13	PEAK
4	5350.00	58.71	-4.08	54.63	74.00	-19.37	PEAK
5	5379.36	61.44	-4.17	57.27	74.00	-16.73	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5755 MHz		
Polarization:	Horizontal		
Remark:			

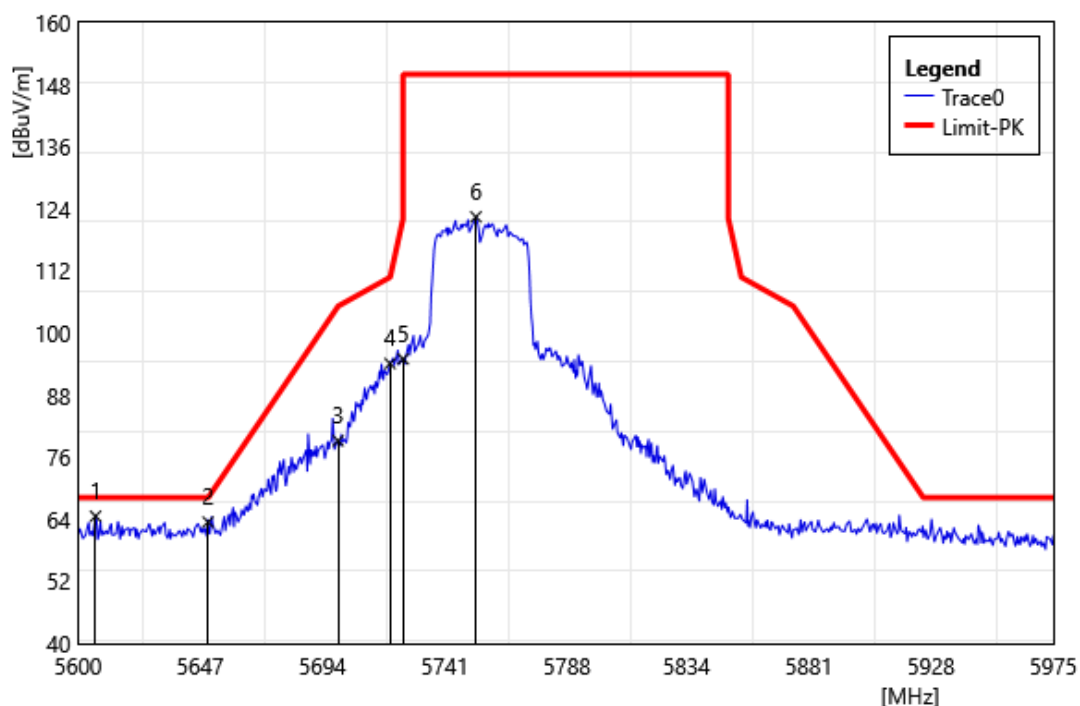


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5606.75	67.74	-3.13	64.61	68.20	-3.59	PEAK
2	5650.00	66.74	-3.27	63.47	68.20	-4.73	PEAK
3	5700.00	82.62	-3.44	79.18	105.20	-26.02	PEAK
4	5720.00	97.39	-3.28	94.11	110.80	-16.69	PEAK
5	5725.00	98.22	-3.23	94.99	150.00	-55.01	PEAK
6	5753.00	125.46	-3.00	122.46	150.00	-27.54	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5755 MHz		
Polarization:	Vertical		
Remark:			

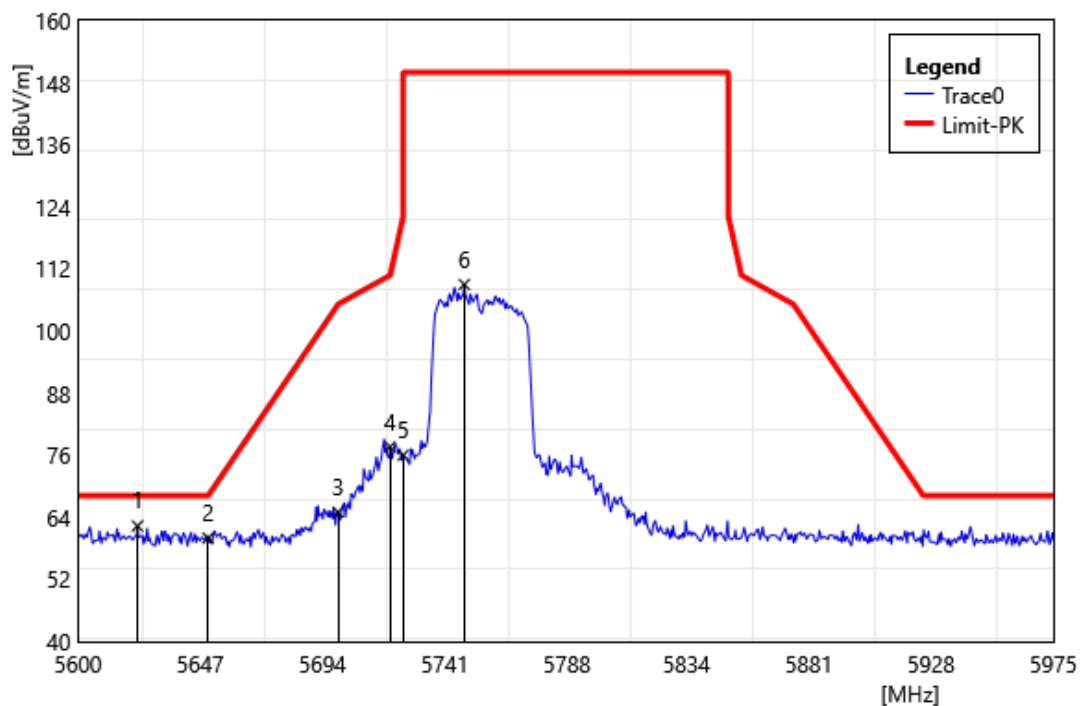


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5622.88	65.50	-3.17	62.33	68.20	-5.87	PEAK
2	5650.00	63.25	-3.27	59.98	68.20	-8.22	PEAK
3	5700.00	68.43	-3.44	64.99	105.20	-40.21	PEAK
4	5720.00	80.90	-3.28	77.62	110.80	-33.18	PEAK
5	5725.00	79.25	-3.23	76.02	150.00	-73.98	PEAK
6	5748.50	112.06	-3.05	109.01	150.00	-40.99	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5795 MHz		
Polarization:	Horizontal		
Remark:			

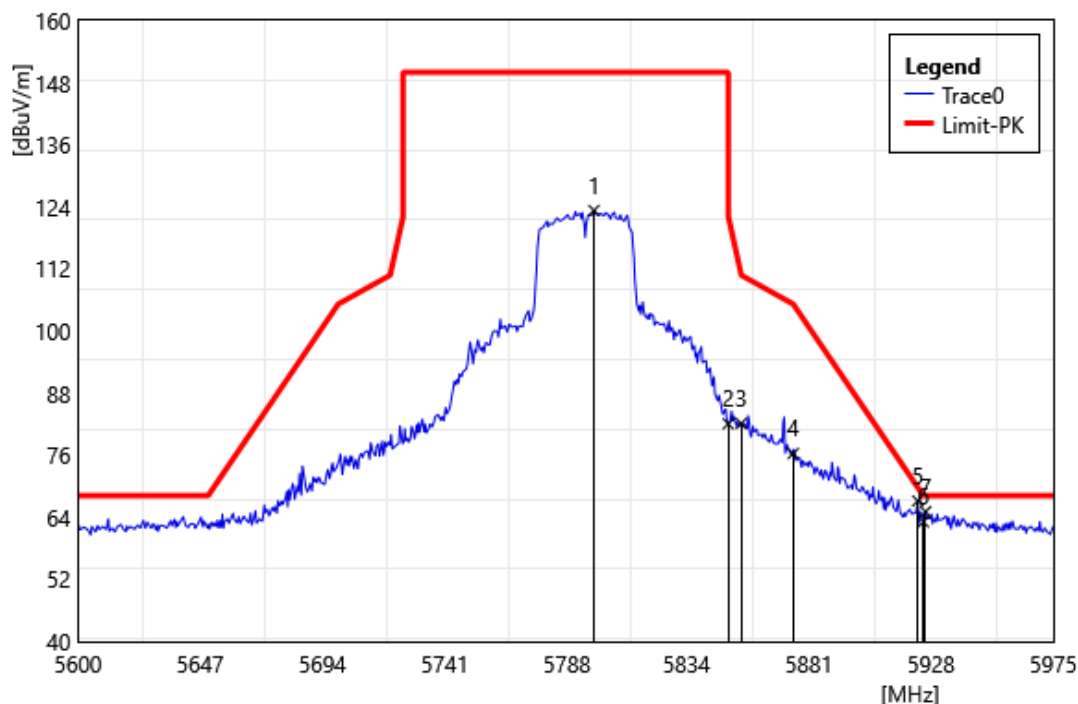


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5798.38	125.84	-2.55	123.29	150.00	-26.71	PEAK
2	5850.00	84.64	-2.57	82.07	122.20	-40.13	PEAK
3	5855.00	84.76	-2.61	82.15	110.80	-28.65	PEAK
4	5875.00	79.10	-2.75	76.35	105.20	-28.85	PEAK
5	5922.88	70.27	-3.10	67.17	69.77	-2.61	PEAK
6	5925.00	66.25	-3.12	63.13	68.20	-5.07	PEAK
7	5925.88	68.22	-3.13	65.09	68.20	-3.11	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5795 MHz		
Polarization:	Vertical		
Remark:			

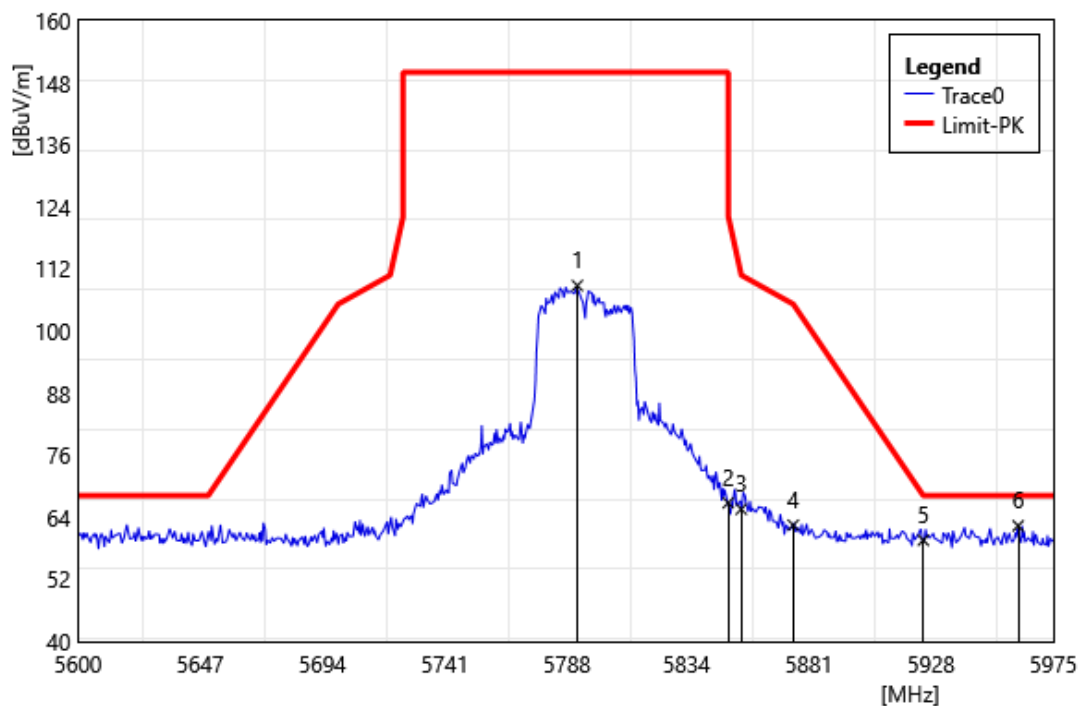


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5792.00	111.41	-2.61	108.80	150.00	-41.20	PEAK
2	5850.00	69.36	-2.57	66.79	122.20	-55.41	PEAK
3	5855.00	68.17	-2.61	65.56	110.80	-45.24	PEAK
4	5875.00	65.25	-2.75	62.50	105.20	-42.70	PEAK
5	5925.00	62.69	-3.12	59.57	68.20	-8.63	PEAK
6	5961.50	65.80	-3.43	62.37	68.20	-5.84	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

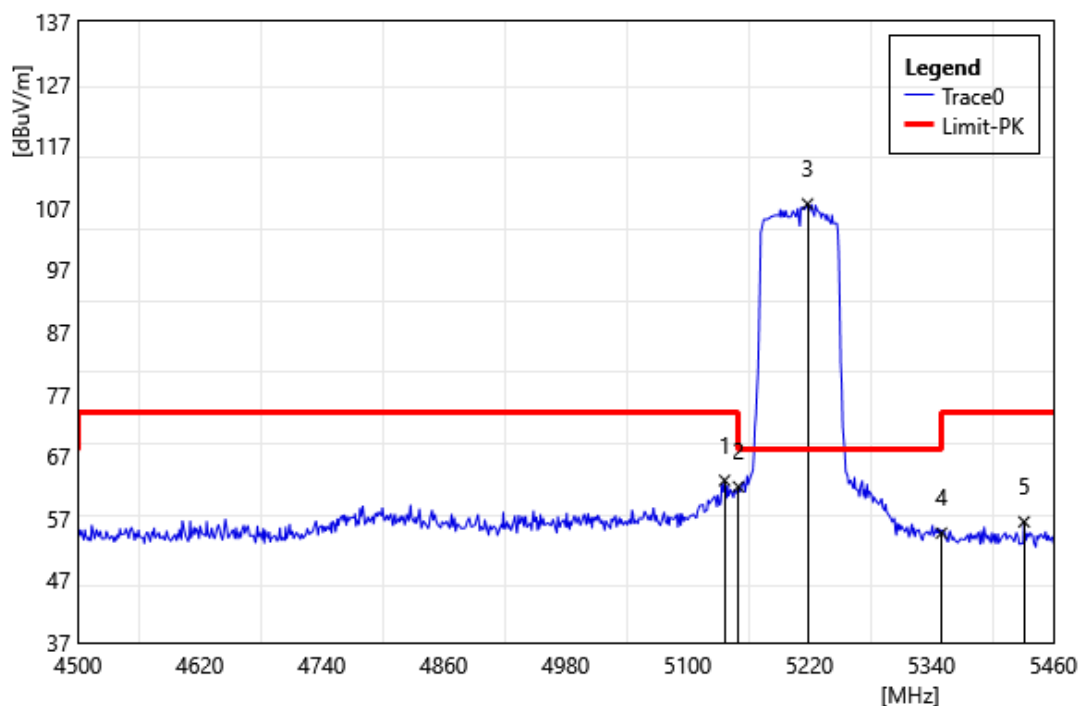


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5136.48	66.35	-3.25	63.10	74.00	-10.90	PEAK
2	5150.00	65.30	-3.22	62.08	74.00	-11.92	PEAK
3	5218.08	110.80	-3.15	107.65	68.20	39.45	PEAK
4	5350.00	58.71	-4.08	54.63	74.00	-19.37	PEAK
5	5431.20	60.58	-4.14	56.44	74.00	-17.56	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

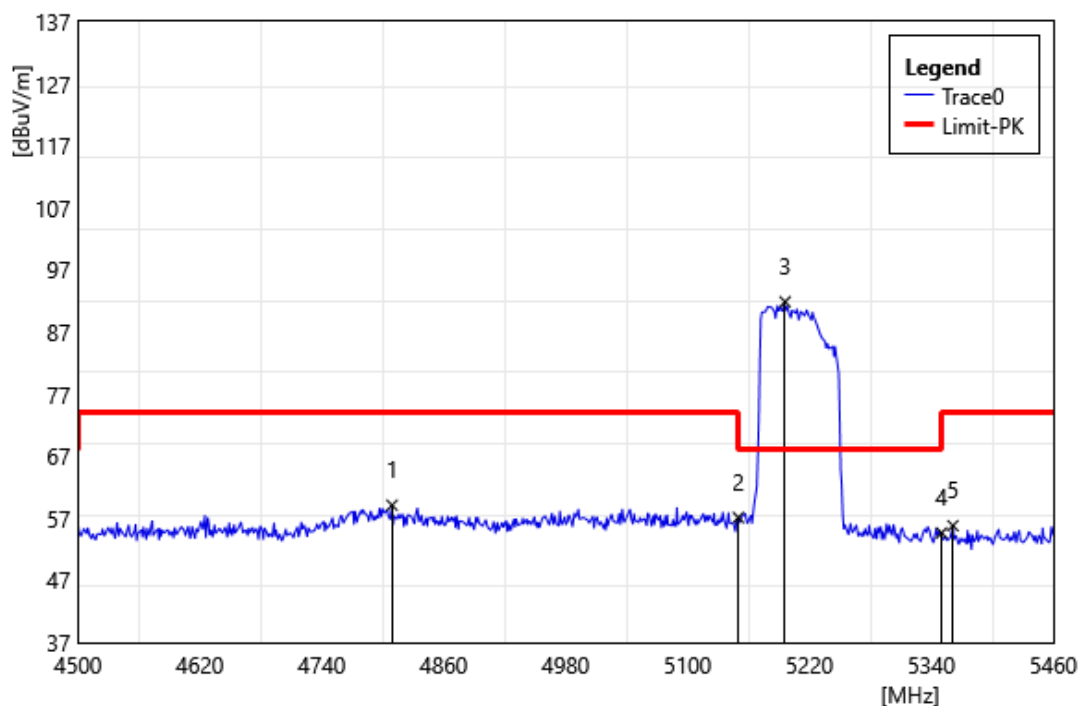

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4809.12	60.67	-1.55	59.12	74.00	-14.88	PEAK
2	5150.00	60.35	-3.22	57.13	74.00	-16.87	PEAK
3	5196.00	94.90	-3.03	91.87	68.20	23.67	PEAK
4	5350.00	58.73	-4.08	54.65	74.00	-19.35	PEAK
5	5361.12	59.92	-4.10	55.82	74.00	-18.18	PEAK


Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5775		
	MHz		
Polarization:	Horizontal		
Remark:			

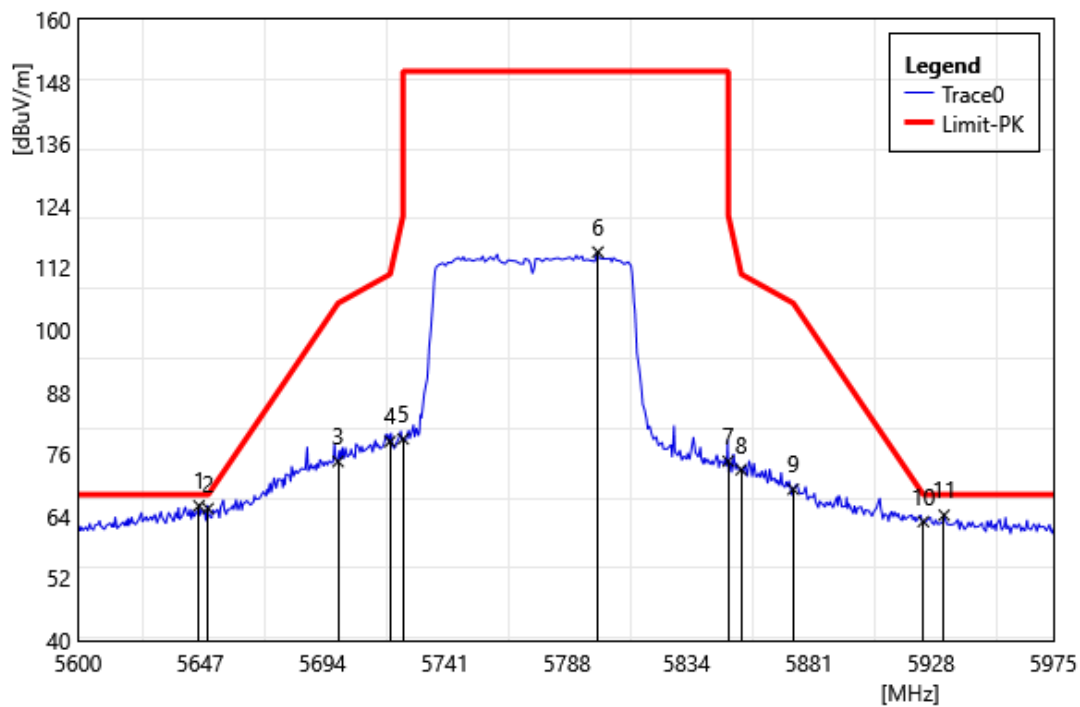

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5775 MHz		
Polarization:	Horizontal		
Remark:			

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5646.50	69.30	-3.26	66.04	68.20	-2.16	PEAK
2	5650.00	68.77	-3.27	65.50	68.20	-2.70	PEAK
3	5700.00	78.03	-3.44	74.59	105.20	-30.61	PEAK
4	5720.00	81.73	-3.28	78.45	110.80	-32.35	PEAK
5	5725.00	82.19	-3.23	78.96	150.00	-71.04	PEAK
6	5799.88	117.60	-2.53	115.08	150.00	-34.93	PEAK
7	5850.00	77.21	-2.57	74.64	122.20	-47.56	PEAK
8	5855.00	75.63	-2.61	73.02	110.80	-37.78	PEAK
9	5875.00	71.97	-2.75	69.22	105.20	-35.98	PEAK
10	5925.00	66.09	-3.12	62.97	68.20	-5.23	PEAK
11	5933.00	67.42	-3.19	64.23	68.20	-3.97	PEAK


Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5775		
	MHz		
Polarization:	Vertical		
Remark:			

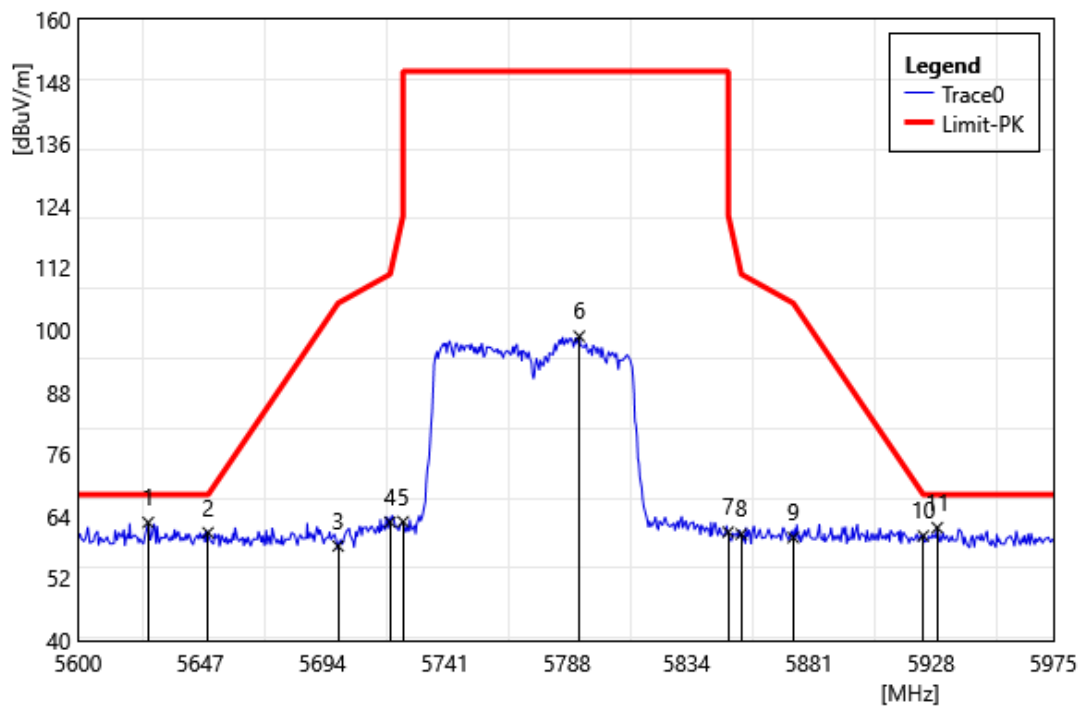

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5775 MHz		
Polarization:	Vertical		
Remark:			


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5627.00	66.03	-3.20	62.83	68.20	-5.37	PEAK
2	5650.00	64.10	-3.27	60.83	68.20	-7.37	PEAK
3	5700.00	61.70	-3.44	58.26	105.20	-46.94	PEAK
4	5720.00	66.17	-3.28	62.89	110.80	-47.91	PEAK
5	5725.00	66.21	-3.23	62.98	150.00	-87.02	PEAK
6	5792.75	101.40	-2.60	98.80	150.00	-51.20	PEAK
7	5850.00	63.52	-2.57	60.95	122.20	-61.25	PEAK
8	5855.00	63.17	-2.61	60.56	110.80	-50.24	PEAK
9	5875.00	62.66	-2.75	59.91	105.20	-45.29	PEAK
10	5925.00	63.33	-3.12	60.21	68.20	-7.99	PEAK
11	5930.38	64.99	-3.17	61.82	68.20	-6.38	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5180		
	MHz		
Polarization:	Horizontal		
Remark:			

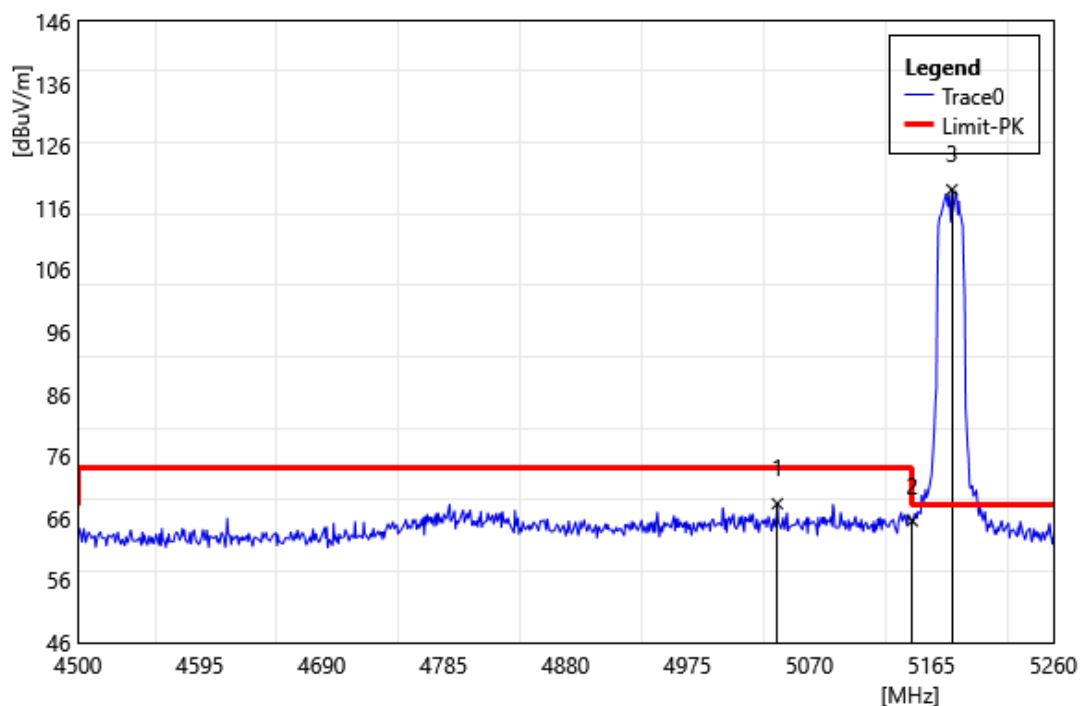


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5044.92	71.42	-3.06	68.37	74.00	-5.64	PEAK
2	5150.00	68.82	-3.22	65.60	74.00	-8.40	PEAK
3	5180.96	122.01	-3.09	118.92	68.20	50.72	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5180		
	MHz		
Polarization:	Vertical		
Remark:			

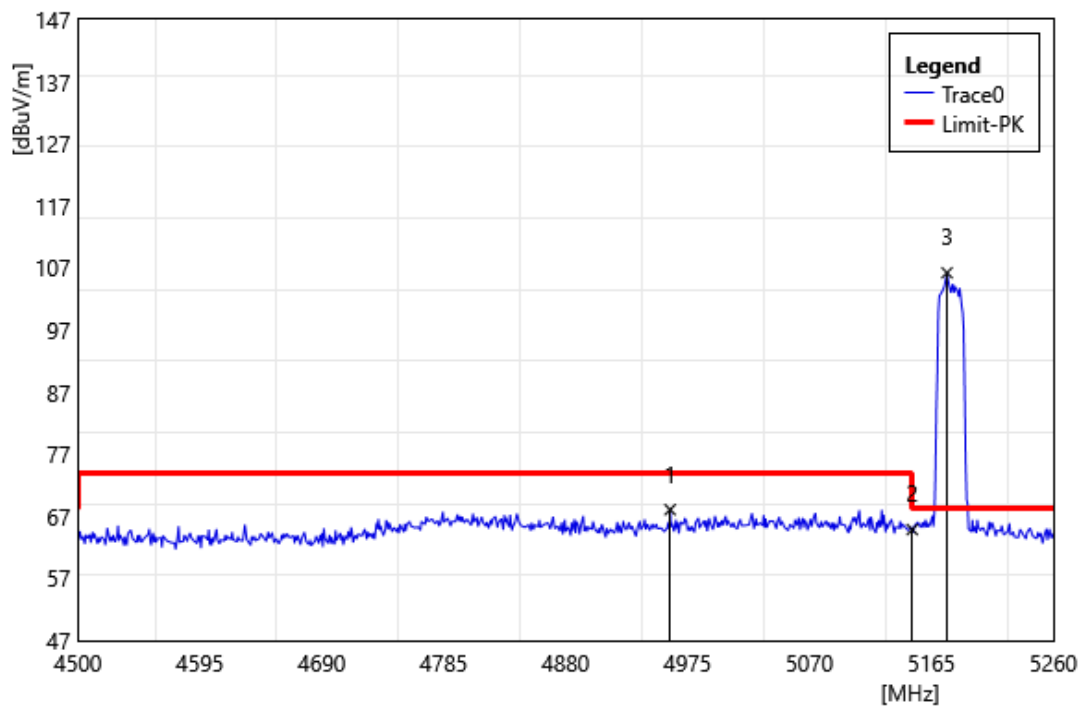


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4961.32	70.96	-2.89	68.07	74.00	-5.93	PEAK
2	5150.00	68.09	-3.22	64.87	74.00	-9.13	PEAK
3	5177.16	109.33	-3.11	106.22	68.20	38.02	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5240		
	MHz		
Polarization:	Horizontal		
Remark:			

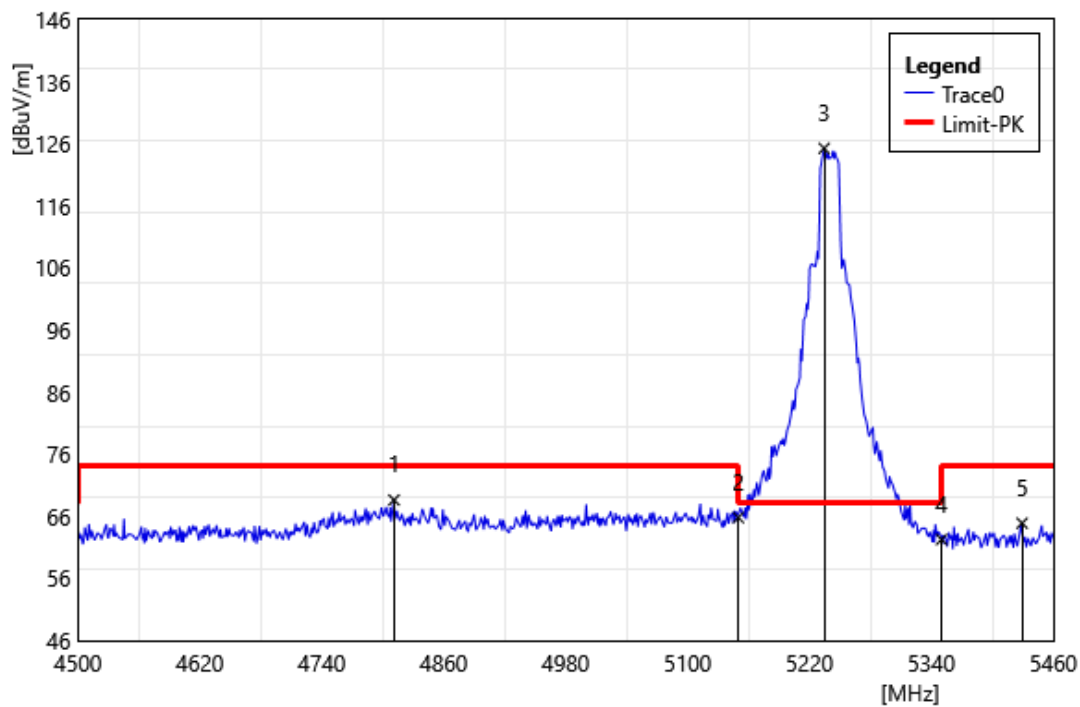


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4811.04	70.22	-1.59	68.64	74.00	-5.37	PEAK
2	5150.00	69.02	-3.22	65.80	74.00	-8.20	PEAK
3	5234.40	128.56	-3.29	125.27	68.20	57.07	PEAK
4	5350.00	66.35	-4.08	62.27	74.00	-11.73	AVG
5	5429.28	69.05	-4.15	64.90	74.00	-9.10	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5240		
	MHz		
Polarization:	Vertical		
Remark:			

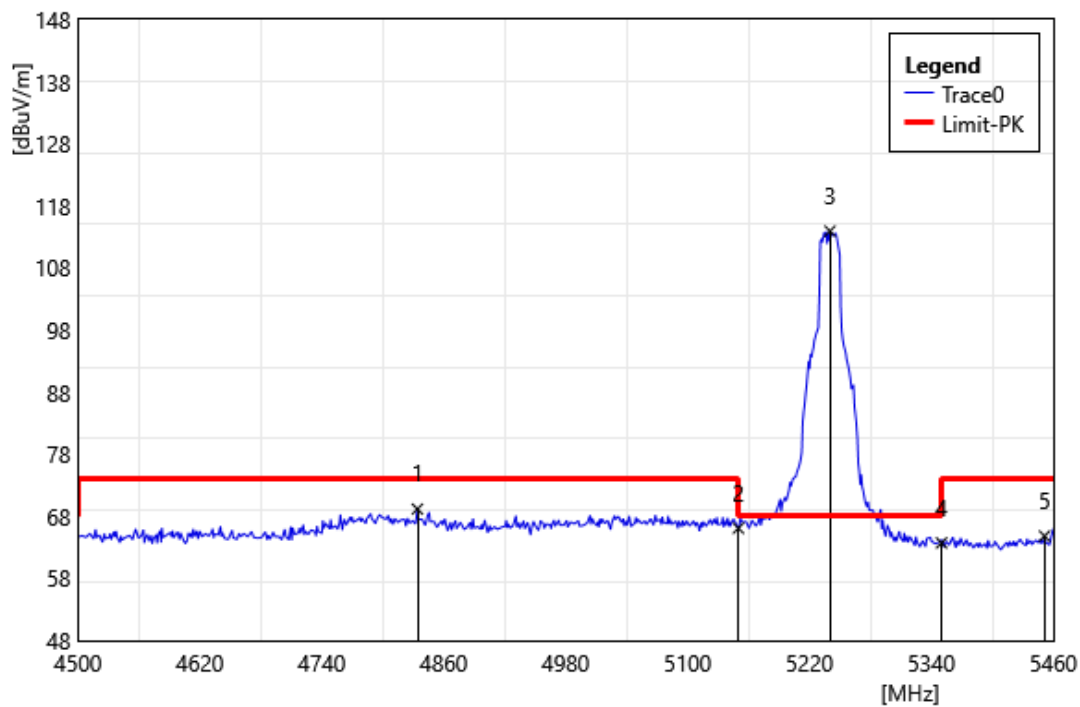


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4834.08	71.08	-1.90	69.18	74.00	-4.82	PEAK
2	5150.00	69.31	-3.22	66.09	74.00	-7.91	PEAK
3	5240.16	117.27	-3.34	113.93	68.20	45.73	PEAK
4	5350.00	67.80	-4.08	63.72	74.00	-10.28	AVG
5	5451.36	68.91	-4.08	64.83	74.00	-9.17	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5745		
	MHz		
Polarization:	Horizontal		
Remark:			

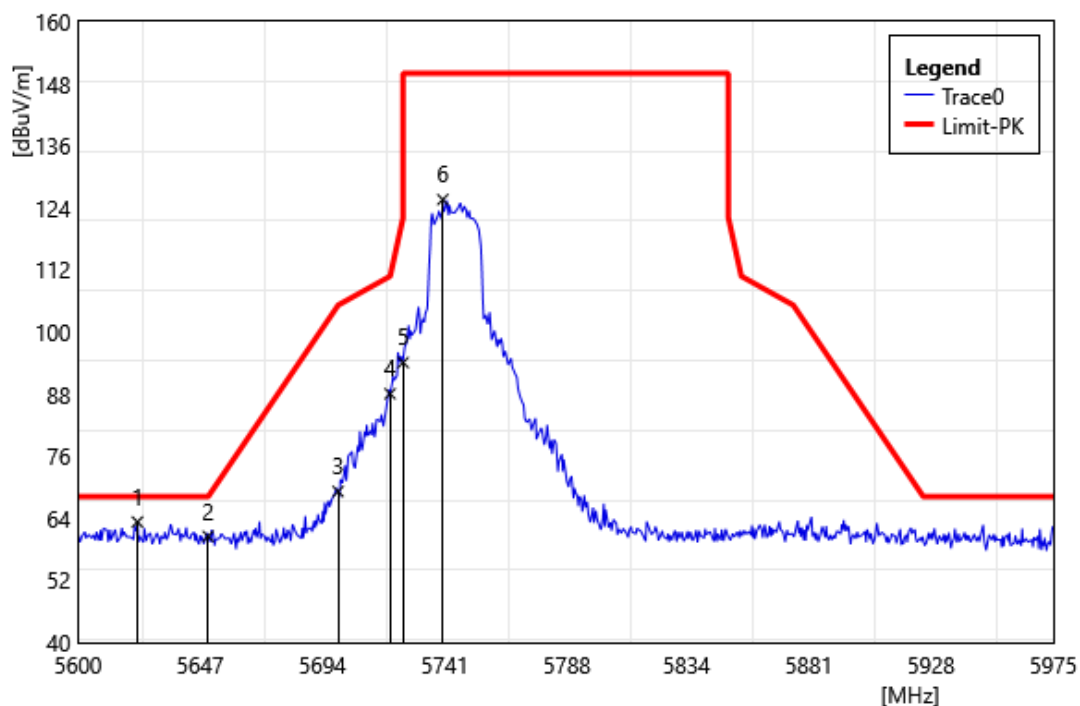


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5622.88	66.47	-3.17	63.30	68.20	-4.90	PEAK
2	5650.00	63.80	-3.27	60.53	68.20	-7.67	PEAK
3	5700.00	72.64	-3.44	69.20	105.20	-36.00	PEAK
4	5720.00	91.36	-3.28	88.08	110.80	-22.72	PEAK
5	5725.00	97.34	-3.23	94.11	150.00	-55.89	PEAK
6	5740.25	128.72	-3.11	125.61	150.00	-24.39	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5745		
	MHz		
Polarization:	Vertical		
Remark:			

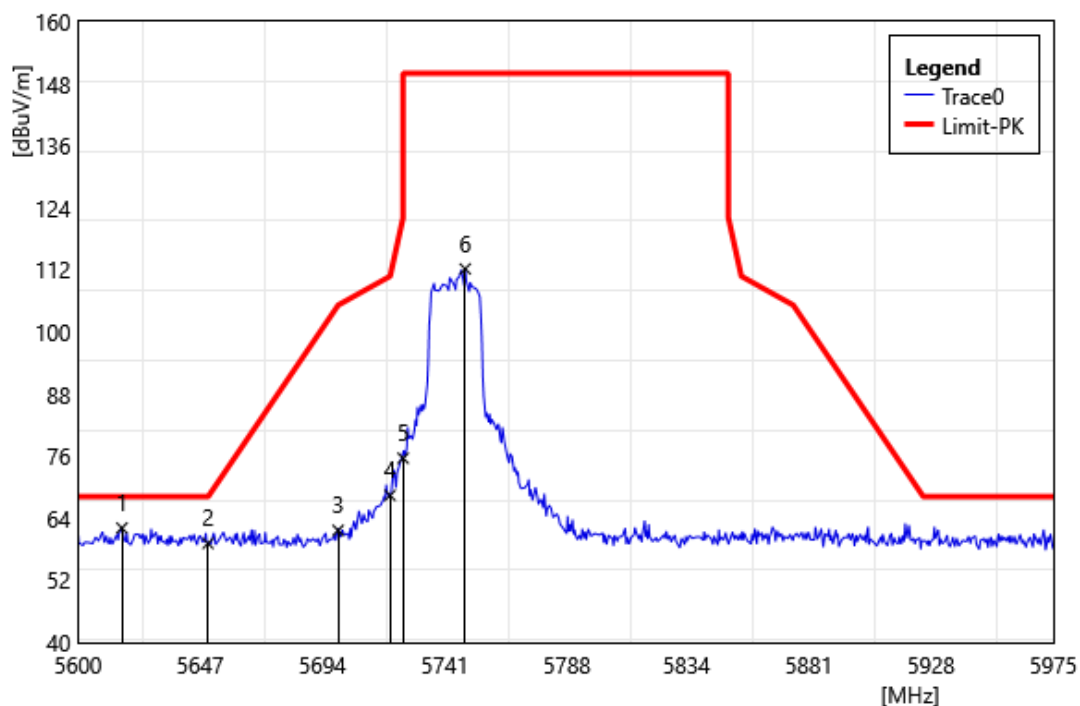


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5616.88	65.28	-3.16	62.12	68.20	-6.08	PEAK
2	5650.00	62.43	-3.27	59.16	68.20	-9.04	PEAK
3	5700.00	65.11	-3.44	61.67	105.20	-43.53	PEAK
4	5720.00	71.73	-3.28	68.45	110.80	-42.35	PEAK
5	5725.00	78.85	-3.23	75.62	150.00	-74.38	PEAK
6	5748.88	115.26	-3.04	112.22	150.00	-37.78	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5825		
	MHz		
Polarization:	Horizontal		
Remark:			

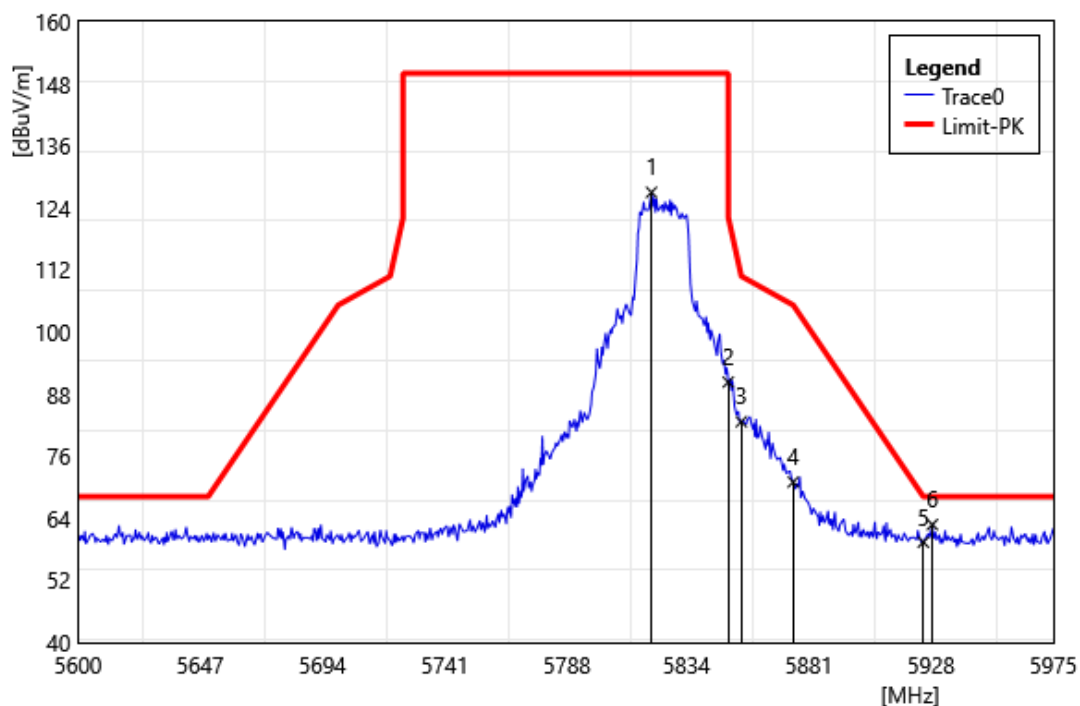


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5820.50	129.55	-2.55	127.00	150.00	-23.00	PEAK
2	5850.00	92.90	-2.57	90.33	122.20	-31.87	PEAK
3	5855.00	85.28	-2.61	82.67	110.80	-28.13	PEAK
4	5875.00	73.76	-2.75	71.01	105.20	-34.19	PEAK
5	5925.00	62.52	-3.12	59.40	68.20	-8.80	PEAK
6	5928.50	65.94	-3.15	62.79	68.20	-5.41	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5825		
	MHz		
Polarization:	Vertical		
Remark:			

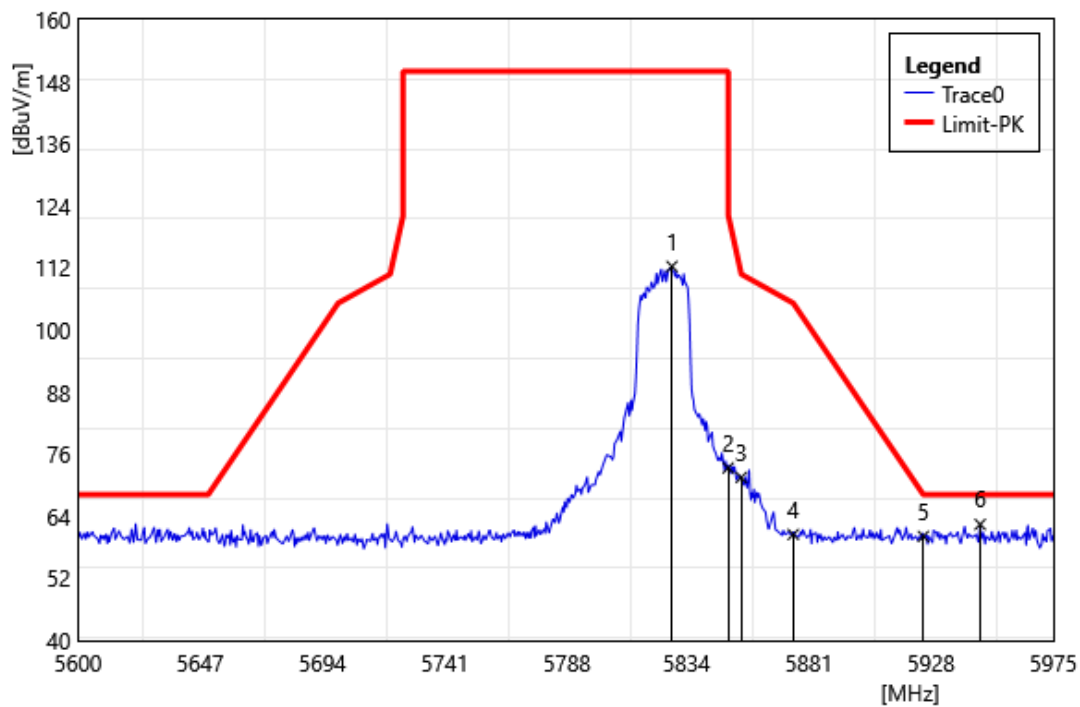


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5828.38	114.85	-2.56	112.29	150.00	-37.71	PEAK
2	5850.00	75.93	-2.57	73.36	122.20	-48.84	PEAK
3	5855.00	74.14	-2.61	71.53	110.80	-39.27	PEAK
4	5875.00	63.26	-2.75	60.51	105.20	-44.69	PEAK
5	5925.00	63.25	-3.12	60.13	68.20	-8.07	PEAK
6	5946.88	65.75	-3.31	62.44	68.20	-5.76	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

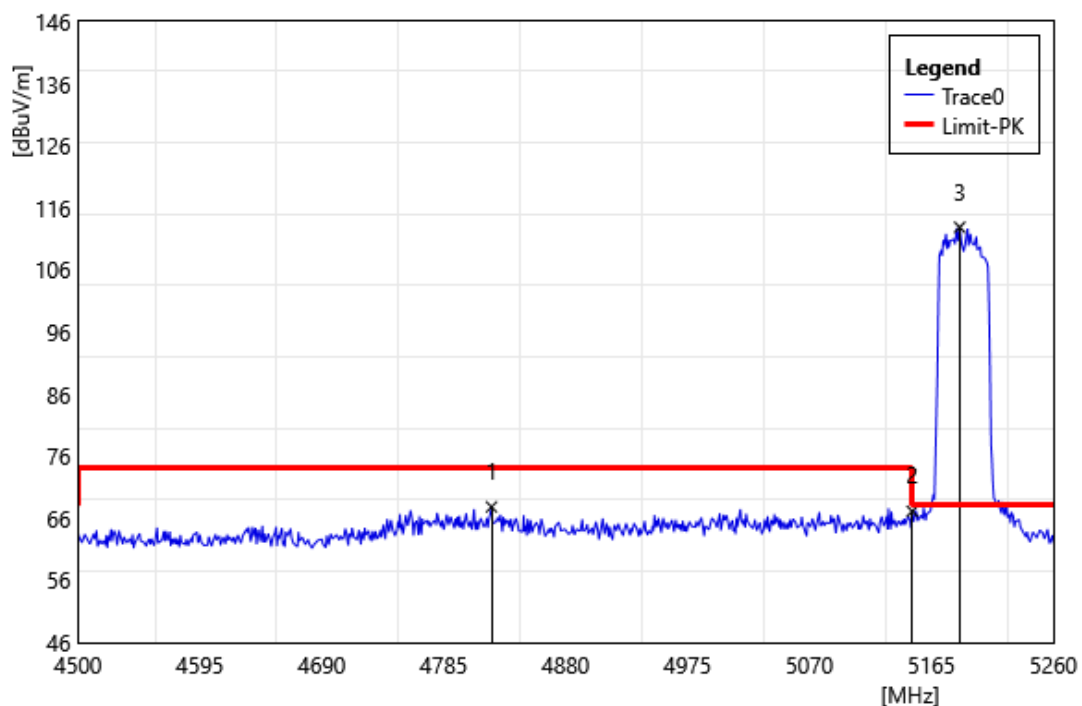


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4822.24	69.58	-1.74	67.84	74.00	-6.16	PEAK
2	5150.00	70.37	-3.22	67.15	74.00	-6.85	PEAK
3	5187.04	115.94	-3.06	112.88	68.20	44.68	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

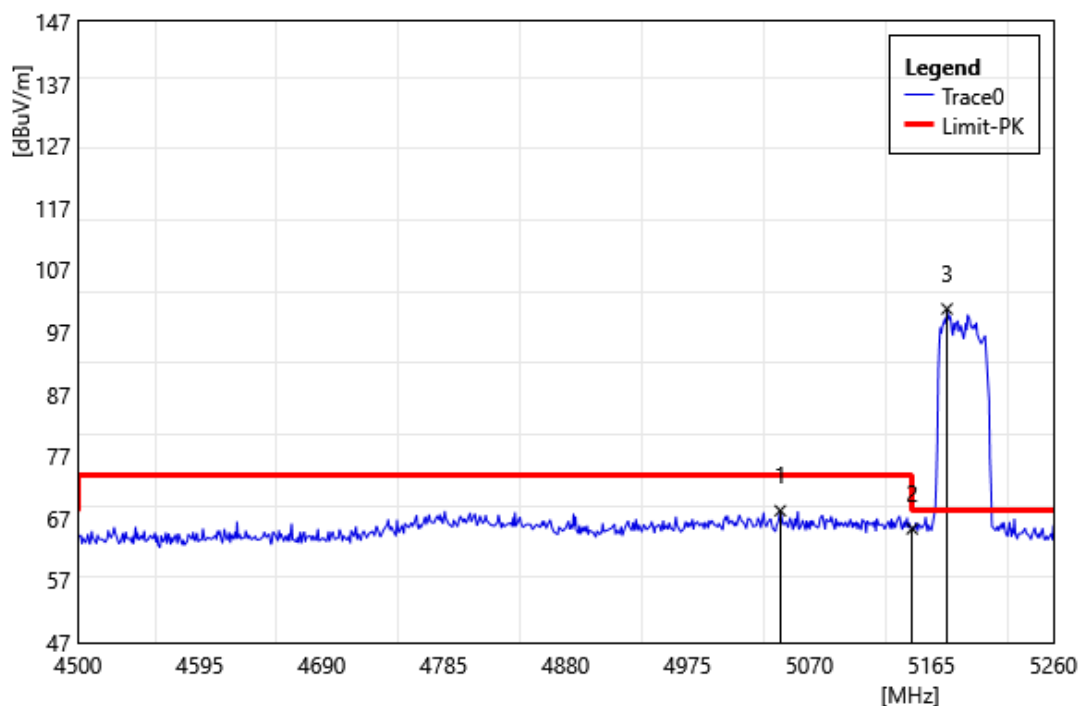


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5047.20	71.31	-3.08	68.23	74.00	-5.77	PEAK
2	5150.00	68.54	-3.22	65.32	74.00	-8.68	PEAK
3	5177.16	103.84	-3.11	100.73	68.20	32.53	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5230		
	MHz		
Polarization:	Horizontal		
Remark:			

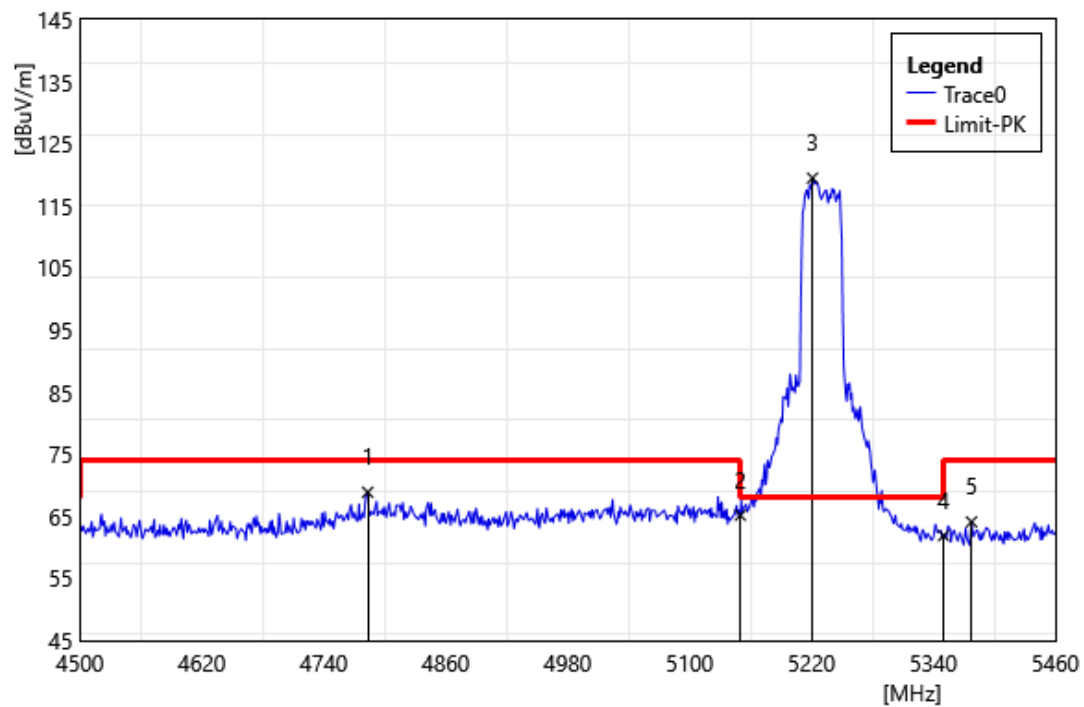


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4783.20	70.85	-1.97	68.88	74.00	-5.12	PEAK
2	5150.00	68.41	-3.22	65.19	74.00	-8.81	PEAK
3	5220.96	122.66	-3.19	119.47	68.20	51.27	PEAK
4	5350.00	65.98	-4.08	61.90	74.00	-12.10	PEAK
5	5377.44	68.27	-4.16	64.11	74.00	-9.89	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

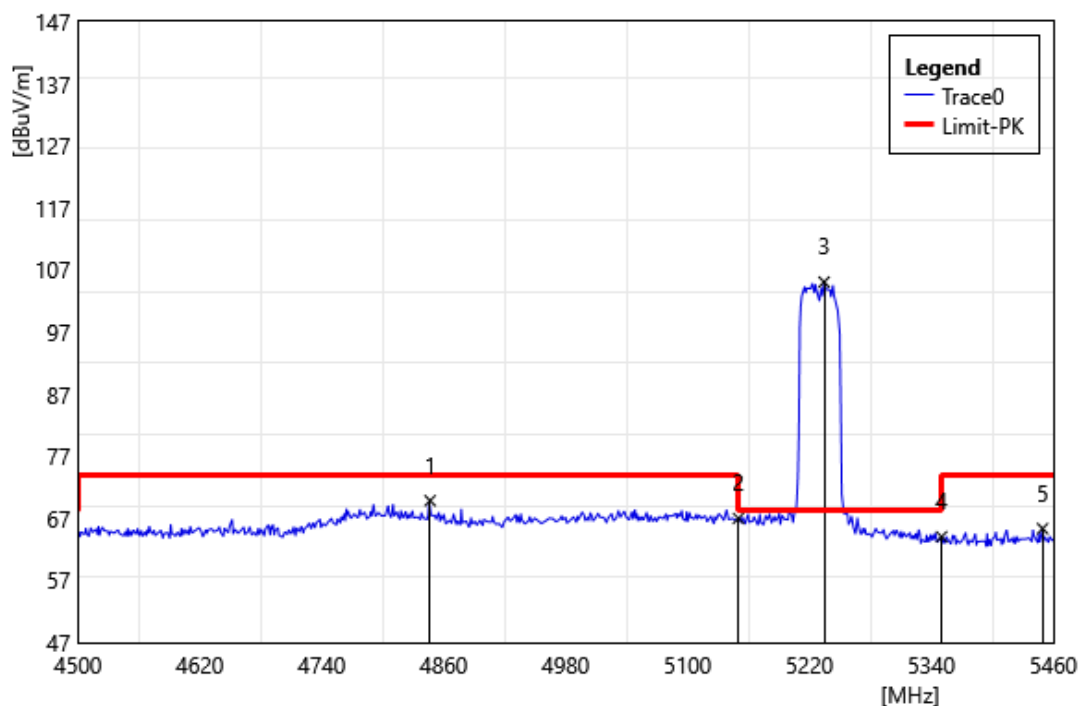


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4846.56	71.92	-2.07	69.85	74.00	-4.15	PEAK
2	5150.00	70.21	-3.22	66.99	74.00	-7.01	PEAK
3	5234.40	108.35	-3.29	105.06	68.20	36.86	PEAK
4	5350.00	68.12	-4.08	64.04	74.00	-9.96	PEAK
5	5449.44	69.43	-4.08	65.35	74.00	-8.65	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5755		
	MHz		
Polarization:	Horizontal		
Remark:			

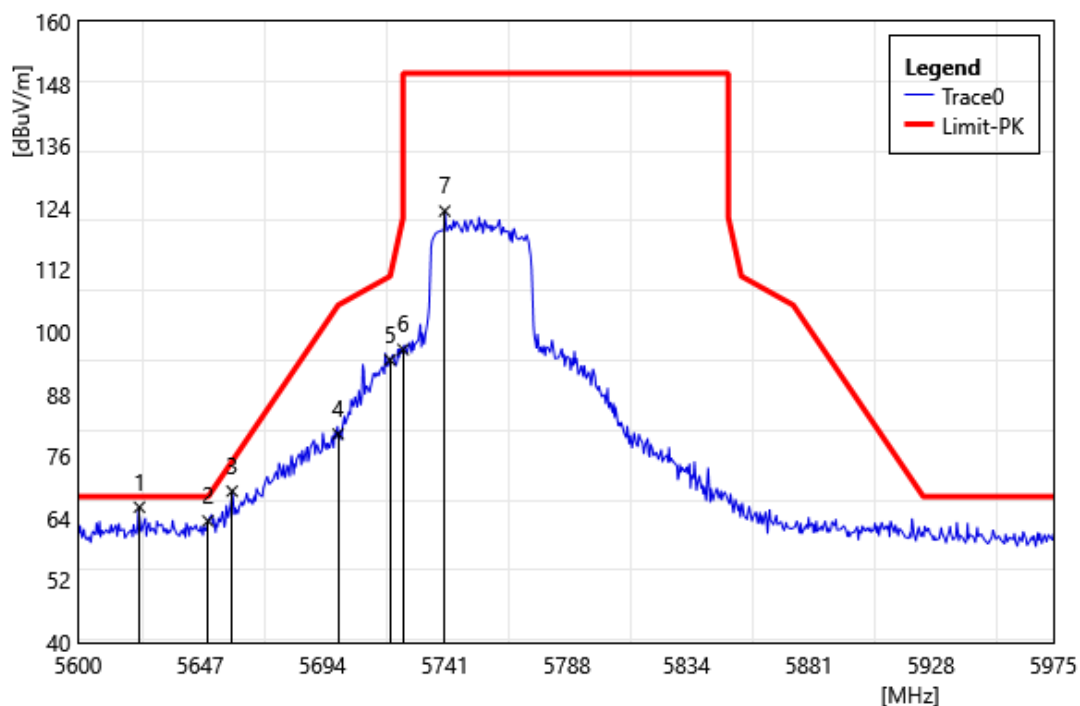


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5623.63	69.33	-3.17	66.16	68.20	-2.04	PEAK
2	5650.00	66.76	-3.27	63.49	68.20	-4.71	PEAK
3	5659.25	72.55	-3.30	69.25	75.05	-5.79	PEAK
4	5700.00	83.73	-3.44	80.29	105.20	-24.91	PEAK
5	5720.00	97.89	-3.28	94.61	110.80	-16.19	PEAK
6	5725.00	99.86	-3.23	96.63	150.00	-53.37	PEAK
7	5741.00	126.50	-3.11	123.39	150.00	-26.61	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5755		
	MHz		
Polarization:	Vertical		
Remark:			

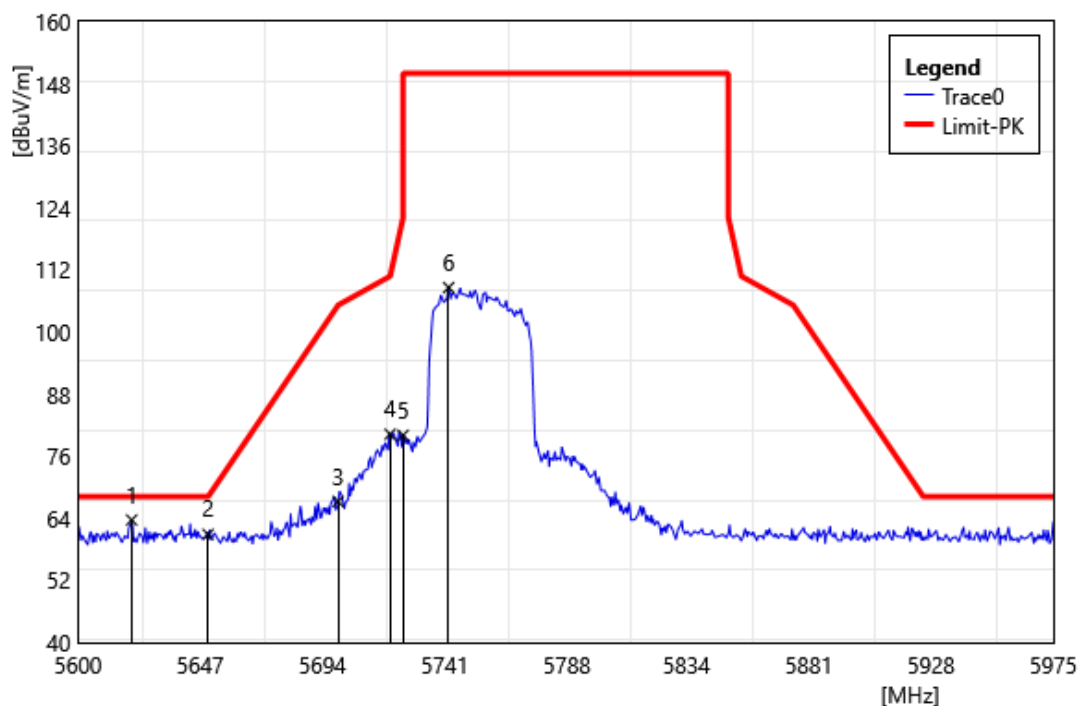


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5620.63	66.87	-3.17	63.70	68.20	-4.50	PEAK
2	5650.00	64.17	-3.27	60.90	68.20	-7.30	PEAK
3	5700.00	70.72	-3.44	67.28	105.20	-37.92	PEAK
4	5720.00	83.54	-3.28	80.26	110.80	-30.54	PEAK
5	5725.00	83.29	-3.23	80.06	150.00	-69.94	PEAK
6	5742.50	111.69	-3.09	108.60	150.00	-41.40	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5795		
	MHz		
Polarization:	Horizontal		
Remark:			

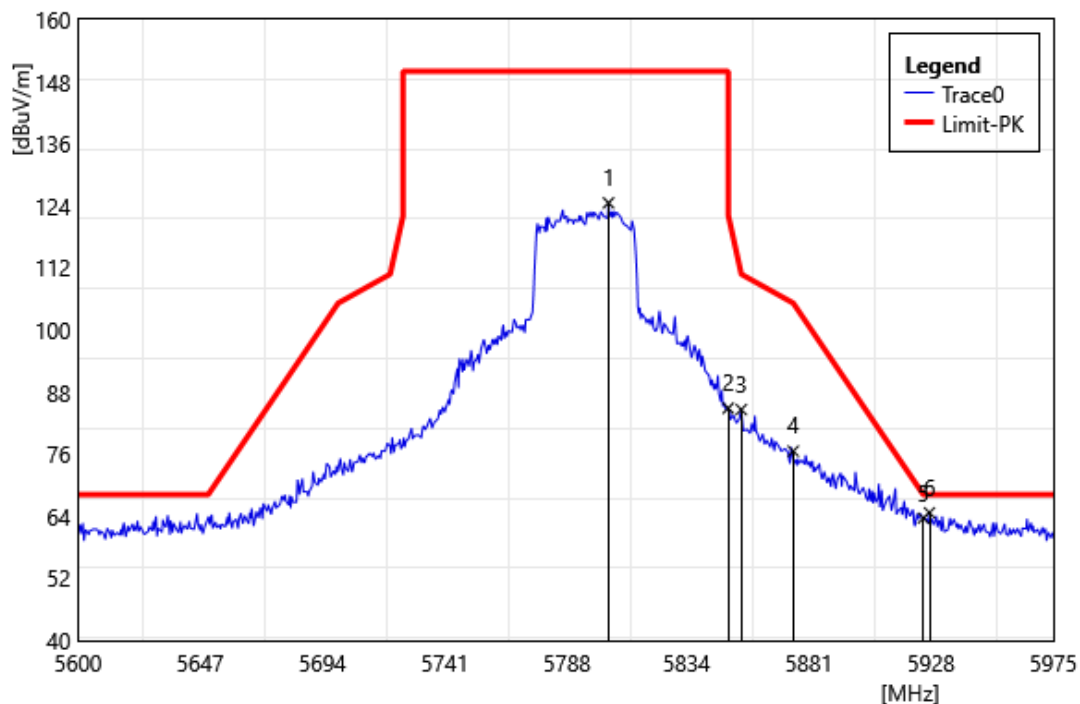


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5804.00	127.11	-2.53	124.58	150.00	-25.42	PEAK
2	5850.00	87.48	-2.57	84.91	122.20	-37.29	PEAK
3	5855.00	87.25	-2.61	84.64	110.80	-26.16	PEAK
4	5875.00	79.37	-2.75	76.62	105.20	-28.58	PEAK
5	5925.00	66.78	-3.12	63.66	68.20	-4.54	PEAK
6	5927.38	67.85	-3.15	64.70	68.20	-3.50	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5795		
	MHz		
Polarization:	Vertical		
Remark:			

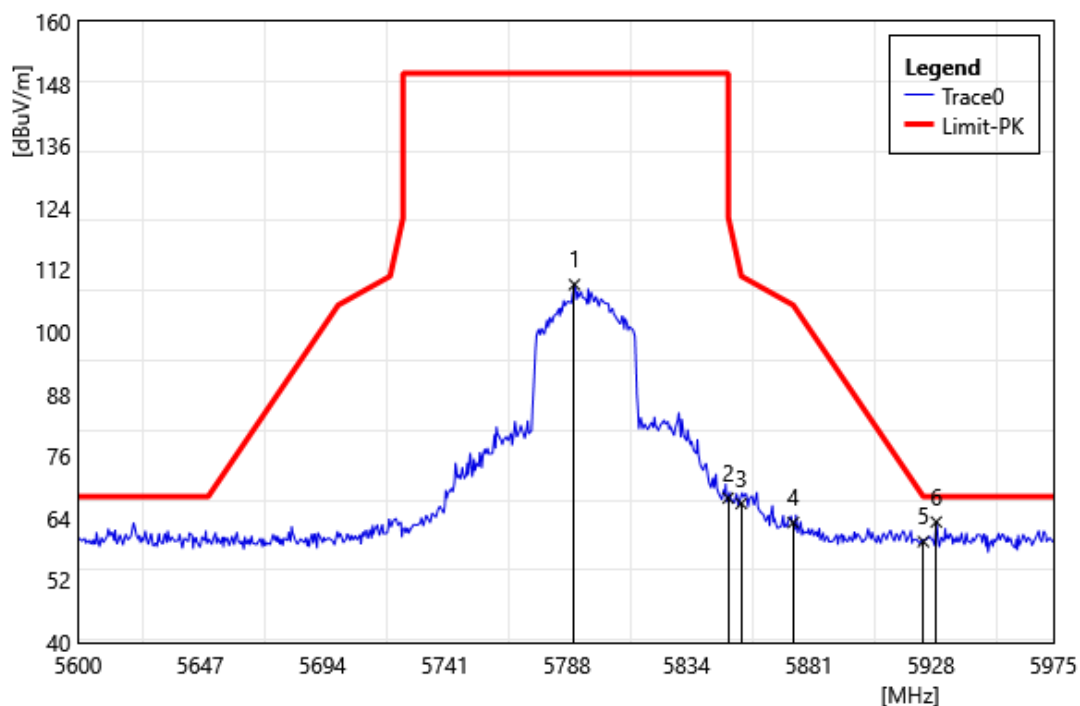


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5790.88	111.79	-2.62	109.18	150.00	-40.83	PEAK
2	5850.00	70.48	-2.57	67.91	122.20	-54.29	PEAK
3	5855.00	69.47	-2.61	66.86	110.80	-43.94	PEAK
4	5875.00	65.93	-2.75	63.18	105.20	-42.02	PEAK
5	5925.00	62.61	-3.12	59.49	68.20	-8.71	PEAK
6	5930.00	66.46	-3.17	63.29	68.20	-4.91	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

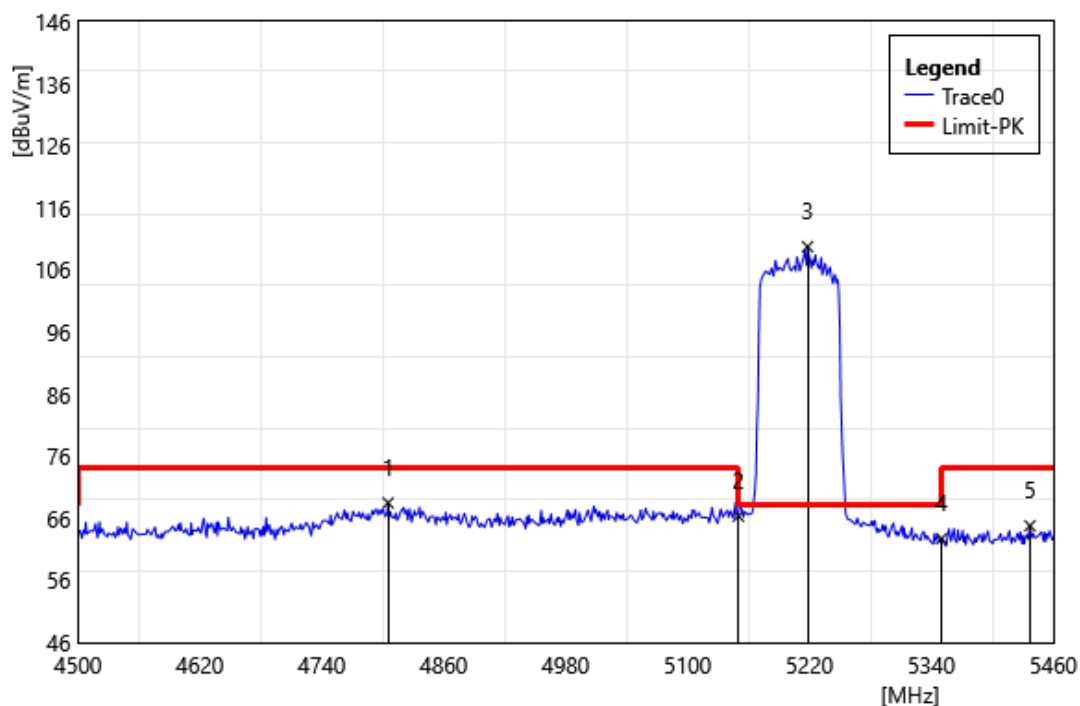


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4805.28	69.98	-1.50	68.48	74.00	-5.52	PEAK
2	5150.00	69.58	-3.22	66.36	74.00	-7.64	PEAK
3	5218.08	112.90	-3.15	109.75	68.20	41.55	PEAK
4	5350.00	66.84	-4.08	62.76	74.00	-11.24	PEAK
5	5436.96	68.93	-4.12	64.81	74.00	-9.19	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

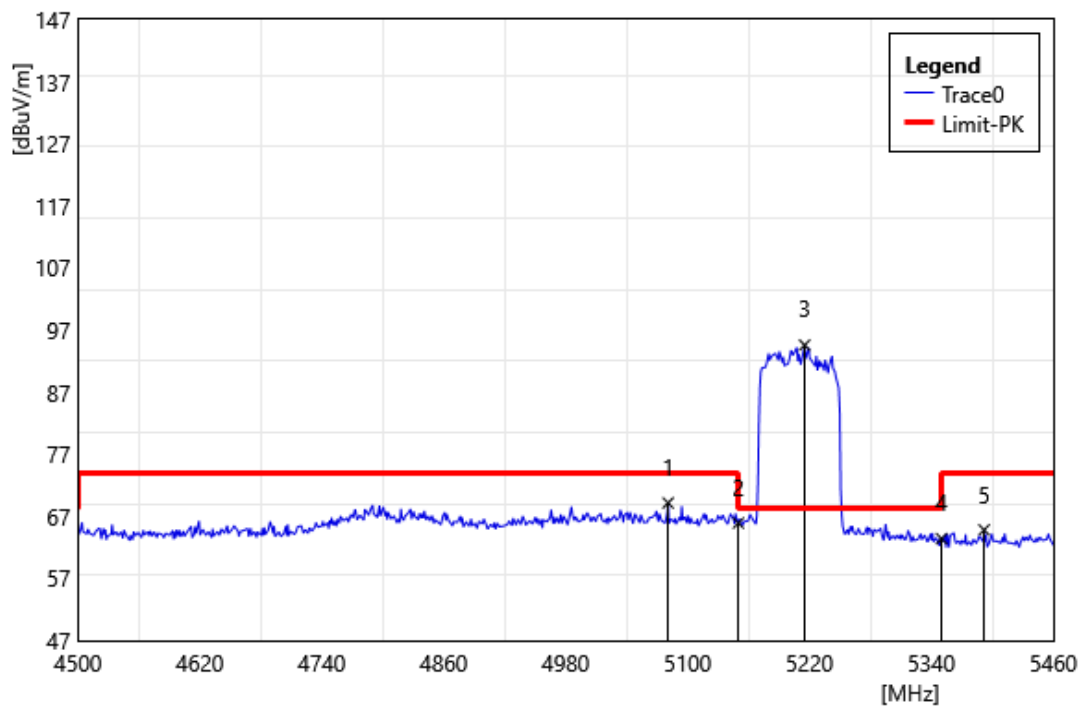

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5080.80	72.41	-3.24	69.17	74.00	-4.83	PEAK
2	5150.00	69.14	-3.22	65.92	74.00	-8.08	PEAK
3	5215.20	97.72	-3.13	94.59	68.20	26.39	PEAK
4	5350.00	67.49	-4.08	63.41	74.00	-10.59	PEAK
5	5391.84	69.04	-4.21	64.83	74.00	-9.18	PEAK


Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5775		
	MHz		
Polarization:	Horizontal		
Remark:			

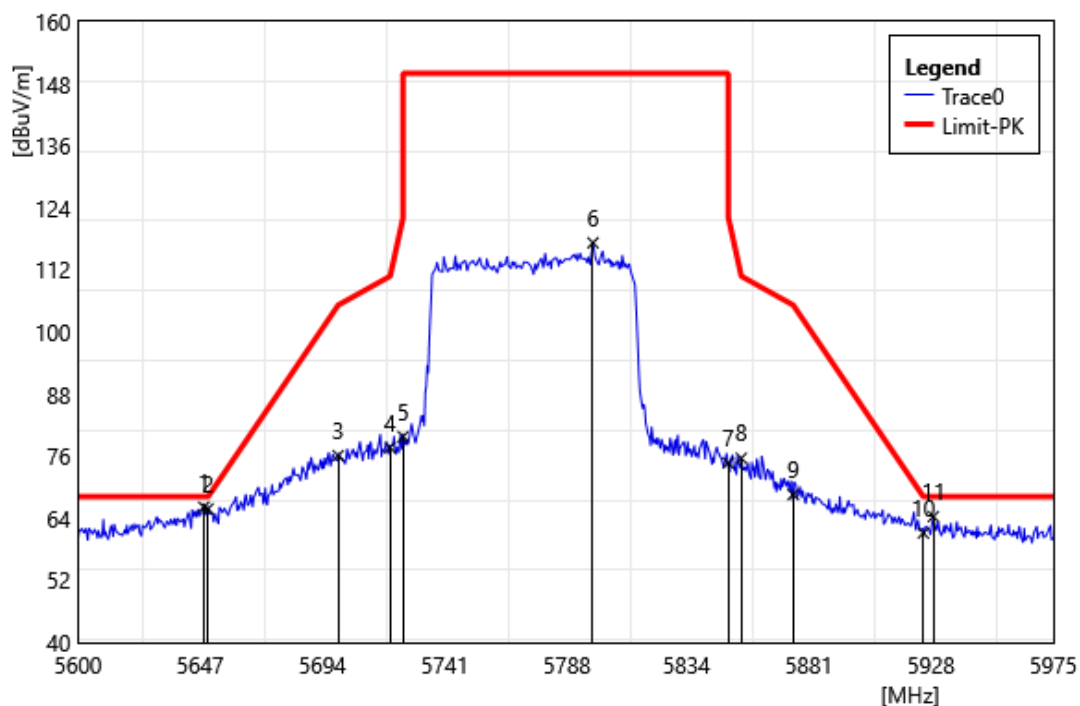

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5775 MHz		
Polarization:	Horizontal		
Remark:			

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5648.38	69.43	-3.26	66.17	68.20	-2.03	PEAK
2	5650.00	69.10	-3.27	65.83	68.20	-2.37	PEAK
3	5700.00	79.56	-3.44	76.12	105.20	-29.08	PEAK
4	5720.00	80.95	-3.28	77.67	110.80	-33.13	PEAK
5	5725.00	83.01	-3.23	79.78	150.00	-70.22	PEAK
6	5798.00	119.80	-2.55	117.25	150.00	-32.75	PEAK
7	5850.00	77.28	-2.57	74.71	122.20	-47.49	PEAK
8	5855.00	78.23	-2.61	75.62	110.80	-35.18	PEAK
9	5875.00	71.34	-2.75	68.59	105.20	-36.61	PEAK
10	5925.00	64.28	-3.12	61.16	68.20	-7.04	PEAK
11	5928.88	67.50	-3.16	64.34	68.20	-3.86	PEAK

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5775		
	MHz		
Polarization:	Vertical		
Remark:			

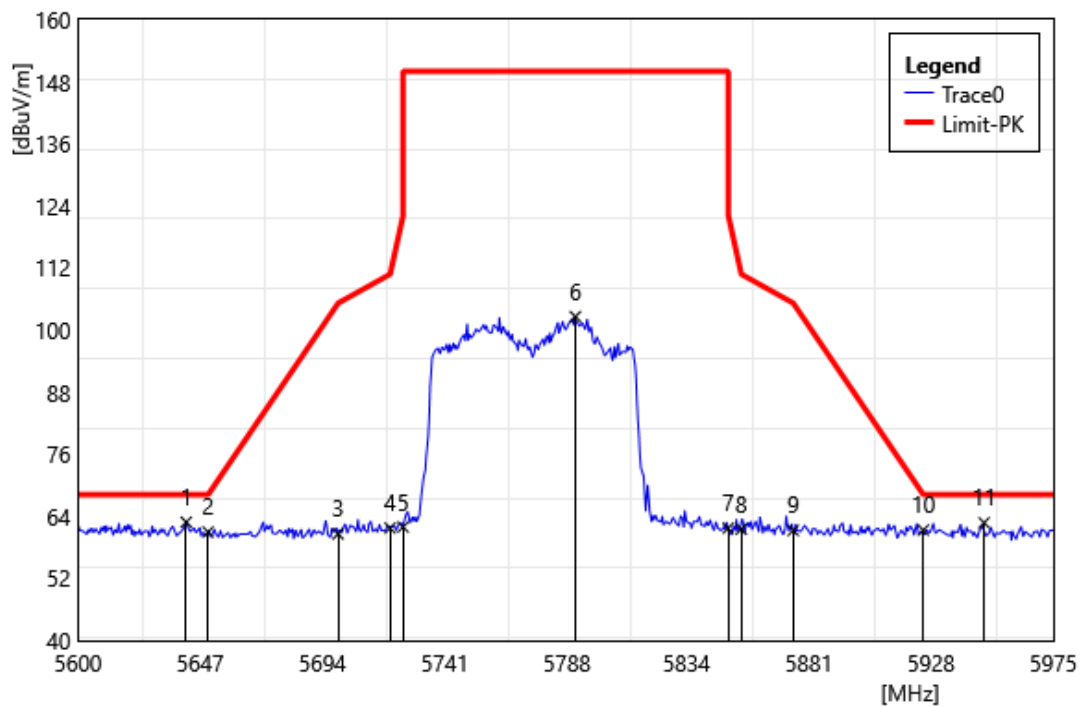


Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5775 MHz		
Polarization:	Vertical		
Remark:			

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5641.63	66.14	-3.24	62.90	68.20	-5.30	PEAK
2	5650.00	64.25	-3.27	60.98	68.20	-7.22	PEAK
3	5700.00	64.04	-3.44	60.60	105.20	-44.60	PEAK
4	5720.00	65.03	-3.28	61.75	110.80	-49.05	PEAK
5	5725.00	65.18	-3.23	61.95	150.00	-88.05	PEAK
6	5791.25	105.21	-2.61	102.60	150.00	-47.40	PEAK
7	5850.00	64.30	-2.57	61.73	122.20	-60.47	PEAK
8	5855.00	64.15	-2.61	61.54	110.80	-49.26	PEAK
9	5875.00	64.04	-2.75	61.29	105.20	-43.91	PEAK
10	5925.00	64.47	-3.12	61.35	68.20	-6.85	PEAK
11	5948.38	66.08	-3.32	62.76	68.20	-5.44	PEAK


MIMO - Average

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5180 MHz		
Polarization:	Horizontal		
Remark:			

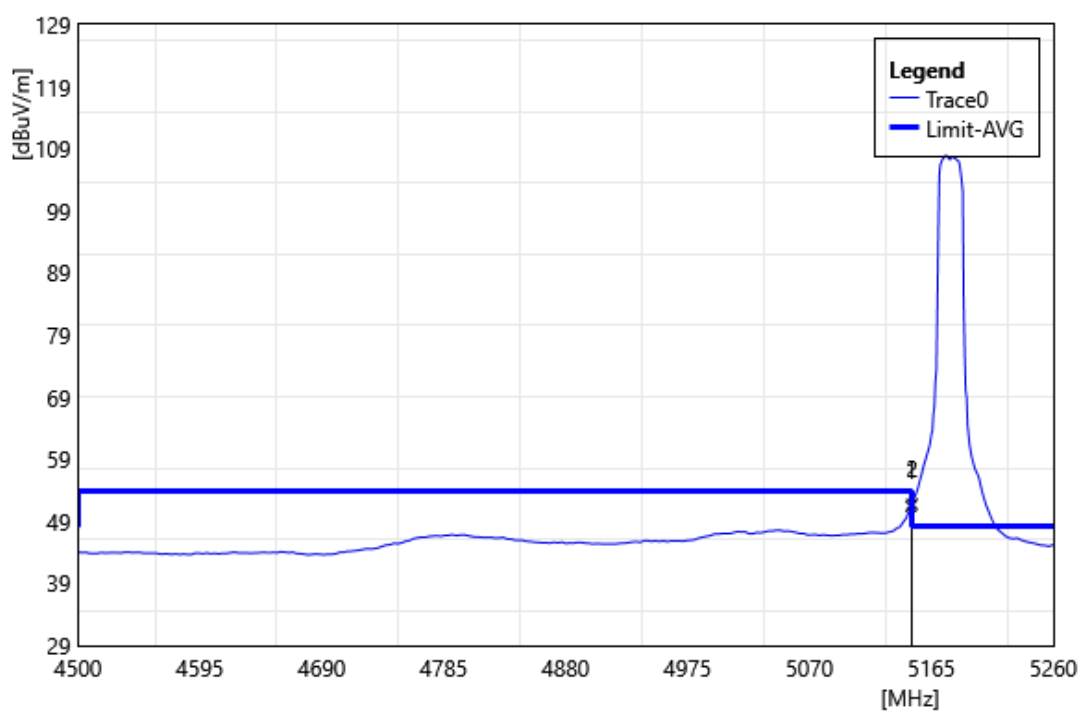


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5149.04	54.64	-3.22	51.42	54.00	-2.58	AVG
2	5150.00	55.00	-3.22	51.78	54.00	-2.22	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5180 MHz		
Polarization:	Vertical		
Remark:			

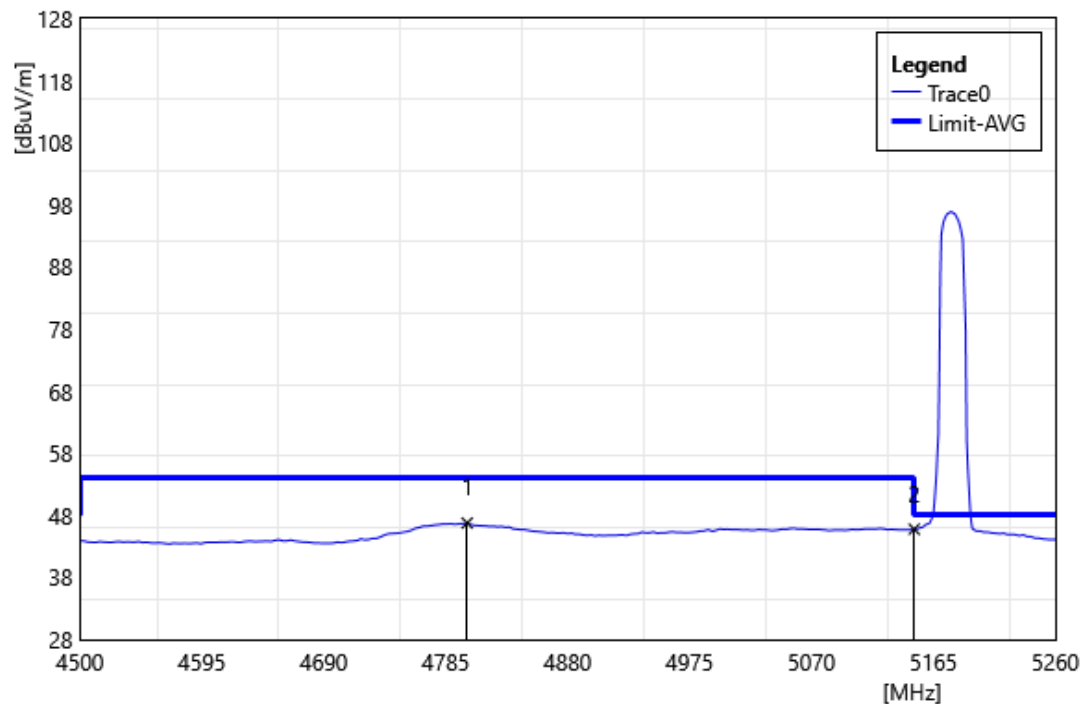


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4801.72	48.22	-1.45	46.77	54.00	-7.23	AVG
2	5150.00	49.00	-3.22	45.78	54.00	-8.22	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5240 MHz		
Polarization:	Horizontal		
Remark:			

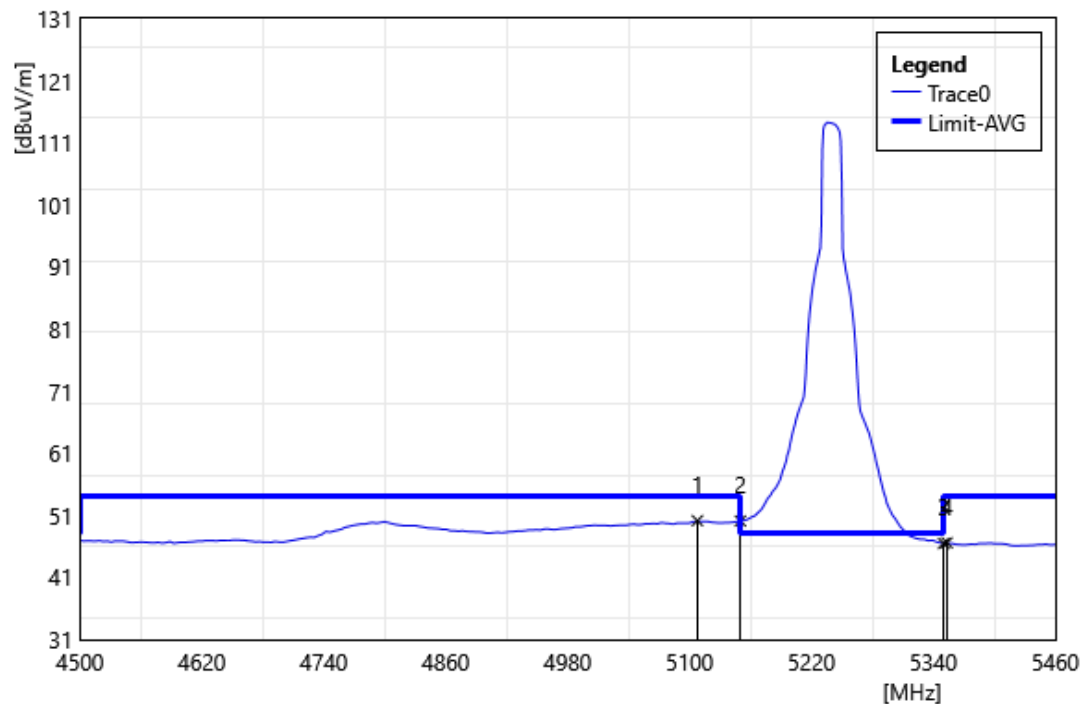


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5107.68	53.46	-3.31	50.15	54.00	-3.85	AVG
2	5150.00	53.31	-3.22	50.09	54.00	-3.91	AVG
3	5350.00	50.54	-4.08	46.46	54.00	-7.54	AVG
4	5353.44	50.66	-4.08	46.58	54.00	-7.42	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5240 MHz		
Polarization:	Vertical		
Remark:			

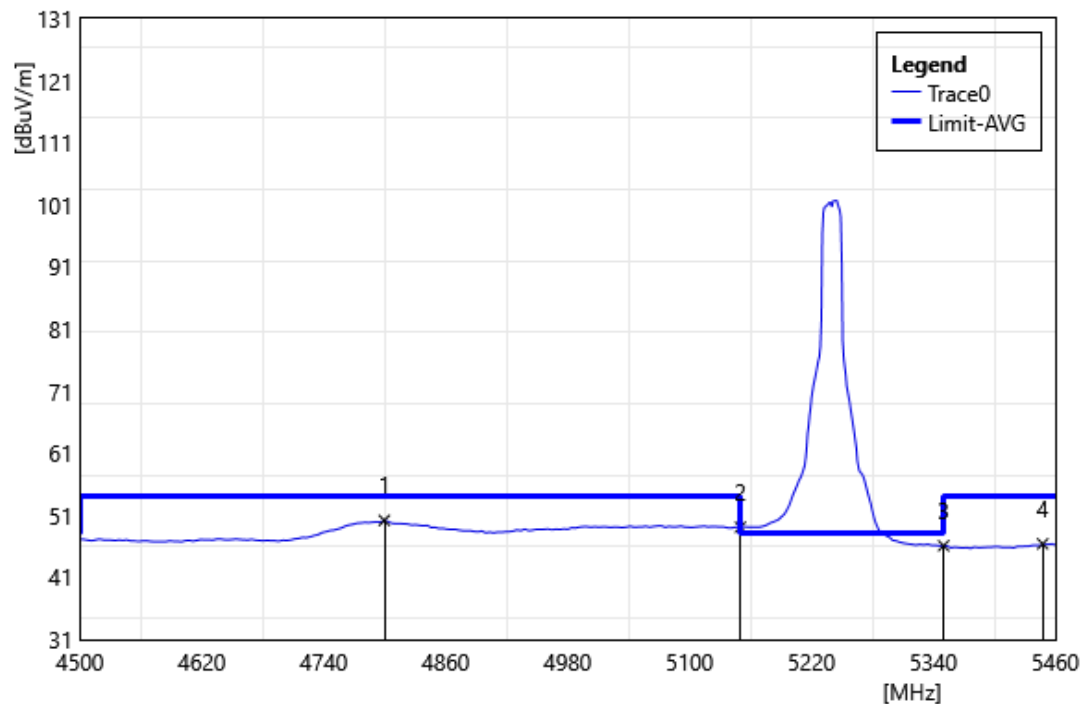


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4799.52	51.63	-1.44	50.19	54.00	-3.81	AVG
2	5150.00	52.32	-3.22	49.10	54.00	-4.90	AVG
3	5350.00	50.19	-4.08	46.11	54.00	-7.89	AVG
4	5447.52	50.51	-4.10	46.41	54.00	-7.59	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5190 MHz		
Polarization:	Horizontal		
Remark:			

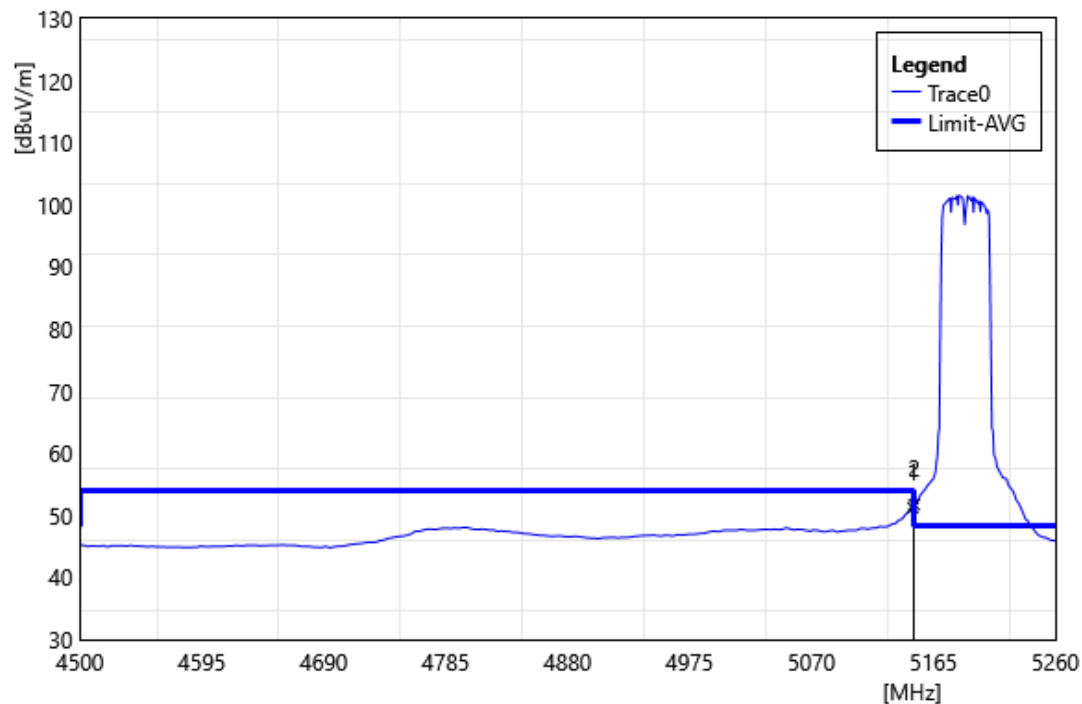


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5149.04	54.45	-3.22	51.23	54.00	-2.77	AVG
2	5150.00	54.96	-3.22	51.74	54.00	-2.26	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5190 MHz		
Polarization:	Vertical		
Remark:			

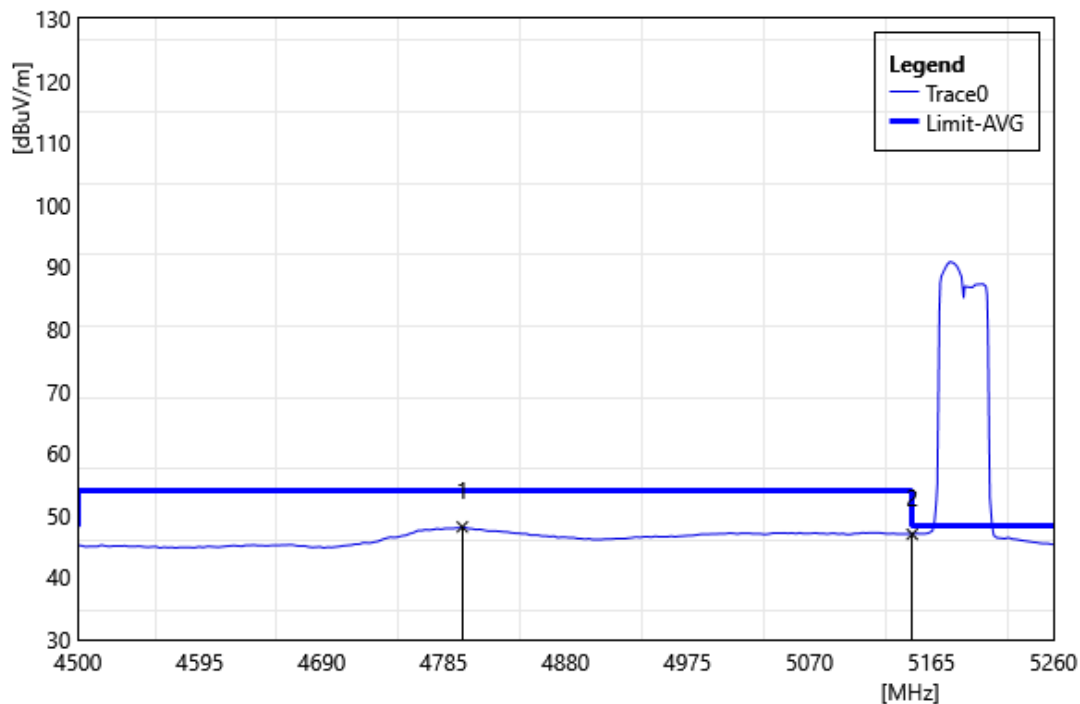


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4799.44	49.59	-1.45	48.14	54.00	-5.86	AVG
2	5150.00	50.17	-3.22	46.95	54.00	-7.05	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5230 MHz		
Polarization:	Horizontal		
Remark:			

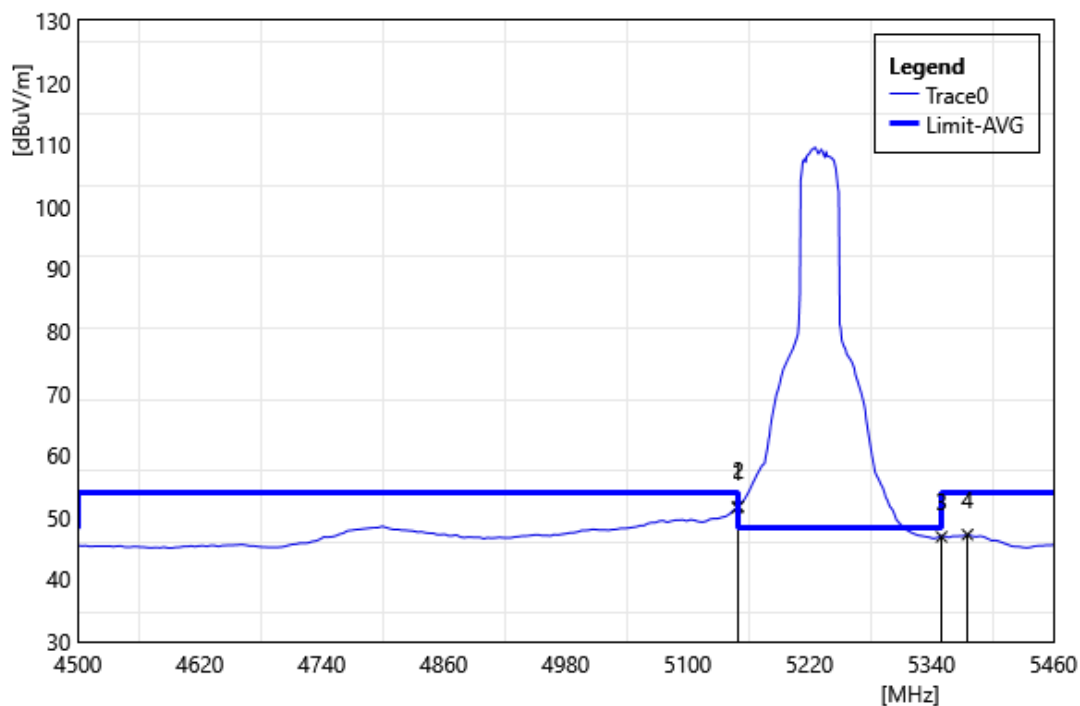


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5148.96	54.81	-3.22	51.59	54.00	-2.41	AVG
2	5150.00	54.95	-3.22	51.73	54.00	-2.27	AVG
3	5350.00	50.95	-4.08	46.87	54.00	-7.13	AVG
4	5375.52	51.38	-4.16	47.22	54.00	-6.78	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5230 MHz		
Polarization:	Vertical		
Remark:			

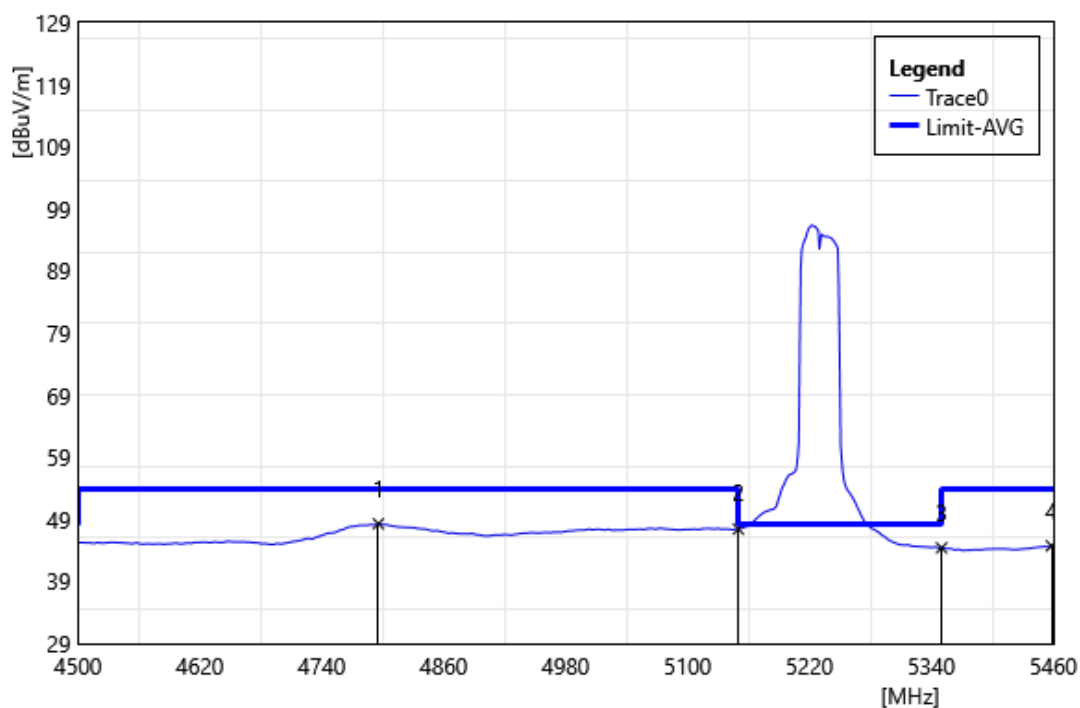


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4795.68	49.85	-1.57	48.28	54.00	-5.72	AVG
2	5150.00	50.66	-3.22	47.44	54.00	-6.56	AVG
3	5350.00	48.49	-4.08	44.41	54.00	-9.59	AVG
4	5458.08	48.82	-4.09	44.73	54.00	-9.27	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

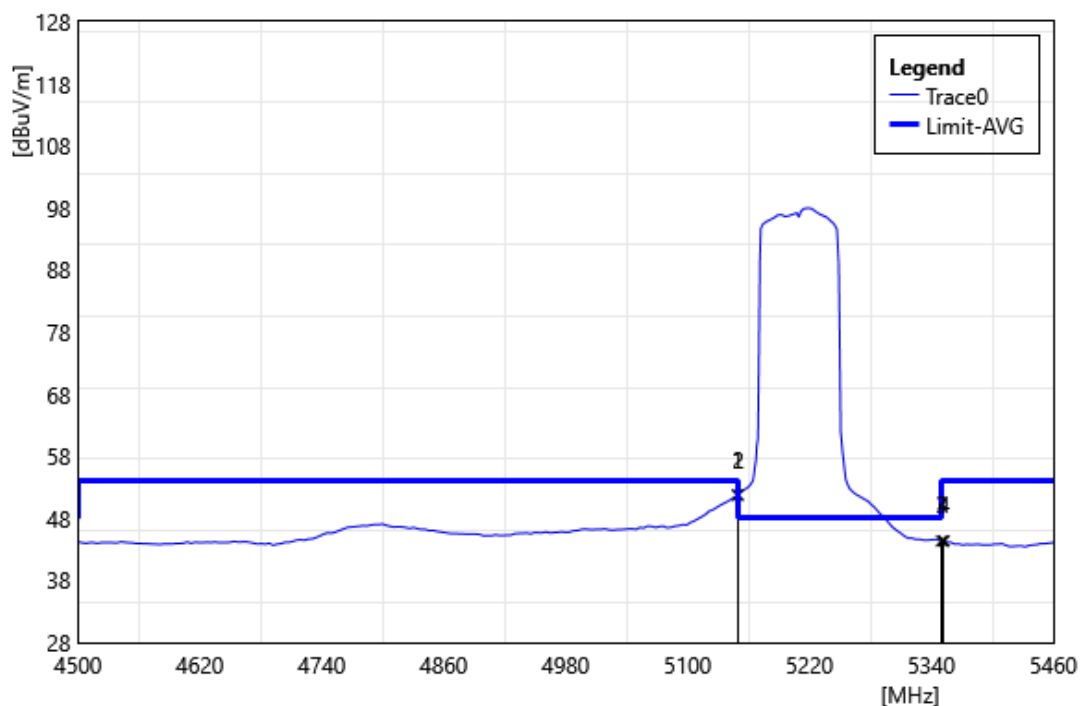


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5148.96	54.96	-3.22	51.74	54.00	-2.26	AVG
2	5150.00	54.99	-3.22	51.77	54.00	-2.23	AVG
3	5350.00	48.44	-4.08	44.36	54.00	-9.64	AVG
4	5352.48	48.43	-4.08	44.35	54.00	-9.65	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

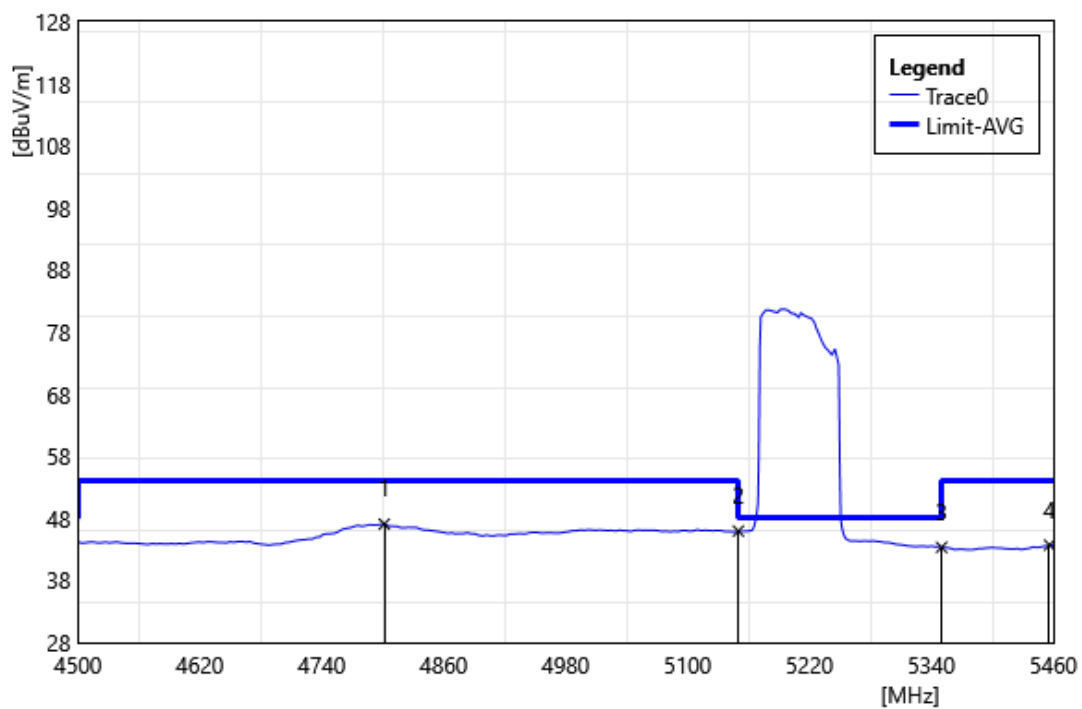


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4801.44	48.51	-1.44	47.07	54.00	-6.93	AVG
2	5150.00	49.19	-3.22	45.97	54.00	-8.03	AVG
3	5350.00	47.41	-4.08	43.33	54.00	-10.67	AVG
4	5456.16	47.78	-4.09	43.69	54.00	-10.31	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5180		
	MHz		
Polarization:	Horizontal		
Remark:			

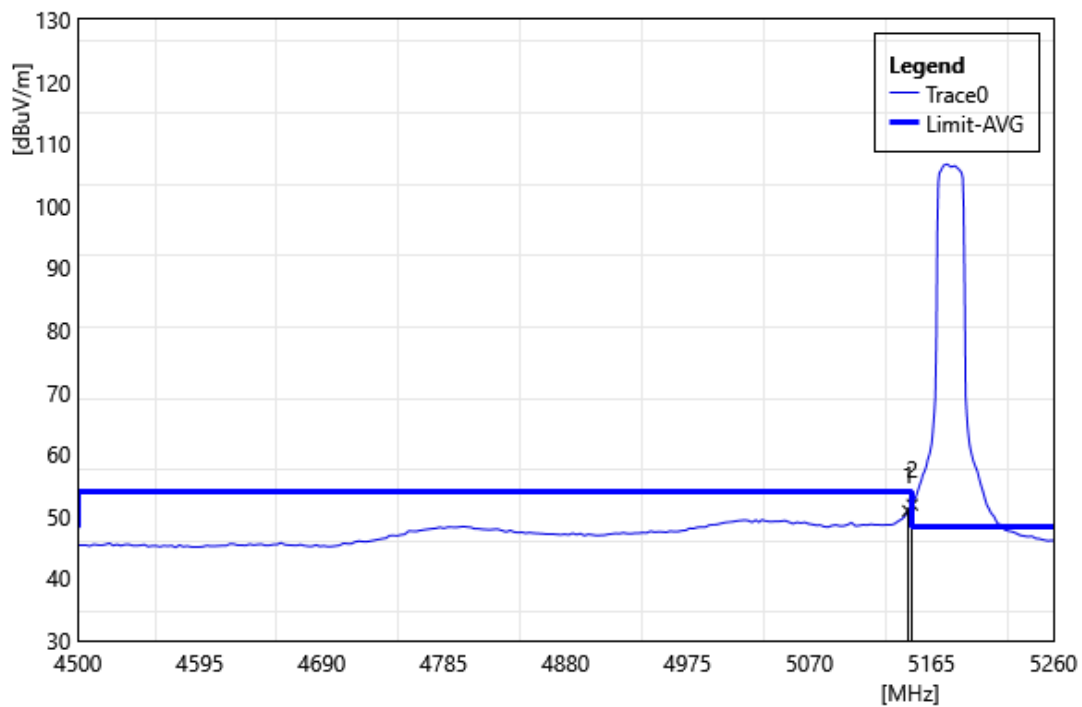


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	54.12	-3.23	50.89	54.00	-3.11	AVG
2	5150.00	55.08	-3.22	51.86	54.00	-2.14	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5180		
	MHz		
Polarization:	Vertical		
Remark:			

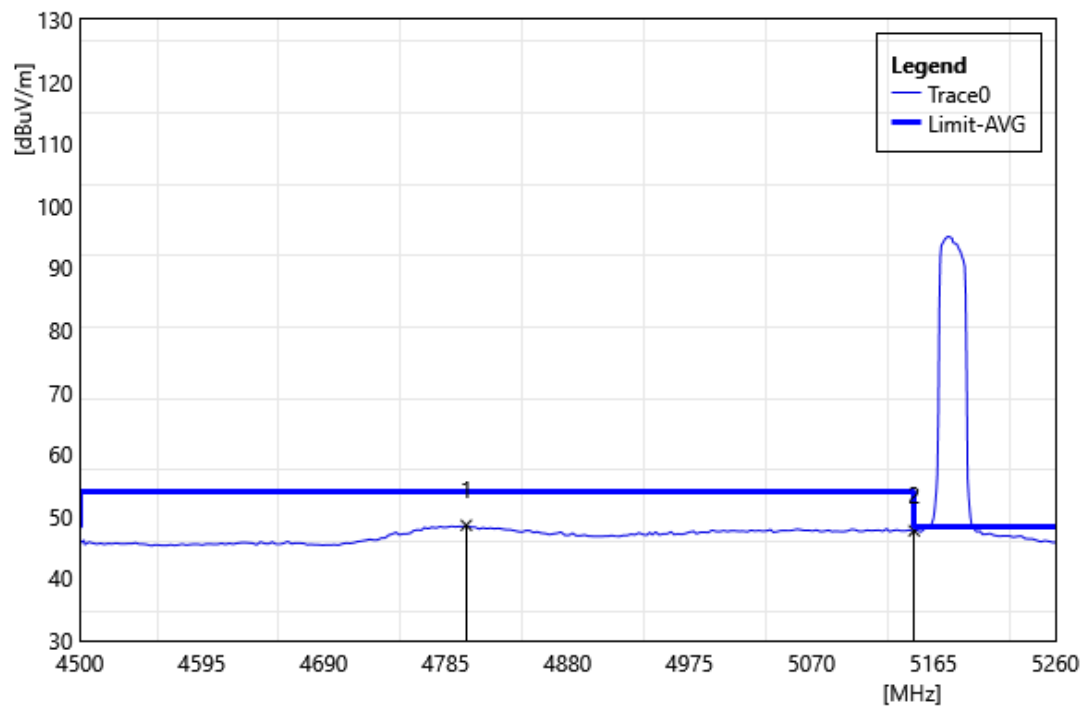


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4800.96	50.01	-1.45	48.56	54.00	-5.44	AVG
2	5150.00	50.90	-3.22	47.68	54.00	-6.32	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5240		
	MHz		
Polarization:	Horizontal		
Remark:			

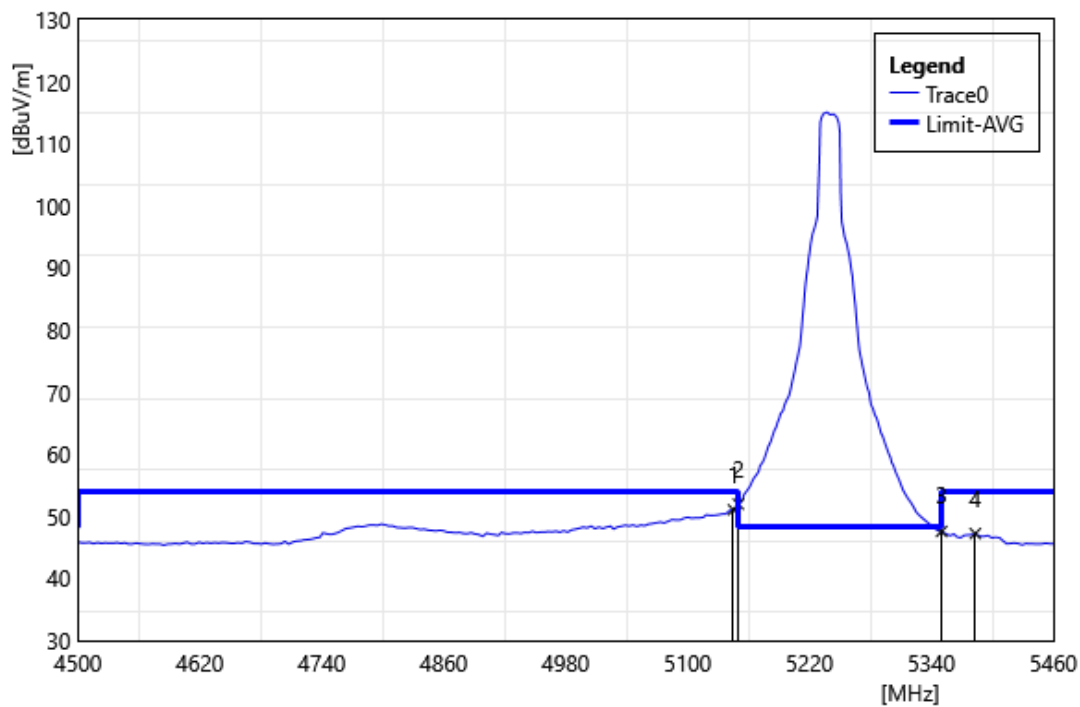


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.12	54.29	-3.23	51.06	54.00	-2.94	AVG
2	5150.00	55.20	-3.22	51.98	54.00	-2.02	AVG
3	5350.00	51.66	-4.08	47.58	54.00	-6.42	AVG
4	5383.20	51.41	-4.18	47.23	54.00	-6.77	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5240		
	MHz		
Polarization:	Vertical		
Remark:			

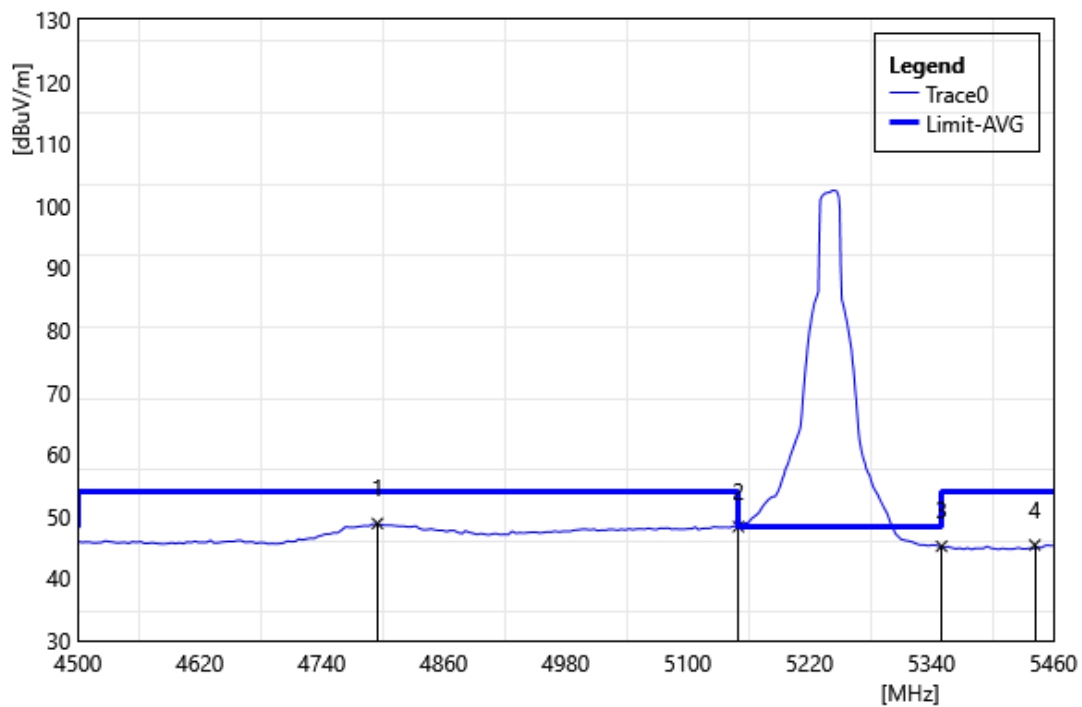


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4794.72	50.45	-1.60	48.85	54.00	-5.15	AVG
2	5150.00	51.57	-3.22	48.35	54.00	-5.65	AVG
3	5350.00	49.26	-4.08	45.18	54.00	-8.82	AVG
4	5441.76	49.51	-4.11	45.40	54.00	-8.60	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

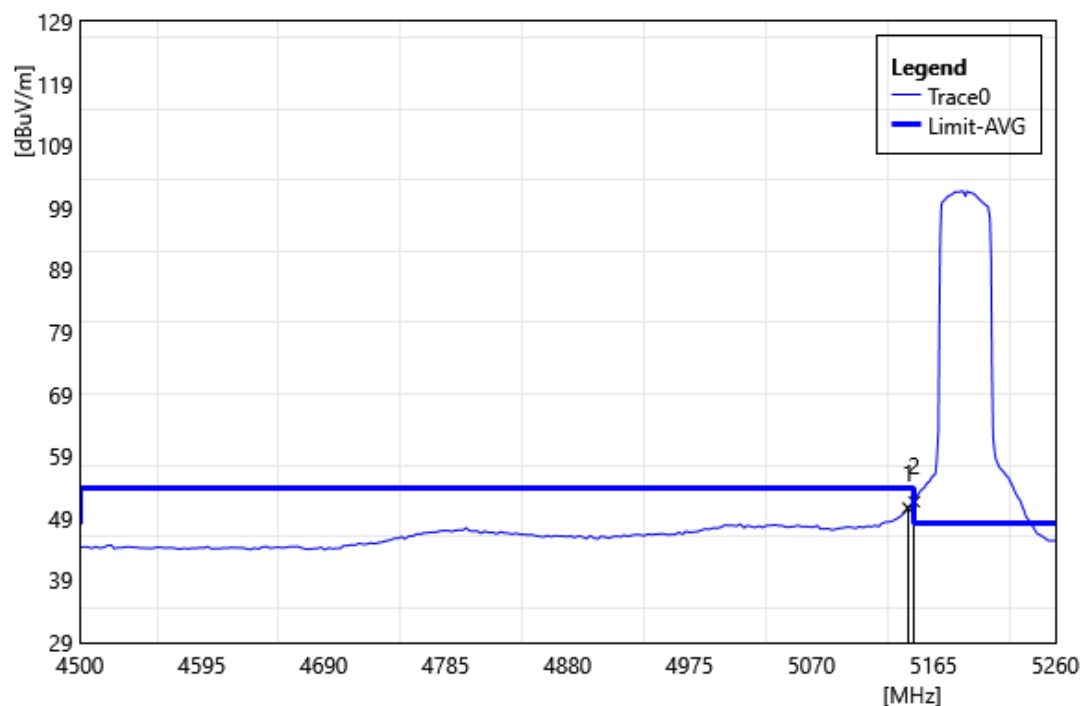


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.24	53.88	-3.23	50.65	54.00	-3.35	AVG
2	5150.00	54.89	-3.22	51.67	54.00	-2.33	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

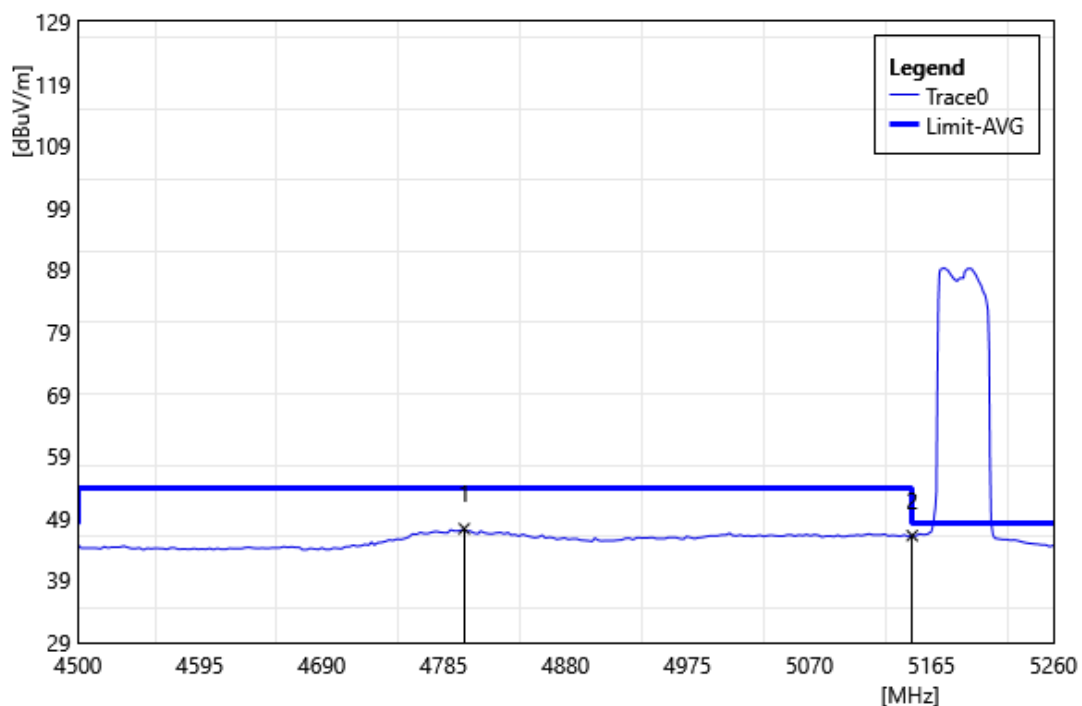


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4800.96	48.78	-1.45	47.33	54.00	-6.68	AVG
2	5150.00	49.43	-3.22	46.21	54.00	-7.79	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5230		
	MHz		
Polarization:	Horizontal		
Remark:			

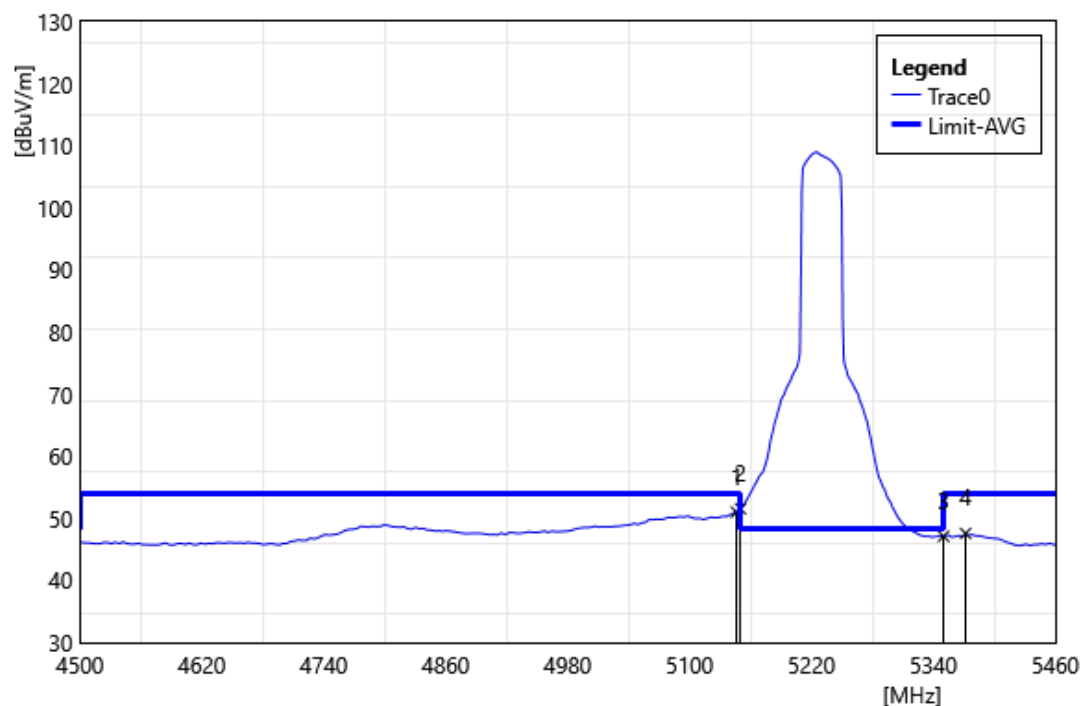


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.08	54.24	-3.23	51.01	54.00	-2.99	AVG
2	5150.00	54.77	-3.22	51.55	54.00	-2.45	AVG
3	5350.00	51.19	-4.08	47.11	54.00	-6.89	AVG
4	5371.68	51.72	-4.15	47.57	54.00	-6.44	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

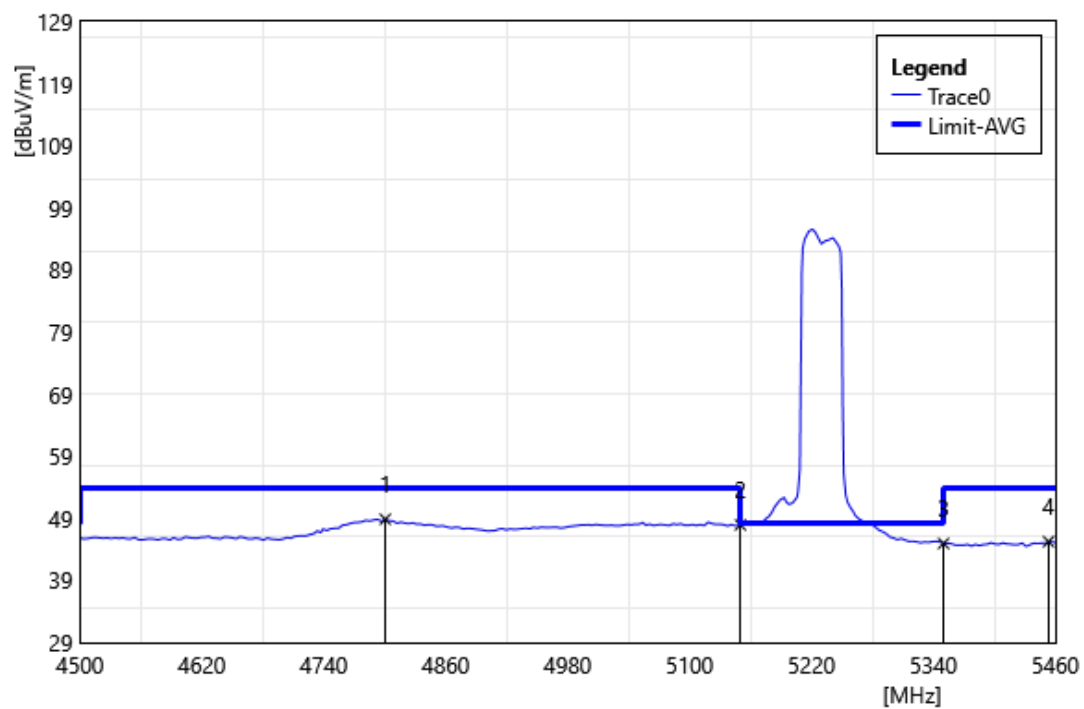


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4800.48	50.30	-1.44	48.86	54.00	-5.14	AVG
2	5150.00	51.16	-3.22	47.94	54.00	-6.06	AVG
3	5350.00	49.03	-4.08	44.95	54.00	-9.05	AVG
4	5453.28	49.33	-4.08	45.25	54.00	-8.75	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

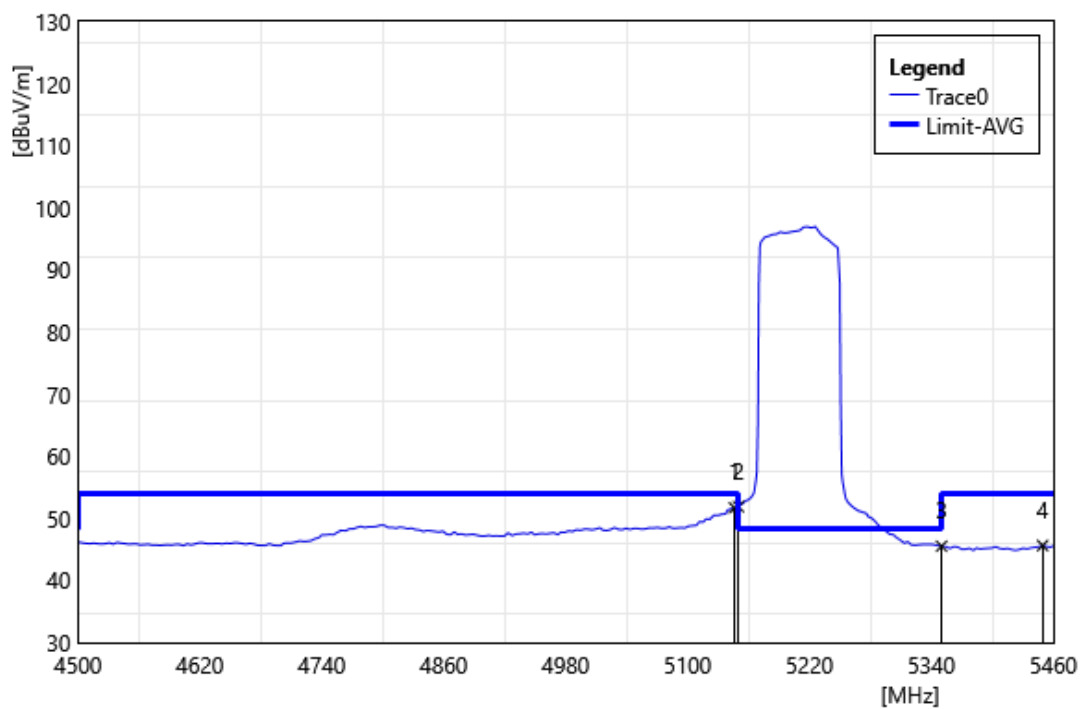

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.08	54.93	-3.23	51.70	54.00	-2.30	AVG
2	5150.00	55.11	-3.22	51.89	54.00	-2.11	AVG
3	5350.00	49.61	-4.08	45.53	54.00	-8.47	AVG
4	5449.44	49.70	-4.08	45.62	54.00	-8.38	AVG

Test Site:	96604-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

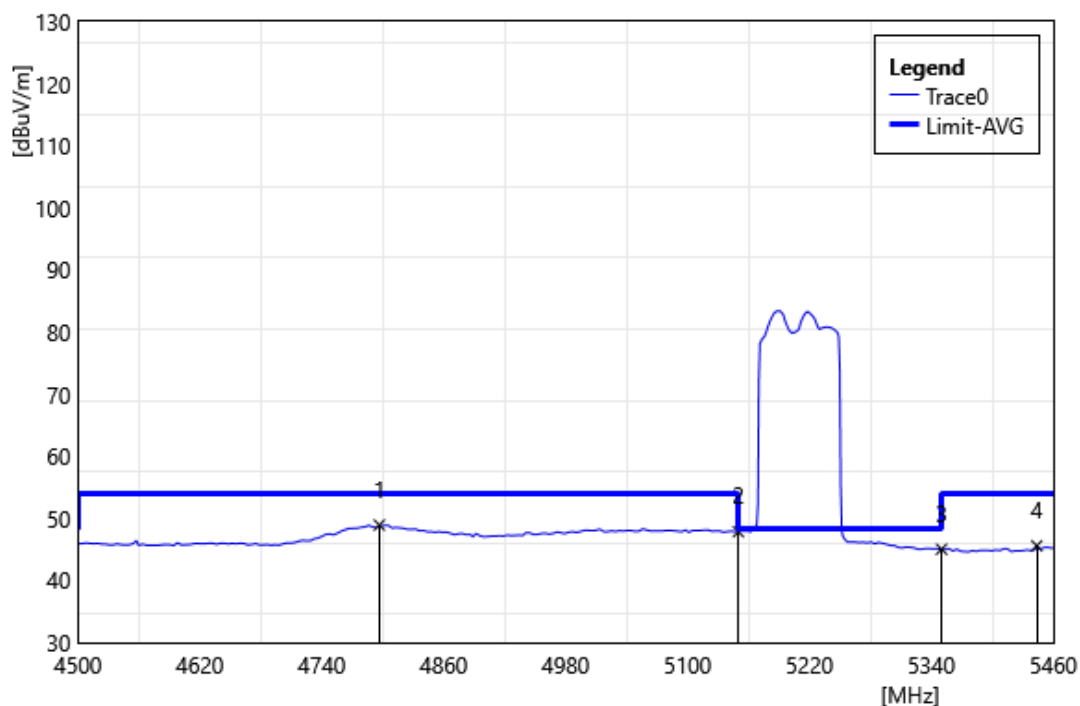

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4796.64	50.47	-1.54	48.93	54.00	-5.07	AVG
2	5150.00	51.07	-3.22	47.85	54.00	-6.15	AVG
3	5350.00	49.10	-4.08	45.02	54.00	-8.98	AVG
4	5443.68	49.67	-4.09	45.58	54.00	-8.42	AVG

5.3. Conducted Test Results

Duty cycle

Reference Appendix A / Appendix B

Maximum Conducted Output Power Measurement

Reference Appendix A

Maximum Conducted Output Power Measurement

Reference Appendix A

26 dB RF Bandwidth Measurement & 99 % Occupied Bandwidth Measurement

Reference Appendix A / Appendix B

6 dB RF Bandwidth Measurement

Reference Appendix A / Appendix B

Maximum Power Spectral Density Measurement

Reference Appendix A / Appendix B

---END---