



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: MAYTON

Address: 2F, 32, Bupyeong-daero 313beon-gil, Bupyeong-gu, incheon, Republic of Korea, Incheon, South Korea

FCC ID: 2BAG8-MAYTONAP3

Product Name: AutoPro Dual

**Standard(s): 47 CFR Part 2, 47 CFR Part 22, Subpart H
47 CFR Part 24, Subpart E
47 CFR Part 27
ANSI C63.26-2015
KDB 971168 D01 Power Meas License Digital Systems
v03r01**

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR230740691-00E

Date Of Issue: 2023/12/27

Reviewed By: Calvin Chen

Title: RF Engineer

Approved By: Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 DESCRIPTION OF TEST CONFIGURATION.....	7
1.2.1 EUT Operation Condition:.....	7
1.2.2 Support Equipment List and Details	11
1.2.3 Support Cable List and Details	11
1.2.4 Block Diagram of Test Setup.....	11
1.3 MEASUREMENT UNCERTAINTY	12
2. SUMMARY OF TEST RESULTS	13
3. REQUIREMENTS AND TEST PROCEDURES	14
3.1 Applicable Standard For Part 22 Subpart H:.....	14
3.2 Applicable Standard For Part 24 Subpart E:	16
3.3 Applicable Standard For Part 27:.....	17
3.4 Test Method:	20
4. Test DATA AND RESULTS	27
4.1 ANTENNA PORT TEST DATA AND RESULTS FOR WCDMA BAND 2:	27
4.2 ANTENNA PORT TEST DATA AND RESULTS FOR WCDMA BAND 4:	34
4.3 ANTENNA PORT TEST DATA AND RESULTS FOR WCDMA BAND 5:	41
4.4 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 2.....	48
4.5 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 4.....	73
4.6 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 5.....	97
4.7 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 17.....	117
4.8 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 25.....	129
4.9 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 41.....	154
4.10 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 66.....	182
4.11 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 71.....	207
4.12 RADIATED SPURIOUS EMISSIONS.....	227
5. EUT PHOTOGRAPHS	239
6. TEST SETUP PHOTOGRAPHS	240

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230740691-00E	Original Report	2023/12/27

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	AutoPro Dual
EUT Model:	MAYTON-AP3
Multiple Models:	MAYTONAP3.5
Operation Bands and modes:	WCDMA: Band 2/4/5 LTE: Band 2/4/5/17/25/41/66/71
Modulation Type:	BPSK, QPSK, 16QAM
Rated Input Voltage:	DC 5V from USB
Serial Number:	288V-1
EUT Received Date:	2023/7/19
EUT Received Status:	Good
Note: The Multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer.	

Operation Voltage (V_{DC}) ▲:

Lowest:	4.4	Normal:	5	Highest:	5.25
---------	-----	---------	---	----------	------

Transmission Antenna Information ▲:

Antenna Type	Operation Bands	Antenna Frequency Range (MHz)	Antenna Gain (Gr) (dBi)	Lc(dB)
PCB	WCDMA B2	1850-1910	1.31	0
	WCDMA B4	1710-1755	-0.42	0
	WCDMA B5	824-849	-2.89	0
	LTE B2	1850-1910	1.31	0
	LTE B4	1710-1755	-0.42	0
	LTE B5	824-849	-2.89	0
	LTE B17	704-716	-1.36	0
	LTE B25	1850-1915	1.31	0
	LTE B41	2496-2690	-0.95	0
	LTE B66	1710-1780	-0.42	0
	LTE B71	663-698	-1.38	0

Note: There is no cable between the transmitter and antenna.

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
/	/	/	/

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in each operation mode.
Equipment Modifications:	No
EUT Exercise Software:	No
The maximum power was configured per 3GPP Standard for each operation modes as below setting: GSM/GPRS/EGPRS Function: Menu select > GSM Mobile Station > GSM 850/1900 Press Connection control to choose the different menus Press RESET > choose all the reset all settings Connection Press Signal Off to turn off the signal and change settings Network Support > GSM + GPRS or GSM + EGSM Main Service > Packet Data Service selection > Test Mode A – Auto Slot Config. off MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting > Slot configuration > Uplink/Gamma > 33 dBm for GPRS 850 > 30 dBm for GPRS 1900 > 27 dBm for EGPRS 850 > 26 dBm for EGPRS 1900 BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel Frequency Offset > + 0 Hz Mode > BCCH and TCH BCCH Level > -85 dBm (May need to adjust if link is not stable) BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel] Channel Type > Off P0 > 4 dB Slot Config > Unchanged (if already set under MS signal) TCH > choose desired test channel Hopping > Off Main Timeslot > 3 Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS) Bit Stream > 2E9-1 PSR Bit Stream AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input Connection Press Signal on to turn on the signal and change settings	

WCDMA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/ 5	0
	β_{ec}	209/225	12/15	30 15	2/15	5/15
	β_c / β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
HSDPA Specific Settings	CM(dB)	1.0	3.0	2.0	3.0	1.0
	PR(dB)	0	2	1	2	0
	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
HSUPA Specific Settings	$A_{hs} = \beta_{hs} / \beta_c$	30/15				
	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate k ps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	

LTE (FDD):

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 96	3	> 5	≤ 1
			5	> 6	≤ 1
			10	> 6	≤ 1
			15	> 8	≤ 1
			20	> 10	≤ 1
NS_04	6.6.2.2.2	41	5	> 6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE(TDD):

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink $\times (T_s) \times \# \text{ of S} + \# \text{ of U}$

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where


$T_s = 1/(15000 \times 2048)$ seconds

1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
LG Electronics	On-Board Unit DV	LC7F	711336610
WITH ONFORMTION	Adapter	SPF-1205	Unknown
PHILIPS	Monitor	24PFF5595/T3	XM2A2124000343

1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Power Cable	No	No	1.2	Adapter	AC Mains
Power Cable	No	Yes	1.2	Adapter	On-Board Unit DV
HDMI Cable	No	No	1.2	EUT	Monitor
USB Cable	No	No	0.2	EUT	On-Board Unit DV

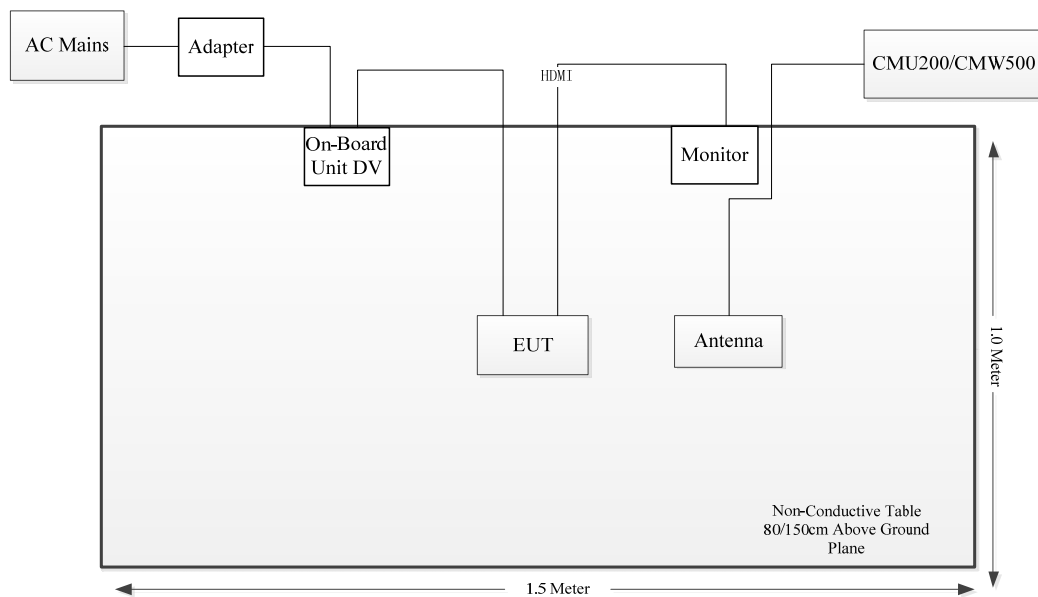1.2.4 Block Diagram of Test Setup

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
RF Frequency	±0.082×10 ⁻⁶

2. SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC§2.1046; § 22.913; § 24.232; §27.50;	RF Output Power	Compliant
FCC§ 2.1047	Modulation Characteristics	Not Applicable
FCC§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53;	Occupied Bandwidth	Compliant
FCC§ 2.1051; § 22.917; § 24.238; §27.53;	Spurious Emissions at Antenna Terminal	Compliant
FCC§ 22.917; § 24.238; §27.53;	Out of band emission, Band Edge	Compliant
FCC§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability vs. temperature Frequency stability vs. voltage	Compliant
FCC§ 2.1053; § 22.917; § 24.238; §27.53;	Field Strength of Spurious Radiation	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 Applicable Standard For Part 22 Subpart H:

3.1.1 RF Output Power

FCC §22.913

(a)(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7watts.

(d) *Power measurement.* Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-toaverage ratio (PAR) of the transmission must not exceed 13 dB. Power measurements for base transmitters and repeaters must be made in accordance with either of the following:

- (1) A Commission-approved average power technique (see FCC Laboratory's Knowledge Database); or
- (2) For purposes of this section, peak transmit power must be measured over an interval of continuous transmission using instrumentation calibrated in terms of an rmseivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

3.1.2 Spurious Emissions

FCC §22.917

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a reference bandwidth as follows:

- (1) In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy, provided that the measured power is integrated over the full required reference bandwidth (i.e., 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (2) In the spectrum above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz

3.1.3 Frequency stability

FCC §22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

Table C-1 - Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20	20	50
50 to 450	5	5	50
450 to 512	2.5	5	5
821 to 896	1.5	2.5	2.5
928 to 929	5	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10	n/a	n/a

3.2 Applicable Standard For Part 24 Subpart E:

3.2.1 RF Output Power

FCC §24.232

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.2.2 Spurious Emissions

FCC §24.238

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.

(d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

3.2.3 Frequency stability

FCC §24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.3 Applicable Standard For Part 27:

3.3.1 RF Output Power

FCC §27.50

(a)(3) *Mobile and portable stations.*

(i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

(ii) Mobile and portable stations are not permitted to transmit in the 2315-2320 MHz and 2345-2350 MHz bands.

(iii) *Automatic transmit power control.* Mobile and portable stations transmitting in the 2305-2315 MHz band or in the 2350-2360 MHz band must employ automatic transmit power control when operating so the stations operate with the minimum power necessary for successful communications.

(iv) *Prohibition on external vehicle-mounted antennas.* The use of external vehicle-mounted antennas for mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band is prohibited.

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c)(10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d)(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h) The following power limits shall apply in the BRS and EBS:

(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

3.3.2 Spurious Emissions

FCC §27.53

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:

(4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

(i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to – 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and – 80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

(h) AWS emission limits

(1) **General protection levels.** Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.3.3 Frequency stability

FCC §27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.4 Test Method:

3.4.1 Transmitter output power, e.r.p. and e.i.r.p

According to CFR Part 2.1046, ANSI C63.26-2015 Section 5.2.5.5 and KDB 971168 D01 Power Meas License Digital Systems v03r01:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

where:


ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

Test Setup Block:

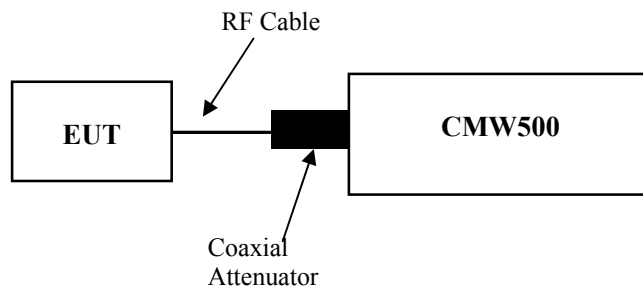

Note: The Insertion loss of the RF cable and coaxial Attenuator was offset into the Reading of CMW500.

3.4.2 Occupied Bandwidth

According to ANSI C63.26-2015 Section 5.4.4

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:

a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient).

b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.


c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.

d) Set the detection mode to peak, and the trace mode to max-hold.

e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.

f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

Test Setup Block:

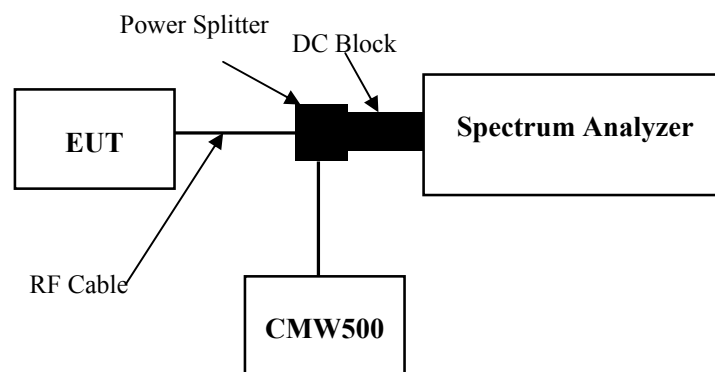


3.4.3 Transmitter unwanted emissions-at antenna terminals

According to ANSI C63.26-2015 Section 5.7.4, KDB 971168 D01 Power Meas License Digital Systems v03r01:

the applicable rule part specifies the reference bandwidth for measuring unwanted emission levels (typically, 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz),8 effectively depicting the unwanted emission limit in terms of a power spectral density. In those cases where no reference bandwidth is explicitly specified, the values in the preceding sentence should be used.

Test Setup Block:

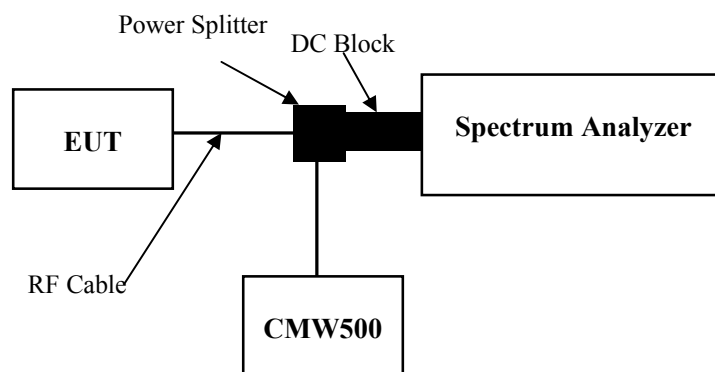


3.4.4 Transmitter unwanted emissions-Out of band emission

According to ANSI C63.26-2015 Section 5.7.3, KDB 971168 D01 Power Meas License Digital Systems v03r01:

Typically, a measurement (resolution) bandwidth smaller than the reference bandwidth is allowed for measurements within a specified frequency range at the edge of the authorized frequency block/band (e.g., within the first Y MHz outside of the authorized frequency band/block, where the value of Y is specified in the relevant rule part). Some FCC out-of-band emission rules permit the use of a narrower RBW (typically limited to a minimum RBW of 1 % of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth. Beyond the specified frequency range in which this relaxation of the uniform reference bandwidth is permitted, it typically is also acceptable to use a narrower RBW (again limited to a minimum of 1 % of OBW) to increase accuracy, but the measurement result must subsequently be integrated over the full reference bandwidth.

Test Setup Block:

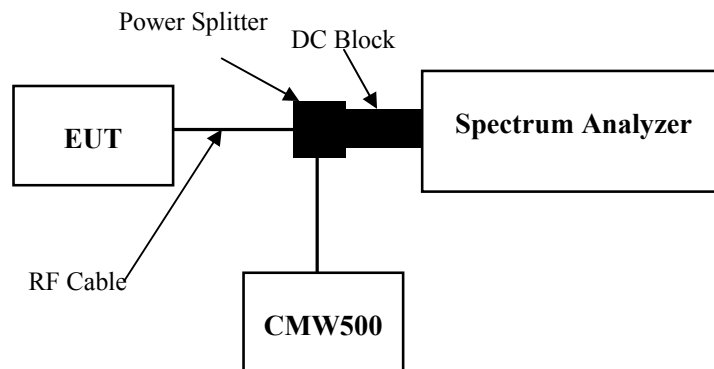

3.4.5 Frequency stability

According to ANSI C63.26-2015 Section 5.6, KDB 971168 D01 Power Meas License Digital Systems v03r01:

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage.


The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency determining circuit element shall be made subsequent to this initial set-up. Frequency stability is tested:

- a) At 10 °C intervals of temperatures between –30 °C and +50 °C at the manufacturer's rated supply voltage, and
- b) At +20 °C temperature and ±15% supply voltage variations. If a product is specified to operate over a range of input voltage then the –15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.

During the test all necessary settings, adjustments and control of the EUT have to be performed without disturbing the test environment, i.e., without opening the environmental chamber. The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range. For handheld equipment that is only capable of operating from internal batteries and the supply voltage cannot be varied, the frequency stability tests shall be performed at the nominal battery voltage and the battery end point voltage specified by the manufacturer. An external supply voltage can be used and set at the internal battery nominal voltage, and again at the battery operating end point voltage which shall be specified by the equipment manufacturer.

If an unmodulated carrier is not available, the mean frequency of a modulated carrier can be obtained by using a frequency counter with gating time set to an appropriately large multiple of bit periods (gating time depending on the required accuracy). Full details on the choice of values shall be included in the test report.

Test Setup Block:

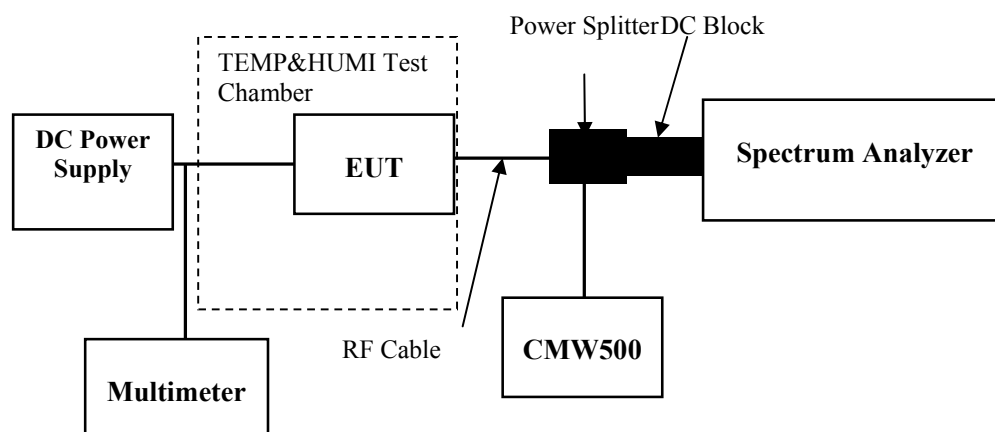

3.4.6 Transmitter unwanted emissions- Radiated Spurious emissions

According to ANSI C63.26-2015 Section 5.5.3:

Test setup:

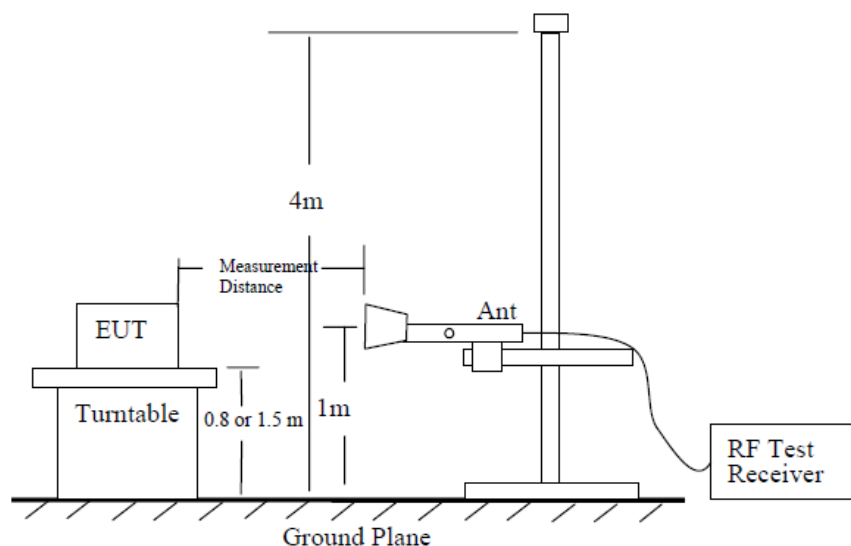


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

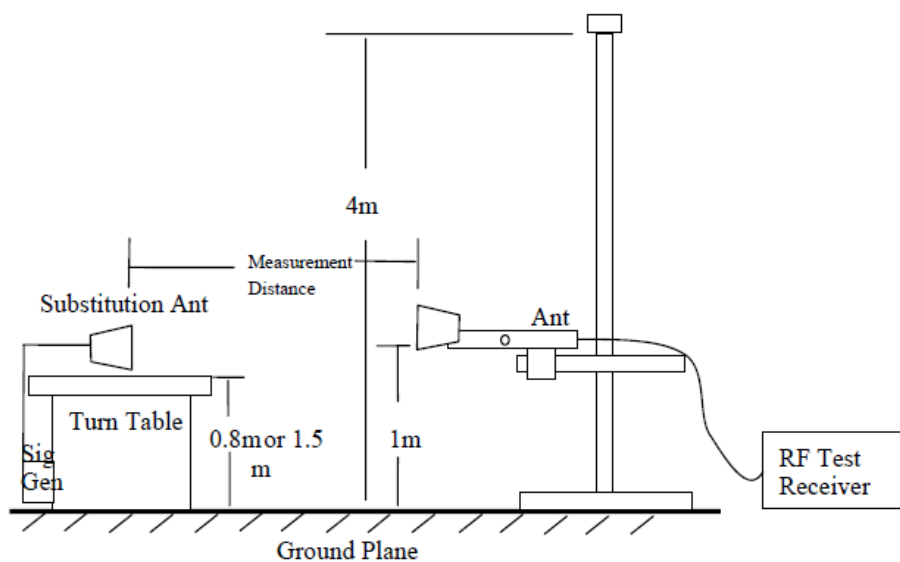


Figure 7—Substitution method set-up for radiated emission

Test Procedure:

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
 - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
 - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
 - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
 where

P_e = equivalent emission power in dBm
 P_s = source (signal generator) power in dBm

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from: $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$. If necessary, the antenna gain can be calculated from calibrated antenna factor information
- k) Provide the complete measurement results as a part of the test report.

4. Test DATA AND RESULTS

4.1 Antenna Port Test Data and Results for WCDMA Band 2:

Serial Number:	288V-1	Test Date:	2023/8/4-2023/8/14
Test Site:	RF	Test Mode:	Transmitting
Tester:	Claire Liu/Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.3-26.4	Relative Humidity: (%)	42-63	ATM Pressure: (kPa)	99.7-101.2
----------------------	-----------	------------------------------	-------	------------------------	------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA Band 2	1852.4	1880	1907.6

Test Data:**FCC§2.1046;§ 24.232****RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	24.75	24.69	24.48	26.06	33
HSDPA Subtest 1	23.61	23.49	23.71	25.02	33
HSDPA Subtest 2	23.72	23.64	23.56	25.03	33
HSDPA Subtest 3	23.64	23.56	23.43	24.95	33
HSDPA Subtest 4	23.67	23.72	23.51	25.03	33
HSUPA Subtest 1	23.15	23.04	22.98	24.46	33
HSUPA Subtest 2	23.07	23.04	22.94	24.38	33
HSUPA Subtest 3	23.05	23.11	23.01	24.42	33
HSUPA Subtest 4	23.54	23.72	23.56	25.03	33
HSUPA Subtest 5	23.45	23.51	23.59	24.9	33

Note: EIRP=Conducted Power(dBm) - Lc(dB) + G_T(dBi)**Result:****Pass****Peak-to-average Ratio(PAR)**

Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	3.33	3.43	3.46	13
HSDPA	4.42	4.42	4.55	13
HSUPA	4.49	4.26	4.49	13

Result:**Pass****FCC §2.1049, §24.238:Occupied Bandwidth**


Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.135	4.135	4.135	4.712	4.712	4.728
HSDPA	4.135	4.135	4.151	4.769	4.763	4.731
HSUPA	4.135	4.119	4.135	4.728	4.728	4.731

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 24.238 (a):Spurious Emissions at Antenna Terminal**Result:****Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.****FCC §2.1051, § 24.238 (a):Out of band emission, Band Edge****Result:****Pass, Please refer to the test plots of Out of band emission, Band Edge.**

FCC §2.1055, §24.235: Frequency Stability						
Test Mode:	WCDMA R99	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	5	1850.329	1850.000	1909.684	1910.000
	-20	5	1850.320	1850.000	1909.680	1910.000
	-10	5	1850.327	1850.000	1909.693	1910.000
	0	5	1850.328	1850.000	1909.683	1910.000
	10	5	1850.306	1850.000	1909.673	1910.000
	20	5	1850.333	1850.000	1909.667	1910.000
	30	5	1850.330	1850.000	1909.682	1910.000
	40	5	1850.329	1850.000	1909.685	1910.000
	50	5	1850.330	1850.000	1909.675	1910.000
Frequency Stability vs. Voltage	20	4.4	1850.333	1850.000	1909.688	1910.000
	20	5.25	1850.312	1850.000	1909.671	1910.000
					Result:	Pass

Test Plots (Note: The 14.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

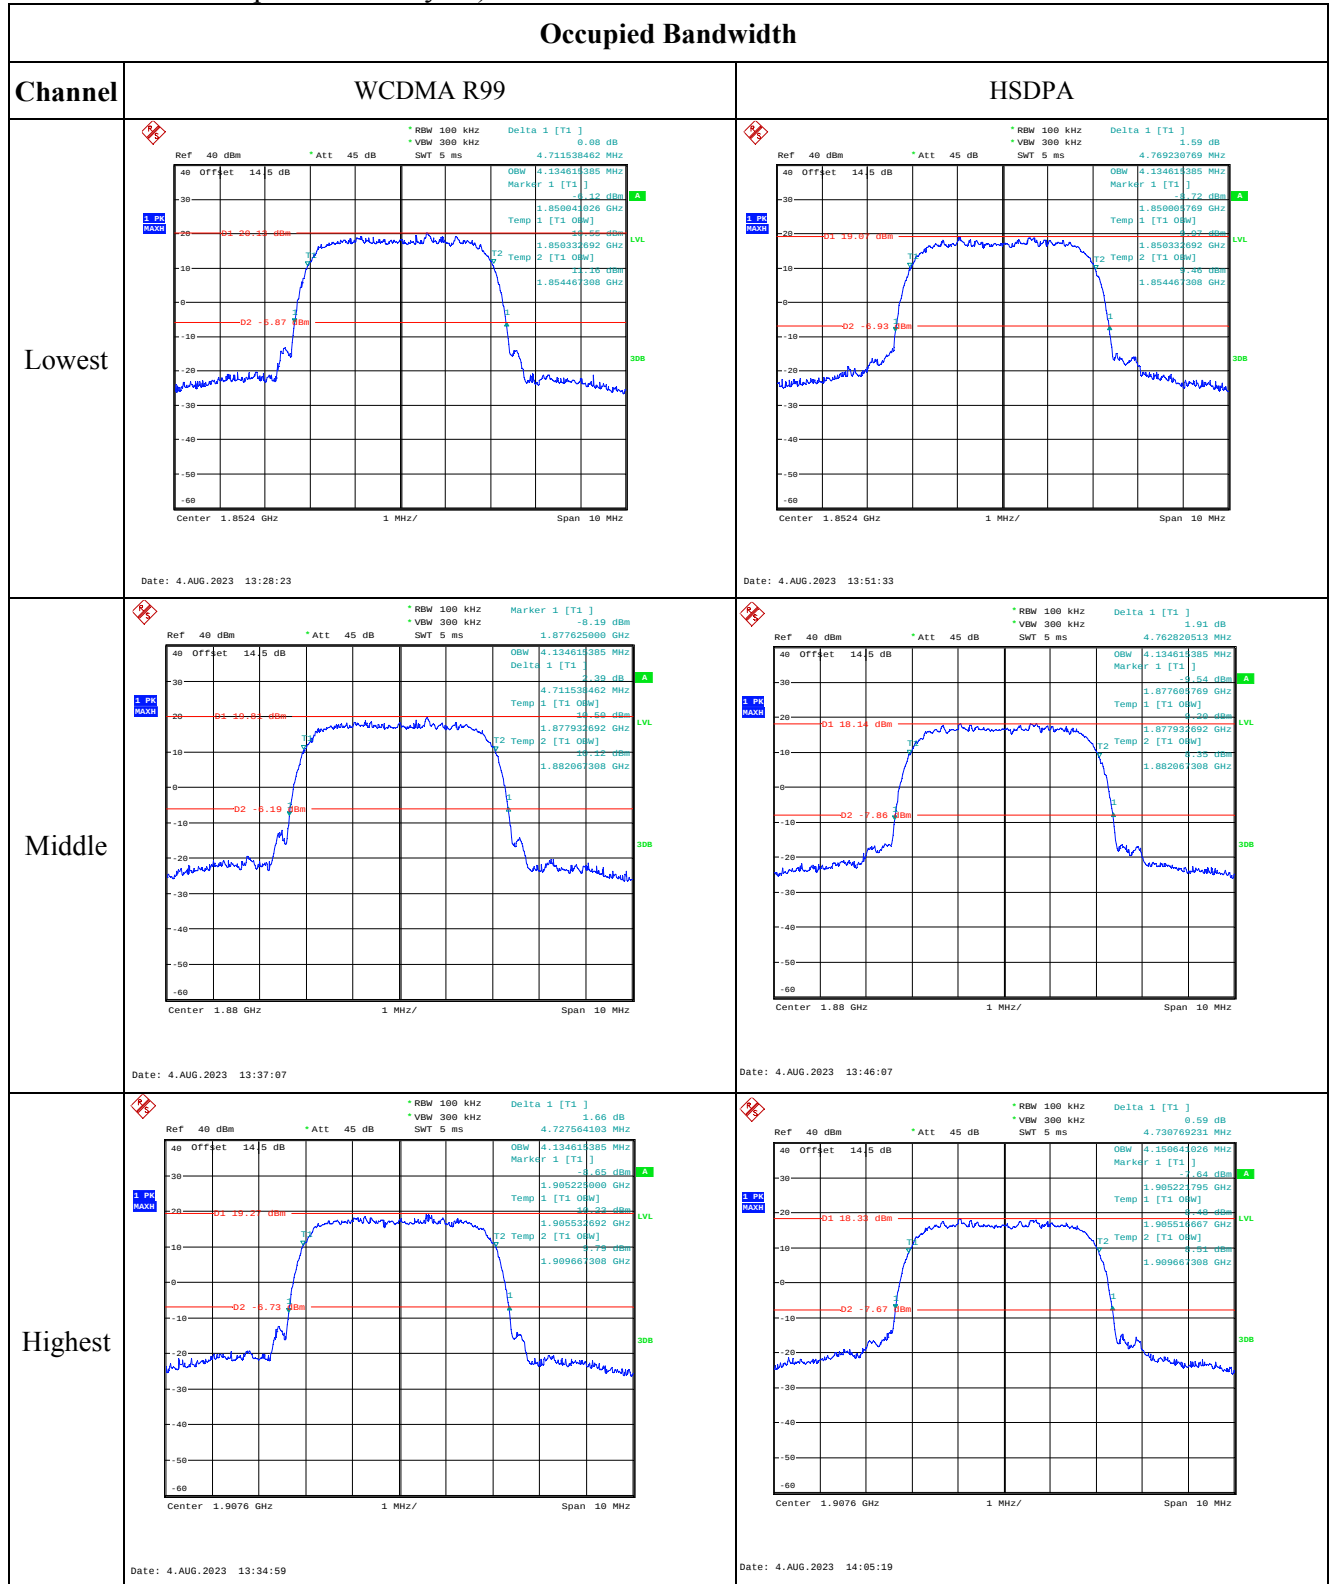


Occupied Bandwidth

Channel


HSUPA

Lowest

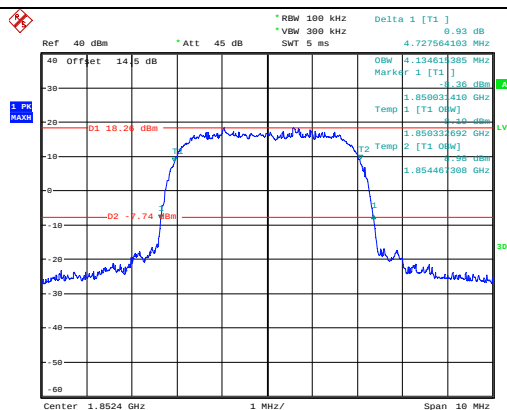


Date: 4.AUG.2023 14:11:13

Middle

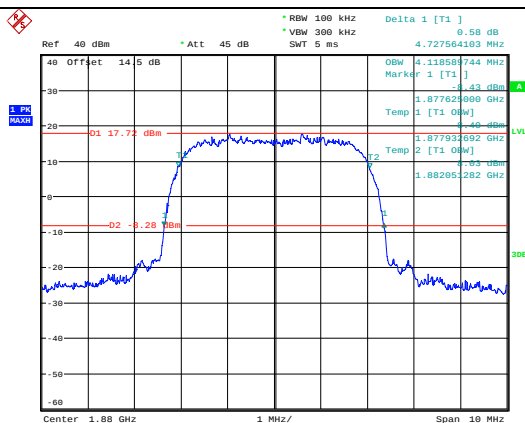

Date: 4.AUG.2023 14:13:27

Highest

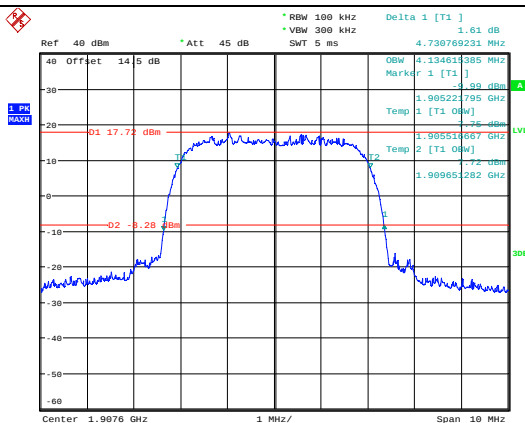


Date: 4.AUG.2023 14:08:19

Spurious Emissions at Antenna Terminal


Channel

WCDMA R99

Lowest

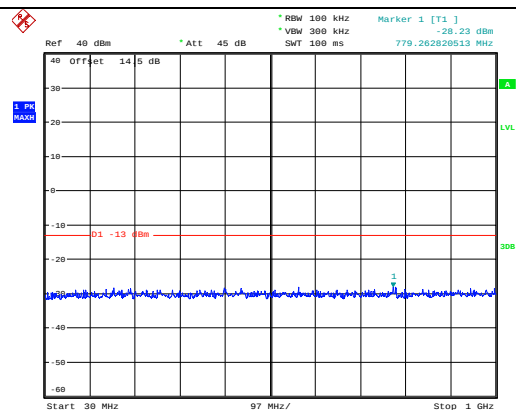


Date: 5.AUG.2023 10:51:22

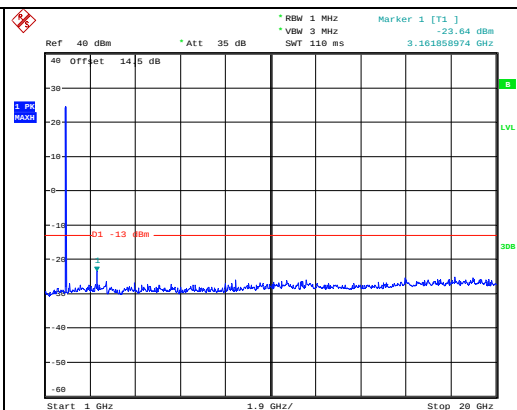


Date: 5.AUG.2023 10:52:43

Middle

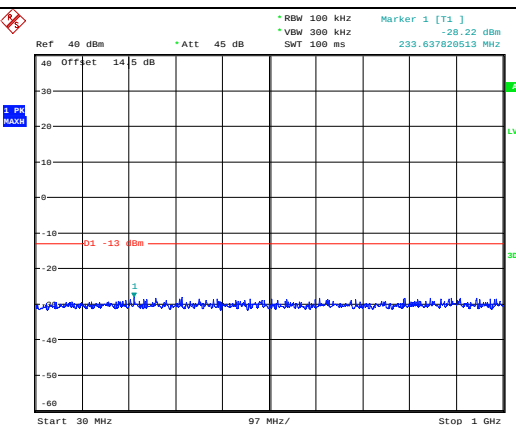


Date: 5.AUG.2023 10:53:44

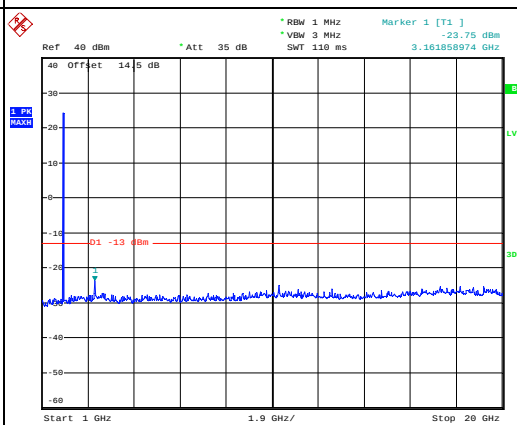


Date: 5.AUG.2023 10:53:29

Highest






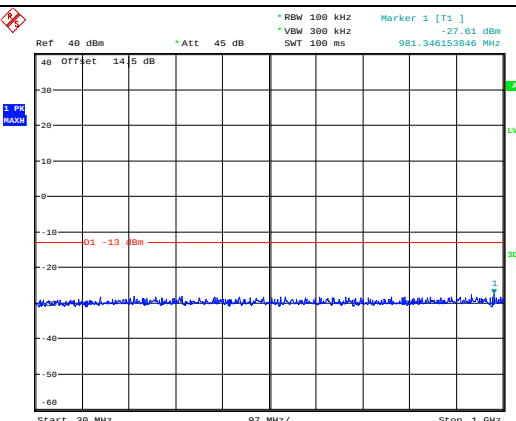


Date: 5.AUG.2023 10:54:00

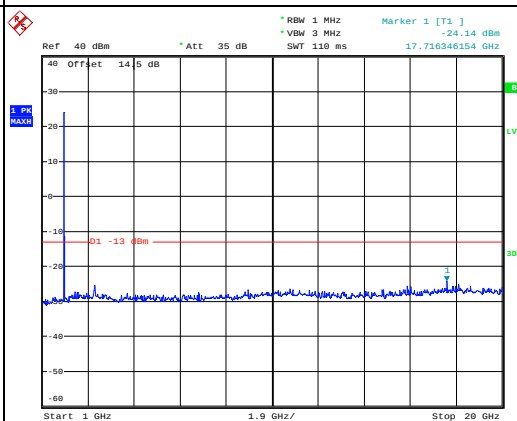

Date: 5.AUG.2023 10:54:34

Out of band emission, Band Edge

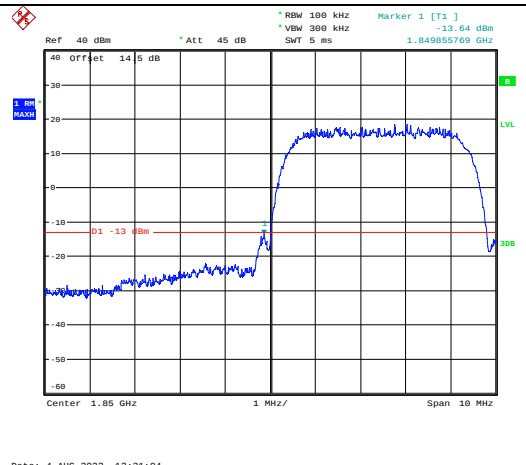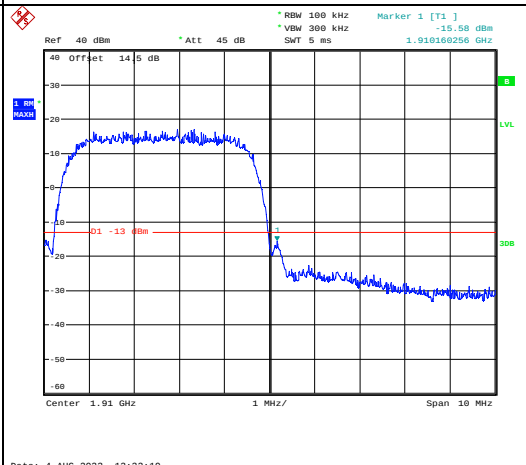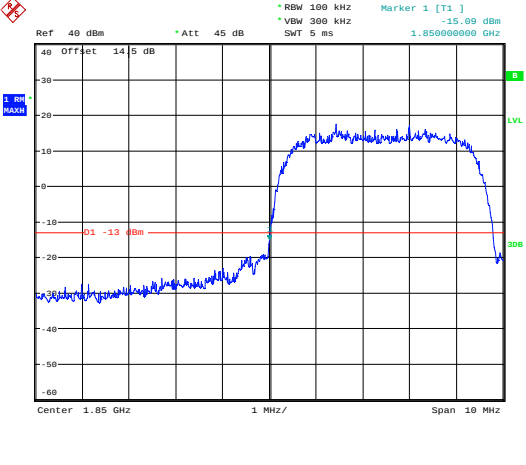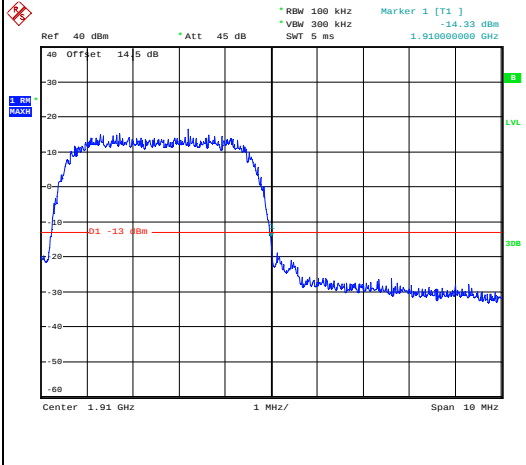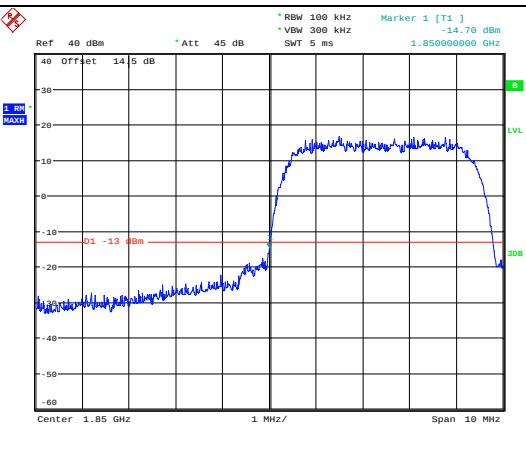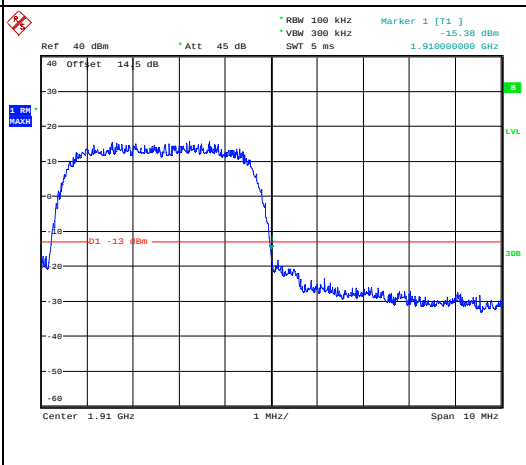Mode	Lowest	Highest
R99	 Ref: 40 dBm, Att: 45 dB, RBW: 100 kHz, VBW: 300 kHz, SWT: 5 ms, Marker 1 [T1]: -15.00 dBm, 1.849855769 GHz Center: 1.85 GHz, Span: 10 MHz Date: 4.AUG.2023 13:31:04	 Ref: 40 dBm, Att: 45 dB, RBW: 100 kHz, VBW: 300 kHz, SWT: 5 ms, Marker 1 [T1]: -15.58 dBm, 1.918168256 GHz Center: 1.91 GHz, Span: 10 MHz Date: 4.AUG.2023 13:32:19
HSUPA	 Ref: 40 dBm, Att: 45 dB, RBW: 100 kHz, VBW: 300 kHz, SWT: 5 ms, Marker 1 [T1]: -15.00 dBm, 1.850000000 GHz Center: 1.85 GHz, Span: 10 MHz Date: 4.AUG.2023 14:09:30	 Ref: 40 dBm, Att: 45 dB, RBW: 100 kHz, VBW: 300 kHz, SWT: 5 ms, Marker 1 [T1]: -14.33 dBm, 1.918000000 GHz Center: 1.91 GHz, Span: 10 MHz Date: 4.AUG.2023 14:08:46
HSDPA	 Ref: 40 dBm, Att: 45 dB, RBW: 100 kHz, VBW: 300 kHz, SWT: 5 ms, Marker 1 [T1]: -14.70 dBm, 1.850000000 GHz Center: 1.85 GHz, Span: 10 MHz Date: 4.AUG.2023 13:52:02	 Ref: 40 dBm, Att: 45 dB, RBW: 100 kHz, VBW: 300 kHz, SWT: 5 ms, Marker 1 [T1]: -15.38 dBm, 1.918000000 GHz Center: 1.91 GHz, Span: 10 MHz Date: 4.AUG.2023 13:52:40

4.2 Antenna Port Test Data and Results for WCDMA Band 4:

Serial Number:	288V-1	Test Date:	2023/8/4-2023/8/14
Test Site:	RF	Test Mode:	Transmitting
Tester:	Claire Liu/Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.3-26.4	Relative Humidity: (%)	42-63	ATM Pressure: (kPa)	99.7-101.2
----------------------	-----------	---------------------------	-------	------------------------	------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA Band 4	1712.4	1732.6	1752.6

Test Data:**FCC§2.1046;§27.50(d)(4)****RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	24.52	24.39	24.68	24.26	30
HSDPA Subtest 1	23.56	23.37	23.68	23.26	30
HSDPA Subtest 2	23.59	23.34	23.66	23.24	30
HSDPA Subtest 3	23.46	23.41	23.57	23.15	30
HSDPA Subtest 4	23.54	23.42	23.67	23.25	30
HSUPA Subtest 1	22.95	22.83	23.06	22.64	30
HSUPA Subtest 2	22.98	22.86	23.13	22.71	30
HSUPA Subtest 3	23.02	22.82	23.09	22.67	30
HSUPA Subtest 4	23.51	23.48	23.71	23.29	30
HSUPA Subtest 5	23.49	23.42	23.59	23.17	30
Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)					
				Result:	Pass

Peak-to-average Ratio(PAR)

Test Mode	Peak-to-average Ratio(dB)			Limit (dB)	
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	3.56	3.21	3.33	13	
HSDPA	4.55	4.07	4.04	13	
HSUPA	4.39	4.17	4.39	13	
				Result:	Pass

FCC §2.1049, §27.53:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.135	4.135	4.135	4.744	4.728	4.721
HSDPA	4.151	4.135	4.135	4.76	4.769	4.744
HSUPA	4.135	4.135	4.135	4.744	4.769	4.763

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 27.53:Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	---


FCC §2.1051, § 27.53:Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	--

FCC §2.1055, §27.54: Frequency Stability

Test Mode:	WCDMA R99	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	5	1710.318	1710.000	1754.677	1755.000
	-20	5	1710.320	1710.000	1754.695	1755.000
	-10	5	1710.325	1710.000	1754.670	1755.000
	0	5	1710.329	1710.000	1754.687	1755.000
	10	5	1710.310	1710.000	1754.693	1755.000
	20	5	1710.333	1710.000	1754.667	1755.000
	30	5	1710.317	1710.000	1754.696	1755.000
	40	5	1710.316	1710.000	1754.686	1755.000
	50	5	1710.305	1710.000	1754.679	1755.000
Frequency Stability vs. Voltage	20	4.4	1710.329	1710.000	1754.690	1755.000
	20	5.25	1710.326	1710.000	1754.668	1755.000
					Result:	Pass

Test Plots (Note: The 14.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

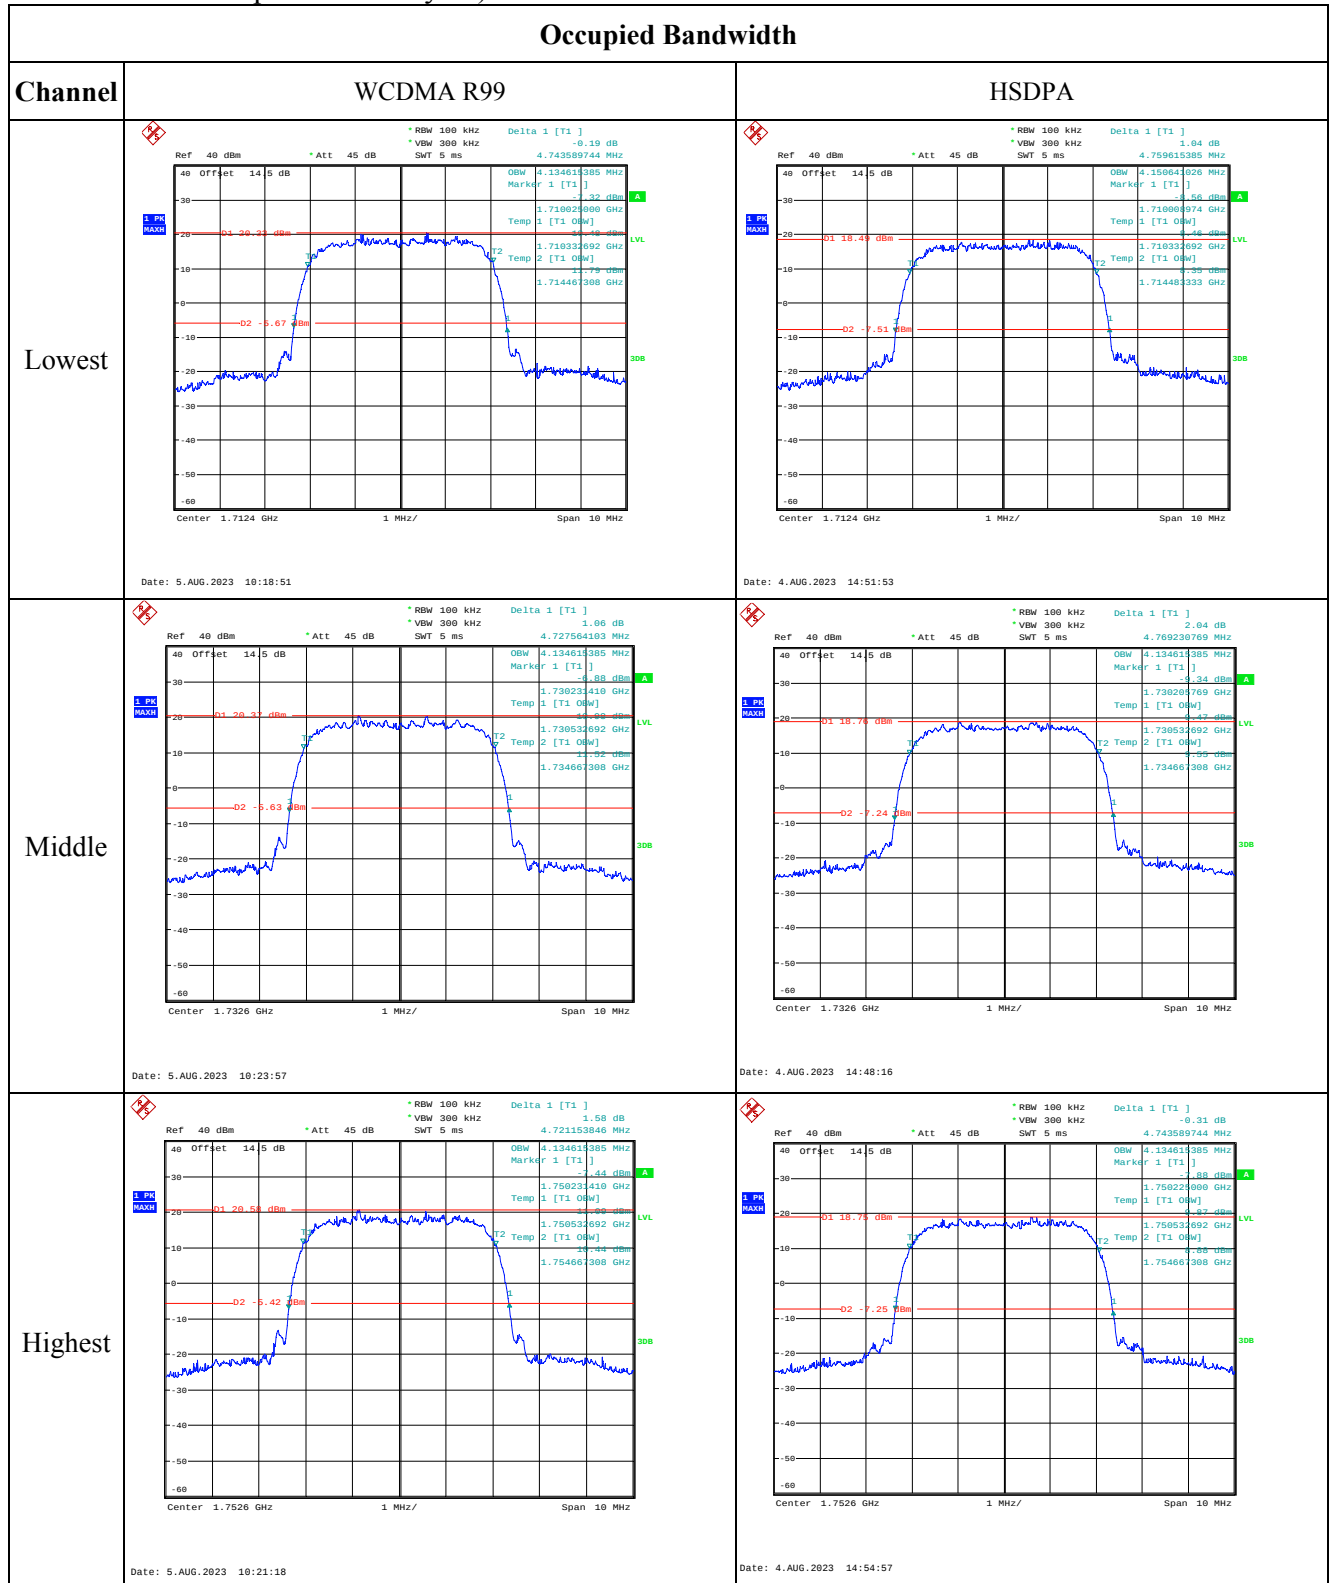


Occupied Bandwidth

Channel


HSUPA

Lowest

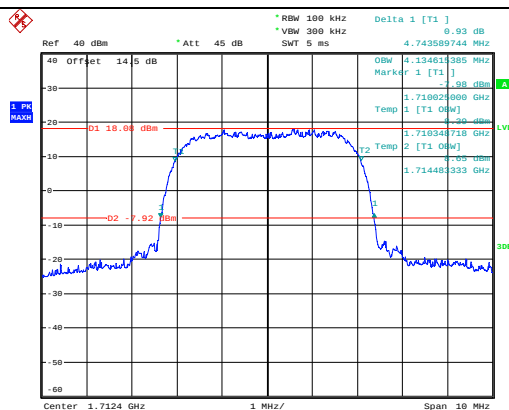


Date: 4.AUG.2023 14:20:50

Middle

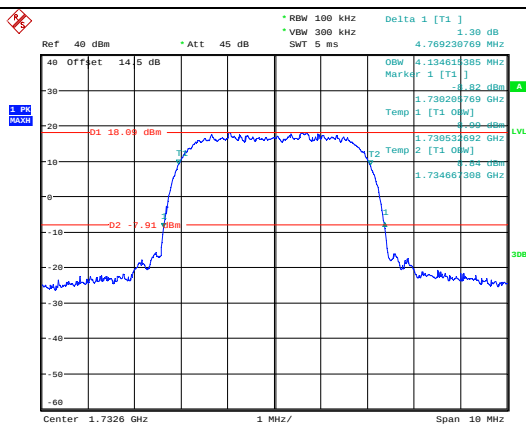









Date: 4.AUG.2023 14:34:34

Highest

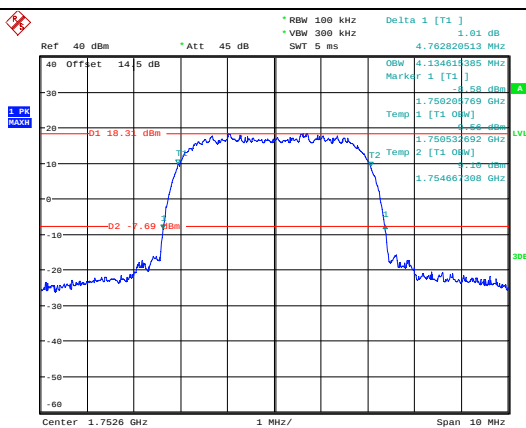

Date: 4.AUG.2023 14:26:12

Spurious Emissions at Antenna Terminal

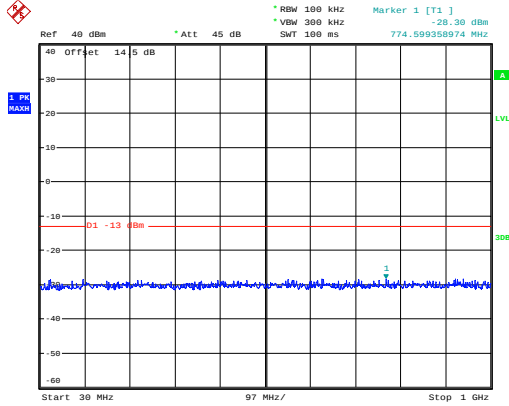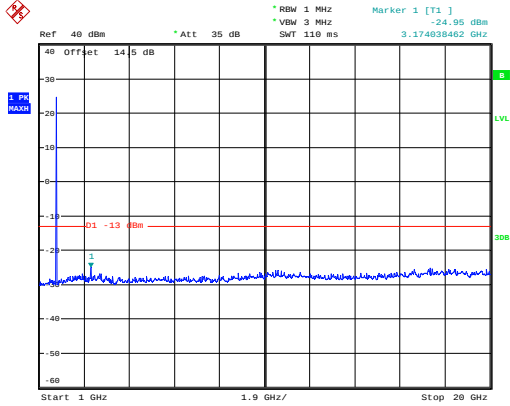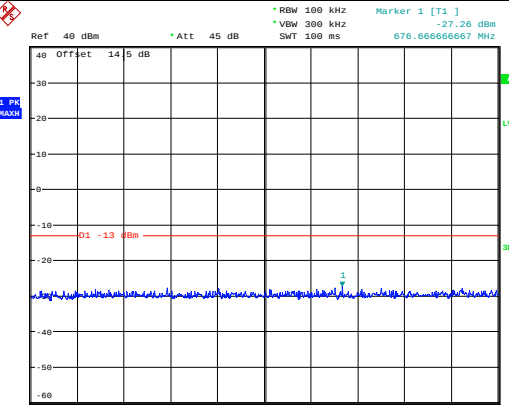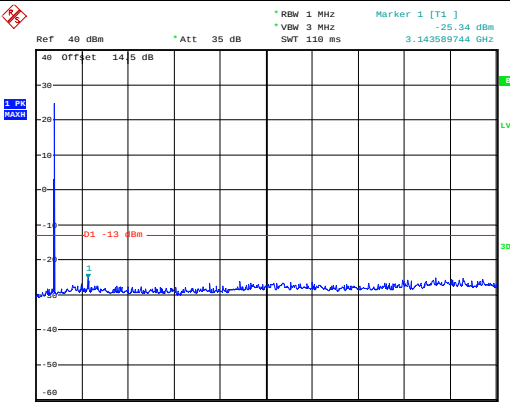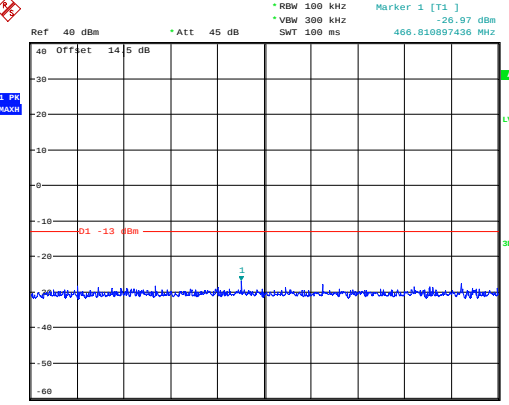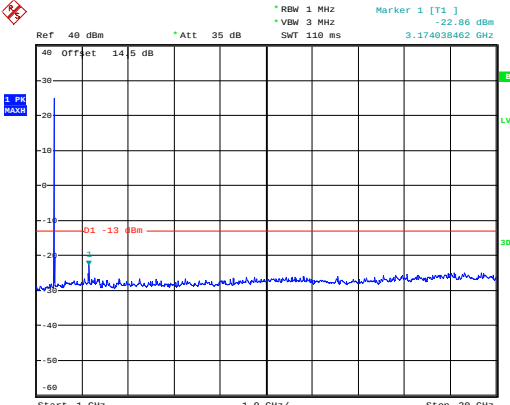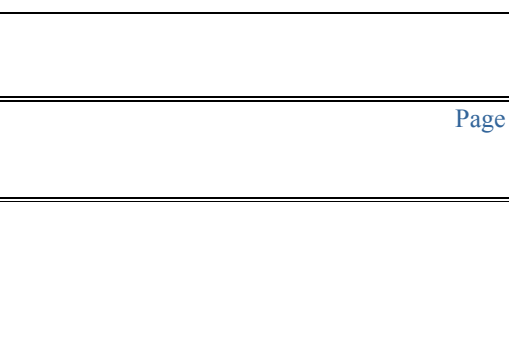Channel	WCDMA R99	
Lowest	 Ref: 40 dBm, Offset: 14.5 dB, Att: 45 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 100 ms, Marker 1 [T1]: -26.30 dBm, 774.599358974 MHz. Start: 30 MHz, Stop: 1 GHz, 97 MHz/. Date: 5.AUG.2023 10:56:12	 Ref: 40 dBm, Offset: 14.5 dB, Att: 35 dB, RBW: 1 MHz, VSW: 3 MHz, SWT: 110 ms, Marker 1 [T1]: -24.95 dBm, 3.174638462 GHz. Start: 1 GHz, Stop: 20 GHz, 1.9 GHz/. Date: 5.AUG.2023 10:55:56
	 Ref: 40 dBm, Offset: 14.5 dB, Att: 45 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 100 ms, Marker 1 [T1]: -27.26 dBm, 676.666666667 MHz. Start: 30 MHz, Stop: 1 GHz, 97 MHz/. Date: 5.AUG.2023 10:56:32	 Ref: 40 dBm, Offset: 14.5 dB, Att: 35 dB, RBW: 1 MHz, VSW: 3 MHz, SWT: 110 ms, Marker 1 [T1]: -25.34 dBm, 3.143589744 GHz. Start: 1 GHz, Stop: 20 GHz, 1.9 GHz/. Date: 5.AUG.2023 10:57:10
Middle	 Ref: 40 dBm, Offset: 14.5 dB, Att: 45 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 100 ms, Marker 1 [T1]: -26.97 dBm, 466.810897436 MHz. Start: 30 MHz, Stop: 1 GHz, 97 MHz/. Date: 5.AUG.2023 10:59:48	 Ref: 40 dBm, Offset: 14.5 dB, Att: 35 dB, RBW: 1 MHz, VSW: 3 MHz, SWT: 110 ms, Marker 1 [T1]: -22.86 dBm, 3.174638462 GHz. Start: 1 GHz, Stop: 20 GHz, 1.9 GHz/. Date: 5.AUG.2023 10:59:35
	 Ref: 40 dBm, Offset: 14.5 dB, Att: 45 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 100 ms, Marker 1 [T1]: -26.97 dBm, 466.810897436 MHz. Start: 30 MHz, Stop: 1 GHz, 97 MHz/. Date: 5.AUG.2023 10:59:48	 Ref: 40 dBm, Offset: 14.5 dB, Att: 35 dB, RBW: 1 MHz, VSW: 3 MHz, SWT: 110 ms, Marker 1 [T1]: -22.86 dBm, 3.174638462 GHz. Start: 1 GHz, Stop: 20 GHz, 1.9 GHz/. Date: 5.AUG.2023 10:59:35
Highest	Ref: 40 dBm, Offset: 14.5 dB, Att: 45 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 100 ms, Marker 1 [T1]: -26.97 dBm, 466.810897436 MHz. Start: 30 MHz, Stop: 1 GHz, 97 MHz/. Date: 5.AUG.2023 10:59:48	Ref: 40 dBm, Offset: 14.5 dB, Att: 35 dB, RBW: 1 MHz, VSW: 3 MHz, SWT: 110 ms, Marker 1 [T1]: -22.86 dBm, 3.174638462 GHz. Start: 1 GHz, Stop: 20 GHz, 1.9 GHz/. Date: 5.AUG.2023 10:59:35

Out of band emission, Band Edge

Mode	Lowest	Highest
R99	Ref: 40 dBm, Att: 45 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 5 ms, Marker 1 [T1]: -14.64 dBm, 1.710000000 GHz Center: 1.71 GHz, Span: 10 MHz Date: 5.AUG.2023 10:19:27	Ref: 40 dBm, Att: 45 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 5 ms, Marker 1 [T1]: -13.95 dBm, 1.755000000 GHz Center: 1.755 GHz, Span: 10 MHz Date: 5.AUG.2023 10:20:07
HSUPA	Ref: 40 dBm, Att: 45 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 5 ms, Marker 1 [T1]: -13.81 dBm, 1.710000000 GHz Center: 1.71 GHz, Span: 10 MHz Date: 4.AUG.2023 14:21:33	Ref: 40 dBm, Att: 45 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 5 ms, Marker 1 [T1]: -14.61 dBm, 1.755000000 GHz Center: 1.755 GHz, Span: 10 MHz Date: 4.AUG.2023 14:22:22
HSDPA	Ref: 40 dBm, Att: 45 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 5 ms, Marker 1 [T1]: -14.00 dBm, 1.710000000 GHz Center: 1.71 GHz, Span: 10 MHz Date: 4.AUG.2023 14:52:19	Ref: 40 dBm, Att: 45 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 5 ms, Marker 1 [T1]: -13.82 dBm, 1.755000000 GHz Center: 1.755 GHz, Span: 10 MHz Date: 4.AUG.2023 14:52:58

4.3 Antenna Port Test Data and Results for WCDMA Band 5:

Serial Number:	288V-1	Test Date:	2023/8/4-2023/8/14
Test Site:	RF	Test Mode:	Transmitting
Tester:	Claire Liu/Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.3-26.4	Relative Humidity: (%)	42-63	ATM Pressure: (kPa)	99.7-101.2
----------------------	-----------	---------------------------	-------	------------------------	------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA Band 5	826.4	836.6	846.6

Test Data:**FCC§2.1046;§ 22.913 (a)****RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	24.97	25.11	24.94	20.07	38.45
HSDPA Subtest 1	23.93	24.12	24.03	19.08	38.45
HSDPA Subtest 2	23.96	24.37	23.94	19.33	38.45
HSDPA Subtest 3	24.01	24.16	23.99	19.12	38.45
HSDPA Subtest 4	23.97	24.19	24.09	19.15	38.45
HSUPA Subtest 1	23.98	24.16	23.91	19.12	38.45
HSUPA Subtest 2	24.06	24.11	23.94	19.07	38.45
HSUPA Subtest 3	24.07	24.19	23.98	19.15	38.45
HSUPA Subtest 4	24.03	24.18	23.99	19.14	38.45
HSUPA Subtest 5	23.97	24.15	24.02	19.11	38.45

Note:

ERP= Conducted Power(dBm) - Lc(dB) + G_T(dBd)G_T(dBd)=G_T(dBi)-2.15**Result:****Pass****Peak-to-average Ratio(PAR)**

Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	3.27	3.11	3.24	13
HSDPA	3.97	4.46	4.36	13
HSUPA	4.26	4.46	4.55	13

Result:**Pass****FCC §2.1049, §22.917, §22.905:Occupied Bandwidth**

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.151	4.135	4.119	4.715	4.715	4.699
HSDPA	4.151	4.119	4.119	4.747	4.715	4.699
HSUPA	4.151	4.119	4.135	4.731	4.731	4.715

Note: The test plots please refer to the Plots of Occupied Bandwidth


FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal**Result:** Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.**FCC §2.1051, §22.917(a):Out of band emission, Band Edge**

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

FCC §2.1055, §22.355: Frequency Stability

Test Modulation:	WCDMA R99		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	5	37	0.044	2.5
	-20	5	11	0.013	2.5
	-10	5	26	0.031	2.5
	0	5	49	0.059	2.5
	10	5	51	0.061	2.5
	20	5	15	0.018	2.5
	30	5	33	0.039	2.5
	40	5	9	0.011	2.5
	50	5	16	0.019	2.5
Frequency Stability vs. Voltage	20	4.4	27	0.032	2.5
	20	5.25	78	0.093	2.5
Result:				Pass	

Test Plots (Note: The 14.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

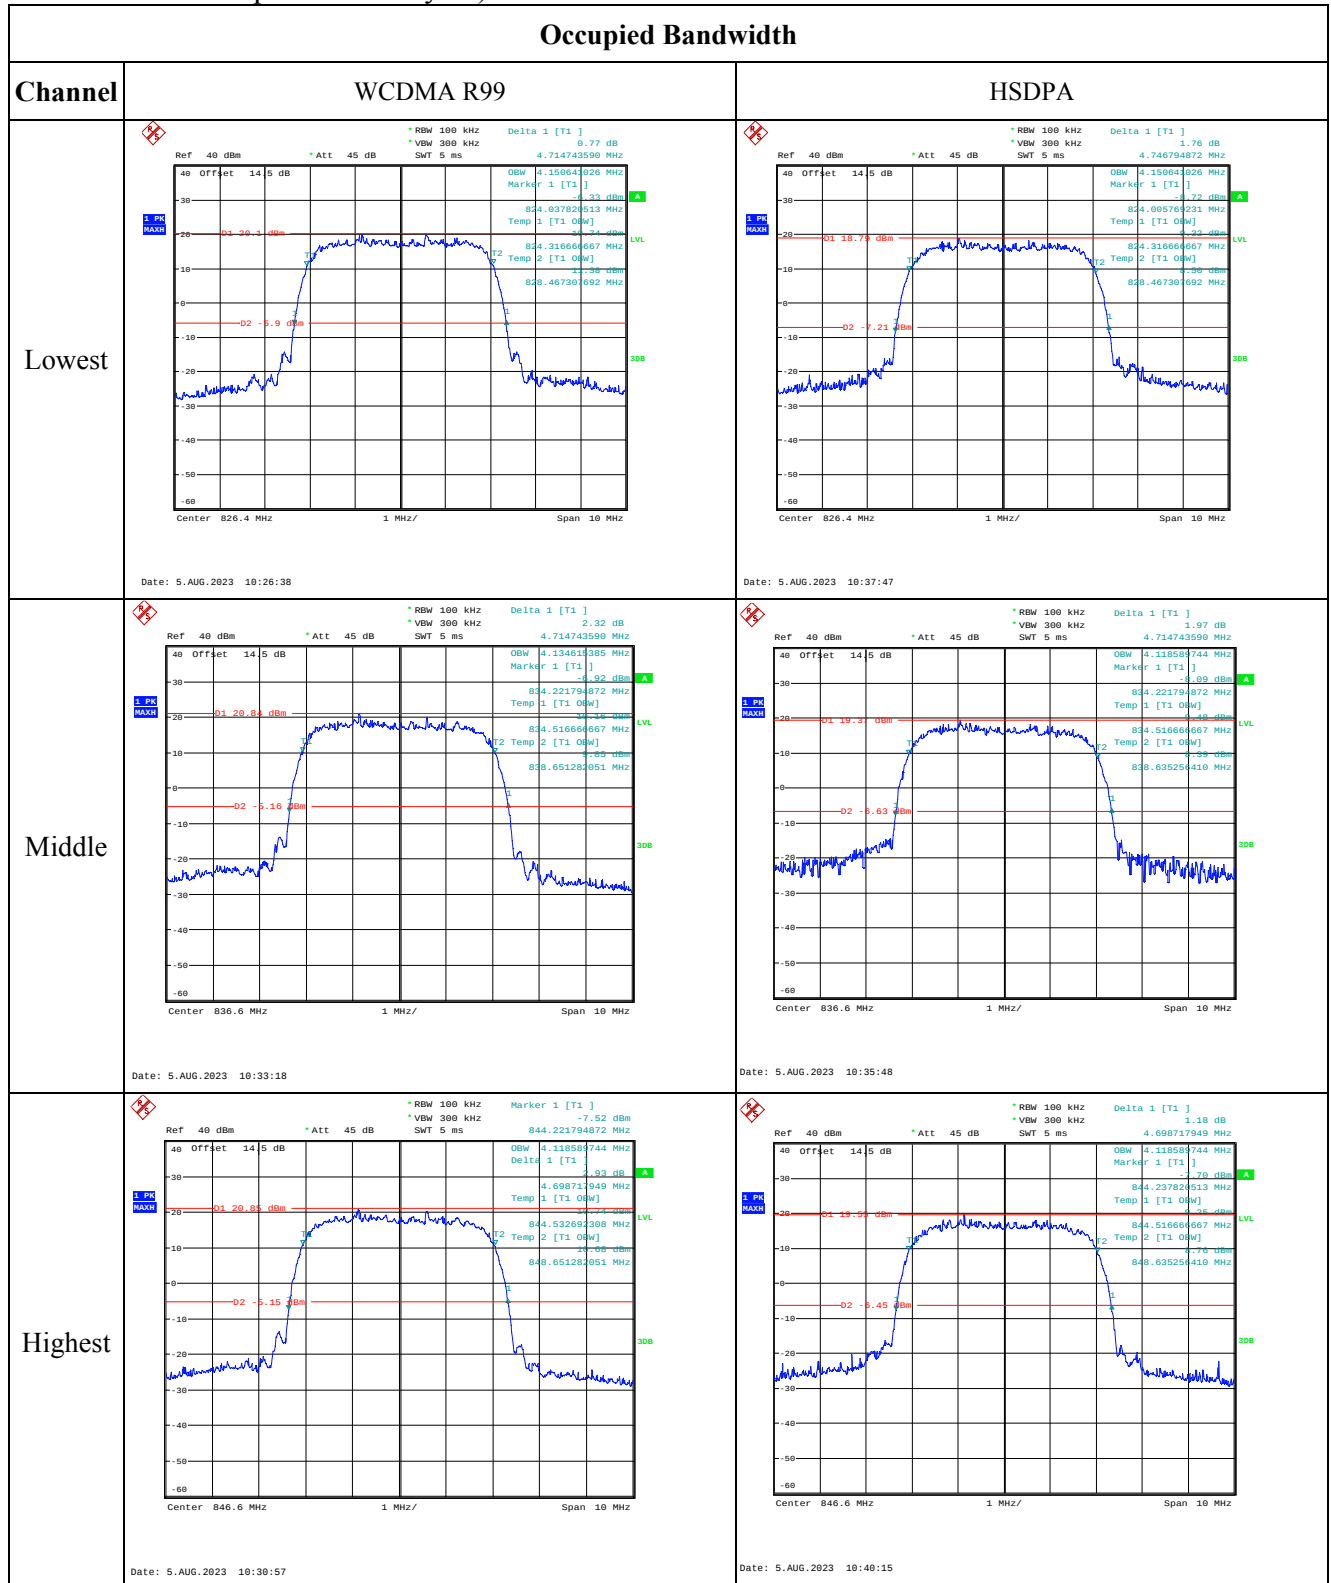


Occupied Bandwidth

Channel


HSUPA

Lowest

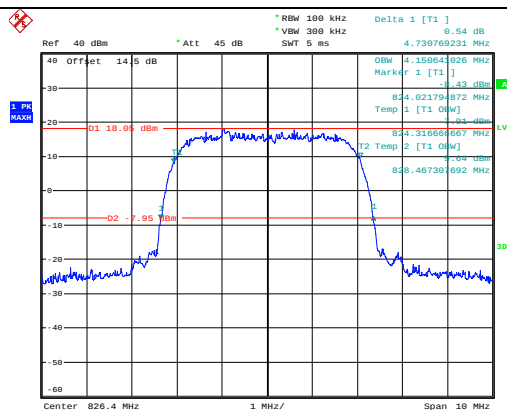


Date: 5.AUG.2023 10:45:33

Middle

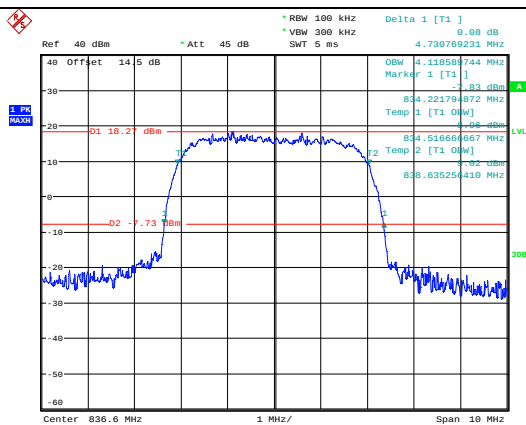

Date: 5.AUG.2023 10:47:54

Highest

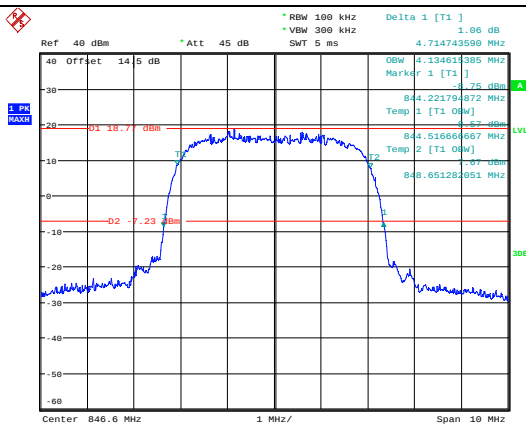


Date: 5.AUG.2023 10:42:24

Spurious Emissions at Antenna Terminal


Channel

WCDMA R99

Lowest

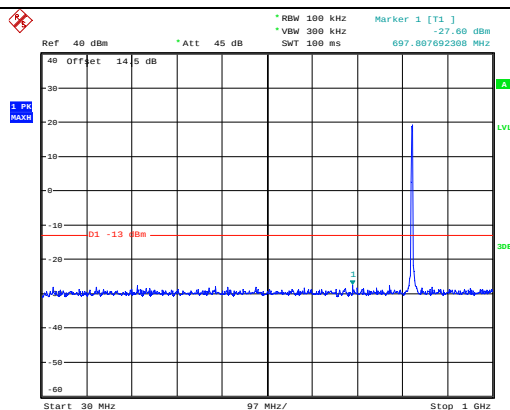


Date: 5.AUG.2023 11:05:37

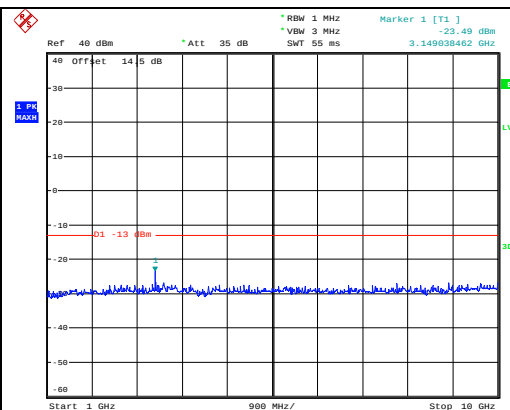


Date: 5.AUG.2023 11:06:02

Middle

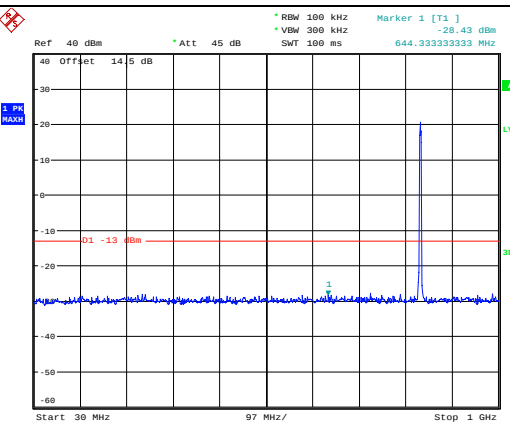


Date: 5.AUG.2023 11:07:12

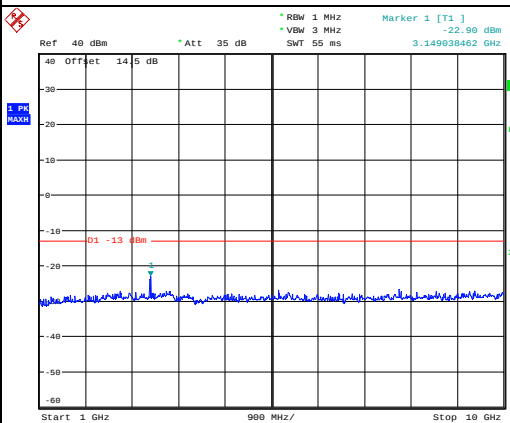


Date: 5.AUG.2023 11:06:29

Highest






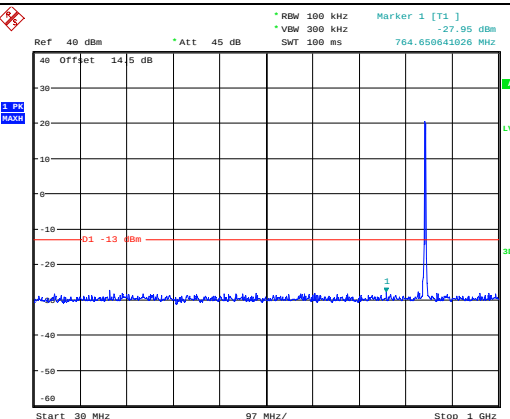


Date: 5.AUG.2023 11:08:05

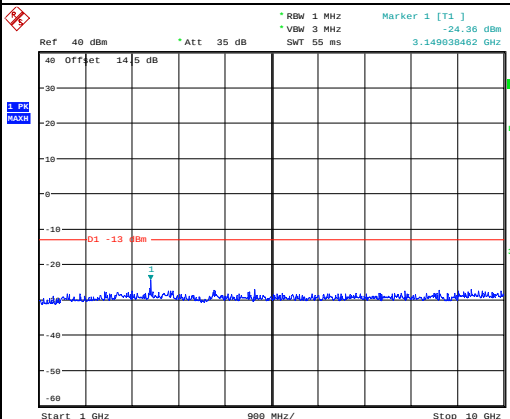

Date: 5.AUG.2023 11:08:20

Out of band emission, Band Edge

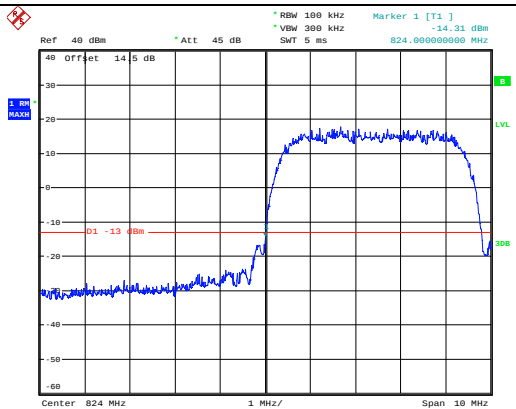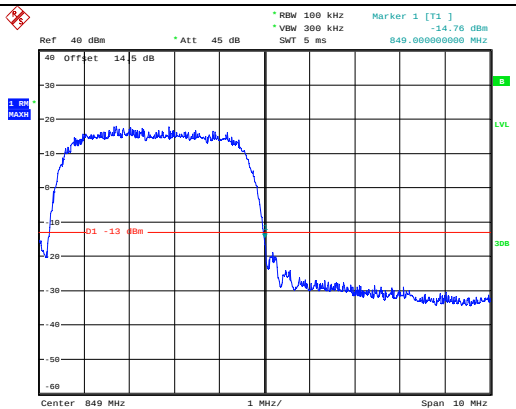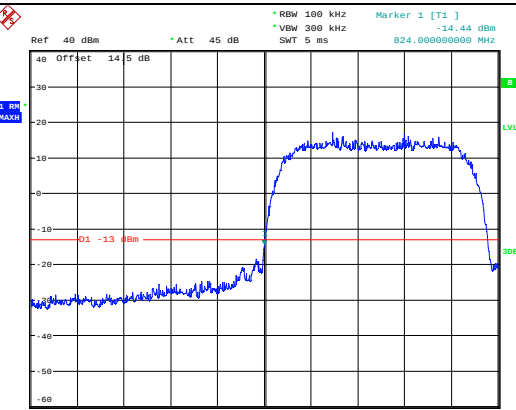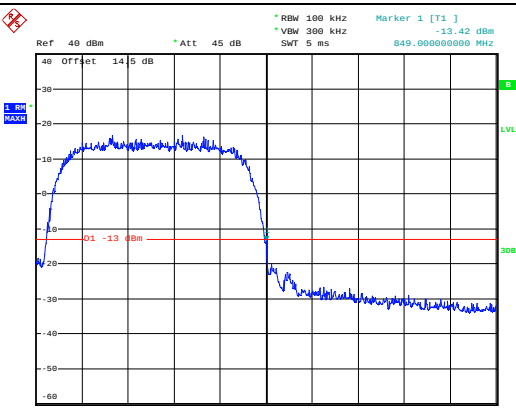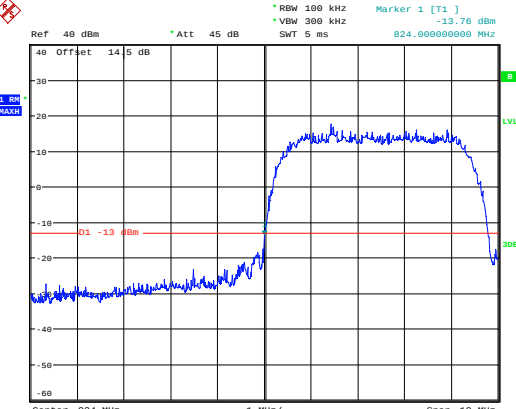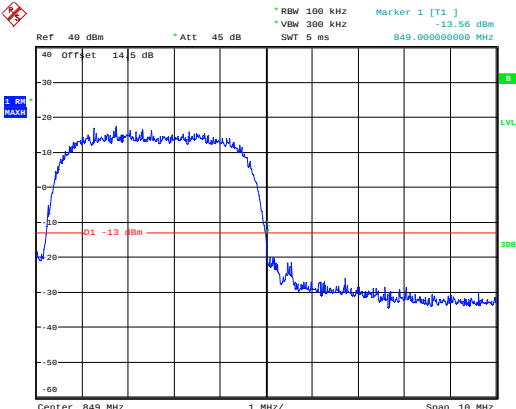Mode	Lowest	Highest
R99	 Ref: 40 dBm, Att: 45 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 5 ms, Marker 1 [T1]: -14.31 dBm, 824.000000000 MHz Center: 824 MHz, Span: 10 MHz Date: 5.AUG.2023 10:27:45	 Ref: 40 dBm, Att: 45 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 5 ms, Marker 1 [T1]: -14.76 dBm, 849.000000000 MHz Center: 849 MHz, Span: 10 MHz Date: 5.AUG.2023 10:28:29
HSUPA	 Ref: 40 dBm, Att: 45 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 5 ms, Marker 1 [T1]: -14.44 dBm, 824.000000000 MHz Center: 824 MHz, Span: 10 MHz Date: 5.AUG.2023 10:44:20	 Ref: 40 dBm, Att: 45 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 5 ms, Marker 1 [T1]: -13.42 dBm, 849.000000000 MHz Center: 849 MHz, Span: 10 MHz Date: 5.AUG.2023 10:43:00
HSDPA	 Ref: 40 dBm, Att: 45 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 5 ms, Marker 1 [T1]: -13.76 dBm, 824.000000000 MHz Center: 824 MHz, Span: 10 MHz Date: 5.AUG.2023 10:38:14	 Ref: 40 dBm, Att: 45 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 5 ms, Marker 1 [T1]: -13.56 dBm, 849.000000000 MHz Center: 849 MHz, Span: 10 MHz Date: 5.AUG.2023 10:38:50

4.4 Antenna Port Test Data and Results for LTE Band 2

Serial Number:	288V-1	Test Date:	2023/8/4-2023/12/23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Claire Liu/Arthur Su/LingLing Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.3-26.1	Relative Humidity: (%)	42-62	ATM Pressure: (kPa)	99.7-101.9
-------------------	-----------	------------------------	-------	---------------------	------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency for Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	1850.7	1880	1909.3
3MHz	1851.5	1880	1908.5
5MHz	1852.5	1880	1907.5
10MHz	1855	1880	1905
15MHz	1857.5	1880	1902.5
20MHz	1860	1880	1900

Test Data:**FCC§2.1046;§ 24.232****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	23.65	23.32	22.54	25.14	33
	RB1#3	23.75	23.39	22.61		
	RB1#5	23.69	23.28	22.49		
	RB3#0	23.78	23.62	22.86		
	RB3#3	23.83	23.6	22.86		
	RB6#0	22.58	22.29	21.49		
1.4MHz 16QAM	RB1#0	22.87	22.54	21.86	24.41	33
	RB1#3	22.96	22.6	21.98		
	RB1#5	22.84	22.59	21.85		
	RB3#0	23.1	22.97	22.12		
	RB3#3	23.07	22.99	22.02		
	RB6#0	21.71	21.53	20.83		
3MHz QPSK	RB1#0	23.63	22.58	22.94	24.94	33
	RB1#8	23.59	22.55	22.88		
	RB1#14	23.59	22.58	22.87		
	RB6#0	22.63	21.53	21.98		
	RB6#9	22.56	21.5	21.95		
	RB15#0	22.7	21.63	22.04		
3MHz 16QAM	RB1#0	23.4	21.87	22.25	24.72	33
	RB1#8	23.36	21.94	22.13		
	RB1#14	23.41	21.85	22.14		
	RB6#0	21.88	20.78	21.13		
	RB6#9	21.88	20.78	21.11		
	RB15#0	21.94	20.8	21.31		
5MHz QPSK	RB1#0	23.76	23.53	22.81	25.08	33
	RB1#13	23.77	23.55	22.79		
	RB1#24	23.74	23.5	22.74		
	RB15#0	22.84	22.63	21.87		
	RB15#10	22.73	22.59	21.8		
	RB25#0	22.83	22.62	21.89		
5MHz 16QAM	RB1#0	22.98	22.65	22.34	24.29	33
	RB1#13	22.95	22.71	22.33		
	RB1#24	22.98	22.66	22.27		
	RB15#0	22.06	21.89	21.08		
	RB15#10	22	21.83	21.04		
	RB25#0	21.99	21.87	21.11		
10MHz QPSK	RB1#0	23.97	23.68	23.23	25.28	33
	RB1#25	23.6	23.4	22.92		
	RB1#49	23.87	23.59	22.91		

	RB25#0	22.82	22.59	22.32		
	RB25#25	22.77	22.51	22.12		
	RB50#0	22.82	22.58	22.3		
10MHz 16QAM	RB1#0	23.18	23.55	22.56	24.86	33
	RB1#25	22.88	23.22	22.34		
	RB1#49	23.03	23.46	22.31		
	RB25#0	22.13	21.82	21.52		
	RB25#25	22.08	21.82	21.41		
	RB50#0	22.04	21.77	21.47		
15MHz QPSK	RB1#0	23.87	22.97	22.87	25.18	33
	RB1#38	23.7	22.88	22.6		
	RB1#74	23.67	22.88	22.57		
	RB36#0	22.81	21.96	21.82		
	RB36#39	22.73	21.89	21.63		
	RB75#0	22.76	21.88	21.78		
15MHz 16QAM	RB1#0	23.52	22.82	22.26	24.83	33
	RB1#38	23.42	22.65	21.97		
	RB1#74	23.37	22.7	21.92		
	RB36#0	21.99	21.15	21.02		
	RB36#39	21.87	21.12	20.82		
	RB75#0	21.9	21.07	20.95		
20MHz QPSK	RB1#0	24.03	23.75	22.99	25.34	33
	RB1#50	23.62	23.4	22.81		
	RB1#99	23.7	23.49	22.74		
	RB50#0	22.94	22.64	22.04		
	RB50#50	22.74	22.48	21.93		
	RB100#0	22.74	22.56	21.98		
20MHz 16QAM	RB1#0	23.79	23.19	22.48	25.1	33
	RB1#50	23.52	22.83	22.27		
	RB1#99	23.49	22.98	22.16		
	RB50#0	22.14	21.75	21.27		
	RB50#50	21.94	21.69	21.13		
	RB100#0	21.95	21.78	21.16		

Note: EIRP=Conducted Power(dBm) - Lc(dB) + G_T(dBi)**Result:****Pass****Peak-to-average Ratio(PAR)**

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	3.72	3.97	4.04	13
	RB100#0	6.47	6.41	6.44	13
20MHz 16QAM	RB1#0	5.54	6.15	6.41	13
	RB100#0	7.44	7.31	7.28	13
				Result:	Pass

FCC §2.1049, §24.238:Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.104	1.104	1.098	1.248	1.248	1.248
1.4MHz 16QAM	1.098	1.104	1.092	1.248	1.242	1.248
3MHz QPSK	2.687	2.687	2.687	2.976	2.940	2.940
3MHz 16QAM	2.687	2.7	2.7	2.952	3.0	3.0
5MHz QPSK	4.54	4.52	4.54	5.00	4.96	5.00
5MHz 16QAM	4.560	4.52	4.52	4.980	5.04	4.96
10MHz QPSK	8.96	8.96	8.96	9.76	9.60	9.68
10MHz 16QAM	8.96	8.96	9	9.68	9.64	10
15MHz QPSK	13.560	13.44	13.560	14.940	14.82	14.700
15MHz 16QAM	13.560	13.560	13.560	14.820	14.820	14.760
20MHz QPSK	18	18	17.92	20	19	19.36
20MHz 16QAM	18	17.92	17.92	19	19.44	19.44
Note: The test plots please refer to the Plots of Occupied Bandwidth						


FCC §2.1051, § 24.238 (a):Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

FCC §2.1051, § 24.238 (a):Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.


FCC §2.1055, §24.235: Frequency Stability						
Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	5	1851.015	1850.000	1908.973	1910.000
	-20	5	1851.021	1850.000	1908.962	1910.000
	-10	5	1851.029	1850.000	1908.969	1910.000
	0	5	1851.035	1850.000	1908.967	1910.000
	10	5	1851.015	1850.000	1908.980	1910.000
	20	5	1851.040	1850.000	1908.960	1910.000
	30	5	1851.036	1850.000	1908.964	1910.000
	40	5	1851.018	1850.000	1908.965	1910.000
	50	5	1851.018	1850.000	1908.979	1910.000
Frequency Stability vs. Voltage	20	4.4	1851.029	1850.000	1908.988	1910.000
	20	5.25	1851.033	1850.000	1908.972	1910.000
					Result:	Pass

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	5	1851.018	1850.000	1908.980	1910.000
	-20	5	1851.033	1850.000	1908.981	1910.000
	-10	5	1851.018	1850.000	1908.962	1910.000
	0	5	1851.025	1850.000	1908.966	1910.000
	10	5	1851.039	1850.000	1908.985	1910.000
	20	5	1851.040	1850.000	1908.960	1910.000
	30	5	1851.026	1850.000	1908.964	1910.000
	40	5	1851.017	1850.000	1908.963	1910.000
	50	5	1851.016	1850.000	1908.985	1910.000
Frequency Stability vs. Voltage	20	4.4	1851.012	1850.000	1908.967	1910.000
	20	5.25	1851.037	1850.000	1908.963	1910.000
					Result:	Pass

Test Plots (Note: The 14.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

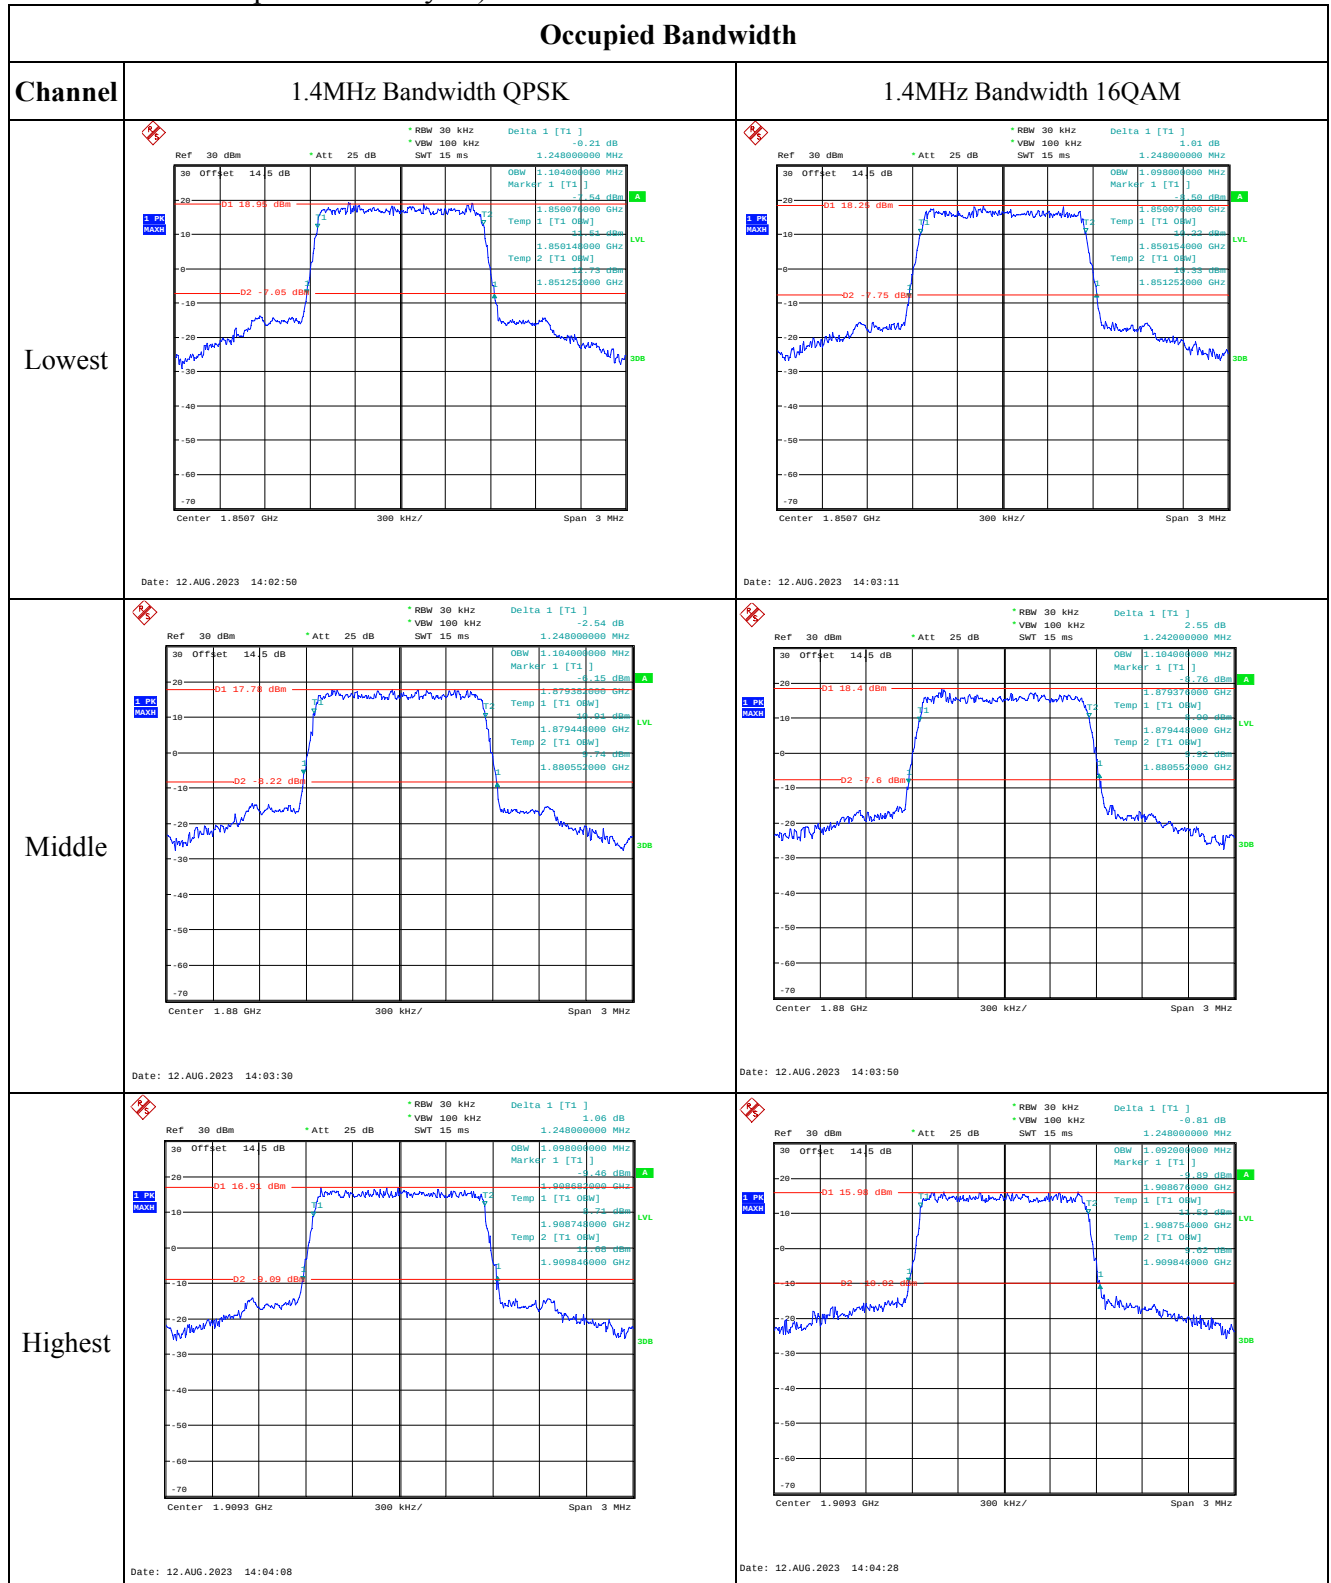

Occupied Bandwidth

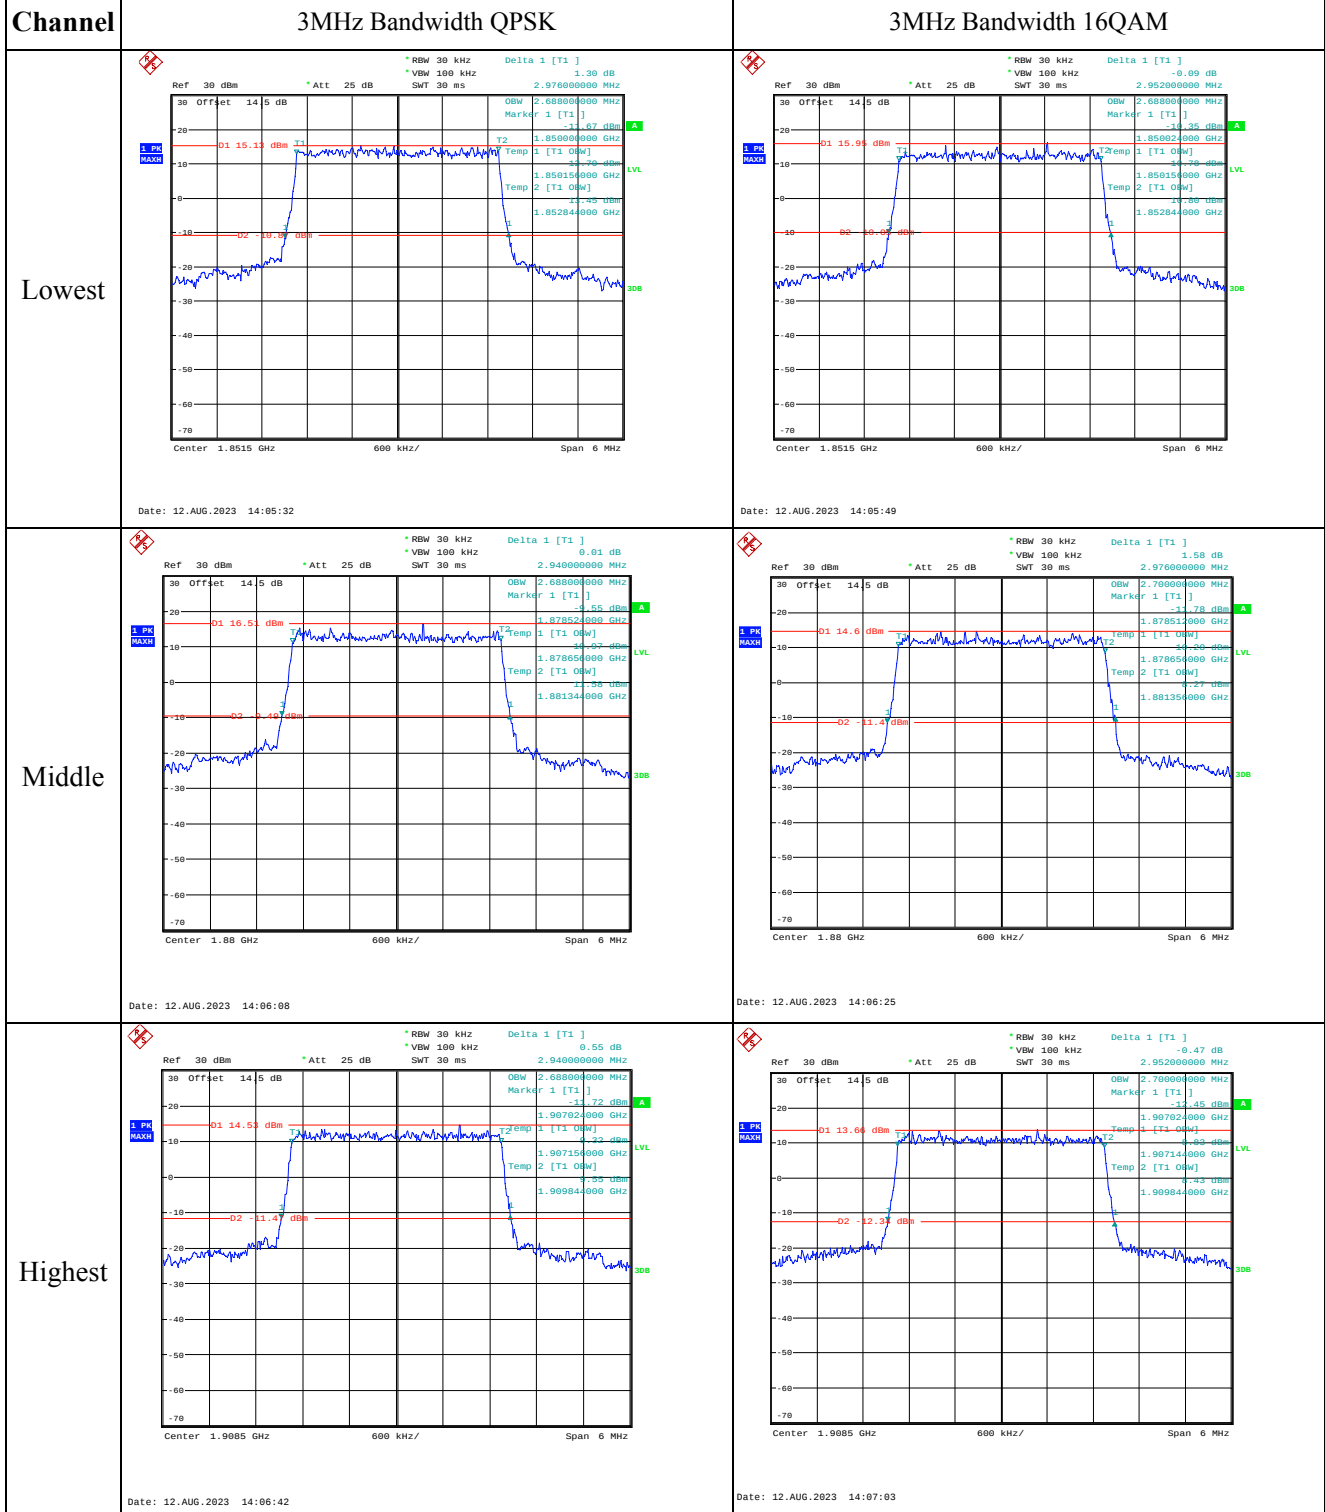


Occupied Bandwidth

Channel


5MHz Bandwidth QPSK

5MHz Bandwidth 16QAM

Lowest

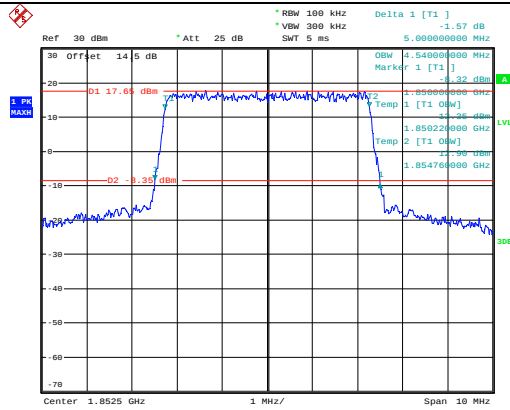


Date: 12.AUG.2023 14:24:13

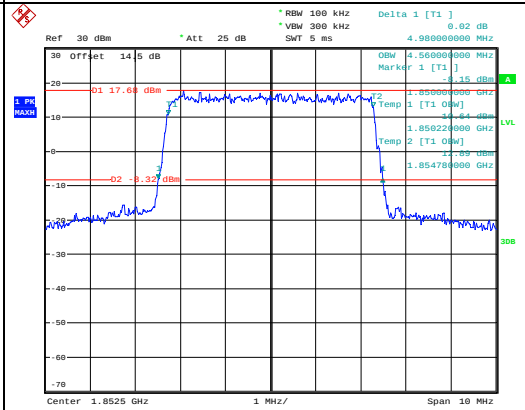


Date: 12.AUG.2023 14:24:37

Middle

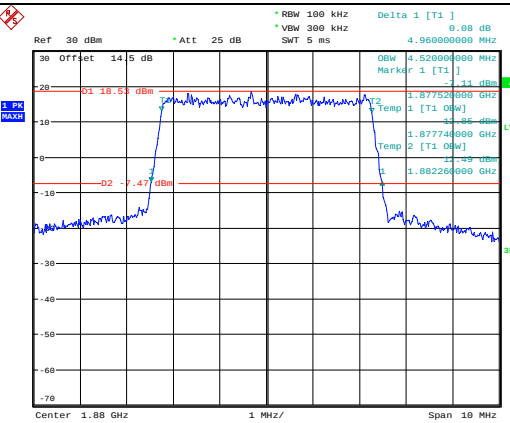


Date: 12.AUG.2023 14:25:04

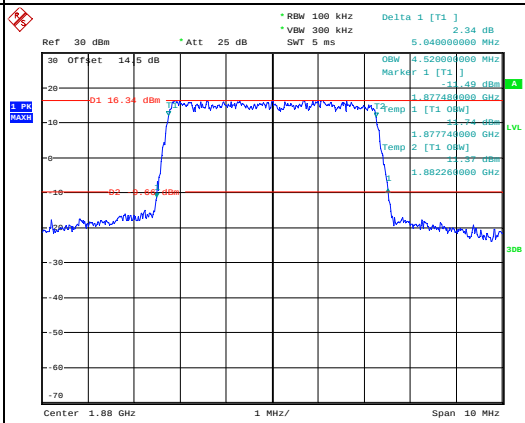


Date: 12.AUG.2023 14:25:27

Highest

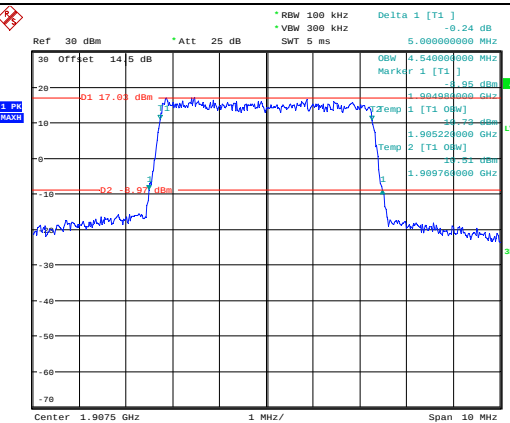

Date: 12.AUG.2023 14:25:54

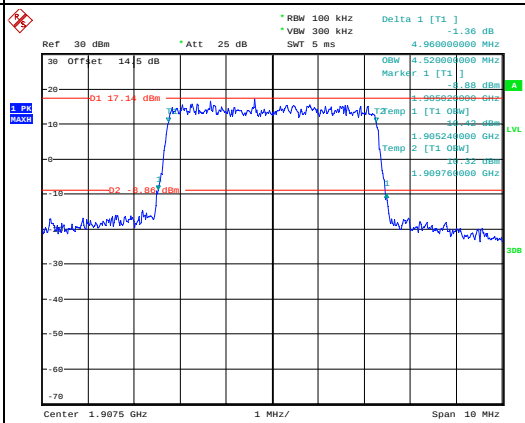

Date: 12.AUG.2023 14:26:17


Page 57 of 240

Spurious Emissions at Antenna Terminal


Channel

1.4MHz Bandwidth QPSK

Lowest

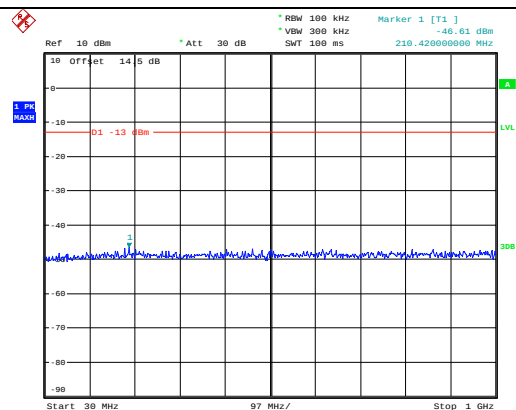


Date: 12.AUG.2023 20:54:26

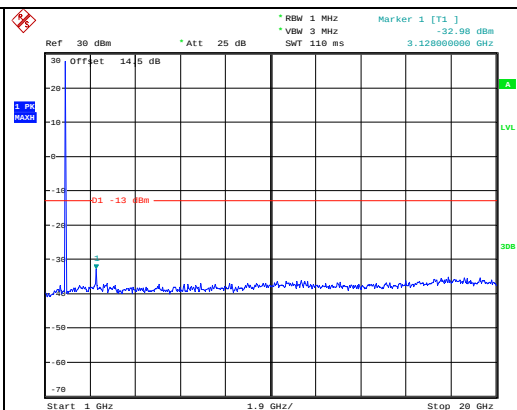


Date: 12.AUG.2023 20:54:37

Middle

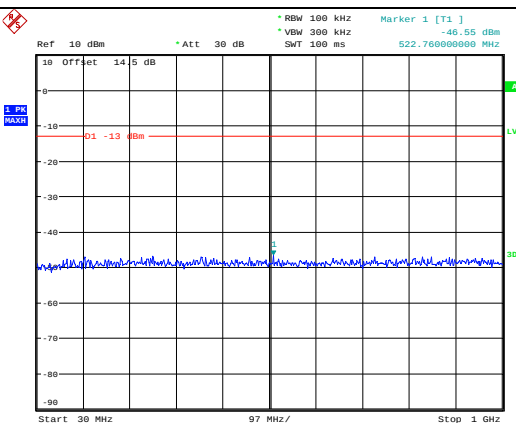


Date: 12.AUG.2023 20:54:51

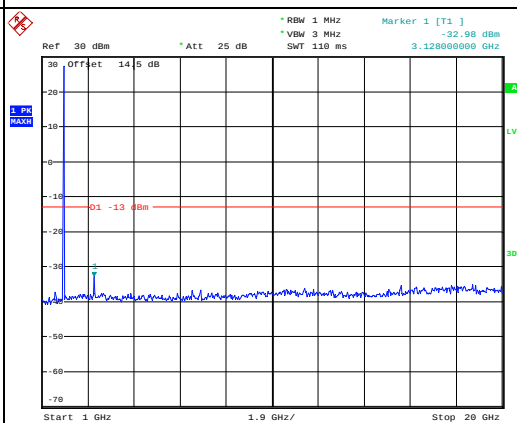


Date: 12.AUG.2023 20:55:02

Highest

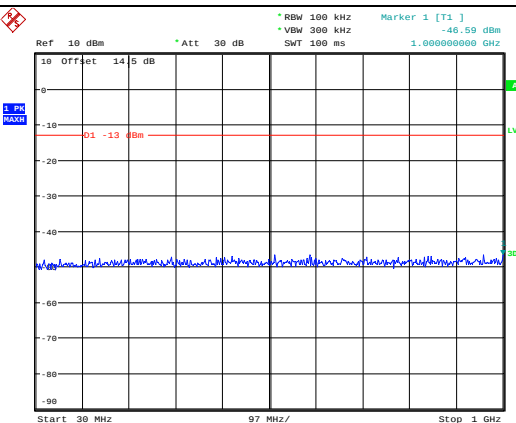

Date: 12.AUG.2023 20:55:16

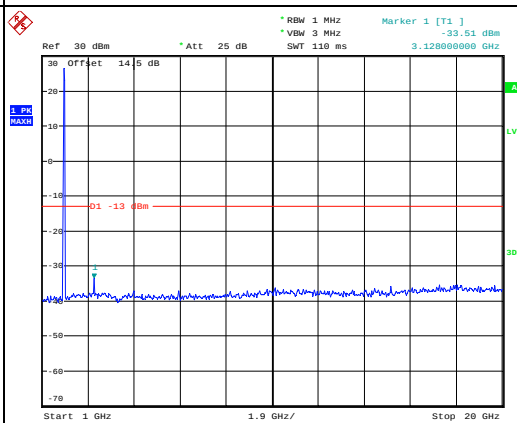



Date: 12.AUG.2023 20:55:27

Spurious Emissions at Antenna Terminal



Channel

3MHz Bandwidth QPSK



Lowest

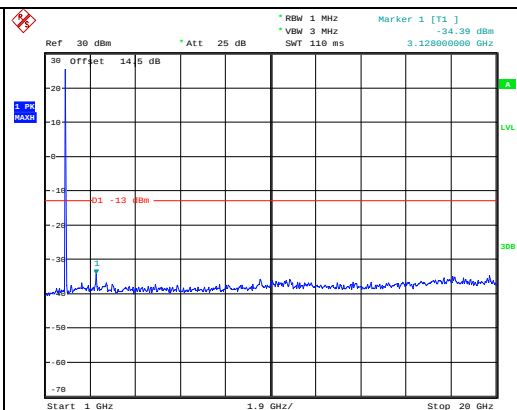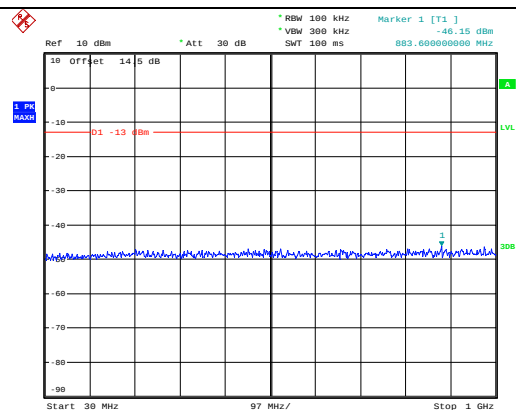

Middle

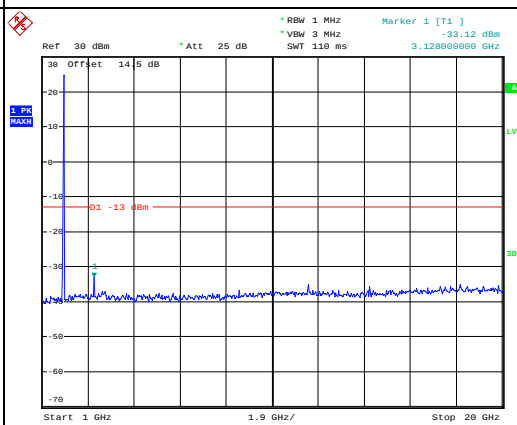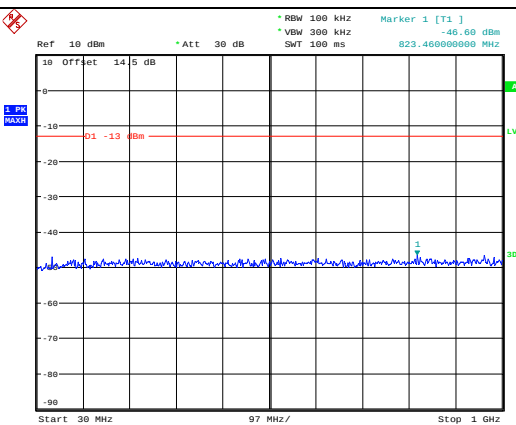

Highest

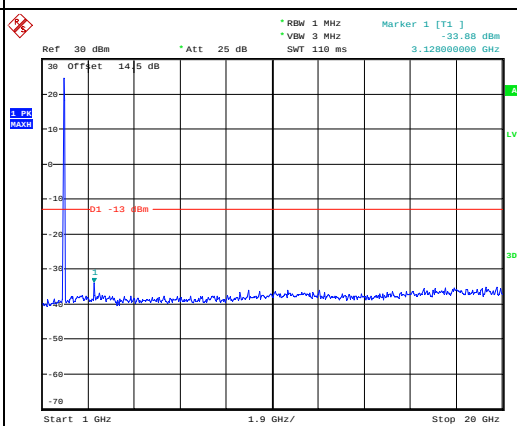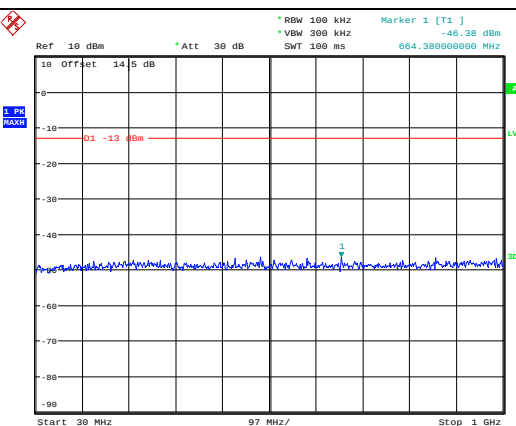


Spurious Emissions at Antenna Terminal


Channel

5MHz Bandwidth QPSK

Lowest

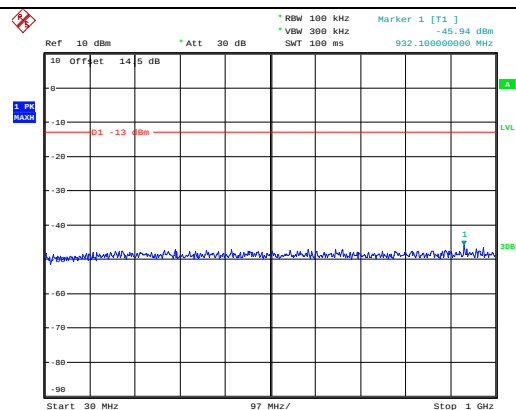


Date: 12.AUG.2023 20:57:48

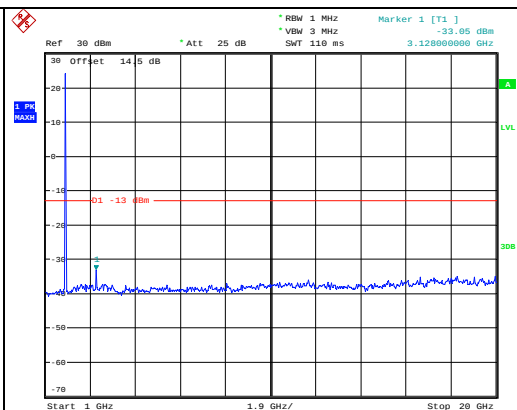


Date: 12.AUG.2023 20:58:00

Middle

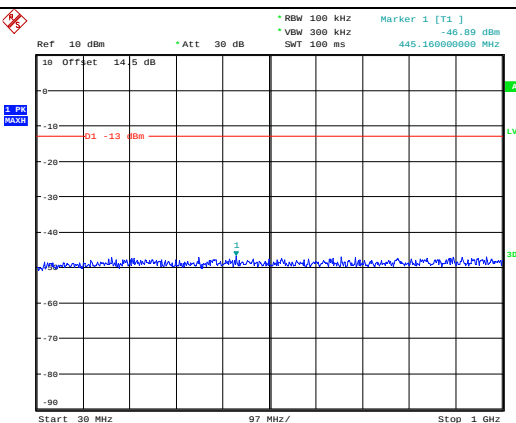


Date: 12.AUG.2023 20:58:13

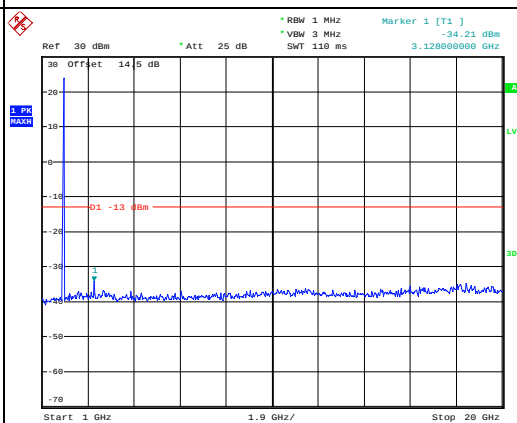


Date: 12.AUG.2023 20:58:25

Highest

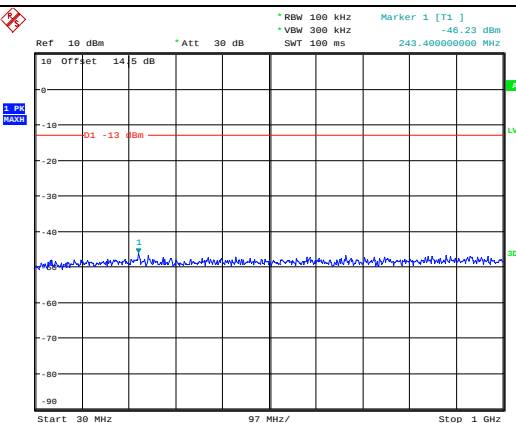

Date: 12.AUG.2023 20:58:41

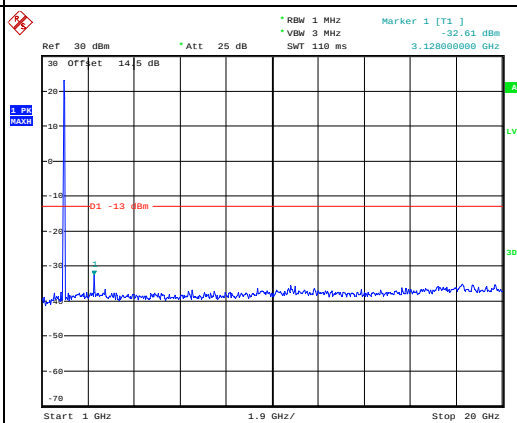


Date: 12.AUG.2023 20:58:53

Channel

Lowest



Middle



Highest





Spurious Emissions at Antenna Terminal



Channel

15MHz Bandwidth QPSK



Lowest

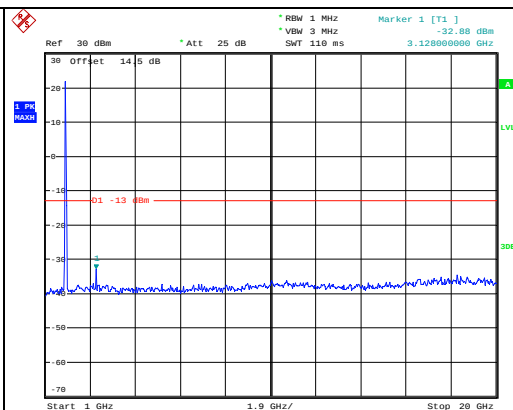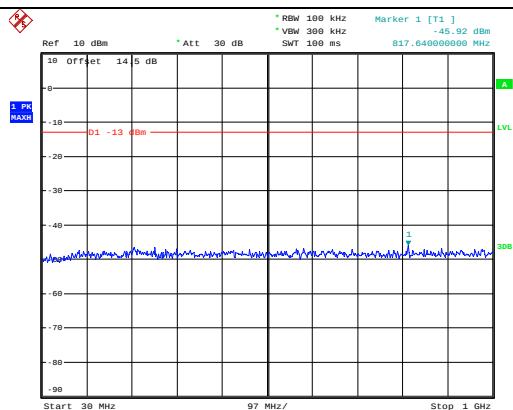

Middle

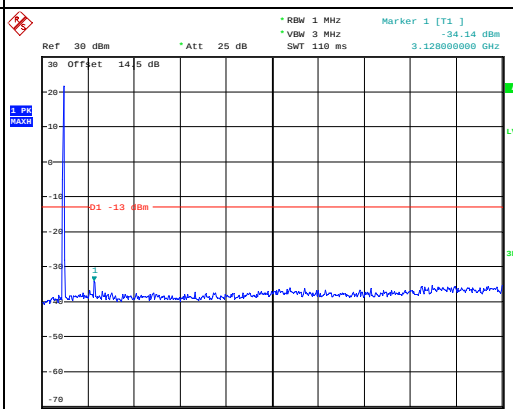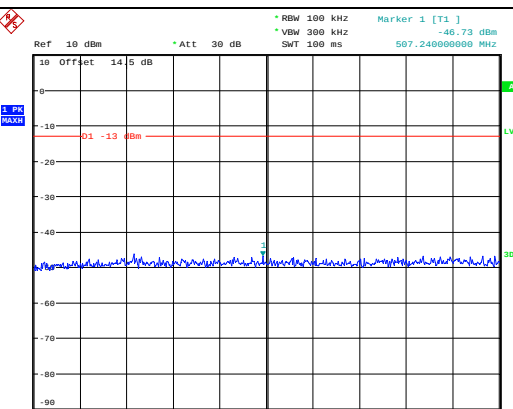

Highest

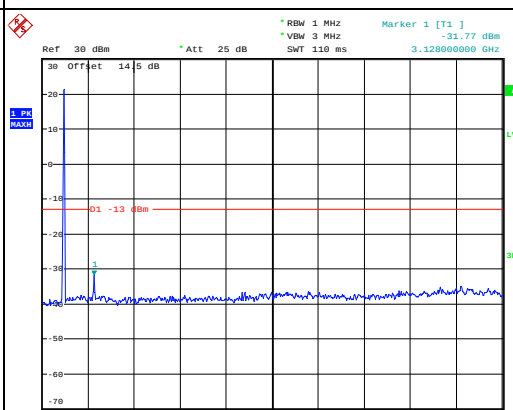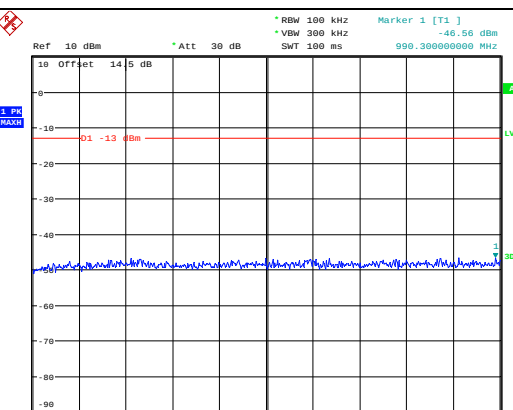


Spurious Emissions at Antenna Terminal


Channel

20MHz Bandwidth QPSK

Lowest

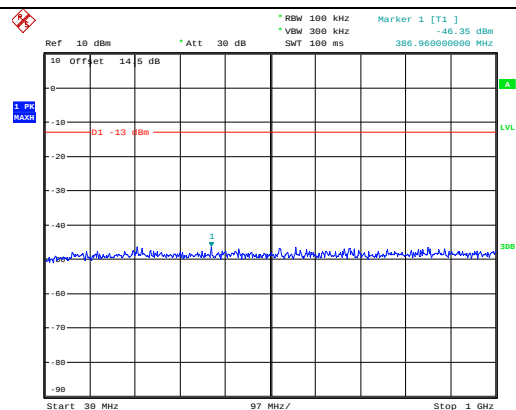


Date: 12.AUG.2023 21:03:04

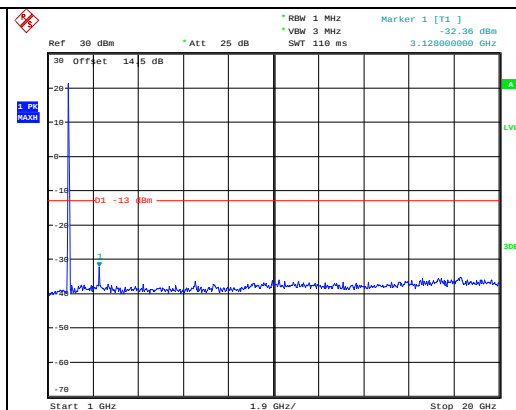


Date: 12.AUG.2023 21:03:15

Middle

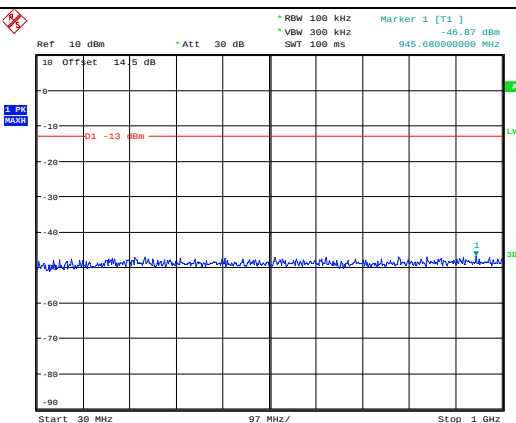


Date: 12.AUG.2023 21:03:28

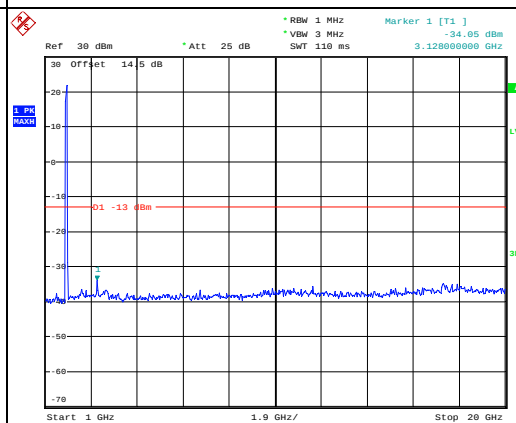


Date: 12.AUG.2023 21:03:40

Highest






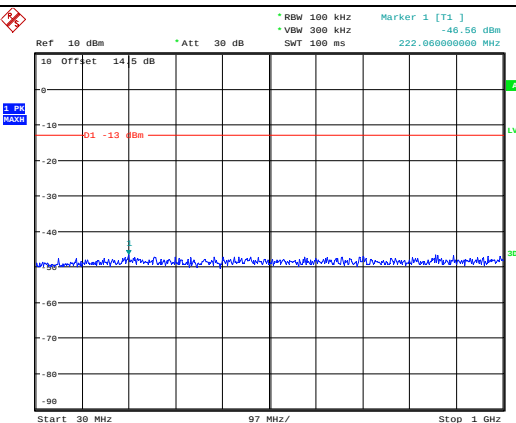


Date: 12.AUG.2023 21:03:56





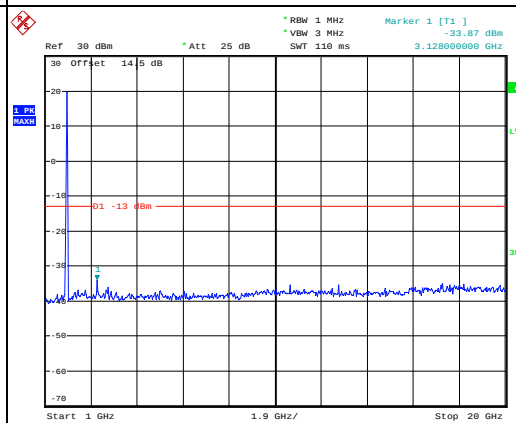


Date: 12.AUG.2023 21:04:08







Test Plots for Out of band emission, Band Edge:
Note: The test is performed in full RB mode.**Out of band emission, Band Edge**

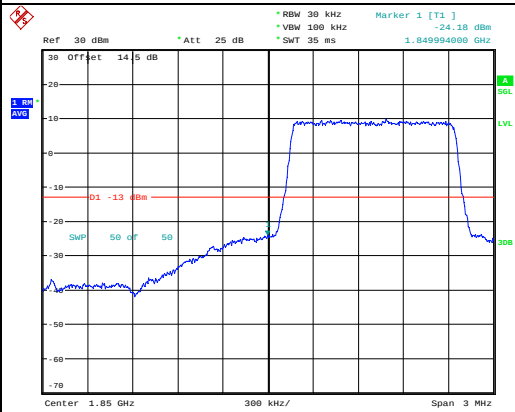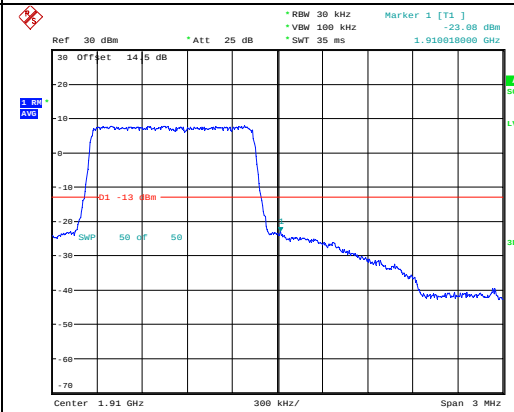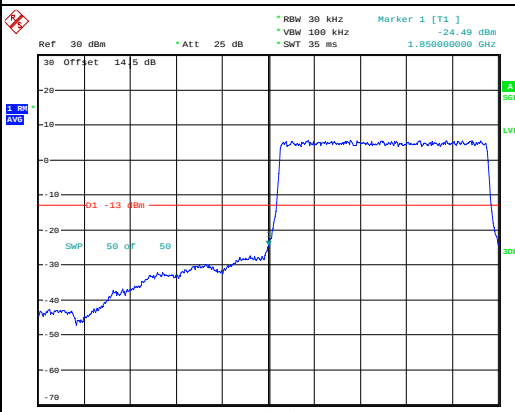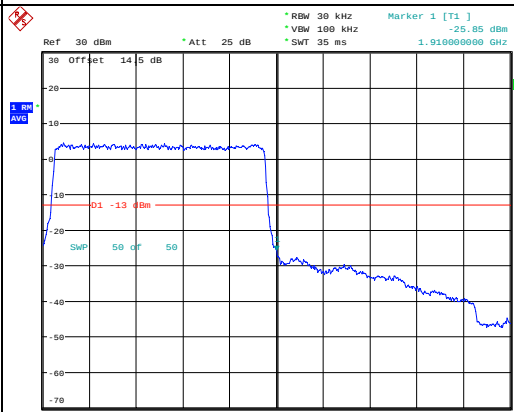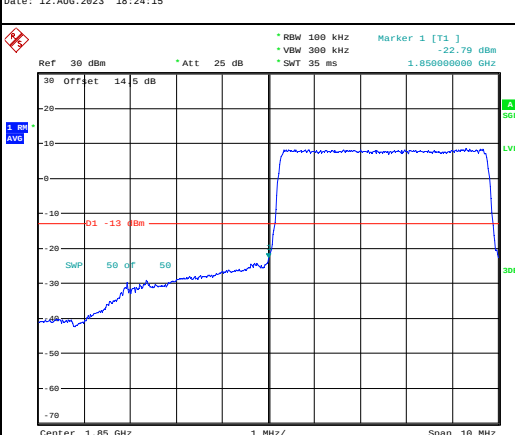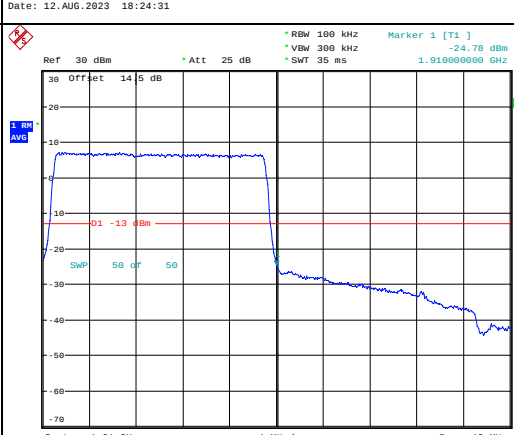Mode	Lowest	Highest
QPSK 1.4MHz	 Date: 12.AUG.2023 18:09:06	 Date: 12.AUG.2023 18:09:22
QPSK 3MHz	 Date: 12.AUG.2023 18:24:15	 Date: 12.AUG.2023 18:24:31
QPSK 5MHz	 Date: 12.AUG.2023 18:39:37	 Date: 12.AUG.2023 18:39:52


Out of band emission, Band Edge

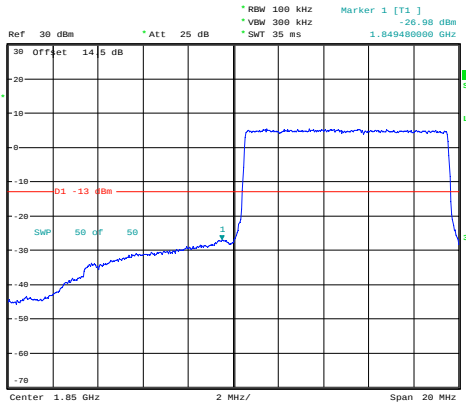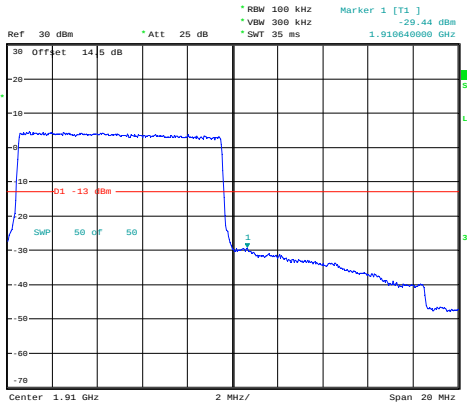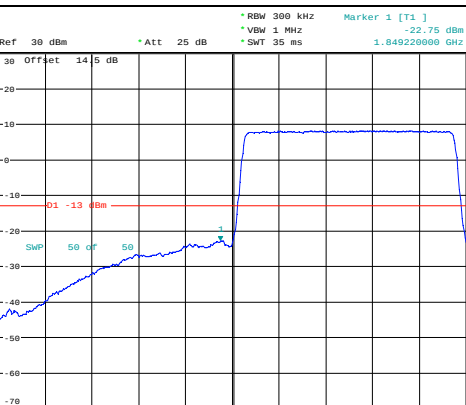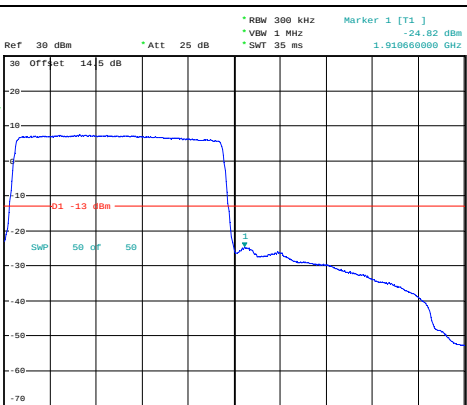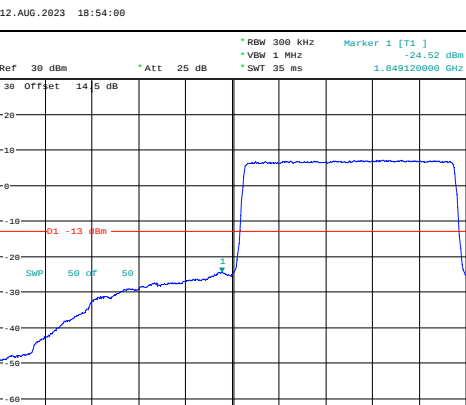
Mode	Lowest	Highest
QPSK 10MHz	 Ref 30 dBm Att 25 dB RBW 100 kHz Marker 1 [T1] -26.98 dBm VBW 300 kHz SWT 35 ms 1.849480000 GHz 30 Offset 14.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.85 GHz 2 MHz/ Span 20 MHz Date: 12.AUG.2023 18:41:43	 Ref 30 dBm Att 25 dB RBW 100 kHz Marker 1 [T1] -29.44 dBm VBW 300 kHz SWT 35 ms 1.910640000 GHz 30 Offset 14.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.91 GHz 2 MHz/ Span 20 MHz Date: 12.AUG.2023 18:41:59
QPSK 15MHz	 Ref 30 dBm Att 25 dB RBW 300 kHz Marker 1 [T1] -22.75 dBm VBW 1 MHz SWT 35 ms 1.849220000 GHz 30 Offset 14.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.85 GHz 3 MHz/ Span 30 MHz Date: 12.AUG.2023 18:54:00	 Ref 30 dBm Att 25 dB RBW 300 kHz Marker 1 [T1] -24.82 dBm VBW 1 MHz SWT 35 ms 1.910660000 GHz 30 Offset 14.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.91 GHz 3 MHz/ Span 30 MHz Date: 12.AUG.2023 18:54:15
QPSK 20MHz	 Ref 30 dBm Att 25 dB RBW 300 kHz Marker 1 [T1] -24.52 dBm VBW 1 MHz SWT 35 ms 1.849120000 GHz 30 Offset 14.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.85 GHz 4 MHz/ Span 40 MHz Date: 12.AUG.2023 18:54:54	 Ref 30 dBm Att 25 dB RBW 300 kHz Marker 1 [T1] -27.22 dBm VBW 1 MHz SWT 35 ms 1.910660000 GHz 30 Offset 14.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.91 GHz 4 MHz/ Span 40 MHz Date: 12.AUG.2023 18:55:10

Out of band emission, Band Edge

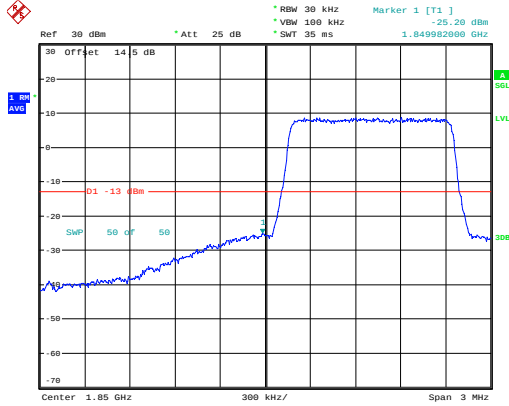
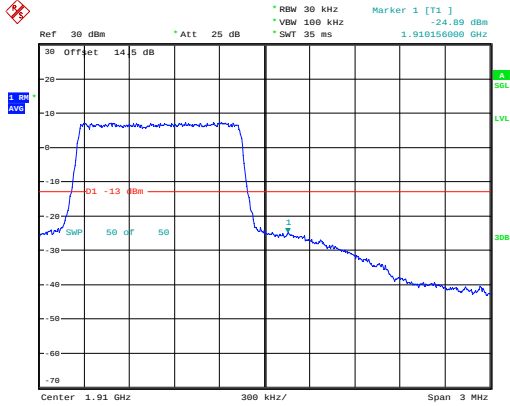
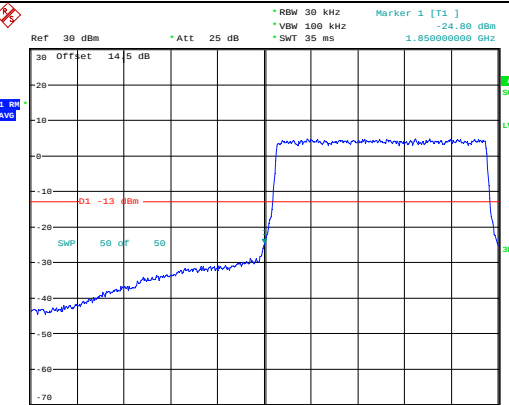
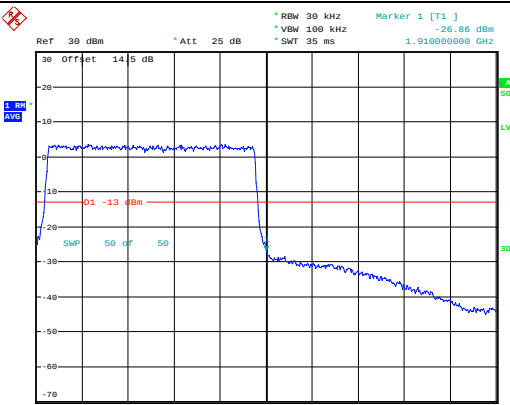
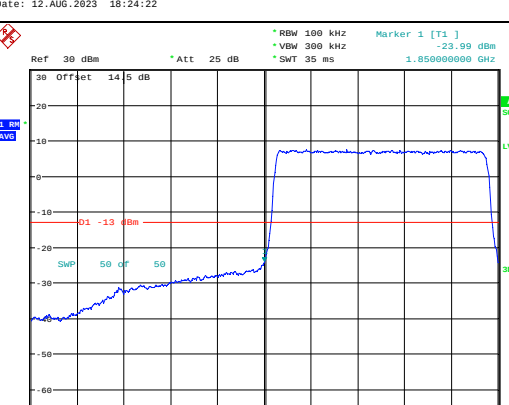
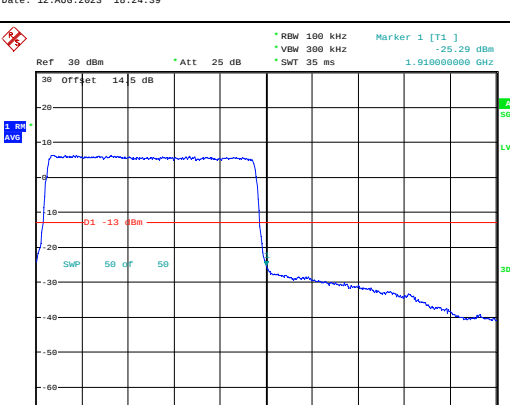
Mode	Lowest	Highest
16QAM 1.4MHz	 Ref: 30 dBm, Att: 25 dB, RBW: 30 kHz, VSW: 100 kHz, SWT: 35 ms, Marker 1 [T1]: -25.20 dBm, 1.849982000 GHz Center: 1.85 GHz, Span: 3 MHz Date: 12.AUG.2023 18:09:13	 Ref: 30 dBm, Att: 25 dB, RBW: 30 kHz, VSW: 100 kHz, SWT: 35 ms, Marker 1 [T1]: -24.89 dBm, 1.910156000 GHz Center: 1.91 GHz, Span: 3 MHz Date: 12.AUG.2023 18:09:30
16QAM 3MHz	 Ref: 30 dBm, Att: 25 dB, RBW: 30 kHz, VSW: 100 kHz, SWT: 35 ms, Marker 1 [T1]: -24.80 dBm, 1.850000000 GHz Center: 1.85 GHz, Span: 6 MHz Date: 12.AUG.2023 18:24:22	 Ref: 30 dBm, Att: 25 dB, RBW: 30 kHz, VSW: 100 kHz, SWT: 35 ms, Marker 1 [T1]: -25.86 dBm, 1.910000000 GHz Center: 1.91 GHz, Span: 6 MHz Date: 12.AUG.2023 18:24:39
16QAM 5MHz	 Ref: 30 dBm, Att: 25 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 35 ms, Marker 1 [T1]: -23.99 dBm, 1.850000000 GHz Center: 1.85 GHz, Span: 10 MHz Date: 12.AUG.2023 18:39:44	 Ref: 30 dBm, Att: 25 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 35 ms, Marker 1 [T1]: -25.29 dBm, 1.910000000 GHz Center: 1.91 GHz, Span: 10 MHz Date: 12.AUG.2023 18:39:59

Out of band emission, Band Edge






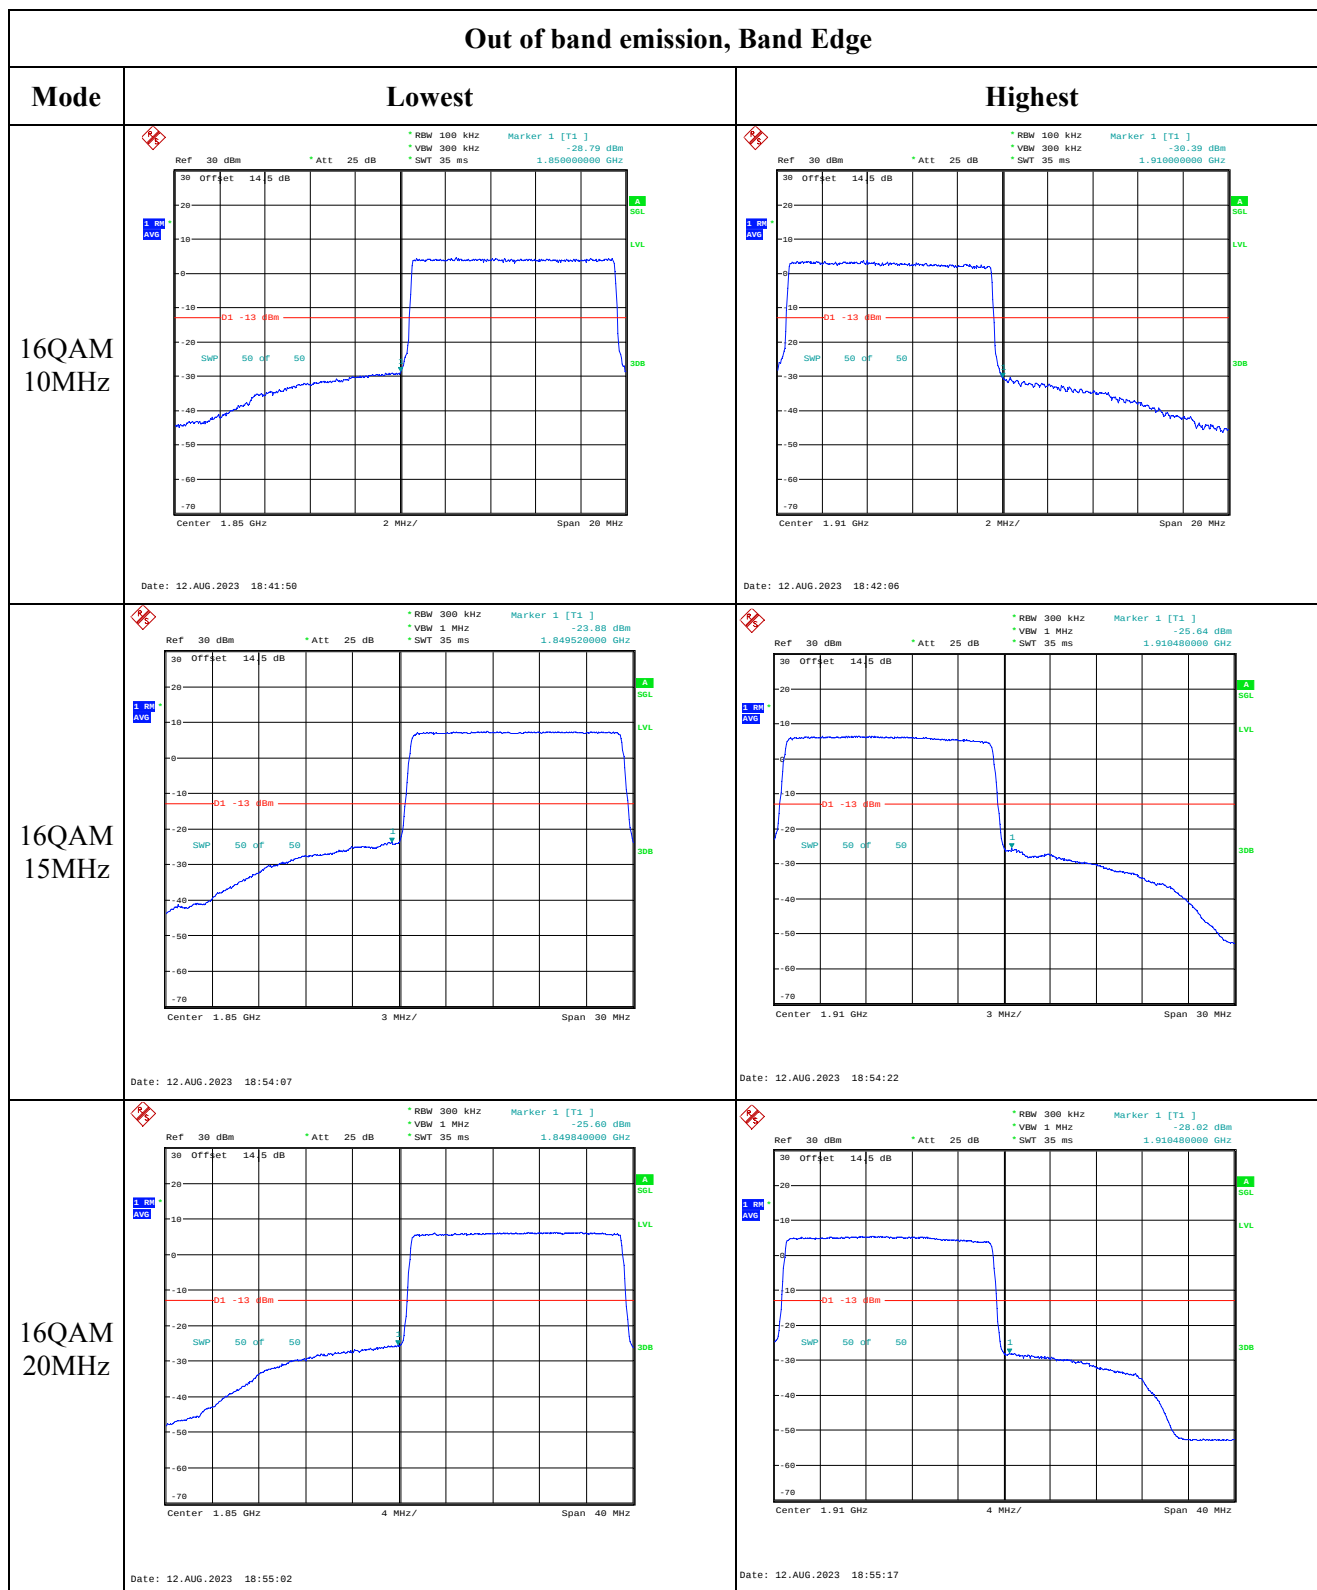


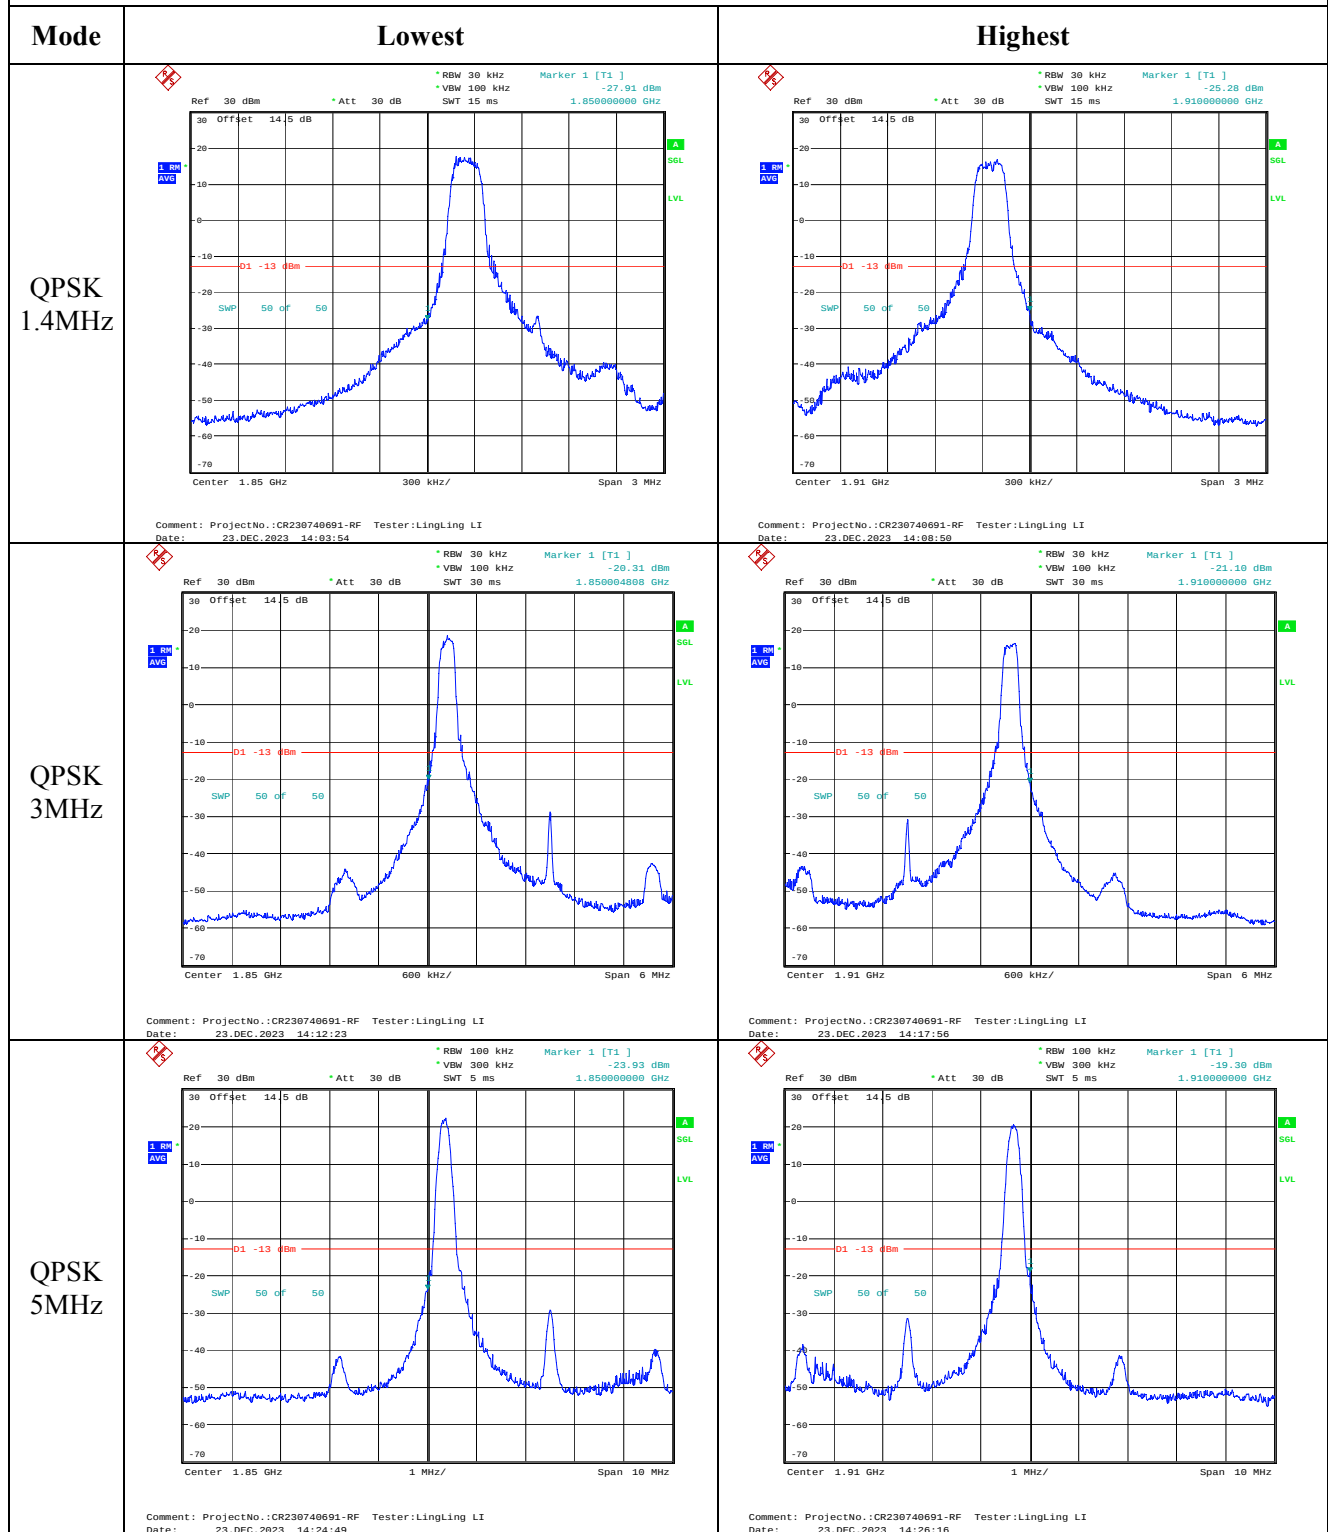Test Plots for Out of band emission, Band Edge:
Note: The test is performed in 1RB mode.**Out of band emission, Band Edge**







Out of band emission, Band Edge

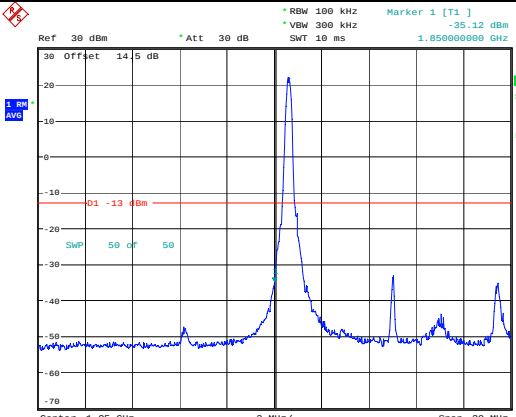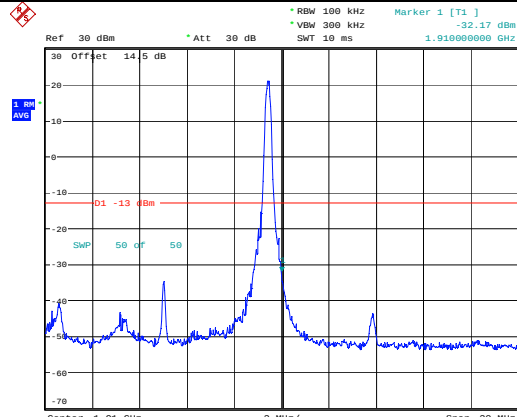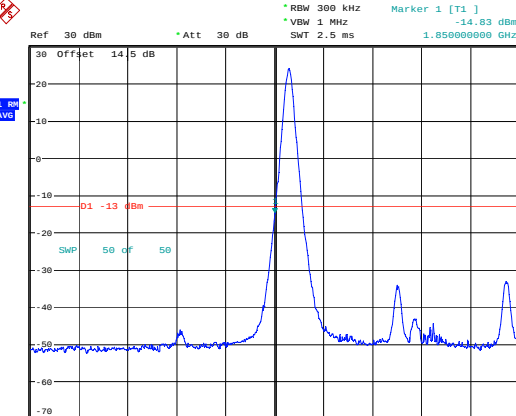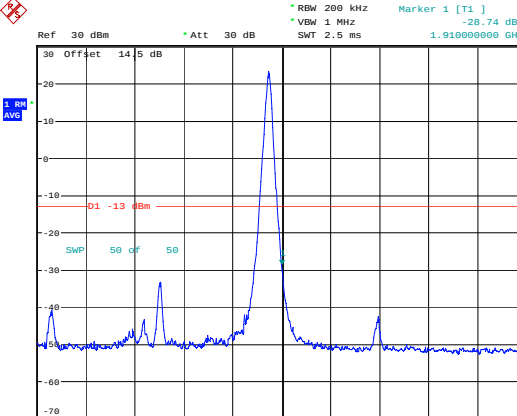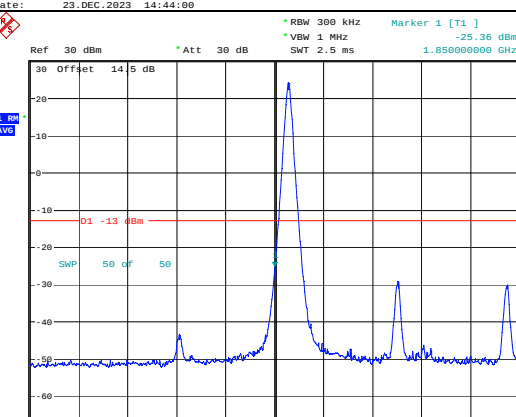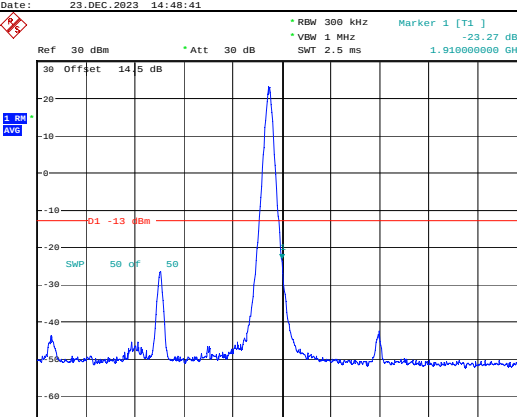Mode	Lowest	Highest
QPSK 10MHz	 Ref 30 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] -25.12 dBm *VBW 300 kHz SWT 10 ms 1.850000000 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 Center 1.85 GHz 2 MHz/ Span 20 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23.DEC.2023 14:36:02	 Ref 30 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] -32.17 dBm *VBW 300 kHz SWT 10 ms 1.910000000 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 Center 1.91 GHz 2 MHz/ Span 20 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23.DEC.2023 14:39:09
QPSK 15MHz	 Ref 30 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -25.36 dBm *VBW 1 MHz SWT 2.5 ms 1.850000000 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 Center 1.85 GHz 3 MHz/ Span 30 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23.DEC.2023 14:44:09	 Ref 30 dBm *Att 30 dB *RBW 200 kHz Marker 1 [T1] -29.74 dBm *VBW 1 MHz SWT 2.5 ms 1.910000000 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 Center 1.91 GHz 3 MHz/ Span 30 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23.DEC.2023 14:48:41
QPSK 20MHz	 Ref 30 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -25.36 dBm *VBW 1 MHz SWT 2.5 ms 1.850000000 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 Center 1.85 GHz 4 MHz/ Span 40 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23.DEC.2023 14:58:48	 Ref 30 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -29.27 dBm *VBW 1 MHz SWT 2.5 ms 1.910000000 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 Center 1.91 GHz 4 MHz/ Span 40 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23.DEC.2023 15:01:09

Out of band emission, Band Edge

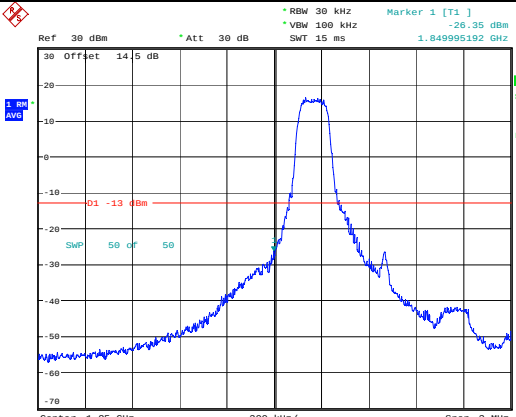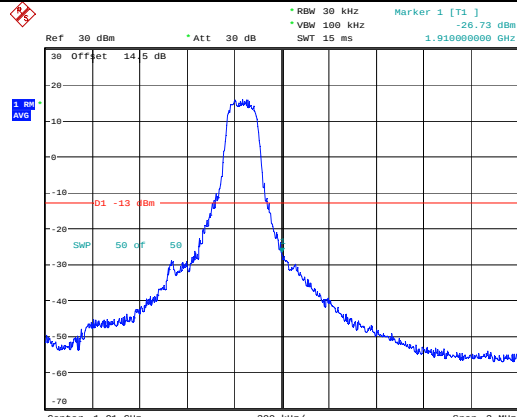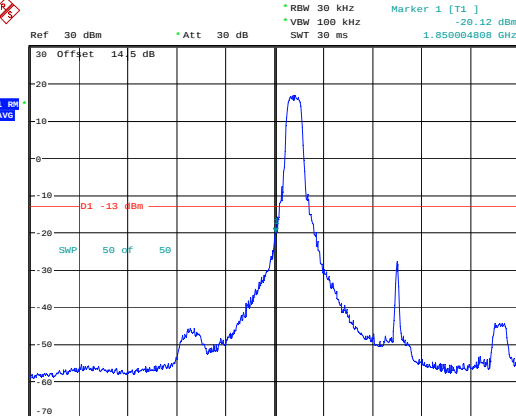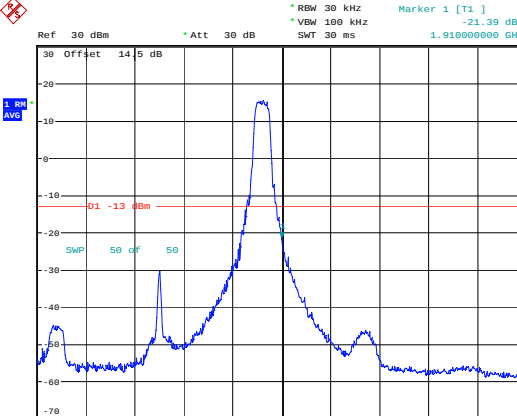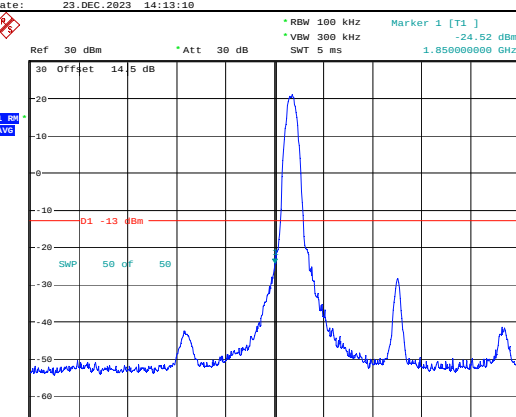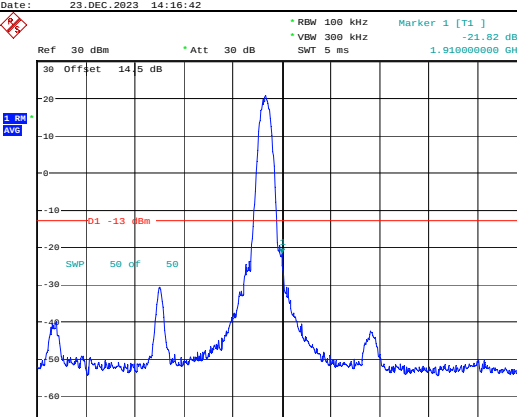Mode	Lowest	Highest
16QAM 1.4MHz	 Ref 30 dBm *Att 30 dB *RBW 30 kHz Marker 1 [T1] -26.35 dBm *VBW 100 kHz SWT 15 ms 1.849995192 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 D1 -13 dBm SWP 50 dB 50 Center 1.85 GHz 300 kHz/ Span 3 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23_DEC.2023 14:04:53	 Ref 30 dBm *Att 30 dB *RBW 30 kHz Marker 1 [T1] -26.73 dBm *VBW 100 kHz SWT 15 ms 1.910000000 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 D1 -13 dBm SWP 50 dB 50 Center 1.91 GHz 300 kHz/ Span 3 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23_DEC.2023 14:07:40
16QAM 3MHz	 Ref 30 dBm *Att 30 dB *RBW 30 kHz Marker 1 [T1] -29.12 dBm *VBW 100 kHz SWT 30 ms 1.850004808 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 D1 -13 dBm SWP 50 dB 50 Center 1.85 GHz 600 kHz/ Span 6 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23_DEC.2023 14:13:10	 Ref 30 dBm *Att 30 dB *RBW 30 kHz Marker 1 [T1] -21.39 dBm *VBW 100 kHz SWT 30 ms 1.910000000 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 D1 -13 dBm SWP 50 dB 50 Center 1.91 GHz 600 kHz/ Span 6 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23_DEC.2023 14:16:42
16QAM 5MHz	 Ref 30 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] -24.52 dBm *VBW 300 kHz SWT 5 ms 1.850000000 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 D1 -13 dBm SWP 50 dB 50 Center 1.85 GHz 1 MHz/ Span 10 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23_DEC.2023 14:24:17	 Ref 30 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] -21.82 dBm *VBW 300 kHz SWT 5 ms 1.910000000 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 D1 -13 dBm SWP 50 dB 50 Center 1.91 GHz 1 MHz/ Span 10 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23_DEC.2023 14:26:56

Out of band emission, Band Edge

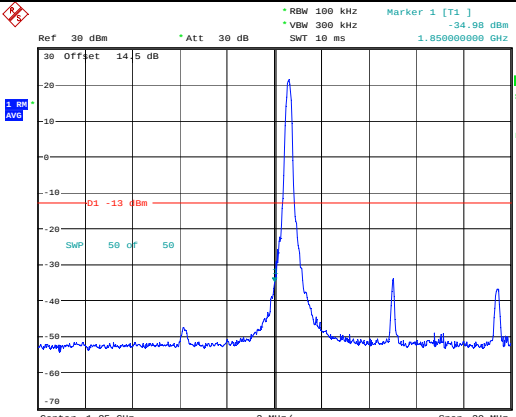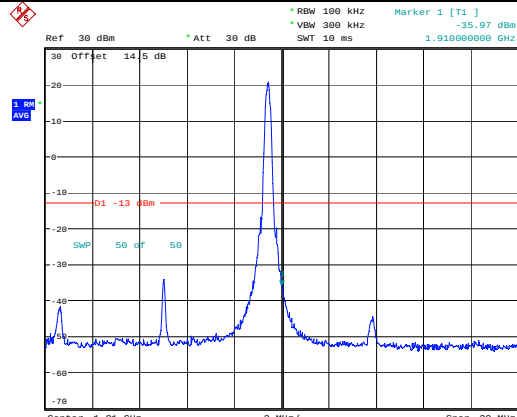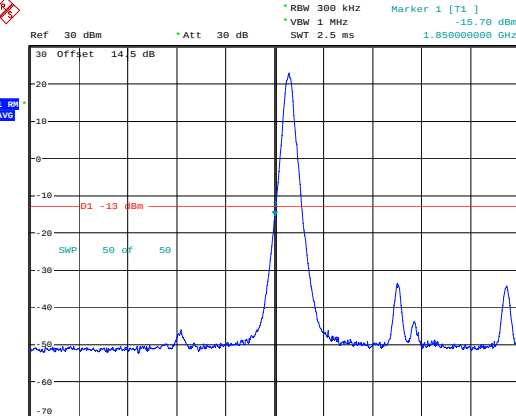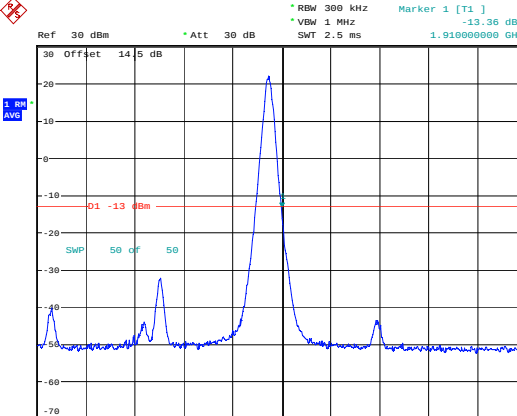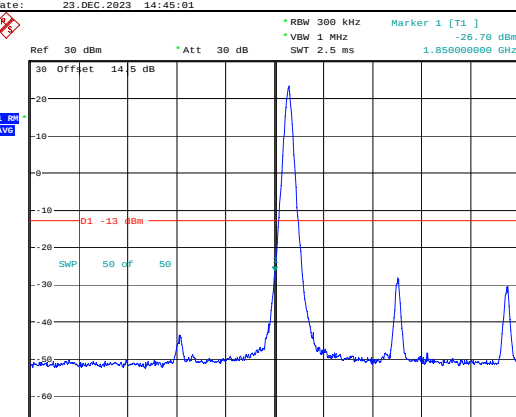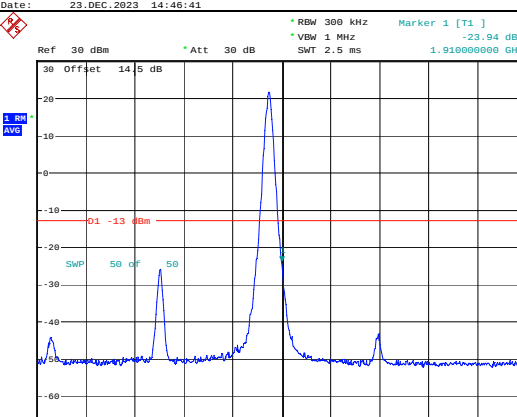Mode	Lowest	Highest
16QAM 10MHz	 Ref 30 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] -34.98 dBm *VBW 300 kHz SWT 10 ms 1.850000000 GHz Offset 14.5 dB Center 1.85 GHz 2 MHz/ Span 20 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23 DEC 2023 14:36:43	 Ref 30 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] -35.97 dBm *VBW 300 kHz SWT 10 ms 1.910000000 GHz Offset 14.5 dB Center 1.91 GHz 2 MHz/ Span 20 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23 DEC 2023 14:38:26
16QAM 15MHz	 Ref 30 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -25.70 dBm *VBW 1 MHz SWT 2.5 ms 1.850000000 GHz Offset 14.5 dB Center 1.85 GHz 3 MHz/ Span 30 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23 DEC 2023 14:45:01	 Ref 30 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -23.36 dBm *VBW 1 MHz SWT 2.5 ms 1.910000000 GHz Offset 14.5 dB Center 1.91 GHz 3 MHz/ Span 30 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23 DEC 2023 14:46:41
16QAM 20MHz	 Ref 30 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -25.70 dBm *VBW 1 MHz SWT 2.5 ms 1.850000000 GHz Offset 14.5 dB Center 1.85 GHz 4 MHz/ Span 40 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23 DEC 2023 14:59:16	 Ref 30 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -23.94 dBm *VBW 1 MHz SWT 2.5 ms 1.910000000 GHz Offset 14.5 dB Center 1.91 GHz 4 MHz/ Span 40 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23 DEC 2023 15:00:29

4.5 Antenna Port Test Data and Results for LTE Band 4

Serial Number:	288V-1	Test Date:	2023/8/4-2023/12/23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Claire Liu/Arthur Su/LingLing Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.3-26.1	Relative Humidity: (%)	42-62	ATM Pressure: (kPa)	99.7-101.9
-------------------	-----------	------------------------	-------	---------------------	------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency for Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	1710.7	1732.5	1754.3
3MHz	1711.5	1732.5	1753.5
5MHz	1712.5	1732.5	1752.5
10MHz	1715	1732.5	1750
15MHz	1717.5	1732.5	1747.5
20MHz	1720	1732.5	1745

Test Data:**FCC§2.1046;§ 27.50(h)(2)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	19.59	19.7	19.06	21.22	33
	RB1#13	19.65	19.84	19.19		
	RB1#24	19.66	19.75	19.12		
	RB15#0	18.6	18.81	18.14		
	RB15#10	18.6	18.82	18.11		
	RB25#0	18.57	18.8	18.09		
5MHz 16QAM	RB1#0	18.94	18.87	18.29	20.42	33
	RB1#13	19.04	18.99	18.42		
	RB1#24	19.04	18.96	18.3		
	RB15#0	17.77	17.83	17.27		
	RB15#10	17.79	17.88	17.31		
	RB25#0	17.73	17.98	17.33		
10MHz QPSK	RB1#0	19.6	19.21	19.28	21.12	33
	RB1#25	19.69	19.38	18.72		
	RB1#49	19.74	19.37	19.34		
	RB25#0	18.73	18.29	17.94		
	RB25#25	18.72	18.41	17.99		
	RB50#0	18.71	18.38	17.93		
10MHz 16QAM	RB1#0	18.85	18.57	18.32	20.38	33
	RB1#25	18.94	18.68	17.74		
	RB1#49	19	18.7	18.4		
	RB25#0	17.82	17.46	17.04		
	RB25#25	17.89	17.54	17.14		
	RB50#0	17.89	17.5	17.06		
15MHz QPSK	RB1#0	19.61	19.82	19.32	21.37	33
	RB1#38	19.8	19.99	19.41		
	RB1#74	19.76	19.95	19.38		
	RB36#0	18.68	18.95	18.44		
	RB36#39	18.74	19.02	18.4		
	RB75#0	18.71	18.93	18.46		
15MHz 16QAM	RB1#0	18.97	19.17	18.37	20.71	33
	RB1#38	19.12	19.33	18.48		
	RB1#74	19.15	19.33	18.44		
	RB36#0	17.88	18.01	17.5		
	RB36#39	17.92	18.1	17.5		
	RB75#0	17.84	18.08	17.61		
20MHz QPSK	RB1#0	19.65	19.13	20.07	21.45	33
	RB1#50	19.86	19.48	19.06		
	RB1#99	19.83	19.55	19.14		

20MHz 16QAM	RB50#0	18.75	18.37	18.15	20.63	33
	RB50#50	18.83	18.58	18.11		
	RB100#0	18.81	18.53	18.2		
	RB1#0	19.03	18.48	19.17		
	RB1#50	19.25	18.73	18.18		
	RB1#99	19.24	18.72	18.29		
	RB50#0	17.89	17.11	17.35		
	RB50#50	17.98	17.24	17.27		
	RB100#0	17.93	17.06	17.34		

Note: EIRP=Conducted Power(dBm) - Lc(dB) + G_T(dBi)

Result: **Pass**

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit(dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	4.93	6.97	5.45	13
	RB100#0	7.21	7.38	7.21	13
20MHz 16QAM	RB1#0	6.75	6.42	6.78	13
	RB100#0	7.98	8.05	8.34	13
Result:					Pass

FCC §2.1049, §27.53:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
5MHz QPSK	4.52	4.52	4.52	5.16	4.92	4.92
5MHz 16QAM	4.52	4.52	4.52	5.00	4.98	5.10
10MHz QPSK	8.96	8.96	8.96	9.60	9.64	9.72
10MHz 16QAM	8.96	8.96	8.96	9.68	9.56	9.56
15MHz QPSK	13.44	13.5	13.5	14.76	14.8	14.8
15MHz 16QAM	13.5	13.5	13.5	14.9	14.9	14.8
20MHz QPSK	17.92	17.92	17.84	19.36	19.36	19.12
20MHz 16QAM	17.92	17.84	17.92	19.44	19.36	19.28

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 27.53:Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	---

FCC §2.1051, § 27.53:Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	--


FCC §2.1055, §27.54: Frequency Stability

Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge
------------	----------	--

Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	5	2497.016	2496.00	2688.985	2690
	-20	5	2497.022	2496.00	2688.988	2690
	-10	5	2497.021	2496.00	2688.982	2690
	0	5	2497.038	2496.00	2688.988	2690
	10	5	2497.035	2496.00	2688.983	2690
	20	5	2497.040	2496.00	2688.960	2690
	30	5	2497.031	2496.00	2688.970	2690
	40	5	2497.018	2496.00	2688.974	2690
	50	5	2497.027	2496.00	2688.972	2690
Frequency Stability vs. Voltage	20	4.4	2497.024	2496.00	2688.981	2690
	20	5.25	2497.030	2496.00	2688.975	2690
					Result:	Pass

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	5	2497.031	2496.00	2688.986	2690
	-20	5	2497.017	2496.00	2688.963	2690
	-10	5	2497.016	2496.00	2688.973	2690
	0	5	2497.039	2496.00	2688.971	2690
	10	5	2497.020	2496.00	2688.987	2690
	20	5	2497.040	2496.00	2688.960	2690
	30	5	2497.011	2496.00	2688.977	2690
	40	5	2497.033	2496.00	2688.965	2690
	50	5	2497.016	2496.00	2688.962	2690
Frequency Stability vs. Voltage	20	4.4	2497.017	2496.00	2688.967	2690
	20	5.25	2497.012	2496.00	2688.978	2690
					Result:	Pass

Test Plots (Note: The 14.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

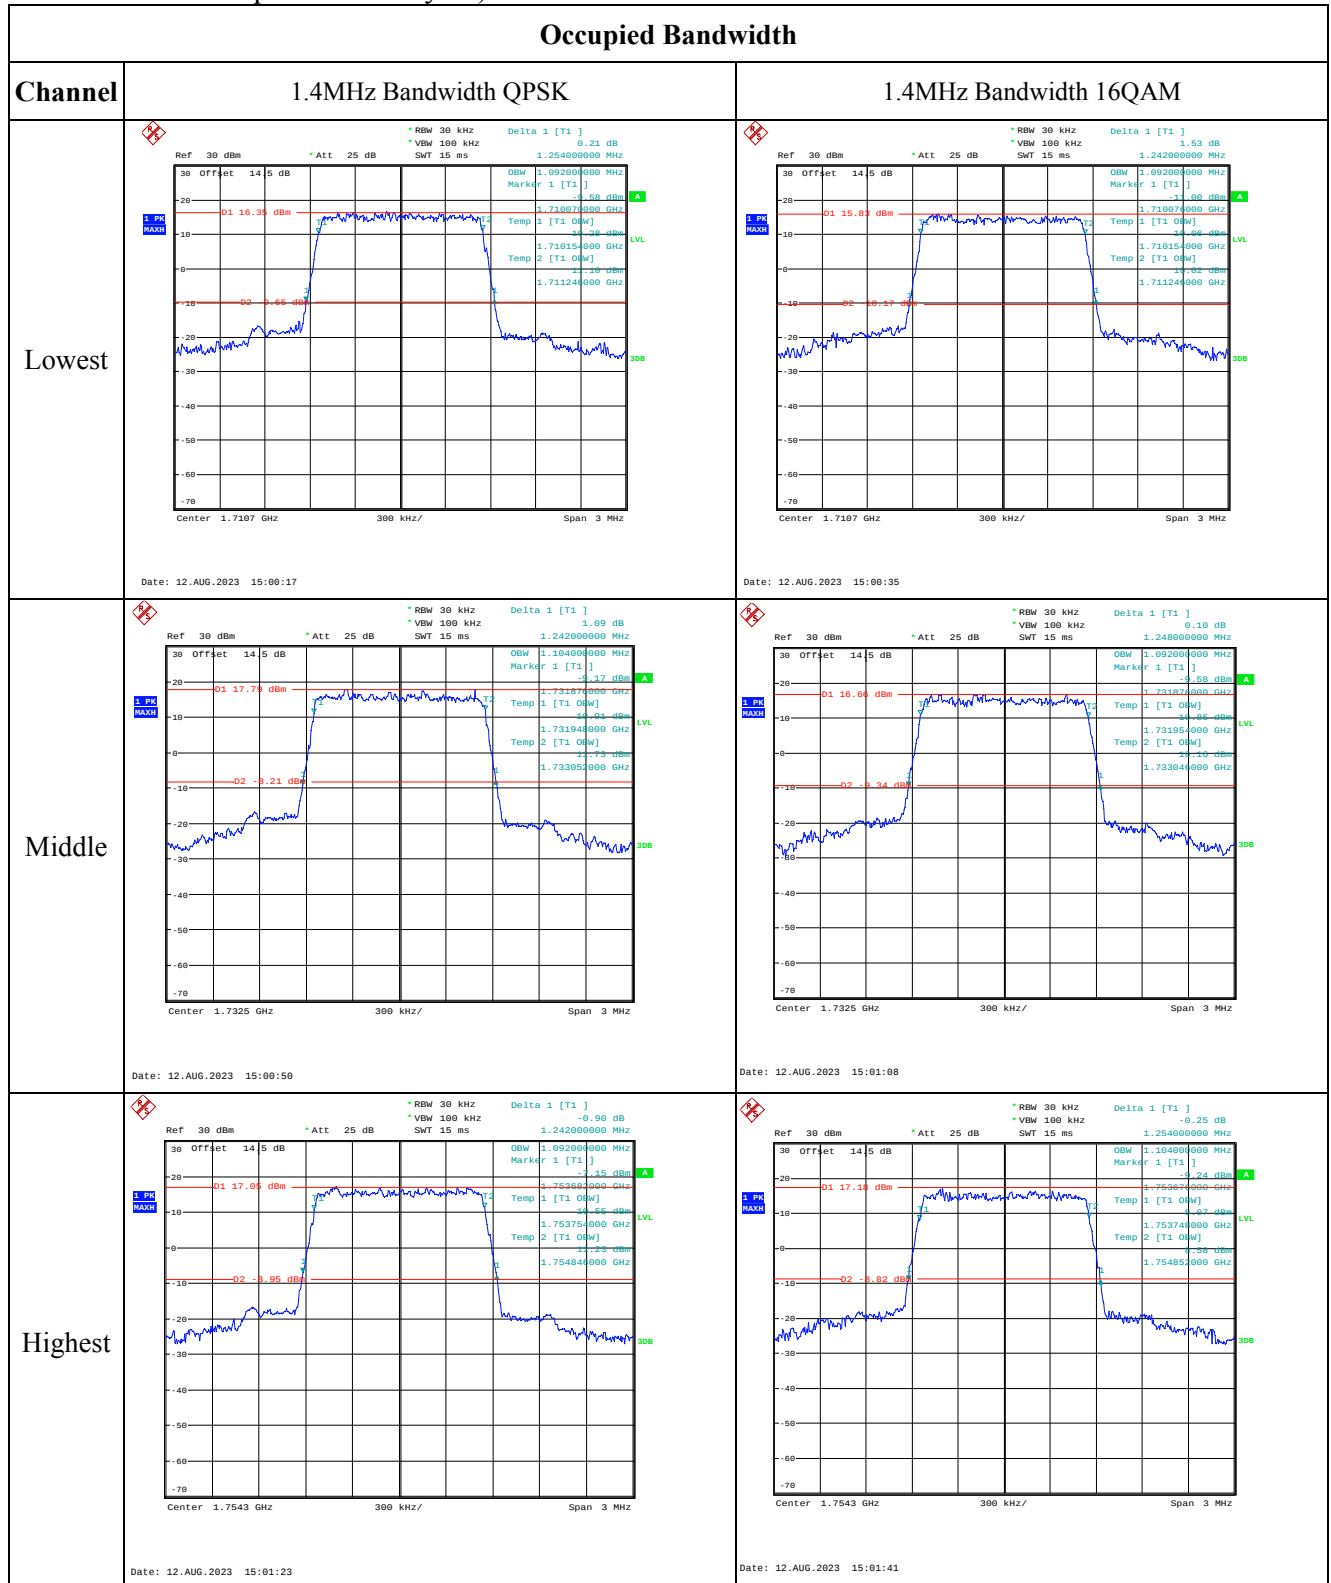



Occupied Bandwidth

Channel



3MHz Bandwidth QPSK

3MHz Bandwidth 16QAM



Lowest

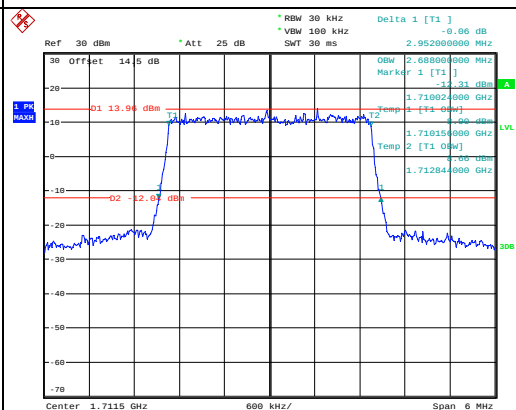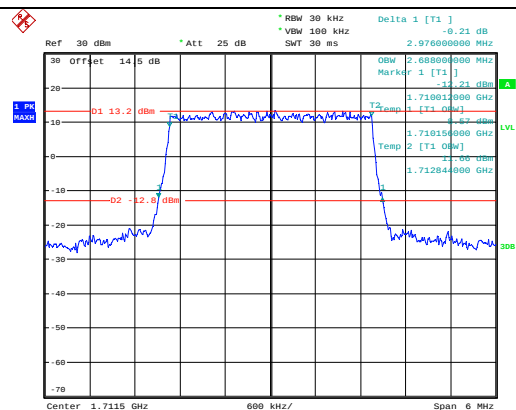

Middle

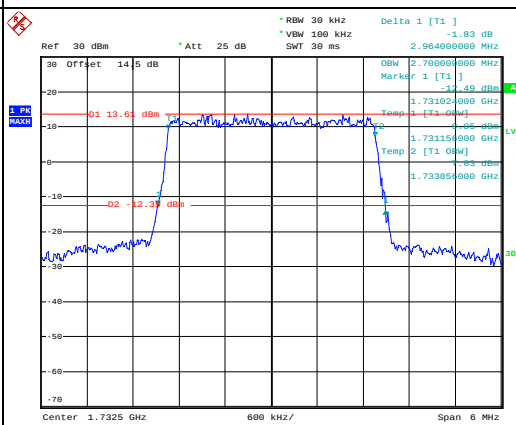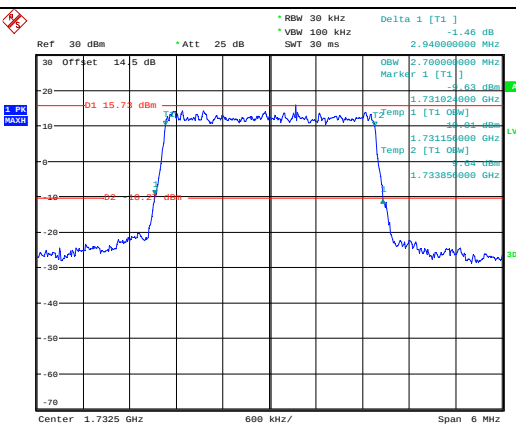

Highest

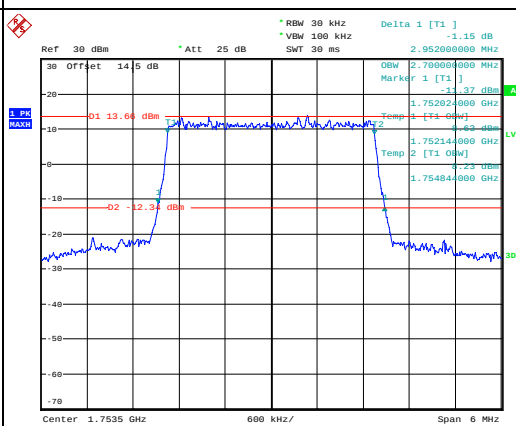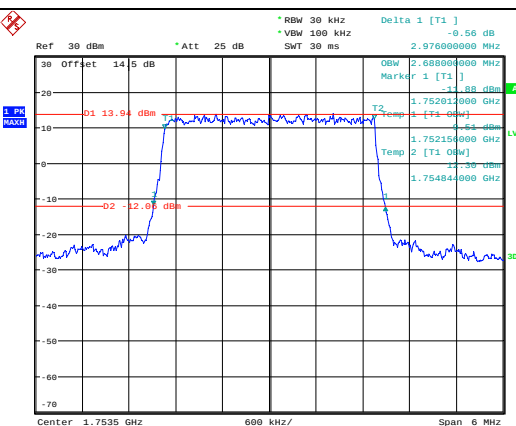


Occupied Bandwidth

Channel


5MHz Bandwidth QPSK

5MHz Bandwidth 16QAM

Lowest

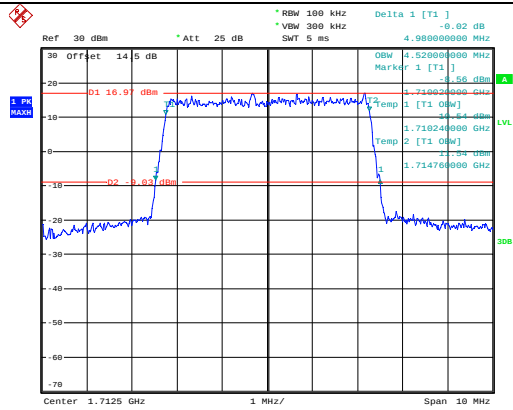


Date: 12.AUG.2023 15:23:44

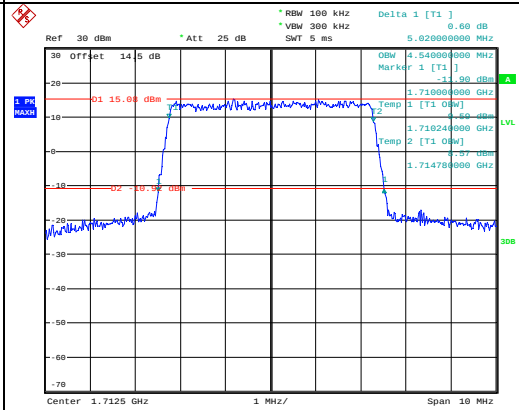


Date: 12.AUG.2023 15:24:02

Middle

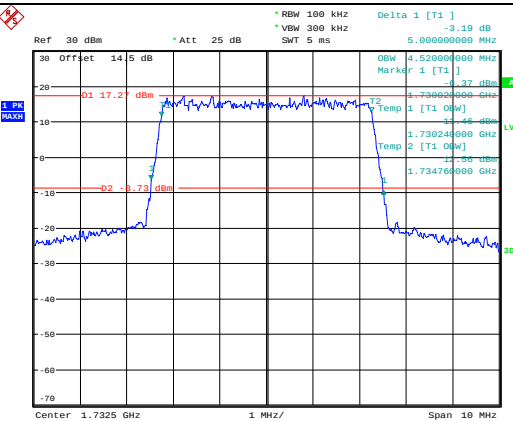


Date: 12.AUG.2023 15:24:21

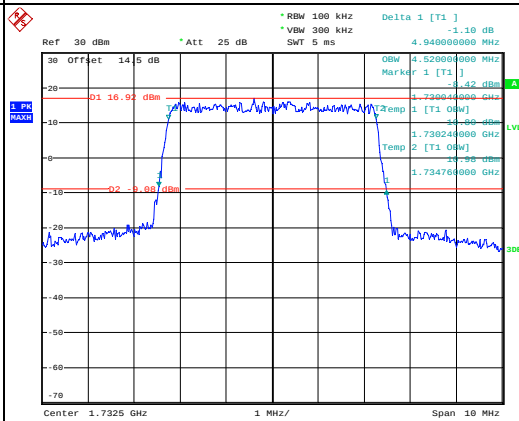


Date: 12.AUG.2023 15:24:35

Highest






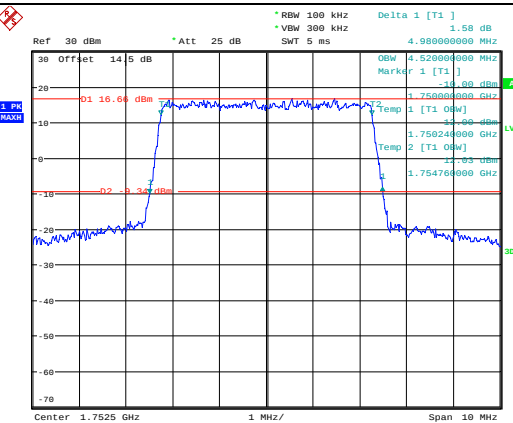


Date: 12.AUG.2023 15:24:54

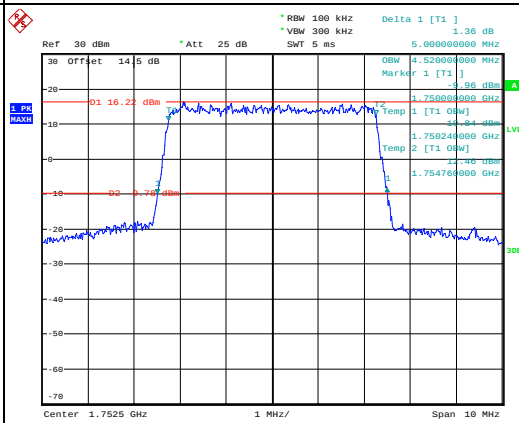

Date: 12.AUG.2023 15:25:11







Occupied Bandwidth

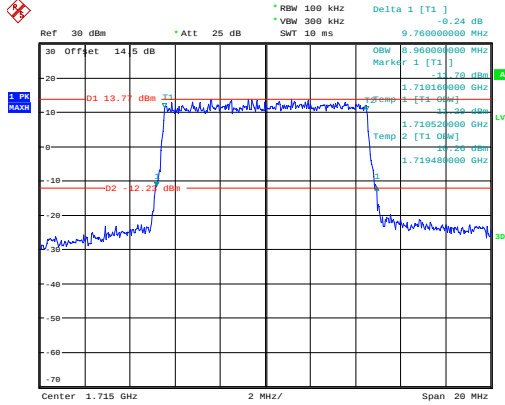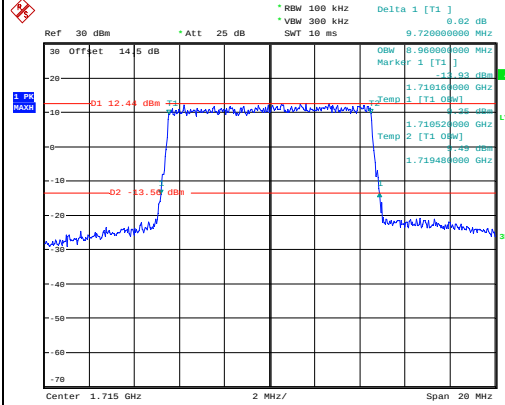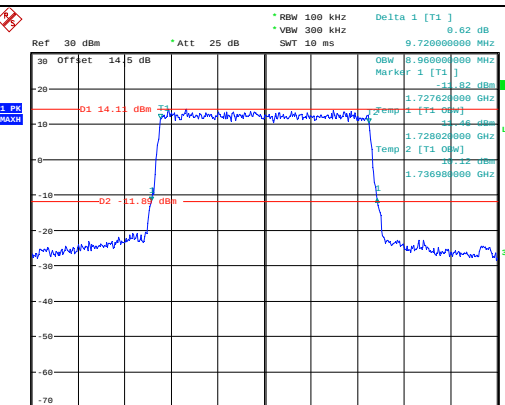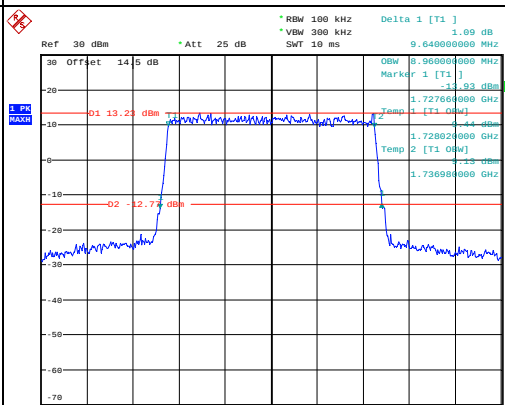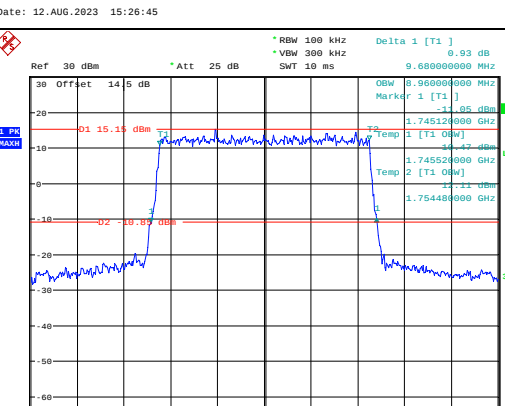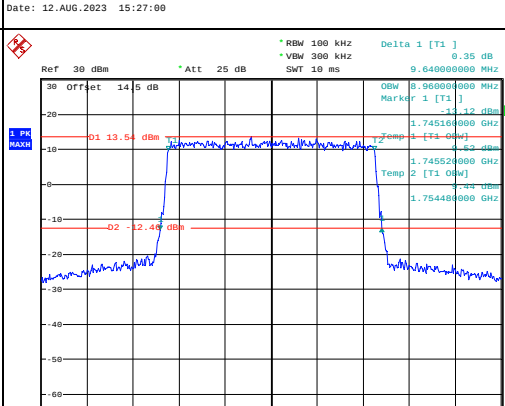Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 0.24 dB *VBW 300 kHz 9.760000000 MHz SWT 10 ms Marker 1 [T1] -13.78 dBm 1.715200000 GHz Temp 1 [T1] 0.00W Temp 2 [T1] 0.00W Temp 3 [T1] 0.00W Temp 4 [T1] 0.00W Temp 5 [T1] 0.00W Temp 6 [T1] 0.00W Temp 7 [T1] 0.00W Temp 8 [T1] 0.00W Temp 9 [T1] 0.00W Temp 10 [T1] 0.00W Temp 11 [T1] 0.00W Temp 12 [T1] 0.00W Temp 13 [T1] 0.00W Temp 14 [T1] 0.00W Temp 15 [T1] 0.00W Temp 16 [T1] 0.00W Temp 17 [T1] 0.00W Temp 18 [T1] 0.00W Temp 19 [T1] 0.00W Temp 20 [T1] 0.00W Center 1.715 GHz 2 MHz/ Span 20 MHz Date: 12.AUG.2023 15:26:12	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 0.82 dB *VBW 300 kHz 9.720000000 MHz SWT 10 ms Marker 1 [T1] -13.93 dBm 1.715200000 GHz Temp 1 [T1] 0.00W Temp 2 [T1] 0.00W Temp 3 [T1] 0.00W Temp 4 [T1] 0.00W Temp 5 [T1] 0.00W Temp 6 [T1] 0.00W Temp 7 [T1] 0.00W Temp 8 [T1] 0.00W Temp 9 [T1] 0.00W Temp 10 [T1] 0.00W Temp 11 [T1] 0.00W Temp 12 [T1] 0.00W Temp 13 [T1] 0.00W Temp 14 [T1] 0.00W Temp 15 [T1] 0.00W Temp 16 [T1] 0.00W Temp 17 [T1] 0.00W Temp 18 [T1] 0.00W Temp 19 [T1] 0.00W Temp 20 [T1] 0.00W Center 1.715 GHz 2 MHz/ Span 20 MHz Date: 12.AUG.2023 15:26:27
Middle	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 0.62 dB *VBW 300 kHz 9.720000000 MHz SWT 10 ms Marker 1 [T1] -14.82 dBm 1.732500000 GHz Temp 1 [T1] 0.00W Temp 2 [T1] 0.00W Temp 3 [T1] 0.00W Temp 4 [T1] 0.00W Temp 5 [T1] 0.00W Temp 6 [T1] 0.00W Temp 7 [T1] 0.00W Temp 8 [T1] 0.00W Temp 9 [T1] 0.00W Temp 10 [T1] 0.00W Temp 11 [T1] 0.00W Temp 12 [T1] 0.00W Temp 13 [T1] 0.00W Temp 14 [T1] 0.00W Temp 15 [T1] 0.00W Temp 16 [T1] 0.00W Temp 17 [T1] 0.00W Temp 18 [T1] 0.00W Temp 19 [T1] 0.00W Temp 20 [T1] 0.00W Center 1.7325 GHz 2 MHz/ Span 20 MHz Date: 12.AUG.2023 15:26:45	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 1.09 dB *VBW 300 kHz 9.640000000 MHz SWT 10 ms Marker 1 [T1] -14.93 dBm 1.732500000 GHz Temp 1 [T1] 0.00W Temp 2 [T1] 0.00W Temp 3 [T1] 0.00W Temp 4 [T1] 0.00W Temp 5 [T1] 0.00W Temp 6 [T1] 0.00W Temp 7 [T1] 0.00W Temp 8 [T1] 0.00W Temp 9 [T1] 0.00W Temp 10 [T1] 0.00W Temp 11 [T1] 0.00W Temp 12 [T1] 0.00W Temp 13 [T1] 0.00W Temp 14 [T1] 0.00W Temp 15 [T1] 0.00W Temp 16 [T1] 0.00W Temp 17 [T1] 0.00W Temp 18 [T1] 0.00W Temp 19 [T1] 0.00W Temp 20 [T1] 0.00W Center 1.7325 GHz 2 MHz/ Span 20 MHz Date: 12.AUG.2023 15:27:00
Highest	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 0.93 dB *VBW 300 kHz 9.680000000 MHz SWT 10 ms Marker 1 [T1] -15.95 dBm 1.750000000 GHz Temp 1 [T1] 0.00W Temp 2 [T1] 0.00W Temp 3 [T1] 0.00W Temp 4 [T1] 0.00W Temp 5 [T1] 0.00W Temp 6 [T1] 0.00W Temp 7 [T1] 0.00W Temp 8 [T1] 0.00W Temp 9 [T1] 0.00W Temp 10 [T1] 0.00W Temp 11 [T1] 0.00W Temp 12 [T1] 0.00W Temp 13 [T1] 0.00W Temp 14 [T1] 0.00W Temp 15 [T1] 0.00W Temp 16 [T1] 0.00W Temp 17 [T1] 0.00W Temp 18 [T1] 0.00W Temp 19 [T1] 0.00W Temp 20 [T1] 0.00W Center 1.75 GHz 2 MHz/ Span 20 MHz Date: 12.AUG.2023 15:27:19	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 0.35 dB *VBW 300 kHz 9.640000000 MHz SWT 10 ms Marker 1 [T1] -15.12 dBm 1.750000000 GHz Temp 1 [T1] 0.00W Temp 2 [T1] 0.00W Temp 3 [T1] 0.00W Temp 4 [T1] 0.00W Temp 5 [T1] 0.00W Temp 6 [T1] 0.00W Temp 7 [T1] 0.00W Temp 8 [T1] 0.00W Temp 9 [T1] 0.00W Temp 10 [T1] 0.00W Temp 11 [T1] 0.00W Temp 12 [T1] 0.00W Temp 13 [T1] 0.00W Temp 14 [T1] 0.00W Temp 15 [T1] 0.00W Temp 16 [T1] 0.00W Temp 17 [T1] 0.00W Temp 18 [T1] 0.00W Temp 19 [T1] 0.00W Temp 20 [T1] 0.00W Center 1.75 GHz 2 MHz/ Span 20 MHz Date: 12.AUG.2023 15:27:36

Occupied Bandwidth

Channel	15MHz Bandwidth QPSK	15MHz Bandwidth 16QAM
Lowest	Ref 30 dBm Offset 14.5 dB Att 25 dB RBW 300 kHz Delta 1 [T1] 0.50 dB VBW 1 MHz SWT 2.5 ms 14.820000000 MHz Marker 1 [T1] -17.33 dBm 1.717500000 GHz Temp 1 [T1 0dB] 1.710780000 GHz Temp 2 [T1 0dB] 1.724280000 GHz Center 1.7175 GHz 3 MHz/ Span 30 MHz Date: 12.AUG.2023 15:39:33	Ref 30 dBm Offset 14.5 dB Att 25 dB RBW 300 kHz Delta 1 [T1] -1.42 dB VBW 1 MHz SWT 2.5 ms 14.820000000 MHz Marker 1 [T1] -16.61 dBm 1.717500000 GHz Temp 1 [T1 0dB] 1.710780000 GHz Temp 2 [T1 0dB] 1.724280000 GHz Center 1.7175 GHz 3 MHz/ Span 30 MHz Date: 12.AUG.2023 15:39:51
Middle	Ref 30 dBm Offset 14.5 dB Att 25 dB RBW 300 kHz Delta 1 [T1] 0.39 dB VBW 1 MHz SWT 2.5 ms 14.760000000 MHz Marker 1 [T1] -17.39 dBm 1.732500000 GHz Temp 1 [T1 0dB] 1.725720000 GHz Temp 2 [T1 0dB] 1.739280000 GHz Center 1.7325 GHz 3 MHz/ Span 30 MHz Date: 12.AUG.2023 15:40:06	Ref 30 dBm Offset 14.5 dB Att 25 dB RBW 300 kHz Delta 1 [T1] -0.38 dB VBW 1 MHz SWT 2.5 ms 14.880000000 MHz Marker 1 [T1] -16.38 dBm 1.732500000 GHz Temp 1 [T1 0dB] 1.725720000 GHz Temp 2 [T1 0dB] 1.739280000 GHz Center 1.7325 GHz 3 MHz/ Span 30 MHz Date: 12.AUG.2023 15:40:24
Highest	Ref 30 dBm Offset 14.5 dB Att 25 dB RBW 300 kHz Delta 1 [T1] 0.92 dB VBW 1 MHz SWT 2.5 ms 14.880000000 MHz Marker 1 [T1] -17.8 dBm 1.747500000 GHz Temp 1 [T1 0dB] 1.740780000 GHz Temp 2 [T1 0dB] 1.754280000 GHz Center 1.7475 GHz 3 MHz/ Span 30 MHz Date: 12.AUG.2023 15:40:45	Ref 30 dBm Offset 14.5 dB Att 25 dB RBW 300 kHz Delta 1 [T1] -1.14 dB VBW 1 MHz SWT 2.5 ms 14.820000000 MHz Marker 1 [T1] -16.51 dBm 1.747500000 GHz Temp 1 [T1 0dB] 1.740780000 GHz Temp 2 [T1 0dB] 1.754280000 GHz Center 1.7475 GHz 3 MHz/ Span 30 MHz Date: 12.AUG.2023 15:41:03

Occupied Bandwidth

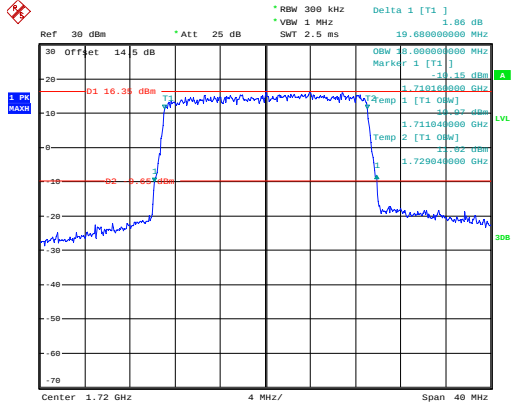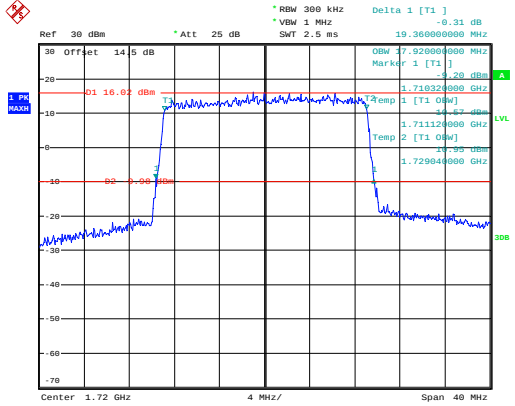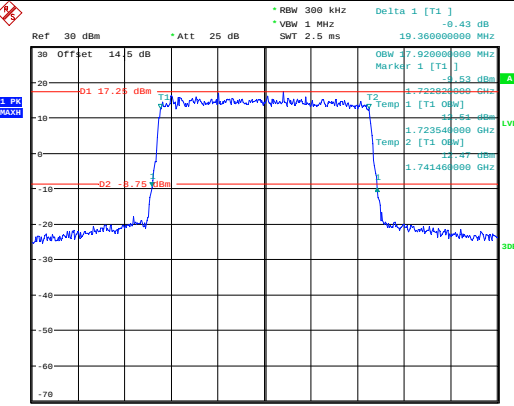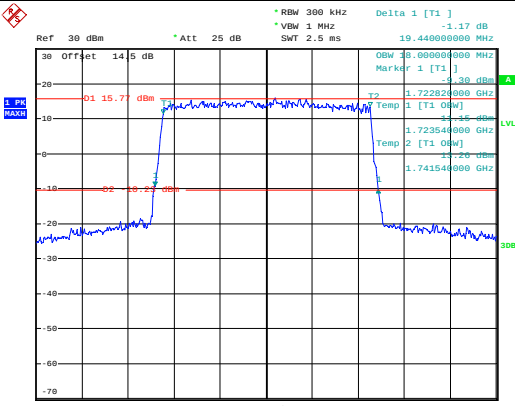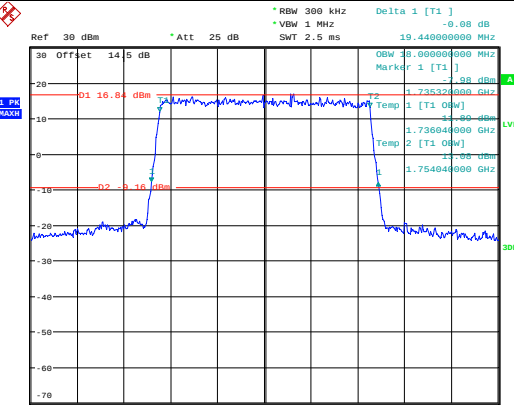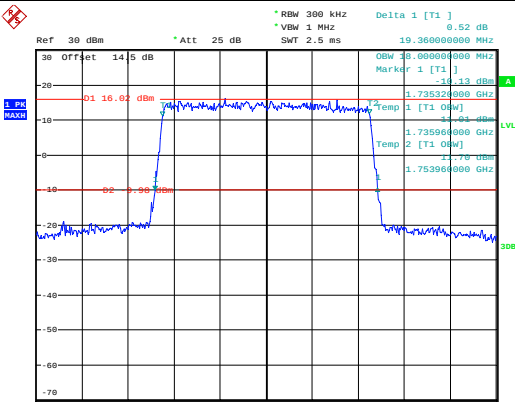
Channel	20MHz Bandwidth QPSK	20MHz Bandwidth 16QAM
Lowest	 Ref 30 dBm Offset 14.5 dB Att 25 dB RBW 300 kHz Delta 1 [T1] -0.43 dB VBW 1 MHz SWT 2.5 ms 19.360000000 MHz Marker 1 [T1] -10.15 dBm OBW 19.360000000 MHz Temp 1 [T1 0dB] 1.710100000 GHz Temp 2 [T1 0dB] 1.711040000 GHz Temp 1 [T1 0dB] 1.710100000 GHz Temp 2 [T1 0dB] 1.711040000 GHz Temp 1 [T1 0dB] 1.710100000 GHz Temp 2 [T1 0dB] 1.711040000 GHz Center 1.72 GHz 4 MHz/ Span 40 MHz Date: 12.AUG.2023 15:42:07	 Ref 30 dBm Offset 14.5 dB Att 25 dB RBW 300 kHz Delta 1 [T1] -0.31 dB VBW 1 MHz SWT 2.5 ms 19.360000000 MHz Marker 1 [T1] -10.20 dBm OBW 19.360000000 MHz Temp 1 [T1 0dB] 1.710320000 GHz Temp 2 [T1 0dB] 1.711120000 GHz Temp 1 [T1 0dB] 1.710320000 GHz Temp 2 [T1 0dB] 1.711120000 GHz Temp 1 [T1 0dB] 1.710320000 GHz Temp 2 [T1 0dB] 1.711120000 GHz Center 1.72 GHz 4 MHz/ Span 40 MHz Date: 12.AUG.2023 15:42:22
Middle	 Ref 30 dBm Offset 14.5 dB Att 25 dB RBW 300 kHz Delta 1 [T1] -0.43 dB VBW 1 MHz SWT 2.5 ms 19.360000000 MHz Marker 1 [T1] -10.53 dBm OBW 19.360000000 MHz Temp 1 [T1 0dB] 1.722800000 GHz Temp 2 [T1 0dB] 1.723540000 GHz Temp 1 [T1 0dB] 1.722800000 GHz Temp 2 [T1 0dB] 1.723540000 GHz Temp 1 [T1 0dB] 1.722800000 GHz Temp 2 [T1 0dB] 1.723540000 GHz Center 1.7325 GHz 4 MHz/ Span 40 MHz Date: 12.AUG.2023 15:42:37	 Ref 30 dBm Offset 14.5 dB Att 25 dB RBW 300 kHz Delta 1 [T1] -1.17 dB VBW 1 MHz SWT 2.5 ms 19.440000000 MHz Marker 1 [T1] -10.30 dBm OBW 19.440000000 MHz Temp 1 [T1 0dB] 1.722820000 GHz Temp 2 [T1 0dB] 1.723540000 GHz Temp 1 [T1 0dB] 1.722820000 GHz Temp 2 [T1 0dB] 1.723540000 GHz Temp 1 [T1 0dB] 1.722820000 GHz Temp 2 [T1 0dB] 1.723540000 GHz Center 1.7325 GHz 4 MHz/ Span 40 MHz Date: 12.AUG.2023 15:42:55
Highest	 Ref 30 dBm Offset 14.5 dB Att 25 dB RBW 300 kHz Delta 1 [T1] -0.68 dB VBW 1 MHz SWT 2.5 ms 19.440000000 MHz Marker 1 [T1] -10.08 dBm OBW 19.440000000 MHz Temp 1 [T1 0dB] 1.735320000 GHz Temp 2 [T1 0dB] 1.735960000 GHz Temp 1 [T1 0dB] 1.735320000 GHz Temp 2 [T1 0dB] 1.735960000 GHz Temp 1 [T1 0dB] 1.735320000 GHz Temp 2 [T1 0dB] 1.735960000 GHz Center 1.745 GHz 4 MHz/ Span 40 MHz Date: 12.AUG.2023 15:43:13	 Ref 30 dBm Offset 14.5 dB Att 25 dB RBW 300 kHz Delta 1 [T1] -0.52 dB VBW 1 MHz SWT 2.5 ms 19.360000000 MHz Marker 1 [T1] -10.13 dBm OBW 19.360000000 MHz Temp 1 [T1 0dB] 1.735320000 GHz Temp 2 [T1 0dB] 1.735960000 GHz Temp 1 [T1 0dB] 1.735320000 GHz Temp 2 [T1 0dB] 1.735960000 GHz Temp 1 [T1 0dB] 1.735320000 GHz Temp 2 [T1 0dB] 1.735960000 GHz Center 1.745 GHz 4 MHz/ Span 40 MHz Date: 12.AUG.2023 15:43:31

Spurious Emissions at Antenna Terminal


Channel

1.4MHz Bandwidth QPSK

Lowest

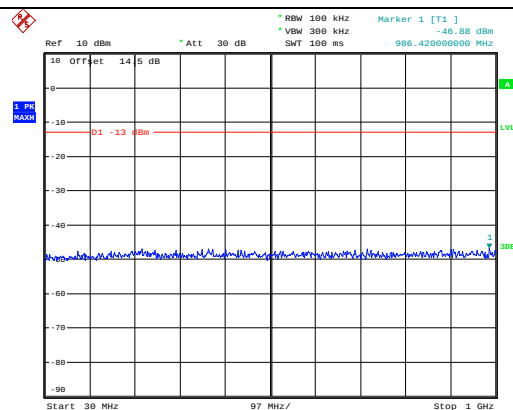


Date: 12.AUG.2023 21:04:26

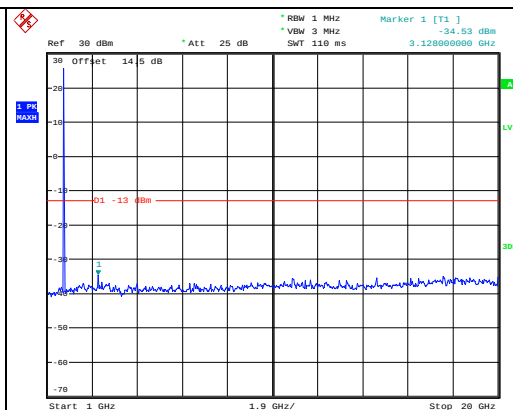


Date: 12.AUG.2023 21:04:38

Middle

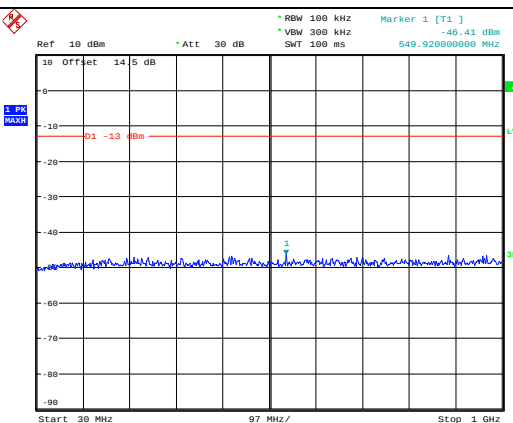


Date: 12.AUG.2023 21:04:51

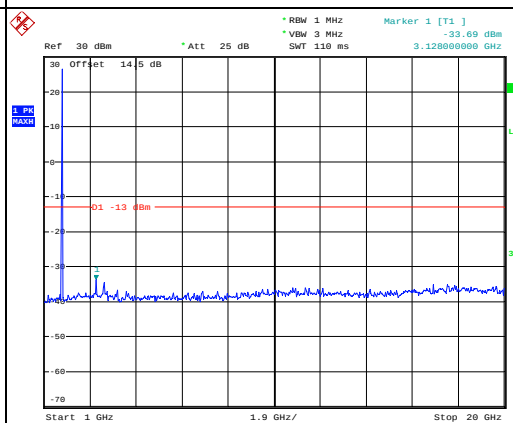


Date: 12.AUG.2023 21:05:02

Highest

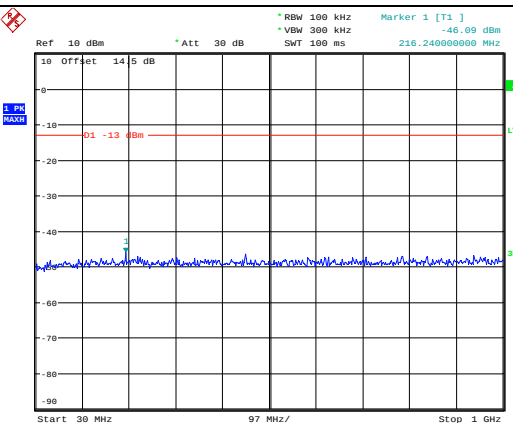

Date: 12.AUG.2023 21:05:16

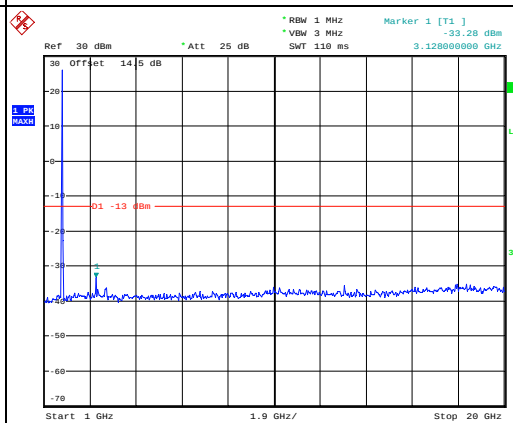


Date: 12.AUG.2023 21:05:28

Spurious Emissions at Antenna Terminal


Channel

3MHz Bandwidth QPSK

Lowest

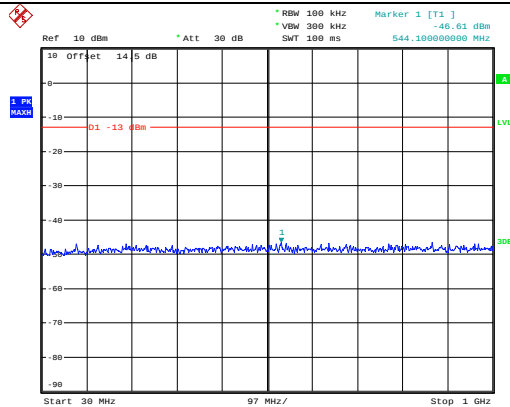


Date: 12.AUG.2023 21:06:18

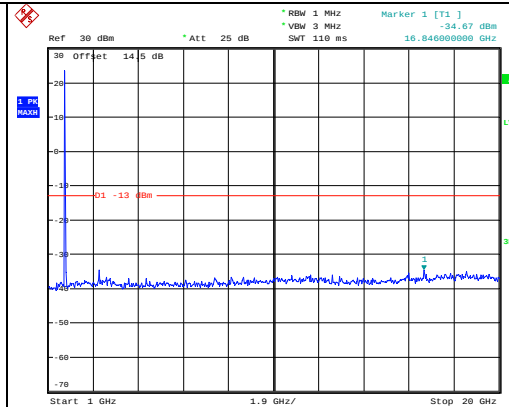


Date: 12.AUG.2023 21:06:29

Middle

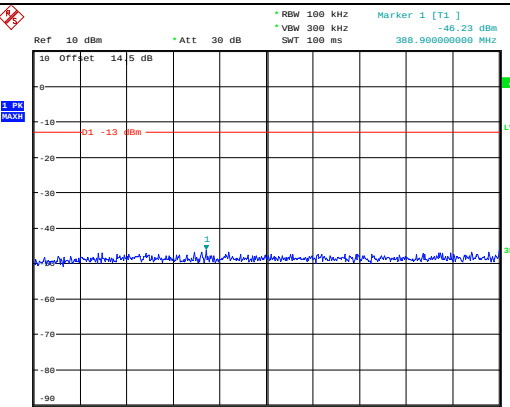


Date: 12.AUG.2023 21:06:46

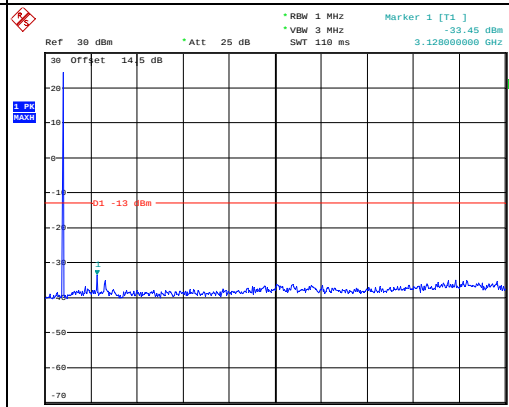


Date: 12.AUG.2023 21:06:57

Highest

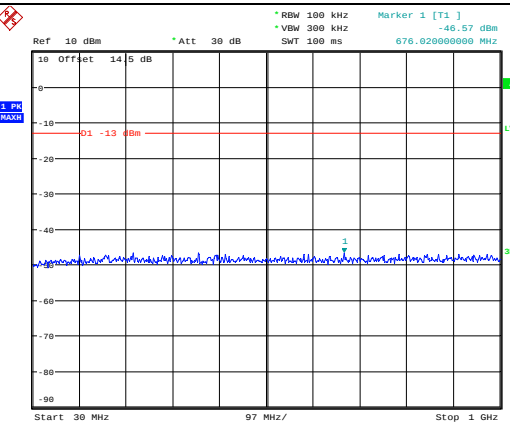

Date: 12.AUG.2023 21:07:14

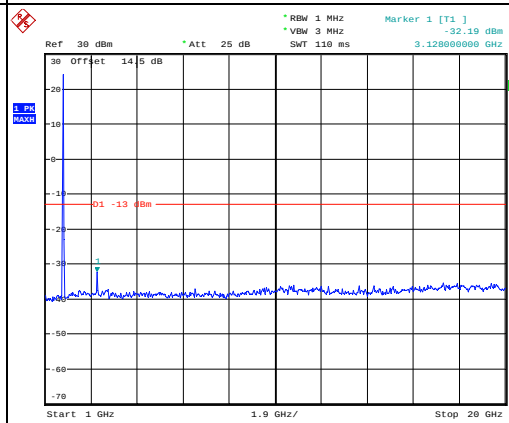


Date: 12.AUG.2023 21:07:25

Spurious Emissions at Antenna Terminal


Channel

5MHz Bandwidth QPSK

Lowest

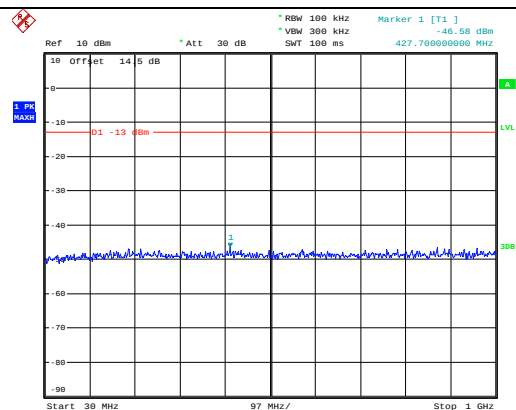


Date: 12.AUG.2023 21:08:12

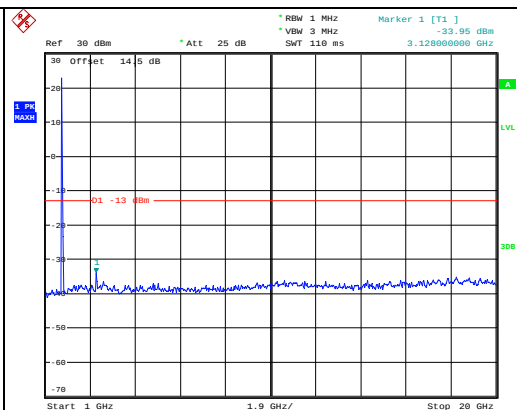


Date: 12.AUG.2023 21:08:23

Middle

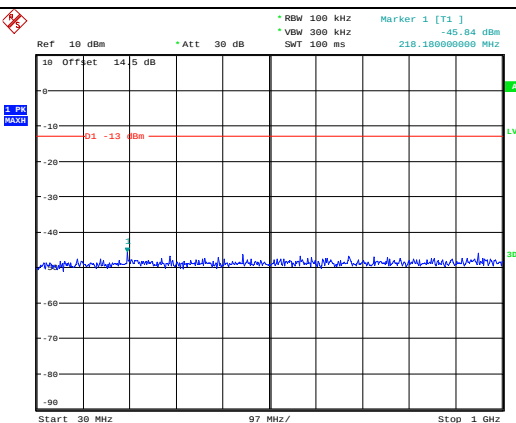


Date: 12.AUG.2023 21:08:37

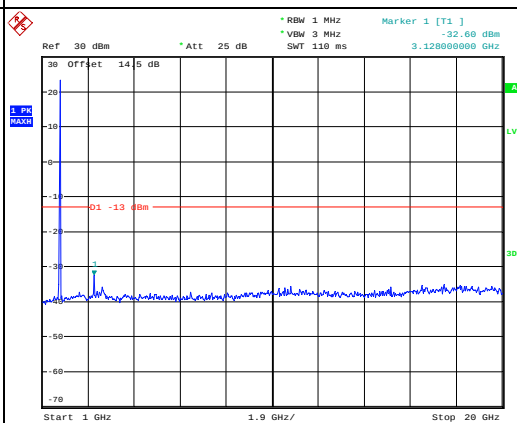


Date: 12.AUG.2023 21:08:48

Highest

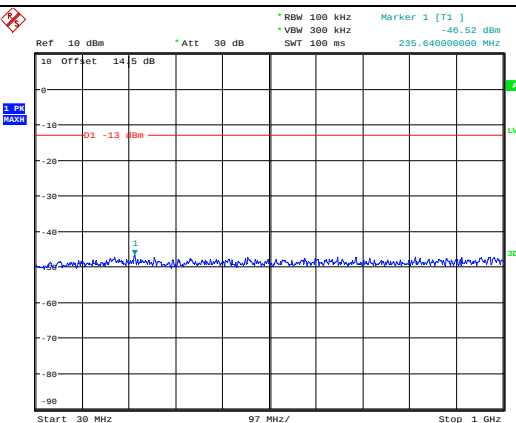

Date: 12.AUG.2023 21:09:02

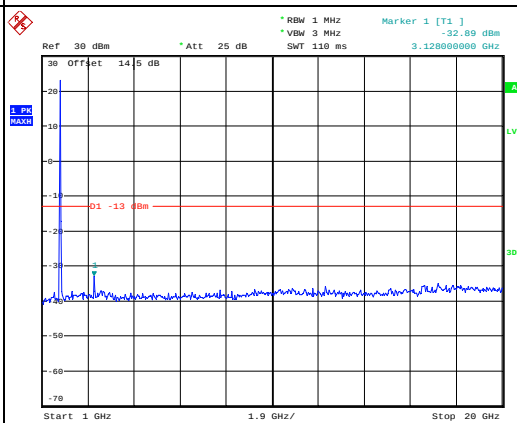


Date: 12.AUG.2023 21:09:13

Spurious Emissions at Antenna Terminal


Channel

10MHz Bandwidth QPSK

Lowest

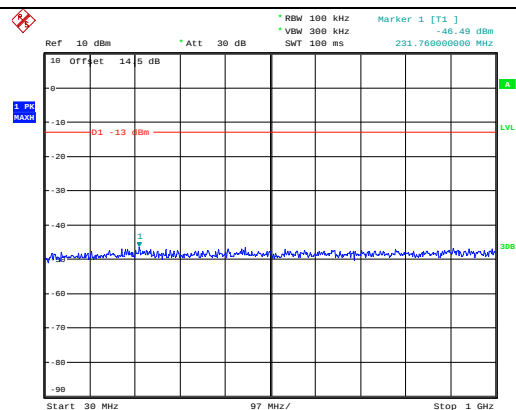


Date: 12.AUG.2023 21:10:03

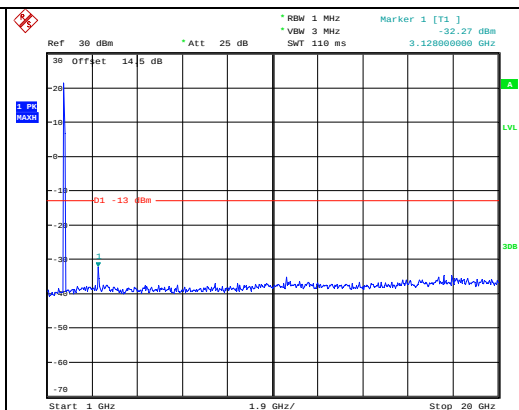


Date: 12.AUG.2023 21:10:14

Middle

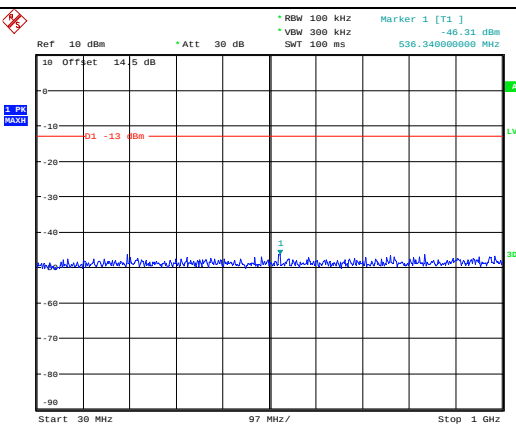


Date: 12.AUG.2023 21:10:28

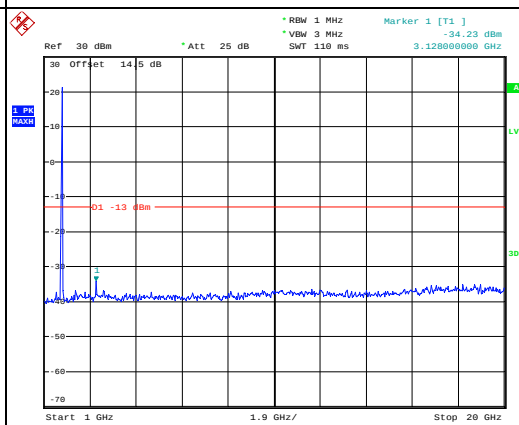


Date: 12.AUG.2023 21:10:41

Highest

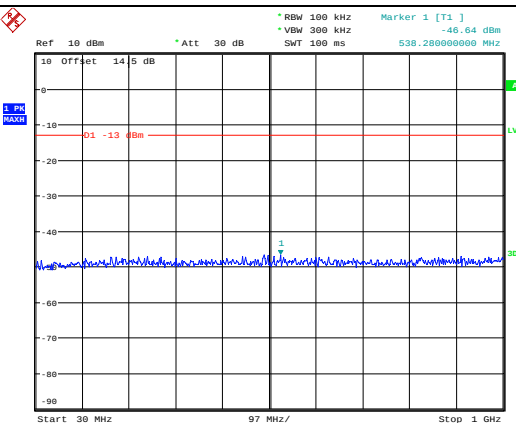

Date: 12.AUG.2023 21:10:54

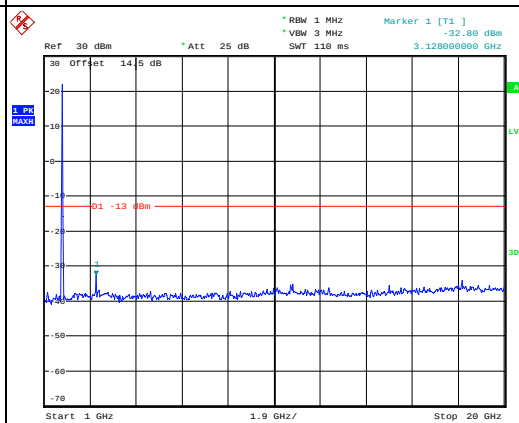


Date: 12.AUG.2023 21:11:06

Spurious Emissions at Antenna Terminal


Channel

15MHz Bandwidth QPSK

Lowest

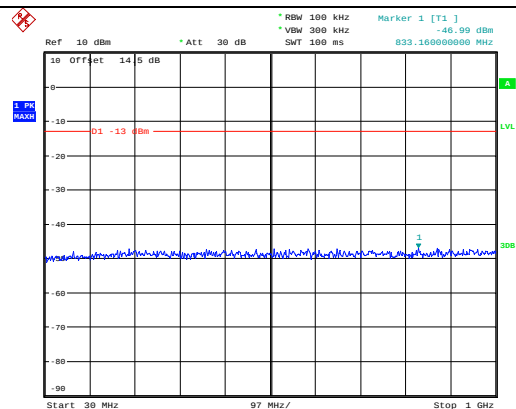


Date: 12.AUG.2023 21:11:52

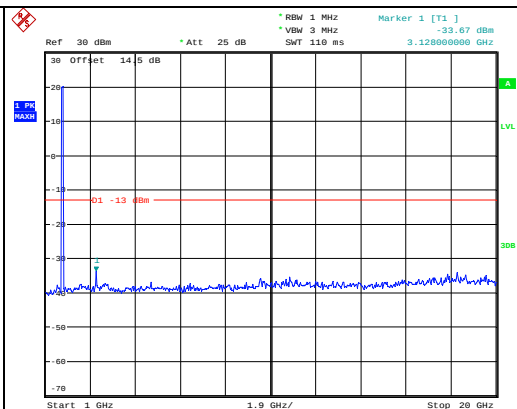


Date: 12.AUG.2023 21:12:04

Middle

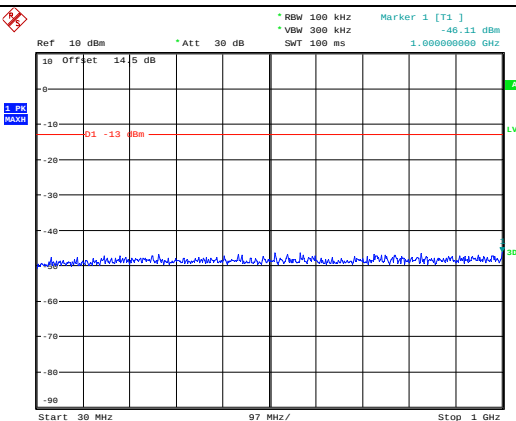


Date: 12.AUG.2023 21:12:20

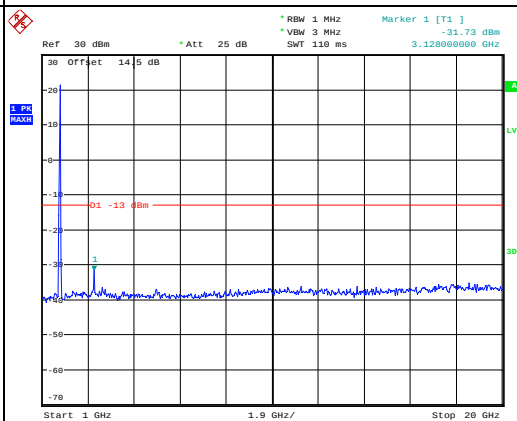


Date: 12.AUG.2023 21:12:32

Highest

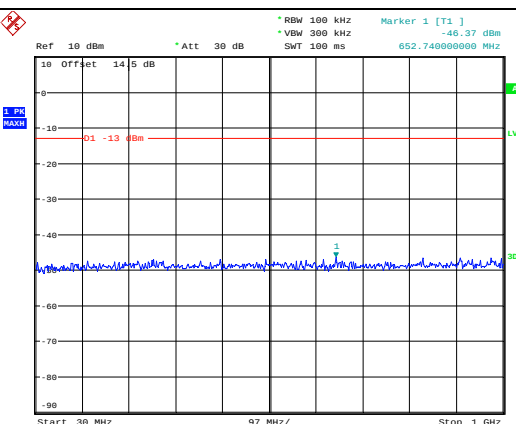

Date: 12.AUG.2023 21:12:45

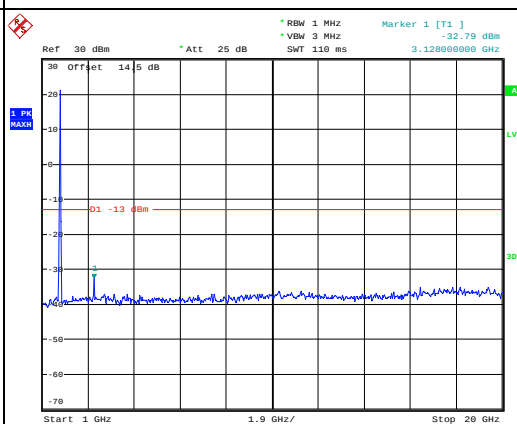


Date: 12.AUG.2023 21:12:56

Spurious Emissions at Antenna Terminal


Channel

20MHz Bandwidth QPSK

Lowest

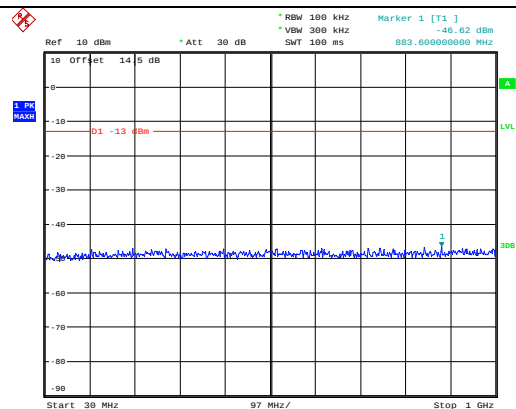


Date: 12.AUG.2023 21:13:43

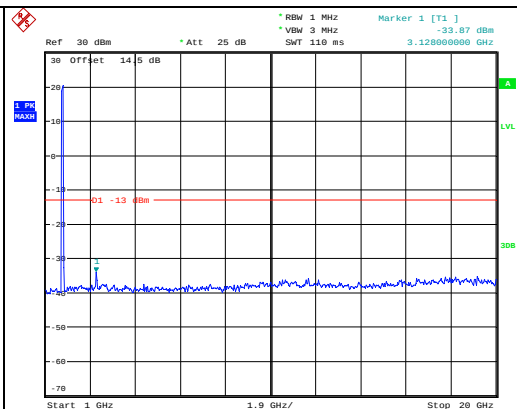


Date: 12.AUG.2023 21:13:55

Middle

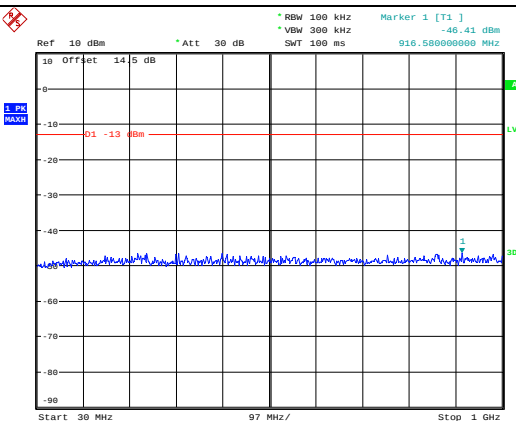


Date: 12.AUG.2023 21:14:08

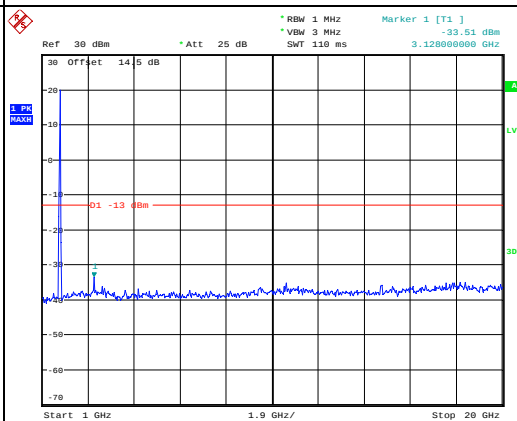


Date: 12.AUG.2023 21:14:19

Highest

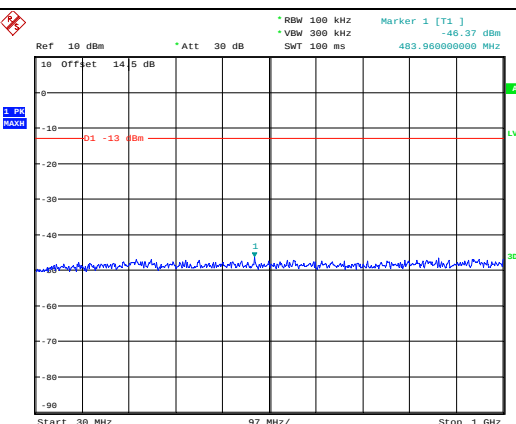


Date: 12.AUG.2023 21:14:36

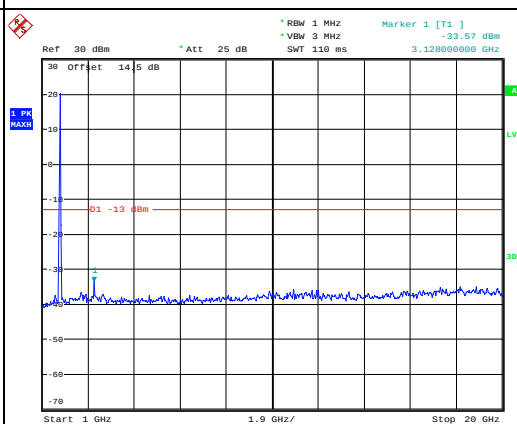


Date: 12.AUG.2023 21:14:48

Test Plots for Out of band emission, Band Edge:
Note: The test is performed in full RB mode.


Out of band emission, Band Edge

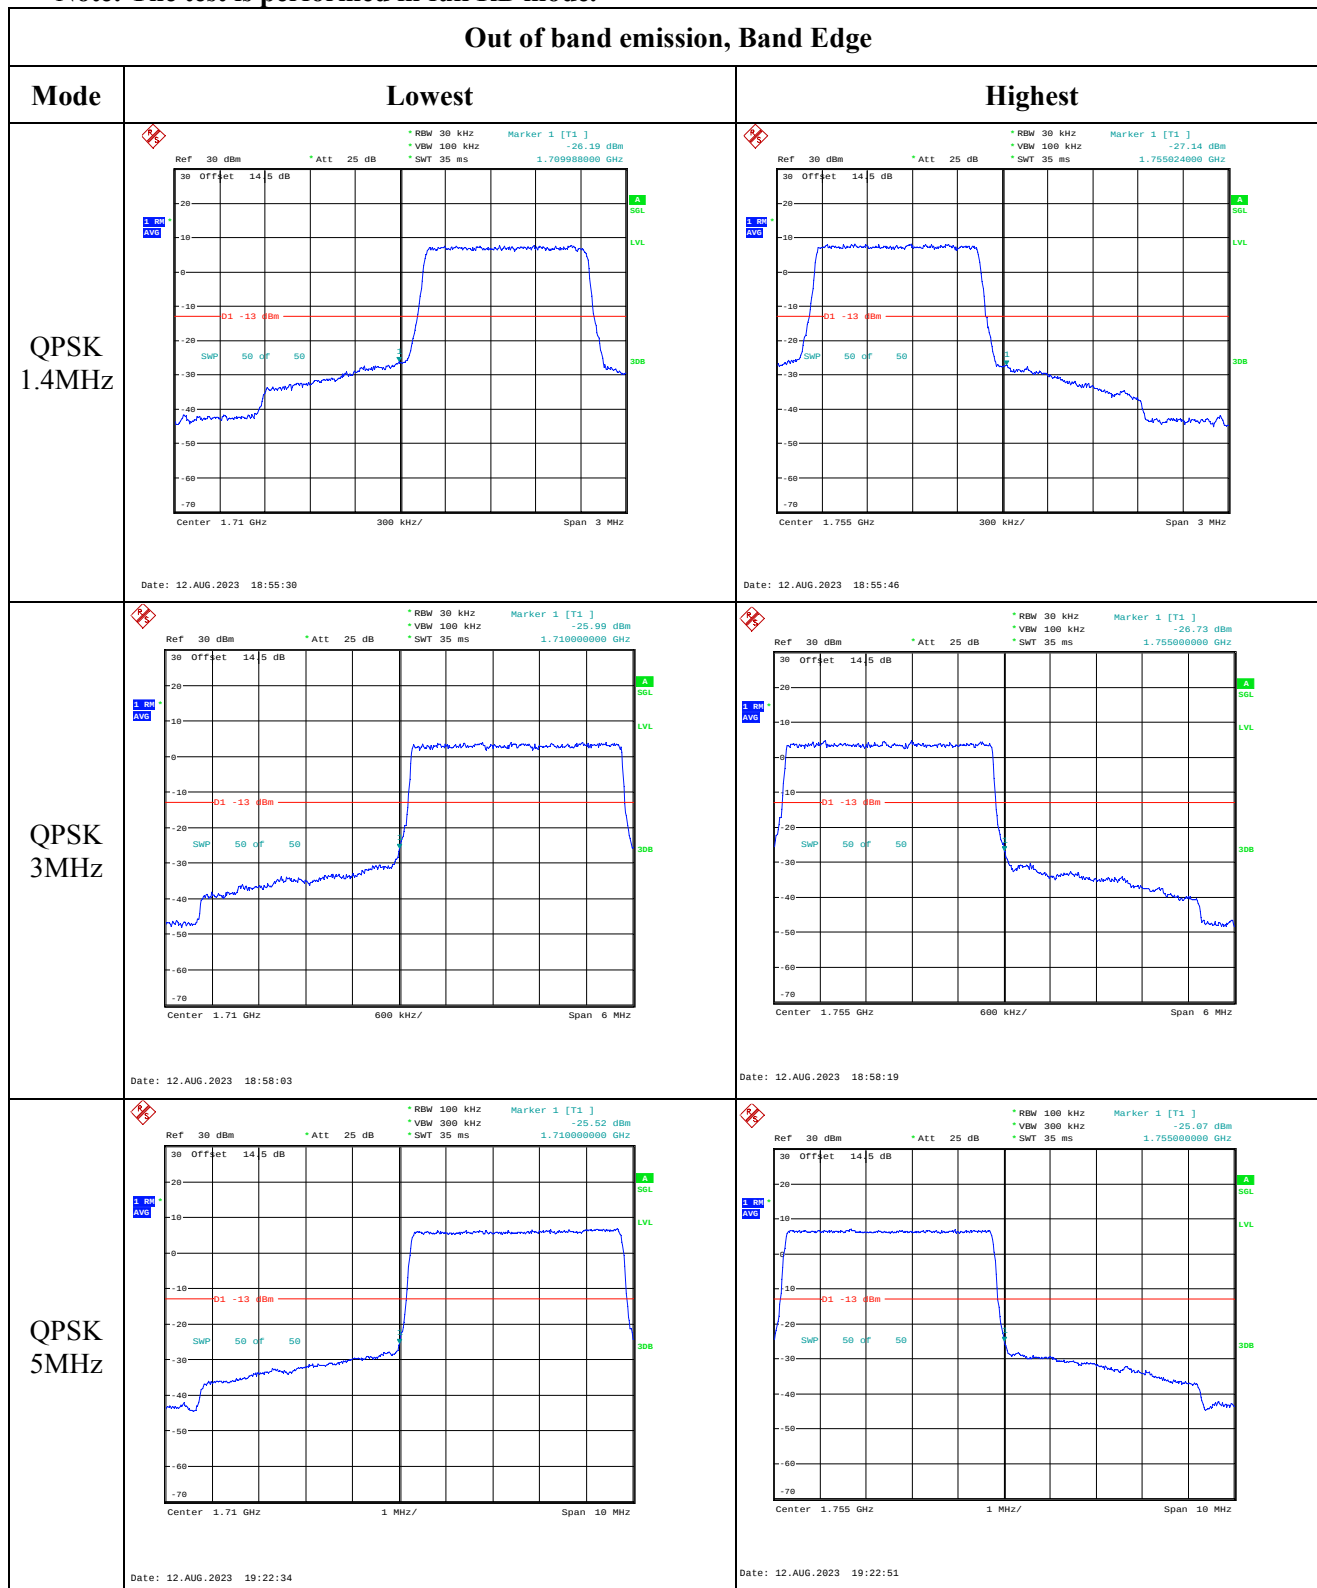







Out of band emission, Band Edge

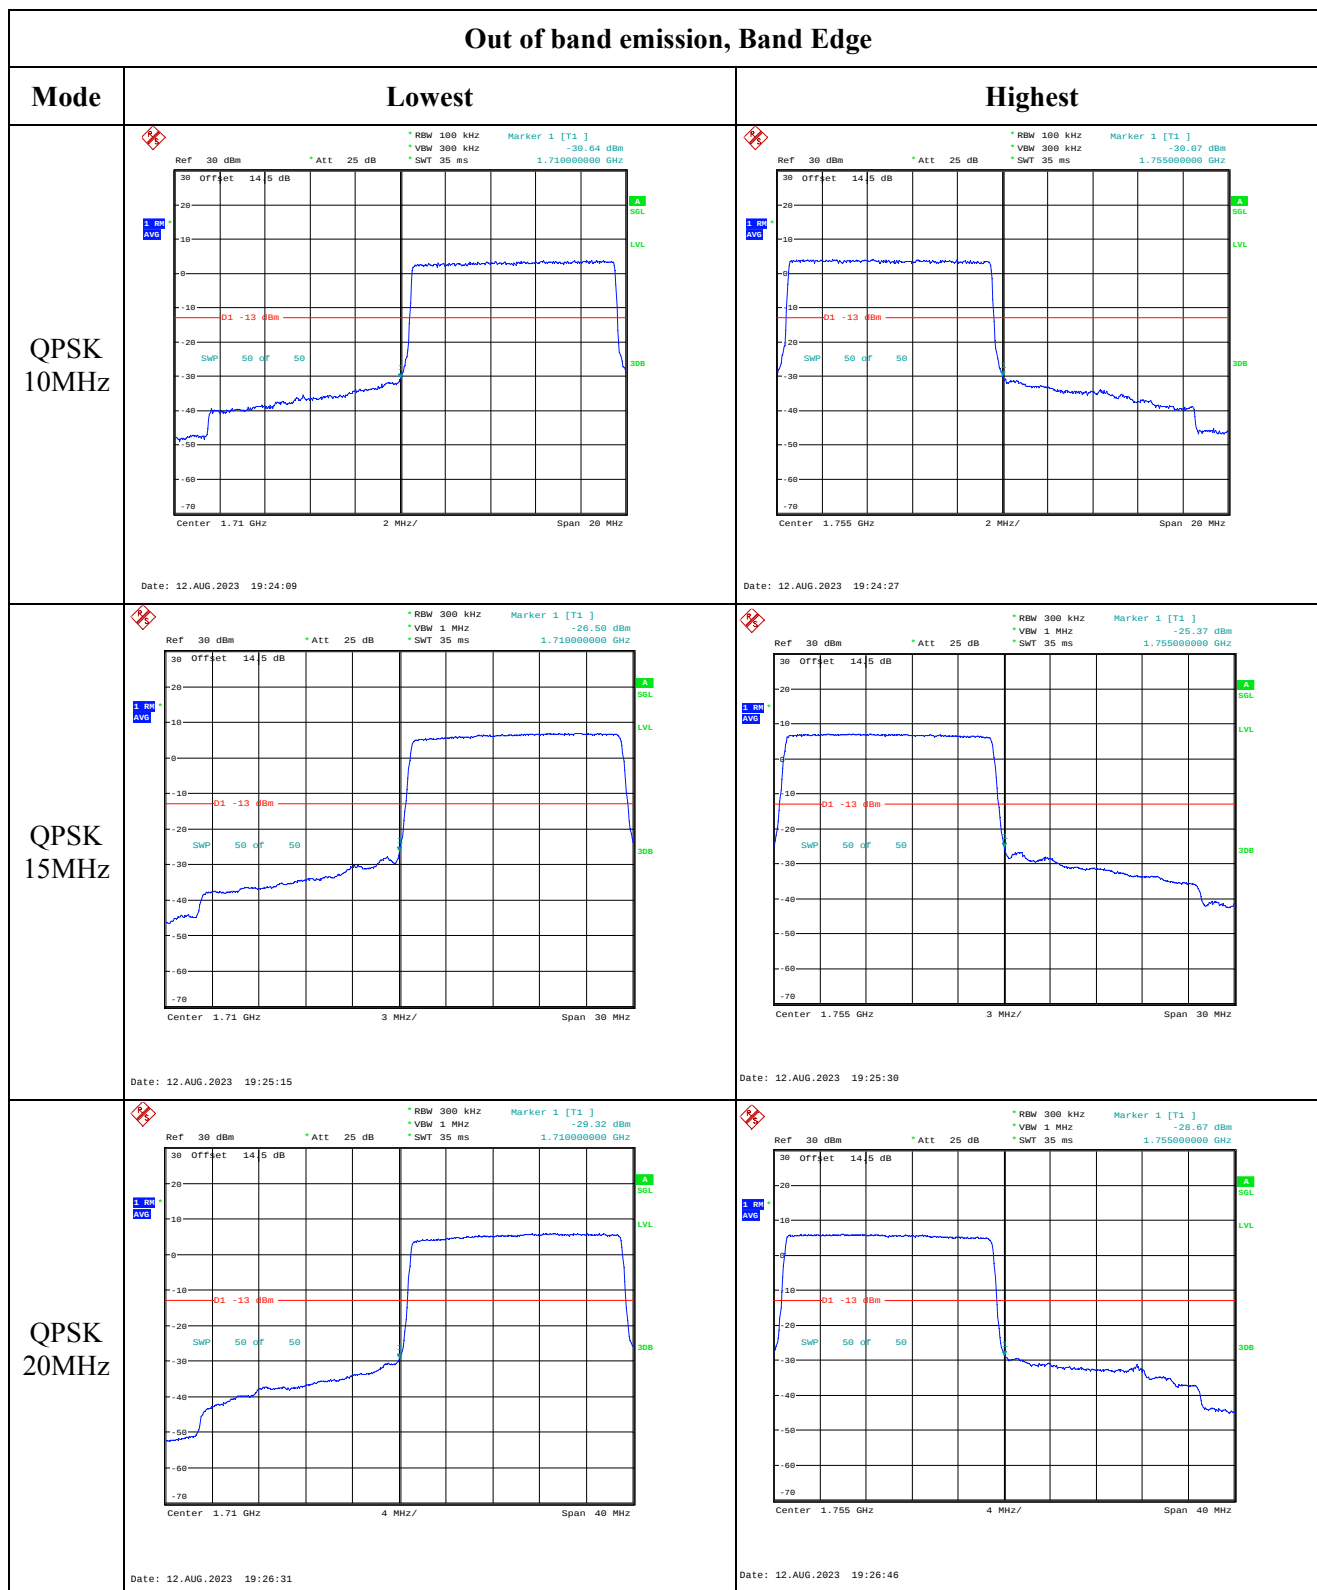


Out of band emission, Band Edge






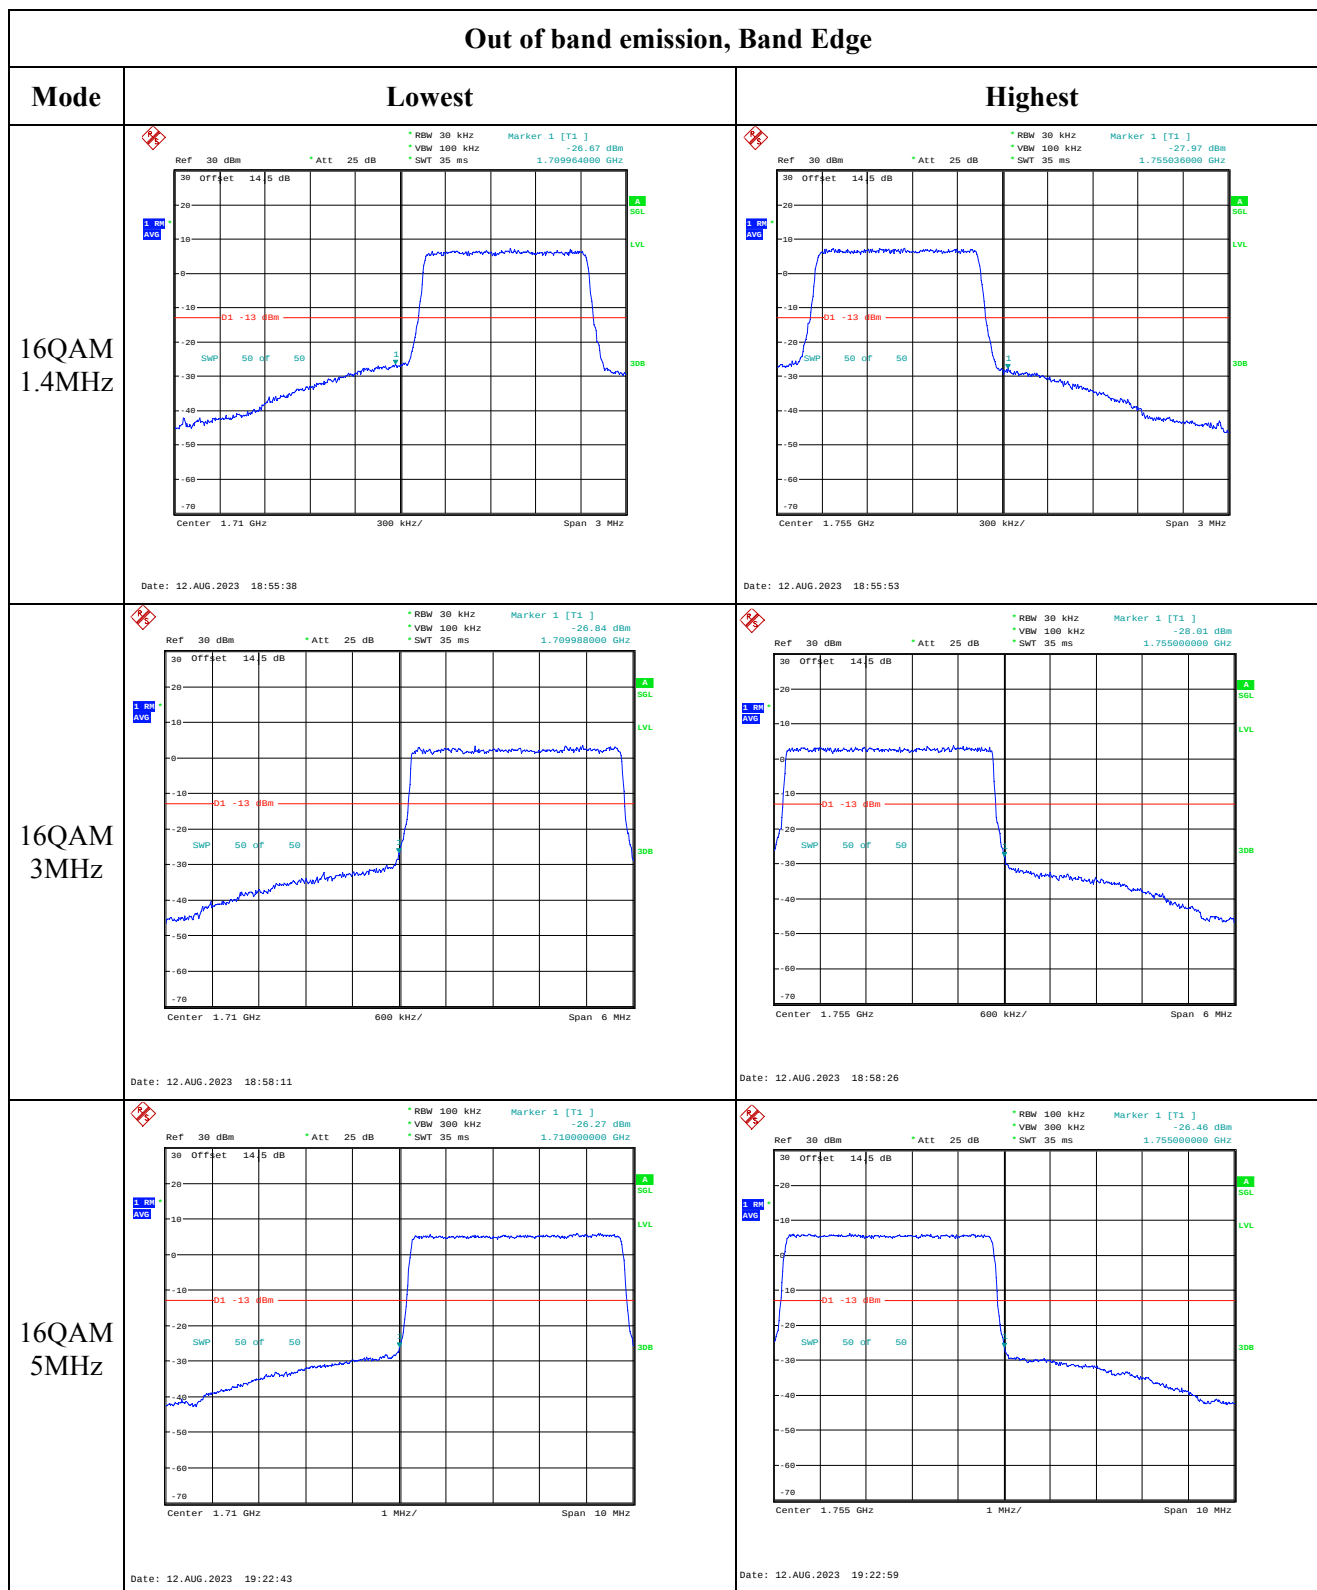


Out of band emission, Band Edge

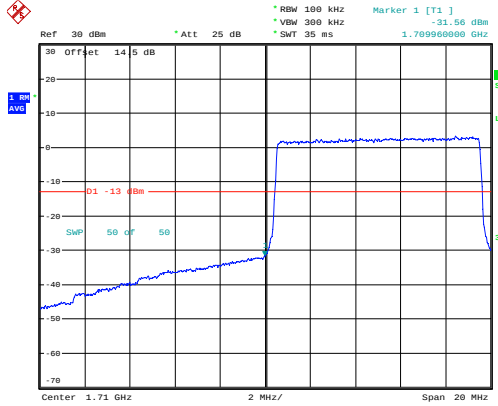
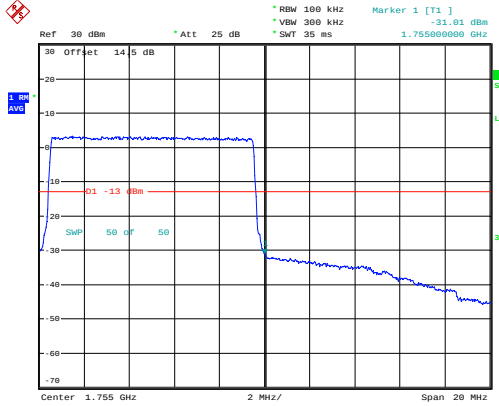
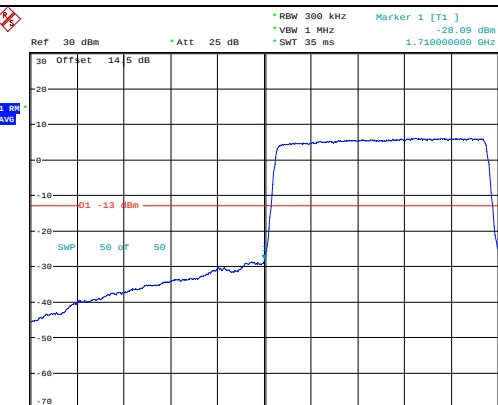
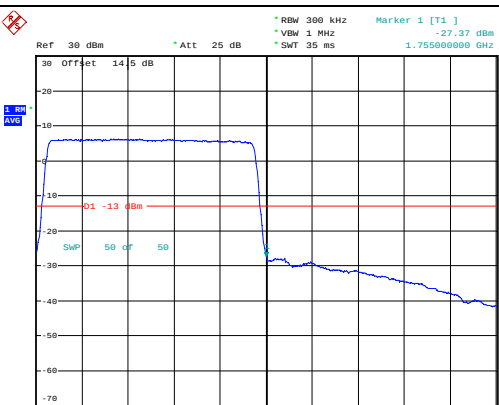
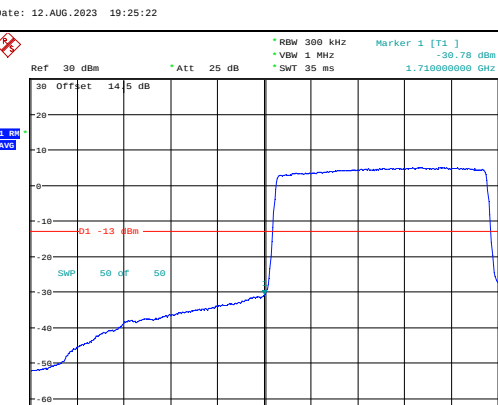
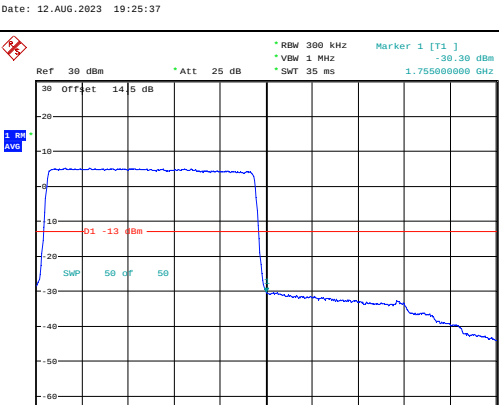
Mode	Lowest	Highest
16QAM 10MHz	 Ref 30 dBm Att 25 dB RBW 100 kHz Marker 1 [T1] -31.56 dBm VBW 300 kHz SWT 35 ms 1.709960000 GHz 30 Offset 14.5 dB SWP 50 OF 50 Center 1.71 GHz 2 MHz/ Span 20 MHz Date: 12.AUG.2023 19:24:18	 Ref 30 dBm Att 25 dB RBW 100 kHz Marker 1 [T1] -31.01 dBm VBW 300 kHz SWT 35 ms 1.755000000 GHz 30 Offset 14.5 dB SWP 50 OF 50 Center 1.755 GHz 2 MHz/ Span 20 MHz Date: 12.AUG.2023 19:24:36
16QAM 15MHz	 Ref 30 dBm Att 25 dB RBW 300 kHz Marker 1 [T1] -28.09 dBm VBW 1 MHz SWT 35 ms 1.710000000 GHz 30 Offset 14.5 dB SWP 50 OF 50 Center 1.71 GHz 3 MHz/ Span 30 MHz Date: 12.AUG.2023 19:25:22	 Ref 30 dBm Att 25 dB RBW 300 kHz Marker 1 [T1] -27.37 dBm VBW 1 MHz SWT 35 ms 1.755000000 GHz 30 Offset 14.5 dB SWP 50 OF 50 Center 1.755 GHz 3 MHz/ Span 30 MHz Date: 12.AUG.2023 19:25:37
16QAM 20MHz	 Ref 30 dBm Att 25 dB RBW 300 kHz Marker 1 [T1] -30.78 dBm VBW 1 MHz SWT 35 ms 1.710000000 GHz 30 Offset 14.5 dB SWP 50 OF 50 Center 1.71 GHz 4 MHz/ Span 40 MHz Date: 12.AUG.2023 19:26:38	 Ref 30 dBm Att 25 dB RBW 300 kHz Marker 1 [T1] -30.30 dBm VBW 1 MHz SWT 35 ms 1.755000000 GHz 30 Offset 14.5 dB SWP 50 OF 50 Center 1.755 GHz 4 MHz/ Span 40 MHz Date: 12.AUG.2023 19:26:53

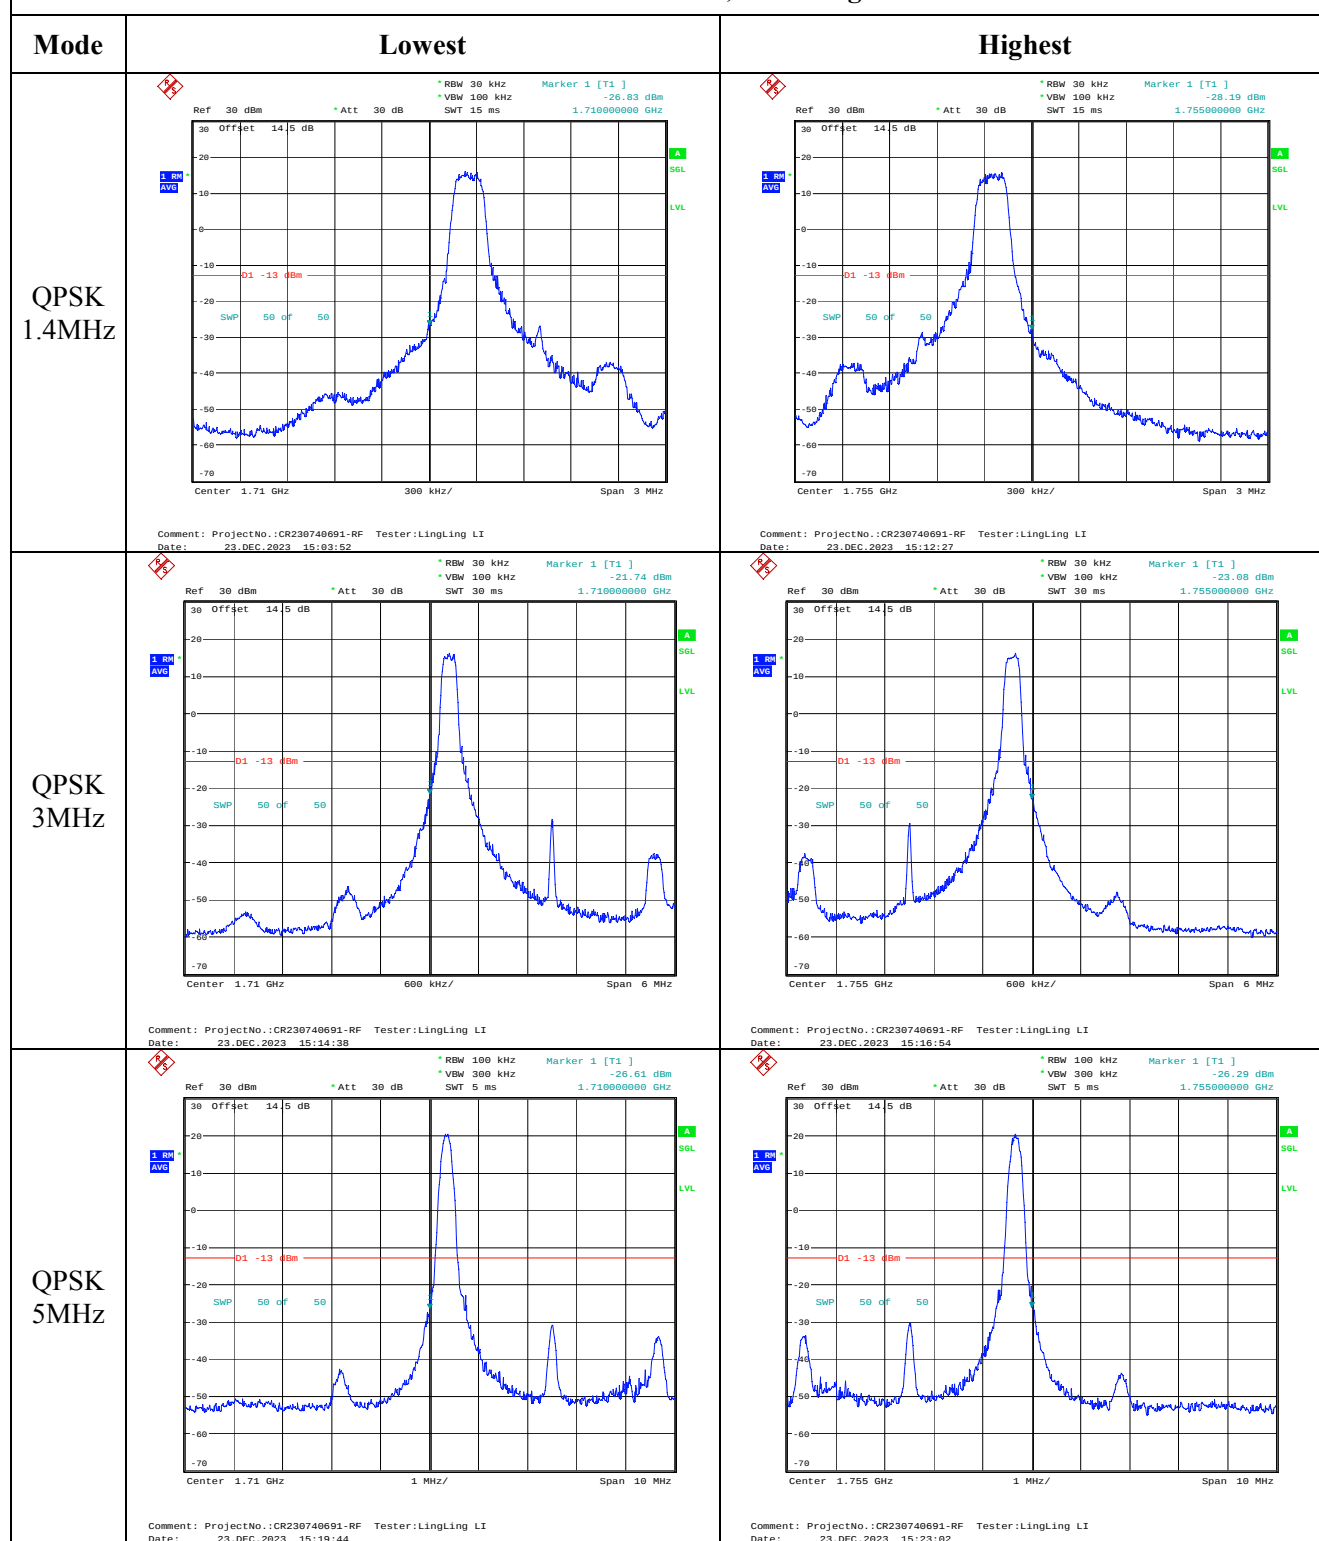Test Plots for Out of band emission, Band Edge:
Note: The test is performed in 1RB mode.**Out of band emission, Band Edge**







Out of band emission, Band Edge

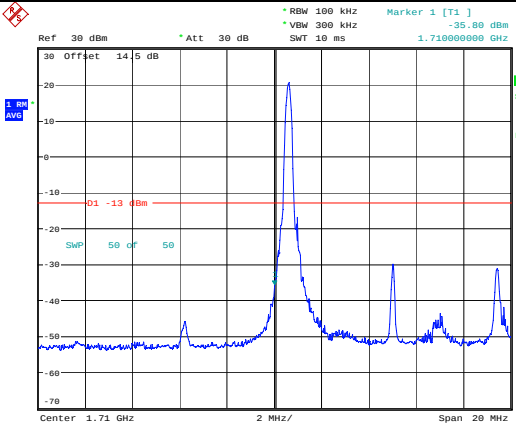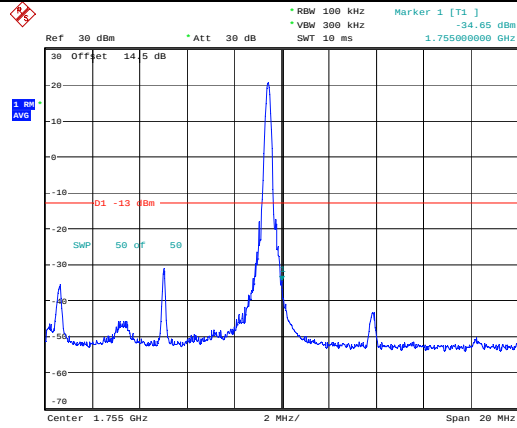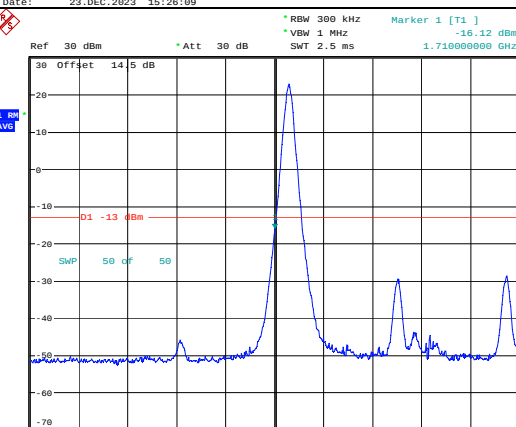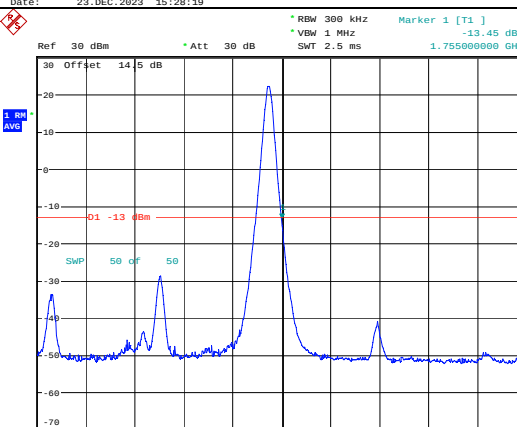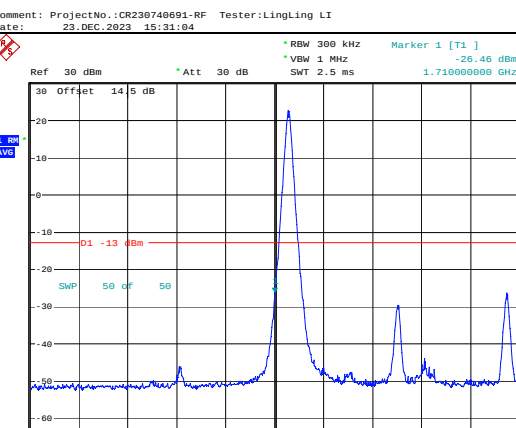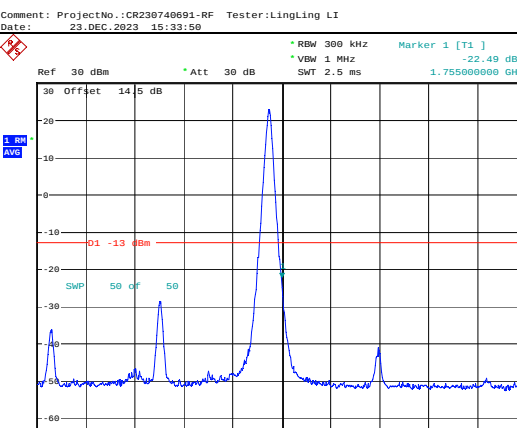Mode	Lowest	Highest
QPSK 10MHz	 Ref 30 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] -25.80 dBm *VBW 300 kHz SWT 10 ms 1.710000000 GHz 30 Offset 14.5 dB -20 -10 0 -10 -20 -30 -40 -50 -60 -70 Center 1.71 GHz 2 MHz/ Span 20 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23.DEC.2023 15:26:09	 Ref 30 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] -34.65 dBm *VBW 300 kHz SWT 10 ms 1.755000000 GHz 30 Offset 14.5 dB -20 -10 0 -10 -20 -30 -40 -50 -60 -70 Center 1.755 GHz 2 MHz/ Span 20 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23.DEC.2023 15:28:19
QPSK 15MHz	 Ref 30 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -26.46 dBm *VBW 1 MHz SWT 2.5 ms 1.710000000 GHz 30 Offset 14.5 dB -20 -10 0 -10 -20 -30 -40 -50 -60 -70 Center 1.71 GHz 3 MHz/ Span 30 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23.DEC.2023 15:31:04	 Ref 30 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -22.45 dBm *VBW 1 MHz SWT 2.5 ms 1.755000000 GHz 30 Offset 14.5 dB -20 -10 0 -10 -20 -30 -40 -50 -60 -70 Center 1.755 GHz 3 MHz/ Span 30 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23.DEC.2023 15:33:50
QPSK 20MHz	 Ref 30 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -26.46 dBm *VBW 1 MHz SWT 2.5 ms 1.710000000 GHz 30 Offset 14.5 dB -20 -10 0 -10 -20 -30 -40 -50 -60 -70 Center 1.71 GHz 4 MHz/ Span 40 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23.DEC.2023 15:36:11	 Ref 30 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -22.49 dBm *VBW 1 MHz SWT 2.5 ms 1.755000000 GHz 30 Offset 14.5 dB -20 -10 0 -10 -20 -30 -40 -50 -60 -70 Center 1.755 GHz 4 MHz/ Span 40 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23.DEC.2023 15:38:25

Out of band emission, Band Edge

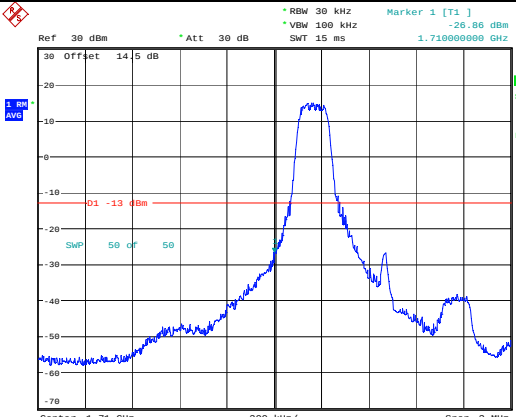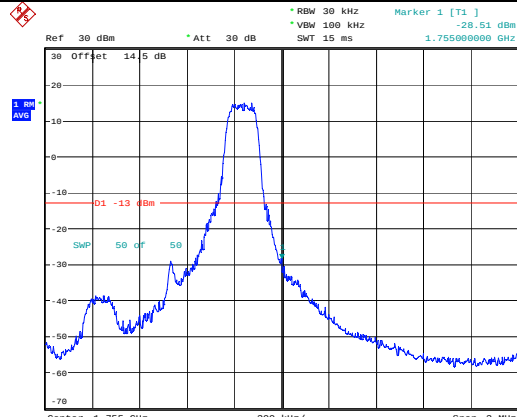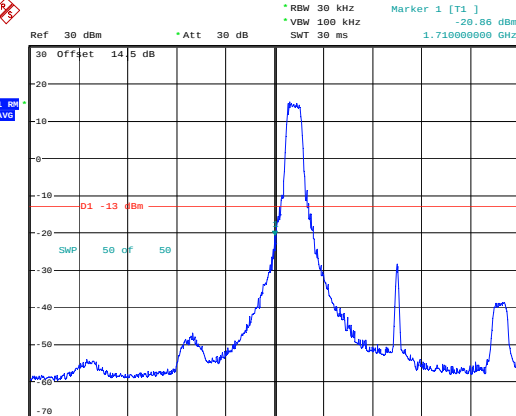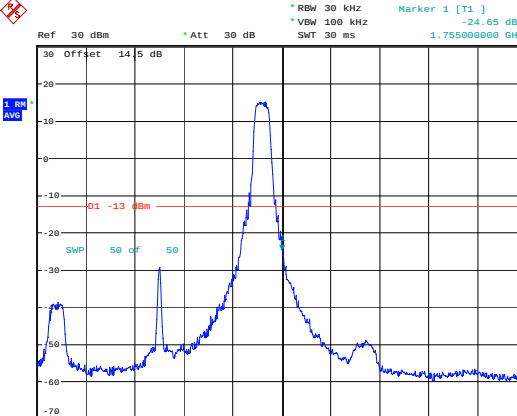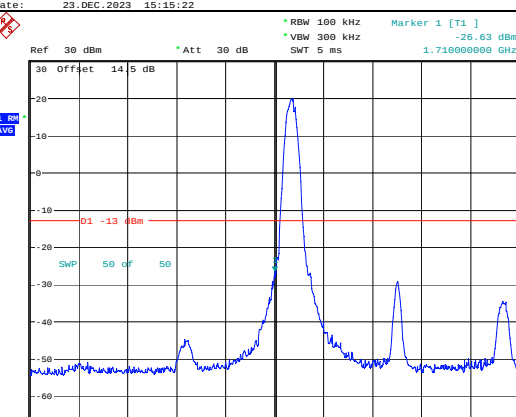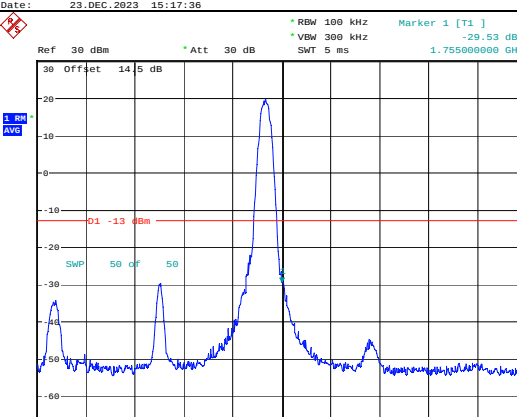Mode	Lowest	Highest
16QAM 1.4MHz	 Ref 30 dBm *Att 30 dB *RBW 30 kHz Marker 1 [T1] -26.86 dBm *VBW 100 kHz SWT 15 ms 1.710000000 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 D1 -13 dBm SWP 50 off 50 Center 1.71 GHz 300 kHz/ Span 3 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23_DEC.2023 15:04:57	 Ref 30 dBm *Att 30 dB *RBW 30 kHz Marker 1 [T1] -28.51 dBm *VBW 100 kHz SWT 15 ms 1.755000000 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 D1 -13 dBm SWP 50 off 50 Center 1.755 GHz 300 kHz/ Span 3 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23_DEC.2023 15:11:45
16QAM 3MHz	 Ref 30 dBm *Att 30 dB *RBW 30 kHz Marker 1 [T1] -26.83 dBm *VBW 100 kHz SWT 30 ms 1.710000000 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 D1 -13 dBm SWP 50 off 50 Center 1.71 GHz 600 kHz/ Span 6 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23_DEC.2023 15:15:22	 Ref 30 dBm *Att 30 dB *RBW 30 kHz Marker 1 [T1] -26.55 dBm *VBW 100 kHz SWT 30 ms 1.755000000 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 D1 -13 dBm SWP 50 off 50 Center 1.755 GHz 600 kHz/ Span 6 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23_DEC.2023 15:17:36
16QAM 5MHz	 Ref 30 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] -26.83 dBm *VBW 300 kHz SWT 5 ms 1.710000000 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 D1 -13 dBm SWP 50 off 50 Center 1.71 GHz 1 MHz/ Span 10 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23_DEC.2023 15:21:07	 Ref 30 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] -29.53 dBm *VBW 300 kHz SWT 5 ms 1.755000000 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 D1 -13 dBm SWP 50 off 50 Center 1.755 GHz 1 MHz/ Span 10 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23_DEC.2023 15:22:15

Out of band emission, Band Edge

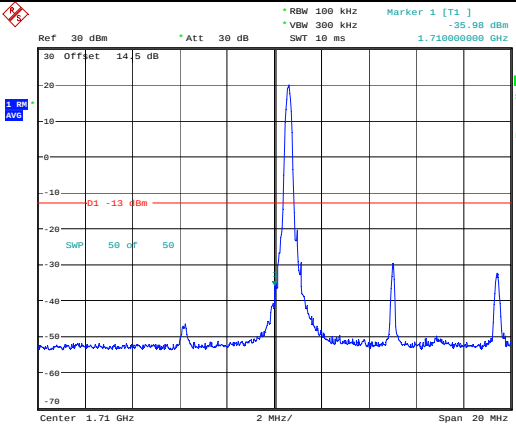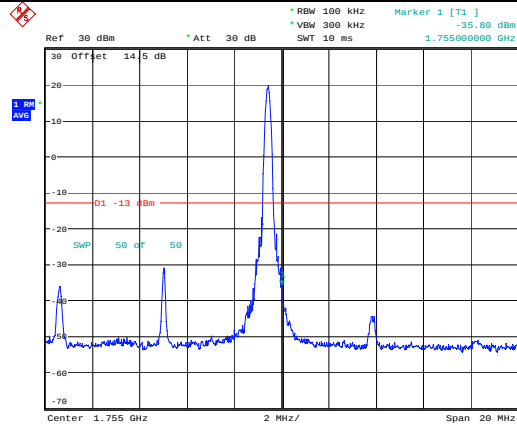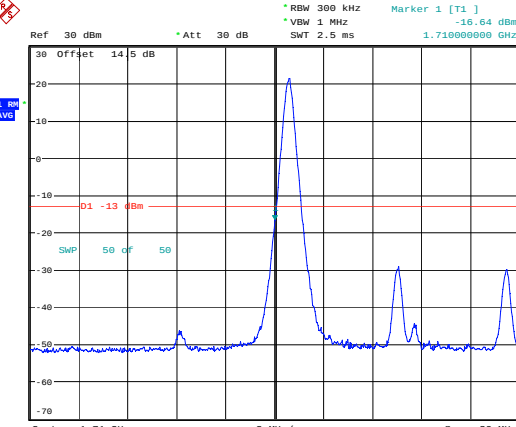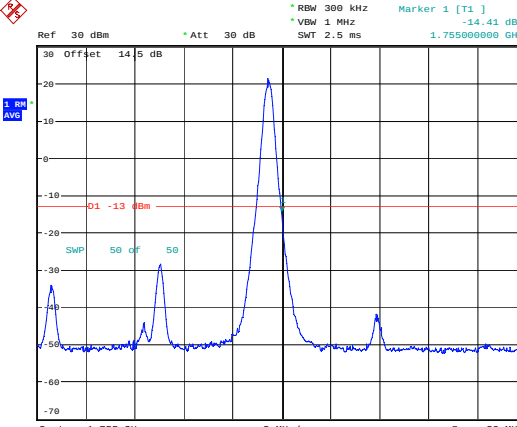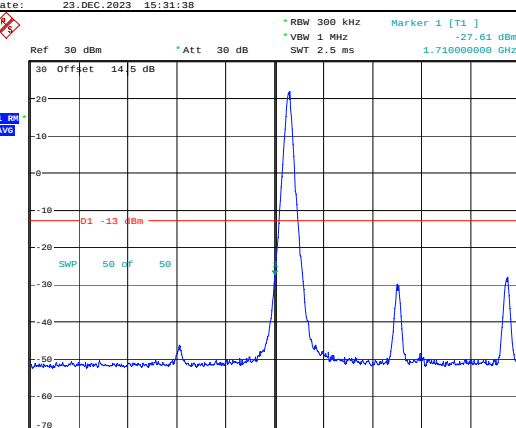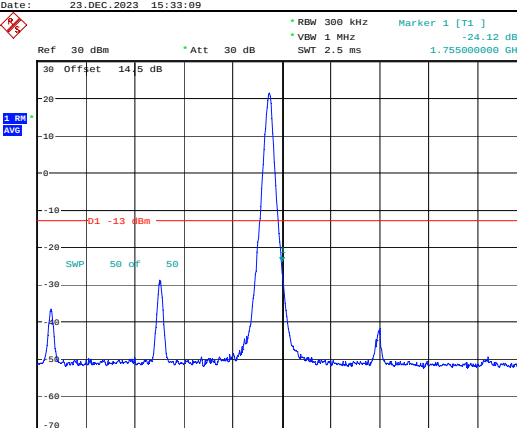Mode	Lowest	Highest
16QAM 10MHz	 Ref 30 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] -35.98 dBm *VBW 300 kHz *SWT 10 ms 1.710000000 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 D1 -13 dBm SWP 50 dB 50 Center 1.71 GHz 2 MHz/ Span 20 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23.DEC.2023 15:26:51	 Ref 30 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] -35.80 dBm *VBW 300 kHz *SWT 10 ms 1.755000000 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 D1 -13 dBm SWP 50 dB 50 Center 1.755 GHz 2 MHz/ Span 20 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23.DEC.2023 15:27:49
16QAM 15MHz	 Ref 30 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -27.64 dBm *VBW 1 MHz *SWT 2.5 ms 1.710000000 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 D1 -13 dBm SWP 50 dB 50 Center 1.71 GHz 3 MHz/ Span 30 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23.DEC.2023 15:31:38	 Ref 30 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -24.41 dBm *VBW 1 MHz *SWT 2.5 ms 1.755000000 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 D1 -13 dBm SWP 50 dB 50 Center 1.755 GHz 3 MHz/ Span 30 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23.DEC.2023 15:33:09
16QAM 20MHz	 Ref 30 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -27.61 dBm *VBW 1 MHz *SWT 2.5 ms 1.710000000 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 D1 -13 dBm SWP 50 dB 50 Center 1.71 GHz 4 MHz/ Span 40 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23.DEC.2023 15:36:34	 Ref 30 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -24.12 dBm *VBW 1 MHz *SWT 2.5 ms 1.755000000 GHz 30 Offset 14.5 dB -20 -10 0 10 20 30 40 50 60 70 D1 -13 dBm SWP 50 dB 50 Center 1.755 GHz 4 MHz/ Span 40 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23.DEC.2023 15:37:53

4.6 Antenna Port Test Data and Results for LTE Band 5

Serial Number:	288V-1	Test Date:	2023/8/4-2023/12/23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Claire Liu/Arthur Su/LingLing Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.3-26.1	Relative Humidity: (%)	42-62	ATM Pressure: (kPa)	99.7-101.9
-------------------	-----------	------------------------	-------	---------------------	------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency for Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	824.7	836.5	848.3
3MHz	825.5	836.5	847.5
5MHz	826.5	836.5	846.5
10MHz	829	836.5	844

Test Data:**FCC§2.1046;§ 22.913 (a)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	25.03	24.97	25.03	20.07	38.45
	RB1#3	25.08	25.03	25.04		
	RB1#5	25.06	24.97	24.96		
	RB3#0	25.08	25.11	25.06		
	RB3#3	25.09	25.07	25.08		
	RB6#0	24	23.98	23.98		
1.4MHz 16QAM	RB1#0	24.15	24.14	24.25	19.35	38.45
	RB1#3	24.24	24.15	24.27		
	RB1#5	24.14	24.12	24.14		
	RB3#0	24.3	24.34	24.15		
	RB3#3	24.27	24.39	24.16		
	RB6#0	23.06	23.14	23.12		
3MHz QPSK	RB1#0	25.11	25.11	25.08	20.07	38.45
	RB1#8	25	25.05	25		
	RB1#14	25.04	25.05	25.04		
	RB6#0	24.08	24.13	24.12		
	RB6#9	24.01	24.07	24.06		
	RB15#0	24.08	24.13	24.12		
3MHz 16QAM	RB1#0	24.31	24.25	24.74	19.7	38.45
	RB1#8	24.26	24.17	24.64		
	RB1#14	24.26	24.16	24.64		
	RB6#0	23.23	23.17	23.27		
	RB6#9	23.17	23.13	23.28		
	RB15#0	23.19	23.26	23.36		
5MHz QPSK	RB1#0	25.17	25.13	25.06	20.13	38.45
	RB1#13	25.15	25.14	25.15		
	RB1#24	25.16	25.14	25.1		
	RB15#0	24.26	24.21	24.09		
	RB15#10	24.2	24.14	24.13		
	RB25#0	24.22	24.14	24.05		
5MHz 16QAM	RB1#0	24.28	24.14	24.43	19.5	38.45
	RB1#13	24.34	24.15	24.54		
	RB1#24	24.3	24.13	24.47		
	RB15#0	23.38	23.29	23.19		
	RB15#10	23.33	23.26	23.29		
	RB25#0	23.37	23.32	23.19		
10MHz QPSK	RB1#0	25.16	25.12	25.17	20.14	38.45
	RB1#25	25.16	25.06	25.04		
	RB1#49	25.18	25.12	25.06		

10MHz 16QAM	RB25#0	24.23	24.21	24.2	19.73	38.45
	RB25#25	24.25	24.12	24.14		
	RB50#0	24.18	24.16	24.18		
	RB1#0	24.3	24.77	24.4		
	RB1#25	24.27	24.73	24.28		
	RB1#49	24.22	24.72	24.29		
	RB25#0	23.43	23.38	23.3		
	RB25#25	23.42	23.3	23.27		
	RB50#0	23.32	23.32	23.25		

Note:

ERP= Conducted Power(dBm) - Lc(dB) + Gr(dBd)

Gr(dBd)=Gr(dBi)-2.15

Result:

Pass

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit(dB)
		Lowest Channel	Middle Channel	Highest Channel	
10MHz QPSK	RB1#0	3.72	3.65	3.65	13
	RB50#0	5.29	4.94	5.38	13
10MHz 16QAM	RB1#0	5.77	5.45	5.45	13
	RB50#0	6.51	6.19	6.51	13
				Result:	Pass

FCC §2.1049, §22.905:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.098	1.098	1.104	1.248	1.248	1.248
1.4MHz 16QAM	1.092	1.098	1.092	1.248	1.248	1.230
3MHz QPSK	2.687	2.687	2.7	2.976	2.964	2.9
3MHz 16QAM	2.687	2.687	2.7	2.964	2.976	3.0
5MHz QPSK	4.52	4.52	4.52	5.00	4.96	5.00
5MHz 16QAM	4.52	4.52	4.5	4.98	4.98	4.9
10MHz QPSK	8.96	8.92	8.96	9.68	9.60	9.68
10MHz 16QAM	8.96	8.96	8.96	9.60	9.64	9.72

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
---------	---


FCC §2.1051, §22.917(a):Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
---------	--







FCC §2.1055, §22.355: Frequency Stability					
Test Modulation:	10 MHz QPSK		Test Channel:	836.5	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	5	28	0.033	2.5
	-20	5	39	0.046	2.5
	-10	5	1	0.001	2.5
	0	5	17	0.020	2.5
	10	5	5	0.005	2.5
	20	5	19	0.023	2.5
	30	5	8	0.009	2.5
	40	5	9	0.011	2.5
	50	5	56	0.067	2.5
Frequency Stability vs. Voltage	20	4.4	25	0.029	2.5
	20	5.25	23	0.028	2.5
				Result:	Pass

Test Modulation:	10 MHz 16QAM		Test Channel:	836.5	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	5	45	0.054	2.5
	-20	5	37	0.044	2.5
	-10	5	6	0.007	2.5
	0	5	18	0.022	2.5
	10	5	9	0.011	2.5
	20	5	13	0.016	2.5
	30	5	6	0.007	2.5
	40	5	9	0.011	2.5
	50	5	42	0.050	2.5
Frequency Stability vs. Voltage	20	4.4	16	0.019	2.5
	20	5.25	28	0.033	2.5
				Result:	Pass







Test Plots(Note: The 14.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

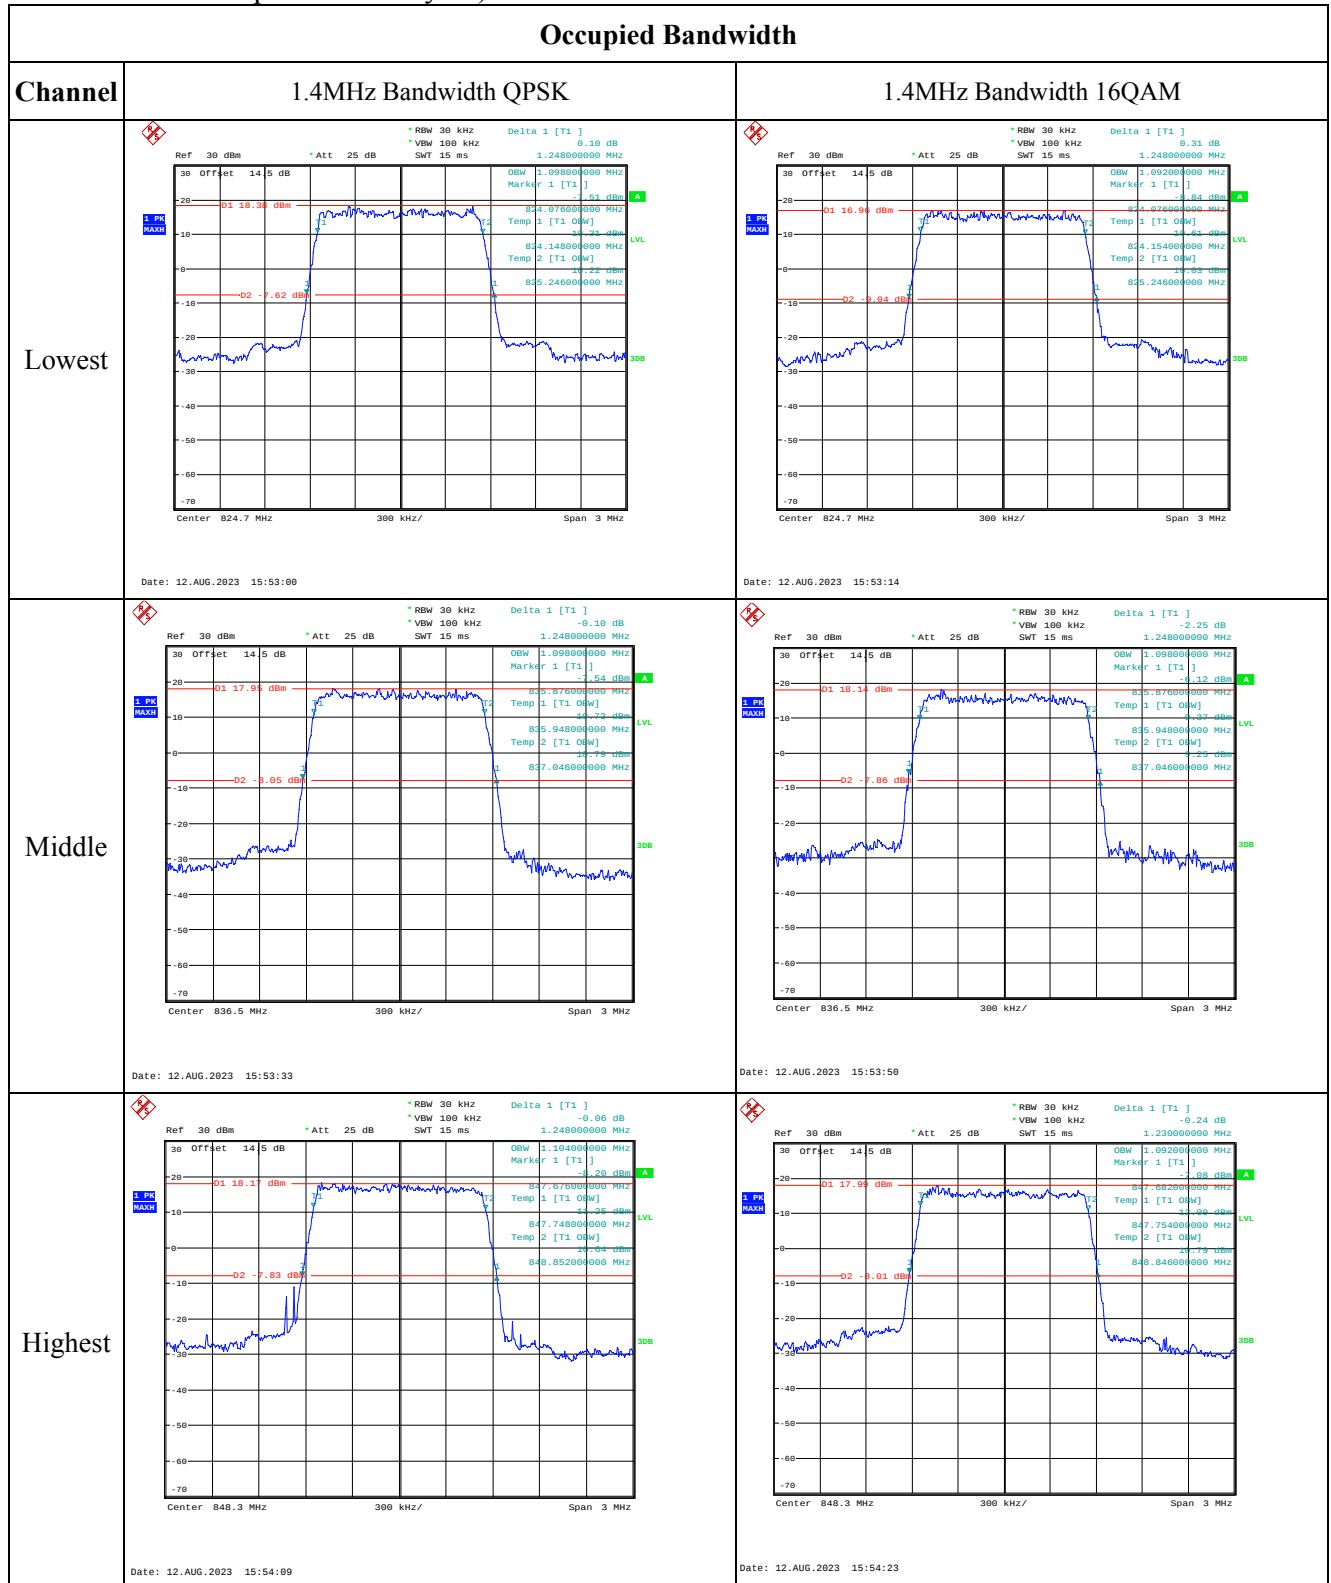

Occupied Bandwidth

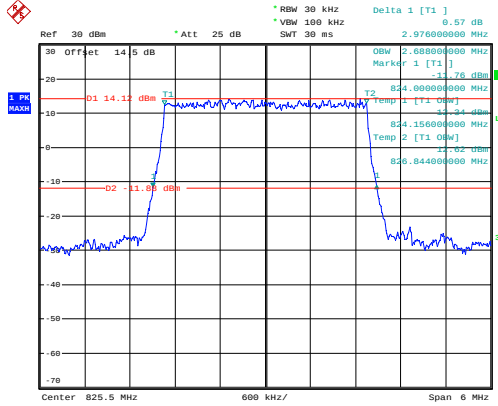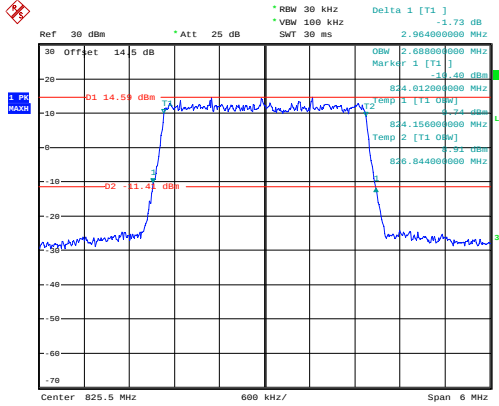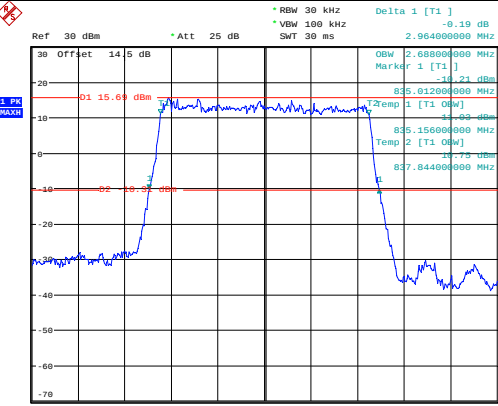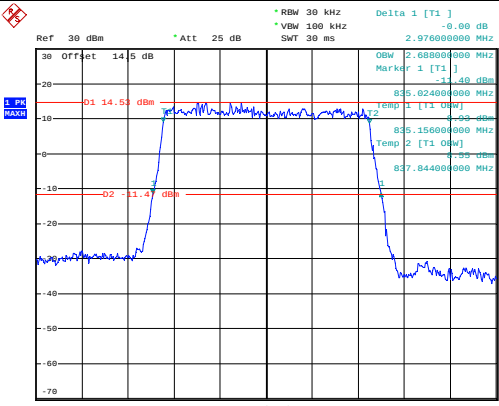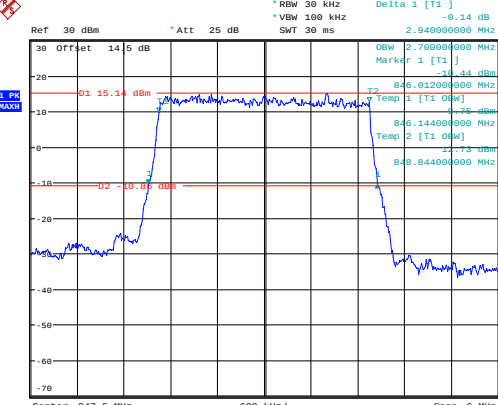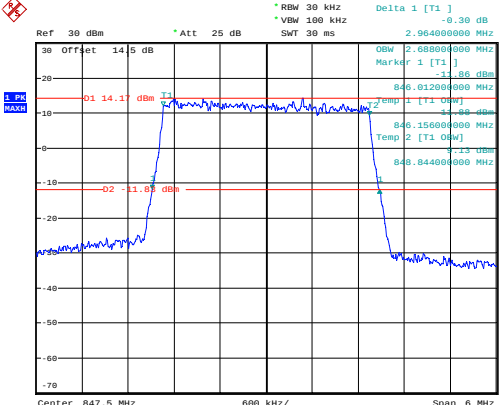Channel	3MHz Bandwidth QPSK	3MHz Bandwidth 16QAM
Lowest	 Date: 12.AUG.2023 15:55:03	 Date: 12.AUG.2023 15:55:21
Middle	 Date: 12.AUG.2023 15:55:39	 Date: 12.AUG.2023 15:55:57
Highest	 Date: 12.AUG.2023 15:56:12	 Date: 12.AUG.2023 15:56:27

Occupied Bandwidth

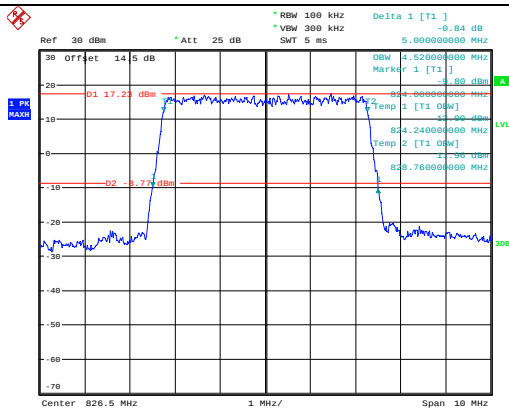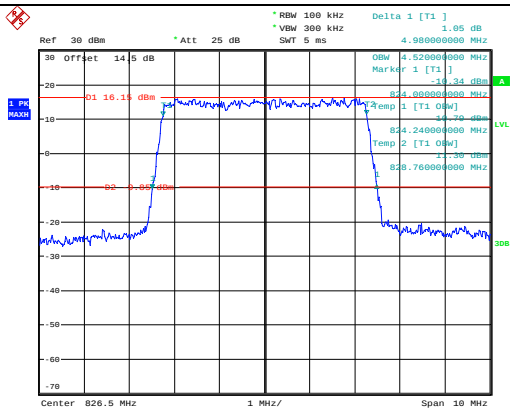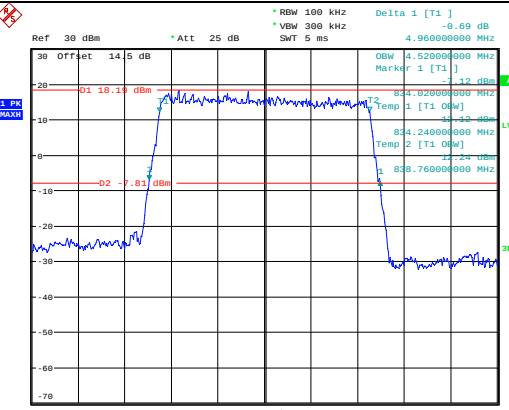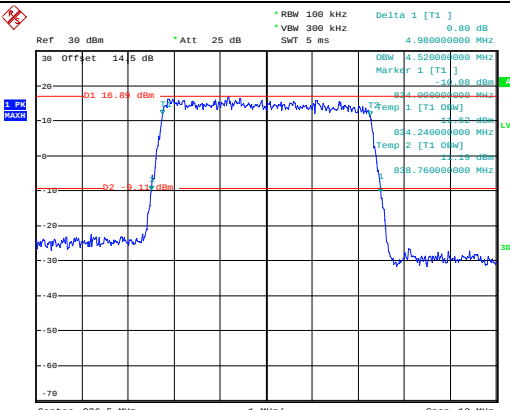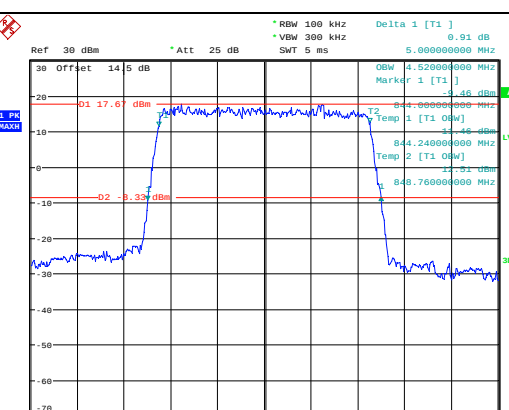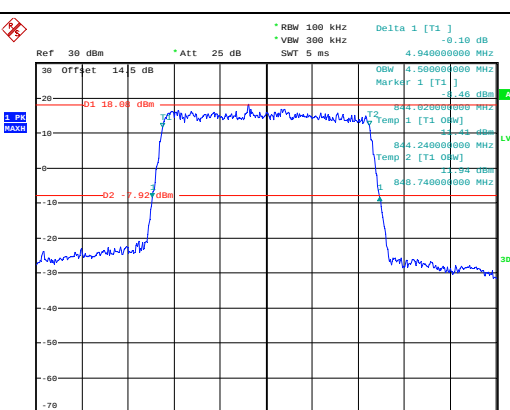Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	 Ref 30 dBm Offset 14.5 dB Att 25 dB RBW 100 kHz VBW 300 kHz SWT 5 ms Delta 1 [T1] -0.84 dB OBW 4.520000000 MHz Marker 1 [T1] -10.80 dBm A D1 17.23 dBm D2 -9.77 dBm Temp 1 [T1 0dB] 824.000000000 MHz LVL 824.240000000 MHz Temp 2 [T1 0dB] 828.760000000 MHz Center 826.5 MHz 1 MHz/ Span 10 MHz Date: 12.AUG.2023 15:58:07	 Ref 30 dBm Offset 14.5 dB Att 25 dB RBW 100 kHz VBW 300 kHz SWT 5 ms Delta 1 [T1] 1.05 dB OBW 4.520000000 MHz Marker 1 [T1] -10.34 dBm A D1 16.15 dBm D2 -9.87 dBm Temp 1 [T1 0dB] 824.000000000 MHz LVL 824.240000000 MHz Temp 2 [T1 0dB] 828.760000000 MHz Center 826.5 MHz 1 MHz/ Span 10 MHz Date: 12.AUG.2023 15:58:22
Middle	 Ref 30 dBm Offset 14.5 dB Att 25 dB RBW 100 kHz VBW 300 kHz SWT 5 ms Delta 1 [T1] -0.69 dB OBW 4.960000000 MHz Marker 1 [T1] -10.42 dBm A D1 18.13 dBm D2 -9.81 dBm Temp 1 [T1 0dB] 834.020000000 MHz LVL 834.240000000 MHz Temp 2 [T1 0dB] 838.760000000 MHz Center 836.5 MHz 1 MHz/ Span 10 MHz Date: 12.AUG.2023 15:58:40	 Ref 30 dBm Offset 14.5 dB Att 25 dB RBW 100 kHz VBW 300 kHz SWT 5 ms Delta 1 [T1] -0.80 dB OBW 4.960000000 MHz Marker 1 [T1] -10.68 dBm A D1 16.89 dBm D2 -9.13 dBm Temp 1 [T1 0dB] 834.020000000 MHz LVL 834.240000000 MHz Temp 2 [T1 0dB] 838.760000000 MHz Center 836.5 MHz 1 MHz/ Span 10 MHz Date: 12.AUG.2023 15:58:58
Highest	 Ref 30 dBm Offset 14.5 dB Att 25 dB RBW 100 kHz VBW 300 kHz SWT 5 ms Delta 1 [T1] 0.91 dB OBW 5.000000000 MHz Marker 1 [T1] -10.46 dBm A D1 17.67 dBm D2 -9.33 dBm Temp 1 [T1 0dB] 844.000000000 MHz LVL 844.240000000 MHz Temp 2 [T1 0dB] 848.760000000 MHz Center 846.5 MHz 1 MHz/ Span 10 MHz Date: 12.AUG.2023 15:59:13	 Ref 30 dBm Offset 14.5 dB Att 25 dB RBW 100 kHz VBW 300 kHz SWT 5 ms Delta 1 [T1] -0.10 dB OBW 4.980000000 MHz Marker 1 [T1] -10.46 dBm A D1 18.04 dBm D2 -9.92 dBm Temp 1 [T1 0dB] 844.020000000 MHz LVL 844.240000000 MHz Temp 2 [T1 0dB] 848.740000000 MHz Center 846.5 MHz 1 MHz/ Span 10 MHz Date: 12.AUG.2023 15:59:31


Occupied Bandwidth

Channel


10MHz Bandwidth QPSK

10MHz Bandwidth 16QAM

Lowest

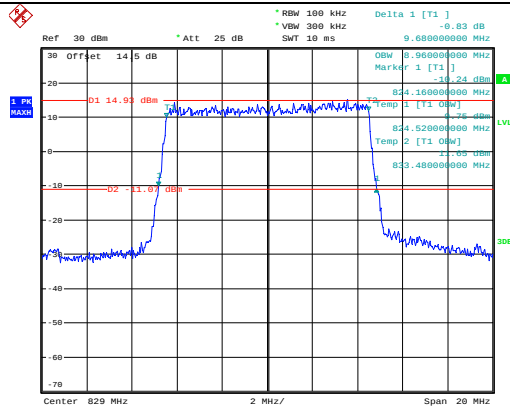


Date: 12.AUG.2023 16:08:26

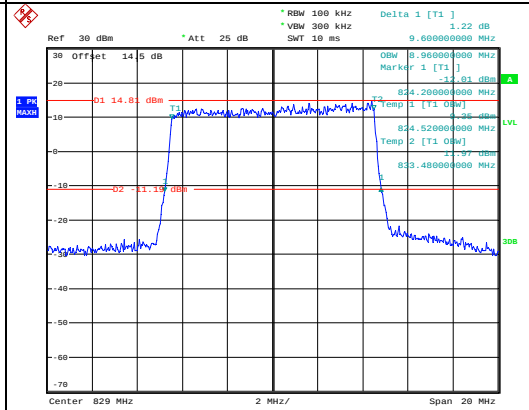


Date: 12.AUG.2023 16:08:48

Middle

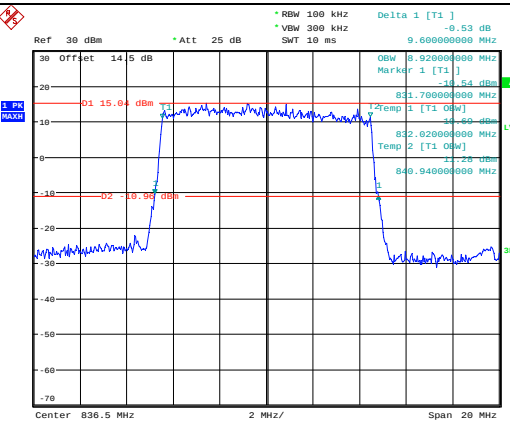


Date: 12.AUG.2023 16:09:03

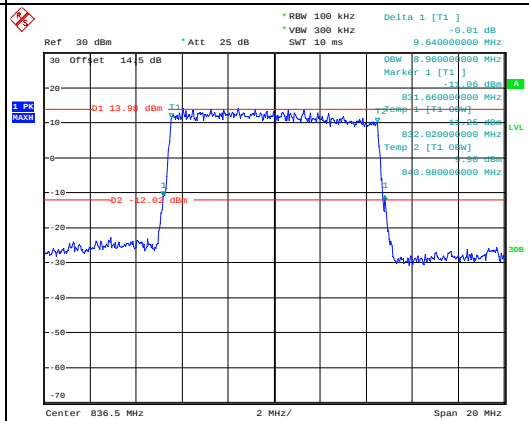


Date: 12.AUG.2023 16:09:20

Highest

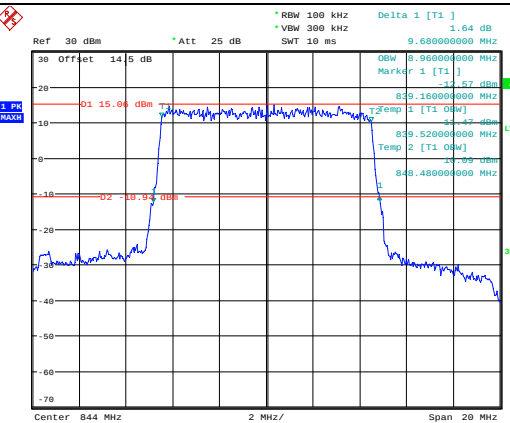

Date: 12.AUG.2023 16:09:39

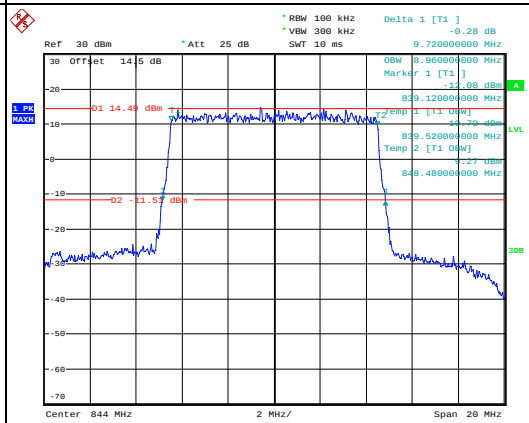



Date: 12.AUG.2023 16:09:56

Spurious Emissions at Antenna Terminal



Channel

1.4MHz Bandwidth QPSK



Lowest

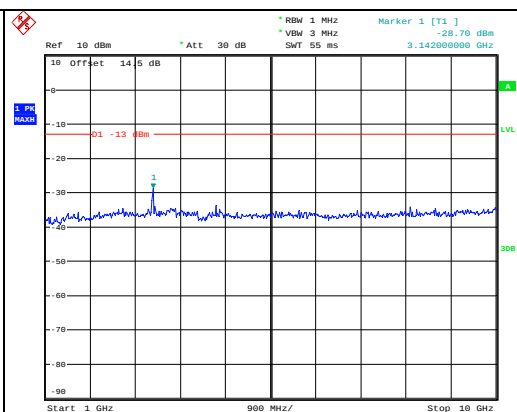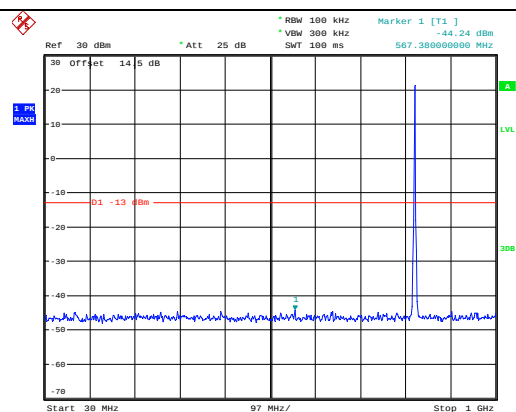

Middle

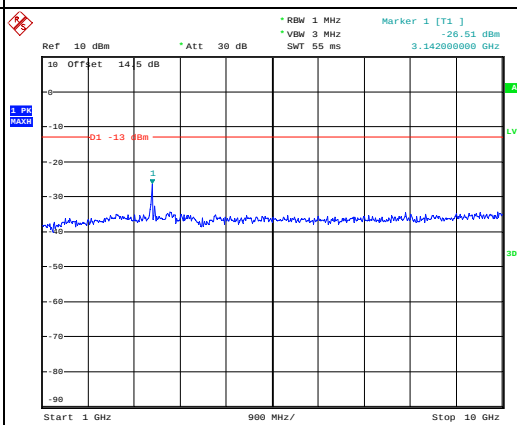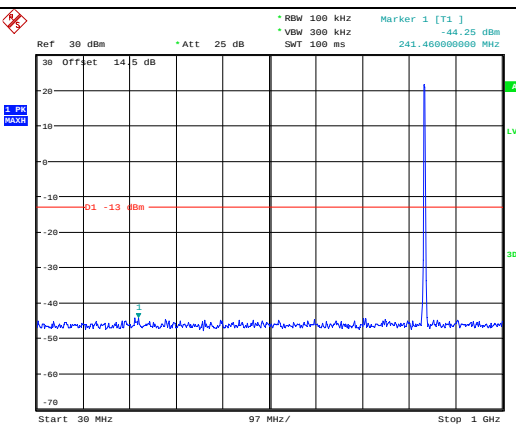

Highest

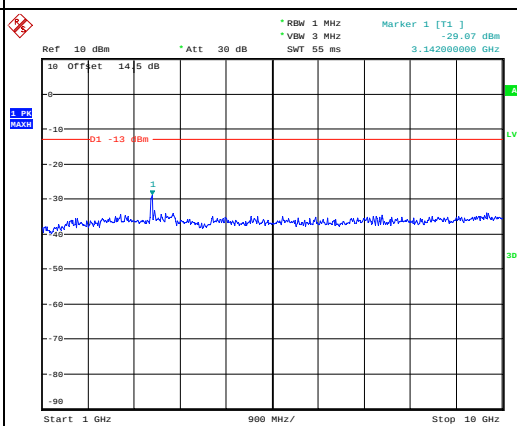
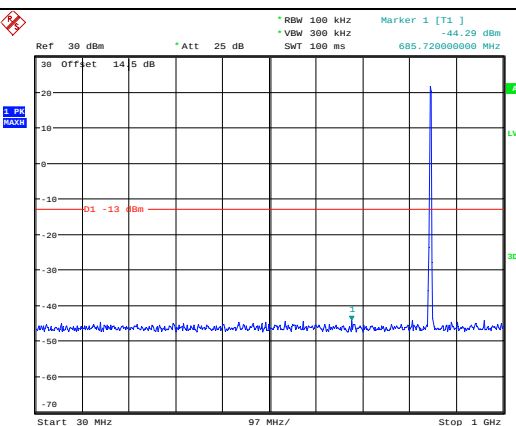


Spurious Emissions at Antenna Terminal



Channel

3MHz Bandwidth QPSK



Lowest

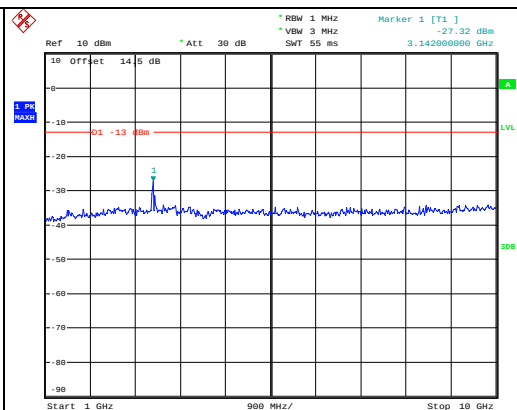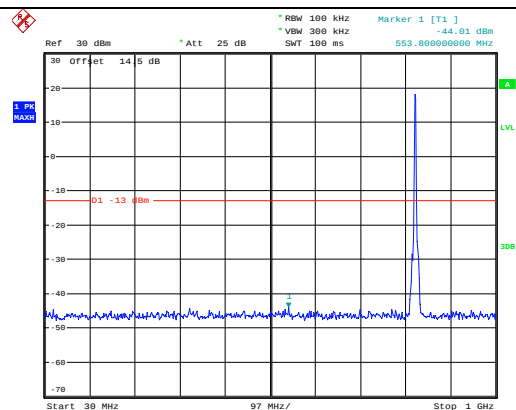

Middle

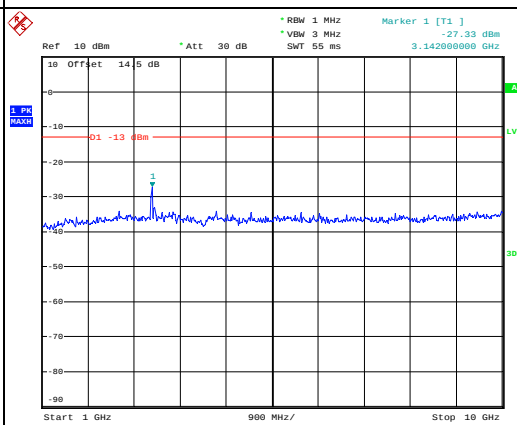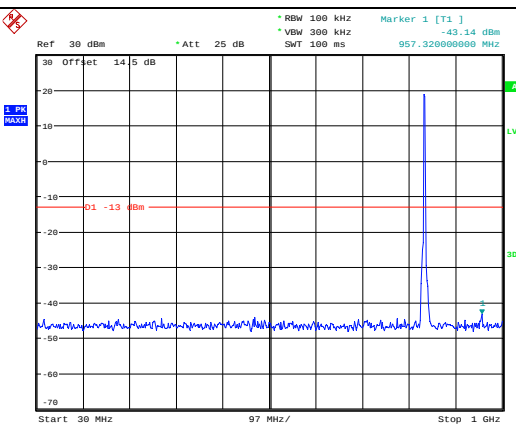

Highest

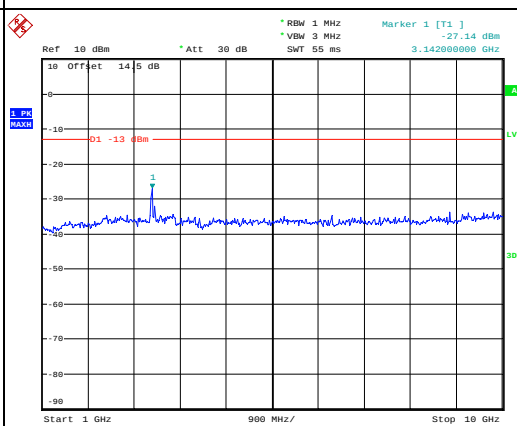
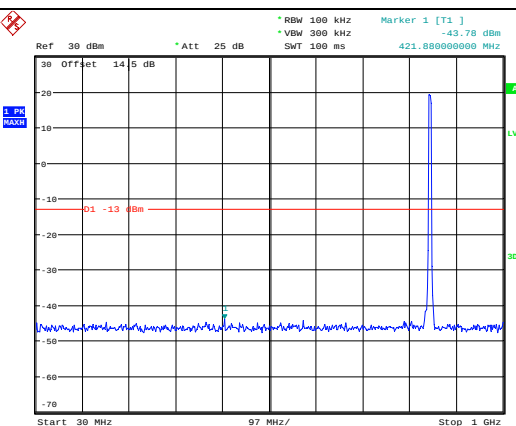


Spurious Emissions at Antenna Terminal



Channel

5MHz Bandwidth QPSK



Lowest

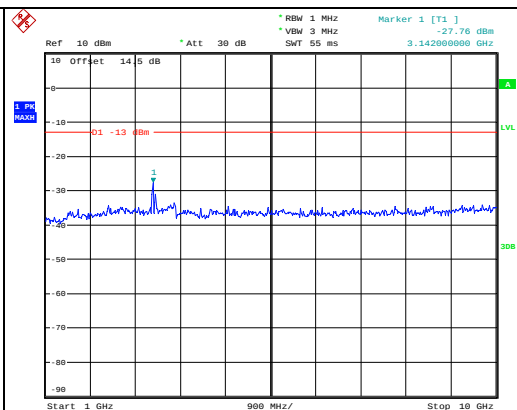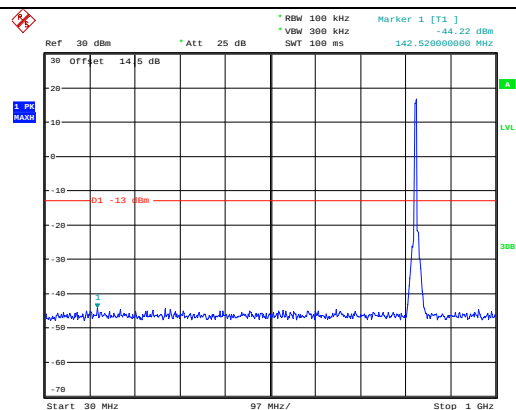

Middle

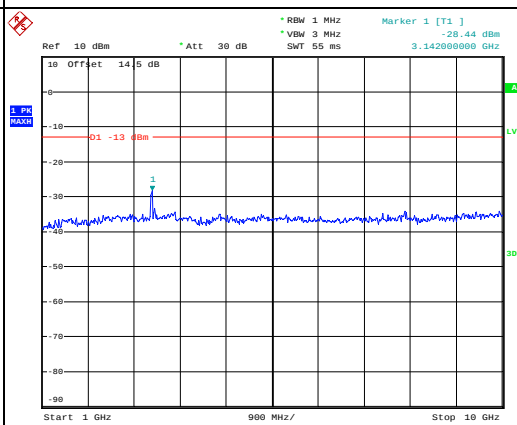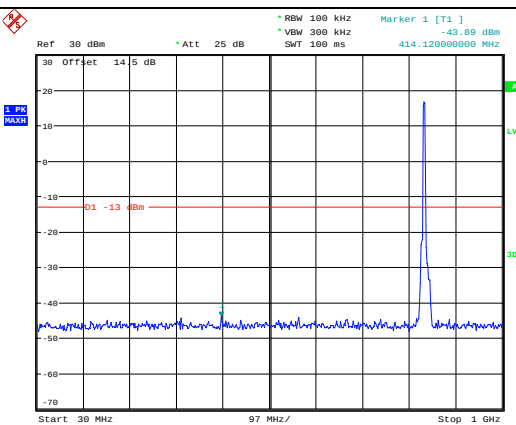

Highest

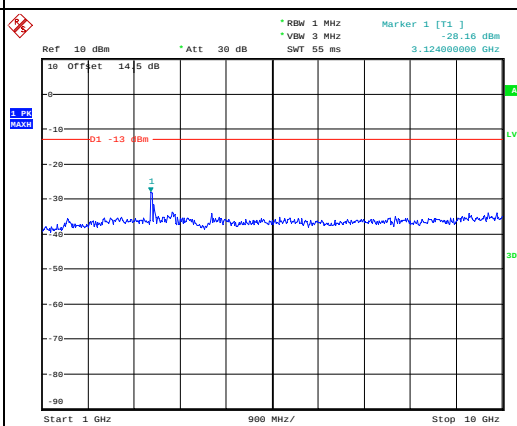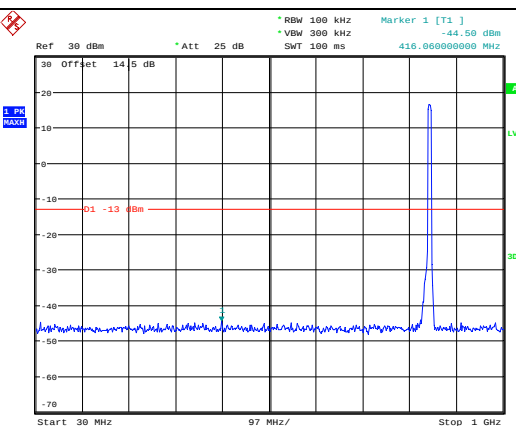


Spurious Emissions at Antenna Terminal


Channel

10MHz Bandwidth QPSK

Lowest

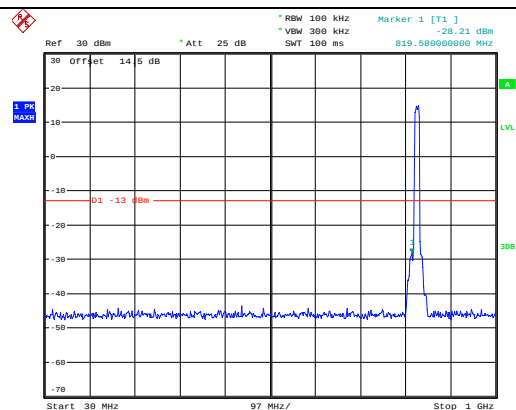


Date: 12.AUG.2023 21:20:42

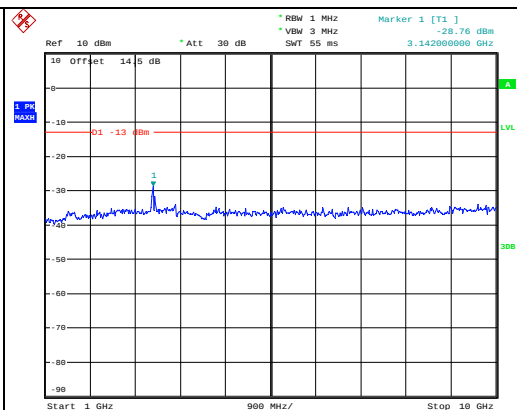


Date: 12.AUG.2023 21:20:53

Middle

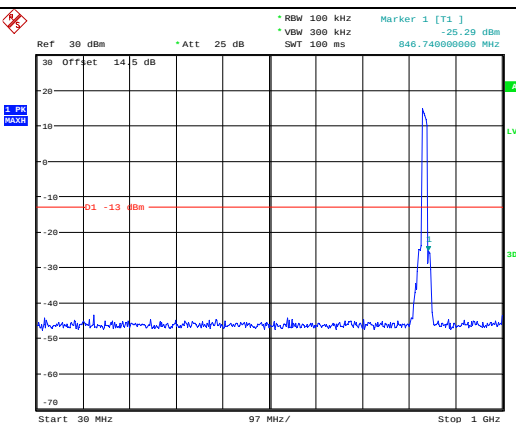


Date: 12.AUG.2023 21:21:10

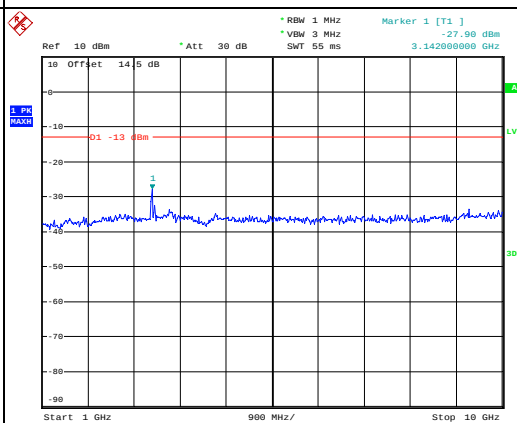


Date: 12.AUG.2023 21:21:21

Highest






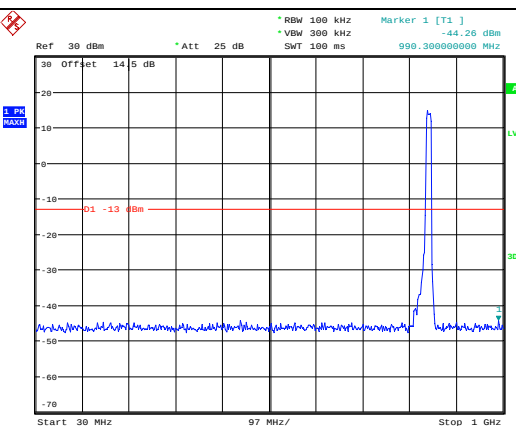


Date: 12.AUG.2023 21:21:38

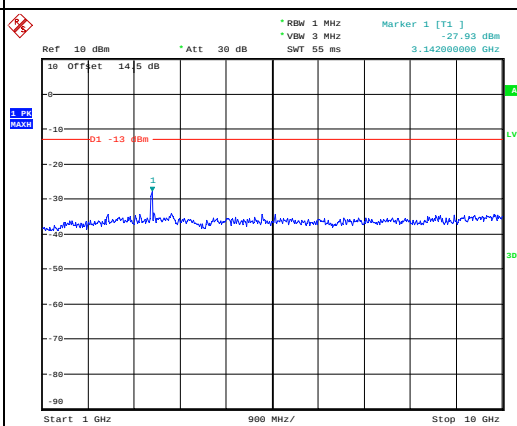


Date: 12.AUG.2023 21:21:49







Test Plots for Out of band emission, Band Edge:
Note: The test is performed in full RB mode.**Out of band emission, Band Edge**

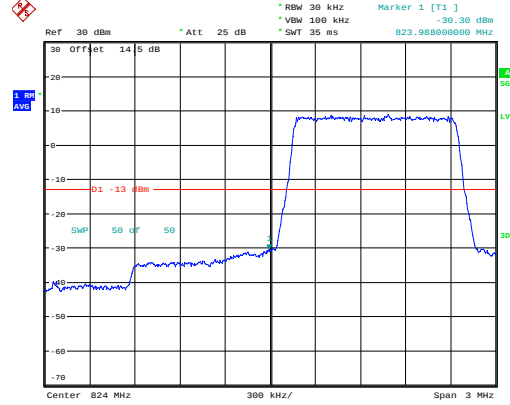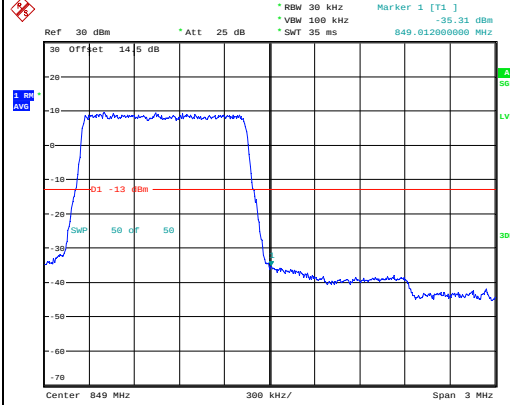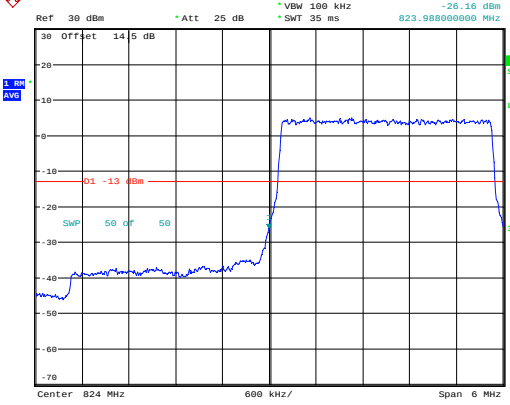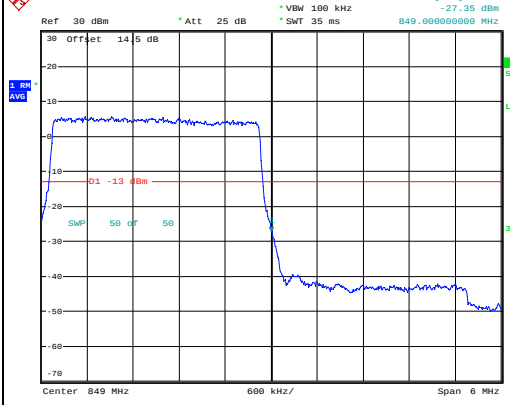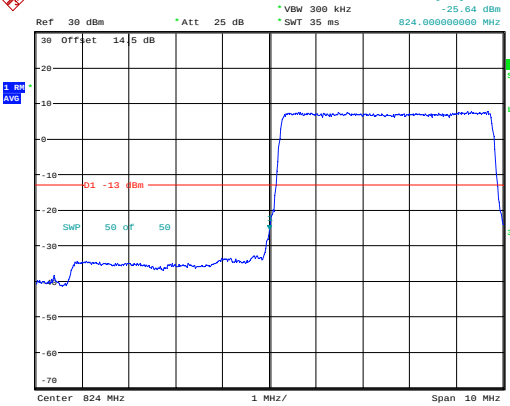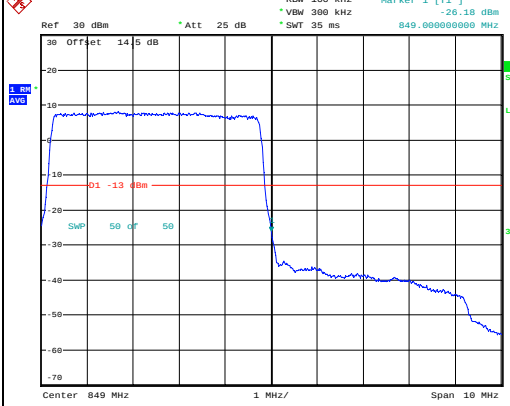Mode	Lowest	Highest
QPSK 1.4MHz	 Ref 30 dBm * Att 25 dB * RBW 30 kHz * VBW 100 kHz * SWT 35 ms * Marker 1 [T1] -20.30 dBm 823.988000000 MHz Center 824 MHz 300 kHz/ Span 3 MHz Date: 12.AUG.2023 19:27:26	 Ref 30 dBm * Att 25 dB * RBW 30 kHz * VBW 100 kHz * SWT 35 ms * Marker 1 [T1] -25.31 dBm 849.012000000 MHz Center 849 MHz 300 kHz/ Span 3 MHz Date: 12.AUG.2023 19:27:41
QPSK 3MHz	 Ref 30 dBm * Att 25 dB * RBW 30 kHz * VBW 100 kHz * SWT 35 ms * Marker 1 [T1] -26.16 dBm 823.988000000 MHz Center 824 MHz 600 kHz/ Span 6 MHz Date: 12.AUG.2023 19:28:21	 Ref 30 dBm * Att 25 dB * RBW 30 kHz * VBW 100 kHz * SWT 35 ms * Marker 1 [T1] -27.35 dBm 849.000000000 MHz Center 849 MHz 600 kHz/ Span 6 MHz Date: 12.AUG.2023 19:28:37
QPSK 5MHz	 Ref 30 dBm * Att 25 dB * RBW 100 kHz * VBW 300 kHz * SWT 35 ms * Marker 1 [T1] -25.64 dBm 824.000000000 MHz Center 824 MHz 1 MHz/ Span 10 MHz Date: 12.AUG.2023 19:41:08	 Ref 30 dBm * Att 25 dB * RBW 100 kHz * VBW 300 kHz * SWT 35 ms * Marker 1 [T1] -26.18 dBm 849.000000000 MHz Center 849 MHz 1 MHz/ Span 10 MHz Date: 12.AUG.2023 19:41:25


Out of band emission, Band Edge

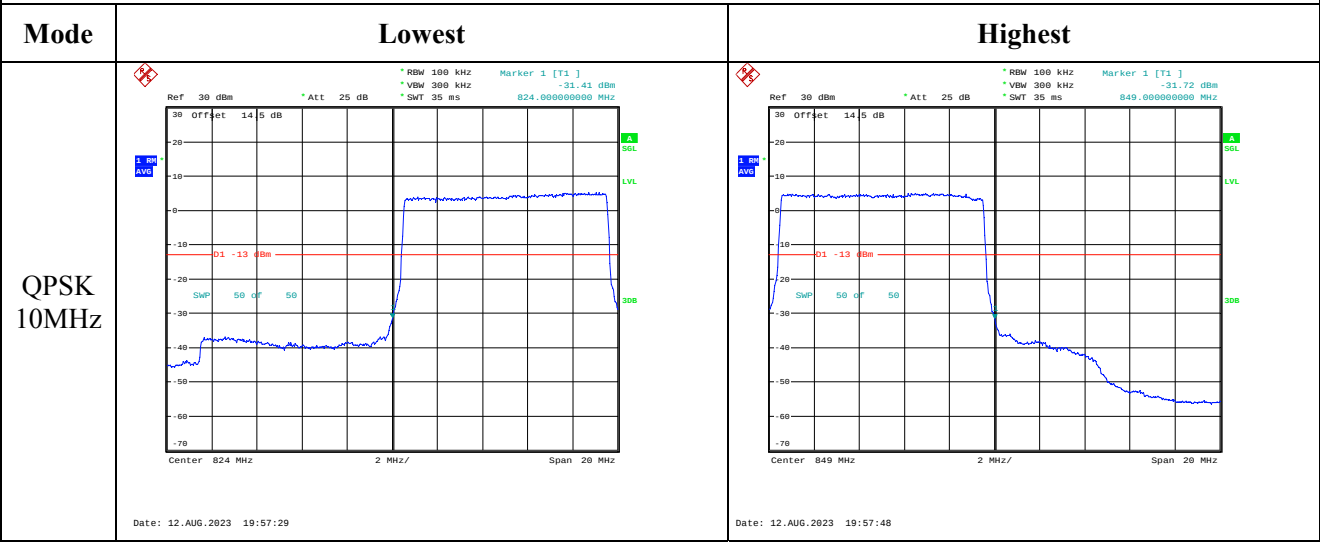



Out of band emission, Band Edge

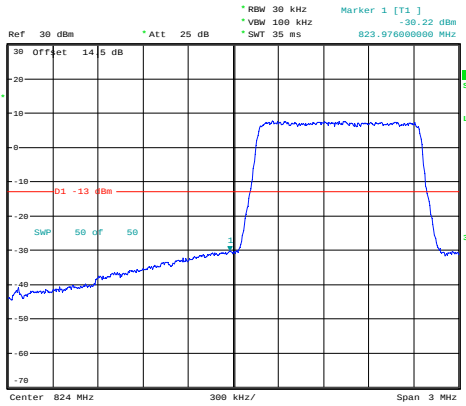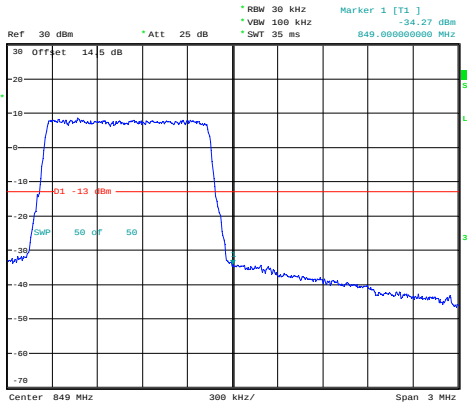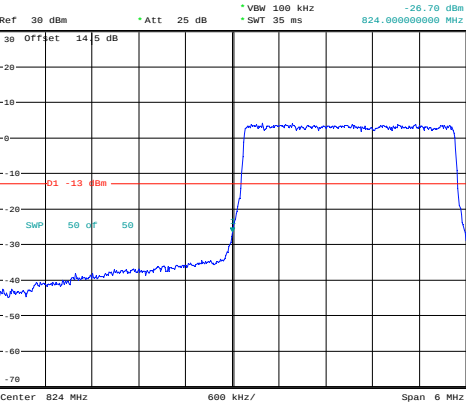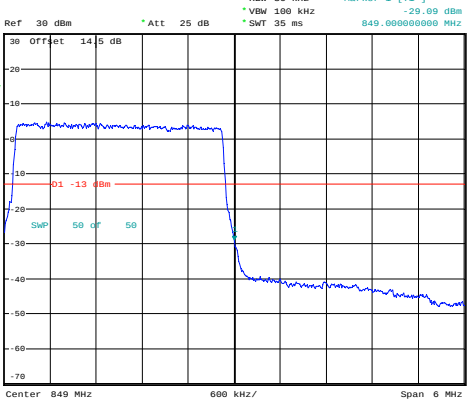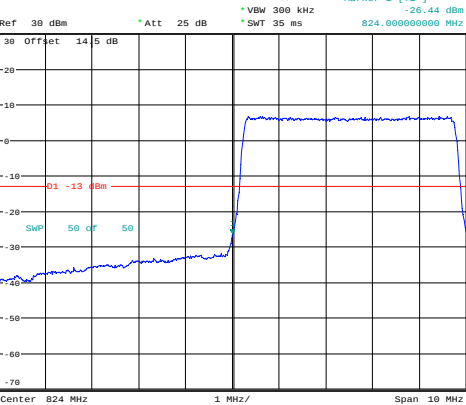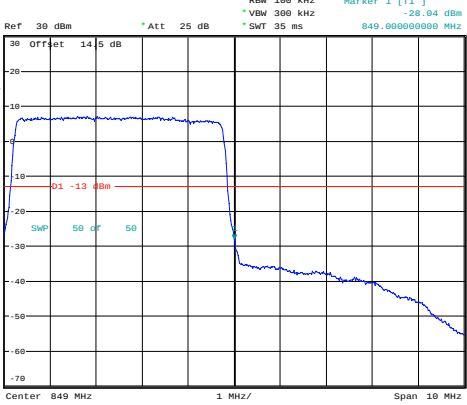Mode	Lowest	Highest
16QAM 1.4MHz	 Ref: 30 dBm, Att: 25 dB, RBW: 30 kHz, VBW: 100 kHz, SWT: 35 ms, Marker 1 [T1]: -30.22 dBm, 823.976000000 MHz 30 Offset 14.5 dB, 01 -13 dBm, SWP 50 OF 50, 30B, 56L, LVL Center: 824 MHz, 300 kHz/, Span: 3 MHz Date: 12.AUG.2023 19:27:33	 Ref: 30 dBm, Att: 25 dB, RBW: 30 kHz, VBW: 100 kHz, SWT: 35 ms, Marker 1 [T1]: -34.27 dBm, 849.000000000 MHz 30 Offset 14.5 dB, 01 -13 dBm, SWP 50 OF 50, 30B, 56L, LVL Center: 849 MHz, 300 kHz/, Span: 3 MHz Date: 12.AUG.2023 19:27:48
16QAM 3MHz	 Ref: 30 dBm, Att: 25 dB, RBW: 30 kHz, VBW: 100 kHz, SWT: 35 ms, Marker 1 [T1]: -26.70 dBm, 824.000000000 MHz 30 Offset 14.5 dB, 01 -13 dBm, SWP 50 OF 50, 30B, 56L, LVL Center: 824 MHz, 600 kHz/, Span: 6 MHz Date: 12.AUG.2023 19:28:28	 Ref: 30 dBm, Att: 25 dB, RBW: 30 kHz, VBW: 100 kHz, SWT: 35 ms, Marker 1 [T1]: -29.69 dBm, 849.000000000 MHz 30 Offset 14.5 dB, 01 -13 dBm, SWP 50 OF 50, 30B, 56L, LVL Center: 849 MHz, 600 kHz/, Span: 6 MHz Date: 12.AUG.2023 19:28:45
16QAM 5MHz	 Ref: 30 dBm, Att: 25 dB, RBW: 100 kHz, VBW: 300 kHz, SWT: 35 ms, Marker 1 [T1]: -26.44 dBm, 824.000000000 MHz 30 Offset 14.5 dB, 01 -13 dBm, SWP 50 OF 50, 30B, 56L, LVL Center: 824 MHz, 1 MHz/, Span: 10 MHz Date: 12.AUG.2023 19:41:16	 Ref: 30 dBm, Att: 25 dB, RBW: 100 kHz, VBW: 300 kHz, SWT: 35 ms, Marker 1 [T1]: -28.84 dBm, 849.000000000 MHz 30 Offset 14.5 dB, 01 -13 dBm, SWP 50 OF 50, 30B, 56L, LVL Center: 849 MHz, 1 MHz/, Span: 10 MHz Date: 12.AUG.2023 19:41:33







Out of band emission, Band Edge

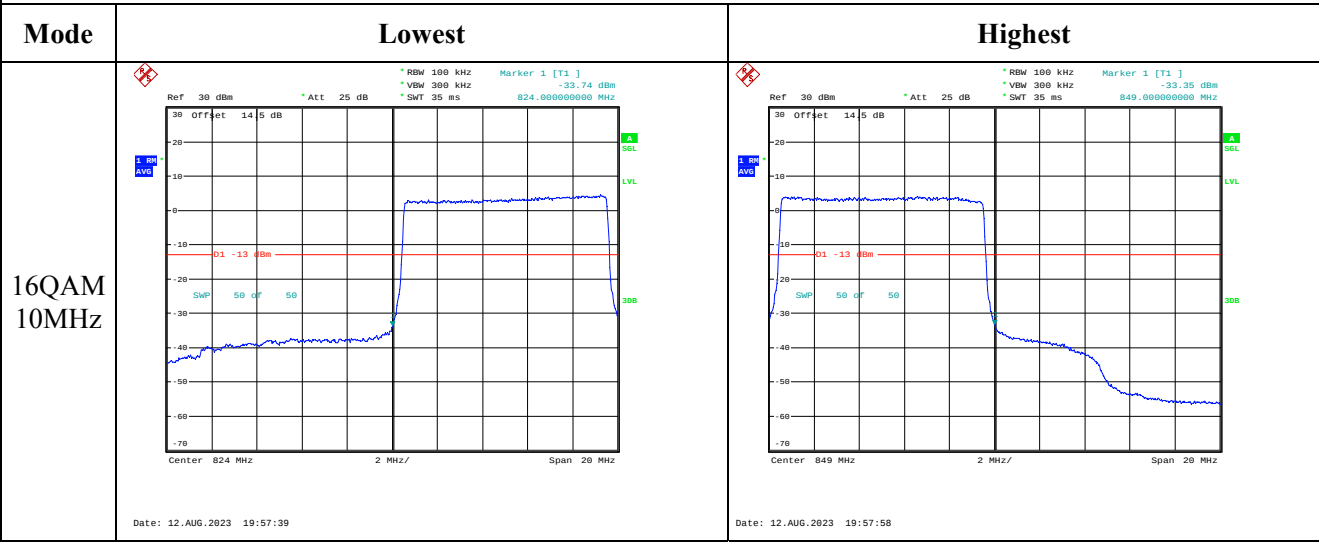

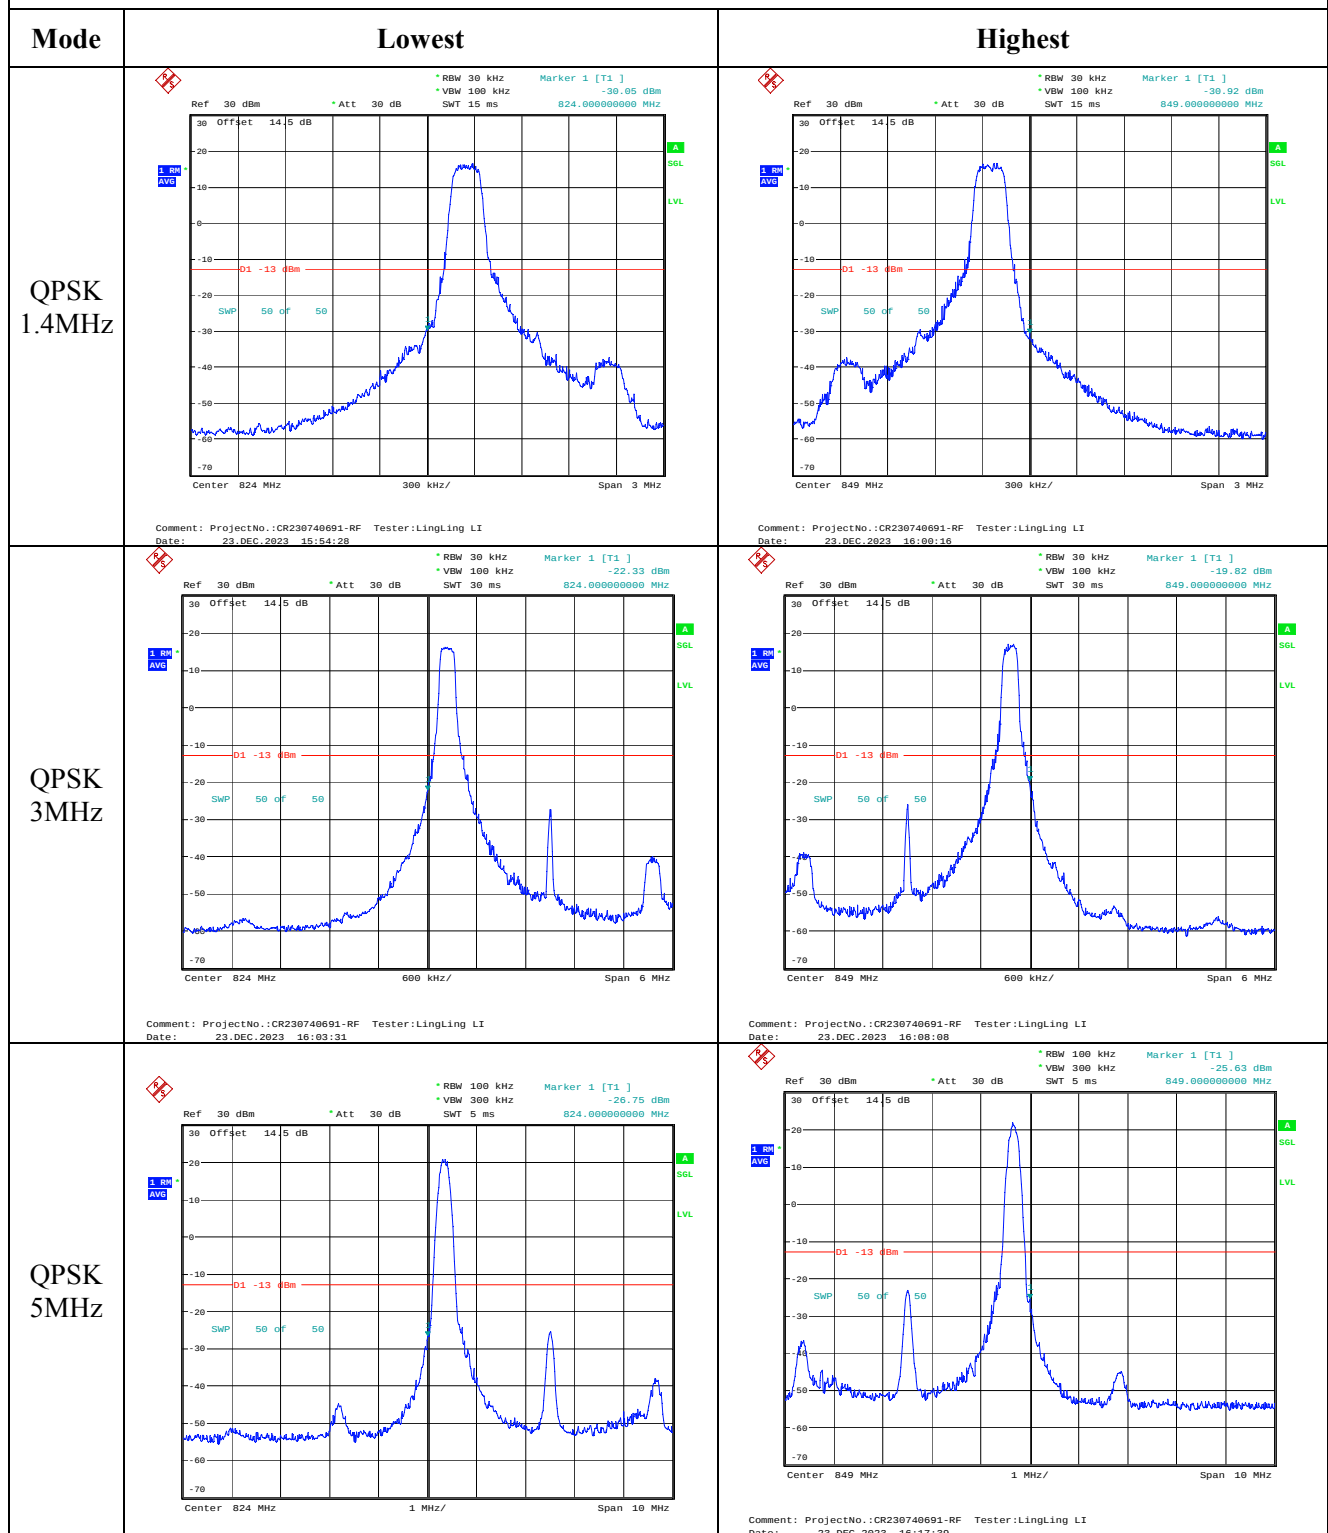
Test Plots for Out of band emission, Band Edge:
Note: The test is performed in 1RB mode.**Out of band emission, Band Edge**

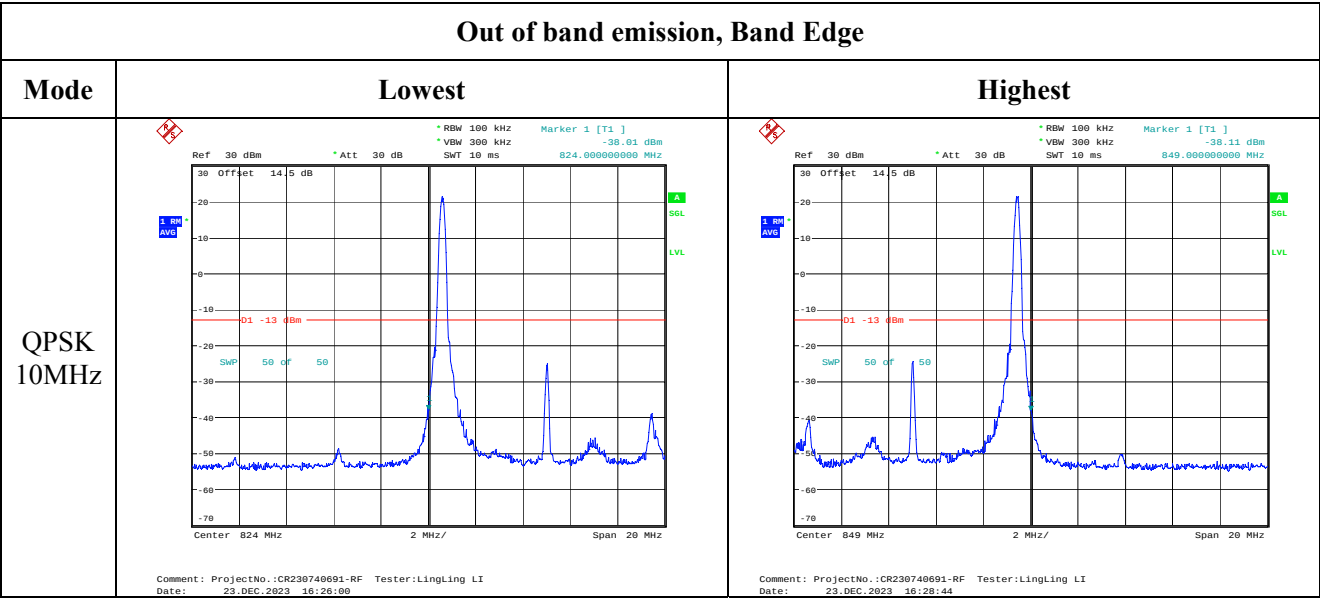

Out of band emission, Band Edge

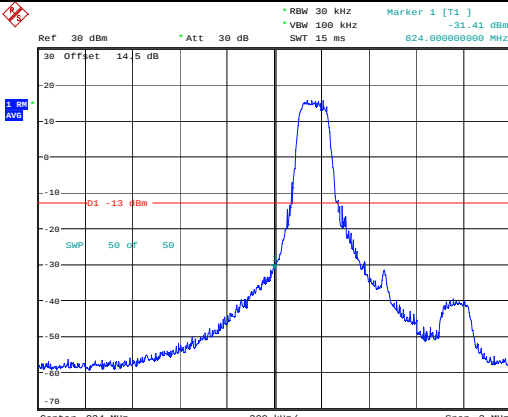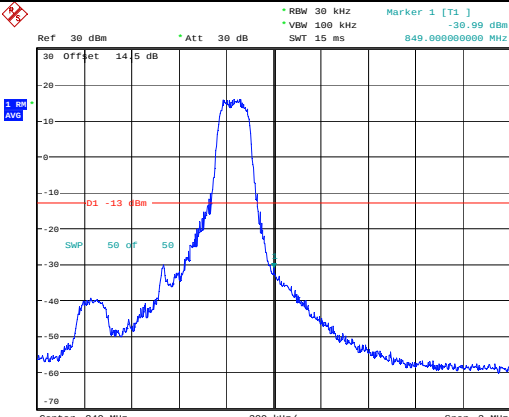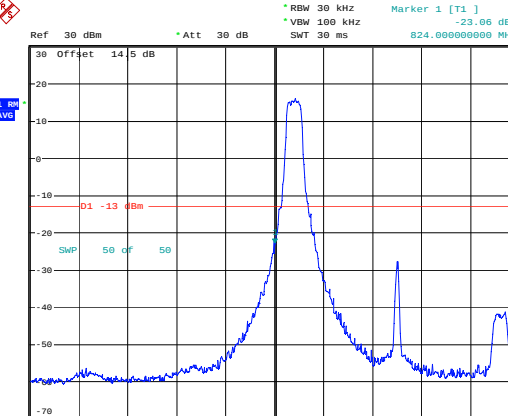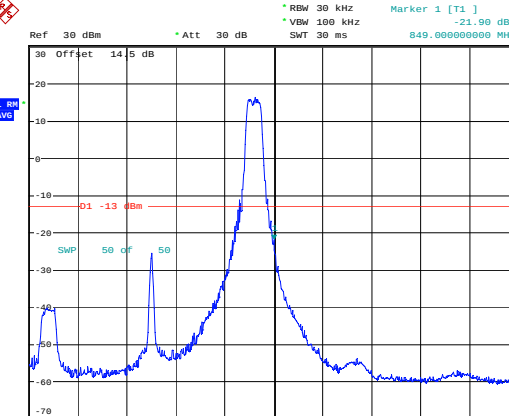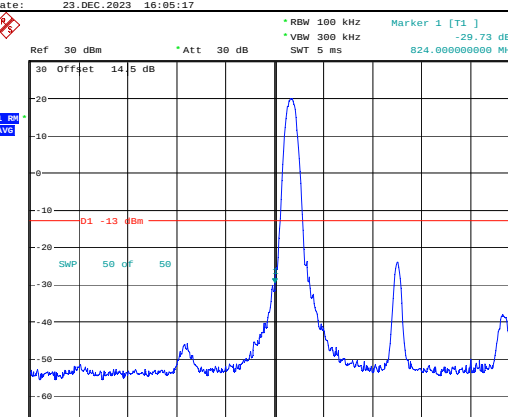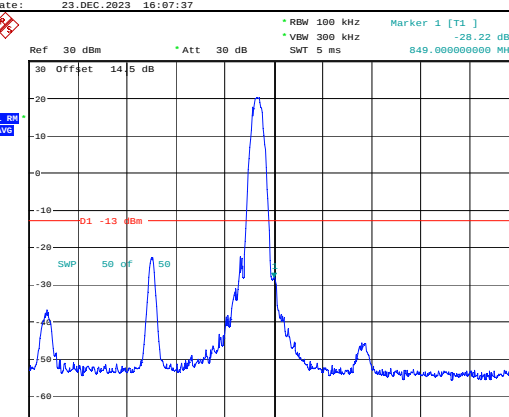Mode	Lowest	Highest
16QAM 1.4MHz	 Ref 30 dBm * Att 30 dB * RBW 30 kHz * VBW 100 kHz * SWT 15 ms * Marker 1 [T1] -21.41 dBm 824.000000000 MHz Offset 14.5 dB Center 824 MHz 300 kHz/ Span 3 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23_DEC.2023 15:55:22	 Ref 30 dBm * Att 30 dB * RBW 30 kHz * VBW 100 kHz * SWT 15 ms * Marker 1 [T1] -30.99 dBm 849.000000000 MHz Offset 14.5 dB Center 849 MHz 300 kHz/ Span 3 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23_DEC.2023 15:58:06
16QAM 3MHz	 Ref 30 dBm * Att 30 dB * RBW 30 kHz * VBW 100 kHz * SWT 30 ms * Marker 1 [T1] -23.06 dBm 824.000000000 MHz Offset 14.5 dB Center 824 MHz 600 kHz/ Span 6 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23_DEC.2023 16:05:17	 Ref 30 dBm * Att 30 dB * RBW 30 kHz * VBW 100 kHz * SWT 30 ms * Marker 1 [T1] -21.00 dBm 849.000000000 MHz Offset 14.5 dB Center 849 MHz 600 kHz/ Span 6 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23_DEC.2023 16:07:37
16QAM 5MHz	 Ref 30 dBm * Att 30 dB * RBW 100 kHz * VBW 300 kHz * SWT 5 ms * Marker 1 [T1] -29.73 dBm 824.000000000 MHz Offset 14.5 dB Center 824 MHz 1 MHz/ Span 10 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23_DEC.2023 16:12:34	 Ref 30 dBm * Att 30 dB * RBW 100 kHz * VBW 300 kHz * SWT 5 ms * Marker 1 [T1] -29.22 dBm 849.000000000 MHz Offset 14.5 dB Center 849 MHz 1 MHz/ Span 10 MHz Comment: ProjectNo.:CR230740691-RF Tester:LingLing LI Date: 23_DEC.2023 16:17:07

Out of band emission, Band Edge

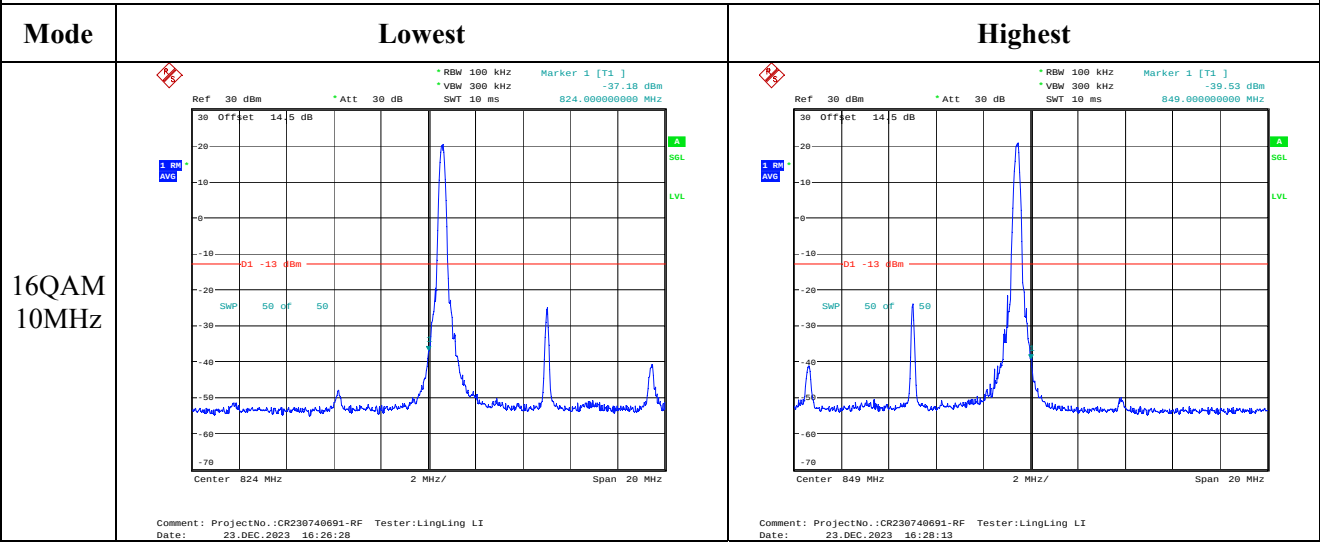

4.7 Antenna Port Test Data and Results for LTE Band 17

Serial Number:	288V-1	Test Date:	2023/8/4-2023/12/23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Claire Liu/Arthur Su/LingLing Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.3-26.1	Relative Humidity: (%)	42-62	ATM Pressure: (kPa)	99.7-101.9
-------------------	-----------	------------------------	-------	---------------------	------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency for Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
5MHz	706.5	710	713.5
10MHz	709	710	711

Test Data:**FCC§2.1046;§ 27.50(c) (10)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	26.02	26.03	26	22.63	34.77
	RB1#13	26.02	25.93	26.14		
	RB1#24	26.04	25.88	26.03		
	RB15#0	24.98	24.95	25.06		
	RB15#10	25.04	24.9	25.08		
	RB25#0	25.09	24.95	24.99		
5MHz 16QAM	RB1#0	25.39	25.09	25.03	21.91	34.77
	RB1#13	25.42	25.12	25.08		
	RB1#24	25.37	25	25.03		
	RB15#0	24.05	24.05	24.12		
	RB15#10	24.09	24.01	24.14		
	RB25#0	24.15	24.04	24.14		
10MHz QPSK	RB1#0	26.03	25.94	25.95	22.56	34.77
	RB1#25	26.01	25.94	25.9		
	RB1#49	26.07	25.98	25.99		
	RB25#0	25.08	25.04	25.02		
	RB25#25	24.96	24.98	24.96		
	RB50#0	25.03	25.04	25		
10MHz 16QAM	RB1#0	25.06	25.6	25.18	22.09	34.77
	RB1#25	25.08	25.56	25.15		
	RB1#49	25.1	25.55	25.18		
	RB25#0	24.18	24.16	24.14		
	RB25#25	24.15	24.09	24.08		
	RB50#0	24.13	24.08	24.08		

Note:

ERP= Conducted Power(dBm) - Lc(dB) + Gr(dBd)

Gr(dBd)=Gr(dBi)-2.15

Result:**Pass****Peak-to-average Ratio(PAR)**

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
10MHz QPSK	RB1#0	3.59	3.59	3.59	13
	RB50#0	5.13	5.29	5.35	13
10MHz 16QAM	RB1#0	5.48	5.48	5.54	13
	RB50#0	6.28	6.35	6.44	13
Result:					Pass

FCC §2.1049, §27.53:Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
5MHz QPSK	4.52	4.52	4.52	5.00	4.98	5.00
5MHz 16QAM	4.52	4.52	4.52	5.00	5.00	5.00
10MHz QPSK	8.96	8.96	9	9.72	9.60	10
10MHz 16QAM	8.96	8.96	8.96	9.60	9.52	9.72
Note: The test plots please refer to the Plots of Occupied Bandwidth						


FCC §2.1051, §27.53:Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

FCC §2.1051, §27.53:Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §27.54: Frequency Stability						
Test Mode:	10M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	5	704.514	704.00	715.498	716.00
	-20	5	704.510	704.00	715.485	716.00
	-10	5	704.511	704.00	715.487	716.00
	0	5	704.512	704.00	715.482	716.00
	10	5	704.509	704.00	715.505	716.00
	20	5	704.520	704.00	715.480	716.00
	30	5	704.518	704.00	715.508	716.00
	40	5	704.497	704.00	715.500	716.00
Frequency Stability vs. Voltage	20	4.4	704.498	704.00	715.494	716.00
	20	5.25	704.496	704.00	715.490	716.00
	Result:					Pass

Test Mode:	10M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	5	704.497	704.00	715.485	716.00
	-20	5	704.510	704.00	715.508	716.00
	-10	5	704.510	704.00	715.485	716.00
	0	5	704.508	704.00	715.501	716.00
	10	5	704.515	704.00	715.504	716.00
	20	5	704.520	704.00	715.480	716.00
	30	5	704.494	704.00	715.480	716.00
	40	5	704.495	704.00	715.480	716.00
	50	5	704.505	704.00	715.490	716.00
Frequency Stability vs. Voltage	20	4.4	704.517	704.00	715.493	716.00
	20	5.25	704.519	704.00	715.485	716.00
					Result:	Pass

Test Plots(Note: The 14.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):


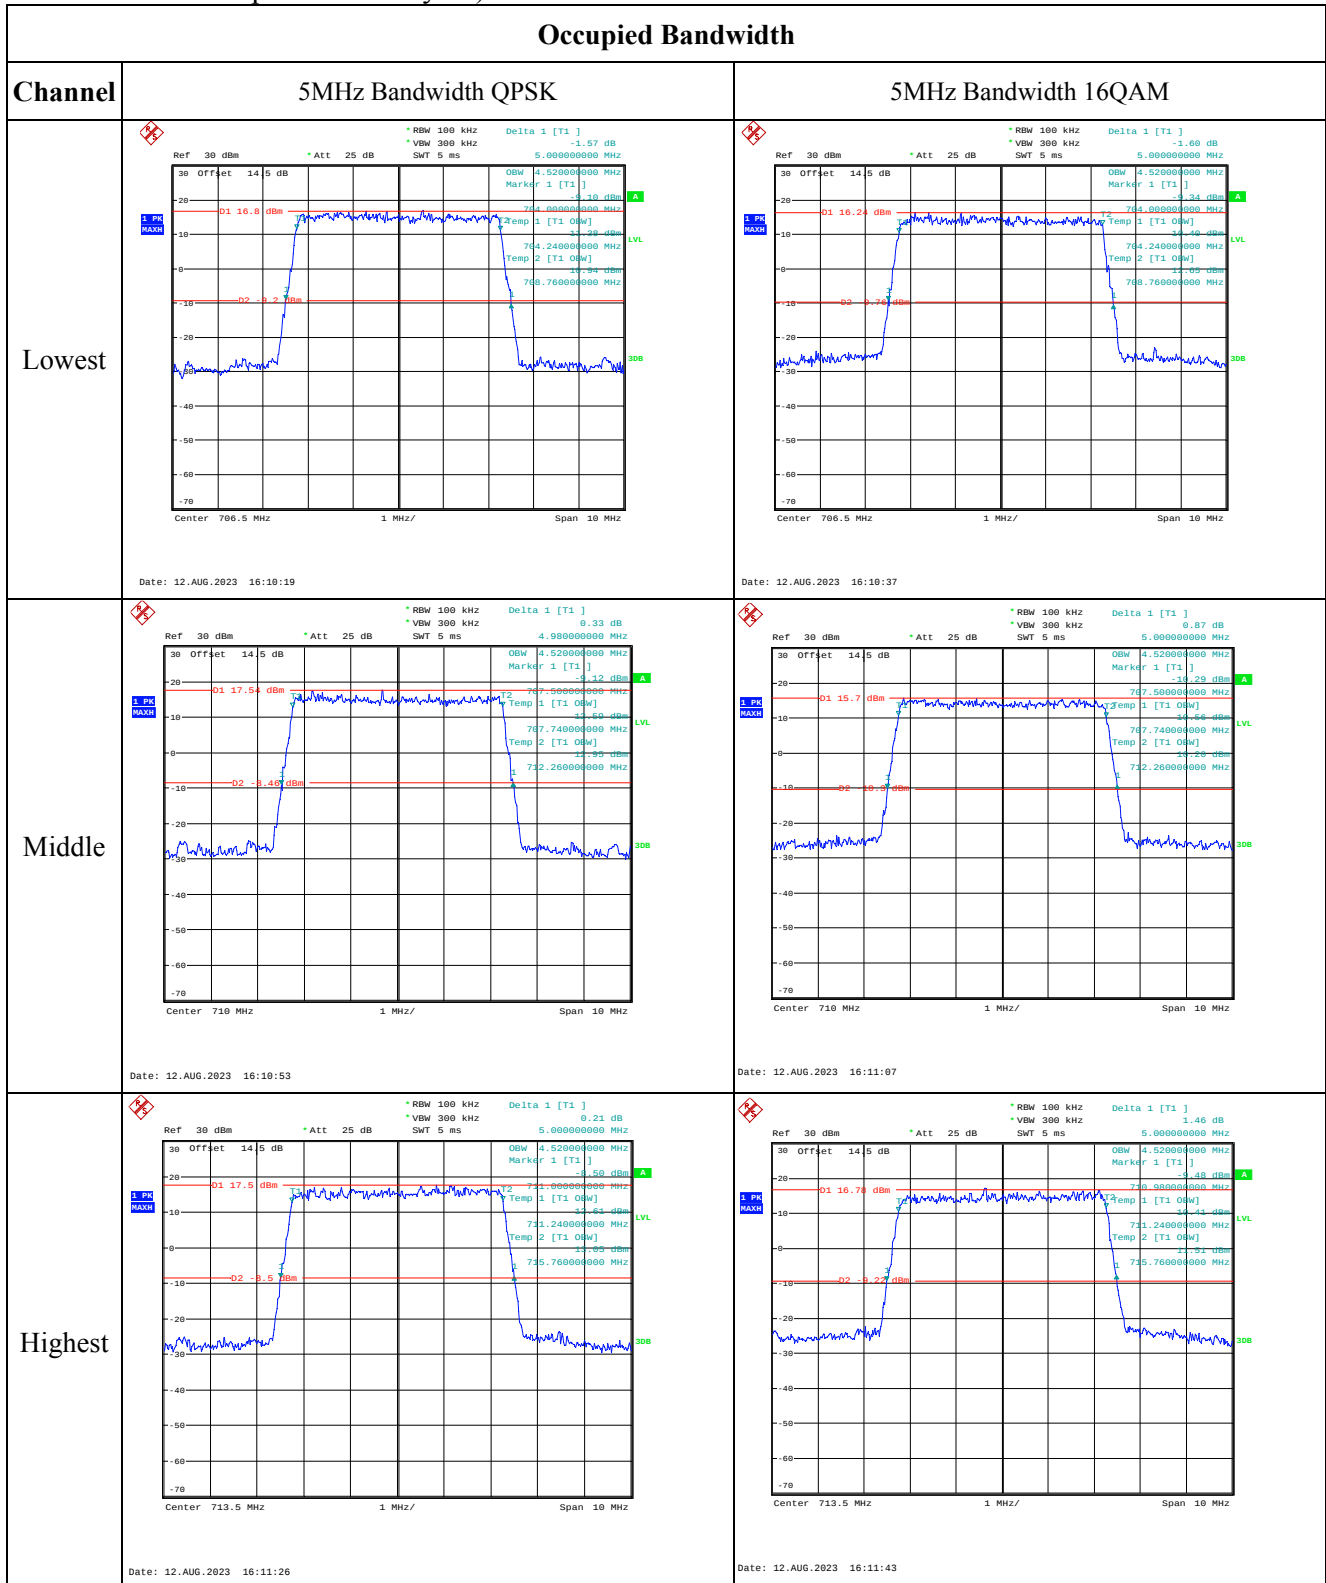


Spurious Emissions at Antenna Terminal



Channel

5MHz Bandwidth QPSK



Lowest

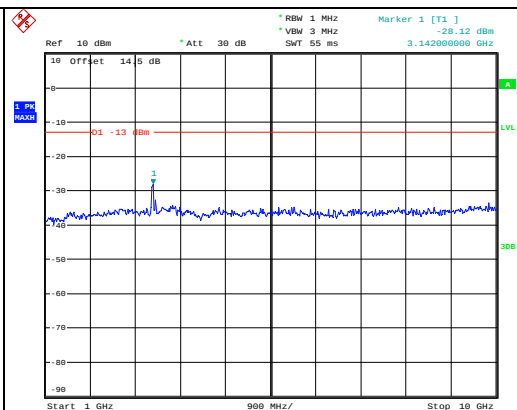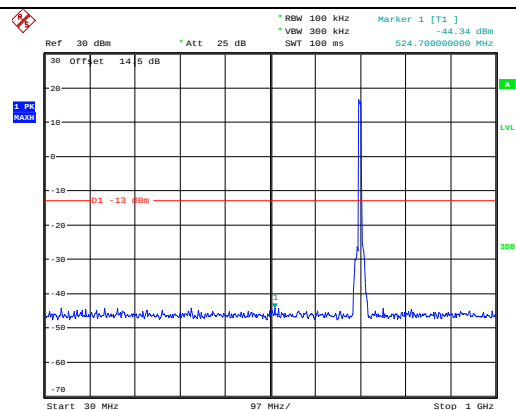

Middle

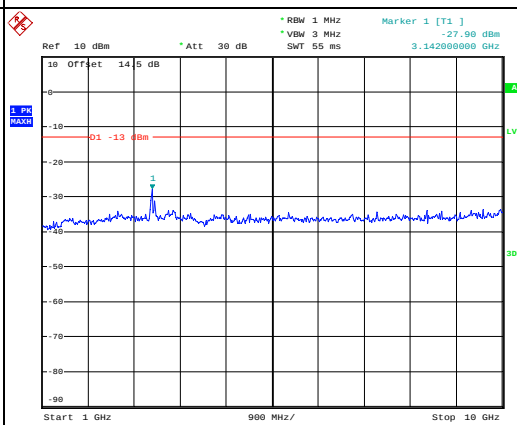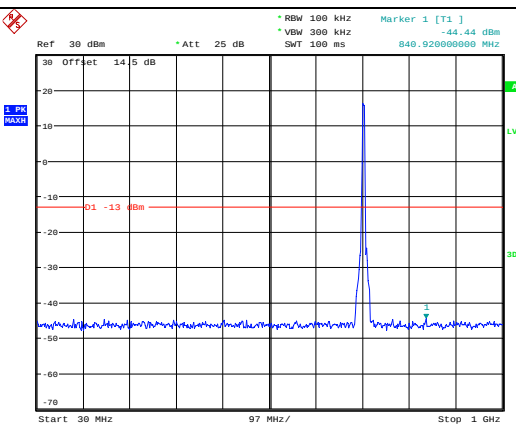

Highest

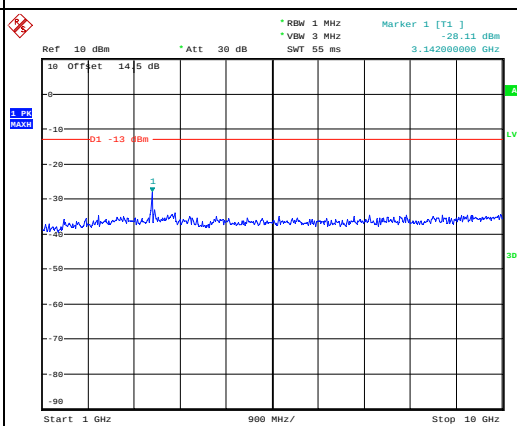
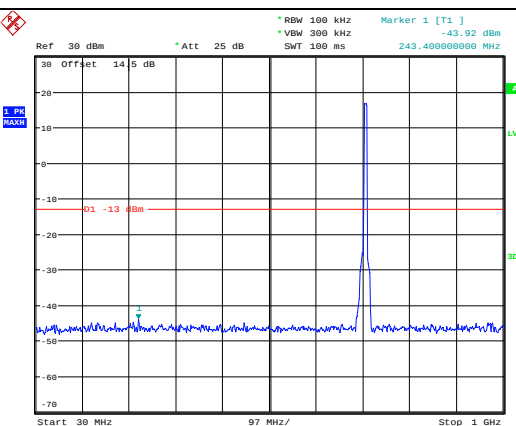


Spurious Emissions at Antenna Terminal



Channel

10MHz Bandwidth QPSK



Lowest

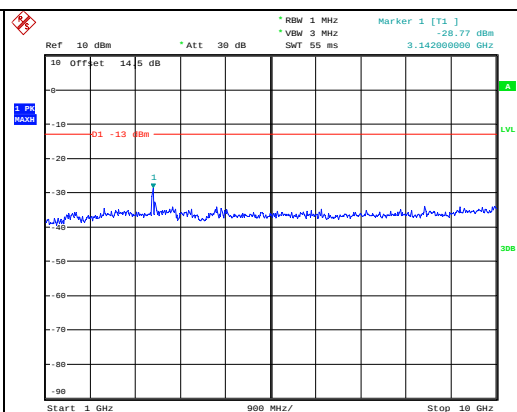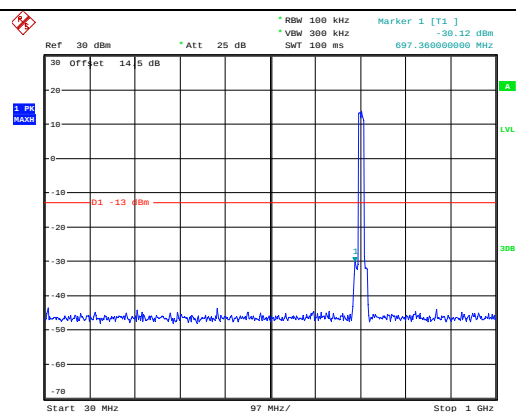

Middle

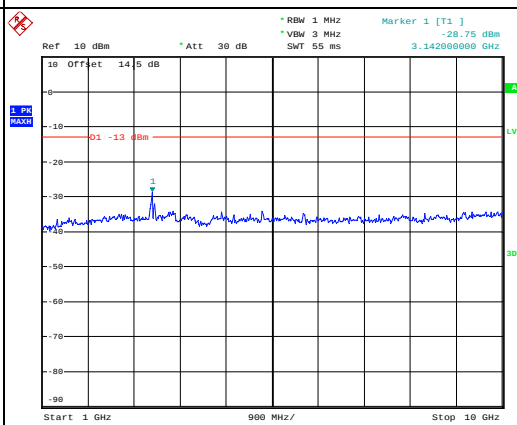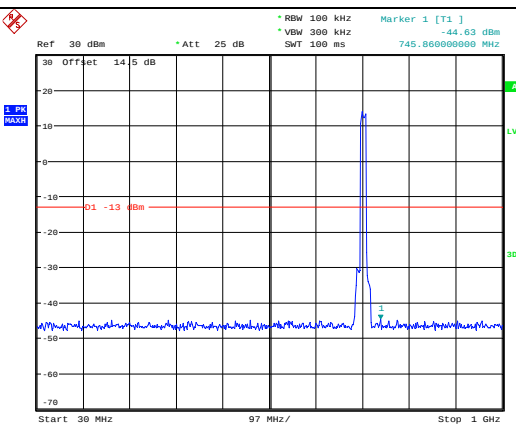


Highest

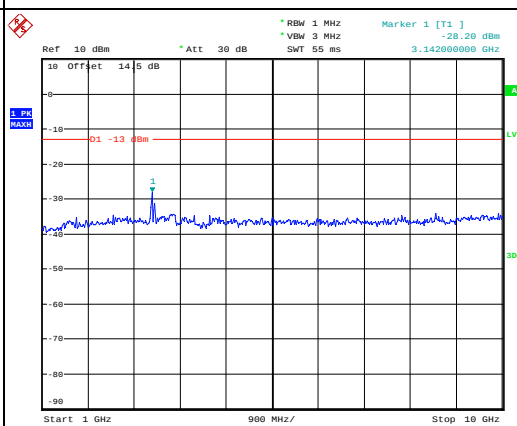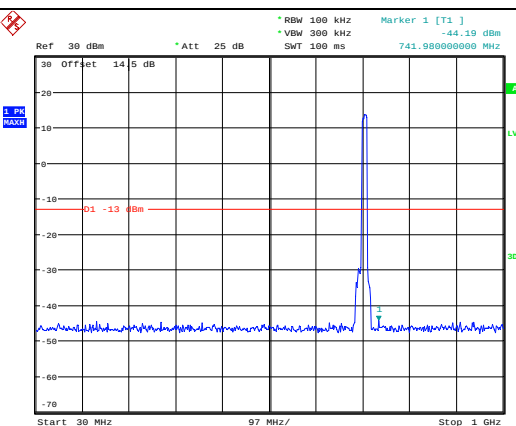



Test Plots for Out of band emission, Band Edge:
Note: The test is performed in full RB mode.

Out of band emission, Band Edge

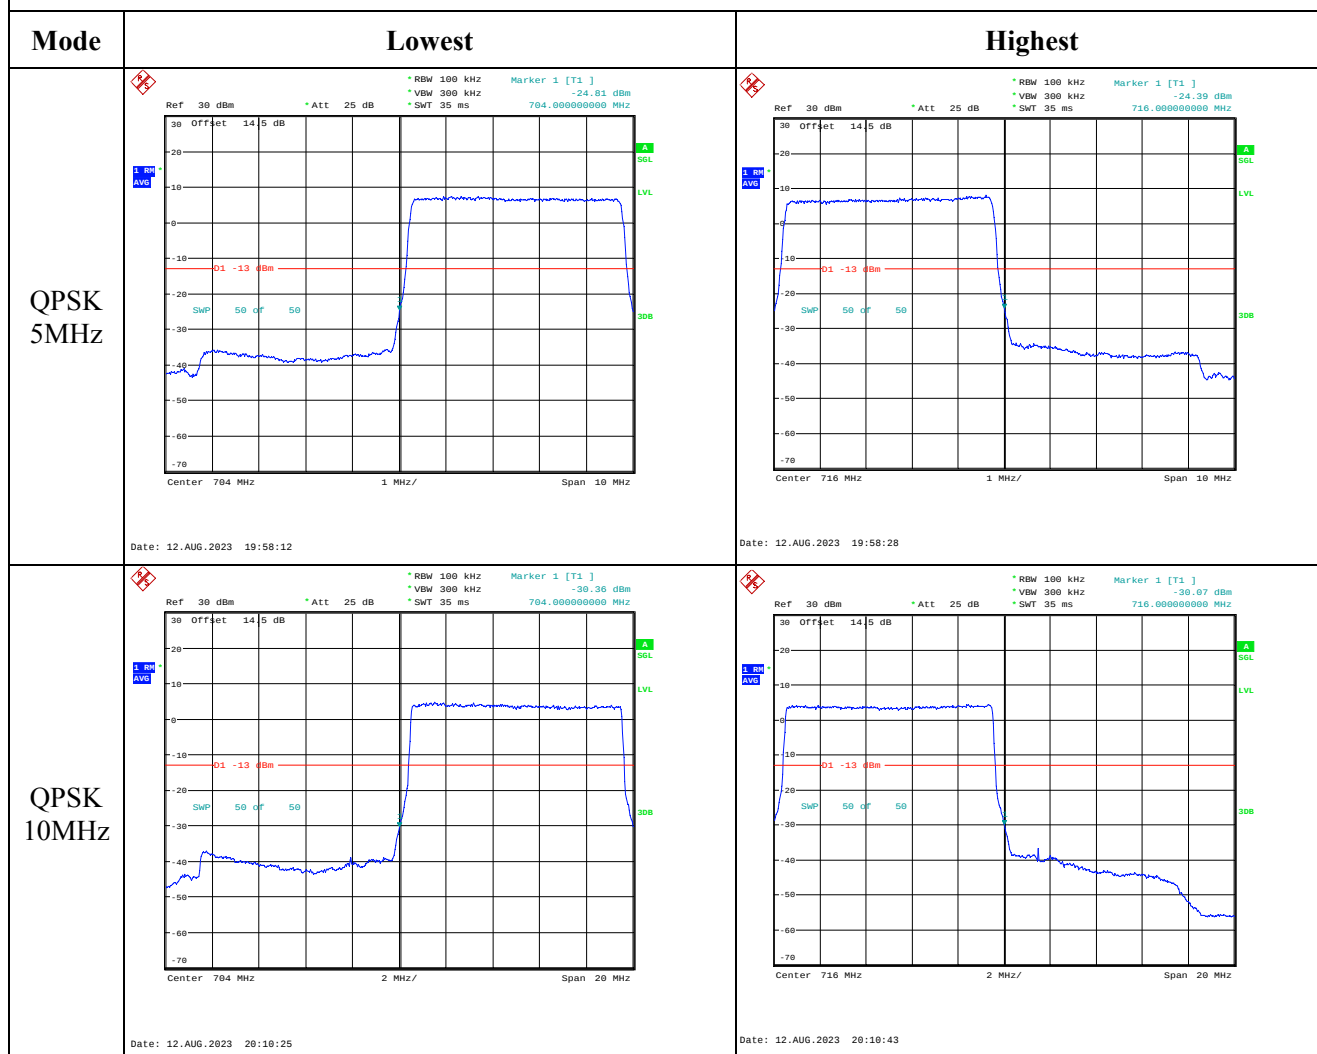


Out of band emission, Band Edge

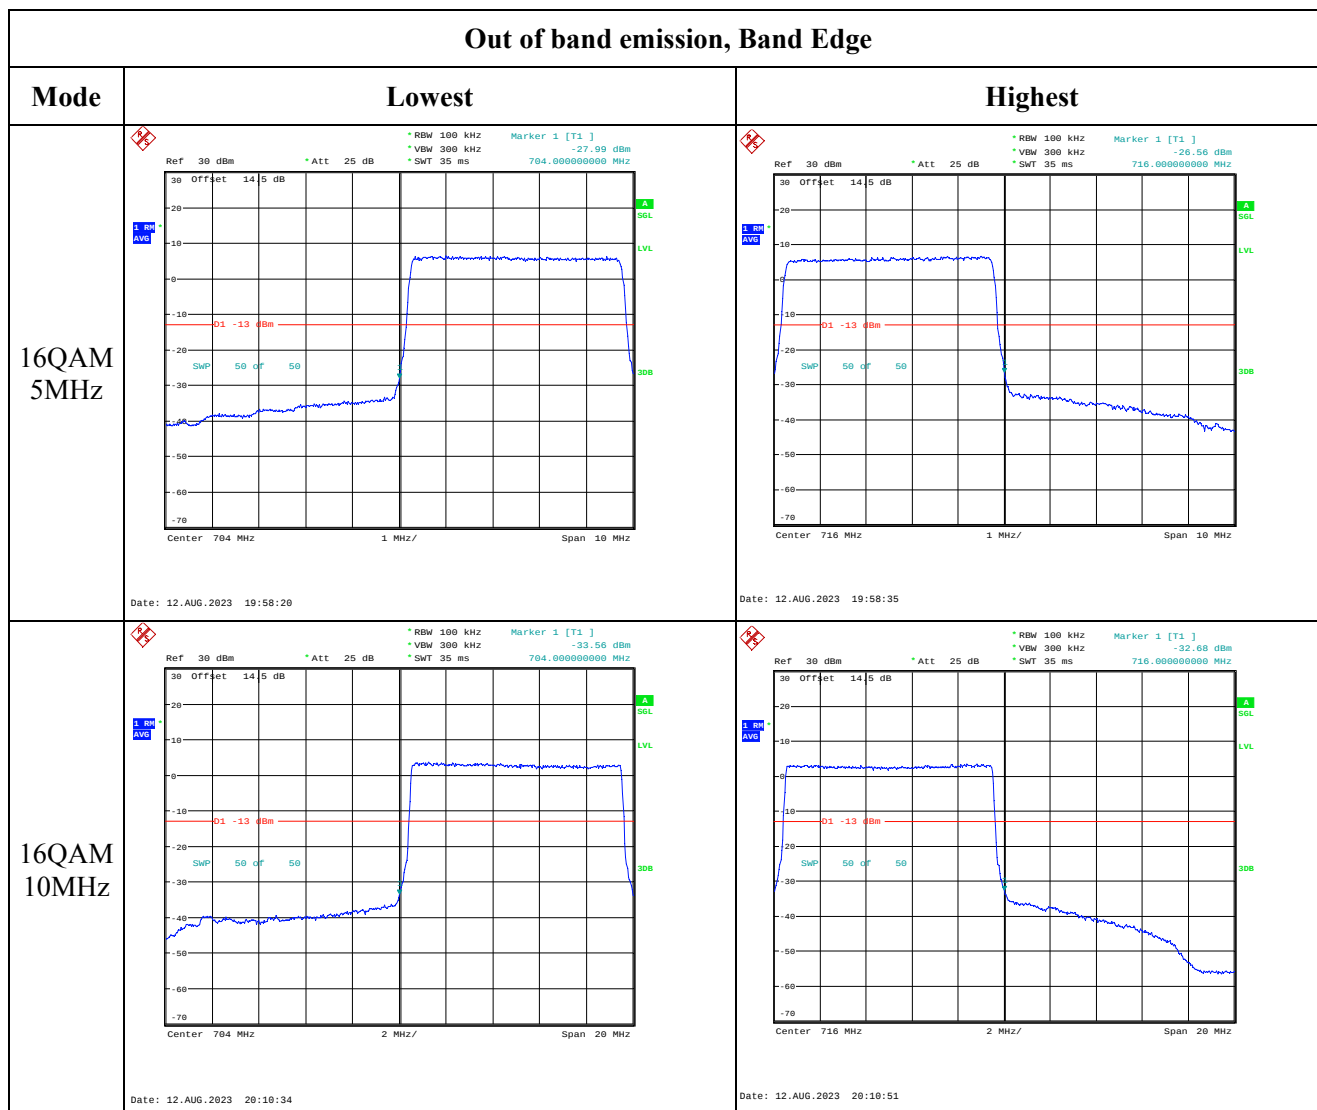

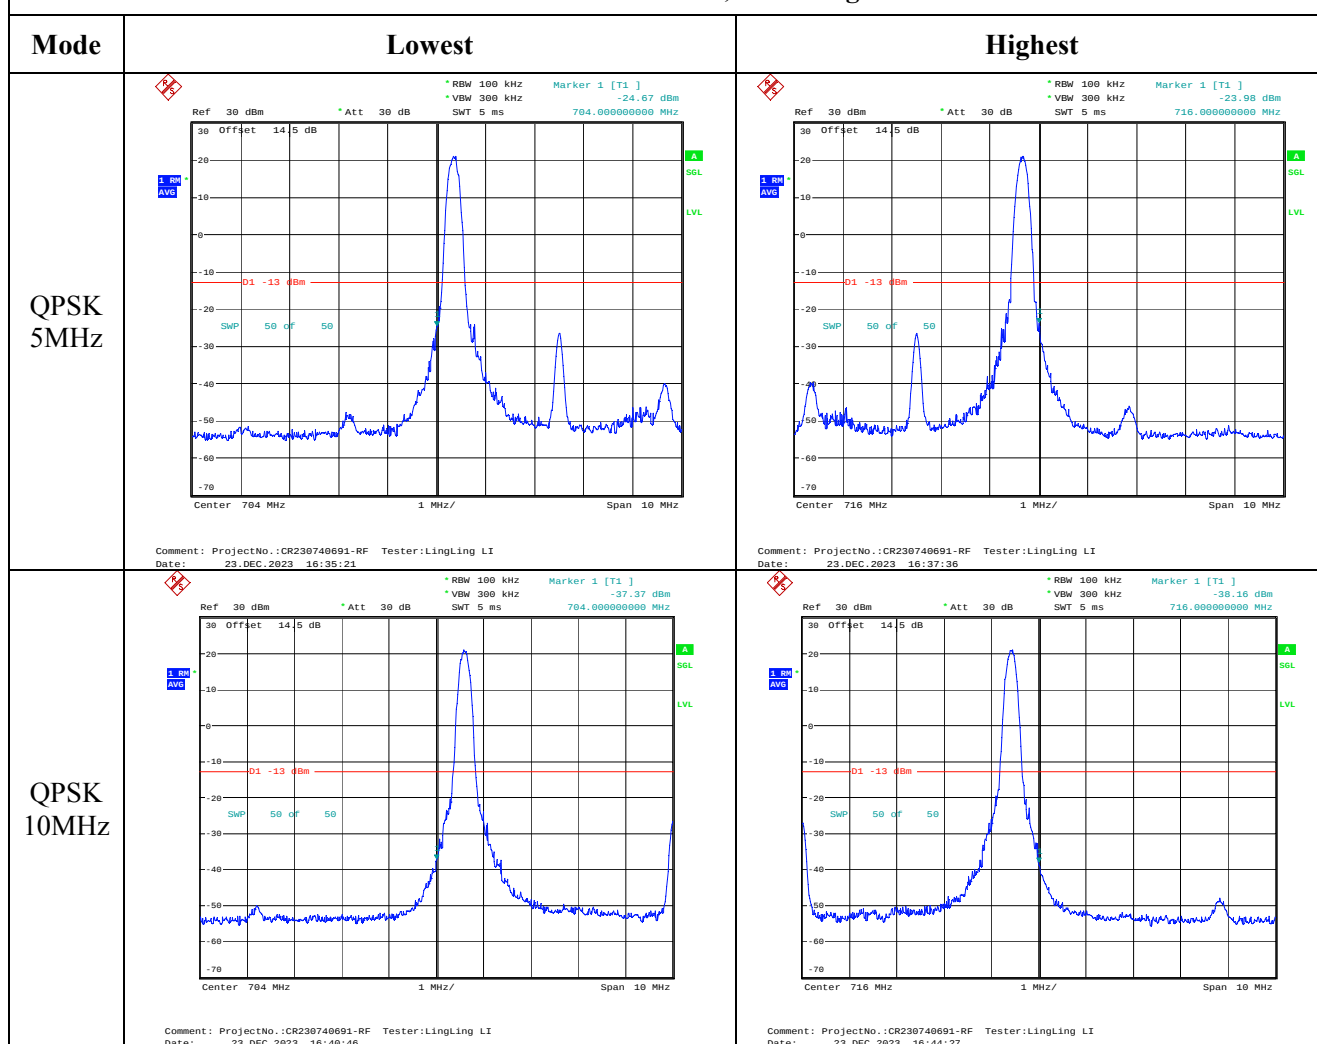Test Plots for Out of band emission, Band Edge:
Note: The test is performed in 1RB mode.**Out of band emission, Band Edge**

Out of band emission, Band Edge

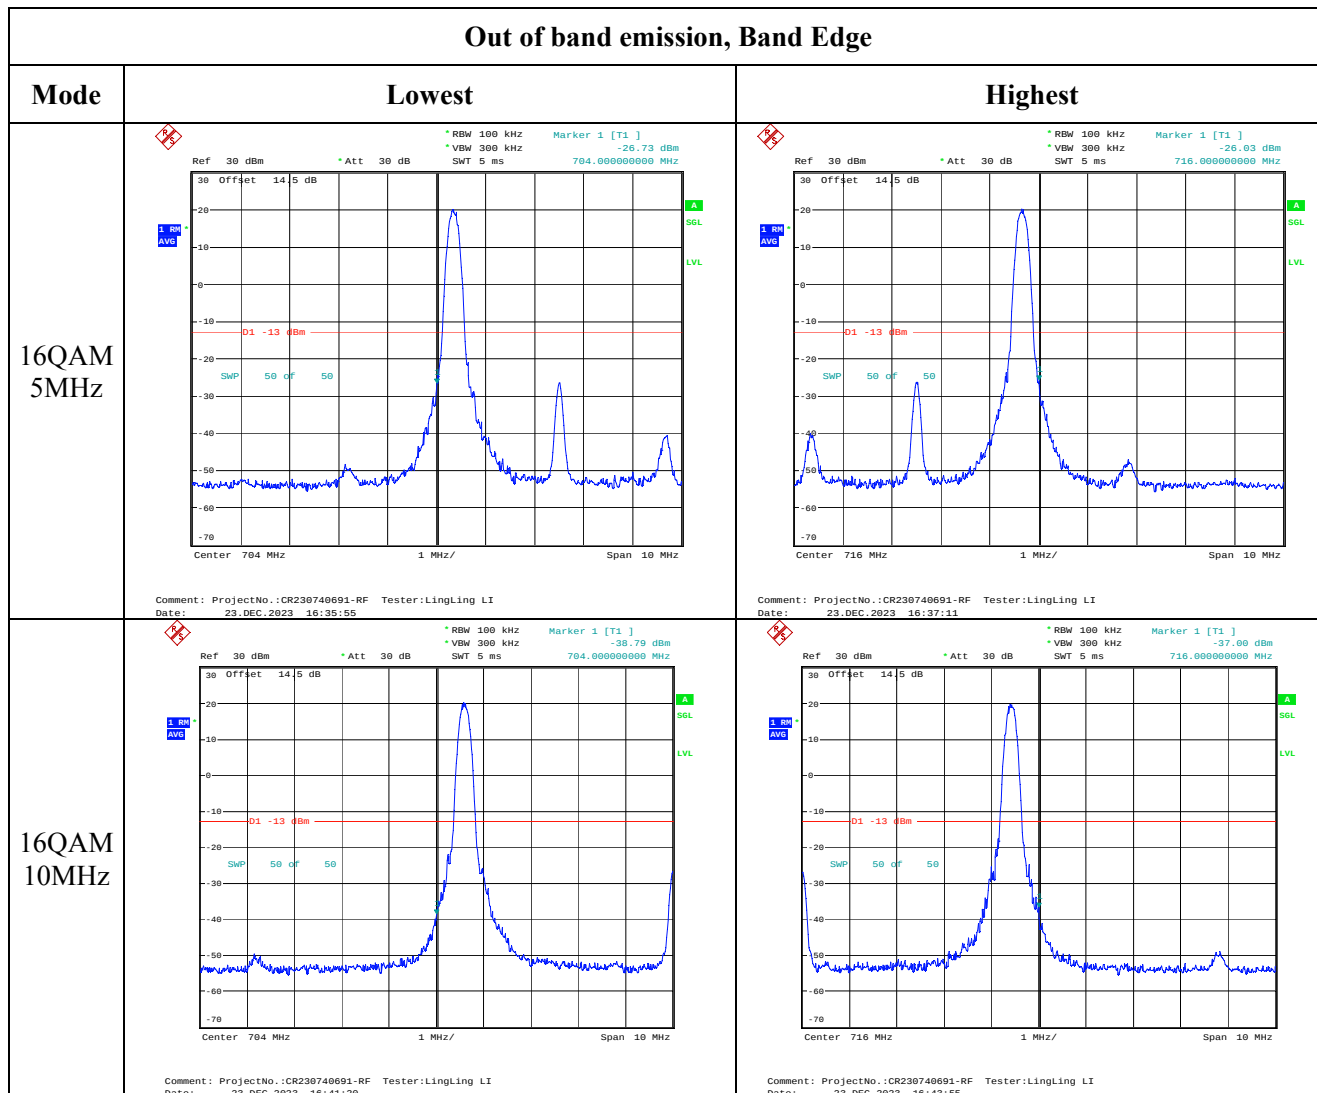

4.8 Antenna Port Test Data and Results for LTE Band 25

Serial Number:	288V-1	Test Date:	2023/8/4-2023/12/23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Claire Liu/Arthur Su/LingLing Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.3-26.1	Relative Humidity: (%)	42-62	ATM Pressure: (kPa)	99.7-101.9
-------------------	-----------	------------------------	-------	---------------------	------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency for Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	1850.7	1882.5	1914.3
3MHz	1851.5	1882.5	1913.5
5MHz	1852.5	1882.5	1912.5
10MHz	1855	1882.5	1910
15MHz	1857.5	1882.5	1907.5
20MHz	1860	1882.5	1905

Test Data:

FCC§2.1046;§ 24.232						
RF Output Power:						
Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	23.42	23.13	22.83	25.03	33
	RB1#3	23.46	23.25	22.91		
	RB1#5	23.4	23.15	22.82		
	RB3#0	23.72	23.38	23.13		
	RB3#3	23.6	23.37	23.07		
	RB6#0	22.38	22.13	21.87		
1.4MHz 16QAM	RB1#0	22.71	22.41	22.06	24.11	33
	RB1#3	22.8	22.49	22.13		
	RB1#5	22.72	22.41	22.05		
	RB3#0	22.72	22.73	22.46		
	RB3#3	22.74	22.71	22.41		
	RB6#0	21.58	21.24	21.1		
3MHz QPSK	RB1#0	23.46	23.25	23.34	24.8	33
	RB1#8	23.49	23.24	23.38		
	RB1#14	23.41	23.2	23.29		
	RB6#0	22.46	22.24	22.32		
	RB6#9	22.43	22.23	22.35		
	RB15#0	22.54	22.31	22.48		
3MHz 16QAM	RB1#0	23.27	22.6	22.64	24.59	33
	RB1#8	23.28	22.65	22.53		
	RB1#14	23.2	22.59	22.5		
	RB6#0	21.74	21.5	21.49		
	RB6#9	21.68	21.49	21.44		
	RB15#0	21.75	21.51	21.69		
5MHz QPSK	RB1#0	23.49	22.47	22.63	24.87	33
	RB1#13	23.56	22.55	22.65		
	RB1#24	23.4	22.46	22.53		
	RB15#0	22.54	21.59	21.68		
	RB15#10	22.52	21.58	21.67		
	RB25#0	22.53	21.6	21.71		
5MHz 16QAM	RB1#0	22.69	21.62	22.14	24.07	33
	RB1#13	22.76	21.73	22.17		
	RB1#24	22.68	21.6	22.03		
	RB15#0	21.76	20.81	20.89		
	RB15#10	21.75	20.79	20.88		
	RB25#0	21.74	20.82	20.94		
10MHz QPSK	RB1#0	23.6	23.44	22.8	24.91	33
	RB1#25	23.44	23.34	22.81		
	RB1#49	23.45	23.43	22.74		

	RB25#0	22.49	22.47	21.9		
	RB25#25	22.4	22.46	21.96		
	RB50#0	22.43	22.51	21.9		
10MHz 16QAM	RB1#0	22.78	23.35	22.17	24.66	33
	RB1#25	22.67	23.25	22.2		
	RB1#49	22.56	23.29	22.01		
	RB25#0	21.85	21.75	21.14		
	RB25#25	21.7	21.76	21.22		
	RB50#0	21.64	21.71	21.13		
15MHz QPSK	RB1#0	23.63	22.83	22.62	24.94	33
	RB1#38	23.58	22.92	22.5		
	RB1#74	23.43	22.95	22.44		
	RB36#0	22.62	21.92	21.66		
	RB36#39	22.46	21.86	21.58		
	RB75#0	22.43	21.9	21.6		
15MHz 16QAM	RB1#0	23.25	22.71	22	24.56	33
	RB1#38	23.25	22.79	21.94		
	RB1#74	23.06	22.8	21.63		
	RB36#0	21.76	21.11	20.83		
	RB36#39	21.6	21.05	20.73		
	RB75#0	21.61	21.03	20.79		
20MHz QPSK	RB1#0	23.66	23.47	23.44	24.97	33
	RB1#50	23.47	23.37	23.46		
	RB1#99	23.46	23.47	23.42		
	RB50#0	22.63	22.51	22.53		
	RB50#50	22.65	22.5	22.52		
	RB100#0	22.61	22.49	22.51		
20MHz 16QAM	RB1#0	23.41	22.98	22.87	24.72	33
	RB1#50	23.35	22.9	22.87		
	RB1#99	23.29	23.01	22.87		
	RB50#0	21.81	21.64	21.7		
	RB50#50	21.84	21.67	21.7		
	RB100#0	21.81	21.66	21.75		

Note: EIRP=Conducted Power(dBm) - Lc(dB) + G_T(dBi)

Result:

Pass

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	3.75	3.91	4.13	13
	RB100#0	6.54	6.44	6.41	13
20MHz 16QAM	RB1#0	5.54	6.12	6.7	13
	RB100#0	7.34	7.31	7.34	13
				Result:	Pass

FCC §2.1049, §24.238:Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.098	1.098	1.098	1.260	1.242	1.248
1.4MHz 16QAM	1.092	1.098	1.11	1.236	1.248	1.25
3MHz QPSK	2.7	2.687	2.687	3.0	2.952	2.964
3MHz 16QAM	2.7	2.687	2.7	3.0	2.964	3.0
5MHz QPSK	4.52	4.54	4.54	4.98	5.00	5.00
5MHz 16QAM	4.54	4.52	4.54	4.98	4.94	5.00
10MHz QPSK	8.96	8.96	8.96	9.72	9.68	9.72
10MHz 16QAM	8.96	8.96	9	9.64	9.68	10
15MHz QPSK	13.560	13.560	13.560	14.940	14.880	14.760
15MHz 16QAM	13.560	13.560	13.560	14.820	14.820	14.880
20MHz QPSK	18	18	17.92	19	19	19.52
20MHz 16QAM	18	17.92	18	20	19.44	20
Note: The test plots please refer to the Plots of Occupied Bandwidth						


FCC §2.1051, § 24.238 (a):Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

FCC §2.1051, § 24.238 (a):Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §24.235: Frequency Stability						
Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	5	1851.038	1850.000	1913.963	1915.000
	-20	5	1851.028	1850.000	1913.988	1915.000
	-10	5	1851.019	1850.000	1913.974	1915.000
	0	5	1851.037	1850.000	1913.977	1915.000
	10	5	1851.032	1850.000	1913.985	1915.000
	20	5	1851.040	1850.000	1913.960	1915.000
	30	5	1851.036	1850.000	1913.971	1915.000
	40	5	1851.039	1850.000	1913.973	1915.000
	50	5	1851.025	1850.000	1913.982	1915.000
Frequency Stability vs. Voltage	20	4.4	1851.033	1850.000	1913.964	1915.000
	20	5.25	1851.018	1850.000	1913.981	1915.000
Result:					Pass	

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	5	1851.022	1850.000	1913.979	1915.000
	-20	5	1851.033	1850.000	1913.960	1915.000
	-10	5	1851.031	1850.000	1913.973	1915.000
	0	5	1851.026	1850.000	1913.961	1915.000
	10	5	1851.029	1850.000	1913.982	1915.000
	20	5	1851.040	1850.000	1913.960	1915.000
	30	5	1851.021	1850.000	1913.988	1915.000
	40	5	1851.025	1850.000	1913.971	1915.000
	50	5	1851.039	1850.000	1913.966	1915.000
Frequency Stability vs. Voltage	20	4.4	1851.025	1850.000	1913.977	1915.000
	20	5.25	1851.030	1850.000	1913.969	1915.000
					Result:	Pass

Test Plots (Note: The 14.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

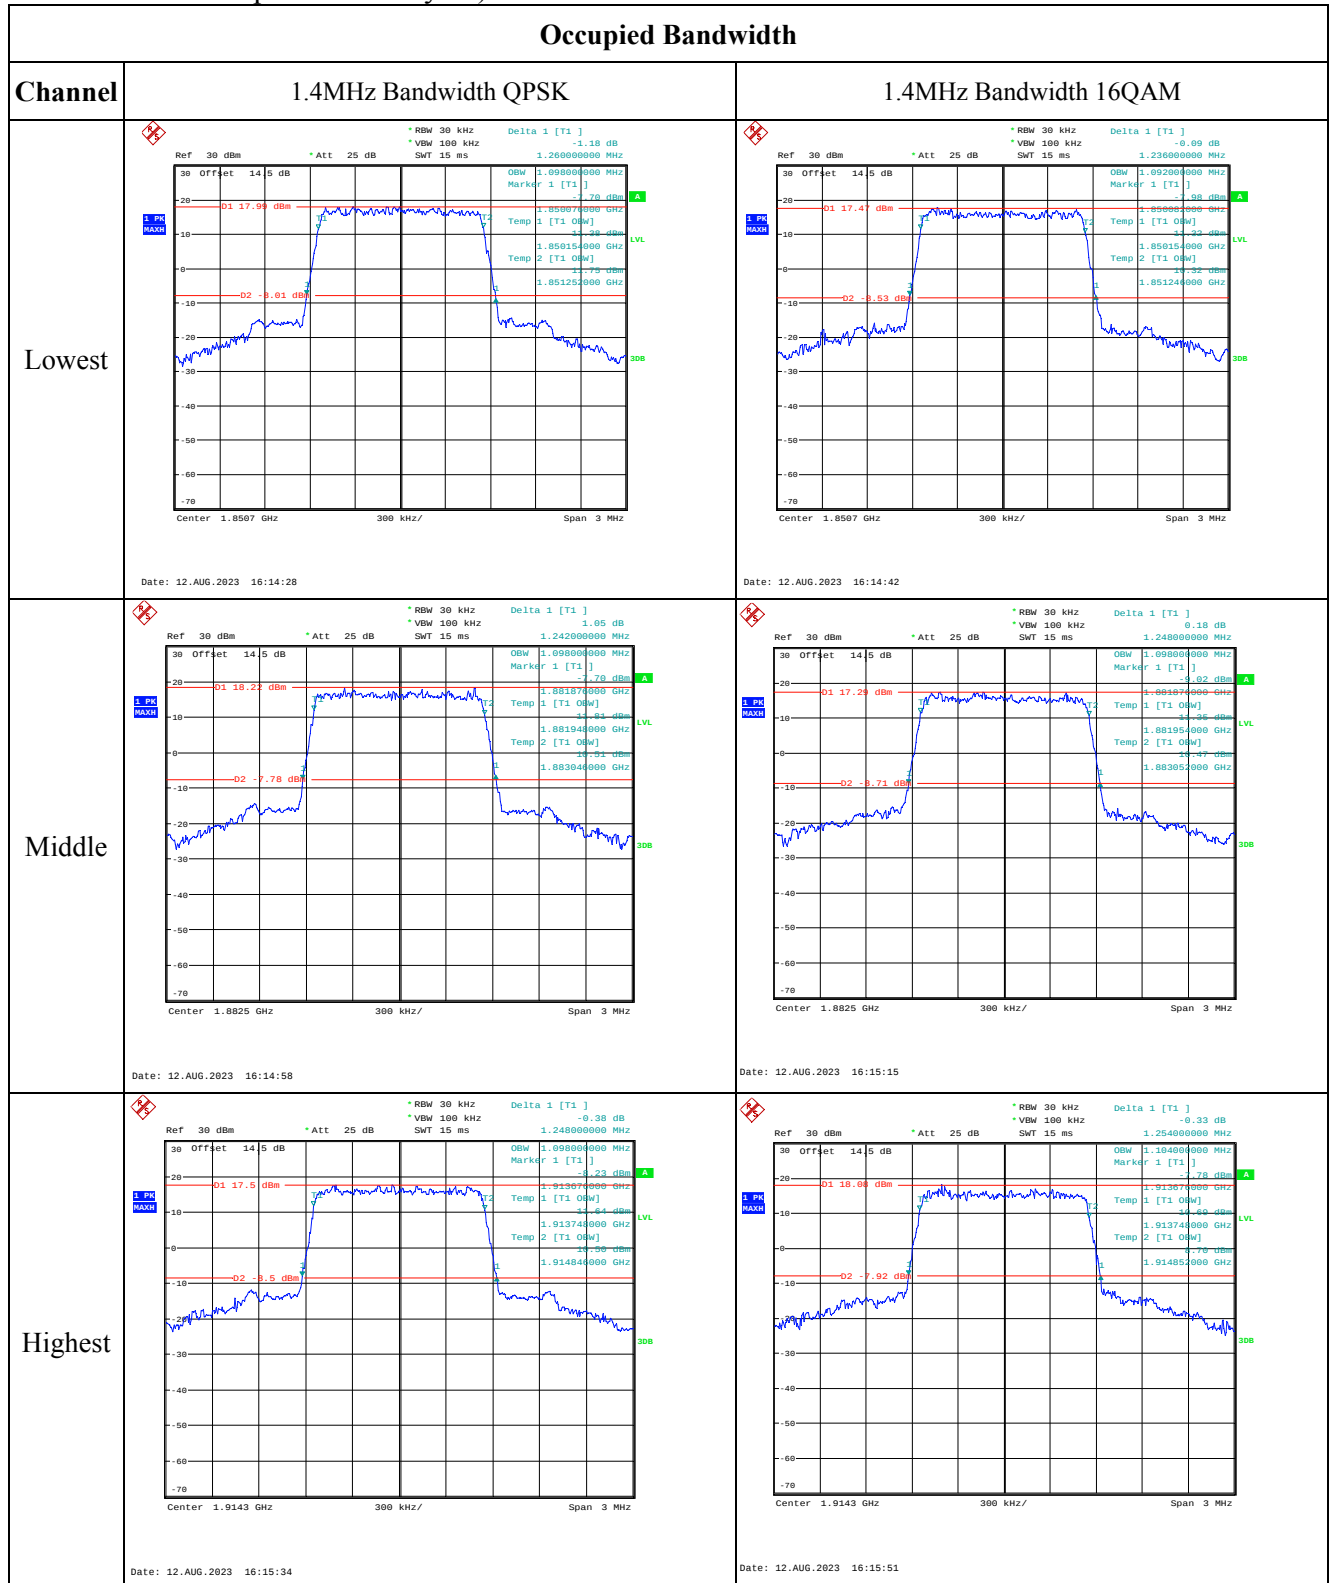

Occupied Bandwidth

Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	Ref 30 dBm *Att 25 dB RBW 100 kHz VBW 300 kHz SWT 10 ms Delta 1 [T1] 1.93 dB OBW 9.720000000 MHz Marker 1 [T1] 1.93 dB Temp 1 [T1 0dB] 1.859120000 GHz Temp 2 [T1 0dB] 1.859520000 GHz Temp 1 [T1 0dB] 1.859480000 GHz LVL 1.859120000 GHz LVL 1.859520000 GHz LVL 1.859480000 GHz 30B Center 1.855 GHz 2 MHz/ Span 20 MHz Date: 12.AUG.2023 16:37:08	Ref 30 dBm *Att 25 dB RBW 100 kHz VBW 300 kHz SWT 10 ms Delta 1 [T1] 0.55 dB OBW 9.640000000 MHz Marker 1 [T1] 0.55 dB Temp 1 [T1 0dB] 1.859120000 GHz Temp 2 [T1 0dB] 1.859520000 GHz Temp 1 [T1 0dB] 1.859480000 GHz LVL 1.859120000 GHz LVL 1.859520000 GHz LVL 1.859480000 GHz 30B Center 1.855 GHz 2 MHz/ Span 20 MHz Date: 12.AUG.2023 16:37:27
Middle	Ref 30 dBm *Att 25 dB RBW 100 kHz VBW 300 kHz SWT 10 ms Delta 1 [T1] -0.59 dB OBW 9.680000000 MHz Marker 1 [T1] -0.59 dB Temp 1 [T1 0dB] 1.877660000 GHz Temp 2 [T1 0dB] 1.878200000 GHz Temp 1 [T1 0dB] 1.877980000 GHz LVL 1.877660000 GHz LVL 1.878200000 GHz LVL 1.877980000 GHz 30B Center 1.8825 GHz 2 MHz/ Span 20 MHz Date: 12.AUG.2023 16:37:42	Ref 30 dBm *Att 25 dB RBW 100 kHz VBW 300 kHz SWT 10 ms Delta 1 [T1] 0.70 dB OBW 9.680000000 MHz Marker 1 [T1] 0.70 dB Temp 1 [T1 0dB] 1.877660000 GHz Temp 2 [T1 0dB] 1.878200000 GHz Temp 1 [T1 0dB] 1.877980000 GHz LVL 1.877660000 GHz LVL 1.878200000 GHz LVL 1.877980000 GHz 30B Center 1.8825 GHz 2 MHz/ Span 20 MHz Date: 12.AUG.2023 16:38:00
Highest	Ref 30 dBm *Att 25 dB RBW 100 kHz VBW 300 kHz SWT 10 ms Delta 1 [T1] -0.83 dB OBW 9.720000000 MHz Marker 1 [T1] -0.83 dB Temp 1 [T1 0dB] 1.914480000 GHz Temp 2 [T1 0dB] 1.914880000 GHz Temp 1 [T1 0dB] 1.914680000 GHz LVL 1.914480000 GHz LVL 1.914880000 GHz LVL 1.914680000 GHz 30B Center 1.91 GHz 2 MHz/ Span 20 MHz Date: 12.AUG.2023 16:38:15	Ref 30 dBm *Att 25 dB RBW 100 kHz VBW 300 kHz SWT 10 ms Delta 1 [T1] -1.47 dB OBW 9.600000000 MHz Marker 1 [T1] -1.47 dB Temp 1 [T1 0dB] 1.905200000 GHz Temp 2 [T1 0dB] 1.905480000 GHz Temp 1 [T1 0dB] 1.905340000 GHz LVL 1.905200000 GHz LVL 1.905480000 GHz LVL 1.905340000 GHz 30B Center 1.91 GHz 2 MHz/ Span 20 MHz Date: 12.AUG.2023 16:38:33


Occupied Bandwidth

Channel


15MHz Bandwidth QPSK

15MHz Bandwidth 16QAM

Lowest

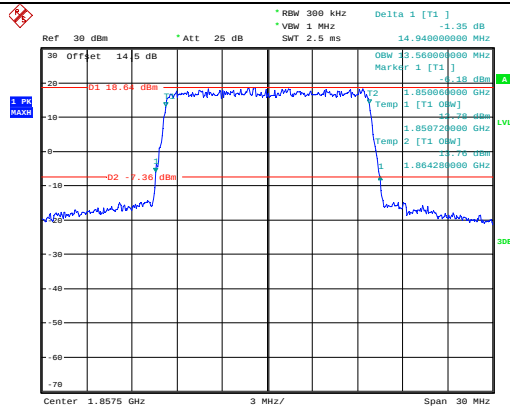


Date: 12.AUG.2023 16:39:26

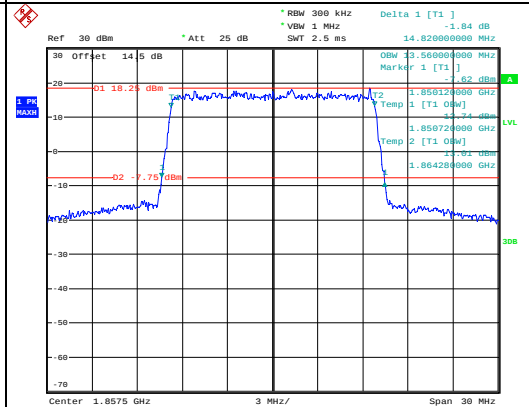


Date: 12.AUG.2023 16:39:47

Middle

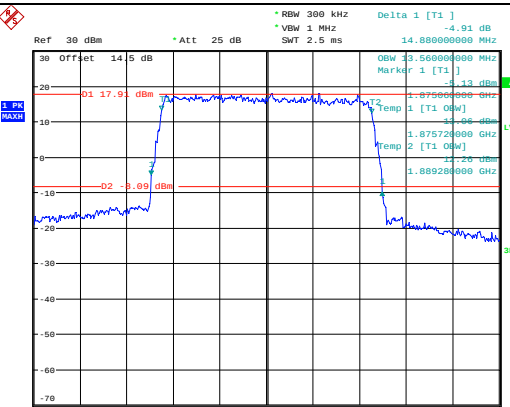


Date: 12.AUG.2023 16:40:09

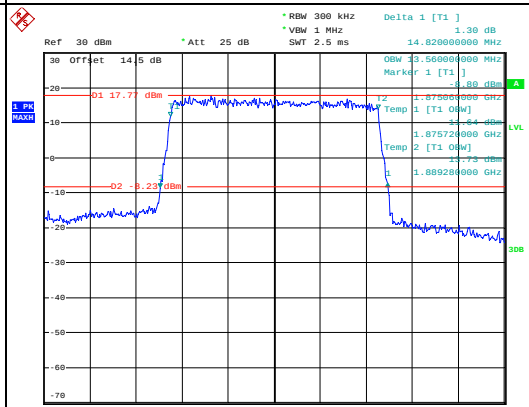


Date: 12.AUG.2023 16:40:26

Highest

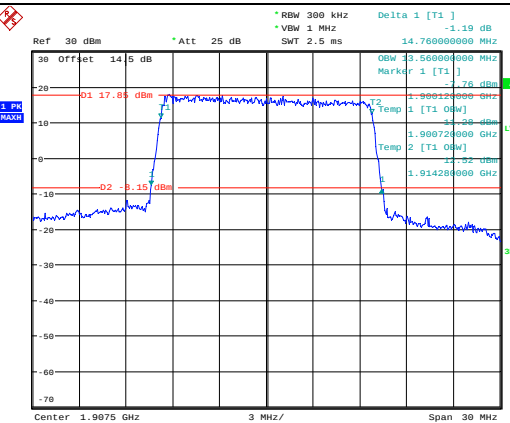

Date: 12.AUG.2023 16:40:48

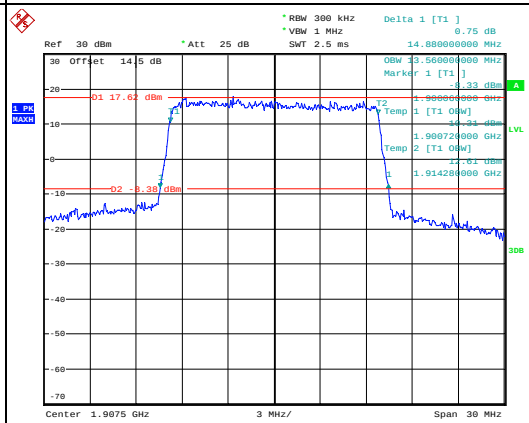

Date: 12.AUG.2023 16:41:09



Occupied Bandwidth

Channel



20MHz Bandwidth QPSK

20MHz Bandwidth 16QAM



Lowest

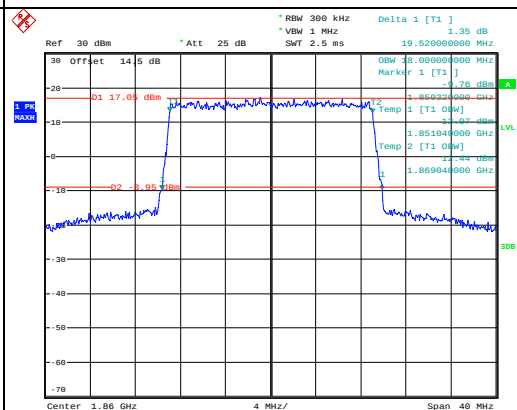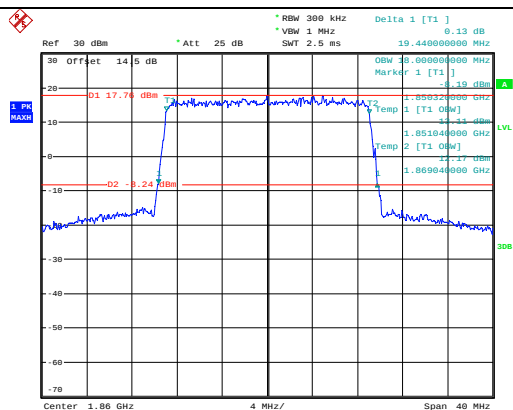

Middle

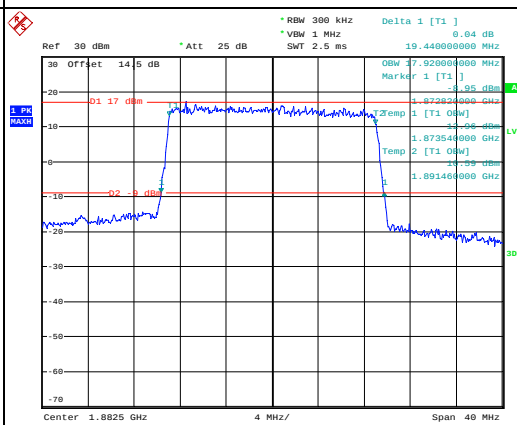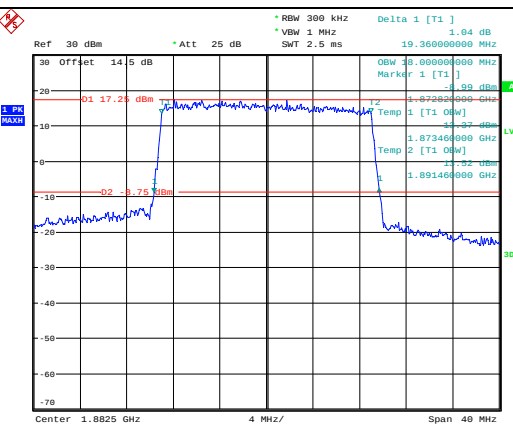

Highest

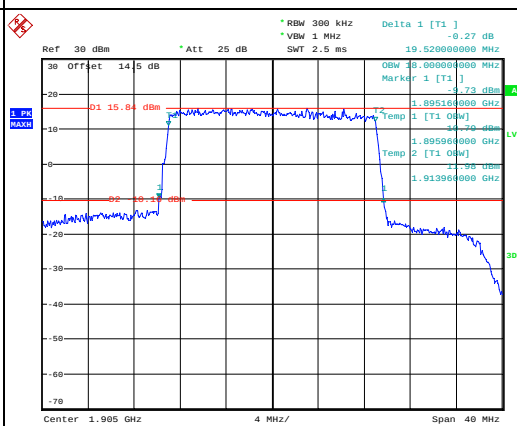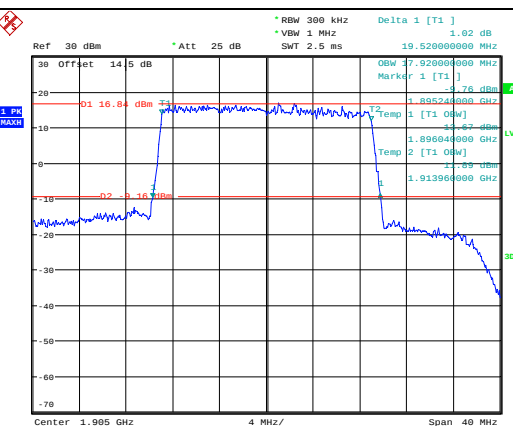


Spurious Emissions at Antenna Terminal


Channel

1.4MHz Bandwidth QPSK

Lowest

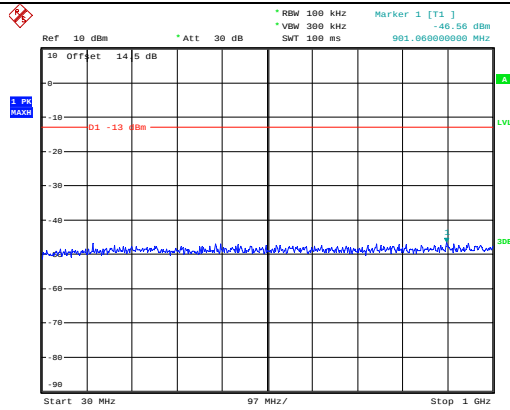


Date: 12.AUG.2023 21:25:16

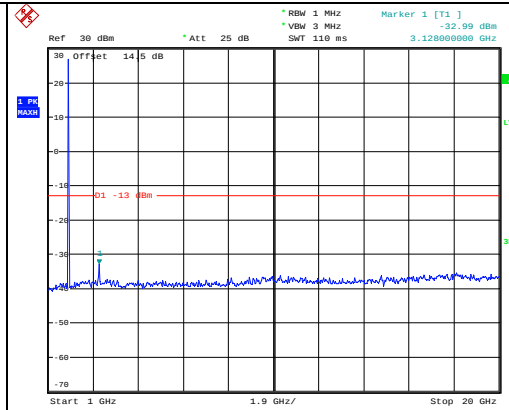


Date: 12.AUG.2023 21:25:27

Middle

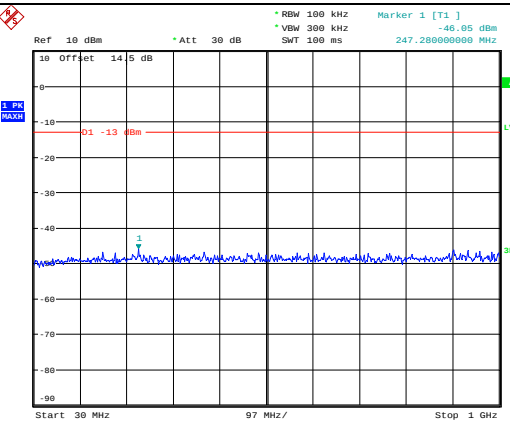


Date: 12.AUG.2023 21:25:41

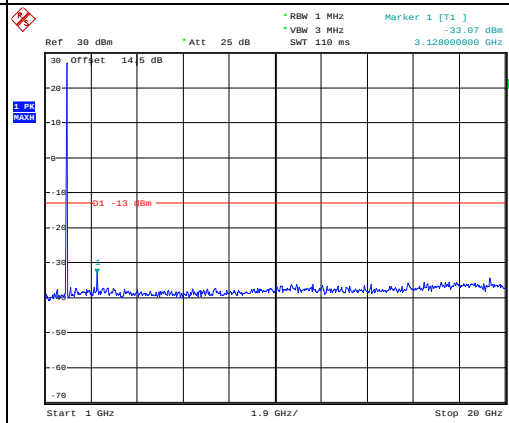


Date: 12.AUG.2023 21:25:52

Highest

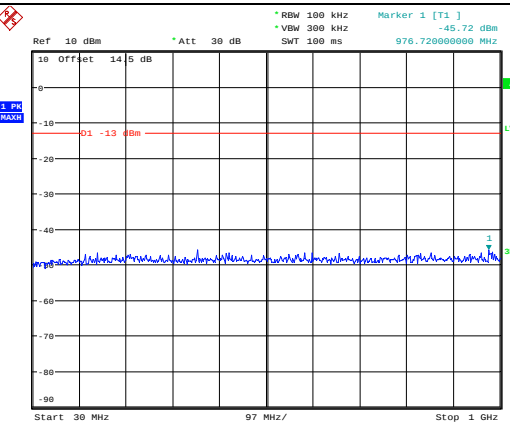

Date: 12.AUG.2023 21:26:09

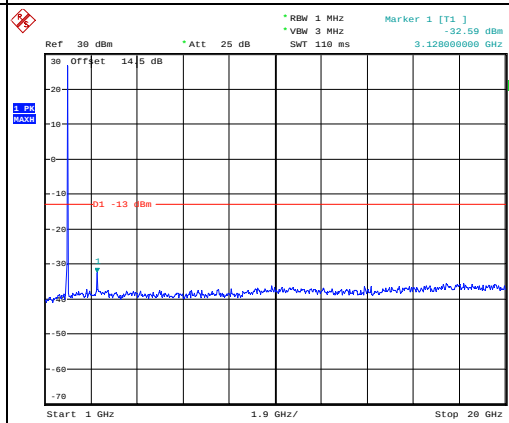


Date: 12.AUG.2023 21:26:29

Spurious Emissions at Antenna Terminal


Channel

3MHz Bandwidth QPSK

Lowest

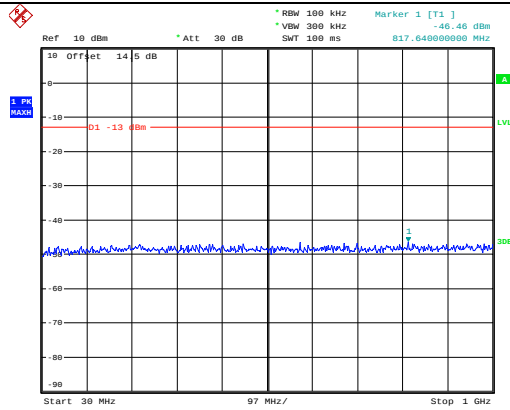


Date: 12.AUG.2023 21:27:02

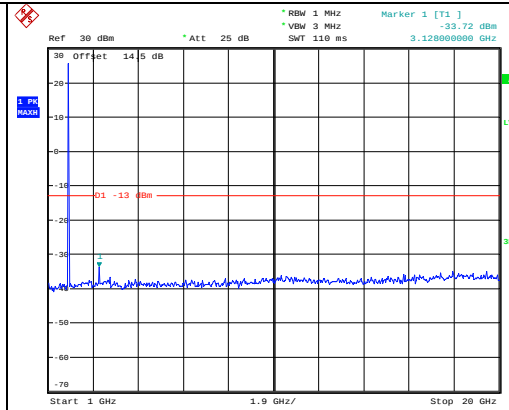


Date: 12.AUG.2023 21:27:13

Middle

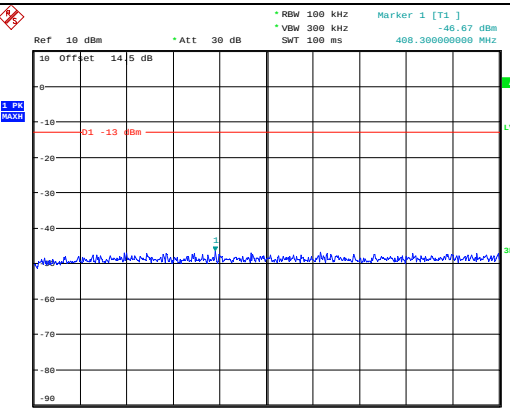


Date: 12.AUG.2023 21:27:27

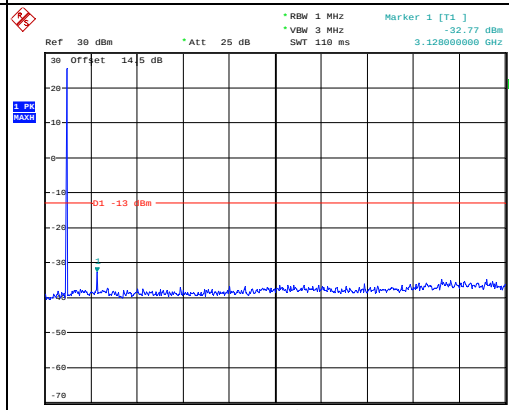


Date: 12.AUG.2023 21:27:38

Highest

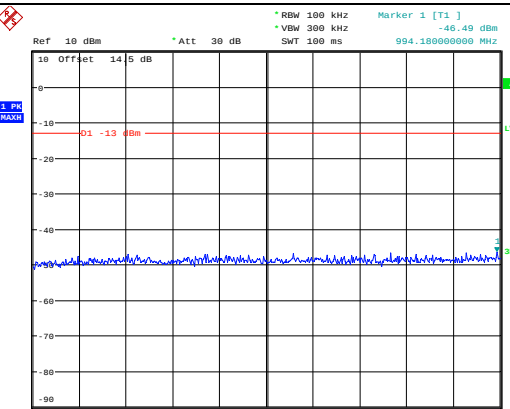

Date: 12.AUG.2023 21:27:52

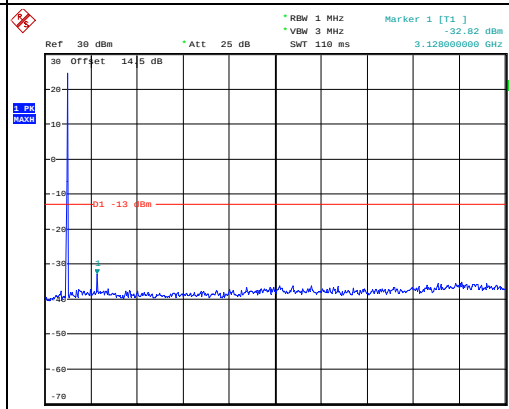


Date: 12.AUG.2023 21:28:03

Spurious Emissions at Antenna Terminal


Channel

5MHz Bandwidth QPSK

Lowest

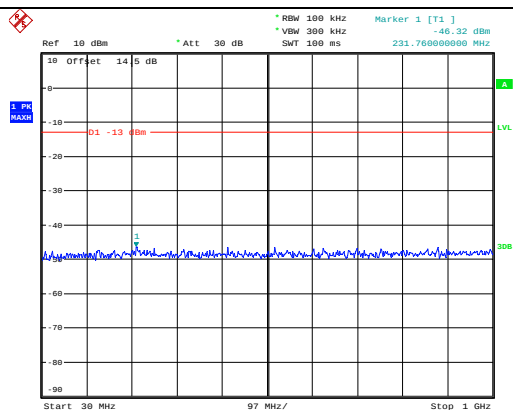


Date: 12.AUG.2023 21:28:45

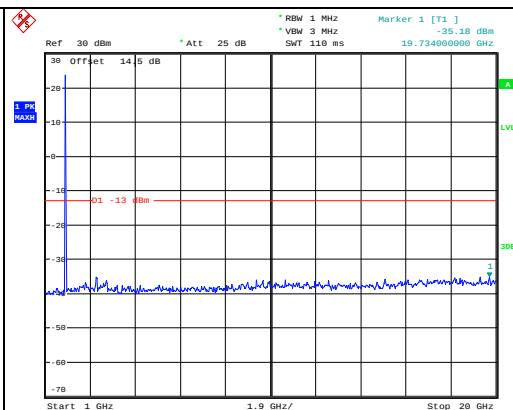


Date: 12.AUG.2023 21:28:56

Middle

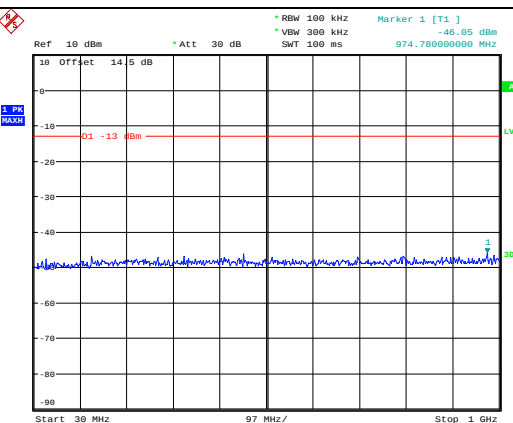


Date: 12.AUG.2023 21:29:13

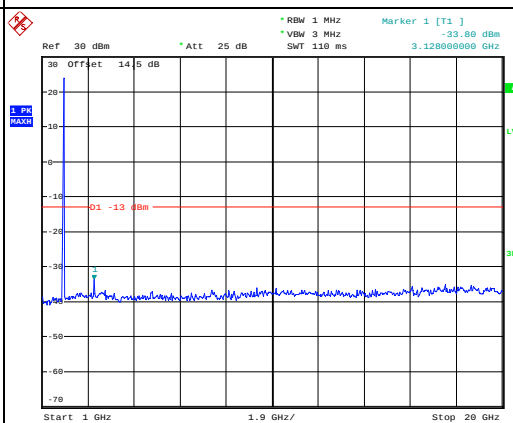


Date: 12.AUG.2023 21:29:24

Highest

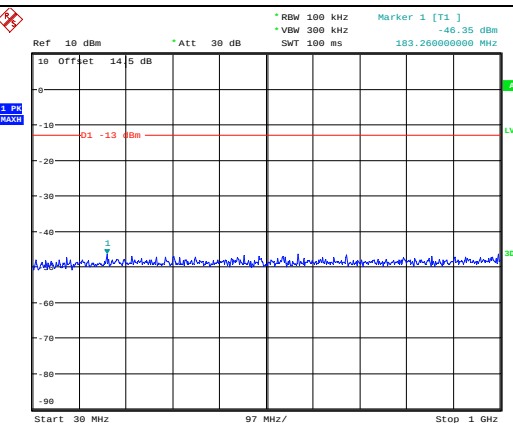


Date: 12.AUG.2023 21:29:38

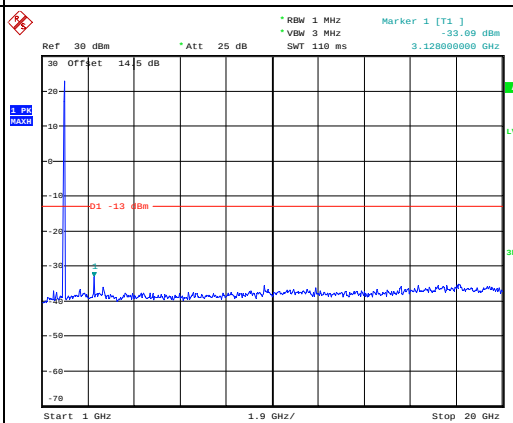

Date: 12.AUG.2023 21:29:49

Spurious Emissions at Antenna Terminal


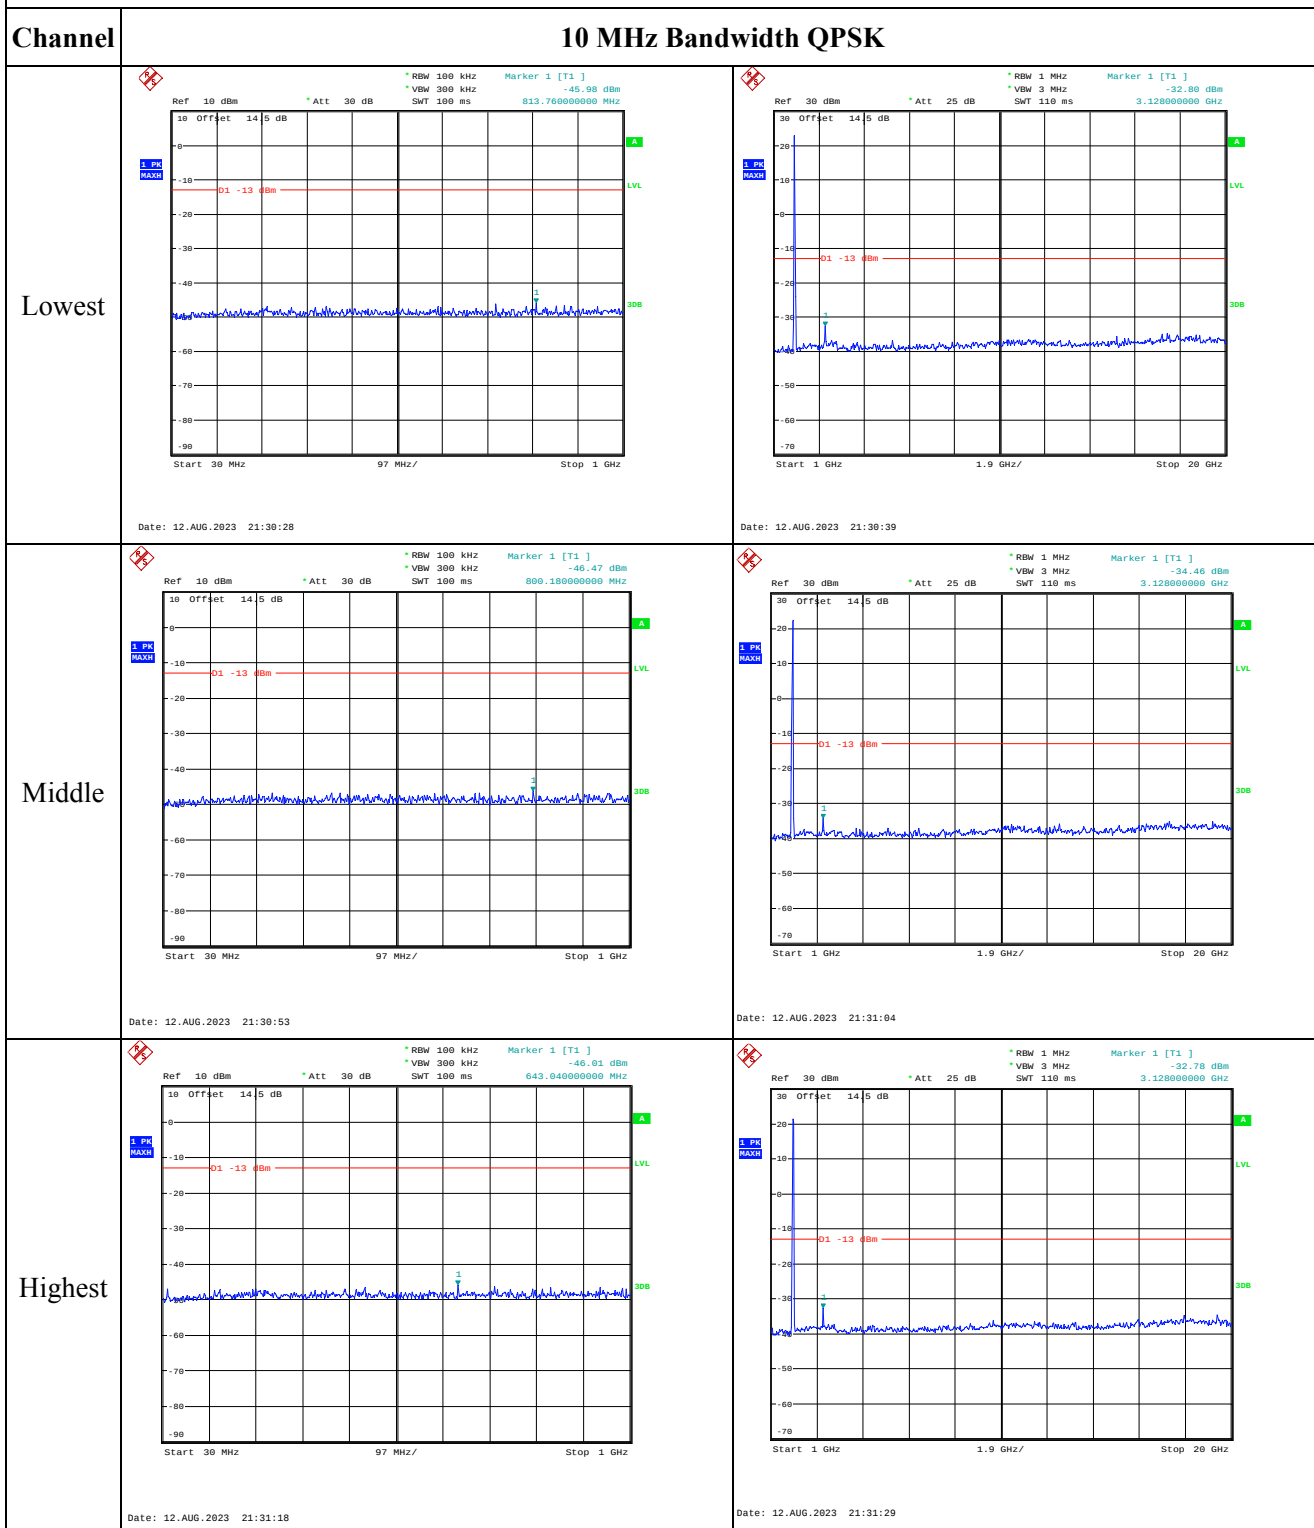


Spurious Emissions at Antenna Terminal



Channel

15MHz Bandwidth QPSK



Lowest

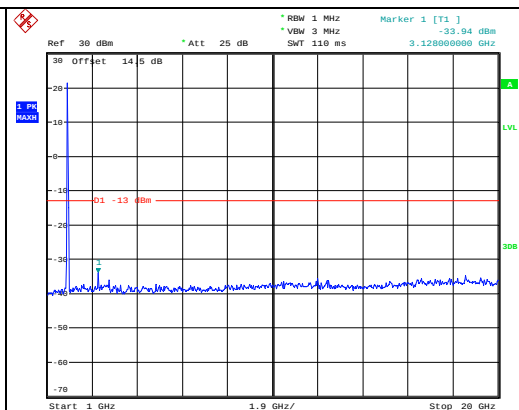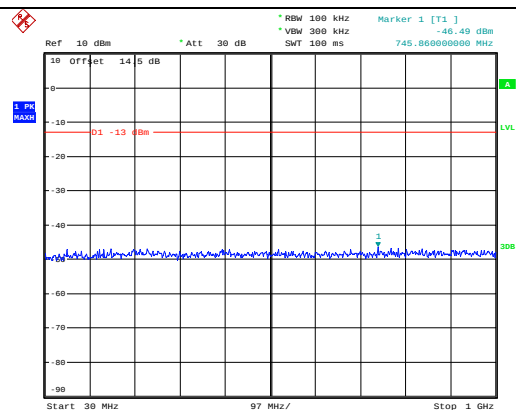

Middle

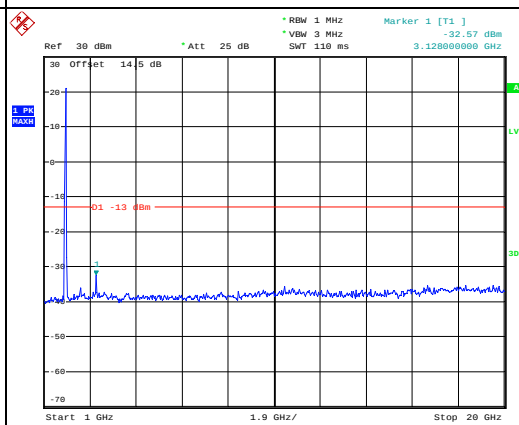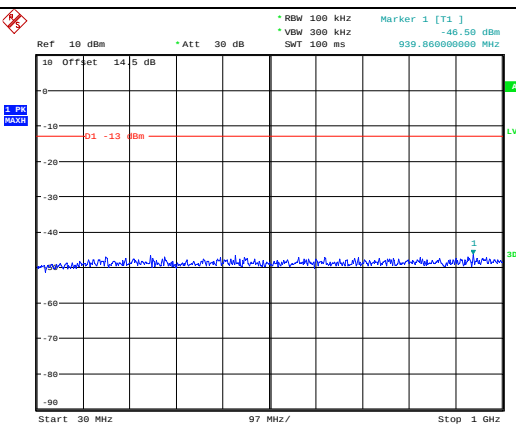

Highest

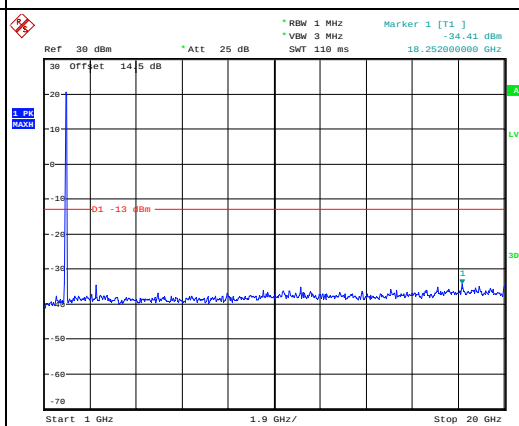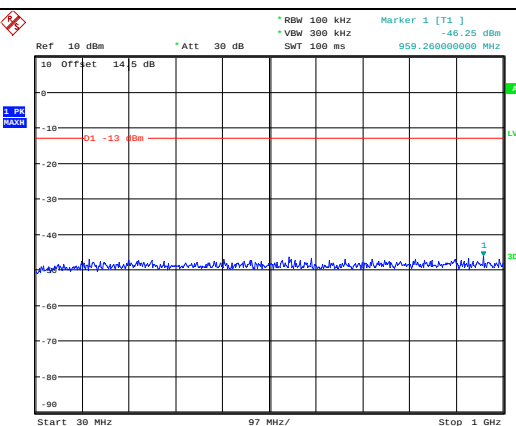


Spurious Emissions at Antenna Terminal


Channel

20MHz Bandwidth QPSK

Lowest

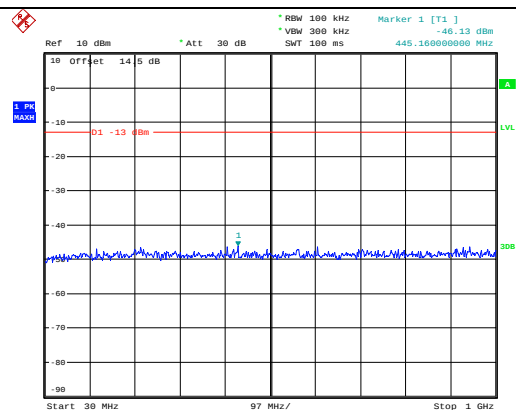


Date: 12.AUG.2023 21:33:50

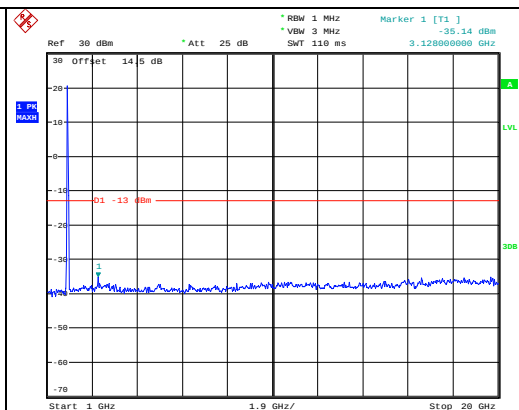


Date: 12.AUG.2023 21:34:02

Middle

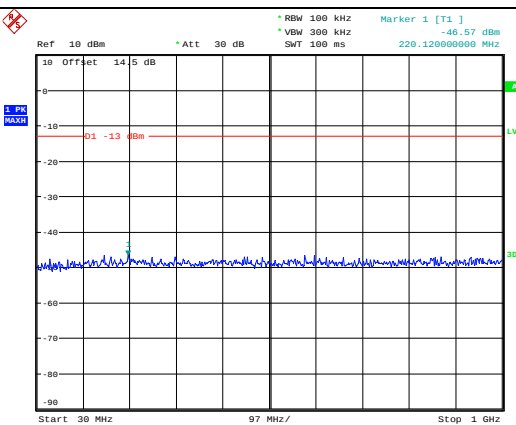


Date: 12.AUG.2023 21:34:15

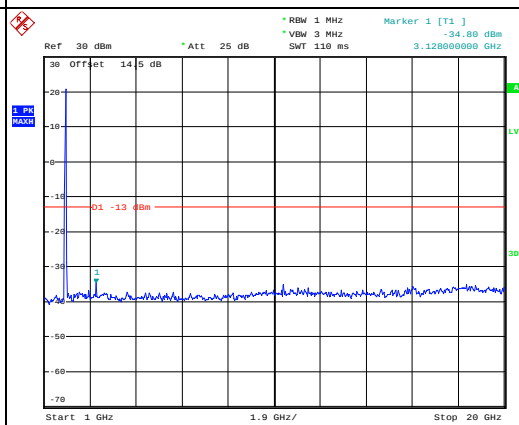


Date: 12.AUG.2023 21:34:26

Highest

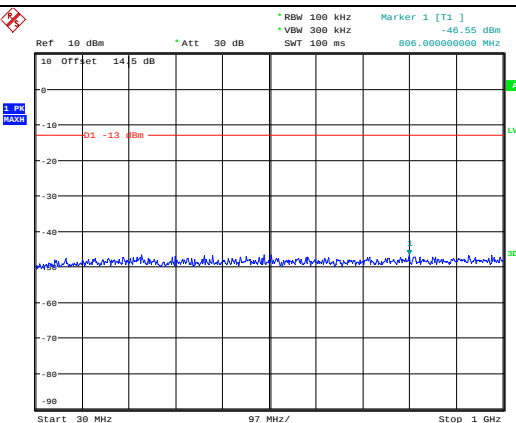


Date: 12.AUG.2023 21:34:43






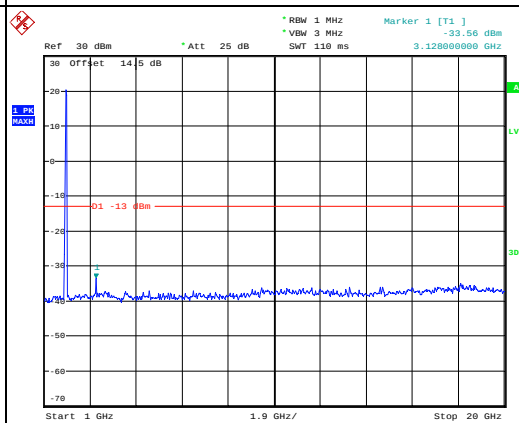


Date: 12.AUG.2023 21:34:54

Test Plots for Out of band emission, Band Edge:
Note: The test is performed in full RB mode.

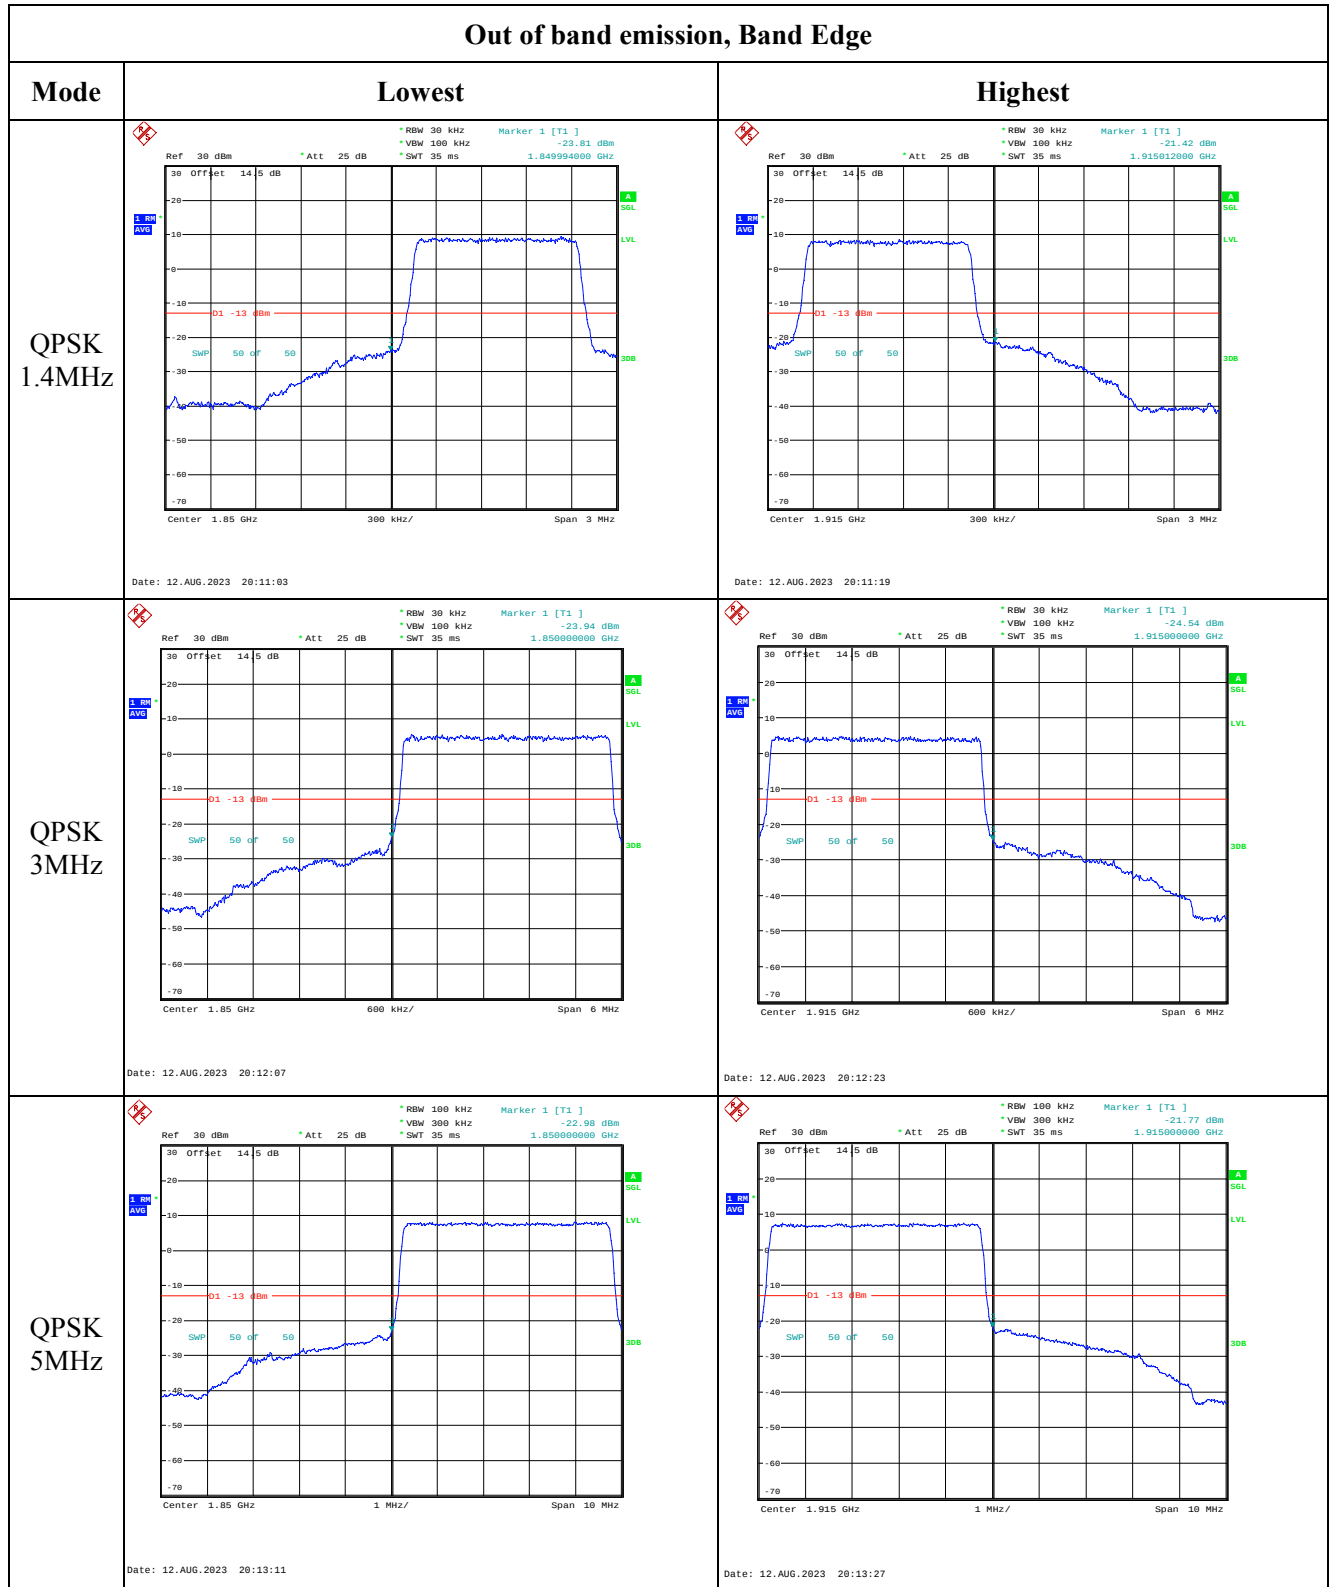

Out of band emission, Band Edge

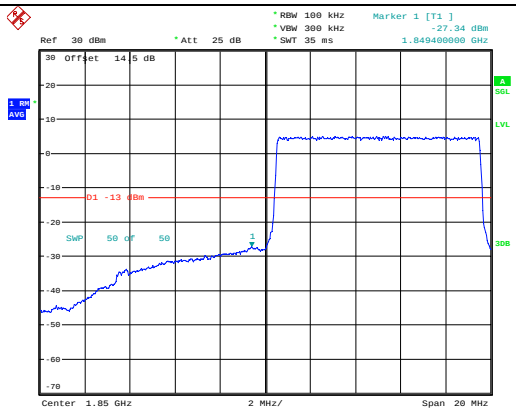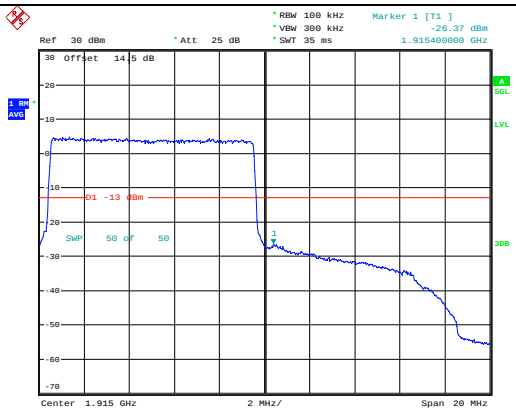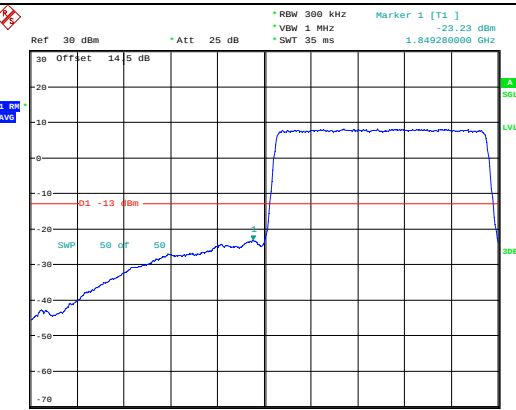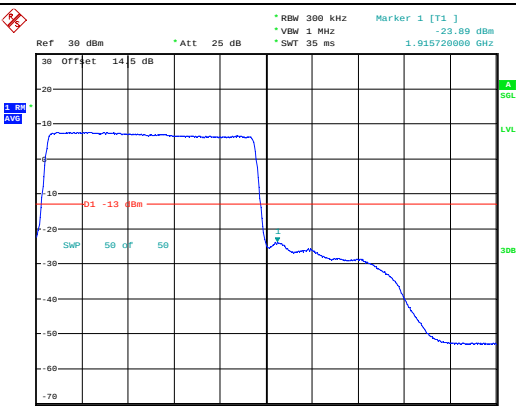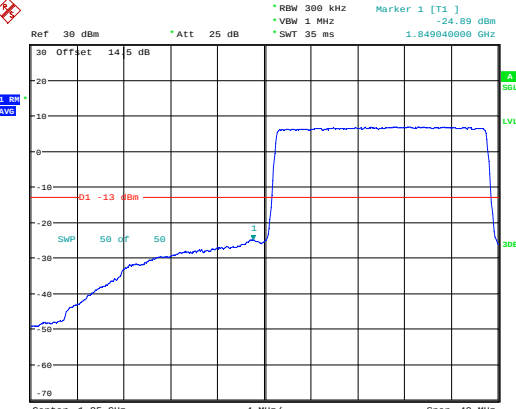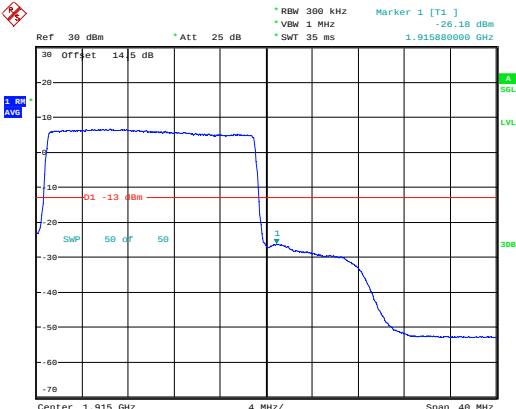Mode	Lowest	Highest
QPSK 10MHz	 Date: 12.AUG.2023 20:30:09	 Date: 12.AUG.2023 20:30:28
QPSK 15MHz	 Date: 12.AUG.2023 20:32:40	 Date: 12.AUG.2023 20:32:55
QPSK 20MHz	 Date: 12.AUG.2023 20:38:09	 Date: 12.AUG.2023 20:38:24