



Mode:	LTE BAND5-L
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

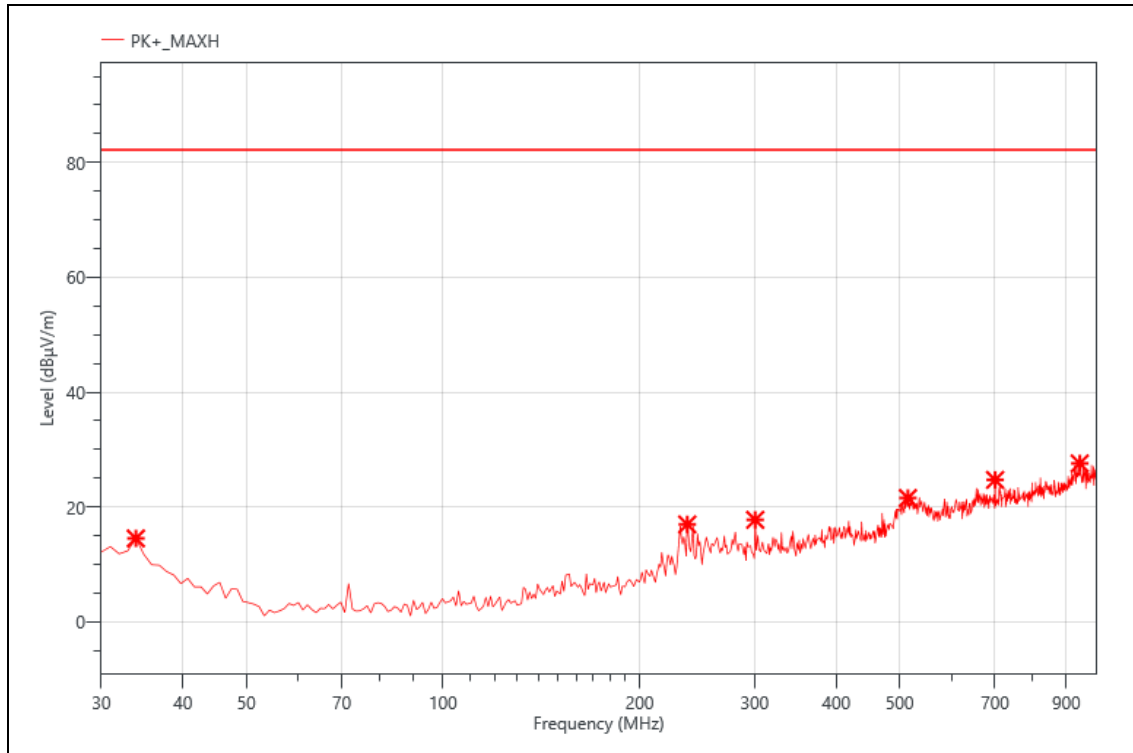

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	33.880	31.15	-16.63	14.52	82.30	67.78	PK+	V
2	236.610	36.36	-19.4	16.96	82.30	65.34	PK+	V
3	300.630	36.38	-18.63	17.75	82.30	64.55	PK+	V
4	515.000	32.73	-11.18	21.55	82.30	60.75	PK+	V
5	700.270	31.75	-7.04	24.71	82.30	57.59	PK+	V
6	943.740	29.78	-2.19	27.59	82.30	54.71	PK+	V


Mode:	LTE BAND5-L
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

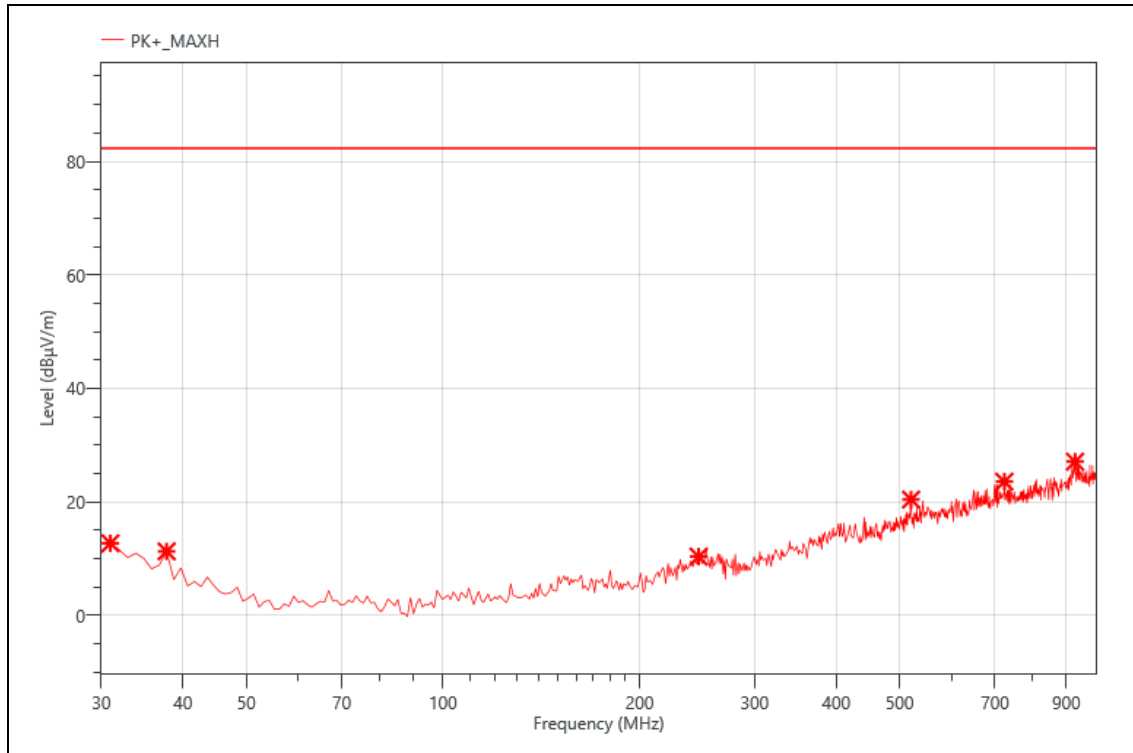

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	30.970	27.56	-14.87	12.69	82.30	69.61	PK+	H
2	37.760	30.12	-18.85	11.27	82.30	71.03	PK+	H
3	246.310	29.23	-18.89	10.34	82.30	71.96	PK+	H
4	520.820	31.28	-10.88	20.40	82.30	61.90	PK+	H
5	723.550	30.09	-6.53	23.56	82.30	58.74	PK+	H
6	928.220	29.28	-2.2	27.08	82.30	55.22	PK+	H


Mode:	LTE BAND5-M
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

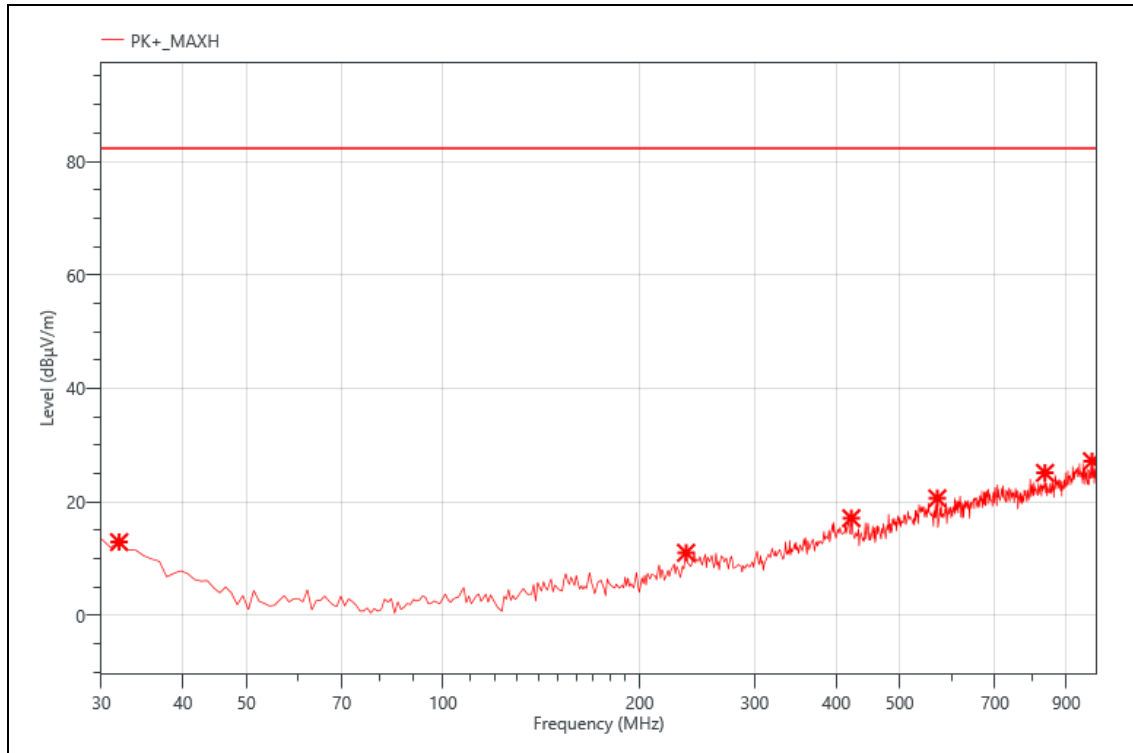

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	31.940	28.34	-15.44	12.90	82.30	69.40	PK+	H
2	235.640	30.49	-19.47	11.02	82.30	71.28	PK+	H
3	421.880	30.83	-13.72	17.11	82.30	65.19	PK+	H
4	571.260	31.11	-10.49	20.62	82.30	61.68	PK+	H
5	835.100	30.34	-5.24	25.10	82.30	57.20	PK+	H
6	985.450	29.72	-2.56	27.16	82.30	55.14	PK+	H


Mode:	LTE BAND5-M
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

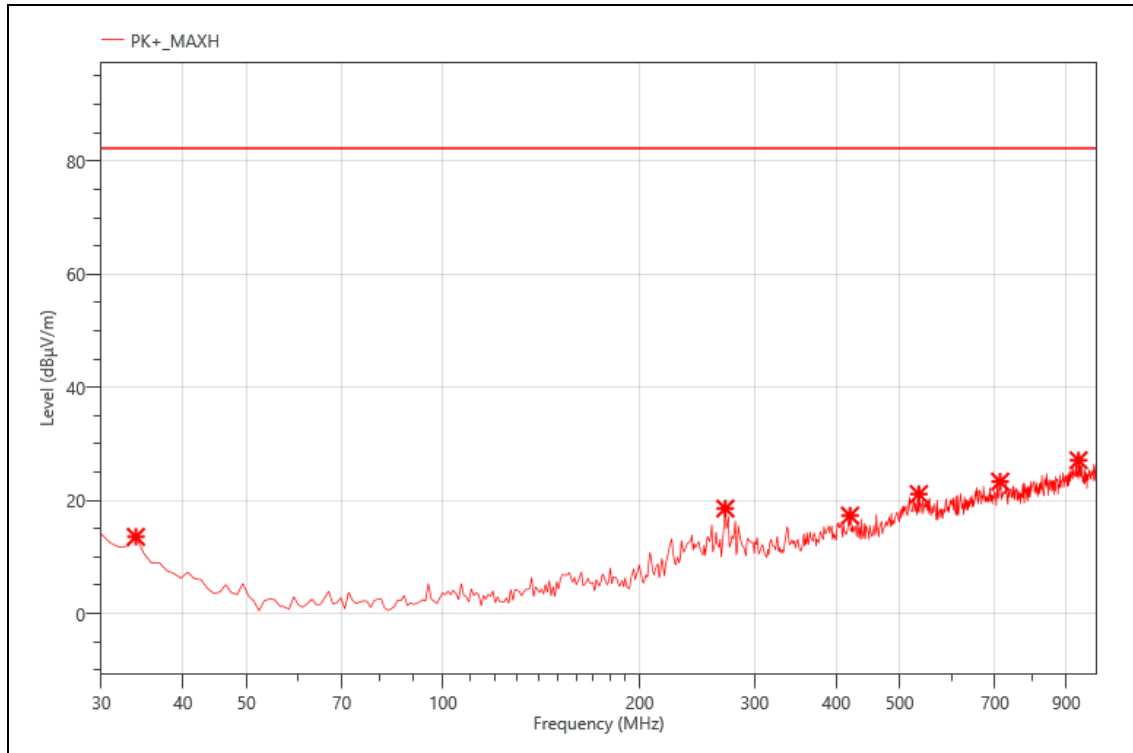

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	33.880	30.19	-16.63	13.56	82.30	68.74	PK+	V
2	270.560	37.07	-18.5	18.57	82.30	63.73	PK+	V
3	419.940	30.96	-13.64	17.32	82.30	64.98	PK+	V
4	535.370	31.32	-10.2	21.12	82.30	61.18	PK+	V
5	712.880	29.92	-6.6	23.32	82.30	58.98	PK+	V
6	939.860	29.26	-2.16	27.10	82.30	55.20	PK+	V


Mode:	LTE BAND5-H
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

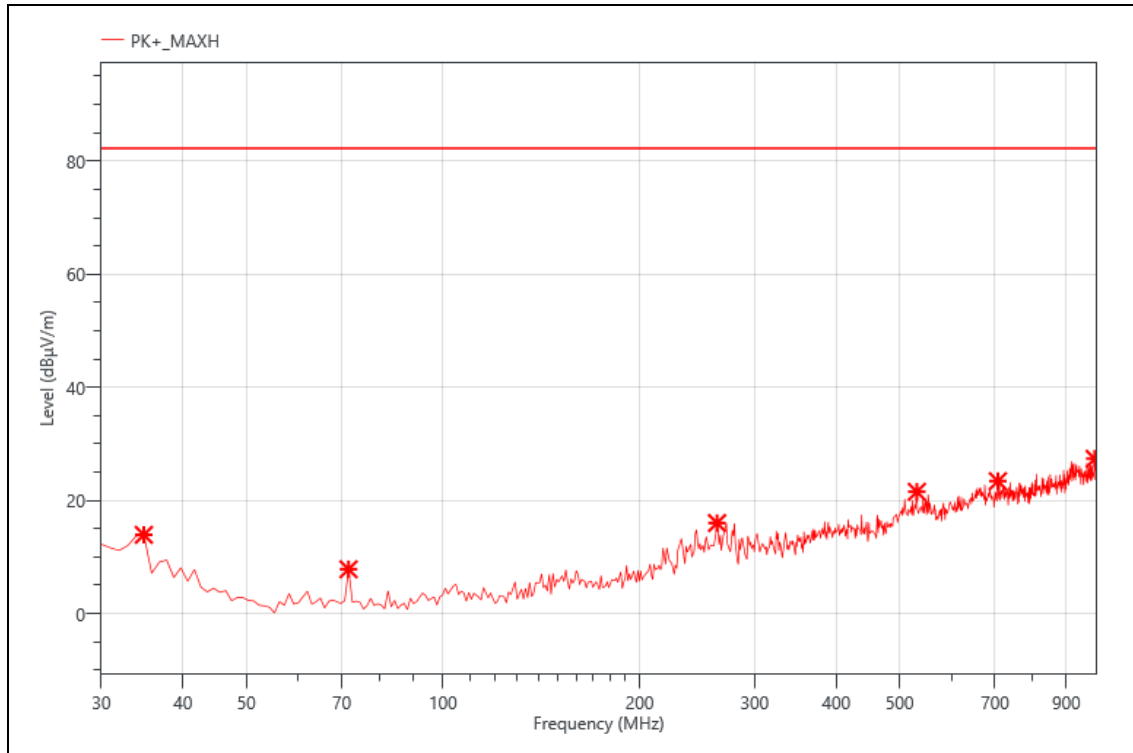

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	34.850	31.10	-17.18	13.92	82.30	68.38	PK+	V
2	71.710	32.62	-24.79	7.83	82.30	74.47	PK+	V
3	262.800	34.20	-18.19	16.01	82.30	66.29	PK+	V
4	531.490	31.93	-10.4	21.53	82.30	60.77	PK+	V
5	707.060	30.19	-6.78	23.41	82.30	58.89	PK+	V
6	995.150	29.75	-2.39	27.36	82.30	54.94	PK+	V

Mode:	LTE BAND5-H
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

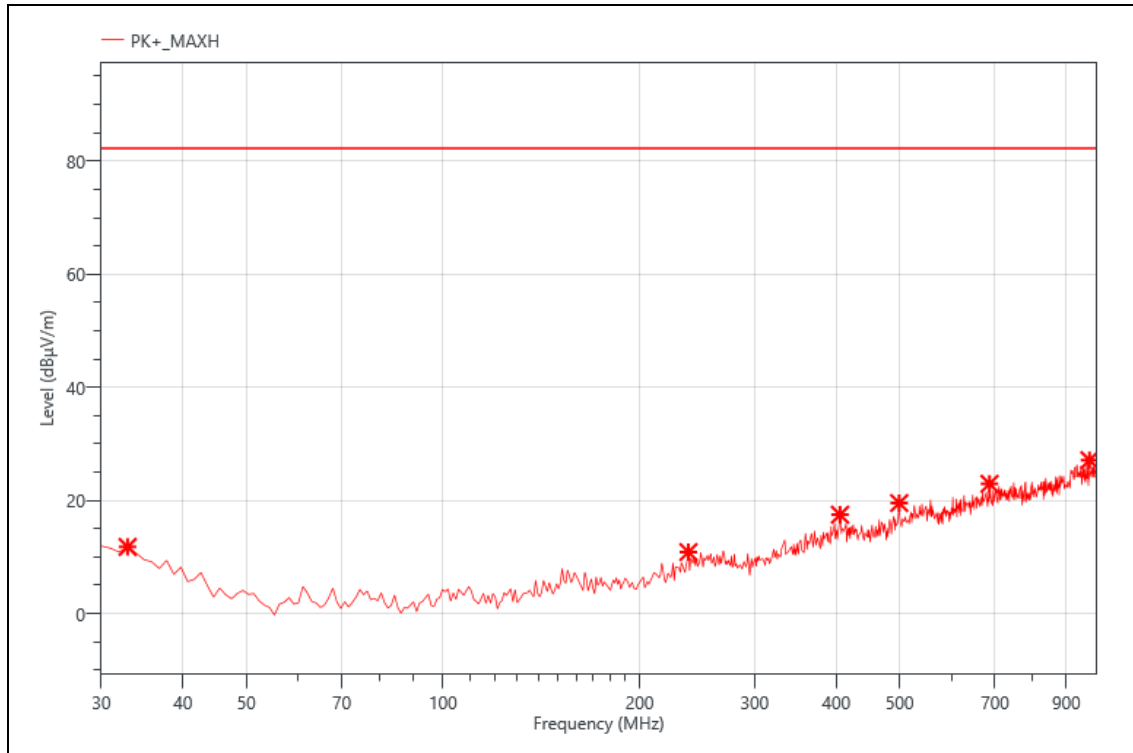

Critical_Freqs


No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	32.910	27.82	-16.04	11.78	82.30	70.52	PK+	H
2	237.580	30.23	-19.36	10.87	82.30	71.43	PK+	H
3	405.390	30.85	-13.37	17.48	82.30	64.82	PK+	H
4	499.480	31.36	-11.82	19.54	82.30	62.76	PK+	H
5	686.690	30.15	-7.21	22.94	82.30	59.36	PK+	H
6	976.720	29.83	-2.7	27.13	82.30	55.17	PK+	H

Note: 1. Limit= -13dBm+95.25=82.3 dBuV/m

2.L: Lowest channel; M: Middle channel; H: Highest channel

3.Product connector 1 and product connector 2 had been tested, but only the worst data recorded in the report(product connector 1).


Mode:	LTE BAND5-L
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

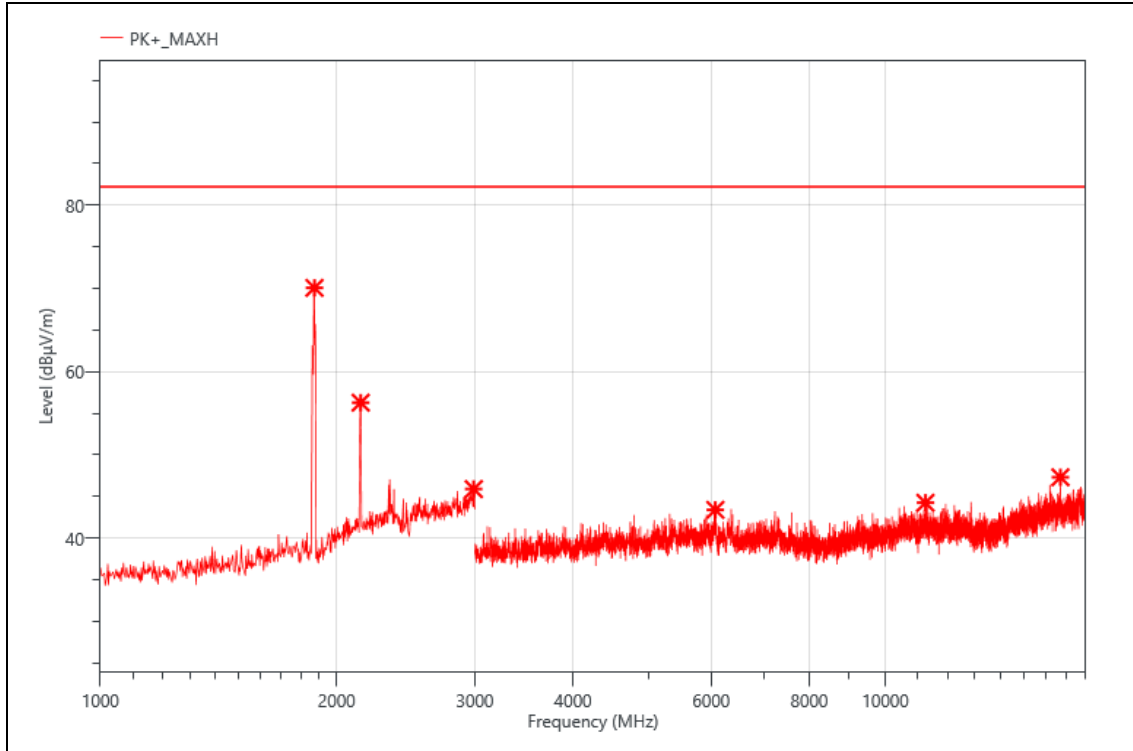

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	1874.000	80.42	-10.35	70.07	82.30	12.23	PK+	V
2	2146.000	65.33	-9.05	56.28	82.30	26.02	PK+	V
3	2990.000	52.88	-6.98	45.90	82.30	36.40	PK+	V
4	6073.500	51.47	-8.07	43.40	82.30	38.90	PK+	V
5	11248.500	48.79	-4.54	44.25	82.30	38.05	PK+	V
6	16711.500	48.12	-0.81	47.31	82.30	34.99	PK+	V


Mode:	LTE BAND5-L
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

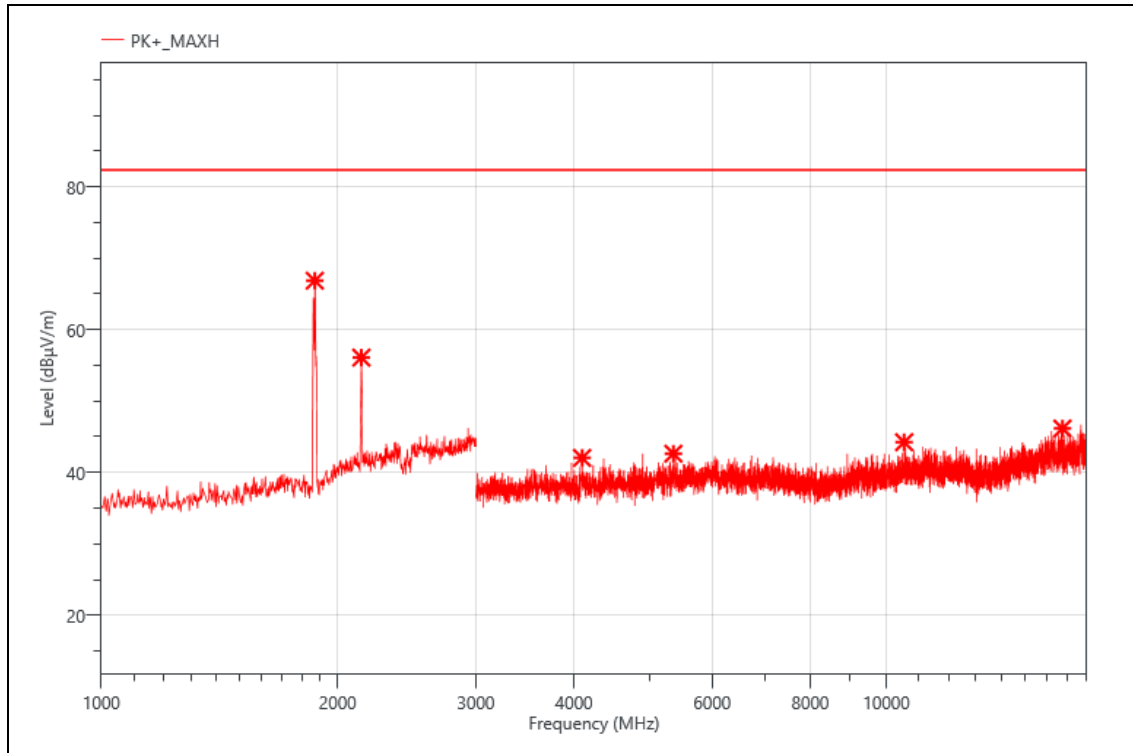

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1870.000	77.22	-10.37	66.85	82.30	15.45	PK+	H
2	2144.000	65.13	-9.05	56.08	82.30	26.22	PK+	H
3	4096.500	54.62	-12.58	42.04	82.30	40.26	PK+	H
4	5355.000	52.25	-9.62	42.63	82.30	39.67	PK+	H
5	10536.000	49.57	-5.33	44.24	82.30	38.06	PK+	H
6	16761.000	47.36	-1.2	46.16	82.30	36.14	PK+	H


Mode:	LTE BAND5-M
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

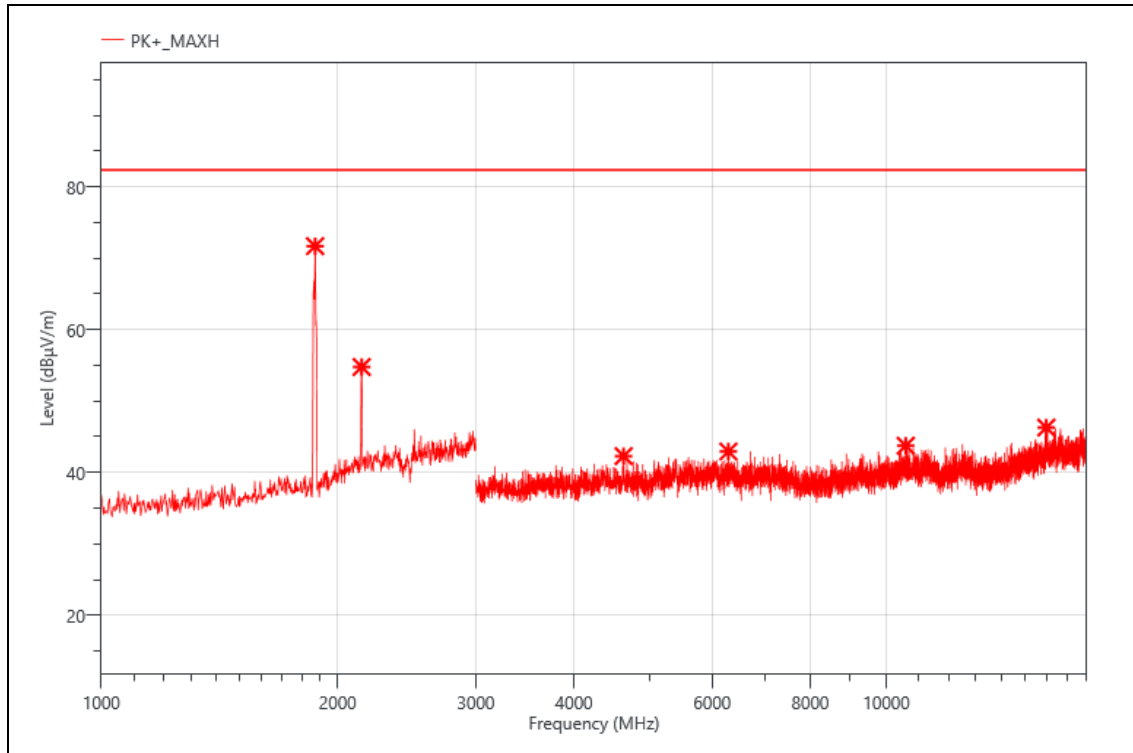

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1872.000	82.05	-10.36	71.69	82.30	10.61	PK+	H
2	2146.000	63.82	-9.05	54.77	82.30	27.53	PK+	H
3	4627.500	53.70	-11.41	42.29	82.30	40.01	PK+	H
4	6292.500	50.88	-7.94	42.94	82.30	39.36	PK+	H
5	10585.500	49.01	-5.26	43.75	82.30	38.55	PK+	H
6	15988.500	48.46	-2.17	46.29	82.30	36.01	PK+	H


Mode:	LTE BAND5-M
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

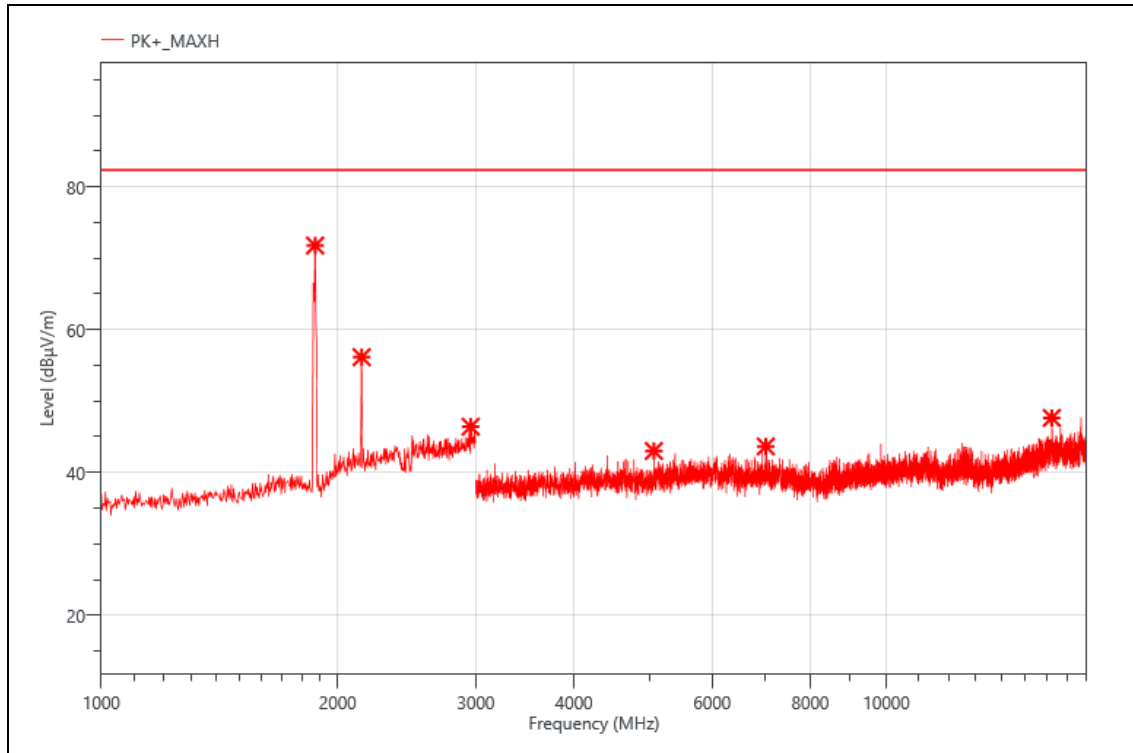

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1872.000	82.14	-10.36	71.78	82.30	10.52	PK+	V
2	2146.000	65.20	-9.05	56.15	82.30	26.15	PK+	V
3	2954.000	53.82	-7.41	46.41	82.30	35.89	PK+	V
4	5056.500	53.56	-10.55	43.01	82.30	39.29	PK+	V
5	7021.500	51.46	-7.81	43.65	82.30	38.65	PK+	V
6	16246.500	48.17	-0.53	47.64	82.30	34.66	PK+	V


Mode:	LTE BAND5-H
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

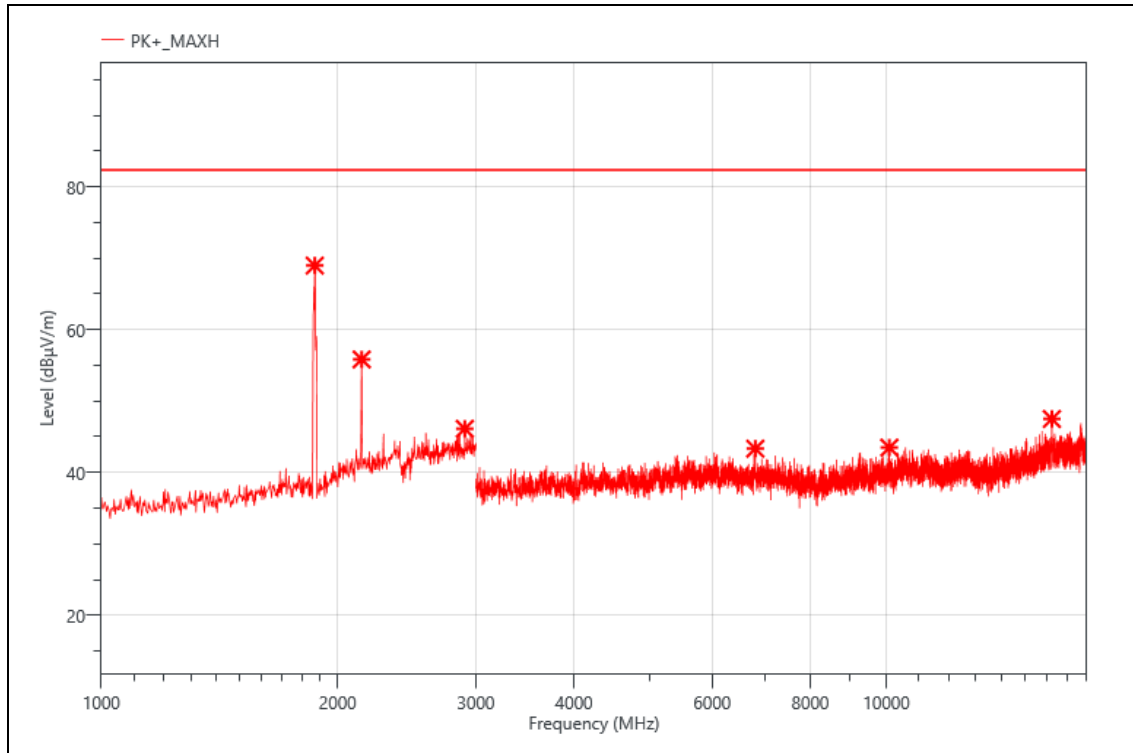

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1870.000	79.34	-10.37	68.97	82.30	13.33	PK+	V
2	2146.000	64.88	-9.05	55.83	82.30	26.47	PK+	V
3	2904.000	53.89	-7.77	46.12	82.30	36.18	PK+	V
4	6808.500	51.57	-8.23	43.34	82.30	38.96	PK+	V
5	10089.000	50.22	-6.73	43.49	82.30	38.81	PK+	V
6	16249.500	48.05	-0.56	47.49	82.30	34.81	PK+	V

Mode:	LTE BAND5-H
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

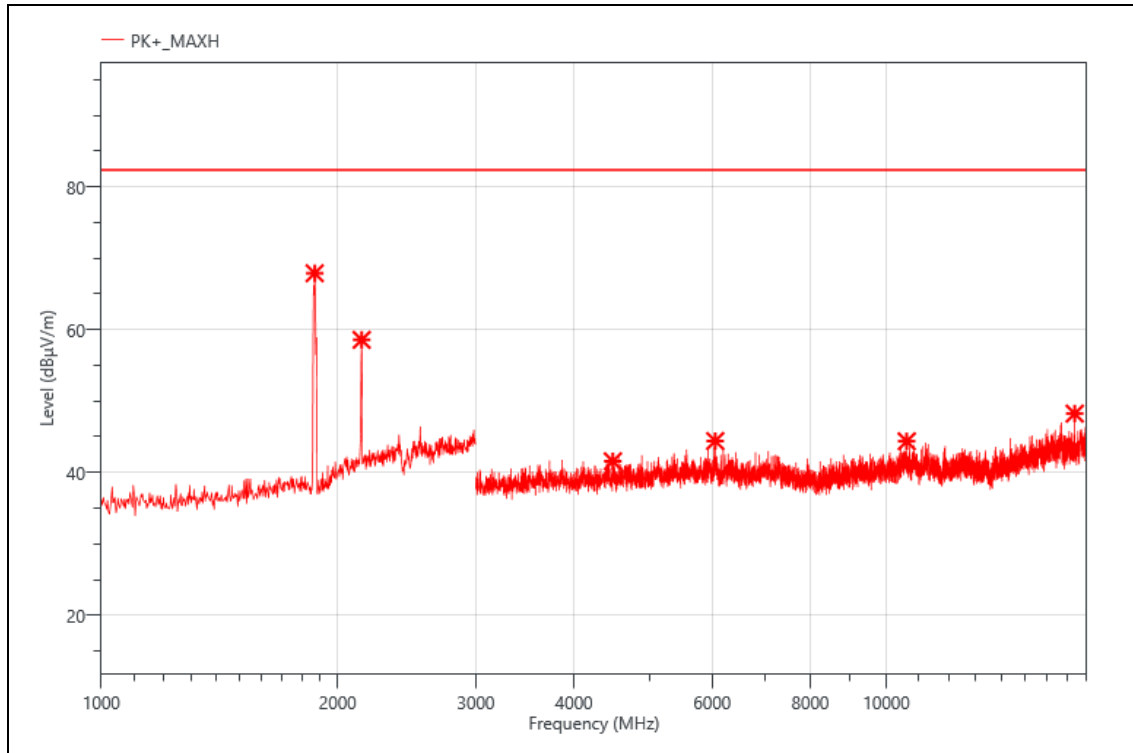


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1870.000	78.27	-10.37	67.90	82.30	14.40	PK+	H
2	2146.000	67.62	-9.05	58.57	82.30	23.73	PK+	H
3	4483.500	53.54	-11.97	41.57	82.30	40.73	PK+	H
4	6054.000	52.42	-8.01	44.41	82.30	37.89	PK+	H
5	10615.500	49.59	-5.22	44.37	82.30	37.93	PK+	H
6	17376.000	48.65	-0.4	48.25	82.30	34.05	PK+	H

Note: 1. Limit= -13dBm+95.25=82.3 dBuV/m

2.L: Lowest channel; M: Middle channel; H: Highest channel


Mode:	LTE BAND7-L
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

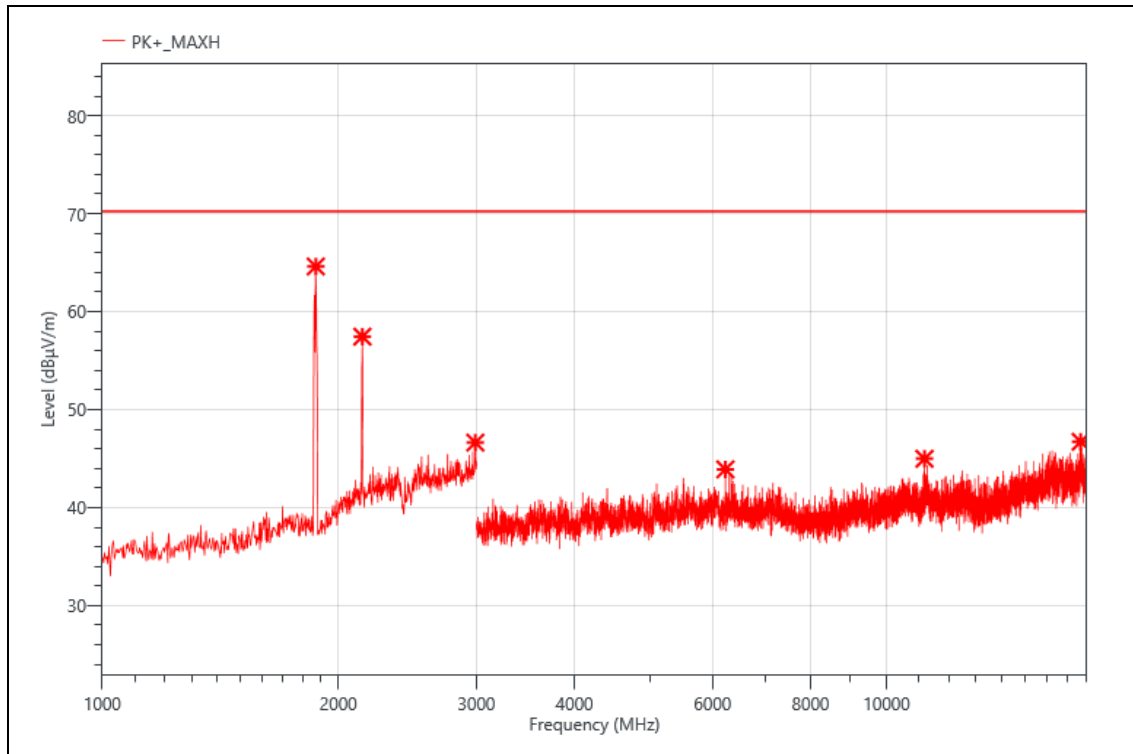

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1872.000	74.97	-10.36	64.61	70.25	5.64	PK+	H
2	2146.000	66.50	-9.05	57.45	70.25	12.80	PK+	H
3	2990.000	53.62	-6.98	46.64	70.25	23.61	PK+	H
4	6229.500	52.20	-8.3	43.90	70.25	26.35	PK+	H
5	11179.500	49.49	-4.5	44.99	70.25	25.26	PK+	H
6	17680.500	46.43	0.29	46.72	70.25	23.53	PK+	H


Mode:	LTE BAND7-L
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

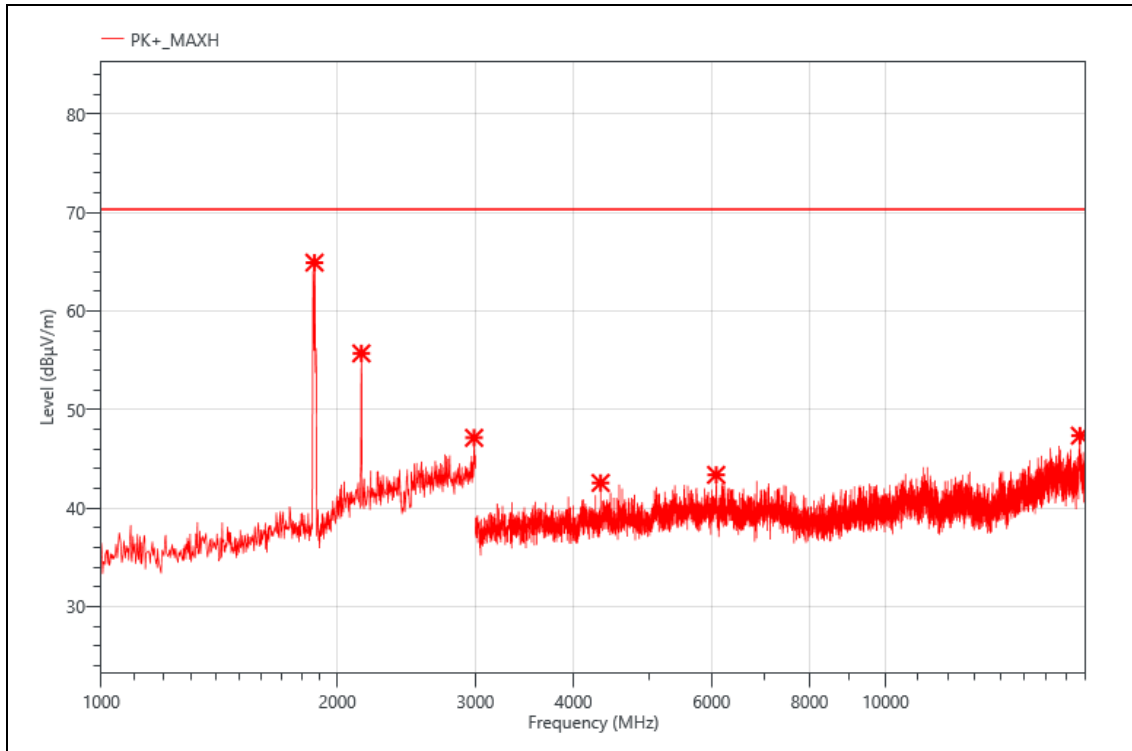

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1870.000	75.28	-10.37	64.91	70.25	5.34	PK+	V
2	2146.000	64.75	-9.05	55.70	70.25	14.55	PK+	V
3	2988.000	54.10	-6.97	47.13	70.25	23.12	PK+	V
4	4332.000	54.81	-12.26	42.55	70.25	27.70	PK+	V
5	6082.500	51.52	-8.15	43.37	70.25	26.88	PK+	V
6	17697.000	47.15	0.2	47.35	70.25	22.90	PK+	V


Mode:	LTE BAND7-M
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

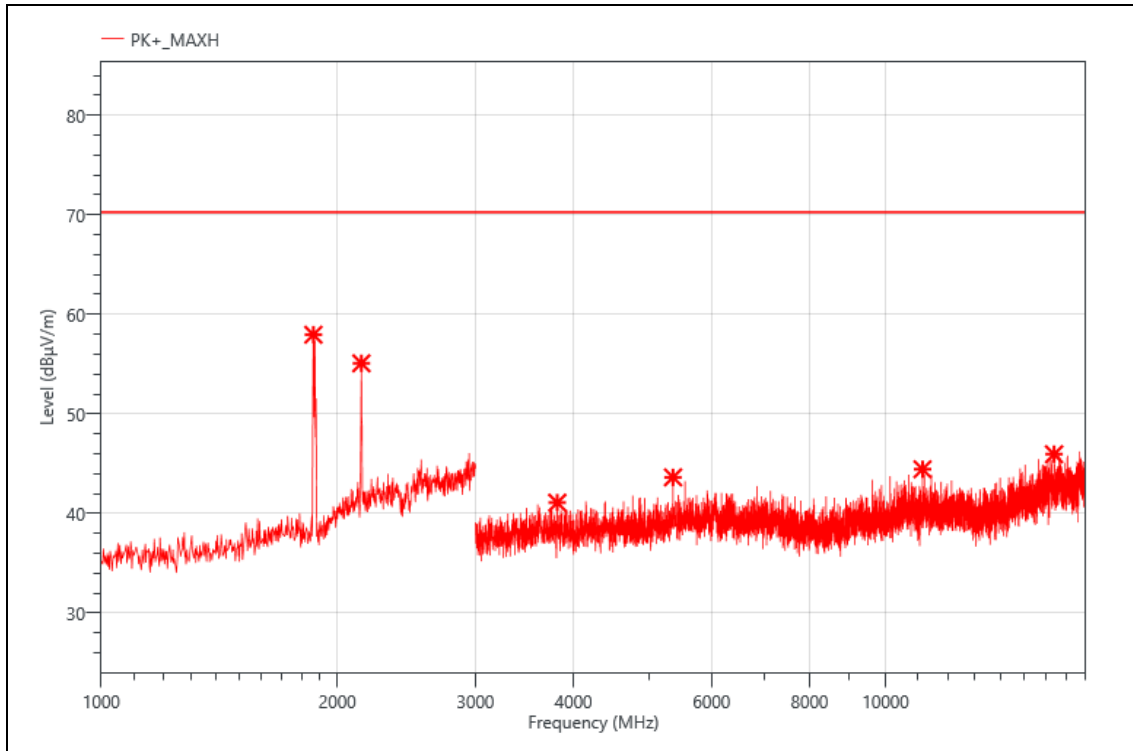

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1864.000	68.36	-10.4	57.96	70.25	12.29	PK+	V
2	2146.000	64.14	-9.05	55.09	70.25	15.16	PK+	V
3	3814.500	54.65	-13.55	41.10	70.25	29.15	PK+	V
4	5358.000	53.20	-9.56	43.64	70.25	26.61	PK+	V
5	11146.500	48.69	-4.24	44.45	70.25	25.80	PK+	V
6	16401.000	47.12	-1.16	45.96	70.25	24.29	PK+	V


Mode:	LTE BAND7-M
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

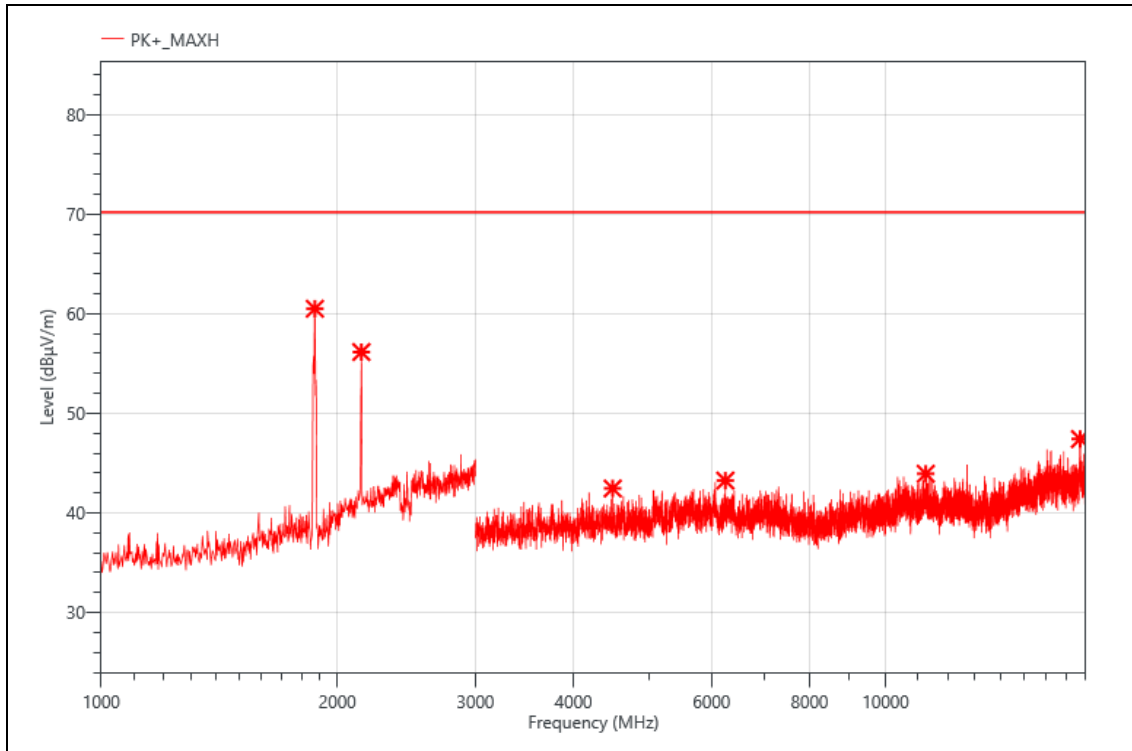

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	1872.000	70.86	-10.36	60.50	70.25	9.75	PK+	H
2	2146.000	65.20	-9.05	56.15	70.25	14.10	PK+	H
3	4488.000	54.41	-11.96	42.45	70.25	27.80	PK+	H
4	6247.500	51.65	-8.41	43.24	70.25	27.01	PK+	H
5	11253.000	48.43	-4.5	43.93	70.25	26.32	PK+	H
6	17701.500	47.27	0.14	47.41	70.25	22.84	PK+	H


Mode:	LTE BAND7-H
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

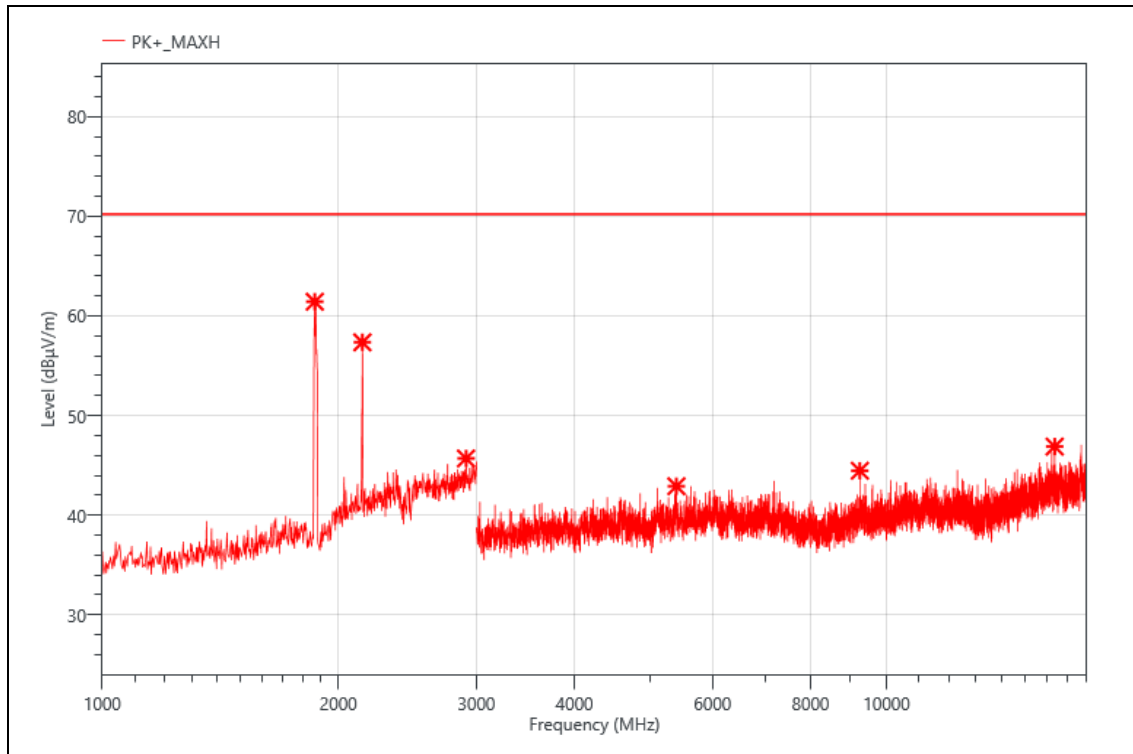

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	1866.000	71.81	-10.39	61.42	70.25	8.83	PK+	H
2	2146.000	66.40	-9.05	57.35	70.25	12.90	PK+	H
3	2910.000	53.39	-7.69	45.70	70.25	24.55	PK+	H
4	5395.500	52.23	-9.32	42.91	70.25	27.34	PK+	H
5	9246.000	51.39	-6.92	44.47	70.25	25.78	PK+	H
6	16380.000	48.37	-1.48	46.89	70.25	23.36	PK+	H

Mode:	LTE BAND7-H
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

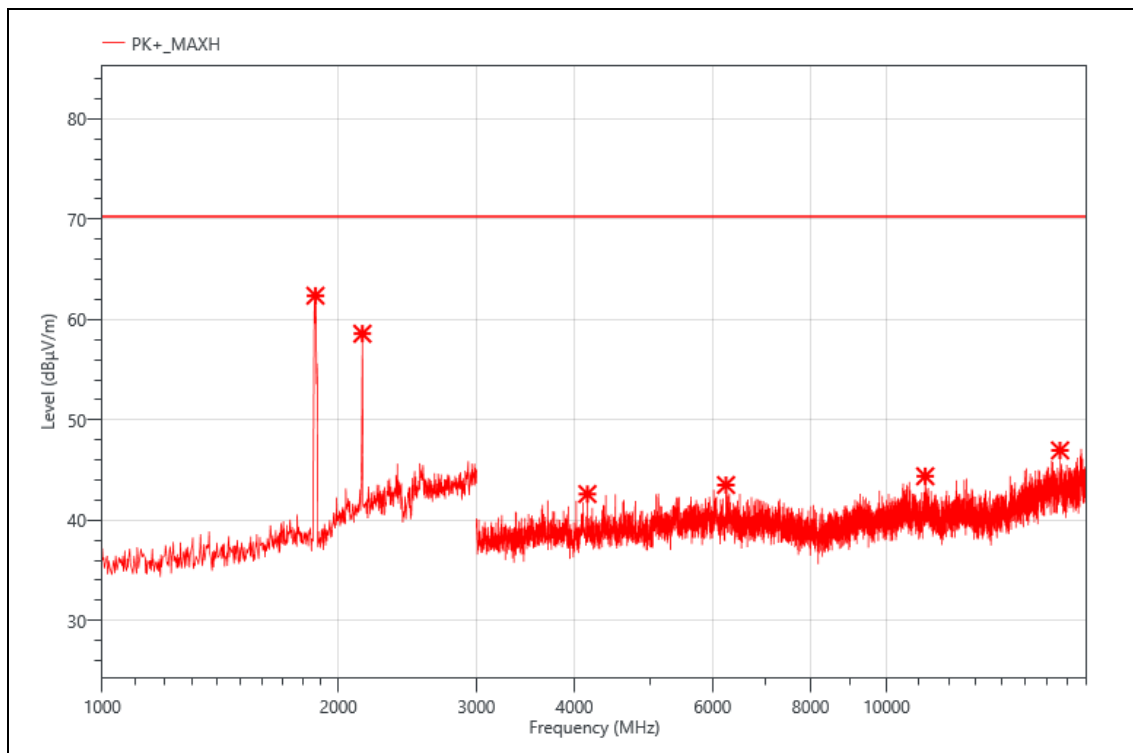


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1870.000	72.75	-10.37	62.38	70.25	7.87	PK+	V
2	2146.000	67.64	-9.05	58.59	70.25	11.66	PK+	V
3	4155.000	55.42	-12.81	42.61	70.25	27.64	PK+	V
4	6241.500	51.86	-8.35	43.51	70.25	26.74	PK+	V
5	11202.000	48.78	-4.4	44.38	70.25	25.87	PK+	V
6	16642.500	47.95	-0.99	46.96	70.25	23.29	PK+	V

Note: 1.Limit= -25dBm+95.25=70.25 dBuV/m

2.L: Lowest channel; M: Middle channel; H: Highest channel


Mode:	LTE BAND7-L
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

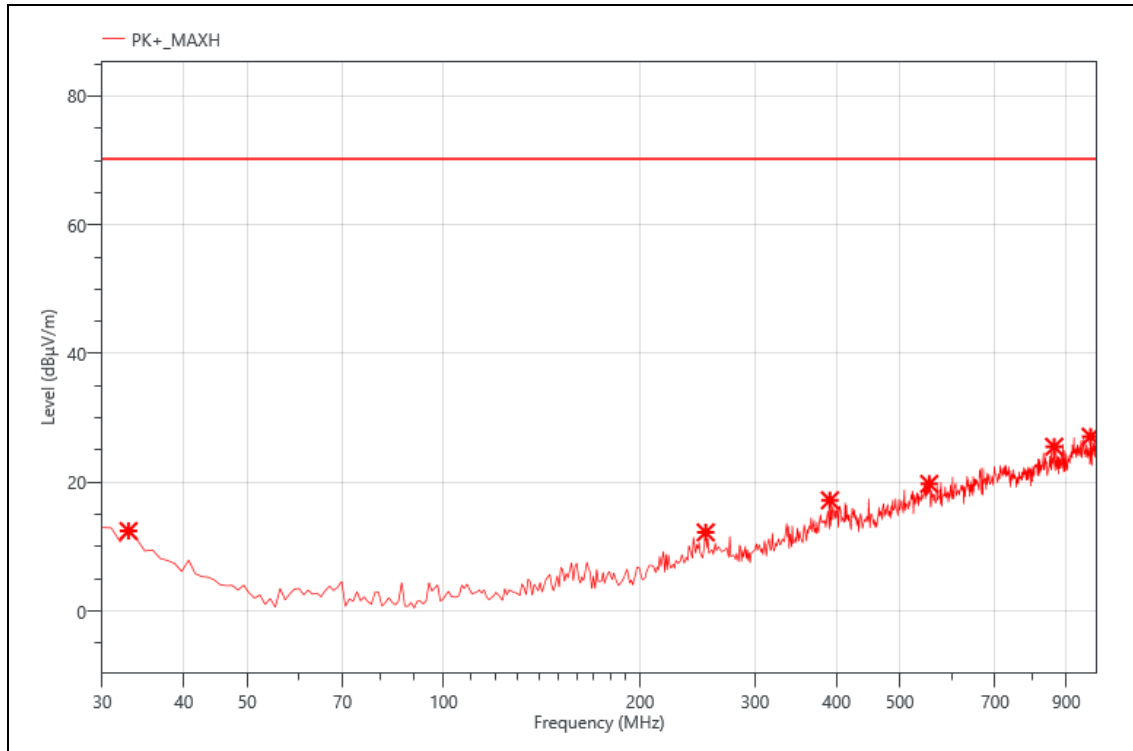

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	32.910	28.49	-16.04	12.45	70.25	57.80	PK+	H
2	252.130	30.90	-18.66	12.24	70.25	58.01	PK+	H
3	390.840	31.17	-13.95	17.22	70.25	53.03	PK+	H
4	554.770	29.49	-9.72	19.77	70.25	50.48	PK+	H
5	862.260	30.38	-4.85	25.53	70.25	44.72	PK+	H
6	980.600	29.77	-2.67	27.10	70.25	43.15	PK+	H


Mode:	LTE BAND7-L
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

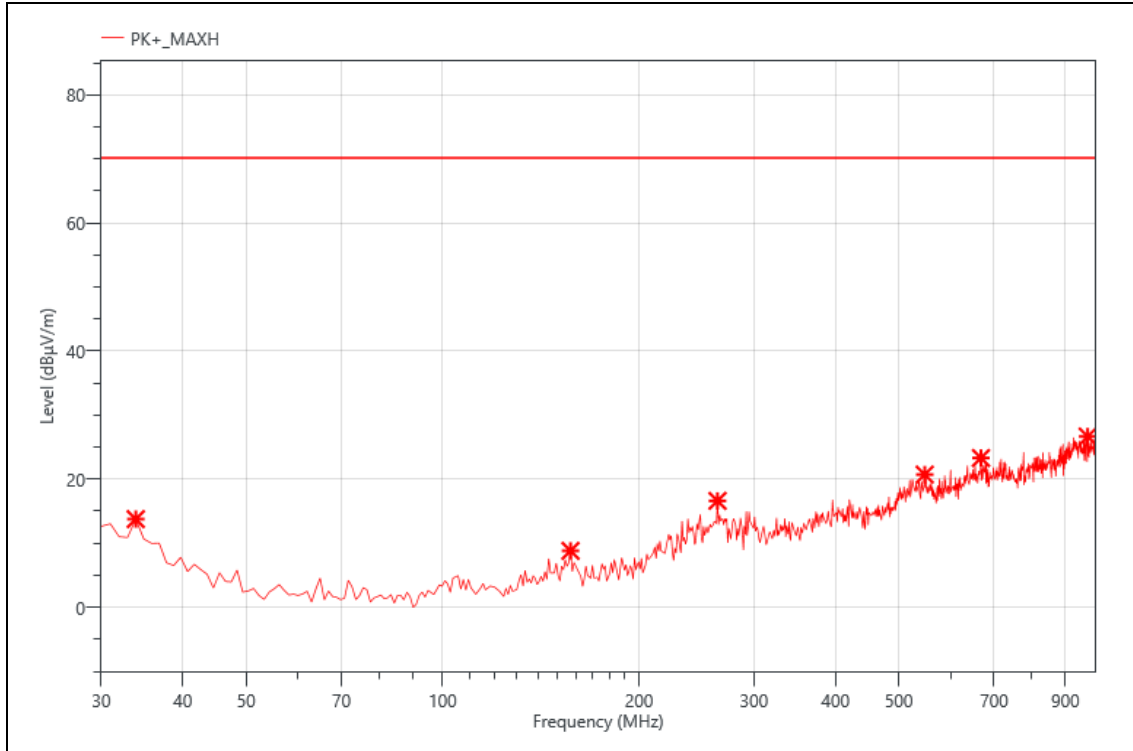

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	33.880	30.38	-16.63	13.75	70.25	56.50	PK+	V
2	157.070	29.73	-20.93	8.80	70.25	61.45	PK+	V
3	263.770	34.74	-18.14	16.60	70.25	53.65	PK+	V
4	547.980	30.29	-9.58	20.71	70.25	49.54	PK+	V
5	668.260	30.78	-7.49	23.29	70.25	46.96	PK+	V
6	973.810	29.43	-2.78	26.65	70.25	43.60	PK+	V


Mode:	LTE BAND7-M
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

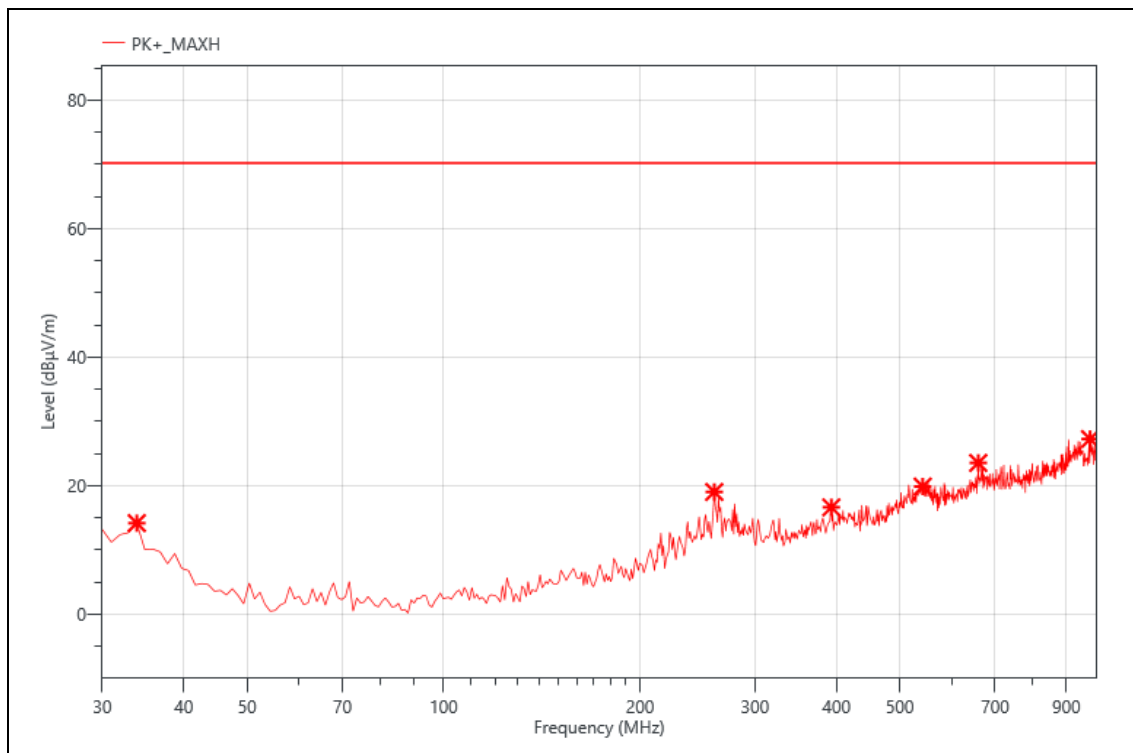

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	33.880	30.82	-16.63	14.19	70.25	56.06	PK+	V
2	259.890	37.35	-18.32	19.03	70.25	51.22	PK+	V
3	392.780	30.54	-13.9	16.64	70.25	53.61	PK+	V
4	542.160	29.75	-9.87	19.88	70.25	50.37	PK+	V
5	659.530	31.36	-7.81	23.55	70.25	46.70	PK+	V
6	978.660	29.93	-2.66	27.27	70.25	42.98	PK+	V


Mode:	LTE BAND7-M
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

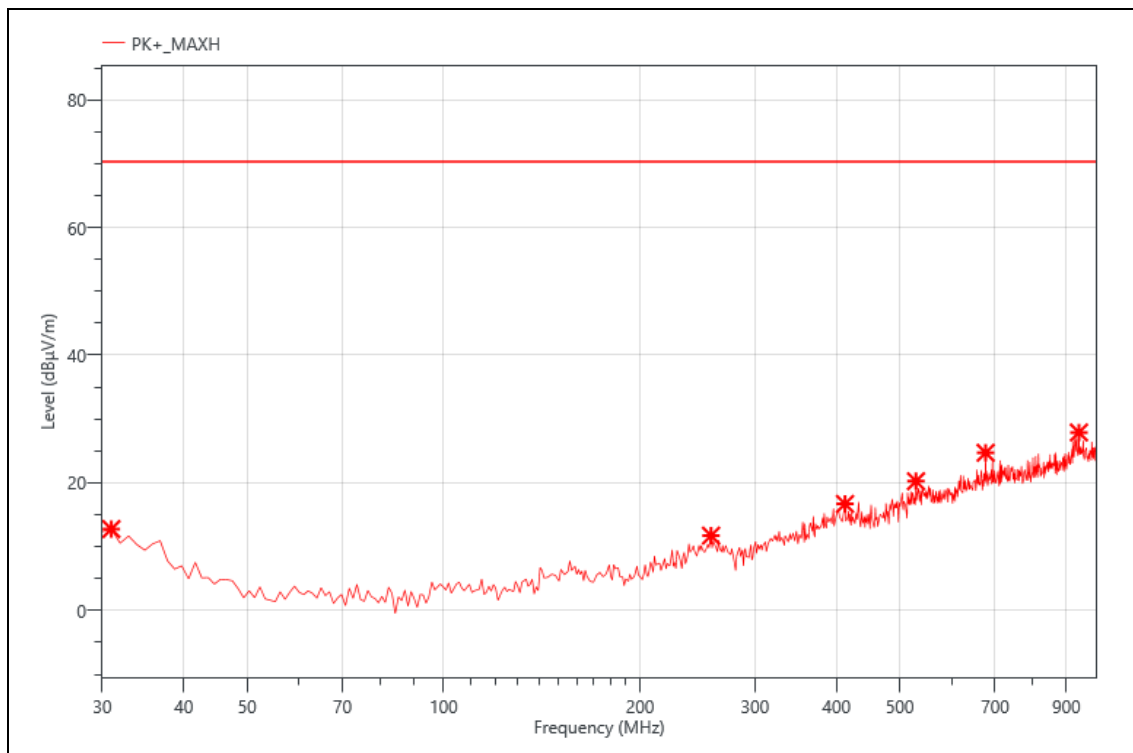

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	30.970	27.63	-14.87	12.76	70.25	57.49	PK+	H
2	256.980	30.19	-18.46	11.73	70.25	58.52	PK+	H
3	412.180	30.17	-13.47	16.70	70.25	53.55	PK+	H
4	529.550	30.75	-10.49	20.26	70.25	49.99	PK+	H
5	676.990	31.97	-7.26	24.71	70.25	45.54	PK+	H
6	940.830	30.06	-2.17	27.89	70.25	42.36	PK+	H


Mode:	LTE BAND7-H
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

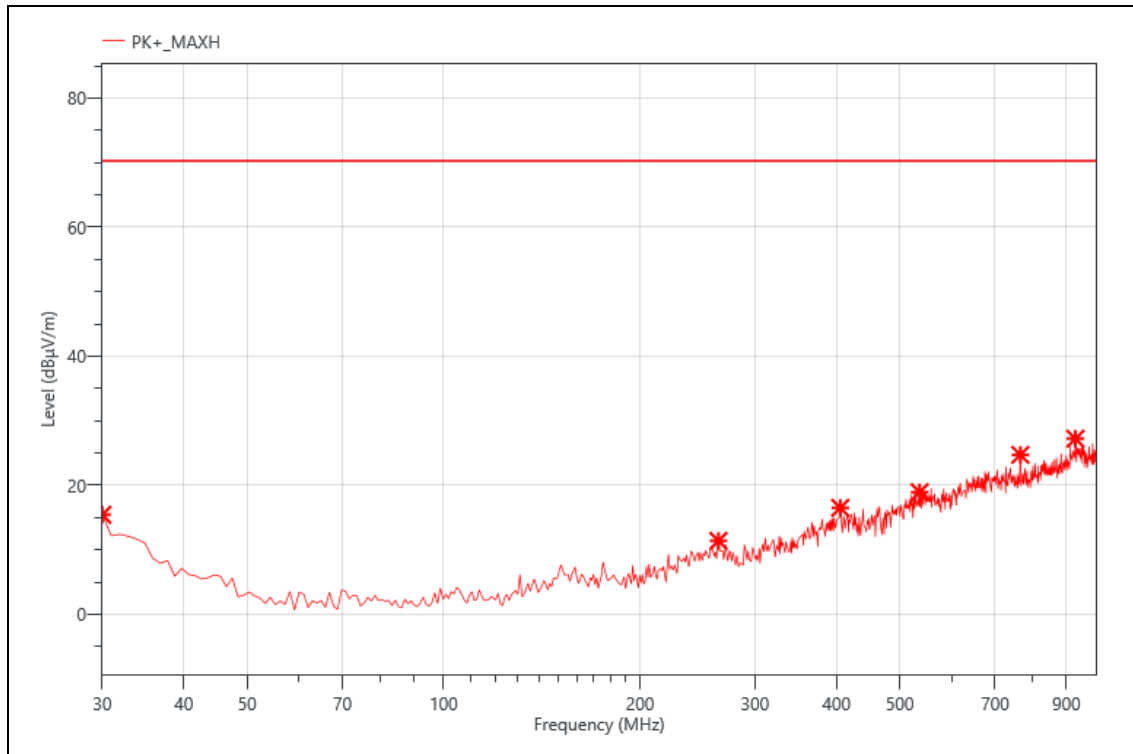

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	30.000	29.77	-14.32	15.45	70.25	54.80	PK+	H
2	263.770	29.54	-18.14	11.40	70.25	58.85	PK+	H
3	405.390	29.88	-13.37	16.51	70.25	53.74	PK+	H
4	536.340	29.11	-10.17	18.94	70.25	51.31	PK+	H
5	765.260	31.47	-6.74	24.73	70.25	45.52	PK+	H
6	929.190	29.37	-2.14	27.23	70.25	43.02	PK+	H

Mode:	LTE BAND7-H
Power:	DC 12V
TE:	Big
Date	2025/08/27
T/A/P	23.5°C/51%/101Kpa

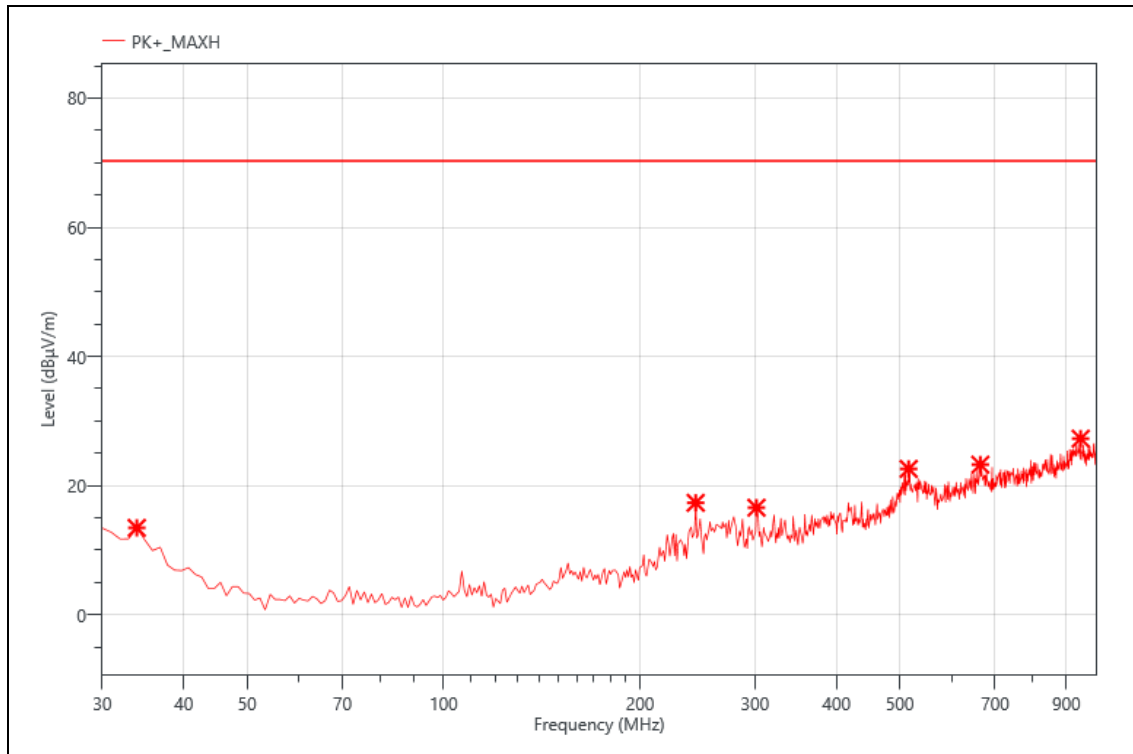

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	33.880	30.09	-16.63	13.46	70.25	56.79	PK+	V
2	243.400	36.30	-18.96	17.34	70.25	52.91	PK+	V
3	301.600	35.13	-18.55	16.58	70.25	53.67	PK+	V
4	515.970	33.68	-11.09	22.59	70.25	47.66	PK+	V
5	664.380	30.92	-7.67	23.25	70.25	47.00	PK+	V
6	946.650	29.46	-2.18	27.28	70.25	42.97	PK+	V

Note: 1.Limit= -25dBm+95.25=70.25 dBuV/m

2.L: Lowest channel; M: Middle channel; H: Highest channel

3.Product connector 1 and product connector 2 had been tested, but only the worst data recorded in the report(product connector 1).