

Antenna specification

Antenna Sample Confirmation From

Name of supplier	ShenZhen Aihui Technology Co. , Ltd				
Customer name	Ju ren				
Sample name	G62				
model					
Sample size					
Inspection item	Performance test	Visual inspection	Structure	In the news	Test results
Notes					
Quality Audit		Project Audit		Business confirmation	
The following is to be completed by the client					

Customer feedback	
Customer signature/seal	date:

Antenna Test Report

Test Unit: Shenzhen Aihui Technology Co. , Ltd.			
Materials	FPC		
Antenna form	PIFA	Polarization mode	Linear
Application	W/G/B		

Shenzhen Aihui Technology Co. , Ltd.

scenario			
Working band	2400Mhz-2500Mhz 5100Mhz-5850Mhz 1575Mhz	VSWR	≤2
Power	Max: 2W	Impedance	50Ω
dBi	≥ 1dB ±0.5DB		
Test Equipment	HPE5071C、Shielding Room、3D automatic turntable		
Antenna Description:: 1. Grounding processing and picture description: no 2. Need to change the motherboard to match: no ● Test voltage: 3.6V, check the antenna contact is good before testing. ● The RF cable of the integrated tester is kept in a natural state and can not be curled. Specification:test the specified power level, all indicators must conform to the specifications.			

1. Project Image
2. Test Fixture
3. Antenna matching circuit
4. S11 test
5. Antenna passive efficiency and gain
6. Darkroom test equipment and data
7. Schematic diagram of antenna assembly
8. Antenna environment handling
9. Antenna mass production index
10. Structural drawing


1.Project Image

The final verification antenna performance prototype in our company for at least one year, easy to analyze and solve the problem of antenna mass production, to ensure the quality of antenna shipment


2.Test Fixture

Objective: to test the passive parameters of antenna as accurately as possible. Making

Method: the handset is made of a 50 ohm coaxial cable, one end of which is connected to the test point of the back end of the matching circuit of the handset motherboard (front end of the RF test hole) , and the other end is connected to the SMA joint. The diagram is as follows:

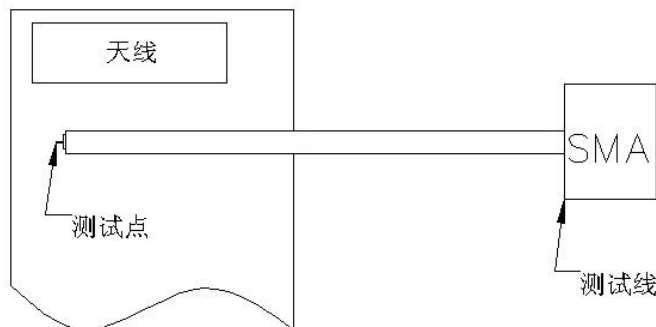

3、 Antenna matching circuit

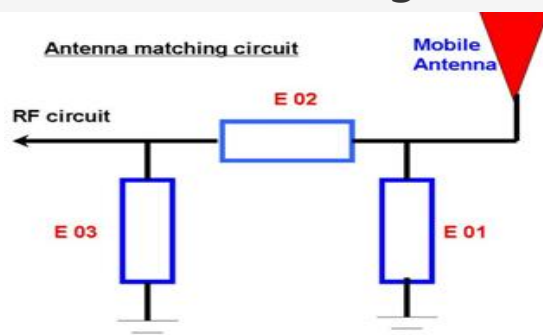


Modify

E01	E02	E03
No	No	No

Note: The match is unmodified.

4.S11 test

4.0 4.0s11 test method description of test equipment: Network Analyzer (E5071C) test method: a 50 ohm CABLE is used to export from the instrument test port. The SMA connector for connecting the handset is calibrated using a calibration piece, record the echo loss and standing wave ratio corresponding to the relevant frequency points. The test schematic is as follows:

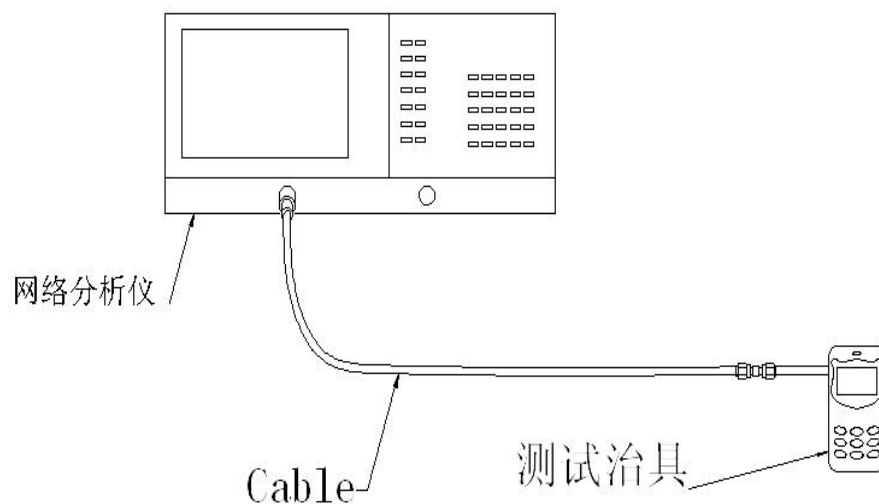


5.Darkroom test equipment and data

6.Test Equipment

Test system: shielded darkroom


The temperature was $22^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and the humidity was $50\% \pm 15\%$


Test equipment: when testing passive data, use the Network analyzer AGILENT E5071C to test active data, use the omnibus CMW500




7.Active antenna test data


BT & WIFI 2400-2500Mhz		
Freq(MHz)	Efficiency (%)	Gain (dBi)
2400	34.55	0.59
2410	31.05	0.49
2420	32.01	0.63
2430	31.92	0.78
2440	34.11	0.91
2450	32.16	0.55
2460	32.66	0.63
2470	31.44	0.47
2480	30.52	0.26
2490	31.63	0.37
2500	30.63	0.51

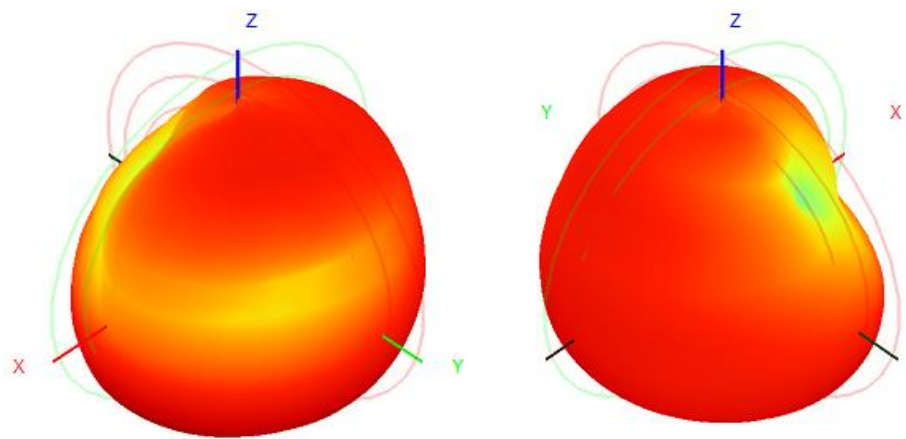

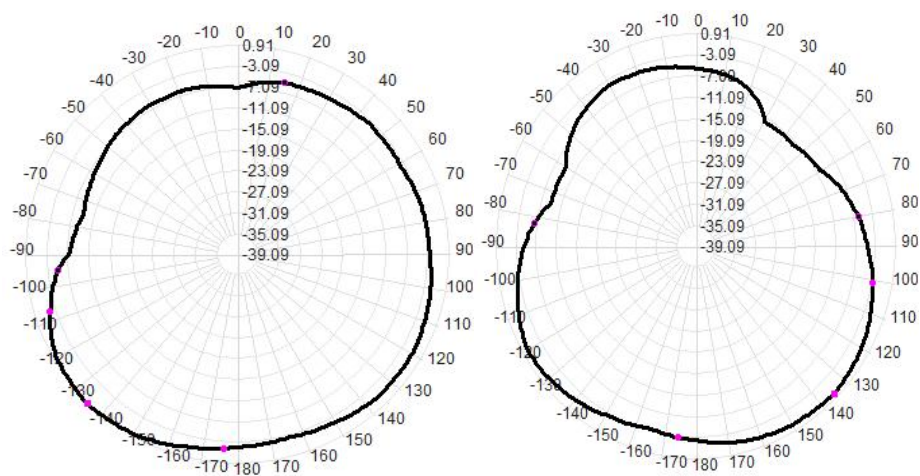

WiFi 5100-5850Mhz		
Freq(MHz)	Efficiency (%)	Gain (dBi)
5100	33.36	0.11
5200	34.15	0.26
5300	32.63	-0.92
5400	31.96	-0.47
5500	30.58	-0.63
5600	31.63	0.20
5700	32.11	0.15
5800	31.63	0.21
5850	31.91	0.19

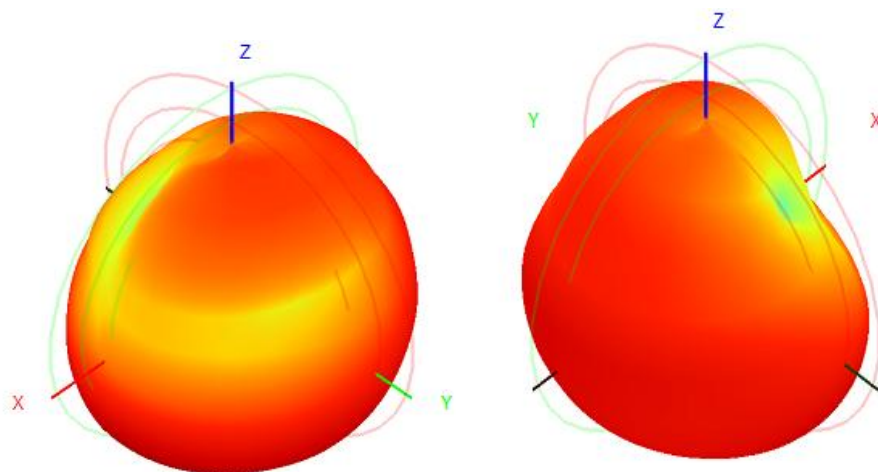

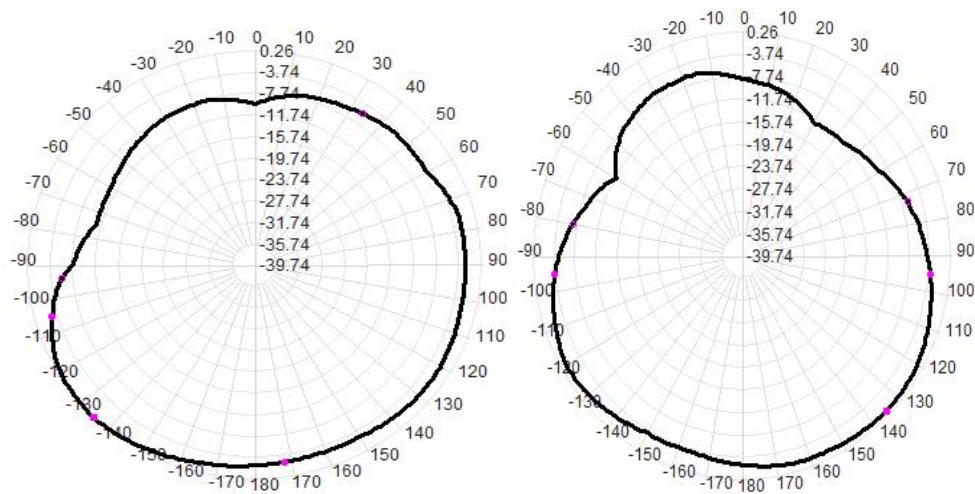

6.The panel matches the change schematic

/

7.Antenna environment handling

/

The original environment, we do not do processing

8.Antenna mass production index


When the antenna is mass-produced, the standing wave ratio is taken as the mass-produced test standard.

Based on the differences of the project itself, the following criteria are given:

Frequency	Standard for volume production
2400 MHZ -2500MHZ	VSWR (Mass Production performance) & LT; VSWR(recognition performance) 0.5
5100 MHZ -5800MHZ 1575MHZ	VSWR (Mass Production performance) & LT; VSWR(recognition performance) 0.5

10. Structural drawings

Shenzhen Aihui Technology Co. , Ltd.

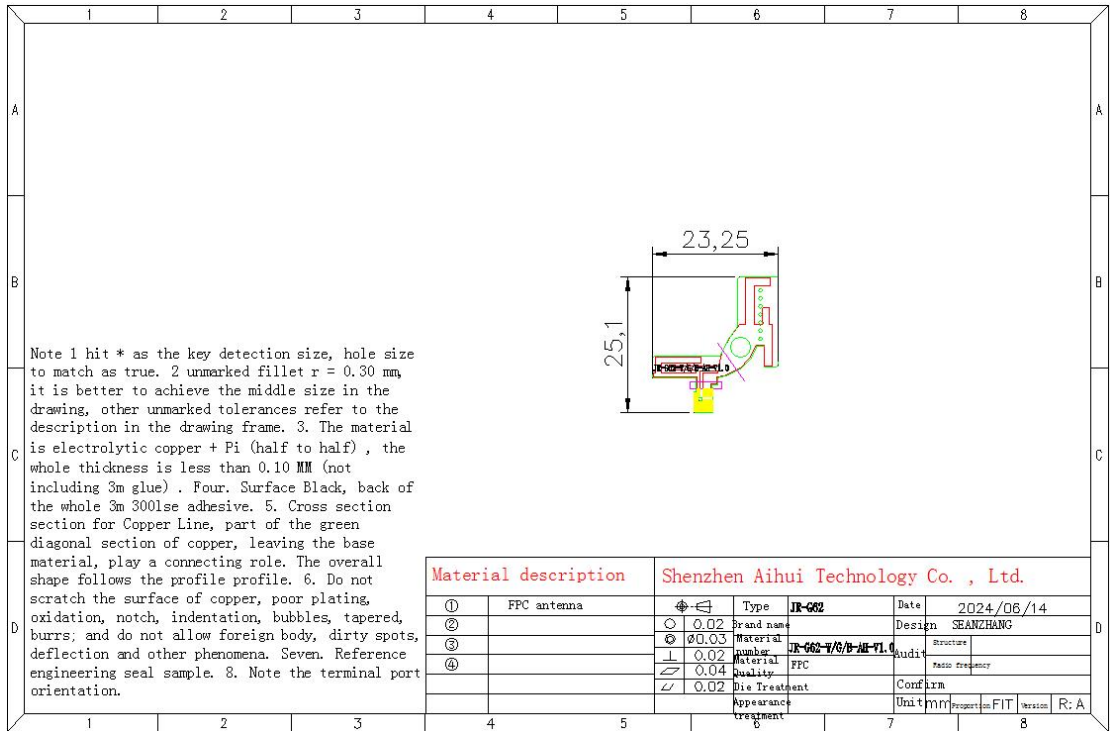

Address: 402TEL: 0755-23203435fax: 0755-23203435, Block C, Juxin Science and Technology Industrial Park, Nanchang community, xixiang, Baoan District, Shenzhen