

WCDMA II_RMC12.2k_Rear Face_0.5cm_Ch9262**DUT: EUT**

Communication System: UID 0, WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1.00462
Medium: H1900 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.385$ S/m; $\epsilon_r = 40.003$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08) @ 1852.4 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P41 AA; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.437 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.79 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.669 W/kg

SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.205 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 56.5%

Maximum value of SAR (measured) = 0.434 W/kg

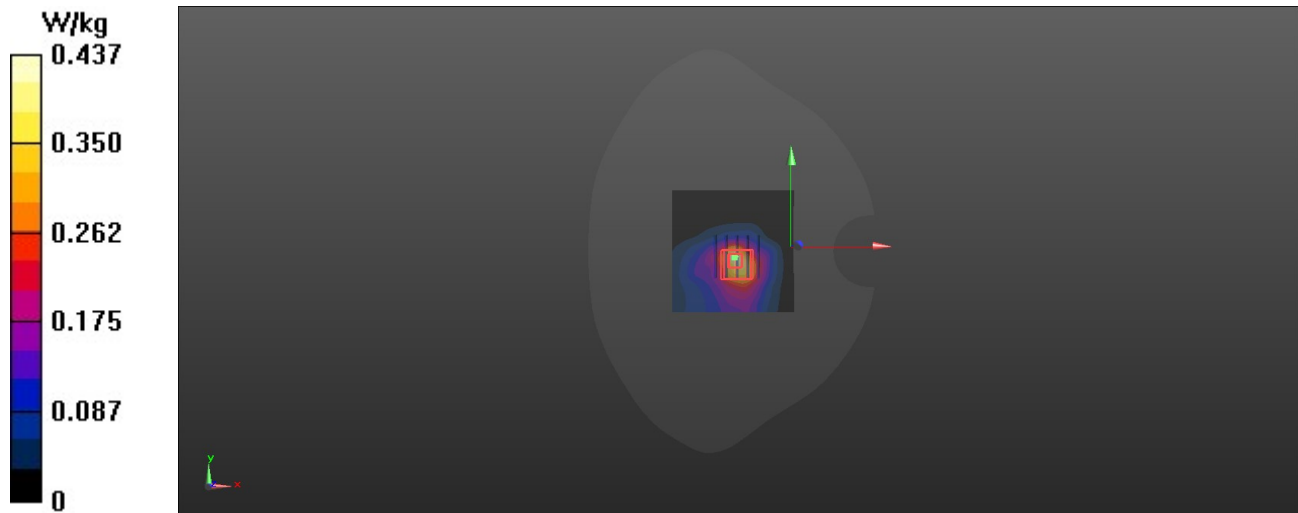

WCDMA IV_RMC12.2k_Rear Face_0.5cm_Ch1412**DUT: EUT**

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1.00462
Medium: H1750 Medium parameters used : $f = 1732.4$ MHz; $\sigma = 1.321$ S/m; $\epsilon_r = 40.377$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.41, 5.41, 5.41) @ 1732.4 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P41 AA; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.759 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.33 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.646 W/kg; SAR(10 g) = 0.363 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 61.5%

Maximum value of SAR (measured) = 0.706 W/kg

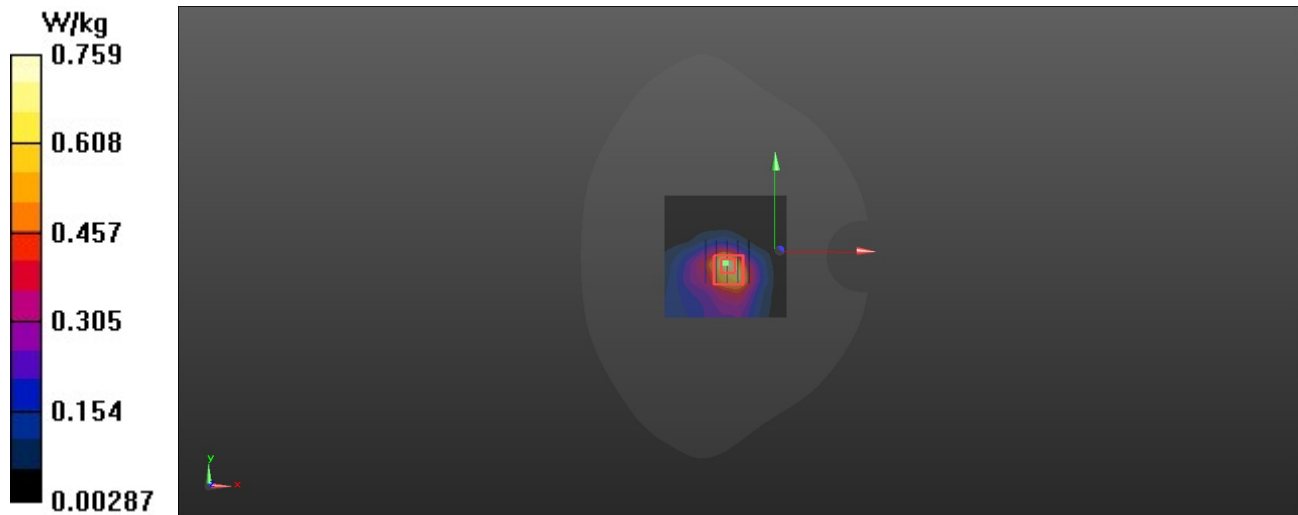

WCDMA V_RMC12.2k_Rear Face_0.5cm_Ch4233**DUT: EUT**

Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1.00462
Medium: H835 Medium parameters used : $f = 846.6$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 41.766$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.16, 6.16, 6.16) @ 846.6 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P41 AA; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.794 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.73 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.720 W/kg; SAR(10 g) = 0.417 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 62.4%

Maximum value of SAR (measured) = 0.741 W/kg

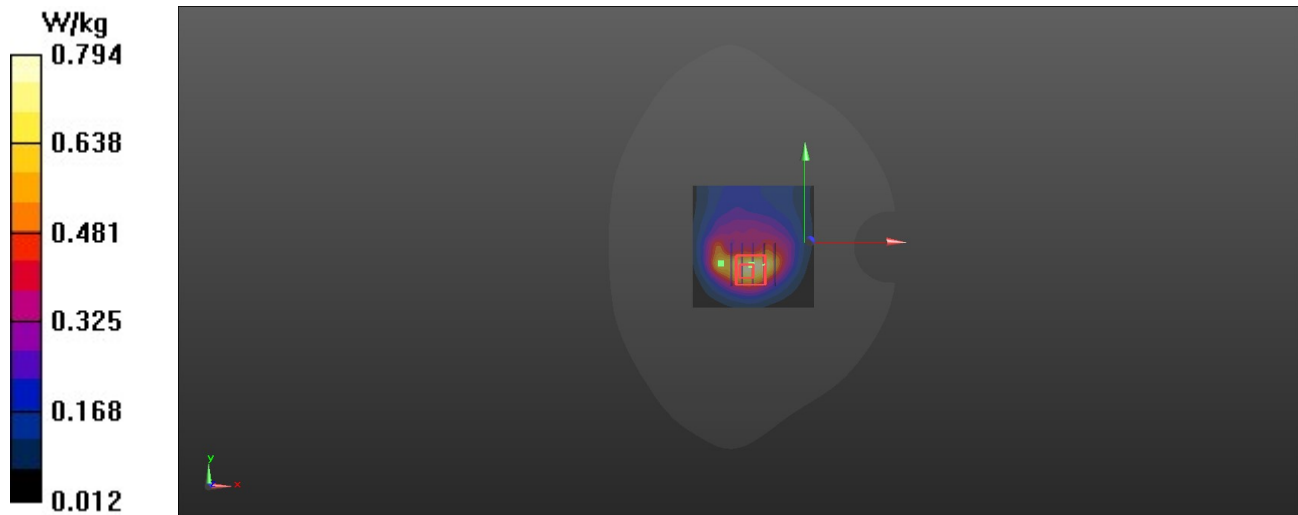

LTE 2_QPSK20M_Rear Face_0.5cm_Ch18900_1RB_OS50**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1=
Medium: H1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.381$ S/m; $\epsilon_r = 39.951$; $\rho = 1000 =$
 kg/m^3

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08) @ 1880 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P41 AA; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.407 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.51 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.740 W/kg

SAR(1 g) = 0.361 W/kg; SAR(10 g) = 0.191 W/kg

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 56.9%

Maximum value of SAR (measured) = 0.397 W/kg

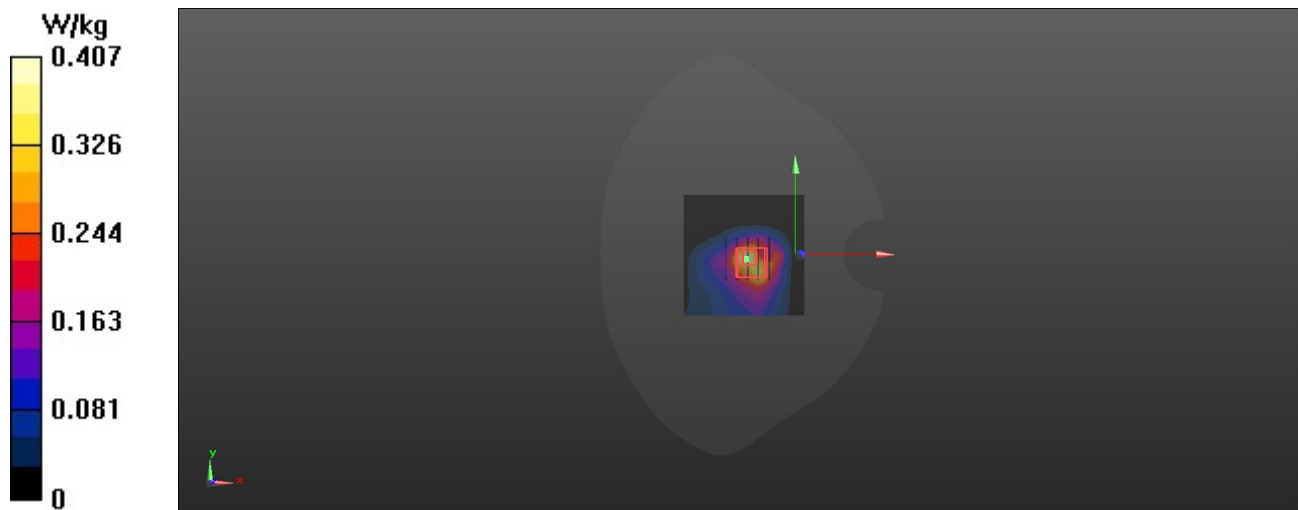

LTE 4_QPSK20M_Rear Face_0.5cm_Ch20050_1RB_OS50**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1=
Medium: H1750 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.287$ S/m; $\epsilon_r = 39.957$; $\rho = 1000 =$
 kg/m^3

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.41, 5.41, 5.41) @ 1720 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P41 AA; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.554 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.74 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.981 W/kg

SAR(1 g) = 0.499 W/kg; SAR(10 g) = 0.270 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 60.4%

Maximum value of SAR (measured) = 0.522 W/kg

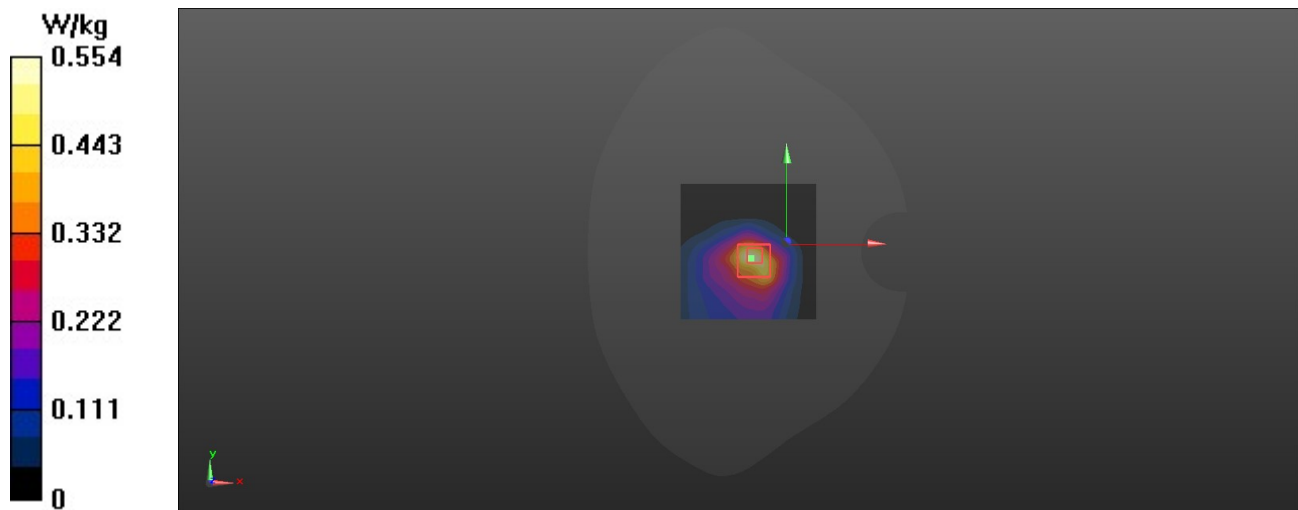

LTE 5_QPSK10M_Rear Face_0.5cm_Ch20450_1RB_OS25**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 829 MHz; Duty Cycle: 1:1 =
Medium: H835 Medium parameters used : $f = 829 \text{ MHz}$; $\sigma = 0.913 \text{ S/m}$; $\epsilon_r = 41.907$; $\rho = 1000 =$
 kg/m^3

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.16, 6.16, 6.16) @ 829 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P41 AA; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.691 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.41 V/m ; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.999 W/kg

SAR(1 g) = 0.615 W/kg ; SAR(10 g) = 0.359 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 63.7%

Maximum value of SAR (measured) = 0.635 W/kg

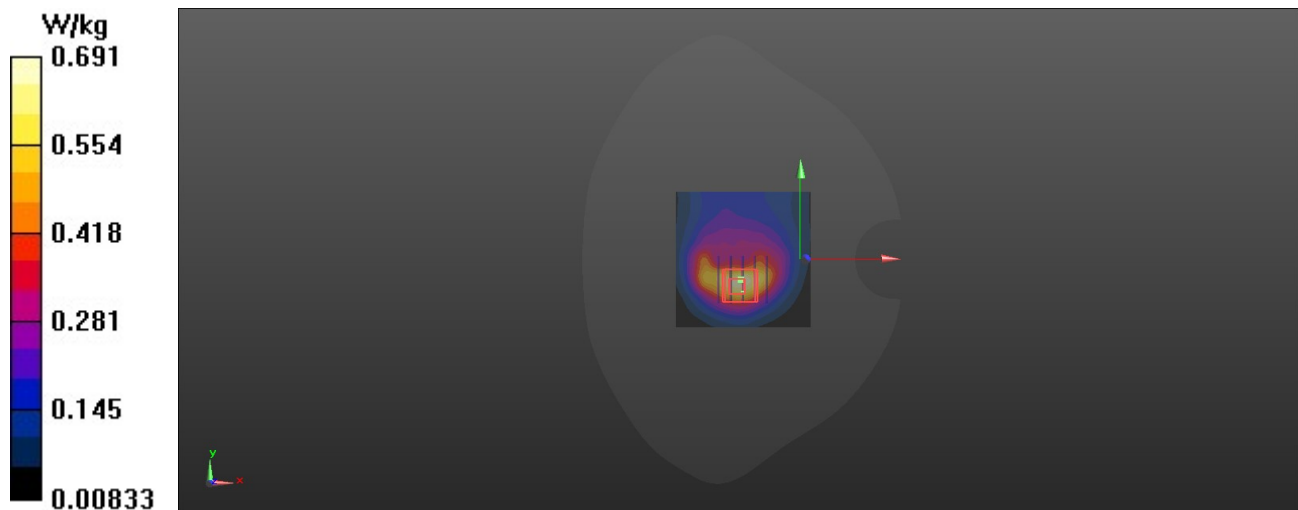

LTE 7_QPSK20M_Rear Face_0.5cm_Ch21100_1RB_OS50**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1=
Medium: H2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 39.163$; $\rho = 1000 =$
 kg/m^3

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.54, 4.54, 4.54) @ 2535 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P41 AA; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.665 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.27 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.669 W/kg; SAR(10 g) = 0.275 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 46.7%

Maximum value of SAR (measured) = 0.786 W/kg

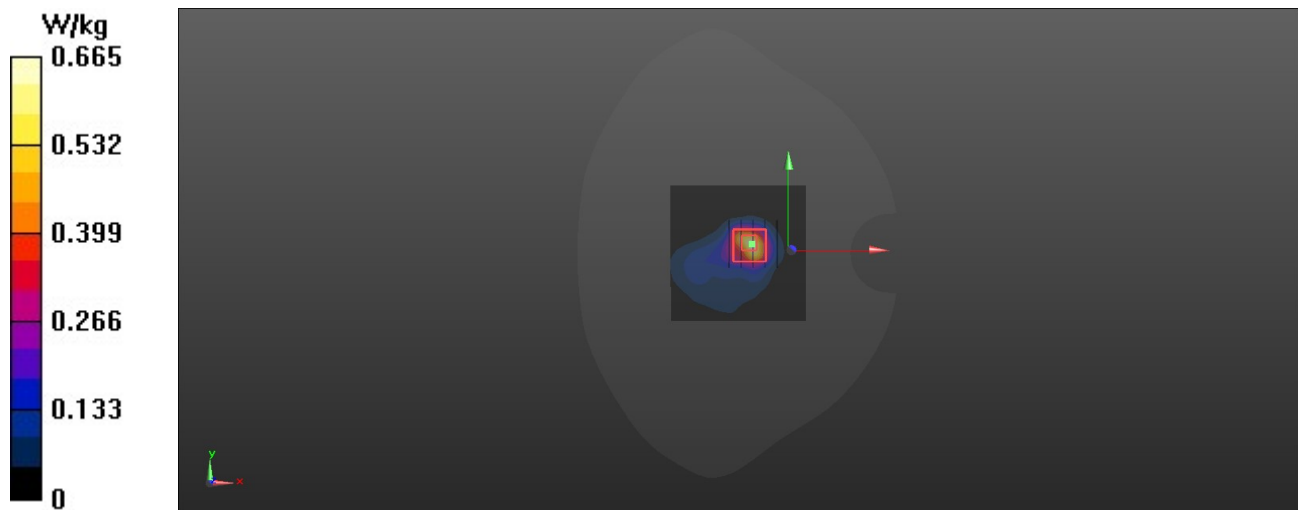

LTE 13_QPSK10M_Rear Face_0.5cm_Ch23230_1RB_OS25**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1 =
Medium: H750 Medium parameters used : $f = 782 \text{ MHz}$; $\sigma = 0.895 \text{ S/m}$; $\epsilon_r = 41.604$; $\rho = 1000 =$
 kg/m^3

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.38, 6.38, 6.38) @ 782 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P41 AA; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.265 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.94 V/m ; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.396 W/kg

SAR(1 g) = 0.252 W/kg ; SAR(10 g) = 0.158 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 63.8%

Maximum value of SAR (measured) = 0.278 W/kg

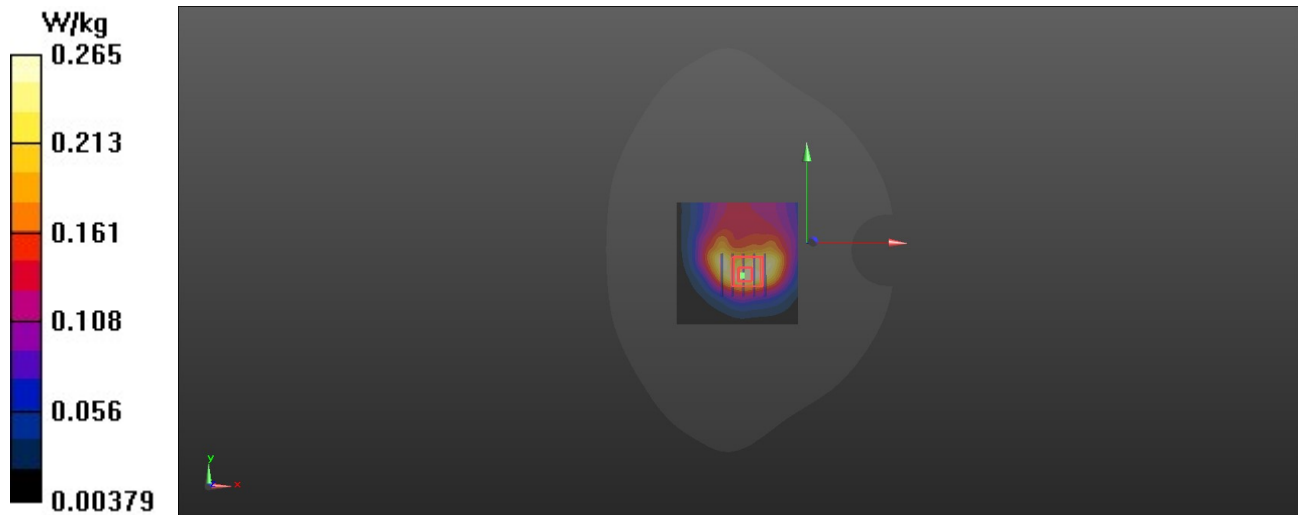

LTE 26_QPSK15M_Rear Face_0.5cm_Ch26865_1RB_OS37**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1=
Medium: H835 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 41.896$; $\rho = 1000 =$
 kg/m^3

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.16, 6.16, 6.16) @ 831.5 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P41 AA; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.692 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.80 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.966 W/kg

SAR(1 g) = 0.611 W/kg; SAR(10 g) = 0.356 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 62.9%

Maximum value of SAR (measured) = 0.675 W/kg

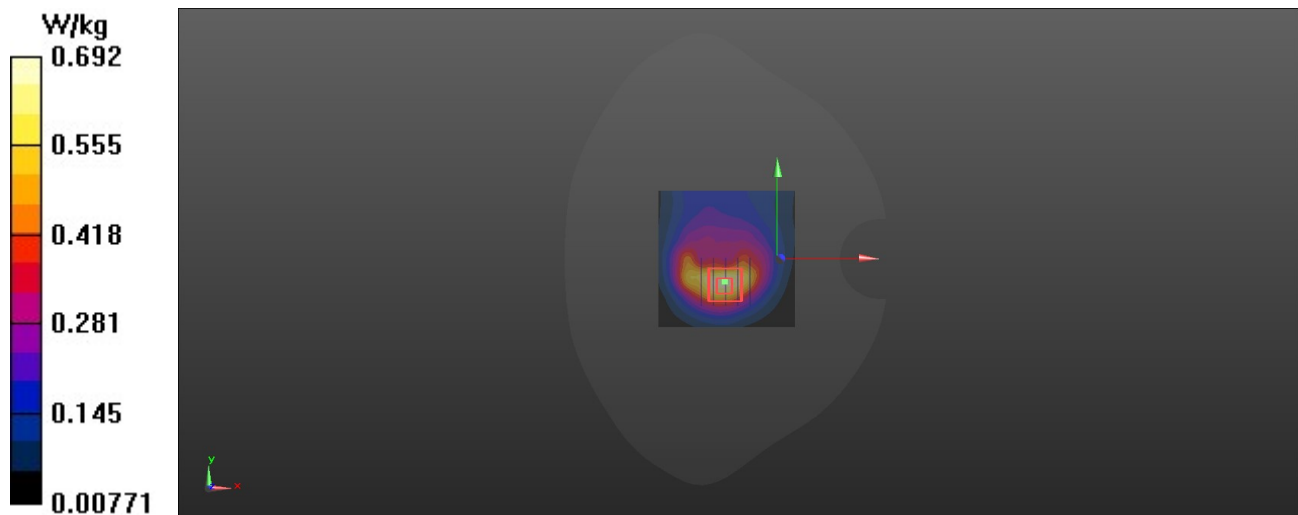

LTE 38_QPSK20M_Rear Face_0.5cm_Ch38150_1RB_OS50**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 2610 MHz; Duty Cycle: 1:1
Medium: H2600 Medium parameters used: $f = 2610$ MHz; $\sigma = 1.872$ S/m; $\epsilon_r = 39.132$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.54, 4.54, 4.54) @ 2610 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P41 AA; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.467 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.83 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.500 W/kg; SAR(10 g) = 0.204 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 46.6%

Maximum value of SAR (measured) = 0.550 W/kg

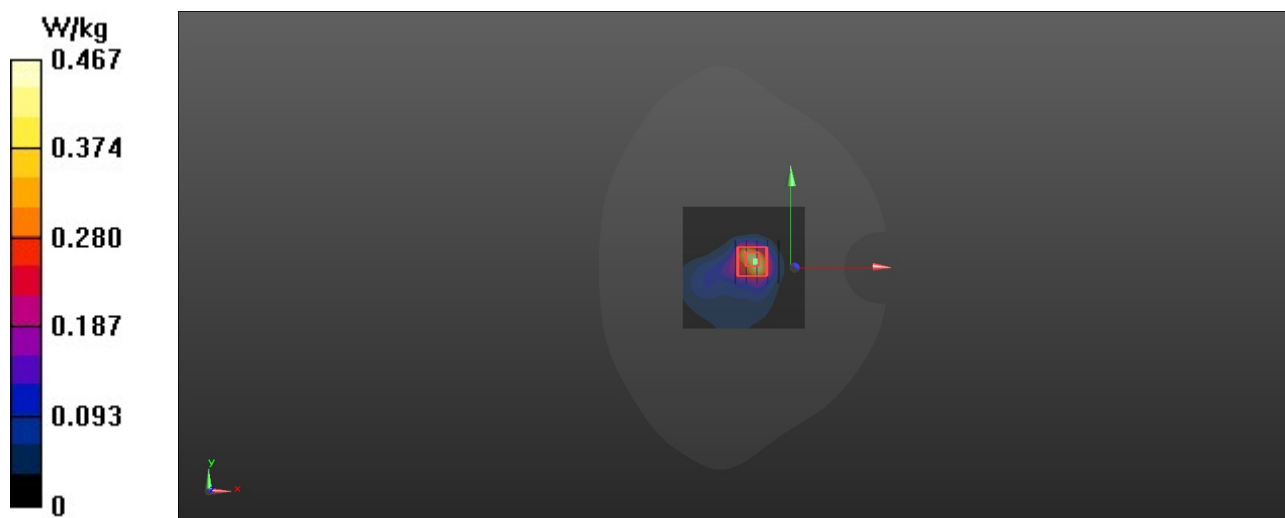

LTE 41_QPSK20M_Rear Face_0.5cm_Ch39750_1RB_OS50**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 2506 MHz; Duty Cycle: 1:1=
Medium: H2600 Medium parameters used : $f = 2506$ MHz; $\sigma = 1.833$ S/m; $\epsilon_r = 39.226$; $\rho = 1000 =$
 kg/m^3

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.54, 4.54, 4.54) @ 2506 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P41 AA; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.594 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.60 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.630 W/kg; SAR(10 g) = 0.260 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 47.6%

Maximum value of SAR (measured) = 0.730 W/kg

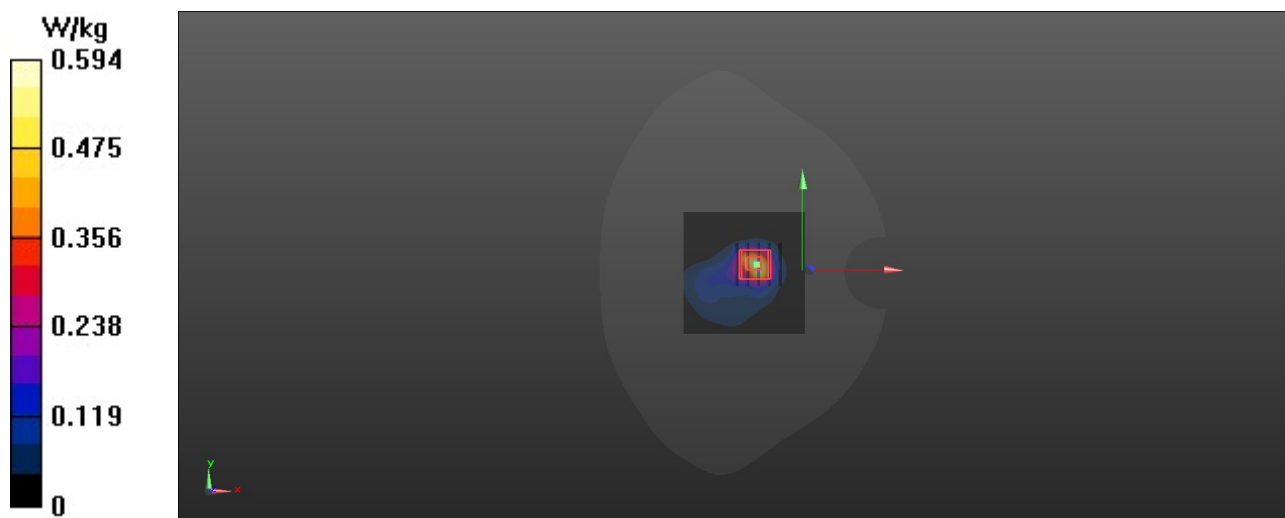

LTE 66_QPSK20M_Rear Face_0.5cm_Ch132572_1RB_OS50**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1=
Medium: H1750 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.345$ S/m; $\epsilon_r = 40.118$; $\rho = 1000 =$
 kg/m^3

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.41, 5.41, 5.41) @ 1770 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P41 AA; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.702 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.96 V/m; Power Drift = -0.16 dB



Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.632 W/kg; SAR(10 g) = 0.343 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 59.6%

Maximum value of SAR (measured) = 0.678 W/kg

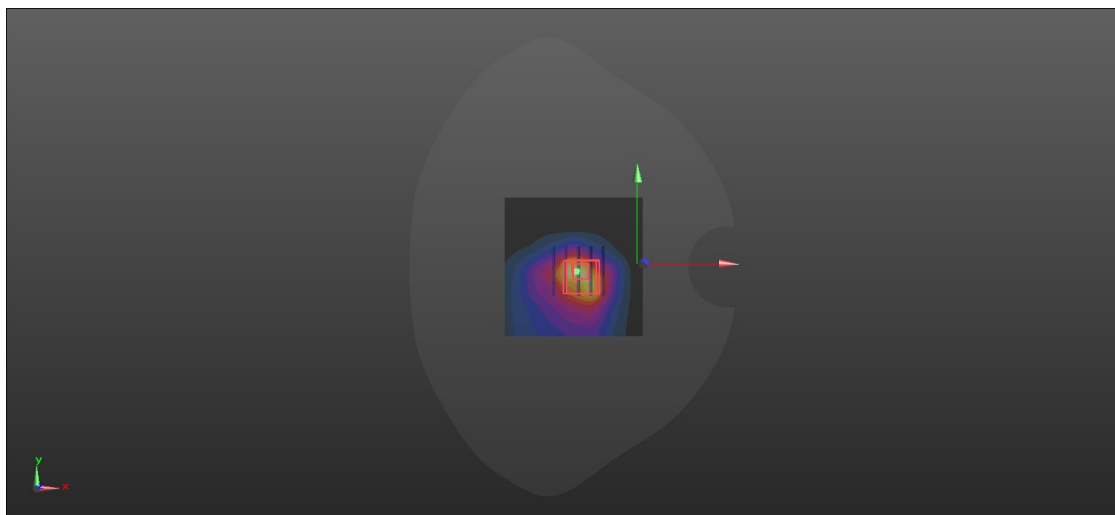

802.11b_Rear Face_0.5cm_Ch11**DUT: EUT**

Communication System: UID 0, WIFI 2.4G (0); Frequency: 2462 MHz; Duty Cycle: 1:1.53815=
Medium: H2450 Medium parameters used : $f = 2462$ MHz; $\sigma = 1.757$ S/m; $\epsilon_r = 39.115$; $\rho = 1000 =$
 kg/m^3

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.7, 4.7, 4.7) @ 2462 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P41 AA; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.432 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.349 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.978 W/kg

SAR(1 g) = 0.390 W/kg; SAR(10 g) = 0.182 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 44%

Maximum value of SAR (measured) = 0.416 W/kg

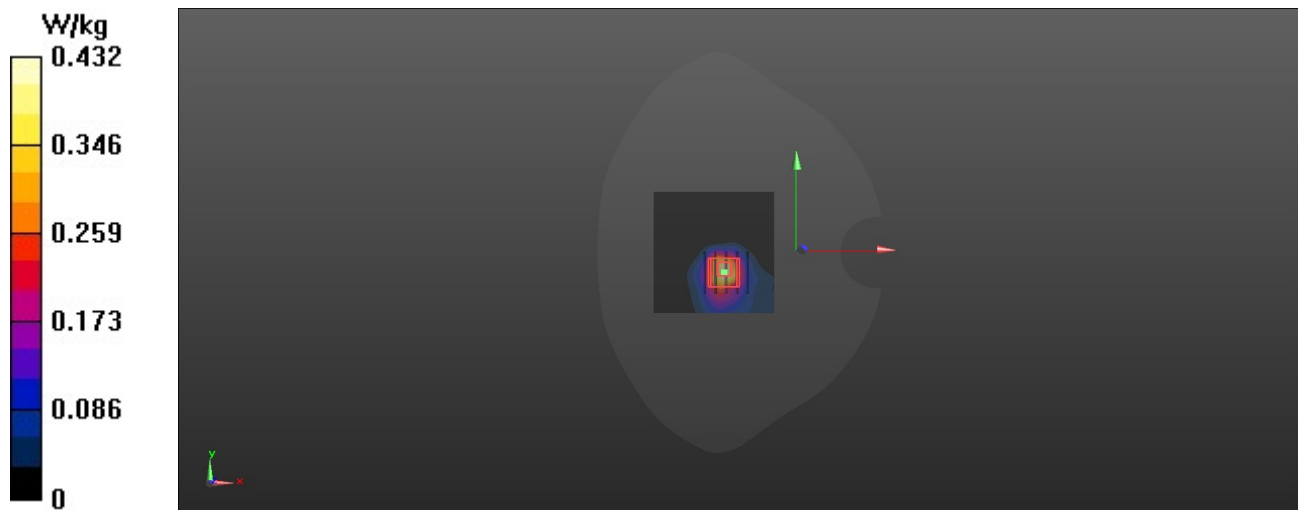

802.11a_Rear Face_0.5cm_Ch48**DUT: EUT**

Communication System: UID 0, WIFI 5G (0); Frequency: 5240 MHz; Duty Cycle: 1:6.85962=
Medium: H5G Medium parameters used: $f = 5240$ MHz; $\sigma = 4.845$ S/m; $\epsilon_r = 36.277$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(5.18, 5.57, 5.14) @ 5240 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P41 AA; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.13 (7474)

Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.357 W/kg

Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.953 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.948 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.062 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 32.2%

Maximum value of SAR (measured) = 0.318 W/kg

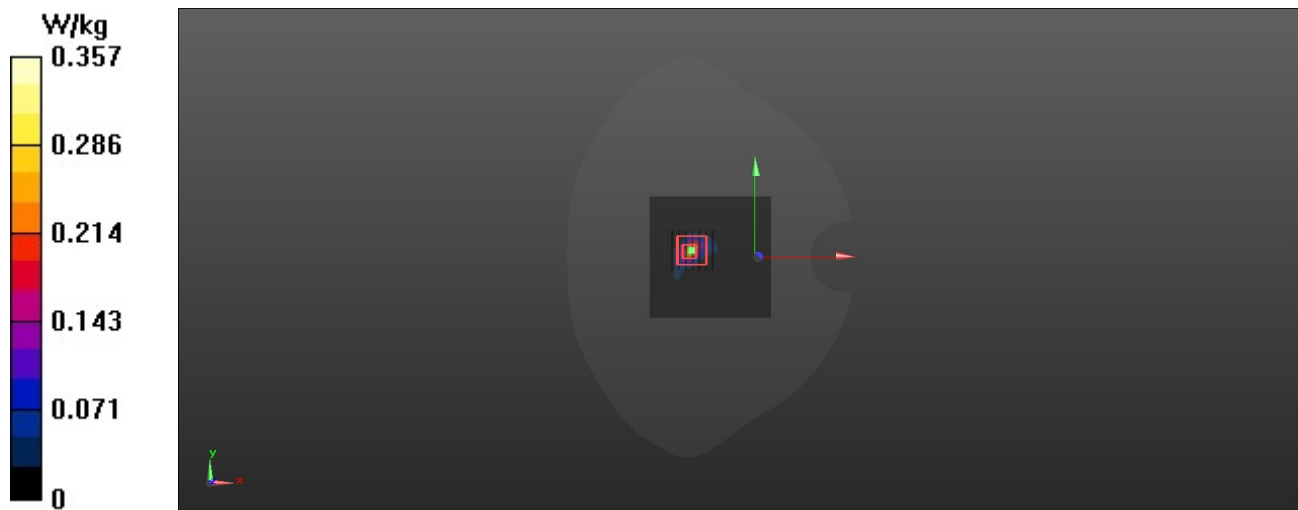

802.11a_Rear Face_0.5cm_Ch56**DUT: EUT**

Communication System: UID 0, WIFI 5G (0); Frequency: 5280 MHz; Duty Cycle: 1:6.85962
Medium: H5G Medium parameters used: $f = 5280$ MHz; $\sigma = 4.773$ S/m; $\epsilon_r = 35.19$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(5.18, 5.57, 5.14) @ 5280 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P41 AA; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.13 (7474)

Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.241 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.630 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.580 W/kg

SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.051 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 32.9%

Maximum value of SAR (measured) = 0.267 W/kg

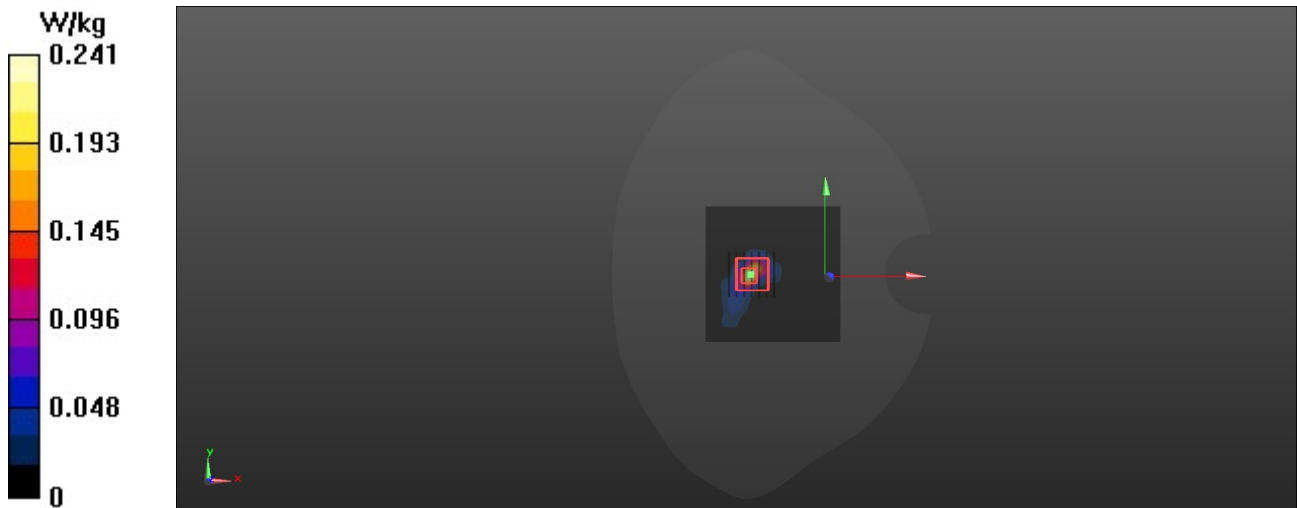

802.11a_Top Side_0.5cm_Ch149**DUT: EUT**

Communication System: UID 0, WIFI 5G (0); Frequency: 5745 MHz; Duty Cycle: 1:6.85962=
Medium: H5G Medium parameters used : $f = 5745$ MHz; $\sigma = 5.388$ S/m; $\epsilon_r = 34.63$; $\rho = 1000 =$
 kg/m^3

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(4.66, 5.02, 4.63) @ 5745 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P41 AA; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.13 (7474)

Area Scan (91x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.443 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.095 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.083 W/kg

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 30.8%

Maximum value of SAR (measured) = 0.425 W/kg

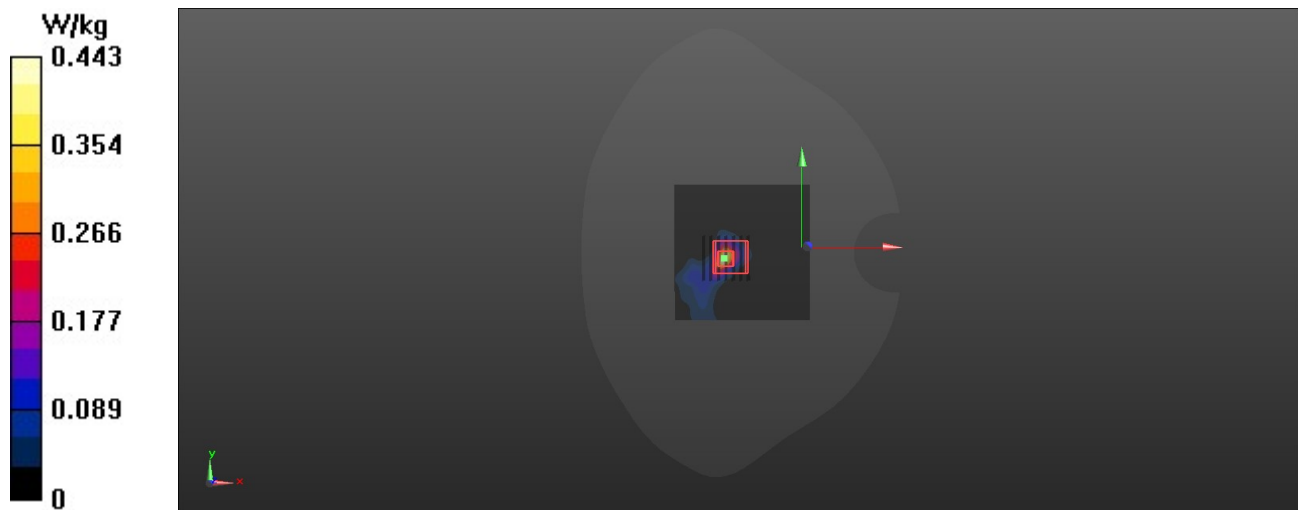

BT_DH5_Rear Face_0.5cm_Ch39**DUT: EUT**

Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used : $f = 2441$ MHz; $\sigma = 1.763$ S/m; $\epsilon_r = 39.56$; $\rho = 1000 = \text{kg/m}^3$

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.7, 4.7, 4.7) @ 2441 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P41 AA; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.0591 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.150 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.023 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 40.3%

Maximum value of SAR (measured) = 0.0562 W/kg

