



FCC TEST REPORT

FCC ID:2BAJU-HC952

Report Number..... : ZKT-230313L1592E-1

Date of Test..... Mar.10, 2023 to Mar.18, 2023

Date of issue..... : Mar.18, 2023

Total number of pages..... 85

Test Result..... : PASS

Testing Laboratory..... : Shenzhen ZKT Technology Co., Ltd.

Address 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : Shenzhen Huachuangyilian Electronics Co.,Ltd.

Address 4th Floor, No. 99, Langkou Industrial Zone, Langkou Community, Dalang Street, Longhua District, Shenzhen,China

Manufacturer's name : Shenzhen Huachuangyilian Electronics Co.,Ltd.

Address 4th Floor, No. 99, Langkou Industrial Zone, Langkou Community, Dalang Street, Longhua District, Shenzhen,China

Test specification:

Standard..... FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013

Test procedure..... : /

Non-standard test method : N/A

Test Report Form No..... : TRF-EL-110_V0

Test Report Form(s) Originator..... : ZKT Testing

Master TRF : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : Wireless Router

Trademark : 

Model/Type reference..... : HC952

Serial model No..... : HC951,HC851,HC841,HC840,HC540,HC202,HC210,HC503,
HC505,HC510,HC318,WE826,WE1026,WG1608,WE2806,
WG1602,Z5001,Z2101,G1,G2,G3,G4,G5,G6,G7,G8,G9,G10,G20,
G30,G40,G50,G60,G70,G80,G90,S100,S200,S300,S400,S500,
S600,S700,S800, S900

Ratings..... : Input: DC 12V/2.5A from Adapter Input AC 120V/60Hz



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

**Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China**

Tested by (name + signature).....: Alen He

Reviewer (name + signature).....: Joe Liu

Approved (name + signature).....: Lake Xie





Table of Contents

	Page
1. VERSION	5
2. SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULT	15
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 RADIATED EMISSION LIMITS	17
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	18
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	19
4.2.6 TEST RESULTS	19
5.RADIATED BAND EMISSIONMEASUREMENT	26
5.1 TEST REQUIREMENT:	26
5.2 TEST PROCEDURE	26
5.3 DEVIATION FROM TEST STANDARD	26
5.4 TEST SETUP	27
5.5 EUT OPERATING CONDITIONS	27
5.6 TEST RESULT	28
6.POWER SPECTRAL DENSITY TEST	32
6.1 APPLIED PROCEDURES / LIMIT	32
6.2 TEST PROCEDURE	32
6.3 DEVIATION FROM STANDARD	32
6.4 TEST SETUP	32
6.5 EUT OPERATION CONDITIONS	32



6.6 TEST RESULT	33
7. CHANNEL BANDWIDTH& 99% OCCUPY BANDWIDTH	57
7.1 APPLIED PROCEDURES / LIMIT	57
7.2 TEST PROCEDURE	57
7.3 DEVIATION FROM STANDARD	57
7.4 TEST SETUP	57
7.5 EUT OPERATION CONDITIONS	57
7.6 TEST RESULT	58
8.PEAK OUTPUT POWER TEST	65
8.1 APPLIED PROCEDURES/LIMIT	65
8.2 TEST PROCEDURE	65
8.3 DEVIATION FROM STANDARD	65
8.4 TEST SETUP	65
8.5 EUT OPERATION CONDITIONS	65
8.6 TEST RESULT	66
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	67
9.1 APPLICABLE STANDARD	67
9.2 TEST PROCEDURE	67
9.3 DEVIATION FROM STANDARD	67
9.4 TEST SETUP	67
9.5 EUT OPERATION CONDITIONS	67
9.6 TEST RESULTS	67
10. ANTENNA REQUIREMENT	84
11. TEST SETUP PHOTO	85
12. EUT CONSTRUCTIONAL DETAILS	85



1. VERSION

Report No.	Version	Description	Approved
ZKT-230313L1592E-1	Rev.01	Initial issue of report	Mar.18, 2023



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (c)	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3)	Conducted Peak Output Power	PASS	
FCC part 15.247 (a)(2)	Channel Bandwidth& 99% OCB	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247(d)	Band Edge	PASS	
FCC part 15.205/15.209	Spurious Emission	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

CAB identifier: CN0110

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ · providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8dB
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59°C



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Wireless Router
Model No.:	HC952
Model Different.:	HC951,HC851,HC841,HC840,HC540,HC202,HC210,HC503,HC505,HC510,HC318,WE826,WE1026,WG1608,WE2806,WG1602,Z5001,Z2101,G1,G2,G3,G4,G5,G6,G7,G8,G9,G10,G20,G30,G40,G50,G60,G70,G80,G90,S100,S200,S300,S400,S500,S600,S700,S800, S900
Difference:	All the same except the model number.
Hardware Version:	V1.0
Software Version:	V1.0
Sample(s) Status:	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20)/802.11ax(HE20):11 802.11n(HT40)/802.11ax(VHT40):7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum(DSSS) 802.11g/802.11n(H20)/802.11n(HT40): Orthogonal Frequency Division Multiplexing(OFDM) 802.11ax(HE20)/802.11ax(VHT40) Orthogonal Frequency-Division Multiple Access(OFDMA)
Antenna Type:	External Antenna
Antenna gain:	2.10 dBi@2.4G; 5.09 dBi@5G
Directional gain:	5.11 dBi@2.4G; 8.19 dBi@5G
Power supply:	Manufacturer: Xiamen shenhai electronics CO., Ltd. Model:SA30V-120250U Input: AC 100-240V 50/60Hz 0.8A Max Output: DC 12V/2.5A

Operation Frequency each of channel							
Channel	Frequency	Chann el	Frequency	Chann el	Frequency	Chann el	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:



Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20) /802.11ax(HE20)	802.11n(HT40) 802.11ax(VHT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

3.2 DESCRIPTION OF TEST MODES


Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:						
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.						
Mode	802.11b	802.11g	802.11n (HT20)	802.11n (HT20)	802.11ax (VHT20)	802.11ax (VHT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps	6.5Mbps	13Mbps


Test Software	Realtek Test Tool
Power level setup	<13dBm

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted Emission

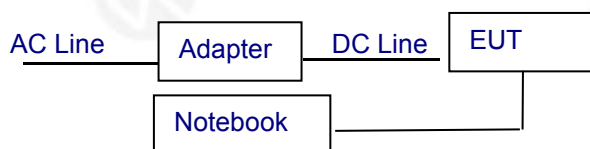

Radiated Emission

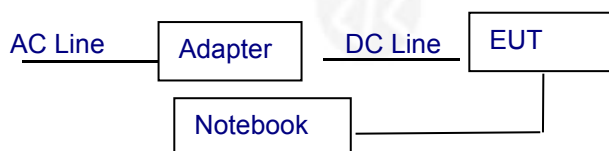

Conducted Spurious

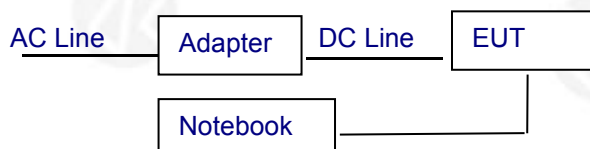



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Wireless Router		HC952	N/A	EUT
E-2	Adapter	N/A	SA30V-120250U	N/A	EUT
E-3	Notebook	N/A	X1502ZA1240-0DASXBJX10	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	Oct. 28, 2022	Oct. 27, 2023
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSQ	100363	Oct. 28, 2022	Oct. 27, 2023
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	Oct. 28, 2022	Oct. 27, 2023
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	Nov. 02, 2022	Nov. 01, 2023
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	Nov. 01, 2022	Oct. 31, 2023
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	Oct. 28, 2022	Oct. 27, 2023
7	Loop Antenna	TESEQ	HLA6121	58357	Nov. 01, 2022	Oct. 31, 2023
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	060747	Nov. 15, 2022	Nov. 14, 2023
9	Amplifier (1GHz-26.5GHz)	Agilent	8449B	3008A00315	Oct. 28, 2022	Oct. 27, 2023
10	Amplifier (500MHz-40GHz)	QJD	DLE-161	097	Oct. 28, 2022	Oct. 27, 2023
11	Test Cable	N/A	R-01	N/A	Oct. 28, 2022	Oct. 27, 2023
12	Test Cable	N/A	R-02	N/A	Oct. 28, 2022	Oct. 27, 2023
13	Test Cable	N/A	R-03	N/A	Oct. 28, 2022	Oct. 27, 2023
14	Test Cable	N/A	RF-01	N/A	Oct. 28, 2022	Oct. 27, 2023
15	Test Cable	N/A	RF-02	N/A	Oct. 28, 2022	Oct. 27, 2023
16	Test Cable	N/A	RF-03	N/A	Oct. 28, 2022	Oct. 27, 2023
17	ESG Signal Generator	Agilent	E4421B	N/A	Oct. 21, 2022	Oct. 20, 2023
18	Signal Generator	Agilent	N5182A	N/A	Oct. 21, 2022	Oct. 20, 2023
19	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	Nov. 15, 2022	Nov. 14, 2023
20	Wideband Radio Communication Test	R&S	CMW500	106504	Oct. 28, 2022	Oct. 27, 2023
21	MWRF Power Meter Test system	MW	MW100-RPCB	N/A	Oct. 21, 2022	Oct. 20, 2023
22	D.C. Power Supply	LongWei	TPR-6405D	N/A	\	\
23	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\
24	RF Software	MW	MTS8310	V2.0.0.0	\	\
25	Turntable	MF	MF-7802BS	N/A	\	\
26	Antenna tower	MF	MF-7802BS	N/A	\	\



Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Oct. 28, 2022	Oct. 27, 2023
2	LISN	CYBERTEK	EM5040A	E1850400149	Oct. 28, 2022	Oct. 27, 2023
3	Test Cable	N/A	C01	N/A	Oct. 28, 2022	Oct. 27, 2023
4	Test Cable	N/A	C02	N/A	Oct. 28, 2022	Oct. 27, 2023
5	EMI Test Receiver	R&S	ESRP3	101946	Oct. 28, 2022	Oct. 27, 2023
6	Absorbing Clamp	DZ	ZN23201	N/A	Oct. 28, 2022	Oct. 27, 2023



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

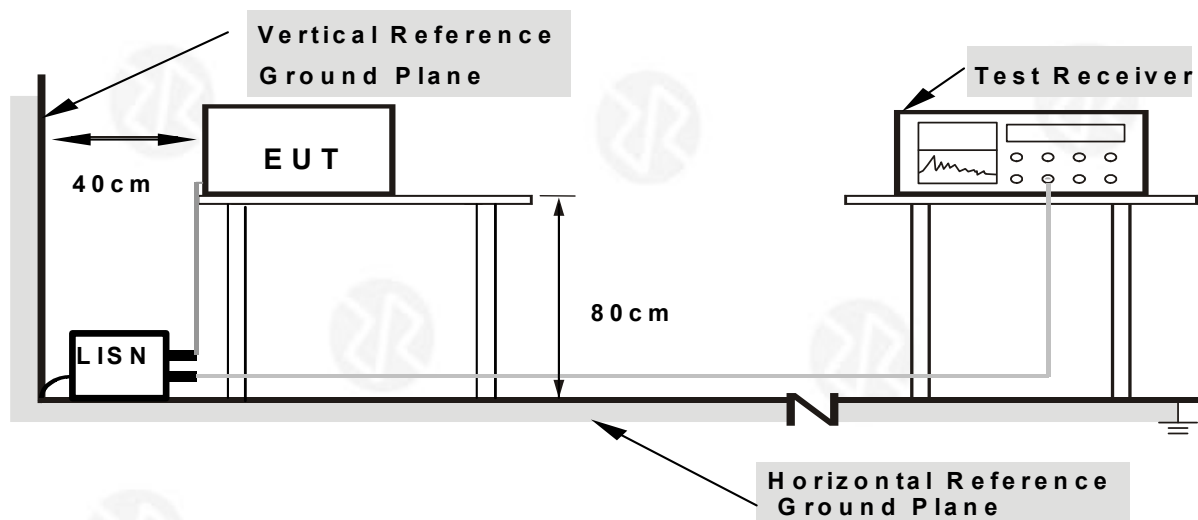

- Note:** 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.



4.1.6 TEST RESULT

Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

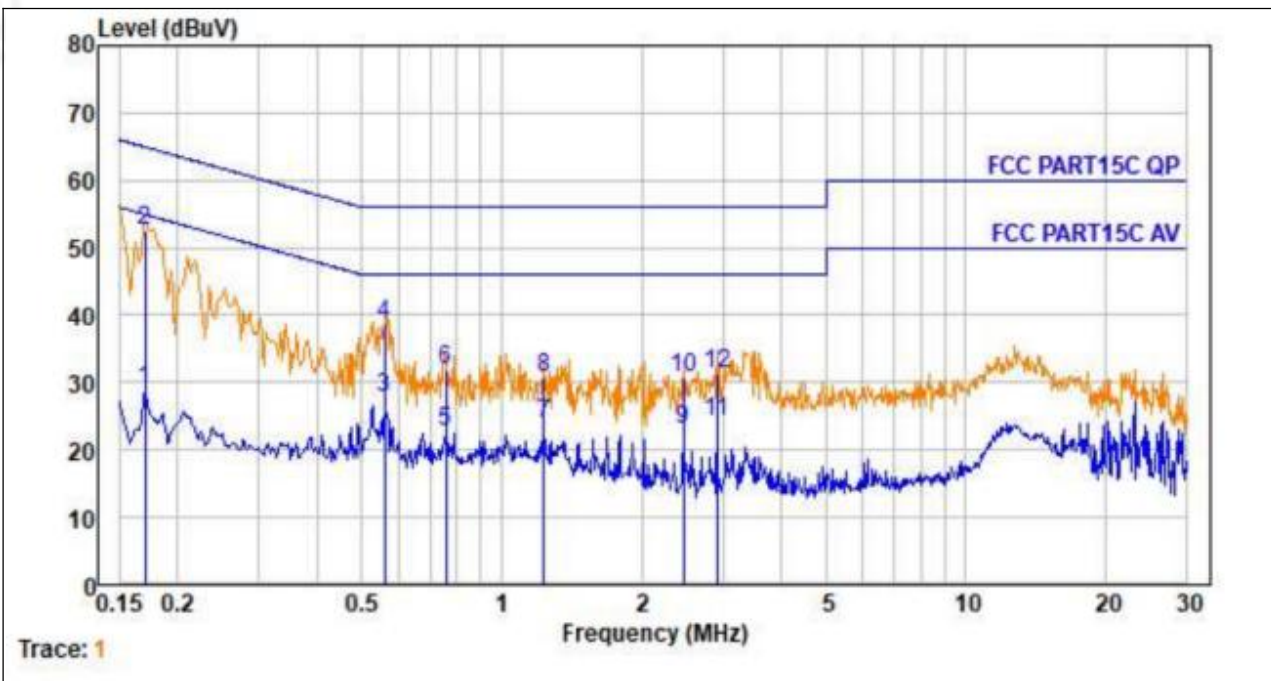


No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBμV	Emission Level dBμV	Limit dBμV	Over Limit dB	Remark
1	0.170	0.24	9.54	19.24	29.02	54.94	-25.92	Average
2	0.170	0.24	9.54	42.79	52.57	64.94	-12.37	QP
3	0.558	0.43	9.57	17.66	27.66	46.00	-18.34	Average
4	0.558	0.43	9.57	28.65	38.65	56.00	-17.35	QP
5	0.759	0.44	9.58	12.85	22.87	46.00	-23.13	Average
6	0.759	0.44	9.58	21.95	31.97	56.00	-24.03	QP
7	1.236	0.46	9.58	13.87	23.91	46.00	-22.09	Average
8	1.236	0.46	9.58	20.66	30.70	56.00	-25.30	QP
9	2.461	0.47	9.59	13.09	23.15	46.00	-22.85	Average
10	2.461	0.47	9.59	20.56	30.62	56.00	-25.38	QP
11	2.915	0.47	9.59	14.04	24.10	46.00	-21.90	Average
12	2.915	0.47	9.59	21.15	31.21	56.00	-24.79	QP

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor



Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

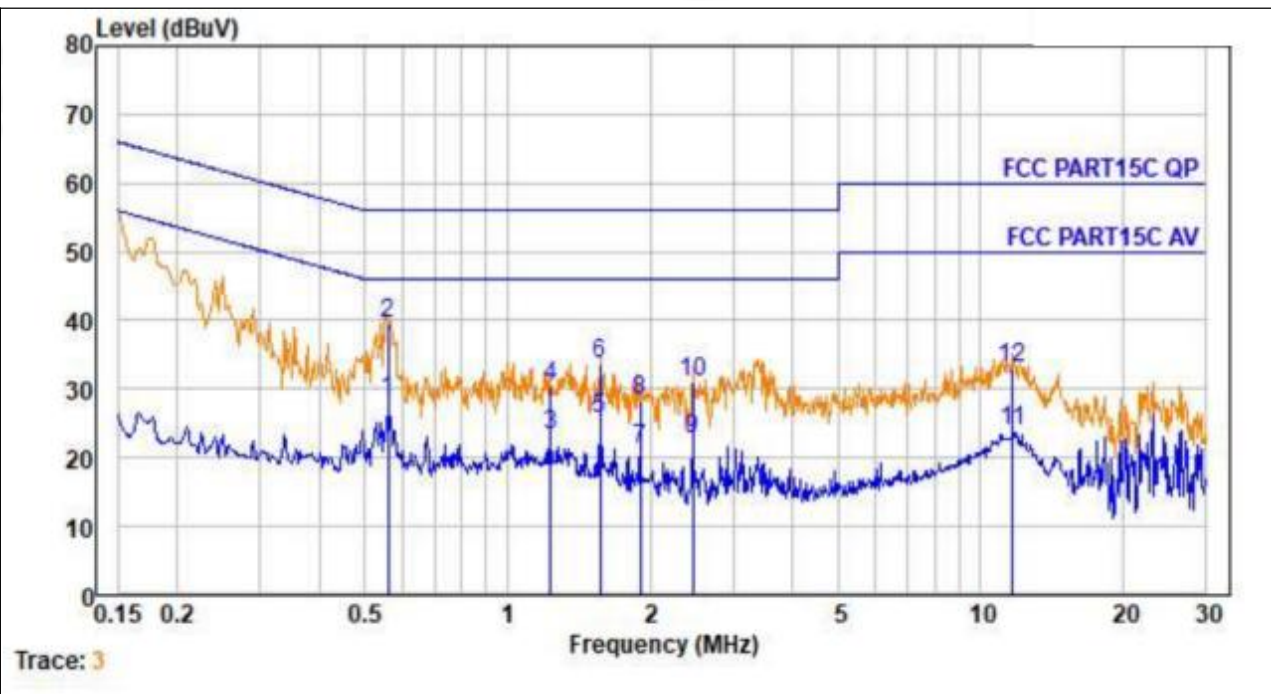

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBμV	Emission Level dBμV	Limit dBμV	Over Limit dB	Remark
1	0.558	0.43	9.58	18.20	28.21	46.00	-17.79	Average
2	0.558	0.43	9.58	29.64	39.65	56.00	-16.35	QP
3	1.236	0.46	9.58	13.14	23.18	46.00	-22.82	Average
4	1.236	0.46	9.58	20.29	30.33	56.00	-25.67	QP
5	1.568	0.47	9.58	15.54	25.59	46.00	-20.41	Average
6	1.568	0.47	9.58	23.69	33.74	56.00	-22.26	QP
7	1.908	0.47	9.58	11.17	21.22	46.00	-24.78	Average
8	1.908	0.47	9.58	18.23	28.28	56.00	-27.72	QP
9	2.461	0.47	9.59	12.75	22.81	46.00	-23.19	Average
10	2.461	0.47	9.59	20.86	30.92	56.00	-25.08	QP
11	11.683	0.56	9.81	13.44	23.81	50.00	-26.19	Average
12	11.683	0.56	9.81	22.64	33.01	60.00	-26.99	QP

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor



4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.



- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

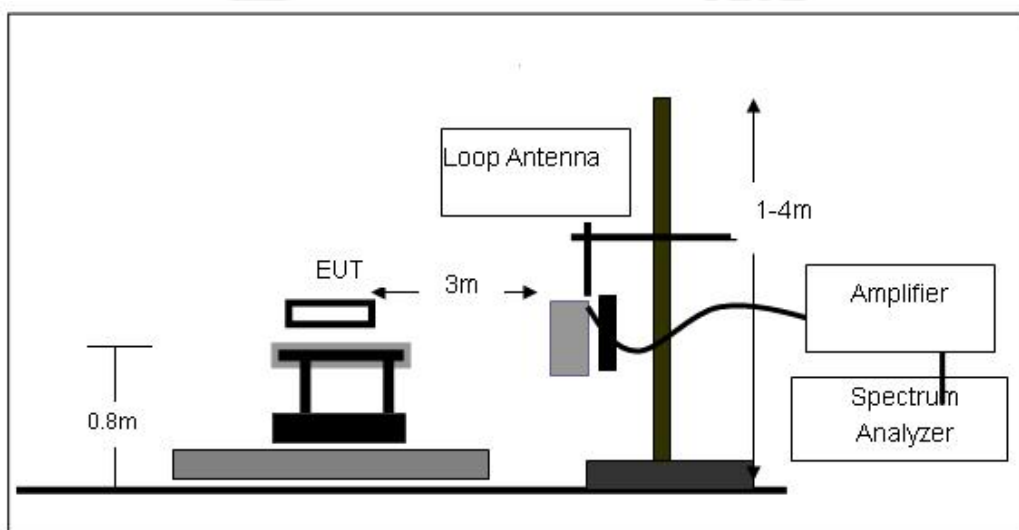




(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

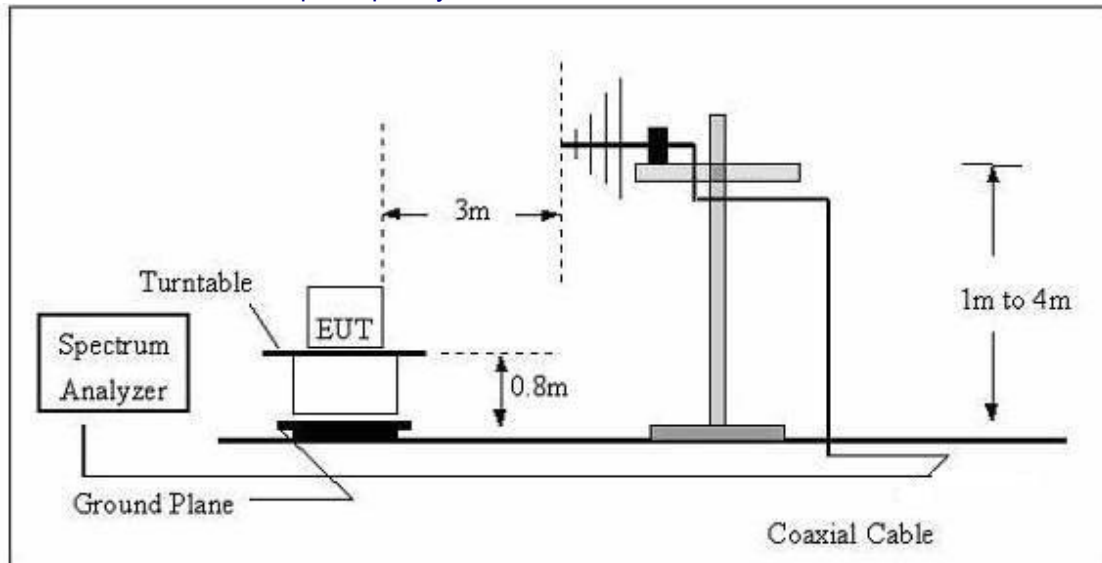

(C) Radiated Emission Test-Up Frequency Above 1GHz

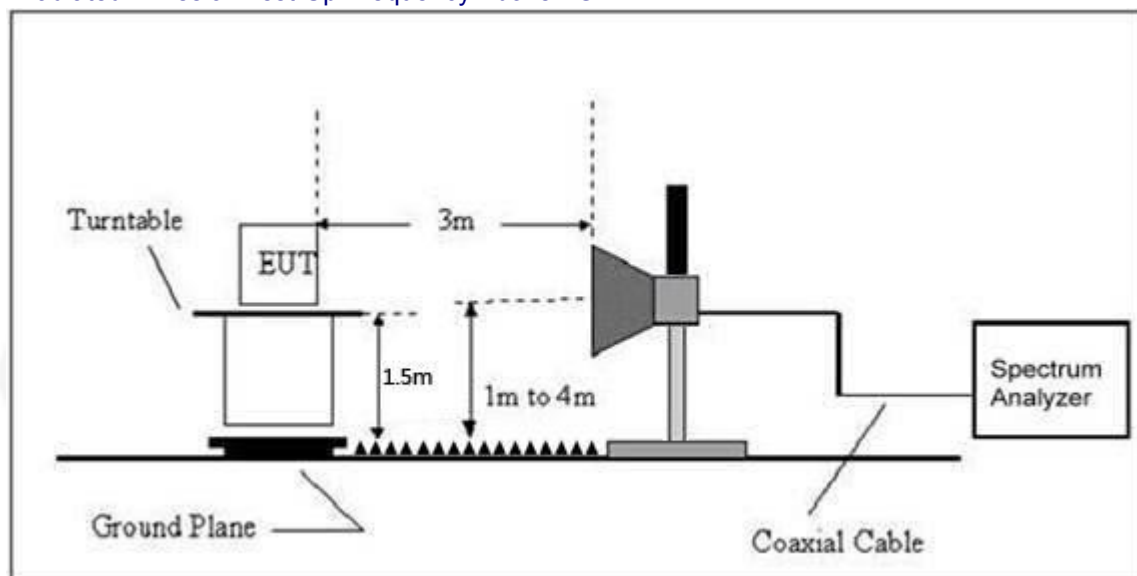

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.




Between 30MHz – 1GHz

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

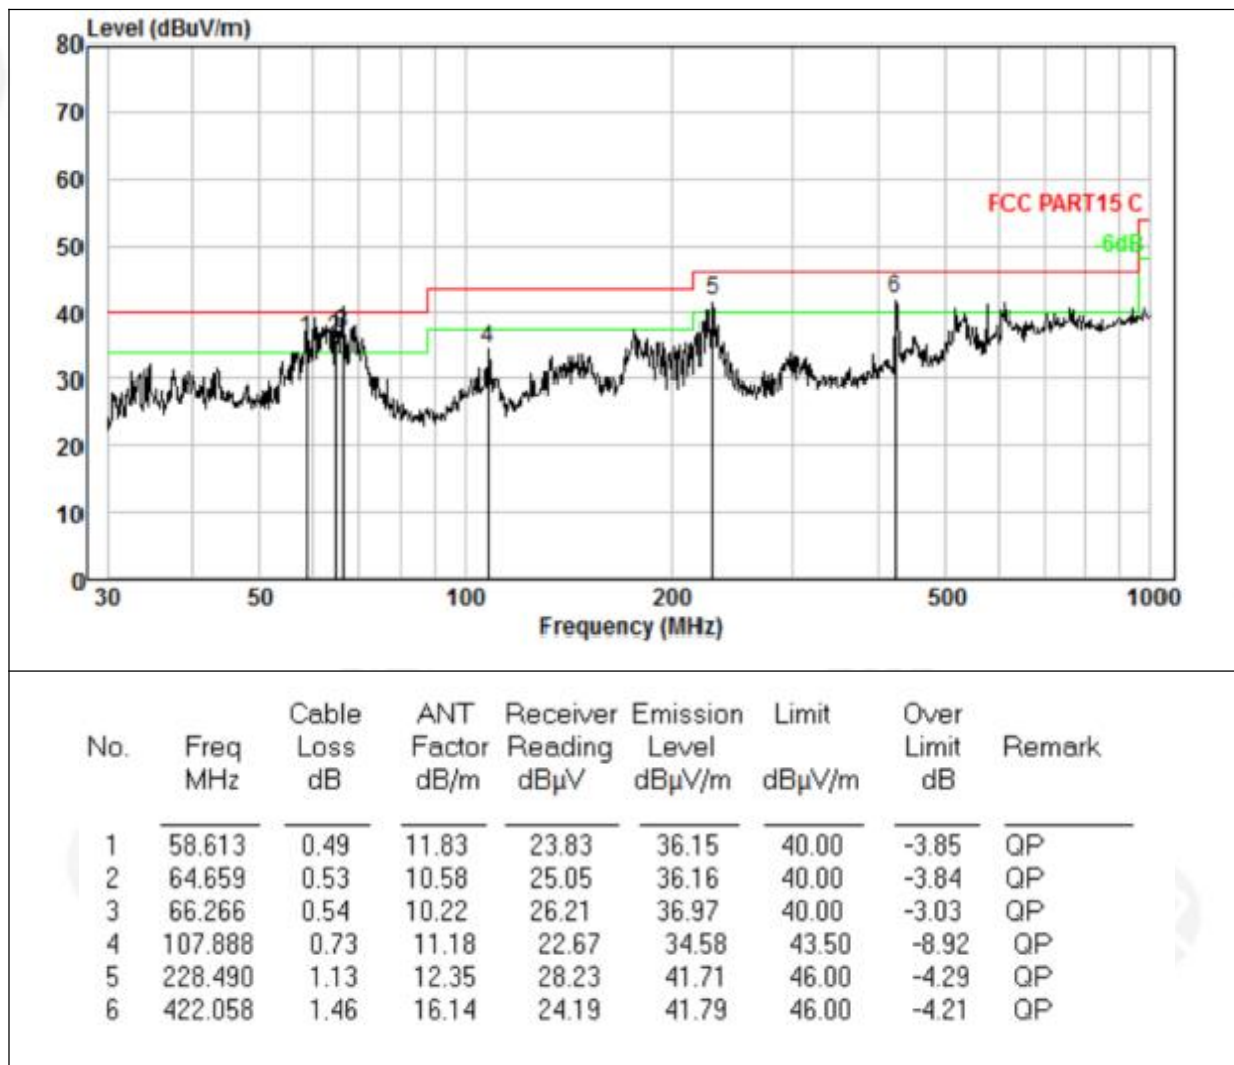



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

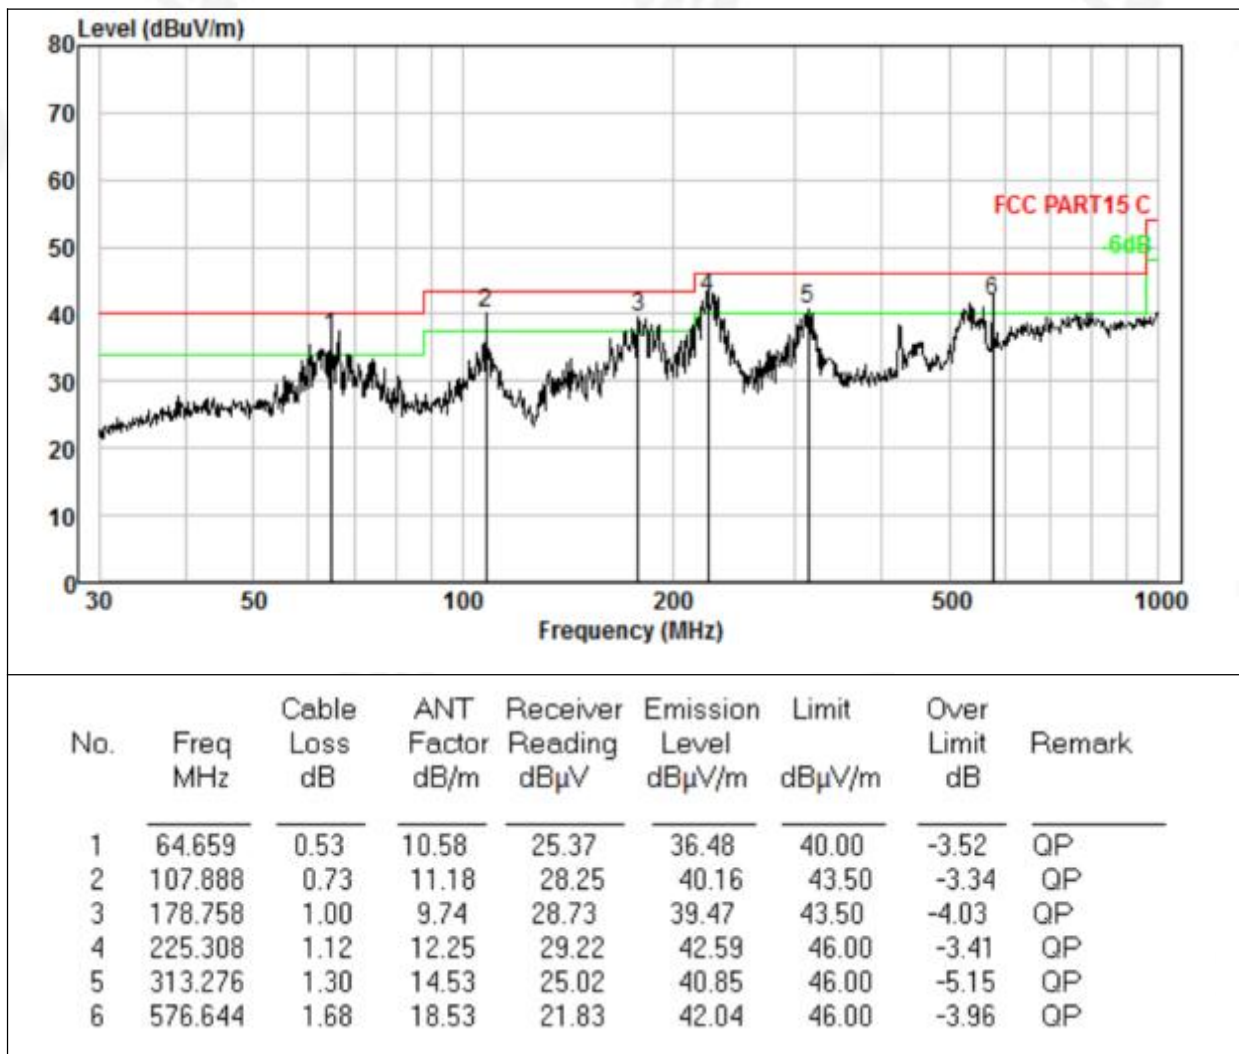

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11b and DC 12Vmode



1GHz~25GHz

ANT1- 802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	53.80	30.55	5.77	24.66	53.68	74.00	-20.32	PK
V	4824.00	43.21	30.55	5.77	24.66	43.09	54.00	-10.91	AV
V	7236.00	52.59	30.33	6.32	24.55	53.13	74.00	-20.87	PK
V	7236.00	43.25	30.33	6.32	24.55	43.79	54.00	-10.21	AV
V	9648.00	51.74	30.85	7.45	24.69	53.03	74.00	-20.97	PK
V	9648.00	41.22	30.85	7.45	24.69	42.51	54.00	-11.49	AV
V	12060.00	52.38	31.02	8.99	25.57	55.92	74.00	-18.08	PK
V	12060.00	41.22	31.02	8.99	25.57	44.76	54.00	-9.24	AV
H	4824.00	53.36	30.55	5.77	24.66	53.24	74.00	-20.76	PK
H	4824.00	43.73	30.55	5.77	24.66	43.61	54.00	-10.39	AV
H	7236.00	51.69	30.33	6.32	24.55	52.23	74.00	-21.77	PK
H	7236.00	41.51	30.33	6.32	24.55	42.05	54.00	-11.95	AV
H	9648.00	52.48	30.85	7.45	24.69	53.77	74.00	-20.23	PK
H	9648.00	42.50	30.85	7.45	24.69	43.79	54.00	-10.21	AV
H	12060.00	50.49	31.02	8.99	25.57	54.03	74.00	-19.97	PK
H	12060.00	40.21	31.02	8.99	25.57	43.75	54.00	-10.25	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	53.82	30.55	5.77	24.66	53.70	74.00	-20.30	PK
V	4874.00	43.17	30.55	5.77	24.66	43.05	54.00	-10.95	AV
V	7311.00	52.57	30.33	6.32	24.55	53.11	74.00	-20.89	PK
V	7311.00	43.50	30.33	6.32	24.55	44.04	54.00	-9.96	AV
V	9748.00	51.59	30.85	7.45	24.69	52.88	74.00	-21.12	PK
V	9748.00	41.01	30.85	7.45	24.69	42.30	54.00	-11.70	AV
V	12185.00	52.85	31.02	8.99	25.57	56.39	74.00	-17.61	PK
V	12185.00	41.43	31.02	8.99	25.57	44.97	54.00	-9.03	AV
H	4874.00	53.49	30.55	5.77	24.66	53.37	74.00	-20.63	PK
H	4874.00	43.42	30.55	5.77	24.66	43.30	54.00	-10.70	AV
H	7311.00	51.24	30.33	6.32	24.55	51.78	74.00	-22.22	PK
H	7311.00	41.51	30.33	6.32	24.55	42.05	54.00	-11.95	AV
H	9748.00	53.03	30.85	7.45	24.69	54.32	74.00	-19.68	PK
H	9748.00	42.45	30.85	7.45	24.69	43.74	54.00	-10.26	AV
H	12185.00	50.45	31.02	8.99	25.57	53.99	74.00	-20.01	PK
H	12185.00	40.58	31.02	8.99	25.57	44.12	54.00	-9.88	AV



Page 20 of 63

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	53.25	30.55	5.77	24.66	53.13	74.00	-20.87	PK
V	4924.00	43.25	30.55	5.77	24.66	43.13	54.00	-10.87	AV
V	7386.00	52.65	30.33	6.32	24.55	53.19	74.00	-20.81	PK
V	7386.00	43.17	30.33	6.32	24.55	43.71	54.00	-10.29	AV
V	9848.00	51.58	30.85	7.45	24.69	52.87	74.00	-21.13	PK
V	9848.00	41.46	30.85	7.45	24.69	42.75	54.00	-11.25	AV
V	12310.00	52.57	31.02	8.99	25.57	56.11	74.00	-17.89	PK
V	12310.00	40.96	31.02	8.99	25.57	44.50	54.00	-9.50	AV
H	4924.00	53.18	30.55	5.77	24.66	53.06	74.00	-20.94	PK
H	4924.00	43.92	30.55	5.77	24.66	43.80	54.00	-10.20	AV
H	7386.00	51.17	30.33	6.32	24.55	51.71	74.00	-22.29	PK
H	7386.00	41.56	30.33	6.32	24.55	42.10	54.00	-11.90	AV
H	9848.00	52.75	30.85	7.45	24.69	54.04	74.00	-19.96	PK
H	9848.00	42.10	30.85	7.45	24.69	43.39	54.00	-10.61	AV
H	12310.00	50.08	31.02	8.99	25.57	53.62	74.00	-20.38	PK
H	12310.00	40.64	31.02	8.99	25.57	44.18	54.00	-9.82	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4. We test all the mode and recorded the worst mode in the report.



1GHz~25GHz

ANT2- 802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	53.62	30.55	5.77	24.66	53.50	74.00	-20.50	PK
V	4824.00	43.55	30.55	5.77	24.66	43.43	54.00	-10.57	AV
V	7236.00	52.52	30.33	6.32	24.55	53.06	74.00	-20.94	PK
V	7236.00	43.33	30.33	6.32	24.55	43.87	54.00	-10.13	AV
V	9648.00	51.69	30.85	7.45	24.69	52.98	74.00	-21.02	PK
V	9648.00	41.28	30.85	7.45	24.69	42.57	54.00	-11.43	AV
V	12060.00	52.74	31.02	8.99	25.57	56.28	74.00	-17.72	PK
V	12060.00	41.22	31.02	8.99	25.57	44.76	54.00	-9.24	AV
H	4824.00	53.55	30.55	5.77	24.66	53.43	74.00	-20.57	PK
H	4824.00	43.59	30.55	5.77	24.66	43.47	54.00	-10.53	AV
H	7236.00	51.67	30.33	6.32	24.55	52.21	74.00	-21.79	PK
H	7236.00	41.61	30.33	6.32	24.55	42.15	54.00	-11.85	AV
H	9648.00	52.84	30.85	7.45	24.69	54.13	74.00	-19.87	PK
H	9648.00	42.51	30.85	7.45	24.69	43.80	54.00	-10.20	AV
H	12060.00	50.49	31.02	8.99	25.57	54.03	74.00	-19.97	PK
H	12060.00	40.49	31.02	8.99	25.57	44.03	54.00	-9.97	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	53.24	30.55	5.77	24.66	53.12	74.00	-20.88	PK
V	4874.00	43.37	30.55	5.77	24.66	43.25	54.00	-10.75	AV
V	7311.00	52.79	30.33	6.32	24.55	53.33	74.00	-20.67	PK
V	7311.00	43.02	30.33	6.32	24.55	43.56	54.00	-10.44	AV
V	9748.00	51.30	30.85	7.45	24.69	52.59	74.00	-21.41	PK
V	9748.00	41.39	30.85	7.45	24.69	42.68	54.00	-11.32	AV
V	12185.00	52.52	31.02	8.99	25.57	56.06	74.00	-17.94	PK
V	12185.00	41.03	31.02	8.99	25.57	44.57	54.00	-9.43	AV
H	4874.00	53.16	30.55	5.77	24.66	53.04	74.00	-20.96	PK
H	4874.00	43.72	30.55	5.77	24.66	43.60	54.00	-10.40	AV
H	7311.00	51.64	30.33	6.32	24.55	52.18	74.00	-21.82	PK
H	7311.00	41.25	30.33	6.32	24.55	41.79	54.00	-12.21	AV
H	9748.00	52.62	30.85	7.45	24.69	53.91	74.00	-20.09	PK
H	9748.00	42.46	30.85	7.45	24.69	43.75	54.00	-10.25	AV
H	12185.00	50.43	31.02	8.99	25.57	53.97	74.00	-20.03	PK
H	12185.00	40.28	31.02	8.99	25.57	43.82	54.00	-10.18	AV



Page 20 of 63

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	53.27	30.55	5.77	24.66	53.15	74.00	-20.85	PK
V	4924.00	43.04	30.55	5.77	24.66	42.92	54.00	-11.08	AV
V	7386.00	52.55	30.33	6.32	24.55	53.09	74.00	-20.91	PK
V	7386.00	43.13	30.33	6.32	24.55	43.67	54.00	-10.33	AV
V	9848.00	51.60	30.85	7.45	24.69	52.89	74.00	-21.11	PK
V	9848.00	41.08	30.85	7.45	24.69	42.37	54.00	-11.63	AV
V	12310.00	52.70	31.02	8.99	25.57	56.24	74.00	-17.76	PK
V	12310.00	41.00	31.02	8.99	25.57	44.54	54.00	-9.46	AV
H	4924.00	53.27	30.55	5.77	24.66	53.15	74.00	-20.85	PK
H	4924.00	43.56	30.55	5.77	24.66	43.44	54.00	-10.56	AV
H	7386.00	51.44	30.33	6.32	24.55	51.98	74.00	-22.02	PK
H	7386.00	41.38	30.33	6.32	24.55	41.92	54.00	-12.08	AV
H	9848.00	52.70	30.85	7.45	24.69	53.99	74.00	-20.01	PK
H	9848.00	42.02	30.85	7.45	24.69	43.31	54.00	-10.69	AV
H	12310.00	50.42	31.02	8.99	25.57	53.96	74.00	-20.04	PK
H	12310.00	40.79	31.02	8.99	25.57	44.33	54.00	-9.67	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4. We test all the mode and recorded the worst mode in the report.



5.RADIATED BAND EMISSIONMEASUREMENT

5.1 TEST REQUIREMENT:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
7. Test the EUT in the lowest channel, the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


5.3 DEVIATION FROM TEST STANDARD

No deviation



5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

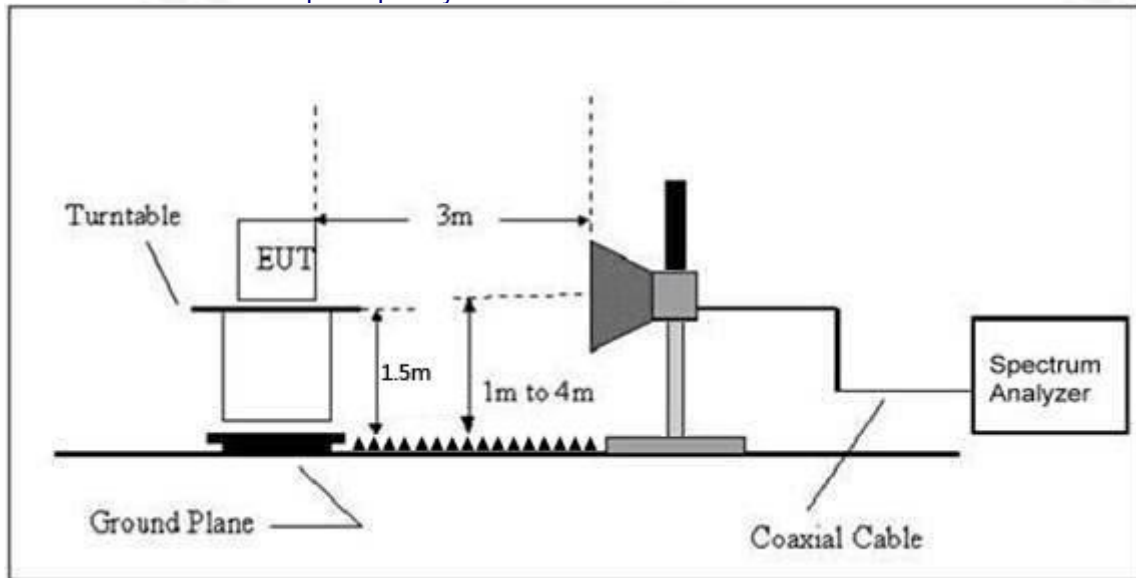

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



5.6 TEST RESULT

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
ANT1-802.11b	Low Channel 2412MHz									
	H	2390.00	54.09	30.22	4.85	23.98	52.70	74.00	PK	PASS
	H	2390.00	45.78	30.22	4.85	23.98	44.39	54.00	AV	PASS
	H	2400.00	55.98	30.22	4.85	23.98	54.59	74.00	PK	PASS
	H	2400.00	45.86	30.22	4.85	23.98	44.47	54.00	AV	PASS
	V	2390.00	53.53	30.22	4.85	23.98	52.14	74.00	PK	PASS
	V	2390.00	45.84	30.22	4.85	23.98	44.45	54.00	AV	PASS
	V	2400.00	55.34	30.22	4.85	23.98	53.95	74.00	PK	PASS
	V	2400.00	45.73	30.22	4.85	23.98	44.34	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	54.00	30.22	4.85	23.98	52.61	74.00	PK	PASS
	H	2483.50	44.49	30.22	4.85	23.98	43.10	54.00	AV	PASS
	H	2500.00	55.25	30.22	4.85	23.98	53.86	74.00	PK	PASS
	H	2500.00	45.62	30.22	4.85	23.98	44.23	54.00	AV	PASS
	V	2483.50	54.31	30.22	4.85	23.98	52.92	74.00	PK	PASS
	V	2483.50	46.27	30.22	4.85	23.98	44.88	54.00	AV	PASS
ANT1-802.11g	Low Channel 2412MHz									
	H	2390.00	53.92	30.22	4.85	23.98	52.53	74.00	PK	PASS
	H	2390.00	45.70	30.22	4.85	23.98	44.31	54.00	AV	PASS
	H	2400.00	55.68	30.22	4.85	23.98	54.29	74.00	PK	PASS
	H	2400.00	46.10	30.22	4.85	23.98	44.71	54.00	AV	PASS
	V	2390.00	54.11	30.22	4.85	23.98	52.72	74.00	PK	PASS
	V	2390.00	45.53	30.22	4.85	23.98	44.14	54.00	AV	PASS
	V	2400.00	55.79	30.22	4.85	23.98	54.40	74.00	PK	PASS
	V	2400.00	46.11	30.22	4.85	23.98	44.72	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	53.42	30.22	4.85	23.98	52.03	74.00	PK	PASS
	H	2483.50	45.03	30.22	4.85	23.98	43.64	54.00	AV	PASS
	H	2500.00	54.98	30.22	4.85	23.98	53.59	74.00	PK	PASS
	H	2500.00	45.76	30.22	4.85	23.98	44.37	54.00	AV	PASS
	V	2483.50	54.52	30.22	4.85	23.98	53.13	74.00	PK	PASS
	V	2483.50	46.10	30.22	4.85	23.98	44.71	54.00	AV	PASS
ANT1-802.11n20	Low Channel 2412MHz									
	H	2390.00	54.18	30.22	4.85	23.98	52.79	74.00	PK	PASS
	H	2390.00	46.18	30.22	4.85	23.98	44.79	54.00	AV	PASS
	H	2400.00	55.69	30.22	4.85	23.98	54.30	74.00	PK	PASS
	H	2400.00	46.19	30.22	4.85	23.98	44.80	54.00	AV	PASS
	V	2390.00	53.74	30.22	4.85	23.98	52.35	74.00	PK	PASS
	V	2390.00	45.61	30.22	4.85	23.98	44.22	54.00	AV	PASS
	V	2400.00	55.68	30.22	4.85	23.98	54.29	74.00	PK	PASS
	V	2400.00	45.57	30.22	4.85	23.98	44.18	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	53.73	30.22	4.85	23.98	52.34	74.00	PK	PASS
	H	2483.50	44.84	30.22	4.85	23.98	43.45	54.00	AV	PASS
	H	2500.00	55.15	30.22	4.85	23.98	53.76	74.00	PK	PASS
	H	2500.00	45.88	30.22	4.85	23.98	44.49	54.00	AV	PASS
	V	2483.50	54.25	30.22	4.85	23.98	52.86	74.00	PK	PASS
	V	2483.50	45.94	30.22	4.85	23.98	44.55	54.00	AV	PASS
	V	2500.00	55.03	30.22	4.85	23.98	53.64	74.00	PK	PASS



ANT1-802.11n40	V	2500.00	45.29	30.22	4.85	23.98	43.90	54.00	AV	PASS
	Low Channel 2422MHz									
	H	2390.00	53.72	30.22	4.85	23.98	52.33	74.00	PK	PASS
	H	2390.00	46.14	30.22	4.85	23.98	44.75	54.00	AV	PASS
	H	2400.00	55.55	30.22	4.85	23.98	54.16	74.00	PK	PASS
	H	2400.00	45.60	30.22	4.85	23.98	44.21	54.00	AV	PASS
	V	2390.00	53.78	30.22	4.85	23.98	52.39	74.00	PK	PASS
	V	2390.00	45.77	30.22	4.85	23.98	44.38	54.00	AV	PASS
	V	2400.00	55.84	30.22	4.85	23.98	54.45	74.00	PK	PASS
	V	2400.00	46.01	30.22	4.85	23.98	44.62	54.00	AV	PASS
	High Channel 2452MHz									
	H	2483.50	53.79	30.22	4.85	23.98	52.40	74.00	PK	PASS
	H	2483.50	44.84	30.22	4.85	23.98	43.45	54.00	AV	PASS
	H	2500.00	55.10	30.22	4.85	23.98	53.71	74.00	PK	PASS
	H	2500.00	45.41	30.22	4.85	23.98	44.02	54.00	AV	PASS
	V	2483.50	54.40	30.22	4.85	23.98	53.01	74.00	PK	PASS
	V	2483.50	46.10	30.22	4.85	23.98	44.71	54.00	AV	PASS
	V	2500.00	54.49	30.22	4.85	23.98	53.10	74.00	PK	PASS
	V	2500.00	45.59	30.22	4.85	23.98	44.20	52.36	AV	PASS
ANT1-802.11 ax 20	Low Channel 2412MHz									
	H	2390.00	52.97	30.22	4.85	23.98	51.58	74.00	PK	PASS
	H	2390.00	44.43	30.22	4.85	23.98	43.04	54.00	AV	PASS
	H	2400.00	54.89	30.22	4.85	23.98	53.50	74.00	PK	PASS
	H	2400.00	44.58	30.22	4.85	23.98	43.19	54.00	AV	PASS
	V	2390.00	53.16	30.22	4.85	23.98	51.77	74.00	PK	PASS
	V	2390.00	44.70	30.22	4.85	23.98	43.31	54.00	AV	PASS
	V	2400.00	54.29	30.22	4.85	23.98	52.90	74.00	PK	PASS
	V	2400.00	45.03	30.22	4.85	23.98	43.64	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	52.92	30.22	4.85	23.98	51.53	74.00	PK	PASS
	H	2483.50	43.57	30.22	4.85	23.98	42.18	54.00	AV	PASS
	H	2500.00	53.95	30.22	4.85	23.98	52.56	74.00	PK	PASS
	H	2500.00	44.50	30.22	4.85	23.98	43.11	54.00	AV	PASS
	V	2483.50	53.81	30.22	4.85	23.98	52.42	74.00	PK	PASS
	V	2483.50	44.86	30.22	4.85	23.98	43.47	54.00	AV	PASS
	V	2500.00	53.96	30.22	4.85	23.98	52.57	74.00	PK	PASS
	V	2500.00	44.66	30.22	4.85	23.98	43.27	54.00	AV	PASS
ANT1-802.11 ax40	Low Channel 2422MHz									
	H	2390.00	52.81	30.22	4.85	23.98	51.42	74.00	PK	PASS
	H	2390.00	45.01	30.22	4.85	23.98	43.62	54.00	AV	PASS
	H	2400.00	54.61	30.22	4.85	23.98	53.22	74.00	PK	PASS
	H	2400.00	44.54	30.22	4.85	23.98	43.15	54.00	AV	PASS
	V	2390.00	52.89	30.22	4.85	23.98	51.50	74.00	PK	PASS
	V	2390.00	44.48	30.22	4.85	23.98	43.09	54.00	AV	PASS
	V	2400.00	54.95	30.22	4.85	23.98	53.56	74.00	PK	PASS
	V	2400.00	45.09	30.22	4.85	23.98	43.70	54.00	AV	PASS
	High Channel 2452MHz									
	H	2483.50	52.92	30.22	4.85	23.98	51.53	74.00	PK	PASS
	H	2483.50	43.88	30.22	4.85	23.98	42.49	54.00	AV	PASS
	H	2500.00	54.24	30.22	4.85	23.98	52.85	74.00	PK	PASS
	H	2500.00	44.77	30.22	4.85	23.98	43.38	54.00	AV	PASS
	V	2483.50	53.76	30.22	4.85	23.98	52.37	74.00	PK	PASS
	V	2483.50	45.42	30.22	4.85	23.98	44.03	54.00	AV	PASS
	V	2500.00	53.78	30.22	4.85	23.98	52.39	74.00	PK	PASS
	V	2500.00	44.36	30.22	4.85	23.98	42.97	54.00	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit



	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
ANT2-802.11b	Low Channel 2412MHz									
	H	2390.00	53.98	30.22	4.85	23.98	52.59	74.00	PK	PASS
	H	2390.00	45.92	30.22	4.85	23.98	44.53	54.00	AV	PASS
	H	2400.00	55.56	30.22	4.85	23.98	54.17	74.00	PK	PASS
	H	2400.00	45.62	30.22	4.85	23.98	44.23	54.00	AV	PASS
	V	2390.00	53.71	30.22	4.85	23.98	52.32	74.00	PK	PASS
	V	2390.00	45.68	30.22	4.85	23.98	44.29	54.00	AV	PASS
	V	2400.00	55.48	30.22	4.85	23.98	54.09	74.00	PK	PASS
	V	2400.00	45.71	30.22	4.85	23.98	44.32	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	54.04	30.22	4.85	23.98	52.65	74.00	PK	PASS
	H	2483.50	44.72	30.22	4.85	23.98	43.33	54.00	AV	PASS
	H	2500.00	54.87	30.22	4.85	23.98	53.48	74.00	PK	PASS
	H	2500.00	45.53	30.22	4.85	23.98	44.14	54.00	AV	PASS
	V	2483.50	54.25	30.22	4.85	23.98	52.86	74.00	PK	PASS
	V	2483.50	45.87	30.22	4.85	23.98	44.48	54.00	AV	PASS
ANT2-802.11g	Low Channel 2412MHz									
	H	2390.00	53.98	30.22	4.85	23.98	52.59	74.00	PK	PASS
	H	2390.00	46.09	30.22	4.85	23.98	44.70	54.00	AV	PASS
	H	2400.00	55.74	30.22	4.85	23.98	54.35	74.00	PK	PASS
	H	2400.00	45.93	30.22	4.85	23.98	44.54	54.00	AV	PASS
	V	2390.00	54.12	30.22	4.85	23.98	52.73	74.00	PK	PASS
	V	2390.00	45.59	30.22	4.85	23.98	44.20	54.00	AV	PASS
	V	2400.00	55.34	30.22	4.85	23.98	53.95	74.00	PK	PASS
	V	2400.00	46.19	30.22	4.85	23.98	44.80	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	53.80	30.22	4.85	23.98	52.41	74.00	PK	PASS
	H	2483.50	44.60	30.22	4.85	23.98	43.21	54.00	AV	PASS
	H	2500.00	55.01	30.22	4.85	23.98	53.62	74.00	PK	PASS
	H	2500.00	45.97	30.22	4.85	23.98	44.58	54.00	AV	PASS
	V	2483.50	54.16	30.22	4.85	23.98	52.77	74.00	PK	PASS
	V	2483.50	45.88	30.22	4.85	23.98	44.49	54.00	AV	PASS
ANT2-802.11n20	Low Channel 2412MHz									
	H	2390.00	54.01	30.22	4.85	23.98	52.62	74.00	PK	PASS
	H	2390.00	45.97	30.22	4.85	23.98	44.58	54.00	AV	PASS
	H	2400.00	55.65	30.22	4.85	23.98	54.26	74.00	PK	PASS
	H	2400.00	45.71	30.22	4.85	23.98	44.32	54.00	AV	PASS
	V	2390.00	53.76	30.22	4.85	23.98	52.37	74.00	PK	PASS
	V	2390.00	45.78	30.22	4.85	23.98	44.39	54.00	AV	PASS
	V	2400.00	55.44	30.22	4.85	23.98	54.05	74.00	PK	PASS
	V	2400.00	45.92	30.22	4.85	23.98	44.53	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	53.38	30.22	4.85	23.98	51.99	74.00	PK	PASS
	H	2483.50	44.67	30.22	4.85	23.98	43.28	54.00	AV	PASS
	H	2500.00	55.18	30.22	4.85	23.98	53.79	74.00	PK	PASS
	H	2500.00	45.95	30.22	4.85	23.98	44.56	54.00	AV	PASS
	V	2483.50	54.13	30.22	4.85	23.98	52.74	74.00	PK	PASS
	V	2483.50	45.87	30.22	4.85	23.98	44.48	54.00	AV	PASS
	V	2500.00	54.82	30.22	4.85	23.98	53.43	74.00	PK	PASS



ANT2-802.11n40	V	2500.00	45.57	30.22	4.85	23.98	44.18	54.00	AV	PASS
	Low Channel 2422MHz									
	H	2390.00	53.93	30.22	4.85	23.98	52.54	74.00	PK	PASS
	H	2390.00	45.85	30.22	4.85	23.98	44.46	54.00	AV	PASS
	H	2400.00	55.86	30.22	4.85	23.98	54.47	74.00	PK	PASS
	H	2400.00	45.44	30.22	4.85	23.98	44.05	54.00	AV	PASS
	V	2390.00	53.56	30.22	4.85	23.98	52.17	74.00	PK	PASS
	V	2390.00	45.90	30.22	4.85	23.98	44.51	54.00	AV	PASS
	V	2400.00	55.47	30.22	4.85	23.98	54.08	74.00	PK	PASS
	V	2400.00	46.02	30.22	4.85	23.98	44.63	54.00	AV	PASS
	High Channel 2452MHz									
	H	2483.50	53.70	30.22	4.85	23.98	52.31	74.00	PK	PASS
	H	2483.50	44.31	30.22	4.85	23.98	42.92	54.00	AV	PASS
	H	2500.00	55.41	30.22	4.85	23.98	54.02	74.00	PK	PASS
	H	2500.00	45.19	30.22	4.85	23.98	43.80	54.00	AV	PASS
	V	2483.50	54.19	30.22	4.85	23.98	52.80	74.00	PK	PASS
	V	2483.50	45.85	30.22	4.85	23.98	44.46	54.00	AV	PASS
	V	2500.00	54.41	30.22	4.85	23.98	53.02	74.00	PK	PASS
	V	2500.00	45.52	30.22	4.85	23.98	44.13	54.00	AV	PASS
ANT2-802.11 ax 20	Low Channel 2412MHz									
	H	2390.00	52.96	30.22	4.85	23.98	51.57	74.00	PK	PASS
	H	2390.00	44.88	30.22	4.85	23.98	43.49	54.00	AV	PASS
	H	2400.00	55.04	30.22	4.85	23.98	53.65	74.00	PK	PASS
	H	2400.00	45.10	30.22	4.85	23.98	43.71	54.00	AV	PASS
	V	2390.00	52.95	30.22	4.85	23.98	51.56	74.00	PK	PASS
	V	2390.00	44.35	30.22	4.85	23.98	42.96	54.00	AV	PASS
	V	2400.00	54.64	30.22	4.85	23.98	53.25	74.00	PK	PASS
	V	2400.00	45.03	30.22	4.85	23.98	43.64	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	52.59	30.22	4.85	23.98	51.20	74.00	PK	PASS
	H	2483.50	43.63	30.22	4.85	23.98	42.24	54.00	AV	PASS
	H	2500.00	54.07	30.22	4.85	23.98	52.68	74.00	PK	PASS
	H	2500.00	44.48	30.22	4.85	23.98	43.09	54.00	AV	PASS
	V	2483.50	53.74	30.22	4.85	23.98	52.35	74.00	PK	PASS
	V	2483.50	45.00	30.22	4.85	23.98	43.61	54.00	AV	PASS
	V	2500.00	54.00	30.22	4.85	23.98	52.61	74.00	PK	PASS
	V	2500.00	44.75	30.22	4.85	23.98	43.36	54.00	AV	PASS
ANT2-802.11 ax40	Low Channel 2422MHz									
	H	2390.00	53.31	30.22	4.85	23.98	51.92	74.00	PK	PASS
	H	2390.00	45.00	30.22	4.85	23.98	43.61	54.00	AV	PASS
	H	2400.00	54.68	30.22	4.85	23.98	53.29	74.00	PK	PASS
	H	2400.00	44.65	30.22	4.85	23.98	43.26	54.00	AV	PASS
	V	2390.00	52.72	30.22	4.85	23.98	51.33	74.00	PK	PASS
	V	2390.00	44.81	30.22	4.85	23.98	43.42	54.00	AV	PASS
	V	2400.00	54.47	30.22	4.85	23.98	53.08	74.00	PK	PASS
	V	2400.00	44.77	30.22	4.85	23.98	43.38	54.00	AV	PASS
	High Channel 2452MHz									
	H	2483.50	52.63	30.22	4.85	23.98	51.24	74.00	PK	PASS
	H	2483.50	43.57	30.22	4.85	23.98	42.18	54.00	AV	PASS
	H	2500.00	54.34	30.22	4.85	23.98	52.95	74.00	PK	PASS
	H	2500.00	44.54	30.22	4.85	23.98	43.15	54.00	AV	PASS
	V	2483.50	53.52	30.22	4.85	23.98	52.13	74.00	PK	PASS
	V	2483.50	45.32	30.22	4.85	23.98	43.93	54.00	AV	PASS
	V	2500.00	53.61	30.22	4.85	23.98	52.22	74.00	PK	PASS
	V	2500.00	44.18	30.22	4.85	23.98	42.79	54.00	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit



6.POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS


6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

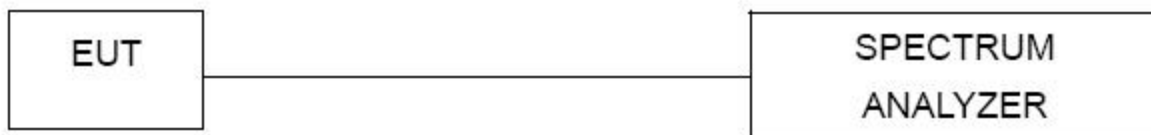

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.




6.6 TEST RESULT

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX b Mode		

Frequency	Power Spectral Density (dBm/3kHz)		Limit (dBm/3kHz)	Result
	ANT1	ANT2		
2412 MHz	-11.02	-8.95	8	PASS
2437 MHz	-11.79	-11.65	8	PASS
2462 MHz	-8.32	-10.23	8	PASS

ANT1-TX CH01

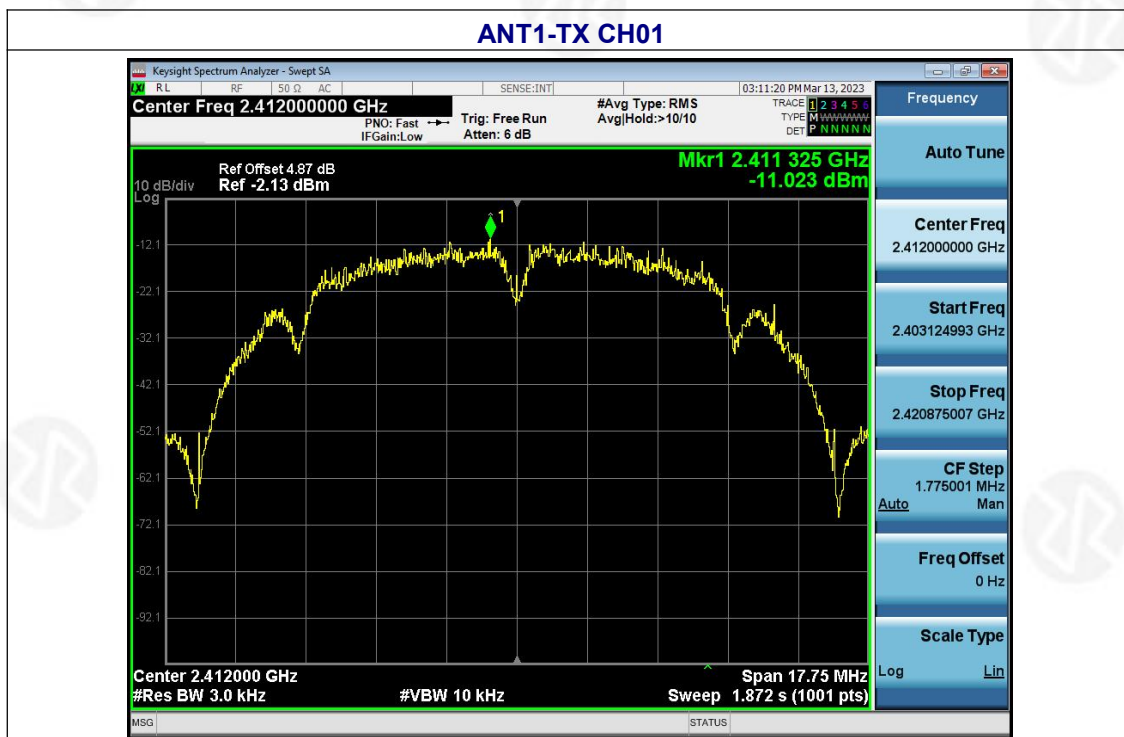



ANT1-TX CH06



ANT1-TX CH11





ANT2-TX CH01





ANT2-TX CH06




ANT2-TX CH11





Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX g Mode		

Frequency	Power Spectral Density (dBm/3kHz)		Limit (dBm/3kHz)	Result
	ANT1	ANT2		
2412 MHz	-21.00	-20.49	8	PASS
2437 MHz	-22.24	-21.70	8	PASS
2462 MHz	-20.61	-19.74	8	PASS

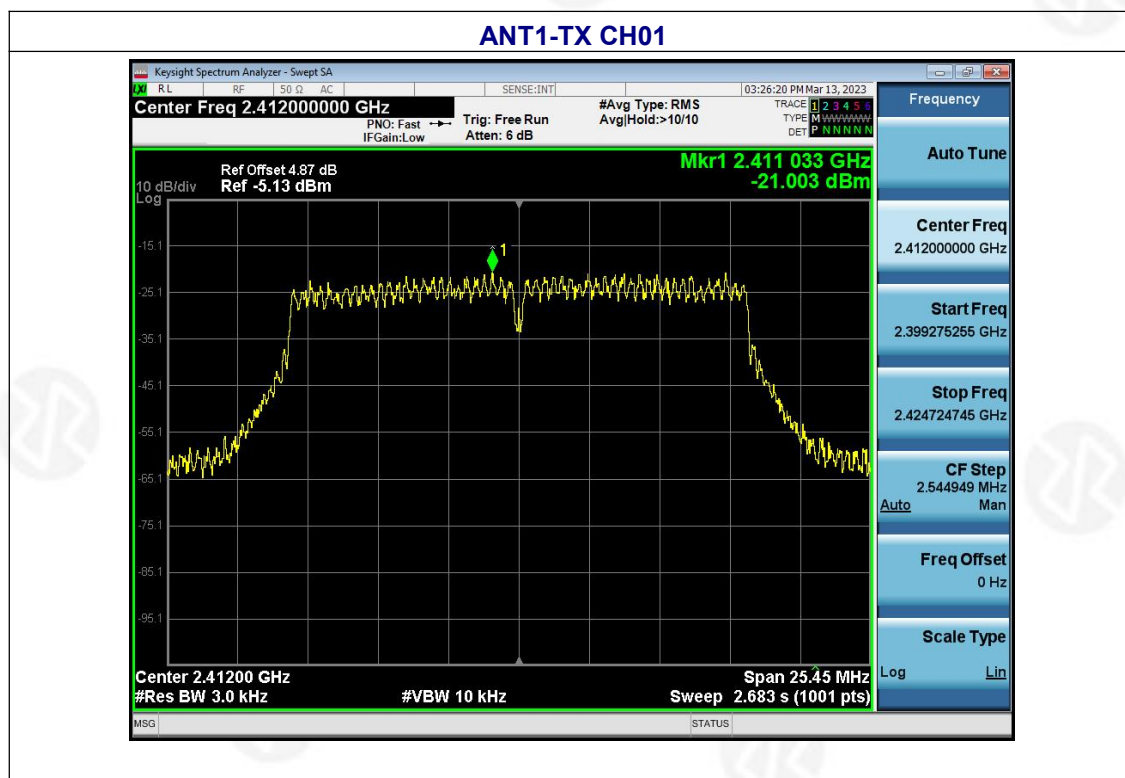



Keysight Spectrum Analyzer - Swept SA

RL RF 50 Ω AC SENSE:INT 03:29:55 PM Mar 13, 2023

Center Freq 2.43700000 GHz PNO: Fast IFGain:Low Trig: Free Run Avg|Hold:->10/10

TRACE 1 2 3 4 5 6 TYPE M W W W W W W W DET P N N N N N N

Ref Offset 4.71 dB Ref -5.29 dBm

Mkr1 2.438 249 GHz -22.243 dBm

10 dB/div Log

Center 2.43700 GHz Span 25.50 MHz

#Res BW 3.0 kHz #VBW 10 kHz Sweep 2.689 s (1001 pts)

Frequency Auto Tune

Center Freq 2.437000000 GHz

Start Freq 2.424250791 GHz

Stop Freq 2.449749209 GHz

CF Step 2.549842 MHz

Auto Man

Freq Offset 0 Hz

Scale Type Log Lin

Keysight Spectrum Analyzer - Swept SA

Center Freq 2.46200000 GHz

Ref Offset 4.73 dB
Ref -5.27 dBm

Mkr1 2.460 415 GHz
-20.605 dBm

Center Freq 2.46200 GHz
#Res BW 3.0 kHz
#VBW 10 kHz

Span 25.56 MHz
Sweep 2.695 s (1001 pts)

Frequency

Auto Tune

Center Freq
2.46200000 GHz

Start Freq
2.449219412 GHz

Stop Freq
2.474780588 GHz

CF Step
2.556118 MHz

Auto

Freq Offset
0 Hz

Scale Type

Log



ANT2-TX CH01





ANT2-TX CH06




ANT2-TX CH11





Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX n Mode(20M)		

Frequency	Power Spectral Density (dBm/3kHz)		Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
	ANT1	ANT2			
2412 MHz	-19.90	-20.44	-17.15	8	PASS
2437 MHz	-20.51	-21.72	-18.06	8	PASS
2462 MHz	-19.48	-19.66	-16.56	8	PASS

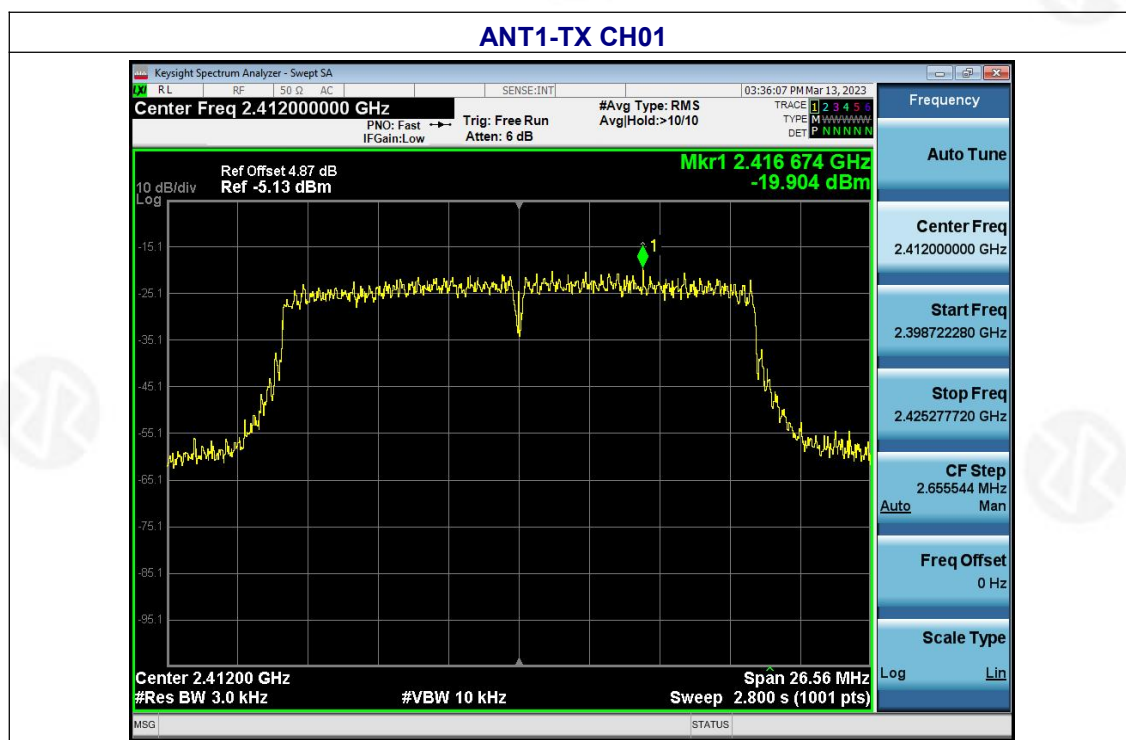



ANT1-TX CH06




ANT1-TX CH11






ANT2-TX CH01

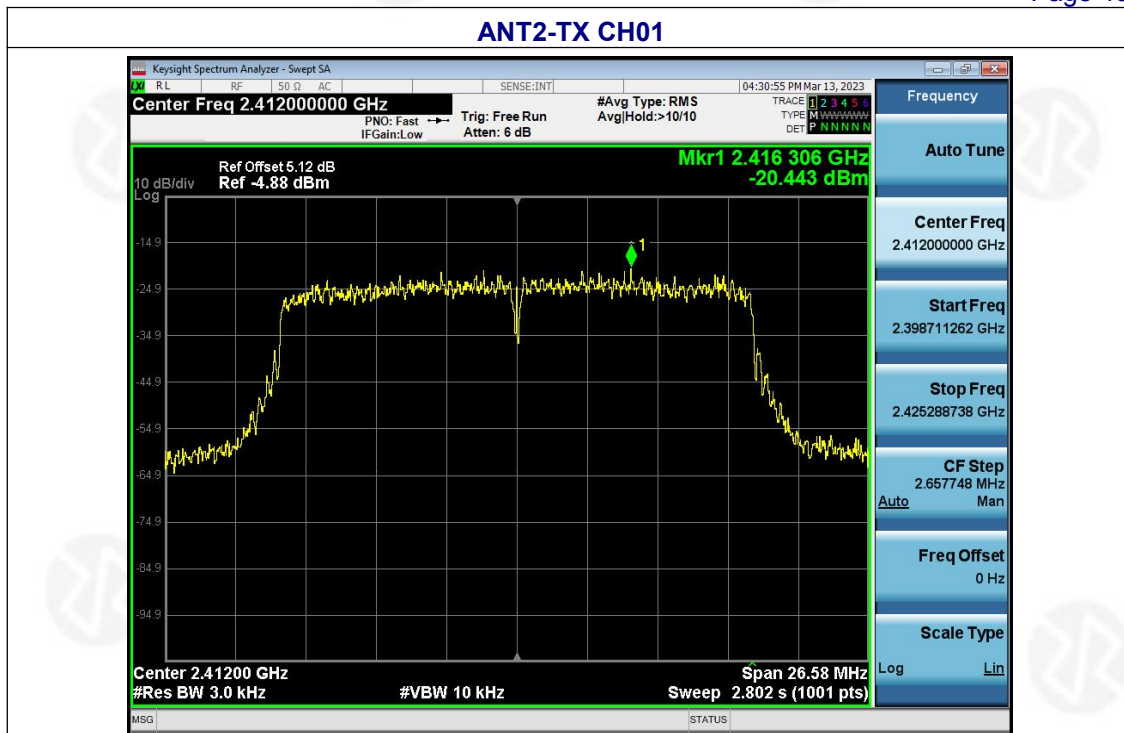




ANT2-TX CH06

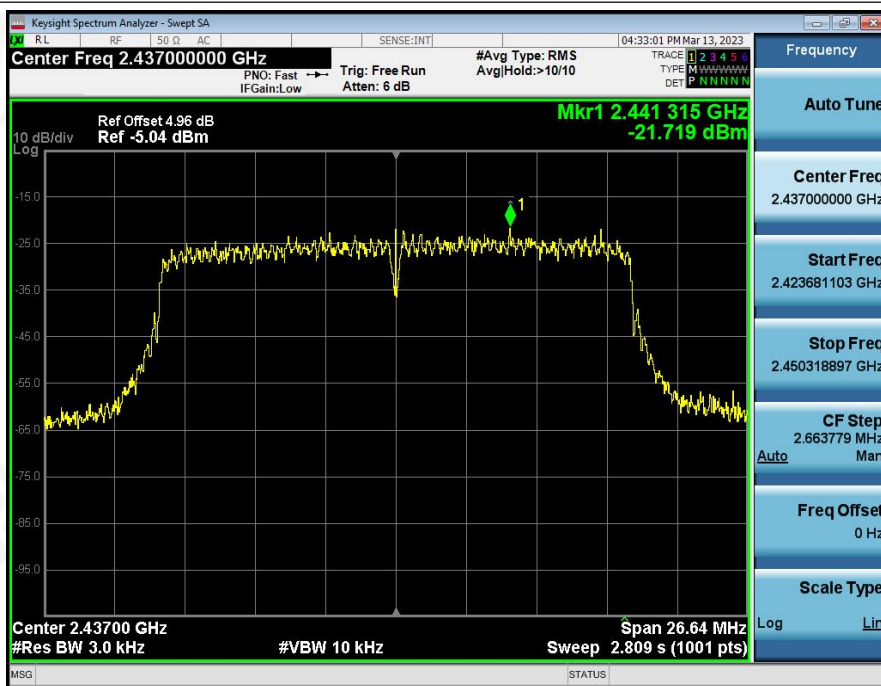

ANT2-TX CH11

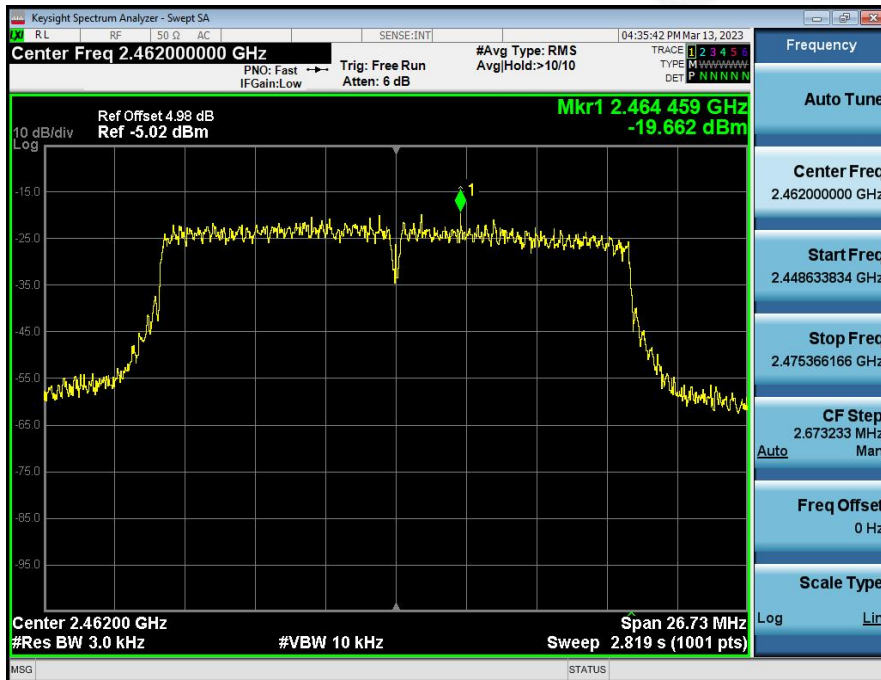



Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX n Mode(40M)		

Frequency	Power Spectral Density (dBm/3kHz)		Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
	ANT1	ANT2			
2422 MHz	-25.43	-25.15	-22.28	8	PASS
2437 MHz	-25.70	-25.13	-22.40	8	PASS
2452 MHz	-23.88	-23.74	-20.80	8	PASS

ANT1- TX CH03





ANT1-TX CH06



ANT1-TX CH09





ANT2- TX CH03



ANT2-TX CH06






ANT2-TX CH09






Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX ax Mode(20M)		

Frequency	Power Spectral Density (dBm/3kHz)		Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
	ANT1	ANT2			
2412 MHz	-19.97	-18.43	-16.12	8	PASS
2437 MHz	-21.07	-21.59	-18.31	8	PASS
2462 MHz	-18.87	-19.64	-16.23	8	PASS

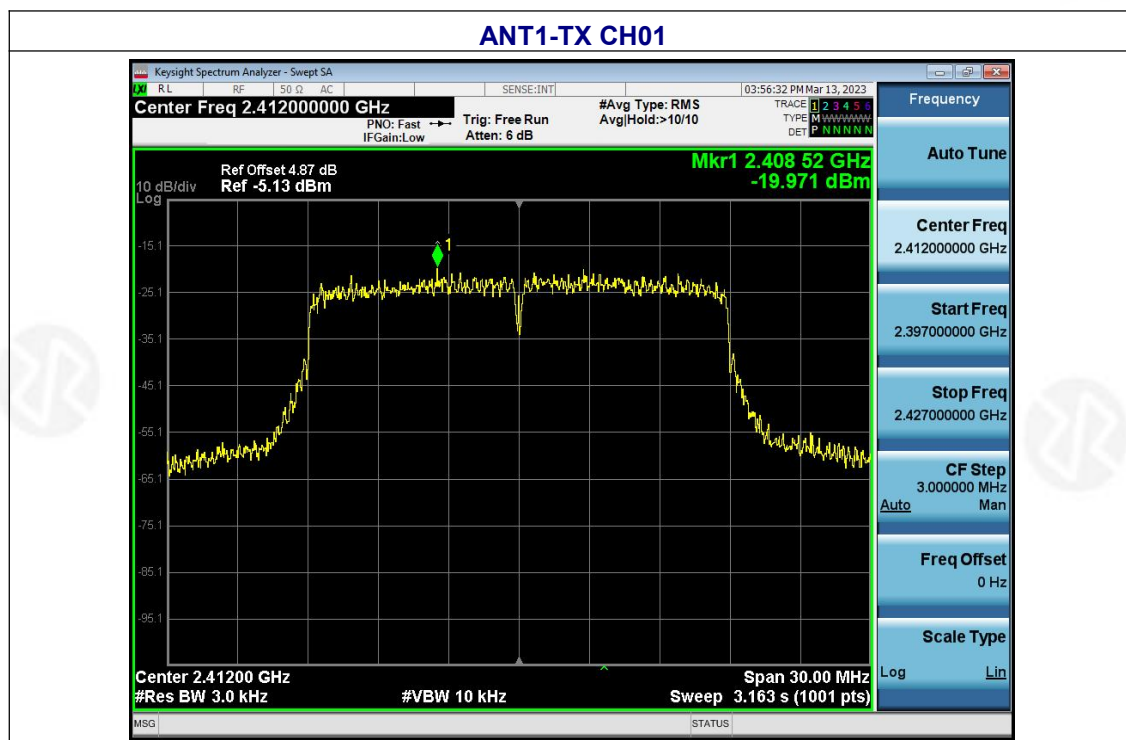




ANT1-TX CH06

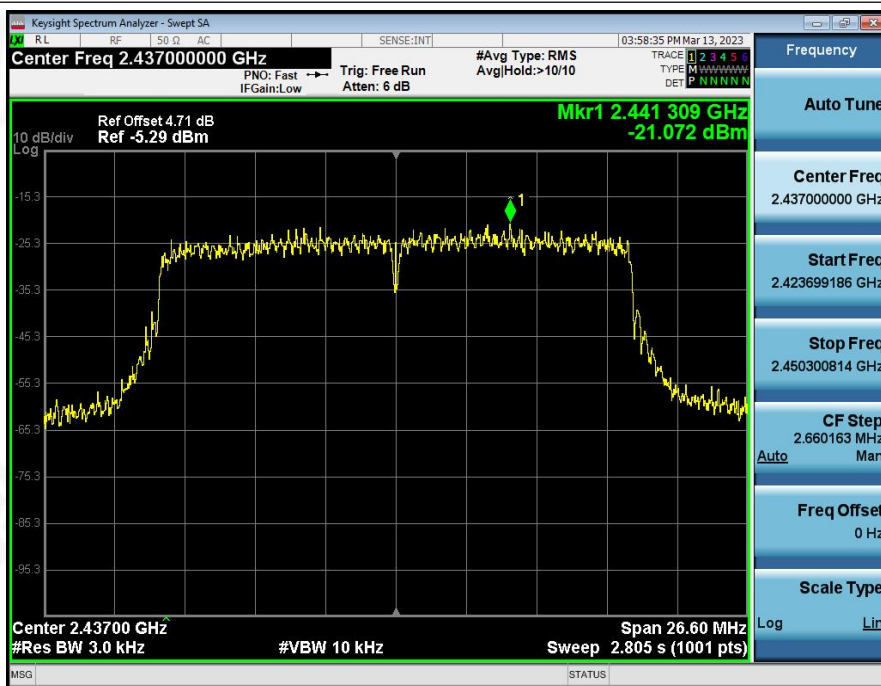

ANT1-TX CH11



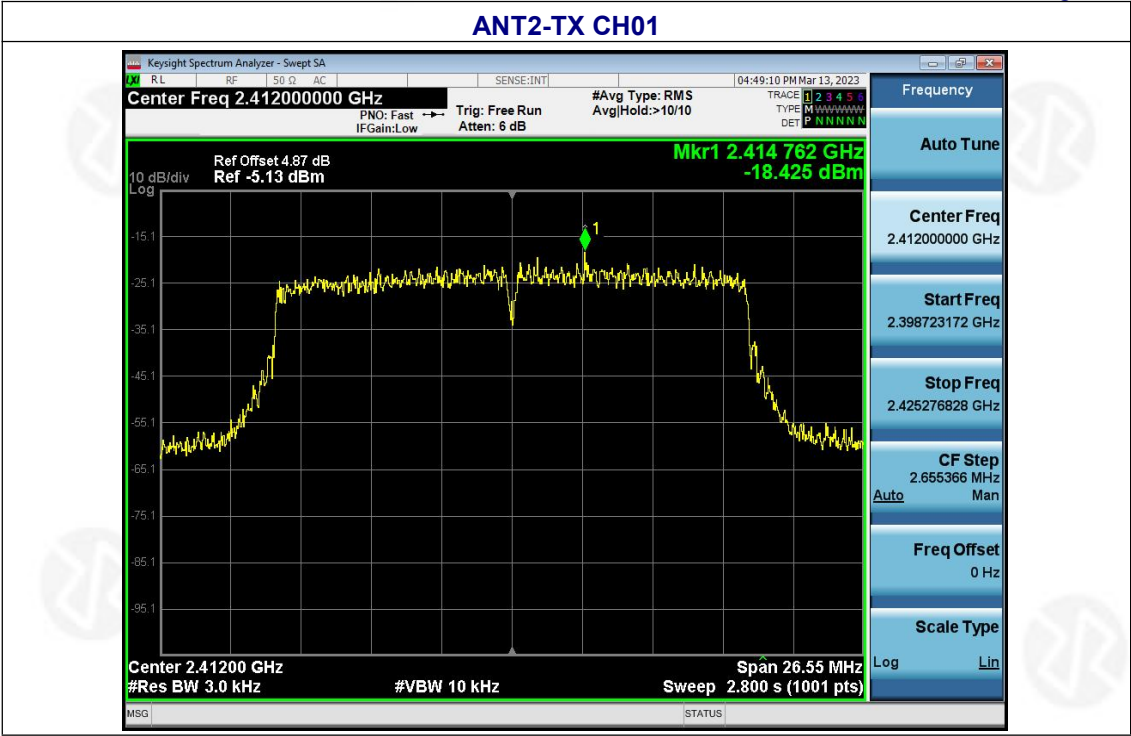



ANT2-TX CH06



ANT2-TX CH11





Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX ax Mode(40M)		


Frequency	Power Spectral Density (dBm/3kHz)		Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
	ANT1	ANT2			
2422 MHz	-24.65	-25.55	-22.07	8	PASS
2437 MHz	-24.28	-24.94	-21.59	8	PASS
2452 MHz	-22.99	-23.49	-20.22	8	PASS

ANT1- TX CH03





ANT1-TX CH06

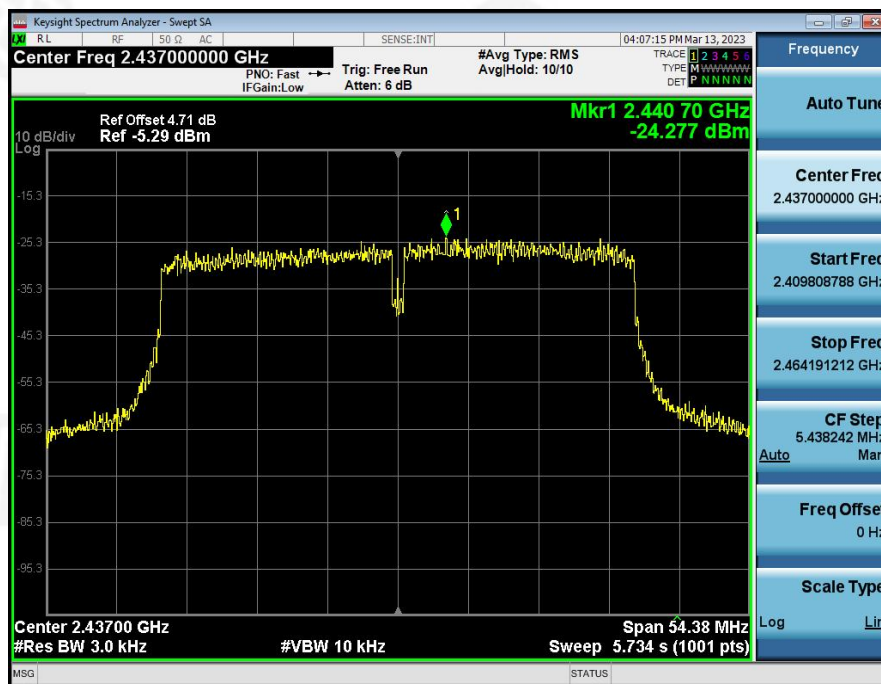


ANT1-TX CH09





ANT2- TX CH03

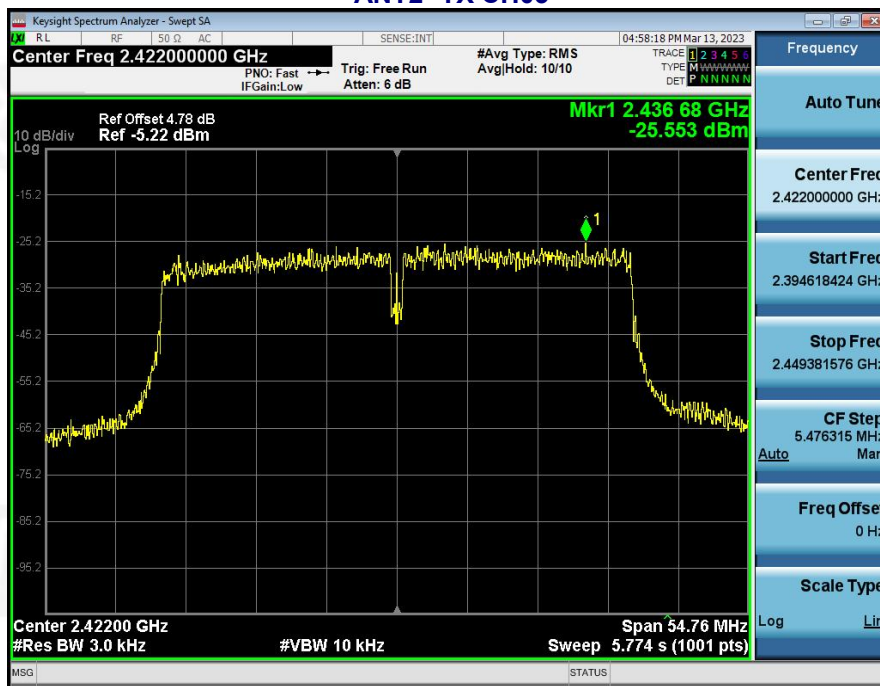

ANT2-TX CH06





ANT2-TX CH09

