

FCC SAR EVALUATION REPORT

**In accordance with the requirements of
FCC 47 CFR Part 2(2.1093) and
IEEE Std 1528-2013**

Product Name : Smart Phone

Brand Name : 

Model Name : F107 Pro

Family Model : F107, F107 Plus, F107 Ultra, F107 S

Report No. : S25032804803001

FCC ID : 2BAK-F107PRO

Prepared for

Shenzhen Qichang Intelligent Technology Co., Ltd

Room 510, Building 7, Yunli Intelligent Park, No. 7, Bantian Street, Longgang , Shenzhen

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District,
Shenzhen, Guangdong, People's Republic of China

Tel. 0755-23200050 Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name Shenzhen Qichang Intelligent Technology Co., Ltd
Address..... Room 510, Building 7, Yunli Intelligent Park, No. 7, Bantian Street,
Longgang, Shenzhen

Manufacturer's Name . Shenzhen Qichang Intelligent Technology Co., Ltd
Address..... Room 510, Building 7, Yunli Intelligent Park, No. 7, Bantian Street,
Longgang, Shenzhen

Product description

Product name Smart Phone
Brand Name 
Model and/or type F07 Pro
reference
Family Model F107, F107 Plus, F107 Ultra, F107 S
FCC 47 CFR Part 2(2.1093)

Standards IEEE Std 1528-2013
Published RF exposure KDB procedures

This device described above has been tested by Shenzhen NTEK. In accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 and KDB 865664 D01. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in FCC 47 CFR Part 2(2.1093). The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personal only, and shall be noted in the revision of the document.

Test Sample Number S250328048015

Date of Test

Date (s) of performance of tests... Apr. 11, 2025~ May. 01, 2025

Date of Issue Jun. 15, 2025

Test Result..... **Pass**

Prepared By : 
Owen Xiao
(Project Engineer)

Reviewed By : 
Aaron Cheng
(Supervisor)

Approved By : 
Alex Li
(Manager)

※ ※ Revision History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	Jun. 15, 2025	Owen Xiao

TABLE OF CONTENTS

1. General Information	6
1.1. RF exposure limits.....	6
1.2. Statement of Compliance	7
1.3. EUT Description	7
1.4. Test specification(s)	9
1.5. Ambient Condition.....	9
2. SAR Measurement System	10
2.1. SATIMO SAR Measurement Set-up Diagram	10
2.2. Robot	11
2.3. E-Field Probe.....	12
2.3.1. E-Field Probe Calibration	12
2.4. SAM phantoms	13
2.4.1. Technical Data	14
2.5. Device Holder	15
2.6. Test Equipment List	16
3. SAR Measurement Procedures	18
3.1. Power Reference	18
3.2. Area scan & Zoom scan.....	18
3.3. Description of interpolation/extrapolation scheme	20
3.4. Volumetric Scan	20
3.5. Power Drift	20
4. System Verification Procedure	21
4.1. Tissue Verification	21
4.1.1. Tissue Dielectric Parameter Check Results	22
4.2. System Verification Procedure	23
4.2.1. System Verification Results	24
5. SAR Measurement variability and uncertainty	25
5.1. SAR measurement variability.....	25
5.2. SAR measurement uncertainty	25
6. RF Exposure Positions	26
6.1. Ear and handset reference point	26
6.2. Definition of the cheek position	26
6.3. Definition of the tilt position	28
6.4. Body Worn Accessory	28
6.5. Wireless Router Devices	29
7. RF Output Power	30
7.1. GSM Conducted Power	30
7.2. WCDMA Conducted Power	30
7.3. LTE Conducted Power	32

7.4. NR Conducted Power	57
7.5. WLAN & Bluetooth Output Power	83
7.6. NFC	87
8. Antenna Location	88
9. Stand-alone SAR test exclusion	88
9.1. NFC	89
10. SAR Results	90
10.1. SAR measurement Result	90
10.1.1. SAR measurement Result of GSM850	90
10.1.2. SAR measurement Result of GSM1900	91
10.1.3. SAR measurement Result of WCDMA Band 2	93
10.1.4. SAR measurement Result of WCDMA Band 4	94
10.1.5. SAR measurement Result of WCDMA Band 5	95
10.1.6. SAR measurement Result of LTE Band 2	96
10.1.7. SAR measurement Result of LTE Band 4	98
10.1.8. SAR measurement Result of LTE Band 5	100
10.1.9. SAR measurement Result of LTE Band 7	102
10.1.10. SAR measurement Result of LTE Band 12	104
10.1.11. SAR measurement Result of LTE Band 13	105
10.1.12. SAR measurement Result of LTE Band 17	107
10.1.13. SAR measurement Result of LTE Band 25	109
10.1.14. SAR measurement Result of LTE Band 26a	111
10.1.15. SAR measurement Result of LTE Band 26b	113
10.1.16. SAR measurement Result of LTE Band 38	115
10.1.17. SAR measurement Result of LTE Band 41	117
10.1.18. SAR measurement Result of LTE Band 66	119
10.1.19. SAR measurement Result of NR 78	121
10.1.20. SAR measurement Result of WLAN2.4G	122
10.1.21. SAR measurement Result of WLAN5.2G	126
10.1.22. SAR measurement Result of WLAN5.3G	129
10.1.23. SAR measurement Result of WLAN5.6G	132
10.1.24. SAR measurement Result of WLAN5.8G	135
10.2. Simultaneous Transmission Analysis	138
11. Appendix A. Photo documentation	144
12. Appendix B. System Check Plots	145
13. Appendix C. Plots of High SAR Measurement	170
14. Appendix D. Calibration Certificate	308

1. General Information

1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE
HEAD AND TRUNK LIMIT
1.6 W/kg
APPLIED TO THIS EUT

1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for F107 Pro are as follows.

RF Exposure Conditions		Equipment Class -Highest Reported SAR (W/kg)				Max. Reported SAR (W/kg)
		PCE	DTS	NII	DSS	
1-g Head		0.459	0.163	0.587	0.297	0.587
1-g Body-Worn (Separation distance of 10mm)		0.335	0.049	0.287	0.149	0.660
1-g Hotspot (Separation distance of 10mm)		0.660	0.057	0.607	0.149	
Max Simultaneous Tx	Head	1.046	0.622	1.046	0.756	1.046
	Body-Worn	0.786	0.543	0.786	0.648	0.902
	Hotspot	0.902	0.660	0.902	0.660	

Note: The Max Simultaneous Tx is calculated based on the same configuration and test position.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2(2.1093), and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 & KDB 865664 D01.

1.3. EUT Description

Device Information	
Product Name	Smart Phone
Brand Name	
Model Name	F107 Pro
Family Model	F107, F107 Plus, F107 Ultra, F107 S
Model Difference	All models are the same circuit and RF module, except for model names.
FCC ID	2BAK-F107PRO
Device Phase	Identical Prototype
Exposure Category	General population / Uncontrolled environment
Antenna Type	PIFA Antenna
Battery Information	DC 3.87V, 28000mAh
HW Version	V1.2

SW Version	V04		
Device Operating Configurations			
Supporting Mode(s)	GSM850/1900,WCDMABand2/4/5,LTEBand2/4/5/7/12/13/17/25/26/38/41/66 ,WLAN 2.4G/5G, Bluetooth, NFC		
Test Modulation	GSM(GMSK), WCDMA(QPSK), LTE(QPSK/16QAM),WLAN(DSSS/OFDM), Bluetooth(GFSK, $\pi/4$ -DQPSK, 8DPSK),		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824-849	869-894
	GSM 1900	1850-1910	1930-1990
	WCDMA Band 2	1850-1910	1930-1990
	WCDMA Band 4	1710-1755	2110-2155
	WCDMA Band 5	824-849	869-894
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	LTE Band 5	824-849	869-894
	LTE Band 7	2500-2570	2620-2690
	LTE Band 12	699-716	729-746
	LTE Band 17	704-716	734-746
	LTE Band 25	1850-1915	1930-1995
	LTE Band 26a	814-824	859-869
	LTE Band 26b	824-849	869-894
	LTE Band 38	2570-2620	
	LTE Band 41	2496-2690	
	LTE Band 66	1710-1780	2110-2200
	N78	3450-3550	
	WLAN 2.4G	2412-2462	
	WLAN 5.2G	5180-5240	
	WLAN 5.3G	5260-5320	
	WLAN 5.6G	5500-5700	
	WLAN 5.8G	5745-5825	
	Bluetooth	2402-2480	
Power Class	4, tested with power level 5(GSM 850)		
	1, tested with power level 0(GSM 1900)		
	3, tested with power control “all 1”(WCDMA Band 2)		
	3, tested with power control “all 1”(WCDMA Band 4)		
	3, tested with power control “all 1”(WCDMA Band 5)		
	3, tested with power control all Max.(LTE Band 2)		
	3, tested with power control all Max.(LTE Band 4)		
	3, tested with power control all Max.(LTE Band 5)		

3, tested with power control all Max.(LTE Band 7)
3, tested with power control all Max.(LTE Band 12)
3, tested with power control all Max.(LTE Band 17)
3, tested with power control all Max.(LTE Band 25)
3, tested with power control all Max.(LTE Band 26)
3, tested with power control all Max.(LTE Band 38)
3, tested with power control all Max.(LTE Band 41)
3, tested with power control all Max.(LTE Band 66)
3, tested with power control all Max.(N78)

1.4. Test specification(s)


FCC 47 CFR Part 2(2.1093)
IEEE Std 1528-2013
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04;
KDB 865664 D02 RF Exposure Reporting v01r02;
KDB 447498 D01 General RF Exposure Guidance v06;
KDB 248227 D01 802.11 Wi-Fi SAR v02r02;
KDB 941225 D01 3G SAR Procedures v02r01;
KDB 941225 D05 SAR for LTE Devices v01r02;
KDB 941225 D06 Hotspot SAR v02r01;
KDB 648474 D04 Handset SAR v01r03;

1.5. Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2. SAR Measurement System

2.1. SATIMO SAR Measurement Set-up Diagram

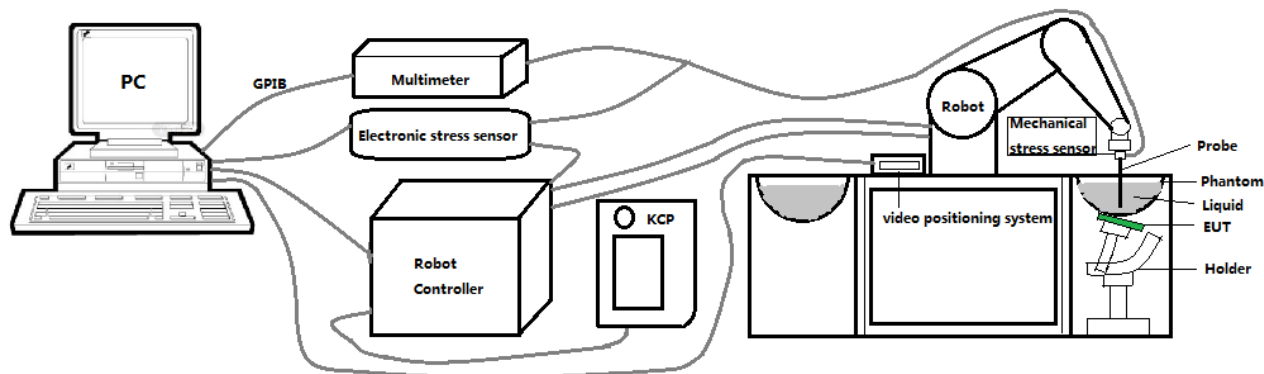

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than ± 0.03 mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface"

2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability ± 0.03 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

2.3. E-Field Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe 4024-EPGO-442 with following specifications is used



- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 2.5 mm
- Distance between probe tip and sensor center: 1 mm
- Distance between sensor center and the inner phantom surface: 2 mm (repeatability better than ± 1 mm).
- Probe linearity: ± 0.06 dB
- Axial isotropy: ± 0.01 dB
- Hemispherical Isotropy: ± 0.01 dB
- Calibration range: 650MHz to 5900MHz for head & body simulating liquid.
- Lower detection limit: 8mW/kg

Angle between probe axis (evaluation axis) and surface normal line: less than 30° .

2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.

2.4. SAM phantoms


Photo of SAM phantom SN 16/15 SAM119



The SAM phantom is used to measure the SAR relative to people exposed to electro-magnetic field radiated by Mobile Phones.

2.4.1. Technical Data

Serial Number	Shell thickness	Filling volume	Dimensions	Positionner Material	Permittivity	Loss Tangent
SN 16/15 SAM119	2 mm ±0.2 mm	27 liters	Length:1000 mm Width:500 mm Height:200 mm	Gelcoat with fiberglass	3.4	0.02

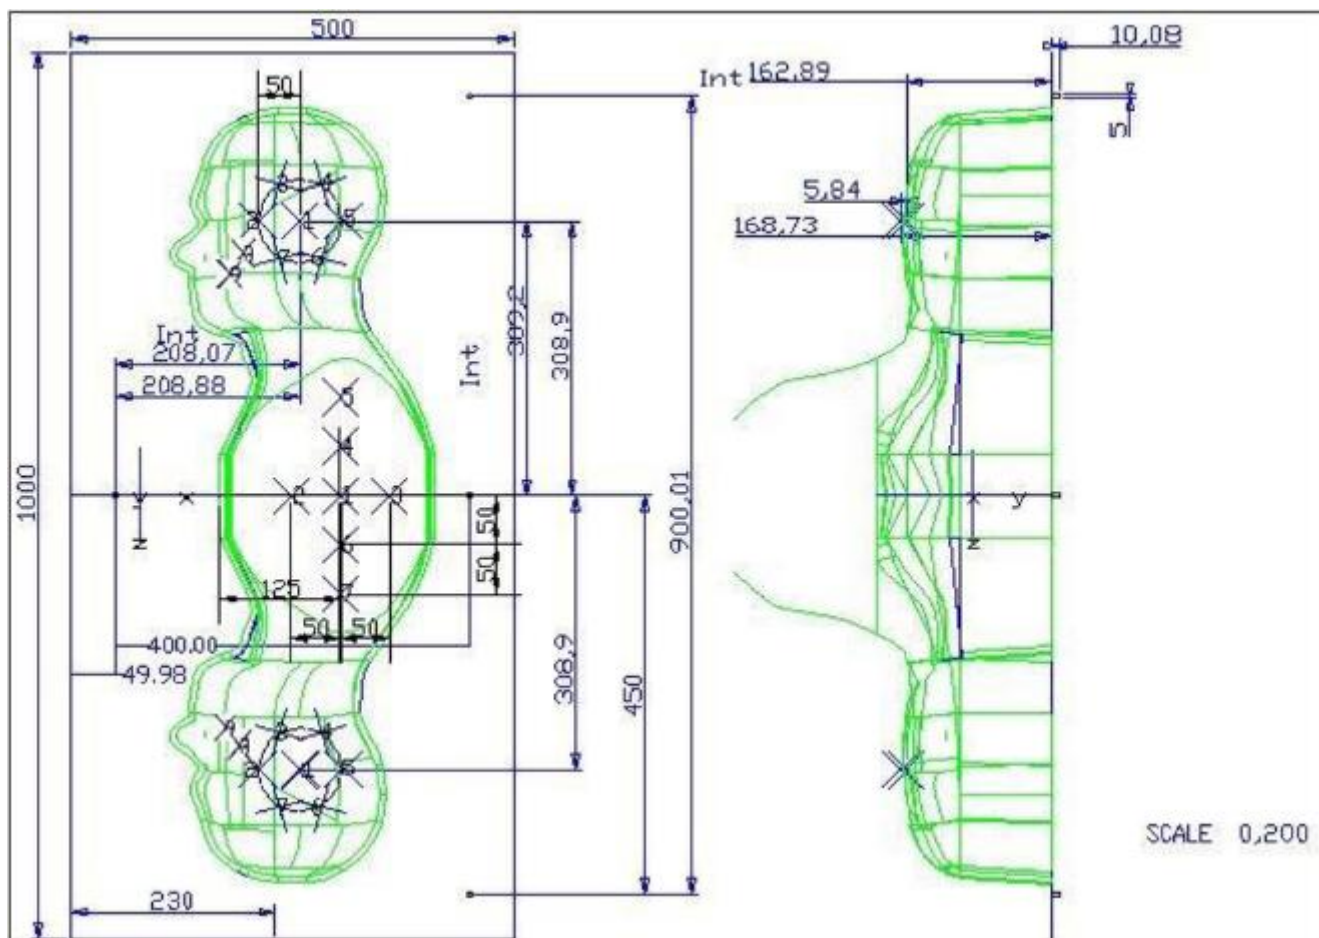


Serial Number	Left Head(mm)		Right Head(mm)		Flat Part(mm)	
SN 16/15 SAM119	2	2.02	2	2.08	1	2.09
	3	2.05	3	2.06	2	2.06
	4	2.07	4	2.07	3	2.08
	5	2.08	5	2.08	4	2.10
	6	2.05	6	2.07	5	2.10
	7	2.05	7	2.05	6	2.07
	8	2.07	8	2.06	7	2.07
	9	2.08	9	2.06	-	-

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10 μm .

2.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 degree.

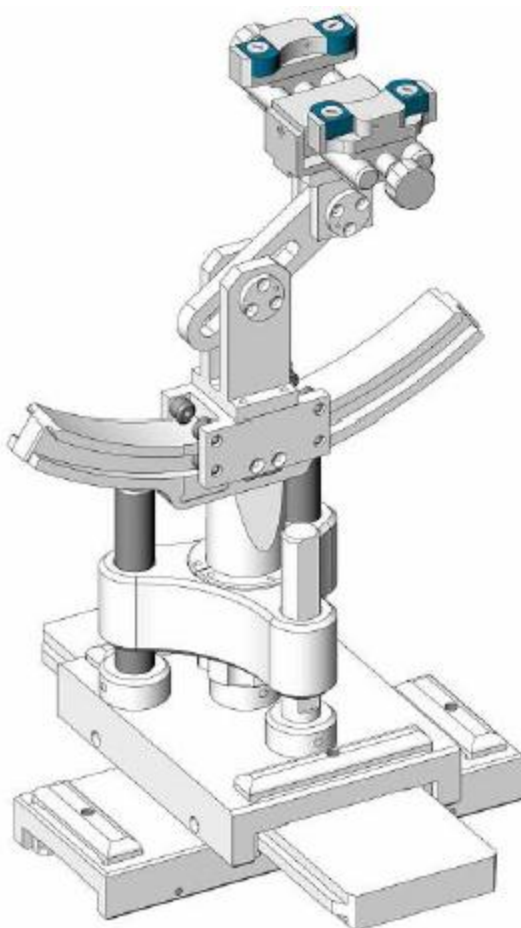

Serial Number	Holder Material	Permittivity	Loss Tangent
SN 16/15 MSH100	Delrin	3.7	0.005

2.6. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked ☒

	Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
					Last Cal.	Due Date
☒	MVG	E FIELD PROBE	SSE2	4024-EPGO-442	Oct.4.2024	Oct.3.2025
☒	MVG	750 MHz Dipole	SID750	SN 03/15 DIP 0G750-355	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	835 MHz Dipole	SID835	SN 03/15 DIP 0G835-347	Feb. 21, 2024	Feb. 20, 2027
☐	MVG	900 MHz Dipole	SID900	SN 03/15 DIP 0G900-348	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	1800 MHz Dipole	SID1800	SN 03/15 DIP 1G800-349	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	1900 MHz Dipole	SID1900	SN 03/15 DIP 1G900-350	Feb. 21, 2024	Feb. 20, 2027
☐	MVG	2000 MHz Dipole	SID2000	SN 03/15 DIP 2G000-351	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	2450 MHz Dipole	SID2450	SN 03/15 DIP 2G450-352	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	2600 MHz Dipole	SID2600	SN 03/15 DIP 2G600-356	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	3500 MHz Dipole	SID3500	SN 09/12 DIP 3G500-360	Oct. 15, 2022	Oct. 14, 2025
☐	MVG	3700 MHz Dipole	SID3700	SN 09/12 DIP 3G/700-361	Oct. 15 2022	Oct. 14 2025
☐	MVG	5000 MHz Dipole	SWG5500	SN 13/14 WGA 33	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	Liquid measurement Kit	SCLMP	SN 21/15 OCPG 72	NCR	NCR
☒	MVG	Power Amplifier	N/A	AMPLISAR_28/14_003	NCR	NCR
☒	KEITHLEY	Millivoltmeter	2000	4072790	Nov. 29, 2024	Nov. 28, 2025
☒	R&S	Universal radio communication tester	CMU200	105747	Apr. 17, 2025	Apr. 16, 2026

☒	R&S	Wideband radio communication tester	CMW500	103917	May. 12, 2025	May. 11, 2026
☒	Anritsu	4G LTE comprehensive tester	MT8821C	6262192315	July.17 2024	July.16 2025
☒	Anritsu	5G NR comprehensive tester	MT8000A	6262186364	July.17 2024	July.16 2025
☒	HP	Network Analyzer	E5071C	LPS-461	Oct. 15, 2024	Oct. 14, 2025
☒	Agilent	Calibration Kit	85033E	N/A	May. 31, 2024	May. 30, 2027
☒	Agilent	MXG Vector Signal Generator	N5182A	MY47070317	Apr. 17, 2025	Apr. 16, 2026
☒	Agilent	Power sensor	E9301A	LES-413-C	May. 6, 2025	May. 5, 2026
☒	Agilent	Power sensor	E9301A	US39212148	Apr. 17, 2025	Apr. 16, 2026
☒	MCLI/USA	Directional Coupler	CB11-20	0D2L51502	Apr. 26, 2024	Apr. 25, 2027
☒	N/A	Thermometer	N/A	LES-085	Mar. 27, 2023	Mar. 26, 2026
☒	MVG	SAM Phantom	SSM2	SN 16/15 SAM119	NCR	NCR
☒	MVG	Device Holder	SMPPD	SN 16/15 MSH100	NCR	NCR

Measurement Software

Manufacturer	Software Name	Software Version
SATIMO	OpenSAR	V5.3.15.11

3. SAR Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For Wi-Fi/BT power measurement, use engineering software to configure EUT Wi-Fi/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure Wi-Fi/BT output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT Wi-Fi/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix A demonstrates.
- (c) Set scan area, grid size and other setting on the OPENSAR software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan

above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

Area scan & Zoom scan scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	≤ 1.5 · $\Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is used to determine this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

3.4. Volumetric Scan

The volumetric scan consists of a full 3D scan over a specific area. This 3D scan is useful for multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scans to calculate the SAR value of the combined measurement as it is defined in the standard IEEE1528 and IEC62209.

3.5. Power Drift

All SAR testing is under the EUT with full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than $\pm 5\%$, the SAR will be retested.

4. System Verification Procedure

4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% of weight)	Head Tissue									
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	34.40	34.40	34.40	55.36	55.36	57.87	57.87	57.87	65.53	65.53
NaCl	0.79	0.79	0.79	0.35	0.35	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	64.81	64.81	64.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	30.45	30.45	19.97	19.97	19.97	24.24	24.24
DGBE	0.00	0.00	0.00	13.84	13.84	22.00	22.00	22.00	10.23	10.23

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid depth from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm.

Photo of Liquid depth for Head Position	Photo of Liquid depth for Body Position
	

4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.


Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Delta(%)		Liquid Temp.	Test Date
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)		
Head 750	750	41.90	0.89	40.57	0.89	-3.18	0.34	21.1 °C	Apr. 11, 2025
Head 750	750	41.90	0.89	41.05	0.89	-2.04	-0.45	21.5 °C	Apr. 25, 2025
Head 835	835	41.50	0.90	42.79	0.93	3.11	2.78	21.6 °C	Apr. 26, 2025
Head 1800	1800	40.00	1.40	40.06	1.43	0.14	2.29	21.4 °C	Apr. 27, 2025
Head 1900	1900	40.00	1.40	38.78	1.46	-3.06	4.29	21.4 °C	Apr. 28, 2025
Head 2450	2450	39.20	1.80	38.61	1.80	-1.52	0.17	21.6 °C	Apr. 17, 2025
Head 2600	2600	39.01	1.96	39.63	2.00	1.58	1.84	21.8 °C	Apr. 29, 2025
Head 3500	3500	37.93	2.91	37.42	2.80	-1.34	-3.85	21.5 °C	May. 01, 2025
Head 5200	5200	36.00	4.66	37.52	4.61	4.22	-1.12	21.0 °C	Apr. 21, 2025
Head 5400	5400	35.80	4.86	35.50	5.01	-0.84	3.09	21.3 °C	Apr. 22, 2025
Head 5600	5600	35.50	5.07	35.92	5.07	1.18	0.00	21.6 °C	Apr. 23, 2025
Head 5800	5800	35.30	5.27	35.32	5.32	0.06	0.95	21.3 °C	Apr. 24, 2025

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

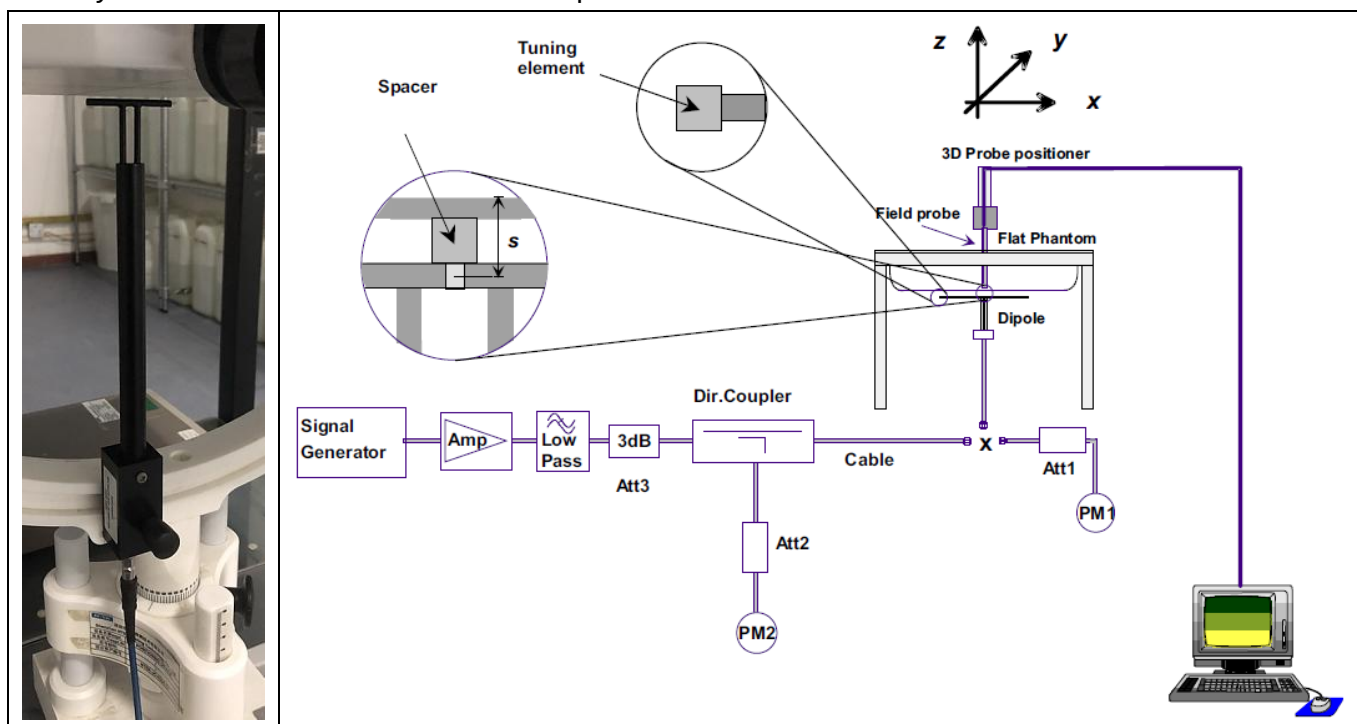

4.2.1. System Verification Results

Comparing to the original SAR value provided by SATIMO, the verification data should be within its specification of $\pm 10\%$. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance verification can meet the variation criterion and the plots can be referred to Appendix B of this report.

System Verification	Target SAR (1W)		Measured SAR			Measured SAR		Delta (%)		Liquid Temp.	Test Date
						(Normalized to 1W)					
	1-g (W/Kg)	10-g (W/Kg)	Input Power (mW)	1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)	1-g (%)	10-g (%)		
750MHz	8.60	5.78	100.00	0.91	0.63	9.13	6.33	6.16	9.52	21.1 °C	Apr. 11, 2025
750MHz	8.60	5.78	100.00	0.83	0.58	8.30	5.78	-3.49	0.00	21.5 °C	Apr. 25, 2025
835MHz	9.40	6.28	100.00	0.99	0.60	9.93	6.04	5.64	-3.82	21.6 °C	Apr. 26, 2025
1800MHz	37.06	20.01	100.00	4.04	1.98	40.35	19.83	8.88	-0.90	21.4 °C	Apr. 27, 2025
1900MHz	39.69	20.92	100.00	4.01	1.97	40.06	19.71	0.93	-5.78	21.4 °C	Apr. 28, 2025
2450MHz	50.05	23.80	100.00	5.25	2.24	52.45	22.41	4.80	-5.84	21.6 °C	Apr. 17, 2025
2600MHz	54.16	24.85	100.00	5.26	2.31	52.61	23.07	-2.86	-7.16	21.8 °C	Apr. 29, 2025
3500MHz	67.18	24.50	100.00	6.14	2.65	61.38	26.49	-8.63	8.12	21.5 °C	May. 01, 2025
5200MHz	162.59	56.21	10.00	1.61	0.54	160.80	54.20	-1.10	-3.58	21.0 °C	Apr. 21, 2025
5400MHz	159.81	55.00	10.00	1.53	0.51	152.50	51.10	-4.57	-7.09	21.3 °C	Apr. 22, 2025
5600MHz	179.15	61.01	10.00	1.65	0.56	164.70	55.90	-8.07	-8.38	21.6 °C	Apr. 23, 2025
5800MHz	182.20	61.32	10.00	1.68	0.57	167.60	57.30	-8.01	-6.56	21.3 °C	Apr. 24, 2025

5. SAR Measurement variability and uncertainty

5.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

5.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6. RF Exposure Positions

6.1. Ear and handset reference point

Figure 6.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M”, the left ear reference point (ERP) is marked “LE”, and the right ERP is marked “RE”.



Fig 6.1.1 Front, back, and side views of SAM phantom

6.2. Definition of the cheek position

1. Define two imaginary lines on the handset, the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 6.2.1 and Figure 6.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 6.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 6.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
2. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
3. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP
4. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
5. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.

6. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 6.2.3. The actual rotation angles should be documented in the test report.

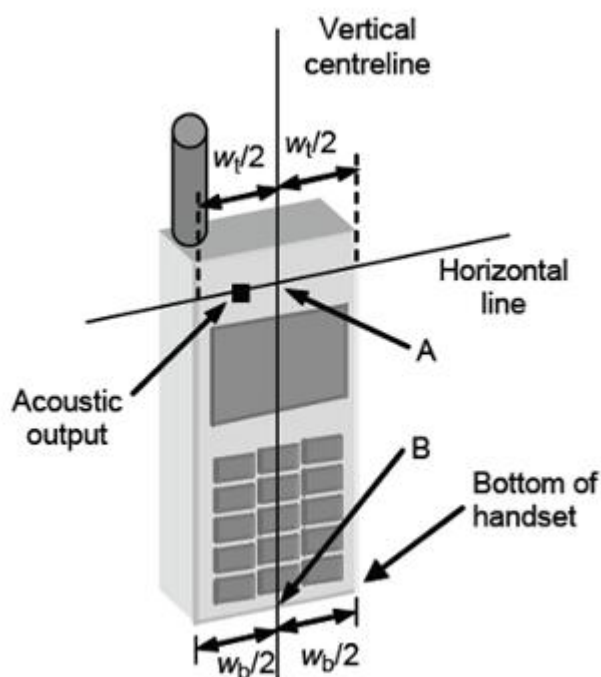


Fig 6.2.1 Handset vertical and horizontal reference lines—"fixed case"

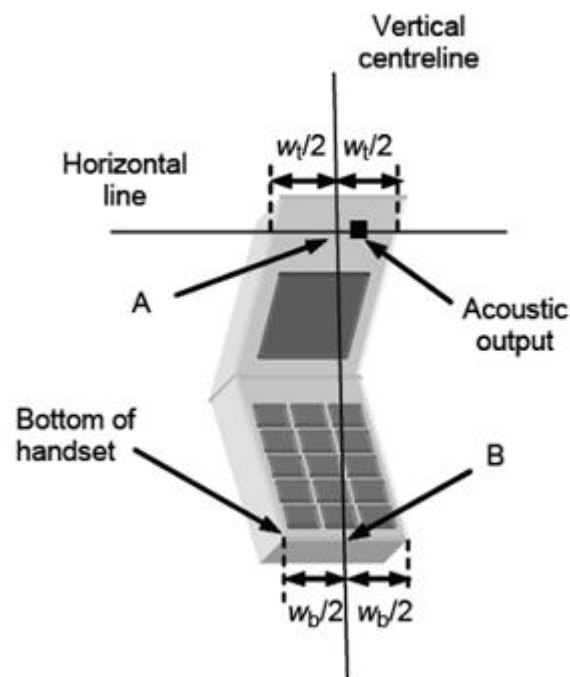


Fig 6.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

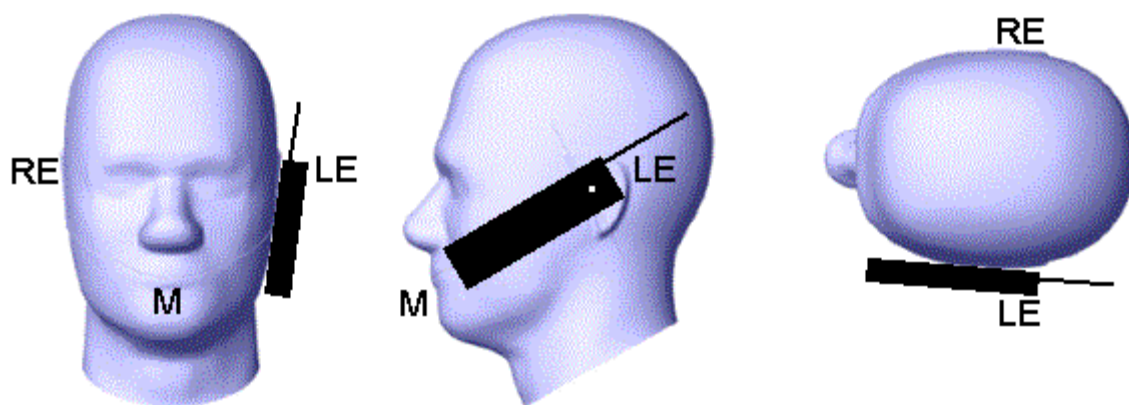


Fig 6.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

6.3. Definition of the tilt position

1. While maintaining the orientation of the handset, retract the handset parallel to the reference plane far enough away from the phantom to enable a rotation of the device by 15 degree.
2. Rotate the Handset around the horizontal line by 15 degree (see Figure 6.3.1).
3. While maintaining the orientation of the handset, move the handset towards the phantom on a line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, e.g., the antenna with the back of the phantom head, the angle of the handset shall be reduced. In this case, the tilt position is obtained if any part of the handset is in contact with the pinna as well as a second part of the handset is in contact with the phantom, e.g., the antenna with the back of the head.

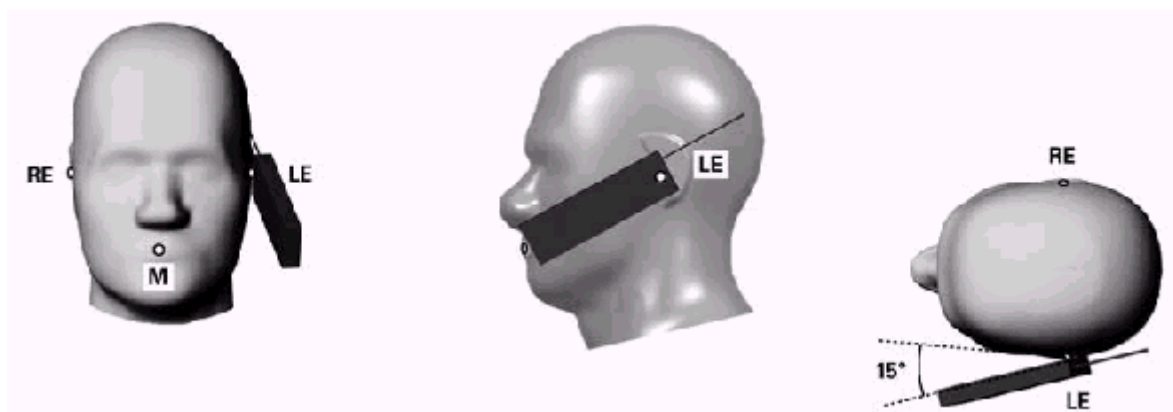


Figure 6.3.1 – Tilt position of the wireless device on the left side of SAM

6.4. Body Worn Accessory

1. Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4.1). Per KDB 648474 D04, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $< 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.
2. Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest

spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

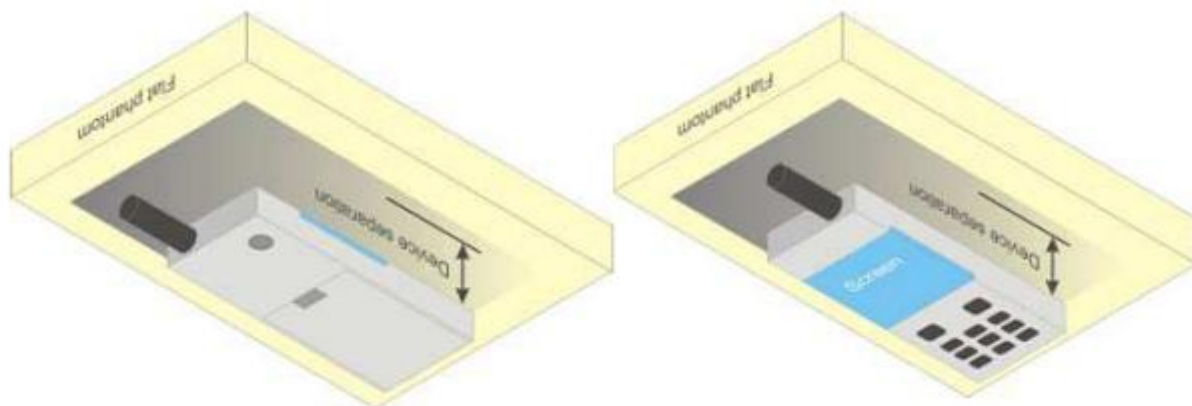


Figure 6.4.1 – Test positions for body-worn devices

6.5. Wireless Router Devices

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WLAN simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WLAN transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WLAN transmitter according to FCC KDB Publication 447498 D01 publication procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

7. RF Output Power

7.1. GSM Conducted Power

Band GSM850	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	128	189	251	Tune-up	128	189	251
Frequency (MHz)	(dBm)	824.2	836.4	848.8	Tune-up	824.2	836.4	848.8
GSM (GMSK)	33.50	33.05	33.04	33.06	24.47	24.02	24.01	24.03
GPRS(GMSK,1 Tx slot)	33.00	32.95	32.94	32.96	23.97	23.92	23.91	23.93
GPRS(GMSK,2 Tx slot)	32.50	31.99	31.98	32.01	26.48	25.97	25.96	25.99
GPRS(GMSK,3 Tx slot)	30.00	29.91	29.93	29.97	25.74	25.65	25.67	25.71
GPRS(GMSK,4 Tx slot)	29.00	28.78	28.81	28.88	25.99	25.77	25.80	25.87
EGPRS(8PSK,1 Tx slot)	26.00	25.57	25.72	25.73	16.97	16.54	16.69	16.70
EGPRS(8PSK,2 Tx slot)	25.00	24.41	24.59	24.48	18.98	18.39	18.57	18.46
EGPRS(8PSK,3 Tx slot)	23.00	22.70	22.31	22.71	18.74	18.44	18.05	18.45
EGPRS(8PSK,4 Tx slot)	22.00	21.53	21.46	21.27	18.99	18.52	18.45	18.26
Band GSM1900	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	512	661	810	Tune-up	512	661	810
Frequency (MHz)	(dBm)	1850.2	1880	1909.8	Tune-up	1850.2	1880	1909.8
GSM (GMSK)	30.50	30.43	30.30	30.06	21.47	21.40	21.27	21.03
GPRS(GMSK,1 Tx slot)	30.50	30.42	30.28	30.05	21.47	21.39	21.25	21.02
GPRS(GMSK,2 Tx slot)	29.50	29.43	29.36	29.14	23.48	23.41	23.34	23.12
GPRS(GMSK,3 Tx slot)	27.50	27.33	27.33	27.20	23.24	23.07	23.07	22.94
GPRS(GMSK,4 Tx slot)	26.50	26.20	26.23	26.18	23.49	23.19	23.22	23.17
EGPRS(8PSK,1 Tx slot)	26.50	26.24	26.49	26.43	17.47	17.21	17.46	17.40
EGPRS(8PSK,2 Tx slot)	26.00	25.35	25.70	25.60	19.98	19.33	19.68	19.58
EGPRS(8PSK,3 Tx slot)	24.00	23.53	23.41	22.79	19.74	19.27	19.15	18.53
EGPRS(8PSK,4 Tx slot)	22.50	22.26	21.89	22.45	19.49	19.25	18.88	19.44

7.2. WCDMA Conducted Power

WCDMA Band 2	Burst-Averaged output Power (dBm)			
Tx Channel	Tune-up (dBm)	9262	9400	9538
Frequency (MHz)		1852.4	1880	1907.6
RMC12.2K	24.00	23.82	23.87	23.88
HSDPA Sub 1	23.00	22.93	22.97	22.95
HSDPA Sub 2	23.00	22.48	22.46	22.61

HSDPA Sub 3	22.00	21.51	21.11	20.90
HSDPA Sub 4	22.00	20.86	21.14	21.82
HSUPA Sub 1	23.00	21.53	22.69	22.66
HSUPA Sub 2	23.00	22.77	22.72	22.68
HSUPA Sub 3	22.00	20.87	21.59	21.36
HSUPA Sub 4	23.00	22.88	22.93	22.91
HSUPA Sub 5	22.50	21.31	22.17	22.24
WCDMA Band 4	Burst-Averaged output Power (dBm)			
Tx Channel	Tune-up (dBm)	1312	1413	1513
Frequency (MHz)		1712.4	1732.6	1752.6
RMC12.2K	24.00	23.58	23.64	23.61
HSDPA Sub 1	23.00	22.63	22.70	22.64
HSDPA Sub 2	22.50	22.33	22.22	22.10
HSDPA Sub 3	21.50	21.01	21.33	21.23
HSDPA Sub 4	21.50	20.85	20.75	21.10
HSUPA Sub 1	23.00	21.21	22.53	22.56
HSUPA Sub 2	23.00	22.63	22.54	22.47
HSUPA Sub 3	22.00	21.11	21.59	21.76
HSUPA Sub 4	23.00	22.65	22.72	22.69
HSUPA Sub 5	22.50	21.15	22.16	22.02
WCDMA Band 5	Burst-Averaged output Power (dBm)			
Tx Channel	Tune-up (dBm)	4132	4182	4233
Frequency (MHz)		826.4	836.4	846.6
RMC12.2K	23.50	23.08	23.13	23.10
HSDPA Sub 1	22.50	22.10	22.15	22.14
HSDPA Sub 2	22.00	21.40	21.43	21.56
HSDPA Sub 3	21.00	20.63	20.56	20.84
HSDPA Sub 4	21.00	20.76	20.57	20.52
HSUPA Sub 1	22.50	21.41	22.01	22.04
HSUPA Sub 2	22.50	22.10	22.04	21.98
HSUPA Sub 3	21.50	20.29	20.70	21.11
HSUPA Sub 4	22.50	22.12	22.17	22.14
HSUPA Sub 5	22.00	20.44	21.64	21.56

7.3. LTE Conducted Power

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18607/1850.7	18900/1880	19193/1909.3
LTE Band 2	1.4MHz	QPSK	1	0	21.50	21.08	20.99	21.10
			1	2	21.50	21.03	21.11	21.13
			1	5	21.50	21.01	21.05	21.21
			3	0	22.00	21.58	21.55	21.73
			3	1	22.00	21.58	21.58	21.69
			3	2	22.00	21.55	21.65	21.74
			6	0	22.00	21.56	21.60	21.74
		16QAM	1	0	21.50	21.38	21.24	21.46
			1	2	21.50	21.29	21.32	21.37
			1	5	21.50	21.28	21.32	21.45
			3	0	22.00	21.58	21.55	21.71
			3	1	22.00	21.59	21.58	21.69
			3	2	22.00	21.56	21.62	21.73
			6	0	22.00	21.54	21.58	21.73
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18615/1851.5	18900/1880	19185/1908.5
LTE Band 2	3MHz	QPSK	1	0	22.00	21.47	21.40	21.51
			1	7	22.00	21.38	21.40	21.49
			1	14	22.00	21.44	21.45	21.56
			8	0	22.00	21.48	21.45	21.56
			8	4	22.00	21.47	21.44	21.55
			8	7	22.00	21.45	21.45	21.61
			15	0	22.00	21.50	21.45	21.58
		16QAM	1	0	22.00	21.76	21.55	21.83
			1	7	22.00	21.61	21.66	21.80
			1	14	22.00	21.75	21.67	21.77
			8	0	22.00	21.53	21.48	21.63
			8	4	22.00	21.53	21.52	21.68
			8	7	22.00	21.56	21.53	21.69
			15	0	22.00	21.51	21.48	21.64
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18625/1852.5	18900/1880	19175/1907.5
LTE	5MHz	QPSK	1	0	22.00	21.58	21.48	21.60

Band 2			1	12	22.00	21.48	21.51	21.07
			1	24	22.00	21.44	21.53	21.66
			12	0	22.00	21.54	21.48	21.63
			12	6	22.00	21.51	21.51	21.63
			12	11	22.00	21.50	21.51	21.65
			25	0	22.00	21.57	21.53	21.66
		16QAM	1	0	22.00	21.70	21.76	21.32
			1	12	22.00	21.73	21.73	21.42
			1	24	22.00	21.68	21.79	21.48
			12	0	22.00	21.54	21.51	21.63
			12	6	22.00	21.50	21.53	21.63
			12	11	22.00	21.49	21.52	21.68
			25	0	22.00	21.55	21.56	21.70
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18650/1855	18900/1880	19150/1905
LTE Band 2	10MHz	QPSK	1	0	21.50	21.16	21.03	21.15
			1	24	21.50	21.02	21.07	21.16
			1	49	21.50	21.04	21.10	21.27
			25	0	22.00	21.55	21.54	21.70
			25	12	22.00	21.53	21.56	21.66
			25	24	22.00	21.55	21.55	21.73
			50	0	22.00	21.56	21.53	21.70
		16QAM	1	0	21.50	21.39	21.24	21.34
			1	24	21.50	21.25	21.37	21.33
			1	49	21.50	21.35	21.36	21.45
			25	0	22.00	21.54	21.57	21.66
			25	12	22.00	21.56	21.58	21.66
			25	24	22.00	21.54	21.58	21.71
			50	0	22.00	21.54	21.55	21.72
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18675/1857.5	18900/1880	19125/1902.5
LTE Band 2	15MHz	QPSK	1	0	21.50	21.07	20.99	21.10
			1	37	21.50	21.07	21.10	21.15
			1	74	21.50	21.02	21.02	21.21
			36	0	22.00	21.55	21.51	21.63
			36	18	22.00	21.49	21.53	21.61
			36	37	22.00	21.51	21.53	21.69

			75	0	22.00	21.53	21.56	21.69
		16QAM	1	0	21.50	21.27	21.29	21.37
			1	37	21.50	21.38	21.36	21.30
			1	74	21.50	21.30	21.27	21.37
			36	0	22.00	21.54	21.53	21.63
			36	18	22.00	21.50	21.54	21.61
			36	37	22.00	21.51	21.56	21.68
			75	0	22.00	21.55	21.57	21.70
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18700/1860	18900/1880	19100/1900
LTE Band 2	20MHz	QPSK	1	0	25.00	24.47	24.44	21.52
			1	49	25.00	24.60	23.44	21.56
			1	99	25.00	24.40	23.45	21.53
			50	0	23.00	22.60	22.41	21.53
			50	24	23.00	22.55	22.41	21.51
			50	49	23.00	22.50	21.39	21.53
			100	0	23.00	22.50	21.44	21.56
		16QAM	1	0	22.00	21.76	21.72	21.70
			1	49	22.00	21.72	21.66	21.82
			1	99	22.00	21.57	21.77	21.85
			50	0	22.00	21.60	21.50	21.58
			50	24	22.00	21.55	21.45	21.57
			50	49	22.00	21.55	21.46	21.63
			100	0	22.00	21.56	21.51	21.70

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		19957/1710.7	20175/1732.5	20393/1754.3
LTE Band 4	1.4MHz	QPSK	1	0	22.00	21.59	21.57	21.09
			1	2	22.00	21.53	21.64	21.09
			1	5	22.00	21.57	21.60	21.09
			3	0	22.00	21.67	21.57	21.43
			3	1	22.00	21.56	21.49	21.38
			3	2	22.00	21.63	21.53	21.38
			6	0	22.00	21.59	21.60	21.46
		16QAM	1	0	22.00	21.84	21.38	21.32
			1	2	22.00	21.76	21.87	21.33
			1	5	22.00	21.86	21.65	21.41

			3	0	22.00	21.72	21.65	21.50
			3	1	22.00	21.64	21.56	21.41
			3	2	22.00	21.54	21.53	21.45
			6	0	22.00	21.67	21.71	21.53
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		19965/1711.5	20175/1732.5	20385/1753.5
LTE Band 4	3MHz	QPSK	1	0	21.50	21.20	21.21	21.02
			1	7	21.50	21.18	21.19	21.06
			1	14	21.50	21.20	21.19	21.09
			8	0	22.00	21.65	21.65	21.51
			8	4	22.00	21.62	21.61	21.43
			8	7	22.00	21.57	21.61	21.45
			15	0	22.00	21.62	21.62	21.46
		16QAM	1	0	22.00	21.37	21.53	21.39
			1	7	22.00	21.40	21.44	21.39
			1	14	22.00	21.53	21.39	21.41
			8	0	22.00	21.71	21.67	21.55
			8	4	22.00	21.69	21.65	21.53
			8	7	22.00	21.70	21.65	21.53
			15	0	22.00	21.63	21.61	21.48
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		19975/1712.5	20175/1732.5	20375/1752.5
LTE Band 4	5MHz	QPSK	1	0	21.50	21.25	21.27	21.13
			1	12	21.50	21.29	21.29	21.14
			1	24	21.50	21.34	21.26	21.17
			12	0	22.00	21.66	21.68	21.54
			12	6	22.00	21.65	21.66	21.53
			12	11	22.00	21.66	21.67	21.51
			25	0	22.00	21.72	21.72	21.55
		16QAM	1	0	22.00	21.51	21.54	21.47
			1	12	22.00	21.48	21.54	21.38
			1	24	22.00	21.52	21.57	21.45
			12	0	22.00	21.70	21.67	21.52
			12	6	22.00	21.68	21.65	21.55
			12	11	22.00	21.70	21.65	21.50

			25	0	22.00	21.74	21.70	21.57
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20000/1715	20175/1732.5	20350/1750
LTE Band 4	10MHz	QPSK	1	0	21.50	21.32	21.35	21.25
			1	24	21.50	21.29	21.27	21.13
			1	49	21.50	21.36	21.34	21.25
			25	0	22.00	21.73	21.75	21.61
			25	12	22.00	21.74	21.69	21.57
			25	24	22.00	21.82	21.72	21.62
		16QAM	50	0	22.00	21.75	21.71	21.58
			1	0	22.00	21.55	21.62	21.55
			1	24	22.00	21.64	21.45	21.48
			1	49	22.00	21.63	21.58	21.54
			25	0	22.00	21.72	21.72	21.59
			25	12	22.00	21.74	21.71	21.55
			25	24	22.00	21.80	21.71	-44.46
			50	0	22.00	21.73	21.77	-44.48
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20025/1717.5	20175/1732.5	20325/1747.5
LTE Band 4	15MHz	QPSK	1	0	22.00	21.64	21.31	21.18
			1	37	22.00	21.33	21.30	21.20
			1	74	22.00	21.77	21.29	21.16
			36	0	22.00	21.69	21.71	21.59
			36	18	22.00	21.73	21.65	21.54
			36	37	22.00	21.75	21.66	21.54
			75	0	22.00	21.74	21.73	21.63
		16QAM	1	0	22.00	21.56	21.50	21.46
			1	37	22.00	21.61	21.53	21.50
			1	74	22.00	21.63	21.57	21.40
			36	0	22.00	21.69	21.71	21.57
			36	18	22.00	21.74	21.65	21.56
			36	37	22.00	21.77	21.66	21.54
			75	0	22.00	21.73	21.73	21.61
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		

			RB Size	RB Offset		20050/1720	20175/1732.5	20300/1745
LTE Band 4	20MHz	QPSK	1	0	22.00	21.23	21.24	21.68
			1	49	22.00	21.31	21.30	21.69
			1	99	22.00	21.34	21.27	21.59
			50	0	22.00	21.75	21.81	21.69
			50	24	22.00	21.78	21.75	21.64
			50	49	22.00	21.82	21.72	21.62
			100	0	22.00	21.75	21.77	21.63
		16QAM	1	0	22.00	21.39	21.48	21.42
			1	49	22.00	21.49	21.57	21.45
			1	99	22.00	21.58	21.57	21.55
			50	0	22.00	21.72	21.77	21.66
			50	24	22.00	21.77	21.74	21.64
			50	49	22.00	21.83	21.73	21.64
			100	0	22.00	21.75	21.75	21.61

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20407/824.7	20525/836.5	20643/848.3
LTE Band 5	1.4MHz	QPSK	1	0	21.50	21.19	21.10	21.37
			1	2	21.50	21.22	21.09	21.32
			1	5	21.50	21.27	21.12	21.34
			3	0	21.50	21.21	21.04	21.40
			3	1	21.50	21.26	21.05	21.34
			3	2	21.50	21.26	21.11	21.31
			6	0	21.50	21.21	21.09	21.36
		16QAM	1	0	22.00	21.59	21.42	21.55
			1	2	22.00	21.40	21.36	21.60
			1	5	22.00	21.64	21.41	21.48
			3	0	21.50	21.21	21.12	21.39
			3	1	21.50	21.23	21.08	21.31
			3	2	21.50	21.18	21.04	21.30
			6	0	21.50	21.30	21.23	21.49
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20415/825.5	20525/836.5	20635/847.5
LTE Band 5	3MHz	QPSK	1	0	21.50	21.19	21.14	20.90
			1	7	21.50	21.32	21.08	21.25
			1	14	21.50	21.33	20.81	21.34

			8	0	21.50	21.27	21.13	21.42
			8	4	21.50	21.33	21.14	21.41
			8	7	21.50	21.38	21.12	21.39
			15	0	21.50	21.33	21.13	21.36
		16QAM	1	0	22.00	21.43	21.36	21.20
			1	7	22.00	21.74	20.93	21.14
			1	14	22.00	21.70	21.31	21.04
			8	0	21.50	21.34	21.17	21.48
			8	4	21.50	21.39	21.19	21.42
			8	7	21.50	21.42	21.16	21.44
			15	0	21.50	21.33	21.14	21.37
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20425/826.5	20525/836.5	20625/846.5
LTE Band 5	5MHz	QPSK	1	0	21.00	20.74	20.71	20.81
			1	12	21.00	20.83	20.62	20.95
			1	24	21.00	20.83	20.84	20.85
			12	0	21.50	21.34	21.17	21.38
			12	6	21.50	21.39	21.17	21.43
			12	11	21.50	21.38	21.19	21.39
			25	0	21.50	21.42	21.21	21.43
		16QAM	1	0	21.50	21.12	21.02	21.09
			1	12	21.50	21.24	20.95	21.22
			1	24	21.50	21.20	20.88	21.19
			12	0	21.50	21.37	21.17	21.42
			12	6	21.50	21.42	21.16	21.45
			12	11	21.50	21.39	21.20	21.40
			25	0	21.50	21.41	21.23	21.41
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20450/829	20525/836.5	20600/844
LTE Band 5	10MHz	QPSK	1	0	22.00	21.79	21.74	21.74
			1	24	22.00	21.81	21.63	21.73
			1	49	22.00	21.75	21.77	21.91
			25	0	21.50	21.38	21.25	21.28
			25	12	21.50	21.30	21.18	21.32
			25	24	21.50	21.22	21.22	21.41
			50	0	21.50	21.30	21.20	21.34
		16QAM	1	0	21.50	21.17	21.05	21.19

			1	24	21.50	21.04	20.99	21.05
			1	49	21.50	21.06	21.12	21.17
			25	0	21.50	21.37	21.22	21.29
			25	12	21.50	21.28	21.15	21.28
			25	24	21.50	21.24	21.23	21.39
			50	0	21.50	21.30	21.21	21.33

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20775/2502.5	21100/2535	21425/2567.5
LTE Band 7	5MHz	QPSK	1	0	22.00	21.87	21.63	21.56
			1	12	22.00	21.35	21.60	21.53
			1	24	22.00	21.38	21.60	21.58
			12	0	22.50	21.87	22.14	22.15
			12	6	22.50	21.87	22.11	22.13
			12	11	22.50	21.86	22.10	22.13
			25	0	22.50	21.94	22.16	22.14
		16QAM	1	0	22.00	21.67	21.83	21.89
			1	12	22.00	21.69	21.77	21.86
			1	24	22.00	21.61	21.96	21.75
			12	0	22.50	21.90	22.13	22.15
			12	6	22.50	21.91	22.16	22.17
			12	11	22.50	21.86	22.15	22.15
			25	0	22.50	21.94	22.18	22.16
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20800/2505	21100/2535	21400/2565
LTE Band 7	10MHz	QPSK	1	0	22.00	21.44	21.64	21.61
			1	24	22.00	21.38	21.68	21.58
			1	49	22.00	21.47	21.66	21.61
			25	0	22.50	21.96	22.15	22.13
			25	12	22.50	21.91	22.14	22.17
			25	24	22.50	21.95	22.14	22.12
			50	0	22.50	21.94	22.13	22.15
		16QAM	1	0	22.00	21.73	21.80	21.87
			1	24	22.00	21.69	21.98	21.90
			1	49	22.00	21.75	21.92	21.89
			25	0	22.50	21.96	22.16	22.16
			25	12	22.50	21.90	22.16	22.17
			25	24	22.50	21.92	22.13	22.13

			50	0	22.50	21.94	22.15	22.17
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20825/2507.5	21100/2535	21375/2562.5
LTE Band 7	15MHz	QPSK	1	0	22.00	21.48	21.61	21.69
			1	37	22.00	21.50	21.68	21.62
			1	74	22.00	21.44	21.60	21.59
			36	0	22.50	21.94	22.13	22.15
			36	18	22.50	21.92	22.13	22.13
			36	37	22.50	21.90	22.11	22.13
			75	0	22.50	21.95	22.15	22.18
		16QAM	1	0	22.00	21.80	21.90	22.00
			1	37	22.00	21.79	21.99	21.84
			1	74	22.00	21.61	21.92	21.83
			36	0	22.50	21.96	22.15	22.15
			36	18	22.50	21.91	22.16	22.17
			36	37	22.50	21.93	22.15	22.13
			75	0	22.50	21.95	22.15	22.19
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20850/2510	21100/2535	21350/2560
LTE Band 7	20MHz	QPSK	1	0	22.00	21.47	21.59	21.64
			1	49	22.00	21.50	21.70	21.66
			1	99	22.00	21.36	21.57	21.60
			50	0	22.50	22.00	22.18	22.24
			50	24	22.50	21.97	22.21	22.21
			50	49	22.50	21.90	22.16	22.19
			100	0	22.50	21.90	22.15	22.21
		16QAM	1	0	22.00	21.78	21.95	21.97
			1	49	22.00	21.72	21.97	21.85
			1	99	22.00	21.71	21.90	21.87
			50	0	22.50	21.97	22.17	22.24
			50	24	22.50	21.94	22.20	22.21
			50	49	22.50	21.90	22.18	22.21
			100	0	22.50	21.91	22.14	22.17

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23017/699.7	23095/707.5	23173/715.3

LTE Band 12	1.4MHz	QPSK	1	0	21.50	21.07	21.08	21.15
			1	2	21.50	20.99	21.08	20.99
			1	5	21.50	20.97	21.07	20.88
			3	0	21.50	21.04	21.10	21.13
			3	1	21.50	21.01	21.05	21.00
			3	2	21.50	20.99	21.06	20.95
			6	0	21.50	21.00	21.13	21.05
		16QAM	1	0	21.50	21.39	21.30	20.94
			1	2	21.50	21.27	21.43	20.75
			1	5	21.50	21.30	21.34	20.72
			3	0	21.50	20.98	21.02	21.13
			3	1	21.50	20.94	21.05	20.95
			3	2	21.50	20.94	21.05	20.91
			6	0	21.50	21.04	21.21	21.09
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23025/700.5	23095/707.5	23165/714.5
LTE Band 12	3MHz	QPSK	1	0	21.00	20.54	20.53	20.60
			1	7	21.00	20.45	20.56	20.64
			1	14	21.00	20.47	20.66	20.41
			8	0	21.50	21.02	21.04	21.21
			8	4	21.50	21.05	21.06	21.13
			8	7	21.50	21.00	21.10	21.10
			15	0	21.50	21.03	21.07	21.11
		16QAM	1	0	21.50	20.84	20.84	20.92
			1	7	21.50	20.71	20.76	21.01
			1	14	21.50	20.83	20.90	20.67
			8	0	21.50	21.08	21.16	21.23
			8	4	21.50	21.09	21.15	21.23
			8	7	21.50	21.05	21.14	21.19
			15	0	21.50	21.05	21.09	21.13
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23035/701.5	23095/707.5	23155/713.5
LTE Band 12	5MHz	QPSK	1	0	21.00	20.62	20.51	20.64
			1	12	21.00	20.51	20.63	20.61
			1	24	21.00	20.66	20.57	20.43
			12	0	21.50	21.12	21.05	21.23
			12	6	21.50	21.03	21.15	21.19

			12	11	21.50	21.01	21.07	21.19
			25	0	21.50	21.12	21.14	21.23
		16QAM	1	0	21.50	20.97	20.72	21.02
			1	12	21.50	20.93	20.90	20.93
			1	24	21.50	20.99	20.89	20.87
			12	0	21.50	21.14	21.06	21.26
			12	6	21.50	21.09	21.16	21.21
			12	11	21.50	21.05	21.09	21.20
			25	0	21.50	21.13	21.11	21.21
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23060/704	23095/707.5	23130/711
LTE Band 12	10MHz	QPSK	1	0	22.00	21.62	21.61	21.69
			1	24	22.00	21.62	21.62	21.60
			1	49	22.00	21.58	21.67	21.57
			25	0	21.50	21.14	21.05	21.11
			25	12	21.50	21.06	21.11	21.13
			25	24	21.50	21.14	21.09	21.13
			50	0	21.50	21.14	21.07	21.15
		16QAM	1	0	21.50	20.96	20.96	20.96
			1	24	21.50	20.95	20.83	20.85
			1	49	21.50	20.81	21.04	20.82
			25	0	21.50	21.17	21.07	21.10
			25	12	21.50	21.03	21.11	21.13
			25	24	21.50	21.17	21.04	21.12
			50	0	21.50	21.18	21.04	21.13

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23205/779.5	23230/782	23255/784.5
LTE Band 13	5MHz	QPSK	1	0	21.00	20.80	20.69	20.77
			1	12	21.00	20.65	20.74	20.77
			1	24	21.00	20.79	20.86	20.86
			12	0	21.50	21.33	21.34	21.32
			12	6	21.50	21.25	21.30	21.33
			12	11	21.50	21.29	21.35	21.30
			25	0	21.50	21.37	21.34	21.34
		16QAM	1	0	21.50	21.15	20.92	21.05
			1	12	21.50	20.90	21.05	21.15

			1	24	21.50	21.14	21.19	21.12
			12	0	21.50	21.33	21.38	21.32
			12	6	21.50	21.28	21.28	21.33
			12	11	21.50	21.29	21.34	21.32
			25	0	21.50	21.36	21.34	21.31
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		/	23230/782	/
LTE Band 13	10MHz	QPSK	1	0	21.00	/	20.87	/
			1	24	21.00	/	20.73	/
			1	49	21.00	/	20.85	/
			25	0	21.50	/	21.34	/
			25	12	21.50	/	21.29	/
			25	24	21.50	/	21.33	/
			50	0	21.50	/	21.35	/
		16QAM	1	0	21.50	/	21.08	/
			1	24	21.50	/	20.96	/
			1	49	21.50	/	21.08	/
			25	0	21.50	/	21.34	/
			25	12	21.50	/	21.29	/
			25	24	21.50	/	21.34	/
			50	0	21.50	/	21.33	/

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23755/706.5	23790/710	23825/713.5
LTE Band 17	5MHz	QPSK	1	0	21.50	21.38	21.16	20.76
			1	12	21.50	21.33	21.29	21.36
			1	24	21.50	21.44	20.88	20.73
			12	0	21.50	21.36	21.42	21.40
			12	6	21.50	21.38	21.33	21.36
			12	11	21.50	21.40	21.21	21.26
			25	0	21.50	21.39	21.33	21.37
		16QAM	1	0	22.00	21.62	21.61	20.93
			1	12	22.00	21.61	21.06	21.23
			1	24	22.00	21.23	21.14	20.98
			12	0	21.50	21.41	21.44	21.40
			12	6	21.50	21.34	21.33	21.34
			12	11	21.50	21.39	21.25	21.26
			25	0	21.50	21.38	21.33	21.38

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		23780/709	23790/710	23800/711
LTE Band 17	10MHz	QPSK	1	0	22.00	21.89	21.93	21.92
			1	24	22.00	21.91	21.85	21.72
			1	49	22.00	21.87	21.78	21.74
			25	0	21.50	21.31	21.36	21.37
			25	12	21.50	21.33	21.33	21.32
			25	24	21.50	21.22	21.24	21.26
			50	0	21.50	21.29	21.32	21.36
		16QAM	1	0	21.50	21.26	21.20	21.12
			1	24	21.50	21.15	21.10	21.07
			1	49	21.50	21.08	21.08	20.95
			25	0	21.50	21.31	21.36	21.39
			25	12	21.50	21.31	21.32	21.32
			25	24	21.50	21.22	21.25	21.23
			50	0	21.50	21.28	21.31	21.37

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26047/1850.7	26365/1882.5	26683/1914.3
LTE Band 25	1.4MHz	QPSK	1	0	22.00	21.85	21.35	21.46
			1	2	22.00	21.33	21.36	21.48
			1	5	22.00	21.38	21.37	21.45
			3	0	22.00	21.89	21.78	21.97
			3	1	22.00	21.86	21.78	21.94
			3	2	22.00	21.88	21.80	21.99
			6	0	22.00	21.88	21.86	21.98
		16QAM	1	0	22.00	21.61	21.49	21.72
			1	2	22.00	21.56	21.66	21.69
			1	5	22.00	21.57	21.57	21.72
			3	0	22.50	21.93	21.85	22.04
			3	1	22.50	21.93	21.87	22.04
			3	2	22.50	21.92	21.83	22.03
			6	0	22.50	21.94	21.97	22.03

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26055/1851.5	26365/1882.5	26675/1913.5
LTE	3MHz	QPSK	1	0	21.50	21.30	21.29	21.47

Band 25			1	7	21.50	21.29	21.29	21.38
			1	14	21.50	21.34	21.35	21.46
			8	0	22.50	21.86	21.83	22.08
			8	4	22.50	21.85	21.84	22.03
			8	7	22.50	21.83	21.85	-49.09
			15	0	22.00	21.88	21.85	-49.09
		16QAM	1	0	22.00	21.61	21.42	-49.08
			1	7	22.00	21.51	21.66	21.66
			1	14	22.00	21.59	21.53	21.70
			8	0	22.50	21.96	21.90	22.13
			8	4	22.50	21.95	21.98	22.06
			8	7	22.50	21.95	21.93	22.03
			15	0	22.50	21.92	21.90	22.02
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26065/1852.5	26365/1882.5	26665/1912.5
LTE Band 25	5MHz	QPSK	1	0	22.00	21.44	21.38	21.54
			1	12	22.00	21.35	21.41	21.51
			1	24	22.00	21.39	21.40	21.54
			12	0	22.50	21.89	21.90	22.12
			12	6	22.50	21.93	21.94	22.06
			12	11	22.50	21.89	21.93	22.04
			25	0	22.50	21.94	21.94	22.09
		16QAM	1	0	22.00	21.72	21.61	21.88
			1	12	22.00	21.59	21.68	21.77
			1	24	22.00	21.66	21.69	21.71
			12	0	22.50	21.95	21.90	22.14
			12	6	22.50	21.94	21.95	22.09
			12	11	22.50	21.91	21.95	22.04
			25	0	22.50	21.95	21.97	22.10
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26090/1855	26365/1882.5	26640/1910
LTE Band 25	10MHz	QPSK	1	0	22.00	21.51	21.44	21.55
			1	24	22.00	21.40	21.52	21.60
			1	49	22.00	21.47	21.45	21.60
			25	0	22.50	21.95	21.94	22.09
			25	12	22.50	21.94	21.95	22.14
			25	24	22.50	21.94	21.97	22.11

			50	0	22.50	21.98	21.92	22.10
		16QAM	1	0	22.00	21.77	21.62	21.75
			1	24	22.00	21.64	21.74	21.74
			1	49	22.00	21.77	21.73	21.79
			25	0	22.50	21.94	21.93	22.09
			25	12	22.50	21.94	21.99	22.14
			25	24	22.50	21.97	21.97	22.09
			50	0	22.50	21.97	21.95	22.09
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26115/1857.5	26365/1882.5	26615/1907.5
LTE Band 25	15MHz	QPSK	1	0	22.00	21.46	21.39	21.47
			1	37	22.00	21.48	21.46	21.57
			1	74	22.00	21.37	21.44	21.58
			36	0	22.50	21.93	21.93	21.97
			36	18	22.50	21.88	21.92	22.04
			36	37	22.50	21.91	21.93	22.05
			75	0	22.50	21.95	21.93	22.07
		16QAM	1	0	22.00	21.76	21.94	21.68
			1	37	22.00	21.73	21.93	21.86
			1	74	22.00	21.72	21.37	21.77
			36	0	22.50	21.93	21.94	21.98
			36	18	22.50	21.93	21.93	22.05
			36	37	22.50	21.95	21.93	22.07
			75	0	22.50	21.97	21.95	22.08
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26140/1860	26365/1882.5	26590/1905
LTE Band 25	20MHz	QPSK	1	0	22.00	21.48	21.37	21.50
			1	49	22.00	21.48	21.49	21.50
			1	99	22.00	21.37	21.38	21.62
			50	0	22.50	22.00	21.98	22.06
			50	24	22.50	21.99	21.99	22.06
			50	49	22.50	21.94	22.00	22.13
			100	0	22.50	21.94	21.93	22.10
		16QAM	1	0	22.00	21.70	21.62	21.68
			1	49	22.00	21.78	21.72	21.74
			1	99	22.00	21.68	21.59	21.77
			50	0	22.50	21.99	21.95	22.06
			50	24	22.50	21.97	21.97	22.05

			50	49	22.50	21.94	21.97	22.15
			100	0	22.50	21.93	21.94	22.06

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26697/814.7	26740/819	26783/823.3
LTE Band 26a	1.4MHz	QPSK	1	0	25.00	24.52	21.64	21.55
			1	2	25.00	24.54	21.60	21.56
			1	5	25.00	24.54	21.63	21.53
			3	0	25.00	24.51	21.61	21.50
			3	1	25.00	24.48	21.63	21.51
			3	2	25.00	24.49	21.62	21.51
			6	0	23.50	23.46	21.65	21.53
		16QAM	1	0	24.00	23.69	22.02	21.92
			1	2	24.00	23.61	21.98	21.86
			1	5	24.00	23.69	21.93	21.87
			3	0	24.00	23.55	21.63	21.49
			3	1	24.00	22.49	21.60	21.50
			3	2	24.00	22.49	21.64	21.52
			6	0	22.00	21.54	21.72	21.65
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26705/818.5	26740/819	26775/822.5
LTE Band 26a	3MHz	QPSK	1	0	22.00	21.43	21.65	21.60
			1	7	22.00	21.50	21.60	21.54
			1	14	22.00	21.56	21.61	21.54
			8	0	22.00	21.50	21.67	21.62
			8	4	22.00	21.51	21.64	21.58
			8	7	22.00	21.53	21.63	21.57
			15	0	22.00	21.53	21.64	21.60
		16QAM	1	0	22.50	21.72	21.98	21.96
			1	7	22.50	21.85	21.93	21.72
			1	14	22.50	21.90	22.01	21.88
			8	0	22.00	21.56	21.74	21.65
			8	4	22.00	21.57	21.68	21.66
			8	7	22.00	21.56	21.71	21.61
			15	0	22.00	21.51	21.67	21.61
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26715/816.5	26740/819	26765/821.5

LTE Band 26a	5MHz	QPSK	1	0	22.00	21.50	21.73	21.67
			1	12	22.00	21.59	21.64	21.60
			1	24	22.00	21.60	21.65	21.59
			12	0	22.00	21.58	21.74	21.69
			12	6	22.00	21.60	21.69	21.64
			12	11	22.00	21.60	21.69	21.61
			25	0	22.00	21.59	21.72	21.67
		16QAM	1	0	22.50	21.79	22.11	21.99
			1	12	22.50	21.90	22.04	21.95
			1	24	22.50	21.90	21.95	21.98
			12	0	22.00	21.59	21.74	21.70
			12	6	22.00	21.60	21.72	21.65
			12	11	22.00	21.63	21.67	21.65
			25	0	22.00	21.61	21.74	21.68
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		/	26740/819	/
LTE Band 26a	10MHz	QPSK	1	0	25.00	/	24.69	/
			1	24	25.00	/	24.68	/
			1	49	25.00	/	24.59	/
			25	0	25.00	/	24.70	/
			25	12	25.00	/	24.66	/
			25	24	25.00	/	24.68	/
			50	0	25.00	/	24.68	/
		16QAM	1	0	22.50	/	21.94	/
			1	24	22.50	/	21.83	/
			1	49	22.50	/	22.01	/
			25	0	22.00	/	21.67	/
			25	12	22.00	/	21.67	/
			25	24	22.00	/	21.66	/
			50	0	22.00	/	21.70	/

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26797/824.7	26915/836.5	27033/848.3
LTE Band 26b	1.4MHz	QPSK	1	0	22.00	21.53	20.88	20.99
			1	2	22.00	20.98	20.87	21.02
			1	5	22.00	21.04	20.90	21.04
			3	0	22.00	21.55	21.36	21.50

			3	1	22.00	21.57	21.33	21.53
			3	2	22.00	21.58	21.34	21.53
			6	0	22.00	21.56	21.39	21.54
		16QAM	1	0	22.00	21.44	21.73	21.29
			1	2	22.00	21.38	21.26	21.38
			1	5	22.00	21.44	21.26	21.46
			3	0	22.00	21.46	21.32	21.56
			3	1	22.00	21.56	21.33	21.59
			3	2	22.00	21.51	21.35	21.61
			6	0	22.00	21.67	21.46	21.68
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26805/825.5	26915/836.5	27025/847.5
LTE Band 26b	3MHz	QPSK	1	0	22.00	21.05	21.09	20.96
			1	7	22.00	21.03	20.93	20.97
			1	14	22.00	21.60	20.87	21.04
			8	0	22.00	21.58	21.41	21.53
			8	4	22.00	21.59	21.44	21.55
			8	7	22.00	21.56	21.42	21.52
			15	0	22.00	21.59	21.43	21.50
		16QAM	1	0	21.50	21.37	21.12	21.29
			1	7	21.50	21.26	21.25	21.18
			1	14	21.50	21.35	21.22	21.35
			8	0	22.00	21.62	21.44	21.55
			8	4	22.00	21.68	21.51	21.60
			8	7	22.00	21.63	21.48	21.55
			15	0	22.00	21.58	21.42	21.52
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26815/826.5	26915/836.5	27015/846.5
LTE Band 26b	5MHz	QPSK	1	0	21.50	21.09	20.89	21.07
			1	12	21.50	21.10	20.95	21.01
			1	24	21.50	21.10	21.32	21.13
			12	0	22.00	21.61	21.44	21.54
			12	6	22.00	21.63	21.46	21.52
			12	11	22.00	21.61	21.48	21.54
			25	0	22.00	21.66	21.48	21.59
		16QAM	1	0	22.00	21.87	21.25	21.41
			1	12	22.00	21.46	21.38	21.32

			1	24	22.00	21.50	21.41	21.88
			12	0	22.00	21.63	21.50	21.58
			12	6	22.00	21.67	21.43	21.57
			12	11	22.00	21.61	21.50	21.54
			25	0	22.00	21.65	21.47	21.59
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26840/829	26915/836.5	26990/844
LTE Band 26b	10MHz	QPSK	1	0	22.00	21.63	21.07	21.55
			1	24	22.00	21.05	20.97	21.03
			1	49	22.00	21.42	20.98	21.59
			25	0	22.00	21.58	21.46	21.52
			25	12	22.00	21.55	21.43	21.55
			25	24	22.00	21.52	21.48	21.53
			50	0	22.00	21.54	21.48	21.50
		16QAM	1	0	22.00	21.95	21.39	21.93
			1	24	22.00	21.29	21.85	21.30
			1	49	22.00	21.55	21.39	21.35
			25	0	22.00	21.61	21.45	21.53
			25	12	22.00	21.56	21.43	21.52
			25	24	22.00	21.49	21.50	21.52
			50	0	22.00	21.53	21.48	21.53
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26865/831.5	26915/836.5	26965/841.5
LTE Band 26b	15MHz	QPSK	1	0	22.00	21.14	21.63	21.49
			1	37	22.00	21.32	21.02	21.01
			1	74	22.00	20.99	21.54	21.10
			36	0	22.00	21.60	21.50	21.51
			36	18	22.00	21.50	21.48	21.56
			36	37	22.00	21.47	21.50	21.55
			75	0	22.00	21.55	21.51	21.55
		16QAM	1	0	22.00	21.51	21.44	21.19
			1	37	22.00	21.97	21.22	21.23
			1	74	22.00	21.76	21.85	21.78
			36	0	22.00	21.57	21.49	21.51
			36	18	22.00	21.49	21.49	21.54
			36	37	22.00	21.45	21.49	21.57
			75	0	22.00	21.57	21.54	21.55

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		37775/2572.5	38000/2595	38225/2617.5
LTE Band 38	5MHz	QPSK	1	0	21.50	20.72	21.13	20.90
			1	12	21.50	20.38	21.22	20.96
			1	24	21.50	20.20	21.25	21.05
			12	0	21.50	20.76	21.15	20.93
			12	6	21.50	20.76	21.18	20.96
			12	11	21.50	20.74	21.18	20.99
			25	0	21.50	20.73	21.22	21.00
		16QAM	1	0	21.50	20.78	21.28	21.03
			1	12	21.50	20.74	21.33	21.10
			1	24	21.50	20.73	21.37	21.17
			12	0	21.50	20.78	21.20	20.97
			12	6	21.50	20.77	21.21	21.01
			12	11	21.50	20.73	21.23	21.03
			25	0	21.50	20.76	21.23	21.06
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		37800/2575	38000/2595	38200/2615
LTE Band 38	10MHz	QPSK	1	0	21.50	20.78	21.07	20.80
			1	24	21.50	20.60	21.19	20.88
			1	49	21.50	20.62	21.17	21.03
			25	0	21.50	20.73	21.10	20.84
			25	12	21.50	20.62	21.15	20.89
			25	24	21.50	20.60	21.17	20.99
			50	0	21.50	20.69	21.15	20.92
		16QAM	1	0	21.50	20.92	21.23	20.94
			1	24	21.50	20.79	21.35	21.01
			1	49	21.50	20.78	21.31	21.19
			25	0	21.50	20.77	21.14	20.88
			25	12	21.50	20.67	21.19	20.94
			25	24	21.50	20.63	21.24	21.03
			50	0	21.50	20.73	21.21	20.95
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		37825/2577.5	38000/2595	38175/2615
LTE Band	15MHz	QPSK	1	0	21.50	20.78	21.01	20.96
			1	37	21.50	20.61	21.24	20.85

38			1	74	21.50	20.73	21.09	21.01
			36	0	21.50	20.68	21.06	20.85
			36	18	21.50	20.59	21.14	20.80
			36	37	21.50	20.62	21.14	20.91
			75	0	21.50	20.70	21.12	20.87
		16QAM	1	0	21.50	20.92	21.16	21.11
			1	37	21.50	20.76	21.40	20.98
			1	74	21.50	20.88	21.23	21.15
			36	0	21.50	20.69	21.06	20.84
			36	18	21.50	20.59	21.12	20.82
			36	37	21.50	20.65	21.12	20.92
			75	0	21.50	20.73	21.15	20.91
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		37850/2580	38000/2595	38150/2610
LTE Band 38	20MHz	QPSK	1	0	21.50	20.75	20.75	21.16
			1	49	21.50	20.66	21.04	20.53
			1	99	21.50	20.96	20.68	20.98
			50	0	21.50	20.74	21.07	20.97
			50	24	21.50	20.69	21.20	20.85
			50	49	21.50	20.81	21.16	20.93
			100	0	21.50	20.76	21.10	20.95
		16QAM	1	0	21.50	20.88	21.05	20.97
			1	49	21.50	20.80	21.38	20.74
			1	99	21.50	20.73	20.92	21.12
			50	0	21.50	20.78	21.10	21.01
			50	24	21.50	20.74	21.23	20.91
			50	49	21.50	20.86	21.21	20.97
			100	0	21.50	20.81	21.14	20.99

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)				
			RB Size	RB Offset		39675/2498.5	40148/2546	40620/2593	41093/2640	41565/2687.5
LTE Band 41	5MHz	QPSK	1	0	25.00	24.78	24.07	24.05	24.41	23.66
			1	12	25.00	24.73	24.76	24.11	24.39	23.54
			1	24	25.00	24.75	24.39	24.09	24.06	23.51
			12	0	24.00	23.67	23.40	23.19	23.21	22.77
			12	6	24.00	23.64	22.73	23.22	23.26	22.73

			12	11	24.00	23.64	23.56	23.22	23.42	22.7
			25	0	24.00	23.67	23.65	23.24	23.58	22.77
		16QAM	1	0	24.00	23.75	22.82	23.25	23.37	22.84
			1	12	24.00	23.67	22.69	23.32	23.22	22.77
			1	24	24.00	23.71	23.30	23.32	23.16	22.69
			12	0	23.00	22.69	22.00	22.23	22.20	21.81
			12	6	23.00	22.65	21.93	22.25	22.29	21.78
			12	11	23.00	22.66	22.56	22.28	21.88	21.76
			25	0	23.00	22.70	21.84	22.30	22.32	21.84
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)				
			RB Size	RB Offset		39700/2501	40160/2547	40620/2593	41080/2639	41540/2685
LTE Band 41	10MHz	QPSK	1	0	25.00	24.58	24.16	24.00	24.19	23.77
			1	24	25.00	24.49	24.35	24.10	24.27	23.62
			1	49	25.00	24.50	24.27	23.99	24.46	23.52
			25	0	24.00	23.62	23.55	23.20	22.81	22.85
			25	12	24.00	23.63	22.80	23.22	23.14	22.79
			25	24	24.00	23.58	23.29	23.18	23.61	22.76
			50	0	24.00	23.65	23.56	23.21	23.53	22.81
		16QAM	1	0	24.00	23.80	23.66	23.22	23.41	22.98
			1	24	24.00	23.73	22.97	23.34	23.41	22.85
			1	49	24.00	23.74	23.12	23.23	23.00	22.73
			25	0	23.00	22.68	22.56	22.24	22.12	21.90
			25	12	23.00	22.69	21.85	22.28	22.14	21.83
			25	24	23.00	22.64	22.18	22.25	22.44	21.80
			50	0	23.00	22.70	22.53	22.28	22.28	21.86
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)				
			RB Size	RB Offset		39725/2503.5	40173/2548	40620/2593	41068/2638	41515/2682.5
LTE Band 41	15MHz	QPSK	1	0	25.00	24.56	23.52	23.91	23.56	23.65
			1	37	25.00	24.51	23.72	24.18	23.95	23.61
			1	74	25.00	24.47	24.42	23.89	23.77	23.4
			36	0	24.00	23.64	23.55	23.16	23.18	22.76
			36	18	24.00	23.61	23.04	23.23	22.71	22.74
			36	37	24.00	23.61	23.54	23.17	23.10	22.66
			75	0	24.00	23.62	23.37	23.18	22.82	22.76
		16QAM	1	0	24.00	23.79	22.74	23.12	23.78	22.84

			1	37	24.00	23.72	22.93	23.40	23.31	22.83
			1	74	24.00	23.71	23.31	23.12	23.24	22.62
			36	0	23.00	22.65	22.08	22.17	22.62	21.76
			36	18	23.00	22.62	22.03	22.24	22.09	21.75
			36	37	23.00	22.63	21.77	22.18	21.81	21.68
			75	0	23.00	22.68	21.80	22.23	21.97	21.8
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)				
			RB Size	RB Offset		39750/2506	40185/2549.5	40620/2593	39650/2636.5	41490/2680
LTE Band 41	20MHz	QPSK	1	0	25.00	24.57	24.16	23.82	23.47	23.65
			1	49	25.00	24.54	23.86	24.18	24.53	23.64
			1	99	25.00	24.39	24.48	23.83	23.45	23.41
			50	0	24.00	23.67	23.55	23.18	23.09	22.81
			50	24	24.00	23.68	23.30	23.28	22.80	22.79
			50	49	24.00	23.61	22.83	23.2	22.77	22.72
			100	0	24.00	23.62	23.28	23.19	23.19	22.77
		16QAM	1	0	24.00	23.8	23.59	23.01	23.15	22.83
			1	49	24.00	23.78	23.26	23.42	22.79	22.86
			1	99	24.00	23.63	23.18	23.05	23.62	22.63
			50	0	23.00	22.73	21.96	22.22	21.78	21.88
			50	24	23.00	22.72	21.98	22.32	22.70	21.86
			50	49	23.00	22.65	22.70	22.25	22.04	21.78
			100	0	23.00	22.65	22.31	22.21	21.90	21.79

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		131979/1710.7	132322/1745	132665/1779.3
LTE Band 66	1.4MHz	QPSK	1	0	22.00	21.73	21.66	21.59
			1	2	22.00	21.47	21.63	21.52
			1	5	22.00	21.21	21.63	21.61
			3	0	22.00	21.91	21.59	21.64
			3	1	22.00	21.35	21.57	21.60
			3	2	22.00	21.70	21.58	21.63
			6	0	22.00	21.73	21.65	21.62
		16QAM	1	0	22.00	21.03	21.97	21.92
			1	2	22.00	21.17	21.87	21.74
			1	5	22.00	21.23	21.91	21.94

			3	0	22.00	2.90	21.70	21.64
			3	1	22.00	21.15	21.70	21.61
			3	2	22.00	21.21	21.66	21.56
			6	0	22.00	21.14	21.64	21.70
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		131987/1711.5	132322/1745	132657/1778.5
LTE Band 66	3MHz	QPSK	1	0	22.00	21.67	21.62	21.54
			1	7	22.00	21.60	21.61	21.54
			1	14	22.00	21.66	21.62	21.58
			8	0	22.00	21.70	21.65	21.70
			8	4	22.00	21.68	21.63	21.62
			8	7	22.00	21.67	21.65	21.65
			15	0	22.00	21.72	21.65	21.62
		16QAM	1	0	22.00	21.86	21.84	21.73
			1	7	22.00	21.94	21.74	21.77
			1	14	22.00	21.87	21.84	21.92
			8	0	22.00	21.78	21.70	21.73
			8	4	22.00	21.76	21.72	21.67
			8	7	22.00	21.78	21.65	21.69
			15	0	22.00	21.77	21.64	21.69
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		131997/1712.5	132322/1745	132647/1777.5
LTE Band 66	5MHz	QPSK	1	0	22.00	21.77	21.71	21.62
			1	12	22.00	21.71	21.68	21.65
			1	24	22.00	21.71	21.66	21.70
			12	0	22.00	21.75	21.69	21.67
			12	6	22.00	21.74	21.66	21.69
			12	11	22.00	21.72	21.66	21.64
			25	0	22.00	21.77	21.71	21.69
		16QAM	1	0	22.50	22.00	22.07	21.95
			1	12	22.50	22.01	21.95	21.79
			1	24	22.50	21.91	21.84	21.95
			12	0	22.00	21.78	21.72	21.70
			12	6	22.00	21.78	21.67	21.69
			12	11	22.00	21.73	21.65	21.68

			25	0	22.00	21.79	21.72	21.70
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		132022/1715	132322/1745	132622/1775
LTE Band 66	10MHz	QPSK	1	0	22.00	21.90	21.84	21.68
			1	24	22.00	21.79	21.71	21.64
			1	49	22.00	21.87	21.73	21.82
			25	0	22.00	21.80	21.78	21.71
			25	12	22.00	21.77	21.71	21.71
			25	24	22.00	21.84	21.72	21.68
		16QAM	50	0	22.00	21.86	21.73	21.68
			1	0	22.50	22.14	22.03	21.94
			1	24	22.50	22.01	22.00	21.87
			1	49	22.50	22.07	22.10	22.00
			25	0	22.00	21.82	21.74	21.68
			25	12	22.00	21.77	21.70	21.69
			25	24	22.00	21.81	21.71	21.69
			50	0	22.00	21.84	21.75	21.68
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		132047/1717.5	132322/1745	132597/1772.5
LTE Band 66	15MHz	QPSK	1	0	22.00	21.81	21.70	21.56
			1	37	22.00	21.79	21.76	21.56
			1	74	22.00	21.87	21.71	21.67
			36	0	22.00	21.75	21.73	21.51
			36	18	22.00	21.75	21.68	21.49
			36	37	22.00	21.82	21.65	21.54
			75	0	22.00	21.85	21.74	21.56
		16QAM	1	0	22.50	21.54	21.93	21.79
			1	37	22.50	21.99	22.04	21.62
			1	74	22.50	22.08	21.96	21.97
			36	0	22.00	21.74	21.71	21.50
			36	18	22.00	21.73	21.69	21.52
			36	37	22.00	21.83	21.68	21.56
			75	0	22.00	21.84	21.73	21.58
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		

			RB Size	RB Offset		132072/1720	132322/1745	132572/1770
LTE Band 66	20MHz	QPSK	1	0	22.00	21.31	21.68	21.19
			1	49	22.00	21.85	21.34	21.18
			1	99	22.00	21.81	21.29	21.20
			50	0	22.00	21.78	21.80	21.56
			50	24	22.00	21.83	21.75	21.59
			50	49	22.00	21.86	21.74	21.57
			100	0	22.00	21.82	21.77	21.55
		16QAM	1	0	22.50	21.76	21.69	21.48
			1	49	22.50	21.61	21.68	21.51
			1	99	22.50	22.11	21.98	21.47
			50	0	22.00	21.74	21.78	21.55
			50	24	22.00	21.83	21.78	21.56
			50	49	22.00	21.86	21.73	21.56
			100	0	22.00	21.80	21.73	21.53

7.4. NR Conducted Power

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	0.50	Power (dBm)
n78	30	10	630334	24@0	DFT_BPSK	22.50	22.09
n78	30	10	630334	12@6	DFT_BPSK	22.50	22.34
n78	30	10	630334	1@1	DFT_BPSK	22.50	22.17
n78	30	10	630334	1@22	DFT_BPSK	22.50	22.4
n78	30	10	630334	24@0	DFT_QPSK	21.50	21.39
n78	30	10	630334	12@6	DFT_QPSK	22.50	22.37
n78	30	10	630334	1@1	DFT_QPSK	22.50	22.13
n78	30	10	630334	1@22	DFT_QPSK	22.50	22.43
n78	30	10	630334	24@0	DFT_16QAM	20.50	20.38
n78	30	10	630334	12@6	DFT_16QAM	21.50	21.41
n78	30	10	630334	1@1	DFT_16QAM	21.50	21.25
n78	30	10	630334	1@22	DFT_16QAM	21.50	21.49
n78	30	10	630334	24@0	DFT_64QAM	20.00	19.89
n78	30	10	630334	12@6	DFT_64QAM	20.00	19.94
n78	30	10	630334	1@1	DFT_64QAM	20.00	19.62
n78	30	10	630334	1@22	DFT_64QAM	20.00	19.88
n78	30	10	630334	24@0	DFT_256QAM	21.50	21.07
n78	30	10	630334	12@6	DFT_256QAM	21.50	21.07
n78	30	10	630334	1@1	DFT_256QAM	21.50	21.07

n78	30	10	630334	1@22	DFT_256QAM	21.50	21.07
n78	30	10	630334	24@0	CP_QPSK	21.50	21.05
n78	30	10	630334	12@6	CP_QPSK	21.50	21.06
n78	30	10	630334	1@1	CP_QPSK	21.50	21.06
n78	30	10	630334	1@22	CP_QPSK	21.50	21.06
n78	30	10	630334	24@0	CP_16QAM	19.50	19.37
n78	30	10	630334	12@6	CP_16QAM	20.50	20.34
n78	30	10	630334	1@1	CP_16QAM	20.50	20.24
n78	30	10	630334	1@22	CP_16QAM	21.00	20.51
n78	30	10	630334	24@0	CP_64QAM	19.50	19.05
n78	30	10	630334	12@6	CP_64QAM	19.50	19.04
n78	30	10	630334	1@1	CP_64QAM	20.00	19.74
n78	30	10	630334	1@22	CP_64QAM	20.00	19.86
n78	30	10	630334	24@0	CP_256QAM	20.00	19.98
n78	30	10	630334	12@6	CP_256QAM	20.00	19.97
n78	30	10	630334	1@1	CP_256QAM	20.00	19.8
n78	30	10	630334	1@22	CP_256QAM	19.50	19.03
n78	30	10	633334	24@0	DFT_BPSK	21.00	20.97
n78	30	10	633334	12@6	DFT_BPSK	23.00	22.79
n78	30	10	633334	1@1	DFT_BPSK	23.00	22.65
n78	30	10	633334	1@22	DFT_BPSK	23.00	22.74
n78	30	10	633334	24@0	DFT_QPSK	22.00	21.81
n78	30	10	633334	12@6	DFT_QPSK	23.00	22.8
n78	30	10	633334	1@1	DFT_QPSK	23.00	22.61
n78	30	10	633334	1@22	DFT_QPSK	23.00	22.7
n78	30	10	633334	24@0	DFT_16QAM	21.00	20.81
n78	30	10	633334	12@6	DFT_16QAM	22.00	21.84
n78	30	10	633334	1@1	DFT_16QAM	22.00	21.75
n78	30	10	633334	1@22	DFT_16QAM	22.00	21.8
n78	30	10	633334	24@0	DFT_64QAM	20.50	20.28
n78	30	10	633334	12@6	DFT_64QAM	20.50	20.34
n78	30	10	633334	1@1	DFT_64QAM	20.50	20.03
n78	30	10	633334	1@22	DFT_64QAM	20.50	20.15
n78	30	10	633334	24@0	DFT_256QAM	20.50	20.43
n78	30	10	633334	12@6	DFT_256QAM	20.50	20.41
n78	30	10	633334	1@1	DFT_256QAM	20.50	20.24
n78	30	10	633334	1@22	DFT_256QAM	20.50	20.35
n78	30	10	633334	24@0	CP_QPSK	21.00	20.97
n78	30	10	633334	12@6	CP_QPSK	21.00	20.97

n78	30	10	633334	1@1	CP_QPSK	21.00	20.96
n78	30	10	633334	1@22	CP_QPSK	21.00	20.98
n78	30	10	633334	24@0	CP_16QAM	20.00	19.79
n78	30	10	633334	12@6	CP_16QAM	21.00	20.76
n78	30	10	633334	1@1	CP_16QAM	21.00	20.75
n78	30	10	633334	1@22	CP_16QAM	21.00	20.79
n78	30	10	633334	24@0	CP_64QAM	19.50	19.26
n78	30	10	633334	12@6	CP_64QAM	19.50	19.26
n78	30	10	633334	1@1	CP_64QAM	19.50	19.11
n78	30	10	633334	1@22	CP_64QAM	19.50	19.18
n78	30	10	633334	24@0	CP_256QAM	19.50	19.37
n78	30	10	633334	12@6	CP_256QAM	19.50	19.39
n78	30	10	633334	1@1	CP_256QAM	19.50	19.29
n78	30	10	633334	1@22	CP_256QAM	19.50	19.37
n78	30	10	636332	24@0	DFT_BPSK	21.00	20.88
n78	30	10	636332	12@6	DFT_BPSK	23.50	23.35
n78	30	10	636332	1@1	DFT_BPSK	23.50	23.29
n78	30	10	636332	1@22	DFT_BPSK	23.50	23.29
n78	30	10	636332	24@0	DFT_QPSK	22.50	22.32
n78	30	10	636332	12@6	DFT_QPSK	23.50	23.33
n78	30	10	636332	1@1	DFT_QPSK	23.50	23.23
n78	30	10	636332	1@22	DFT_QPSK	23.50	23.25
n78	30	10	636332	24@0	DFT_16QAM	21.50	21.35
n78	30	10	636332	12@6	DFT_16QAM	22.50	22.34
n78	30	10	636332	1@1	DFT_16QAM	22.50	22.34
n78	30	10	636332	1@22	DFT_16QAM	22.50	22.35
n78	30	10	636332	24@0	DFT_64QAM	21.00	20.81
n78	30	10	636332	12@6	DFT_64QAM	21.00	20.89
n78	30	10	636332	1@1	DFT_64QAM	21.00	20.69
n78	30	10	636332	1@22	DFT_64QAM	21.00	20.68
n78	30	10	636332	24@0	DFT_256QAM	21.00	20.86
n78	30	10	636332	12@6	DFT_256QAM	21.00	20.87
n78	30	10	636332	1@1	DFT_256QAM	21.00	20.87
n78	30	10	636332	1@22	DFT_256QAM	21.00	20.87
n78	30	10	636332	24@0	CP_QPSK	20.50	20.29
n78	30	10	636332	12@6	CP_QPSK	22.00	21.82
n78	30	10	636332	1@1	CP_QPSK	22.00	21.79
n78	30	10	636332	1@22	CP_QPSK	22.00	21.78
n78	30	10	636332	24@0	CP_16QAM	20.50	20.3

n78	30	10	636332	12@6	CP_16QAM	21.50	21.34
n78	30	10	636332	1@1	CP_16QAM	21.50	21.31
n78	30	10	636332	1@22	CP_16QAM	21.50	21.35
n78	30	10	636332	24@0	CP_64QAM	20.00	19.83
n78	30	10	636332	12@6	CP_64QAM	20.00	19.81
n78	30	10	636332	1@1	CP_64QAM	20.00	19.71
n78	30	10	636332	1@22	CP_64QAM	20.00	19.73
n78	30	10	636332	24@0	CP_256QAM	20.00	19.92
n78	30	10	636332	12@6	CP_256QAM	20.00	19.9
n78	30	10	636332	1@1	CP_256QAM	20.00	19.88
n78	30	10	636332	1@22	CP_256QAM	20.00	19.87
n78	30	15	630500	36@0	DFT_BPSK	21.00	20.58
n78	30	15	630500	18@9	DFT_BPSK	21.00	20.61
n78	30	15	630500	1@1	DFT_BPSK	21.00	20.58
n78	30	15	630500	1@36	DFT_BPSK	21.00	20.6
n78	30	15	630500	36@0	DFT_QPSK	21.50	21.45
n78	30	15	630500	18@9	DFT_QPSK	22.50	22.46
n78	30	15	630500	1@1	DFT_QPSK	22.50	22.11
n78	30	15	630500	1@36	DFT_QPSK	23.00	22.53
n78	30	15	630500	36@0	DFT_16QAM	20.50	20.47
n78	30	15	630500	18@9	DFT_16QAM	22.00	21.52
n78	30	15	630500	1@1	DFT_16QAM	21.50	21.26
n78	30	15	630500	1@36	DFT_16QAM	22.00	21.56
n78	30	15	630500	36@0	DFT_64QAM	20.00	19.94
n78	30	15	630500	18@9	DFT_64QAM	20.50	20.01
n78	30	15	630500	1@1	DFT_64QAM	20.00	19.58
n78	30	15	630500	1@36	DFT_64QAM	20.00	19.93
n78	30	15	630500	36@0	DFT_256QAM	21.00	20.59
n78	30	15	630500	18@9	DFT_256QAM	21.00	20.58
n78	30	15	630500	1@1	DFT_256QAM	21.00	20.61
n78	30	15	630500	1@36	DFT_256QAM	21.00	20.58
n78	30	15	630500	38@0	CP_QPSK	21.00	20.59
n78	30	15	630500	19@9	CP_QPSK	21.00	20.59
n78	30	15	630500	1@1	CP_QPSK	21.00	20.6
n78	30	15	630500	1@36	CP_QPSK	21.00	20.63
n78	30	15	630500	38@0	CP_16QAM	19.50	19.41
n78	30	15	630500	19@9	CP_16QAM	20.50	20.49
n78	30	15	630500	1@1	CP_16QAM	20.50	20.2
n78	30	15	630500	1@36	CP_16QAM	21.00	20.58

n78	30	15	630500	38@0	CP_64QAM	19.50	19.04
n78	30	15	630500	19@9	CP_64QAM	19.50	19.09
n78	30	15	630500	1@1	CP_64QAM	21.00	20.77
n78	30	15	630500	1@36	CP_64QAM	21.00	20.96
n78	30	15	630500	38@0	CP_256QAM	19.50	19.08
n78	30	15	630500	19@9	CP_256QAM	19.50	19.09
n78	30	15	630500	1@1	CP_256QAM	20.00	19.77
n78	30	15	630500	1@36	CP_256QAM	19.50	19.11
n78	30	15	633334	36@0	DFT_BPSK	20.50	20.49
n78	30	15	633334	18@9	DFT_BPSK	23.00	22.81
n78	30	15	633334	1@1	DFT_BPSK	23.00	22.59
n78	30	15	633334	1@36	DFT_BPSK	23.00	22.74
n78	30	15	633334	36@0	DFT_QPSK	22.00	21.75
n78	30	15	633334	18@9	DFT_QPSK	23.00	22.82
n78	30	15	633334	1@1	DFT_QPSK	23.00	22.56
n78	30	15	633334	1@36	DFT_QPSK	23.00	22.69
n78	30	15	633334	36@0	DFT_16QAM	21.00	20.78
n78	30	15	633334	18@9	DFT_16QAM	22.00	21.8
n78	30	15	633334	1@1	DFT_16QAM	22.00	21.73
n78	30	15	633334	1@36	DFT_16QAM	22.00	21.83
n78	30	15	633334	36@0	DFT_64QAM	20.50	20.24
n78	30	15	633334	18@9	DFT_64QAM	20.00	20.35
n78	30	15	633334	1@1	DFT_64QAM	20.00	19.8
n78	30	15	633334	1@36	DFT_64QAM	20.00	19.94
n78	30	15	633334	36@0	DFT_256QAM	20.50	20.46
n78	30	15	633334	18@9	DFT_256QAM	20.50	20.46
n78	30	15	633334	1@1	DFT_256QAM	20.50	20.48
n78	30	15	633334	1@36	DFT_256QAM	20.50	20.46
n78	30	15	633334	38@0	CP_QPSK	20.00	19.75
n78	30	15	633334	19@9	CP_QPSK	21.50	21.3
n78	30	15	633334	1@1	CP_QPSK	21.50	21.08
n78	30	15	633334	1@36	CP_QPSK	21.50	21.23
n78	30	15	633334	38@0	CP_16QAM	20.00	19.73
n78	30	15	633334	19@9	CP_16QAM	21.00	20.79
n78	30	15	633334	1@1	CP_16QAM	21.00	20.73
n78	30	15	633334	1@36	CP_16QAM	21.00	20.8
n78	30	15	633334	38@0	CP_64QAM	19.50	19.21
n78	30	15	633334	19@9	CP_64QAM	19.50	19.3
n78	30	15	633334	1@1	CP_64QAM	19.50	19.02

n78	30	15	633334	1@36	CP_64QAM	19.50	19.16
n78	30	15	633334	38@0	CP_256QAM	19.50	19.4
n78	30	15	633334	19@9	CP_256QAM	19.50	19.39
n78	30	15	633334	1@1	CP_256QAM	19.50	19.22
n78	30	15	633334	1@36	CP_256QAM	19.50	19.34
n78	30	15	636166	36@0	DFT_BPSK	23.00	22.83
n78	30	15	636166	18@9	DFT_BPSK	23.50	23.33
n78	30	15	636166	1@1	DFT_BPSK	23.50	23.26
n78	30	15	636166	1@36	DFT_BPSK	23.50	23.28
n78	30	15	636166	36@0	DFT_QPSK	22.50	22.34
n78	30	15	636166	18@9	DFT_QPSK	23.50	23.32
n78	30	15	636166	1@1	DFT_QPSK	23.50	23.23
n78	30	15	636166	1@36	DFT_QPSK	23.50	23.24
n78	30	15	636166	36@0	DFT_16QAM	21.50	21.37
n78	30	15	636166	18@9	DFT_16QAM	22.50	22.33
n78	30	15	636166	1@1	DFT_16QAM	22.50	22.31
n78	30	15	636166	1@36	DFT_16QAM	22.50	22.37
n78	30	15	636166	36@0	DFT_64QAM	21.00	20.82
n78	30	15	636166	18@9	DFT_64QAM	21.00	20.84
n78	30	15	636166	1@1	DFT_64QAM	21.00	20.63
n78	30	15	636166	1@36	DFT_64QAM	21.00	20.65
n78	30	15	636166	36@0	DFT_256QAM	21.00	20.98
n78	30	15	636166	18@9	DFT_256QAM	19.50	19.03
n78	30	15	636166	1@1	DFT_256QAM	21.00	20.86
n78	30	15	636166	1@36	DFT_256QAM	21.00	20.86
n78	30	15	636166	38@0	CP_QPSK	20.50	20.38
n78	30	15	636166	19@9	CP_QPSK	20.50	20.37
n78	30	15	636166	1@1	CP_QPSK	20.50	20.37
n78	30	15	636166	1@36	CP_QPSK	20.50	20.37
n78	30	15	636166	38@0	CP_16QAM	20.50	20.3
n78	30	15	636166	19@9	CP_16QAM	21.50	21.34
n78	30	15	636166	1@1	CP_16QAM	21.50	21.27
n78	30	15	636166	1@36	CP_16QAM	21.50	21.31
n78	30	15	636166	38@0	CP_64QAM	20.00	19.78
n78	30	15	636166	19@9	CP_64QAM	20.00	19.8
n78	30	15	636166	1@1	CP_64QAM	20.00	19.69
n78	30	15	636166	1@36	CP_64QAM	20.00	19.71
n78	30	15	636166	38@0	CP_256QAM	20.00	19.95
n78	30	15	636166	19@9	CP_256QAM	20.00	19.95

n78	30	15	636166	1@1	CP_256QAM	20.00	19.83
n78	30	15	636166	1@36	CP_256QAM	20.00	19.86
n78	30	20	630668	50@0	DFT_BPSK	20.50	20.49
n78	30	20	630668	25@12	DFT_BPSK	23.00	22.52
n78	30	20	630668	1@1	DFT_BPSK	22.50	22.15
n78	30	20	630668	1@49	DFT_BPSK	22.50	22.42
n78	30	20	630668	50@0	DFT_QPSK	21.50	21.48
n78	30	20	630668	25@12	DFT_QPSK	23.00	22.56
n78	30	20	630668	1@1	DFT_QPSK	22.50	22.1
n78	30	20	630668	1@49	DFT_QPSK	22.50	22.37
n78	30	20	630668	50@0	DFT_16QAM	20.50	20.44
n78	30	20	630668	25@12	DFT_16QAM	22.00	21.61
n78	30	20	630668	1@1	DFT_16QAM	21.50	21.25
n78	30	20	630668	1@49	DFT_16QAM	21.50	21.47
n78	30	20	630668	50@0	DFT_64QAM	20.00	19.98
n78	30	20	630668	25@12	DFT_64QAM	20.50	20.08
n78	30	20	630668	1@1	DFT_64QAM	20.00	19.57
n78	30	20	630668	1@49	DFT_64QAM	20.00	19.86
n78	30	20	630668	50@0	DFT_256QAM	20.50	20.48
n78	30	20	630668	25@12	DFT_256QAM	20.50	20.49
n78	30	20	630668	1@1	DFT_256QAM	20.50	20.48
n78	30	20	630668	1@49	DFT_256QAM	20.50	20.49
n78	30	20	630668	51@0	CP_QPSK	19.50	19.45
n78	30	20	630668	25@12	CP_QPSK	21.50	21.02
n78	30	20	630668	1@1	CP_QPSK	21.00	20.65
n78	30	20	630668	1@49	CP_QPSK	21.00	20.92
n78	30	20	630668	51@0	CP_16QAM	19.00	19.48
n78	30	20	630668	25@12	CP_16QAM	21.00	20.62
n78	30	20	630668	1@1	CP_16QAM	20.50	20.17
n78	30	20	630668	1@49	CP_16QAM	20.50	20.44
n78	30	20	630668	51@0	CP_64QAM	19.50	19.09
n78	30	20	630668	25@12	CP_64QAM	19.50	19.03
n78	30	20	630668	1@1	CP_64QAM	21.00	20.75
n78	30	20	630668	1@49	CP_64QAM	21.00	20.9
n78	30	20	630668	51@0	CP_256QAM	19.00	19.09
n78	30	20	630668	25@12	CP_256QAM	19.50	19.13
n78	30	20	630668	1@1	CP_256QAM	20.00	19.77
n78	30	20	630668	1@49	CP_256QAM	19.50	19.03
n78	30	20	633334	50@0	DFT_BPSK	20.50	20.35

n78	30	20	633334	25@12	DFT_BPSK	23.00	22.79
n78	30	20	633334	1@1	DFT_BPSK	23.00	22.5
n78	30	20	633334	1@49	DFT_BPSK	23.00	22.66
n78	30	20	633334	50@0	DFT_QPSK	22.00	21.76
n78	30	20	633334	25@12	DFT_QPSK	23.00	22.8
n78	30	20	633334	1@1	DFT_QPSK	22.50	22.49
n78	30	20	633334	1@49	DFT_QPSK	23.00	22.65
n78	30	20	633334	50@0	DFT_16QAM	21.00	20.73
n78	30	20	633334	25@12	DFT_16QAM	22.00	21.81
n78	30	20	633334	1@1	DFT_16QAM	22.00	21.61
n78	30	20	633334	1@49	DFT_16QAM	22.00	21.73
n78	30	20	633334	50@0	DFT_64QAM	20.50	20.27
n78	30	20	633334	25@12	DFT_64QAM	20.50	20.32
n78	30	20	633334	1@1	DFT_64QAM	20.00	19.91
n78	30	20	633334	1@49	DFT_64QAM	20.50	20.1
n78	30	20	633334	50@0	DFT_256QAM	20.50	20.34
n78	30	20	633334	25@12	DFT_256QAM	20.50	20.34
n78	30	20	633334	1@1	DFT_256QAM	20.50	20.36
n78	30	20	633334	1@49	DFT_256QAM	20.50	20.35
n78	30	20	633334	51@0	CP_QPSK	20.00	19.72
n78	30	20	633334	25@12	CP_QPSK	21.50	21.28
n78	30	20	633334	1@1	CP_QPSK	21.50	21.06
n78	30	20	633334	1@49	CP_QPSK	21.50	21.18
n78	30	20	633334	51@0	CP_16QAM	20.00	19.7
n78	30	20	633334	25@12	CP_16QAM	21.00	20.82
n78	30	20	633334	1@1	CP_16QAM	21.00	20.62
n78	30	20	633334	1@49	CP_16QAM	21.00	20.77
n78	30	20	633334	51@0	CP_64QAM	19.50	19.22
n78	30	20	633334	25@12	CP_64QAM	19.50	19.29
n78	30	20	633334	1@1	CP_64QAM	21.00	20.98
n78	30	20	633334	1@49	CP_64QAM	19.50	19.1
n78	30	20	633334	51@0	CP_256QAM	19.50	19.37
n78	30	20	633334	25@12	CP_256QAM	19.50	19.41
n78	30	20	633334	1@1	CP_256QAM	19.50	19.11
n78	30	20	633334	1@49	CP_256QAM	19.50	19.27
n78	30	20	636000	50@0	DFT_BPSK	20.50	20.26
n78	30	20	636000	25@12	DFT_BPSK	23.50	23.31
n78	30	20	636000	1@1	DFT_BPSK	23.50	23.11
n78	30	20	636000	1@49	DFT_BPSK	23.50	23.2

n78	30	20	636000	50@0	DFT_QPSK	22.50	22.28
n78	30	20	636000	25@12	DFT_QPSK	23.50	23.32
n78	30	20	636000	1@1	DFT_QPSK	23.50	23.07
n78	30	20	636000	1@49	DFT_QPSK	23.50	23.18
n78	30	20	636000	50@0	DFT_16QAM	21.50	21.28
n78	30	20	636000	25@12	DFT_16QAM	22.50	22.3
n78	30	20	636000	1@1	DFT_16QAM	22.50	22.2
n78	30	20	636000	1@49	DFT_16QAM	22.50	22.24
n78	30	20	636000	50@0	DFT_64QAM	21.00	20.8
n78	30	20	636000	25@12	DFT_64QAM	21.00	20.81
n78	30	20	636000	1@1	DFT_64QAM	21.00	20.53
n78	30	20	636000	1@49	DFT_64QAM	21.00	20.58
n78	30	20	636000	50@0	DFT_256QAM	20.50	20.23
n78	30	20	636000	25@12	DFT_256QAM	20.50	20.26
n78	30	20	636000	1@1	DFT_256QAM	20.50	20.23
n78	30	20	636000	1@49	DFT_256QAM	20.50	20.23
n78	30	20	636000	51@0	CP_QPSK	20.50	20.24
n78	30	20	636000	25@12	CP_QPSK	20.50	20.24
n78	30	20	636000	1@1	CP_QPSK	20.50	20.23
n78	30	20	636000	1@49	CP_QPSK	20.50	20.24
n78	30	20	636000	51@0	CP_16QAM	20.50	20.24
n78	30	20	636000	25@12	CP_16QAM	21.50	21.37
n78	30	20	636000	1@1	CP_16QAM	21.50	21.1
n78	30	20	636000	1@49	CP_16QAM	21.50	21.19
n78	30	20	636000	51@0	CP_64QAM	20.00	19.73
n78	30	20	636000	25@12	CP_64QAM	20.00	19.76
n78	30	20	636000	1@1	CP_64QAM	20.00	19.54
n78	30	20	636000	1@49	CP_64QAM	20.00	19.63
n78	30	20	636000	51@0	CP_256QAM	20.00	19.88
n78	30	20	636000	25@12	CP_256QAM	20.00	19.93
n78	30	20	636000	1@1	CP_256QAM	20.00	19.72
n78	30	20	636000	1@49	CP_256QAM	20.00	19.79
n78	30	40	631334	100@0	DFT_BPSK	21.00	20.77
n78	30	40	631334	50@25	DFT_BPSK	21.00	20.76
n78	30	40	631334	1@1	DFT_BPSK	21.00	20.75
n78	30	40	631334	1@104	DFT_BPSK	21.00	20.77
n78	30	40	631334	100@0	DFT_QPSK	21.50	21.44
n78	30	40	631334	50@25	DFT_QPSK	23.00	22.61
n78	30	40	631334	1@1	DFT_QPSK	22.00	21.85

n78	30	40	631334	1@104	DFT_QPSK	22.50	22.03
n78	30	40	631334	100@0	DFT_16QAM	20.50	20.45
n78	30	40	631334	50@25	DFT_16QAM	22.00	21.61
n78	30	40	631334	1@1	DFT_16QAM	21.00	21
n78	30	40	631334	1@104	DFT_16QAM	21.50	21.18
n78	30	40	631334	100@0	DFT_64QAM	20.00	19.93
n78	30	40	631334	50@25	DFT_64QAM	20.50	20.1
n78	30	40	631334	1@1	DFT_64QAM	19.50	19.34
n78	30	40	631334	1@104	DFT_64QAM	19.50	19.48
n78	30	40	631334	100@0	DFT_256QAM	20.50	20.09
n78	30	40	631334	50@25	DFT_256QAM	20.50	20.25
n78	30	40	631334	1@1	DFT_256QAM	18.00	17.52
n78	30	40	631334	1@104	DFT_256QAM	18.00	17.68
n78	30	40	631334	106@0	CP_QPSK	21.00	20.76
n78	30	40	631334	53@26	CP_QPSK	21.00	20.75
n78	30	40	631334	1@1	CP_QPSK	21.00	20.77
n78	30	40	631334	1@104	CP_QPSK	21.00	20.75
n78	30	40	631334	106@0	CP_16QAM	19.50	19.44
n78	30	40	631334	53@26	CP_16QAM	21.00	20.55
n78	30	40	631334	1@1	CP_16QAM	20.00	19.97
n78	30	40	631334	1@104	CP_16QAM	20.50	20.18
n78	30	40	631334	106@0	CP_64QAM	21.00	20.92
n78	30	40	631334	53@26	CP_64QAM	19.50	19.06
n78	30	40	631334	1@1	CP_64QAM	20.50	20.45
n78	30	40	631334	1@104	CP_64QAM	21.00	20.58
n78	30	40	631334	106@0	CP_256QAM	19.50	19.04
n78	30	40	631334	53@26	CP_256QAM	19.50	19.17
n78	30	40	631334	1@1	CP_256QAM	20.00	19.52
n78	30	40	631334	1@104	CP_256QAM	20.00	19.72
n78	30	40	633334	100@0	DFT_BPSK	21.00	20.66
n78	30	40	633334	50@25	DFT_BPSK	23.00	22.8
n78	30	40	633334	1@1	DFT_BPSK	22.00	22
n78	30	40	633334	1@104	DFT_BPSK	22.50	22.44
n78	30	40	633334	100@0	DFT_QPSK	22.00	21.65
n78	30	40	633334	50@25	DFT_QPSK	23.00	22.8
n78	30	40	633334	1@1	DFT_QPSK	22.00	21.93
n78	30	40	633334	1@104	DFT_QPSK	22.50	22.39
n78	30	40	633334	100@0	DFT_16QAM	21.00	20.65
n78	30	40	633334	50@25	DFT_16QAM	22.00	21.8

n78	30	40	633334	1@1	DFT_16QAM	21.5.5	21.05
n78	30	40	633334	1@104	DFT_16QAM	22.00	21.51
n78	30	40	633334	100@0	DFT_64QAM	20.50	20.14
n78	30	40	633334	50@25	DFT_64QAM	20.50	20.3
n78	30	40	633334	1@1	DFT_64QAM	19.50	19.38
n78	30	40	633334	1@104	DFT_64QAM	20.00	19.87
n78	30	40	633334	100@0	DFT_256QAM	21.00	20.65
n78	30	40	633334	50@25	DFT_256QAM	21.00	20.66
n78	30	40	633334	1@1	DFT_256QAM	21.00	20.66
n78	30	40	633334	1@104	DFT_256QAM	21.00	20.66
n78	30	40	633334	106@0	CP_QPSK	21.00	20.66
n78	30	40	633334	53@26	CP_QPSK	21.00	20.66
n78	30	40	633334	1@1	CP_QPSK	21.00	20.65
n78	30	40	633334	1@104	CP_QPSK	21.00	20.65
n78	30	40	633334	106@0	CP_16QAM	20.00	19.61
n78	30	40	633334	53@26	CP_16QAM	21.00	20.78
n78	30	40	633334	1@1	CP_16QAM	20.50	20.06
n78	30	40	633334	1@104	CP_16QAM	21.00	20.56
n78	30	40	633334	106@0	CP_64QAM	19.50	19.13
n78	30	40	633334	53@26	CP_64QAM	19.5.5	19.26
n78	30	40	633334	1@1	CP_64QAM	20.50	20.48
n78	30	40	633334	1@104	CP_64QAM	21.00	20.92
n78	30	40	633334	106@0	CP_256QAM	19.50	19.25
n78	30	40	633334	53@26	CP_256QAM	19.50	19.4
n78	30	40	633334	1@1	CP_256QAM	20.00	19.67
n78	30	40	633334	1@104	CP_256QAM	19.50	19.15
n78	30	40	635332	100@0	DFT_BPSK	21.00	20.56
n78	30	40	635332	50@25	DFT_BPSK	21.00	20.58
n78	30	40	635332	1@1	DFT_BPSK	21.00	20.57
n78	30	40	635332	1@104	DFT_BPSK	21.00	20.58
n78	30	40	635332	100@0	DFT_QPSK	22.50	22.09
n78	30	40	635332	50@25	DFT_QPSK	23.50	23.18
n78	30	40	635332	1@1	DFT_QPSK	22.50	22.38
n78	30	40	635332	1@104	DFT_QPSK	23.00	22.82
n78	30	40	635332	100@0	DFT_16QAM	21.50	21.1
n78	30	40	635332	50@25	DFT_16QAM	22.50	22.16
n78	30	40	635332	1@1	DFT_16QAM	22.00	21.54
n78	30	40	635332	1@104	DFT_16QAM	22.00	21.99
n78	30	40	635332	100@0	DFT_64QAM	21.00	20.6

n78	30	40	635332	50@25	DFT_64QAM	21.00	20.69
n78	30	40	635332	1@1	DFT_64QAM	20.00	19.88
n78	30	40	635332	1@104	DFT_64QAM	20.50	20.31
n78	30	40	635332	100@0	DFT_256QAM	21.00	20.58
n78	30	40	635332	50@25	DFT_256QAM	21.00	20.59
n78	30	40	635332	1@1	DFT_256QAM	21.00	20.57
n78	30	40	635332	1@104	DFT_256QAM	21.00	20.59
n78	30	40	635332	106@0	CP_QPSK	20.50	20.09
n78	30	40	635332	53@26	CP_QPSK	22.00	21.64
n78	30	40	635332	1@1	CP_QPSK	21.00	20.93
n78	30	40	635332	1@104	CP_QPSK	21.50	21.39
n78	30	40	635332	106@0	CP_16QAM	20.50	20.05
n78	30	40	635332	53@26	CP_16QAM	21.00	21.15
n78	30	40	635332	1@1	CP_16QAM	21.00	20.51
n78	30	40	635332	1@104	CP_16QAM	21.00	20.95
n78	30	40	635332	106@0	CP_64QAM	20.00	19.54
n78	30	40	635332	53@26	CP_64QAM	20.00	19.62
n78	30	40	635332	1@1	CP_64QAM	21.00	20.92
n78	30	40	635332	1@104	CP_64QAM	19.50	19.35
n78	30	40	635332	106@0	CP_256QAM	20.00	19.65
n78	30	40	635332	53@26	CP_256QAM	20.00	19.77
n78	30	40	635332	1@1	CP_256QAM	19.50	19.1
n78	30	40	635332	1@104	CP_256QAM	20.00	19.54
n78	30	50	631668	128@0	DFT_BPSK	22.50	22.01
n78	30	50	631668	64@32	DFT_BPSK	23.00	22.57
n78	30	50	631668	1@1	DFT_BPSK	22.50	22.06
n78	30	50	631668	1@131	DFT_BPSK	23.00	22.54
n78	30	50	631668	128@0	DFT_QPSK	22.00	21.52
n78	30	50	631668	64@32	DFT_QPSK	23.00	22.6
n78	30	50	631668	1@1	DFT_QPSK	22.5.5	22.07
n78	30	50	631668	1@131	DFT_QPSK	23.50	22.5
n78	30	50	631668	128@0	DFT_16QAM	21.50	20.5
n78	30	50	631668	64@32	DFT_16QAM	22.50	21.6
n78	30	50	631668	1@1	DFT_16QAM	21.50	21.18
n78	30	50	631668	1@131	DFT_16QAM	22.00	21.62
n78	30	50	631668	128@0	DFT_64QAM	20.50	20.03
n78	30	50	631668	64@32	DFT_64QAM	20.50	20.07
n78	30	50	631668	1@1	DFT_64QAM	20.00	19.51
n78	30	50	631668	1@131	DFT_64QAM	20.00	19.9

n78	30	50	631668	128@0	DFT_256QAM	20.50	20.17
n78	30	50	631668	64@32	DFT_256QAM	20.50	20.18
n78	30	50	631668	1@1	DFT_256QAM	18.00	17.86
n78	30	50	631668	1@131	DFT_256QAM	20.50	20.27
n78	30	50	631668	133@0	CP_QPSK	21.00	20.84
n78	30	50	631668	67@33	CP_QPSK	21.00	20.83
n78	30	50	631668	1@1	CP_QPSK	21.00	20.83
n78	30	50	631668	1@131	CP_QPSK	21.00	20.84
n78	30	50	631668	133@0	CP_16QAM	21.00	20.84
n78	30	50	631668	67@33	CP_16QAM	21.00	20.56
n78	30	50	631668	1@1	CP_16QAM	20.50	20.15
n78	30	50	631668	1@131	CP_16QAM	21.00	20.55
n78	30	50	631668	133@0	CP_64QAM	19.50	19.01
n78	30	50	631668	67@33	CP_64QAM	19.5.5	19.03
n78	30	50	631668	1@1	CP_64QAM	21.00	20.73
n78	30	50	631668	1@131	CP_64QAM	21.00	20.97
n78	30	50	631668	133@0	CP_256QAM	19.50	19.14
n78	30	50	631668	67@33	CP_256QAM	19.50	19.18
n78	30	50	631668	1@1	CP_256QAM	20.00	19.74
n78	30	50	631668	1@131	CP_256QAM	19.50	19.14
n78	30	50	633334	128@0	DFT_BPSK	21.00	20.81
n78	30	50	633334	64@32	DFT_BPSK	23.00	22.83
n78	30	50	633334	1@1	DFT_BPSK	22.50	22.24
n78	30	50	633334	1@131	DFT_BPSK	23.00	22.77
n78	30	50	633334	128@0	DFT_QPSK	22.00	21.7
n78	30	50	633334	64@32	DFT_QPSK	23.00	22.84
n78	30	50	633334	1@1	DFT_QPSK	22.00	22.23
n78	30	50	633334	1@131	DFT_QPSK	23.00	22.74
n78	30	50	633334	128@0	DFT_16QAM	21.00	20.69
n78	30	50	633334	64@32	DFT_16QAM	22.00	21.85
n78	30	50	633334	1@1	DFT_16QAM	21.50	21.37
n78	30	50	633334	1@131	DFT_16QAM	22.00	21.85
n78	30	50	633334	128@0	DFT_64QAM	20.50	20.21
n78	30	50	633334	64@32	DFT_64QAM	20.50	20.31
n78	30	50	633334	1@1	DFT_64QAM	20.00	19.67
n78	30	50	633334	1@131	DFT_64QAM	20.50	20.17
n78	30	50	633334	128@0	DFT_256QAM	20.50	20.35
n78	30	50	633334	64@32	DFT_256QAM	20.50	20.42
n78	30	50	633334	1@1	DFT_256QAM	18.00	17.88

n78	30	50	633334	1@131	DFT_256QAM	20.50	20.42
n78	30	50	633334	133@0	CP_QPSK	20.00	19.74
n78	30	50	633334	67@33	CP_QPSK	21.50	21.35
n78	30	50	633334	1@1	CP_QPSK	21.00	20.79
n78	30	50	633334	1@131	CP_QPSK	21.50	21.28
n78	30	50	633334	133@0	CP_16QAM	20.00	19.75
n78	30	50	633334	67@33	CP_16QAM	21.00	20.86
n78	30	50	633334	1@1	CP_16QAM	20.50	20.31
n78	30	50	633334	1@131	CP_16QAM	21.00	20.83
n78	30	50	633334	133@0	CP_64QAM	19.50	19.23
n78	30	50	633334	67@33	CP_64QAM	19.50	19.34
n78	30	50	633334	1@1	CP_64QAM	21.00	20.75
n78	30	50	633334	1@131	CP_64QAM	19.50	19.25
n78	30	50	633334	133@0	CP_256QAM	19.50	19.32
n78	30	50	633334	67@33	CP_256QAM	19.50	19.47
n78	30	50	633334	1@1	CP_256QAM	20.00	19.94
n78	30	50	633334	1@131	CP_256QAM	19.50	19.41
n78	30	50	635000	128@0	DFT_BPSK	21.00	20.68
n78	30	50	635000	64@32	DFT_BPSK	23.50	23.16
n78	30	50	635000	1@1	DFT_BPSK	23.00	22.67
n78	30	50	635000	1@131	DFT_BPSK	23.50	23.11
n78	30	50	635000	128@0	DFT_QPSK	22.50	22.1
n78	30	50	635000	64@32	DFT_QPSK	23.50	23.17
n78	30	50	635000	1@1	DFT_QPSK	23.00	22.65
n78	30	50	635000	1@131	DFT_QPSK	23.50	23.08
n78	30	50	635000	128@0	DFT_16QAM	21.50	21.08
n78	30	50	635000	64@32	DFT_16QAM	22.50	22.16
n78	30	50	635000	1@1	DFT_16QAM	22.00	21.72
n78	30	50	635000	1@131	DFT_16QAM	22.50	22.16
n78	30	50	635000	128@0	DFT_64QAM	21.00	20.6
n78	30	50	635000	64@32	DFT_64QAM	21.00	20.62
n78	30	50	635000	1@1	DFT_64QAM	20.00	20.08
n78	30	50	635000	1@131	DFT_64QAM	21.00	20.5
n78	30	50	635000	128@0	DFT_256QAM	21.00	20.68
n78	30	50	635000	64@32	DFT_256QAM	21.00	20.68
n78	30	50	635000	1@1	DFT_256QAM	21.00	20.67
n78	30	50	635000	1@131	DFT_256QAM	21.00	20.67
n78	30	50	635000	133@0	CP_QPSK	21.00	20.66
n78	30	50	635000	67@33	CP_QPSK	21.00	20.66

n78	30	50	635000	1@1	CP_QPSK	21.00	20.67
n78	30	50	635000	1@131	CP_QPSK	21.00	20.67
n78	30	50	635000	133@0	CP_16QAM	20.50	20.03
n78	30	50	635000	67@33	CP_16QAM	21.50	21.13
n78	30	50	635000	1@1	CP_16QAM	21.50	20.7
n78	30	50	635000	1@131	CP_16QAM	21.50	21.16
n78	30	50	635000	133@0	CP_64QAM	20.00	19.55
n78	30	50	635000	67@33	CP_64QAM	20.00	19.64
n78	30	50	635000	1@1	CP_64QAM	19.50	19.09
n78	30	50	635000	1@131	CP_64QAM	20.00	19.54
n78	30	50	635000	133@0	CP_256QAM	20.00	19.67
n78	30	50	635000	67@33	CP_256QAM	20.00	19.75
n78	30	50	635000	1@1	CP_256QAM	19.50	19.33
n78	30	50	635000	1@131	CP_256QAM	20.00	19.8
n78	30	60	632000	162@0	DFT_BPSK	20.50	20.14
n78	30	60	632000	81@40	DFT_BPSK	23.00	22.59
n78	30	60	632000	1@1	DFT_BPSK	22.00	21.97
n78	30	60	632000	1@160	DFT_BPSK	22.00	22.44
n78	30	60	632000	162@0	DFT_QPSK	22.00	21.58
n78	30	60	632000	81@40	DFT_QPSK	23.00	22.59
n78	30	60	632000	1@1	DFT_QPSK	22.00	21.98
n78	30	60	632000	1@160	DFT_QPSK	22.50	22.4
n78	30	60	632000	162@0	DFT_16QAM	21.00	20.55
n78	30	60	632000	81@40	DFT_16QAM	22.00	21.58
n78	30	60	632000	1@1	DFT_16QAM	21.50	21.11
n78	30	60	632000	1@160	DFT_16QAM	22.00	21.53
n78	30	60	632000	162@0	DFT_64QAM	20.50	20.06
n78	30	60	632000	81@40	DFT_64QAM	20.50	20.12
n78	30	60	632000	1@1	DFT_64QAM	19.50	19.43
n78	30	60	632000	1@160	DFT_64QAM	20.00	19.86
n78	30	60	632000	162@0	DFT_256QAM	20.50	20.17
n78	30	60	632000	81@40	DFT_256QAM	20.50	20.24
n78	30	60	632000	1@1	DFT_256QAM	18.00	17.66
n78	30	60	632000	1@160	DFT_256QAM	20.50	20.1
n78	30	60	632000	162@0	CP_QPSK	20.50	20.14
n78	30	60	632000	81@40	CP_QPSK	20.50	20.15
n78	30	60	632000	1@1	CP_QPSK	20.50	20.14
n78	30	60	632000	1@160	CP_QPSK	20.50	20.15
n78	30	60	632000	162@0	CP_16QAM	20.00	19.51

n78	30	60	632000	81@40	CP_16QAM	21.00	20.56
n78	30	60	632000	1@1	CP_16QAM	20.50	20.05
n78	30	60	632000	1@160	CP_16QAM	20.50	20.47
n78	30	60	632000	162@0	CP_64QAM	19.00	19
n78	30	60	632000	81@40	CP_64QAM	19.00	19
n78	30	60	632000	1@1	CP_64QAM	21.00	20.64
n78	30	60	632000	1@160	CP_64QAM	21.00	20.85
n78	30	60	632000	162@0	CP_256QAM	19.50	19.19
n78	30	60	632000	81@40	CP_256QAM	19.50	19.14
n78	30	60	632000	1@1	CP_256QAM	20.00	19.7
n78	30	60	632000	1@160	CP_256QAM	19.50	19.11
n78	30	60	633334	162@0	DFT_BPSK	20.50	20.11
n78	30	60	633334	81@40	DFT_BPSK	20.50	20.09
n78	30	60	633334	1@1	DFT_BPSK	20.50	20.08
n78	30	60	633334	1@160	DFT_BPSK	20.50	20.08
n78	30	60	633334	162@0	DFT_QPSK	22.00	21.68
n78	30	60	633334	81@40	DFT_QPSK	23.00	22.8
n78	30	60	633334	1@1	DFT_QPSK	22.50	22.19
n78	30	60	633334	1@160	DFT_QPSK	23.00	22.73
n78	30	60	633334	162@0	DFT_16QAM	21.00	20.73
n78	30	60	633334	81@40	DFT_16QAM	22.00	21.78
n78	30	60	633334	1@1	DFT_16QAM	21.50	21.3
n78	30	60	633334	1@160	DFT_16QAM	22.00	21.87
n78	30	60	633334	162@0	DFT_64QAM	20.50	20.21
n78	30	60	633334	81@40	DFT_64QAM	20.50	20.31
n78	30	60	633334	1@1	DFT_64QAM	20.00	19.63
n78	30	60	633334	1@160	DFT_64QAM	20.50	20.2
n78	30	60	633334	162@0	DFT_256QAM	20.50	20.09
n78	30	60	633334	81@40	DFT_256QAM	20.50	20.1
n78	30	60	633334	1@1	DFT_256QAM	20.50	20.06
n78	30	60	633334	1@160	DFT_256QAM	20.50	20.09
n78	30	60	633334	162@0	CP_QPSK	20.00	19.68
n78	30	60	633334	81@40	CP_QPSK	21.50	21.25
n78	30	60	633334	1@1	CP_QPSK	21.00	20.77
n78	30	60	633334	1@160	CP_QPSK	21.50	21.3
n78	30	60	633334	162@0	CP_16QAM	20.00	19.65
n78	30	60	633334	81@40	CP_16QAM	21.00	20.73
n78	30	60	633334	1@1	CP_16QAM	20.50	20.33
n78	30	60	633334	1@160	CP_16QAM	21.00	20.87

n78	30	60	633334	162@0	CP_64QAM	19.50	19.15
n78	30	60	633334	81@40	CP_64QAM	19.50	19.2
n78	30	60	633334	1@1	CP_64QAM	21.00	20.66
n78	30	60	633334	1@160	CP_64QAM	19.50	19.24
n78	30	60	633334	162@0	CP_256QAM	19.50	19.29
n78	30	60	633334	81@40	CP_256QAM	19.50	19.35
n78	30	60	633334	1@1	CP_256QAM	20.00	19.97
n78	30	60	633334	1@160	CP_256QAM	19.50	19.47
n78	30	60	634666	162@0	DFT_BPSK	20.50	20.01
n78	30	60	634666	81@40	DFT_BPSK	20.00	20
n78	30	60	634666	1@1	DFT_BPSK	20.50	20.01
n78	30	60	634666	1@160	DFT_BPSK	20.00	20
n78	30	60	634666	162@0	DFT_QPSK	22.00	22
n78	30	60	634666	81@40	DFT_QPSK	23.50	23.05
n78	30	60	634666	1@1	DFT_QPSK	22.50	22.33
n78	30	60	634666	1@160	DFT_QPSK	23.00	22.94
n78	30	60	634666	162@0	DFT_16QAM	21.00	21
n78	30	60	634666	81@40	DFT_16QAM	22.50	22.03
n78	30	60	634666	1@1	DFT_16QAM	21.50	21.42
n78	30	60	634666	1@160	DFT_16QAM	22.50	22.05
n78	30	60	634666	162@0	DFT_64QAM	21.00	20.51
n78	30	60	634666	81@40	DFT_64QAM	21.00	20.56
n78	30	60	634666	1@1	DFT_64QAM	20.00	19.76
n78	30	60	634666	1@160	DFT_64QAM	20.50	20.38
n78	30	60	634666	162@0	DFT_256QAM	21.00	20.62
n78	30	60	634666	81@40	DFT_256QAM	21.00	20.64
n78	30	60	634666	1@1	DFT_256QAM	20.50	20.08
n78	30	60	634666	1@160	DFT_256QAM	21.00	20.67
n78	30	60	634666	162@0	CP_QPSK	20.50	20.01
n78	30	60	634666	81@40	CP_QPSK	20.00	20
n78	30	60	634666	1@1	CP_QPSK	20.00	19.99
n78	30	60	634666	1@160	CP_QPSK	20.00	20
n78	30	60	634666	162@0	CP_16QAM	20.00	19.98
n78	30	60	634666	81@40	CP_16QAM	21.00	21
n78	30	60	634666	1@1	CP_16QAM	20.50	20.39
n78	30	60	634666	1@160	CP_16QAM	21.50	21.02
n78	30	60	634666	162@0	CP_64QAM	19.50	19.44
n78	30	60	634666	81@40	CP_64QAM	19.50	19.48
n78	30	60	634666	1@1	CP_64QAM	21.00	20.8

n78	30	60	634666	1@160	CP_64QAM	19.50	19.41
n78	30	60	634666	162@0	CP_256QAM	20.00	19.6
n78	30	60	634666	81@40	CP_256QAM	20.00	19.59
n78	30	60	634666	1@1	CP_256QAM	19.50	19.04
n78	30	60	634666	1@160	CP_256QAM	20.00	19.68
n78	30	70	632334	180@0	DFT_BPSK	19.50	19.44
n78	30	70	632334	90@45	DFT_BPSK	19.50	19.47
n78	30	70	632334	1@1	DFT_BPSK	19.50	19.47
n78	30	70	632334	1@187	DFT_BPSK	19.50	19.47
n78	30	70	632334	180@0	DFT_QPSK	22.00	21.54
n78	30	70	632334	90@45	DFT_QPSK	23.00	22.57
n78	30	70	632334	1@1	DFT_QPSK	22.00	21.83
n78	30	70	632334	1@187	DFT_QPSK	22.50	22.34
n78	30	70	632334	180@0	DFT_16QAM	21.00	20.54
n78	30	70	632334	90@45	DFT_16QAM	22.00	21.55
n78	30	70	632334	1@1	DFT_16QAM	21.00	20.98
n78	30	70	632334	1@187	DFT_16QAM	21.50	21.45
n78	30	70	632334	180@0	DFT_64QAM	20.50	20.06
n78	30	70	632334	90@45	DFT_64QAM	20.50	20.06
n78	30	70	632334	1@1	DFT_64QAM	19.50	19.14
n78	30	70	632334	1@187	DFT_64QAM	20.00	19.59
n78	30	70	632334	180@0	DFT_256QAM	19.50	19.48
n78	30	70	632334	90@45	DFT_256QAM	19.50	19.48
n78	30	70	632334	1@1	DFT_256QAM	19.50	19.47
n78	30	70	632334	1@187	DFT_256QAM	19.50	19.47
n78	30	70	632334	189@0	CP_QPSK	19.50	19.49
n78	30	70	632334	95@47	CP_QPSK	21.50	21.02
n78	30	70	632334	1@1	CP_QPSK	20.50	20.39
n78	30	70	632334	1@187	CP_QPSK	21.00	20.89
n78	30	70	632334	189@0	CP_16QAM	19.50	19.43
n78	30	70	632334	95@47	CP_16QAM	21.00	20.55
n78	30	70	632334	1@1	CP_16QAM	20.00	19.95
n78	30	70	632334	1@187	CP_16QAM	20.50	20.46
n78	30	70	632334	189@0	CP_64QAM	19.00	19
n78	30	70	632334	95@47	CP_64QAM	19.50	19.03
n78	30	70	632334	1@1	CP_64QAM	21.00	20.58
n78	30	70	632334	1@187	CP_64QAM	21.00	20.84
n78	30	70	632334	189@0	CP_256QAM	19.50	19.14
n78	30	70	632334	95@47	CP_256QAM	19.50	19.15

n78	30	70	632334	1@1	CP_256QAM	20.00	19.57
n78	30	70	632334	1@187	CP_256QAM	19.50	19.11
n78	30	70	633334	180@0	DFT_BPSK	19.50	19.47
n78	30	70	633334	90@45	DFT_BPSK	23.00	22.76
n78	30	70	633334	1@1	DFT_BPSK	22.50	22.22
n78	30	70	633334	1@187	DFT_BPSK	23.00	22.75
n78	30	70	633334	180@0	DFT_QPSK	22.00	21.7
n78	30	70	633334	90@45	DFT_QPSK	23.00	22.79
n78	30	70	633334	1@1	DFT_QPSK	22.50	22.15
n78	30	70	633334	1@187	DFT_QPSK	23.00	22.73
n78	30	70	633334	180@0	DFT_16QAM	21.00	20.7
n78	30	70	633334	90@45	DFT_16QAM	22.00	21.75
n78	30	70	633334	1@1	DFT_16QAM	21.50	21.32
n78	30	70	633334	1@187	DFT_16QAM	22.00	21.87
n78	30	70	633334	180@0	DFT_64QAM	20.50	20.22
n78	30	70	633334	90@45	DFT_64QAM	20.50	20.28
n78	30	70	633334	1@1	DFT_64QAM	20.00	19.62
n78	30	70	633334	1@187	DFT_64QAM	20.50	20.16
n78	30	70	633334	180@0	DFT_256QAM	19.50	19.47
n78	30	70	633334	90@45	DFT_256QAM	19.50	19.46
n78	30	70	633334	1@1	DFT_256QAM	19.50	19.46
n78	30	70	633334	1@187	DFT_256QAM	19.50	19.45
n78	30	70	633334	189@0	CP_QPSK	20.00	19.61
n78	30	70	633334	95@47	CP_QPSK	21.50	21.21
n78	30	70	633334	1@1	CP_QPSK	21.00	20.75
n78	30	70	633334	1@187	CP_QPSK	21.50	21.29
n78	30	70	633334	189@0	CP_16QAM	20.00	19.61
n78	30	70	633334	95@47	CP_16QAM	21.00	20.77
n78	30	70	633334	1@1	CP_16QAM	20.50	20.3
n78	30	70	633334	1@187	CP_16QAM	21.00	20.79
n78	30	70	633334	189@0	CP_64QAM	19.50	19.16
n78	30	70	633334	95@47	CP_64QAM	19.50	19.25
n78	30	70	633334	1@1	CP_64QAM	21.00	20.69
n78	30	70	633334	1@187	CP_64QAM	19.50	19.23
n78	30	70	633334	189@0	CP_256QAM	19.50	19.31
n78	30	70	633334	95@47	CP_256QAM	19.50	19.37
n78	30	70	633334	1@1	CP_256QAM	20.00	19.98
n78	30	70	633334	1@187	CP_256QAM	19.50	19.47
n78	30	70	634332	180@0	DFT_BPSK	19.50	19.46

n78	30	70	634332	90@45	DFT_BPSK	19.50	19.44
n78	30	70	634332	1@1	DFT_BPSK	19.50	19.44
n78	30	70	634332	1@187	DFT_BPSK	19.50	19.44
n78	30	70	634332	180@0	DFT_QPSK	22.00	21.89
n78	30	70	634332	90@45	DFT_QPSK	23.00	22.99
n78	30	70	634332	1@1	DFT_QPSK	22.50	22.04
n78	30	70	634332	1@187	DFT_QPSK	23.00	22.84
n78	30	70	634332	180@0	DFT_16QAM	21.00	20.9
n78	30	70	634332	90@45	DFT_16QAM	22.00	21.94
n78	30	70	634332	1@1	DFT_16QAM	21.50	21.1
n78	30	70	634332	1@187	DFT_16QAM	22.00	21.87
n78	30	70	634332	180@0	DFT_64QAM	20.50	20.41
n78	30	70	634332	90@45	DFT_64QAM	20.50	20.47
n78	30	70	634332	1@1	DFT_64QAM	19.5.5	19.2
n78	30	70	634332	1@187	DFT_64QAM	20.50	20.09
n78	30	70	634332	180@0	DFT_256QAM	19.50	19.44
n78	30	70	634332	90@45	DFT_256QAM	19.50	19.45
n78	30	70	634332	1@1	DFT_256QAM	19.50	19.44
n78	30	70	634332	1@187	DFT_256QAM	19.50	19.44
n78	30	70	634332	189@0	CP_QPSK	19.50	19.45
n78	30	70	634332	95@47	CP_QPSK	19.50	19.44
n78	30	70	634332	1@1	CP_QPSK	19.50	19.45
n78	30	70	634332	1@187	CP_QPSK	19.50	19.45
n78	30	70	634332	189@0	CP_16QAM	20.00	19.83
n78	30	70	634332	95@47	CP_16QAM	21.00	20.99
n78	30	70	634332	1@1	CP_16QAM	20.50	20.04
n78	30	70	634332	1@187	CP_16QAM	21.00	20.93
n78	30	70	634332	189@0	CP_64QAM	19.50	19.37
n78	30	70	634332	95@47	CP_64QAM	19.50	19.43
n78	30	70	634332	1@1	CP_64QAM	20.50	20.44
n78	30	70	634332	1@187	CP_64QAM	19.50	19.31
n78	30	70	634332	189@0	CP_256QAM	20.00	19.52
n78	30	70	634332	95@47	CP_256QAM	20.00	19.56
n78	30	70	634332	1@1	CP_256QAM	20.00	19.74
n78	30	70	634332	1@187	CP_256QAM	20.00	19.6
n78	30	80	632668	216@0	DFT_BPSK	20.00	19.97
n78	30	80	632668	108@54	DFT_BPSK	23.00	22.62
n78	30	80	632668	1@1	DFT_BPSK	22.00	21.69
n78	30	80	632668	1@215	DFT_BPSK	22.50	22.48

n78	30	80	632668	216@0	DFT_QPSK	22.00	21.55
n78	30	80	632668	108@54	DFT_QPSK	23.00	22.62
n78	30	80	632668	1@1	DFT_QPSK	22.00	21.68
n78	30	80	632668	1@215	DFT_QPSK	22.50	22.47
n78	30	80	632668	216@0	DFT_16QAM	21.00	20.5
n78	30	80	632668	108@54	DFT_16QAM	22.00	21.62
n78	30	80	632668	1@1	DFT_16QAM	21.00	20.86
n78	30	80	632668	1@215	DFT_16QAM	22.00	21.61
n78	30	80	632668	216@0	DFT_64QAM	20.50	20.03
n78	30	80	632668	108@54	DFT_64QAM	20.50	20.14
n78	30	80	632668	1@1	DFT_64QAM	19.50	19.16
n78	30	80	632668	1@215	DFT_64QAM	20.00	19.92
n78	30	80	632668	216@0	DFT_256QAM	20.50	20.22
n78	30	80	632668	108@54	DFT_256QAM	20.50	20.26
n78	30	80	632668	1@1	DFT_256QAM	18.00	17.52
n78	30	80	632668	1@215	DFT_256QAM	20.50	20.27
n78	30	80	632668	217@0	CP_QPSK	20.00	19.51
n78	30	80	632668	109@54	CP_QPSK	21.50	21.09
n78	30	80	632668	1@1	CP_QPSK	20.50	20.23
n78	30	80	632668	1@215	CP_QPSK	21.00	21
n78	30	80	632668	217@0	CP_16QAM	20.00	19.54
n78	30	80	632668	109@54	CP_16QAM	21.00	20.66
n78	30	80	632668	1@1	CP_16QAM	20.00	19.77
n78	30	80	632668	1@215	CP_16QAM	21.00	20.54
n78	30	80	632668	217@0	CP_64QAM	19.00	19
n78	30	80	632668	109@54	CP_64QAM	19.50	19.11
n78	30	80	632668	1@1	CP_64QAM	20.50	20.48
n78	30	80	632668	1@215	CP_64QAM	21.00	20.96
n78	30	80	632668	217@0	CP_256QAM	19.50	19.2
n78	30	80	632668	109@54	CP_256QAM	19.50	19.24
n78	30	80	632668	1@1	CP_256QAM	19.50	19.46
n78	30	80	632668	1@215	CP_256QAM	19.50	19.26
n78	30	80	633334	216@0	DFT_BPSK	20.00	19.93
n78	30	80	633334	108@54	DFT_BPSK	23.00	22.76
n78	30	80	633334	1@1	DFT_BPSK	22.50	22.09
n78	30	80	633334	1@215	DFT_BPSK	23.00	22.67
n78	30	80	633334	216@0	DFT_QPSK	22.00	21.68
n78	30	80	633334	108@54	DFT_QPSK	23.00	22.75
n78	30	80	633334	1@1	DFT_QPSK	22.50	22.02

n78	30	80	633334	1@215	DFT_QPSK	23.00	22.66
n78	30	80	633334	216@0	DFT_16QAM	21.00	20.68
n78	30	80	633334	108@54	DFT_16QAM	22.00	21.8
n78	30	80	633334	1@1	DFT_16QAM	21.50	21.1
n78	30	80	633334	1@215	DFT_16QAM	22.00	21.65
n78	30	80	633334	216@0	DFT_64QAM	20.50	20.18
n78	30	80	633334	108@54	DFT_64QAM	20.50	20.28
n78	30	80	633334	1@1	DFT_64QAM	19.50	19.3
n78	30	80	633334	1@215	DFT_64QAM	20.00	19.91
n78	30	80	633334	216@0	DFT_256QAM	20.00	20.38
n78	30	80	633334	108@54	DFT_256QAM	20.50	20.43
n78	30	80	633334	1@1	DFT_256QAM	18.00	17.91
n78	30	80	633334	1@215	DFT_256QAM	21.00	20.51
n78	30	80	633334	217@0	CP_QPSK	20.00	19.68
n78	30	80	633334	109@54	CP_QPSK	21.50	21.21
n78	30	80	633334	1@1	CP_QPSK	21.00	20.56
n78	30	80	633334	1@215	CP_QPSK	21.50	21.16
n78	30	80	633334	217@0	CP_16QAM	20.00	19.69
n78	30	80	633334	109@54	CP_16QAM	21.00	20.8
n78	30	80	633334	1@1	CP_16QAM	20.50	20.1
n78	30	80	633334	1@215	CP_16QAM	21.00	20.7
n78	30	80	633334	217@0	CP_64QAM	19.50	19.13
n78	30	80	633334	109@54	CP_64QAM	19.50	19.24
n78	30	80	633334	1@1	CP_64QAM	21.00	20.5
n78	30	80	633334	1@215	CP_64QAM	19.50	19.1
n78	30	80	633334	217@0	CP_256QAM	19.50	19.35
n78	30	80	633334	109@54	CP_256QAM	19.50	19.38
n78	30	80	633334	1@1	CP_256QAM	20.00	19.81
n78	30	80	633334	1@215	CP_256QAM	19.50	19.42
n78	30	80	634000	216@0	DFT_BPSK	20.00	19.88
n78	30	80	634000	108@54	DFT_BPSK	23.00	22.93
n78	30	80	634000	1@1	DFT_BPSK	22.50	22.01
n78	30	80	634000	1@215	DFT_BPSK	23.00	22.72
n78	30	80	634000	216@0	DFT_QPSK	22.00	21.79
n78	30	80	634000	108@54	DFT_QPSK	23.00	22.93
n78	30	80	634000	1@1	DFT_QPSK	22.00	21.97
n78	30	80	634000	1@215	DFT_QPSK	23.00	22.7
n78	30	80	634000	216@0	DFT_16QAM	21.00	20.79
n78	30	80	634000	108@54	DFT_16QAM	22.00	21.93

n78	30	80	634000	1@1	DFT_16QAM	21.50	21.09
n78	30	80	634000	1@215	DFT_16QAM	22.00	21.87
n78	30	80	634000	216@0	DFT_64QAM	20.50	20.28
n78	30	80	634000	108@54	DFT_64QAM	20.50	20.45
n78	30	80	634000	1@1	DFT_64QAM	19.50	19.4
n78	30	80	634000	1@215	DFT_64QAM	20.50	20.15
n78	30	80	634000	216@0	DFT_256QAM	20.00	19.88
n78	30	80	634000	108@54	DFT_256QAM	20.00	19.87
n78	30	80	634000	1@1	DFT_256QAM	20.00	19.88
n78	30	80	634000	1@215	DFT_256QAM	20.00	19.88
n78	30	80	634000	217@0	CP_QPSK	20.00	19.88
n78	30	80	634000	109@54	CP_QPSK	20.00	19.87
n78	30	80	634000	1@1	CP_QPSK	20.00	19.87
n78	30	80	634000	1@215	CP_QPSK	20.00	19.88
n78	30	80	634000	217@0	CP_16QAM	20.00	19.76
n78	30	80	634000	109@54	CP_16QAM	21.00	20.95
n78	30	80	634000	1@1	CP_16QAM	20.50	20.02
n78	30	80	634000	1@215	CP_16QAM	21.00	20.74
n78	30	80	634000	217@0	CP_64QAM	19.50	19.23
n78	30	80	634000	109@54	CP_64QAM	19.50	19.4
n78	30	80	634000	1@1	CP_64QAM	20.50	20.4
n78	30	80	634000	1@215	CP_64QAM	19.50	19.12
n78	30	80	634000	217@0	CP_256QAM	19.50	19.42
n78	30	80	634000	109@54	CP_256QAM	20.00	19.54
n78	30	80	634000	1@1	CP_256QAM	20.00	19.73
n78	30	80	634000	1@215	CP_256QAM	19.50	19.46
n78	30	90	633000	243@0	DFT_BPSK	19.50	19.41
n78	30	90	633000	120@60	DFT_BPSK	23.00	22.64
n78	30	90	633000	1@1	DFT_BPSK	22.00	21.53
n78	30	90	633000	1@243	DFT_BPSK	22.00	22.47
n78	30	90	633000	243@0	DFT_QPSK	22.00	21.56
n78	30	90	633000	120@60	DFT_QPSK	23.00	22.64
n78	30	90	633000	1@1	DFT_QPSK	22.00	21.55
n78	30	90	633000	1@243	DFT_QPSK	22.50	22.44
n78	30	90	633000	243@0	DFT_16QAM	21.00	20.59
n78	30	90	633000	120@60	DFT_16QAM	22.00	21.67
n78	30	90	633000	1@1	DFT_16QAM	21.00	20.57
n78	30	90	633000	1@243	DFT_16QAM	21.50	21.45
n78	30	90	633000	243@0	DFT_64QAM	20.50	20.06

n78	30	90	633000	120@60	DFT_64QAM	20.50	20.1
n78	30	90	633000	1@1	DFT_64QAM	21.00	20.77
n78	30	90	633000	1@243	DFT_64QAM	20.00	19.71
n78	30	90	633000	243@0	DFT_256QAM	19.50	19.39
n78	30	90	633000	120@60	DFT_256QAM	19.50	19.39
n78	30	90	633000	1@1	DFT_256QAM	19.50	19.41
n78	30	90	633000	1@243	DFT_256QAM	19.50	19.4
n78	30	90	633000	245@0	CP_QPSK	20.00	19.54
n78	30	90	633000	123@61	CP_QPSK	21.50	21.09
n78	30	90	633000	1@1	CP_QPSK	20.50	20.06
n78	30	90	633000	1@243	CP_QPSK	21.00	20.96
n78	30	90	633000	245@0	CP_16QAM	20.00	19.56
n78	30	90	633000	123@61	CP_16QAM	21.00	20.6
n78	30	90	633000	1@1	CP_16QAM	20.00	19.59
n78	30	90	633000	1@243	CP_16QAM	20.50	20.49
n78	30	90	633000	245@0	CP_64QAM	19.50	19.05
n78	30	90	633000	123@61	CP_64QAM	19.50	19.07
n78	30	90	633000	1@1	CP_64QAM	20.50	20.37
n78	30	90	633000	1@243	CP_64QAM	21.00	20.87
n78	30	90	633000	245@0	CP_256QAM	19.50	19.19
n78	30	90	633000	123@61	CP_256QAM	19.50	19.18
n78	30	90	633000	1@1	CP_256QAM	19.50	19.31
n78	30	90	633000	1@243	CP_256QAM	19.50	19.19
n78	30	90	633334	243@0	DFT_BPSK	19.50	19.41
n78	30	90	633334	120@60	DFT_BPSK	19.50	19.41
n78	30	90	633334	1@1	DFT_BPSK	19.50	19.41
n78	30	90	633334	1@243	DFT_BPSK	19.00	19.42
n78	30	90	633334	243@0	DFT_QPSK	22.00	21.64
n78	30	90	633334	120@60	DFT_QPSK	23.00	22.72
n78	30	90	633334	1@1	DFT_QPSK	22.00	21.78
n78	30	90	633334	1@243	DFT_QPSK	22.50	22.49
n78	30	90	633334	243@0	DFT_16QAM	21.00	20.69
n78	30	90	633334	120@60	DFT_16QAM	22.00	21.71
n78	30	90	633334	1@1	DFT_16QAM	21.00	20.78
n78	30	90	633334	1@243	DFT_16QAM	22.00	21.53
n78	30	90	633334	243@0	DFT_64QAM	20.50	20.15
n78	30	90	633334	120@60	DFT_64QAM	20.50	20.2
n78	30	90	633334	1@1	DFT_64QAM	19.50	19.2
n78	30	90	633334	1@243	DFT_64QAM	20.00	19.91

n78	30	90	633334	243@0	DFT_256QAM	20.50	20.34
n78	30	90	633334	120@60	DFT_256QAM	20.50	20.33
n78	30	90	633334	1@1	DFT_256QAM	18.00	17.57
n78	30	90	633334	1@243	DFT_256QAM	20.50	20.31
n78	30	90	633334	245@0	CP_QPSK	20.00	19.64
n78	30	90	633334	123@61	CP_QPSK	21.50	21.21
n78	30	90	633334	1@1	CP_QPSK	20.50	20.33
n78	30	90	633334	1@243	CP_QPSK	21.50	21.03
n78	30	90	633334	245@0	CP_16QAM	20.00	19.66
n78	30	90	633334	123@61	CP_16QAM	21.00	20.71
n78	30	90	633334	1@1	CP_16QAM	20.00	19.84
n78	30	90	633334	1@243	CP_16QAM	21.00	20.57
n78	30	90	633334	245@0	CP_64QAM	19.50	19.16
n78	30	90	633334	123@61	CP_64QAM	19.50	19.19
n78	30	90	633334	1@1	CP_64QAM	20.50	20.23
n78	30	90	633334	1@243	CP_64QAM	21.00	20.94
n78	30	90	633334	245@0	CP_256QAM	19.50	19.32
n78	30	90	633334	123@61	CP_256QAM	19.50	19.3
n78	30	90	633334	1@1	CP_256QAM	20.00	19.54
n78	30	90	633334	1@243	CP_256QAM	19.50	19.28
n78	30	90	633666	243@0	DFT_BPSK	19.50	19.41
n78	30	90	633666	120@60	DFT_BPSK	23.00	22.83
n78	30	90	633666	1@1	DFT_BPSK	22.00	22
n78	30	90	633666	1@243	DFT_BPSK	23.00	22.61
n78	30	90	633666	243@0	DFT_QPSK	22.00	21.74
n78	30	90	633666	120@60	DFT_QPSK	23.00	22.83
n78	30	90	633666	1@1	DFT_QPSK	22.00	21.94
n78	30	90	633666	1@243	DFT_QPSK	23.00	22.57
n78	30	90	633666	243@0	DFT_16QAM	21.00	20.74
n78	30	90	633666	120@60	DFT_16QAM	22.00	21.81
n78	30	90	633666	1@1	DFT_16QAM	21.50	21.07
n78	30	90	633666	1@243	DFT_16QAM	22.00	21.67
n78	30	90	633666	243@0	DFT_64QAM	20.50	20.24
n78	30	90	633666	120@60	DFT_64QAM	20.50	20.3
n78	30	90	633666	1@1	DFT_64QAM	19.50	19.39
n78	30	90	633666	1@243	DFT_64QAM	20.00	19.97
n78	30	90	633666	243@0	DFT_256QAM	20.50	20.47
n78	30	90	633666	120@60	DFT_256QAM	20.50	20.47
n78	30	90	633666	1@1	DFT_256QAM	18.00	17.83

n78	30	90	633666	1@243	DFT_256QAM	20.50	20.44
n78	30	90	633666	245@0	CP_QPSK	20.00	19.73
n78	30	90	633666	123@61	CP_QPSK	21.50	21.29
n78	30	90	633666	1@1	CP_QPSK	20.50	20.44
n78	30	90	633666	1@243	CP_QPSK	21.50	21.14
n78	30	90	633666	245@0	CP_16QAM	20.00	19.73
n78	30	90	633666	123@61	CP_16QAM	21.00	20.82
n78	30	90	633666	1@1	CP_16QAM	20.00	20
n78	30	90	633666	1@243	CP_16QAM	21.00	20.68
n78	30	90	633666	245@0	CP_64QAM	19.50	19.2
n78	30	90	633666	123@61	CP_64QAM	19.50	19.3
n78	30	90	633666	1@1	CP_64QAM	20.50	20.46
n78	30	90	633666	1@243	CP_64QAM	19.50	19.21
n78	30	90	633666	245@0	CP_256QAM	19.50	19.42
n78	30	90	633666	123@61	CP_256QAM	19.50	19.42
n78	30	90	633666	1@1	CP_256QAM	20.00	19.74
n78	30	90	633666	1@243	CP_256QAM	19.50	19.42
n78	30	100	633334	270@0	DFT_BPSK	20.00	19.96
n78	30	100	633334	135@67	DFT_BPSK	23.00	22.72
n78	30	100	633334	1@1	DFT_BPSK	21.50	21.41
n78	30	100	633334	1@271	DFT_BPSK	22.50	22.42
n78	30	100	633334	270@0	DFT_QPSK	22.00	21.63
n78	30	100	633334	135@67	DFT_QPSK	23.00	22.74
n78	30	100	633334	1@1	DFT_QPSK	21.50	21.43
n78	30	100	633334	1@271	DFT_QPSK	22.00	22.39
n78	30	100	633334	270@0	DFT_16QAM	21.00	20.63
n78	30	100	633334	135@67	DFT_16QAM	22.00	21.76
n78	30	100	633334	1@1	DFT_16QAM	21.00	20.53
n78	30	100	633334	1@271	DFT_16QAM	21.50	21.49
n78	30	100	633334	270@0	DFT_64QAM	20.50	20.14
n78	30	100	633334	135@67	DFT_64QAM	20.50	20.22
n78	30	100	633334	1@1	DFT_64QAM	21.00	20.87
n78	30	100	633334	1@271	DFT_64QAM	20.00	19.84
n78	30	100	633334	270@0	DFT_256QAM	20.00	19.94
n78	30	100	633334	135@67	DFT_256QAM	20.00	19.97
n78	30	100	633334	1@1	DFT_256QAM	20.00	19.96
n78	30	100	633334	1@271	DFT_256QAM	20.00	19.96
n78	30	100	633334	273@0	CP_QPSK	20.00	19.96
n78	30	100	633334	137@68	CP_QPSK	21.50	21.21

n78	30	100	633334	1@1	CP_QPSK	20.00	19.94
n78	30	100	633334	1@271	CP_QPSK	21.00	20.9
n78	30	100	633334	273@0	CP_16QAM	20.00	19.59
n78	30	100	633334	137@68	CP_16QAM	21.00	20.71
n78	30	100	633334	1@1	CP_16QAM	20.00	19.5
n78	30	100	633334	1@271	CP_16QAM	20.50	20.44
n78	30	100	633334	273@0	CP_64QAM	19.50	19.09
n78	30	100	633334	137@68	CP_64QAM	19.50	19.18
n78	30	100	633334	1@1	CP_64QAM	20.50	20.28
n78	30	100	633334	1@271	CP_64QAM	21.00	20.85
n78	30	100	633334	273@0	CP_256QAM	19.50	19.29
n78	30	100	633334	137@68	CP_256QAM	19.50	19.33
n78	30	100	633334	1@1	CP_256QAM	19.50	19.21
n78	30	100	633334	1@271	CP_256QAM	19.50	19.22

7.5. WLAN & Bluetooth Output Power

Mode	Channel	Frequency (MHz)	Tune-up (dBm)		Output Power (dBm)		Tune-up (dBm)		Output Power (dBm)	
			Ant1		Ant2		MIMO			
802.11b	1	2412	13.00	12.10	11.00	10.66	/	/	/	/
	6	2437	13.00	12.58	11.00	10.49	/	/	/	/
	11	2462	13.00	12.91	11.00	10.59	/	/	/	/
802.11g	1	2412	13.00	12.43	11.00	10.96	/	/	/	/
	6	2437	13.00	11.79	11.00	10.17	/	/	/	/
	11	2462	13.00	12.71	11.00	10.63	/	/	/	/
802.11n HT20	1	2412	13.00	12.42	11.50	11.06	15.00	14.79	15.00	14.79
	6	2437	13.00	12.12	11.50	10.13	15.00	14.19	15.00	14.19
	11	2462	13.00	12.74	11.50	10.54	15.00	14.84	15.00	14.84
802.11n HT40	3	2422	12.50	11.65	11.00	10.15	15.50	14.55	15.50	14.55
	6	2437	12.50	11.68	11.00	10.16	15.50	15.09	15.50	15.09
	9	2452	12.50	12.34	11.00	10.75	15.50	15.07	15.50	15.07
802.11ax HT20	1	2412	13.00	12.82	11.50	11.29	15.50	15.34	15.50	15.34
	6	2437	13.00	11.94	11.50	10.22	15.50	14.29	15.50	14.29
	11	2462	13.00	12.72	11.50	10.73	15.50	15.15	15.50	15.15
802.11ax HT40	3	2422	12.50	12.21	11.00	10.41	15.50	14.66	15.50	14.66
	6	2437	12.50	12.23	11.00	10.43	15.50	14.49	15.50	14.49
	9	2452	12.50	12.43	11.00	10.93	15.50	15.35	15.50	15.35

NOTE: Power measurement results of WLAN 2.4G.

Mode	Channel	Frequency (MHz)	Tune-up (dBm)	Output Power (dBm)	Tune-up (dBm)	Output Power (dBm)	Tune-up (dBm)	Output Power (dBm)
			Ant1		Ant2		MIMO	
802.11a	36	5180	9.50	8.82	11.50	11.46	/	/
	40	5200	9.50	7.82	11.50	11.20	/	/
	48	5240	9.50	9.44	11.50	10.32	/	/
802.11n HT20	36	5180	12.00	11.00	12.00	11.55	14.50	13.31
	40	5200	12.00	11.60	12.00	11.05	14.50	13.53
	48	5240	12.00	11.64	12.00	10.26	14.50	14.12
802.11n HT40	38	5190	11.50	9.58	12.00	11.54	14.00	13.73
	46	5230	11.50	11.46	12.00	10.31	14.00	13.98
802.11ac VHT20	36	5180	11.00	9.13	11.50	11.41	14.00	13.44
	40	5200	11.00	9.62	11.50	11.01	14.00	13.37
	48	5240	11.00	10.61	11.50	10.23	14.00	13.97
802.11ac VHT40	38	5190	11.50	9.56	12.00	11.50	14.50	14.23
	46	5230	11.50	11.42	12.00	10.28	14.50	14.40
802.11ac VHT80	42	5210	10.50	10.20	10.50	10.48	14.00	13.83
802.11ax HE20	36	5180	12.00	11.54	12.00	11.69	14.50	14.08
	40	5200	12.00	11.66	12.00	11.04	14.50	14.12
	48	5240	12.00	11.73	12.00	10.27	14.50	14.42
802.11ax HE40	38	5190	12.00	9.75	12.00	11.63	15.00	14.44
	46	5230	12.00	11.56	12.00	10.47	15.00	14.59
802.11ax HE80	42	5210	10.50	10.45	11.00	10.71	14.50	14.37

NOTE: Power measurement results of WLAN 5.2G.

Mode	Channel	Frequency (MHz)	Tune-up (dBm)	Output Power (dBm)	Tune-up (dBm)	Output Power (dBm)	Tune-up (dBm)	Output Power (dBm)
			Ant1		Ant2		MIMO	
802.11a	52	5260	13.00	12.70	12.00	11.14	/	/
	56	5280	13.00	12.93	12.00	11.20	/	/
	64	5320	13.00	12.44	12.00	11.55	/	/
802.11n HT20	52	5260	13.00	12.55	11.50	11.22	15.50	15.02
	56	5280	13.00	12.86	11.50	11.31	15.50	15.25
	64	5320	13.00	12.43	11.50	11.34	15.50	15.13
802.11n HT40	54	5270	13.00	12.96	12.00	11.21	15.50	15.13
	62	5310	13.00	12.51	12.00	11.54	15.50	15.34

802.11ac VHT20	52	5260	13.00	12.51	11.50	11.03	15.50	14.99
	56	5280	13.00	12.92	11.50	11.30	15.50	15.39
	64	5320	13.00	12.37	11.50	11.39	15.50	15.03
802.11ac VHT40	54	5270	13.00	12.95	12.00	11.18	15.50	15.30
	62	5310	13.00	12.60	12.00	11.53	15.50	15.30
802.11ac VHT80	58	5290	12.50	12.26	11.00	11.00	15.00	14.92
802.11ax HE20	52	5260	13.00	12.77	12.00	11.20	15.50	15.14
	56	5280	13.00	12.92	12.00	11.39	15.50	15.14
	64	5320	13.00	12.22	12.00	11.61	15.50	15.00
802.11ax HE40	54	5270	13.50	13.10	12.00	11.47	15.50	15.31
	62	5310	13.50	12.83	12.00	11.68	15.50	15.18
802.11ax HE80	58	5290	13.00	12.60	11.50	11.26	15.00	14.84

NOTE: Power measurement results of WLAN 5.3G.

Mode	Channel	Frequency (MHz)	Tune-up (dBm)	Output Power (dBm)	Tune-up (dBm)	Output Power (dBm)	Tune-up (dBm)	Output Power (dBm)
			Ant1		Ant2		MIMO	
802.11a	100	5500	9.50	9.44	16.50	16.01	/	/
	120	5600	9.50	7.92	16.50	15.81	/	/
	140	5700	9.50	9.22	16.50	15.40	/	/
802.11n HT20	100	5500	10.00	9.72	16.00	15.87	17.50	17.17
	120	5600	10.00	9.37	16.00	15.39	17.50	16.74
	140	5700	10.00	9.03	16.00	15.36	17.50	16.45
802.11n HT40	102	5510	10.00	9.76	16.50	16.35	17.50	17.27
	118	5590	10.00	8.89	16.50	15.11	17.50	16.92
	134	5670	10.00	8.77	16.50	15.06	17.50	16.61
802.11ac VHT20	100	5500	10.00	9.83	16.00	15.96	17.50	17.16
	120	5600	10.00	8.65	16.00	15.37	17.50	16.01
	140	5700	10.00	9.00	16.00	15.34	17.50	15.96
802.11ac VHT40	102	5510	10.00	9.62	16.50	16.40	17.50	17.33
	118	5590	10.00	8.22	16.50	14.95	17.50	15.96
	134	5670	10.00	8.64	16.50	15.10	17.50	16.24
802.11ac VHT80	106	5530	9.00	8.87	16.00	15.77	17.00	16.59
	122	5610	9.00	7.85	16.00	13.90	17.00	15.07
802.11ax HE20	100	5500	10.00	9.51	16.00	15.98	17.50	17.12
	120	5600	10.00	8.80	16.00	14.32	17.50	14.42
	140	5700	10.00	9.18	16.00	14.91	17.50	12.27

802.11ax HE40	102	5510	10.00	9.59	16.50	16.36	17.50	17.41
	118	5590	10.00	8.17	16.50	16.22	17.50	16.10
	134	5670	10.00	9.69	16.50	16.30	17.50	16.89
802.11ax HE80	106	5530	10.00	9.77	16.00	15.97	17.50	17.01
	122	5610	10.00	8.48	16.00	14.17	17.50	16.12

NOTE: Power measurement results of WLAN 5.6G.

Mode	Channel	Frequency (MHz)	Tune-up (dBm)	Output Power (dBm)	Tune-up (dBm)	Output Power (dBm)	Tune-up (dBm)	Output Power (dBm)
			Ant1		Ant2		MIMO	
802.11a	149	5745	12.50	11.00	13.00	11.95	/	/
	157	5785	12.50	11.79	13.00	12.54	/	/
	165	5825	12.50	12.09	13.00	12.76	/	/
802.11n HT20	149	5745	12.50	10.64	13.00	11.83	15.00	13.81
	157	5785	12.50	11.83	13.00	12.07	15.00	14.73
	165	5825	12.50	12.33	13.00	12.73	15.00	14.79
802.11n HT40	151	5755	12.00	11.17	11.50	10.78	15.00	13.65
	159	5795	12.00	11.96	11.50	11.34	15.00	14.62
802.11ac VHT20	149	5745	12.50	10.58	12.00	10.46	15.00	13.44
	157	5785	12.50	11.98	12.00	10.93	15.00	14.28
	165	5825	12.50	12.31	12.00	11.88	15.00	14.74
802.11ac VHT40	151	5755	12.50	10.91	11.50	10.53	14.50	13.60
	159	5795	12.50	12.38	11.50	11.25	14.50	14.45
802.11ac VHT80	155	5775	12.00	11.68	11.00	10.76	14.50	14.11
802.11ax HE20	149	5745	12.50	10.83	12.00	10.72	15.00	13.52
	157	5785	12.50	11.86	12.00	10.91	15.00	14.15
	165	5825	12.50	12.24	12.00	12.00	15.00	14.90
802.11ax HE40	151	5755	12.50	11.15	11.50	10.82	14.50	13.73
	159	5795	12.50	12.15	11.50	11.30	14.50	14.43
802.11ax HE80	155	5775	12.00	11.73	11.00	10.81	14.50	14.14

NOTE: Power measurement results of WLAN 5.8G.

BR+EDR	Output Power (dBm)				
	Data Rates	Tune-up (dBm)	Channel		
			0CH	39CH	78CH
	1M	8.50	7.56	7.82	8.37
	2M	8.00	6.67	7.85	7.52
	3M	8.00	6.88	7.01	7.68


BLE	Output Power (dBm)				
	Data Rates	Tune-up (dBm)	Channe		
			0CH	19CH	39CH
	1M	-1.00	-2.08	-1.37	-1.39
	2M	-1.00	-1.8	-1.58	-1.16

NOTE: Power measurement results of Bluetooth.

7.6. NFC

Channel Freq (MHz)	Min Distance (mm)	Max power (dBm)	tune-up power (dBm)	Max power (mW)	Limits (mW)	SAR Test Exclusion
13.56	10	-34.63	-34.63 ± 1	0.00043	443	Yes

8. Antenna Location

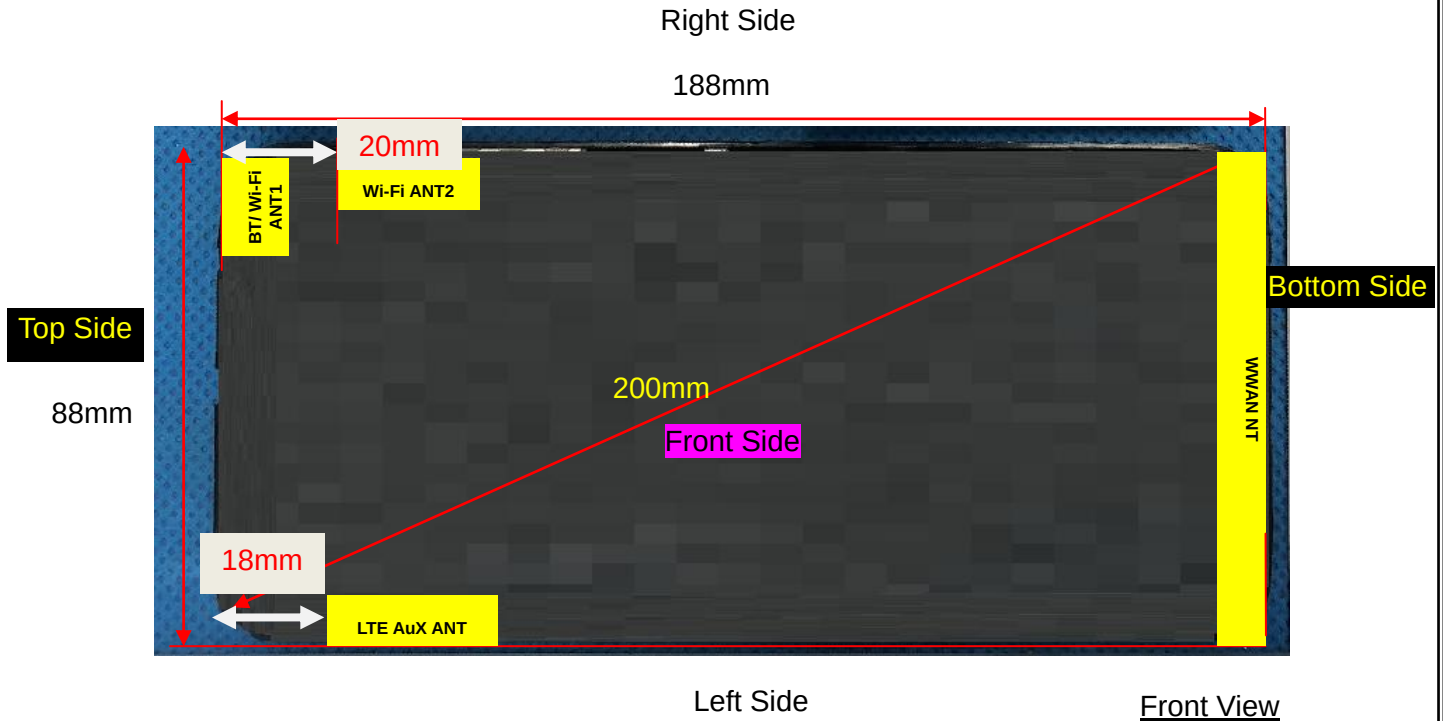

Note: Since the confidentiality request of EUT, the antenna location example diagram see as above.

Distance of the Antenna to the EUT surface/edge						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN ANT	≤ 25mm	≤ 25mm	≤25mm	≤ 25mm	> 25mm	≤ 25mm
WWAN AUX ANT	≤25mm	≤25mm	≤25mm	> 25mm	≤ 25mm	> 25mm
WLAN & Bluetooth ANT 1	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm	≤ 25mm	>25mm
WLAN ANT 2	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm	≤ 25mm	>25mm
Positions for SAR tests						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN ANT	Yes	Yes	Yes	Yes	NO	Yes
WWAN AUX ANT	Yes	Yes	Yes	NO	Yes	NO
WLAN & Bluetooth ANT	Yes	Yes	NO	Yes	Yes	NO
WLAN ANT	Yes	Yes	NO	Yes	Yes	NO

9. Stand-alone SAR test exclusion

Refer to FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}}]$
 ≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	P_{max} (dBm)	P_{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
Bluetooth	8.50	7.08	5	2.480	2.23	3	Yes

NOTE: Standalone SAR test exclusion for Bluetooth.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}}/x]$ W/kg for test separation distances $\leq 50\text{mm}$, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)	P_{max} (mW)	Distance (mm)	f (GHz)	x	Estimated SAR (W/Kg)
Bluetooth	Head	7.50	5.623	5	2.48	7.5	0.297
Bluetooth	Body	7.50	5.623	10	2.48	7.5	0.149
Bluetooth	Hotspot	7.50	5.623	10	2.48	7.5	0.149

NOTE: Estimated SAR calculation for Bluetooth

9.1. NFC

Channel Freq (MHz)	Min Distance (mm)	Max power (dBm)	tune-up power (dBm)	Max power (mW)	Limits (mW)	SAR Test Exclusion
13.56	10	-34.63	-34.63 ± 1	0.00043	443	Yes

10. SAR Results

10.1. SAR measurement Result

10.1.1. SAR measurement Result of GSM850

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(±5%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	189/836.4	GPRS(GMSK 2TS)	0.145	0.111	-3.71	31.98	32.50	0.163	2025/4/26	1#
Left Tilt 15 Degree	189/836.4	GPRS(GMSK 2TS)	0.074	0.055	1.95	31.98	32.50	0.083	2025/4/26	
Right Cheek	189/836.4	GPRS(GMSK 2TS)	0.127	0.096	-3.08	31.98	32.50	0.143	2025/4/26	
Right Tilt 15 Degree	189/836.4	GPRS(GMSK 2TS)	0.068	0.049	0.28	31.98	32.50	0.077	2025/4/26	

NOTE: Head SAR test results of GSM850.

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
Front Side	189/836.4	GPRS(GMSK 2TS)	0.156	0.089	-3.51	31.98	32.50	0.176	2025/4/26	
Back Side	189/836.4	GPRS(GMSK 2TS)	0.158	0.090	-0.27	31.98	32.50	0.178	2025/4/26	

NOTE: Body-Worn SAR test results of GSM850

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	189/836.4	GPRS(GMSK 2TS)	0.156	0.089	-3.51	31.98	32.50	0.176	2025/4/26	
Back Side	189/836.4	GPRS(GMSK 2TS)	0.158	0.090	-0.27	31.98	32.50	0.178	2025/4/26	

NOTE: Hotspot SAR test results of GSM850

NOTE: Head SAR test results of GSM1900

NOTE: Body-Worn SAR test results of GSM1900

[illegible]

Hotspot with 10mm								(W/Kg)		
Front Side	661/1880	GPRS(GMSK 4TS)	0.144	0.073	0.86	26.23	26.50	0.153	2025/4/28	
Back Side	661/1880	GPRS(GMSK 4TS)	0.144	0.076	-1.27	26.23	26.50	0.153	2025/4/28	
Left Side	661/1880	GPRS(GMSK 4TS)	0.064	0.034	3.96	26.23	26.50	0.068	2025/4/28	
Right Side	661/1880	GPRS(GMSK 4TS)	0.028	0.015	1.72	26.23	26.50	0.030	2025/4/28	
Bottom Side	661/1880	GPRS(GMSK 4TS)	0.311	0.166	-0.95	26.23	26.50	0.331	2025/4/28	4#

NOTE: Hotspot SAR test results of GSM1900

10.1.3. SAR measurement Result of WCDMA Band 2

Test Position of Head	Test channel /Freq	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	9400/1880	RMC12.2K	0.052	0.026	1.12	23.87	24.00	0.054	2025/4/28	5#
Left Tilt 15 Degree	9400/1880	RMC12.2K	0.027	0.013	-2.25	23.87	24.00	0.028	2025/4/28	
Right Cheek	9400/1880	RMC12.2K	0.047	0.023	-1.12	23.87	24.00	0.048	2025/4/28	
Right Tilt 15 Degree	9400/1880	RMC12.2K	0.025	0.012	3.89	23.87	24.00	0.026	2025/4/28	

NOTE: Head SAR test results of WCDMA Band 2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
Front Side	9400/1880	RMC12.2K	0.120	0.064	-0.47	23.87	24.00	0.124	2025/4/28	
Back Side	9400/1880	RMC12.2K	0.131	0.069	0.65	23.87	24.00	0.135	2025/4/28	

NOTE: Body-Worn SAR test results of WCDMA Band 2

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	9400/1880	RMC12.2K	0.120	0.064	-0.47	23.87	24.00	0.124	2025/4/28	
Back Side	9400/1880	RMC12.2K	0.131	0.069	0.65	23.87	24.00	0.135	2025/4/28	
Left Side	9400/1880	RMC12.2K	0.060	0.031	0.86	23.87	24.00	0.062	2025/4/28	
Right Side	9400/1880	RMC12.2K	0.066	0.036	1.29	23.87	24.00	0.068	2025/4/28	
Bottom Side	9400/1880	RMC12.2K	0.284	0.155	-2.17	23.87	24.00	0.293	2025/4/28	6#

NOTE: Hotspot SAR test results of WCDMA Band 2

10.1.4. SAR measurement Result of WCDMA Band 4

Test Position of Head	Test channel /Freq	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	1413/1732.6	RMC12.2K	0.132	0.069	1.82	23.64	24.00	0.143	2025/4/27	7#
Left Tilt 15 Degree	1413/1732.6	RMC12.2K	0.069	0.036	1.74	23.64	24.00	0.075	2025/4/27	
Right Cheek	1413/1732.6	RMC12.2K	0.117	0.061	-1.98	23.64	24.00	0.127	2025/4/27	
Right Tilt 15 Degree	1413/1732.6	RMC12.2K	0.059	0.029	-3.71	23.64	24.00	0.064	2025/4/27	

NOTE: Head SAR test results of WCDMA Band 4

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
Front Side	1413/1732.6	RMC12.2K	0.236	0.129	2.84	23.64	24.00	0.256	2025/4/27	
Back Side	1413/1732.6	RMC12.2K	0.261	0.141	0.55	23.64	24.00	0.284	2025/4/27	

NOTE: Body-Worn SAR test results of WCDMA Band 4

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	1413/1732.6	RMC12.2K	0.236	0.129	2.84	23.64	24.00	0.256	2025/4/27	
Back Side	1413/1732.6	RMC12.2K	0.261	0.141	0.55	23.64	24.00	0.284	2025/4/27	
Left Side	1413/1732.6	RMC12.2K	0.118	0.062	1.38	23.64	24.00	0.128	2025/4/27	
Right Side	1413/1732.6	RMC12.2K	0.116	0.061	0.13	23.64	24.00	0.126	2025/4/27	
Bottom Side	1413/1732.6	RMC12.2K	0.560	0.309	-2.10	23.64	24.00	0.608	2025/4/27	8#

NOTE: Hotspot SAR test results of WCDMA Band 4

10.1.5. SAR measurement Result of WCDMA Band 5

Test Position of Head	Test channel /Freq	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	4182/836.4	RMC12.2K	0.082	0.054	-2.36	23.13	23.50	0.089	2025/4/26	9#
Left Tilt 15 Degree	4182/836.4	RMC12.2K	0.044	0.028	-3.61	23.13	23.50	0.048	2025/4/26	
Right Cheek	4182/836.4	RMC12.2K	0.073	0.046	3.79	23.13	23.50	0.079	2025/4/26	
Right Tilt 15 Degree	4182/836.4	RMC12.2K	0.038	0.025	-3.64	23.13	23.50	0.041	2025/4/26	

NOTE: Head SAR test results of WCDMA Band 5

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
Front Side	4182/836.4	RMC12.2K	0.174	0.101	-3.57	23.13	23.50	0.189	2025/4/26	
Back Side	4182/836.4	RMC12.2K	0.186	0.110	-3.70	23.13	23.50	0.203	2025/4/26	

NOTE: Body-Worn SAR test results of WCDMA Band 5

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	4182/836.4	RMC12.2K	0.174	0.101	-3.57	23.13	23.50	0.189	2025/4/26	
Back Side	4182/836.4	RMC12.2K	0.186	0.110	-3.70	23.13	23.50	0.203	2025/4/26	
Left Side	4182/836.4	RMC12.2K	0.084	0.050	3.26	23.13	23.50	0.091	2025/4/26	
Right Side	4182/836.4	RMC12.2K	0.217	0.126	0.46	23.13	23.50	0.236	2025/4/26	
Bottom Side	4182/836.4	RMC12.2K	0.277	0.166	0.30	23.13	23.50	0.302	2025/4/26	10#

NOTE: Hotspot SAR test results of WCDMA Band 5

10.1.6. SAR measurement Result of LTE Band 2

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	18900/1880	20M QPSK(1,49)	0.061	0.037	-2.82	24.44	25.00	0.069	2025/4/28	41#
Left Tilt 15 Degree	18900/1880	20M QPSK(1,49)	0.035	0.021	0.15	24.44	25.00	0.040	2025/4/28	
Right Cheek	18900/1880	20M QPSK(1,49)	0.053	0.031	-1.06	24.44	25.00	0.060	2025/4/28	
Right Tilt 15 Degree	18900/1880	20M QPSK(1,49)	0.027	0.016	0.71	24.44	25.00	0.031	2025/4/28	
50%RB										
Left Cheek	18900/1880	20M QPSK(50,0)	0.036	0.021	3.58	22.41	23.00	0.041	2025/4/28	
Left Tilt 15 Degree	18900/1880	20M QPSK(50,0)	0.019	0.012	-3.91	22.41	23.00	0.022	2025/4/28	
Right Cheek	18900/1880	20M QPSK(50,0)	0.030	0.017	-1.53	22.41	23.00	0.034	2025/4/28	
Right Tilt 15 Degree	18900/1880	20M QPSK(50,0)	0.016	0.009	2.13	22.41	23.00	0.018	2025/4/28	

NOTE: Head SAR test results of LTE Band 2

Test Position of Body- Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
1RB										
Front Side	18900/1880	20M QPSK(1,49)	0.140	0.075	-1.64	24.44	25.00	0.159	2025/4/28	

Back Side	18900/1880	20M QPSK(1,49)	0.153	0.082	-0.12	24.44	25.00	0.174	2025/4/28	
50%RB										
Front Side	18900/1880	20M QPSK(50,0)	0.117	0.054	2.26	22.41	23.00	0.134	2025/4/28	
Back Side	18900/1880	20M QPSK(50,0)	0.108	0.057	-2.30	22.41	23.00	0.124	2025/4/28	

NOTE: Body-Worn SAR test results of LTE Band 2

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	18900/1880	20M QPSK(1,49)	0.140	0.075	-1.64	24.44	25.00	0.159	2025/4/28	
Back Side	18900/1880	20M QPSK(1,49)	0.153	0.082	-0.12	24.44	25.00	0.174	2025/4/28	
Left Side	18900/1880	20M QPSK(1,49)	0.066	0.034	-0.88	24.44	25.00	0.075	2025/4/28	
Right Side	18900/1880	20M QPSK(1,49)	0.066	0.035	3.37	24.44	25.00	0.075	2025/4/28	
Bottom Side	18900/1880	20M QPSK(1,49)	0.316	0.171	-0.18	24.44	25.00	0.359	2025/4/28	42#
50%RB										
Front Side	18900/1880	20M QPSK(50,0)	0.117	0.054	2.26	22.41	23.00	0.134	2025/4/28	
Back Side	18900/1880	20M QPSK(50,0)	0.108	0.057	-2.30	22.41	23.00	0.124	2025/4/28	
Left Side	18900/1880	20M QPSK(50,0)	0.050	0.025	-0.52	22.41	23.00	0.057	2025/4/28	
Right Side	18900/1880	20M QPSK(50,0)	0.121	0.075	2.06	22.41	23.00	0.139	2025/4/28	
Bottom Side	18900/1880	20M QPSK(50,0)	0.173	0.087	-3.70	22.41	23.00	0.198	2025/4/28	

NOTE: Hotspot SAR test results of LTE Band 2

10.1.7. SAR measurement Result of LTE Band 4

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	20175/1732.5	20M QPSK(1,49)	0.057	0.034	4.21	21.30	22.00	0.067	2025/4/27	43#
Left Tilt 15 Degree	20175/1732.5	20M QPSK(1,49)	0.031	0.018	1.21	21.30	22.00	0.036	2025/4/27	
Right Cheek	20175/1732.5	20M QPSK(1,49)	0.052	0.03	0.09	21.30	22.00	0.061	2025/4/27	
Right Tilt 15 Degree	20175/1732.5	20M QPSK(1,49)	0.025	0.015	-1.76	21.30	22.00	0.029	2025/4/27	
50%RB										
Left Cheek	20175/1732.5	20M QPSK(50,0)	0.053	0.031	3.98	21.81	22.00	0.055	2025/4/27	
Left Tilt 15 Degree	20175/1732.5	20M QPSK(50,0)	0.027	0.015	-2.53	21.81	22.00	0.028	2025/4/27	
Right Cheek	20175/1732.5	20M QPSK(50,0)	0.048	0.026	1.11	21.81	22.00	0.050	2025/4/27	
Right Tilt 15 Degree	20175/1732.5	20M QPSK(50,0)	0.021	0.012	-1.08	21.81	22.00	0.022	2025/4/27	

NOTE: Head SAR test results of LTE Band 4

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
1RB										
Front Side	20175/1732.5	20M QPSK(1,49)	0.204	0.114	-4.00	21.30	22.00	0.240	2025/4/27	

Back Side	20175/1732.5	20M QPSK(1,49)	0.234	0.125	-1.15	21.30	22.00	0.275	2025/4/27	
50%RB										
Front Side	20175/1732.5	20M QPSK(50,0)	0.107	0.059	-2.51	21.81	22.00	0.112	2025/4/27	
Back Side	20175/1732.5	20M QPSK(50,0)	0.130	0.065	0.50	21.81	22.00	0.136	2025/4/27	

NOTE: Body-Worn SAR test results of LTE Band 4

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	20175/1732.5	20M QPSK(1,49)	0.204	0.114	-4.00	21.30	22.00	0.240	2025/4/27	
Back Side	20175/1732.5	20M QPSK(1,49)	0.234	0.125	-1.15	21.30	22.00	0.275	2025/4/27	
Left Side	20175/1732.5	20M QPSK(1,49)	0.104	0.058	-1.76	21.30	22.00	0.122	2025/4/27	
Right Side	20175/1732.5	20M QPSK(1,49)	0.100	0.053	-3.19	21.30	22.00	0.117	2025/4/27	
Bottom Side	20175/1732.5	20M QPSK(1,49)	0.482	0.270	-0.70	21.30	22.00	0.566	2025/4/27	44#
50%RB										
Front Side	20175/1732.5	20M QPSK(50,0)	0.107	0.059	-2.51	21.81	22.00	0.112	2025/4/27	
Back Side	20175/1732.5	20M QPSK(50,0)	0.130	0.065	0.50	21.81	22.00	0.136	2025/4/27	
Left Side	20175/1732.5	20M QPSK(50,0)	0.061	0.029	0.35	21.81	22.00	0.064	2025/4/27	
Right Side	20175/1732.5	20M QPSK(50,0)	0.052	0.030	-0.43	21.81	22.00	0.054	2025/4/27	
Bottom Side	20175/1732.5	20M QPSK(50,0)	0.269	0.155	-0.34	21.81	22.00	0.281	2025/4/27	

NOTE: Hotspot SAR test results of LTE Band 4

10.1.8. SAR measurement Result of LTE Band 5

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	20525/836.5	10M QPSK(1,49)	0.087	0.070	-1.06	21.77	22.00	0.092	2025/4/26	45#
Left Tilt 15 Degree	20525/836.5	10M QPSK(1,49)	0.046	0.035	1.10	21.77	22.00	0.049	2025/4/26	
Right Cheek	20525/836.5	10M QPSK(1,49)	0.078	0.060	-2.19	21.77	22.00	0.082	2025/4/26	
Right Tilt 15 Degree	20525/836.5	10M QPSK(1,49)	0.040	0.032	-2.97	21.77	22.00	0.042	2025/4/26	
50%RB										
Left Cheek	20525/836.5	10M QPSK(25,0)	0.047	0.039	1.41	21.25	21.50	0.050	2025/4/26	
Left Tilt 15 Degree	20525/836.5	10M QPSK(25,0)	0.027	0.020	3.67	21.25	21.50	0.029	2025/4/26	
Right Cheek	20525/836.5	10M QPSK(25,0)	0.044	0.031	1.01	21.25	21.50	0.047	2025/4/26	
Right Tilt 15 Degree	20525/836.5	10M QPSK(25,0)	0.021	0.019	4.01	21.25	21.50	0.022	2025/4/26	

NOTE: Head SAR test results of LTE Band 5

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
1RB										
Front Side	20525/836.5	10M QPSK(1,49)	0.252	0.149	3.90	21.77	22.00	0.266	2025/4/26	
Back	20525/836.5	10M	0.240	0.139	-2.74	21.77	22.00	0.253	2025/4/26	

Side		QPSK(1,49)								
50%RB										
Front Side	20525/836.5	10M QPSK(25,0)	0.131	0.083	-1.73	21.25	21.50	0.139	2025/4/26	
Back Side	20525/836.5	10M QPSK(25,0)	0.124	0.079	4.02	21.25	21.50	0.131	2025/4/26	

NOTE: Body-Worn SAR test results of LTE Band 5

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	20525/836.5	10M QPSK(1,49)	0.252	0.149	3.90	21.77	22.00	0.266	2025/4/26	
Back Side	20525/836.5	10M QPSK(1,49)	0.240	0.139	-2.74	21.77	22.00	0.253	2025/4/26	
Left Side	20525/836.5	10M QPSK(1,49)	0.117	0.071	3.31	21.77	22.00	0.123	2025/4/26	
Right Side	20525/836.5	10M QPSK(1,49)	0.280	0.164	3.92	21.77	22.00	0.295	2025/4/26	
Bottom Side	20525/836.5	10M QPSK(1,49)	0.373	0.228	-1.09	21.77	22.00	0.393	2025/4/26	46#
50%RB										
Front Side	20525/836.5	10M QPSK(25,0)	0.131	0.083	-1.73	21.25	21.50	0.139	2025/4/26	
Back Side	20525/836.5	10M QPSK(25,0)	0.124	0.079	4.02	21.25	21.50	0.131	2025/4/26	
Left Side	20525/836.5	10M QPSK(25,0)	0.068	0.038	-3.48	21.25	21.50	0.072	2025/4/26	
Right Side	20525/836.5	10M QPSK(25,0)	0.163	0.084	1.73	21.25	21.50	0.173	2025/4/26	
Bottom Side	20525/836.5	10M QPSK(25,0)	0.216	0.116	0.59	21.25	21.50	0.229	2025/4/26	

NOTE: Hotspot SAR test results of LTE Band 5

10.1.9. SAR measurement Result of LTE Band 7

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	21100/2535	20M QPSK(1,49)	0.020	0.014	-4.85	21.70	22.00	0.021	2025/4/29	47#
Left Tilt 15 Degree	21100/2535	20M QPSK(1,49)	0.011	0.009	-0.41	21.70	22.00	0.012	2025/4/29	
Right Cheek	21100/2535	20M QPSK(1,49)	0.017	0.015	1.06	21.70	22.00	0.018	2025/4/29	
Right Tilt 15 Degree	21100/2535	20M QPSK(1,49)	0.008	0.006	-1.30	21.70	22.00	0.009	2025/4/29	
50%RB										
Left Cheek	21100/2535	20M QPSK(50,24)	0.019	0.013	2.21	22.21	22.50	0.020	2025/4/29	
Left Tilt 15 Degree	21100/2535	20M QPSK(50,24)	0.010	0.008	1.11	22.21	22.50	0.011	2025/4/29	
Right Cheek	21100/2535	20M QPSK(50,24)	0.015	0.013	0.15	22.21	22.50	0.016	2025/4/29	
Right Tilt 15 Degree	21100/2535	20M QPSK(50,24)	0.008	0.005	2.66	22.21	22.50	0.009	2025/4/29	

NOTE: Head SAR test results of LTE Band 7

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1g	10g						
1RB										
Front Side	21100/2535	20M QPSK(1,49)	0.206	0.114	1.94	21.70	22.00	0.221	2025/4/29	

Back Side	21100/2535	20M QPSK(1,49)	0.133	0.075	0.71	21.70	22.00	0.143	2025/4/29	
50%RB										
Front Side	21100/2535	20M QPSK(50,24)	0.175	0.101	-2.59	22.21	22.50	0.187	2025/4/29	
Back Side	21100/2535	20M QPSK(50,24)	0.116	0.069	0.20	22.21	22.50	0.124	2025/4/29	

NOTE: Body-Worn SAR test results of LTE Band 7

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	21100/2535	20M QPSK(1,49)	0.206	0.114	1.94	21.70	22.00	0.221	2025/4/29	
Back Side	21100/2535	20M QPSK(1,49)	0.133	0.075	0.71	21.70	22.00	0.143	2025/4/29	
Left Side	21100/2535	20M QPSK(1,49)	0.216	0.122	0.74	21.70	22.00	0.231	2025/4/29	
Right Side	21100/2535	20M QPSK(1,49)	0.063	0.030	-1.08	21.70	22.00	0.068	2025/4/29	
Bottom Side	21100/2535	20M QPSK(1,49)	0.616	0.295	-1.39	21.70	22.00	0.660	2025/4/29	48#
50%RB										
Front Side	21100/2535	20M QPSK(50,24)	0.175	0.101	-2.59	22.21	22.50	0.187	2025/4/29	
Back Side	21100/2535	20M QPSK(50,24)	0.116	0.069	0.20	22.21	22.50	0.124	2025/4/29	
Left Side	21100/2535	20M QPSK(50,24)	0.184	0.107	0.97	22.21	22.50	0.197	2025/4/29	
Right Side	21100/2535	20M QPSK(50,24)	0.056	0.028	-2.62	22.21	22.50	0.060	2025/4/29	
Bottom Side	21100/2535	20M QPSK(50,24)	0.553	0.260	3.52	22.21	22.50	0.591	2025/4/29	

NOTE: Hotspot SAR test results of LTE Band 7

10.1.10. SAR measurement Result of LTE Band 12

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	23095/707.5	10M QPSK(1,49)	0.045	0.037	1.47	21.67	22.00	0.049	2025/4/11	49#
Left Tilt 15 Degree	23095/707.5	10M QPSK(1,49)	0.023	0.018	-3.10	21.67	22.00	0.025	2025/4/11	
Right Cheek	23095/707.5	10M QPSK(1,49)	0.039	0.032	3.21	21.67	22.00	0.042	2025/4/11	
Right Tilt 15 Degree	23095/707.5	10M QPSK(1,49)	0.021	0.017	3.07	21.67	22.00	0.023	2025/4/11	
50%RB										
Left Cheek	23095/707.5	10M QPSK(25,0)	0.026	0.020	2.06	21.11	21.50	0.028	2025/4/11	
Left Tilt 15 Degree	23095/707.5	10M QPSK(25,0)	0.012	0.009	-3.29	21.11	21.50	0.013	2025/4/11	
Right Cheek	23095/707.5	10M QPSK(25,0)	0.022	0.017	0.35	21.11	21.50	0.024	2025/4/11	
Right Tilt 15 Degree	23095/707.5	10M QPSK(25,0)	0.012	0.009	-0.36	21.11	21.50	0.013	2025/4/11	

NOTE: Head SAR test results of LTE Band 12

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	23095/707.5	10M QPSK(1,49)	0.114	0.065	-2.44	21.67	22.00	0.123	2025/4/11	
Back Side	23095/707.5	10M QPSK(1,49)	0.120	0.067	-2.07	21.67	22.00	0.129	2025/4/11	
50%RB										

Front Side	23095/707.5	10M QPSK(25,0)	0.063	0.039	-2.79	21.11	21.50	0.069	2025/4/11	
Back Side	23095/707.5	10M QPSK(25,0)	0.065	0.036	0.41	21.11	21.50	0.071	2025/4/11	

NOTE: Body-Worn SAR test results of LTE Band 12

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	23095/707.5	10M QPSK(1,49)	0.114	0.065	-2.44	21.67	22.00	0.123	2025/4/11	
Back Side	23095/707.5	10M QPSK(1,49)	0.120	0.067	-2.07	21.67	22.00	0.129	2025/4/11	
Left Side	23095/707.5	10M QPSK(1,49)	0.069	0.039	1.29	21.67	22.00	0.074	2025/4/11	
Right Side	23095/707.5	10M QPSK(1,49)	0.140	0.079	1.01	21.67	22.00	0.151	2025/4/11	
Bottom Side	23095/707.5	10M QPSK(1,49)	0.187	0.108	-0.84	21.67	22.00	0.202	2025/4/11	50#
50%RB										
Front Side	23095/707.5	10M QPSK(25,0)	0.063	0.039	-2.79	21.11	21.50	0.069	2025/4/11	
Back Side	23095/707.5	10M QPSK(25,0)	0.065	0.036	0.41	21.11	21.50	0.071	2025/4/11	
Left Side	23095/707.5	10M QPSK(25,0)	0.040	0.020	4.16	21.11	21.50	0.044	2025/4/11	
Right Side	23095/707.5	10M QPSK(25,0)	0.071	0.046	-0.13	21.11	21.50	0.078	2025/4/11	
Bottom Side	23095/707.5	10M QPSK(25,0)	0.108	0.064	0.02	21.11	21.50	0.118	2025/4/11	

NOTE: Hotspot SAR test results of LTE Band 12

10.1.11. SAR measurement Result of LTE Band 13

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						

1RB										
Left Cheek	23230/782	10M QPSK(1,0)	0.103	0.080	-0.58	20.87	21.00	0.106	2025/4/11	51#
Left Tilt 15 Degree	23230/782	10M QPSK(1,0)	0.053	0.040	2.09	20.87	21.00	0.055	2025/4/11	
Right Cheek	23230/782	10M QPSK(1,0)	0.088	0.067	-1.20	20.87	21.00	0.091	2025/4/11	
Right Tilt 15 Degree	23230/782	10M QPSK(1,0)	0.041	0.031	-2.48	20.87	21.00	0.042	2025/4/11	
50%RB										
Left Cheek	23230/782	10M QPSK(25,0)	0.097	0.075	1.98	21.34	21.50	0.101	2025/4/11	
Left Tilt 15 Degree	23230/782	10M QPSK(25,0)	0.050	0.037	-0.38	21.34	21.50	0.052	2025/4/11	
Right Cheek	23230/782	10M QPSK(25,0)	0.079	0.062	-0.15	21.34	21.50	0.082	2025/4/11	
Right Tilt 15 Degree	23230/782	10M QPSK(25,0)	0.039	0.027	4.77	21.34	21.50	0.040	2025/4/11	

NOTE: Head SAR test results of LTE Band 13

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	23230/782	10M QPSK(1,0)	0.150	0.084	1.43	20.87	21.00	0.155	2025/4/11	
Back Side	23230/782	10M QPSK(1,0)	0.144	0.084	1.64	20.87	21.00	0.148	2025/4/11	
50%RB										
Front Side	23230/782	10M QPSK(25,0)	0.137	0.079	1.49	21.34	21.50	0.142	2025/4/11	
Back Side	23230/782	10M QPSK(25,0)	0.130	0.080	-3.85	21.34	21.50	0.135	2025/4/11	

NOTE: Body-Worn SAR test results of LTE Band 13

Test Position of Hotspot	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						

with 10mm										
1RB										
Front Side	23230/782	10M QPSK(1,0)	0.150	0.084	1.43	20.87	21.00	0.155	2025/4/11	
Back Side	23230/782	10M QPSK(1,0)	0.144	0.084	1.64	20.87	21.00	0.148	2025/4/11	
Left Side	23230/782	10M QPSK(1,0)	0.075	0.044	0.12	20.87	21.00	0.077	2025/4/11	
Right Side	23230/782	10M QPSK(1,0)	0.147	0.085	0.66	20.87	21.00	0.151	2025/4/11	
Bottom Side	23230/782	10M QPSK(1,0)	0.201	0.118	-1.72	20.87	21.00	0.207	2025/4/11	52#
50%RB										
Front Side	23230/782	10M QPSK(25,0)	0.137	0.079	1.49	21.34	21.50	0.142	2025/4/11	
Back Side	23230/782	10M QPSK(25,0)	0.130	0.080	-3.85	21.34	21.50	0.135	2025/4/11	
Left Side	23230/782	10M QPSK(25,0)	0.068	0.041	-2.52	21.34	21.50	0.071	2025/4/11	
Right Side	23230/782	10M QPSK(25,0)	0.136	0.080	-3.56	21.34	21.50	0.141	2025/4/11	
Bottom Side	23230/782	10M QPSK(25,0)	0.190	0.111	-3.04	21.34	21.50	0.197	2025/4/11	

NOTE: Hotspot SAR test results of LTE Band 13

10.1.12. SAR measurement Result of LTE Band 17

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	23790/710	10M QPSK(1,24)	0.045	0.036	-3.24	21.93	22.00	0.046	2025/4/25	53#
Left Tilt 15 Degree	23790/710	10M QPSK(1,24)	0.023	0.018	1.43	21.93	22.00	0.023	2025/4/25	
Right Cheek	23790/710	10M QPSK(1,24)	0.039	0.031	0.52	21.93	22.00	0.040	2025/4/25	

Right Tilt 15 Degree	23790/710	10M QPSK(1,24)	0.018	0.016	3.51	21.93	22.00	0.018	2025/4/25	
50%RB										
Left Cheek	23790/710	10M QPSK(25,0)	0.023	0.021	0.80	21.36	21.50	0.024	2025/4/25	
Left Tilt 15 Degree	23790/710	10M QPSK(25,0)	0.014	0.009	4.15	21.36	21.50	0.014	2025/4/25	
Right Cheek	23790/710	10M QPSK(25,0)	0.020	0.016	-2.73	21.36	21.50	0.021	2025/4/25	
Right Tilt 15 Degree	23790/710	10M QPSK(25,0)	0.009	0.009	3.44	21.36	21.50	0.009	2025/4/25	

NOTE: Head SAR test results of LTE Band 17

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	23790/710	10M QPSK(1,24)	0.132	0.074	2.78	21.93	22.00	0.134	2025/4/25	
Back Side	23790/710	10M QPSK(1,24)	0.114	0.065	1.57	21.93	22.00	0.116	2025/4/25	
50%RB										
Front Side	23790/710	10M QPSK(25,0)	0.071	0.037	-4.32	21.36	21.50	0.073	2025/4/25	
Back Side	23790/710	10M QPSK(25,0)	0.058	0.034	3.51	21.36	21.50	0.060	2025/4/25	

NOTE: Body-Worn SAR test results of LTE Band 17

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
			1RB							
Front	23790/710	10M QPSK(1,24)	0.132	0.074	2.78	21.93	22.00	0.134	2025/4/25	

Side										
Back Side	23790/710	10M QPSK(1,24)	0.114	0.065	1.57	21.93	22.00	0.116	2025/4/25	
Left Side	23790/710	10M QPSK(1,24)	0.069	0.040	-2.85	21.93	22.00	0.070	2025/4/25	
Right Side	23790/710	10M QPSK(1,24)	0.140	0.079	-0.93	21.93	22.00	0.142	2025/4/25	
Bottom Side	23790/710	10M QPSK(1,24)	0.181	0.107	-0.25	21.93	22.00	0.184	2025/4/25	54#
50%RB										
Front Side	23790/710	10M QPSK(25,0)	0.071	0.037	-4.32	21.36	21.50	0.073	2025/4/25	
Back Side	23790/710	10M QPSK(25,0)	0.058	0.034	3.51	21.36	21.50	0.060	2025/4/25	
Left Side	23790/710	10M QPSK(25,0)	0.036	0.020	4.38	21.36	21.50	0.037	2025/4/25	
Right Side	23790/710	10M QPSK(25,0)	0.076	0.043	1.05	21.36	21.50	0.078	2025/4/25	
Bottom Side	23790/710	10M QPSK(25,0)	0.106	0.060	-4.28	21.36	21.50	0.109	2025/4/25	

NOTE: Hotspot SAR test results of LTE Band 17

10.1.13. SAR measurement Result of LTE Band 25

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	26365/1882.5	20M QPSK(1,49)	0.060	0.035	-2.44	21.49	22.00	0.067	2025/4/28	55#
Left Tilt 15 Degree	26365/1882.5	20M QPSK(1,49)	0.035	0.020	3.54	21.49	22.00	0.039	2025/4/28	
Right Cheek	26365/1882.5	20M QPSK(1,49)	0.053	0.030	-3.45	21.49	22.00	0.060	2025/4/28	
Right Tilt 15 Degree	26365/1882.5	20M QPSK(1,49)	0.027	0.015	-1.34	21.49	22.00	0.030	2025/4/28	
50%RB										
Left	26365/1882.5	20M	0.057	0.030	2.37	22.00	22.50	0.064	2025/4/28	

Cheek		QPSK(25,0)								
Left Tilt 15 Degree	26365/1882.5	20M QPSK(25,0)	0.032	0.018	0.05	22.00	22.50	0.036	2025/4/28	
Right Cheek	26365/1882.5	20M QPSK(25,0)	0.046	0.028	-2.21	22.00	22.50	0.052	2025/4/28	
Right Tilt 15 Degree	26365/1882.5	20M QPSK(25,0)	0.025	0.013	0.32	22.00	22.50	0.028	2025/4/28	

NOTE: Head SAR test results of LTE Band 25

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	26365/1882.5	20M QPSK(1,49)	0.168	0.088	1.07	21.49	22.00	0.189	2025/4/28	
Back Side	26365/1882.5	20M QPSK(1,49)	0.189	0.098	-3.15	21.49	22.00	0.213	2025/4/28	
50%RB										
Front Side	26365/1882.5	20M QPSK(25,0)	0.157	0.075	2.38	22.00	22.50	0.176	2025/4/28	
Back Side	26365/1882.5	20M QPSK(25,0)	0.165	0.085	-2.16	22.00	22.50	0.185	2025/4/28	

NOTE: Body-Worn SAR test results of LTE Band 25

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	26365/1882.5	20M QPSK(1,49)	0.168	0.088	1.07	21.49	22.00	0.189	2025/4/28	
Back Side	26365/1882.5	20M QPSK(1,49)	0.189	0.098	-3.15	21.49	22.00	0.213	2025/4/28	
Left Side	26365/1882.5	20M QPSK(1,49)	0.076	0.039	-1.41	21.49	22.00	0.085	2025/4/28	

Right Side	26365/1882.5	20M QPSK(1,49)	0.076	0.039	2.35	21.49	22.00	0.085	2025/4/28	
Bottom Side	26365/1882.5	20M QPSK(1,49)	0.371	0.198	-1.17	21.49	22.00	0.417	2025/4/28	56#
50%RB										
Front Side	26365/1882.5	20M QPSK(25,0)	0.157	0.075	2.38	22.00	22.50	0.176	2025/4/28	
Back Side	26365/1882.5	20M QPSK(25,0)	0.165	0.085	-2.16	22.00	22.50	0.185	2025/4/28	
Left Side	26365/1882.5	20M QPSK(25,0)	0.070	0.037	2.35	22.00	22.50	0.079	2025/4/28	
Right Side	26365/1882.5	20M QPSK(25,0)	0.070	0.037	-4.30	22.00	22.50	0.079	2025/4/28	
Bottom Side	26365/1882.5	20M QPSK(25,0)	0.348	0.172	-1.85	22.00	22.50	0.390	2025/4/28	

NOTE: Hotspot SAR test results of LTE Band 25

10.1.14. SAR measurement Result of LTE Band 26a

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	26740/819	10M QPSK(1,0)	0.062	0.049	0.42	24.69	25.00	0.067	2025/4/26	57#
Left Tilt 15 Degree	26740/819	10M QPSK(1,0)	0.037	0.029	-1.18	24.69	25.00	0.040	2025/4/26	
Right Cheek	26740/819	10M QPSK(1,0)	0.059	0.047	-2.23	24.69	25.00	0.063	2025/4/26	
Right Tilt 15 Degree	26740/819	10M QPSK(1,0)	0.029	0.022	-3.03	24.69	25.00	0.031	2025/4/26	
50%RB										
Left Cheek	26740/819	10M QPSK(25,0)	0.034	0.025	1.59	24.70	25.00	0.036	2025/4/26	
Left Tilt 15 Degree	26740/819	10M QPSK(25,0)	0.020	0.016	0.46	24.70	25.00	0.021	2025/4/26	
Right	26740/819	10M	0.030	0.025	-1.97	24.70	25.00	0.032	2025/4/26	

Cheek		QPSK(25,0)								
Right Tilt 15 Degree	26740/819	10M QPSK(25,0)	0.017	0.013	2.48	24.70	25.00	0.018	2025/4/26	

NOTE: Head SAR test results of LTE Band 26a

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	26740/819	10M QPSK(1,0)	0.168	0.086	0.67	24.69	25.00	0.180	2025/4/26	
Back Side	26740/819	10M QPSK(1,0)	0.174	0.087	-1.45	24.69	25.00	0.187	2025/4/26	
50%RB										
Front Side	26740/819	10M QPSK(25,0)	0.098	0.048	-2.16	24.70	25.00	0.105	2025/4/26	
Back Side	26740/819	10M QPSK(25,0)	0.099	0.046	-1.40	24.70	25.00	0.106	2025/4/26	

NOTE: Body-Worn SAR test results of LTE Band 26a

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	26740/819	10M QPSK(1,0)	0.168	0.086	0.67	24.69	25.00	0.180	2025/4/26	
Back Side	26740/819	10M QPSK(1,0)	0.174	0.087	-1.45	24.69	25.00	0.187	2025/4/26	
Left Side	26740/819	10M QPSK(1,0)	0.090	0.045	-0.92	24.69	25.00	0.097	2025/4/26	
Right Side	26740/819	10M QPSK(1,0)	0.210	0.107	-1.85	24.69	25.00	0.226	2025/4/26	
Bottom Side	26740/819	10M QPSK(1,0)	0.268	0.163	-1.19	24.69	25.00	0.288	2025/4/26	58#
50%RB										

Front Side	26740/819	10M QPSK(25,0)	0.098	0.048	-2.16	24.70	25.00	0.105	2025/4/26	
Back Side	26740/819	10M QPSK(25,0)	0.099	0.046	-1.40	24.70	25.00	0.106	2025/4/26	
Left Side	26740/819	10M QPSK(25,0)	0.053	0.026	3.13	24.70	25.00	0.057	2025/4/26	
Right Side	26740/819	10M QPSK(25,0)	0.121	0.058	-4.48	24.70	25.00	0.130	2025/4/26	
Bottom Side	26740/819	10M QPSK(25,0)	0.152	0.083	1.30	24.70	25.00	0.163	2025/4/26	

NOTE: Hotspot SAR test results of LTE Band 26a

10.1.15. SAR measurement Result of LTE Band 26b

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	26865/831.5	15M QPSK(1,37)	0.072	0.058	1.32	21.63	22.00	0.078	2025/4/26	59#
Left Tilt 15 Degree	26865/831.5	15M QPSK(1,37)	0.036	0.029	1.92	21.63	22.00	0.039	2025/4/26	
Right Cheek	26865/831.5	15M QPSK(1,37)	0.068	0.054	-1.50	21.63	22.00	0.074	2025/4/26	
Right Tilt 15 Degree	26865/831.5	15M QPSK(1,37)	0.036	0.028	-3.49	21.63	22.00	0.039	2025/4/26	
50%RB										
Left Cheek	26865/831.5	15M QPSK(36,0)	0.041	0.032	2.17	21.50	22.00	0.046	2025/4/26	
Left Tilt 15 Degree	26865/831.5	15M QPSK(36,0)	0.021	0.017	3.35	21.50	22.00	0.024	2025/4/26	
Right Cheek	26865/831.5	15M QPSK(36,0)	0.037	0.032	-0.39	21.50	22.00	0.042	2025/4/26	
Right Tilt 15 Degree	26865/831.5	15M QPSK(36,0)	0.021	0.017	-3.93	21.50	22.00	0.024	2025/4/26	

NOTE: Head SAR test results of LTE Band 26b

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	26865/831.5	15M QPSK(1,37)	0.186	0.107	1.37	21.63	22.00	0.203	2025/4/26	
Back Side	26865/831.5	15M QPSK(1,37)	0.174	0.104	-1.20	21.63	22.00	0.189	2025/4/26	
50%RB										
Front Side	26865/831.5	15M QPSK(36,0)	0.105	0.063	-2.12	21.50	22.00	0.118	2025/4/26	
Back Side	26865/831.5	15M QPSK(36,0)	0.090	0.061	4.01	21.50	22.00	0.101	2025/4/26	

NOTE: Body-Worn SAR test results of LTE Band 26b

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	26865/831.5	15M QPSK(1,37)	0.186	0.107	1.37	21.63	22.00	0.203	2025/4/26	
Back Side	26865/831.5	15M QPSK(1,37)	0.174	0.104	-1.20	21.63	22.00	0.189	2025/4/26	
Left Side	26865/831.5	15M QPSK(1,37)	0.090	0.053	0.00	21.63	22.00	0.098	2025/4/26	
Right Side	26865/831.5	15M QPSK(1,37)	0.217	0.127	-3.23	21.63	22.00	0.236	2025/4/26	
Bottom Side	26865/831.5	15M QPSK(1,37)	0.279	0.146	-1.46	21.63	22.00	0.304	2025/4/26	60#
50%RB										
Front Side	26865/831.5	15M QPSK(36,0)	0.105	0.063	-2.12	21.50	22.00	0.118	2025/4/26	
Back Side	26865/831.5	15M QPSK(36,0)	0.090	0.061	4.01	21.50	22.00	0.101	2025/4/26	
Left	26865/831.5	15M	0.046	0.029	-2.07	21.50	22.00	0.052	2025/4/26	

NOTE: Hotspot SAR test results of LTE Band 26b

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	38000/2595	20M QPSK(1,49)	0.366	0.186	-4.23	21.04	21.50	0.407	2025/4/29	61#
Left Tilt 15 Degree	38000/2595	20M QPSK(1,49)	0.210	0.104	-1.17	21.04	21.50	0.233	2025/4/29	
Right Cheek	38000/2595	20M QPSK(1,49)	0.334	0.166	-0.52	21.04	21.50	0.371	2025/4/29	
Right Tilt 15 Degree	38000/2595	20M QPSK(1,49)	0.168	0.084	-1.23	21.04	21.50	0.187	2025/4/29	
50%RB										
Left Cheek	38000/2595	20M QPSK(50,24)	0.334	0.164	0.97	21.20	21.50	0.358	2025/4/29	
Left Tilt 15 Degree	38000/2595	20M QPSK(50,24)	0.179	0.090	3.68	21.20	21.50	0.192	2025/4/29	
Right Cheek	38000/2595	20M QPSK(50,24)	0.317	0.142	-0.20	21.20	21.50	0.340	2025/4/29	
Right Tilt 15 Degree	38000/2595	20M QPSK(50,24)	0.145	0.077	0.54	21.20	21.50	0.155	2025/4/29	

Test Position of Body-Worn	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g	Date	Plot
			1-g	10-g						

with 10mm								(W/Kg)		
1RB										
Front Side	38000/2595	20M QPSK(1,49)	0.149	0.072	2.85	21.04	21.50	0.166	2025/4/29	
Back Side	38000/2595	20M QPSK(1,49)	0.180	0.086	0.25	21.04	21.50	0.200	2025/4/29	
50%RB										
Front Side	38000/2595	20M QPSK(50,24)	0.131	0.067	-2.96	21.20	21.50	0.140	2025/4/29	
Back Side	38000/2595	20M QPSK(50,24)	0.166	0.076	-4.50	21.20	21.50	0.178	2025/4/29	

NOTE: Body-Worn SAR test results of LTE Band 38

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	38000/2595	20M QPSK(1,49)	0.149	0.072	2.85	21.04	21.50	0.166	2025/4/29	
Back Side	38000/2595	20M QPSK(1,49)	0.180	0.086	0.25	21.04	21.50	0.200	2025/4/29	
Left Side	38000/2595	20M QPSK(1,49)	0.257	0.129	-2.41	21.04	21.50	0.286	2025/4/29	62#
Right Side	38000/2595	20M QPSK(1,49)	0.054	0.027	1.63	21.04	21.50	0.060	2025/4/29	
Top Side	38000/2595	20M QPSK(1,49)	0.116	0.056	-3.53	21.04	21.50	0.129	2025/4/29	
50%RB										
Front Side	38000/2595	20M QPSK(50,24)	0.131	0.067	-2.96	21.20	21.50	0.140	2025/4/29	
Back Side	38000/2595	20M QPSK(50,24)	0.166	0.076	-4.50	21.20	21.50	0.178	2025/4/29	
Left Side	38000/2595	20M QPSK(50,24)	0.244	0.117	1.12	21.20	21.50	0.261	2025/4/29	
Right Side	38000/2595	20M QPSK(50,24)	0.049	0.023	-4.14	21.20	21.50	0.053	2025/4/29	
Top	38000/2595	20M	0.105	0.052	-4.57	21.20	21.50	0.113	2025/4/29	

Side QPSK(50,24)

NOTE: Hotspot SAR test results of LTE Band 38

10.1.17. SAR measurement Result of LTE Band 41

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	40620/2593	20M QPSK(1,49)	0.380	0.195	0.58	24.18	25.00	0.459	2025/4/29	63#
Left Tilt 15 Degree	40620/2593	20M QPSK(1,49)	0.223	0.112	-2.42	24.18	25.00	0.269	2025/4/29	
Right Cheek	40620/2593	20M QPSK(1,49)	0.333	0.167	-1.04	24.18	25.00	0.402	2025/4/29	
Right Tilt 15 Degree	40620/2593	20M QPSK(1,49)	0.173	0.088	2.85	24.18	25.00	0.209	2025/4/29	
50%RB										
Left Cheek	40620/2593	20M QPSK(50,24)	0.228	0.111	-4.33	23.28	24.00	0.269	2025/4/29	
Left Tilt 15 Degree	40620/2593	20M QPSK(50,24)	0.130	0.067	1.23	23.28	24.00	0.153	2025/4/29	
Right Cheek	40620/2593	20M QPSK(50,24)	0.193	0.090	-2.62	23.28	24.00	0.228	2025/4/29	
Right Tilt 15 Degree	40620/2593	20M QPSK(50,24)	0.099	0.049	-1.31	23.28	24.00	0.117	2025/4/29	

NOTE: Head SAR test results of LTE Band 41

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	40620/2593	20M QPSK(1,49)	0.149	0.072	1.58	24.18	25.00	0.180	2025/4/29	
Back Side	40620/2593	20M	0.174	0.086	2.89	24.18	25.00	0.210	2025/4/29	

		QPSK(1,49)								
50%RB										
Front Side	40620/2593	20M QPSK(50,24)	0.085	0.040	2.99	23.28	24.00	0.100	2025/4/29	
Back Side	40620/2593	20M QPSK(50,24)	0.090	0.044	-0.64	23.28	24.00	0.106	2025/4/29	

NOTE: Body-Worn SAR test results of LTE Band 41

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	40620/2593	20M QPSK(1,49)	0.149	0.072	1.58	24.18	25.00	0.180	2025/4/29	
Back Side	40620/2593	20M QPSK(1,49)	0.174	0.086	2.89	24.18	25.00	0.210	2025/4/29	
Left Side	40620/2593	20M QPSK(1,49)	0.257	0.131	0.94	24.18	25.00	0.310	2025/4/29	64#
Right Side	40620/2593	20M QPSK(1,49)	0.060	0.029	-0.15	24.18	25.00	0.072	2025/4/29	
Top Side	40620/2593	20M QPSK(1,49)	0.112	0.056	-3.95	24.18	25.00	0.135	2025/4/29	
50%RB										
Front Side	40620/2593	20M QPSK(50,24)	0.085	0.040	2.99	23.28	24.00	0.100	2025/4/29	
Back Side	40620/2593	20M QPSK(50,24)	0.090	0.044	-0.64	23.28	24.00	0.106	2025/4/29	
Left Side	40620/2593	20M QPSK(50,24)	0.133	0.078	4.52	23.28	24.00	0.157	2025/4/29	
Right Side	40620/2593	20M QPSK(50,24)	0.033	0.017	-4.06	23.28	24.00	0.039	2025/4/29	
Top Side	40620/2593	20M QPSK(50,24)	0.061	0.030	-2.14	23.28	24.00	0.072	2025/4/29	

NOTE: Hotspot SAR test results of LTE Band 41

10.1.18. SAR measurement Result of LTE Band 66

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	132322/1745	20M QPSK(1,0)	0.167	0.091	-1.52	21.68	22.00	0.180	2025/4/27	65#
Left Tilt 15 Degree	132322/1745	20M QPSK(1,0)	0.093	0.051	0.29	21.68	22.00	0.100	2025/4/27	
Right Cheek	132322/1745	20M QPSK(1,0)	0.157	0.082	0.81	21.68	22.00	0.169	2025/4/27	
Right Tilt 15 Degree	132322/1745	20M QPSK(1,0)	0.080	0.043	-3.61	21.68	22.00	0.086	2025/4/27	
50%RB										
Left Cheek	132322/1745	20M QPSK(50,0)	0.144	0.080	-4.42	21.80	22.00	0.151	2025/4/27	
Left Tilt 15 Degree	132322/1745	20M QPSK(50,0)	0.088	0.045	-4.00	21.80	22.00	0.092	2025/4/27	
Right Cheek	132322/1745	20M QPSK(50,0)	0.139	0.071	4.63	21.80	22.00	0.146	2025/4/27	
Right Tilt 15 Degree	132322/1745	20M QPSK(50,0)	0.069	0.039	-0.98	21.80	22.00	0.072	2025/4/27	

NOTE: Head SAR test results of LTE Band 66

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	132322/1745	20M QPSK(1,0)	0.212	0.117	-2.20	21.68	22.00	0.228	2025/4/27	
Back Side	132322/1745	20M QPSK(1,0)	0.234	0.130	-3.86	21.68	22.00	0.252	2025/4/27	
50%RB										

Front Side	132322/1745	20M QPSK(1,0)	0.212	0.117	-2.20	21.68	22.00	0.228	2025/4/27	
Back Side	132322/1745	20M QPSK(1,0)	0.234	0.130	-3.86	21.68	22.00	0.252	2025/4/27	

NOTE: Body-Worn SAR test results of LTE Band 66

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	132322/1745	20M QPSK(1,0)	0.212	0.117	-2.20	21.68	22.00	0.228	2025/4/27	
Back Side	132322/1745	20M QPSK(1,0)	0.234	0.130	-3.86	21.68	22.00	0.252	2025/4/27	
Left Side	132322/1745	20M QPSK(1,0)	0.106	0.059	0.12	21.68	22.00	0.114	2025/4/27	
Right Side	132322/1745	20M QPSK(1,0)	0.104	0.056	-3.71	21.68	22.00	0.112	2025/4/27	
Bottom Side	132322/1745	20M QPSK(1,0)	0.512	0.285	-0.73	21.68	22.00	0.551	2025/4/27	66#
50%RB										
Front Side	132322/1745	20M QPSK(50,0)	0.191	0.107	-3.49	21.80	22.00	0.200	2025/4/27	
Back Side	132322/1745	20M QPSK(50,0)	0.216	0.117	-1.06	21.80	22.00	0.226	2025/4/27	
Left Side	132322/1745	20M QPSK(50,0)	0.093	0.052	-2.67	21.80	22.00	0.097	2025/4/27	
Right Side	132322/1745	20M QPSK(50,0)	0.089	0.049	-0.60	21.80	22.00	0.093	2025/4/27	
Bottom Side	132322/1745	20M QPSK(50,0)	0.482	0.259	3.95	21.80	22.00	0.505	2025/4/27	

NOTE: Hotspot SAR test results of LTE Band 66

10.1.19. SAR measurement Result of NR 78

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	633334/3500.01	100M QPSK(1,1)	0.273	0.100	2.61	21.43	21.50	0.277	2025/5/10	67#
Left Tilt 15 Degree	633334/3500.01	100M QPSK(1,1)	0.138	0.050	1.94	21.43	21.50	0.140	2025/5/10	
Right Cheek	633334/3500.01	100M QPSK(1,1)	0.238	0.087	-1.16	21.43	21.50	0.242	2025/5/10	
Right Tilt 15 Degree	633334/3500.01	100M QPSK(1,1)	0.120	0.042	-2.88	21.43	21.50	0.122	2025/5/10	
50%RB										
Left Cheek	633334/3500.01	100M QPSK(1,1)	0.256	0.086	3.39	22.74	23.00	0.272	2025/5/10	
Left Tilt 15 Degree	633334/3500.01	100M QPSK(1,1)	0.123	0.045	-3.22	22.74	23.00	0.131	2025/5/10	
Right Cheek	633334/3500.01	100M QPSK(1,1)	0.210	0.081	-2.05	22.74	23.00	0.223	2025/5/10	
Right Tilt 15 Degree	633334/3500.01	100M QPSK(1,1)	0.110	0.037	2.25	22.74	23.00	0.117	2025/5/10	

NOTE: Head SAR test results of LTE Band 78

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	633334/3500.01	100M QPSK(1,1)	0.326	0.150	-2.20	21.43	21.50	0.331	2025/5/10	
Back Side	633334/3500.01	100M QPSK(1,1)	0.316	0.028	1.08	21.43	21.50	0.321	2025/5/10	
50%RB										

Front Side	633334/3500.01	100M QPSK(1,1)	0.291	0.141	1.59	22.74	23.00	0.309	2025/5/10	
Back Side	633334/3500.01	100M QPSK(1,1)	0.287	0.025	-3.49	22.74	23.00	0.305	2025/5/10	

NOTE: Body-Worn SAR test results of NR n78

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	633334/3500.01	100M QPSK(1,1)	0.326	0.150	-2.20	21.43	21.50	0.331	2025/5/10	
Back Side	633334/3500.01	100M QPSK(1,1)	0.316	0.028	1.08	21.43	21.50	0.321	2025/5/10	
Left Side	633334/3500.01	100M QPSK(1,1)	0.346	0.163	-0.61	21.43	21.50	0.352	2025/5/10	68#
Right Side	633334/3500.01	100M QPSK(1,1)	0.072	0.034	-3.89	21.43	21.50	0.073	2025/5/10	
Top Side	633334/3500.01	100M QPSK(1,1)	0.175	0.082	-3.91	21.43	21.50	0.178	2025/5/10	
50%RB										
Front Side	633334/3500.01	100M QPSK(1,1)	0.291	0.141	1.59	22.74	23.00	0.309	2025/5/10	
Back Side	633334/3500.01	100M QPSK(1,1)	0.287	0.025	-3.49	22.74	23.00	0.305	2025/5/10	
Left Side	633334/3500.01	100M QPSK(1,1)	0.297	0.145	-3.46	22.74	23.00	0.315	2025/5/10	
Right Side	633334/3500.01	100M QPSK(1,1)	0.067	0.029	-2.49	22.74	23.00	0.071	2025/5/10	
Top Side	633334/3500.01	100M QPSK(1,1)	0.165	0.076	-1.69	22.74	23.00	0.175	2025/5/10	

NOTE: Hotspot SAR test results of NR n78

10.1.20. SAR measurement Result of WLAN2.4G

Ant 1

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g	Date	Plot
			1-g	10-g						

								(W/Kg)		
Left Cheek	6/2437	802.11b	0.088	0.040	-2.20	12.58	13.00	0.097	2025/4/17	37#
Left Tilt 15 Degree	6/2437	802.11b	0.048	0.021	-1.75	12.58	13.00	0.053	2025/4/17	
Right Cheek	6/2437	802.11b	0.078	0.035	-0.05	12.58	13.00	0.086	2025/4/17	
Right Tilt 15 Degree	6/2437	802.11b	0.041	0.018	1.16	12.58	13.00	0.045	2025/4/17	

NOTE: Head SAR test results of WLAN2.4G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	6/2437	802.11b	0.021	0.012	-1.68	12.58	13.00	0.023	2025/4/17	
Back Side	6/2437	802.11b	0.014	0.009	2.94	12.58	13.00	0.015	2025/4/17	

NOTE: Body-worn SAR test results of WLAN2.4G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	6/2437	802.11b	0.021	0.012	-1.68	12.58	13.00	0.023	2025/4/17	
Back Side	6/2437	802.11b	0.014	0.009	2.94	12.58	13.00	0.015	2025/4/17	
Right Side	6/2437	802.11b	0.037	0.021	1.35	12.58	13.00	0.041	2025/4/17	40#
Top Side	6/2437	802.11b	0.016	0.010	-2.53	12.58	13.00	0.018	2025/4/17	

NOTE: Hotspot SAR test results of WLAN2.4G

Ant 2

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	6/2437	802.11b	0.059	0.033	-4.47	10.49	11.00	0.066	2025/4/17	36#
Left Tilt 15 Degree	6/2437	802.11b	0.034	0.018	-1.36	10.49	11.00	0.038	2025/4/17	
Right Cheek	6/2437	802.11b	0.053	0.029	0.44	10.49	11.00	0.060	2025/4/17	
Right Tilt 15 Degree	6/2437	802.11b	0.028	0.016	-2.69	10.49	11.00	0.031	2025/4/17	

NOTE: Head SAR test results of WLAN2.4G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	6/2437	802.11b	0.020	0.011	0.93	10.49	11.00	0.022	2025/4/17	
Back Side	6/2437	802.11b	0.012	0.007	-1.36	10.49	11.00	0.013	2025/4/17	

NOTE: Body-worn SAR test results of WLAN2.4G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	6/2437	802.11b	0.020	0.011	0.93	10.49	11.00	0.022	2025/4/17	
Back Side	6/2437	802.11b	0.012	0.007	-1.36	10.49	11.00	0.013	2025/4/17	
Right Side	6/2437	802.11b	0.014	0.008	-1.59	10.49	11.00	0.016	2025/4/17	
Top Side	6/2437	802.11b	0.024	0.015	2.91	10.49	11.00	0.027	2025/4/17	39#

NOTE: Hotspot SAR test results of WLAN2.4G

MIMO

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	6/2437	802.11b	0.148	0.065	1.04	15.09	15.50	0.163	2025/4/17	35#
Left Tilt 15 Degree	6/2437	802.11b	0.079	0.033	2.09	15.09	15.50	0.087	2025/4/17	
Right Cheek	6/2437	802.11b	0.134	0.059	-0.03	15.09	15.50	0.147	2025/4/17	
Right Tilt 15 Degree	6/2437	802.11b	0.064	0.027	-3.98	15.09	15.50	0.070	2025/4/17	

NOTE: Head SAR test results of WLAN2.4G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	6/2437	802.11b	0.045	0.026	-2.31	15.09	15.50	0.049	2025/4/17	
Back Side	6/2437	802.11b	0.024	0.014	-1.29	15.09	15.50	0.026	2025/4/17	

NOTE: Body-worn SAR test results of WLAN2.4G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	6/2437	802.11b	0.045	0.026	-2.31	15.09	15.50	0.049	2025/4/17	
Back Side	6/2437	802.11b	0.024	0.014	-1.29	15.09	15.50	0.026	2025/4/17	
Right Side	6/2437	802.11b	0.052	0.030	-1.55	15.09	15.50	0.057	2025/4/17	38#
Top Side	6/2437	802.11b	0.030	0.017	-3.18	15.09	15.50	0.033	2025/4/17	

10.1.21. SAR measurement Result of WLAN5.2G

Ant 1

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	40/5200	802.11n HT20	0.287	0.106	-1.64	11.60	12.00	0.315	2025/4/21	13#
Left Tilt 15 Degree	40/5200	802.11n HT20	0.167	0.061	-3.81	11.60	12.00	0.183	2025/4/21	
Right Cheek	40/5200	802.11n HT20	0.269	0.096	1.46	11.60	12.00	0.295	2025/4/21	
Right Tilt 15 Degree	40/5200	802.11n HT20	0.131	0.047	-1.74	11.60	12.00	0.144	2025/4/21	

NOTE: Head SAR test results of WLAN5.2G Ant1

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	40/5200	802.11n HT20	0.063	0.028	-3.13	11.60	12.00	0.069	2025/4/21	
Back Side	40/5200	802.11n HT20	0.143	0.062	-0.70	11.60	12.00	0.157	2025/4/21	

NOTE: Head SAR test results of WLAN5.2G Ant1

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	40/5200	802.11n HT20	0.063	0.028	-3.13	11.60	12.00	0.069	2025/4/21	
Back Side	40/5200	802.11n HT20	0.143	0.062	-0.70	11.60	12.00	0.157	2025/4/21	
Right Side	40/5200	802.11n HT20	0.138	0.061	2.99	11.60	12.00	0.151	2025/4/21	

Top Side	40/5200	802.11n HT20	0.194	0.087	4.30	11.60	12.00	0.213	2025/4/21	15#
----------	---------	-----------------	-------	-------	------	-------	-------	-------	-----------	-----

NOTE: Head SAR test results of WLAN5.2G Ant1

Ant 2

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	40/5200	802.11a	0.277	0.120	-3.89	11.05	12.00	0.345	2025/4/21	11#
Left Tilt 15 Degree	40/5200	802.11a	0.143	0.059	-3.70	11.05	12.00	0.178	2025/4/21	
Right Cheek	40/5200	802.11a	0.244	0.104	2.45	11.05	12.00	0.304	2025/4/21	
Right Tilt 15 Degree	40/5200	802.11a	0.130	0.054	3.87	11.05	12.00	0.162	2025/4/21	

NOTE: Extremity SAR test results of 5.2G Ant2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	40/5200	802.11a	0.074	0.031	1.44	11.05	12.00	0.092	2025/4/21	
Back Side	40/5200	802.11a	0.088	0.039	-2.38	11.05	12.00	0.110	2025/4/21	

NOTE: Extremity SAR test results of 5.2G Ant2

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	40/5200	802.11a	0.074	0.031	1.44	11.05	12.00	0.092	2025/4/21	
Back Side	40/5200	802.11a	0.088	0.039	-2.38	11.05	12.00	0.110	2025/4/21	
Right	40/5200	802.11a	0.184	0.081	-0.60	11.05	12.00	0.229	2025/4/21	16#

Side										
Top Side	40/5200	802.11a	0.100	0.043	2.56	11.05	12.00	0.124	2025/4/21	

NOTE: Extremity SAR test results of 5.2G Ant2

MIMO

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	46/5230	802.11ax HE40	0.436	0.166	-3.92	14.59	15.00	0.479	2025/4/21	12#
Left Tilt 15 Degree	46/5230	802.11ax HE40	0.251	0.093	-2.26	14.59	15.00	0.276	2025/4/21	
Right Cheek	46/5230	802.11ax HE40	0.374	0.140	1.86	14.59	15.00	0.411	2025/4/21	
Right Tilt 15 Degree	46/5230	802.11ax HE40	0.188	0.069	1.18	14.59	15.00	0.207	2025/4/21	

NOTE: Extremity SAR test results of 5.2G MIMO

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	46/5230	802.11ax HE40	0.096	0.037	-2.87	14.59	15.00	0.106	2025/4/21	
Back Side	46/5230	802.11ax HE40	0.144	0.055	-1.08	14.59	15.00	0.158	2025/4/21	

NOTE: Extremity SAR test results of 5.2G MIMO

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	46/5230	802.11ax HE40	0.096	0.037	-2.87	14.59	15.00	0.106	2025/4/21	
Back	46/5230	802.11ax	0.144	0.055	-1.08	14.59	15.00	0.158	2025/4/21	

Side		HE40								
Right Side	46/5230	802.11ax HE40	0.261	0.102	1.58	14.59	15.00	0.287	2025/4/21	
Top Side	46/5230	802.11ax HE40	0.274	0.110	0.51	14.59	15.00	0.301	2025/4/21	14#

NOTE: Extremity SAR test results of 5.2G MIMO

10.1.22. SAR measurement Result of WLAN5.3G

Ant 1

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	54/5270	802.11ax HE40	0.337	0.127	-3.64	13.10	13.50	0.370	2025/4/22	17#
Left Tilt 15 Degree	54/5270	802.11ax HE40	0.197	0.071	3.70	13.10	13.50	0.216	2025/4/22	
Right Cheek	54/5270	802.11ax HE40	0.294	0.105	-3.16	13.10	13.50	0.322	2025/4/22	
Right Tilt 15 Degree	54/5270	802.11ax HE40	0.149	0.053	0.75	13.10	13.50	0.163	2025/4/22	

NOTE: Head SAR test results of WLAN5.3G Ant1

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	54/5270	802.11ax HE40	0.087	0.035	-1.85	13.10	13.50	0.095	2025/4/22	
Back Side	54/5270	802.11ax HE40	0.202	0.079	-2.88	13.10	13.50	0.221	2025/4/22	

NOTE: Head SAR test results of WLAN5.3G Ant1

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						

Front Side	54/5270	802.11ax HE40	0.087	0.035	-1.85	13.10	13.50	0.095	2025/4/22	
Back Side	54/5270	802.11ax HE40	0.202	0.079	-2.88	13.10	13.50	0.221	2025/4/22	
Right Side	54/5270	802.11ax HE40	0.180	0.071	1.43	13.10	13.50	0.197	2025/4/22	
Top Side	54/5270	802.11ax HE40	0.267	0.110	-0.90	13.10	13.50	0.293	2025/4/22	21#

NOTE: Head SAR test results of WLAN5.3G Ant1

Ant 2

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	56/5280	802.11a	0.354	0.115	-2.30	11.20	12.00	0.426	2025/4/22	18#
Left Tilt 15 Degree	56/5280	802.11a	0.204	0.065	-2.37	11.20	12.00	0.245	2025/4/22	
Right Cheek	56/5280	802.11a	0.334	0.109	-1.42	11.20	12.00	0.402	2025/4/22	
Right Tilt 15 Degree	56/5280	802.11a	0.151	0.048	-3.46	11.20	12.00	0.182	2025/4/22	

NOTE: Head SAR test results of WLAN5.3G Ant2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	56/5280	802.11a	0.102	0.044	2.78	11.20	12.00	0.123	2025/4/22	
Back Side	56/5280	802.11a	0.108	0.045	2.71	11.20	12.00	0.130	2025/4/22	

NOTE: Head SAR test results of WLAN5.3G Ant2

Test Position of Hotspot with	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						

10mm										
Front Side	56/5280	802.11a	0.102	0.044	2.78	11.20	12.00	0.123	2025/4/22	
Back Side	56/5280	802.11a	0.108	0.045	2.71	11.20	12.00	0.130	2025/4/22	
Right Side	56/5280	802.11a	0.257	0.111	-2.05	11.20	12.00	0.309	2025/4/22	22#
Top Side	56/5280	802.11a	0.130	0.054	0.10	11.20	12.00	0.156	2025/4/22	

NOTE: Head SAR test results of WLAN5.3G Ant2

MIMO

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	56/5280	802.11n HT20	0.500	0.179	-4.44	15.25	15.50	0.530	2025/4/22	19#
Left Tilt 15 Degree	56/5280	802.11n HT20	0.254	0.090	2.94	15.25	15.50	0.269	2025/4/22	
Right Cheek	56/5280	802.11n HT20	0.470	0.160	2.72	15.25	15.50	0.498	2025/4/22	
Right Tilt 15 Degree	56/5280	802.11n HT20	0.242	0.087	2.02	15.25	15.50	0.256	2025/4/22	

NOTE: Head SAR test results of WLAN5.3G MIMO

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	56/5280	802.11n HT20	0.114	0.043	-1.98	15.25	15.50	0.121	2025/4/22	
Back Side	56/5280	802.11n HT20	0.162	0.058	-2.34	15.25	15.50	0.172	2025/4/22	

NOTE: Head SAR test results of WLAN5.3G MIMO

Test Position of	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted	Tune-up	Scaled	Date	Plot
			1-g	10-g		Power (dBm)	Power (dBm)	SAR 1-g		

Hotspot with 10mm								(W/Kg)		
Front Side	56/5280	802.11n HT20	0.114	0.043	-1.98	15.25	15.50	0.121	2025/4/22	
Back Side	56/5280	802.11n HT20	0.162	0.058	-2.34	15.25	15.50	0.172	2025/4/22	
Right Side	56/5280	802.11n HT20	0.315	0.117	1.13	15.25	15.50	0.334	2025/4/22	
Top Side	56/5280	802.11n HT20	0.345	0.131	-3.89	15.25	15.50	0.365	2025/4/22	20#

NOTE: Head SAR test results of WLAN5.3G MIMO

10.1.23. SAR measurement Result of WLAN5.6G

Ant 1

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	120/5600	802.11a	0.417	0.151	-1.06	9.37	10.00	0.482	2025/4/23	25#
Left Tilt 15 Degree	120/5600	802.11a	0.209	0.075	3.70	9.37	10.00	0.242	2025/4/23	
Right Cheek	120/5600	802.11a	0.356	0.128	-1.22	9.37	10.00	0.412	2025/4/23	
Right Tilt 15 Degree	120/5600	802.11a	0.168	0.059	3.11	9.37	10.00	0.194	2025/4/23	

NOTE: Head SAR test results of WLAN5.6G Ant1

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	120/5600	802.11a	0.093	0.039	-1.70	9.37	10.00	0.108	2025/4/23	
Back Side	120/5600	802.11a	0.215	0.091	-0.90	9.37	10.00	0.249	2025/4/23	

NOTE: Head SAR test results of WLAN5.6G Ant1

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	120/5600	802.11a	0.093	0.039	-1.70	9.37	10.00	0.108	2025/4/23	
Back Side	120/5600	802.11a	0.215	0.091	-0.90	9.37	10.00	0.249	2025/4/23	
Right Side	120/5600	802.11a	0.204	0.084	-2.23	9.37	10.00	0.236	2025/4/23	
Top Side	120/5600	802.11a	0.304	0.129	-3.81	9.37	10.00	0.351	2025/4/23	26#

NOTE: Head SAR test results of WLAN5.6G Ant1

Ant 2

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	120/5600	802.11a	0.338	0.138	-2.66	15.81	16.50	0.396	2025/4/23	24#
Left Tilt 15 Degree	120/5600	802.11a	0.183	0.074	1.32	15.81	16.50	0.215	2025/4/23	
Right Cheek	120/5600	802.11a	0.305	0.123	3.34	15.81	16.50	0.358	2025/4/23	
Right Tilt 15 Degree	120/5600	802.11a	0.138	0.055	1.85	15.81	16.50	0.162	2025/4/23	

NOTE: Head SAR test results of WLAN5.6G Ant2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	120/5600	802.11a	0.182	0.072	-1.09	15.81	16.50	0.213	2025/4/23	
Back Side	120/5600	802.11a	0.220	0.090	3.27	15.81	16.50	0.258	2025/4/23	

NOTE: Head SAR test results of WLAN5.6G Ant2

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	120/5600	802.11a	0.182	0.072	-1.09	15.81	16.50	0.213	2025/4/23	
Back Side	120/5600	802.11a	0.220	0.090	3.27	15.81	16.50	0.258	2025/4/23	
Right Side	120/5600	802.11a	0.518	0.216	1.03	15.81	16.50	0.607	2025/4/23	28#
Top Side	120/5600	802.11a	0.270	0.108	0.47	15.81	16.50	0.316	2025/4/23	

NOTE: Head SAR test results of WLAN5.6G Ant2

MIMO

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	120/5600	802.11n HT20	0.493	0.188	-1.69	16.74	17.50	0.587	2025/4/23	23#
Left Tilt 15 Degree	120/5600	802.11n HT20	0.261	0.099	-2.41	16.74	17.50	0.311	2025/4/23	
Right Cheek	120/5600	802.11n HT20	0.453	0.164	-0.80	16.74	17.50	0.540	2025/4/23	
Right Tilt 15 Degree	120/5600	802.11n HT20	0.211	0.078	3.52	16.74	17.50	0.251	2025/4/23	

NOTE: Head SAR test results of WLAN5.6G MIMO

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	120/5600	802.11n HT20	0.135	0.054	-1.30	16.74	17.50	0.161	2025/4/23	

Back Side	120/5600	802.11n HT20	0.189	0.077	-3.59	16.74	17.50	0.225	2025/4/23	
-----------	----------	-----------------	-------	-------	-------	-------	-------	-------	-----------	--

NOTE: Head SAR test results of WLAN5.6G MIMO

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	120/5600	802.11n HT20	0.135	0.054	-1.30	16.74	17.50	0.161	2025/4/23	
Back Side	120/5600	802.11n HT20	0.189	0.077	-3.59	16.74	17.50	0.225	2025/4/23	
Right Side	120/5600	802.11n HT20	0.378	0.146	2.73	16.74	17.50	0.450	2025/4/23	
Top Side	120/5600	802.11n HT20	0.403	0.164	0.82	16.74	17.50	0.480	2025/4/23	27#

NOTE: Head SAR test results of WLAN5.6G MIMO

10.1.24. SAR measurement Result of WLAN5.8G

Ant 1

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	157/5785	802.11a	0.222	0.087	-3.67	11.79	12.50	0.261	2025/4/24	30#
Left Tilt 15 Degree	157/5785	802.11a	0.126	0.048	0.85	11.79	12.50	0.148	2025/4/24	
Right Cheek	157/5785	802.11a	0.200	0.075	1.29	11.79	12.50	0.236	2025/4/24	
Right Tilt 15 Degree	157/5785	802.11a	0.093	0.035	3.38	11.79	12.50	0.110	2025/4/24	

NOTE: Extremity SAR test results of 5.8G Ant1

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	157/5785	802.11a	0.078	0.031	3.16	11.79	12.50	0.092	2025/4/24	
Back Side	157/5785	802.11a	0.156	0.066	0.03	11.79	12.50	0.184	2025/4/24	

NOTE: Extremity SAR test results of 5.8G Ant1

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	157/5785	802.11a	0.078	0.031	3.16	11.79	12.50	0.092	2025/4/24	
Back Side	157/5785	802.11a	0.156	0.066	0.03	11.79	12.50	0.184	2025/4/24	
Right Side	157/5785	802.11a	0.162	0.069	-2.00	11.79	12.50	0.191	2025/4/24	
Top Side	157/5785	802.11a	0.226	0.096	-4.82	11.79	12.50	0.266	2025/4/24	32#

NOTE: Extremity SAR test results of 5.8G Ant1

Ant 2

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	157/5785	802.11a	0.226	0.086	-2.60	12.54	13.00	0.251	2025/4/24	31#
Left Tilt 15 Degree	157/5785	802.11a	0.123	0.044	1.15	12.54	13.00	0.137	2025/4/24	
Right Cheek	157/5785	802.11a	0.200	0.075	-2.78	12.54	13.00	0.222	2025/4/24	
Right Tilt 15 Degree	157/5785	802.11a	0.109	0.039	0.64	12.54	13.00	0.121	2025/4/24	

NOTE: Extremity SAR test results of 5.8G Ant2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	157/5785	802.11a	0.161	0.062	-1.38	12.54	13.00	0.179	2025/4/24	
Back Side	157/5785	802.11a	0.192	0.077	-2.89	12.54	13.00	0.213	2025/4/24	

NOTE: Extremity SAR test results of 5.8G Ant2

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	157/5785	802.11a	0.161	0.062	-1.38	12.54	13.00	0.179	2025/4/24	
Back Side	157/5785	802.11a	0.192	0.077	-2.89	12.54	13.00	0.213	2025/4/24	
Right Side	157/5785	802.11a	0.439	0.179	-1.80	12.54	13.00	0.488	2025/4/24	34#
Top Side	157/5785	802.11a	0.220	0.085	-0.82	12.54	13.00	0.245	2025/4/24	

NOTE: Extremity SAR test results of 5.8G Ant2

MIMO

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	157/5785	802.11n HT20	0.373	0.148	-1.72	14.73	15.00	0.397	2025/4/24	29#
Left Tilt 15 Degree	157/5785	802.11n HT20	0.213	0.081	3.37	14.73	15.00	0.227	2025/4/24	
Right Cheek	157/5785	802.11n HT20	0.352	0.133	3.59	14.73	15.00	0.375	2025/4/24	
Right Tilt 15	157/5785	802.11n HT20	0.189	0.073	-3.44	14.73	15.00	0.201	2025/4/24	

Degree										
--------	--	--	--	--	--	--	--	--	--	--

NOTE: Extremity SAR test results of 5.8G MIMO

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	157/5785	802.11n HT20	0.171	0.071	-3.72	14.73	15.00	0.182	2025/4/24	
Back Side	157/5785	802.11n HT20	0.270	0.108	-1.41	14.73	15.00	0.287	2025/4/24	

NOTE: Extremity SAR test results of 5.8G MIMO

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	157/5785	802.11n HT20	0.171	0.071	-3.72	14.73	15.00	0.182	2025/4/24	
Back Side	157/5785	802.11n HT20	0.270	0.108	-1.41	14.73	15.00	0.287	2025/4/24	
Right Side	157/5785	802.11n HT20	0.540	0.221	3.91	14.73	15.00	0.575	2025/4/24	
Top Side	157/5785	802.11n HT20	0.566	0.234	-2.18	14.73	15.00	0.602	2025/4/24	33#

NOTE: Extremity SAR test results of 5.8G MIMO

10.2. Simultaneous Transmission Analysis

Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

- Scalar SAR summation < 1.6W/kg.
- $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

Test Position	Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
	WWAN	DTS			

Head	Left Cheek	0.459	0.163	0.622	N/A	N/A
	Left Tilt 15 Degree	0.269	0.087	0.356	N/A	N/A
	Right Cheek	0.402	0.147	0.549	N/A	N/A
	Right Tilt 15 Degree	0.209	0.070	0.279	N/A	N/A
Body-Worn	Front Side	0.335	0.049	0.384	N/A	N/A
	Back Side	0.325	0.026	0.351	N/A	N/A
Hotspot	Front Side	0.335	0.049	0.384	N/A	N/A
	Back Side	0.325	0.026	0.351	N/A	N/A
	Left Side	0.356	N/A	0.356	N/A	N/A
	Right Side	0.295	0.057	0.352	N/A	N/A
	Top Side	0.180	0.033	0.213	N/A	N/A
	Bottom Side	0.660	N/A	0.660	N/A	N/A

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WWAN	NII			
Head	Left Cheek	0.459	0.587	1.046	N/A	N/A
	Left Tilt 15 Degree	0.269	0.311	0.580	N/A	N/A
	Right Cheek	0.402	0.540	0.942	N/A	N/A
	Right Tilt 15 Degree	0.209	0.256	0.465	N/A	N/A
Body-Worn	Front Side	0.335	0.213	0.548	N/A	N/A
	Back Side	0.325	0.287	0.612	N/A	N/A
Hotspot	Front Side	0.335	0.213	0.548	N/A	N/A
	Back Side	0.325	0.287	0.612	N/A	N/A
	Left Side	0.356	N/A	0.356	N/A	N/A
	Right Side	0.295	0.607	0.902	N/A	N/A
	Top Side	0.180	0.602	0.782	N/A	N/A
	Bottom Side	0.660	N/A	0.660	N/A	N/A

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WWAN	DSS			
Head	Left Cheek	0.459	0.297	0.756	N/A	N/A
	Left Tilt 15 Degree	0.269	0.297	0.566	N/A	N/A
	Right Cheek	0.402	0.297	0.699	N/A	N/A
	Right Tilt 15 Degree	0.209	0.297	0.506	N/A	N/A
Body-Worn	Front Side	0.335	0.149	0.484	N/A	N/A
	Back Side	0.325	0.149	0.474	N/A	N/A
Hotspot	Front Side	0.335	0.149	0.484	N/A	N/A
	Back Side	0.325	0.149	0.474	N/A	N/A
	Left Side	0.356	N/A	0.356	N/A	N/A
	Right Side	0.295	0.149	0.444	N/A	N/A
	Top Side	0.180	0.149	0.329	N/A	N/A
	Bottom Side	0.660	N/A	0.660	N/A	N/A

NSA

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTEBand2+N 78	DTS			
Head	Left Cheek	0.350	0.163	0.513	N/A	N/A
	Left Tilt 15 Degree	0.182	0.087	0.269	N/A	N/A
	Right Cheek	0.305	0.147	0.452	N/A	N/A
	Right Tilt 15 Degree	0.154	0.070	0.224	N/A	N/A
Body-Worn	Front Side	0.494	0.049	0.543	N/A	N/A
	Back Side	0.499	0.026	0.525	N/A	N/A
Hotspot	Front Side	0.494	0.049	0.543	N/A	N/A
	Back Side	0.499	0.026	0.525	N/A	N/A
	Left Side	0.431	N/A	0.431	N/A	N/A
	Right Side	0.213	0.057	0.270	N/A	N/A
	Top Side	0.180	0.033	0.213	N/A	N/A
	Bottom Side	0.359	N/A	0.359	N/A	N/A

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTEBand2+N 78	NII			
Head	Left Cheek	0.350	0.587	0.937	N/A	N/A
	Left Tilt 15 Degree	0.182	0.311	0.493	N/A	N/A
	Right Cheek	0.305	0.540	0.845	N/A	N/A
	Right Tilt 15 Degree	0.154	0.256	0.410	N/A	N/A
Body-Worn	Front Side	0.494	0.213	0.707	N/A	N/A
	Back Side	0.499	0.287	0.786	N/A	N/A
Hotspot	Front Side	0.494	0.213	0.707	N/A	N/A
	Back Side	0.499	0.287	0.786	N/A	N/A
	Left Side	0.431	N/A	0.431	N/A	N/A
	Right Side	0.213	0.607	0.820	N/A	N/A

	Top Side	0.180	0.602	0.782	N/A	N/A
	Bottom Side	0.359	N/A	0.359	N/A	N/A

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTEBand2+N 78	DSS			
Head	Left Cheek	0.350	0.297	0.647	N/A	N/A
	Left Tilt 15 Degree	0.182	0.297	0.479	N/A	N/A
	Right Cheek	0.305	0.297	0.602	N/A	N/A
	Right Tilt 15 Degree	0.154	0.297	0.451	N/A	N/A
Body-Worn	Front Side	0.494	0.149	0.643	N/A	N/A
	Back Side	0.499	0.149	0.648	N/A	N/A
Hotspot	Front Side	0.494	0.149	0.643	N/A	N/A
	Back Side	0.499	0.149	0.648	N/A	N/A
	Left Side	0.431	N/A	0.431	N/A	N/A
	Right Side	0.213	0.149	0.362	N/A	N/A
	Top Side	0.180	0.149	0.329	N/A	N/A
	Bottom Side	0.359	N/A	0.359	N/A	N/A

11. Appendix A. Photo documentation

Refer to appendix Test Setup photo---SAR

12. Appendix B. System Check Plots

Table of contents
MEASUREMENT 1 System Performance Check - 750MHz
MEASUREMENT 2 System Performance Check - 750MHz
MEASUREMENT 3 System Performance Check - 835MHz
MEASUREMENT 4 System Performance Check - 1800MHz
MEASUREMENT 5 System Performance Check - 1900MHz
MEASUREMENT 6 System Performance Check - 2450MHz
MEASUREMENT 7 System Performance Check - 2600MHz
MEASUREMENT 8 System Performance Check - 3500MHz
MEASUREMENT 9 System Performance Check - 5200MHz
MEASUREMENT 10 System Performance Check - 5400MHz
MEASUREMENT 11 System Performance Check - 5600MHz
MEASUREMENT 12 System Performance Check - 5800MHz

1# System check at 750 MHz

Date of measurement: 11/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.42
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW750
Channels/Frequency	Middle
Signal	CW

B. Permittivity

Middle TX Frequency (MHz)	750.000
Relative permittivity (real part)	40.57
Relative permittivity (imaginary part)	21.44
Conductivity (S/m)	0.89

C. SAR Surface and Volume

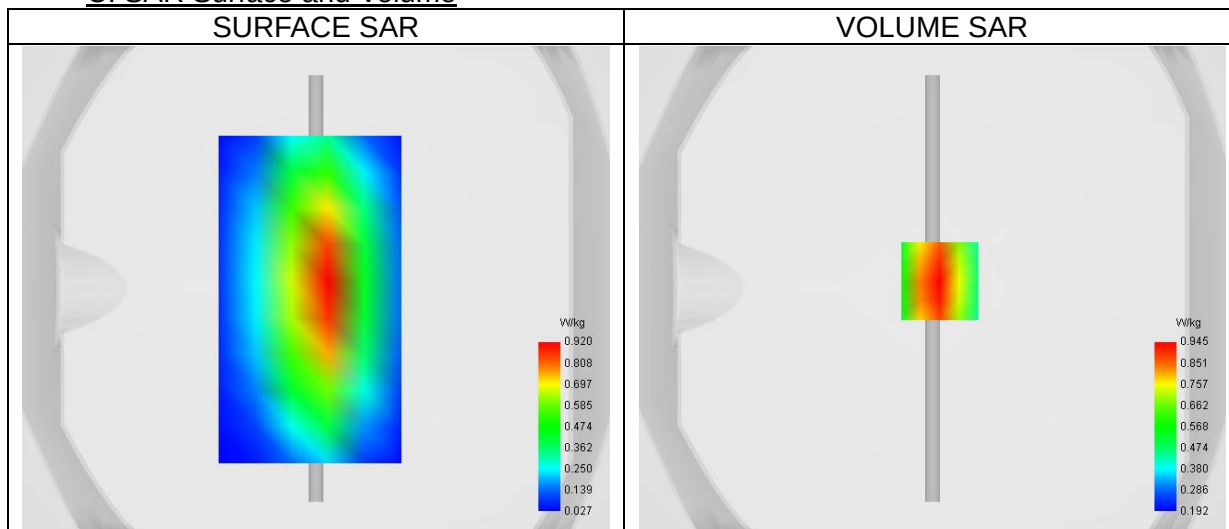


Maximum location: X=3.00, Y=3.00 ; SAR Peak: 1.20 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.633
SAR 1g (W/Kg)	0.913
Variation (%)	-0.43
Horizontal validation criteria: minimum distance (mm)	16.00
Vertical validation criteria: SAR ratio M2/M1 (%)	74.63

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.191	0.945	0.705	0.533	0.402	0.308	0.254

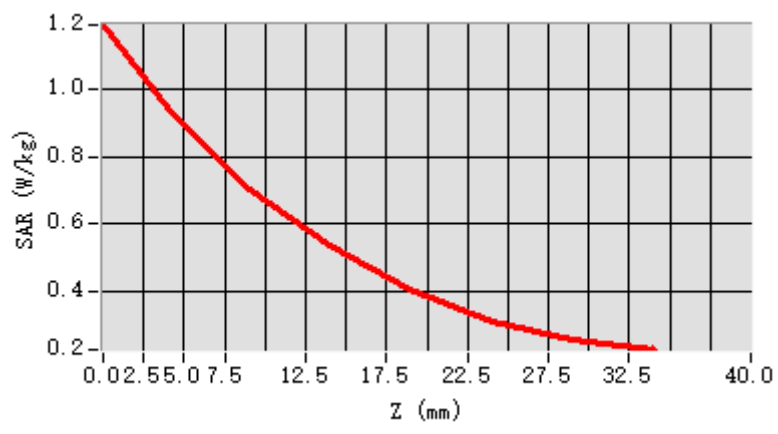

F. 3D Image

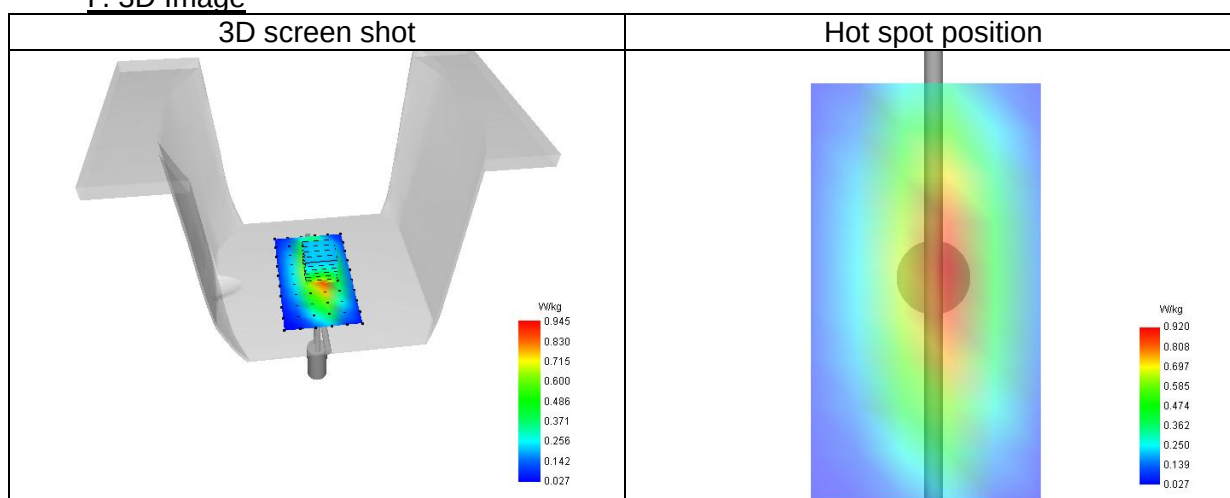

2# System check at 750 MHz

Date of measurement: 25/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.42
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW750
Channels/Frequency	Middle
Signal	CW

B. Permittivity

Middle TX Frequency (MHz)	750.000
Relative permittivity (real part)	41.05
Relative permittivity (imaginary part)	21.28
Conductivity (S/m)	0.89

C. SAR Surface and Volume

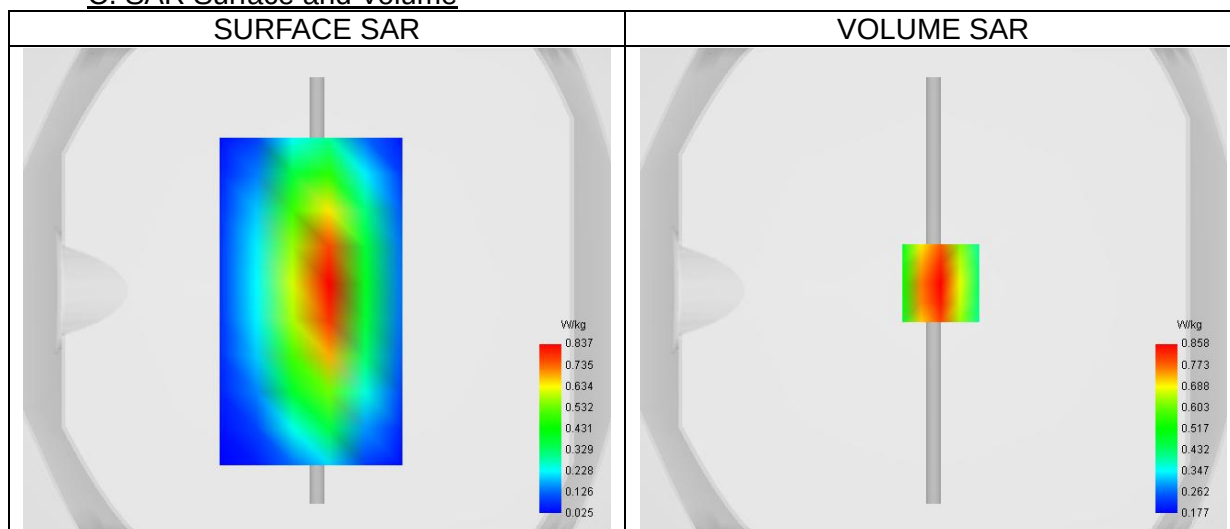


Maximum location: X=3.00, Y=3.00 ; SAR Peak: 1.08 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.578
SAR 1g (W/Kg)	0.830
Variation (%)	-0.37
Horizontal validation criteria: minimum distance (mm)	16.00
Vertical validation criteria: SAR ratio M2/M1 (%)	75.07

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.075	0.858	0.644	0.490	0.369	0.282	0.232

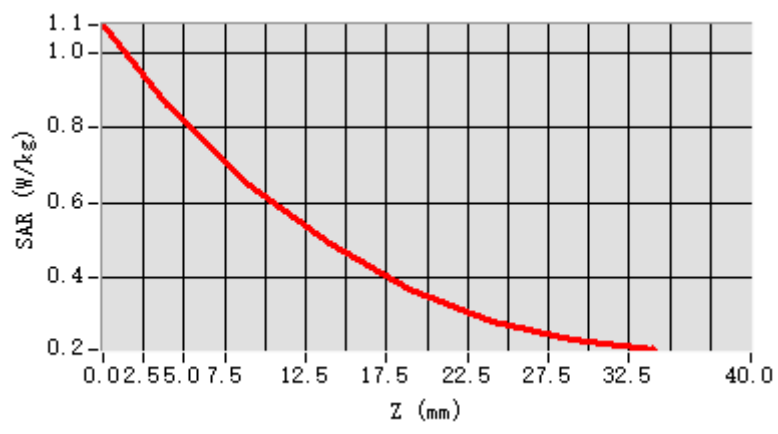

F. 3D Image

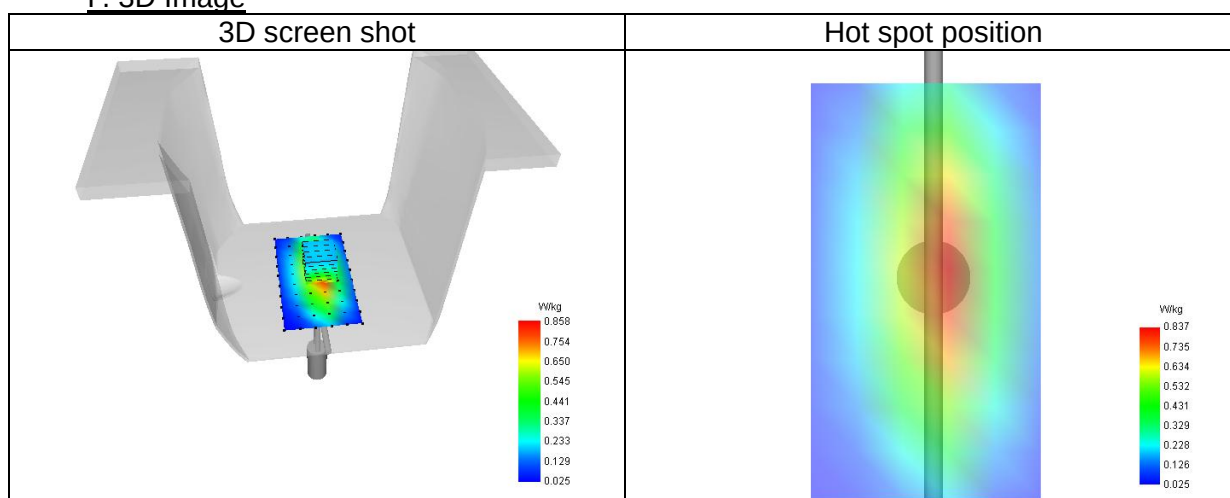

3# System check at 835 MHz

Date of measurement: 26/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	1.34
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW835
Signal	CW
Channels/Frequency	Middle

B. Permittivity

Middle TX Frequency (MHz)	835.00
Relative permittivity (real part)	42.79
Relative permittivity (imaginary part)	19.94
Conductivity (S/m)	0.92

C. SAR Surface and Volume

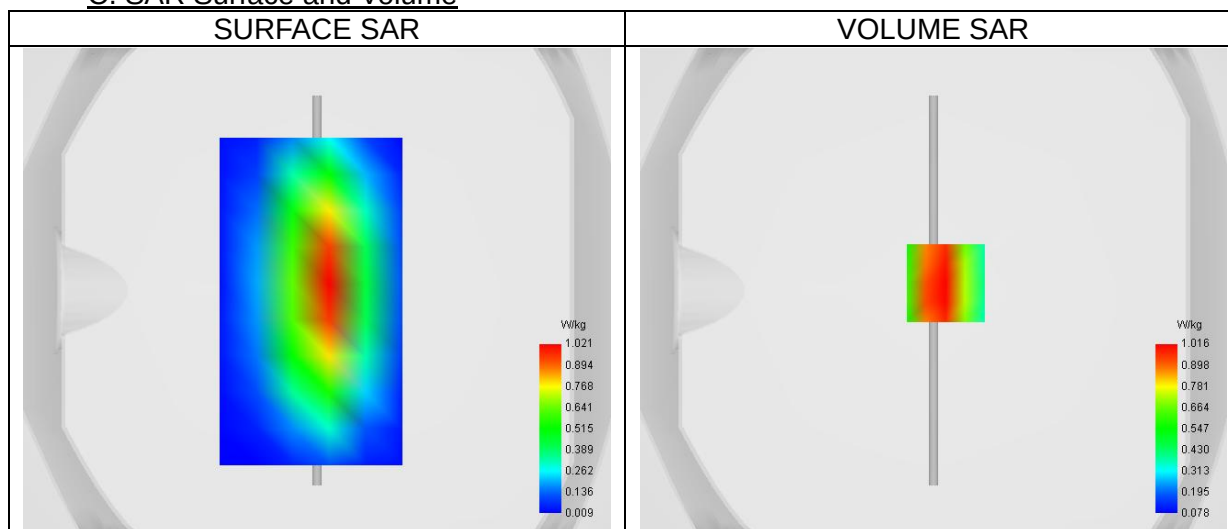


Maximum location: X=5.00, Y=3.00 ; SAR Peak: 1.52 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.604
SAR 1g (W/Kg)	0.993
Variation (%)	0.27
Horizontal validation criteria: minimum distance (mm)	16.00
Vertical validation criteria: SAR ratio M2/M1 (%)	64.33

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.426	1.016	0.653	0.447	0.292	0.208	0.159

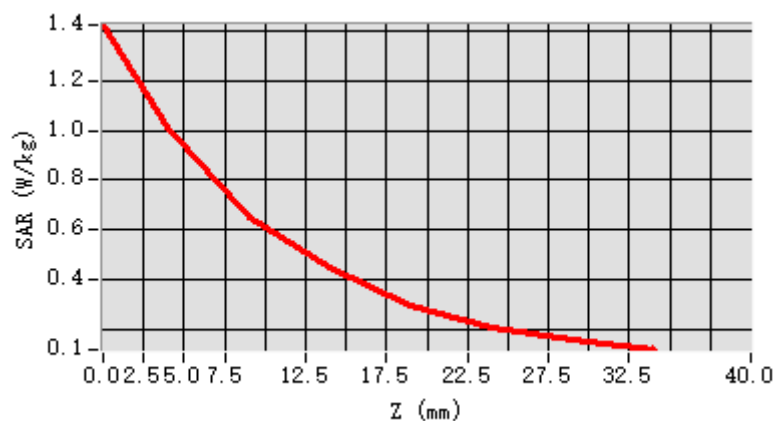

F. 3D Image

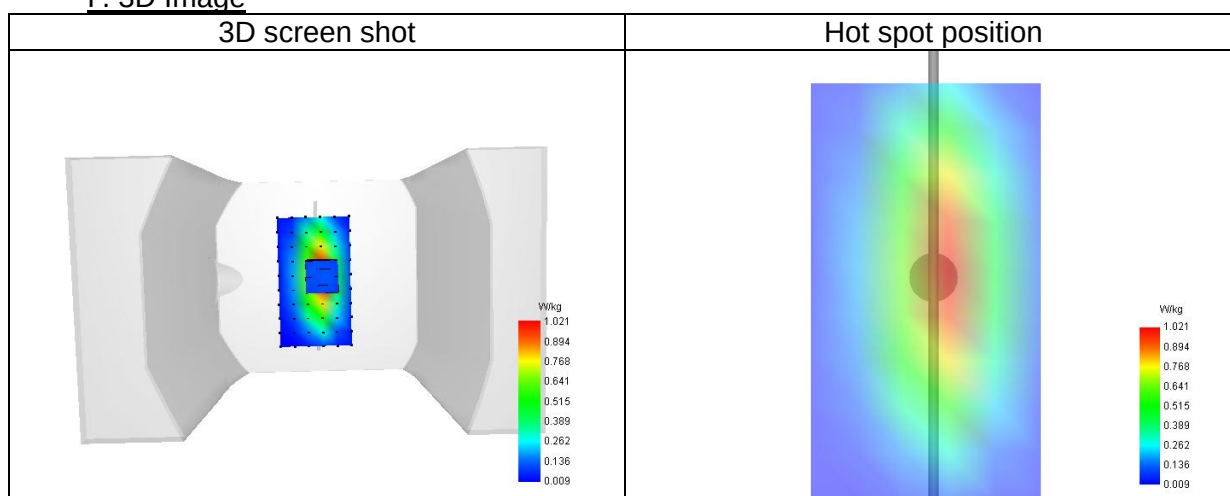

4# System check at 1800 MHz
Date of measurement: 27/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.51
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Channels/Frequency	Middle
Signal	CW

B. Permittivity

Middle TX Frequency (MHz)	1800.000
Relative permittivity (real part)	40.06
Relative permittivity (imaginary part)	14.32
Conductivity (S/m)	1.43

C. SAR Surface and Volume

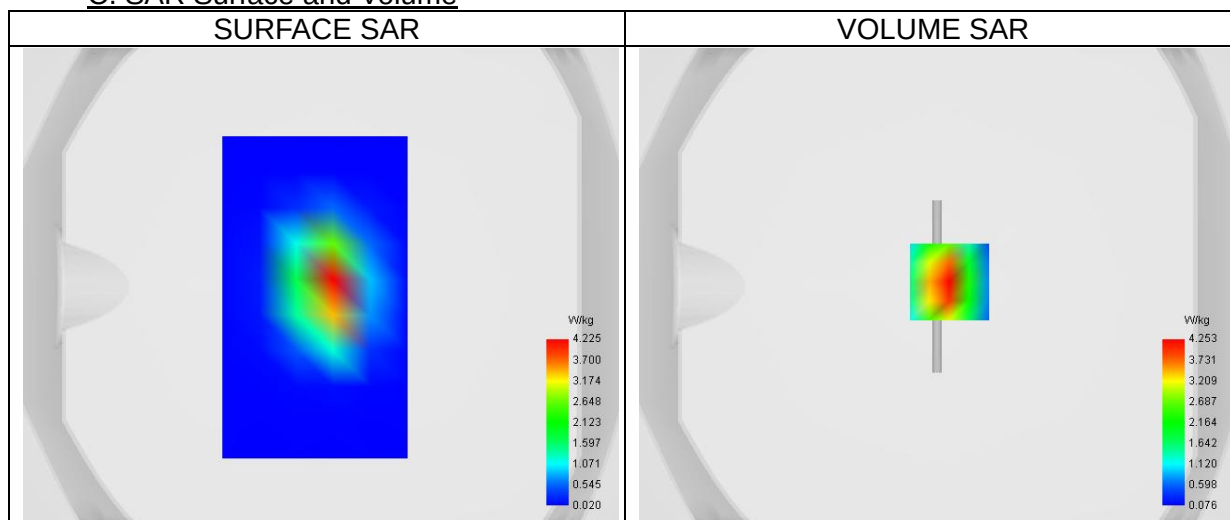


Maximum location: X=5.00, Y=2.00 ; SAR Peak: 7.06 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	1.983
SAR 1g (W/Kg)	4.035
Variation (%)	-0.20
Horizontal validation criteria: minimum distance (mm)	11.31
Vertical validation criteria: SAR ratio M2/M1 (%)	52.53

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	6.967	4.253	2.234	1.244	0.722	0.429	0.264

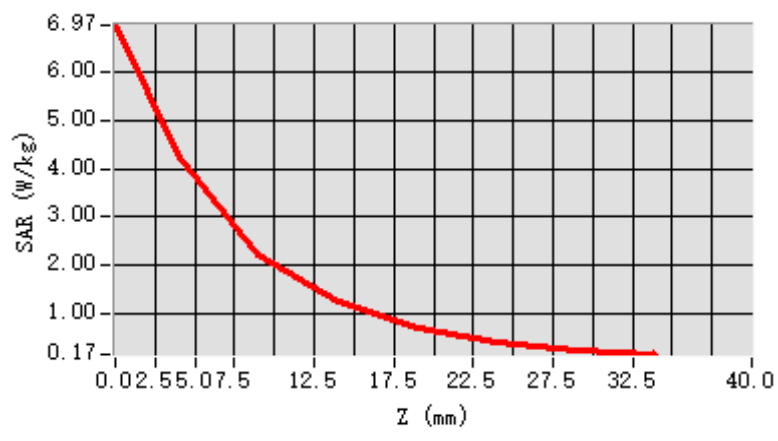

F. 3D Image

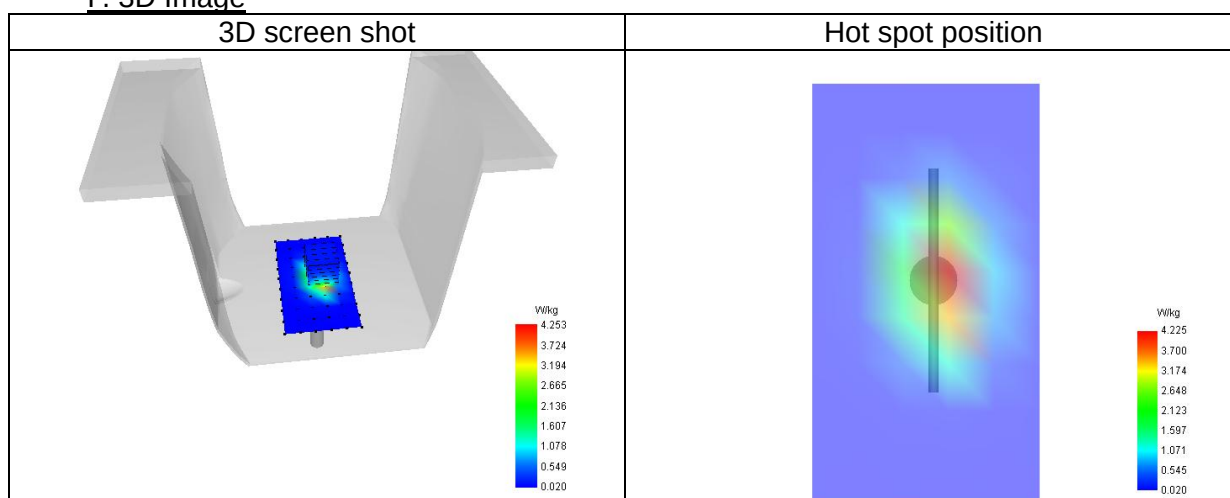

5# System check at 1900 MHz

Date of measurement: 28/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	1.57
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Signal	CW
Channels/Frequency	Middle

B. Permittivity

Middle TX Frequency (MHz)	1900.00
Relative permittivity (real part)	38.78
Relative permittivity (imaginary part)	13.83
Conductivity (S/m)	1.46

C. SAR Surface and Volume

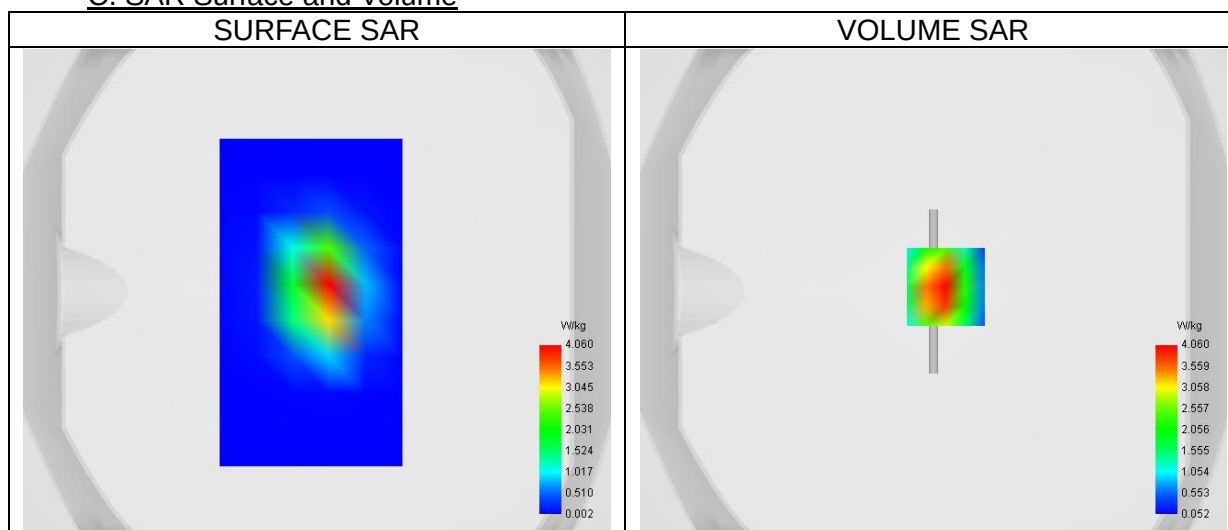


Maximum location: X=5.00, Y=2.00 ; SAR Peak: 6.66 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	1.971
SAR 1g (W/Kg)	4.006
Variation (%)	-1.46
Horizontal validation criteria: minimum distance (mm)	11.31
Vertical validation criteria: SAR ratio M2/M1 (%)	54.40

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	6.476	4.060	2.209	1.250	0.718	0.422	0.249

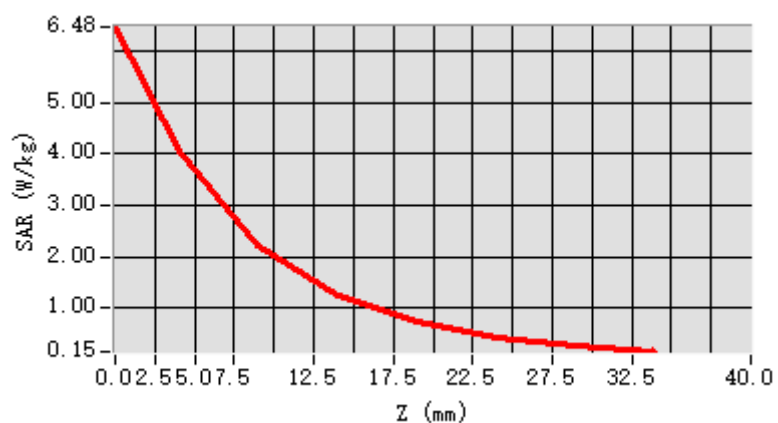

F. 3D Image

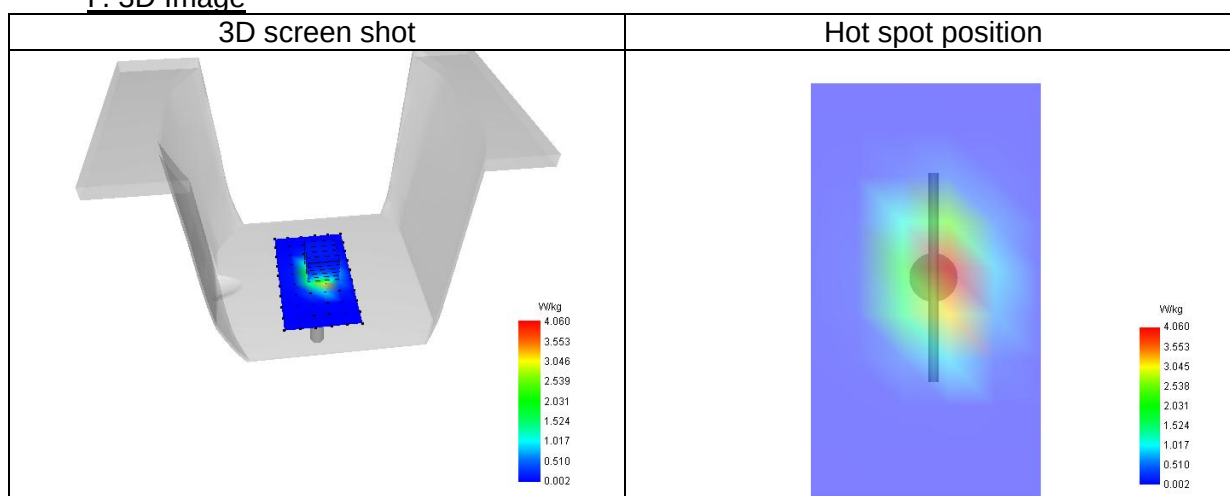

6# System check at 2450 MHz
Date of measurement: 17/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.74
Area Scan	dx=12mm dy=12mm, Complete
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels/Frequency	Middle
Signal	CW

B. Permittivity

Middle TX Frequency (MHz)	2450.000
Relative permittivity (real part)	38.60
Relative permittivity (imaginary part)	13.25
Conductivity (S/m)	1.80

C. SAR Surface and Volume

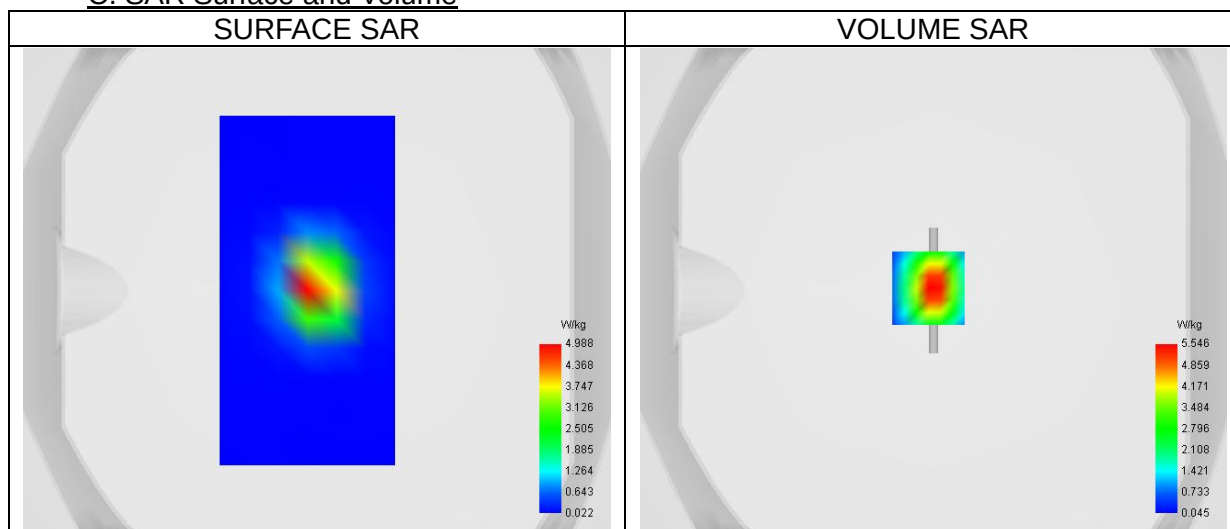


Maximum location: X=-2.00, Y=1.00 ; SAR Peak: 10.01 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	2.241
SAR 1g (W/Kg)	5.245
Variation (%)	-0.50
Horizontal validation criteria: minimum distance (mm)	10.00
Vertical validation criteria: SAR ratio M2/M1 (%)	46.08

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	9.738	5.546	2.556	1.225	0.605	0.305	0.163

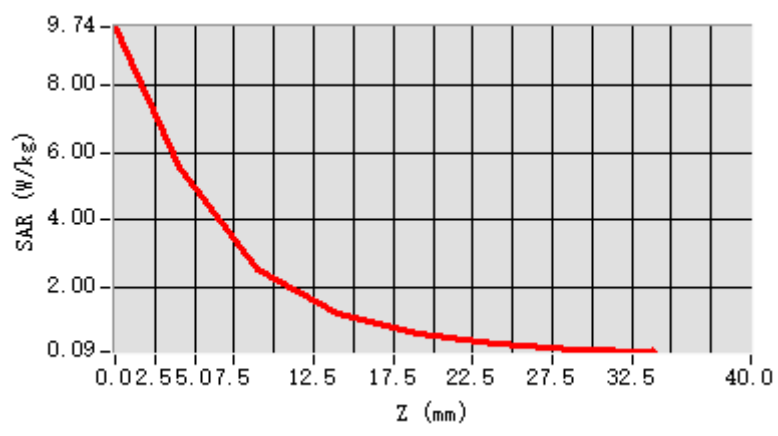

F. 3D Image

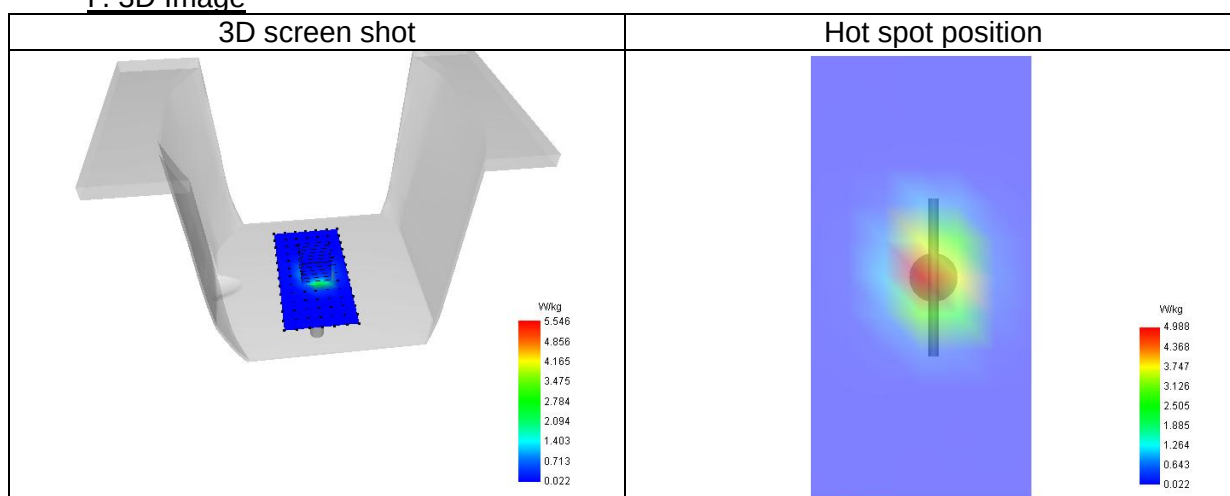

7# System check at 2600 MHz

Date of measurement: 29/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	1.51
Area Scan	dx=12mm dy=12mm, Complete
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Signal	CW
Channels/Frequency	Middle

B. Permittivity

Middle TX Frequency (MHz)	2600.00
Relative permittivity (real part)	39.63
Relative permittivity (imaginary part)	13.82
Conductivity (S/m)	2.00

C. SAR Surface and Volume

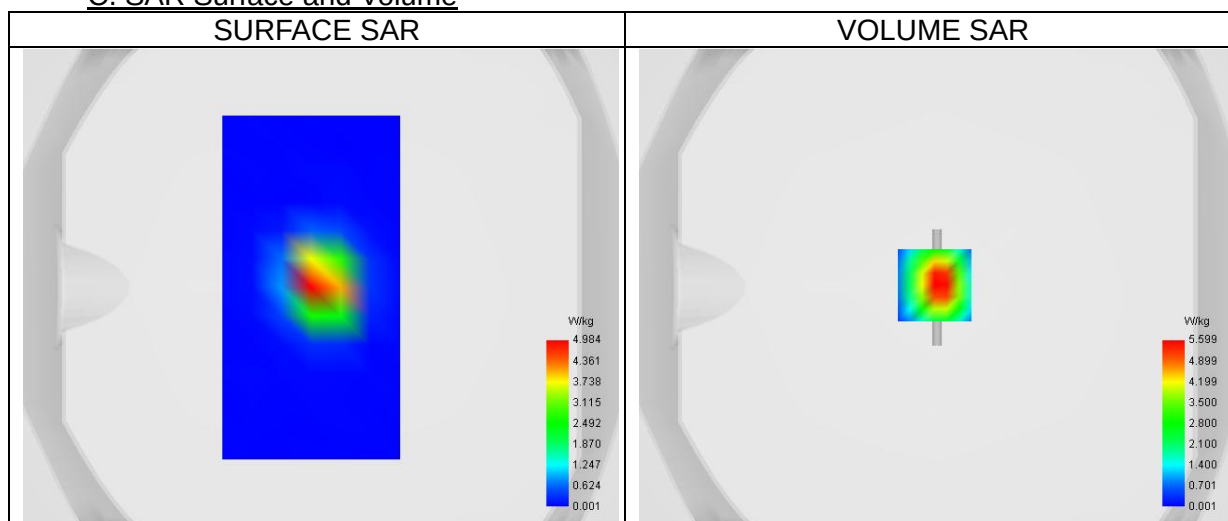


Maximum location: X=-1.00, Y=1.00 ; SAR Peak: 9.82 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	2.307
SAR 1g (W/Kg)	5.261
Variation (%)	-1.17
Horizontal validation criteria: minimum distance (mm)	10.00
Vertical validation criteria: SAR ratio M2/M1 (%)	50.61

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	9.190	5.599	2.800	1.368	0.642	0.334	0.186

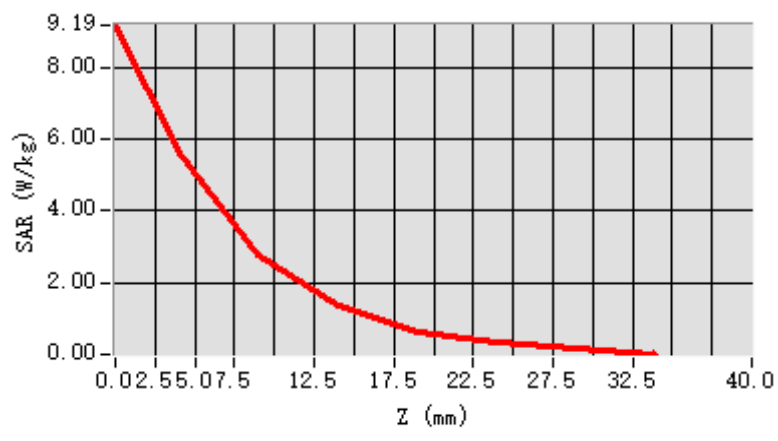

F. 3D Image

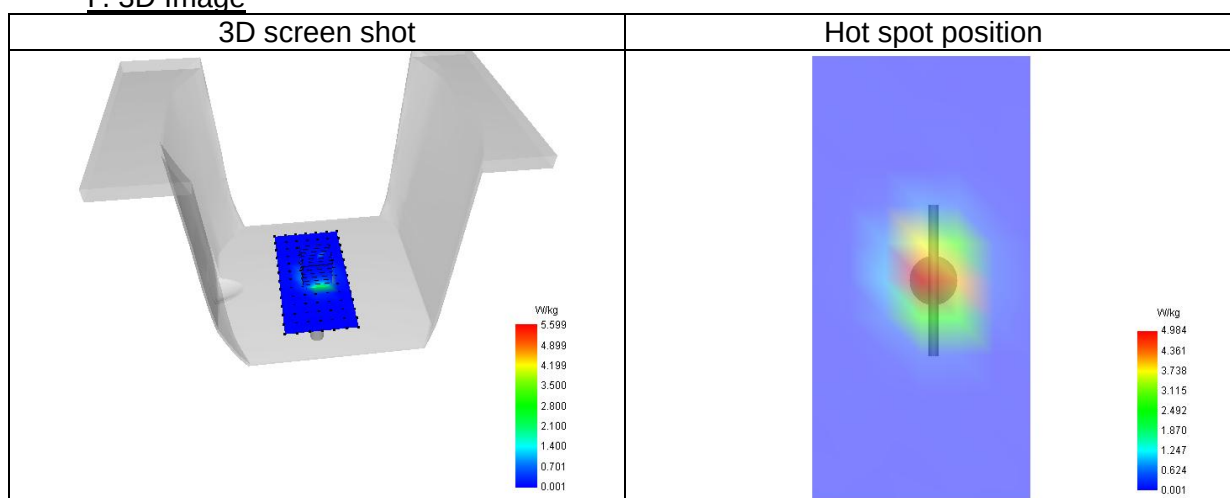

8# System check at 3500 MHz
Date of measurement: 1/5/2025


A. Experimental conditions.

Probe	0725-EPGO-448
ConvF	1.39
Area Scan	dx=12mm dy=12mm, Complete
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW3500
Signal	CW
Channels/Frequency	Middle

B. Permittivity

Middle TX Frequency (MHz)	3500.00
Relative permittivity (real part)	37.42
Relative permittivity (imaginary part)	14.39
Conductivity (S/m)	2.80

C. SAR Surface and Volume

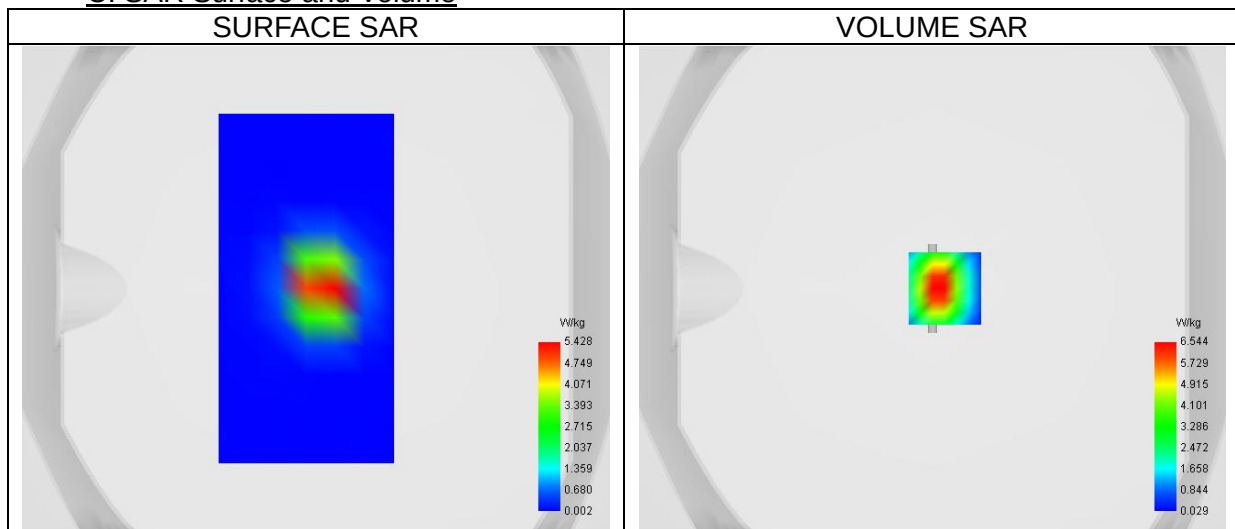


Maximum location: X=5.00, Y=0.00 ; SAR Peak: 11.64 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	2.649
SAR 1g (W/Kg)	6.138
Variation (%)	-0.57
Horizontal validation criteria: minimum distance (mm)	10.00
Vertical validation criteria: SAR ratio M2/M1 (%)	48.06

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	12.965	6.544	2.377	1.537	0.642	0.381	0.169

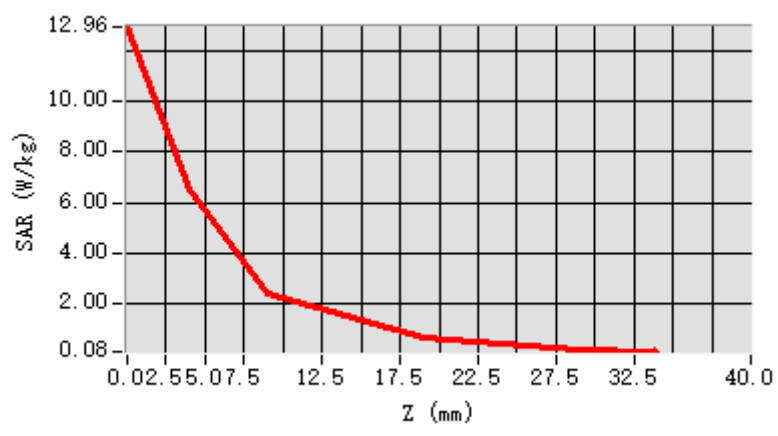

F. 3D Image

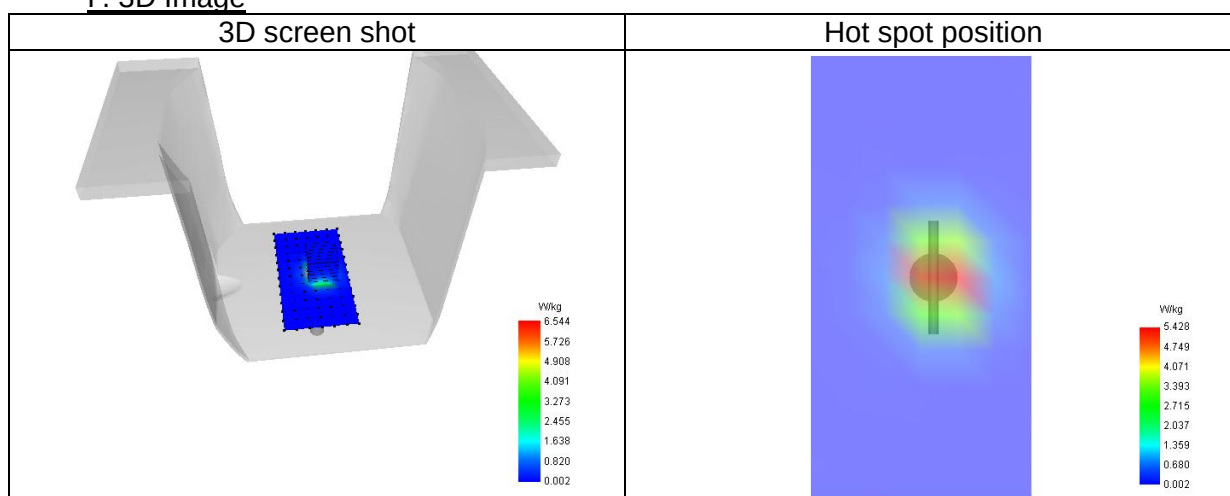

9# System check at 5200 MHz

Date of measurement: 21/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	1.89
Area Scan	dx=10mm dy=10mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Signal	CW
Channels/Frequency	Middle

B. Permittivity

Middle TX Frequency (MHz)	5200.00
Relative permittivity (real part)	37.52
Relative permittivity (imaginary part)	15.95
Conductivity (S/m)	4.61

C. SAR Surface and Volume

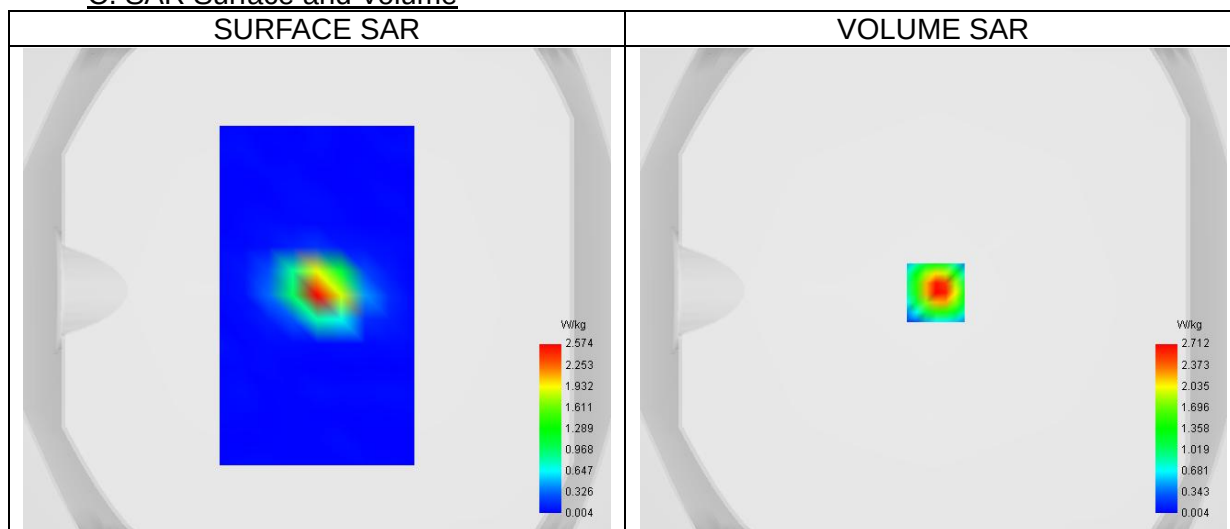


Maximum location: X=1.00, Y=-1.00 ; SAR Peak: 4.86 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.542
SAR 1g (W/Kg)	1.608
Variation (%)	-0.40
Horizontal validation criteria: minimum distance (mm)	8.94
Vertical validation criteria: SAR ratio M2/M1 (%)	52.56

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
SAR (W/Kg)	4.45	2.71	1.42	0.81	0.44	0.23	0.11	0.08	0.06	0.01	0.01	0.02
	7	2	5	5	2	8	8	6	2	1	1	7

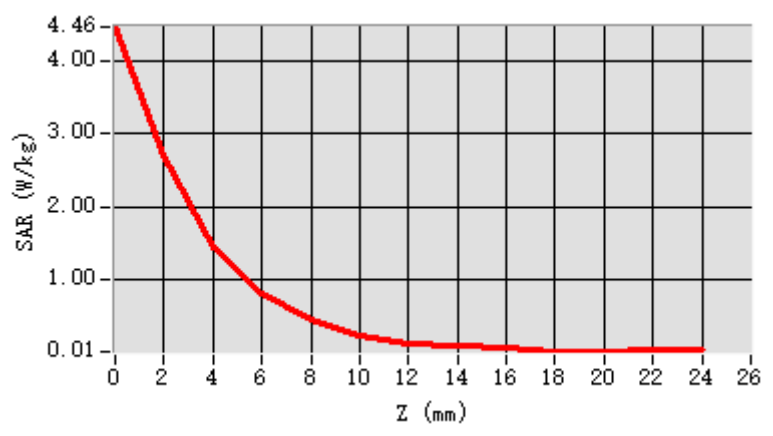

F. 3D Image

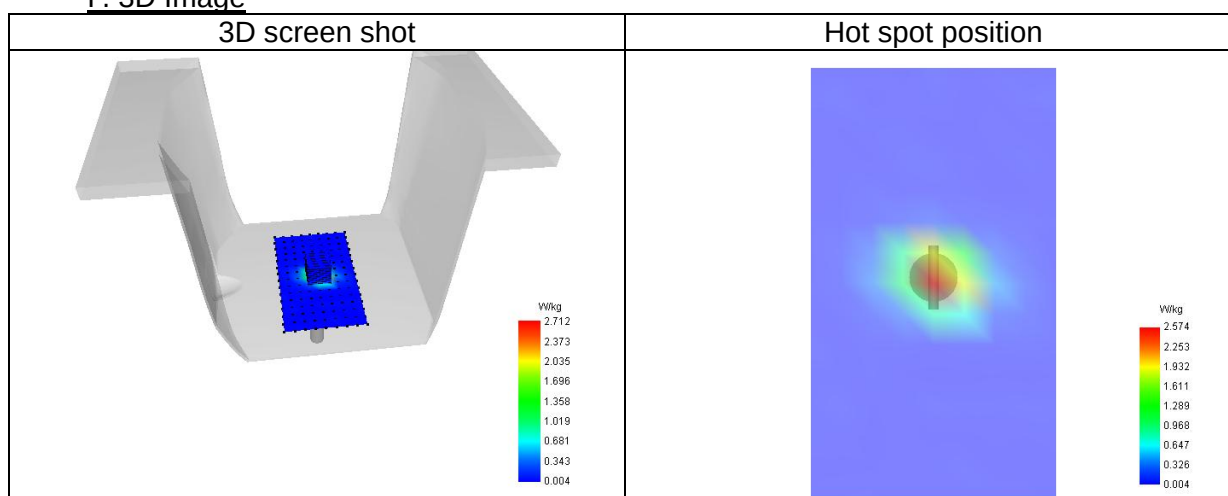

10# System check at 5400 MHz

Date of measurement: 22/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	1.97
Area Scan	dx=10mm dy=10mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5400
Signal	CW
Channels/Frequency	Middle

B. Permittivity

Middle TX Frequency (MHz)	5400.00
Relative permittivity (real part)	35.50
Relative permittivity (imaginary part)	16.71
Conductivity (S/m)	5.01

C. SAR Surface and Volume

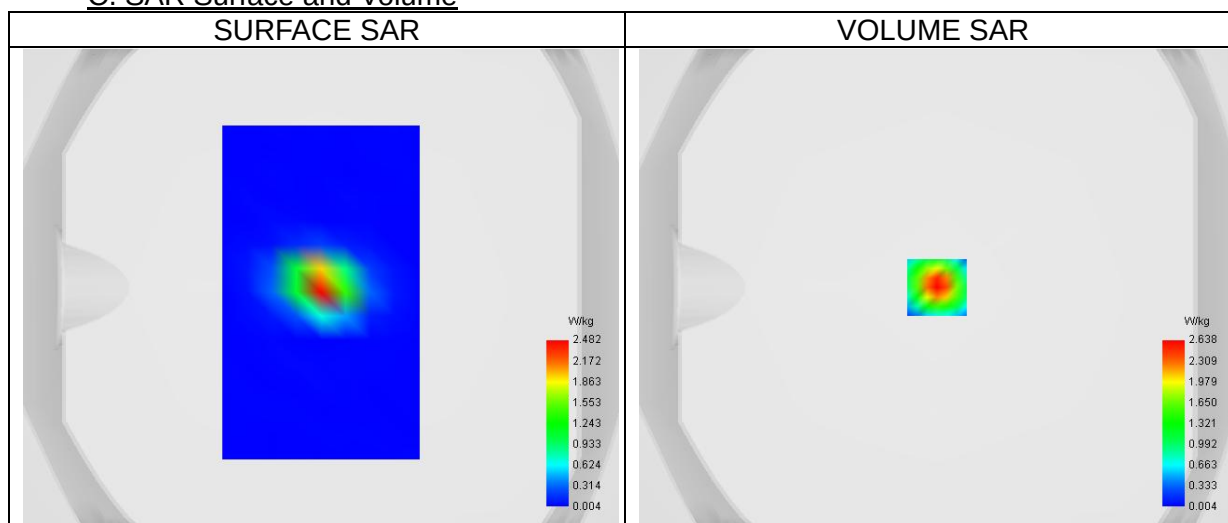


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 4.60 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.511
SAR 1g (W/Kg)	1.525
Variation (%)	0.14
Horizontal validation criteria: minimum distance (mm)	8.94
Vertical validation criteria: SAR ratio M2/M1 (%)	53.68

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
SAR (W/Kg)	4.28	2.63	1.41	0.80	0.43	0.22	0.11	0.07	0.03	0.01	0.02	0.00
	7	8	6	6	1	2	8	4	0	8	8	8

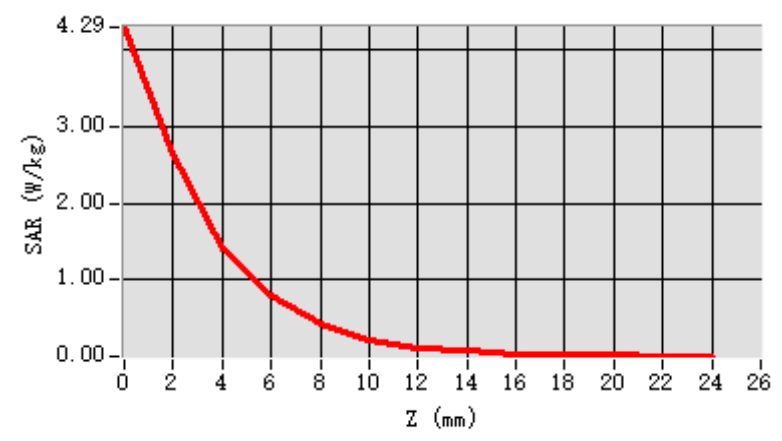

F. 3D Image

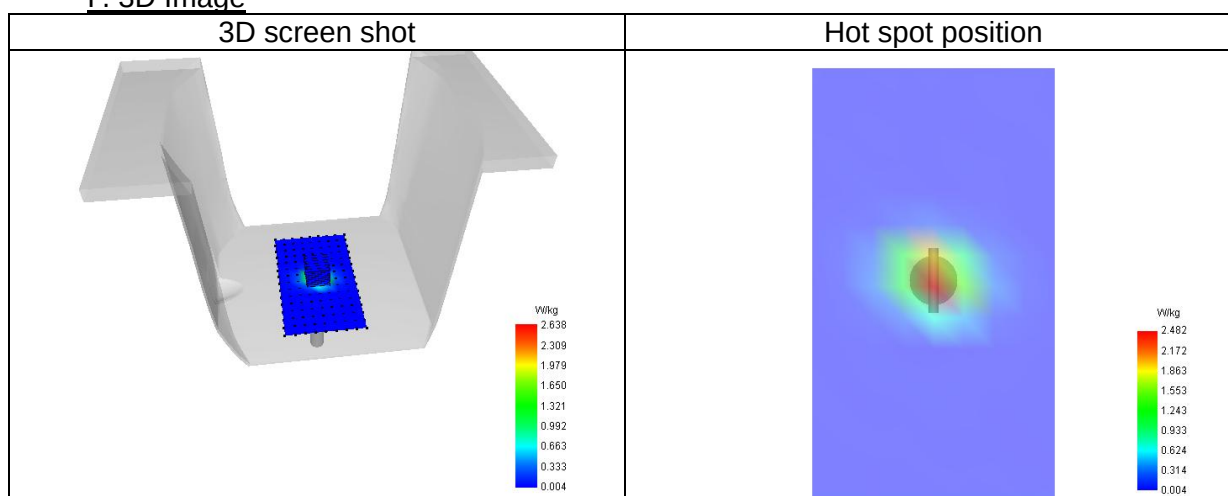

11# System check at 5600 MHz
Date of measurement: 23/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	1.88
Area Scan	dx=10mm dy=10mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5600
Signal	CW
Channels/Frequency	Middle

B. Permittivity

Middle TX Frequency (MHz)	5600.00
Relative permittivity (real part)	35.92
Relative permittivity (imaginary part)	16.30
Conductivity (S/m)	5.07

C. SAR Surface and Volume

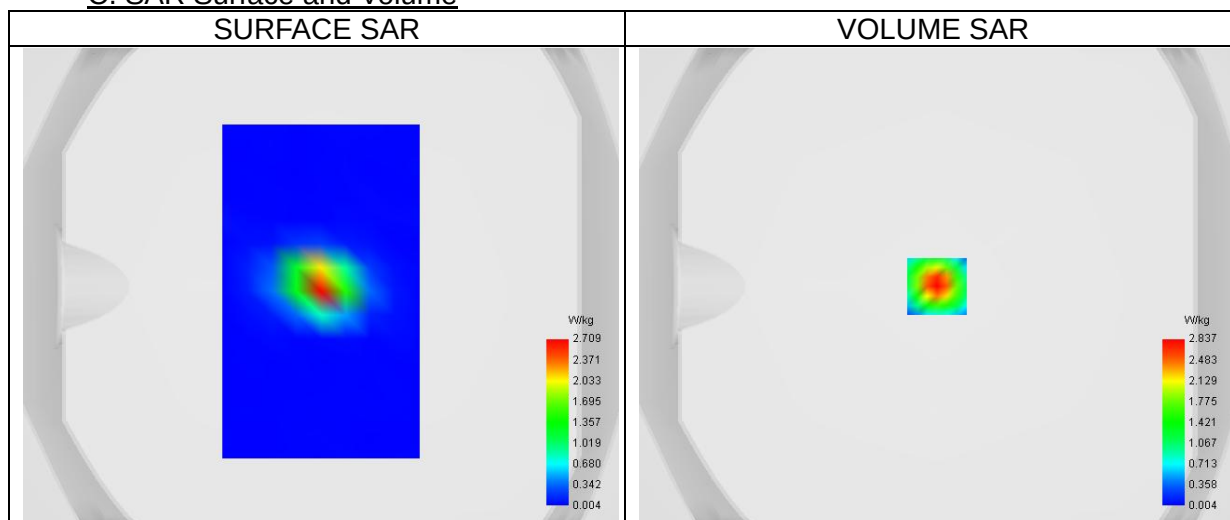


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 4.89 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.559
SAR 1g (W/Kg)	1.647
Variation (%)	1.28
Horizontal validation criteria: minimum distance (mm)	11.31
Vertical validation criteria: SAR ratio M2/M1 (%)	54.40

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
						0	0	0	0	0	0	0
SAR (W/Kg)	4.59	2.83	1.54	0.88	0.47	0.27	0.14	0.08	0.04	0.03	0.02	0.01
	7	7	4	6	8	4	9	4	6	1	7	6

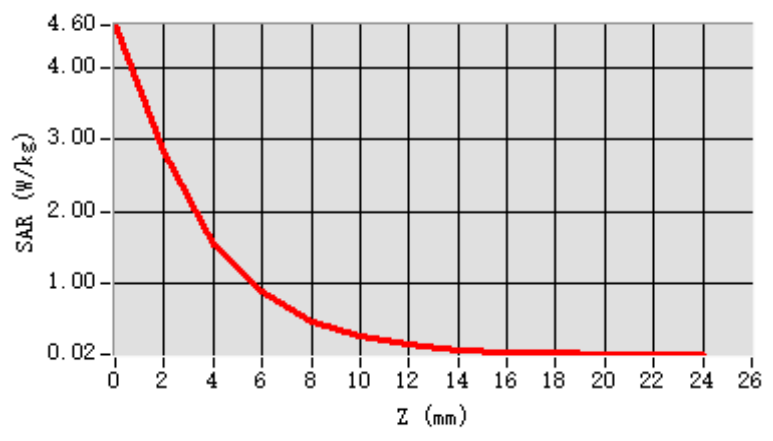

F. 3D Image

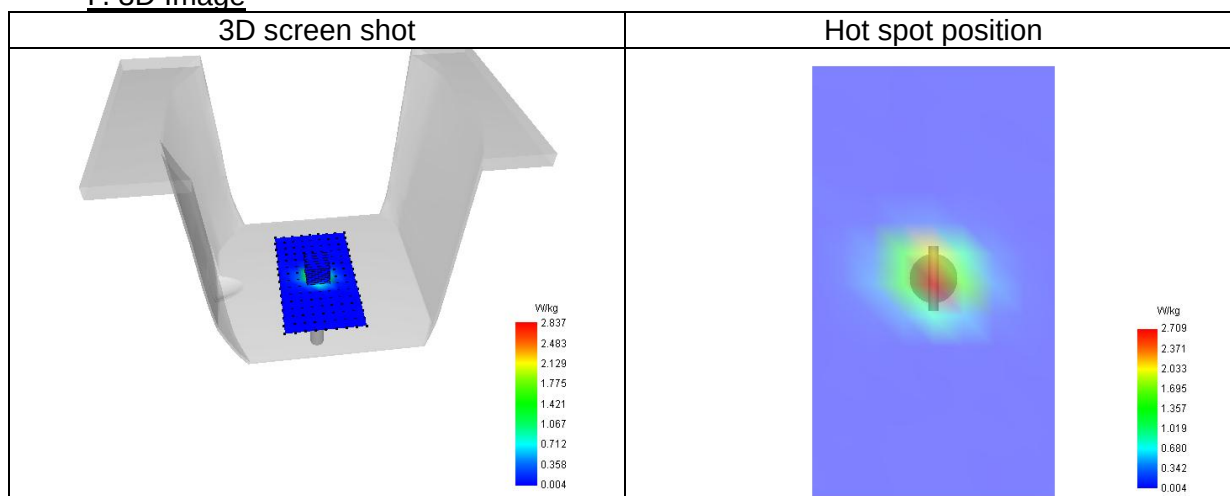

12# System check at 5800 MHz

Date of measurement: 24/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	1.90
Area Scan	dx=10mm dy=10mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Signal	CW
Channels/Frequency	Middle

B. Permittivity

Middle TX Frequency (MHz)	5800.00
Relative permittivity (real part)	35.32
Relative permittivity (imaginary part)	16.52
Conductivity (S/m)	5.32

C. SAR Surface and Volume

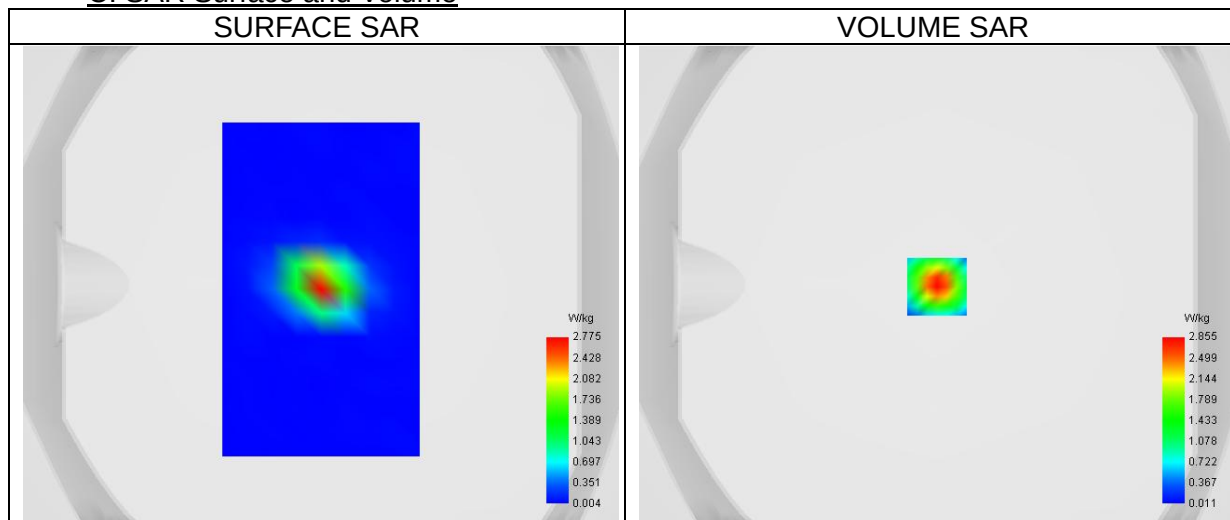


Maximum location: X=0.00, Y=-1.00 ; SAR Peak: 5.07 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.573
SAR 1g (W/Kg)	1.676
Variation (%)	1.18
Horizontal validation criteria: minimum distance (mm)	8.94
Vertical validation criteria: SAR ratio M2/M1 (%)	54.30

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
						0	0	0	0	0	0	0
SAR (W/Kg)	4.59	2.85	1.55	0.90	0.51	0.29	0.15	0.08	0.06	0.05	0.04	0.01
	4	5	0	3	7	8	2	4	2	1	2	5

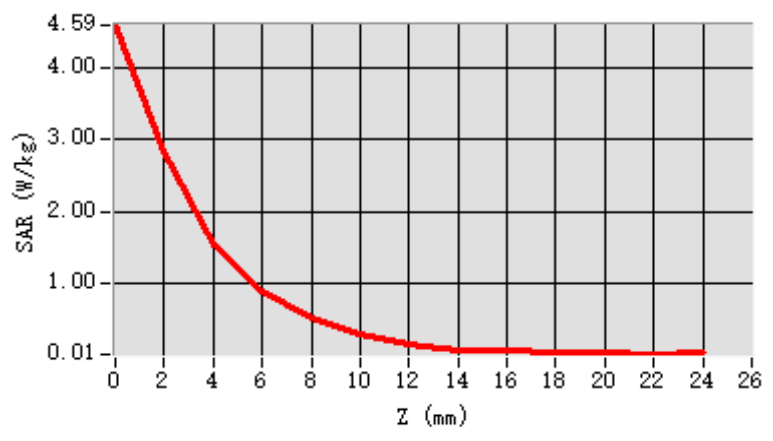

F. 3D Image

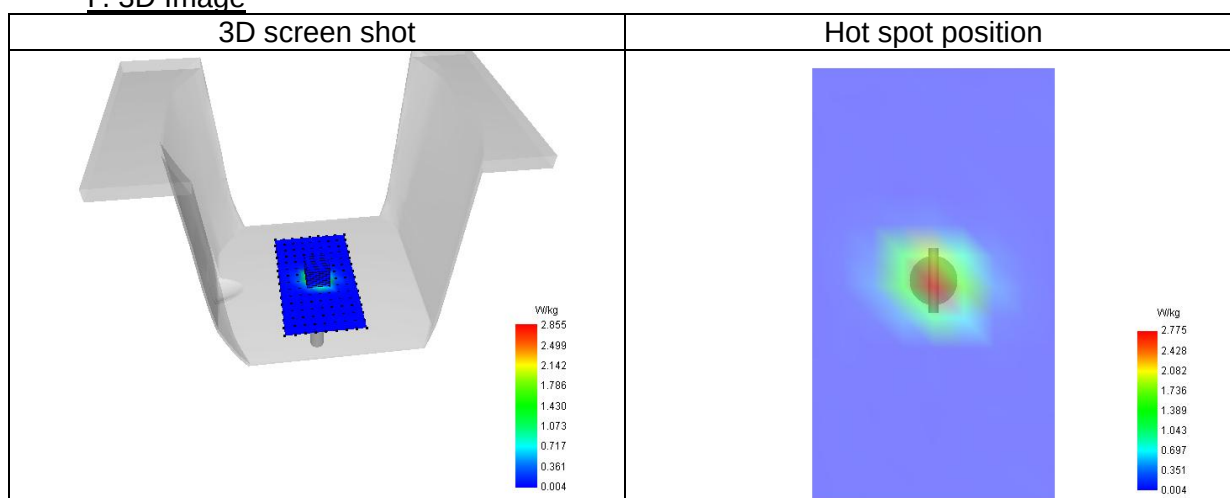

13. Appendix C. Plots of High SAR Measurement

- 1# SAR Measurement at GPRS850 (Cheek, Left)
- 2# SAR Measurement at GPRS850 (Body, Validation Plane)
- 3# SAR Measurement at GPRS1900 (Cheek, Left)
- 4# SAR Measurement at GPRS1900 (Body, Validation Plane)
- 5# SAR Measurement at Band 2 (1900) (Cheek, Left)
- 6# SAR Measurement at Band 2 (1900) (Body, Validation Plane)
- 7# SAR Measurement at Band 4 (1700) (Cheek, Left)
- 8# SAR Measurement at Band 4 (1700) (Body, Validation Plane)
- 9# SAR Measurement at Band 5 (850) (Cheek, Left)
- 10# SAR Measurement at Band 5 (850) (Body, Validation Plane)
- 11# SAR Measurement at U-NII-1 (Cheek, Left)
- 12# SAR Measurement at U-NII-1 (Cheek, Left)
- 13# SAR Measurement at U-NII-1 (Cheek, Left)
- 14# SAR Measurement at U-NII-1 (Body, Validation Plane)
- 15# SAR Measurement at U-NII-1 (Body, Validation Plane)
- 16# SAR Measurement at U-NII-1 (Body, Validation Plane)
- 17# SAR Measurement at U-NII-2a (Cheek, Left)
- 18# SAR Measurement at U-NII-2a (Cheek, Left)
- 19# SAR Measurement at U-NII-2a (Cheek, Left)
- 20# SAR Measurement at U-NII-2a (Body, Validation Plane)
- 21# SAR Measurement at U-NII-2a (Body, Validation Plane)
- 22# SAR Measurement at U-NII-2a (Body, Validation Plane)
- 23# SAR Measurement at U-NII-2c (Cheek, Left)
- 24# SAR Measurement at U-NII-2c (Cheek, Left)
- 25# SAR Measurement at U-NII-2c (Cheek, Left)
- 26# SAR Measurement at U-NII-2c (Body, Validation Plane)
- 27# SAR Measurement at U-NII-2c (Body, Validation Plane)
- 28# SAR Measurement at U-NII-2c (Body, Validation Plane)
- 29# SAR Measurement at U-NII-3 (Cheek, Left)
- 30# SAR Measurement at U-NII-3 (Cheek, Left)
- 31# SAR Measurement at U-NII-3 (Cheek, Left)
- 32# SAR Measurement at U-NII-3 (Body, Validation Plane)
- 33# SAR Measurement at U-NII-3 (Body, Validation Plane)
- 34# SAR Measurement at U-NII-3 (Body, Validation Plane)
- 35# SAR Measurement at ISM (Cheek, Left)
- 36# SAR Measurement at ISM (Cheek, Left)
- 37# SAR Measurement at ISM (Cheek, Left)
- 38# SAR Measurement at ISM (Body, Validation Plane)
- 39# SAR Measurement at ISM (Body, Validation Plane)
- 40# SAR Measurement at ISM (Body, Validation Plane)
- 41# SAR Measurement at LTE band 2 (Cheek, Left)
- 42# SAR Measurement at LTE band 2 (Body, Validation Plane)
- 43# SAR Measurement at LTE band 4 (Cheek, Left)
- 44# SAR Measurement at LTE band 4 (Body, Validation Plane)
- 45# SAR Measurement at LTE band 5 (Cheek, Left)
- 46# SAR Measurement at LTE band 5 (Body, Validation Plane)
- 47# SAR Measurement at LTE band 7 (Cheek, Left)
- 48# SAR Measurement at LTE band 7 (Body, Validation Plane)
- 49# SAR Measurement at LTE band 12 (Cheek, Left)
- 50# SAR Measurement at LTE band 12 (Body, Validation Plane)
- 51# SAR Measurement at LTE band 13 (Cheek, Left)
- 52# SAR Measurement at LTE band 13 (Body, Validation Plane)
- 53# SAR Measurement at LTE band 17 (Cheek, Left)
- 54# SAR Measurement at LTE band 17 (Body, Validation Plane)
- 55# SAR Measurement at LTE band 25 (Cheek, Left)

56# SAR Measurement at LTE band 25 (Body, Validation Plane)
57# SAR Measurement at LTE band 26 (Cheek, Left)
58# SAR Measurement at LTE band 26 (Cheek, Left)
59# SAR Measurement at LTE band 26 (Body, Validation Plane)
60# SAR Measurement at LTE band 26 (Body, Validation Plane)
61# SAR Measurement at LTE band 38 (Cheek, Left)
62# SAR Measurement at LTE band 38 (Body, Validation Plane)
63# SAR Measurement at LTE band 41 (Cheek, Left)
64# SAR Measurement at LTE band 41 (Body, Validation Plane)
65# SAR Measurement at LTE band 66 (Cheek, Left)
66# SAR Measurement at LTE band 66 (Body, Validation Plane)
67# SAR Measurement at LTE band N78 (Cheek, Left)
68# SAR Measurement at LTE band N78 (Body, Validation Plane)

1# SAR Measurement at GPRS850 (Cheek, Left)

Date of measurement: 26/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.34
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Left head
Device Position	Cheek
Band	GPRS850
Signal	TDMA (GPRS)
Channels/Frequency	Middle (189)/ frequency 836.40 Mhz
Modulation	GMSK (CS-4)
TX-slots	4

B. Permittivity

Middle TX Frequency (MHz)	836.40
Relative permittivity (real part)	42.70
Relative permittivity (imaginary part)	19.96
Conductivity (S/m)	0.93

C. SAR Surface and Volume

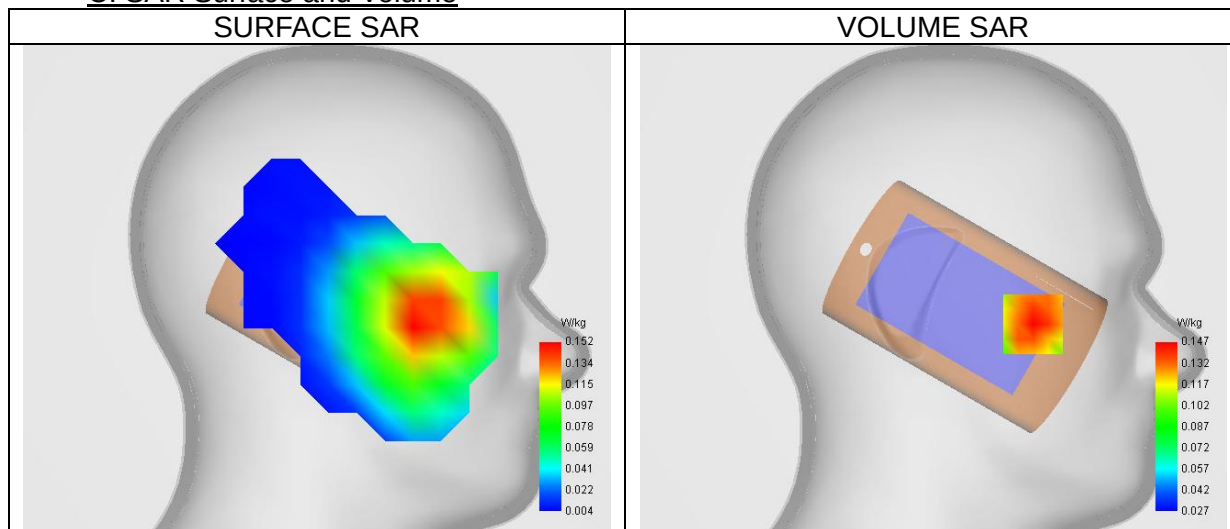


Maximum location: X=-53.00, Y=-19.00 ; SAR Peak: 0.19 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.111
SAR 1g (W/Kg)	0.145
Variation (%)	-3.71
Horizontal validation criteria: minimum distance (mm)	0.00
Vertical validation criteria: SAR ratio M2/M1 (%)	0.00


E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.180	0.147	0.118	0.102	0.086	0.071	0.061

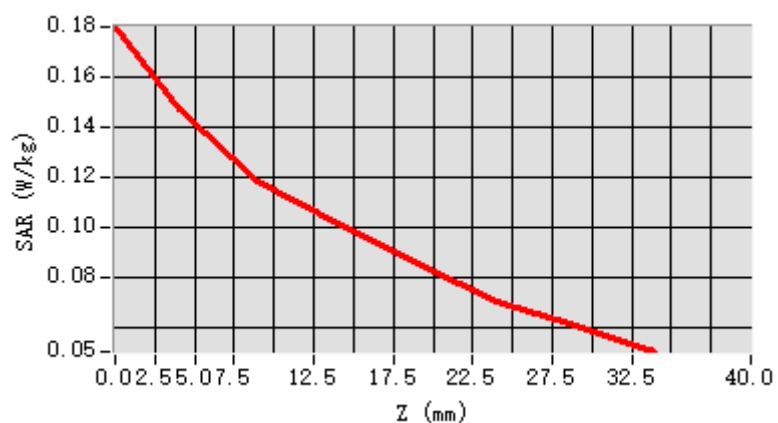


F. 3D Image

3D screen shot

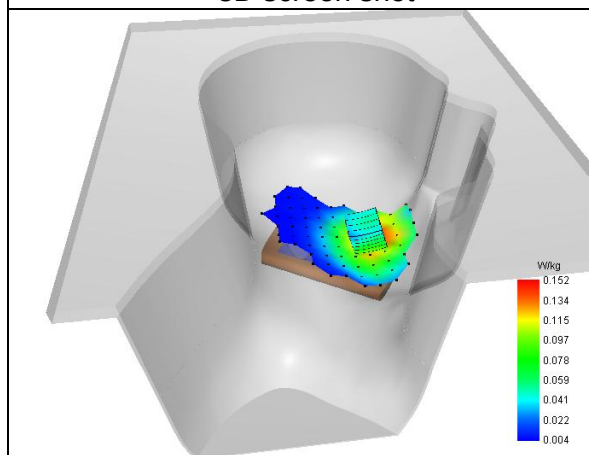

Hot spot position

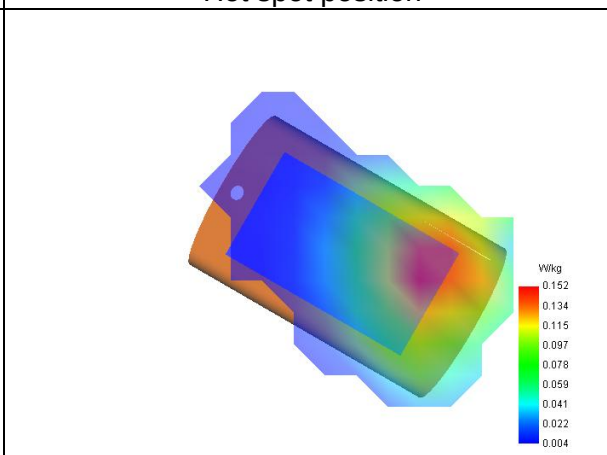

2# SAR Measurement at GPRS850 (Body, Validation Plane)

Date of measurement: 26/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.34
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	GPRS850
Signal	TDMA (GPRS)
Channels/Frequency	Middle (189)/ frequency 836.40 Mhz
Modulation	GMSK (CS-4)
TX-slots	4

B. Permittivity

Middle TX Frequency (MHz)	836.40
Relative permittivity (real part)	42.70
Relative permittivity (imaginary part)	19.96
Conductivity (S/m)	0.93

C. SAR Surface and Volume

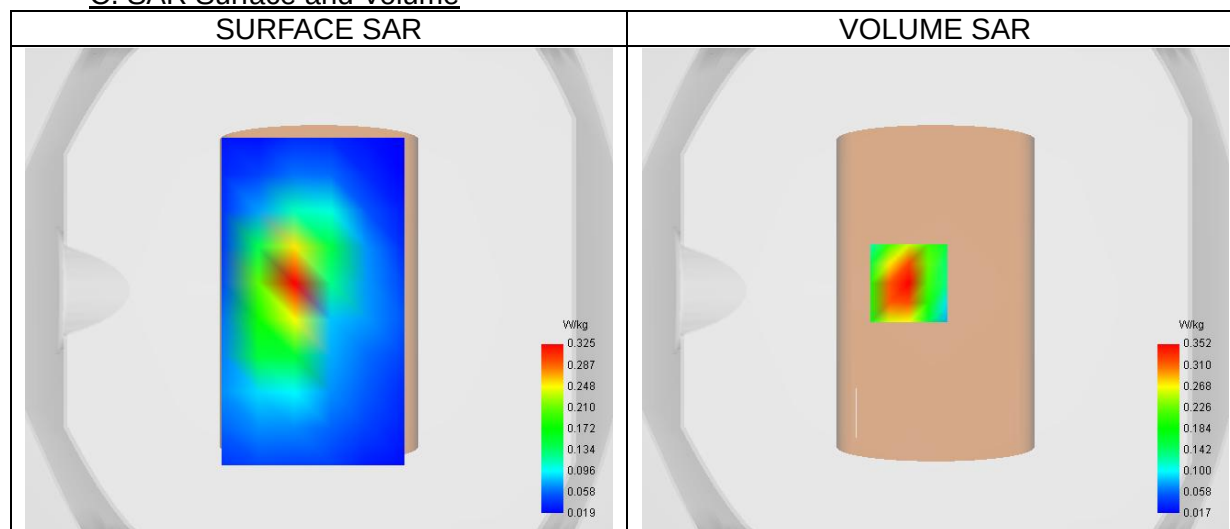


Maximum location: X=-11.00, Y=3.00 ; SAR Peak: 0.53 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.199
SAR 1g (W/Kg)	0.341
Variation (%)	0.17
Horizontal validation criteria: minimum distance (mm)	16.00
Vertical validation criteria: SAR ratio M2/M1 (%)	64.40

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.511	0.352	0.222	0.152	0.101	0.073	0.052

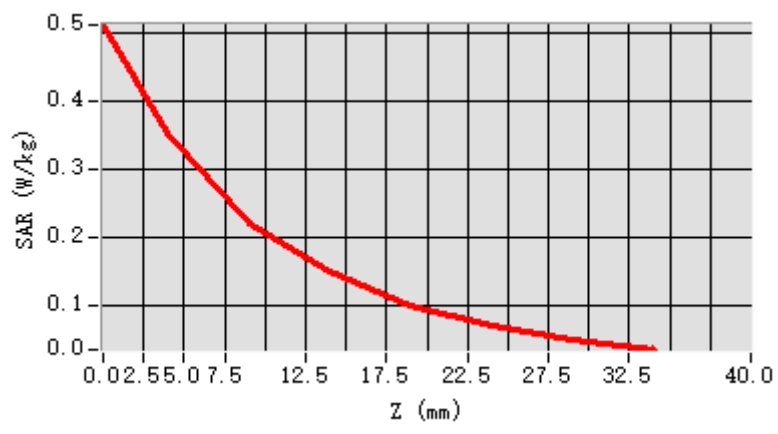

F. 3D Image

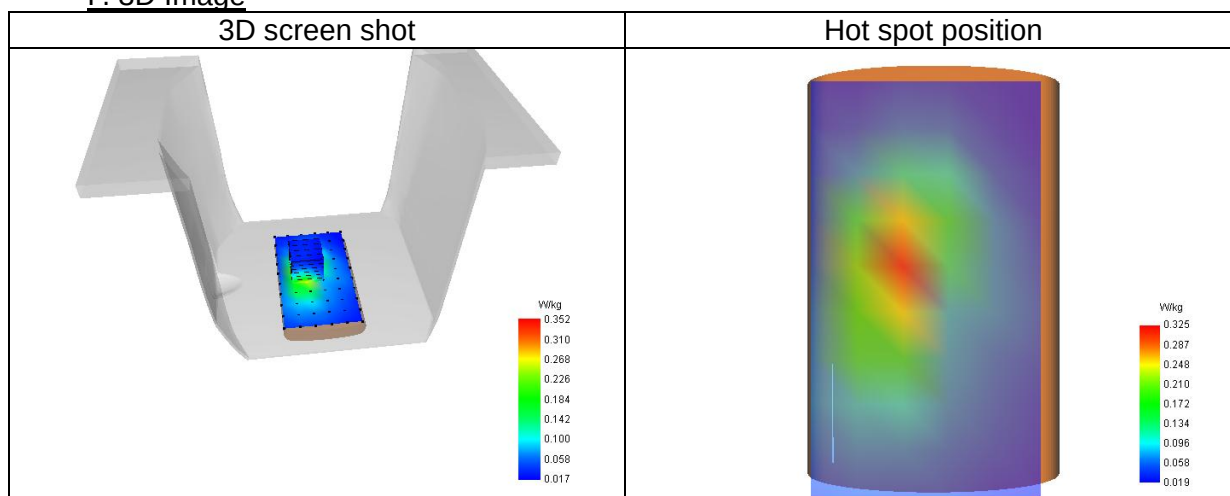

3# SAR Measurement at GPRS1900 (Cheek, Left)

Date of measurement: 28/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.57
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Left head
Device Position	Cheek
Band	GPRS1900
Signal	TDMA (GPRS)
Channels/Frequency	Middle (661)/ frequency 1880.00 Mhz
Modulation	GMSK (CS-4)
TX-slots	4

B. Permittivity

Middle TX Frequency (MHz)	1880.00
Relative permittivity (real part)	38.30
Relative permittivity (imaginary part)	13.65
Conductivity (S/m)	1.43

C. SAR Surface and Volume

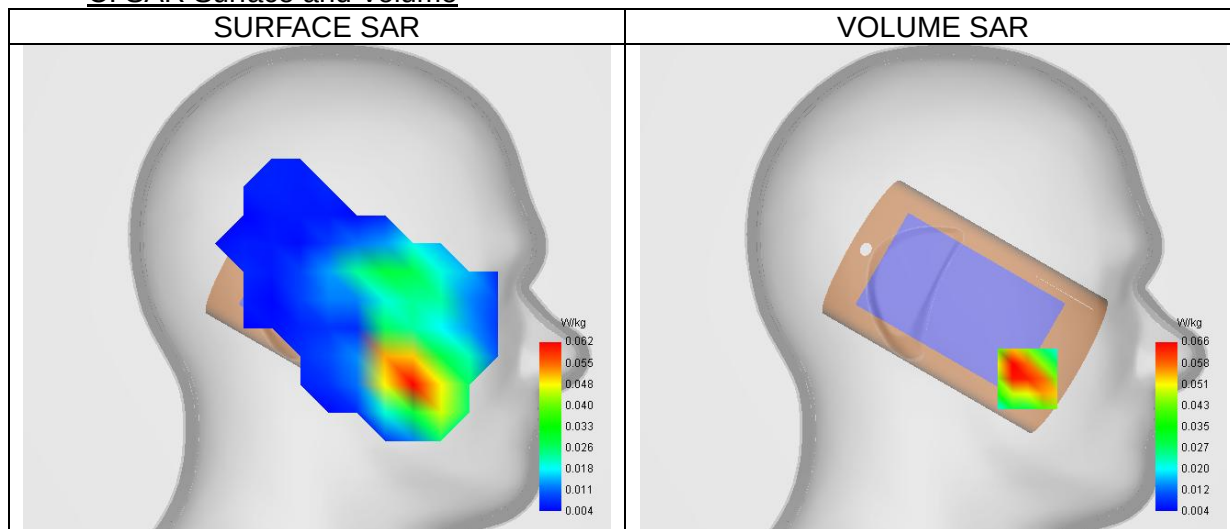


Maximum location: X=-50.00, Y=-48.00 ; SAR Peak: 0.09 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.038
SAR 1g (W/Kg)	0.065
Variation (%)	4.29
Horizontal validation criteria: minimum distance (mm)	17.89
Vertical validation criteria: SAR ratio M2/M1 (%)	71.65


E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.116	0.066	0.032	0.030	0.015	0.012	0.008

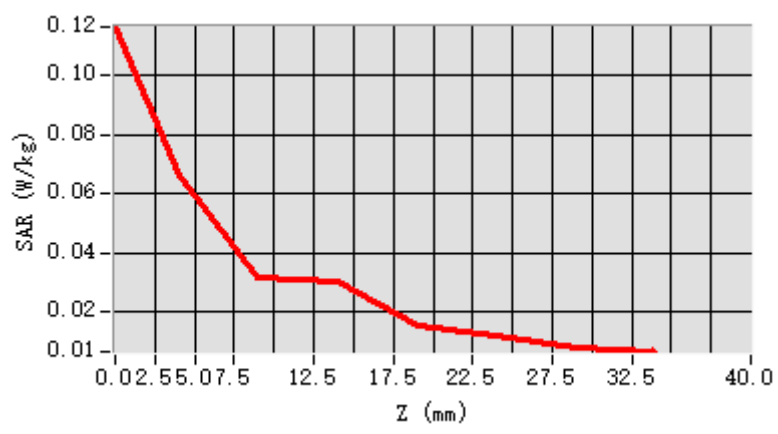


F. 3D Image

3D screen shot

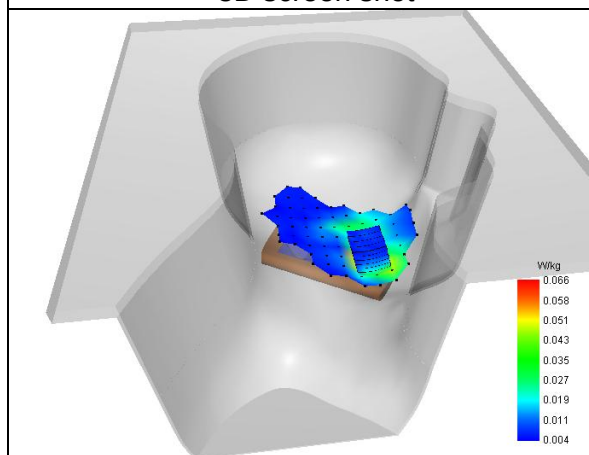

Hot spot position

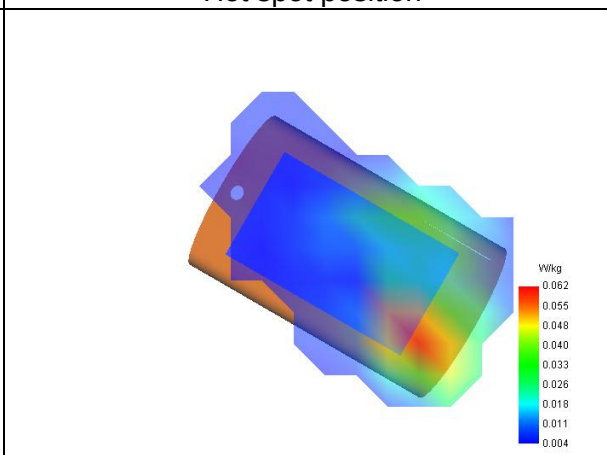

4# SAR Measurement at GPRS1900 (Body, Validation Plane)

Date of measurement: 28/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.57
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	GPRS1900
Signal	TDMA (GPRS)
Channels/Frequency	Middle (661)/ frequency 1880.00 Mhz
Modulation	GMSK (CS-4)
TX-slots	4

B. Permittivity

Middle TX Frequency (MHz)	1880.00
Relative permittivity (real part)	38.30
Relative permittivity (imaginary part)	13.65
Conductivity (S/m)	1.43

C. SAR Surface and Volume

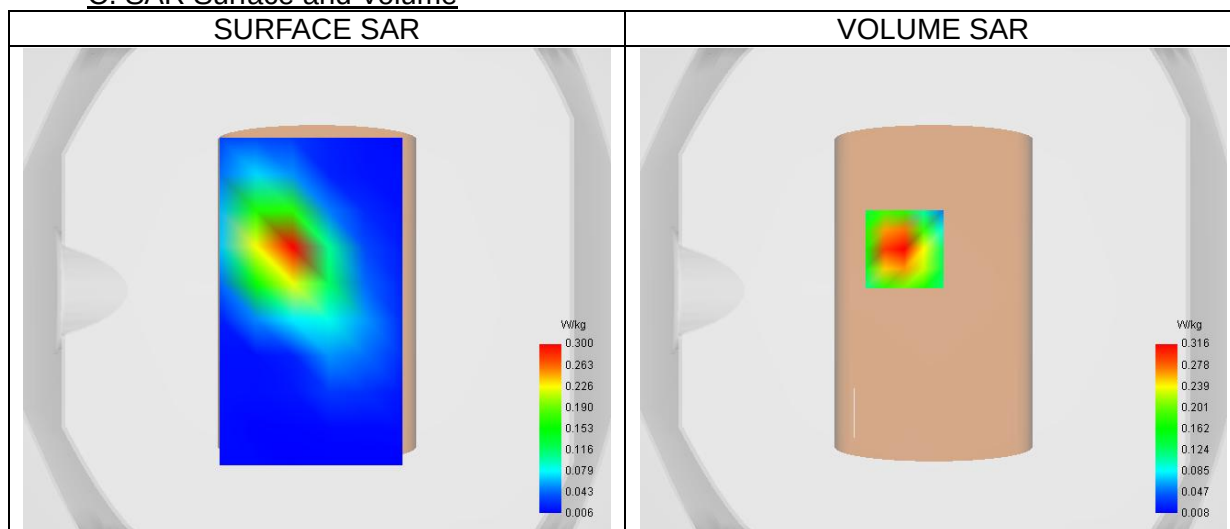


Maximum location: X=-12.00, Y=17.00 ; SAR Peak: 0.49 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.166
SAR 1g (W/Kg)	0.311
Variation (%)	-0.95
Horizontal validation criteria: minimum distance (mm)	16.00
Vertical validation criteria: SAR ratio M2/M1 (%)	59.59

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.471	0.316	0.189	0.115	0.068	0.040	0.024

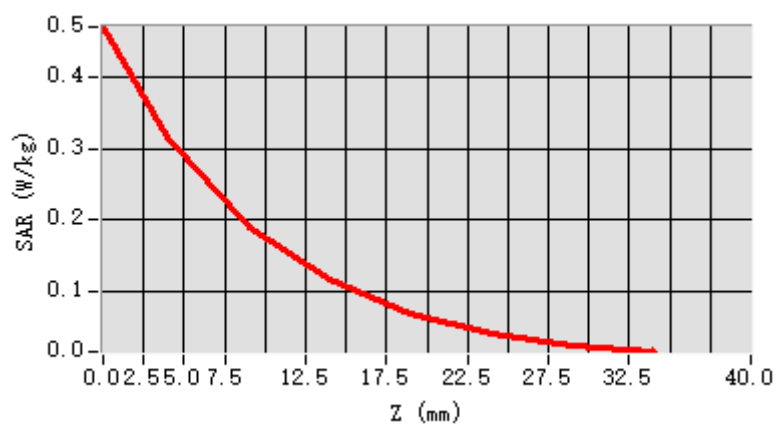

F. 3D Image

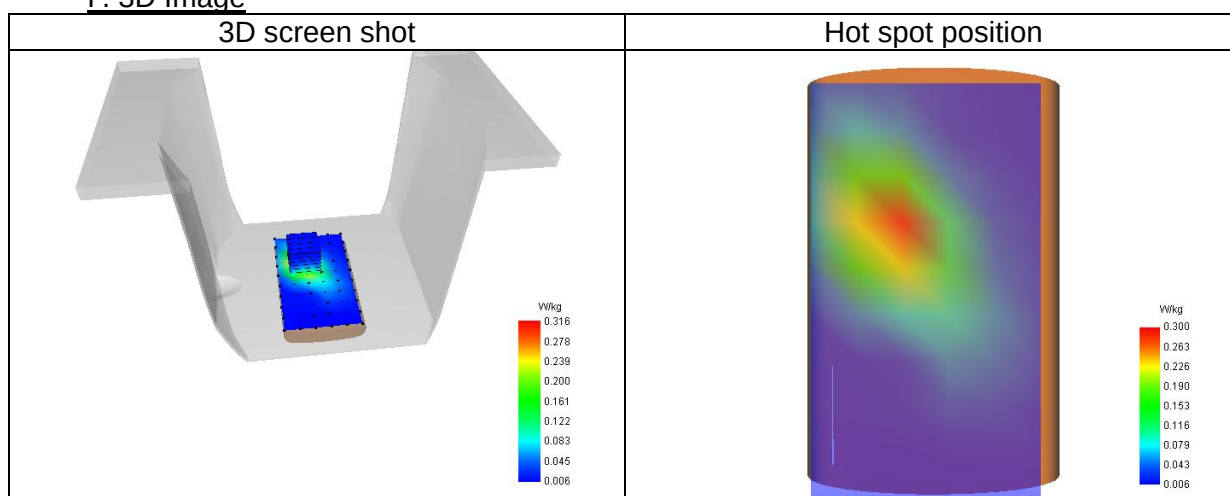

5# SAR Measurement at Band 2 (1900) (Cheek, Left)

Date of measurement: 28/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.57
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	Band 2 (1900)
Signal	WCDMA
Channels/Frequency	Middle (9400)/ frequency 1880.00 Mhz
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Middle TX Frequency (MHz)	1880.00
Relative permittivity (real part)	38.86
Relative permittivity (imaginary part)	13.85
Conductivity (S/m)	1.45

C. SAR Surface and Volume

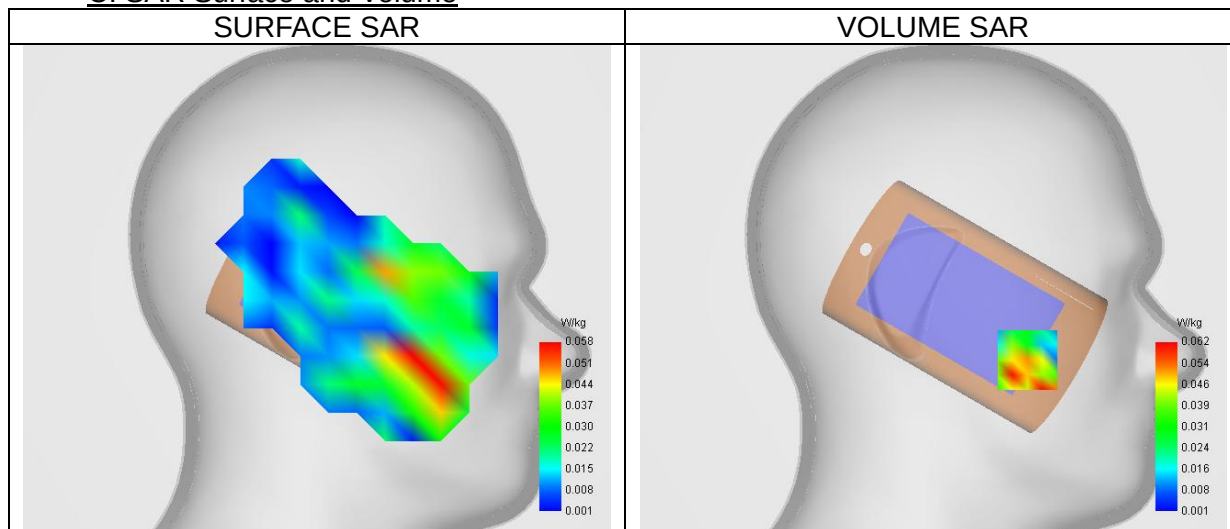


Maximum location: X=-50.00, Y=-38.00 ; SAR Peak: 0.12 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.026
SAR 1g (W/Kg)	0.052
Variation (%)	1.12
Horizontal validation criteria: minimum distance (mm)	17.89
Vertical validation criteria: SAR ratio M2/M1 (%)	74.26


E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.138	0.062	0.016	0.022	0.003	0.028	0.012

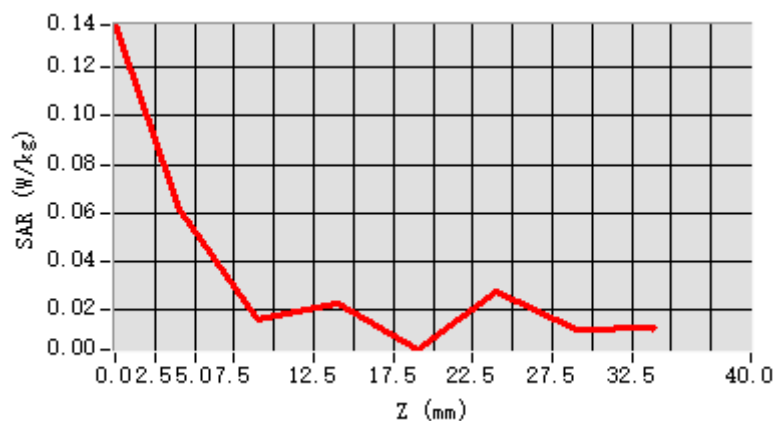


F. 3D Image

3D screen shot

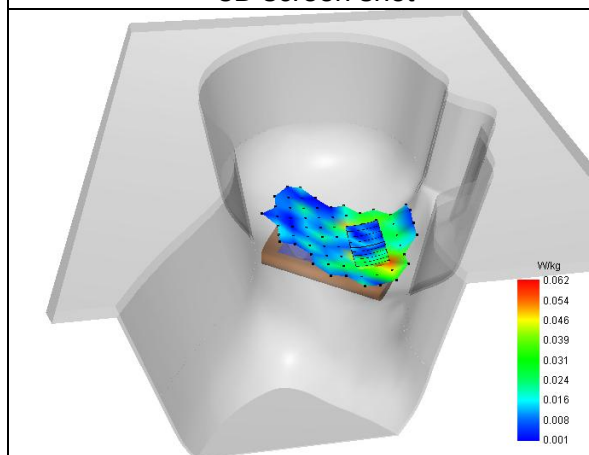

Hot spot position

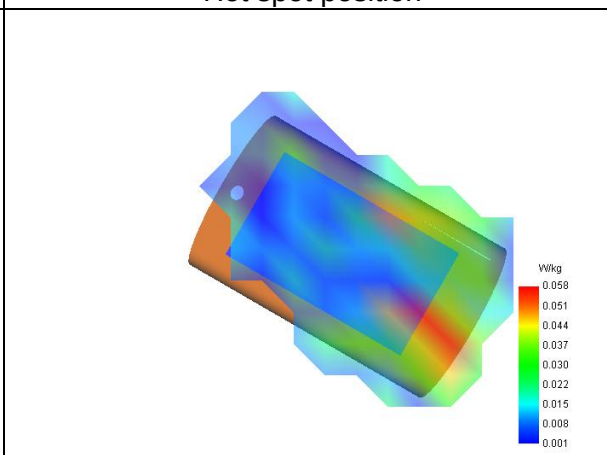

6# SAR Measurement at Band 2 (1900) (Body, Validation Plane)

Date of measurement: 28/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.57
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	Band 2 (1900)
Signal	WCDMA
Channels/Frequency	Middle (9400)/ frequency 1880.00 Mhz
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Middle TX Frequency (MHz)	1880.00
Relative permittivity (real part)	38.86
Relative permittivity (imaginary part)	13.85
Conductivity (S/m)	1.45

C. SAR Surface and Volume

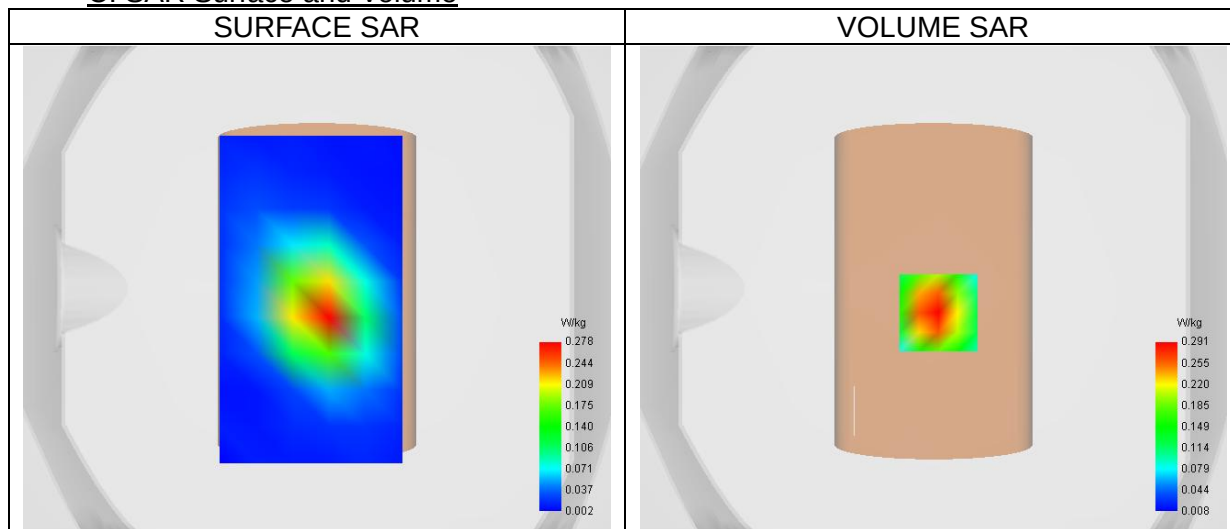


Maximum location: X=2.00, Y=-10.00 ; SAR Peak: 0.44 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.155
SAR 1g (W/Kg)	0.284
Variation (%)	-2.17
Horizontal validation criteria: minimum distance (mm)	16.00
Vertical validation criteria: SAR ratio M2/M1 (%)	60.12

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.434	0.291	0.175	0.106	0.064	0.038	0.021

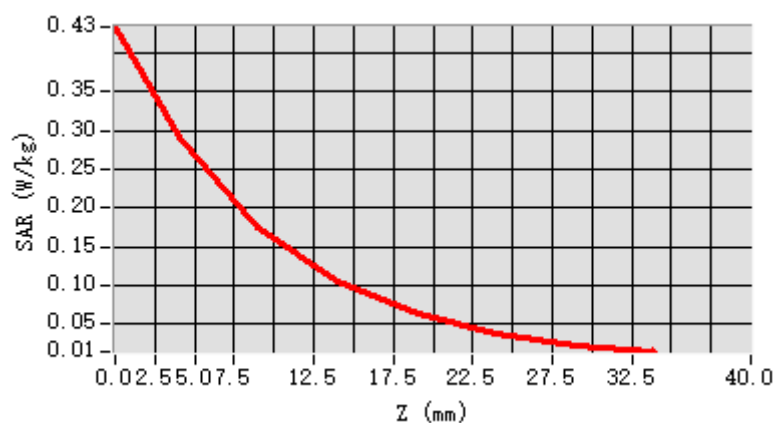

F. 3D Image

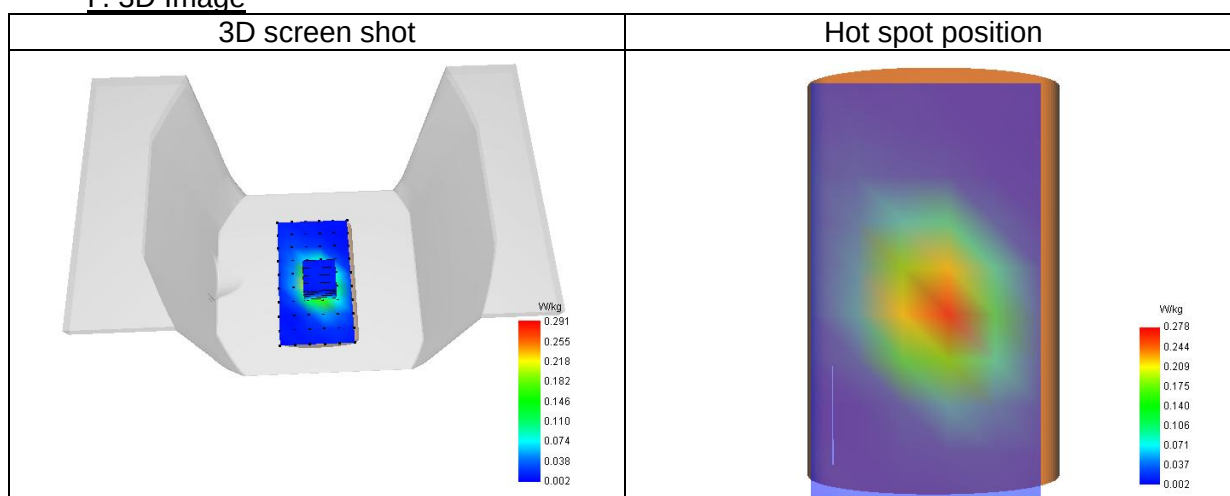

7# SAR Measurement at Band 4 (1700) (Cheek, Left)

Date of measurement: 27/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.51
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	Band 4 (1700)
Signal	WCDMA
Channels/Frequency	Middle (1413)/ frequency 1732.60 Mhz
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Middle TX Frequency (MHz)	1732.60
Relative permittivity (real part)	40.52
Relative permittivity (imaginary part)	14.25
Conductivity (S/m)	1.37

C. SAR Surface and Volume

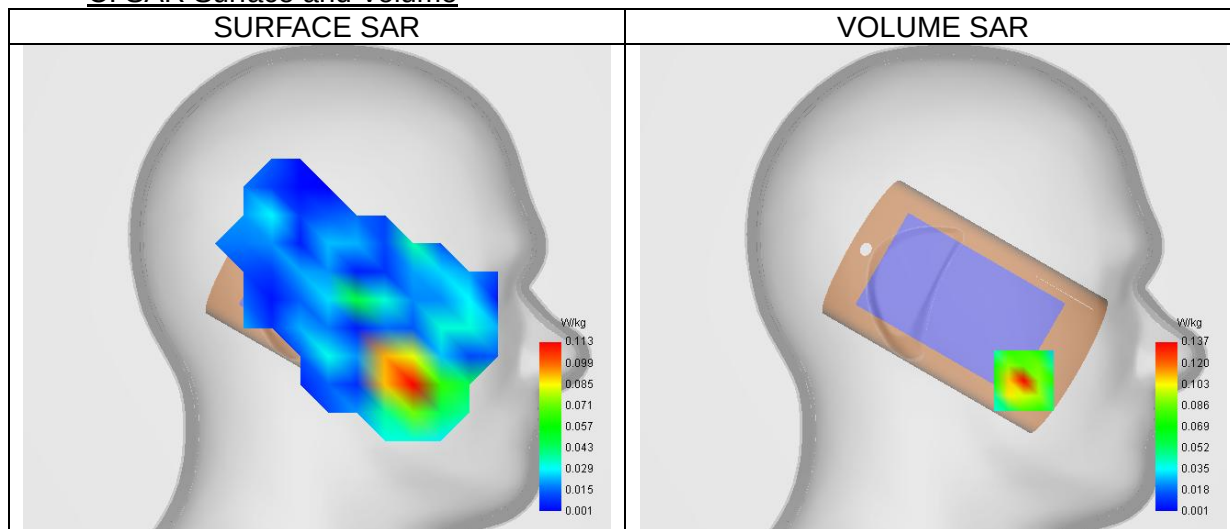


Maximum location: X=-48.00, Y=-49.00 ; SAR Peak: 0.25 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.069
SAR 1g (W/Kg)	0.132
Variation (%)	1.82
Horizontal validation criteria: minimum distance (mm)	16.00
Vertical validation criteria: SAR ratio M2/M1 (%)	60.29


E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.168	0.137	0.083	0.078	0.034	0.038	0.038

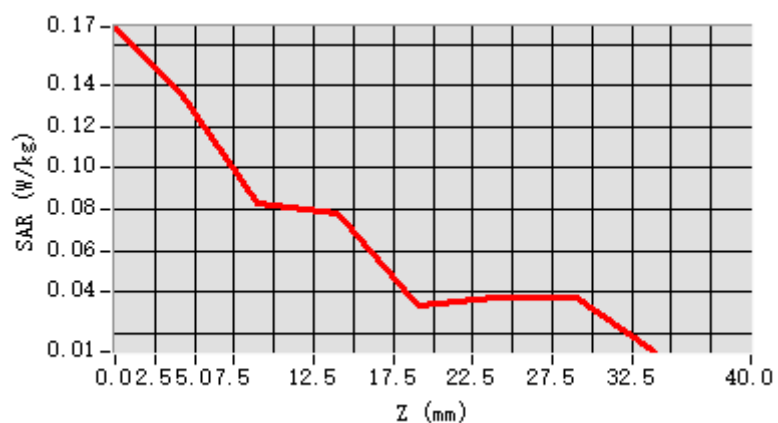


F. 3D Image

3D screen shot

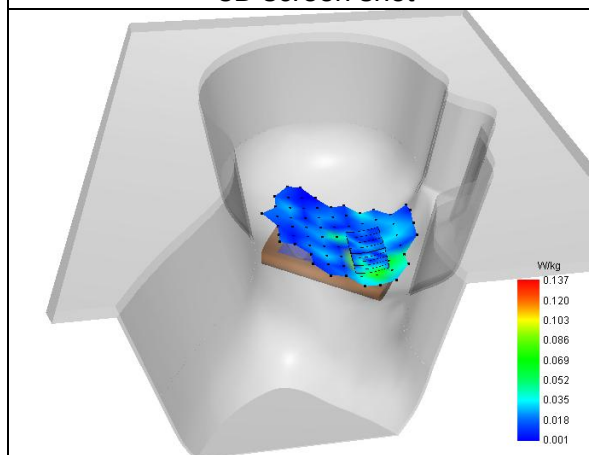

Hot spot position

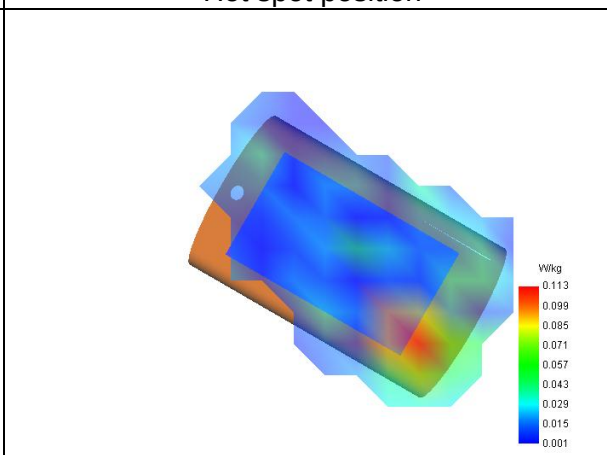

8# SAR Measurement at Band 4 (1700) (Body, Validation Plane)

Date of measurement: 27/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	1.51
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	Band 4 (1700)
Signal	WCDMA
Channels/Frequency	Middle (1413)/ frequency 1732.60 Mhz
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Middle TX Frequency (MHz)	1732.60
Relative permittivity (real part)	40.52
Relative permittivity (imaginary part)	14.25
Conductivity (S/m)	1.37

C. SAR Surface and Volume

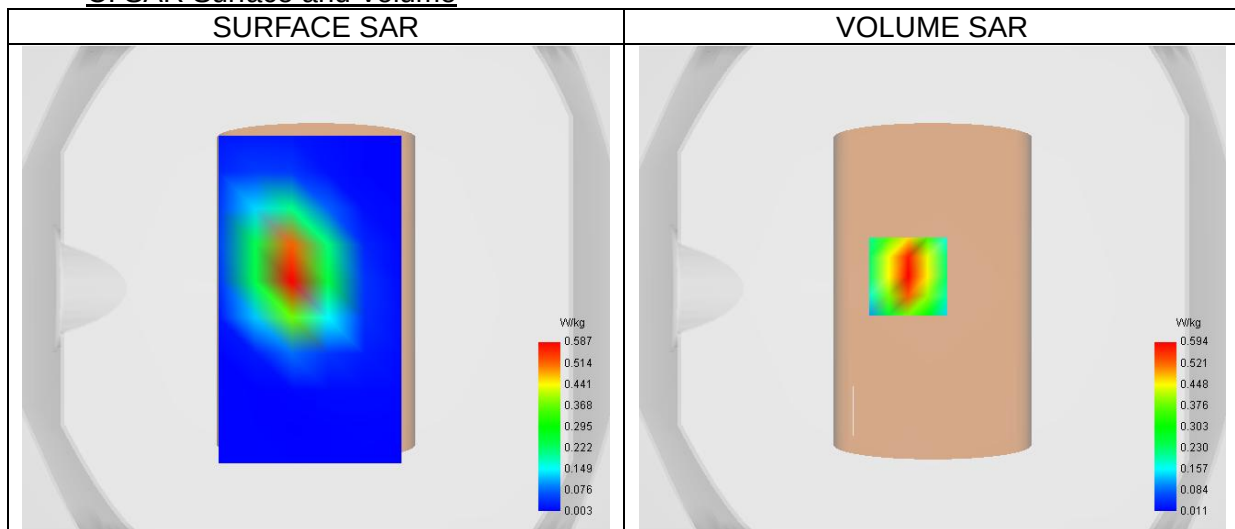


Maximum location: X=-10.00, Y=5.00 ; SAR Peak: 0.88 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.309
SAR 1g (W/Kg)	0.560
Variation (%)	-2.10
Horizontal validation criteria: minimum distance (mm)	16.00
Vertical validation criteria: SAR ratio M2/M1 (%)	60.16

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.886	0.594	0.357	0.218	0.136	0.085	0.051

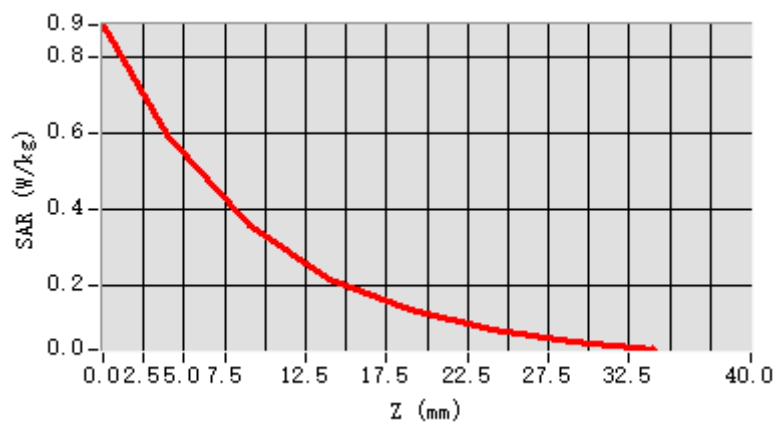

F. 3D Image

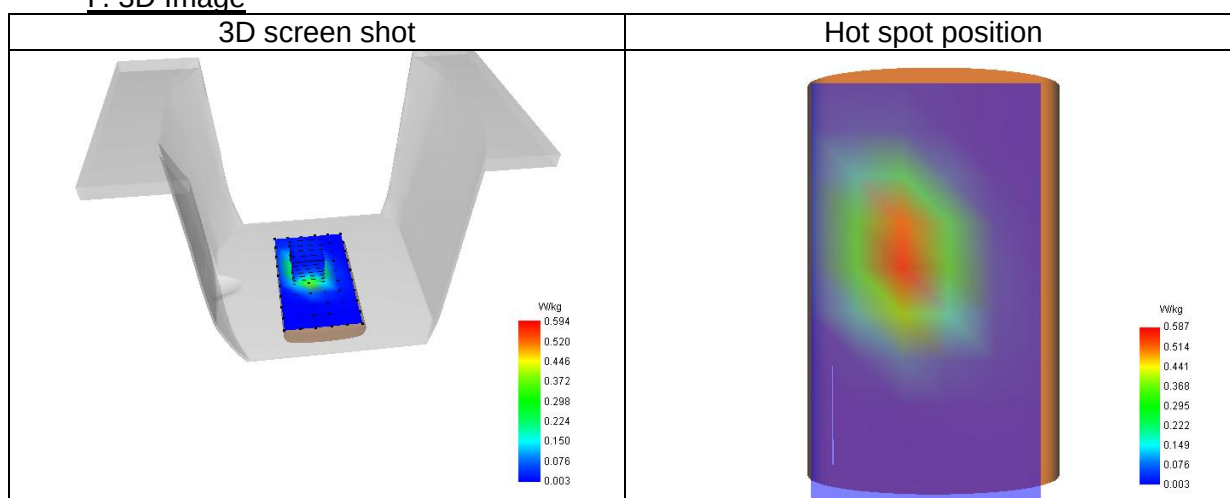

9# SAR Measurement at Band 5 (850) (Cheek, Left)

Date of measurement: 26/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.34
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Left head
Device Position	Cheek
Band	Band 5 (850)
Signal	WCDMA
Channels/Frequency	Middle (4182)/ frequency 836.40 Mhz
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Middle TX Frequency (MHz)	836.40
Relative permittivity (real part)	42.70
Relative permittivity (imaginary part)	19.96
Conductivity (S/m)	0.93

C. SAR Surface and Volume

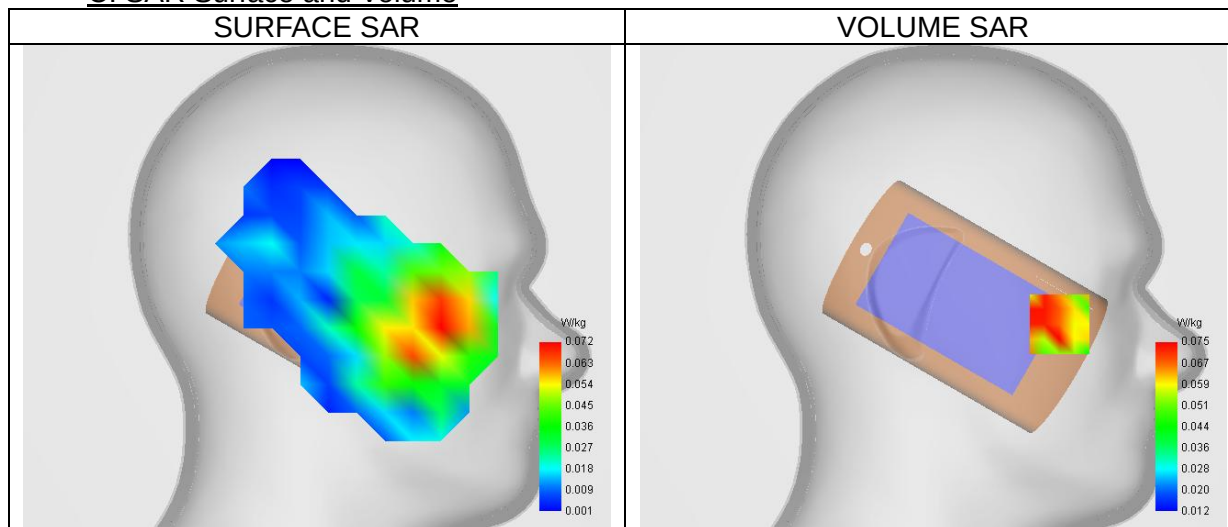


Maximum location: X=-67.00, Y=-19.00 ; SAR Peak: 0.13 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.054
SAR 1g (W/Kg)	0.082
Variation (%)	-2.36
Horizontal validation criteria: minimum distance (mm)	0.00
Vertical validation criteria: SAR ratio M2/M1 (%)	0.00


E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.125	0.075	0.054	0.059	0.046	0.041	0.021

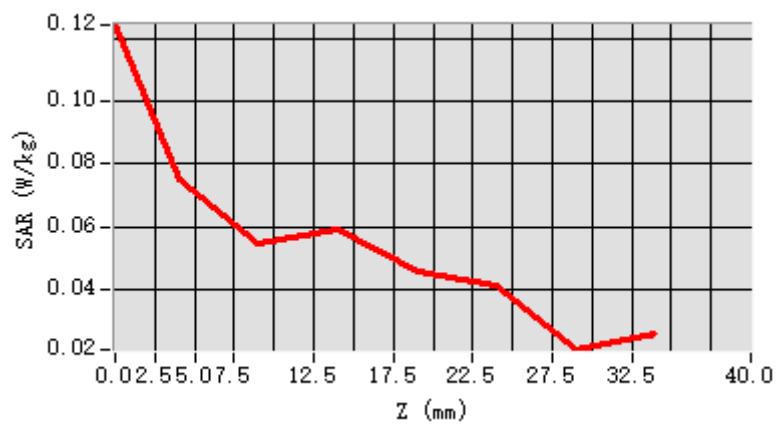


F. 3D Image

3D screen shot

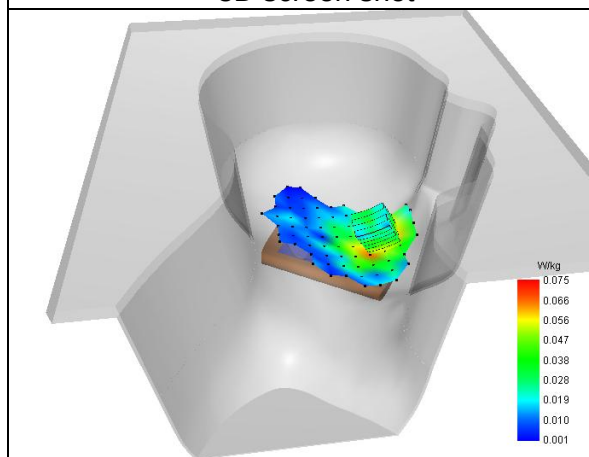

Hot spot position

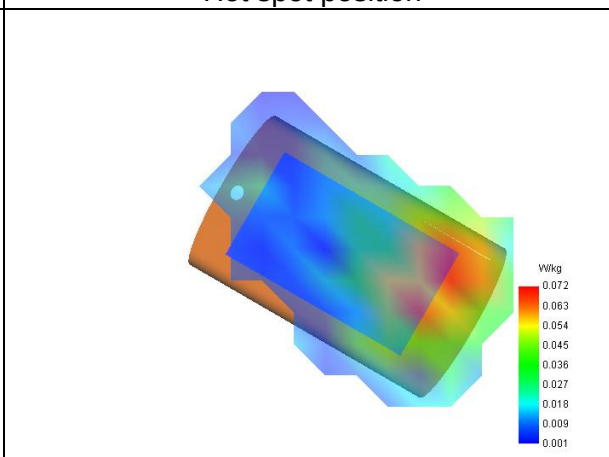

10# SAR Measurement at Band 5 (850) (Body, Validation Plane)

Date of measurement: 26/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.34
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	Band 5 (850)
Signal	WCDMA
Channels/Frequency	Middle (4182)/ frequency 836.40 Mhz
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Middle TX Frequency (MHz)	836.40
Relative permittivity (real part)	42.70
Relative permittivity (imaginary part)	19.96
Conductivity (S/m)	0.93

C. SAR Surface and Volume

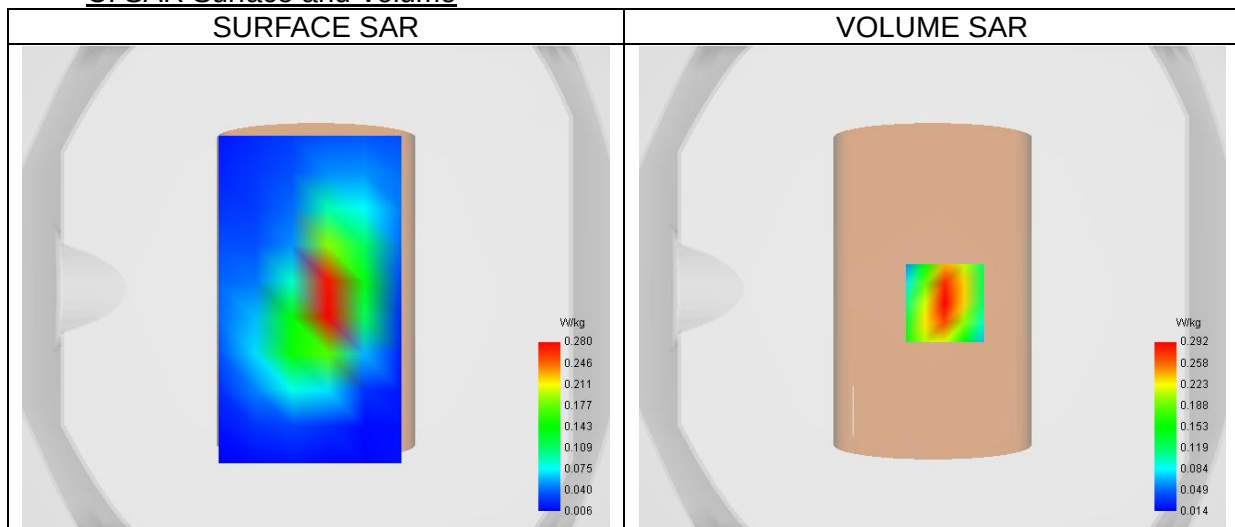

Maximum location: X=5.00, Y=-6.00 ; SAR Peak: 0.41 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.166
SAR 1g (W/Kg)	0.277
Variation (%)	0.30
Horizontal validation criteria: minimum distance (mm)	16.00
Vertical validation criteria: SAR ratio M2/M1 (%)	66.81

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.402	0.292	0.195	0.130	0.089	0.062	0.044