



TEST REPORT

Test item description: Smart Phone
FCC ID: 2BAY5 SE
Trademark(s): FOSSIBOT
Model/Type reference: S5, S5 PRO
Applicant's name: Shenzhen Qichang Intelligent Technology Co., Ltd
Address: Room 510, Building 7, Yunli Intelligent Park, No. 7, Bantian Street, Longgang , Shenzhen
Manufacturer: Shenzhen Qichang Intelligent Technology Co., Ltd
Address: Room 510, Building 7, Yunli Intelligent Park, No. 7, Bantian Street, Longgang , Shenzhen
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Jun. 13, 2025
Sample tested Date: Jun. 13, 2025 to Oct. 10, 2025
Issue Date: Oct. 10, 2025
Report No.: CTB25061304801RF06
Test Standards: FCC Part 2, 22, 24E, 27
Test Results: PASS
Remark: This is LTE radio test report.

Compiled by:

Reviewed by:

Approved by:

Kai Chen

Martin Feng

Bin Mei

Kai ChenMartin FengBin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration.....	7
4.3 Support Equipment.....	7
4.4 Test Mode	7
4.5 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. RF EXPOSURE	10
6.1 Standard Applicable	10
6.2 Test Result	10
7. RF OUTPUT POWER.....	11
7.1 Standard Applicable	11
7.2 Test Procedure.....	11
7.3 Summary of Test Results/Plots	11
8. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER	12
8.1 Standard Applicable	12
8.2 Test Procedure.....	12
8.3 Summary of Test Results	12
9. EMISSION BANDWIDTH	13
9.1 Standard Applicable	13
9.2 Test Procedure.....	13
9.3 Summary of Test Results/Plots	13
10. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL	14
10.1 Standard Applicable	14
10.2 Test Procedure.....	14
10.3 Summary of Test Results/Plots	15
11. SPURIOUS RADIATED EMISSIONS.....	16
11.1 Standard Applicable	16
11.2 Test Procedure.....	17
11.3 Summary of Test Results/Plots	17
12. FREQUENCY STABILITY	36
12.1 Standard Applicable	36
12.2 Test Procedure.....	36
12.3 Summary of Test Results/Plots	36

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB25061304801RF06	Oct. 10, 2025	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
Conducted output power	Part 2.1046(a)	TIA-603-E-2016 & KDB 971168 D01v03r01	PASS
Effective Radiated Power of Transmitter(EIRP)	Part 22.913(a)(5)/Part27.50(h)(2)	TIA-603-E-2016 & KDB 971168 D01v03r01	PASS
peak-to-average ratio	Part 27.50(d)	KDB 971168 D01v03r01	PASS
99% & 26dB Occupied Bandwidth	Part 2.1049(h)	KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	Part 2.1051/ Part 22.917(a)/Part 27.53(m) (4)	KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	Part 2.1051/ Part 22.917(a)/Part 27.53(m) (4)	TIA-603-E-2016 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	Part 2.1053/ Part 22.917(a)/Part 27.53(m) (4)	TIA-603-E-2016 & KDB 971168 D01v03r01	PASS
Frequency stability	Part 2.1055/Part 27.54	TIA-603-E-2016 & KDB 971168 D01v03r01	PASS

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m camber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
Receiver Reference Sensitivity level	1.9dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model/Type reference:	S5, S5 PRO
Model Description:	All the model are the same circuit and RF module, only the name is different. Test sample model: S5
Hardware Version:	J566A_9230MB_D4XUF_V1.1
Software Version:	Android 15
Operation Frequency:	FDD-LTE BAND 2: 1850-1910MHz FDD-LTE BAND 4: 1710-1755MHz FDD-LTE BAND 5: 824-849MHz FDD-LTE BAND 7: 2500-2570MHz FDD-LTE BAND 12: 699-716MHz FDD-LTE BAND 17: 704-716MHz
Max. RF output power:	FDD-LTE BAND 2: 24.48 dBm FDD-LTE BAND 4: 22.92 dBm FDD-LTE BAND 5: 23.76 dBm FDD-LTE BAND 7: 23.79 dBm FDD-LTE BAND 12: 24.60 dBm FDD-LTE BAND 17: 24.47 dBm
Type of Modulation:	QPSK, 16QAM
Antenna installation:	FPC antenna
Antenna Gain:	FDD-LTE BAND 2: 0.47dBi FDD-LTE BAND 4: 0.54dBi FDD-LTE BAND 5: -0.87dBi FDD-LTE BAND 7: -0.47dBi FDD-LTE BAND 12: -1.22dBi FDD-LTE BAND 17: -1.25dBi
Ratings:	AC 120-240V DC 3.89V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	Router	Huawei	AX2 Pro	/	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Test Mode

Test Mode List		
Test Mode	Description	Remark
TM1	FDD-LTE BAND 2	Low, Middle, High Channels
TM2	FDD-LTE BAND 4	Low, Middle, High Channels
TM3	TDD-LTE BAND 5	Low, Middle, High Channels
TM4	TDD-LTE BAND 7	Low, Middle, High Channels
TM5	TDD-LTE BAND 12	Low, Middle, High Channels
TM6	TDD-LTE BAND 17	Low, Middle, High Channels

4.5 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.89V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhua Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: CN1276

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated Date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/5/23	2026/5/22
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/5/23	2026/5/22
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/5/23	2026/5/22
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/5/23	2026/5/22
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/5/22	2026/5/21
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/5/22	2026/5/21
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/5/22	2026/5/21
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	/	2025/6/18	2026/6/17
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	/	2025/6/18	2026/6/17
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	/	2025/5/24	2026/5/23
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2024/10/31	2025/10/30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/5/22	2026/5/21
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/	/
16	966 chamber	C.R.T.	966	/	/	2024/6/23	2027/6/22
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/5/23	2026/5/22
18	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22

19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/2	2026/6/1
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/1	2026/5/31
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/2	2026/6/1
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/2	2026/6/1
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/2	2026/6/1

6. RF EXPOSURE

6.1 Standard Applicable

According to §1.1307 and §2.1091, §2.1093, the portable transmitter must comply the RF exposure requirements.

6.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure report.

7. RF OUTPUT POWER

7.1 Standard Applicable

According to §22.913(a)(2), the ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.


According to §24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d)(4), fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

According to §27.50(c)(10), portable stations (hand-held devices) in the 698-746 MHz band are limited to 3 watts ERP.

7.2 Test Procedure

Conducted output power test method:

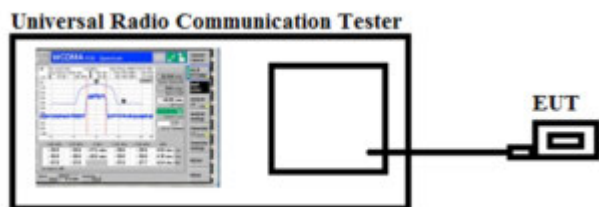

Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

7.3 Summary of Test Results/Plots

Please refer to Appendix 1: Conducted output power

Test result: Pass

8. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER

8.1 Standard Applicable

According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51, in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal


corresponding to the highest PAPR expected during periods of continuous transmission.

8.2 Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Configuration for the emission bandwidth testing:

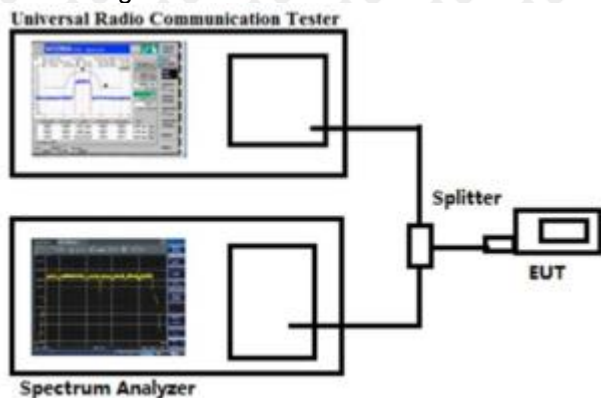

8.3 Summary of Test Results

Please refer to Appendix 3: Peak-to-Average Ratio

Test result: Pass

9. EMISSION BANDWIDTH

9.1 Standard Applicable

According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


According to §24.238(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §27.53, the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

9.2 Test Procedure

According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Test Configuration for the emission bandwidth testing:

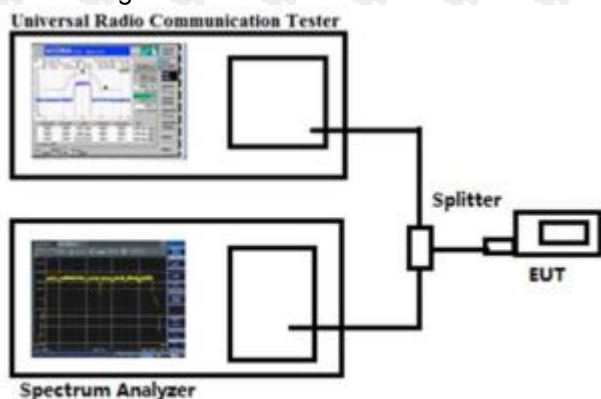

9.3 Summary of Test Results/Plots

Please refer to Appendix 4: 26dB Bandwidth and Occupied Bandwidth
Test result: Pass

10. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL

10.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

According to §27.53 (f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

According to §27.53(h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.


According to §27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB.

According to §27.53(m)(4), for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz.

10.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10 th harmonic.

Test Configuration for the out of band emissions testing:

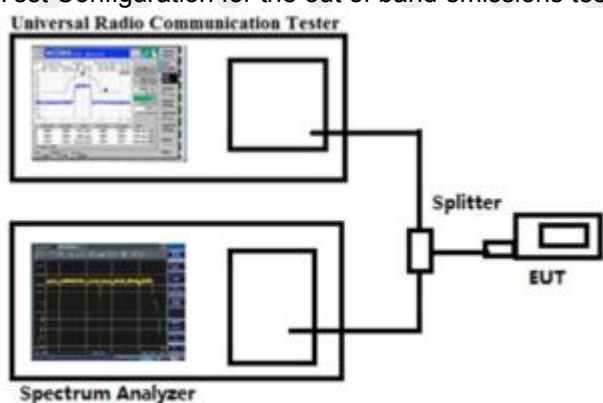

10.3 Summary of Test Results/Plots

Please refer to Appendix 5 & 6: Band Edge & Conducted Spurious Emission

Test result: Pass

11. SPURIOUS RADIATED EMISSIONS

11.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

According to §27.53 (f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

According to §27.53(h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

According to §27.53(g) the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB.

11.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA-603-E and ANSI C63.4-2014 measurement procedure.
 2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
 3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
 4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.
- Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$

11.3 Summary of Test Results/Plots

- Note: 1. this EUT was tested in 3 orthogonal positions and the worst case position data was reported.
2. All test modes (different bandwidth and different modulation) are performed, but only the worst case is recorded in this report.

QPSK

Band 2 18607 channel/BW 1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1762.66	149	355	-59.83	-13	-46.83	Pass	H
1633.19	154	34	-50.13	-13	-37.13	Pass	H
3932.40	146	271	-45.26	-13	-32.26	Pass	H
5899.84	160	301	-45.19	-13	-32.19	Pass	H
6564.95	143	314	-45.48	-13	-32.48	Pass	H
8012.02	154	237	-41.41	-13	-28.41	Pass	H
1243.87	159	131	-55.42	-13	-42.42	Pass	V
1433.89	153	180	-55.50	-13	-42.50	Pass	V
3497.04	154	196	-49.91	-13	-36.91	Pass	V
3895.08	151	52	-48.89	-13	-35.89	Pass	V
5714.85	159	14	-48.63	-13	-35.63	Pass	V
6592.65	155	68	-48.99	-13	-35.99	Pass	V

Band 2 18900 channel/BW 1.4 (middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1781.43	150	49	-57.78	-13	-44.78	Pass	H
1705.16	146	41	-52.69	-13	-39.69	Pass	H
3851.11	150	123	-53.32	-13	-40.32	Pass	H
5776.75	146	168	-44.77	-13	-31.77	Pass	H
6552.49	149	153	-47.39	-13	-34.39	Pass	H
8042.18	151	100	-46.09	-13	-33.09	Pass	H
1295.36	149	4	-54.04	-13	-41.04	Pass	V
1377.32	148	162	-56.62	-13	-43.62	Pass	V
3671.00	147	327	-53.45	-13	-40.45	Pass	V
4009.84	148	252	-49.09	-13	-36.09	Pass	V
5839.15	150	82	-50.69	-13	-37.69	Pass	V
6468.57	150	249	-49.77	-13	-36.77	Pass	V

Band 2 19193 channel/BW 1.4 (highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1978.89	147	107	-55.03	-13	-42.03	Pass	H
1747.16	147	114	-49.91	-13	-36.91	Pass	H
3789.79	148	225	-47.46	-13	-34.46	Pass	H
5967.98	147	252	-39.53	-13	-26.53	Pass	H
6611.27	148	279	-44.11	-13	-31.11	Pass	H
7915.67	148	117	-44.92	-13	-31.92	Pass	H
1239.03	148	304	-54.85	-13	-41.85	Pass	V
1471.49	145	172	-58.46	-13	-45.46	Pass	V
3610.23	146	57	-54.26	-13	-41.26	Pass	V
3815.17	153	211	-50.93	-13	-37.93	Pass	V
5829.47	152	205	-40.46	-13	-27.46	Pass	V
6553.40	146	181	-49.93	-13	-36.93	Pass	V

16QAM

Band 2 18607 channel/BW 1.4 (lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1828.43	147	217	-59.88	-13	-46.88	Pass	H
1642.26	154	272	-48.01	-13	-35.01	Pass	H
3934.47	146	126	-49.86	-13	-36.86	Pass	H
5902.36	147	275	-44.42	-13	-31.42	Pass	H
6653.43	154	230	-46.70	-13	-33.70	Pass	H
8099.24	146	307	-39.65	-13	-26.65	Pass	H
1187.42	151	345	-50.35	-13	-37.35	Pass	V
1498.37	149	345	-56.98	-13	-43.98	Pass	V
3539.72	152	144	-53.80	-13	-40.80	Pass	V
3887.16	146	279	-49.20	-13	-36.20	Pass	V
5826.50	154	266	-46.89	-13	-33.89	Pass	V
6667.42	146	128	-47.59	-13	-34.59	Pass	V

Band 2 18900 channel/BW 1.4 (middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1850.57	151	333	-51.38	-13	-41.45	Pass	H
1713.59	153	20	-48.69	-13	-37.85	Pass	H
3856.78	145	340	-50.37	-13	-35.2	Pass	H
5972.74	155	89	-42.30	-13	-30.39	Pass	H
6408.64	152	46	-46.95	-13	-32.24	Pass	H
8120.22	150	137	-41.50	-13	-30.22	Pass	H
1197.98	154	334	-60.79	-13	-44.9	Pass	V
1454.06	149	16	-54.95	-13	-43.63	Pass	V
3611.52	146	192	-49.40	-13	-35.94	Pass	V
3887.94	154	88	-51.46	-13	-36.01	Pass	V
5895.41	154	124	-44.82	-13	-33.75	Pass	V
6448.04	154	299	-43.69	-13	-32.41	Pass	V

Band 2 19193 channel/BW 1.4 (highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1877.98	145	226	-53.63	-13	-40.63	Pass	H
1630.15	148	346	-50.92	-13	-37.92	Pass	H
3940.17	153	231	-40.27	-13	-27.27	Pass	H
5842.72	148	85	-42.32	-13	-29.32	Pass	H
6524.38	151	202	-43.73	-13	-30.73	Pass	H
8100.35	146	86	-42.37	-13	-29.37	Pass	H
1114.98	149	58	-54.38	-13	-41.38	Pass	V
1539.65	146	3	-61.75	-13	-48.75	Pass	V
3610.83	149	286	-52.54	-13	-39.54	Pass	V
3833.75	149	206	-50.66	-13	-37.66	Pass	V
5831.51	149	68	-46.25	-13	-33.25	Pass	V
6521.62	154	300	-48.74	-13	-35.74	Pass	V

QPSK

Band 4 19957 channel/BW 1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1712.70	157	269	-58.51	-13	-45.51	Pass	H
1705.19	147	292	-46.94	-13	-33.94	Pass	H
3975.09	155	346	-46.68	-13	-33.68	Pass	H
5807.51	159	94	-44.05	-13	-31.05	Pass	H
6409.19	145	194	-45.26	-13	-32.26	Pass	H
8088.17	143	206	-43.37	-13	-30.37	Pass	H
1258.56	145	209	-56.54	-13	-43.54	Pass	V
1501.44	149	141	-55.78	-13	-42.78	Pass	V
3520.98	146	114	-49.49	-13	-36.49	Pass	V
3901.24	149	222	-51.32	-13	-38.32	Pass	V
5824.73	149	335	-46.56	-13	-33.56	Pass	V
6571.65	159	12	-48.11	-13	-35.11	Pass	V

Band 4 20175 channel/BW 1.4 (middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1720.28	150	74	-55.61	-13	-42.61	Pass	H
1760.82	146	290	-51.94	-13	-38.94	Pass	H
3836.78	150	185	-52.04	-13	-39.04	Pass	H
5965.45	146	161	-46.54	-13	-33.54	Pass	H
6400.78	149	119	-46.96	-13	-33.96	Pass	H
7940.90	151	244	-49.50	-13	-36.50	Pass	H
1230.80	149	146	-52.90	-13	-39.90	Pass	V
1428.22	148	172	-58.17	-13	-45.17	Pass	V
3504.40	147	116	-51.51	-13	-38.51	Pass	V
3964.77	148	167	-51.52	-13	-38.52	Pass	V
5837.55	150	191	-46.22	-13	-33.22	Pass	V
6569.34	150	26	-51.04	-13	-38.04	Pass	V

Band 4 1754.3 channel/BW 1.4 (highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1770.99	147	89	-57.98	-13	-44.98	Pass	H
1672.17	152	76	-49.68	-13	-36.68	Pass	H
3918.47	151	139	-47.94	-13	-34.94	Pass	H
5896.35	150	90	-42.42	-13	-29.42	Pass	H
6623.56	154	161	-44.37	-13	-31.37	Pass	H
7955.01	147	323	-43.94	-13	-30.94	Pass	H
1352.42	152	19	-55.54	-13	-42.54	Pass	V
1495.33	153	235	-55.34	-13	-42.34	Pass	V
3563.36	154	6	-55.16	-13	-42.16	Pass	V
3896.20	154	139	-47.42	-13	-34.42	Pass	V
5702.98	153	252	-45.02	-13	-32.02	Pass	V
6645.96	149	197	-50.25	-13	-37.25	Pass	V

16QAM

Band 4 1710.7 channel/BW 1.4 (lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1757.47	151	69	-56.24	-13	-43.24	Pass	H
1645.23	150	46	-46.04	-13	-33.04	Pass	H
3790.14	153	89	-47.11	-13	-34.11	Pass	H
5891.37	151	309	-43.72	-13	-30.72	Pass	H
6646.46	152	93	-43.01	-13	-30.01	Pass	H
7926.27	149	16	-43.60	-13	-30.60	Pass	H
1190.23	149	345	-50.86	-13	-37.86	Pass	V
1480.68	154	168	-57.25	-13	-44.25	Pass	V
3520.56	151	86	-53.13	-13	-40.13	Pass	V
3864.86	147	124	-49.46	-13	-36.46	Pass	V
5829.29	149	278	-42.63	-13	-29.63	Pass	V
6525.51	146	52	-50.14	-13	-37.14	Pass	V

Band 4 20175 channel/BW 1.4 (middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1706.62	146	330	-51.52	-13	-41.45	Pass	H
1638.78	146	186	-53.22	-13	-37.85	Pass	H
3858.26	148	347	-51.17	-13	-35.2	Pass	H
5898.15	149	305	-43.06	-13	-30.39	Pass	H
6488.09	149	286	-42.61	-13	-32.24	Pass	H
8129.77	148	27	-42.95	-13	-30.22	Pass	H
1186.11	153	192	-59.13	-13	-44.9	Pass	V
1434.65	148	94	-52.95	-13	-43.63	Pass	V
3570.97	153	190	-46.93	-13	-35.94	Pass	V
3831.89	145	353	-48.50	-13	-36.01	Pass	V
5729.73	149	315	-43.87	-13	-33.75	Pass	V
6520.65	153	318	-48.35	-13	-32.41	Pass	V

Band 4 20393 channel/BW 1.4 (highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1713.53	146	360	-57.98	-13	-44.98	Pass	H
1661.31	151	240	-50.60	-13	-37.60	Pass	H
3990.44	149	264	-42.53	-13	-29.53	Pass	H
5897.46	147	102	-43.95	-13	-30.95	Pass	H
6503.17	149	194	-43.96	-13	-30.96	Pass	H
8066.89	150	30	-47.85	-13	-34.85	Pass	H
1245.17	148	251	-56.96	-13	-43.96	Pass	V
1521.11	149	38	-58.10	-13	-45.10	Pass	V
3585.93	146	166	-46.40	-13	-33.40	Pass	V
3904.35	150	205	-52.42	-13	-39.42	Pass	V
5781.70	154	165	-48.62	-13	-35.62	Pass	V
6509.82	145	63	-47.54	-13	-34.54	Pass	V

QPSK

Band 7 20775 channel/BW 5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1336.914	147	256	-57.67	-13	-44.67	Pass	H
1682.429	147	243	-47.41	-13	-34.41	Pass	H
3867.309	148	259	-49.90	-13	-36.90	Pass	H
5926.238	149	28	-46.07	-13	-33.07	Pass	H
6556.935	148	108	-44.79	-13	-31.79	Pass	H
8001.810	147	328	-41.84	-13	-28.84	Pass	H
1181.319	150	16	-54.24	-13	-41.24	Pass	V
1424.907	148	117	-56.57	-13	-43.57	Pass	V
3596.468	147	325	-50.85	-13	-37.85	Pass	V
3900.220	149	302	-51.46	-13	-38.46	Pass	V
5851.915	147	15	-45.52	-13	-32.52	Pass	V
6584.025	147	280	-48.32	-13	-35.32	Pass	V

Band 7 21100 channel/BW 5 (middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1334.035	151	14	-54.58	-13	-41.58	Pass	H
1725.114	147	71	-48.80	-13	-35.80	Pass	H
3853.292	150	318	-47.44	-13	-34.44	Pass	H
5927.139	147	56	-42.18	-13	-29.18	Pass	H
6504.833	147	216	-43.49	-13	-30.49	Pass	H
8058.294	151	79	-45.55	-13	-32.55	Pass	H
1191.791	151	65	-57.66	-13	-44.66	Pass	V
1383.036	146	225	-59.64	-13	-46.64	Pass	V
3535.795	149	47	-48.85	-13	-35.85	Pass	V
3854.372	150	73	-47.81	-13	-34.81	Pass	V
5820.741	147	168	-44.02	-13	-31.02	Pass	V
6519.553	150	28	-45.83	-13	-32.83	Pass	V

Band 7 21425 channel/BW 5 (highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1334.588	149	165	-53.651	-13	-40.65	Pass	H
1702.091	146	208	-48.956	-13	-35.96	Pass	H
3900.869	146	4	-44.174	-13	-31.17	Pass	H
5890.521	150	198	-41.568	-13	-28.57	Pass	H
6511.016	146	341	-44.165	-13	-31.16	Pass	H
8079.590	150	235	-42.705	-13	-29.71	Pass	H
1204.729	146	292	-54.555	-13	-41.55	Pass	V
1461.572	150	158	-56.609	-13	-43.61	Pass	V
3542.782	149	55	-50.573	-13	-37.57	Pass	V
3830.544	150	319	-48.337	-13	-35.34	Pass	V
5803.017	146	118	-47.459	-13	-34.46	Pass	V
6558.221	150	155	-48.488	-13	-35.49	Pass	V

16QAM

Band 7 20775 channel/BW 5 (lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1335.825	150	78	-56.55	-13	-43.55	Pass	H
1726.285	149	291	-52.97	-13	-39.97	Pass	H
3902.486	151	213	-50.47	-13	-37.47	Pass	H
5858.221	150	89	-46.45	-13	-33.45	Pass	H
6497.692	151	329	-47.86	-13	-34.86	Pass	H
7997.269	148	138	-47.83	-13	-34.83	Pass	H
1219.537	149	99	-57.55	-13	-44.55	Pass	V
1439.397	148	217	-55.34	-13	-42.34	Pass	V
3571.423	150	12	-50.36	-13	-37.36	Pass	V
3835.328	150	137	-48.45	-13	-35.45	Pass	V
5804.448	146	356	-46.43	-13	-33.43	Pass	V
6552.667	146	95	-48.08	-13	-35.08	Pass	V

Band 7 21100 channel/BW 5 (middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1295.830	150	142	-57.01	-13	-44.01	Pass	H
1715.462	146	280	-53.75	-13	-40.75	Pass	H
3877.169	150	330	-49.16	-13	-36.16	Pass	H
5866.314	146	194	-44.86	-13	-31.86	Pass	H
6458.405	149	260	-50.57	-13	-37.57	Pass	H
8018.511	151	31	-46.11	-13	-33.11	Pass	H
1233.443	149	4	-54.38	-13	-41.38	Pass	V
1393.811	148	257	-63.29	-13	-50.29	Pass	V
3590.295	147	55	-52.04	-13	-39.04	Pass	V
3914.602	148	273	-53.51	-13	-40.51	Pass	V
5827.383	150	136	-51.79	-13	-38.79	Pass	V
6516.447	150	16	-48.89	-13	-35.89	Pass	V

Band 7 21425 channel/BW 5 (highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1337.948	149	156	-57.12	-13	-44.12	Pass	H
1668.740	149	170	-51.84	-13	-38.84	Pass	H
3841.514	149	127	-46.83	-13	-33.83	Pass	H
5911.252	146	42	-42.88	-13	-29.88	Pass	H
6526.565	147	69	-43.27	-13	-30.27	Pass	H
8001.111	151	110	-46.21	-13	-33.21	Pass	H
1256.550	148	61	-53.84	-13	-40.84	Pass	V
1405.030	147	266	-53.72	-13	-40.72	Pass	V
3523.014	148	303	-52.15	-13	-39.15	Pass	V
3907.089	149	195	-46.73	-13	-33.73	Pass	V
5790.819	147	323	-45.35	-13	-32.35	Pass	V
6580.124	146	325	-47.42	-13	-34.42	Pass	V

QPSK

Band 5 20407 channel/BW1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1335.923	150	78	-55.07	-13	-42.07	Pass	H
1726.041	149	291	-50.38	-13	-37.38	Pass	H
3902.205	151	213	-49.01	-13	-36.01	Pass	H
5856.340	150	89	-44.81	-13	-31.81	Pass	H
6497.289	151	329	-44.34	-13	-31.34	Pass	H
7996.504	148	138	-47.49	-13	-34.49	Pass	H
1218.853	149	99	-55.37	-13	-42.37	Pass	V
1440.383	148	217	-58.29	-13	-45.29	Pass	V
3570.413	150	12	-52.19	-13	-39.19	Pass	V
3836.225	150	137	-48.14	-13	-35.14	Pass	V
5802.271	146	356	-45.27	-13	-32.27	Pass	V
6552.230	146	95	-48.48	-13	-35.48	Pass	V

Band 5 20525 channel/BW1.4(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1296.050	150	142	-56.31	-13	-43.31	Pass	H
1715.369	146	280	-51.81	-13	-38.81	Pass	H
3876.610	150	330	-50.52	-13	-37.52	Pass	H
5867.686	146	194	-45.34	-13	-32.34	Pass	H
6458.449	149	260	-49.16	-13	-36.16	Pass	H
8020.853	151	31	-48.51	-13	-35.51	Pass	H
1235.106	149	4	-53.82	-13	-40.82	Pass	V
1394.738	148	257	-59.09	-13	-46.09	Pass	V
3590.206	147	55	-53.87	-13	-40.87	Pass	V
3915.015	148	273	-50.98	-13	-37.98	Pass	V
5829.043	150	136	-48.55	-13	-35.55	Pass	V
6518.620	150	16	-48.26	-13	-35.26	Pass	V

Band 5 20643 channel/BW1.4(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1340.713	149	156	-56.73	-13	-43.73	Pass	H
1669.900	149	170	-52.00	-13	-39.00	Pass	H
3845.500	149	127	-45.66	-13	-32.66	Pass	H
5906.908	146	42	-40.96	-13	-27.96	Pass	H
6531.650	147	69	-42.47	-13	-29.47	Pass	H
8000.071	151	110	-44.74	-13	-31.74	Pass	H
1257.628	148	61	-56.49	-13	-43.49	Pass	V
1403.175	147	266	-56.84	-13	-43.84	Pass	V
3525.243	148	303	-52.79	-13	-39.79	Pass	V
3912.129	149	195	-48.59	-13	-35.59	Pass	V
5788.308	147	323	-43.05	-13	-30.05	Pass	V
6576.285	146	325	-47.76	-13	-34.76	Pass	V

16QAM

Band 5 20407 channel/BW1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1333.388	147	256	-58.58	-13	-45.58	Pass	H
1686.285	147	243	-47.50	-13	-34.50	Pass	H
3871.595	148	259	-48.88	-13	-35.88	Pass	H
5922.236	149	28	-44.97	-13	-31.97	Pass	H
6559.259	148	108	-44.23	-13	-31.23	Pass	H
7999.466	147	328	-42.32	-13	-29.32	Pass	H
1179.127	150	16	-52.48	-13	-39.48	Pass	V
1427.446	148	117	-55.56	-13	-42.56	Pass	V
3593.941	147	325	-51.51	-13	-38.51	Pass	V
3904.708	149	302	-51.53	-13	-38.53	Pass	V
5855.285	147	15	-45.36	-13	-32.36	Pass	V
6579.994	147	280	-49.33	-13	-36.33	Pass	V

Band 5 20525 channel/BW1.4(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1333.387	151	14	-54.45	-13	-41.45	Pass	H
1724.842	147	71	-50.85	-13	-37.85	Pass	H
3853.828	150	318	-48.20	-13	-35.20	Pass	H
5927.747	147	56	-43.39	-13	-30.39	Pass	H
6504.467	147	216	-45.24	-13	-32.24	Pass	H
8058.305	151	79	-43.22	-13	-30.22	Pass	H
1191.468	151	65	-57.90	-13	-44.90	Pass	V
1383.042	146	225	-56.63	-13	-43.63	Pass	V
3536.693	149	47	-48.94	-13	-35.94	Pass	V
3855.255	150	73	-49.01	-13	-36.01	Pass	V
5820.512	147	168	-46.75	-13	-33.75	Pass	V
6519.526	150	28	-45.41	-13	-32.41	Pass	V

Band 5 20643 channel/BW1.4(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1333.212	149	165	-56.287	-13	-43.29	Pass	H
1703.699	146	208	-49.706	-13	-36.71	Pass	H
3901.055	146	4	-44.234	-13	-31.23	Pass	H
5890.032	150	198	-42.648	-13	-29.65	Pass	H
6509.796	146	341	-41.373	-13	-28.37	Pass	H
8078.278	150	235	-45.896	-13	-32.90	Pass	H
1205.270	146	292	-55.728	-13	-42.73	Pass	V
1461.157	150	158	-59.167	-13	-46.17	Pass	V
3542.135	149	55	-50.175	-13	-37.17	Pass	V
3830.941	150	319	-50.928	-13	-37.93	Pass	V
5802.269	146	118	-48.924	-13	-35.92	Pass	V
6556.507	150	155	-45.845	-13	-32.84	Pass	V

QPSK

Band 12 23017 channel/BW1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1460.00	144	148	-55.93	-13	-42.93	Pass	H
1787.82	146	331	-49.83	-13	-36.83	Pass	H
3860.72	141	108	-47.41	-13	-34.41	Pass	H
5936.61	150	302	-45.77	-13	-32.77	Pass	H
6589.29	148	82	-45.08	-13	-32.08	Pass	H
8004.64	148	344	-45.31	-13	-32.31	Pass	H
1252.01	143	154	-54.65	-13	-41.65	Pass	V
1515.04	155	251	-58.78	-13	-45.78	Pass	V
3509.52	158	293	-50.57	-13	-37.57	Pass	V
3732.50	150	56	-52.20	-13	-39.20	Pass	V
5895.44	142	123	-49.48	-13	-36.48	Pass	V
6648.73	149	34	-46.97	-13	-33.97	Pass	V

Band 12 23095 channel/BW1.4(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1456.71	150	238	-55.25	-13	-42.25	Pass	H
1671.88	146	54	-54.04	-13	-41.04	Pass	H
3889.79	150	137	-51.53	-13	-38.53	Pass	H
5821.11	146	72	-44.53	-13	-31.53	Pass	H
6528.34	149	310	-51.30	-13	-38.30	Pass	H
8059.60	151	279	-46.85	-13	-33.85	Pass	H
1233.15	149	111	-50.98	-13	-37.98	Pass	V
1370.82	148	227	-57.49	-13	-44.49	Pass	V
3583.80	147	117	-54.87	-13	-41.87	Pass	V
3982.08	148	23	-50.78	-13	-37.78	Pass	V
5763.62	150	186	-49.98	-13	-36.98	Pass	V
6536.93	150	132	-45.46	-13	-32.46	Pass	V

Band 12 23173 channel/BW1.4(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1430.94	155	109	-55.70	-13	-42.70	Pass	H
1676.87	149	22	-49.96	-13	-36.96	Pass	H
3860.00	149	94	-44.38	-13	-31.38	Pass	H
5853.15	148	176	-38.83	-13	-25.83	Pass	H
6449.84	152	311	-44.58	-13	-31.58	Pass	H
7908.68	147	223	-47.03	-13	-34.03	Pass	H
1295.03	147	103	-56.42	-13	-43.42	Pass	V
1406.68	146	157	-59.17	-13	-46.17	Pass	V
3537.86	152	41	-52.60	-13	-39.60	Pass	V
3967.22	153	261	-47.05	-13	-34.05	Pass	V
5826.86	147	341	-44.86	-13	-31.86	Pass	V
6548.98	155	309	-45.40	-13	-32.40	Pass	V

16QAM

Band 12 23017 channel/BW1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1424.60	152	37	-60.89	-13	-47.89	Pass	H
1643.48	152	305	-44.69	-13	-31.69	Pass	H
3901.08	151	346	-46.77	-13	-33.77	Pass	H
5956.53	154	220	-45.44	-13	-32.44	Pass	H
6555.20	150	339	-42.79	-13	-29.79	Pass	H
7912.53	151	157	-42.84	-13	-29.84	Pass	H
1222.08	147	244	-54.97	-13	-41.97	Pass	V
1331.44	154	83	-55.08	-13	-42.08	Pass	V
3663.17	146	231	-50.53	-13	-37.53	Pass	V
3927.54	150	245	-50.26	-13	-37.26	Pass	V
5770.04	146	184	-47.55	-13	-34.55	Pass	V
6591.40	150	175	-46.84	-13	-33.84	Pass	V

Band 12 23095 channel/BW1.4(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1429.90	151	108	-56.95	-13	-41.45	Pass	H
1743.96	151	144	-48.64	-13	-37.85	Pass	H
3776.08	149	232	-50.53	-13	-35.2	Pass	H
5896.69	147	260	-40.81	-13	-30.39	Pass	H
6415.47	147	125	-44.14	-13	-32.24	Pass	H
7990.29	148	159	-43.93	-13	-30.22	Pass	H
1167.26	150	20	-55.86	-13	-44.9	Pass	V
1295.11	149	188	-53.82	-13	-43.63	Pass	V
3522.38	147	55	-46.28	-13	-35.94	Pass	V
3847.96	146	201	-49.34	-13	-36.01	Pass	V
5860.58	150	190	-46.51	-13	-33.75	Pass	V
6432.56	154	320	-45.37	-13	-32.41	Pass	V

Band 12 23173 channel/BW1.4(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1334.40	150	36	-56.04	-13	-43.04	Pass	H
1650.69	147	2	-47.16	-13	-34.16	Pass	H
3930.02	153	122	-41.98	-13	-28.98	Pass	H
5875.11	147	276	-38.82	-13	-25.82	Pass	H
6570.68	154	296	-41.19	-13	-28.19	Pass	H
8160.42	151	148	-48.33	-13	-35.33	Pass	H
1241.71	151	321	-58.52	-13	-45.52	Pass	V
1458.34	150	52	-56.07	-13	-43.07	Pass	V
3507.56	147	106	-52.00	-13	-39.00	Pass	V
3887.23	149	275	-53.57	-13	-40.57	Pass	V
5769.97	147	91	-45.12	-13	-32.12	Pass	V
6472.60	145	337	-46.57	-13	-33.57	Pass	V

QPSK

Band 17 23755 channel/BW5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1612.25	141	207	-55.31	-13	-42.31	Pass	H
1635.56	141	287	-47.54	-13	-34.54	Pass	H
3820.65	146	317	-49.14	-13	-36.14	Pass	H
5881.48	160	2	-42.59	-13	-29.59	Pass	H
6461.21	156	87	-45.84	-13	-32.84	Pass	H
8078.39	145	254	-43.85	-13	-30.85	Pass	H
1207.59	152	166	-54.47	-13	-41.47	Pass	V
1519.56	152	155	-58.03	-13	-45.03	Pass	V
3624.10	160	110	-50.61	-13	-37.61	Pass	V
3859.25	153	161	-53.62	-13	-40.62	Pass	V
5893.26	153	343	-47.37	-13	-34.37	Pass	V
6478.55	159	29	-47.53	-13	-34.53	Pass	V

Band 17 23790 channel/BW5(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1552.48	150	271	-57.62	-13	-44.62	Pass	H
1757.57	146	55	-49.05	-13	-36.05	Pass	H
3894.60	150	151	-47.89	-13	-34.89	Pass	H
5933.19	146	81	-44.50	-13	-31.50	Pass	H
6390.77	149	221	-50.82	-13	-37.82	Pass	H
8078.93	151	100	-49.90	-13	-36.90	Pass	H
1251.26	149	346	-55.54	-13	-42.54	Pass	V
1424.81	148	354	-56.51	-13	-43.51	Pass	V
3627.46	147	236	-56.29	-13	-43.29	Pass	V
3899.00	148	114	-52.41	-13	-39.41	Pass	V
5923.84	150	64	-50.27	-13	-37.27	Pass	V
6483.16	150	289	-46.80	-13	-33.80	Pass	V

Band 17 23825 channel/BW5(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1649.68	145	114	-54.83	-13	-41.83	Pass	H
1648.41	150	164	-55.00	-13	-42.00	Pass	H
3848.33	148	10	-42.84	-13	-29.84	Pass	H
5908.68	152	231	-41.14	-13	-28.14	Pass	H
6526.23	154	276	-39.60	-13	-26.60	Pass	H
7960.02	153	109	-44.12	-13	-31.12	Pass	H
1351.63	148	165	-54.36	-13	-41.36	Pass	V
1327.92	153	101	-54.51	-13	-41.51	Pass	V
3549.65	150	95	-55.79	-13	-42.79	Pass	V
3901.52	153	112	-51.51	-13	-38.51	Pass	V
5776.42	154	243	-43.37	-13	-30.37	Pass	V
6491.62	146	61	-48.25	-13	-35.25	Pass	V

16QAM

Band 17 23755 channel/BW5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1628.36	154	84	-60.51	-13	-47.51	Pass	H
1781.31	151	220	-46.25	-13	-33.25	Pass	H
3947.47	150	146	-49.35	-13	-36.35	Pass	H
5826.60	146	134	-44.49	-13	-31.49	Pass	H
6549.05	153	308	-45.66	-13	-32.66	Pass	H
7901.89	148	223	-41.22	-13	-28.22	Pass	H
1165.49	152	33	-51.21	-13	-38.21	Pass	V
1462.46	148	6	-52.94	-13	-39.94	Pass	V
3673.71	151	152	-49.49	-13	-36.49	Pass	V
3886.25	149	265	-53.60	-13	-40.60	Pass	V
5778.26	147	243	-43.06	-13	-30.06	Pass	V
6535.24	153	21	-50.23	-13	-37.23	Pass	V

Band 17 23790 channel/BW5(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1461.04	150	353	-51.27	-13	-41.45	Pass	H
1783.84	146	6	-50.77	-13	-37.85	Pass	H
3835.28	153	177	-49.99	-13	-35.2	Pass	H
5946.35	147	97	-41.87	-13	-30.39	Pass	H
6424.90	150	45	-44.25	-13	-32.24	Pass	H
8146.40	146	245	-45.57	-13	-30.22	Pass	H
1207.47	153	111	-57.71	-13	-44.9	Pass	V
1358.57	152	117	-53.90	-13	-43.63	Pass	V
3501.44	152	81	-47.56	-13	-35.94	Pass	V
3761.80	148	40	-49.23	-13	-36.01	Pass	V
5887.70	152	354	-44.54	-13	-33.75	Pass	V
6469.04	146	98	-43.38	-13	-32.41	Pass	V

Band 17 23825 channel/BW5(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1636.83	151	107	-53.32	-13	-40.32	Pass	H
1793.58	151	221	-49.34	-13	-36.34	Pass	H
3984.68	153	342	-43.83	-13	-30.83	Pass	H
5937.87	151	164	-43.17	-13	-30.17	Pass	H
6554.37	149	13	-38.55	-13	-25.55	Pass	H
8028.08	147	25	-46.65	-13	-33.65	Pass	H
1224.93	146	94	-52.36	-13	-39.36	Pass	V
1445.16	150	324	-60.10	-13	-47.10	Pass	V
3464.59	146	9	-50.77	-13	-37.77	Pass	V
3909.76	153	300	-47.74	-13	-34.74	Pass	V
5706.62	152	128	-46.31	-13	-33.31	Pass	V
6561.32	149	124	-45.77	-13	-32.77	Pass	V

Note:

1) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 1GHz are attenuated more than 20 dB below the applicable limit and not required to be reported, the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

2) Tested with all kind of bandwidth, RB Size and RB Offset, Found the 1.4MHz with full RB were the worst case; and then Only the worst case is recorded in the report.

12. FREQUENCY STABILITY

12.1 Standard Applicable

According to §22.355, §24.235, §27.54 the limit is 2.5ppm.

12.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode

12.3 Summary of Test Results/Plots

Note: 1.Normal Voltage NV=AC 120V; Low Voltage LV=AC 108V; High Voltage HV=AC 132V

Please refer to Appendix 2: Frequency Stability

Test result: Pass

※※※※※ END OF REPORT ※※※※※