



FCC Test Report

Application No.: DNT2510220366R11843-14713

Applicant: Shenzhen Sihaijialan Electronic Technology Co., Ltd.
301, Building 2, Hongxin Industrial Park, No.1303, Guanguang Road,
Address of Applicant: Xinlan Community, Guanlan Street, Longhua District, Shenzhen, Guangdong,
China

EUT Description: Wireless Adapter

Model No.: NF-U373

Additional Model(s): NF-U370, NF-U372, NF-U375, NF-U377, NF-U378, NF-U379, NF-U323 V2,
NF-U351

FCC ID: 2BAO6-NF-U373

Power Supply DC 5V

Trade Mark: NEWFAST
47 CFR FCC Part 2, Subpart J

Standards: 47 CFR Part 15, Subpart E
ANSI C63.10: 2020

Date of Receipt: 2025/10/22

Date of Test: 2025/10/23 to 2025/11/13

Date of Issue: 2025/11/24

Test Result: **PASS**

Prepared By: Wayne Lin (Testing Engineer)

Reviewed By: Peipei Chen (Project Engineer)

Approved By: Hense Shen (Manager)



Note: If there is any objection to the results in this report, please submit a written inquiry to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp, and is issued by the company in accordance with the requirements of the "Conditions of Issuance of Test Reports" printed in the attached page. Unless otherwise stated, the results presented in this report only apply to the samples tested this time. Partial reproduction of this report is not allowed unless approved by the company in writing.

Dongguan DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China

Web: www.dn-testing.com

Tel: +86-769-88087383

E-mail: service@dn-testing.com



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Nov 24, 2025	Valid	Original Report



1 Test Summary

No.	Description of Test Item	FCC Standard Section	Results
1	6dB Bandwidth & 26dB Bandwidth & 99% Occupied Bandwidth	15.407(a) 15.407(e)	PASS
2	Maximum Conducted Output Power	15.407(a)	PASS
3	Peak Power Spectral Density	15.407(a)	PASS
4	Unwanted Emissions and Band Edge	15.205 15.209 15.407(b)	PASS
5	Frequency Stability	15.407(g)	PASS
6	AC Power Line Conducted Emissions	15.207 15.407(b)(9)	PASS
7	Antenna Requirement	15.203	PASS

Note:

1. "N/A" denotes test is not applicable in this test report.



Contents

1	Test Summary	3
2	General Information.....	5
	2.1 Test Location	5
	2.2 General Description of EUT	6
	2.3 Channel List.....	7
	2.4 Test Environment and Mode	8
	2.5 Power Setting of Test Software	9
	2.6 Description of Support Units	9
	2.7 Test Facility.....	10
	2.8 Measurement Uncertainty (95% confidence levels, k=2)	10
	2.9 Equipment List.....	11
	2.10 Assistant equipment used for test	12
3	Test results and Measurement Data	13
	3.1 Antenna Requirement.....	13
	3.2 Duty Cycle	14
	3.3 Emission Bandwidth	15
	3.4 99% Occupied Bandwidth	16
	3.5 Conducted Output Power	17
	3.6 Power Spectral Density	18
	3.7 Frequency Stability	19
	3.8 Radiated Spurious Emissions.....	21
	3.9 Restricted bands around fundamental frequency.....	33
	3.10 AC Power Line Conducted Emissions.....	40
4	Appendix	43
	Appendix A: Duty Cycle	43
	Appendix B: 26dB Emission Bandwidth	73
	Appendix C:Occupied channel bandwidth.....	103
	Appendix D: Maximum conducted output power.....	133
	Appendix E: Maximum power spectral density.....	135
	Appendix F: Frequency Stability	165



2 General Information

2.1 Test Location

Company:	Dongguan DN Testing Co., Ltd
Address:	No. 1, West Fourth Street, South Xinfu Road, Wusha Liwu, Chang 'an Town, Dongguan City, Guangdong P.R.China
Test engineer:	Wayne Lin



2.2 General Description of EUT

Manufacturer:	Shenzhen Sihaijialan Electronic Technology Co., Ltd.
Address of Manufacturer:	301, Building 2, Hongxin Industrial Park, No.1303, Guanguang Road, Xinlan Community, Guanlan Street, Longhua District, Shenzhen, Guangdong, China
EUT Description:	Wireless Adapter
Test Model No.:	NF-U373
Additional Model(s):	NF-U370, NF-U372, NF-U375, NF-U377, NF-U378, NF-U379, NF-U323 V2, NF-U351
Power Supply:	DC 5V
Trade Mark:	NEWFAST
Hardware Version:	V1.0
Software Version:	V1.0
Chip Type:	RTL8912AU
Serial number	PR2510220366R11843
IEEE 802.11 WLAN Mode Supported	☒ 802.11a (20 MHz channel bandwidth), ☒ 802.11n (20 MHz channel bandwidth) ☒ 802.11n (40 MHz channel bandwidth), ☒ 802.11ac (20 MHz channel bandwidth), ☒ 802.11ac (40 MHz channel bandwidth), ☒ 802.11ac (80 MHz channel bandwidth), ☒ 802.11ax (20 MHz channel bandwidth), ☒ 802.11ax (40 MHz channel bandwidth), ☒ 802.11ax (80 MHz channel bandwidth),
Operation Frequency:	5150MHz to 5250MHz 5725MHz to 5850MHz
Type of Modulation:	OFDM/OFDMA
Sample Type:	☐ Portable Device, ☐ Module, ☒ Mobile Device
Antenna Type:	☐ External, ☒ Integrated
Antenna Ports	☒ Ant 1, ☒ Ant 2, ☐ Ant 3
Smart System	☒ SISO (for 802.11a), ☒ MIMO (for 802.11 n/ac/ax), ☐ Diversity (for 802.11a).
Antenna Gain*:	☒ Provided by applicant Ant1:3.45 dBi, Ant2:3.45 dBi
Directional Gain:	6.46dBi
RF Cable*:	☒ Provided by applicant 0.5dB(0.6~1GHz); 0.8dB(1.4~2GHz); 1.0dB(2.1~2.7GHz); 1.5dB(3~4GHz); 1.8dB(4.4~6GHz);



Remark:

*All models are just color differences, motherboard, PCB circuit board, chip, electronic components, appearance is all the same.

*Directional gains=3.36+10LOG(2)=6.46dBi.

*Since the above data and/or information is provided by the applicant relevant results or conclusions of this report are only made for these data and/or information, DNT is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.

2.3 Channel List

Band	Mode	Channel	Frequency (MHz)
U-NII-1	IEEE 802.11a & n HT20 & ac VHT 20 & ax HE 20	36	5180
		40	5200
		44	5220
		48	5240
	IEEE 802.11n HT40 & ac VHT 40 & ax HE 40	38	5190
		46	5230
	IEEE 802.11ac VHT 80 & ax HE 80	42	5210
U-NII-3	IEEE 802.11a & n HT20 & ac VHT20 & ax HE20	50	5250
		149	5745
		153	5765
		157	5785
		161	5805
	IEEE 802.11n HT40 & ac VHT40 & ax HE40	165	5825
		151	5755
		159	5795
	IEEE 802.11ac VHT 80 & ax HE 80	155	5775

Remark:

In FCC 15.31, for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table, and the selected channel to perform the test as below:

Frequency Range of Operation Operating Frequency Range (in each Band)	Number of Measurement Frequencies Required	Location of Measurement Frequency in Band of Operation
1 MHz or less	1	centre
1 MHz to 10 MHz	2	1 near high end, 1 near low end
Greater than 10 MHz	3	1 near high end, 1 near centre



2.4 Test Environment and Mode

Operating Environment:	
Temperature:	20~25.0 °C
Humidity:	45~56 % RH
Atmospheric Pressure:	101.0~101.30 KPa
Test mode:	
Transmitting mode:	1.Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate and 802.11ax only full RU is supported.

Environment Parameter	101.0 kPa Selected Values During Tests	
Relative Humidity	44-60 % RH Ambient	
Value	Temperature(°C)	Voltage(V)
NTNV	22~25	DC 5V
LTNV	-30	DC 5V
HTNV	50	DC 5V
NTLV	22~25	DC 4.5V
NTHV	22~25	DC 5.5V
Remark: NV: Normal Voltage NT: Normal Temperature LT: Low Extreme Test Temperature HT: High Extreme Test Temperature		



2.5 Power Setting of Test Software

Software Name	AX MPTool kit					
Frequency(MHz)	5180	5200	5240	5748	5785	5825
11a	16	16	16	8	8	8
11n HT20	16	16	16	8	8	8
11ac VHT20	16	16	16	8	8	8
11ax HE20	16	16	16	8	8	8
Frequency(MHz)	5190	5230	5755	5795		
11n HT40	14	14	7	7		
11ac VHT40	14	14	7	7		
11ax HE40	14	14	7	7		
Frequency(MHz)	5210	5775				
11ac VHT80	14	8				
11ax HE80	14	8				
Frequency(MHz)	5250					
11ax HE160	14					

2.6 Description of Support Units

The EUT has been tested independent unit.



2.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Lab A:

• **FCC, USA**

Designation Number: CN1348

• **A2LA (Certificate No. 7050.01)**

DONGGUAN DN TESTING CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 7050.01.

• **Innovation, Science and Economic Development Canada**

DONGGUAN DN TESTING CO., LTD. EMC Laboratory has been recognized by ISED as an accredited testing laboratory. CAB identifier is CN0149.

IC#: 30755.

2.8 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	DTS Bandwidth	$\pm 0.0196\%$
2	Maximum Conducted Output Power	± 0.686 dB
3	Maximum Power Spectral Density Level	± 0.743 dB
4	Band-edge Compliance	± 1.328 dB
5	Unwanted Emissions In Non-restricted Freq Bands	9KHz-1GHz: ± 0.746 dB 1GHz-26GHz: ± 1.328 dB

No.	Item	Measurement Uncertainty
1	Conduction Emission	± 3.0 dB (150kHz to 30MHz)
2	Radiated Emission	± 4.8 dB (Below 1GHz)
		± 4.8 dB (1GHz to 6GHz)
		± 4.5 dB (6GHz to 18GHz)
		± 5.02 dB (Above 18GHz)



2.9 Equipment List

For Connect EUT Antenna Terminal Test					
Description	Manufacturer	Model	Serial Number	Cal date	Due date
Signal Generator	Keysight	N5181A-6G	MY48180415	2025-10-21	2026-10-20
Signal Generator	Keysight	N5182B	MY57300617	2025-10-21	2026-10-20
Power supply	Keysight	E3640A	ZB2022656	2025-10-21	2026-10-20
Radio Communication Tester	R&S	CMW500	105082	2025-10-21	2026-10-20
Spectrum Analyzer	Aglient	N9010A	MY52221458	2025-10-21	2026-10-20
BT/WIFI Test Software	Tonscend	JS1120-3 V3.6.16	NA	NA	NA
RF Control Unit	Tonscend	JS0806-2	22F8060581	NA	NA
Power Sensor	Anritsu	ML2495A	2129005	2025-10-21	2026-10-20
Pulse Power Sensor	Anritsu	MA2411B	1911397	2025-10-21	2026-10-20
temperature and humidity box	SCOTEK	SCD-C40-80PRO	6866682020008	2025-10-21	2026-10-20

Test Equipment for Conducted Emission					
Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Receiver	R&S	ESCI3	101152	2025-10-21	2026-10-20
LISN	R&S	ENV216	102874	2025-10-21	2026-10-20
ISN	R&S	ENY81-CA6	1309.8590.03	2025-10-21	2026-10-20

Test Equipment for Radiated Emission(30MHz-1000MHz)					
Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Receiver	R&S	ESR7	102497	2025-10-21	2026-10-20
Test Software	ETS-LINDGREN	TiLE-FULL	NA	NA	NA
RF Cable	ETS-LINDGREN	RFC-NMS-100-NMS-350-IN	NA	2025-10-21	2026-10-20
Log periodic antenna	ETS-LINDGREN	VULB 9168	01475	2025-10-21	2026-10-20
Pre-amplifier	Schwarzbeck	BBV9743B	00423	2025-10-21	2026-10-20



Test Equipment for Radiated Emission(Above 1000MHz)					
Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Frequency analyser	Keysight	N9010A	MY52221458	2025-10-21	2026-10-20
RF Cable	ETS-LINDGREN	RFC-NMS-100- NMS-350-IN	NA	2025-10-21	2026-10-20
Horn Antenna	ETS-LINDGREN	3117	00252567	2025-10-21	2026-10-20
Double ridged waveguide antenna	ETS-LINDGREN	3116C	00251780	2025-10-21	2026-10-20
Test Software	ETS-LINDGREN	TILE-FULL	NA	NA	NA
Pre-amplifier	ETS-LINDGREN	3117-PA	252567	2025-10-21	2026-10-20
Pre-amplifier	ETS-LINDGREN	3116C-PA	251780	2025-10-21	2026-10-20

2.10 Assistant equipment used for test

Code	Equipment	Manufacturer	Model No.	Equipment No.
1	Adapter	GaoFanDe	GFDQ3- 0502000U	NA
2	Computer	acer	N22C8	EMC notebook01



3 Test results and Measurement Data

3.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
The ABS antenna is externally connected to the motherboard and no consideration of replacement. The direction gain of the antenna is 6.46dBi.	



3.2 Duty Cycle


Refer to section : **Appendix A**

Note:

- 1.If duty cycle $< 98\%$, the conducted average output power and average power spectral density should be add duty factor.
- 2.If duty cycle $\geq 98\%$, the EUT is consider to be transmitting continuously, the conducted average output power and average power spectral density no need to add duty factor (consider to be zero).
- 3.The conducted peak output power and peak power spectral density no need to consider duty factor.
- 4.The on-time time is transmission duration (T).




3.3 Emission Bandwidth

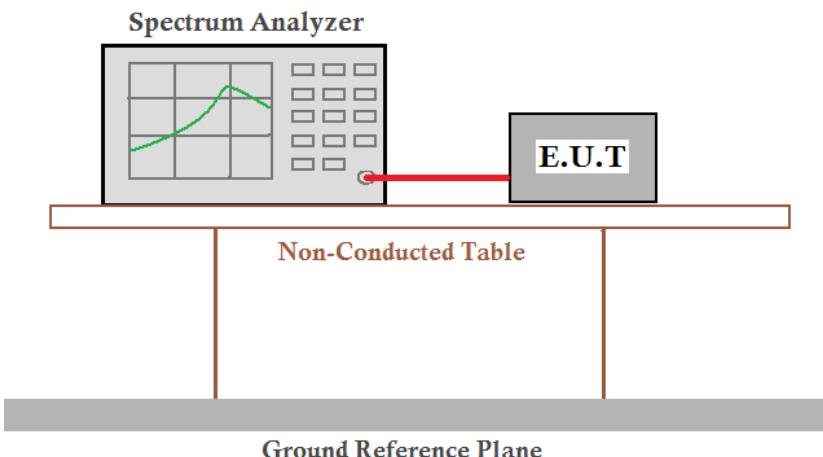Test Requirement:	47 CFR Part 15 Section 15.407(a)																							
Test Method:	ANSI C63.10: 2020																							
Test Setup:																								
Instruments Used:	Refer to section 6 for details																							
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates																							
Final Test Mode:	Through Pre-scan, find the worst case and recorded in the report.																							
Limit	<table><tr><th>Band</th><th>Frequency (MHz)</th><th>Test Item</th><th>Limit</th></tr><tr><td>U-NII-1</td><td>5150-5250</td><td>26dB Bandwidth&99% Occupied Bandwidth</td><td>N/A</td></tr><tr><td>U-NII-2A</td><td>5250-5350</td><td>26dB Bandwidth&99% Occupied Bandwidth</td><td>N/A</td></tr><tr><td>U-NII-2C</td><td>5470-5725</td><td>26dB Bandwidth&99% Occupied Bandwidth</td><td>N/A</td></tr><tr><td>U-NII-3</td><td>5725-5850</td><td>6dB Bandwidth&99% Occupied Bandwidth</td><td>6dB Bandwidth ≥ 500KHz</td></tr></table>				Band	Frequency (MHz)	Test Item	Limit	U-NII-1	5150-5250	26dB Bandwidth&99% Occupied Bandwidth	N/A	U-NII-2A	5250-5350	26dB Bandwidth&99% Occupied Bandwidth	N/A	U-NII-2C	5470-5725	26dB Bandwidth&99% Occupied Bandwidth	N/A	U-NII-3	5725-5850	6dB Bandwidth&99% Occupied Bandwidth	6dB Bandwidth ≥ 500KHz
Band	Frequency (MHz)	Test Item	Limit																					
U-NII-1	5150-5250	26dB Bandwidth&99% Occupied Bandwidth	N/A																					
U-NII-2A	5250-5350	26dB Bandwidth&99% Occupied Bandwidth	N/A																					
U-NII-2C	5470-5725	26dB Bandwidth&99% Occupied Bandwidth	N/A																					
U-NII-3	5725-5850	6dB Bandwidth&99% Occupied Bandwidth	6dB Bandwidth ≥ 500KHz																					

The detailed test data see: **Appendix B**




3.4 99% Occupied Bandwidth

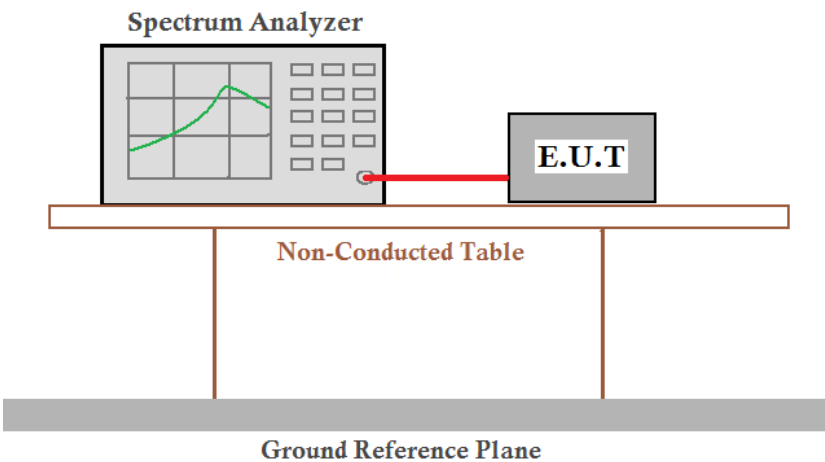Test Requirement:	47 CFR Part 15 Section 15.407(a)																						
Test Method:	ANSI C63.10: 2020																						
Test Setup:																							
Instruments Used:	Refer to section 6 for details																						
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates																						
Final Test Mode:	Through Pre-scan, find the worst case and recorded in the report.																						
Limit:	<table><thead><tr><th>Band</th><th>Frequency (MHz)</th><th>Test Item</th><th>Limit</th></tr></thead><tbody><tr><td>U-NII-1</td><td>5150-5250</td><td>26dB Bandwidth&99% Occupied Bandwidth</td><td>N/A</td></tr><tr><td>U-NII-2A</td><td>5250-5350</td><td>26dB Bandwidth&99% Occupied Bandwidth</td><td>N/A</td></tr><tr><td>U-NII-2C</td><td>5470-5725</td><td>26dB Bandwidth&99% Occupied Bandwidth</td><td>N/A</td></tr><tr><td>U-NII-3</td><td>5725-5850</td><td>6dB Bandwidth&99% Occupied Bandwidth</td><td>6dB Bandwidth $\geq$ 500KHz</td></tr></tbody></table>			Band	Frequency (MHz)	Test Item	Limit	U-NII-1	5150-5250	26dB Bandwidth&99% Occupied Bandwidth	N/A	U-NII-2A	5250-5350	26dB Bandwidth&99% Occupied Bandwidth	N/A	U-NII-2C	5470-5725	26dB Bandwidth&99% Occupied Bandwidth	N/A	U-NII-3	5725-5850	6dB Bandwidth&99% Occupied Bandwidth	6dB Bandwidth $\geq$ 500KHz
Band	Frequency (MHz)	Test Item	Limit																				
U-NII-1	5150-5250	26dB Bandwidth&99% Occupied Bandwidth	N/A																				
U-NII-2A	5250-5350	26dB Bandwidth&99% Occupied Bandwidth	N/A																				
U-NII-2C	5470-5725	26dB Bandwidth&99% Occupied Bandwidth	N/A																				
U-NII-3	5725-5850	6dB Bandwidth&99% Occupied Bandwidth	6dB Bandwidth $\geq$ 500KHz																				
Test Results:	Pass																						

The detailed test data see: **Appendix C**




3.5 Conducted Output Power

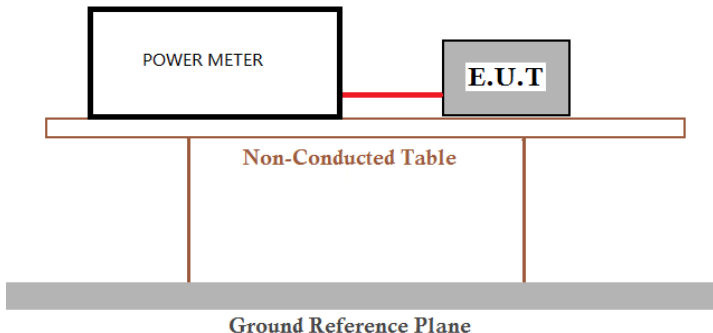Test Requirement:	47 CFR Part 15 Section 15.407(a)	
Test Method:	ANSI C63.10 :2020	
Test Setup:		
Test Instruments:	Refer to section 2.9 for details	
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates	
Final Test Mode:	Through Pre-scan, find the worst case and recorded in the report.	
Limit:	Frequency Band	Limit
	5150-5250MHz	Not exceed 250mW(24dBm)
	5250-5350MHz	The lesser of 250mW(24dBm) or $11 + 10\log B$
	5470-5725MHz	The lesser of 250mW(24dBm) or $11 + 10\log B$
	5725-5850MHz	Not exceed 1W(30dBm)
Test Results:	Pass	

The detailed test data see: **Appendix D**



3.6 Power Spectral Density

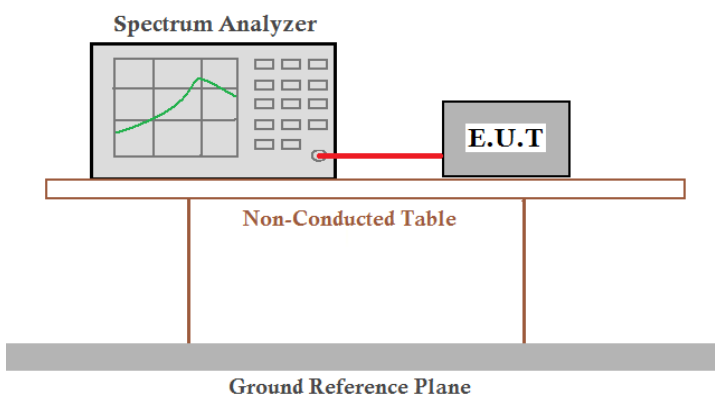Test Requirement:	47 CFR Part 15 Section 15.407(a)	
Test Method:	ANSI C63.10: 2020 KDB 789033 D02 v02r01, Section F.	
Test Setup:		
Test Instruments:	Refer to section 2.9 for details	
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates	
Final Test Mode:	Through Pre-scan, find the worst case and recorded in the report.	
Limit:	Frequency Band	Limit
	5150-5250MHz	The power spectral density less than 11dBm/1MHz
	5250-5350MHz	The power spectral density less than 11dBm/1MHz
	5470-5725MHz	The power spectral density less than 11dBm/1MHz
	5725-5850MHz	The power spectral density less than <30dBm/500KHz
Test Results:	Pass	

The detailed test data see: **Appendix E**




3.7 Frequency Stability

3.7.1 Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the operational description.

3.7.2 Test Setup

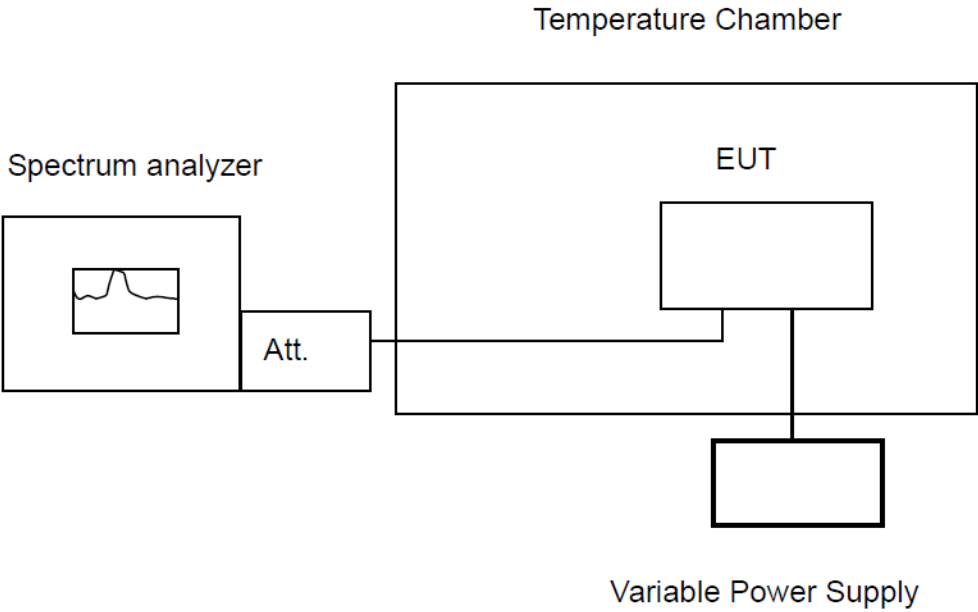

3.7.3 Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	10KHz
VBW	10KHz
Span	200KHz
Sweep Time	Auto
Detector	PEAK
Trace Mode	Max Hold



3.7.4 Test Procedure

For measurement frequency stability under temperature variation :

- a. Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT.
- b. Turn the EUT OFF and place it inside the environmental temperature chamber.
- c. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- d. Spectrum analyzer setting parameters in accordance with section 7.3.
- e. Set the temperature control on the chamber to the Specified temperature and allow the oscillator heater and the chamber temperature to stabilize.
- f. Turn the EUT ON with the rated voltage, and the EUT transmit continuously with maximum output power.
- g. Record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized.
- h. Repeat step d through step f to measured the temperature form -30°C to +50°C in 10°C steps.

For frequency stability under voltage variation:

- a. Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT.
- b. Turn the EUT OFF and place it inside the environmental temperature chamber.
- c. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- d. Spectrum analyzer setting parameters in accordance with section 7.3.
- e. Unless otherwise specified, set the temperature control on the chamber to the ambient room temperature (+22°C to +25°C) and allow the oscillator heater and the chamber temperature to stabilize.
- f. Turn the EUT ON with the rated voltage, and the EUT transmit continuously with maximum output power.
- g. Record the operating frequency.
- h. Repeat step d through step f to measured the varied from 85% to 115% of the rated voltage.

3.7.5 Test Result




Refer to section 10: Appendix F



3.8 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15 Section 15.407(b)				
Test Method:	ANSI C63.10: 2020				
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz (DC $\geq$ 0.98) $\geq$ 1/T (DC<0.98)	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Remark: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

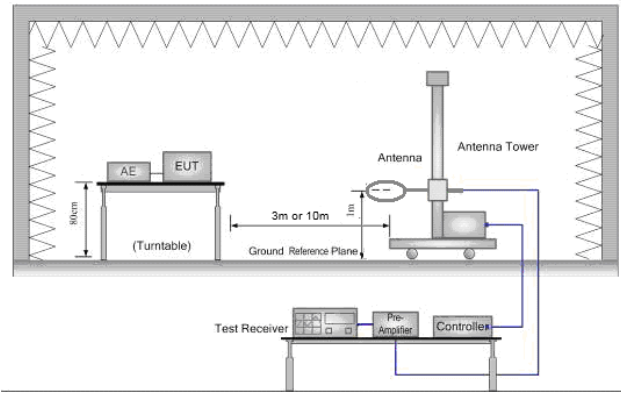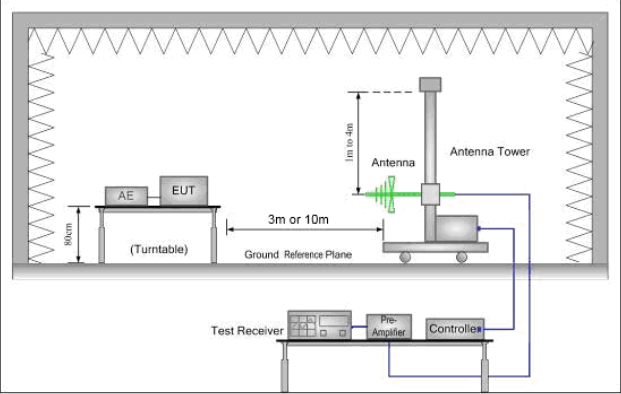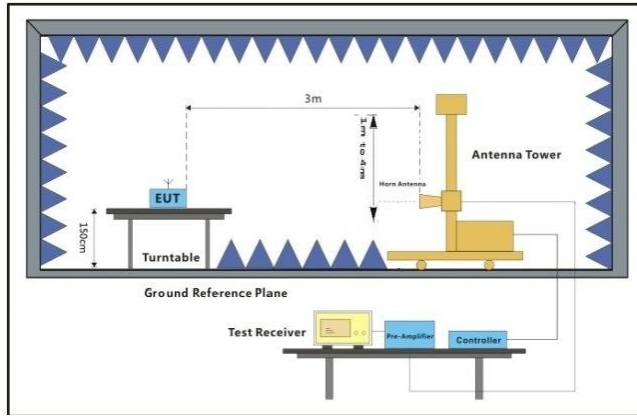

Test Setup:	
	
Figure 1. Below 30MHz	Figure 2. 30MHz to 1GHz
	
Figure 3. Above 1 GHz	
Test Procedure:	- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation - The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. - Test the EUT in the lowest channel, the middle channel, the Highest channel. - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.
Test Configuration:	Measurements Below 1000MHz



	• RBW = 120 kHz • VBW = 300 kHz • Detector = Peak • Trace mode = max hold Peak Measurements Above 1000 MHz • RBW = 1 MHz • VBW $\geq$ 3 MHz • Detector = Peak • Sweep time = auto • Trace mode = max hold Average Measurements Above 1000MHz • RBW = 1 MHz • VBW = 10 Hz, when duty cycle is no less than 98 percent. • VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Charge + Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode. Through Pre-scan, find the worst case and recorded in the report. For below 1GHz, through Pre-scan, find the the worst case. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 2.9 for details
Test Results:	Pass




Test data

For 30-1000MHz


5.1G

Horizontal:

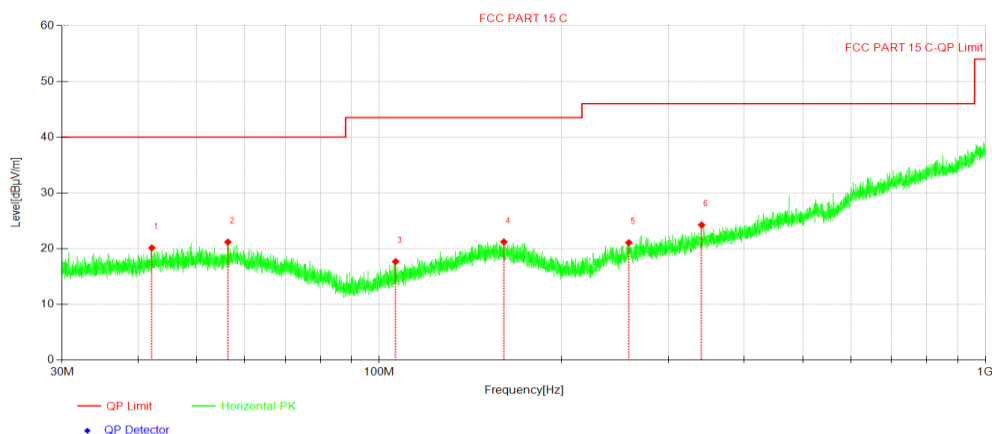

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]
1	42.17	28.66	-8.50	20.16	40.00	19.84	100	159
2	56.28	29.57	-8.37	21.20	40.00	18.80	100	184
3	106.46	29.34	-11.64	17.70	43.50	25.80	100	294
4	160.57	29.03	-7.80	21.23	43.50	22.27	100	312
5	258.15	29.77	-8.68	21.09	46.00	24.91	100	359
6	340.30	30.17	-5.90	24.27	46.00	21.73	100	5


Vertical :

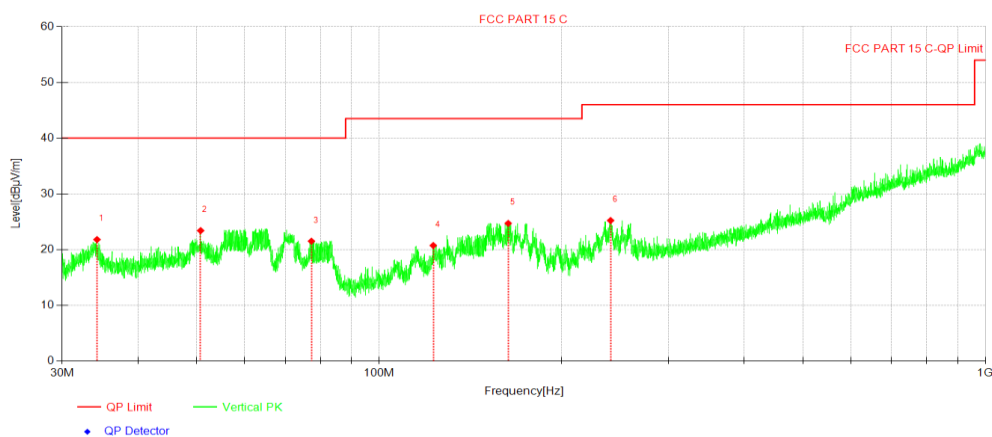

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]
1	34.23	31.21	-9.39	21.82	40.00	18.18	100	157
2	50.75	31.51	-8.08	23.43	40.00	16.57	100	71
3	77.29	33.36	-11.83	21.53	40.00	18.47	100	55
4	122.79	30.80	-10.04	20.76	43.50	22.74	100	275
5	163.24	32.61	-7.88	24.73	43.50	18.77	100	218
6	240.83	34.46	-9.22	25.24	46.00	20.76	100	212


**5.8G**

Horizontal:

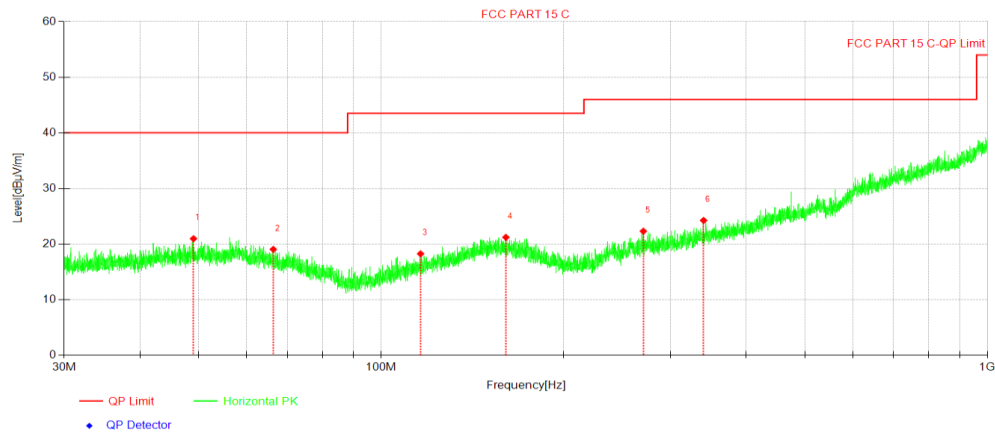

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]
1	49.01	29.07	-8.08	20.99	40.00	19.01	100	169
2	66.36	28.58	-9.51	19.07	40.00	20.93	100	334
3	116.13	28.87	-10.60	18.27	43.50	25.23	100	300
4	160.57	29.03	-7.80	21.23	43.50	22.27	100	312
5	270.66	30.33	-8.00	22.33	46.00	23.67	100	359
6	340.30	30.17	-5.90	24.27	46.00	21.73	100	5

Vertical :

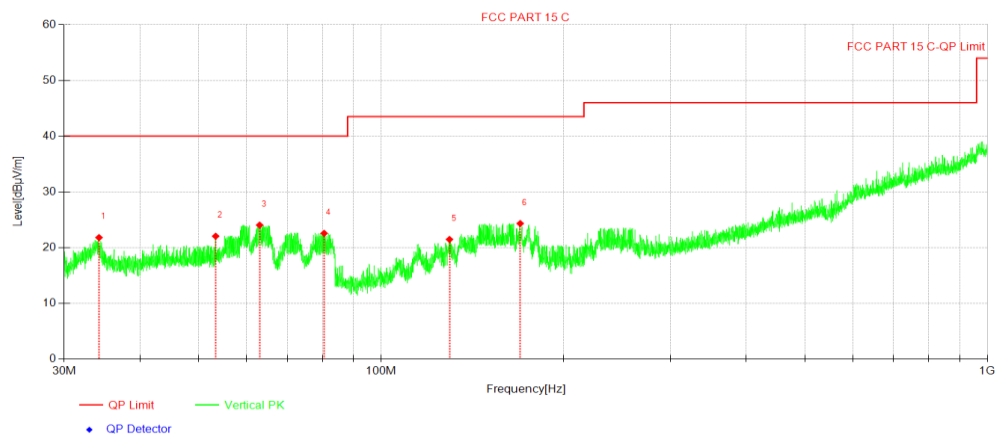


NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]
1	34.23	31.21	-9.39	21.82	40.00	18.18	100	157
2	53.32	30.23	-8.16	22.07	40.00	17.93	100	360
3	63.00	33.16	-9.10	24.06	40.00	15.94	100	322
4	80.50	35.26	-12.67	22.59	40.00	17.41	100	95
5	129.60	30.95	-9.46	21.49	43.50	22.01	100	338
6	169.54	32.61	-8.27	24.34	43.50	19.16	100	89



For above 1GHz


11A Ant1 5180MHz

Horizontal:

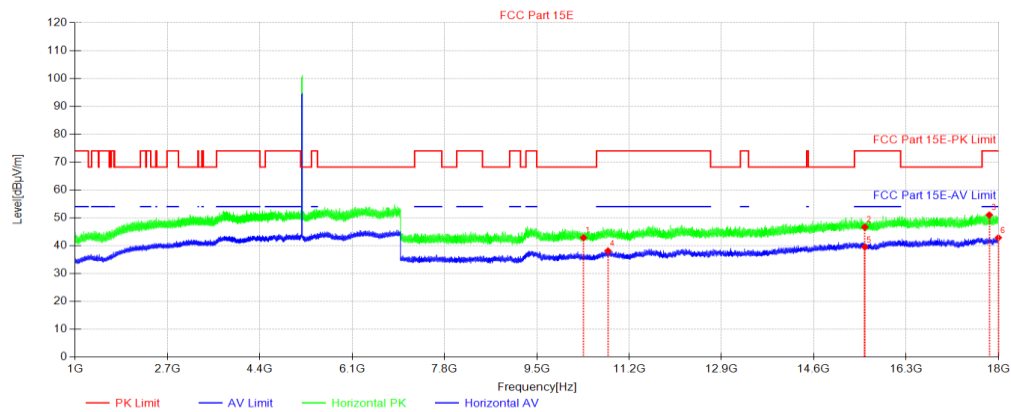

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	10360.41	42.47	0.40	42.87	68.20	25.33	150	248	PK
2	15540.30	41.13	5.56	46.69	74.00	27.31	150	133	PK
3	17833.23	40.83	10.23	51.06	74.00	22.94	150	248	PK
4	10810.99	36.57	1.58	38.15	54.00	15.85	150	228	AV
5	15540.30	34.00	5.56	39.56	54.00	14.44	150	77	AV
6	18000.00	32.03	10.84	42.87	54.00	11.13	150	171	AV


Vertical:

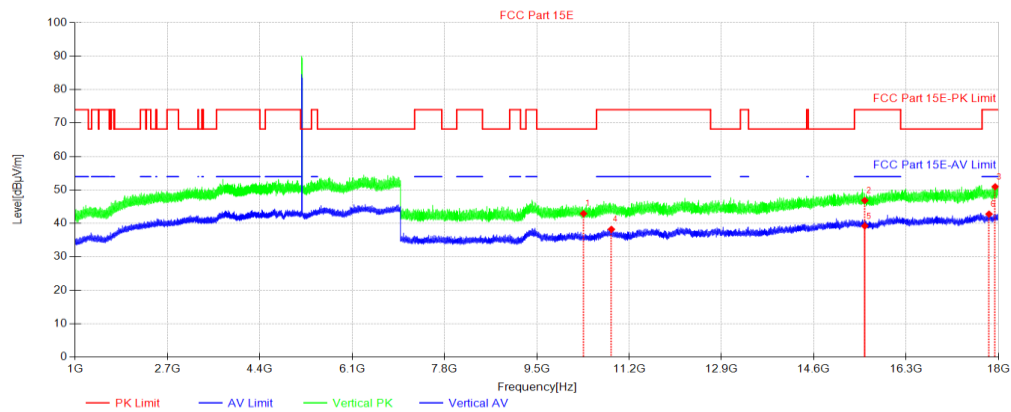

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	10360.41	42.54	0.40	42.94	68.20	25.26	150	133	PK
2	15540.30	41.30	5.56	46.86	74.00	27.14	150	208	PK
3	17941.92	40.32	10.66	50.98	74.00	23.02	150	0	PK
4	10873.47	36.72	1.53	38.25	54.00	15.75	150	171	AV
5	15540.30	33.66	5.56	39.22	54.00	14.78	150	244	AV
6	17827.95	32.59	10.21	42.80	54.00	11.20	150	337	AV


**11A Ant1 5200MHz**

Horizontal:

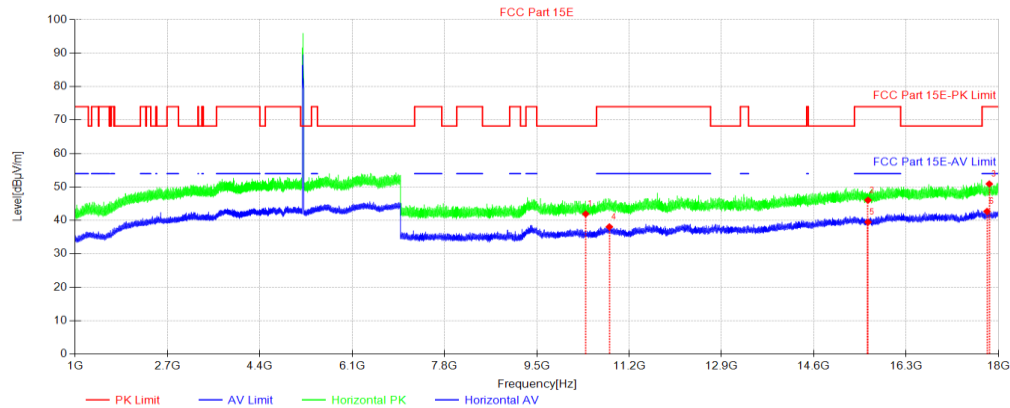

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	10400.02	41.58	0.36	41.94	68.20	26.26	150	211	PK
2	15600.14	40.61	5.43	46.04	74.00	27.96	150	338	PK
3	17833.23	40.68	10.23	50.91	74.00	23.09	150	136	PK
4	10836.51	36.51	1.57	38.08	54.00	15.92	150	113	AV
5	15600.14	34.06	5.43	39.49	54.00	14.51	150	299	AV
6	17791.43	32.56	10.15	42.71	54.00	11.29	150	21	AV


Vertical:

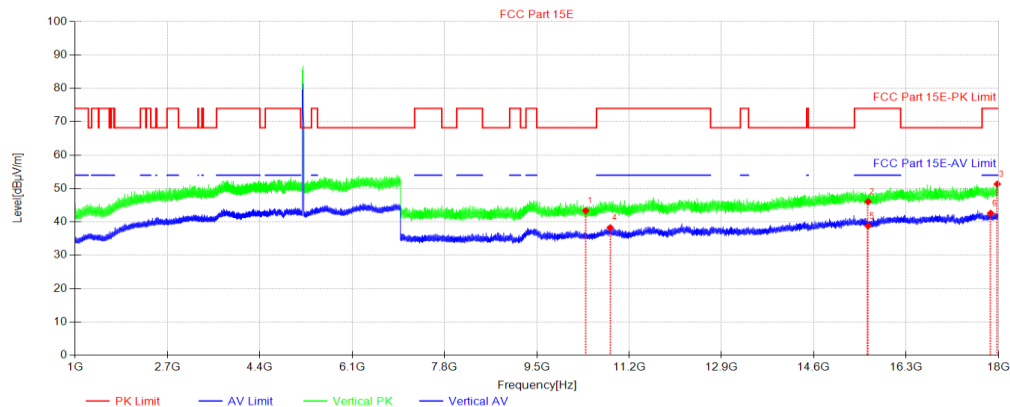

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	10400.02	43.01	0.36	43.37	68.20	24.83	150	94	PK
2	15600.14	40.61	5.43	46.04	74.00	27.96	150	61	PK
3	17981.52	40.55	10.79	51.34	74.00	22.66	150	94	PK
4	10851.03	36.72	1.56	38.28	54.00	15.72	150	77	AV
5	15600.14	33.38	5.43	38.81	54.00	15.19	150	149	AV
6	17858.75	32.30	10.31	42.61	54.00	11.39	150	149	AV


**11A Ant1 5240MHz**

Horizontal:

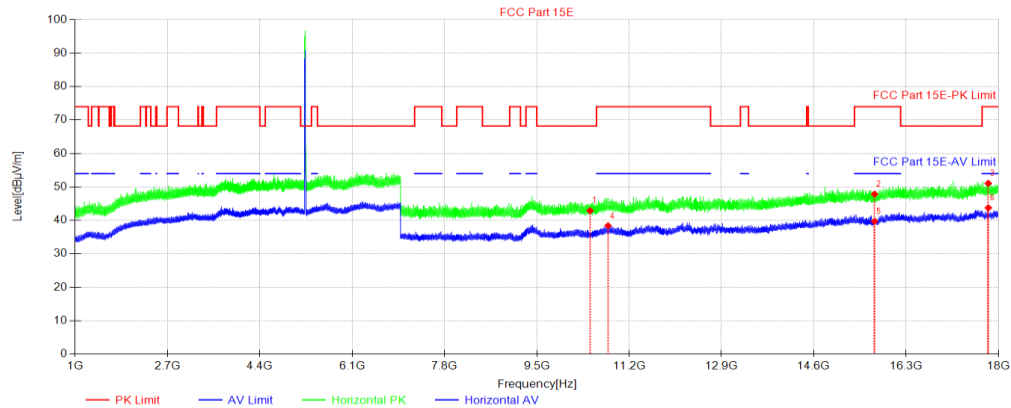

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	10480.10	42.44	0.47	42.91	68.20	25.29	150	22	PK
2	15720.27	42.52	5.35	47.87	74.00	26.13	150	76	PK
3	17814.31	40.91	10.18	51.09	74.00	22.91	150	260	PK
4	10811.87	36.82	1.58	38.40	54.00	15.60	150	0	AV
5	15720.27	34.39	5.35	39.74	54.00	14.26	150	22	AV
6	17815.19	33.60	10.18	43.78	54.00	10.22	150	135	AV


Vertical:

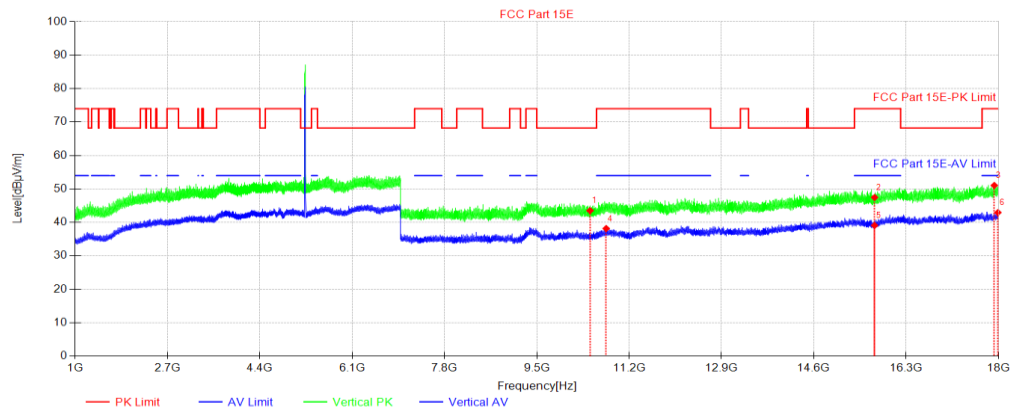

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	10480.10	43.06	0.47	43.53	68.20	24.67	150	156	PK
2	15720.27	42.11	5.35	47.46	74.00	26.54	150	171	PK
3	17925.20	40.48	10.58	51.06	74.00	22.94	150	10	PK
4	10778.43	36.70	1.48	38.18	54.00	15.82	150	171	AV
5	15720.27	33.74	5.35	39.09	54.00	14.91	150	340	AV
6	17991.64	32.15	10.81	42.96	54.00	11.04	150	156	AV


**11A Ant1 5745MHz**

Horizontal:

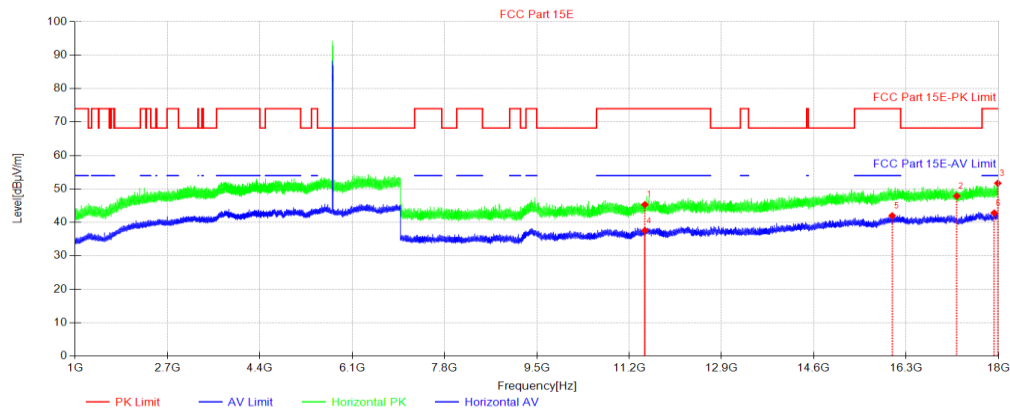

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	11490.38	43.32	2.03	45.35	74.00	28.65	150	17	PK
2	17235.25	39.02	8.86	47.88	68.20	20.32	150	298	PK
3	17990.32	40.90	10.81	51.71	74.00	22.29	150	179	PK
4	11490.38	35.54	2.03	37.57	54.00	16.43	150	78	AV
5	16044.56	35.63	6.38	42.01	54.00	11.99	150	3	AV
6	17923.44	32.27	10.57	42.84	54.00	11.16	150	0	AV


Vertical:

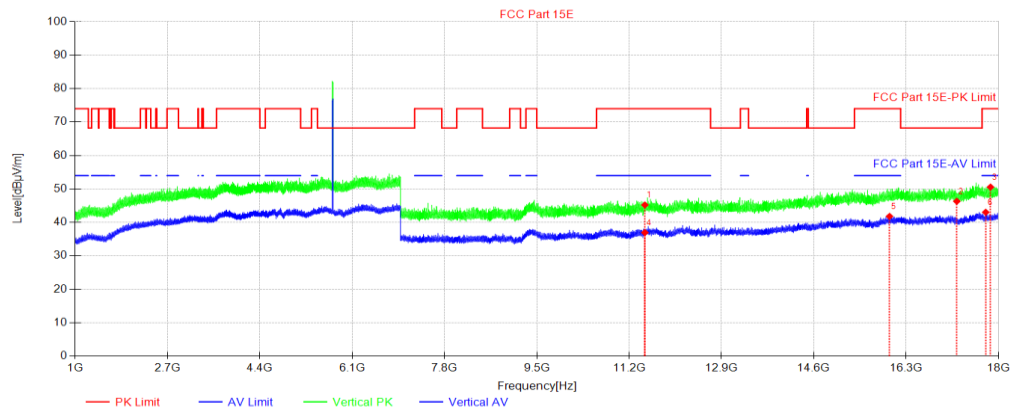

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	11490.38	43.19	2.03	45.22	74.00	28.78	150	38	PK
2	17235.25	37.45	8.86	46.31	68.20	21.89	150	92	PK
3	17855.67	40.26	10.30	50.56	74.00	23.44	150	182	PK
4	11490.38	34.94	2.03	36.97	54.00	17.03	150	92	AV
5	15996.16	35.49	6.33	41.82	54.00	12.18	150	148	AV
6	17766.79	32.82	10.22	43.04	54.00	10.96	150	129	AV


**11A Ant1 5785MHz**

Horizontal:

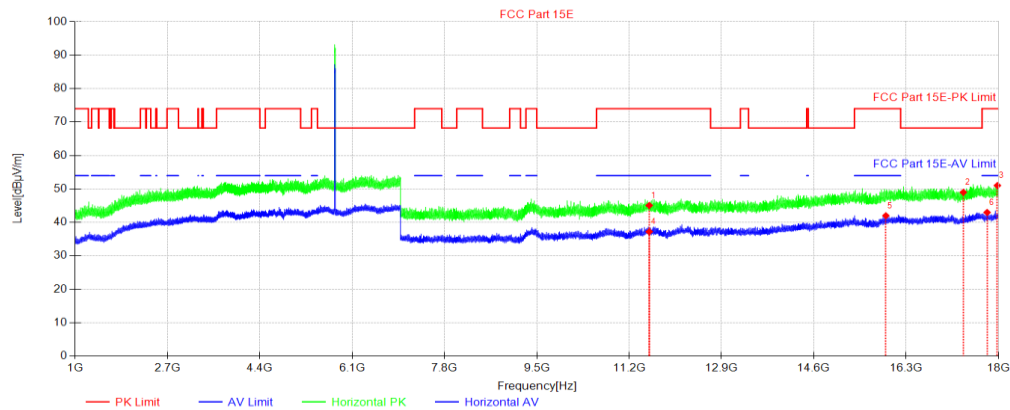

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	11570.02	42.75	2.33	45.08	74.00	28.92	150	356	PK
2	17355.37	40.03	8.97	49.00	68.20	19.20	150	247	PK
3	17982.84	40.24	10.79	51.03	74.00	22.97	150	174	PK
4	11570.02	34.88	2.33	37.21	54.00	16.79	150	340	AV
5	15928.40	36.05	5.96	42.01	54.00	11.99	150	356	AV
6	17792.31	32.84	10.15	42.99	54.00	11.01	150	118	AV


Vertical:

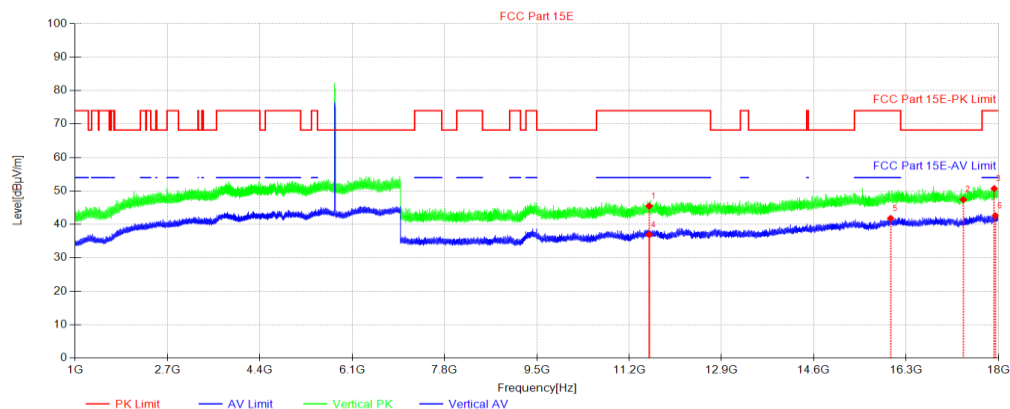

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	11570.02	43.17	2.33	45.50	74.00	28.50	150	110	PK
2	17355.37	38.45	8.97	47.42	68.20	20.78	150	93	PK
3	17923.88	40.14	10.57	50.71	74.00	23.29	150	319	PK
4	11570.02	34.60	2.33	36.93	54.00	17.07	150	20	AV
5	16016.84	35.47	6.35	41.82	54.00	12.18	150	110	AV
6	17946.32	31.95	10.67	42.62	54.00	11.38	150	57	AV


**11A Ant1 5825MHz**

Horizontal:

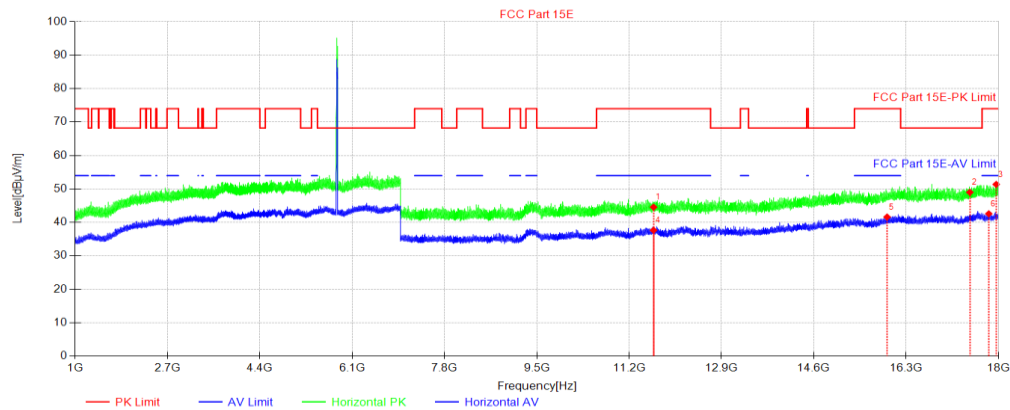

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	11650.11	42.25	2.32	44.57	74.00	29.43	150	285	PK
2	17475.06	39.45	9.55	49.00	68.20	19.20	150	17	PK
3	17960.40	40.65	10.73	51.38	74.00	22.62	150	108	PK
4	11650.11	35.34	2.32	37.66	54.00	16.34	150	187	AV
5	15950.84	35.53	6.09	41.62	54.00	12.38	150	36	AV
6	17823.99	32.39	10.21	42.60	54.00	11.40	150	247	AV

Vertical:

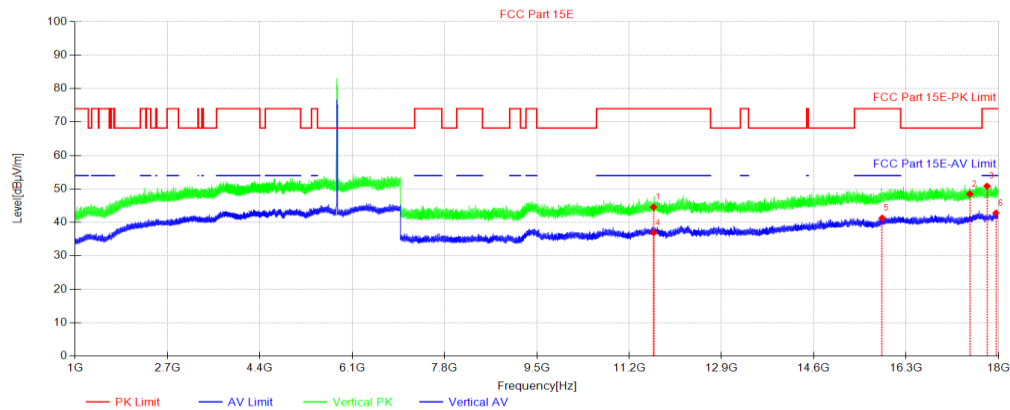

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	11650.11	42.26	2.32	44.58	74.00	29.42	150	356	PK
2	17475.06	38.92	9.55	48.47	68.20	19.73	150	70	PK
3	17791.43	40.71	10.15	50.86	74.00	23.14	150	15	PK
4	11650.11	34.60	2.32	36.92	54.00	17.08	150	356	AV
5	15861.51	35.72	5.60	41.32	54.00	12.68	150	0	AV
6	17958.20	32.10	10.72	42.82	54.00	11.18	150	318	AV



Note:

1. The Measurement (Result Level) is calculated by Reading Level adding the Correct Factor(maybe including Ant.Factor and the Cable Factor etc.), The basic equation is as follows:

Result Level= Reading Level + Correct Factor(including Ant.Factor, Cable Factor etc.)

2. The amplitude of 9KHz to 30MHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

3. The amplitude of 18GHz to 40GHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be report.

4. All channels had been pre-test, 802.11a ant1 is the worst case, only the worst case was reported.



3.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15 Section 15.407(b)		
Test Method:	ANSI C63.10: 2020		
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m)	Remark
	30MHz-88MHz	40.0	Quasi-peak
	88MHz-216MHz	43.5	Quasi-peak
	216MHz-960MHz	46.0	Quasi-peak
	960MHz-1GHz	54.0	Quasi-peak
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
	MHz	MHz	MHz
	0.090 - 0.110	16.42 - 16.423	399.9 - 410
	0.495 - 0.505	16.69475 - 16.69525	608 - 614
	2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240
	4.125 - 4.128	25.5 - 25.67	1300 - 1427
	4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5
	4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5
	6.215 - 6.218	74.8 - 75.2	1660 - 1710
	6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2
	6.31175 - 6.31225	123 - 138	2200 - 2300
	8.291 - 8.294	149.9 - 150.05	2310 - 2390
	8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500
	8.37625 - 8.38675	156.7 - 156.9	2690 - 2900
	8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267
	12.29 - 12.293	167.72 - 173.2	3332 - 3339
	12.51975 - 12.52025	240 - 285	3345.8 - 3358
	12.57675 - 12.57725	322 - 335.4	3600 - 4400
			GHz
			4.5 - 5.15
			5.35 - 5.46
			7.25 - 7.75
			8.025 - 8.5
			9.0 - 9.2
			9.3 - 9.5
			10.6 - 12.7
			13.25 - 13.4
			14.47 - 14.5
			15.35 - 16.2
			17.7 - 21.4
			22.01 - 23.12
			23.6 - 24.0
			31.2 - 31.8
			36.43 - 36.5
			(°)
Test Setup:			

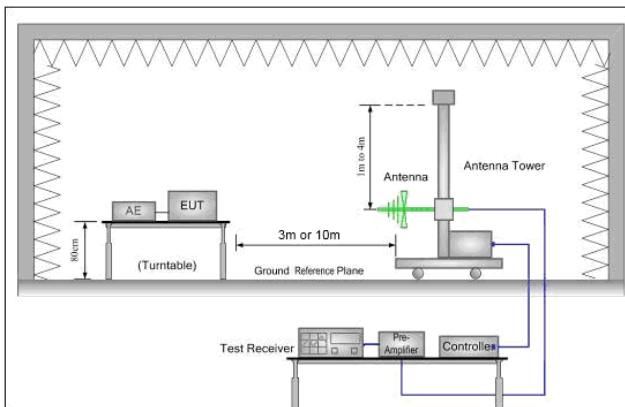


Figure 1. 30MHz to 1GHz

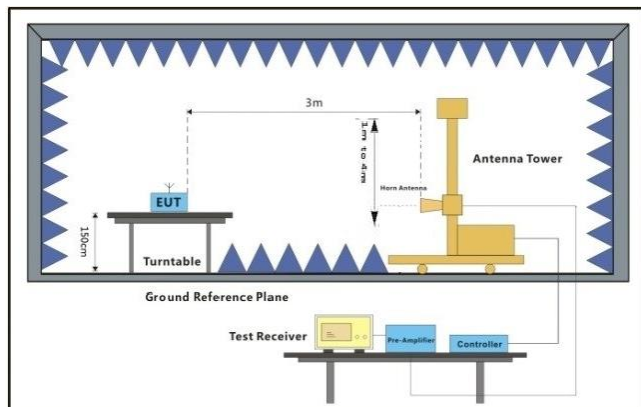


Figure 2. Above 1 GHz




Test Procedure:	- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel - Test the EUT in the lowest channel , the Highest channel - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.
Test Configuration:	Measurements Below 1000MHz • RBW = 120 kHz • VBW = 300 kHz • Detector = Peak • Trace mode = max hold Peak Measurements Above 1000 MHz • RBW = 1 MHz • VBW $\geq$ 3 MHz • Detector = Peak • Sweep time = auto • Trace mode = max hold Average Measurements Above 1000MHz • RBW = 1 MHz • VBW = 10 Hz, when duty cycle is no less than 98 percent. • VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:	Pretest the EUT at Charge + Transmitting mode. Through Pre-scan, find the 6Mbps of rate is the worst case of 802.11a; MCS0 of rate is the worst case of 802.11n(HT20) ;



	MCS0 of rate is the worst case of 802.11n(HT40); MCS0 of rate is the worst case of 802.11ax(HE20); MCS0 of rate is the worst case of 802.11ax(HE40); Only the worst case is recorded in the report.
Instruments Used:	Refer to section 2.9 for details
Test Results:	Pass


Test Date
11AX20 MIMO 5180MHz

Horizontal:

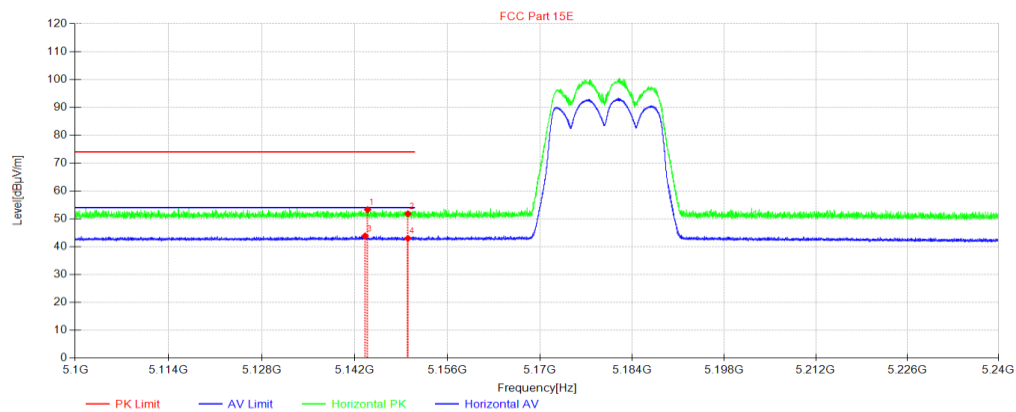

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	5143.94	48.31	4.99	53.30	74.00	20.70	150	306	PK
2	5150.01	46.81	5.01	51.82	74.00	22.18	150	114	PK
3	5143.54	38.88	4.99	43.87	54.00	10.13	150	159	AV
4	5150.01	37.99	5.01	43.00	54.00	11.00	150	24	AV

Vertical:

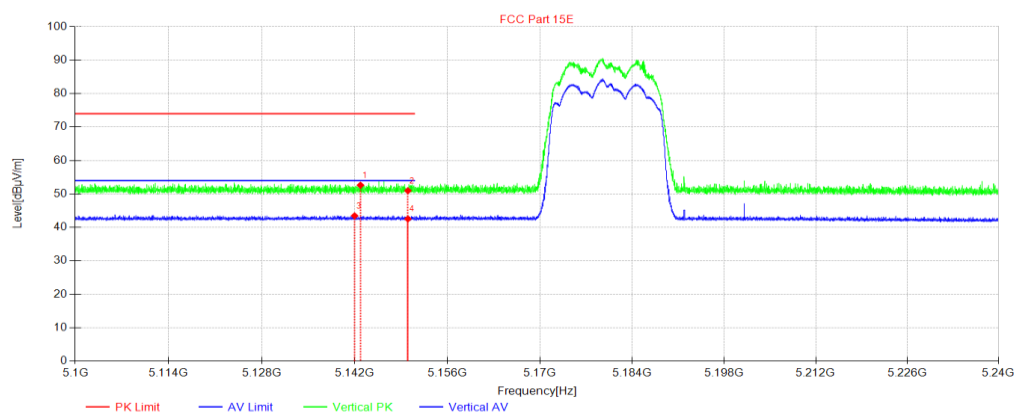


NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	5142.84	47.64	4.99	52.63	74.00	21.37	150	201	PK
2	5150.01	45.96	5.01	50.97	74.00	23.03	150	124	PK
3	5141.96	38.50	4.98	43.48	54.00	10.52	150	302	AV
4	5150.01	37.53	5.01	42.54	54.00	11.46	150	92	AV




**11AX20 MIMO 5240MHz**

Horizontal:

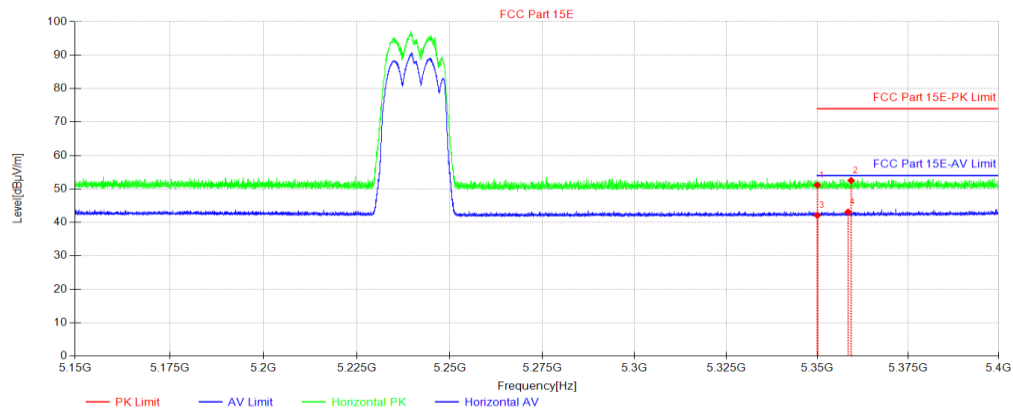

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	5350.02	46.01	5.15	51.16	74.00	22.84	150	360	PK
2	5359.32	47.39	5.13	52.52	74.00	21.48	150	132	PK
3	5350.02	36.98	5.15	42.13	54.00	11.87	150	280	AV
4	5358.47	37.98	5.13	43.11	54.00	10.89	150	57	AV


Vertical:

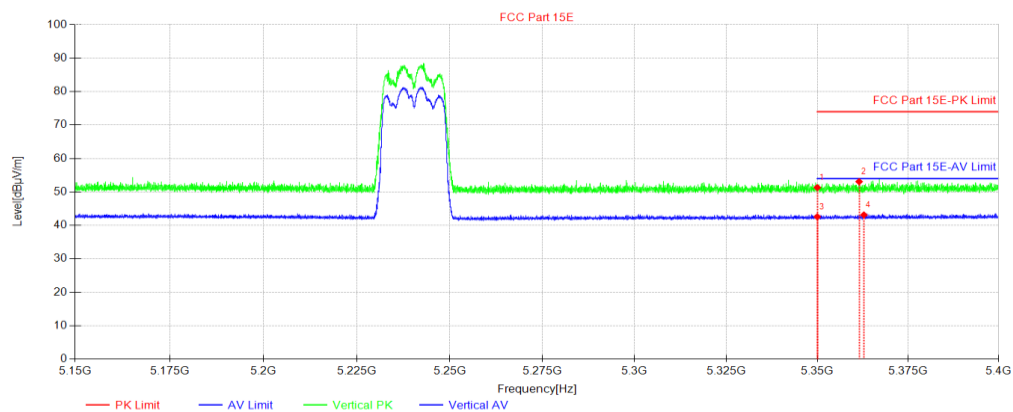

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	5350.02	46.17	5.15	51.32	74.00	22.68	150	303	PK
2	5361.52	47.95	5.13	53.08	74.00	20.92	150	21	PK
3	5350.02	37.44	5.15	42.59	54.00	11.41	150	279	AV
4	5362.85	38.02	5.12	43.14	54.00	10.86	150	1	AV


**11AX20 MIMO 5745MHz**

Horizontal:

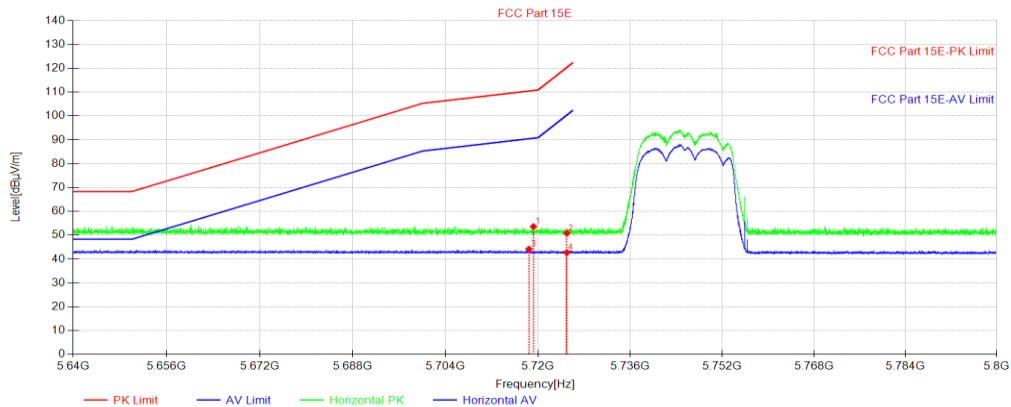

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	5719.21	48.43	5.20	53.63	110.68	57.05	150	216	PK
2	5725.00	45.64	5.21	50.85	120.40	69.55	150	4	PK
3	5718.42	38.96	5.19	44.15	90.46	46.31	150	247	AV
4	5725.00	37.52	5.21	42.73	100.40	57.67	150	92	AV


Vertical:

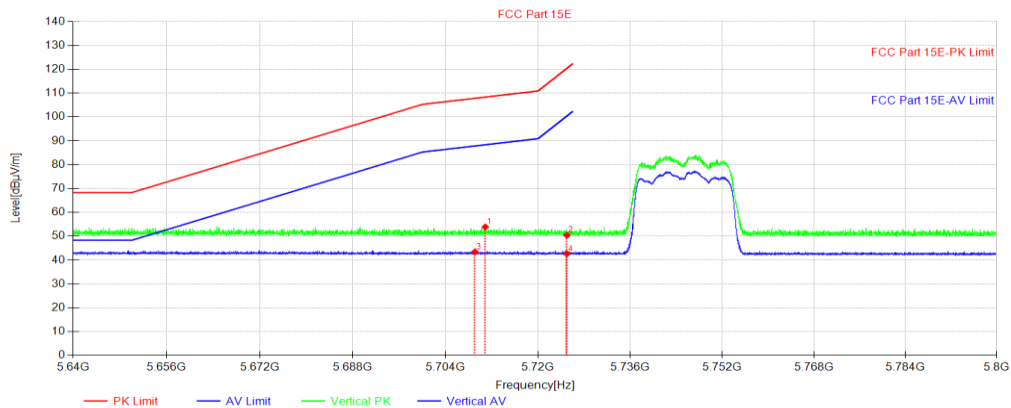

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	5710.86	48.71	5.18	53.89	108.34	54.45	150	4	PK
2	5725.00	45.19	5.21	50.40	120.40	70.00	150	258	PK
3	5709.06	38.27	5.17	43.44	87.84	44.40	150	140	AV
4	5725.00	37.43	5.21	42.64	100.40	57.76	150	117	AV


**11AX20 MIMO 5825MHz**

Horizontal:

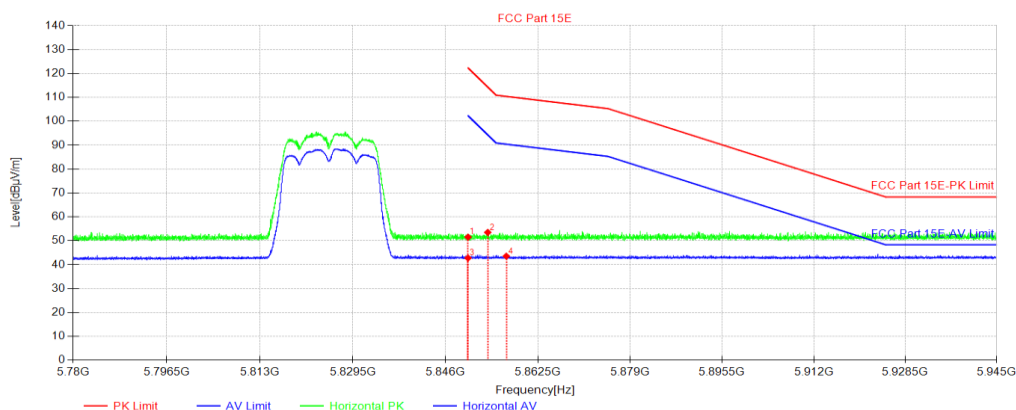

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	5850.00	46.04	5.50	51.54	122.30	70.76	150	221	PK
2	5853.51	48.00	5.51	53.51	114.29	60.78	150	235	PK
3	5850.00	37.28	5.50	42.78	102.30	59.52	150	349	AV
4	5856.83	38.03	5.52	43.55	90.39	46.84	150	322	AV

Vertical:

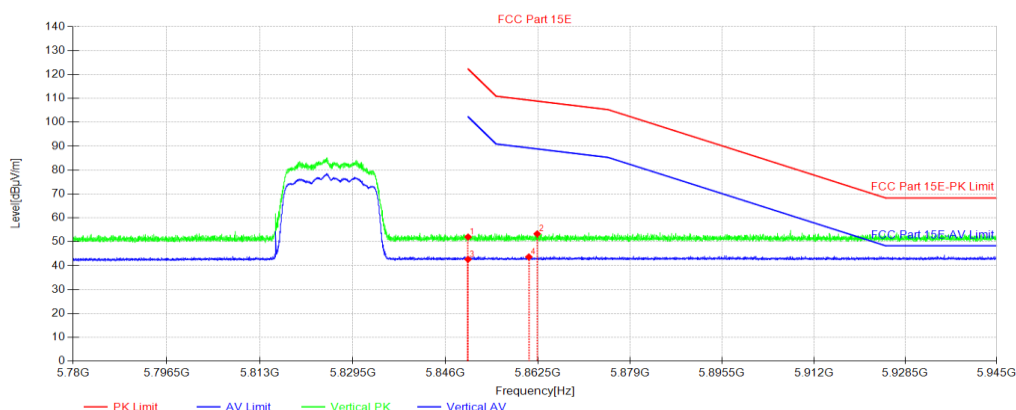

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	5850.00	46.49	5.50	51.99	122.30	70.31	150	120	PK
2	5862.34	47.79	5.53	53.32	108.84	55.52	150	181	PK
3	5850.00	37.14	5.50	42.64	102.30	59.66	150	51	AV
4	5860.86	38.12	5.53	43.65	89.26	45.61	150	51	AV


1. The Measurement (Result Level) is calculated by Reading Level adding the Correct Factor(maybe including Ant.Factor and the Cable Factor etc.), The basic equation is as follows:

$$\text{Result Level} = \text{Reading Level} + \text{Correct Factor}(\text{including Ant.Factor, Cable Factor etc.})$$

2. All channels had been pre-test, 802.11AX MIMO is the worst case, only the worst case was reported.



3.10 AC Power Line Conducted Emissions

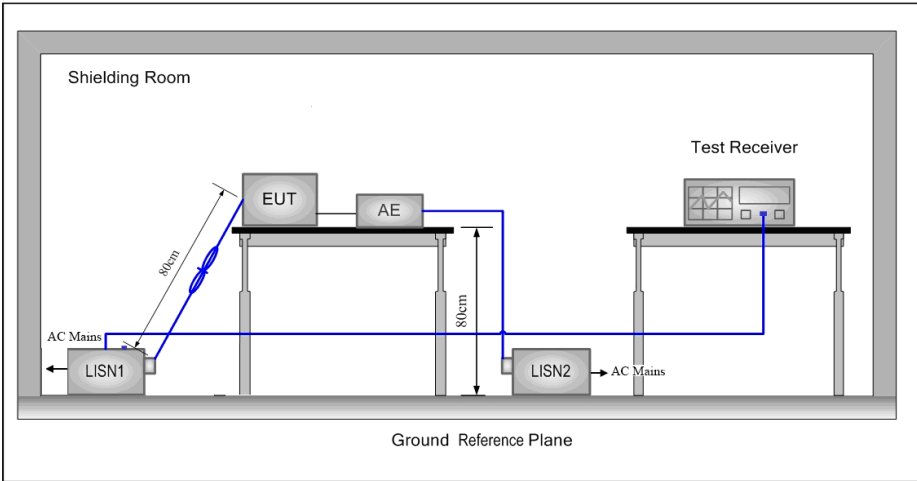Test Requirement:	47 CFR Part 15 Section 15.407(b)		
Test Method:	ANSI C63.10: 2020		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 2020 on conducted measurement.		
Test Setup:			
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.		
Final Test Mode:	Charge + Transmitting mode. Only the worst case is recorded in the report.		




Instruments Used:	Refer to section 2.9 for details
Test Results:	Pass

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live Line:

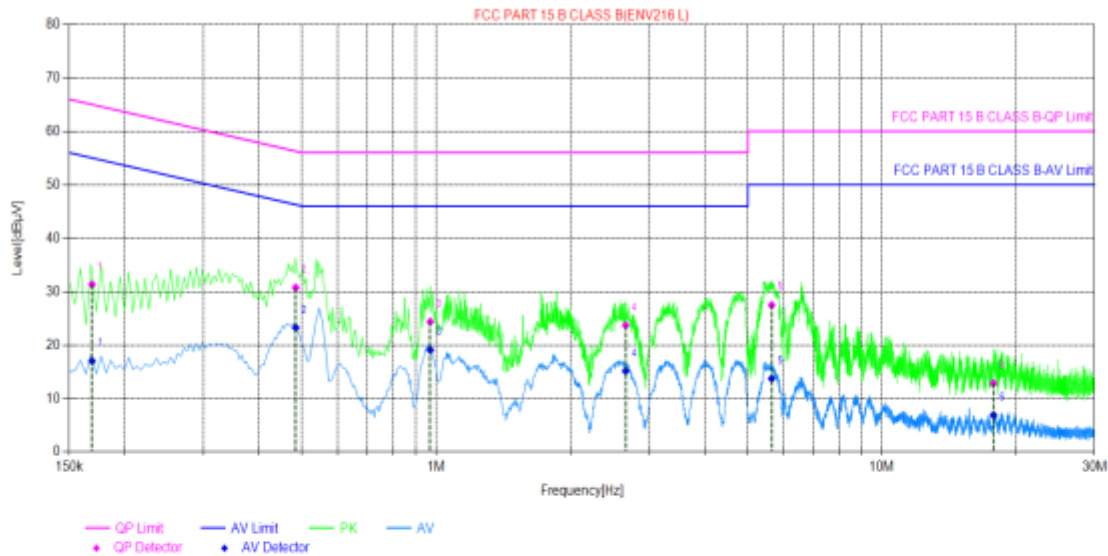


Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1688	9.91	31.34	65.02	33.68	17.01	55.02	38.01	PASS
2	0.4836	9.86	30.75	56.28	25.53	23.27	46.28	23.01	PASS
3	0.9681	9.72	24.37	56.00	31.63	19.08	46.00	26.92	PASS
4	2.6604	9.73	23.70	56.00	32.30	15.14	46.00	30.86	PASS
5	5.6562	9.81	27.47	60.00	32.53	13.73	50.00	36.27	PASS
6	17.7930	10.06	12.84	60.00	47.16	6.89	50.00	43.11	PASS



Neutral Line:

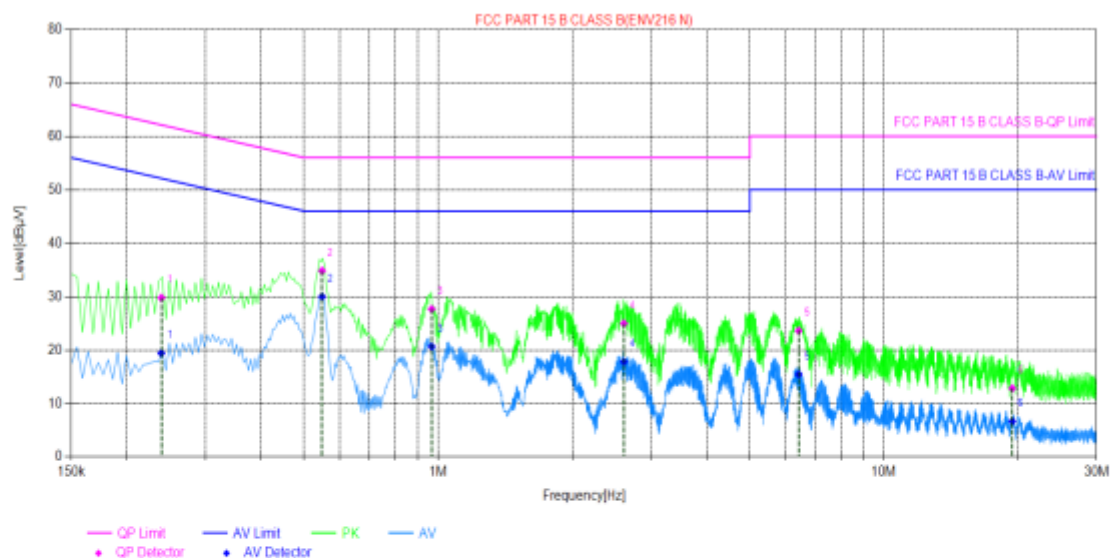

Final Data List									
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBuV]	QP Limit [dBuV]	QP Margin [dB]	AV Value [dBuV]	AV Limit [dBuV]	AV Margin [dB]	Verdict
1	0.2390	9.87	29.78	62.13	32.35	19.42	52.13	32.71	PASS
2	0.5484	9.75	34.84	56.00	21.16	30.00	46.00	16.00	PASS
3	0.9664	9.70	27.67	56.00	28.33	20.67	46.00	25.33	PASS
4	2.6082	9.83	24.98	56.00	31.02	17.82	46.00	28.18	PASS
5	6.4369	9.98	23.63	60.00	36.37	15.45	50.00	34.55	PASS
6	19.4163	10.05	12.83	60.00	47.17	6.68	50.00	43.32	PASS

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. The Measurement (Result Level) is calculated by Reading Level adding the Correct Factor(maybe including LISN Factor and the Cable Factor etc.), The basic equation is as follows:

Result Level= Reading Level + Correct Factor(including LISN Factor, Cable Factor etc.)



4 Appendix

Appendix A: Duty Cycle

Test Result

TestMode	Antenna	Freq(MHz)	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Limit	Verdict
11A	Ant1	5180	0.09	0.29	31.03	---	---
	Ant2	5180	0.09	0.29	31.03	---	---
	Ant1	5200	0.09	0.30	30.00	---	---
	Ant2	5200	0.09	0.30	30.00	---	---
	Ant1	5240	0.09	0.30	30.00	---	---
	Ant2	5240	0.09	0.29	31.03	---	---
	Ant1	5745	0.09	0.30	30.00	---	---
	Ant2	5745	0.09	0.29	31.03	---	---
	Ant1	5785	0.08	0.29	27.59	---	---
	Ant2	5785	0.09	0.29	31.03	---	---
	Ant1	5825	0.09	0.29	31.03	---	---
	Ant2	5825	0.08	0.29	27.59	---	---
11N20MIMO	Ant1	5180	0.10	0.31	32.26	---	---
	Ant2	5180	0.11	0.32	34.38	---	---
	Ant1	5200	0.11	0.31	35.48	---	---
	Ant2	5200	0.10	0.31	32.26	---	---
	Ant1	5240	0.11	0.31	35.48	---	---
	Ant2	5240	0.11	0.31	35.48	---	---
	Ant1	5745	0.11	0.32	34.38	---	---
	Ant2	5745	0.11	0.31	35.48	---	---
	Ant1	5785	0.11	0.31	35.48	---	---
	Ant2	5785	0.11	0.31	35.48	---	---
	Ant1	5825	0.11	0.31	35.48	---	---
	Ant2	5825	0.10	0.31	32.26	---	---
11N40MIMO	Ant1	5190	0.11	0.31	35.48	---	---
	Ant2	5190	0.10	0.31	32.26	---	---
	Ant1	5230	0.10	0.31	32.26	---	---
	Ant2	5230	0.11	0.31	35.48	---	---
	Ant1	5755	0.10	0.31	32.26	---	---
	Ant2	5755	0.10	0.31	32.26	---	---
	Ant1	5795	0.11	0.31	35.48	---	---
	Ant2	5795	0.10	0.30	33.33	---	---
11AC20MIMO	Ant1	5180	0.12	0.32	37.50	---	---
	Ant2	5180	0.12	0.32	37.50	---	---
	Ant1	5200	0.11	0.31	35.48	---	---
	Ant2	5200	0.11	0.31	35.48	---	---
	Ant1	5240	0.11	0.32	34.38	---	---
	Ant2	5240	0.12	0.32	37.50	---	---
	Ant1	5745	0.12	0.32	37.50	---	---
	Ant2	5745	0.11	0.32	34.38	---	---
	Ant1	5785	0.11	0.31	35.48	---	---
	Ant2	5785	0.11	0.32	34.38	---	---
	Ant1	5825	0.11	0.31	35.48	---	---
	Ant2	5825	0.11	0.31	35.48	---	---
11AC40MIMO	Ant1	5190	0.11	0.31	35.48	---	---
	Ant2	5190	0.11	0.32	34.38	---	---
	Ant1	5230	0.10	0.31	32.26	---	---
	Ant2	5230	0.10	0.31	32.26	---	---
	Ant1	5755	0.10	0.31	32.26	---	---
	Ant2	5755	0.11	0.32	34.38	---	---
	Ant1	5795	0.11	0.31	35.48	---	---
	Ant2	5795	0.10	0.31	32.26	---	---
11AC80MIMO	Ant1	5210	0.11	0.32	34.38	---	---
	Ant2	5210	0.11	0.31	35.48	---	---
	Ant1	5775	0.11	0.31	35.48	---	---
	Ant2	5775	0.11	0.32	34.38	---	---
11AX20MIMO	Ant1	5180	0.33	0.53	62.26	---	---
	Ant2	5180	0.33	0.53	62.26	---	---




	Ant1	5200	0.32	0.53	60.38	---	---
	Ant2	5200	0.32	0.53	60.38	---	---
	Ant1	5240	0.33	0.53	62.26	---	---
	Ant2	5240	0.33	0.53	62.26	---	---
	Ant1	5745	0.09	0.30	30.00	---	---
	Ant2	5745	0.33	0.53	62.26	---	---
	Ant1	5785	0.33	0.53	62.26	---	---
	Ant2	5785	0.33	0.53	62.26	---	---
	Ant1	5825	0.33	0.53	62.26	---	---
	Ant2	5825	0.32	0.53	60.38	---	---
11AX40MIMO	Ant1	5190	0.33	0.53	62.26	---	---
	Ant2	5190	0.11	0.31	35.48	---	---
	Ant1	5230	0.10	0.31	32.26	---	---
	Ant2	5230	0.10	0.31	32.26	---	---
	Ant1	5755	0.10	0.31	32.26	---	---
	Ant2	5755	0.10	0.31	32.26	---	---
	Ant1	5795	0.10	0.30	33.33	---	---
11AX80MIMO	Ant2	5795	0.10	0.30	33.33	---	---
	Ant1	5210	0.33	0.53	62.26	---	---
	Ant2	5210	0.33	0.53	62.26	---	---
	Ant1	5775	0.33	0.53	62.26	---	---
11AX160MIMO	Ant2	5775	0.32	0.53	60.38	---	---
	Ant1	5250	0.33	0.53	62.26	---	---
	Ant2	5250	0.33	0.53	62.26	---	---




Test Graphs


11A_Ant1_5180

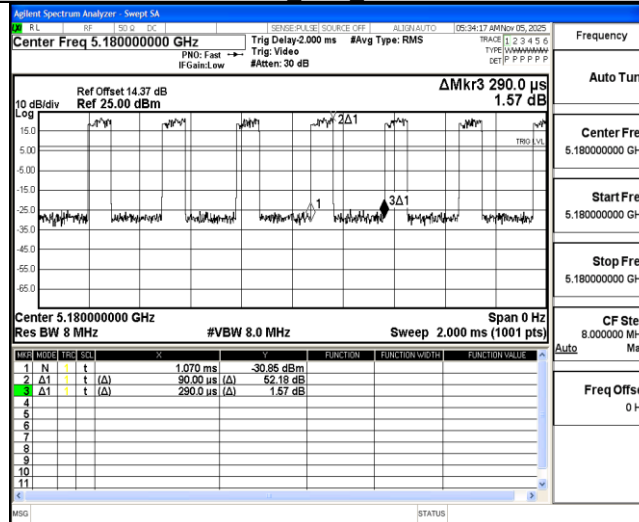


11A_Ant2_5180

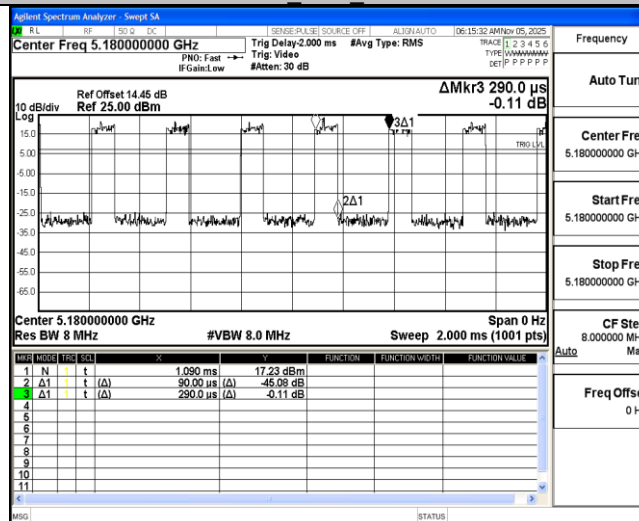


11A_Ant1_5200

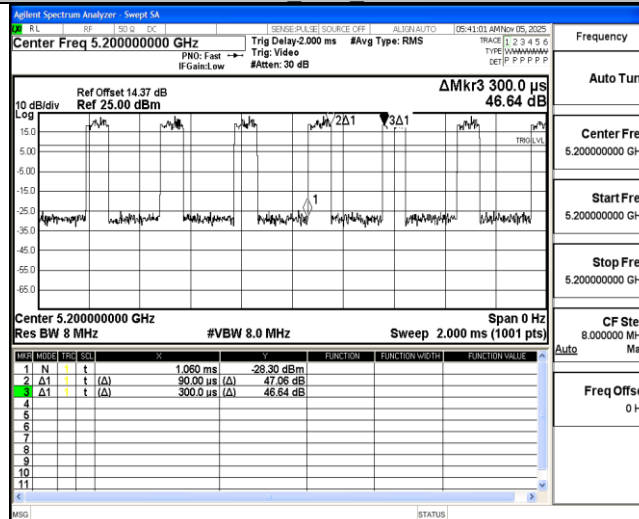


11A_Ant2_5200

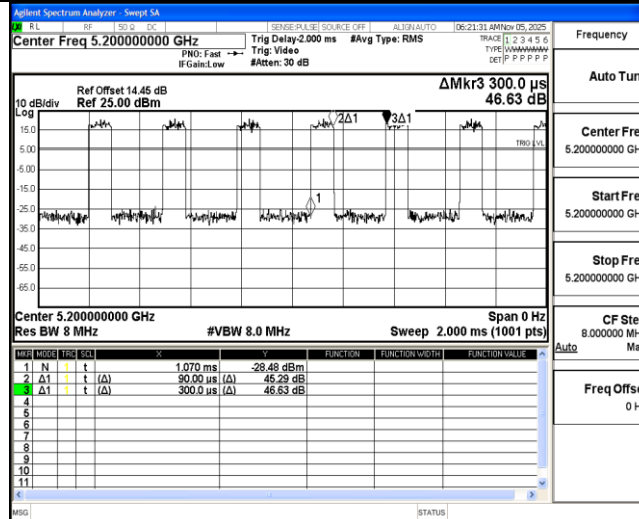


11A Ant1 5240

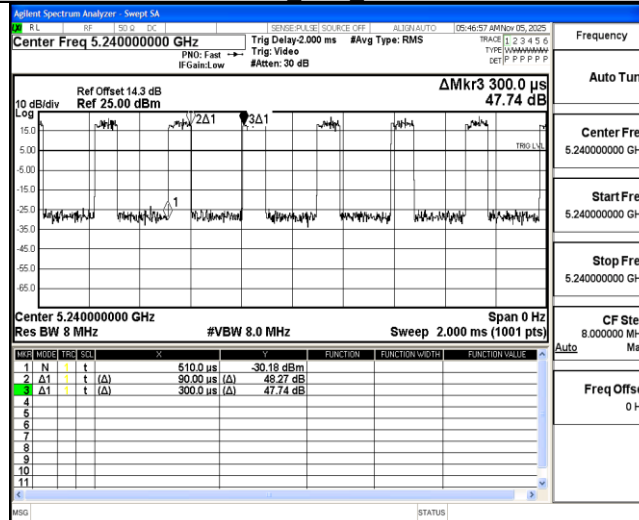


11A Ant2 5240

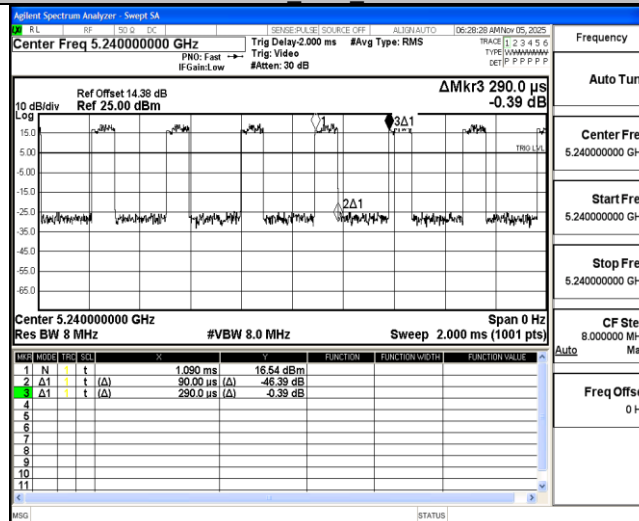


11A Ant1 5745

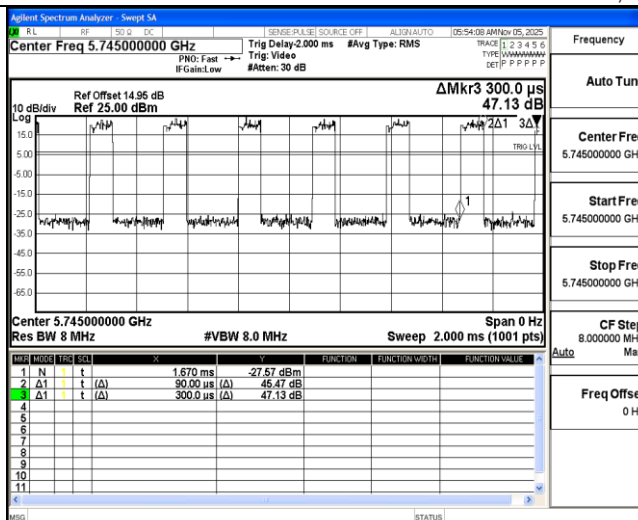


11A_Ant2_5745

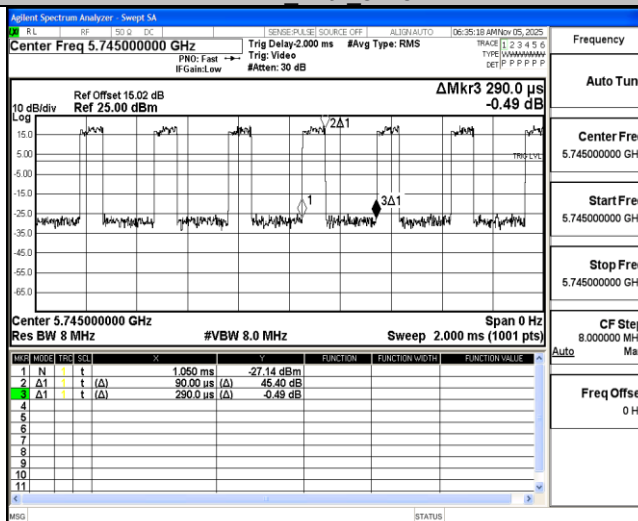


11A_Ant1_5785

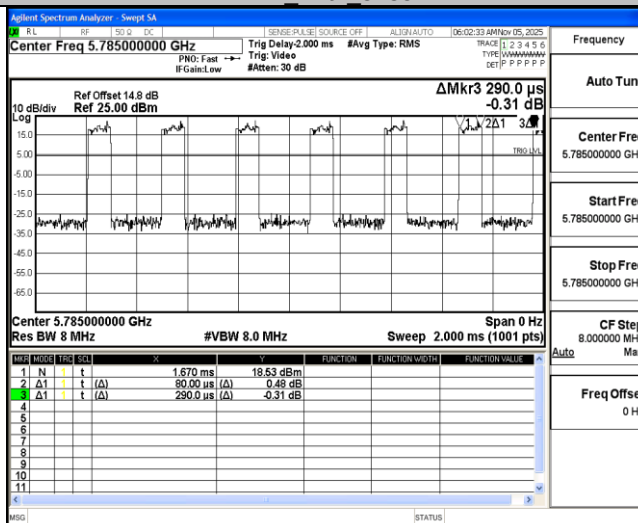


11A_Ant2_5785

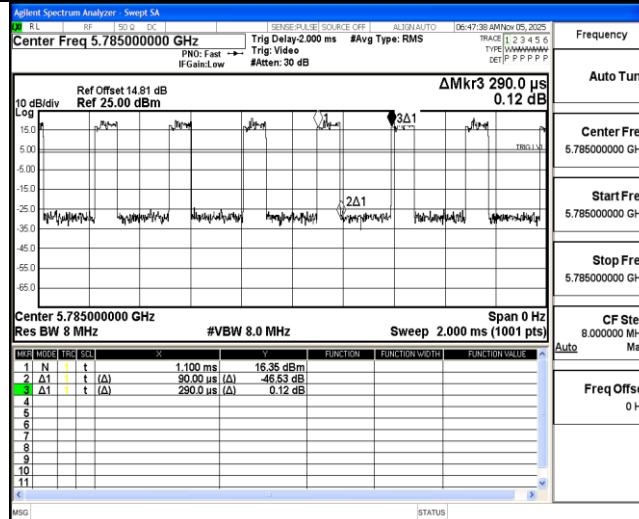


11A Ant1 5825

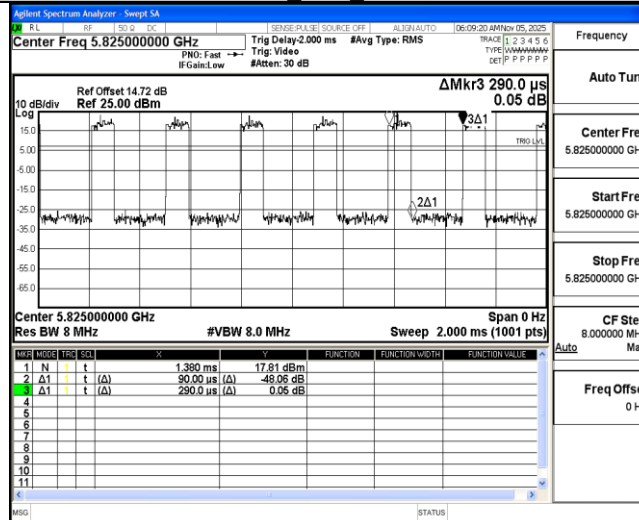


11A Ant2 5825

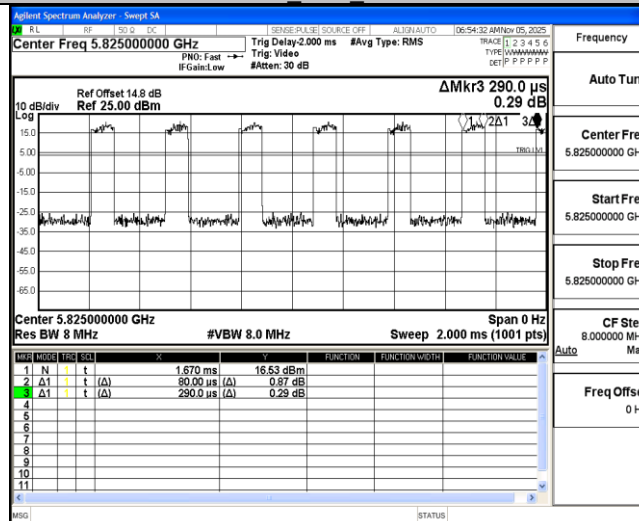


11N20MIMO_Ant1_5180

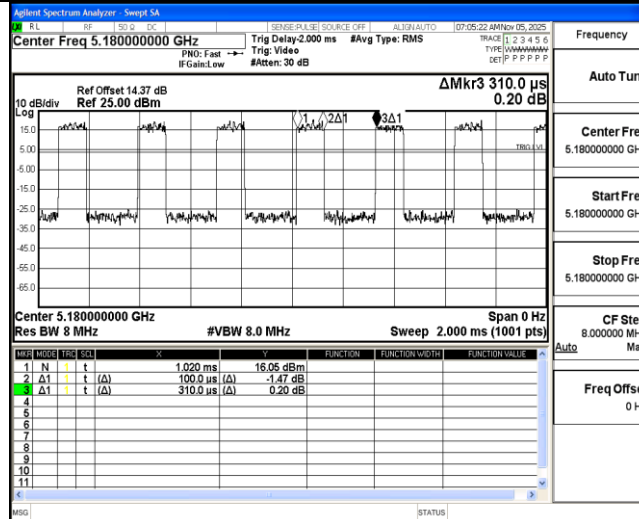


11N20MIMO Ant2 5180

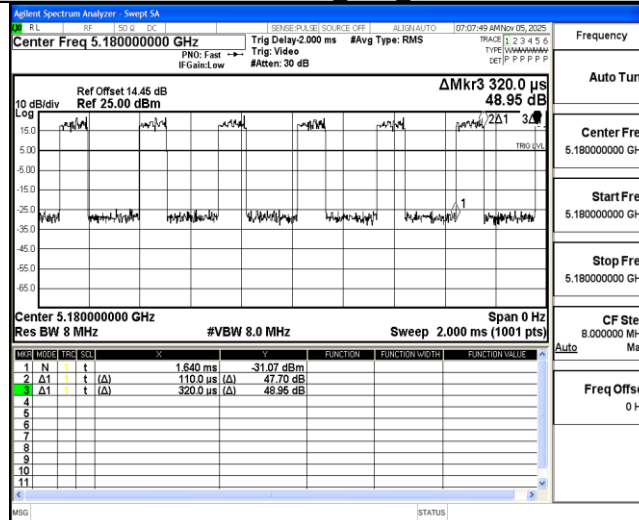


11N20MIMO Ant1 5200

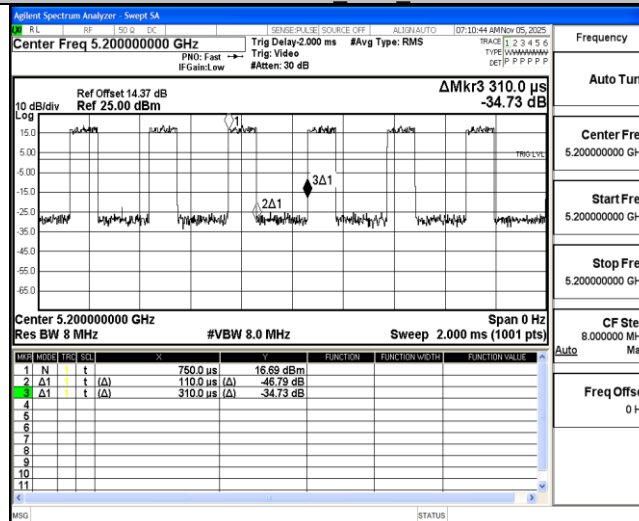


11N20MIMO Ant2 5200

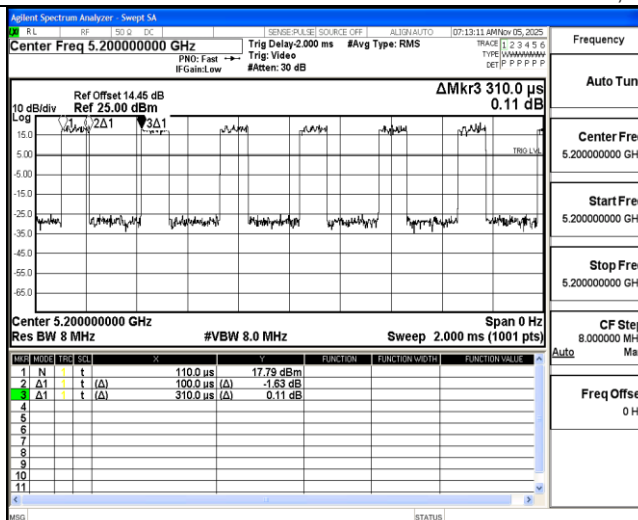


11N20MIMO Ant1 5240

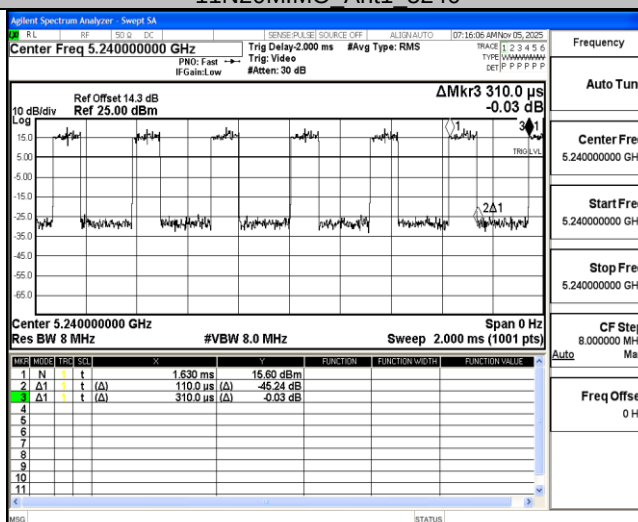


11N20MIMO Ant2 5240

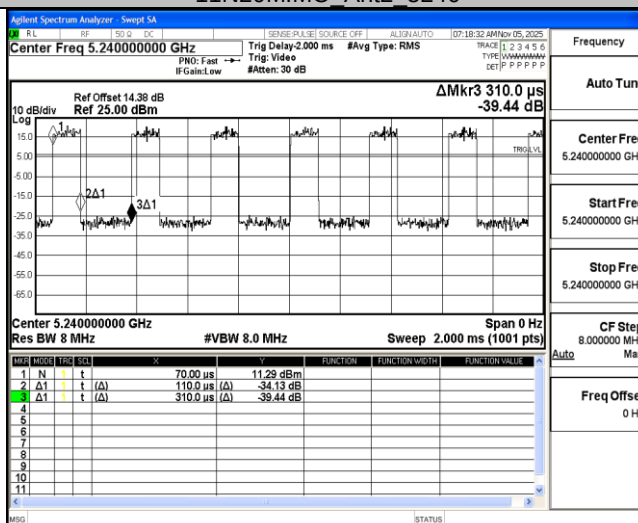


11N20MIMO Ant1 5745

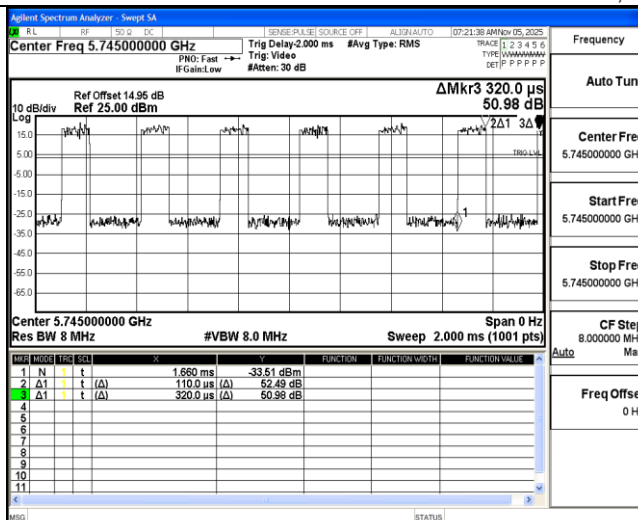


11N20MIMO Ant2 5745

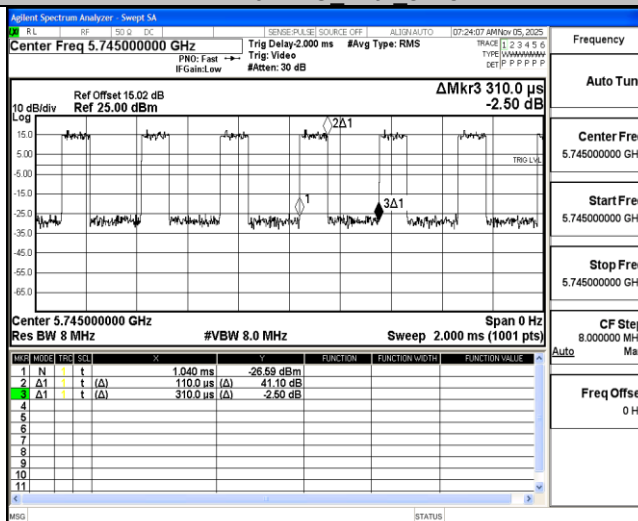

11N20MIMO Ant1 5785

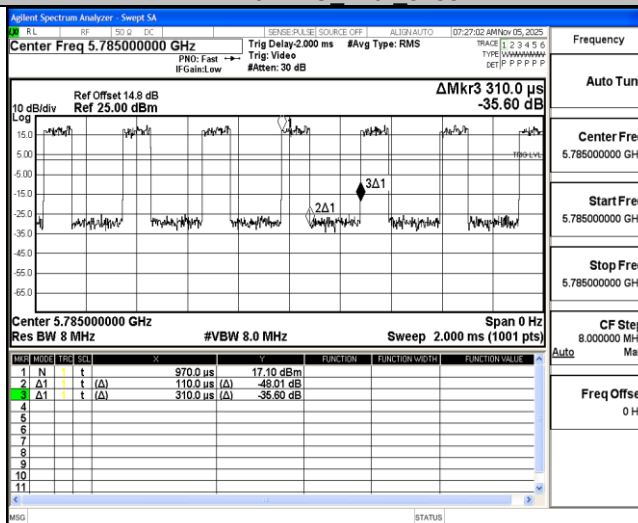

11N20MIMO Ant2 5785

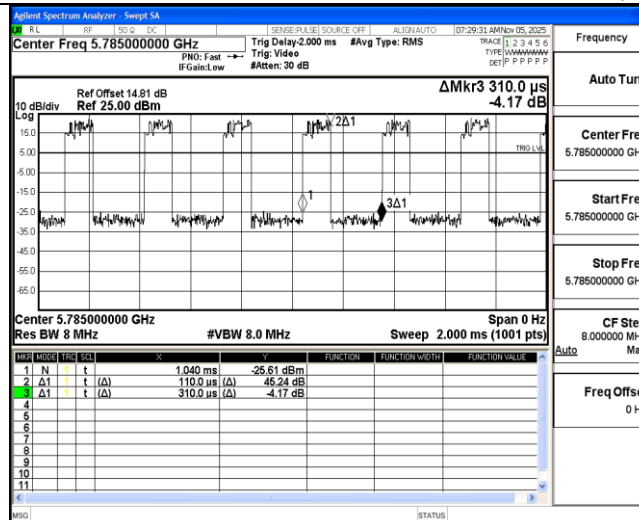

Frequency

Auto Tune

Center Freq

Start Freq

Stop Freq

CF Step


Auto

Man

Freq Offset

0 Hz

11N20MIMO Ant1 5825

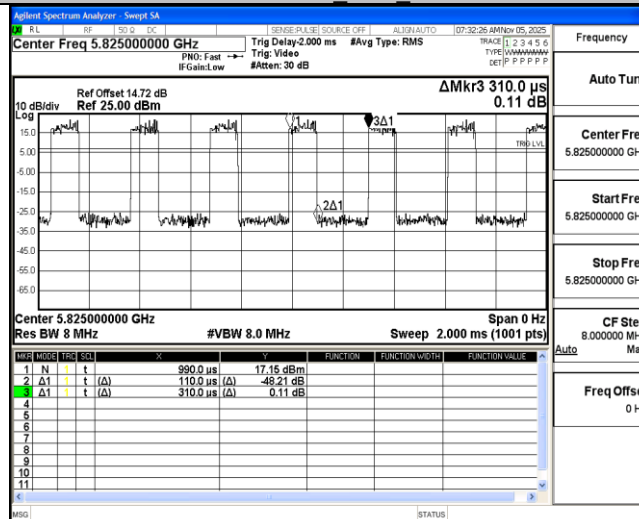

Frequency

Auto Tune

Center Freq

Start Freq

Stop Freq

CF Step


Auto

Man

Freq Offset

0 Hz

11N20MIMO Ant2 5825

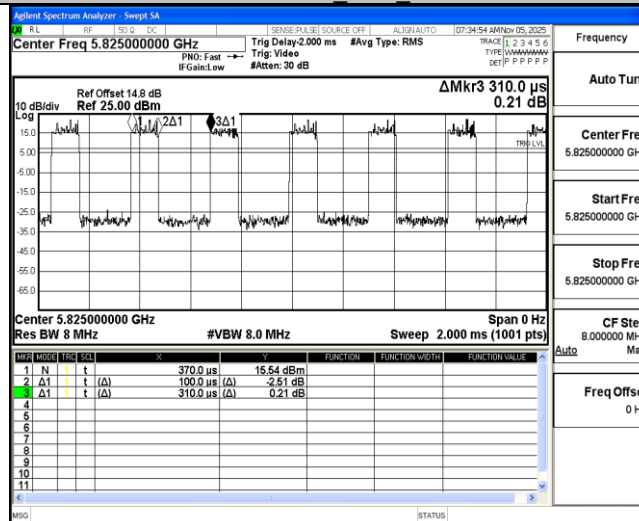

Frequency

Auto Tune

Center Freq

Start Freq

Stop Freq

CF Step


Auto

Man


Freq Offset

0 Hz


11N40MIMO Ant1 5190

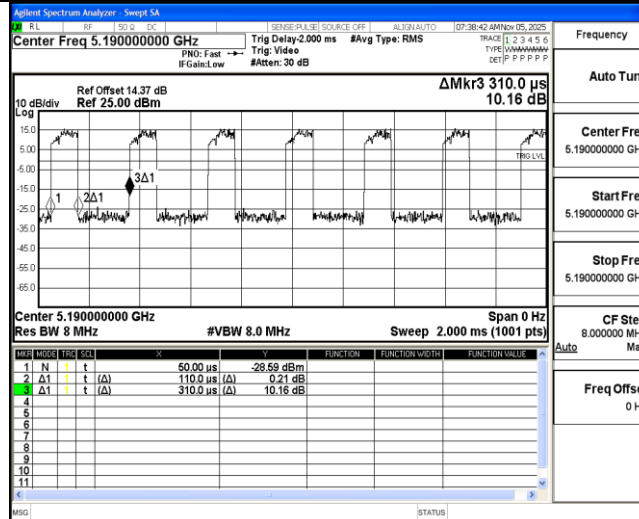


11N40MIMO Ant2 5190

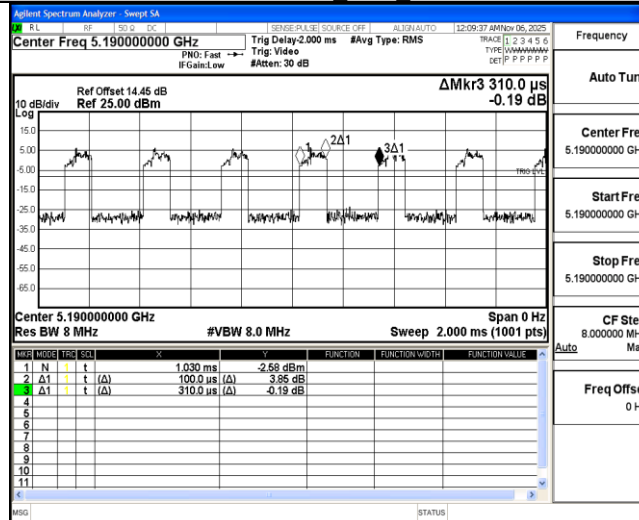


11N40MIMO Ant1 5230

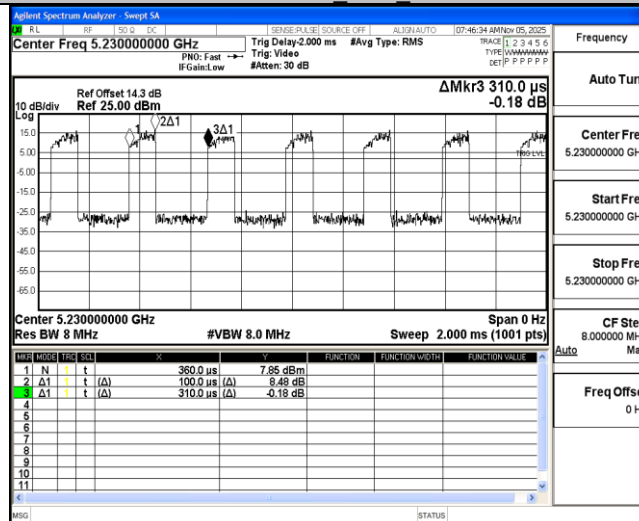


11N40MIMO Ant2 5230

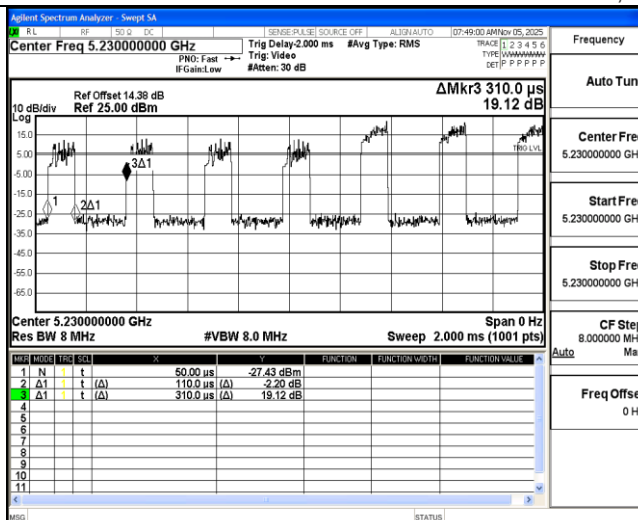


11N40MIMO Ant1 5755

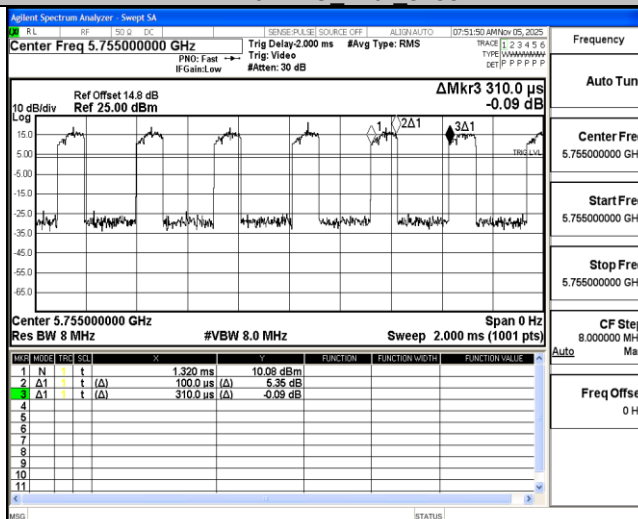


11N40MIMO Ant2 5755

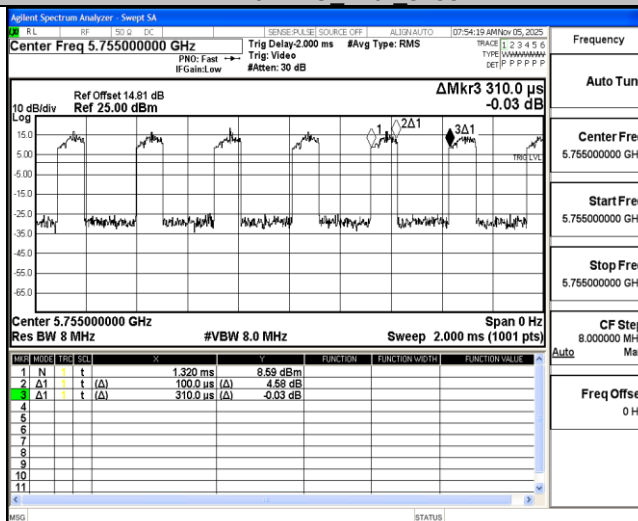


11N40MIMO Ant1 5795

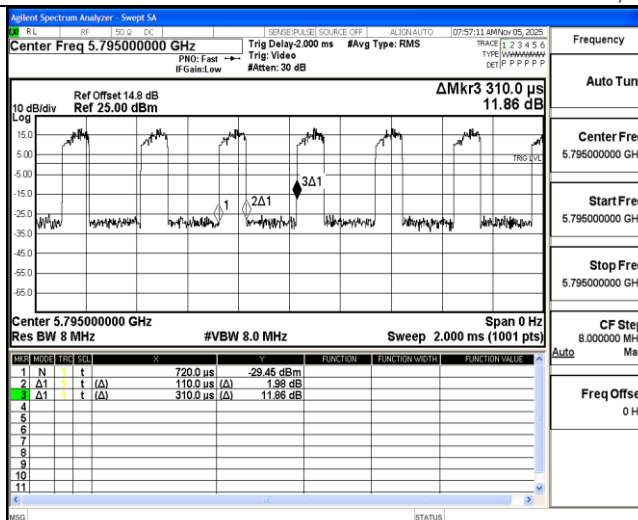


11N40MIMO Ant2 5795

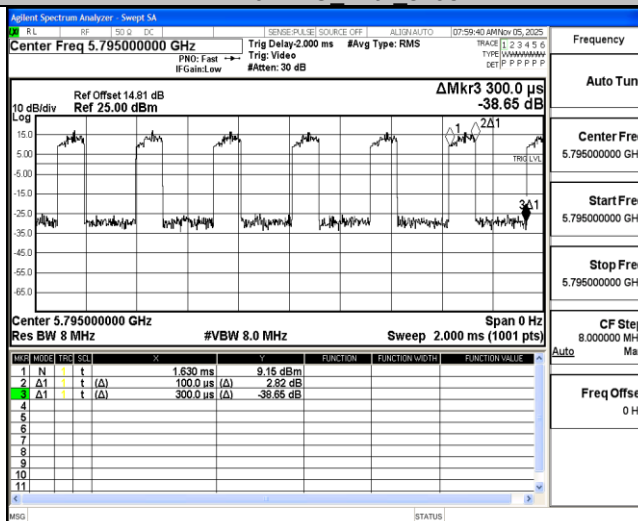


11AC20MIMO Ant1 5180

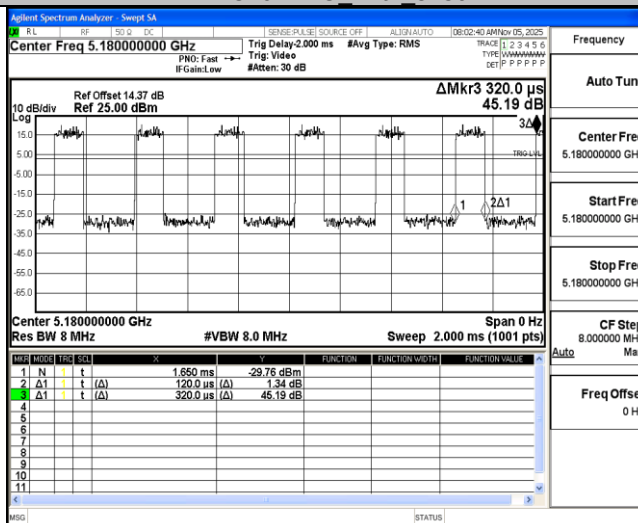


11AC20MIMO Ant2 5180

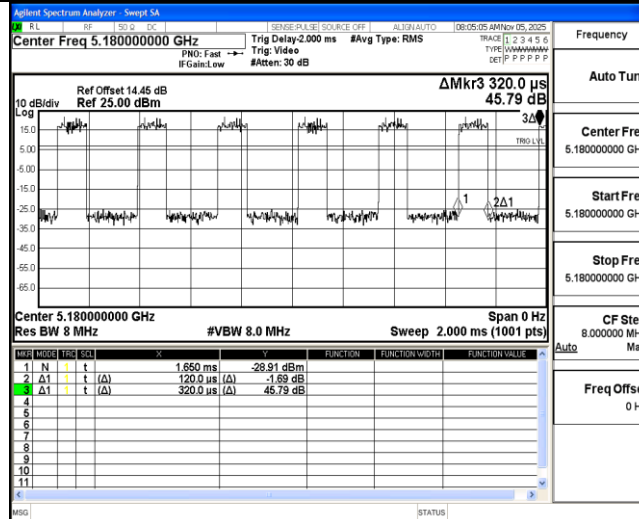

11AC20MIMO_Ant1_5200

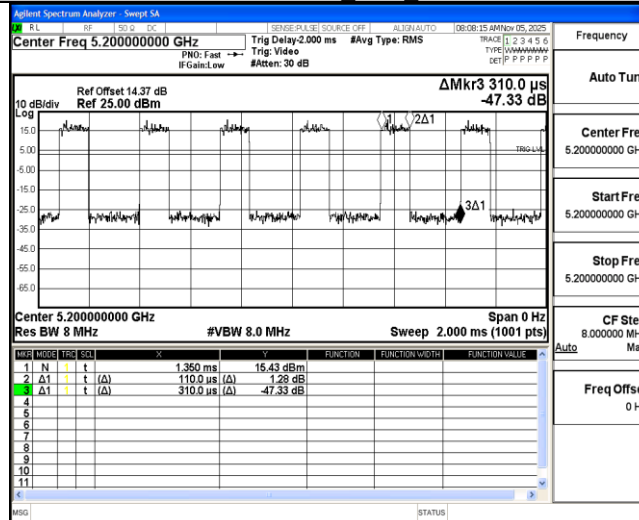

11AC20MIMO_Ant2_5200

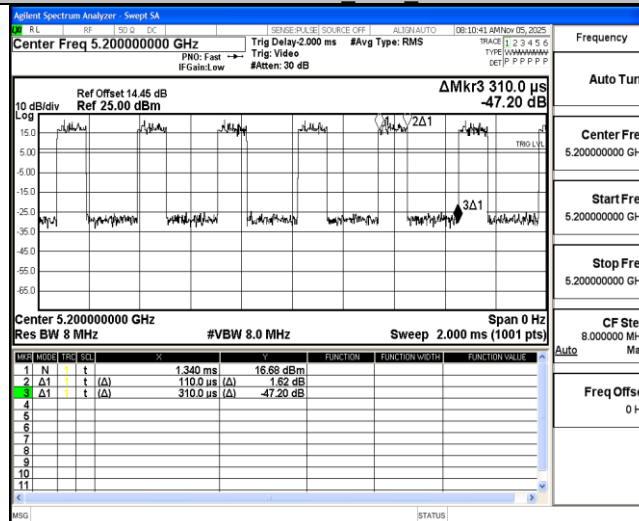

11AC20MIMO_Ant1_5240