

Scan QR code
verification of authenticity

FCC PART 15 SUBPART C FCC PART 15.249 TEST REPORT

FCC ID:2BAQ9-GT19**Report No:** CTSL2620630270E**Product Name:** Wireless Lavalier Microphone**Main Test Model:** GT19**Series Models:** -**Applicant:** ShenZhen YaoWei Technology Co.,Ltd

EXECUTIVE SUMMARY

A sample of this product was tested and found to be in compliance with
FCC PART 15C, FCC PART 15 SUBPART C (15.249).

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from CTSL. All Test Data Presented in this report is only applicable to presented Test sample.

CTSL Testing (Dongguan) Co., Ltd.

Main company address: Building 1, Houjie Road, Houjie Town, Guangdong Province
Dongguan City, China

Test Report

FCC ID:2BAQ9-GT19

Applicant Name	ShenZhen YaoWei Technology Co.,Ltd				
Applicant Address	5th Floor,1st Building, #68 LongDong TongCang Road, LongGang District,ShenZhen China				
Manufacturer Name	ShenZhen YaoWei Technology Co.,Ltd				
Manufacturer Address	5th Floor,1st Building, #68 LongDong TongCang Road, LongGang District,ShenZhen China				
Trade Mark	-				
Product name	Wireless Lavalier Microphone				
Main Test Model	GT19				
Series Models	-				
Standard	FCC Part 15 Subpart C (15.249) ANSI C63.10:2020				
Test Location	ISO/IEC 17025 by ILAC-MRA is A2LA 7556.01 CTSL Testing (Dongguan) Co., Ltd. Room 112, Building 1, No. 15, Jiaoyuansongshan, Hetian Village, Houjie Town, Dongguan, Guangdong China				
Receipt Date	2026.06.25	Test period	2026.06.26-2026.07.03	Issue Date	2026.07.07
Conclusion	The equipment under test was found to be compliance with the requirements of the standards applied.				
Performs Testing:	Ethan Zhao				
Test Report Reviewer:	Steve Qin				
Test Report Authorizer:	Alan Li				

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. General Description of EUT (Equipment Under Test)	5
1.2. Antenna Information	6
1.3. Information of RF Cable	6
2. SUMMARY OF TEST	7
2.1. Test Standards	7
2.2. Summary of test result	7
2.3. Test Facilities	8
2.4. Measurement uncertainty	8
2.5. Block Diagram	9
2.6. Assistant equipment used for test	9
2.7. Test mode	10
2.8. Channel List	11
2.9. Power Setting of Test Software	11
2.10. Test Equipment	12
3. FIELD STRENGTH OF FUNDAMENTAL	14
3.1. Limit	14
3.2. Test Setup	14
3.3. Spectrum Analyzer Setting	15
3.4. Test Procedure	15
3.5. Test Conditions	15
3.6. Test Result	16
3.7. Original Test record	17
4. RADIATED SPURIOUS EMISSIONS AND BAND EDGE	23
4.1. Limit	23
4.2. Test Setup	24
4.3. Spectrum Analyzer Setting	25
4.4. Test Procedure	27
4.5. Test Conditions	27
4.6. Test Result	28
5. 20DB BANDWIDTH	36
5.1. Limit	36
5.2. Test Setup	36
5.3. Spectrum Analyzer Setting	36
5.4. Test Procedure	36
5.5. Test Conditions	37
5.6. Test Result	37
5.7. Original Test record	38
6. AC POWER LINE CONDUCTED EMISSIONS	39
6.1. Limit	39
6.2. Test Setup	39
6.3. Spectrum Analyzer Setting	39
6.4. Test Procedure	40
6.5. Test Conditions	40
6.6. Test Result	41
7. ANTENNA REQUIREMENTS	43

7.1. Limit..... 43

7.2. Test Result 43

8. APPENDIX.....44



1. GENERAL INFORMATION

1.1. General Description of EUT (Equipment Under Test)

Product Information	
Product Name	: Wireless Lavalier Microphone
Main Test Model	: GT19
Series Models	: --
Power supply (TX)	: Charging Input: 5V DC 1A by USB-C Port Battery: DC 3.7V from Rechargeable Battery
Power supply (RX)	: Input: DC 5V (Only connect mobile phones and other terminals)
Software Version	: V1.0
Hardware Version	: HS-M39-TX-B-V2.1
Equipment Under Test	
Testing sample ID	: CTSL2620630270-S1 (Engineer sample) CTSL2620630270-S2 (Normal sample)
Test supplied	: ☐ supplied by the manufacturer ☒ supplied by the lab (Auxiliary test equipment supplied by test Lab, Details reference Section 2.6.)
Power supply information	: DC 5V
Wireless Specification	
Supported Type	: 2.4G Wireless SRD
Modulation Type	: GFSK(1Mbps) 4/π DQPSK(2Mbps)
Operation frequency	: 2402-2480MHz
Number of channels	: 40 Channels
Channel separation	: 2MHz
Max Field Strength@3m (Fundamental)	: 85.47dBμV/m (Peak)
Antenna Gain& type	: Refer to Section 1.2 of the report.
Sample Type	: Prototype production
Type of Device	: ☒ Portable Device; ☐ Mobile Device; ☐ Modular Device

Note: For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

1.2. Antenna Information

Ant No.	Band	Model Name	Antenna Type	Connector	Gain (dBi)
1	2400 ~2500MHz	RANT3216F245 C03	2.4GHz 3216 Chip Antenna	/	2.7
Note: 1. The antenna gain is declared by the customer and the laboratory is not responsible for the accuracy of the antenna gain. 2. The test results of this report only apply to the sample as received.					

1.3. Information of RF Cable

Cable Loss(dB)	Provided by
1.0	ShenZhen YaoWei Technology Co.,Ltd
Note: 1. The customer declared the loss value of the RF Cable. and the test results of this report only apply to the sample as received. 2. The laboratory is not responsible for the accuracy of the cable loss.	

2. SUMMARY OF TEST

2.1. Test Standards

FCC Rules Part 15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz.

ANSI C63.10:2020: American National Standard for Testing Unlicensed Wireless Devices

2.2. Summary of test result

No.	Description of Test Item	FCC Standard Section	Results
1	Field Strength of Fundamental	§15.249(a)	PASS
2	Radiated Spurious Emissions and Band Edge	§15.205 §15.209 §15.249(a)(c)(d)(e) §15.35(b)	PASS
3	20dB Bandwidth	§15.215(c)	PASS
4	AC Power Line Conducted Emissions	§15.207	PASS
5	Antenna Requirement	§15.203	PASS

Note: "N/A" denotes test is not applicable in this test report.

2.3. Test Facilities

EMC Lab :

A2LA Certificate Number: 7556.01;
CTSL Testing (Dongguan) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.
The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

FCC Designation Number: CN1425;
Test Firm Registration Number:750639;
CTSL Testing (Dongguan) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

Industry Canada Registration Number. Is: 34801;
CAB identifier: CN0192;
CTSL Testing (Dongguan) Co., Ltd. The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

Name of Firm : CTSL Testing (Dongguan) Co.,Ltd.

EMC test location/satellite location:

Room 112, Building 1, No. 15, Jiaoyuansongshan Hetian Village, Houjie Town Dongguan City, Guangdong, People's Republic of China City, Guangdong, China

2.4. Measurement uncertainty


Test Item	Uncertainty
Uncertainty for Conduction emission test	$\pm 3.48\text{dB}$
Uncertainty for spurious emissions test (Below 30MHz)	$\pm 1.62\text{ dB}$
Uncertainty for spurious emissions test (30MHz-1GHz)	$\pm 4.60\text{ dB(Polarize: H)}$
	$\pm 4.68\text{ dB(Polarize: V)}$
Uncertainty for spurious emissions test (1GHz to 25GHz)	$\pm 4.96\text{dB}$
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for Temperature	0.5°C
Uncertainty for Relative Humidity	$1.8\%\text{RH}$
Uncertainty for Atmospheric Pressure	0.16 kPa

Note: This uncertainty represents an expanded uncertainty expressed at approximately The 95% confidence level using a coverage factor of $k=2$.


2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground. EUT was beset into Bluetooth test mode by software before test.


Connect EUT Antenna Terminal, Above 1GHz Radiated Spurious Emissions& Band Edge Test

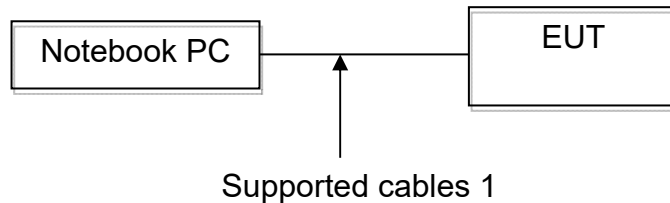

30-1000MHz Radiated Spurious Emission Test

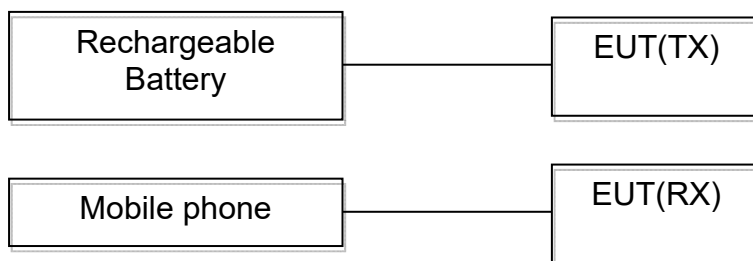

AC Power Line Conducted Emissions

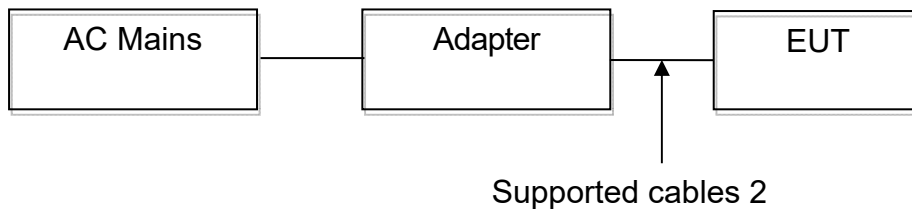

(EUT: Wireless Lavalier Microphone)

2.6. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
1	Notebook PC	Dell	Inspiron 14R-5421 (Manufacturer: Dell)	-	25TZHW1
2	ADAPTER (supplied by the Lab.)	OPPO	VCB7CACH	-	C622503PB1 009774
3	Mobile phone	OPPO	PLK110	-	3B165J00PQ W00000

Supported cables				
Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	0.5m	USB Extension Cable (supplied by the Lab.)
2	NO	NO	0.3m	USB-C Extension Cable for Charging Mode (supplied by the manufacturer)

2.7. Test mode

Combining all the rates, modulations, and packet types, the Pre-scans had been carried out. The worst-case test mode was selected for the final test as listed below.

Test Item	Modulation Type	Operating Mode	Test Channel
Fundamental	GFSK / 4/π DQPSK	Continuous TX	Low / Mid / High
Radiated Spurious Emissions	GFSK / 4/π DQPSK	Continuous TX	Low / Mid / High
Band Edge	GFSK / 4/π DQPSK GFSK / 4/π DQPSK	Continuous TX	Low / High
20dB Bandwidth	GFSK / 4/π DQPSK	Continuous TX	Low / Mid / High
AC Power Line Conducted Emissions	GFSK	Continuous TX	Worst channel

Note 1: Both GFSK and 4/π DQPSK modulations were tested for all applicable radiated measurements. The test results for both modulations are presented in Sections 3, 4, and 5 of this report.

Note 2: In radiated measurement, the EUT had been pre-scan on the positioned of each 3 axis (X, Y, Z), the worst case was found when positioned on X-plane.

2.8. Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
01	2402	02	2404	03	2406	04	2408
05	2410	06	2412	07	2414	08	2416
09	2418	10	2420	11	2422	12	2424
13	2426	14	2428	15	2430	16	2432
17	2434	18	2436	19	2438	20	2440
21	2442	22	2444	23	2446	24	2448
25	2450	26	2452	27	2454	28	2456
29	2458	30	2460	31	2462	32	2464
33	2466	34	2468	35	2470	36	2472
37	2474	38	2476	39	2478	40	2480

2.9. Power Setting of Test Software

Software Name	FCC_assist1.0.4		
Frequency (MHz)	2402	2440	2480
GFSK Setting	7	7	7
4/π DQPSK	7	7	7

Note: This information is provided by the applicant.

2.10. Test Equipment

For Conducted Emission Test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESCI 3	AT005	GUANGZHOU NEM	May 28,26	May 27,27
LISN	Rohde & Schwarz	ENV216	AT006	GUANGZHOU NEM	May 28,26	May 27,27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	AT007	GUANGZHOU NEM	May 28,26	May 27,27
CE Cable	Times Microwave	LMR195UF-N MNM-1.50M	AT041	GUANGZHOU NEM	May 28,26	May 27,27
Test Software	FARAD	EZ-EMC Ver.3A1.1+	N/A	N/A	N/A	N/A

For Radiated Emission Test (9kHz-30MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI TestReceiver	Rohde& Schwarz	ESCI 7	AT001	GUANGZHOU NEM	May 28,26	May 27,27
Active Loop Antenna	HCT	6505	AT064	GRG METROLOGY	Mar 22,26	Mar 21,27
Test Software	FARAD	EZ-EMC Ver.3A1.1+	N/A	N/A	N/A	N/A
9kHz-30MHz Cable	Times Microwave	LMR195UF-N MNM-9M	AT045	GUANGZHOU NEM	May 28,26	May 27,27

For Radiated Emissions Test (30MHz-1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde& Schwarz	ESCI 7	AT001	GUANGZHOU NEM	May 28,26	May 27,27
Trilog-Broadband Antenna (Includes 6db attenuator)	SCHWARZBECK	VULB 9168	AT002	LISAI	May 30,26	May 29,27
Test Software	FARAD	EZ-EMC Ver.3A1.1+	N/A	N/A	N/A	N/A
30-1000MHz Cable	Times Microwave Systems	LMR195UF-N MRNMR-3.00M+ LMR400UF-N MNM-3.00M+ LMR400UF-N MNM-3.00M	AT042+AT043+AT044	GUANGZHOU NEM	May 28,26	May 27,27

For Radiated Emission test (Above 1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna 1-18G	SCHWARZBEC K	BBHA 9120 D	AT003	LISAI	May 30,26	May 29,27
Horn Antenna 18-40GHz	XIBAO	XB-WDB18-40K	AT064	LISAI	May 30,26	May 29,27
Broadband Preamplifier	SCHWARZBEC K	BBV 9718 D	AT004	GUANGZHOU NEM	May 28,26	May 27,27
Low Noise Amplifier	MWRFTest	DLA8-18-40G-2078	AT065	GUANGZHOU NEM	May 28,26	May 27,27
Spectrum Analyzer 40G	Keysight	N9020B	AT066	GUANGZHOU NEM	May 28,26	May 27,27
Spectrum Analyzer 26.5G	Keysight	N9020A	AT050	GUANGZHOU NEM	May 28,26	May 27,27
Radio switching unit	TiGroup	SU319	AT055	N/A	N/A	N/A
Filtering unit	TiGroup	SU319F	AT056	N/A	N/A	N/A
Test Software	BL	BL410-E V25.5 en	N/A	N/A	N/A	N/A
Above 1GHz Cable	Times Microwave Systems	SFT205-NMN M-7.0M+ SFT205-NMN M-2.0M	AT057+ AT058	GUANGZHOU NEM	May 28,26	May 27,27

For Connect EUT Antenna Terminal Test (RF Test system)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Spectrum analyzer	Keysight	N9020A	AT050	GUANGZHOU NEM	May 28,26	May 27,27
Power probe unit	Ti Group	SU319P	AT053	GUANGZHOU NEM	May 28,26	May 27,27
Switch unit	Ti Group	SU319S	AT054	N/A	N/A	N/A
Test Software	BL	BL410R 3.5.2.621	N/A	N/A	N/A	N/A

3. FIELD STRENGTH OF FUNDAMENTAL

3.1. Limit


§ 15.249(a) Fundamental Field Strength Limits (at 3 m)			
Frequency band (MHz)	Fundamental limit (mV/m)	Average Limit (dBμV/m)	Peak Limit (dBμV/m)
2400-2483.5MHz	50	94	114

Note:

1. Average Limit (dBμV/m)=20×log[1000×Field Strength (mV/m)].
2. Peak Limit (dBμV/m) = Average Limit (dBμV/m) +20dB, per §15.35(b).

3.2. Test Setup

(A) Radiated Emission Test Set-Up, Frequency above 1GHz

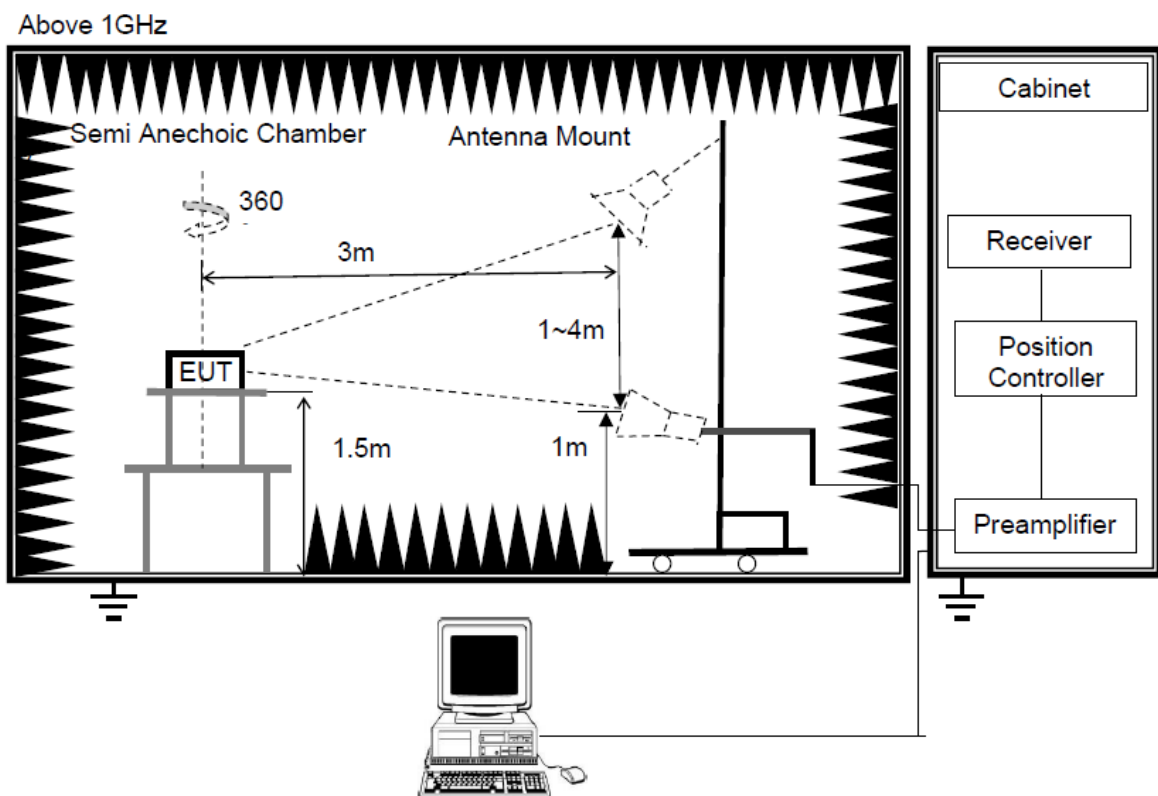

3.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	≥OBW (Suggested 1MHz)
VBW	3×RBW (Suggested 3MHz)
Start frequency	2400MHz
Stop frequency	2483.5MHz
Sweep Time	Auto
Detector	Peak / Average
Trace Mode	Max Hold

3.4. Test Procedure

- EUT was placed on a turn table, which is 1.5 meter high above the ground.
- EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Set the EUT transmit continuously with maximum output power.
- The turn table can rotate 360 degrees to determine the position of the maximum emission level.
- The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test, record the average and peak value.
- Repeat above procedures until all channels were measured.
- Record the results in the test report.
- recorded in this report.

3.5. Test Conditions

EUT:	Wireless Lavalier Microphone	M/N:	GT19
Test Voltage:	DC 3.7V from Rechargeable Battery		
Temperature:	23.2°C	Humidity:	53 % RH
Atmosphere Pressure:	101.1kPa		


3.6. Test Result

Field Strength of Fundamental@3m						
GFSK						
Frequency MHz	Field strength of fundamental level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization	Result
2402	63.90	114.00	50.10	Peak	Vertical	Pass
	63.30	94.00	30.70	Average		
	76.66	114.00	37.34	Peak	Horizontal	Pass
	74.57	94.00	19.43	Average		
2440	63.65	114.00	50.35	Peak	Vertical	Pass
	63.32	94.00	30.68	Average		
	76.70	114.00	37.30	Peak	Horizontal	Pass
	76.59	94.00	17.41	Average		
2480	70.72	114.00	43.28	Peak	Vertical	Pass
	69.94	94.00	24.06	Average		
	85.12	114.00	28.88	Peak	Horizontal	Pass
	84.19	94.00	9.81	Average		
4/π DQPSK						
Frequency MHz	Field strength of fundamental level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization	Result
2402	70.46	114.00	43.54	Peak	Vertical	Pass
	67.56	94.00	26.44	Average		
	83.79	114.00	30.21	Peak	Horizontal	Pass
	82.31	94.00	11.69	Average		
2440	72.32	114.00	41.68	Peak	Vertical	Pass
	69.37	94.00	24.63	Average		
	85.29	114.00	28.71	Peak	Horizontal	Pass
	83.04	94.00	10.96	Average		
2480	70.93	114.00	43.07	Peak	Vertical	Pass
	67.87	94.00	26.13	Average		
	85.47	114.00	28.53	Peak	Horizontal	Pass
	83.74	94.00	10.26	Average		

3.7.Original Test record


Field Strength of Fundamental@3m (GFSK-Low Channel)

RF_FCC RE_FCC ID 2.4G wireless SRD_FCC 15.249(2.4G SRD)Power_2.4GHz-2.483GHz

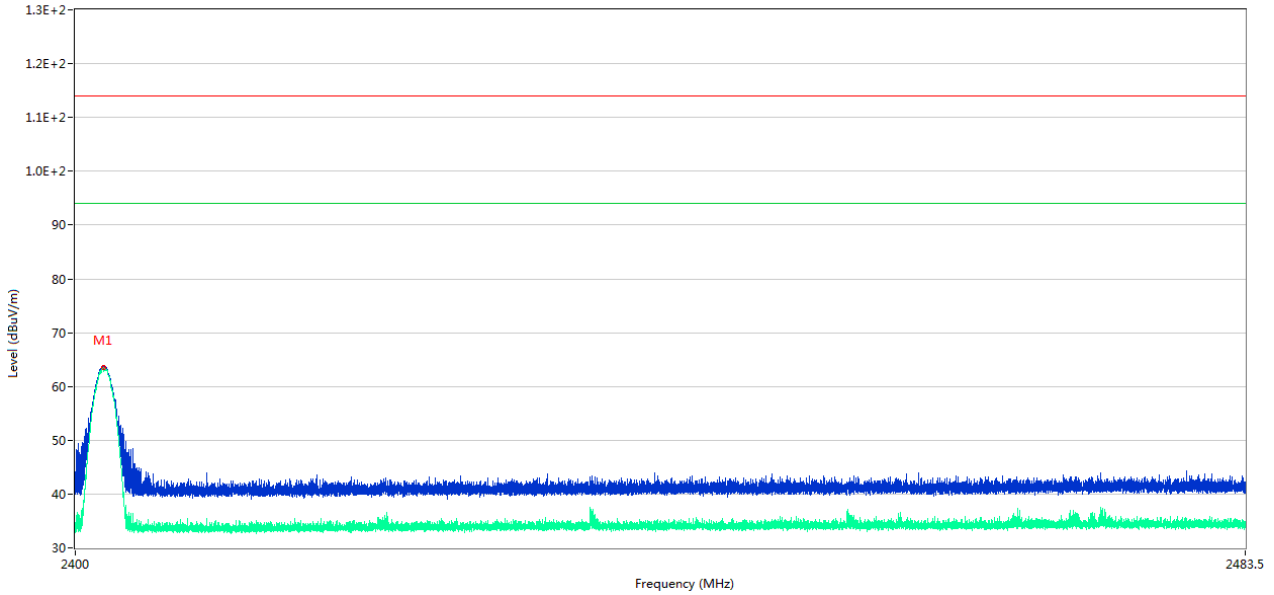

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2401.966	63.90	-19.67	114.0	50.10	Peak	325.40	150	Vertical	Pass


RF_FCC RE_FCC ID 2.4G wireless SRD_FCC 15.249(2.4G SRD)Power_2.4GHz-2.483GHz

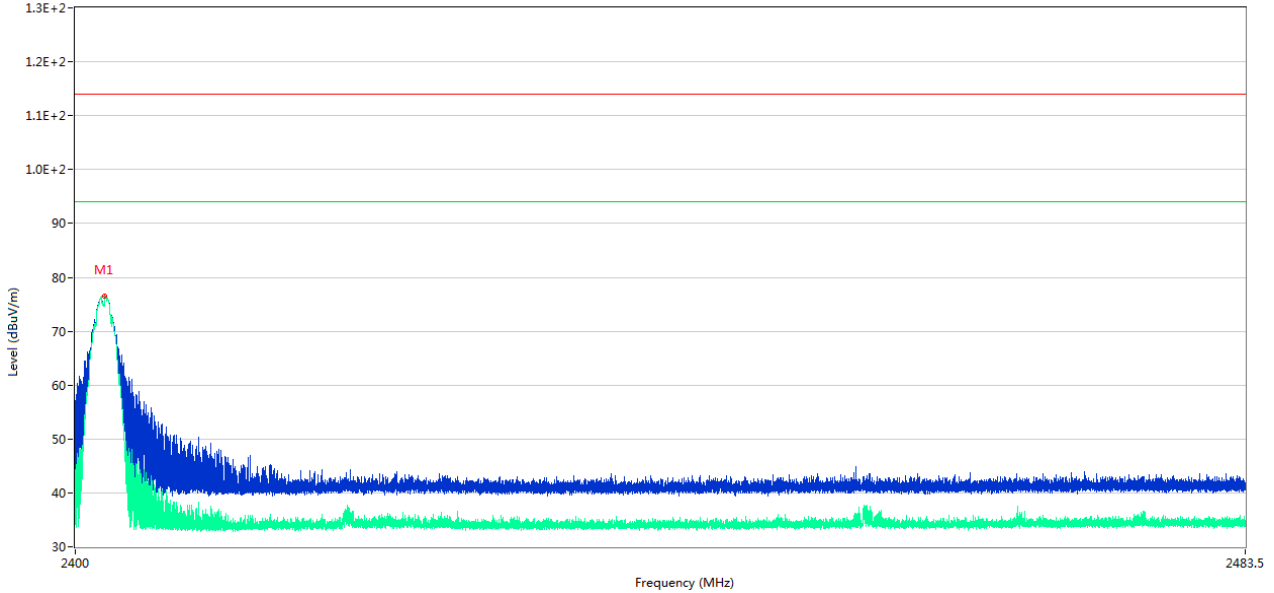

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2402.037	76.66	-19.67	114.0	37.34	Peak	214.60	150	Horizontal	Pass


Field Strength of Fundamental@3m (GFSK-Mid Channel)

RF_FCC RE_FCC ID 2.4G wireless SRD_FCC 15.249(2.4G SRD)Power_2.4GHz-2.483GHz

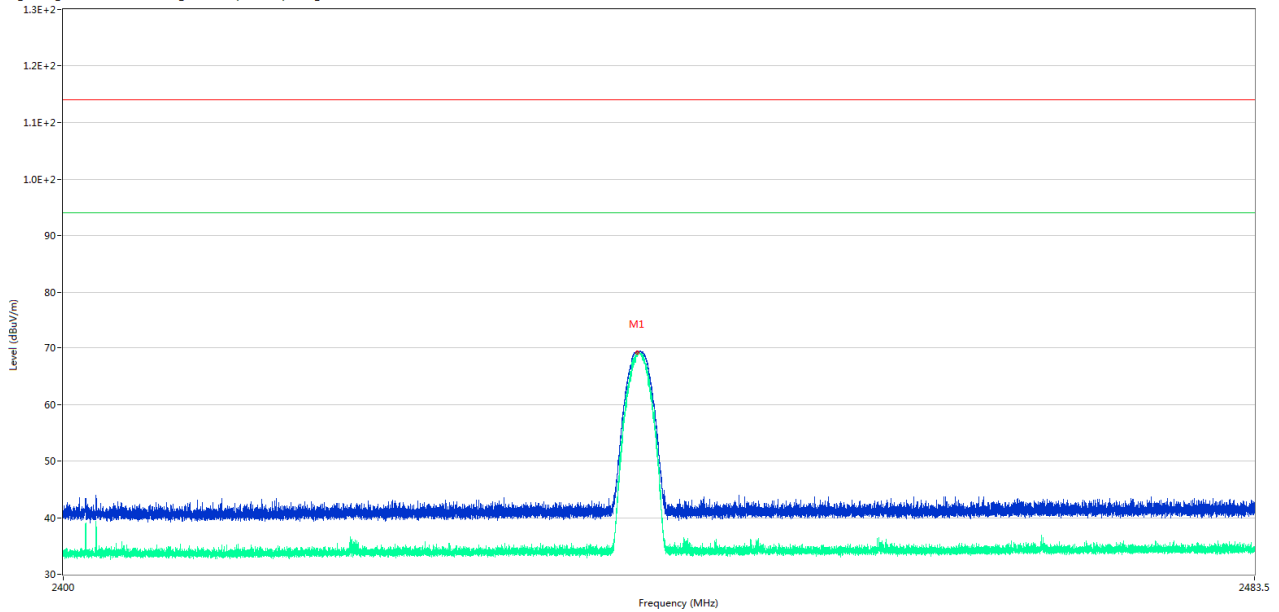

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2440.134	63.65	-19.67	114.0	50.35	Peak	325.40	150	Vertical	Pass


RF_FCC RE_FCC ID 2.4G wireless SRD_FCC 15.249(2.4G SRD)Power_2.4GHz-2.483GHz

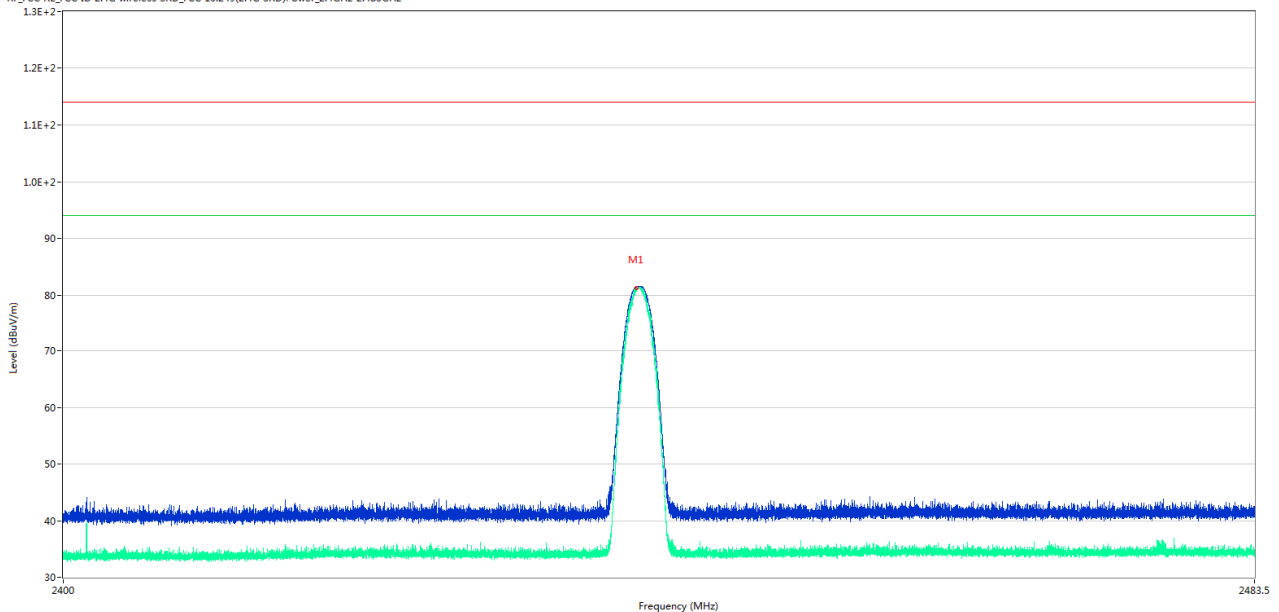

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2439.991	76.70	-19.67	114.0	37.30	Peak	214.60	150	Horizontal	Pass


Field Strength of Fundamental@3m (GFSK-High Channel)

RF_FCC RE_FCC ID 2.4G wireless SRD_FCC 15.249(2.4G SRD)Power_2.4GHz-2.483GHz

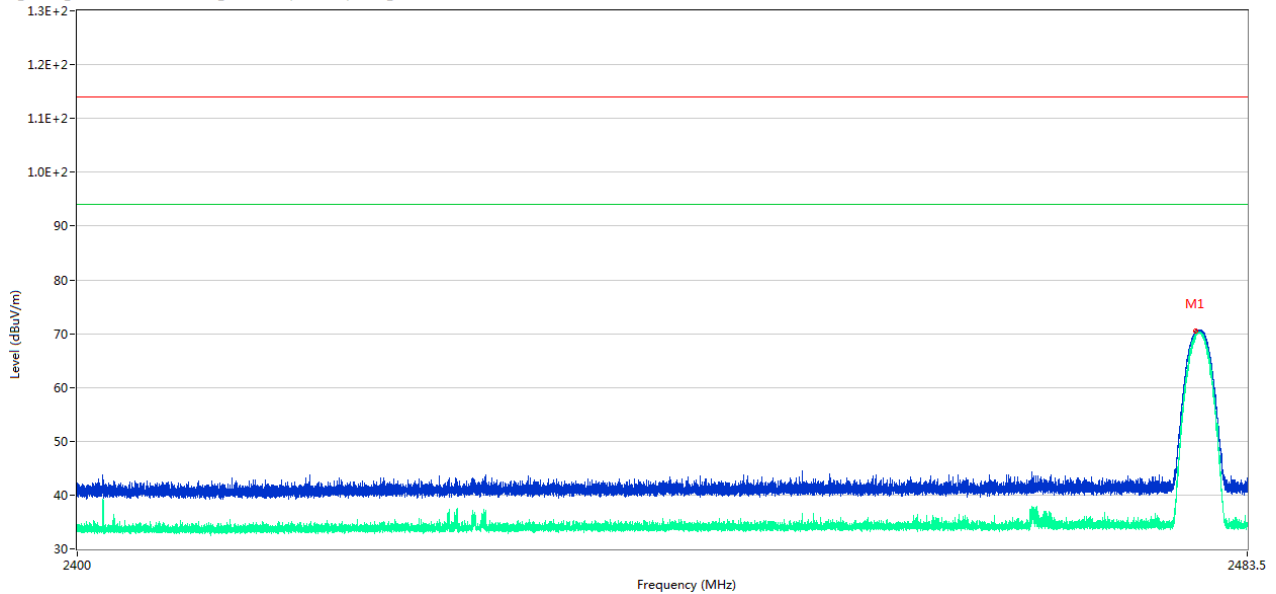

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2479.839	70.72	-19.49	114.0	43.28	Peak	211.30	150	Vertical	Pass


RF_FCC RE_FCC ID 2.4G wireless SRD_FCC 15.249(2.4G SRD)Power_2.4GHz-2.483GHz

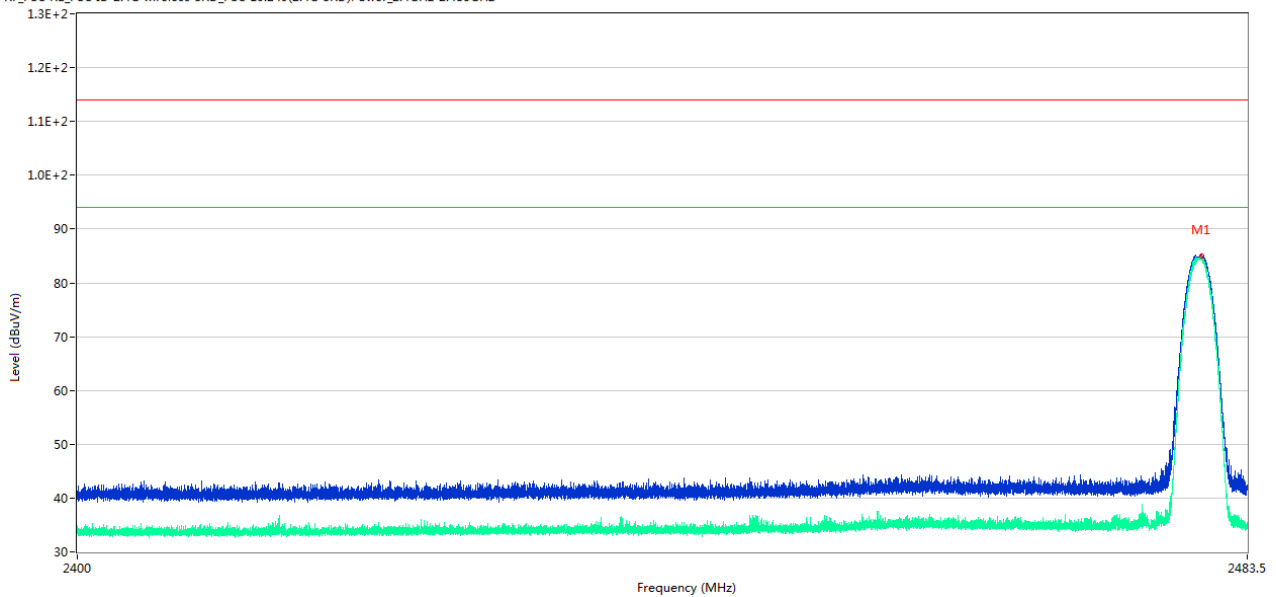

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2480.193	85.12	-19.49	114.0	28.88	Peak	68.60	150	Horizontal	Pass


Field Strength of Fundamental@3m (4/π DQPSK-Low Channel)

RF_FCC RE_FCC ID 2.4G wireless SRD_FCC 15.249(2.4G SRD)Power_2.4GHz-2.483GHz

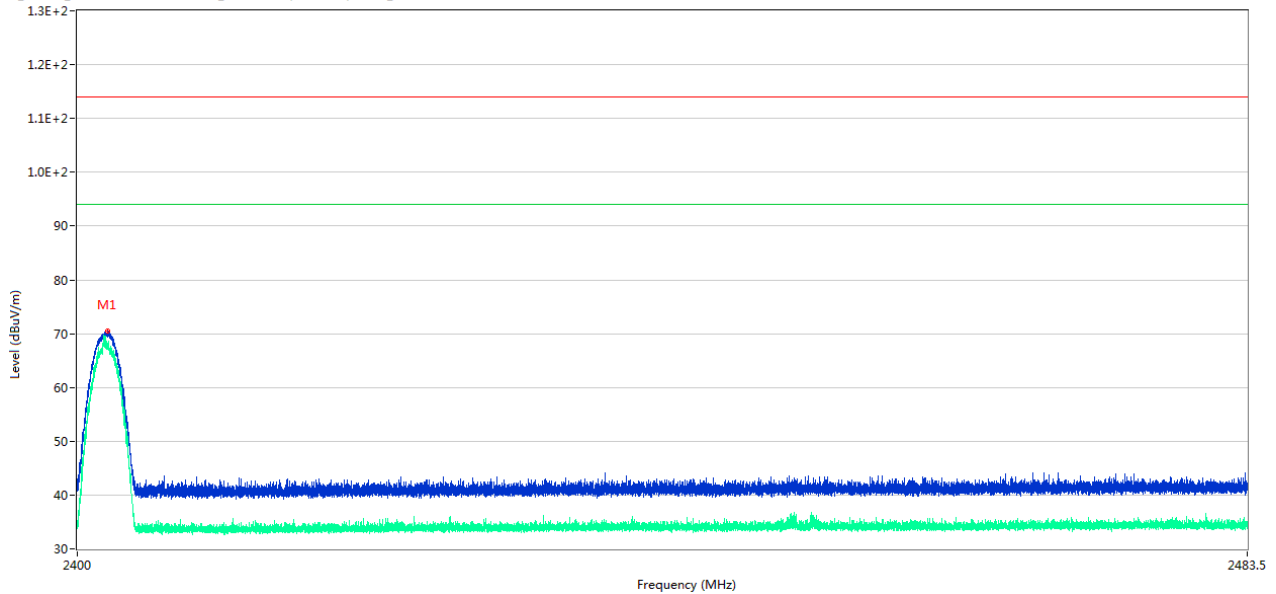

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2402.146	70.46	-19.67	114.0	43.54	Peak	323.00	150	Vertical	Pass


RF_FCC RE_FCC ID 2.4G wireless SRD_FCC 15.249(2.4G SRD)Power_2.4GHz-2.483GHz

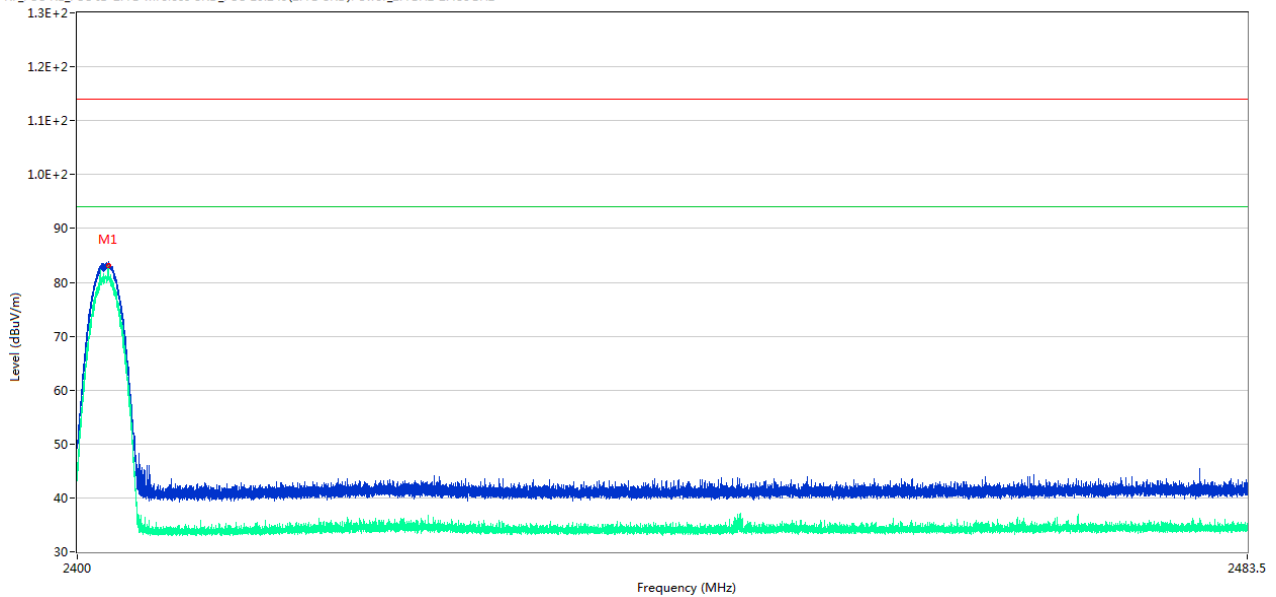

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2402.209	83.79	-19.67	114.0	30.21	Peak	214.60	150	Horizontal	Pass


Field Strength of Fundamental@3m (4/π DQPSK-Mid Channel)

RF_FCC RE_FCC ID 2.4G wireless SRD_FCC 15.249(2.4G SRD)Power_2.4GHz-2.483GHz

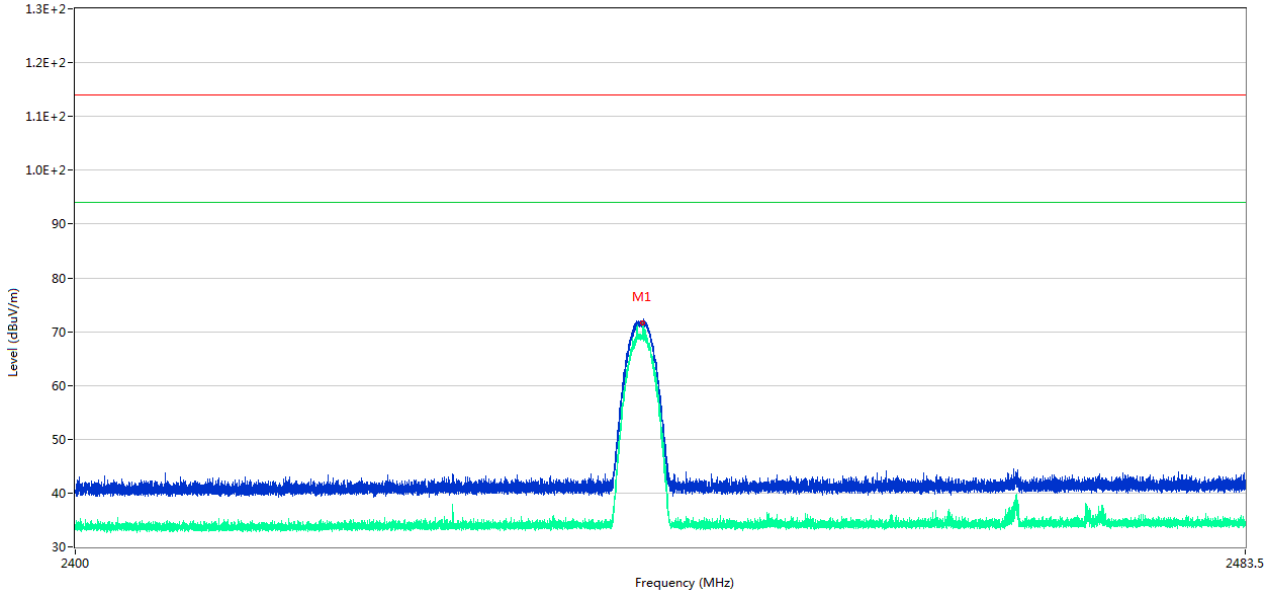

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2440.197	72.32	-19.50	114.0	41.68	Peak	323.00	150	Vertical	Pass


RF_FCC RE_FCC ID 2.4G wireless SRD_FCC 15.249(2.4G SRD)Power_2.4GHz-2.483GHz

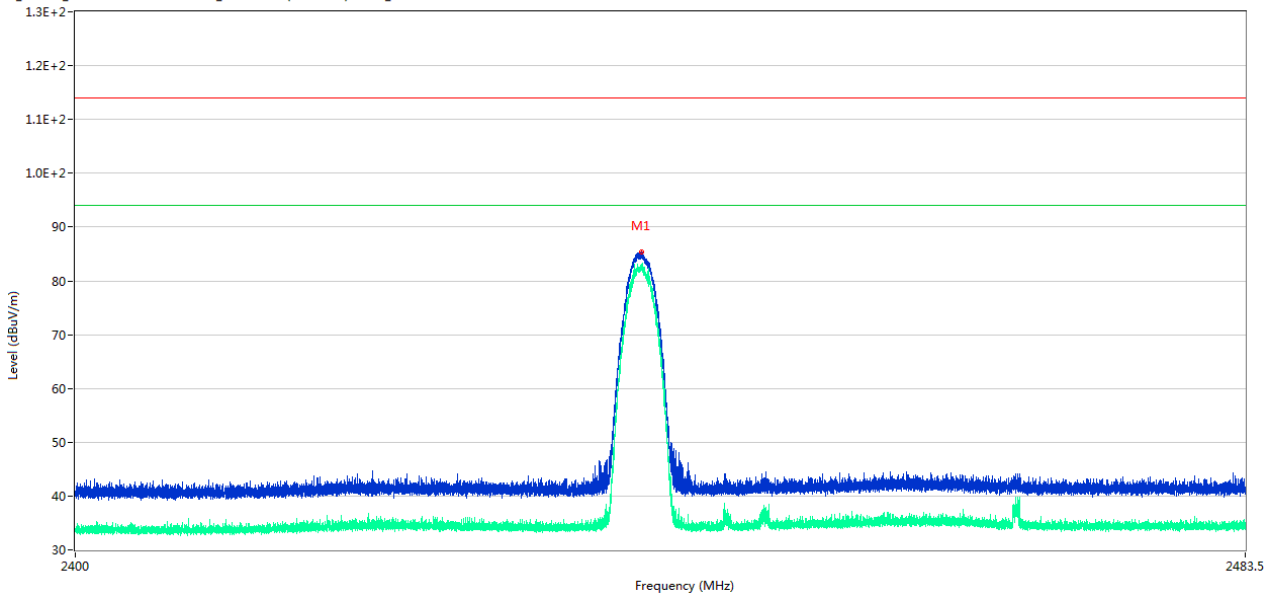

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2440.080	85.29	-19.50	114.0	28.71	Peak	211.30	150	Horizontal	Pass


Field Strength of Fundamental@3m (4/π DQPSK -High Channel)

RF_FCC RE_FCC ID 2.4G wireless SRD_FCC 15.249(2.4G SRD)Power_2.4GHz-2.483GHz

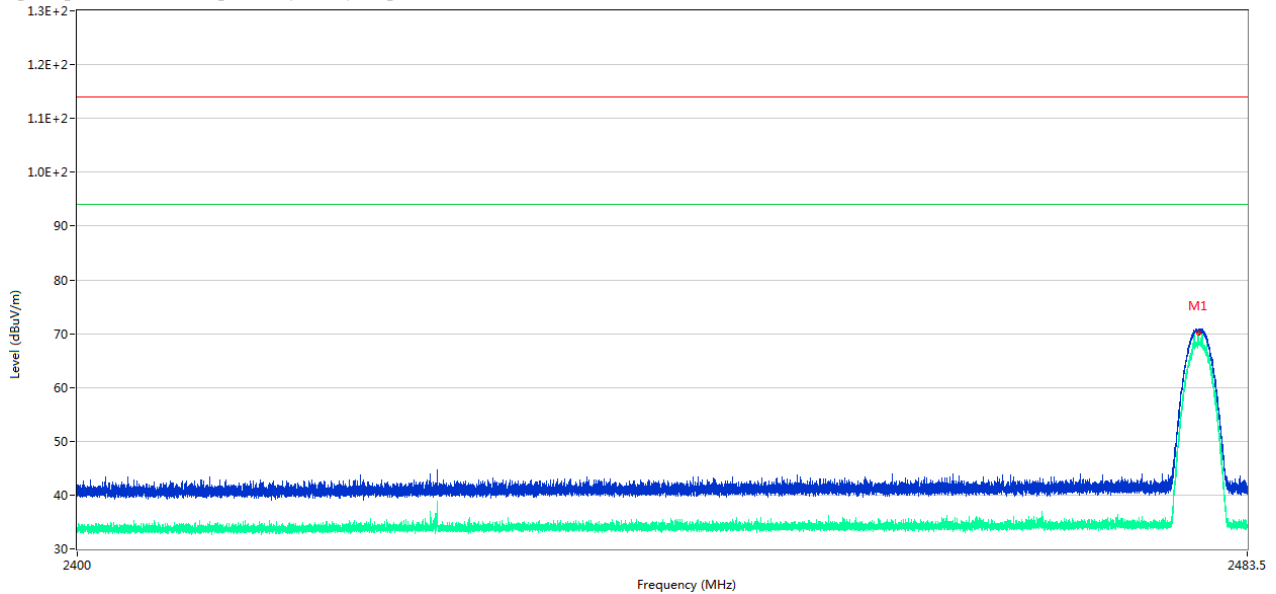

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2479.784	70.93	-19.49	114.0	43.07	Peak	214.60	150	Vertical	Pass

RF_FCC RE_FCC ID 2.4G wireless SRD_FCC 15.249(2.4G SRD)Power_2.4GHz-2.483GHz

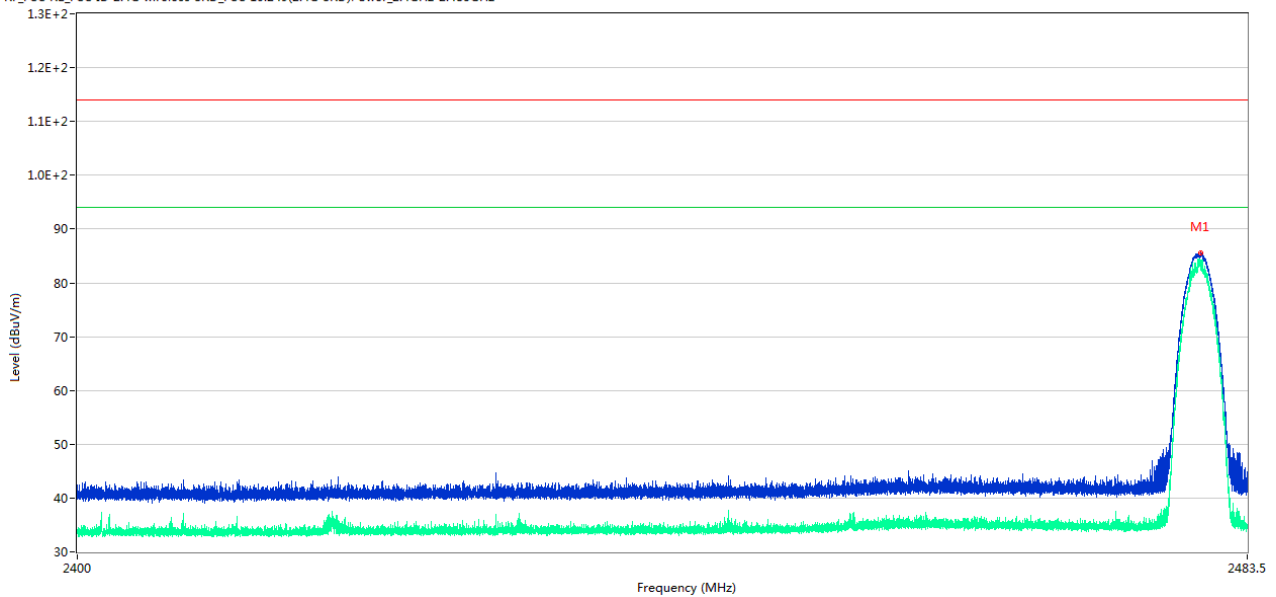

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2480.093	85.47	-19.49	114.0	28.53	Peak	78.80	150	Horizontal	Pass

4. RADIATED SPURIOUS EMISSIONS AND BAND EDGE

4.1. Limit

15.205 Restricted frequency band			
MHZ	MHz	MHZ	GHZ
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)

For harmonics and other spurious emissions:

Harmonics: 500 $\mu\text{V/m}$ = 54 $\text{dB}\mu\text{V/m}$ (at 3 m)

Other spurious emissions outside the band: comply with general limits in §15.209 (see table below)

§ 15.209 Radiated emission general limits			
Frequency (MHz)	Field Strength($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Distance(m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3


Note: Peak measurement may exceed average limit by up to 20 dB per §15.35(b). Restricted bands per §15.205 apply; emissions falling within these bands must meet the §15.209 limits.

Note:


- (1) Emission level $\text{dB}\mu\text{V}$ = 20 log Emission level $\mu\text{V/m}$.
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.2. Test Setup

(B) Radiated Emission Test Set-Up, Frequency Below 30MHz

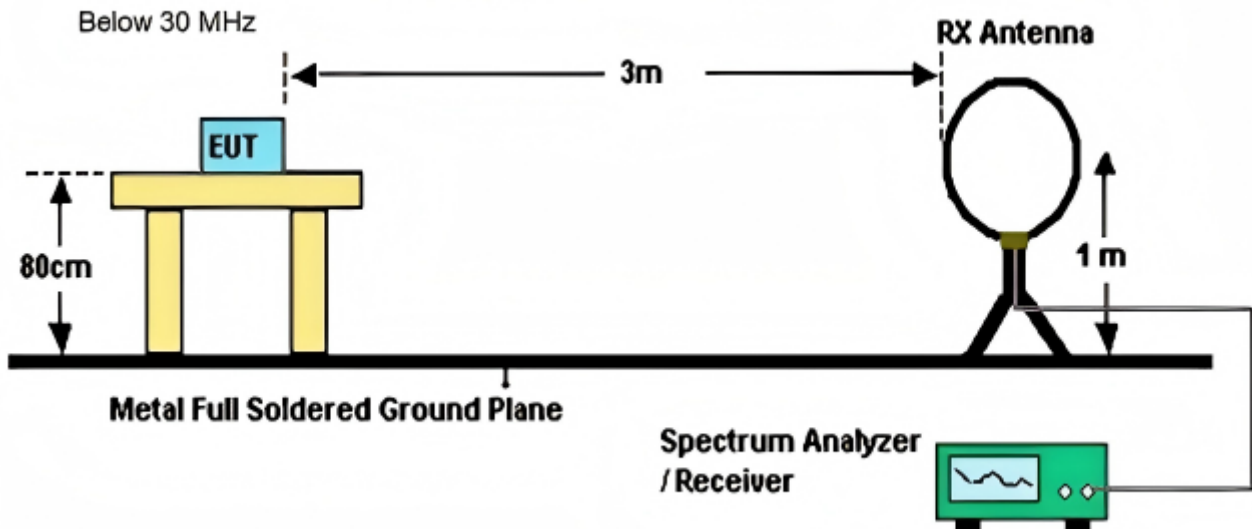


(C) Radiated Emission Test Set-Up, Frequency below 1000MHz Below 1 GHz and above 30 MHz

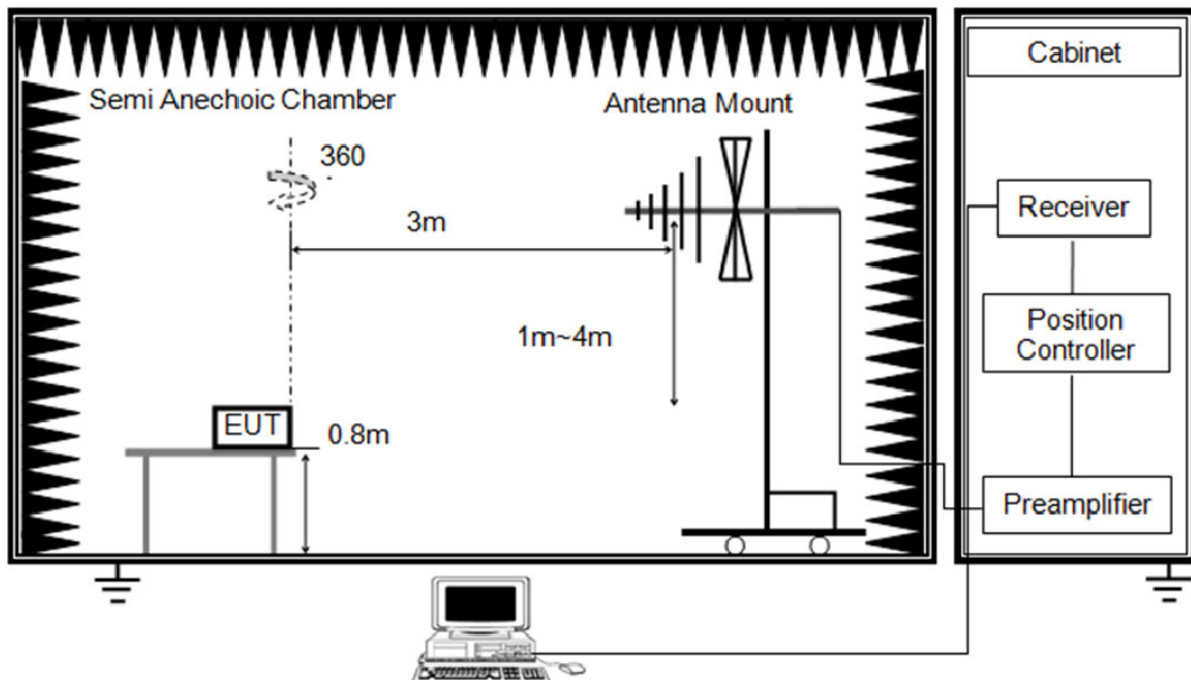

(D) Radiated Emission Test Set-Up, Frequency above 1GHz

Above 1GHz

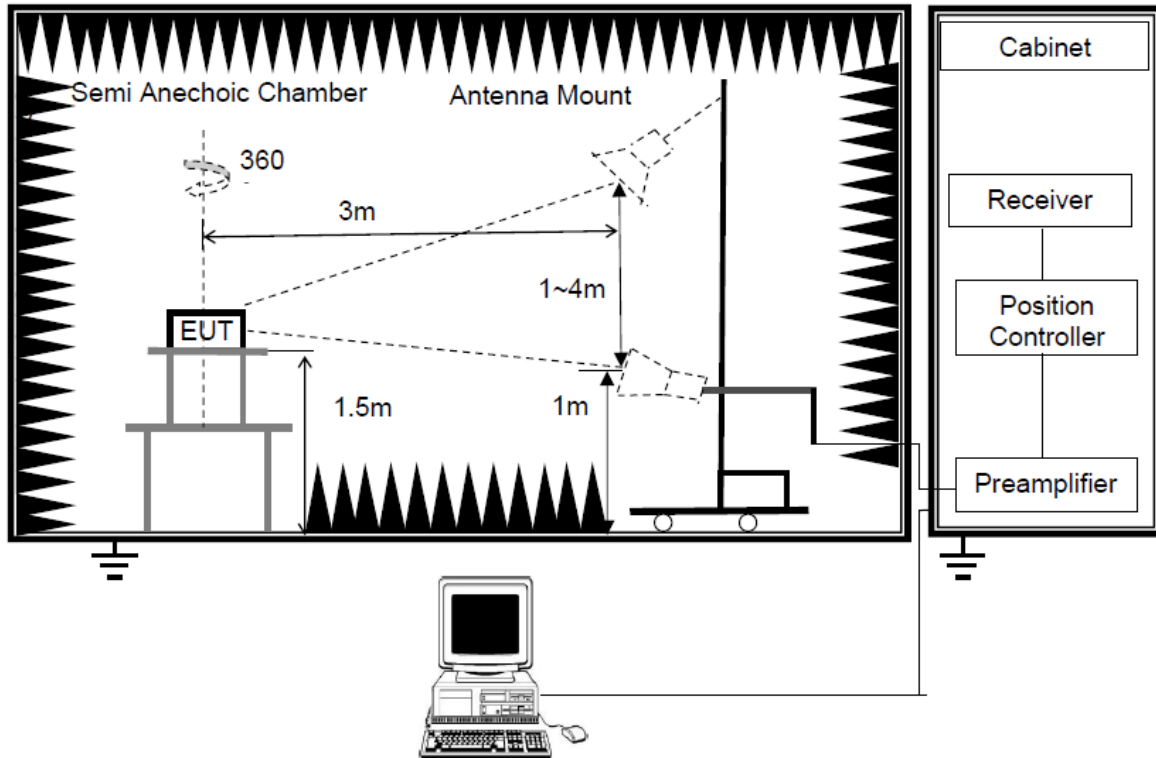

4.3. Spectrum Analyzer Setting

For 9KHz-150KHz	
Spectrum Parameters	Setting
RBW	300Hz (for Peak&AVG)/CISPR 200Hz (for QP)
VBW	300Hz (for Peak&AVG)/CISPR 200Hz (for QP)
Start frequency	9KHz
Stop frequency	150KHz
Sweep Time	Auto
Detector	PEAK/QP/AVG
Trace Mode	Max Hold

Note: For 9KHz-90KHz&110KHz-150KHz, the detector is average, other frequency is CISPR QP detector.

For 150KHz-30MHz	
Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

Note : For 150KHz-490KHz,the detector is average,other frequency is CISPR QP detector.

For 30MHz-1GHz	
Spectrum Parameters	Setting
RBW	120KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	1GHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For Above 1GHz		
Spectrum Parameters	Setting	
RBW	1MHz	
VBW	Peak Measurement: 3MHz	Average Measurement: 10Hz (using Peak detector)
Start frequency	1GHz	
Stop frequency	40GHz	
Sweep Time	Auto	
Detector	Peak	Peak with 10Hz VBW (for Average measurement)
Trace Mode	Max Hold	

4.4. Test Procedure

- Reference: ANSI C63.10:2020, Sections 6.3, 6.6
- Place the EUT on a non-metallic turntable at 0.8 m (below 1 GHz) or 1.5 m (above 1 GHz) height.
- Set the EUT to transmit continuously at maximum power.
- Rotate the turntable 360° and vary antenna height 1–4 m (below 1 GHz) to maximise emissions.
- For above 1 GHz, antenna height is typically 1.5 m, but can be varied if required.
- Measure emissions from 9 kHz up to the 10th harmonic of the fundamental (up to 25 GHz).
- Use Peak and Average detectors (or QP for below 1 GHz) as per section 4.3
- For band edge measurements, focus on 2310–2390 MHz (low) and 2483.5–2500 MHz (high).
- Record the highest emissions for each frequency range.

Note:

- For emissions above 1GHz, if peak level complies with average limit, then the average level is deemed to comply with average limit.
- The frequency 2402MHz ,2440MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.
- For 30-1000MHz Radiation emissions, GFSK mode all have been tested, only worse case: GFSK mode with CH40 2480MHz is reported.
- Radiated emission test from 9KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9KHz to 30MHz and not recorded in this report.
- The amplitude of 18GHz to 25GHz spurious emissions that are attenuated by more than 20dB below the permissible limit have no need to be reported.
- Radiated emission test from 25GHz to 40GHz of fundamental was verified, and no emission found except system noise floor in 25GHz to 40GHz and not recorded in this report.

4.5. Test Conditions


Radiated Emissions 30-1000MHz			
EUT:	Wireless Lavalier Microphone	M/N:	GT19
Test Voltage TX:	DC 3.7V from Rechargeable Battery		
Test Voltage RX:	DC 5V by Mobile phone		
Temperature:	22.8°C	Humidity:	42 % RH
Atmosphere Pressure:	100.1kPa		

Radiated Emissions Above 1GHz & Radiated Band Edge			
EUT:	Wireless Lavalier Microphone	M/N:	GT19
Test Voltage:	DC 3.7V from Rechargeable Battery		
Temperature:	23.2°C	Humidity:	49 % RH
Atmosphere Pressure:	100.6kPa		

4.6. Test Result

Radiated Emissions 30-1000MHz


EUT: Wireless Lavalier Microphone
M/N: GT19
Test Voltage: EUT TX: DC 3.7V from Rechargeable Battery
EUT RX: 5V DC by Mobile phone
Ant. Pol.: Vertical
Test Mode: TX Mode& RX Mode
Note: only worse case: GFSK mode with CH40 2480MHz is reported
Detailed results are shown below

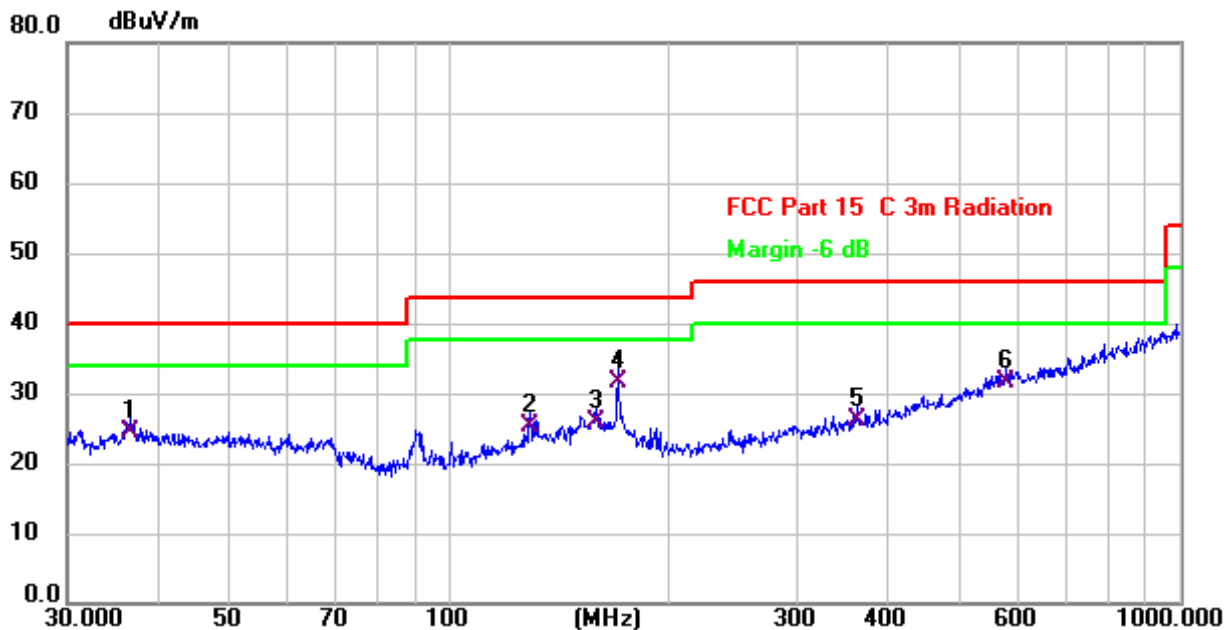

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	36.509	5.02	19.30	24.32	40.00	-15.68	QP	100	16	P	
2	129.014	6.29	18.96	25.25	43.50	-18.25	QP	100	263	P	
3	159.225	5.28	20.47	25.75	43.50	-17.75	QP	100	98	P	
4 *	170.195	12.25	19.34	31.59	43.50	-11.91	QP	100	149	P	
5	361.714	4.03	22.04	26.07	46.00	-19.93	QP	100	311	P	
6	576.644	5.43	26.27	31.70	46.00	-14.30	QP	100	194	P	

Remarks: 1). Level (dBuV/m) = Reading (dBuV/m) + Factor (dB/m)
2). Factor(dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-amplifier Gain (dB) (if applicable)
3). Margin(dB) = Limit (dBuV/m) - Level (dBuV/m)
4). No pre-amplifier was used for the 30 MHz – 1 GHz measurement.

EUT: Wireless Lavalier Microphone
M/N: GT19
Test Voltage: EUT TX: DC 3.7V from Rechargeable Battery
EUT RX: 5V DC by Mobile phone
Ant. Pol.: Horizontal
Test Mode: TX Mode& RX Mode
Note: only worse case: GFSK mode with CH40 2480MHz is reported
Detailed results are shown below

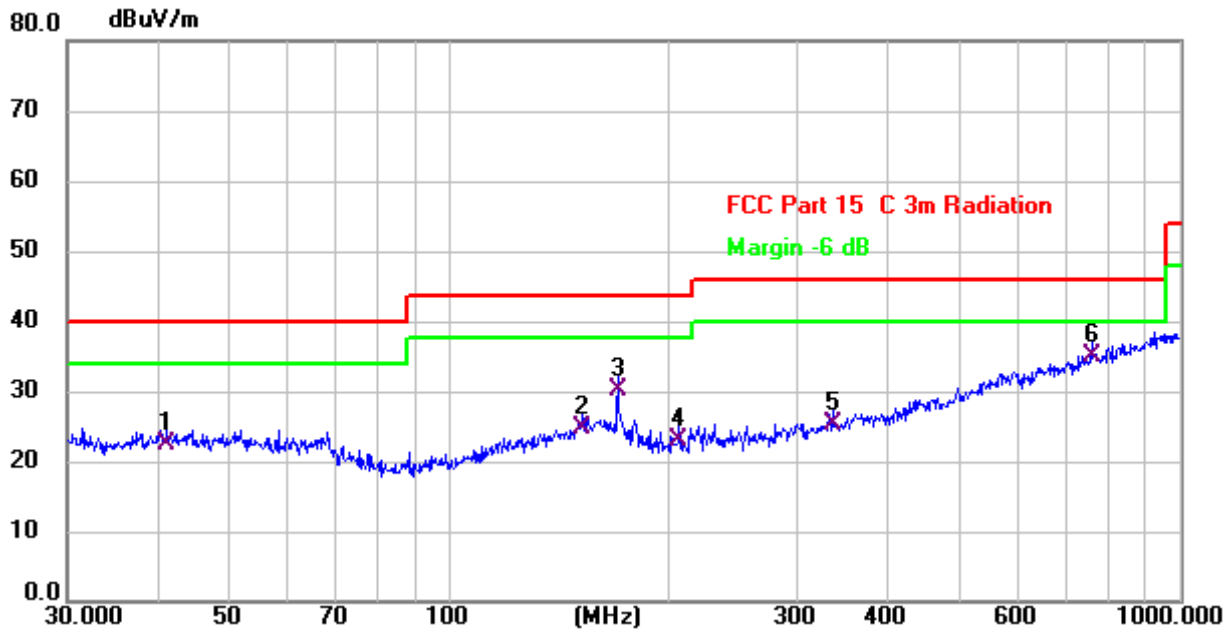

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	41.132	2.56	19.96	22.52	40.00	-17.48	QP	241	156	P	
2	152.130	4.25	20.36	24.61	43.50	-18.89	QP	156	23	P	
3	170.195	10.68	19.34	30.02	43.50	-13.48	QP	185	266	P	
4	206.398	5.96	16.95	22.91	43.50	-20.59	QP	206	351	P	
5	334.859	4.10	21.11	25.21	46.00	-20.79	QP	133	96	P	
6 *	758.041	5.43	29.47	34.90	46.00	-11.10	QP	100	252	P	

Remarks: 1). Level (dBuV/m) = Reading (dBuV/m) + Factor (dB/m)
2). Factor(dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-amplifier Gain (dB) (if applicable)
3). Margin(dB) = Limit (dBuV/m) - Level (dBuV/m)
4). No pre-amplifier was used for the 30 MHz – 1 GHz measurement.

Radiated Emissions Above 1GHz -GFSK

GFSK-CH01 2402MHz										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2261.531	40.44	-19.45	74.0	33.56	Peak	252.00	150	Vertical	Pass
1**	2261.531	31.47	-19.45	54.0	22.53	AV	252.00	150	Vertical	Pass
2	4731.000	49.01	-10.73	74.0	24.99	Peak	360.00	150	Vertical	Pass
2**	4731.000	40.39	-10.73	54.0	13.61	AV	360.00	150	Vertical	Pass
3	4804.000	45.05	-11.07	74.0	28.95	Peak	288.00	150	Vertical	Pass
3**	4804.000	38.88	-11.07	54.0	15.12	AV	288.00	150	Vertical	Pass
4	7205.750	48.97	-6.87	74.0	25.03	Peak	180.00	150	Vertical	Pass
4**	7205.750	42.64	-6.87	54.0	11.36	AV	180.00	150	Vertical	Pass
5	7900.500	53.04	-6.20	74.0	20.96	Peak	72.00	150	Vertical	Pass
5**	7900.500	43.16	-6.20	54.0	10.84	AV	72.00	150	Vertical	Pass
6	17927.000	52.73	1.41	74.0	21.27	Peak	72.00	150	Vertical	Pass
6**	17927.000	44.68	1.41	54.0	9.32	AV	72.00	150	Vertical	Pass

GFSK-CH01 2402MHz										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2392.396	41.32	-19.28	74.0	32.68	Peak	252.00	150	Horizontal	Pass
1**	2392.396	31.20	-19.28	54.0	22.80	AV	252.00	150	Horizontal	Pass
2	4779.500	49.82	-10.48	74.0	24.18	Peak	324.00	150	Horizontal	Pass
2**	4779.500	39.82	-10.48	54.0	14.18	AV	324.00	150	Horizontal	Pass
3	4804.000	45.38	-11.07	74.0	28.62	Peak	216.00	150	Horizontal	Pass
3**	4804.000	38.36	-11.07	54.0	15.64	AV	216.00	150	Horizontal	Pass
4	7205.750	48.83	-6.87	74.0	25.17	Peak	324.00	150	Horizontal	Pass
4**	7205.750	43.48	-6.87	54.0	10.52	AV	324.00	150	Horizontal	Pass
5	7787.250	52.70	-6.26	74.0	21.30	Peak	360.00	150	Horizontal	Pass
5**	7787.250	43.47	-6.26	54.0	10.53	AV	360.00	150	Horizontal	Pass
6	17932.501	53.43	1.62	74.0	20.57	Peak	360.00	150	Horizontal	Pass
6**	17932.501	45.00	1.62	54.0	9.00	AV	360.00	150	Horizontal	Pass

GFSK-CH20 2440MHz										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2393.396	41.66	-19.29	74.0	32.34	Peak	324.00	150	Horizontal	Pass
1**	2393.396	30.73	-19.29	54.0	23.27	AV	324.00	150	Horizontal	Pass
2	4738.000	49.43	-10.68	74.0	24.57	Peak	36.00	150	Horizontal	Pass
2**	4738.000	39.84	-10.68	54.0	14.16	AV	36.00	150	Horizontal	Pass
3	4879.750	46.29	-10.57	74.0	27.71	Peak	288.00	150	Horizontal	Pass
3**	4879.750	39.27	-10.57	54.0	14.73	AV	288.00	150	Horizontal	Pass
4	7319.750	50.55	-6.79	74.0	23.45	Peak	36.00	150	Horizontal	Pass
4**	7319.750	42.50	-6.79	54.0	11.50	AV	36.00	150	Horizontal	Pass
5	7663.250	53.22	-6.32	74.0	20.78	Peak	324.00	150	Horizontal	Pass
5**	7663.250	43.20	-6.32	54.0	10.80	AV	324.00	150	Horizontal	Pass
6	17934.500	52.88	1.61	74.0	21.12	Peak	288.00	150	Horizontal	Pass
6**	17934.500	44.16	1.61	54.0	9.84	AV	288.00	150	Horizontal	Pass

GFSK-CH20 2440MHz										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2303.551	40.72	-19.52	74.0	33.28	Peak	360.00	150	Vertical	Pass
1**	2303.551	31.00	-19.52	54.0	23.00	AV	360.00	150	Vertical	Pass
2	4772.750	49.14	-10.52	74.0	24.86	Peak	36.00	150	Vertical	Pass
2**	4772.750	39.84	-10.52	54.0	14.16	AV	36.00	150	Vertical	Pass
3	4879.750	45.49	-10.57	74.0	28.51	Peak	180.00	150	Vertical	Pass
3**	4879.750	39.41	-10.57	54.0	14.59	AV	180.00	150	Vertical	Pass
4	7319.750	49.64	-6.79	74.0	24.36	Peak	288.00	150	Vertical	Pass
4**	7319.750	43.32	-6.79	54.0	10.68	AV	288.00	150	Vertical	Pass
5	7531.750	52.83	-7.31	74.0	21.17	Peak	324.00	150	Vertical	Pass
5**	7531.750	41.73	-7.31	54.0	12.27	AV	324.00	150	Vertical	Pass
6	17935.999	52.83	1.58	74.0	21.17	Peak	36.00	150	Vertical	Pass
6**	17935.999	44.76	1.58	54.0	9.24	AV	36.00	150	Vertical	Pass

GFSK-CH40 2480MHz										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2368.684	40.50	-19.55	74.0	33.50	Peak	36.00	150	Horizontal	Pass
1**	2368.684	30.87	-19.55	54.0	23.13	AV	36.00	150	Horizontal	Pass
2	4765.000	49.02	-10.56	74.0	24.98	Peak	144.00	150	Horizontal	Pass
2**	4765.000	40.79	-10.56	54.0	13.21	AV	144.00	150	Horizontal	Pass
3	4959.750	53.16	-10.88	74.0	20.84	Peak	216.00	150	Horizontal	Pass
3**	4959.750	49.11	-10.88	54.0	4.89	AV	216.00	150	Horizontal	Pass
4	7439.750	50.80	-6.77	74.0	23.20	Peak	360.00	150	Horizontal	Pass
4**	7439.750	43.78	-6.77	54.0	10.22	AV	360.00	150	Horizontal	Pass
5	7654.250	52.94	-6.42	74.0	21.06	Peak	108.00	150	Horizontal	Pass
5**	7654.250	43.09	-6.42	54.0	10.91	AV	108.00	150	Horizontal	Pass
6	17806.000	52.80	0.58	74.0	21.20	Peak	72.00	150	Horizontal	Pass
6**	17806.000	43.38	0.58	54.0	10.62	AV	72.00	150	Horizontal	Pass

GFSK-CH40 2480MHz										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2252.826	41.69	-19.60	74.0	32.31	Peak	108.00	150	Vertical	Pass
1**	2252.826	30.64	-19.60	54.0	23.36	AV	108.00	150	Vertical	Pass
2	4791.750	48.69	-10.67	74.0	25.31	Peak	72.00	150	Vertical	Pass
2**	4791.750	39.39	-10.67	54.0	14.61	AV	72.00	150	Vertical	Pass
3	4959.750	46.47	-10.88	74.0	27.53	Peak	72.00	150	Vertical	Pass
3**	4959.750	39.78	-10.88	54.0	14.22	AV	72.00	150	Vertical	Pass
4	7439.750	51.14	-6.77	74.0	22.86	Peak	216.00	150	Vertical	Pass
4**	7439.750	42.79	-6.77	54.0	11.21	AV	216.00	150	Vertical	Pass
5	7786.000	52.57	-6.25	74.0	21.43	Peak	72.00	150	Vertical	Pass
5**	7786.000	42.85	-6.25	54.0	11.15	AV	72.00	150	Vertical	Pass
6	17942.000	53.42	1.44	74.0	20.58	Peak	288.00	150	Vertical	Pass
6**	17942.000	44.85	1.44	54.0	9.15	AV	288.00	150	Vertical	Pass

Note:

- Results (dBuV/m) = Raw Value (dBuV) + Factor (dB/m)
- Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier
- Margin value = Limit - Results.

Radiated Band Edge - GFSK

GFSK-CH01 2402MHz-Low Band Edge										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2341.020	41.59	-19.65	74.0	32.41	Peak	252.00	150	Horizontal	Pass
1**	2341.020	30.10	-19.65	54.0	23.90	AV	252.00	150	Horizontal	Pass
2	2389.970	39.45	-19.56	74.0	34.55	Peak	360.00	150	Horizontal	Pass
2**	2389.970	29.82	-19.56	54.0	24.18	AV	360.00	150	Horizontal	Pass
3	2399.980	50.31	-19.64	74.0	23.69	Peak	108.00	150	Horizontal	Pass
3**	2399.980	32.26	-19.64	54.0	21.74	AV	108.00	150	Horizontal	Pass

GFSK-CH01 2402MHz-Low Band Edge										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2313.740	41.88	-19.40	74.0	32.12	Peak	72.00	150	Vertical	Pass
1**	2313.740	30.18	-19.40	54.0	23.82	AV	72.00	150	Vertical	Pass
2	2389.970	39.12	-19.56	74.0	34.88	Peak	36.00	150	Vertical	Pass
2**	2389.970	29.78	-19.56	54.0	24.22	AV	36.00	150	Vertical	Pass
3	2399.980	41.33	-19.64	74.0	32.67	Peak	360.00	150	Vertical	Pass
3**	2399.980	29.55	-19.64	54.0	24.45	AV	360.00	150	Vertical	Pass

GFSK-CH40 2480MHz-High Band Edge										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.497	39.26	-19.50	74.0	34.74	Peak	360.00	150	Vertical	Pass
1**	2483.497	30.11	-19.50	54.0	23.89	AV	360.00	150	Vertical	Pass
2	2488.205	41.88	-19.50	74.0	32.12	Peak	72.00	150	Vertical	Pass
2**	2488.205	30.42	-19.50	54.0	23.58	AV	72.00	150	Vertical	Pass
3	2494.890	42.51	-19.49	74.0	31.49	Peak	360.00	150	Vertical	Pass
3**	2494.890	30.74	-19.49	54.0	23.26	AV	360.00	150	Vertical	Pass

GFSK-CH40 2480MHz-High Band Edge										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.497	40.18	-19.50	74.0	33.82	Peak	108.00	150	Horizontal	Pass
1**	2483.497	31.22	-19.50	54.0	22.78	AV	108.00	150	Horizontal	Pass
2	2488.765	42.75	-19.51	74.0	31.25	Peak	360.00	150	Horizontal	Pass
2**	2488.765	31.25	-19.51	54.0	22.75	AV	360.00	150	Horizontal	Pass
3	2493.052	43.37	-19.49	74.0	30.63	Peak	36.00	150	Horizontal	Pass
3**	2493.052	31.88	-19.49	54.0	22.12	AV	36.00	150	Horizontal	Pass

Note:

1. Results (dBuV/m) = Raw Value (dBuV) + Factor (dB/m)
2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier
3. Margin value = Limit - Results.

Radiated Emissions Above 1GHz -4/π DQPSK

4/π DQPSK -CH01 2402MHz										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2289.044	40.90	-19.48	74.0	33.10	Peak	108.00	150	Vertical	Pass
1**	2289.044	30.45	-19.48	54.0	23.55	AV	108.00	150	Vertical	Pass
2	4316.500	49.24	-12.29	74.0	24.76	Peak	252.00	150	Vertical	Pass
2**	4316.500	40.03	-12.29	54.0	13.97	AV	252.00	150	Vertical	Pass
3	4804.000	45.63	-11.07	74.0	28.37	Peak	108.00	150	Vertical	Pass
3**	4804.000	40.25	-11.07	54.0	13.75	AV	108.00	150	Vertical	Pass
4	7205.750	48.19	-6.87	74.0	25.81	Peak	288.00	150	Vertical	Pass
4**	7205.750	41.41	-6.87	54.0	12.59	AV	288.00	150	Vertical	Pass
5	7397.500	52.85	-6.83	74.0	21.15	Peak	252.00	150	Vertical	Pass
5**	7397.500	43.28	-6.83	54.0	10.72	AV	252.00	150	Vertical	Pass
6	17924.000	52.59	1.18	74.0	21.41	Peak	324.00	150	Vertical	Pass
6**	17924.000	44.30	1.18	54.0	9.70	AV	324.00	150	Vertical	Pass

4/π DQPSK -CH01 2402MHz										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2349.975	40.73	-19.68	74.0	33.27	Peak	252.00	150	Horizontal	Pass
1**	2349.975	31.18	-19.68	54.0	22.82	AV	252.00	150	Horizontal	Pass
2	4783.250	48.93	-10.50	74.0	25.07	Peak	72.00	150	Horizontal	Pass
2**	4783.250	40.68	-10.50	54.0	13.32	AV	72.00	150	Horizontal	Pass
3	4804.000	48.10	-11.07	74.0	25.90	Peak	144.00	150	Horizontal	Pass
3**	4804.000	41.68	-11.07	54.0	12.32	AV	144.00	150	Horizontal	Pass
4	7205.750	48.18	-6.87	74.0	25.82	Peak	360.00	150	Horizontal	Pass
4**	7205.750	42.41	-6.87	54.0	11.59	AV	360.00	150	Horizontal	Pass
5	7643.500	52.76	-6.59	74.0	21.24	Peak	288.00	150	Horizontal	Pass
5**	7643.500	43.07	-6.59	54.0	10.93	AV	288.00	150	Horizontal	Pass
6	17818.499	53.46	1.06	74.0	20.54	Peak	324.00	150	Horizontal	Pass
6**	17818.499	44.60	1.06	54.0	9.40	AV	324.00	150	Horizontal	Pass

4/π DQPSK -CH20 2440MHz										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2339.470	40.90	-19.71	74.0	33.10	Peak	288.00	150	Horizontal	Pass
1**	2339.470	30.61	-19.71	54.0	23.39	AV	288.00	150	Horizontal	Pass
2	4779.750	49.07	-10.48	74.0	24.93	Peak	72.00	150	Horizontal	Pass
2**	4779.750	39.31	-10.48	54.0	14.69	AV	72.00	150	Horizontal	Pass
3	4879.750	51.28	-10.57	74.0	22.72	Peak	216.00	150	Horizontal	Pass
3**	4879.750	46.21	-10.57	54.0	7.79	AV	216.00	150	Horizontal	Pass
4	7319.750	49.45	-6.79	74.0	24.55	Peak	252.00	150	Horizontal	Pass
4**	7319.750	42.19	-6.79	54.0	11.81	AV	252.00	150	Horizontal	Pass
5	7726.750	52.50	-6.31	74.0	21.50	Peak	36.00	150	Horizontal	Pass
5**	7726.750	43.33	-6.31	54.0	10.67	AV	36.00	150	Horizontal	Pass
6	17938.500	52.75	1.54	74.0	21.25	Peak	144.00	150	Horizontal	Pass
6**	17938.500	45.69	1.54	54.0	8.31	AV	144.00	150	Horizontal	Pass

4/π DQPSK -CH20 2440MHz										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2208.404	41.14	-19.83	74.0	32.86	Peak	216.00	150	Vertical	Pass
1**	2208.404	31.60	-19.83	54.0	22.40	AV	216.00	150	Vertical	Pass
2	4778.750	49.43	-10.48	74.0	24.57	Peak	108.00	150	Vertical	Pass
2**	4778.750	41.14	-10.48	54.0	12.86	AV	108.00	150	Vertical	Pass
3	4879.750	46.70	-10.57	74.0	27.30	Peak	324.00	150	Vertical	Pass
3**	4879.750	39.12	-10.57	54.0	14.88	AV	324.00	150	Vertical	Pass
4	7319.750	49.99	-6.79	74.0	24.01	Peak	324.00	150	Vertical	Pass
4**	7319.750	42.36	-6.79	54.0	11.64	AV	324.00	150	Vertical	Pass
5	7891.000	52.87	-6.06	74.0	21.13	Peak	72.00	150	Vertical	Pass
5**	7891.000	43.93	-6.06	54.0	10.07	AV	72.00	150	Vertical	Pass
6	17924.499	53.15	1.22	74.0	20.85	Peak	324.00	150	Vertical	Pass
6**	17924.499	44.23	1.22	54.0	9.77	AV	324.00	150	Vertical	Pass

4/π DQPSK -CH40 2480MHz										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2369.584	40.61	-19.53	74.0	33.39	Peak	324.00	150	Horizontal	Pass
1**	2369.584	31.46	-19.53	54.0	22.54	AV	324.00	150	Horizontal	Pass
2	4763.500	50.67	-10.56	74.0	23.33	Peak	360.00	150	Horizontal	Pass
2**	4763.500	40.01	-10.56	54.0	13.99	AV	360.00	150	Horizontal	Pass
3	4959.750	52.45	-10.88	74.0	21.55	Peak	72.00	150	Horizontal	Pass
3**	4959.750	47.34	-10.88	54.0	6.66	AV	72.00	150	Horizontal	Pass
4	7439.750	48.27	-6.77	74.0	25.73	Peak	72.00	150	Horizontal	Pass
4**	7439.750	42.40	-6.77	54.0	11.60	AV	72.00	150	Horizontal	Pass
5	7728.500	53.20	-6.31	74.0	20.80	Peak	180.00	150	Horizontal	Pass
5**	7728.500	44.04	-6.31	54.0	9.96	AV	180.00	150	Horizontal	Pass
6	17931.000	52.76	1.64	74.0	21.24	Peak	108.00	150	Horizontal	Pass
6**	17931.000	44.36	1.64	54.0	9.64	AV	108.00	150	Horizontal	Pass

4/π DQPSK -CH40 2480MHz										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2322.961	40.34	-19.63	74.0	33.66	Peak	288.00	150	Vertical	Pass
1**	2322.961	32.10	-19.63	54.0	21.90	AV	288.00	150	Vertical	Pass
2	4767.250	49.17	-10.55	74.0	24.83	Peak	288.00	150	Vertical	Pass
2**	4767.250	40.56	-10.55	54.0	13.44	AV	288.00	150	Vertical	Pass
3	4959.750	46.08	-10.88	74.0	27.92	Peak	144.00	150	Vertical	Pass
3**	4959.750	39.84	-10.88	54.0	14.16	AV	144.00	150	Vertical	Pass
4	7439.750	48.68	-6.77	74.0	25.32	Peak	360.00	150	Vertical	Pass
4**	7439.750	42.21	-6.77	54.0	11.79	AV	360.00	150	Vertical	Pass
5	7926.750	54.29	-6.02	74.0	19.71	Peak	108.00	150	Vertical	Pass
5**	7926.750	43.32	-6.02	54.0	10.68	AV	108.00	150	Vertical	Pass
6	17924.000	53.08	1.18	74.0	20.92	Peak	288.00	150	Vertical	Pass
6**	17924.000	44.28	1.18	54.0	9.72	AV	288.00	150	Vertical	Pass

Note:

1. Results (dBuV/m) = Raw Value (dBuV) + Factor (dB/m)
2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier
3. Margin value = Limit - Results.

Radiated Band Edge - GFSK

4/π DQPSK -CH01 2402MHz-Low Band Edge										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2322.045	42.02	-19.49	74.0	31.98	Peak	108.00	150	Horizontal	Pass
1**	2322.045	30.57	-19.49	54.0	23.43	AV	108.00	150	Horizontal	Pass
2	2389.970	38.93	-19.56	74.0	35.07	Peak	72.00	150	Horizontal	Pass
2**	2389.970	29.96	-19.56	54.0	24.04	AV	72.00	150	Horizontal	Pass
3	2399.980	44.35	-19.64	74.0	29.65	Peak	36.00	150	Horizontal	Pass
3**	2399.980	34.19	-19.64	54.0	19.81	AV	36.00	150	Horizontal	Pass

4/π DQPSK -CH01 2402MHz-Low Band Edge										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2323.365	42.39	-19.51	74.0	31.61	Peak	108.00	150	Vertical	Pass
1**	2323.365	30.24	-19.51	54.0	23.76	AV	108.00	150	Vertical	Pass
2	2389.970	38.77	-19.56	74.0	35.23	Peak	324.00	150	Vertical	Pass
2**	2389.970	29.78	-19.56	54.0	24.22	AV	324.00	150	Vertical	Pass
3	2399.980	38.97	-19.64	74.0	35.03	Peak	360.00	150	Vertical	Pass
3**	2399.980	29.73	-19.64	54.0	24.27	AV	360.00	150	Vertical	Pass

4/π DQPSK -CH40 2480MHz-High Band Edge										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.497	40.45	-19.50	74.0	33.55	Peak	36.00	150	Vertical	Pass
1**	2483.497	30.21	-19.50	54.0	23.79	AV	36.00	150	Vertical	Pass
2	2486.560	42.47	-19.50	74.0	31.53	Peak	108.00	150	Vertical	Pass
2**	2486.560	30.44	-19.50	54.0	23.56	AV	108.00	150	Vertical	Pass
3	2497.183	42.04	-19.48	74.0	31.96	Peak	324.00	150	Vertical	Pass
3**	2497.183	30.74	-19.48	54.0	23.26	AV	324.00	150	Vertical	Pass

4/π DQPSK -CH40 2480MHz-High Band Edge										
No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.497	41.04	-19.50	74.0	32.96	Peak	36.00	150	Horizontal	Pass
1**	2483.497	31.04	-19.50	54.0	22.96	AV	36.00	150	Horizontal	Pass
2	2483.707	43.56	-19.50	74.0	30.44	Peak	0.00	150	Horizontal	Pass
2**	2483.707	30.92	-19.50	54.0	23.08	AV	0.00	150	Horizontal	Pass
3	2494.400	43.73	-19.49	74.0	30.27	Peak	360.00	150	Horizontal	Pass
3**	2494.400	32.38	-19.49	54.0	21.62	AV	360.00	150	Horizontal	Pass

Note:

1. Results (dBuV/m) = Raw Value (dBuV) + Factor (dB/m)
2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier
3. Margin value = Limit - Results.


5. 20DB BANDWIDTH

5.1. Limit

According to FCC §15.215(c), for devices operating under the provisions of this section, the 20 dB bandwidth of the emission shall be contained within the frequency band designated in the rule section under which the equipment is operated. No specific minimum bandwidth is required.

If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band (i.e., 2400-2483.5 MHz) in order to minimize the possibility of out-of-band operation.

5.2. Test Setup

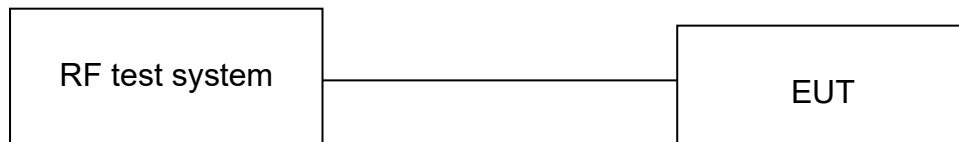

5.3. Spectrum Analyzer Setting

20dB Bandwidth	
Spectrum Parameters	Setting
RBW	30KHz
VBW	100KHz
Span	3MHz (or sufficient to display the emission)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

5.4. Test Procedure

- The test according to ANSI C63.10 clause Section 6.9.
- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 5.3.
- Set the EUT to transmit continuously at maximum power on the selected channel.
- Allow the trace to stabilize, use the “ndB down” function (set to 20 dB) to measure the 20 dB bandwidth.
- Repeat above procedures until all channels and test modes were measured.
- Record the results in the test report.

5.5. Test Conditions

EUT:	Wireless Lavalier Microphone	M/N:	GT19
Test Voltage:	DC 3.7V from Rechargeable Battery		
Temperature:	22.9°C	Humidity:	50 % RH
Atmosphere Pressure:	100.6kPa		

5.6. Test Result

Test Mode	Antenna	Channel& Frequency	20dB Bandwidth	Result
		MHz	MHz	
GFSK	Ant1	CH01 2402	0.968	PASS
		CH20 2440	0.975	
		CH40 2480	0.975	
4/π DQPSK	Ant1	CH01 2402	1.297	PASS
		CH20 2440	1.297	
		CH40 2480	1.297	
Note: The measured bandwidth is fully contained within the 2400-2483.5 MHz band.				

5.7.Original Test record



6. AC POWER LINE CONDUCTED EMISSIONS


6.1. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note:

1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

6.2. Test Setup

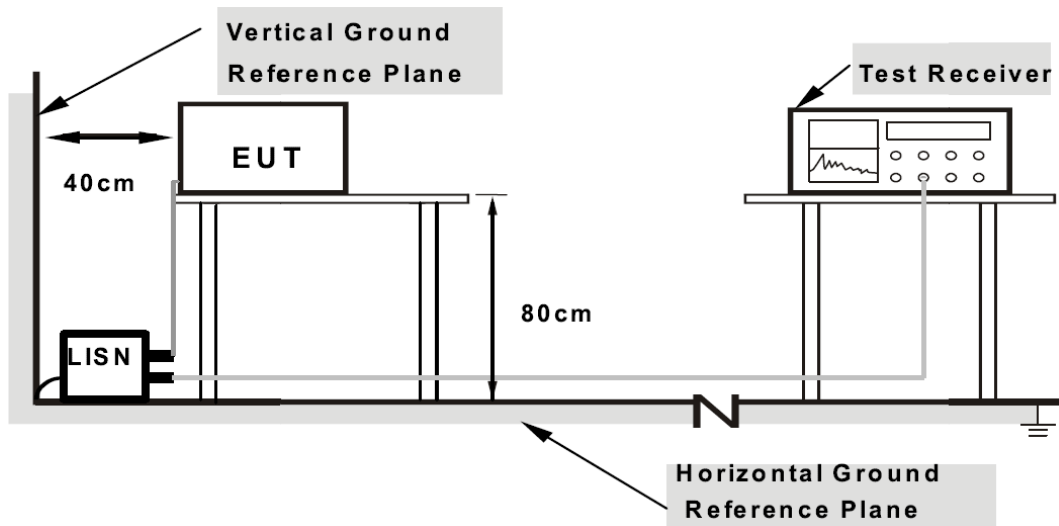

6.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP/AVG
Trace Mode	Max Hold

6.4. Test Procedure

- Reference: ANSI C63.10:2020, Section 6.2.
- The EUT was placed on a non-metallic table, 80cm above the ground plane.
- The EUT Power connected to the power mains through a line impedance stabilization network.
- Provides a 50ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs).
- Set the EUT transmit continuously with maximum output power.
- Spectrum analyzer setting parameters in accordance with section 6.3.
- The AC line is checked to find out the maximum conducted emission. To find the maximum emission levels, the relative positions of equipment and all the interface cables shall be changed according to ANSI C63.10:2020 on Conducted Emission Test.

6.5. Test Conditions

AC POWER LINE CONDUCTED EMISSIONS			
EUT:	Wireless Lavalier Microphone	M/N:	GT19
Test Voltage:	Charging Input: DC 5V by AC/DC ADAPTER, AC/DC ADAPTER Input: AC 120V/60Hz		
Temperature:	22.8°C	Humidity:	42 % RH
Atmosphere Pressure:	100.1kPa		

6.6. Test Result

EUT: Wireless Lavalier Microphone

M/N: GT19


Test Voltage: Charging Input: DC 5V by AC/DC ADAPTER, AC/DC ADAPTER Input: AC 120V/60Hz

Phase: Live

Test Mode: TX Mode

Note: only worse case: GFSK mode with CH40 2480MHz is reported

Detailed results are shown below

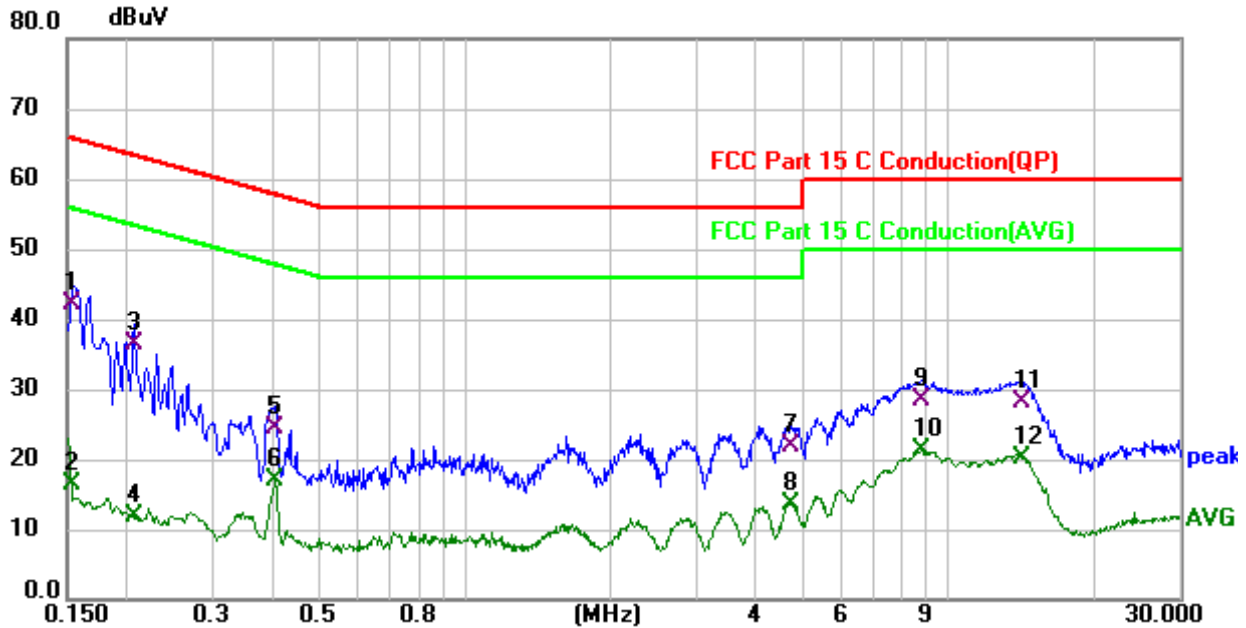


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.154	21.34	20.72	42.06	65.79	-23.73	QP	P	
2	0.154	-4.27	20.72	16.45	55.79	-39.34	AVG	P	
3	0.206	15.67	20.73	36.40	63.37	-26.97	QP	P	
4	0.206	-8.85	20.73	11.88	53.37	-41.49	AVG	P	
5	0.402	3.84	20.73	24.57	57.81	-33.24	QP	P	
6	0.402	-3.81	20.73	16.92	47.81	-30.89	AVG	P	
7	4.742	0.77	21.08	21.85	56.00	-34.15	QP	P	
8	4.742	-7.38	21.08	13.70	46.00	-32.30	AVG	P	
9	8.782	6.68	21.69	28.37	60.00	-31.63	QP	P	
10	8.782	-0.54	21.69	21.15	50.00	-28.85	AVG	P	
11	14.162	5.23	22.91	28.14	60.00	-31.86	QP	P	
12	14.162	-2.67	22.91	20.24	50.00	-29.76	AVG	P	

Remark: The test Result=Reading+ Lisn+ Cab L.

If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

EUT: Wireless Lavalier Microphone
M/N: GT19
Test Voltage: Charging Input: DC 5V by AC/DC ADAPTER, AC/DC ADAPTER Input: AC 120V/60Hz
Phase: Neutral
Test Mode: TX Mode
Note: only worse case: GFSK mode with CH40 2480MHz is reported
Detailed results are shown below

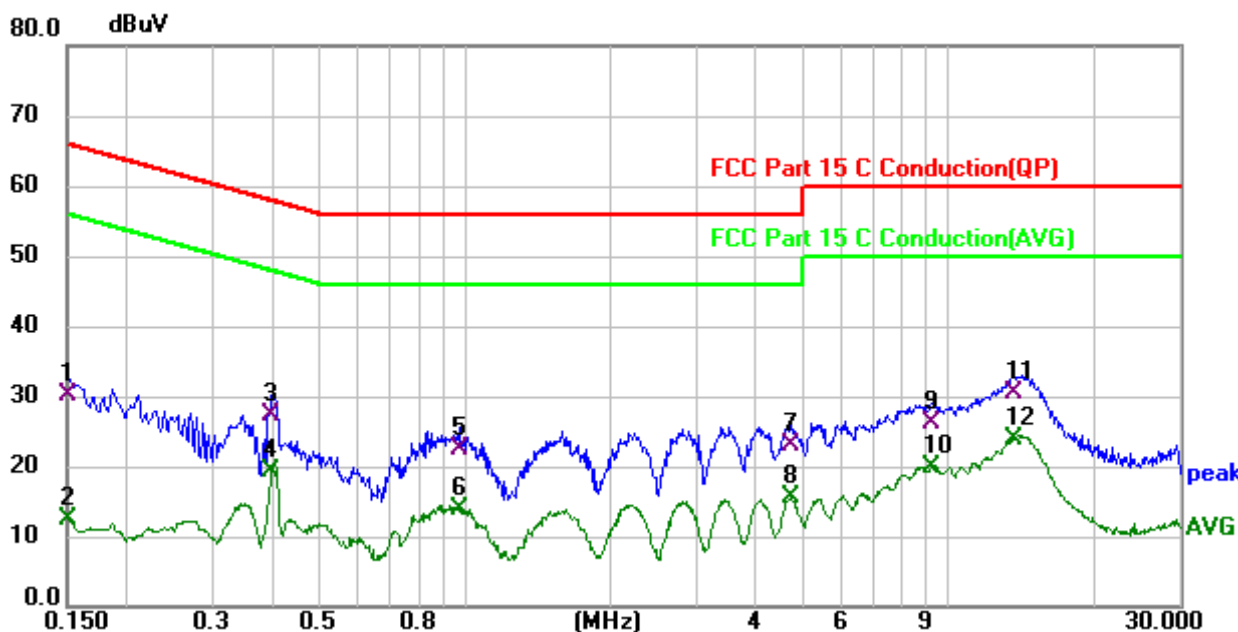

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.150	9.67	20.55	30.22	66.00	-35.78	QP	P	
2	0.150	-8.07	20.55	12.48	56.00	-43.52	AVG	P	
3	0.398	6.85	20.57	27.42	57.90	-30.48	QP	P	
4	0.398	-1.29	20.57	19.28	47.90	-28.62	AVG	P	
5	0.970	1.93	20.59	22.52	56.00	-33.48	QP	P	
6	0.970	-6.60	20.59	13.99	46.00	-32.01	AVG	P	
7	4.730	1.92	20.99	22.91	56.00	-33.09	QP	P	
8	4.730	-5.36	20.99	15.63	46.00	-30.37	AVG	P	
9	9.222	4.35	21.79	26.14	60.00	-33.86	QP	P	
10	9.222	-1.99	21.79	19.80	50.00	-30.20	AVG	P	
11	13.670	7.39	22.97	30.36	60.00	-29.64	QP	P	
12 *	13.670	0.87	22.97	23.84	50.00	-26.16	AVG	P	

Remark: The test Result=Reading+ Lisn+ Cab L.
If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

7. ANTENNA REQUIREMENTS

7.1. Limit

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

7.2. Test Result

The antennas used for this product is 2.4GHz 3216 Chip Antenna (Internal antenna), so compliance with antenna requirements. (Please refer to the **Annex B. EUT Internal Photos** for details)



8.APPENDIX

"EUT of External Photos, EUT Internal Photos & Test Setup Photos" Please refer to the Annex A, Annex B& Annex C document.

CTSL2620630270E Annex A. EUT External Photos

CTSL2620630270E Annex B. EUT Internal Photos

CTSL2620630270E Annex C. Test Setup Photos

-----*End of Test Report*-----

