

FCC Test Report

Report No. : 1812C50290512504

Applicant : Hunan Zennze Technology Limited

Address : Apartment 501, Xianglu International Garden
: II Hotel No. 61 Lufeng Road, High-tech
Development Zone, Changsha, 410221, China

Product Name : Smart Sleep Speaker

Report Date : 2026-07-08

Shenzhen Anbotek Compliance Laboratory Limited



Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com



Contents

1. General Information.....	5
1.1. Client Information	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	6
1.4. Description of Test Configuration	6
1.5. Description Of Test Setup	7
1.6. Test Equipment List.....	8
1.7. Measurement Uncertainty	9
1.8. Description of Test Facility	10
1.9. Disclaimer.....	10
2. Summary of Test Results	11
3. Conducted Emission Test.....	12
3.1. Test Standard and Limit	12
3.2. Test Setup	12
3.3. Test Procedure.....	12
3.4. Test Data.....	12
4. Radiation Spurious Emission.....	15
4.1. Test Standard and Limit	15
4.2. Test Setup	16
4.3. Test Procedure.....	17
4.4. Test Data.....	17
5. UWB Operation Bandwidth Test.....	21
5.1. Test Standard and Limit	21
5.2. Test Setup	21
5.3. Test Procedure.....	21
5.4. Test Data.....	21
6. Peak Emission in a 50 MHz Bandwidth Test.....	23
6.1. Test Standard and Limit	23
6.2. Test Setup	23
6.3. Test Procedure.....	23
6.4. Test Data.....	23
7. Antenna Requirement.....	25
7.1. Test Standard and Requirement	25
7.2. Antenna Connected Construction	25
APPENDIX I -- TEST SETUP PHOTOGRAPH	26
APPENDIX II -- EXTERNAL PHOTOGRAPH	26
APPENDIX III -- INTERNAL PHOTOGRAPH.....	26

TEST REPORT

Applicant : Hunan Zennze Technology Limited

Manufacturer : Hunan Zennze Technology Limited

Product Name : Smart Sleep Speaker

Model No. : KUN-SL-W

Trade Mark :



ZENNZE TECHNOLOGY



鯤护卫
KUN GUARD

Rating(s) : Input: 5V=2A

Test Standard(s) : FCC Part15 Subpart F, Section 15.517 &Section 15.521

Test Method(s) : ANSI C63.10-2020+Cor.1-2023

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart F requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt 2025-06-17

Date of Test 2025-06-17 to 2026-07-08

Prepared By

(Lene Chen)

Approved & Authorized Signer

(Jules Guo)

Revision History

Report Version	Description	Issued Date
R00	Original Issue.	2026-07-08

1. General Information

1.1. Client Information

Applicant	:	Hunan Zennze Technology Limited
Address	:	Apartment 501, Xianglu International Garden II Hotel No. 61 Lufeng Road, High-tech Development Zone, Changsha, 410221, China
Manufacturer	:	Hunan Zennze Technology Limited
Address	:	Apartment 501, Xianglu International Garden II Hotel No. 61 Lufeng Road, High-tech Development Zone, Changsha, 410221, China
Factory	:	Hunan Zennze Technology Limited
Address	:	Apartment 501, Xianglu International Garden II Hotel No. 61 Lufeng Road, High-tech Development Zone, Changsha, 410221, China

1.2. Description of Device (EUT)

Product Name	:	Smart Sleep Speaker
Model No.	:	KUN-SL-W
Trade Mark	:	 ZENNZE TECHNOLOGY  
Test Power Supply	:	DC 5V from adapter input AC 120V/50Hz
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	Manufacturer: Guangdong Sangu Technology Co.,Ltd Model: SG-050200012AU Input: 100-240V~ 50/60Hz 0.6A MAX Output: 5.0V=2.0A 10.0W
RF Specification		
Operation Frequency	:	7.3216GHz to 8.6528GHz
Number of Channel	:	1
Modulation Type	:	BPSK
Antenna Type	:	PCB Antenna
Antenna Gain(Peak)	:	5dBi
Remark: 1) All of the RF specification are provided by customer. 2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		

1.3. Auxiliary Equipment Used During Test

Title	Manufacturer	Model No.	Serial No.
/	/	/	/

1.4. Description of Test Configuration


Channel	Freq. (MHz)		
01	8128.3		

Note:


1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.

1.5. Description Of Test Setup

CE

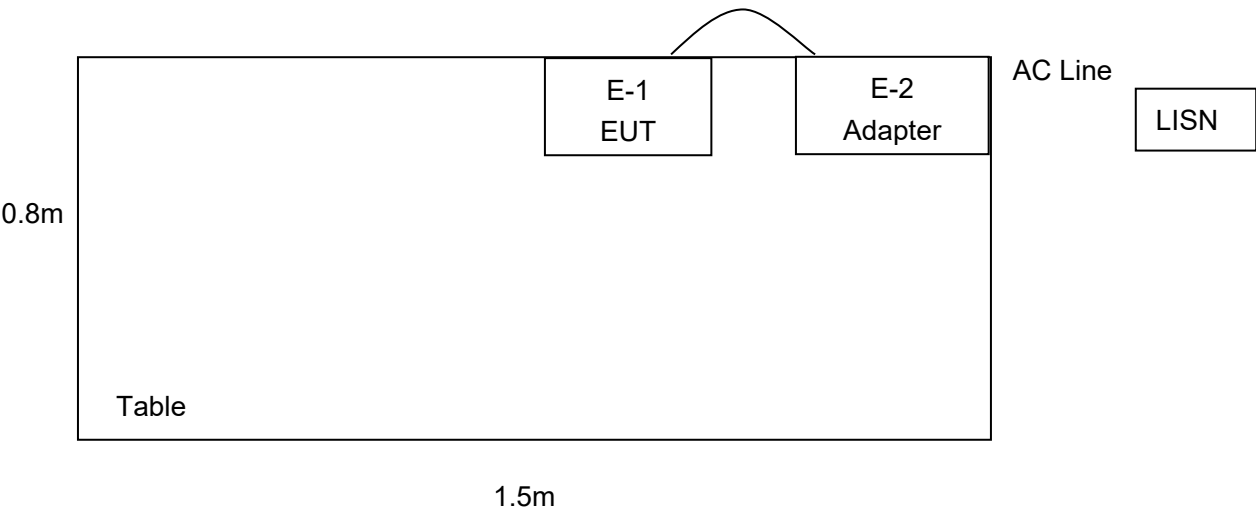

RE

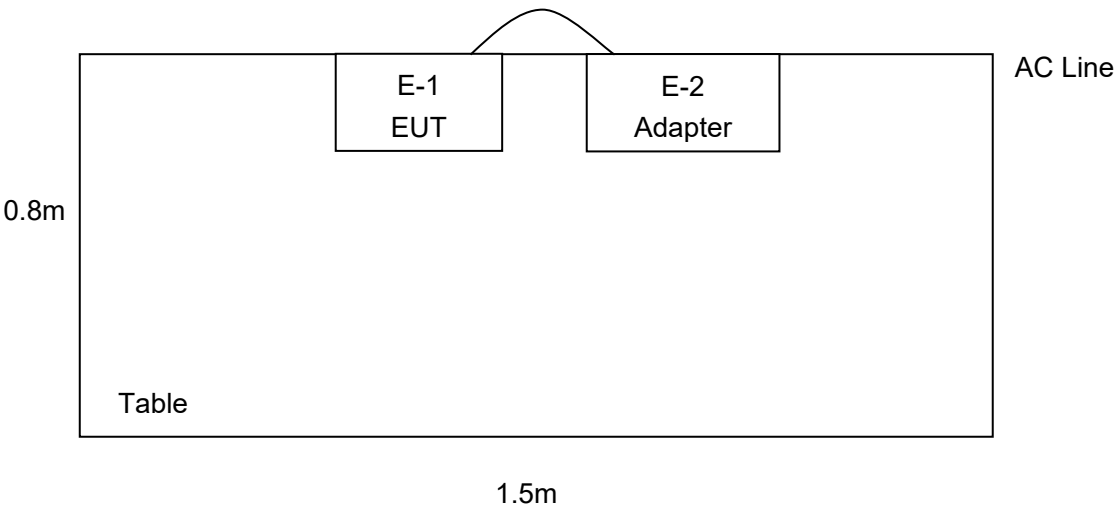

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	2024-09-09	1 Year
				2025-09-05	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	2025-01-13	1 Year
				2025-12-30	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	2024-09-09	1 Year
				2025-09-05	1 Year
				2025-12-29	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR26	2025-01-14	1 Year
				2025-12-30	1 Year
5.	MXA Spectrum Analysis	Agilent	N9020A	2024-09-09	1 Year
				2025-07-28	1 Year
				2025-12-29	1 Year
6.	EMI Preamplifier	SKET Electronic	LNPA-0118G-45	2025-01-13	1 Year
				2025-12-30	1 Year
7.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	2022-10-16	3 Year
				2025-10-27	3 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	2022-10-23	3 Year
				2025-10-26	3 Year
9.	Loop Antenna(9K-30M)	Schwarzbeck	FMZB1519B	2024-09-12	1 Year
				2025-09-05	1 Year
10.	Horn Antenna	A-INFO	LB-180400-KF	2024-01-22	3 Year
11.	Pre-amplifier	SONOMA	310N	2025-01-14	1 Year
				2025-12-30	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A
13.	MXA Spectrum Analysis	KEYSIGHT	N9020A	2024-09-09	1 Year
				2025-09-05	1 Year
14.	MXG RF Vector Signal Generator	Agilent	N5182A	2025-02-21	1 Year
				2025-12-29	1 Year
15.	Signal Generator	Agilent	E4421B	2025-02-21	1 Year

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

				2025-12-29	1 Year
16.	DC Power Supply	IVYTECH	IV3605	2024-09-09	1 Year
				2025-09-05	1 Year
17.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	2024-10-14	1 Year
			ZJ-HWHS80B	2025-08-29	1 Year
18.	Spectrum Analyzer	Rohde & Schwarz	FSV40-N	2025-04-25	1 Year
				2025-12-29	1 Year
19.	RF Test software	Toscend	JS1120-3	N/A	N/A

1.7. Measurement Uncertainty

Parameter	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	3.8dB
Occupied Bandwidth	925Hz
Power Spectral Density	0.76dB
Conducted Spurious Emission	1.24dB
Radiated spurious emissions (Below 30MHz)	3.53dB
Radiated spurious emissions (30MHz~1GHz)	Horizontal: 3.92dB; Vertical: 4.52dB
Radiated spurious emissions (above 1GHz)	1G-6GHz: 4.78dB; 6G-18GHz: 4.88dB 18G-40GHz: 5.68dB
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.:279531

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 279531.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.

1.9. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.
7. The data in this report will be synchronized with the corresponding national market supervision and management departments and cross-border e-commerce platforms as required by regulatory agencies.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.517(a)/15.521(b)	Antenna Requirement	PASS
15.207(a)	Conducted Emission	PASS
15.209/ 15.517(c)(d)/ 15.521(d)(h)	Radiated Emissions	PASS
15.503 (a)(d), 15.517(b)	UWB Operation bandwidth	PASS
15.517(e)/15.521(g)	Peak Emission in a 50 MHz bandwidth	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207(a)		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark:(1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

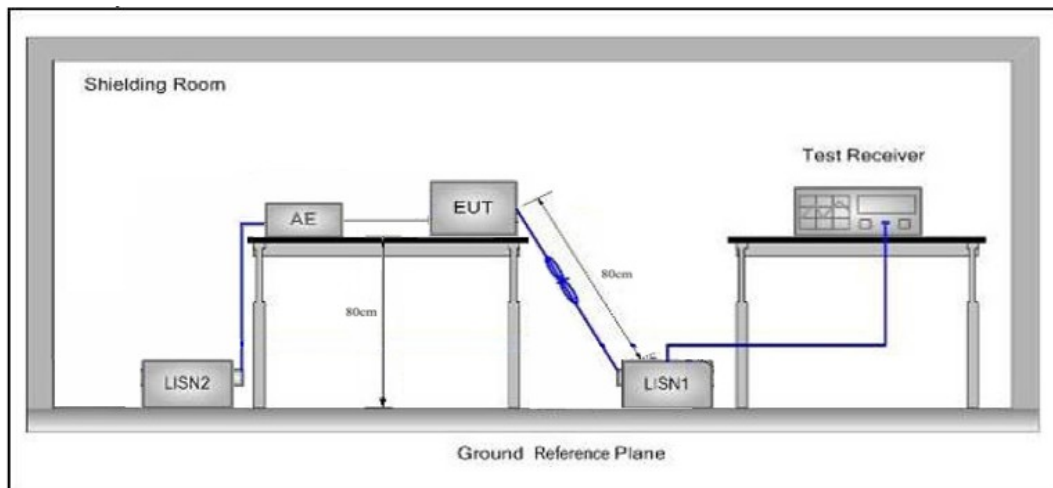

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2020+Cor.1-2023 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages.

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: 8128.3MHz
Test Specification: DC 5V from adapter input AC 120V/50Hz
Comment: Live Line
Temp.(°C)/Hum.(%RH): 24.6°C/59%RH

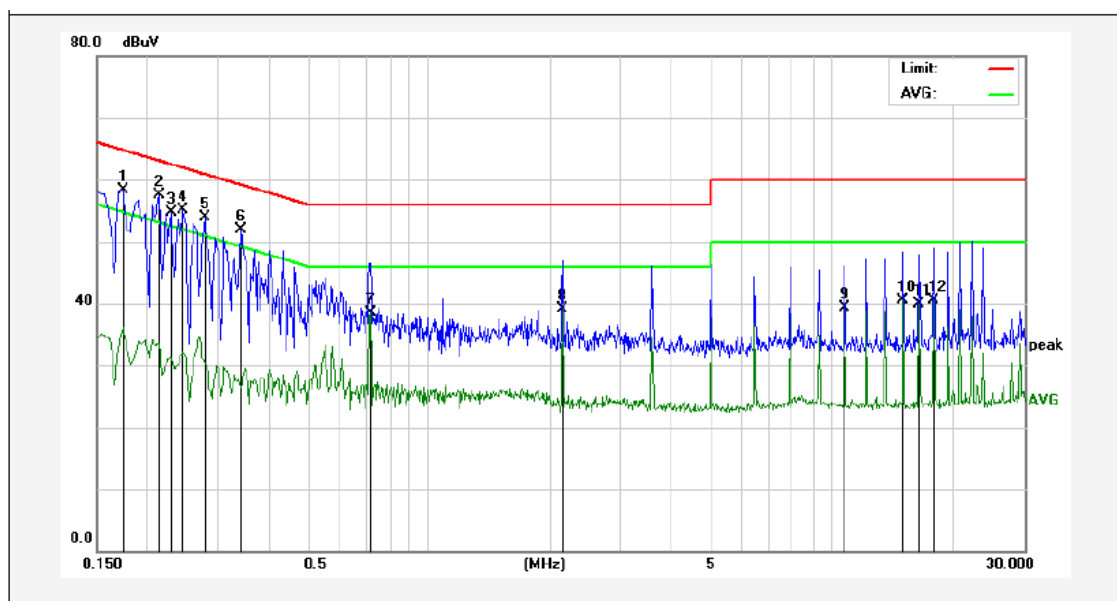


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1740	40.49	17.83	58.32	64.76	-6.44	QP	
2	0.2140	39.71	17.82	57.53	63.04	-5.51	QP	
3	0.2300	36.92	17.82	54.74	62.45	-7.71	QP	
4	0.2460	37.24	17.82	55.06	61.89	-6.83	QP	
5	0.2779	36.14	17.84	53.98	60.88	-6.90	QP	
6	0.3420	34.05	17.83	51.88	59.15	-7.27	QP	
7	0.7180	20.70	17.87	38.57	46.00	-7.43	AVG	
8	2.1500	21.29	17.85	39.14	46.00	-6.86	AVG	
9	10.7460	21.39	18.00	39.39	50.00	-10.61	AVG	
10	15.0420	22.44	18.15	40.59	50.00	-9.41	AVG	
11	16.4740	21.75	18.19	39.94	50.00	-10.06	AVG	
12	17.9060	22.33	18.23	40.56	50.00	-9.44	AVG	

Remark: Result = Reading + Factor; Over Limit = Result - Limit

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: 8128.3MHz
Test Specification: DC 5V from adapter input AC 120V/50Hz
Comment: Neutral Line
Temp.(°C)/Hum.(%RH): 24.6°C/59%RH

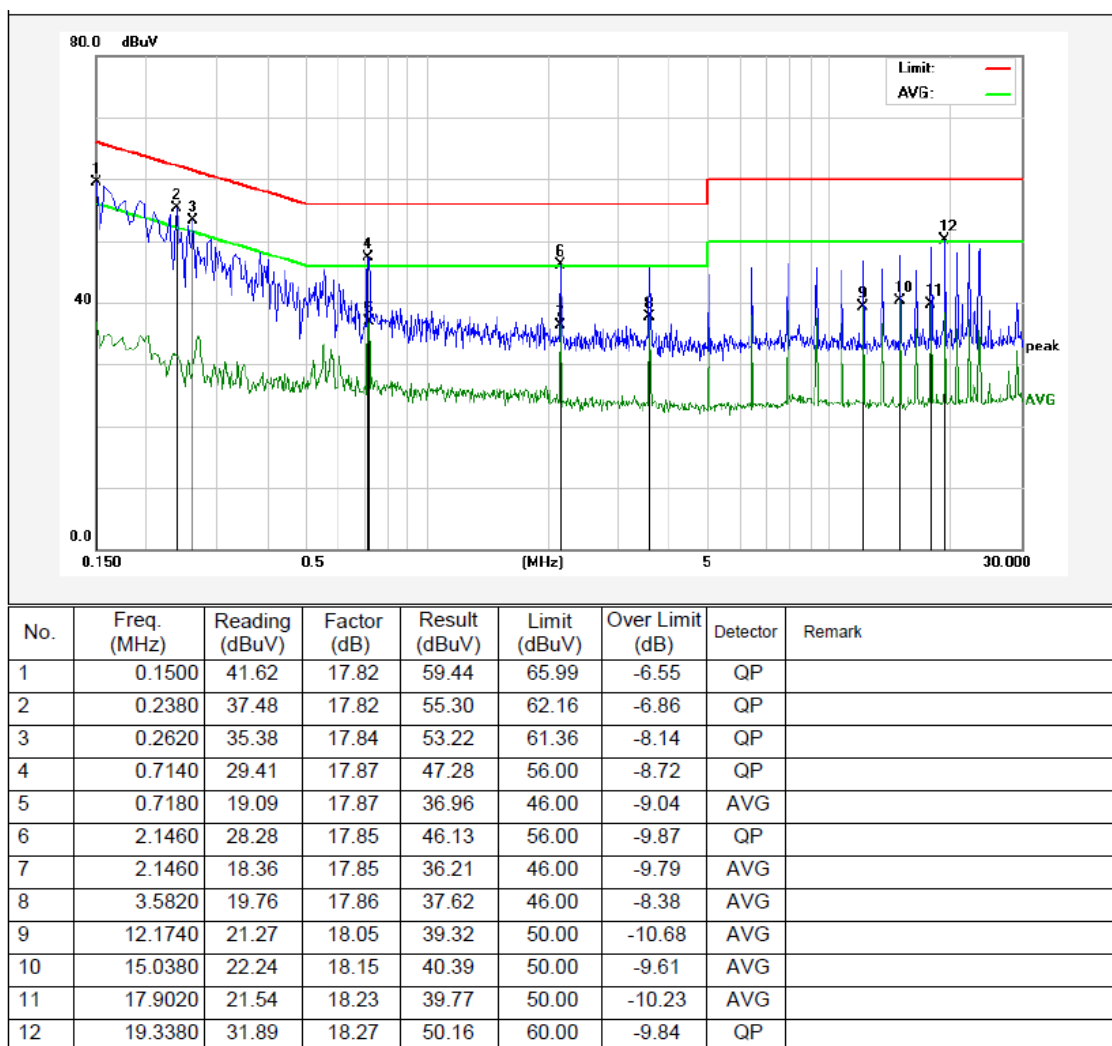

Remark: Result = Reading + Factor; Over Limit = Result - Limit

4. Radiation Spurious Emission

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Test Standard	FCC Part15 C Section 15.517(c)(d)	
Test Limit	Frequency (MHz)	EIRP in dBm
	960~1610	-75.3
	1610~1990	-53.3
	1990~3100	-51.3
	3100~10600	-41.3
	Above 10600	-51.3

Test Standard	FCC Part15 C Section 15.517(d)	
Test Limit	Frequency (MHz)	EIRP in dBm
	1164~1240	-85.3
	1559~1610	-85.3

4.2. Test Setup

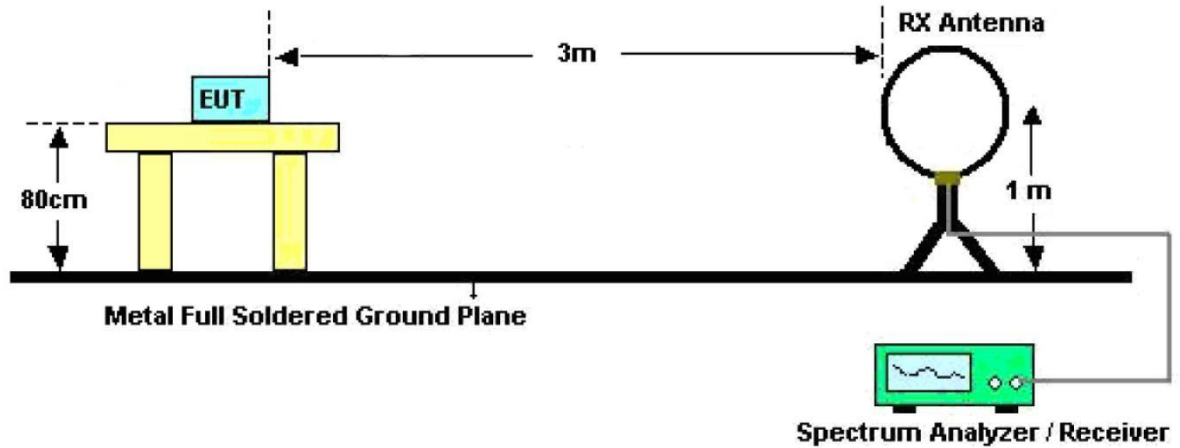


Figure 1. Below 30MHz

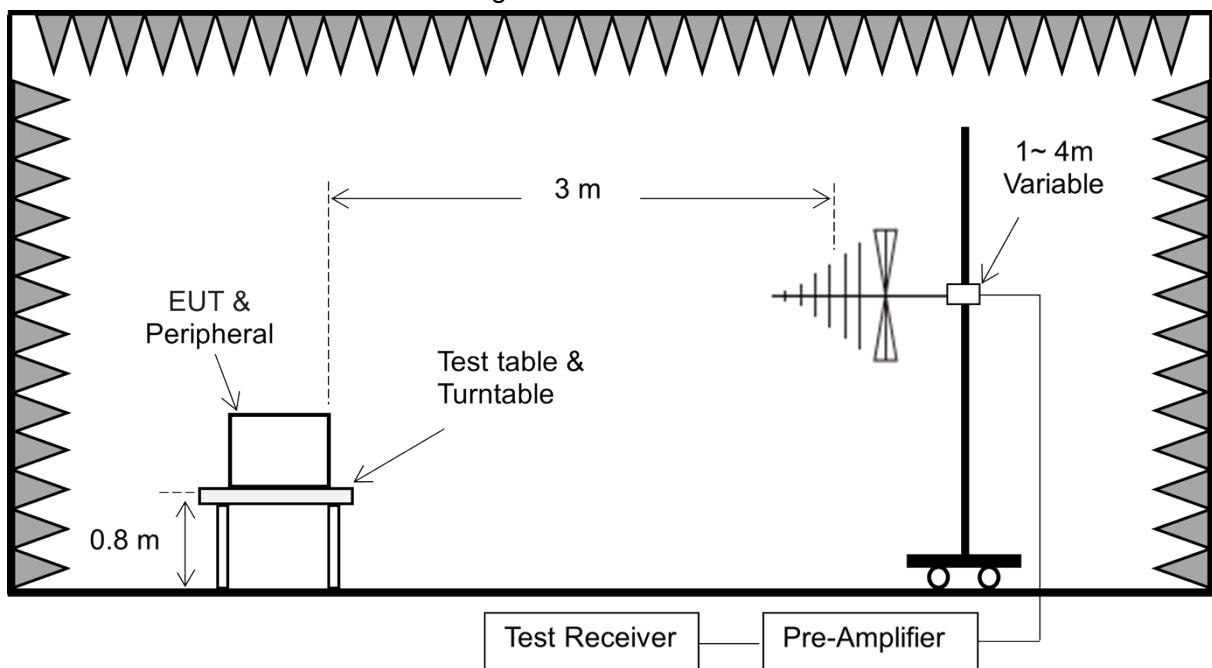


Figure 2. 30MHz to 1GHz

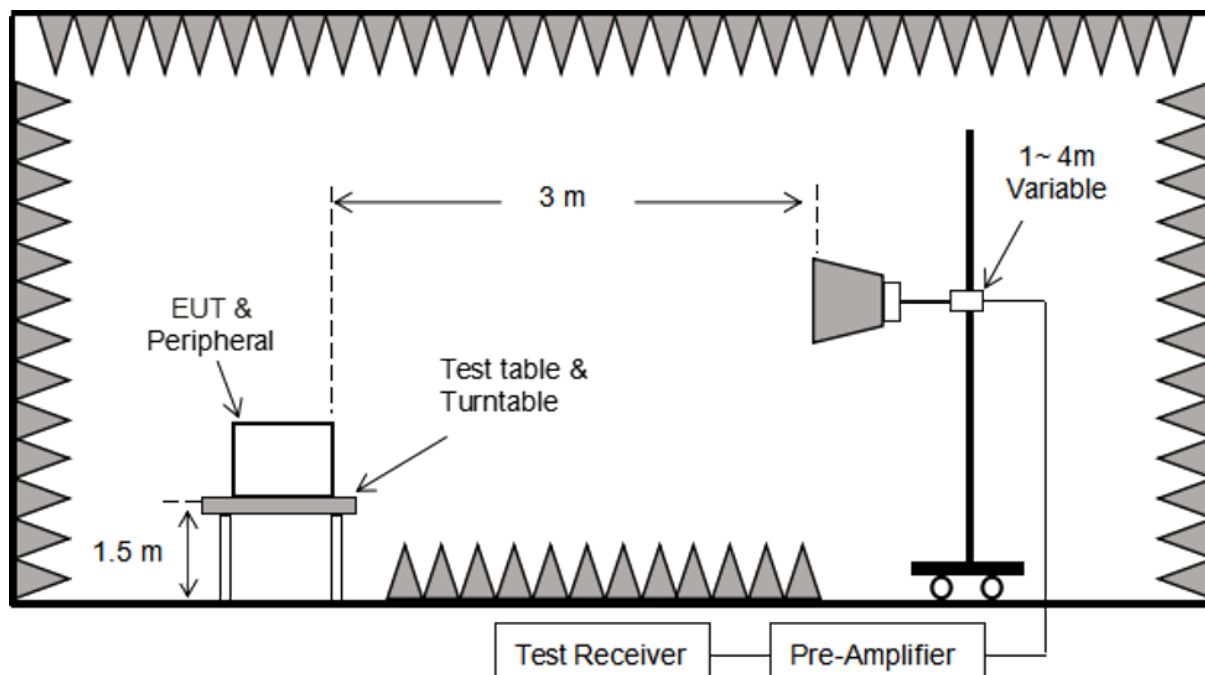


Figure 3. Above 1 GHz

4.3. Test Procedure

Refer to the ANSI C63.10-2020+Cor.1-2023 Section 10.2 & 10.3.

4.4. Test Data


PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Results (30~960MHz)


Test Mode: 8128.3MHz
Power Source: DC 5V from adapter input AC 120V/50Hz
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 22.5°C/55%RH

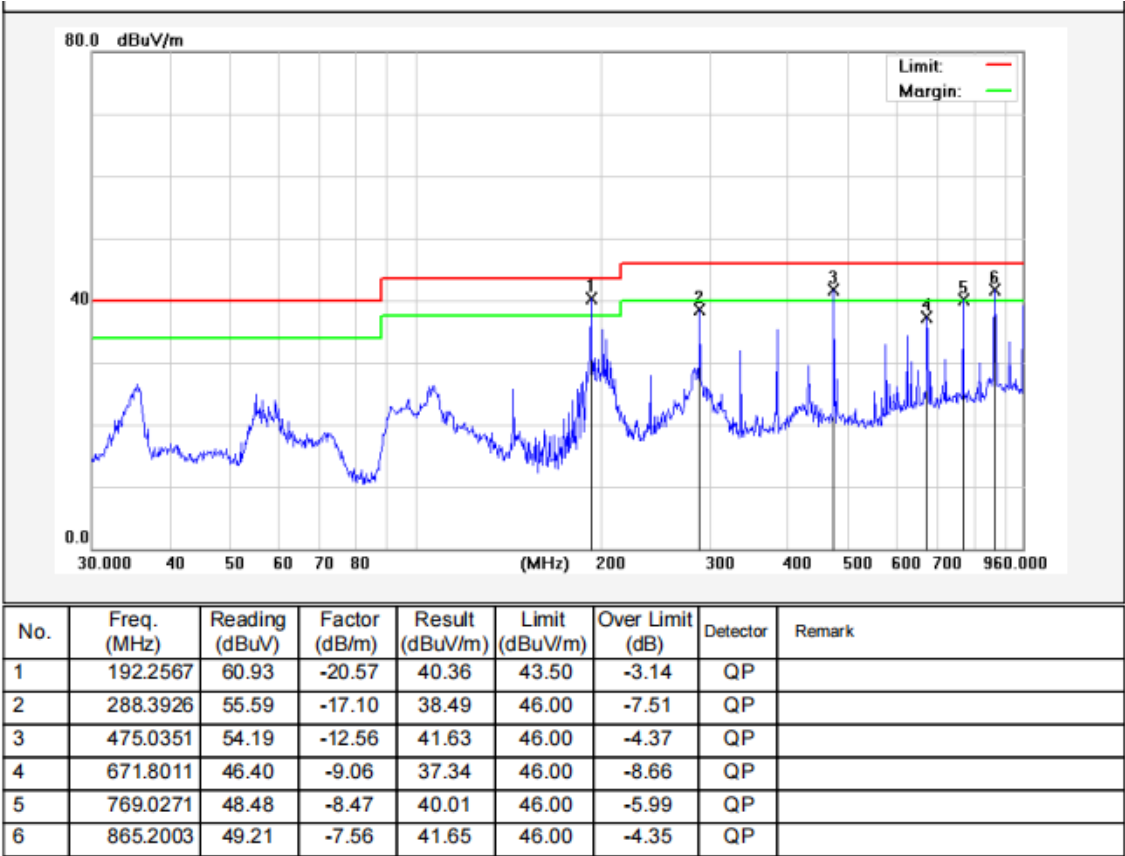

Remark: Result = Reading + Factor; Over Limit = Result - Limit

Test Results (30~960MHz)

Test Mode: 8128.3MHz
Power Source: DC 5V from adapter input AC 120V/50Hz
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 22.5°C/55%RH

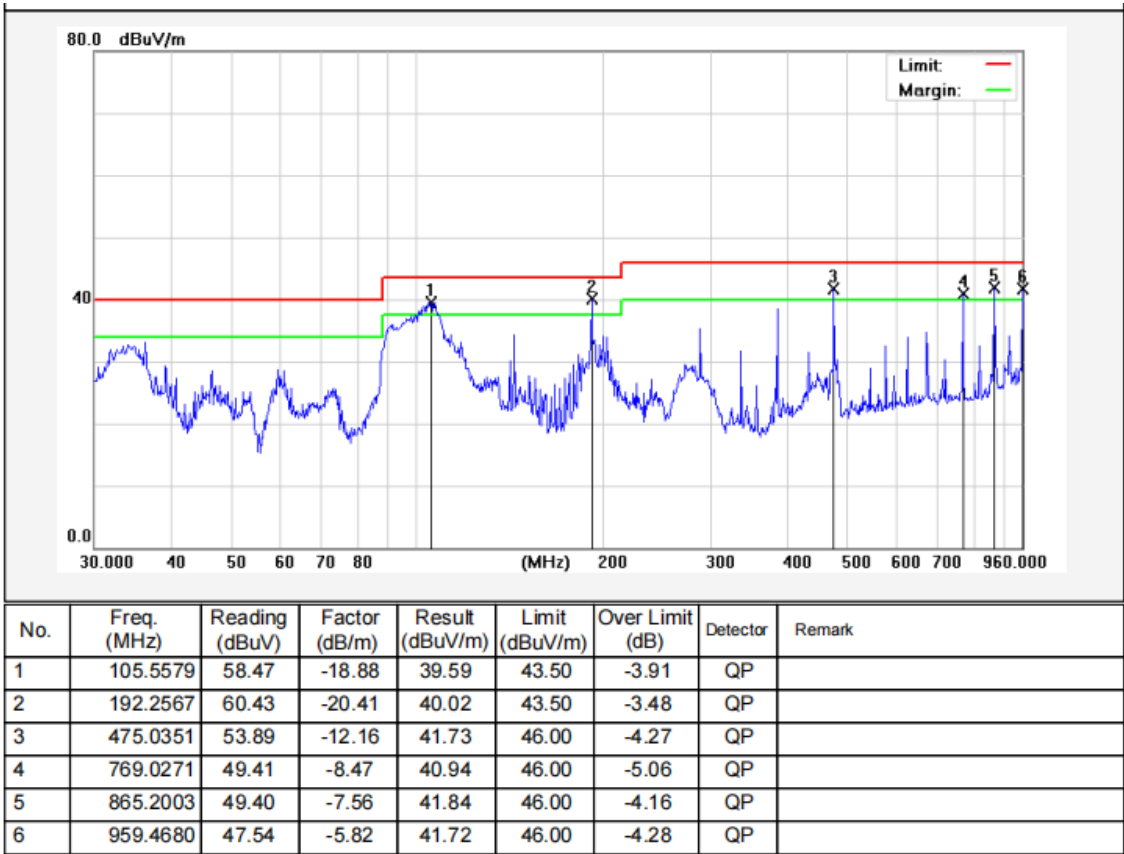

Remark: Result = Reading + Factor; Over Limit = Result - Limit

Spurious radiated emission above 960MHz in non GPS band:

Average value:

Frequency (MHz)	Result (dBuV/m)	Factor(dB/m)	meas result(dBuV/m)	Mea EIRP (dBm)	EIRP Limit (dBm)	Over Limit (dBm)	polarization
1189.75	4.60	2.38	6.98	-88.22	-85.3	-2.92	Vertical
1291.58	13.81	2.75	16.56	-78.64	-75.3	-3.34	Vertical
1576.84	3.29	3.62	6.91	-88.29	-85.3	-2.99	Vertical
1785.81	12.14	4.08	16.22	-78.98	-53.3	-25.68	Vertical
2740.92	5.26	10.54	15.80	-79.40	-51.3	-28.10	Vertical
8073.74	-8.92	21.37	12.45	-82.75	-41.3	-41.45	Vertical
10843.30	-11.89	24.65	12.76	-82.44	-51.3	-31.14	Vertical
974.40	21.14	-5.55	15.59	-79.61	-75.3	-4.31	Horizontal
1205.35	4.28	2.54	6.82	-88.38	-85.3	-3.08	Horizontal
1594.27	2.13	3.68	5.81	-89.39	-85.3	-4.09	Horizontal
1704.48	12.08	3.89	15.97	-79.23	-53.3	-25.93	Horizontal
2255.11	5.95	8.43	14.38	-80.82	-51.3	-29.52	Horizontal
8323.89	-8.10	22.65	14.55	-80.65	-41.3	-39.35	Horizontal
10644.37	-9.40	24.03	14.63	-80.57	-51.3	-29.27	Horizontal

Note: meas result(dBuV/m)=Result(dBuV/m)+Factor(dB/m)


Mea EIRP(dBm)=meas result(dBuV/m)-95.2

5. UWB Operation Bandwidth Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.503 (a)(d), 15.517(b)
Test Limit	15.503(a): UWB bandwidth. For the purpose of this subpart, the UWB bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna. The upper boundary is designated f_H and the lower boundary is designated f_L. The frequency at which the highest radiated emission occurs is designated f_M. 15.503(d): Ultra-wideband (UWB) transmitter. An intentional radiator that, at any point in time, has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth. 15.517(b) The UWB bandwidth of a UWB system operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.

5.2. Test Setup




5.3. Test Procedure

Refer to the ANSI C63.10-2020+Cor.1-2023 Section 10.1

5.4. Test Data

Temperature:	26.4 °C	Humidity:	54 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

Item		Result	Limit(MHz)
f_M (MHz)	The highest emission frequency	8237.2	/
f_L (MHz)	10dB below the highest emission	7533.9	>3100
f_H (MHz)	10dB above the highest emission	8441.3	<10600
f_C (MHz)	$(f_H + f_L)/2$	7987.6	/
10dB bandwidth(MHz)	$f_H - f_L$	907.4	≥500
Fractional bandwidth	$2(f_H - f_L) / (f_H + f_L)$	0.2272	/

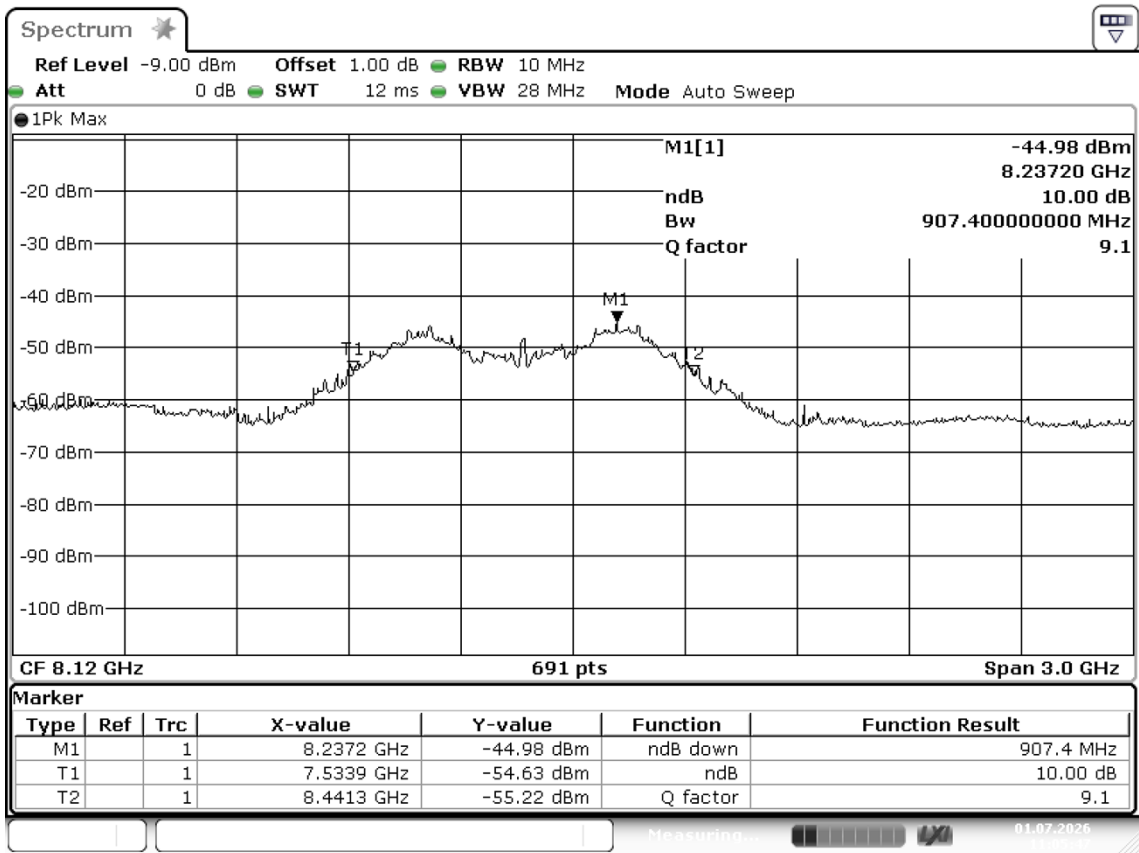

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.


Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

6. Peak Emission in a 50 MHz Bandwidth Test

6.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.517(e)
Test Limit	There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_M . That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth, and a correspondingly different peak emission limit, following the procedures described in § 15.521.

6.2. Test Setup



6.3. Test Procedure

Refer to the ANSI C63.10-2020+Cor.1-2023 Section 10.3.5.


6.4. Test Data

Temperature:	26.4 °C	Humidity:	54 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

Frequency (MHz)	EIRP (dBm/1MHz)	EIRP (dBm/50MHz)	Limit dBm/50MHz
8128.3	-45.27	-11.29	0

Note: the correct factor of RBW 1MHz to 50MHz is $20 \log (50/\text{RBW}) = 33.98$

The antenna factor, cable loss and preamplifier gain have been entered into the analyzer as the transducer factor.

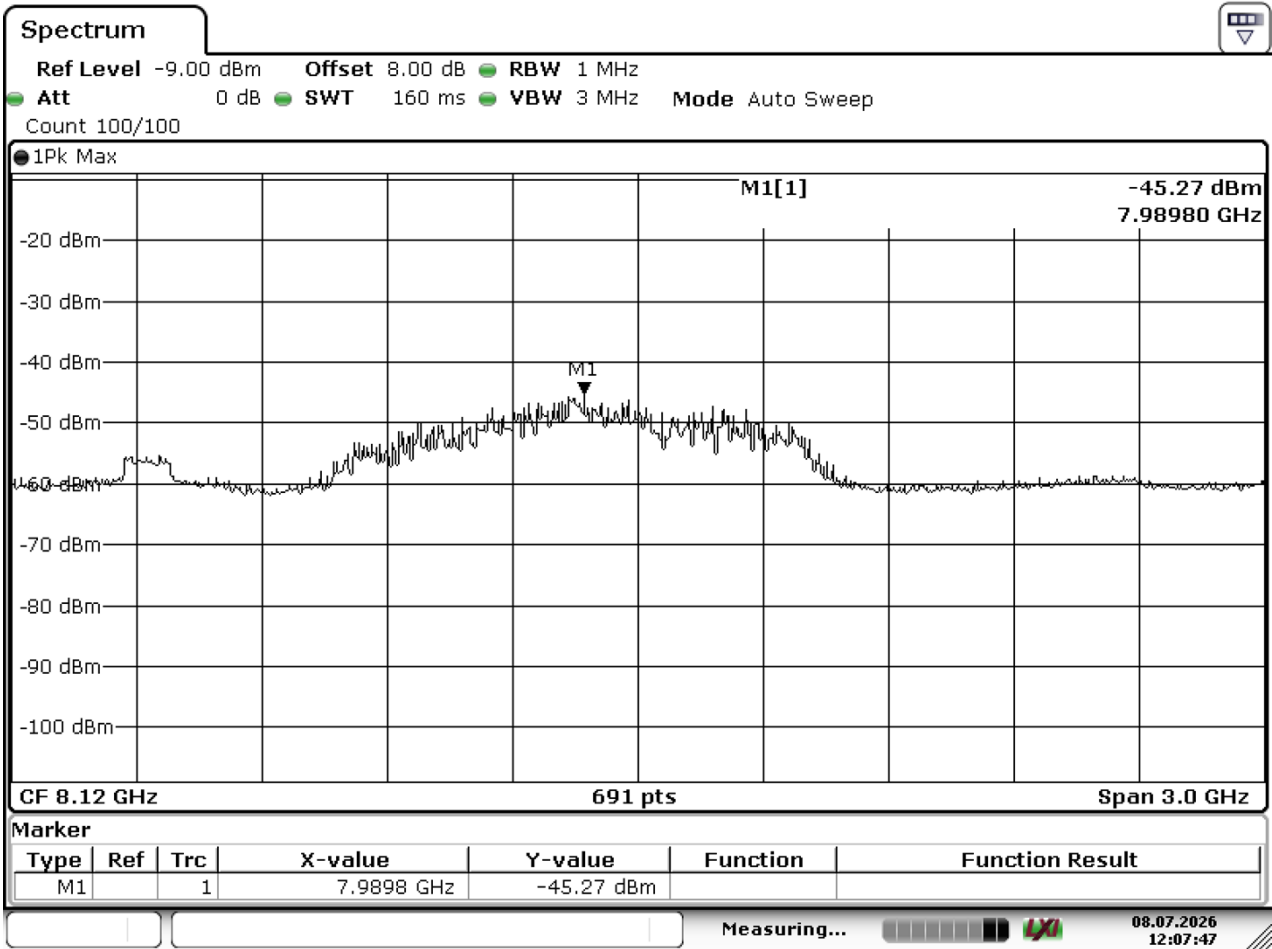

Shenzhen Anbotek Compliance Laboratory Limited

Any unauthorized modification, forgery, or falsification of this document constitutes a violation of law and is subject to legal penalties. If you have any questions, you may scan the QR code to download the report for verification or contact us via email.

Hotline: 400-003-0500 web: www.anbotek.com E-mail: service@anbotek.com

7. Antenna Requirement

7.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203/15.517(a)
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.517(a) requirement: (a) Operation under the provisions of this section is limited to UWB transmitters employed solely for indoor operation. (1) Indoor UWB devices, by the nature of their design, must be capable of operation only indoors. The necessity to operate with a fixed indoor infrastructure, e.g., a transmitter that must be connected to the AC power lines, may be considered sufficient to demonstrate this. (2) The emissions from equipment operated under this section shall not be intentionally directed outside of the building in which the equipment is located, such as through a window or a doorway, to perform an outside function, such as the detection of persons about to enter a building. (3) The use of outdoor mounted antennas, e.g., antennas mounted on the outside of a building or on a telephone pole, or any other outdoors infrastructure is prohibited. (4) Field disturbance sensors installed inside of metal or underground storage tanks are considered to operate indoors provided the emissions are directed towards the ground. (5) A communications system shall transmit only when the intentional radiator is sending information to an associated receiver.

7.2. Antenna Connected Construction

The antenna is a PCB Antenna which permanently attached, and the best case gain of the antenna is 5dBi. It complies with the standard requirement.

APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_RF

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----