

RF TEST REPORT

Applicant Realsil Microelectronics (Suzhou) Co., Ltd.

FCC ID 2BASB-PKM8721DAF

Product 2.4GHz/5GHz wireless LAN/Bluetooth module


Brand Realsil

Model PKM8721DAF-C13-F10;
PKM8721DAF-D23-F10

Report No. EFTA25040242-IE-08-R1

Issue Date September 25, 2025

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2024)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.



Prepared by: Xu Ying



Approved by: Xu Kai

Eurofins TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the Test Report.....	4
1.2. Test Facility	4
1.3. Testing Location.....	4
2. General Description of Equipment Under Test.....	5
2.1. Applicant and Manufacturer Information	5
2.2. General Information	5
3. Applied Standards	7
4. Test Configuration	8
5. Test Case Results	9
5.1. Maximum output power	9
5.2. 99% Bandwidth and 6dB Bandwidth	13
5.3. Band Edge	48
5.4. Power Spectral Density	73
5.5. Spurious RF Conducted Emissions.....	93
5.6. Unwanted Emission	127
5.7. Conducted Emission.....	244
6. Main Test Instruments.....	253
ANNEX A: The EUT Appearance.....	254
ANNEX B: Test Setup Photos	255

Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	Maximum output power	15.247(b)(3)	PASS
2	99% Bandwidth and 6dB Bandwidth	15.247(a)(2) C63.10 6.9	PASS
3	Power spectral density	15.247(e)	PASS
4	Band Edge	15.247(d)	PASS
5	Spurious RF Conducted Emissions	15.247(d)	PASS
6	Unwanted Emissions	15.247(d), 15.205, 15.209	PASS
7	Conducted Emissions	15.207	PASS
Date of Testing: April 27, 2025 ~ May 14, 2025 and July 14, 2025 ~ July 22, 2025 and September 2, 2025 ~ September 9, 2025			
Date of Sample Received: April 22, 2025			
Note: All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test Facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3. Testing Location

Company: Eurofins TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <https://www.eurofins.com/electrical-and-electronics>
E-mail: Kain.Xu@cpt.eurofinscn.com

2. General Description of Equipment Under Test

2.1. Applicant and Manufacturer Information

Applicant	Realsil Microelectronics (Suzhou) Co., Ltd.
Applicant address	No.128, West Shenhui Road, Suzhou Industrial Park, Jiangsu Province
Manufacturer	Realsil Microelectronics (Suzhou) Co., Ltd.
Manufacturer address	No.128, West Shenhui Road, Suzhou Industrial Park, Jiangsu Province

2.2. General Information

EUT Description		
Model	PKM8721DAF-C13-F10; PKM8721DAF-D23-F10	
Lab internal SN	EFTA25040242-IE-08/S01	
Hardware Version	HDK-PKM8721DAF-C13-F10-20241029; HDK-PKM8721DAF-D23-F10-20241029	
Software Version	20250312_PKM8721DAF_mp&normal image_V01.bin	
Power Supply	External power supply	
Antenna Type	PKM8721DAF-C13-F10: PCB Antenna PKM8721DAF-D23-F10: FPC Antenna	
Antenna Connector	PKM8721DAF-C13-F10	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)
	PKM8721DAF-D23-F10	FPC antenna (meet with the standard FCC Part 15.203 requirement)
Antenna Gain	PKM8721DAF-C13-F10: 4.30 dBi PKM8721DAF-D23-F10: 3.60 dBi	
Additional Beamforming Gain	NA	
Operating Frequency Range(s)	802.11b/g/n(HT20): 2412 ~ 2472 MHz 802.11n(HT40): 2422 ~ 2462 MHz Bluetooth LE V5.0: 2402 ~2480 MHz	
Modulation Type	802.11b: DSSS 802.11g/n: OFDM Bluetooth LE: GFSK	
Max. Output Power	Wi-Fi 2.4GHz: 20.66 dBm Bluetooth LE: 8.20 dBm	
Operating voltage range	3.0 Vdc to 3.6 Vdc	
State voltage	3.3 Vdc	
Note: 1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant.		

The detailed product change description please refers to following table:

Module	PKM8721DAF-C13-F10	PKM8721DAF-D23-F10
Antenna	PCB Antenna	FPC Antenna
Others	The same	

Note:

1. This report conducted data section tested of PKM8721DAF-C13-F10 (MAX Gain), radiation data were tested on both models.
2. The detailed product change description please refers to the Difference Declaration Letter.

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 15C (2024) Radio Frequency Devices

ANSI C63.10-2013

Reference standard:

KDB 558074 D01 15.247 Meas Guidance v05r02

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Test Mode	Data Rate
Bluetooth(Low Energy)	1Mbps; 2Mbps
Bluetooth (Low Energy) (S=2)	500kbps
Bluetooth (Low Energy) (S=8)	125kbps
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

5. Test Case Results

5.1. Maximum output power


Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Methods of Measurement

During the process of the testing, The EUT was connected to Power meter with a known loss. The EUT is max power transmission with proper modulation.

Test Setup



Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Average Output Power	$\leq 1\text{W}$ (30dBm)
----------------------	--------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.

Test Results

Power Index					
Channel	802.11b	802.11g	802.11n HT20	Channel	802.11n HT40
CH1	Index111	Index94	Index94	CH3	Index85
CH6	Index112	Index107	Index107	CH6	Index99
CH11	Index112	Index90	Index88	CH9	Index85
CH12	Index108	Index81	Index77	CH10	Index80
CH13	Index91	Index70	Index68	CH11	Index72
Power Index					
Channel		Bluetooth (Low Energy)			
CH0		Default			
CH19		Default			
CH39		Default			

Test Mode	Duty cycle	Duty cycle correction Factor (dB)
802.11b	1.000	0.000
802.11g	1.000	0.000
802.11n HT20	1.000	0.000
802.11n HT40	1.000	0.000
Bluetooth LE (1M)	0.631	2.000
Bluetooth LE (2M)	0.336	4.740
Bluetooth LE (S=2)	0.572	2.430
Bluetooth LE (S=8)	0.828	0.820
Note: when Duty cycle ≥ 0.98 , Duty cycle correction Factor not required.		

Test Mode	Carrier frequency (MHz)/ Channel	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11b	2412/CH 1	20.11	20.11	30	PASS
	2437/CH 6	20.13	20.13	30	PASS
	2462/CH11	20.66	20.66	30	PASS
	2467/CH12	19.26	19.26	30	PASS
	2472/CH13	15.58	15.58	30	PASS
802.11g	2412/CH 1	16.51	16.51	30	PASS
	2437/CH 6	19.36	19.36	30	PASS
	2462/CH11	15.55	15.55	30	PASS
	2467/CH12	13.23	13.23	30	PASS
	2472/CH13	8.96	8.96	30	PASS
802.11n HT20	2412/CH 1	16.15	16.15	30	PASS
	2437/CH 6	19.19	19.19	30	PASS
	2462/CH11	14.96	14.96	30	PASS
	2467/CH12	12.17	12.17	30	PASS
	2472/CH13	7.82	7.82	30	PASS
802.11n HT40	2422/CH3	14.03	14.03	30	PASS
	2437/CH6	16.99	16.99	30	PASS
	2452/CH9	14.19	14.19	30	PASS
	2457/CH10	13.28	13.28	30	PASS
	2462/CH11	11.55	11.55	30	PASS
Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor					

Test Mode	Carrier frequency (MHz)/ Channel	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
Bluetooth (Low Energy) (1M)	2402/CH0	5.90	7.90	30	PASS
	2440/CH19	6.16	8.16	30	PASS
	2480/CH39	6.10	8.10	30	PASS
Bluetooth (Low Energy) (2M)	2402/CH0	2.82	7.56	30	PASS
	2440/CH19	3.46	8.20	30	PASS
	2480/CH39	3.33	8.07	30	PASS
Bluetooth (Low Energy) (S=2)	2402/CH0	5.10	7.53	30	PASS
	2440/CH19	5.69	8.12	30	PASS
	2480/CH39	5.74	8.17	30	PASS
Bluetooth (Low Energy) (S=8)	2402/CH0	6.73	7.55	30	PASS
	2440/CH19	7.20	8.02	30	PASS
	2480/CH39	7.02	7.84	30	PASS
Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor					

5.2. 99% Bandwidth and 6dB Bandwidth

Ambient Condition


Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer.
Detector=Peak, Trace mode=max hold.

The EUT was connected to the spectrum analyzer through a known loss cable. The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value.

Test Setup



Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

minimum 6 dB bandwidth	≥ 500 kHz
------------------------	-----------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.


Test Results:

Test Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11b	2412	13.650	9.070	500	PASS
	2437	13.909	10.034	500	PASS
	2462	13.468	9.050	500	PASS
	2467	13.460	8.613	500	PASS
	2472	13.612	8.578	500	PASS
802.11g	2412	16.471	16.390	500	PASS
	2437	16.911	16.569	500	PASS
	2462	16.434	16.410	500	PASS
	2467	16.454	16.392	500	PASS
	2472	16.434	16.393	500	PASS
802.11n HT20	2412	17.473	17.293	500	PASS
	2437	18.167	17.797	500	PASS
	2462	17.450	17.225	500	PASS
	2467	17.466	17.110	500	PASS
	2472	17.467	17.121	500	PASS
802.11n HT40	2422	35.817	36.324	500	PASS
	2437	35.807	36.328	500	PASS
	2452	35.803	36.310	500	PASS
	2457	35.794	36.309	500	PASS
	2462	35.804	36.307	500	PASS
Bluetooth (Low Energy) (1M)	2402	1.026	0.657	500	PASS
	2440	1.033	0.634	500	PASS
	2480	1.029	0.650	500	PASS
Bluetooth (Low Energy) (2M)	2402	2.055	0.945	500	PASS
	2440	2.061	0.949	500	PASS
	2480	2.046	1.209	500	PASS
Bluetooth (Low Energy) (S=2)	2402	1.022	0.642	500	PASS
	2440	1.018	0.654	500	PASS
	2480	1.022	0.646	500	PASS
Bluetooth	2402	1.050	0.675	500	PASS


(Low Energy) (S=8)	2440	1.051	0.602	500	PASS
	2480	1.044	0.595	500	PASS

99%bandwidth


OBW 802.11b 2412MHz

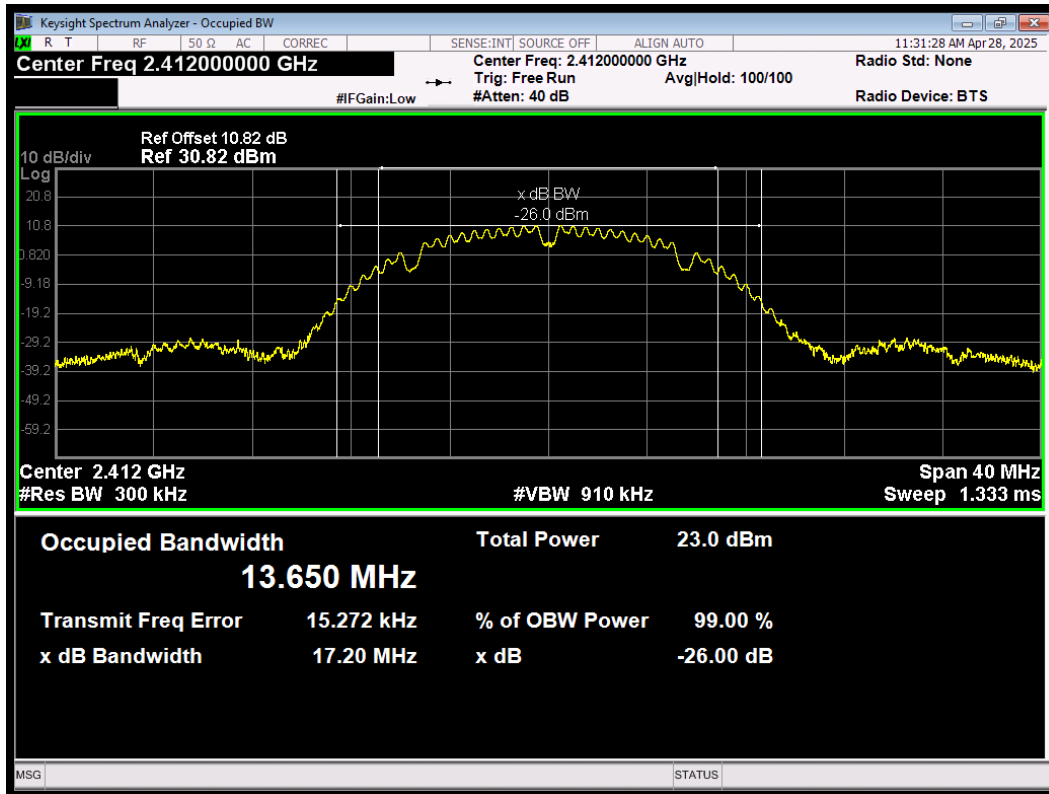


OBW 802.11b 2437MHz

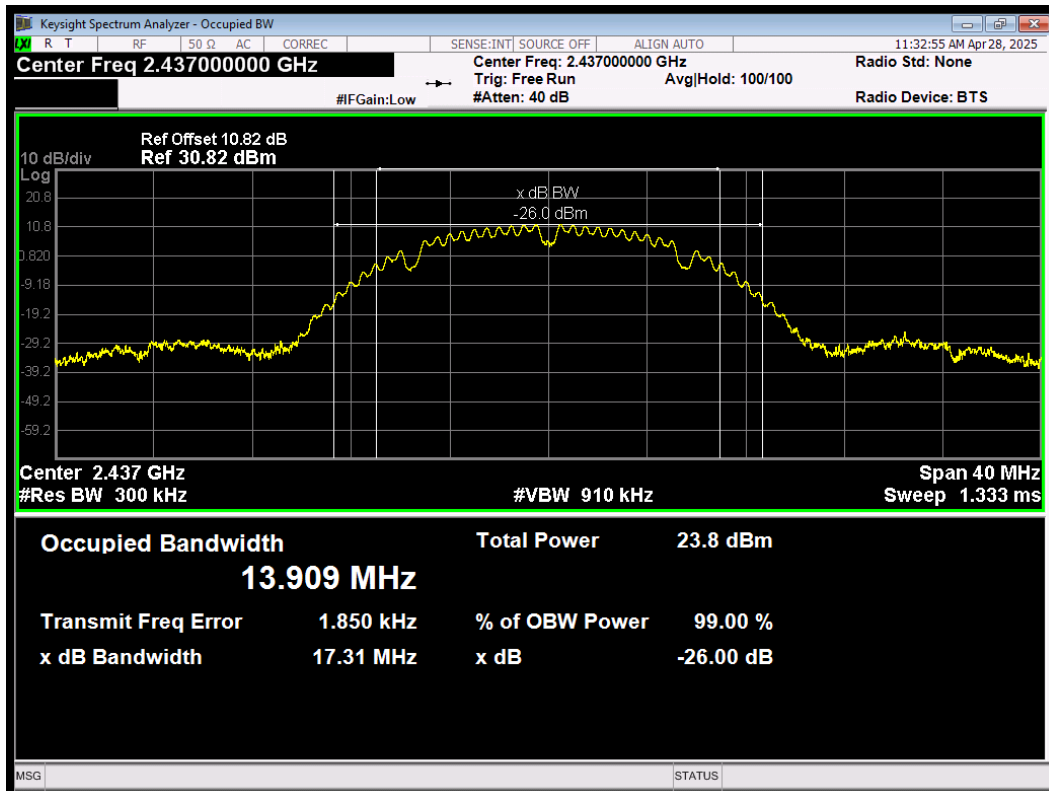


OBW 802.11b 2462MHz

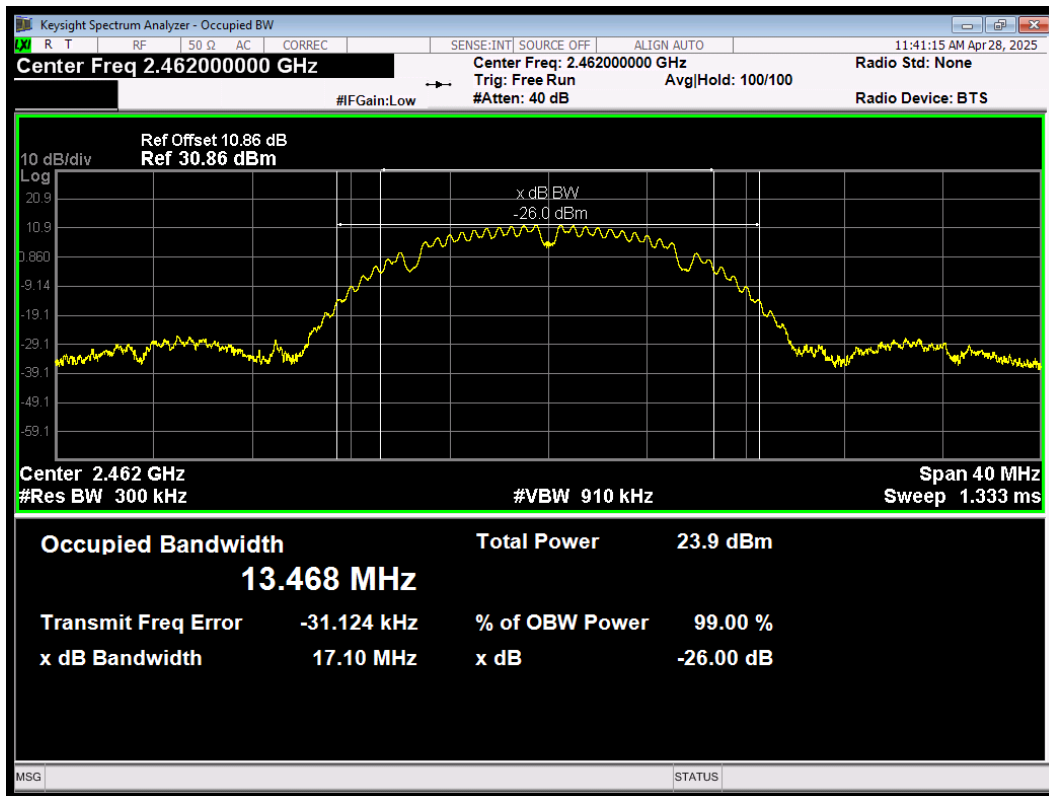


OBW 802.11b 2467MHz

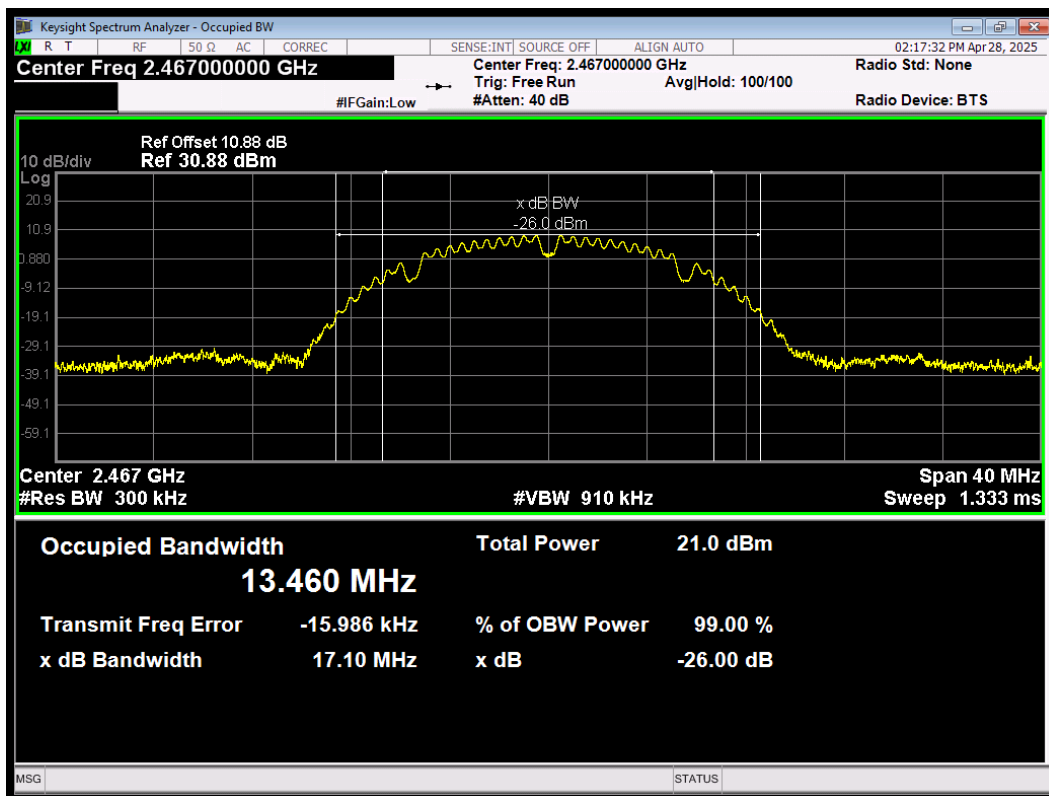


OBW 802.11b 2472MHz

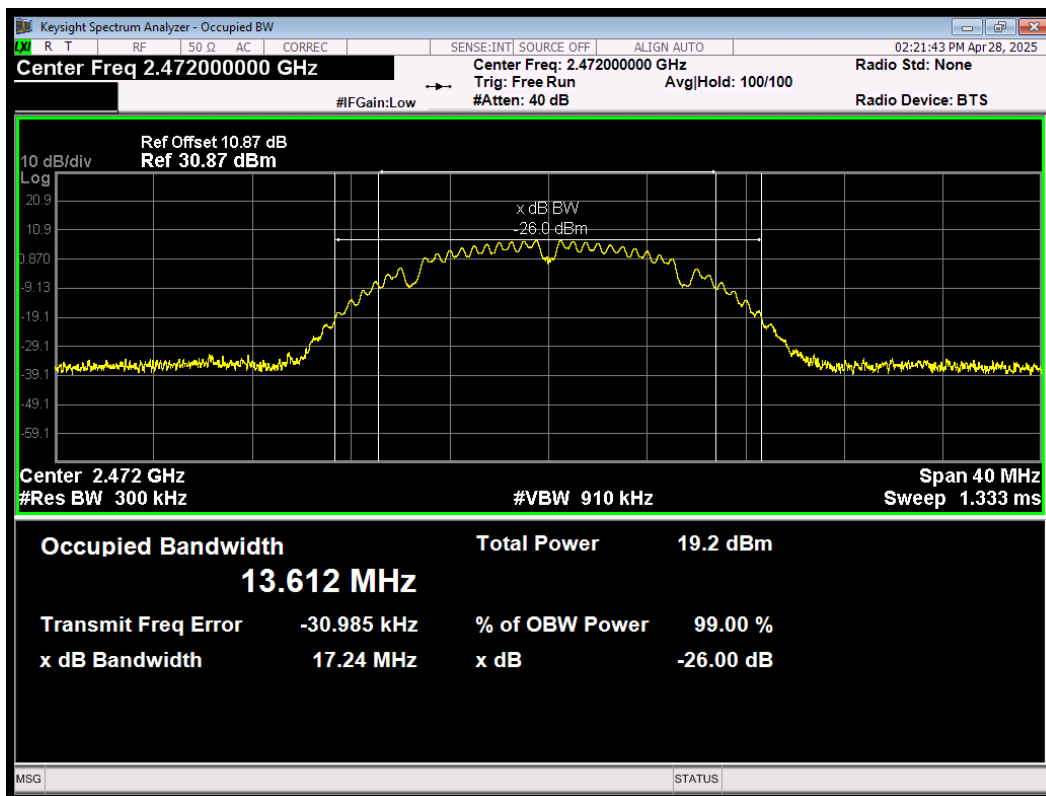


OBW 802.11g 2412MHz

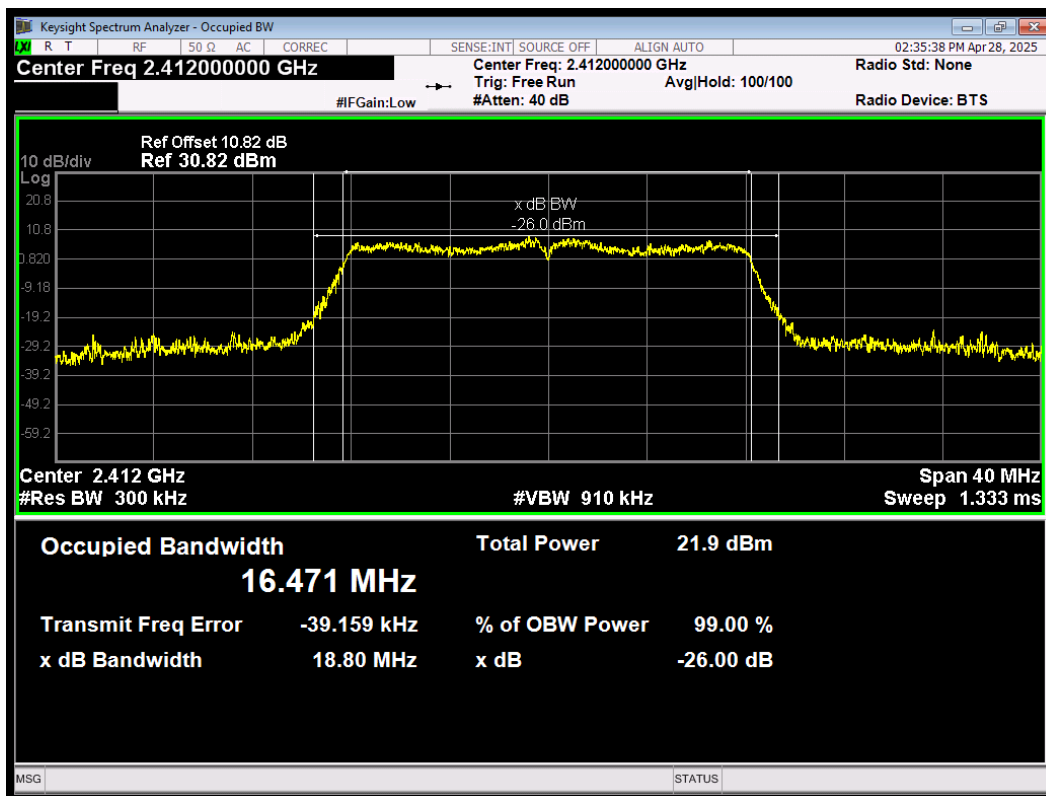


OBW 802.11g 2437MHz

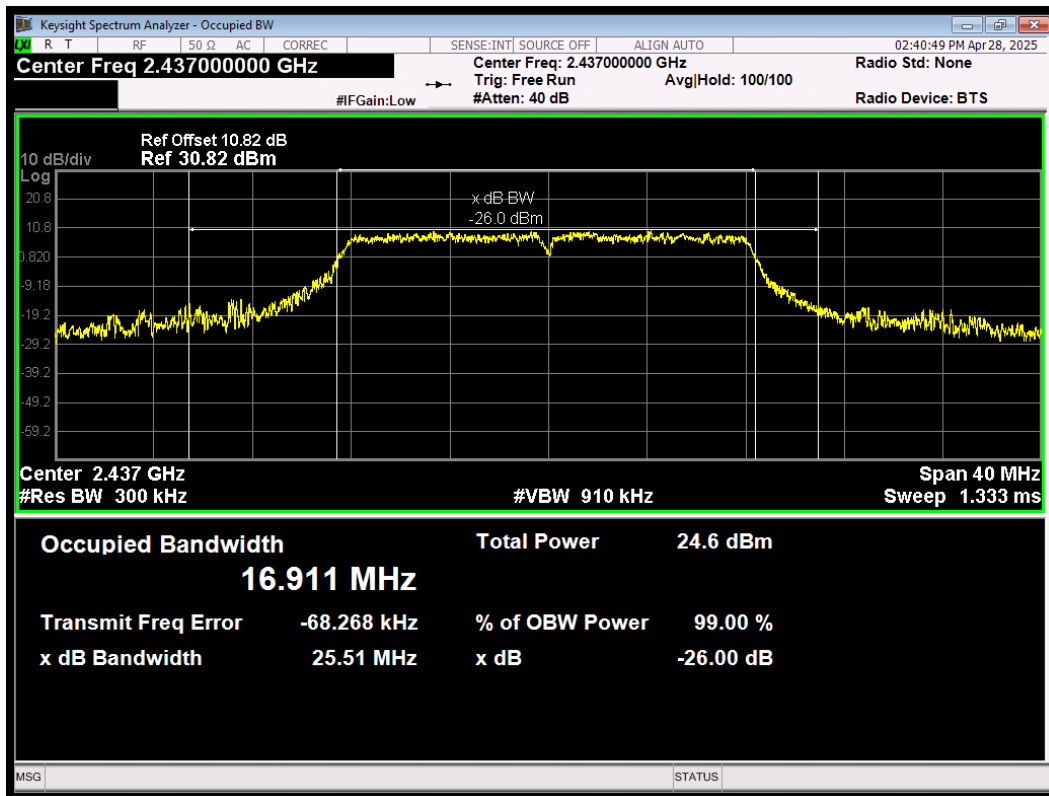


OBW 802.11g 2462MHz

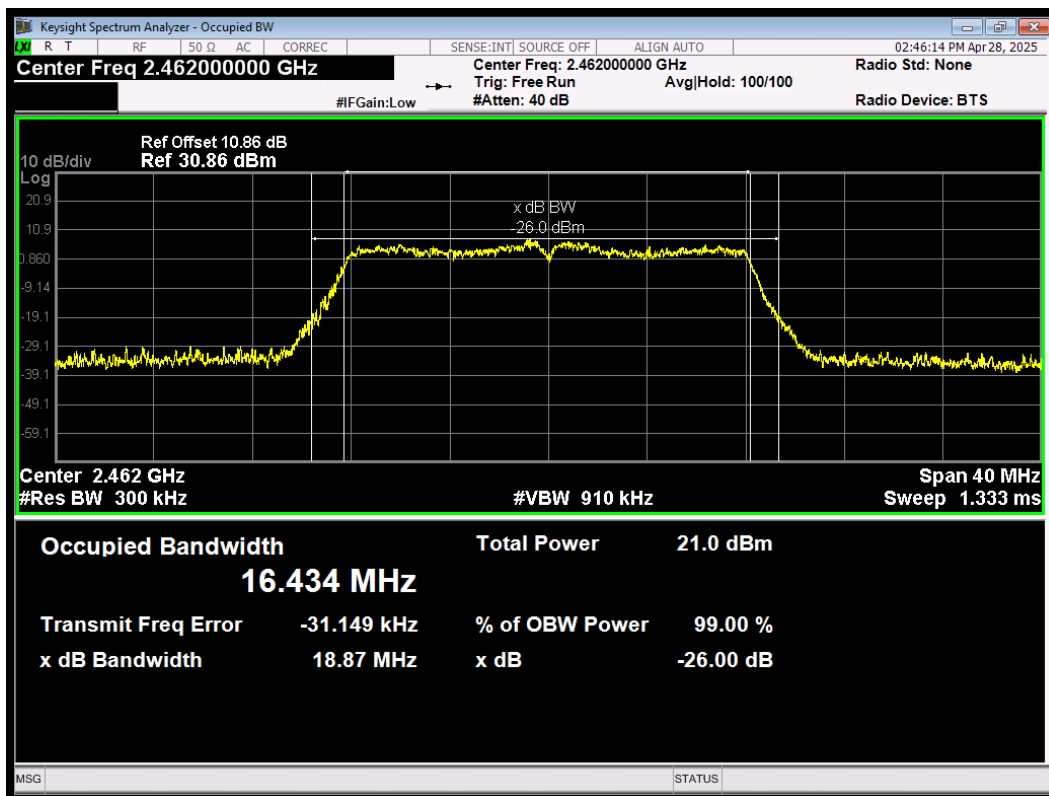


OBW 802.11g 2467MHz

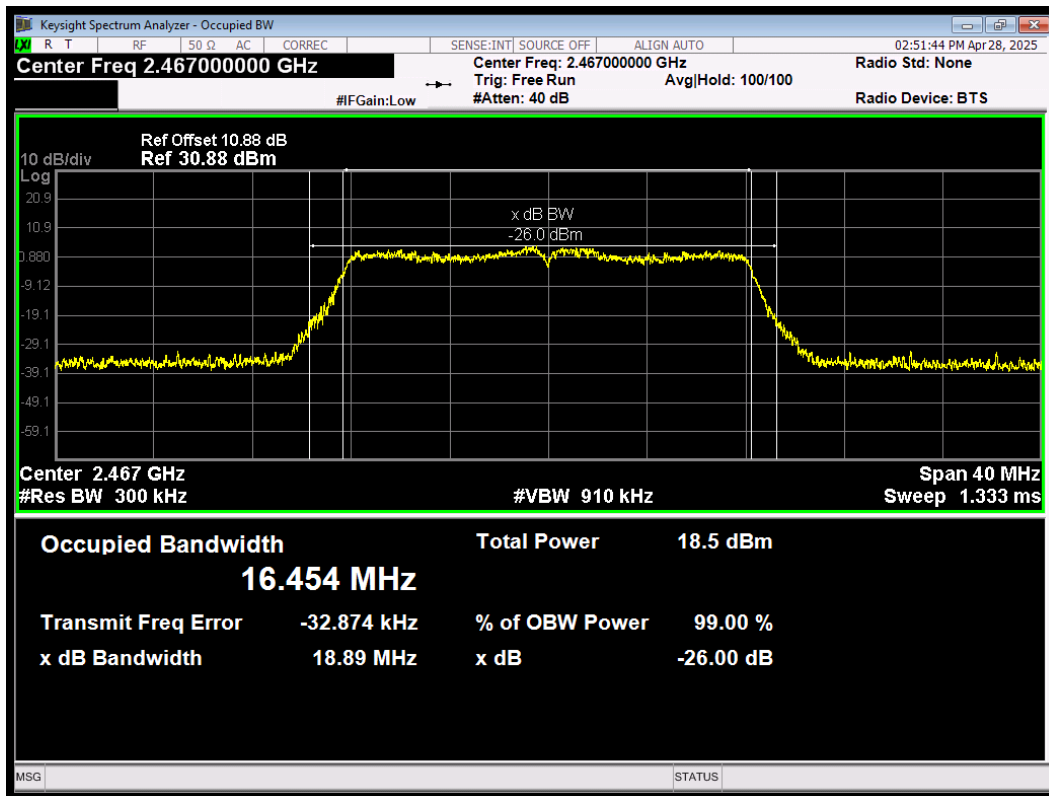


OBW 802.11g 2472MHz

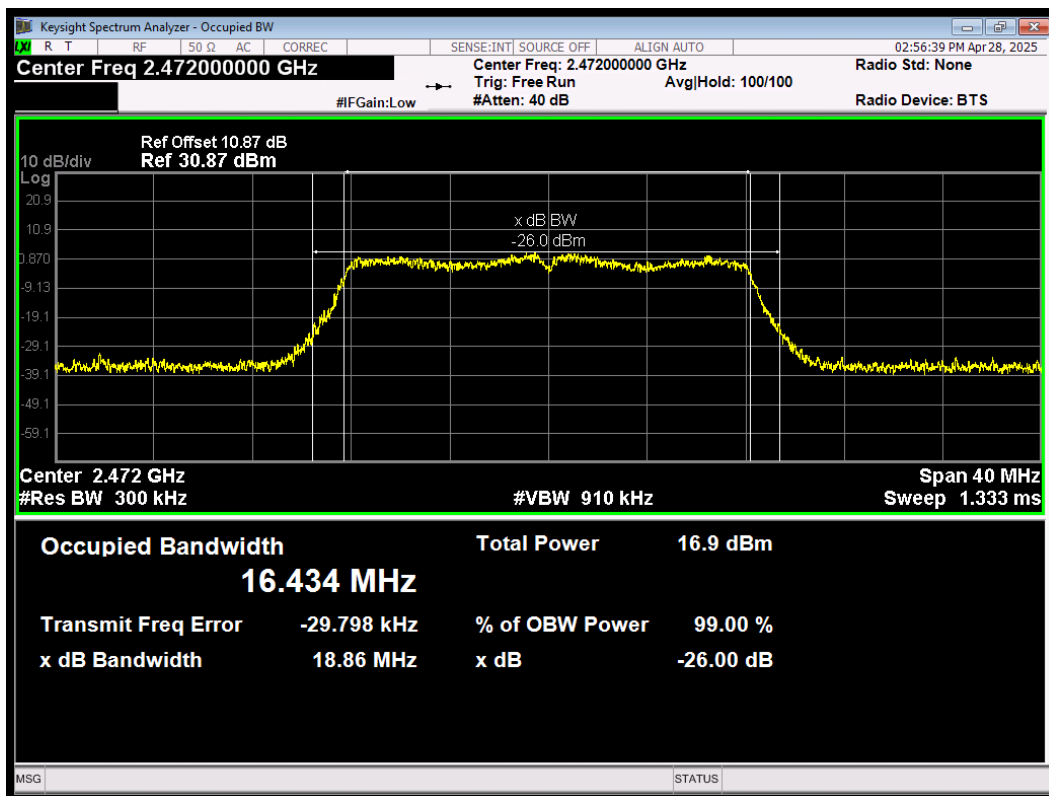


OBW 802.11n(HT20) 2412MHz

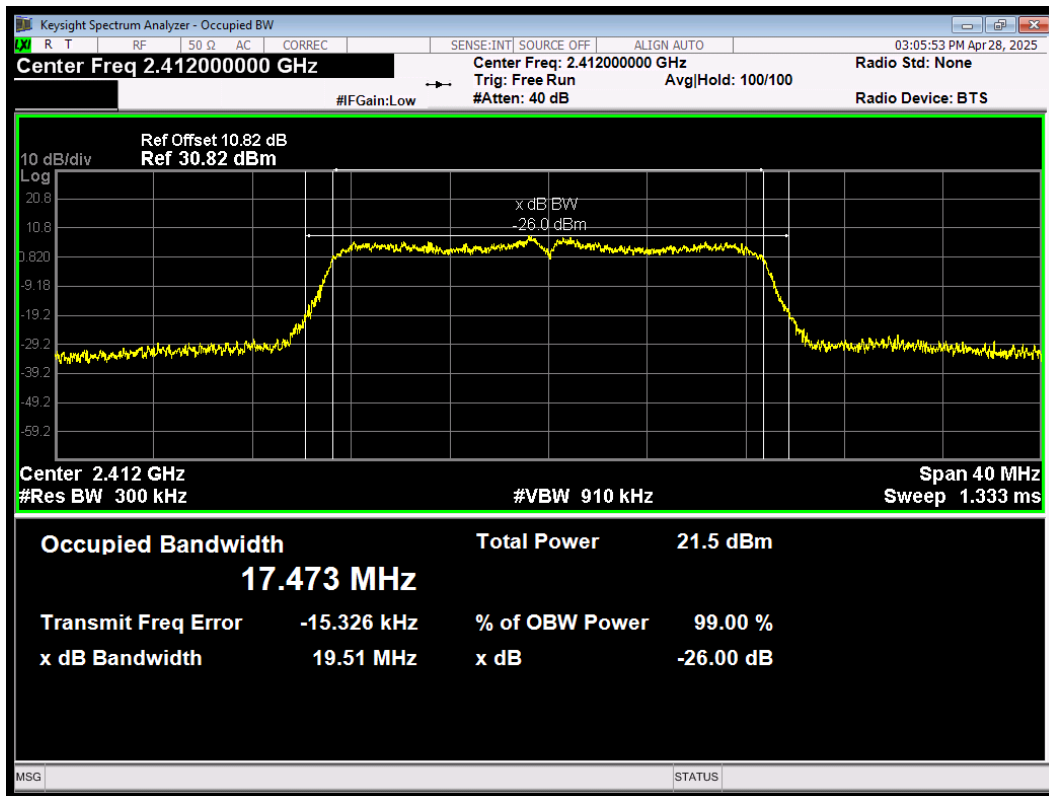


OBW 802.11n(HT20) 2437MHz

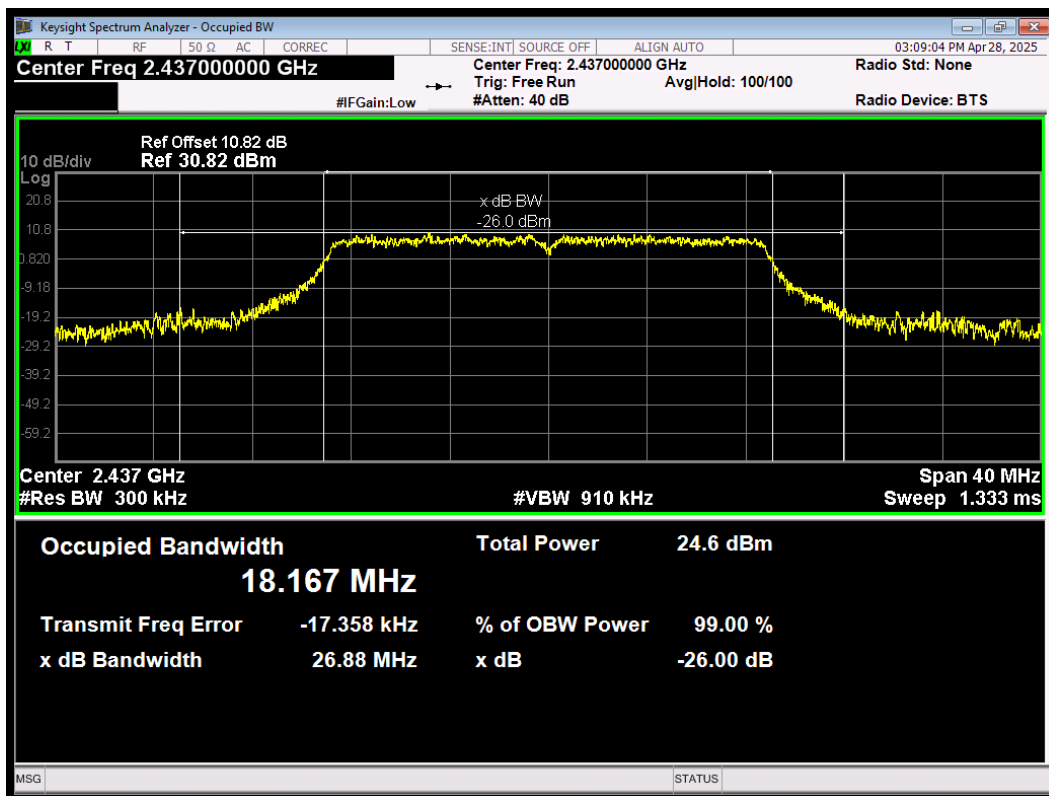


OBW 802.11n(HT20) 2462MHz

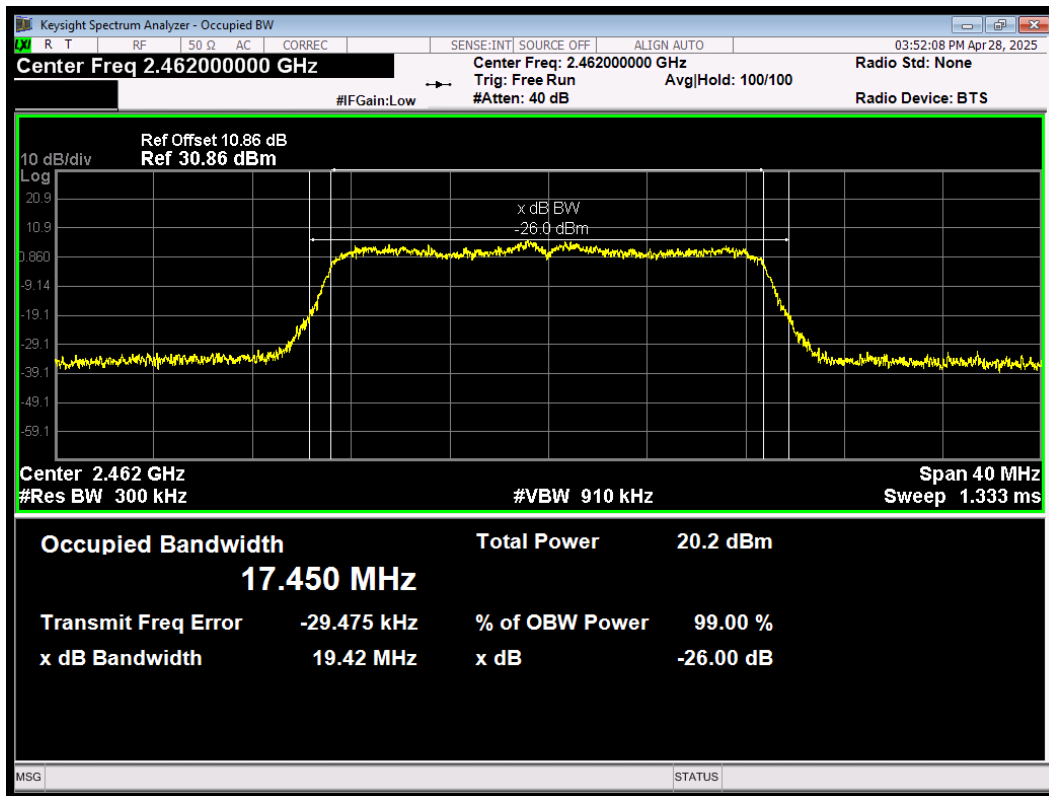


OBW 802.11n(HT20) 2467MHz

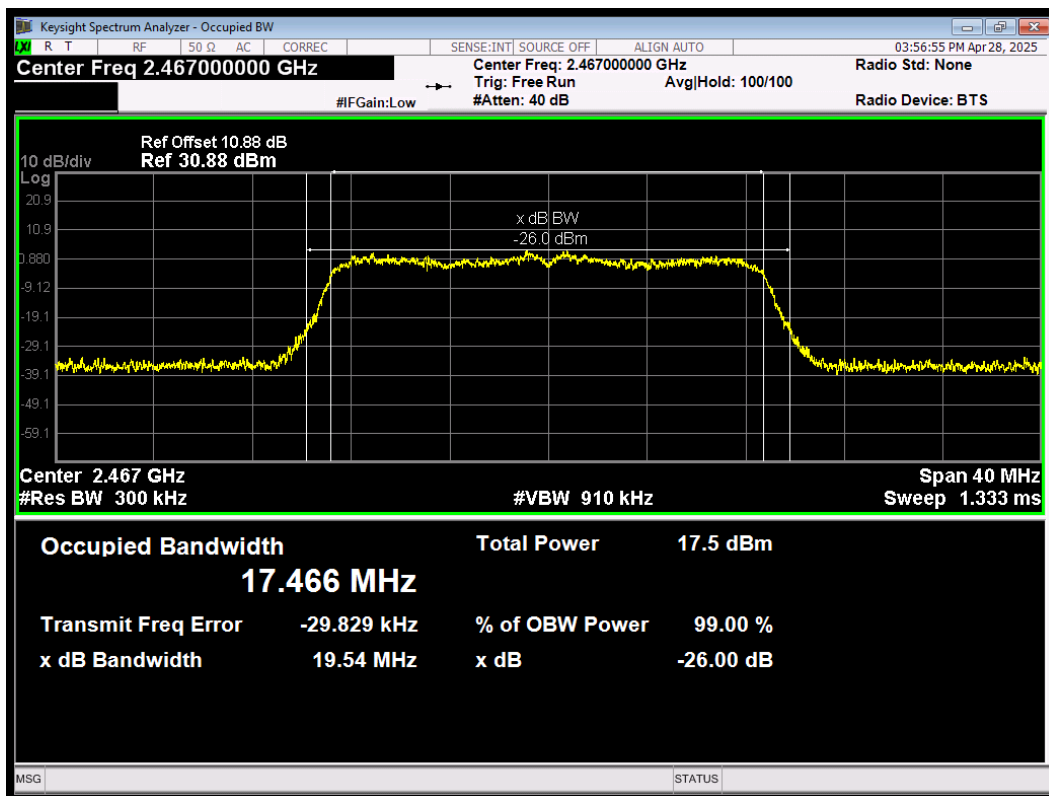


OBW 802.11n(HT20) 2472MHz

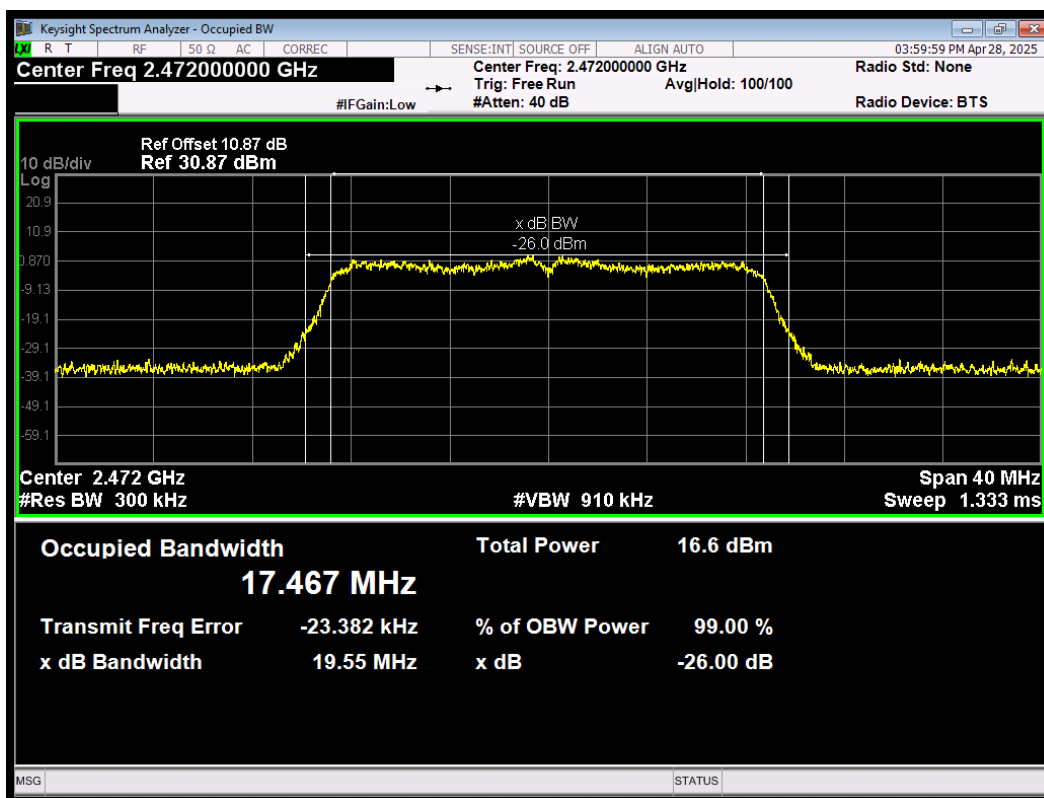


OBW 802.11n(HT40) 2422MHz

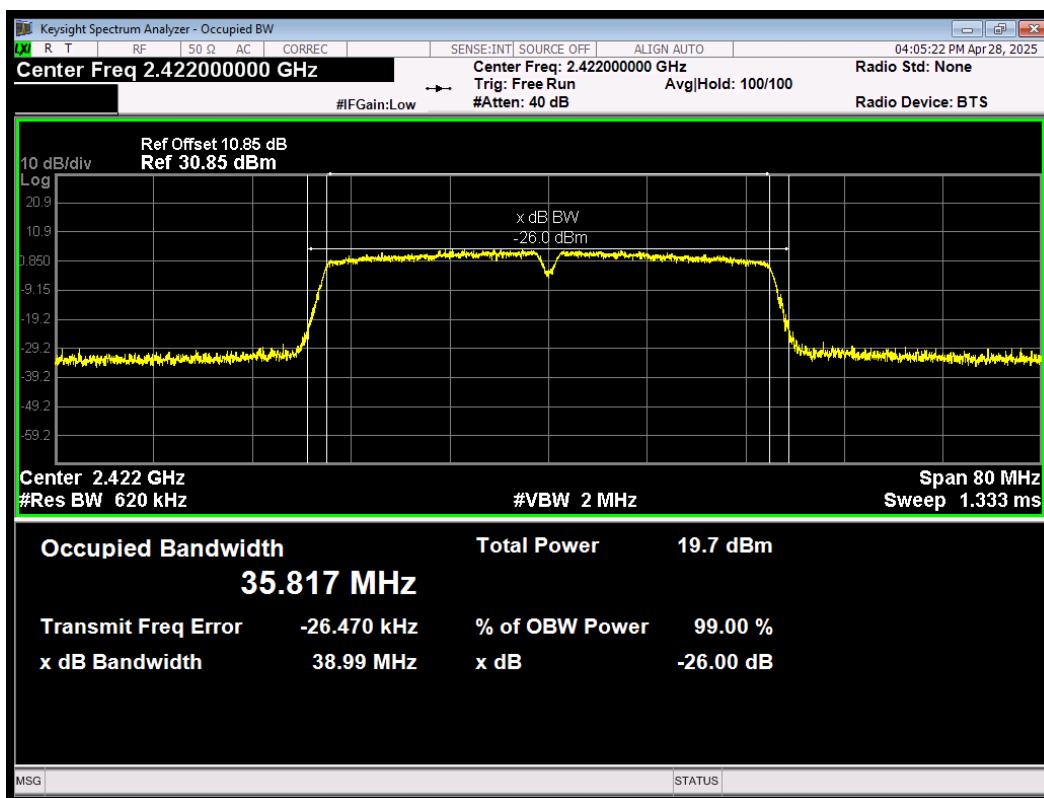


OBW 802.11n(HT40) 2437MHz

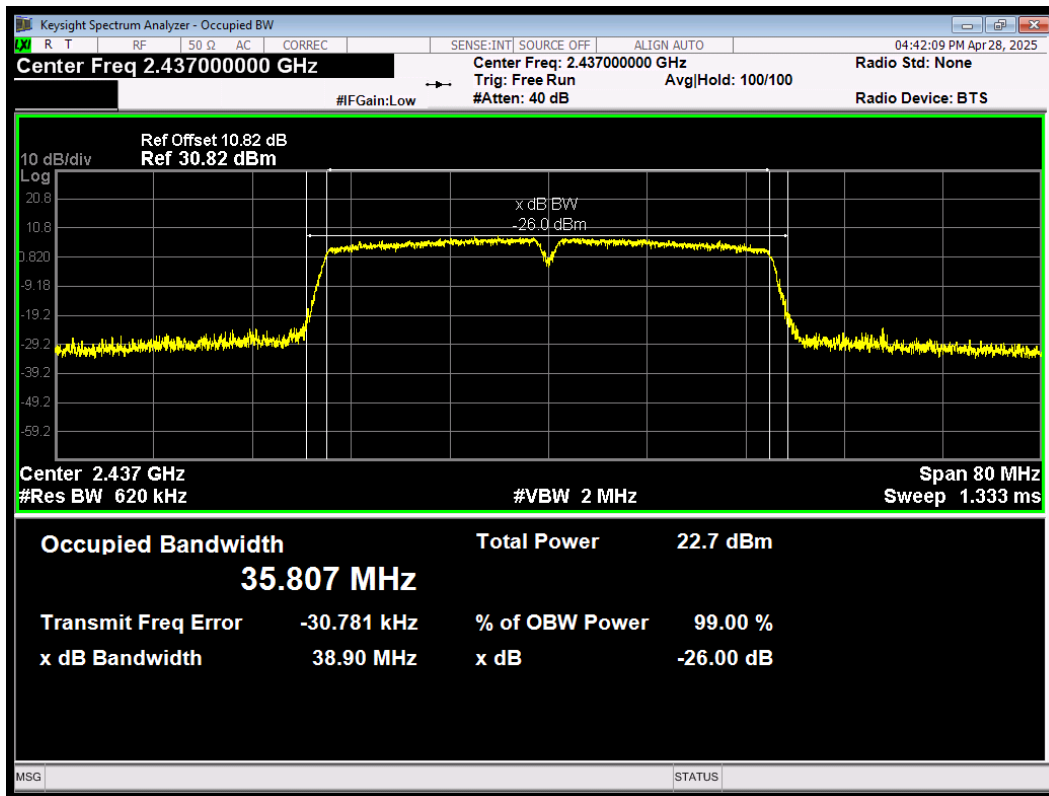


OBW 802.11n(HT40) 2452MHz

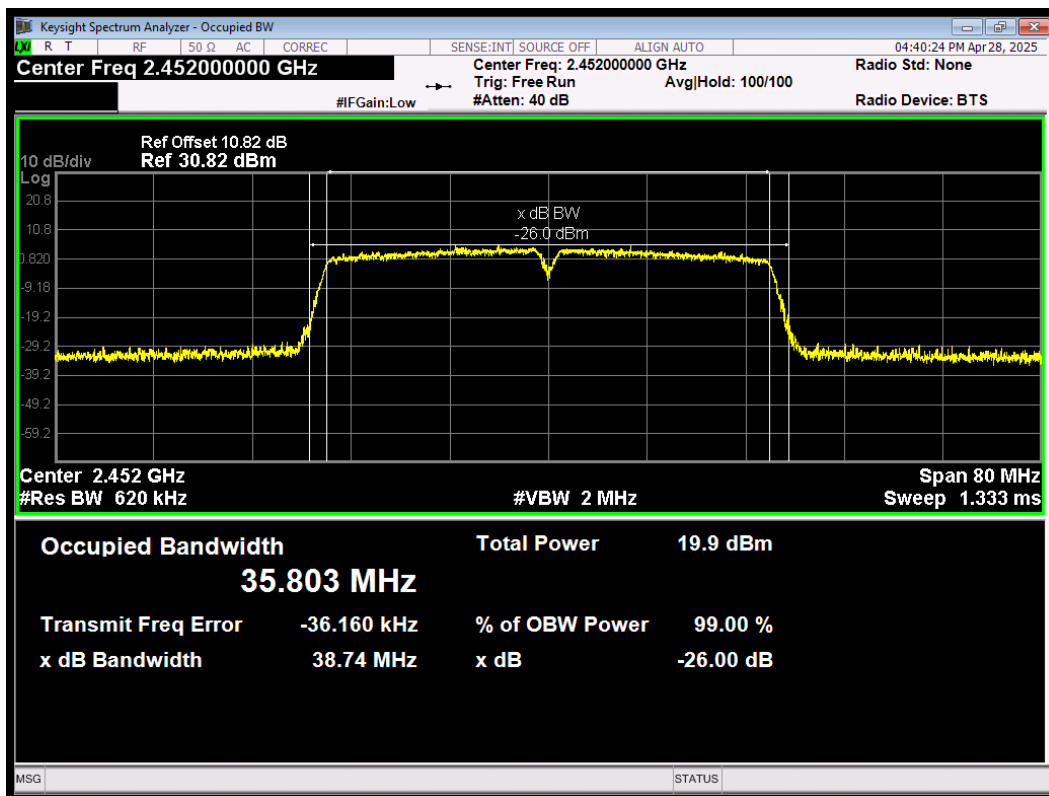


OBW 802.11n(HT40) 2457MHz

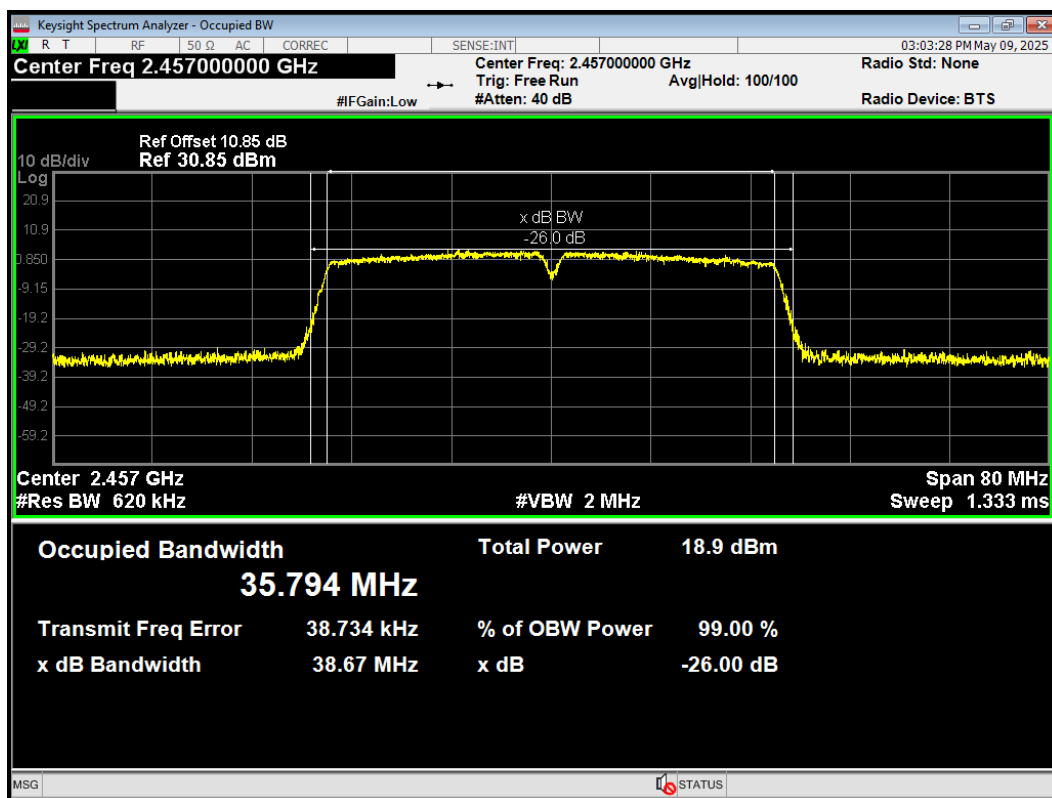


OBW 802.11n(HT40) 2462MHz

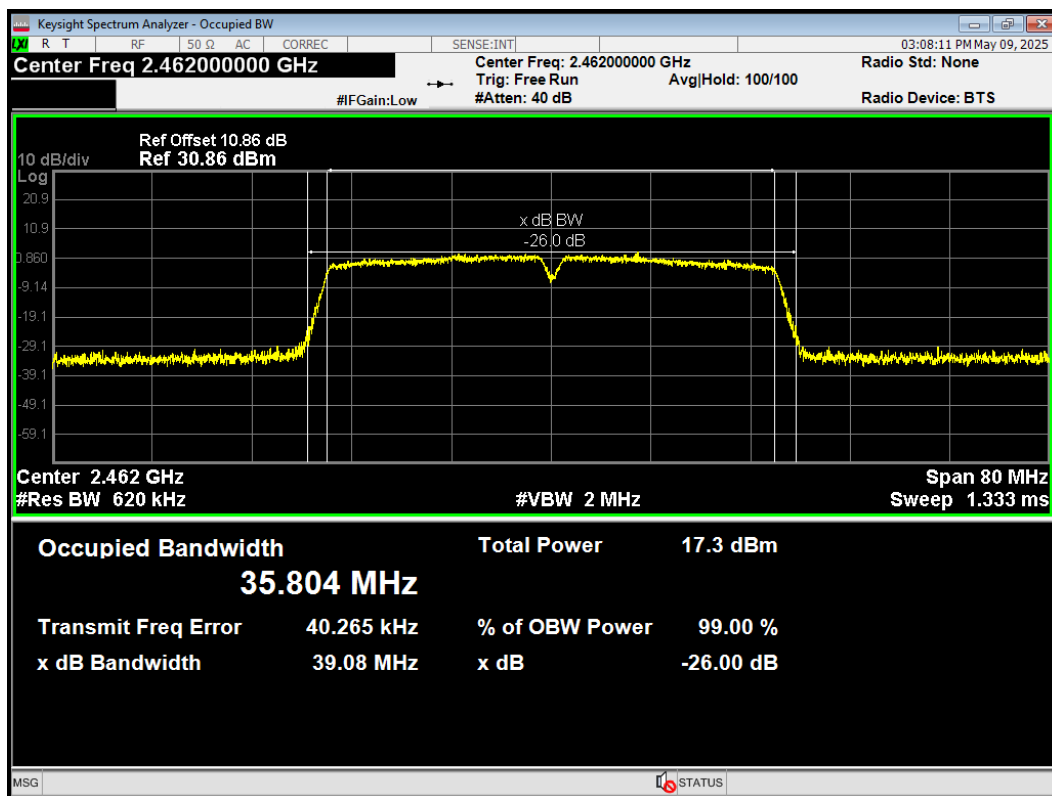


OBW Bluetooth LE(1M) 2402MHz

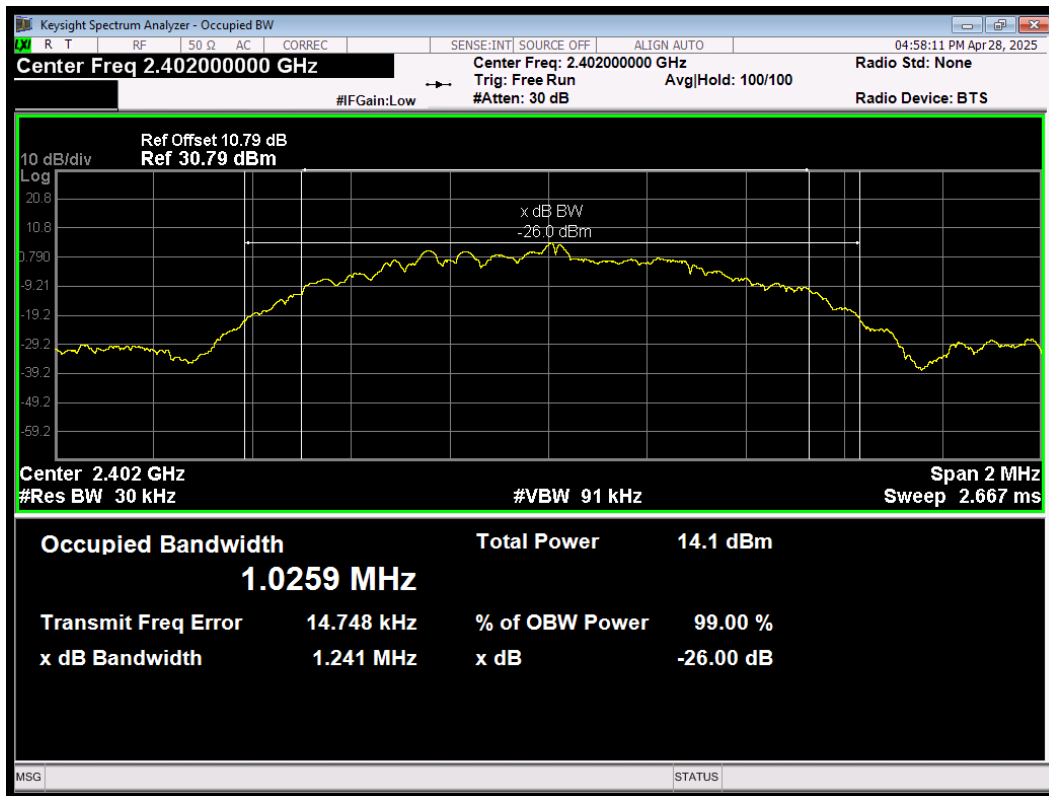


OBW Bluetooth LE(1M) 2440MHz

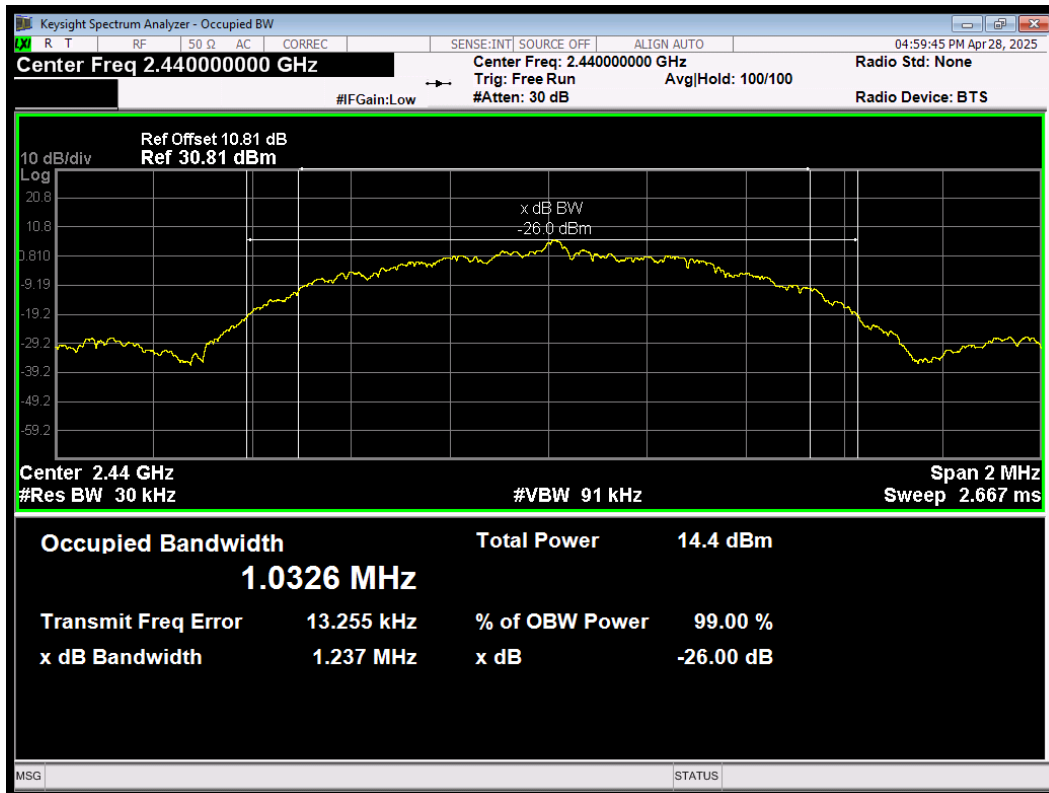


OBW Bluetooth LE(1M) 2480MHz

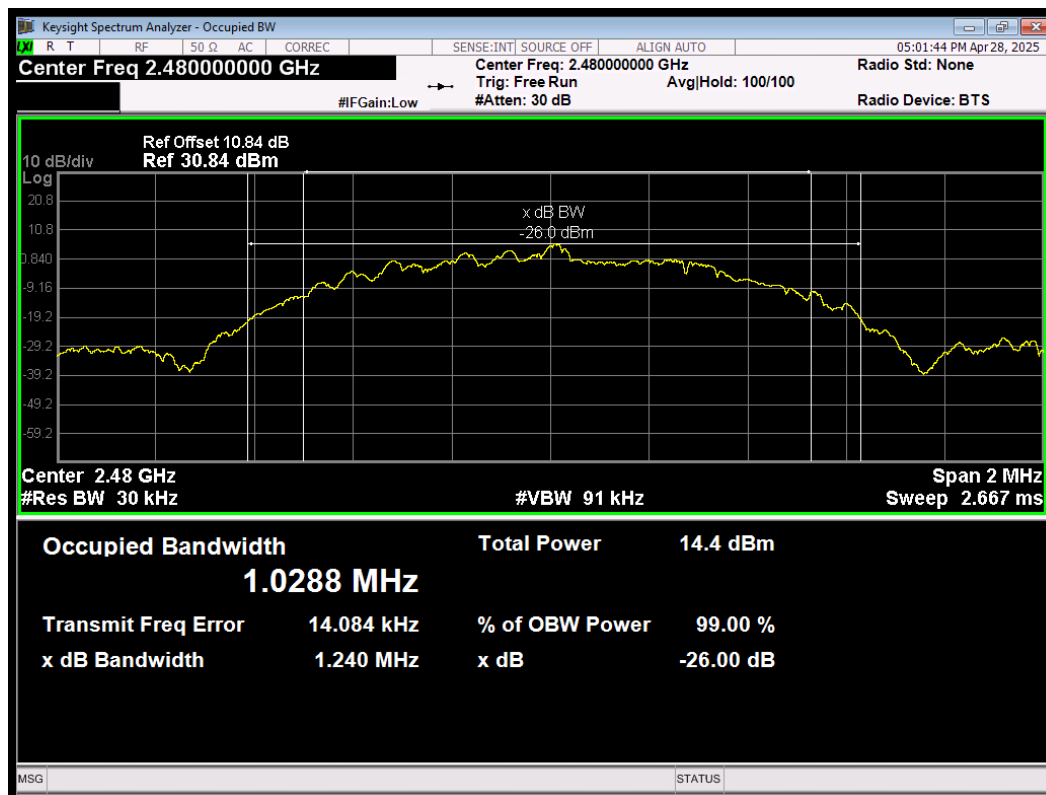


OBW Bluetooth LE(2M) 2404MHz

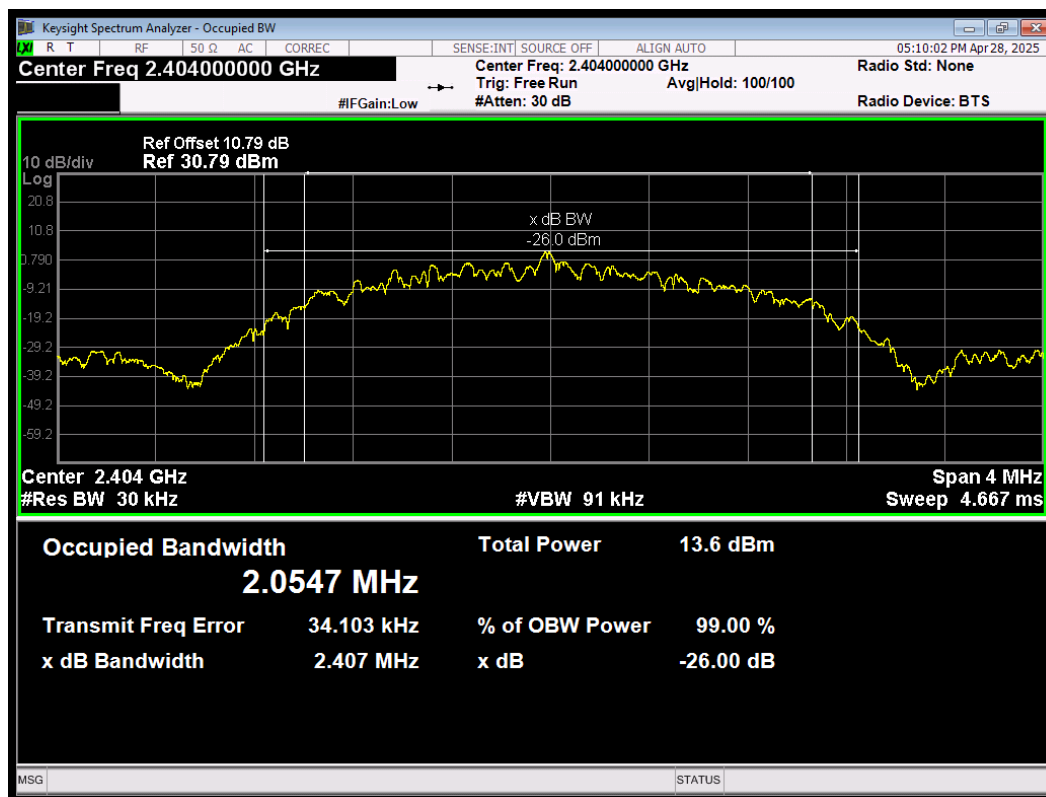


OBW Bluetooth LE(2M) 2440MHz

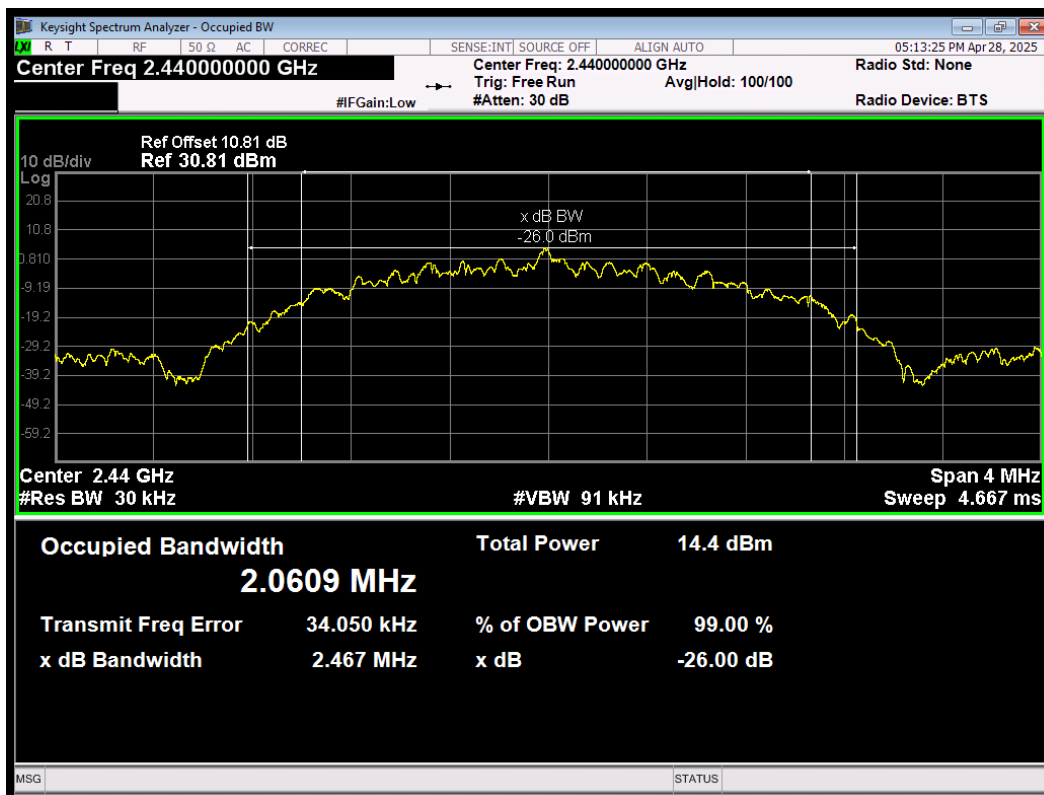


OBW Bluetooth LE(2M) 2478MHz

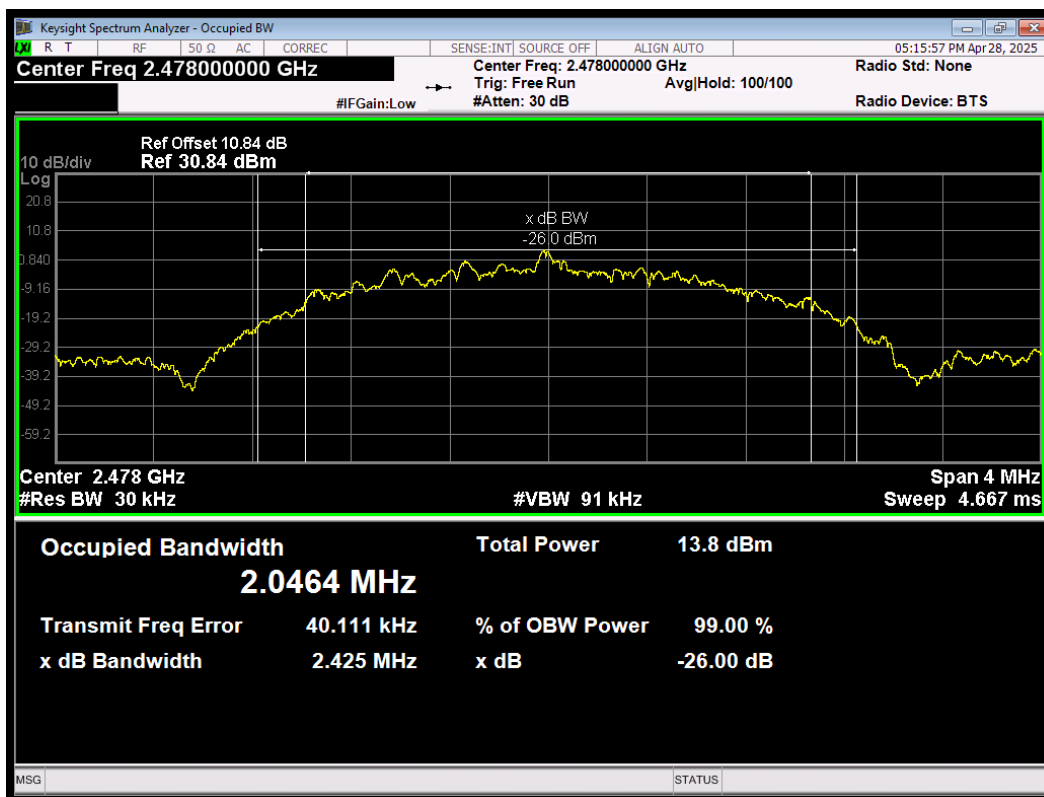


OBW Bluetooth LE(S=2) 2402MHz

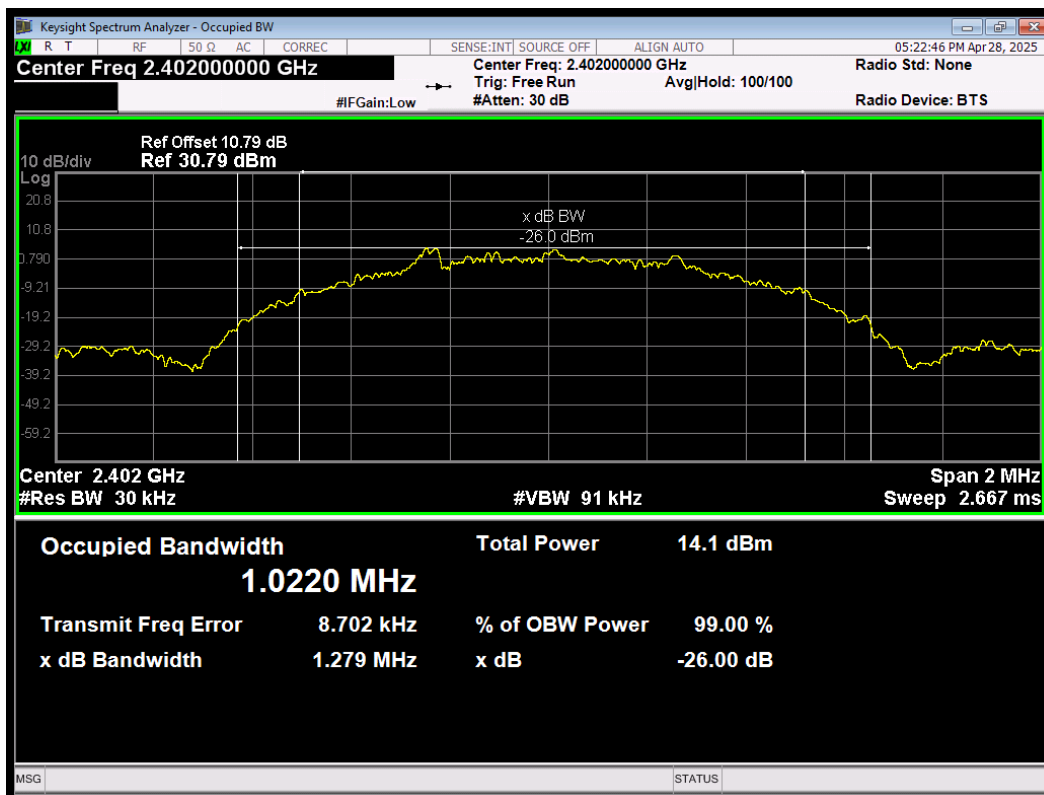


OBW Bluetooth LE(S=2) 2440MHz

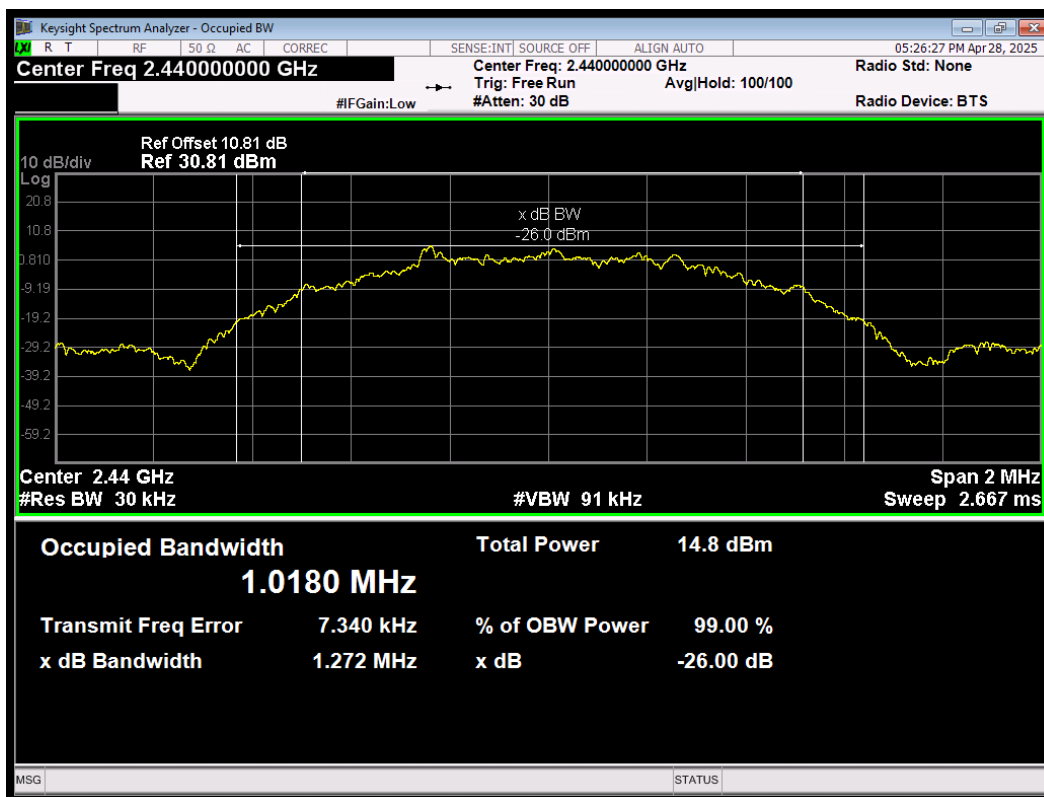


OBW Bluetooth LE(S=2) 2480MHz

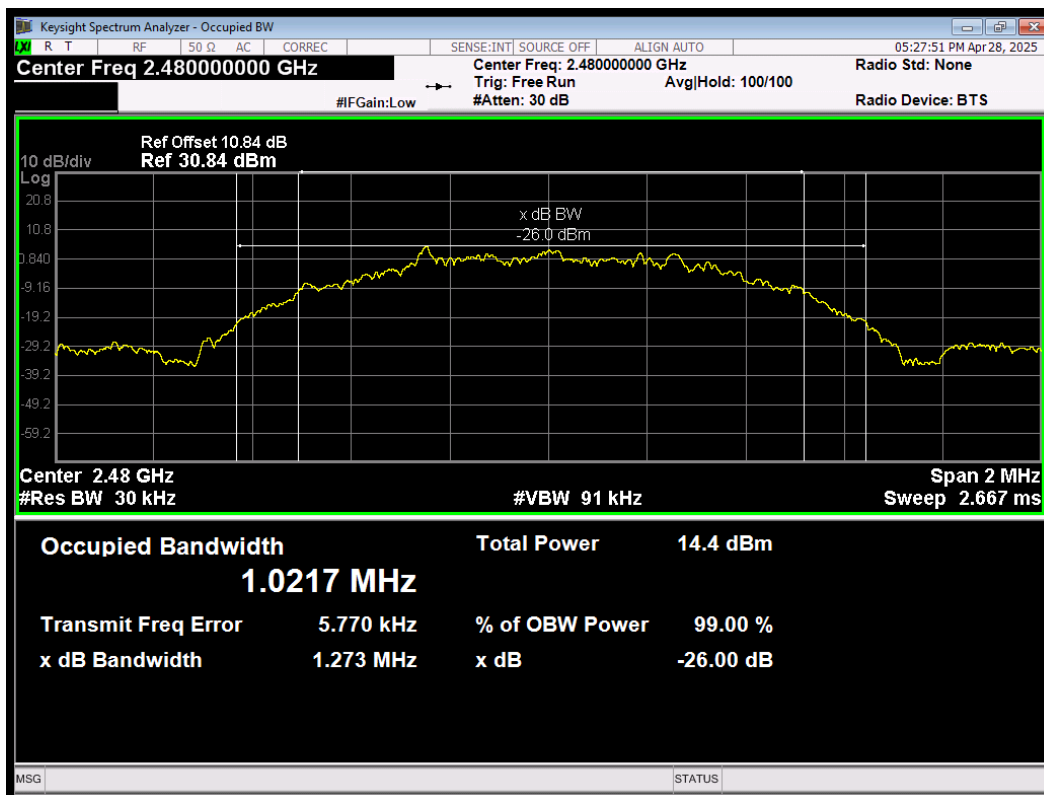


OBW Bluetooth LE(S=8) 2402MHz

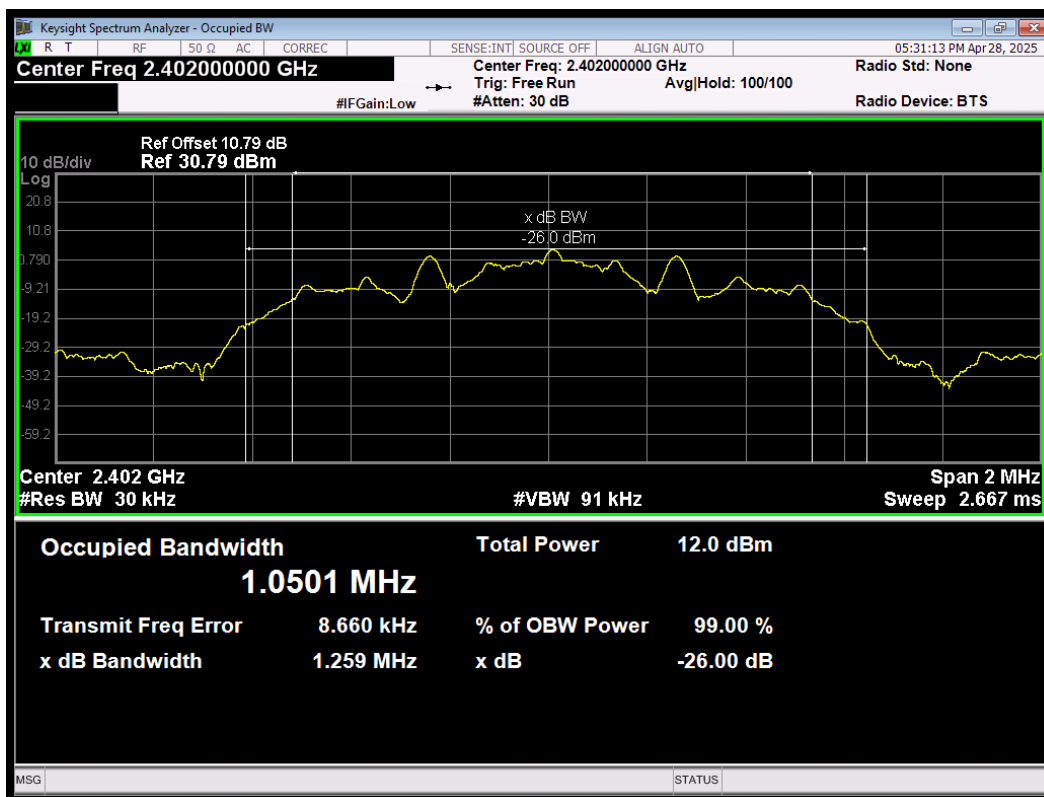

OBW Bluetooth LE(S=8) 2440MHz

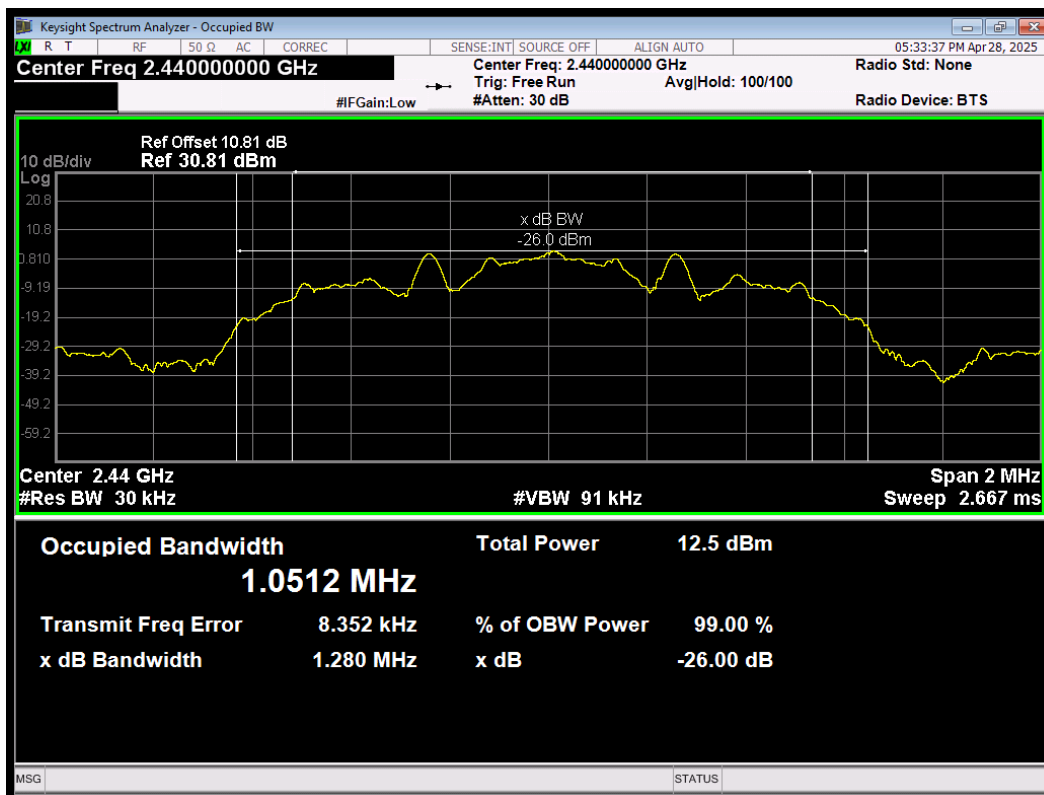


OBW Bluetooth LE(S=8) 2480MHz

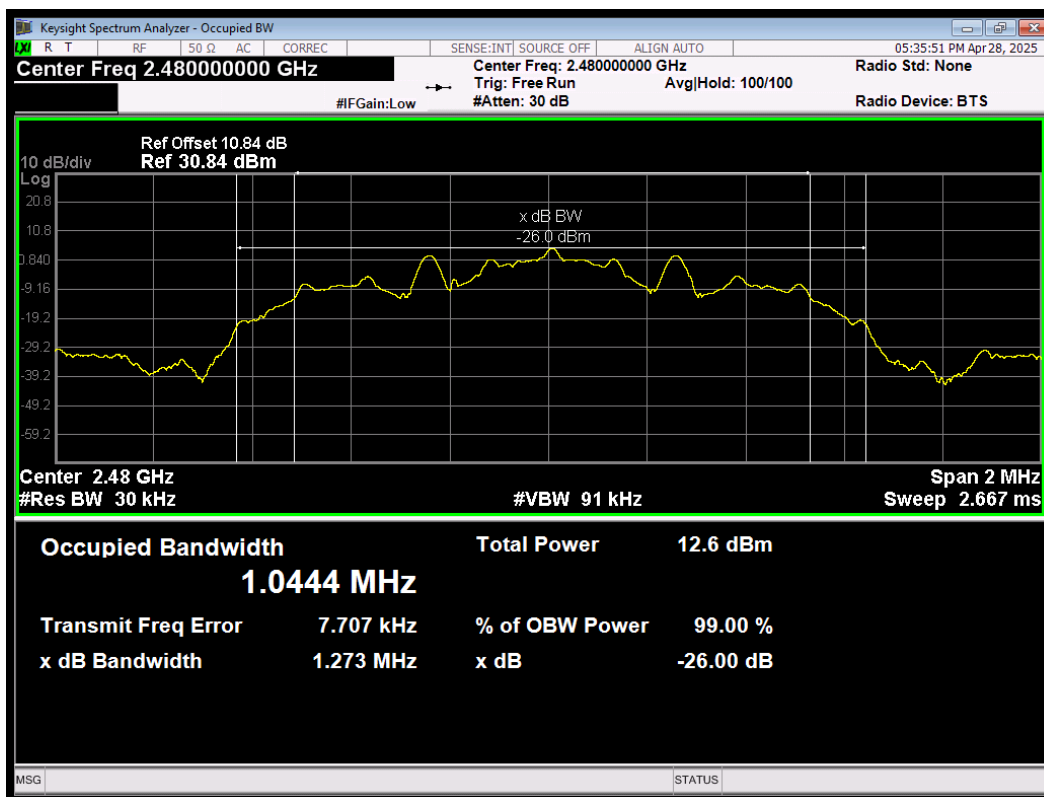


6 dB bandwidth


-6dB Bandwidth 802.11b 2412MHz

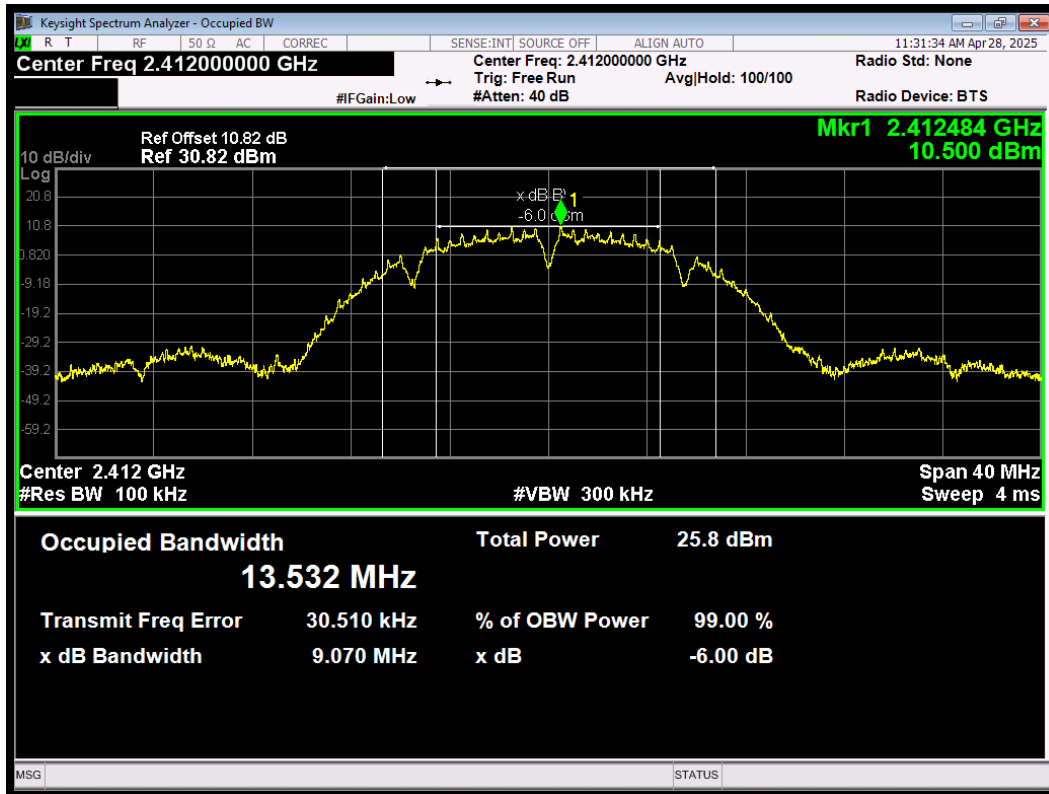


-6dB Bandwidth 802.11b 2437MHz

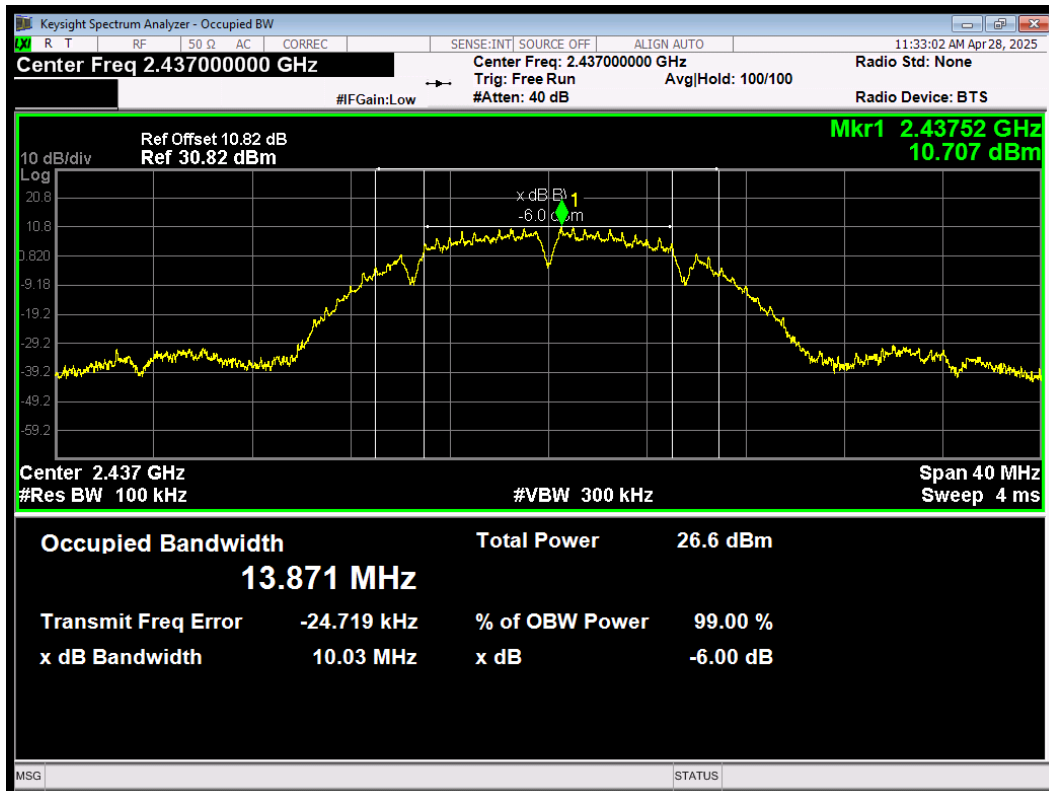


-6dB Bandwidth 802.11b 2462MHz

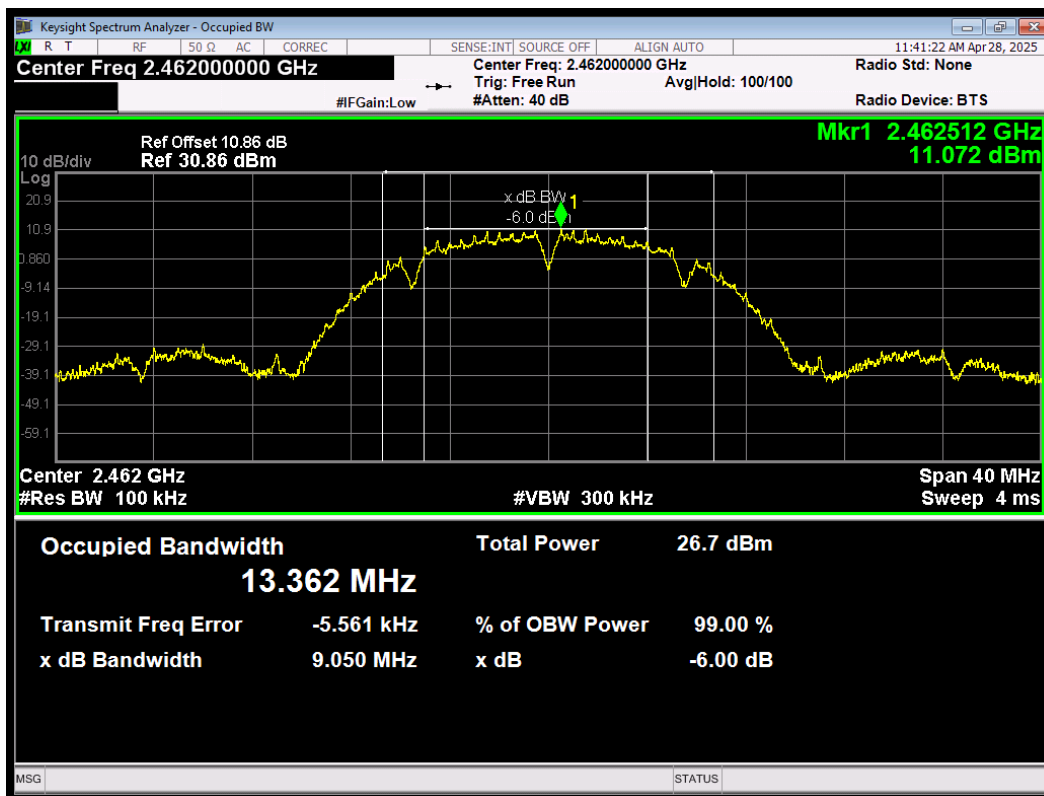


-6dB Bandwidth 802.11b 2467MHz

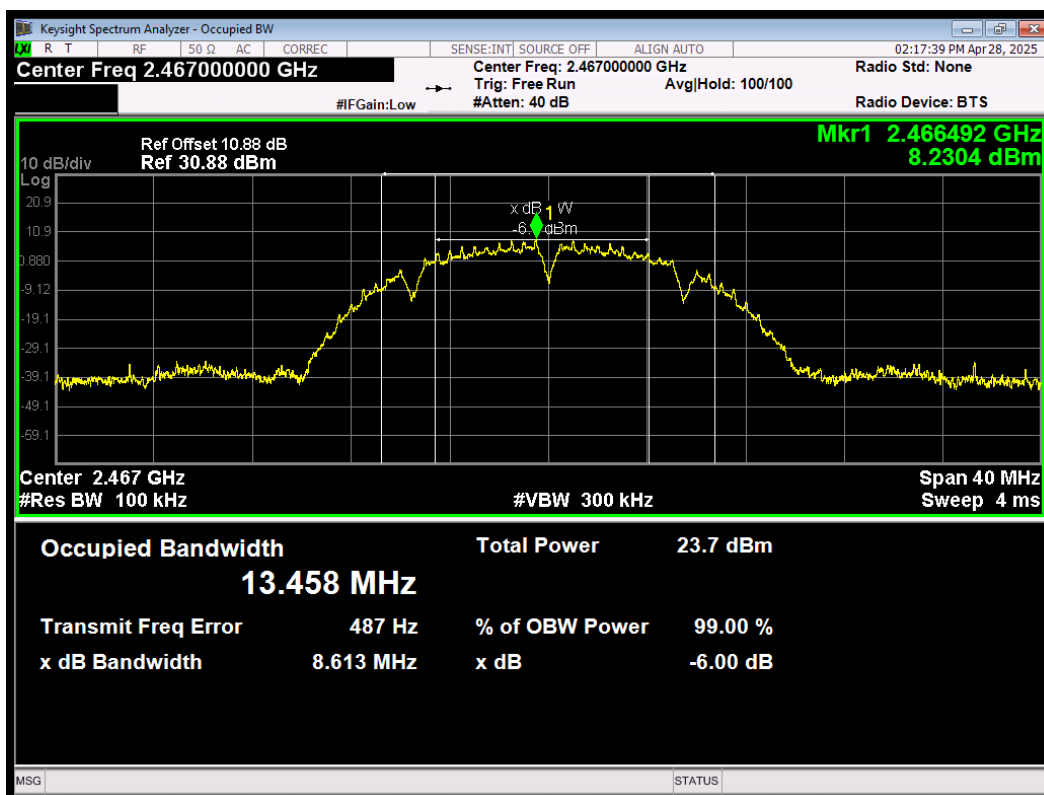


-6dB Bandwidth 802.11b 2472MHz

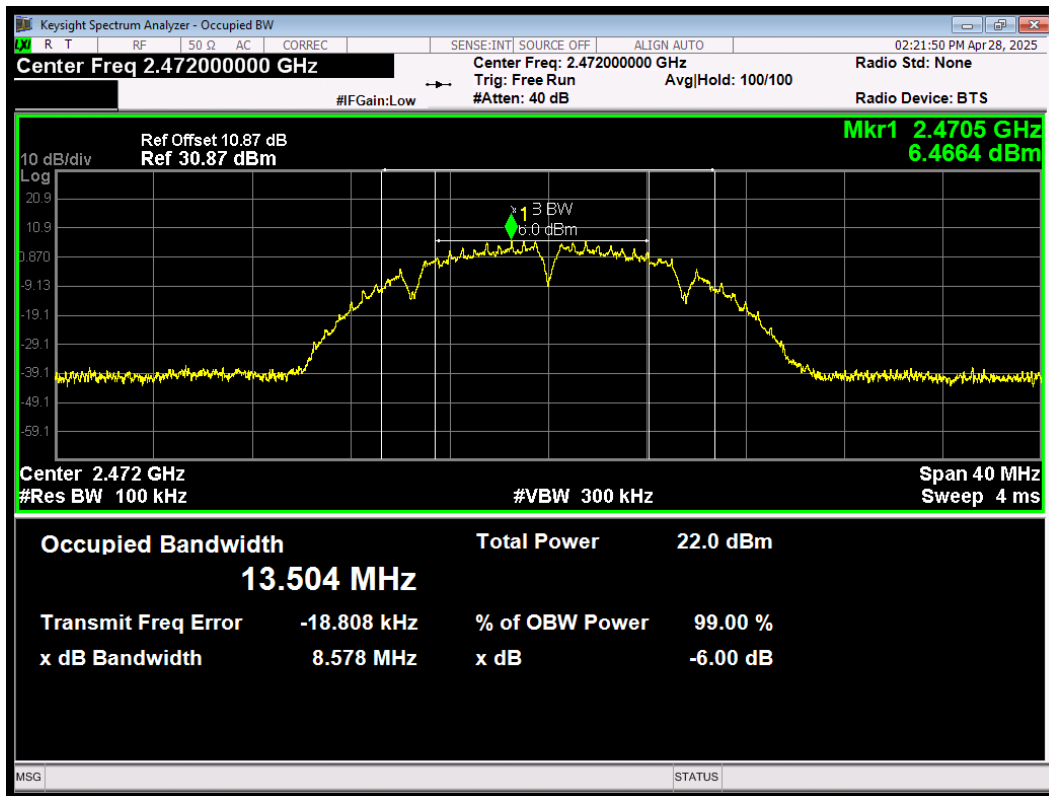


-6dB Bandwidth 802.11g 2412MHz

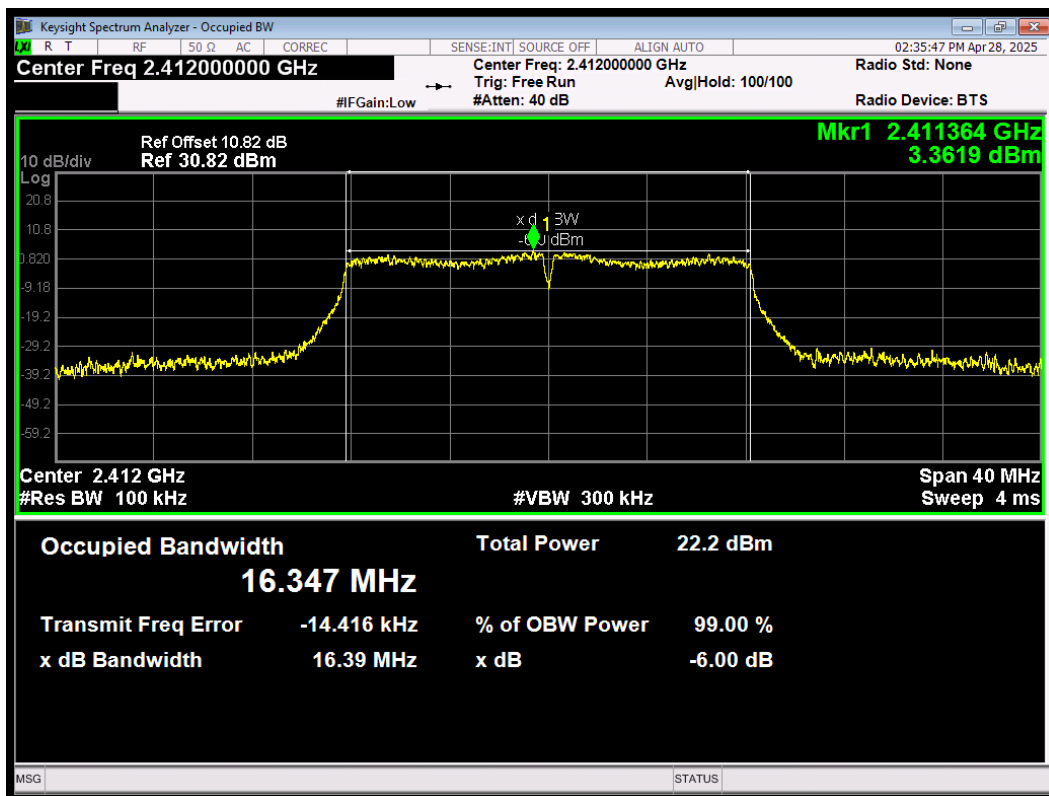


-6dB Bandwidth 802.11g 2437MHz

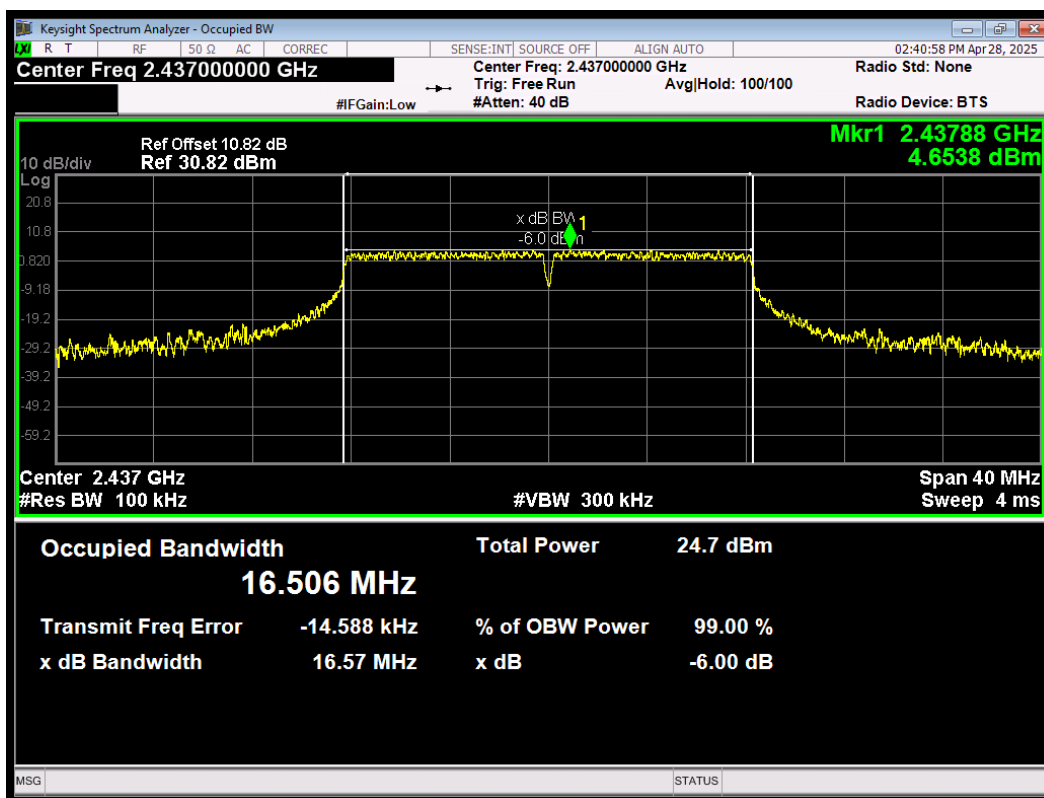


-6dB Bandwidth 802.11g 2462MHz

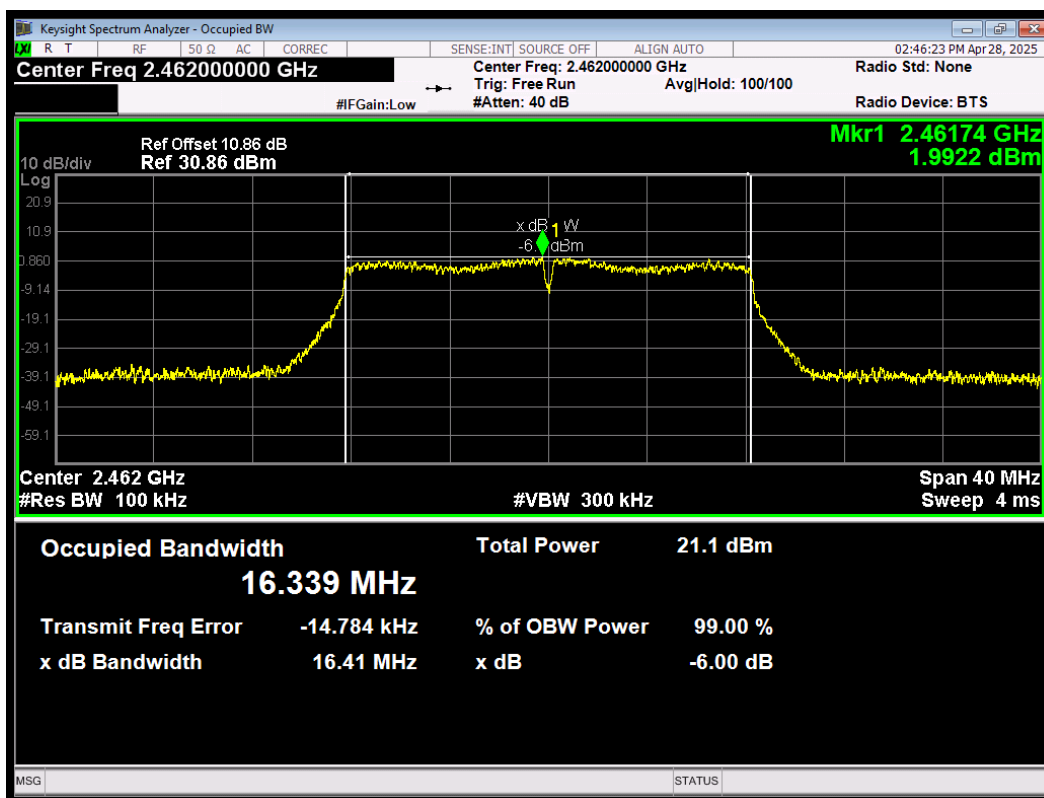


-6dB Bandwidth 802.11g 2467MHz

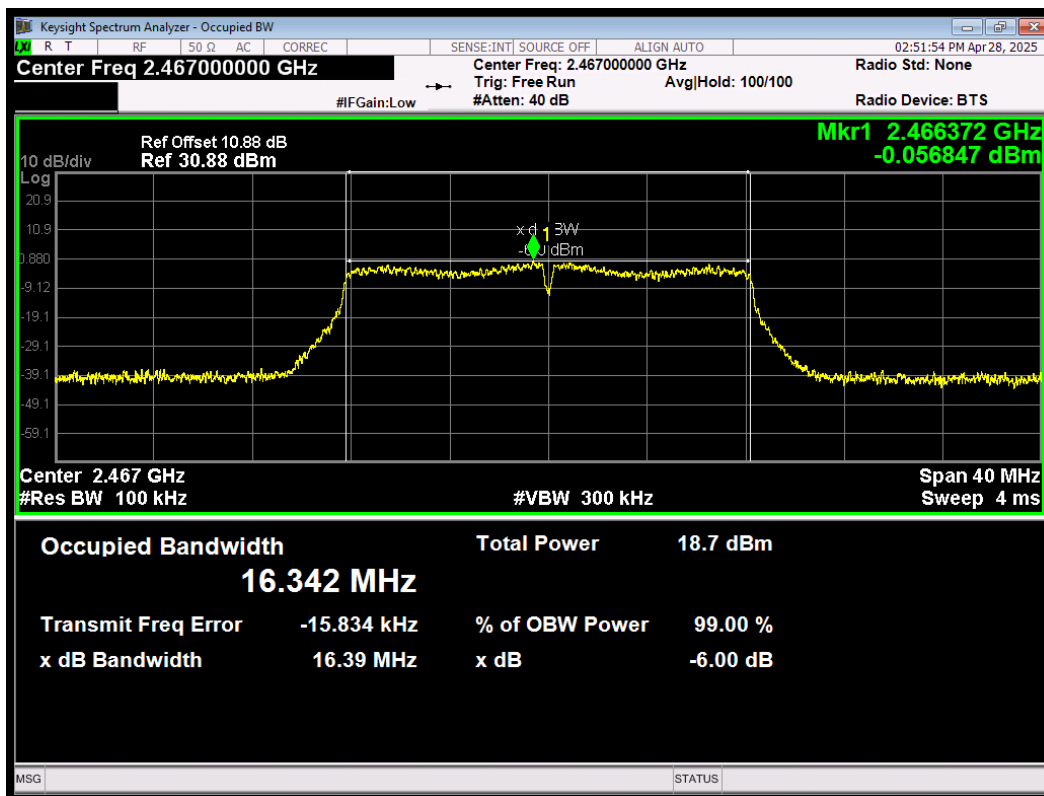


-6dB Bandwidth 802.11g 2472MHz

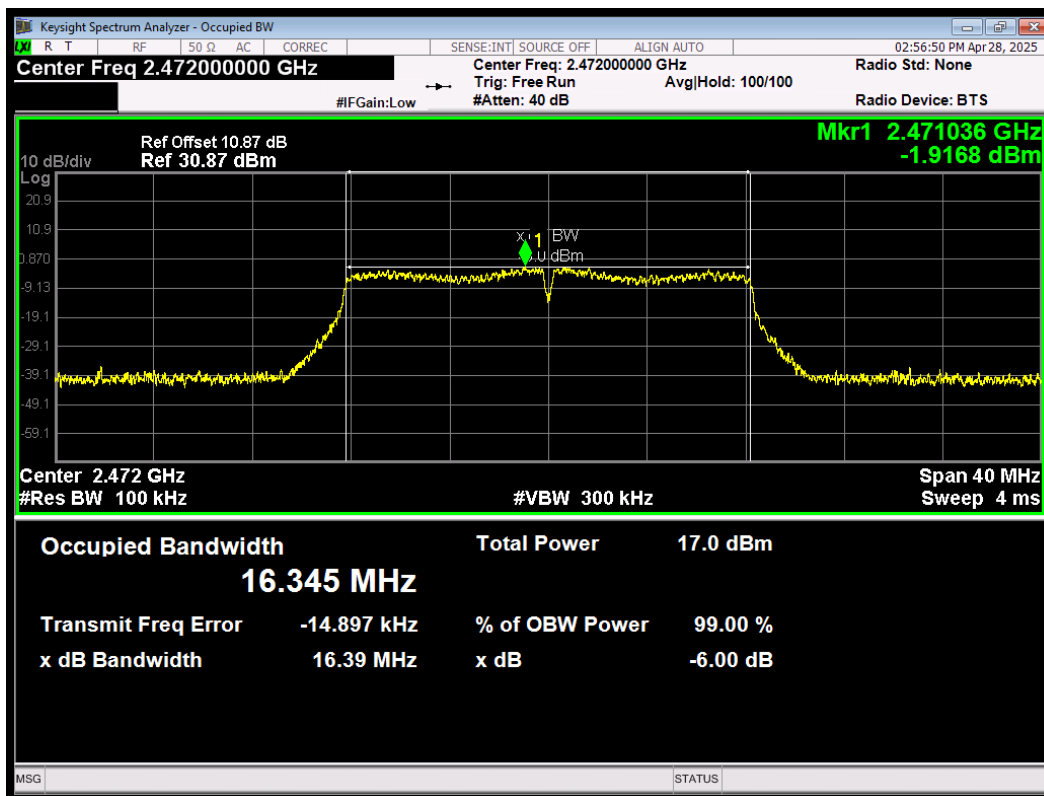


-6dB Bandwidth 802.11n(HT20) 2412MHz

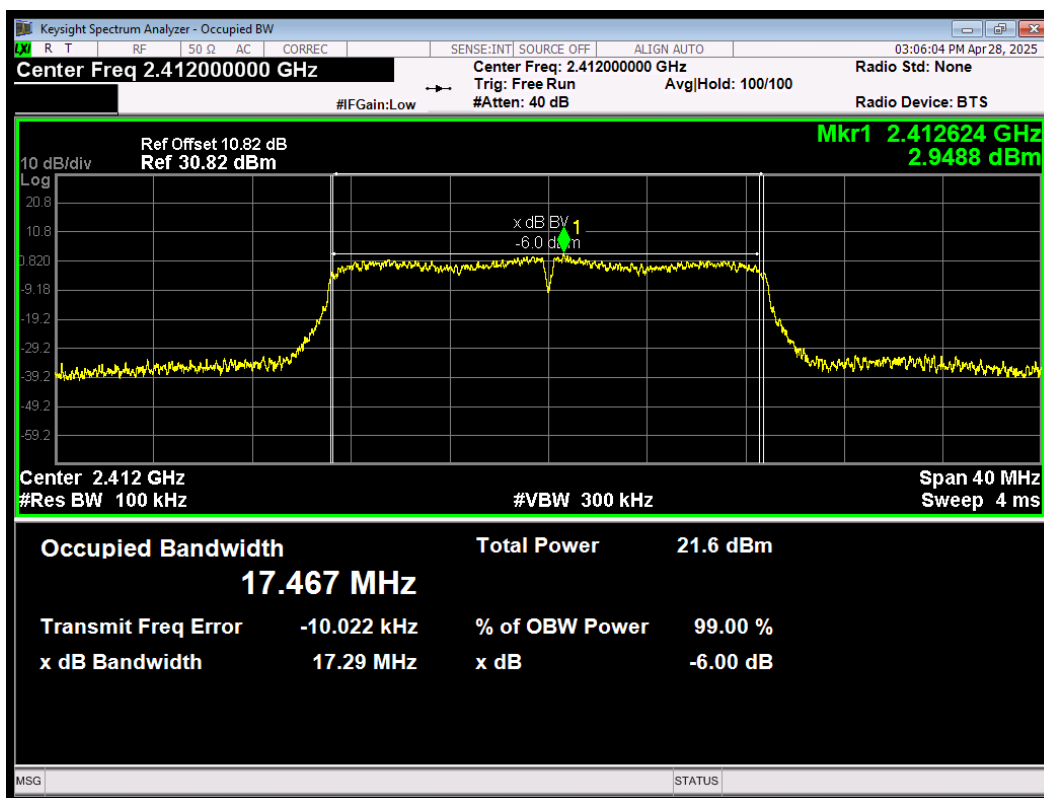


-6dB Bandwidth 802.11n(HT20) 2437MHz

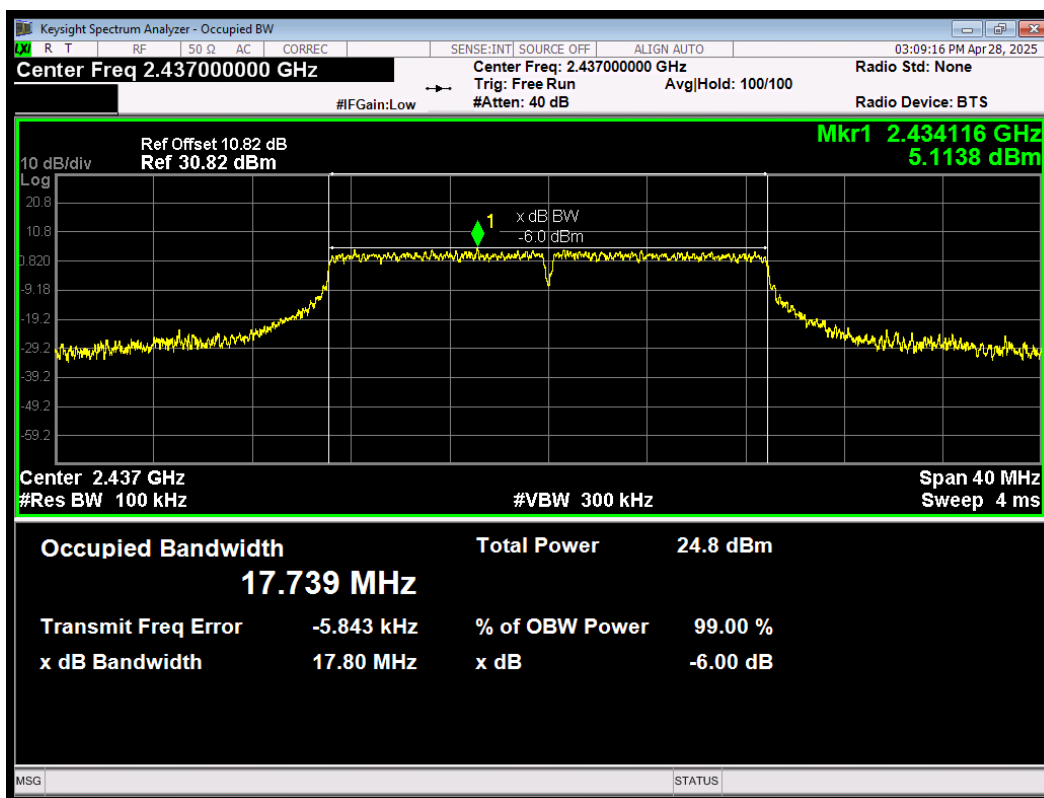


-6dB Bandwidth 802.11n(HT20) 2462MHz

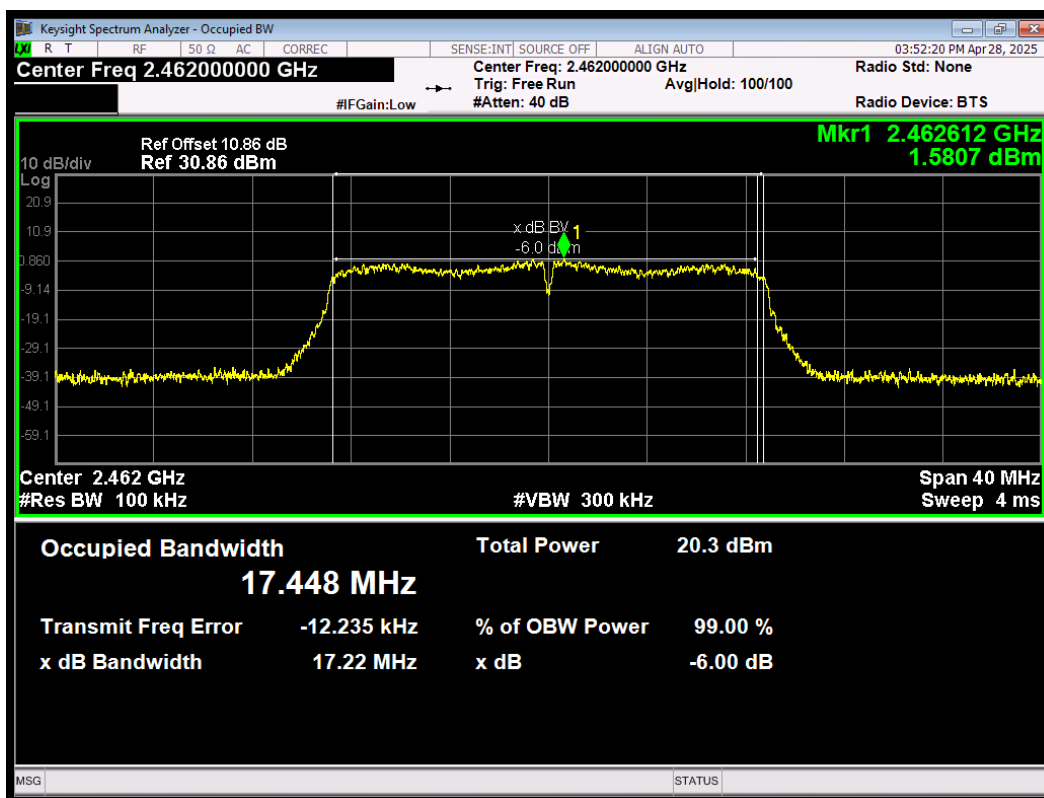


-6dB Bandwidth 802.11n(HT20) 2467MHz

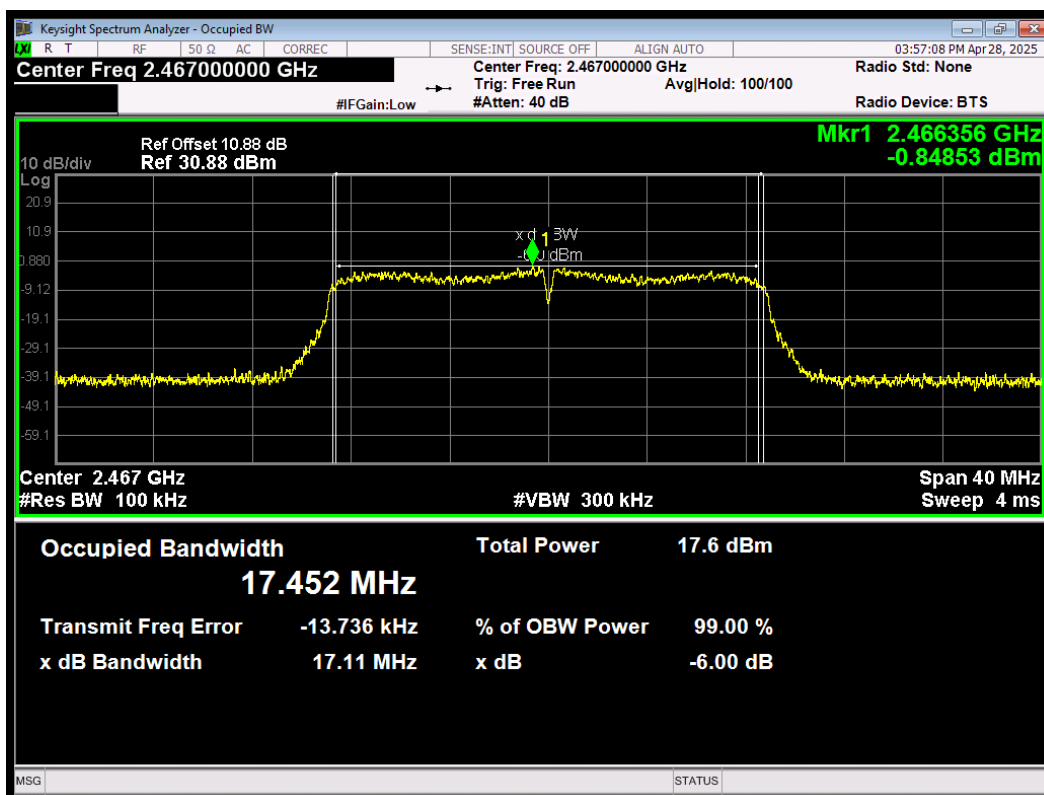


-6dB Bandwidth 802.11n(HT20) 2472MHz

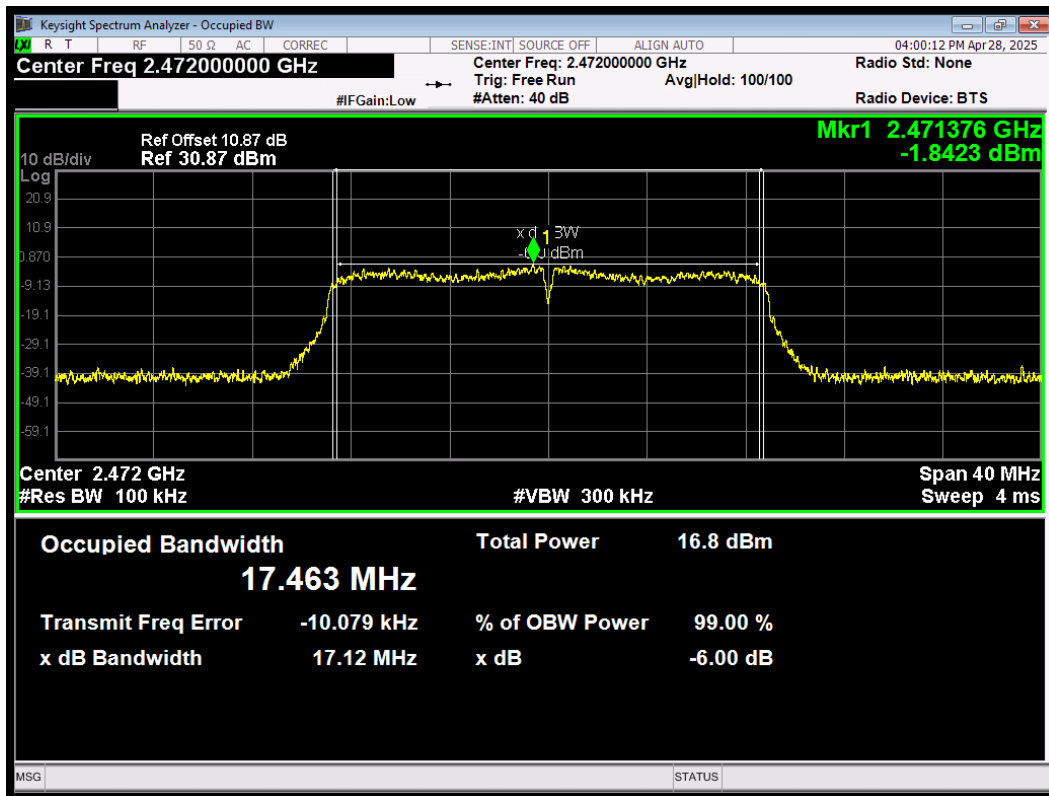


-6dB Bandwidth 802.11n(HT40) 2422MHz

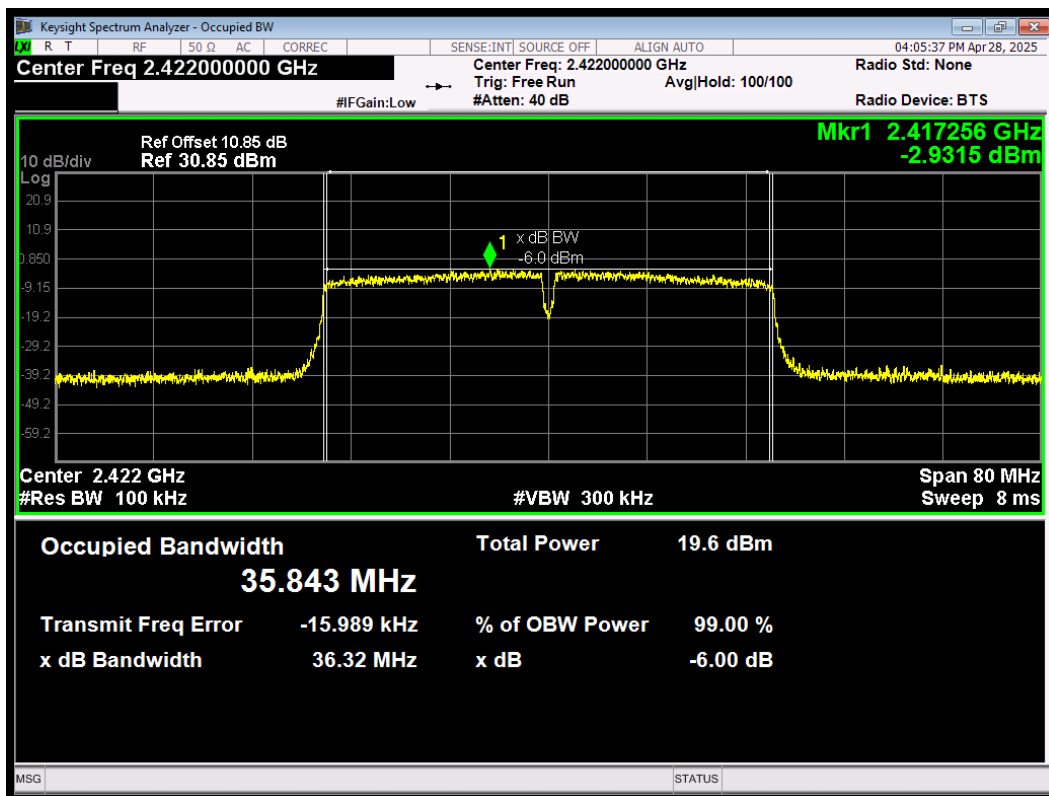


-6dB Bandwidth 802.11n(HT40) 2437MHz

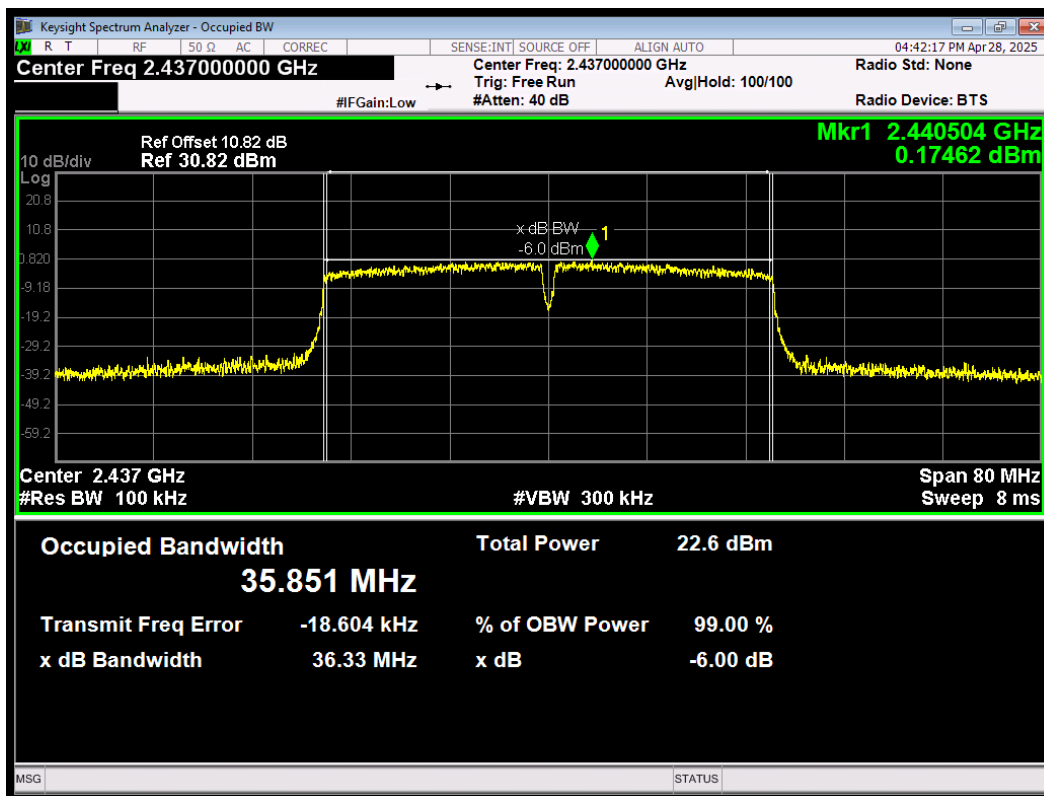


-6dB Bandwidth 802.11n(HT40) 2452MHz

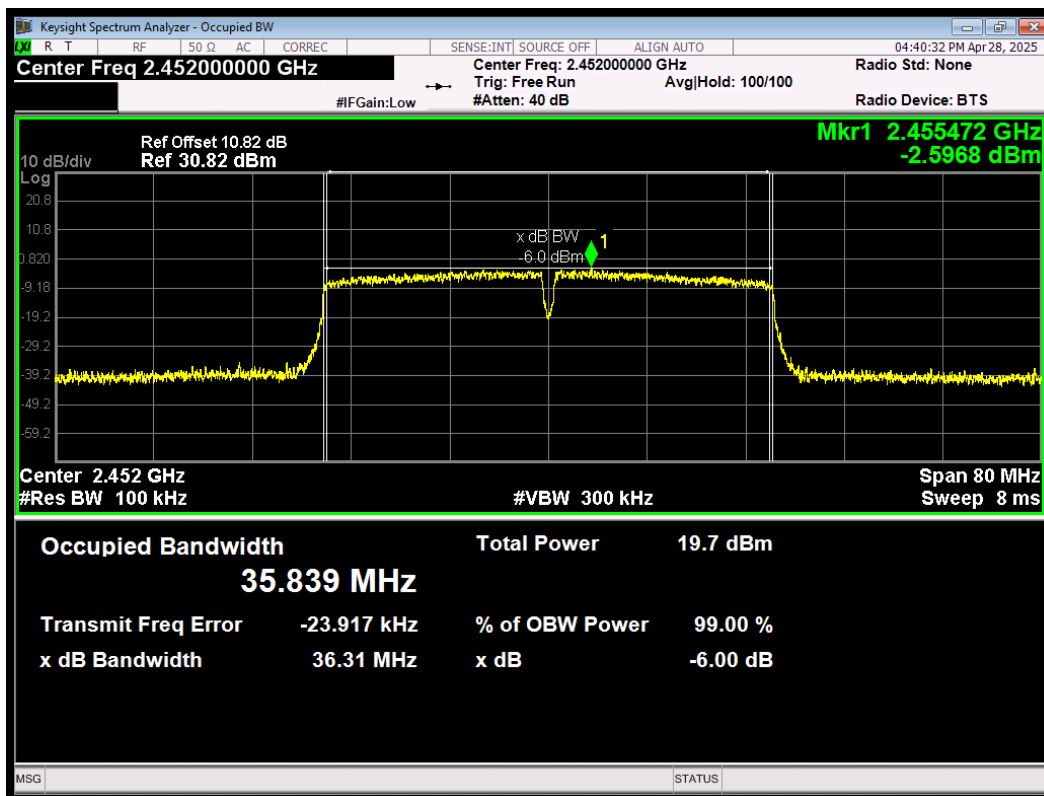


-6dB Bandwidth 802.11n(HT40) 2457MHz

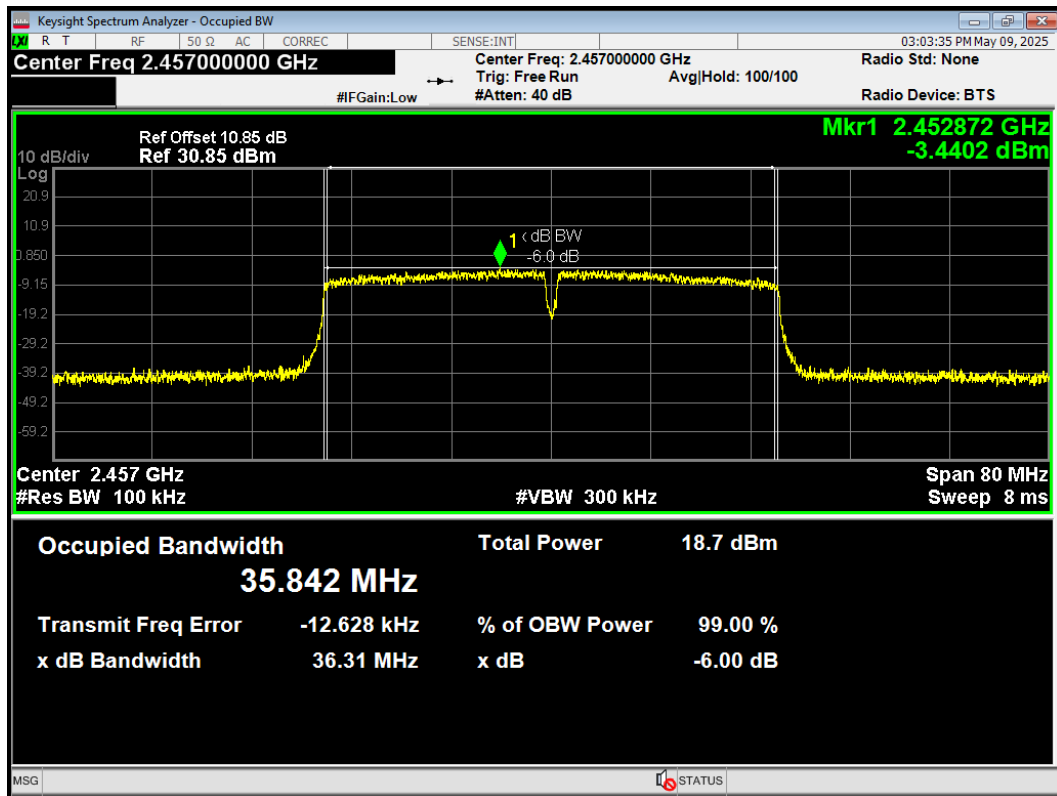


-6dB Bandwidth 802.11n(HT40) 2462MHz

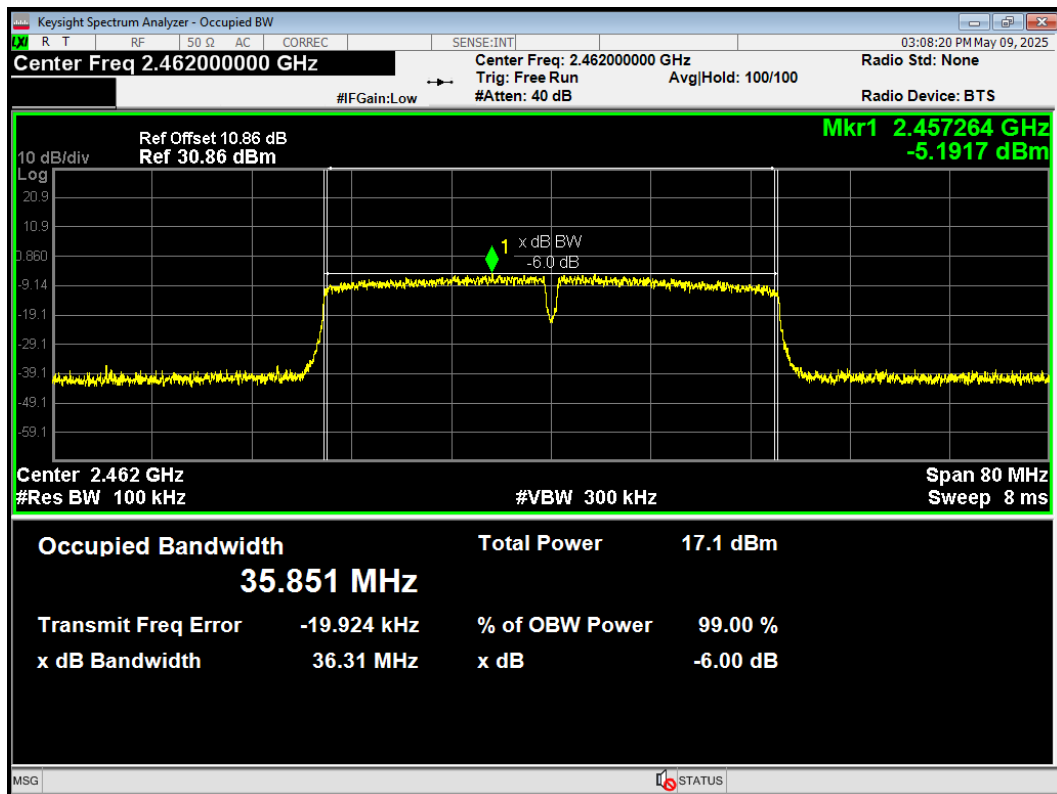


-6dB Bandwidth Bluetooth LE(1M) 2402MHz

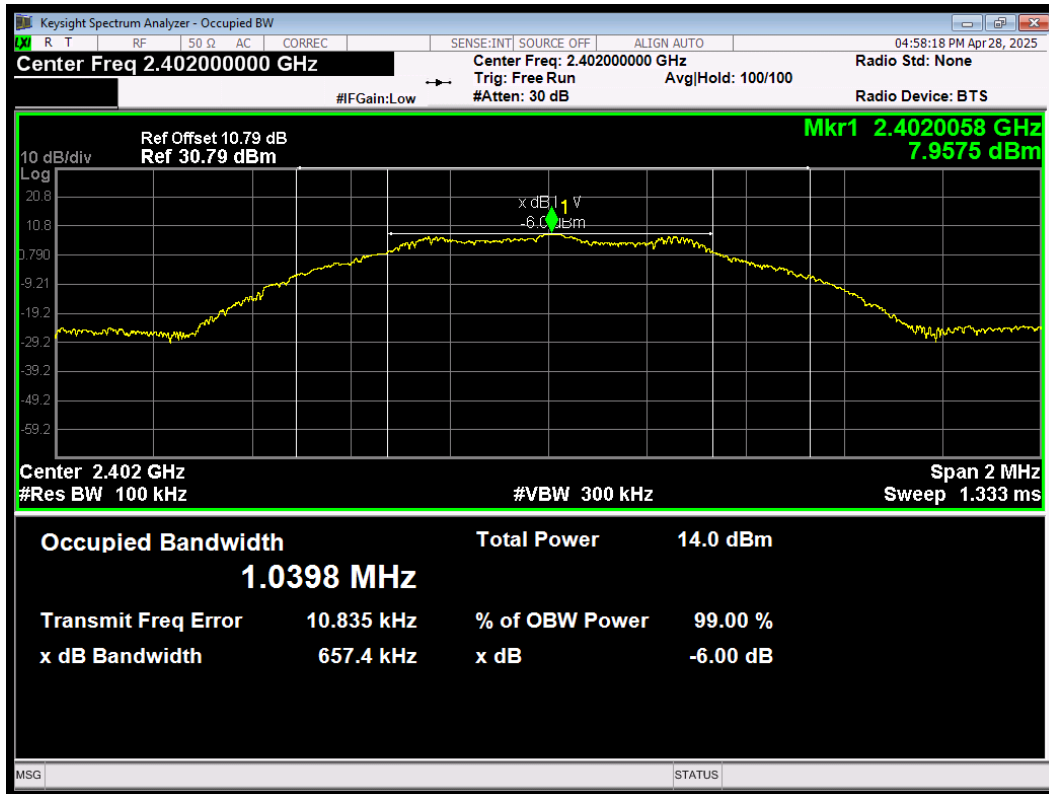


-6dB Bandwidth Bluetooth LE(1M) 2440MHz

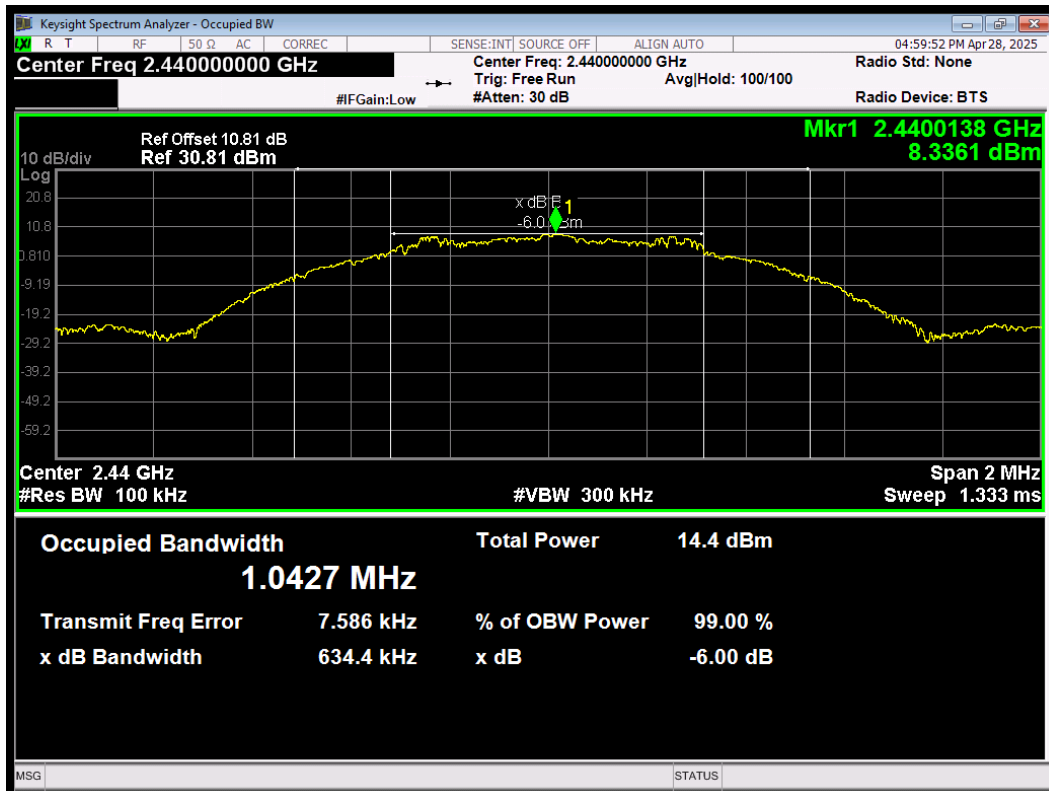


-6dB Bandwidth Bluetooth LE(1M) 2480MHz

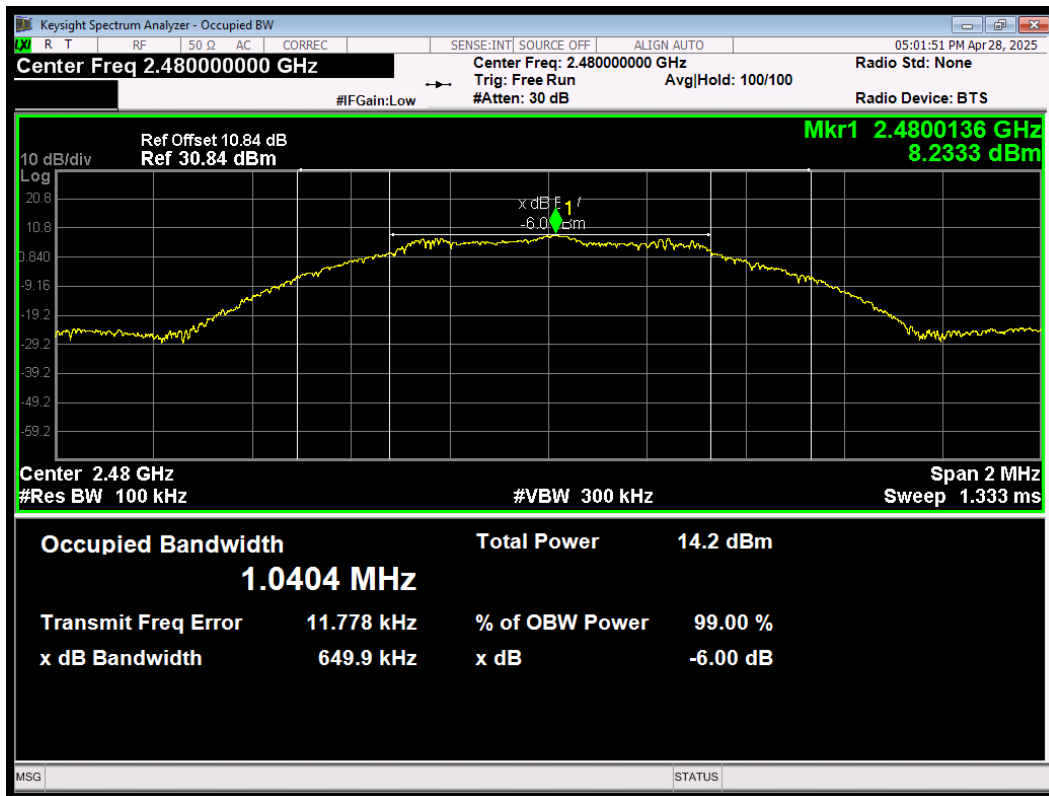


-6dB Bandwidth Bluetooth LE(2M) 2404MHz

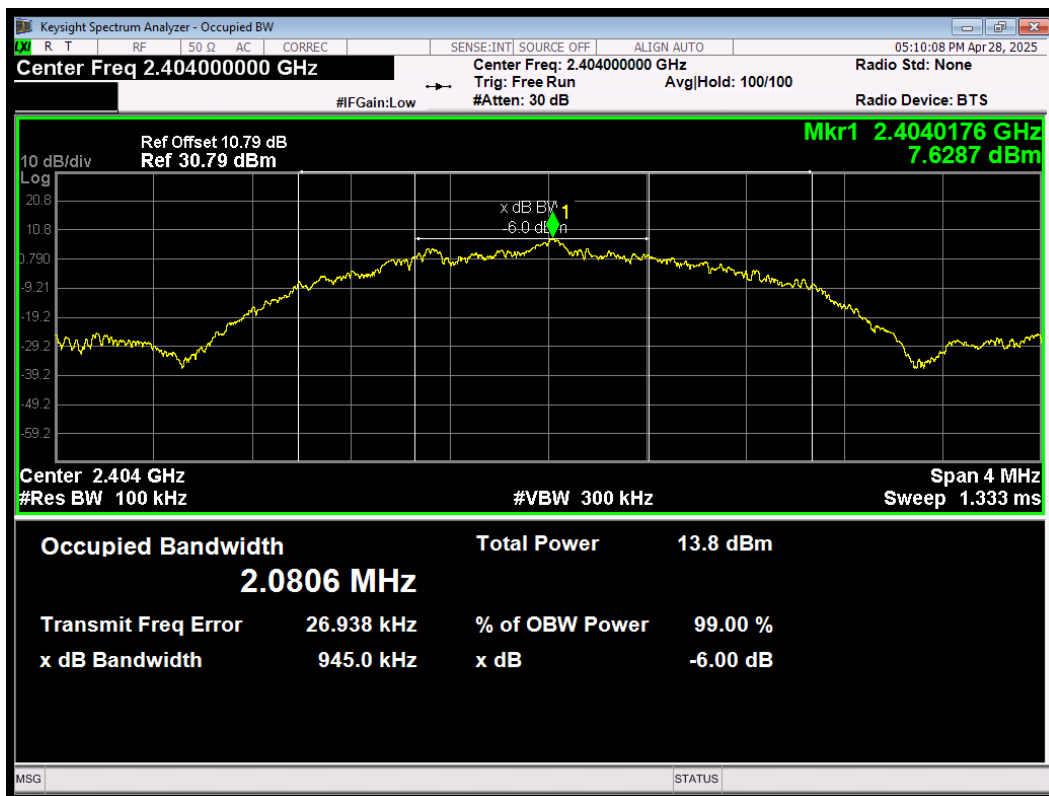


-6dB Bandwidth Bluetooth LE(2M) 2440MHz

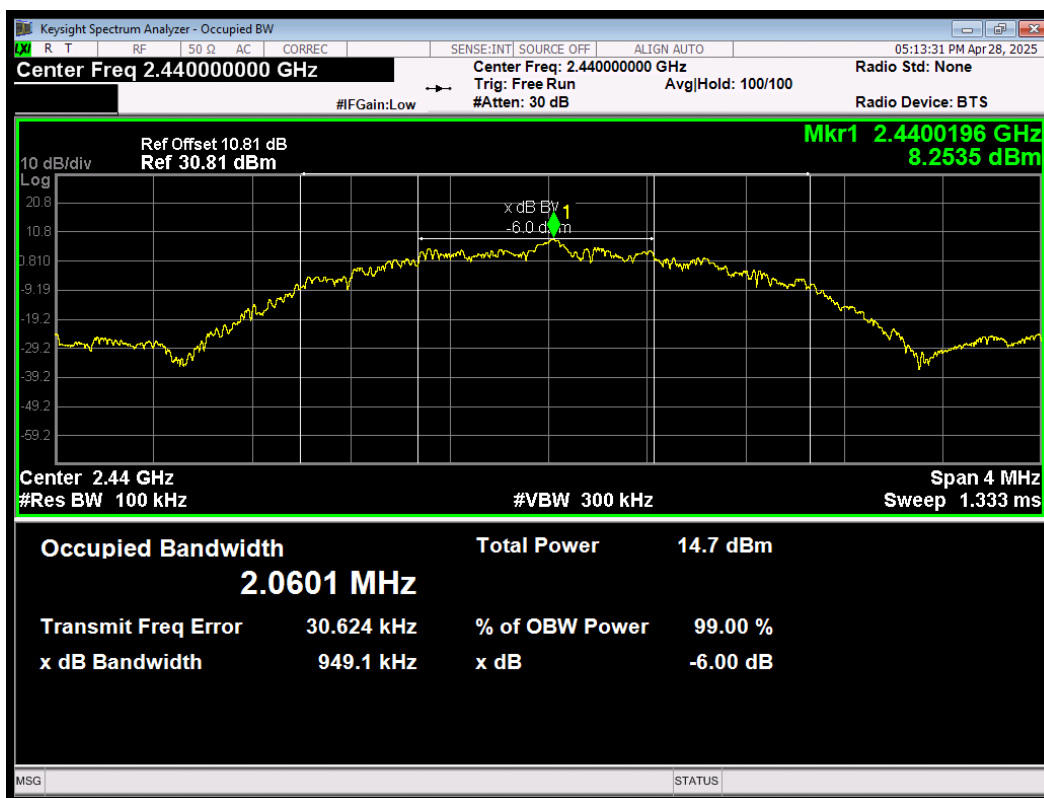


-6dB Bandwidth Bluetooth LE(2M) 2478MHz

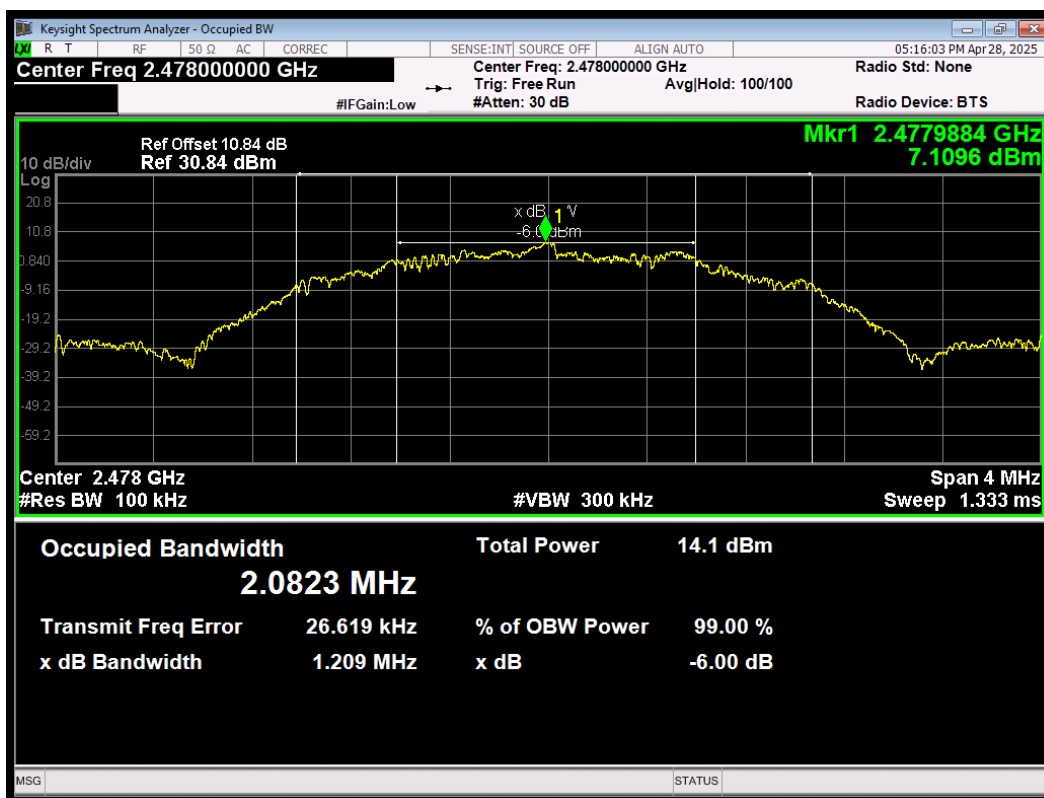


-6dB Bandwidth Bluetooth LE(S=2) 2402MHz

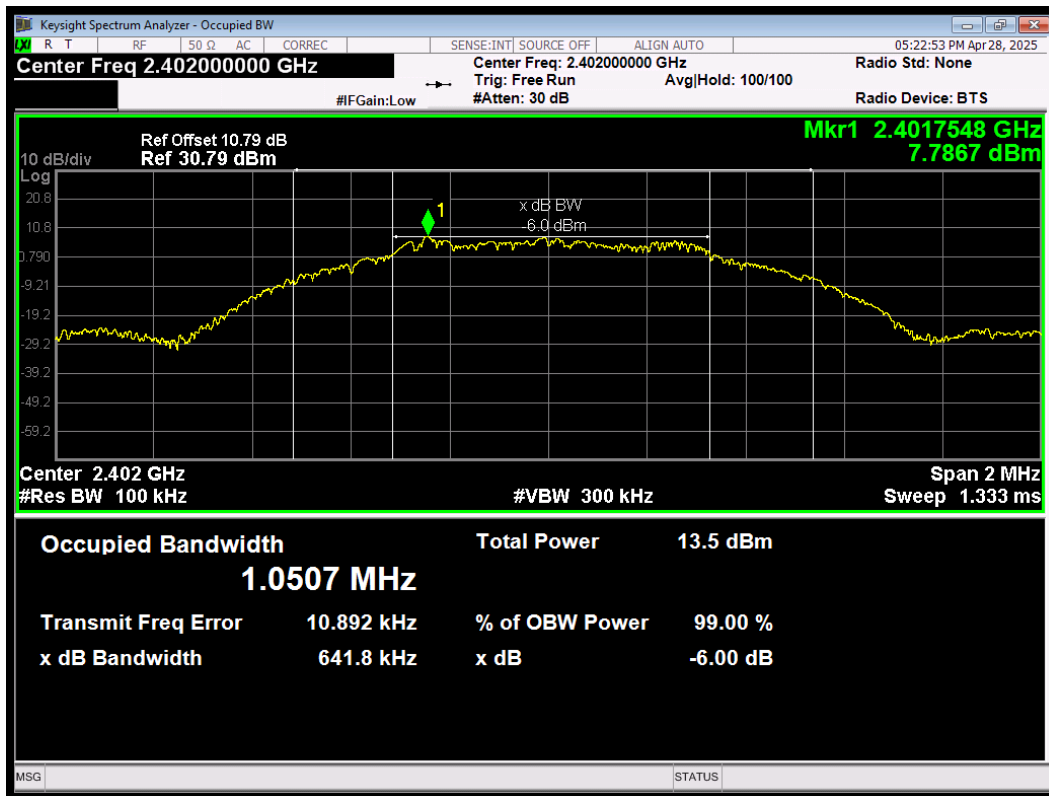


-6dB Bandwidth Bluetooth LE(S=2) 2440MHz

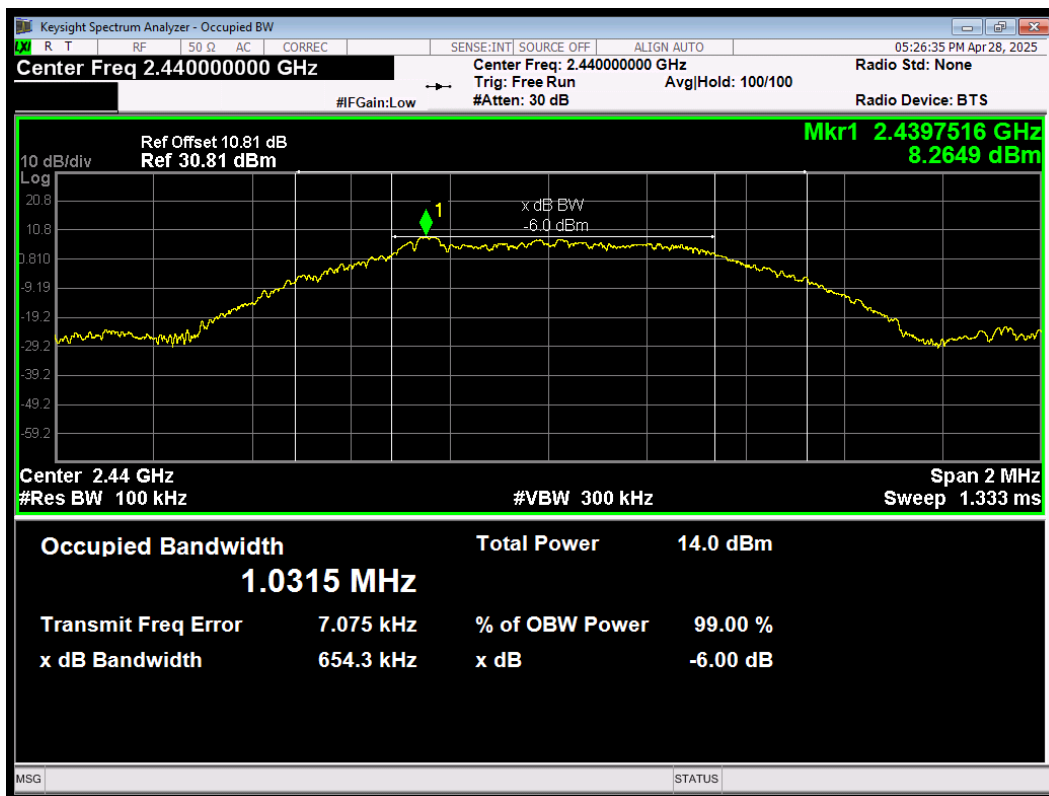


-6dB Bandwidth Bluetooth LE(S=2) 2480MHz

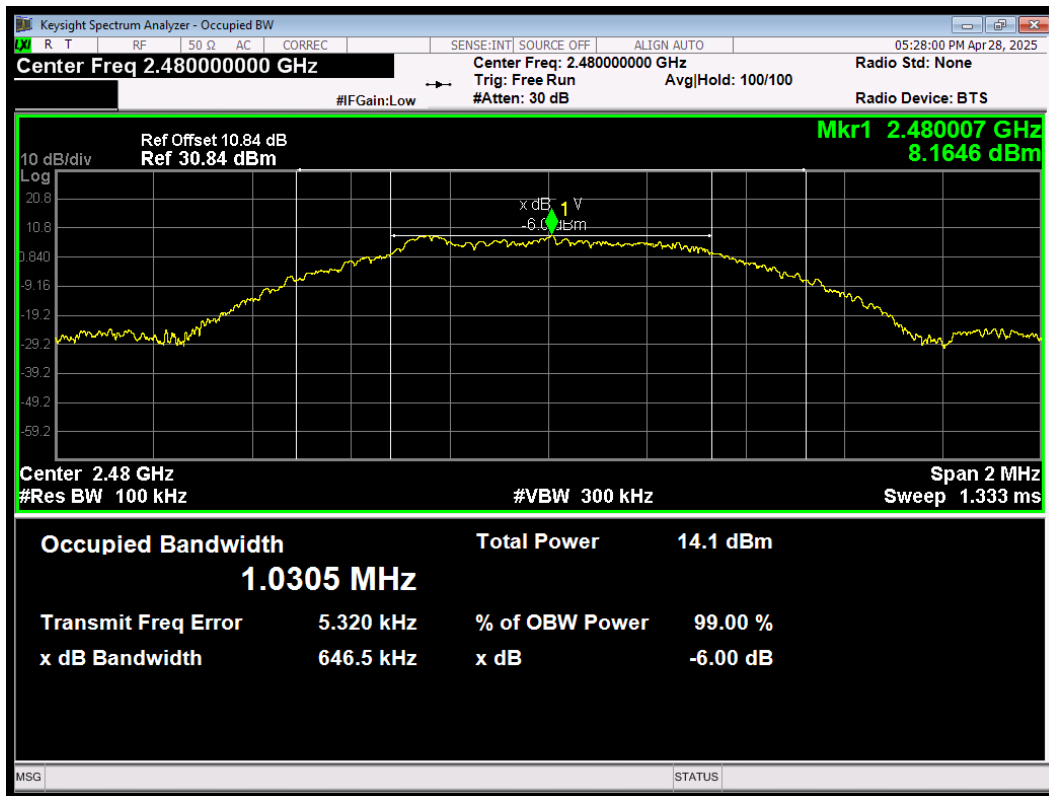


-6dB Bandwidth Bluetooth LE(S=8) 2402MHz

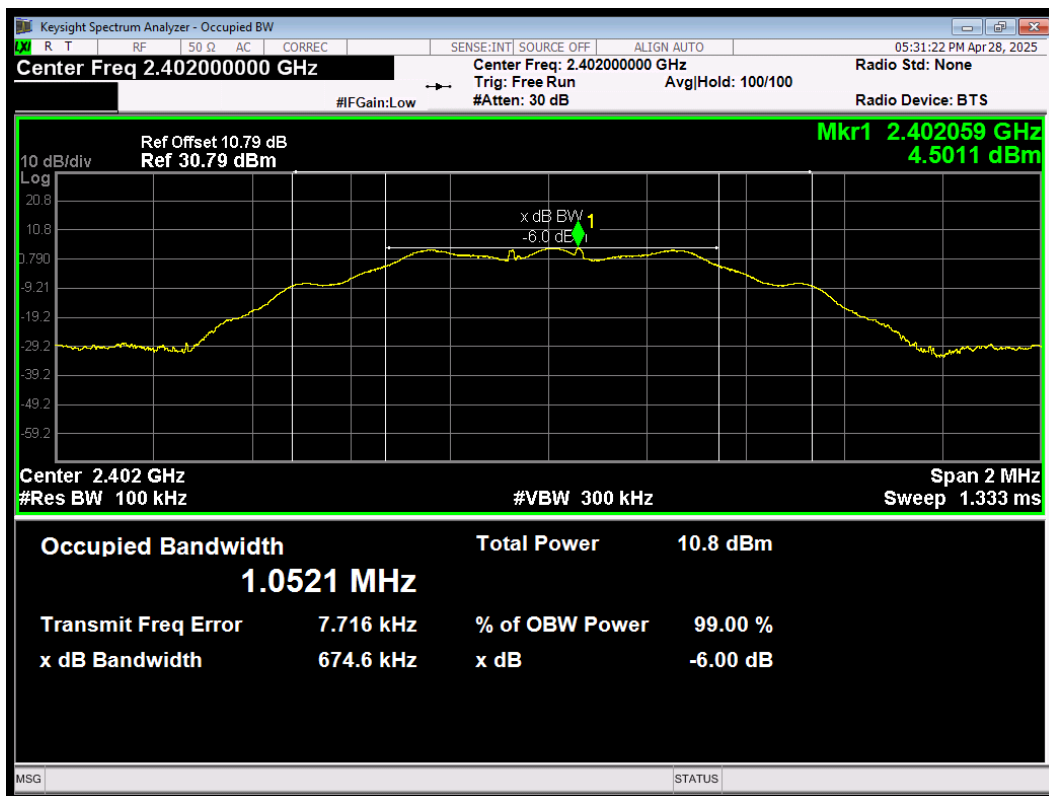

-6dB Bandwidth Bluetooth LE(S=8) 2440MHz

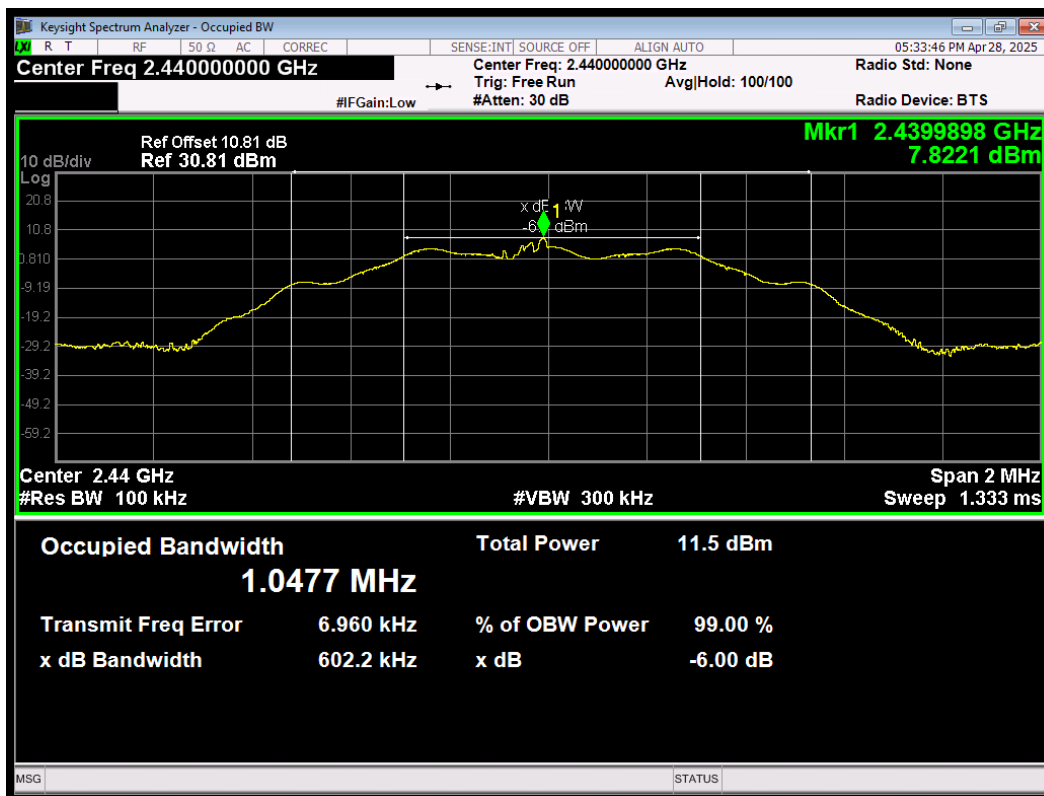

-6dB Bandwidth Bluetooth LE(S=8) 2480MHz

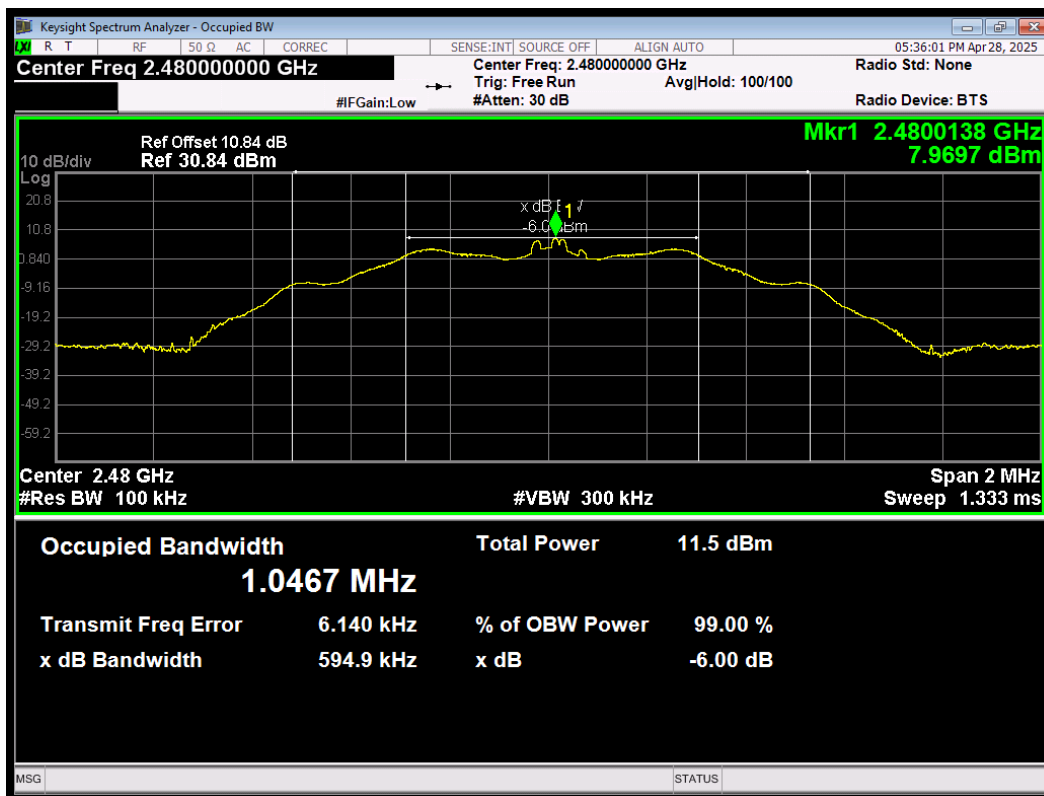

5.3. Band Edge


Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

Test Setup



Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.” If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.”


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
2GHz-3GHz	1.407 dB

Test Results: PASS

Band Edge 802.11b 2412MHz Ref

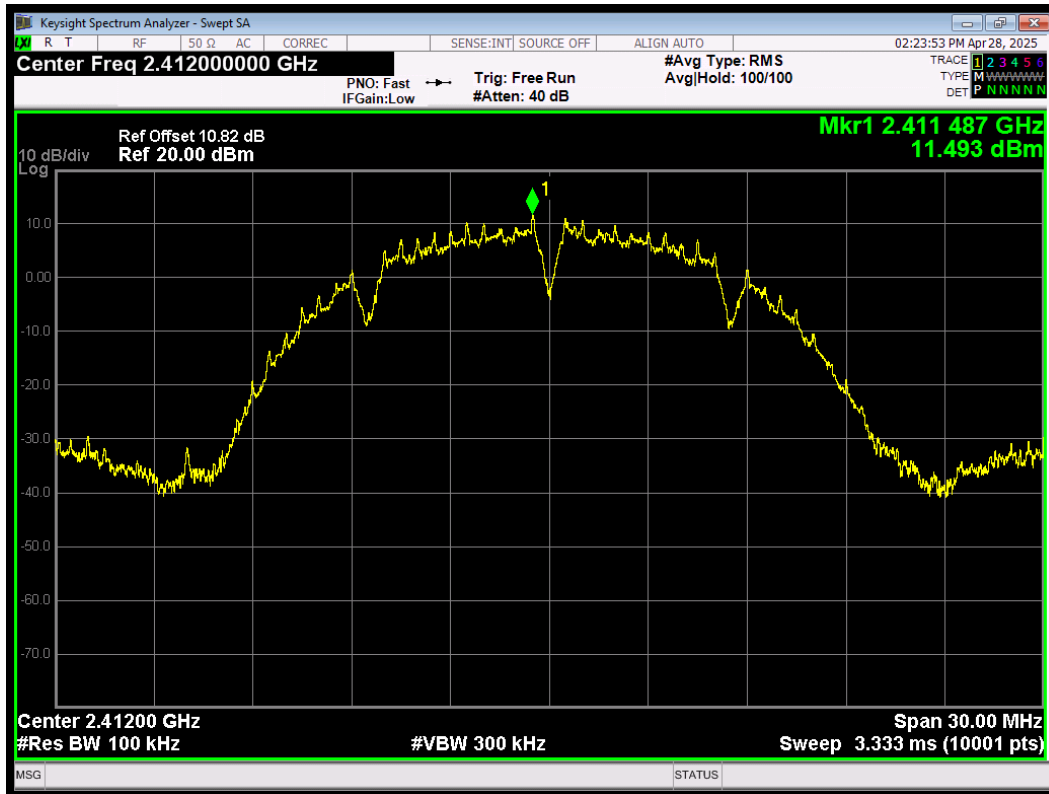


Band Edge 802.11b 2412MHz Emission

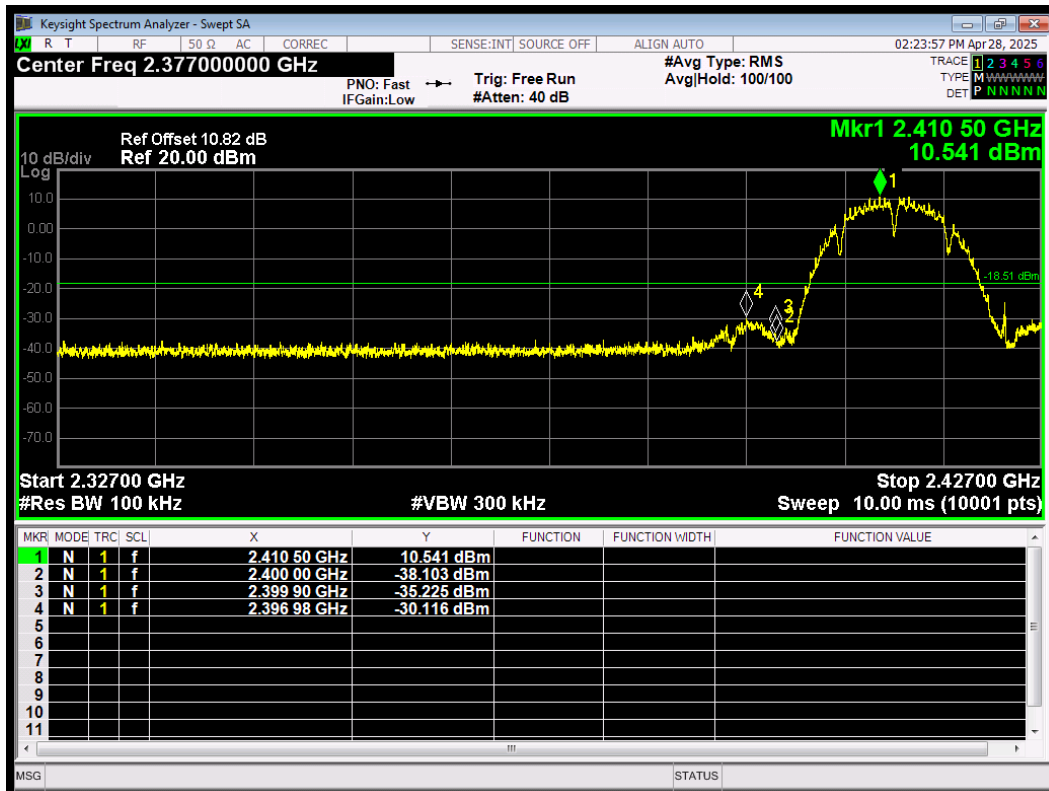


Band Edge 802.11b 2462MHz Ref




Band Edge 802.11b 2462MHz Emission

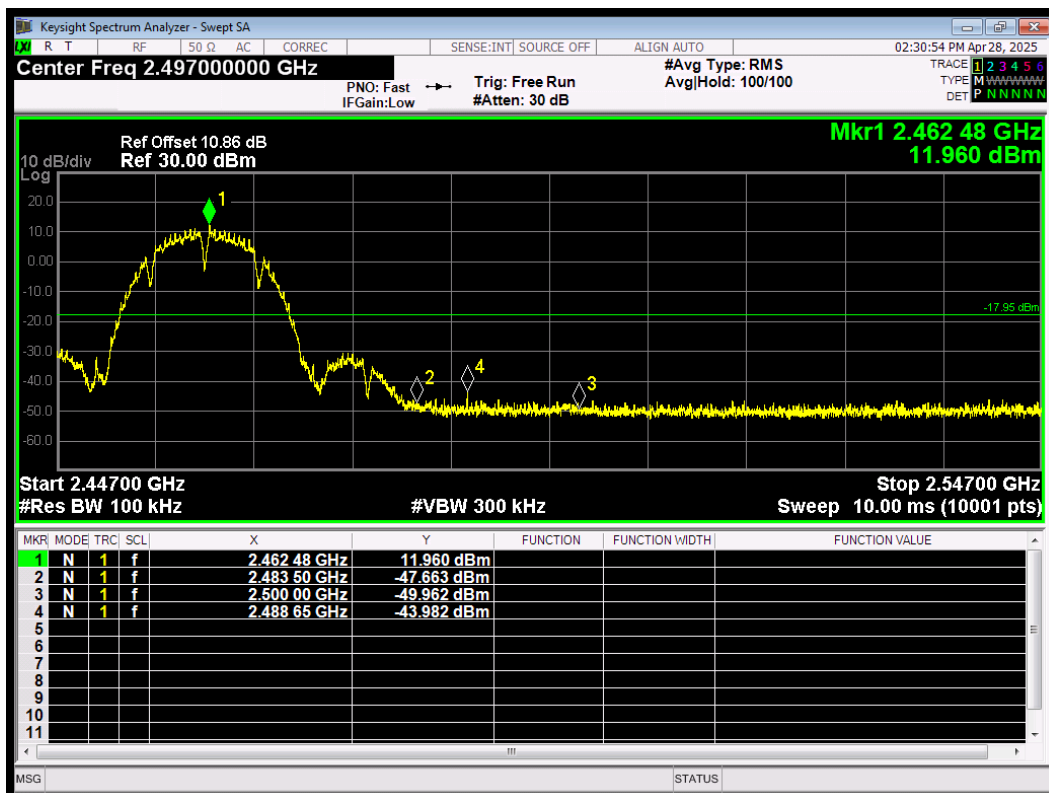


Band Edge 802.11b 2467MHz Ref

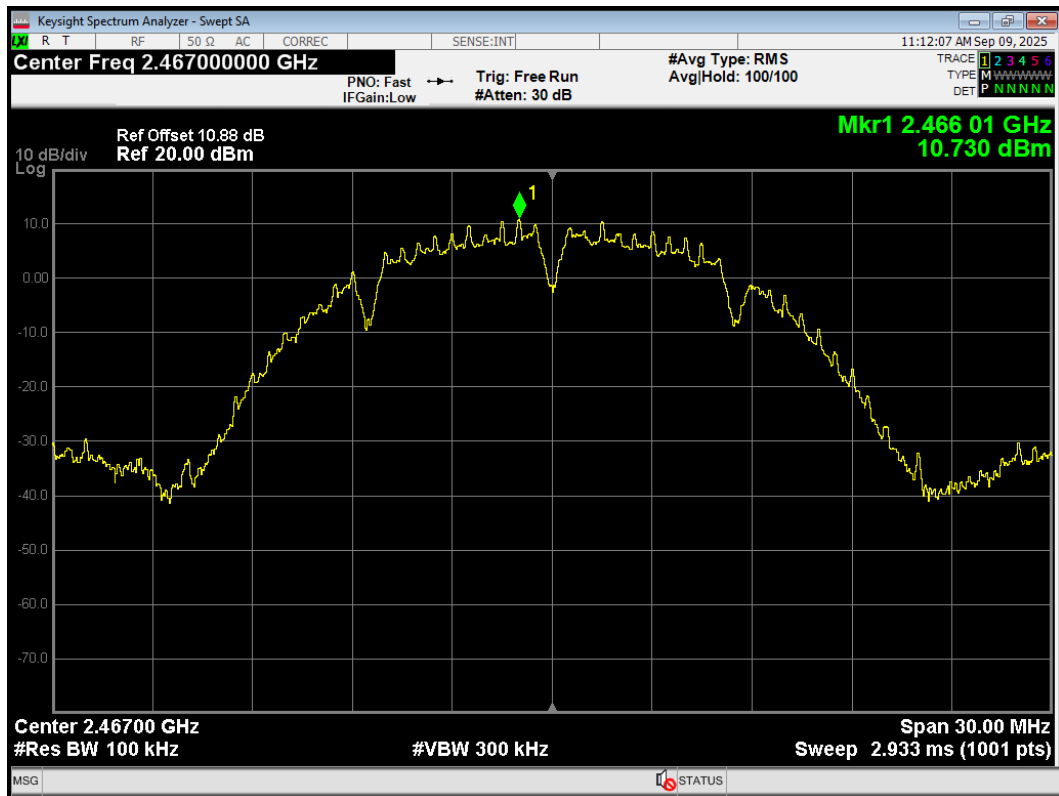


Band Edge 802.11b 2467MHz Emission

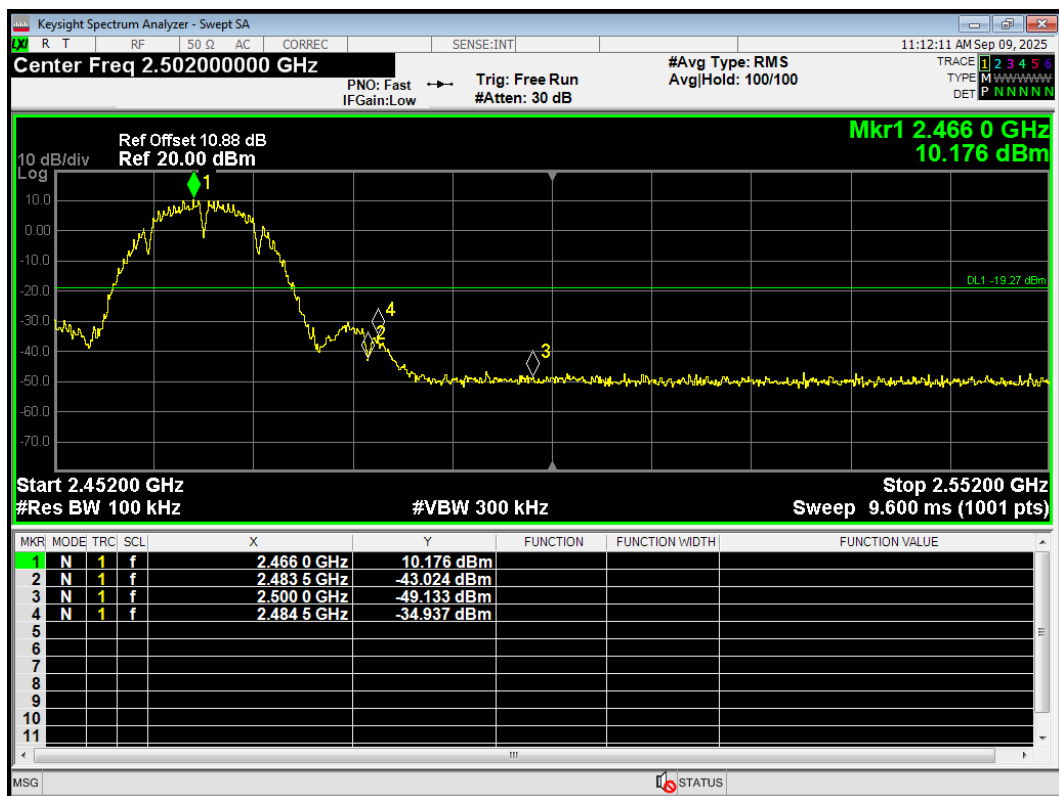


Band Edge 802.11b 2472MHz Ref

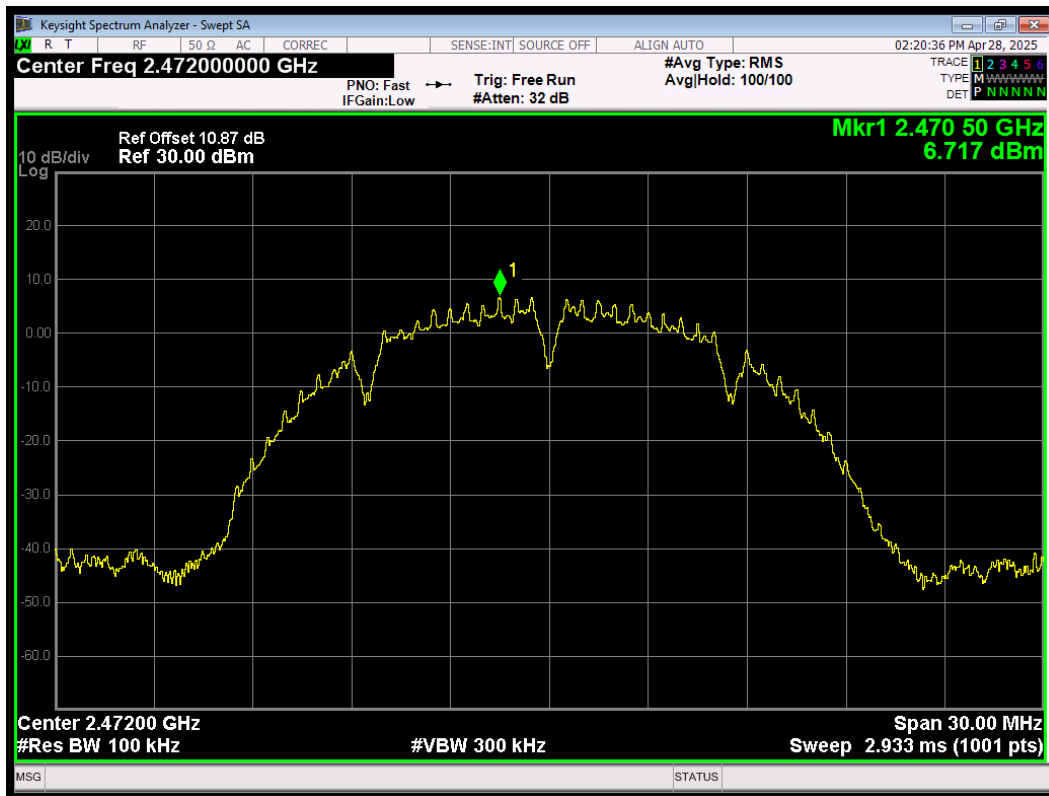


Band Edge 802.11b 2472MHz Emission

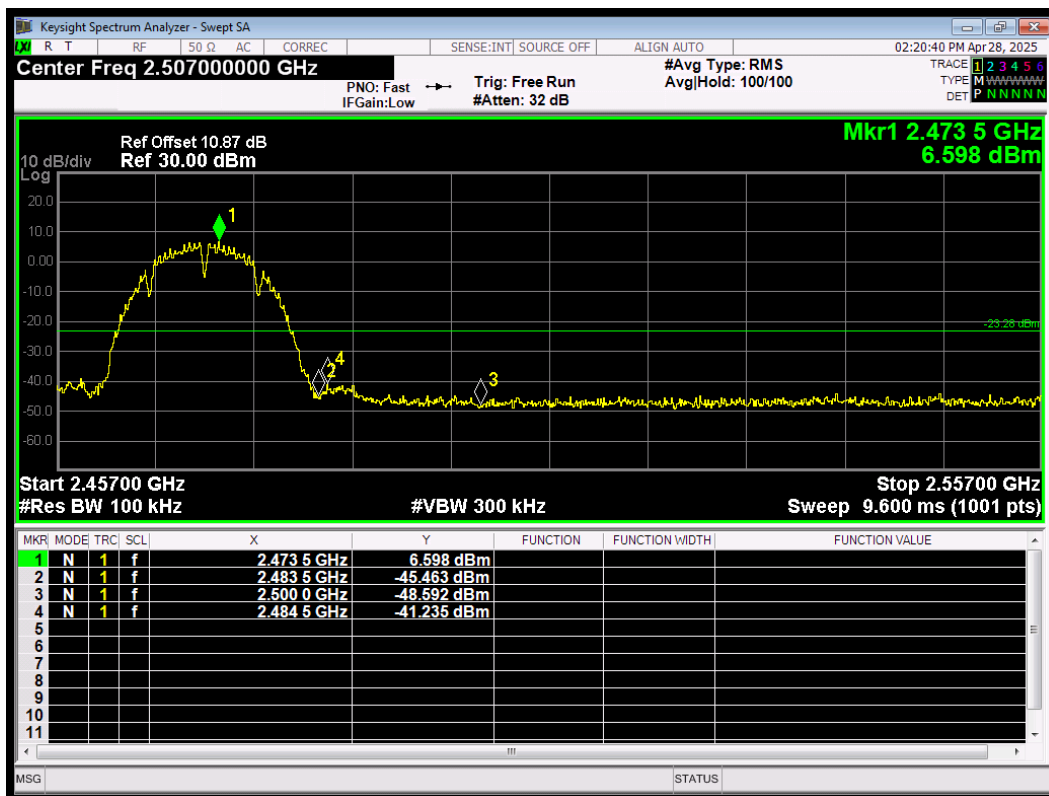


Band Edge 802.11g 2412MHz Ref

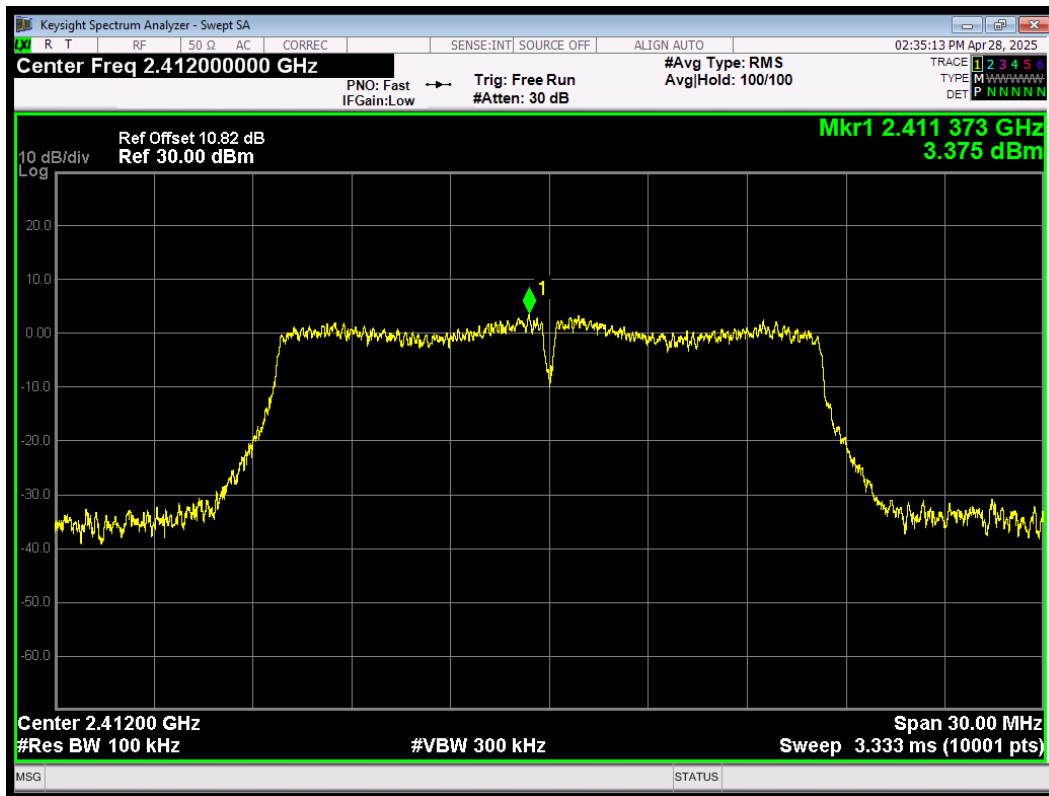


Band Edge 802.11g 2412MHz Emission

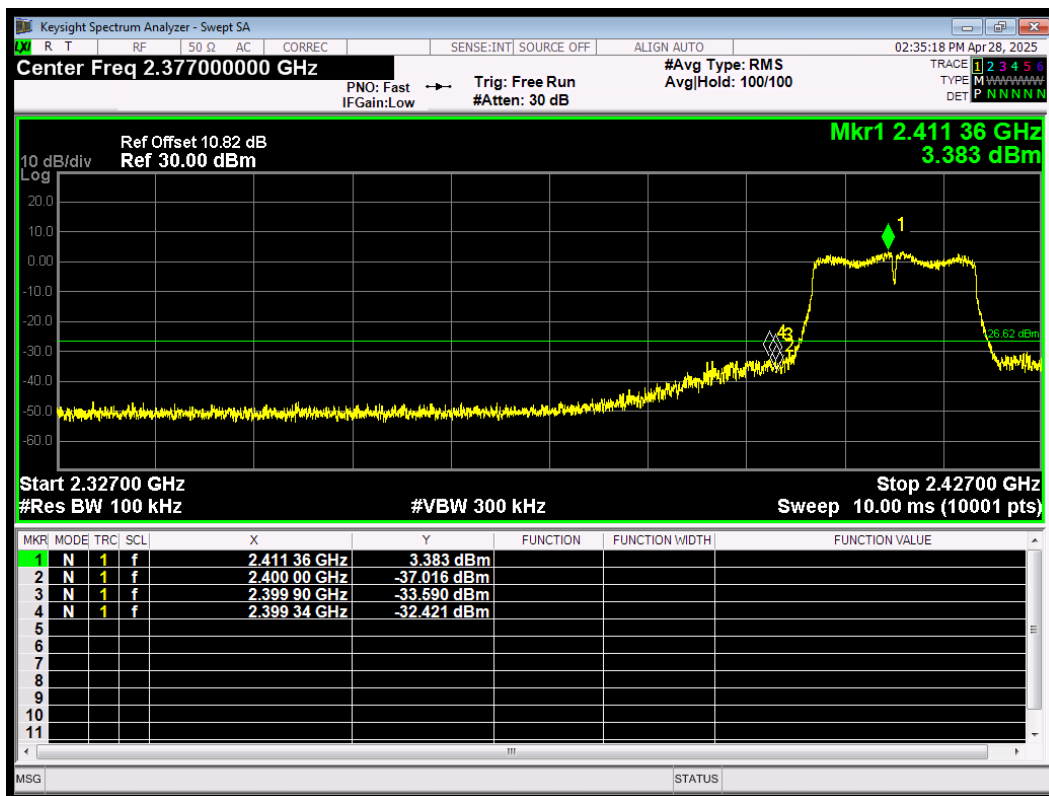


Band Edge 802.11g 2462MHz Ref

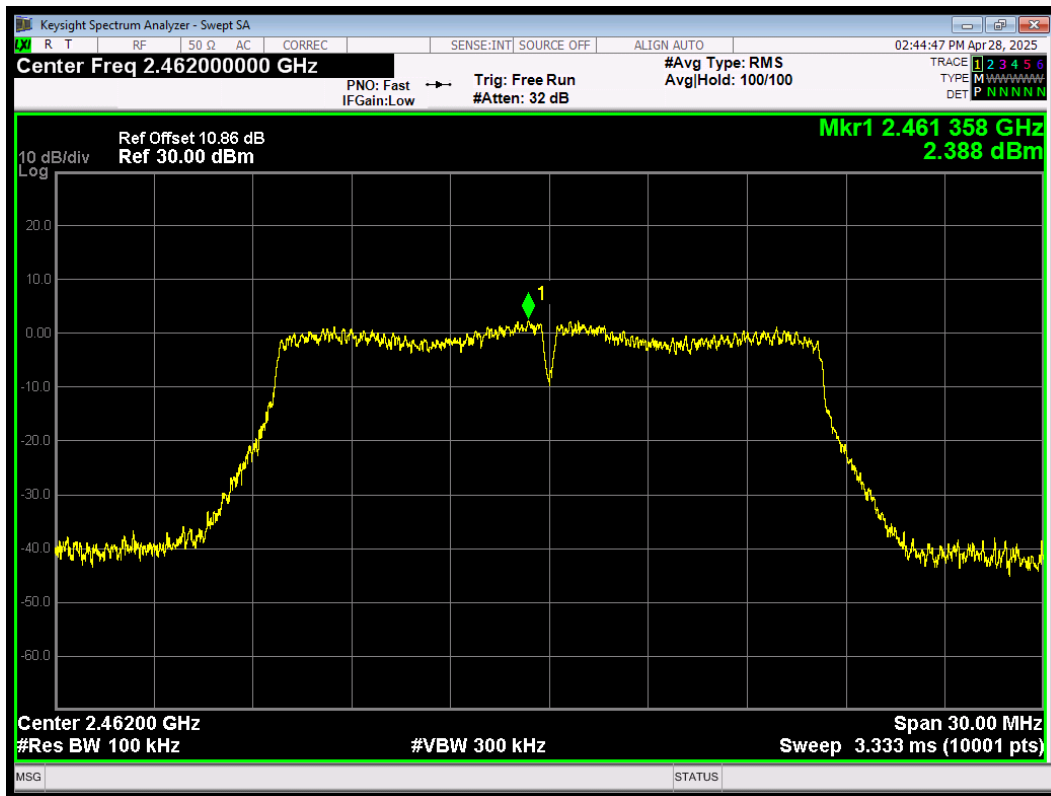


Band Edge 802.11g 2462MHz Emission

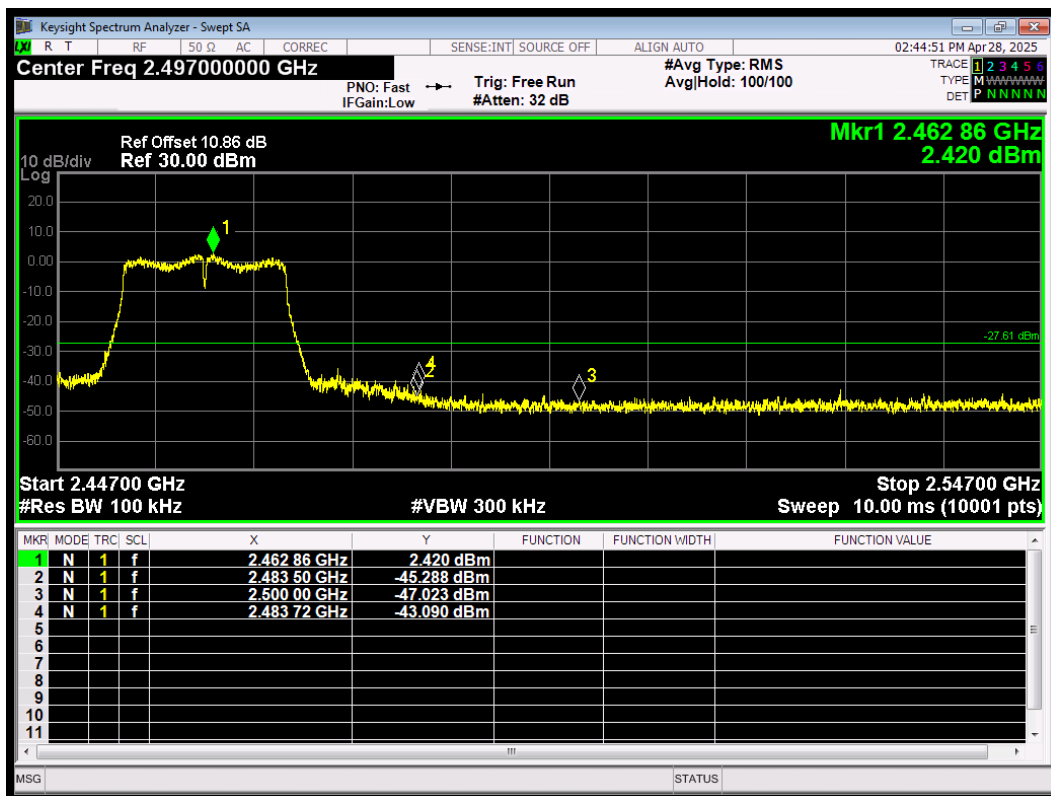


Band Edge 802.11g 2467MHz Ref

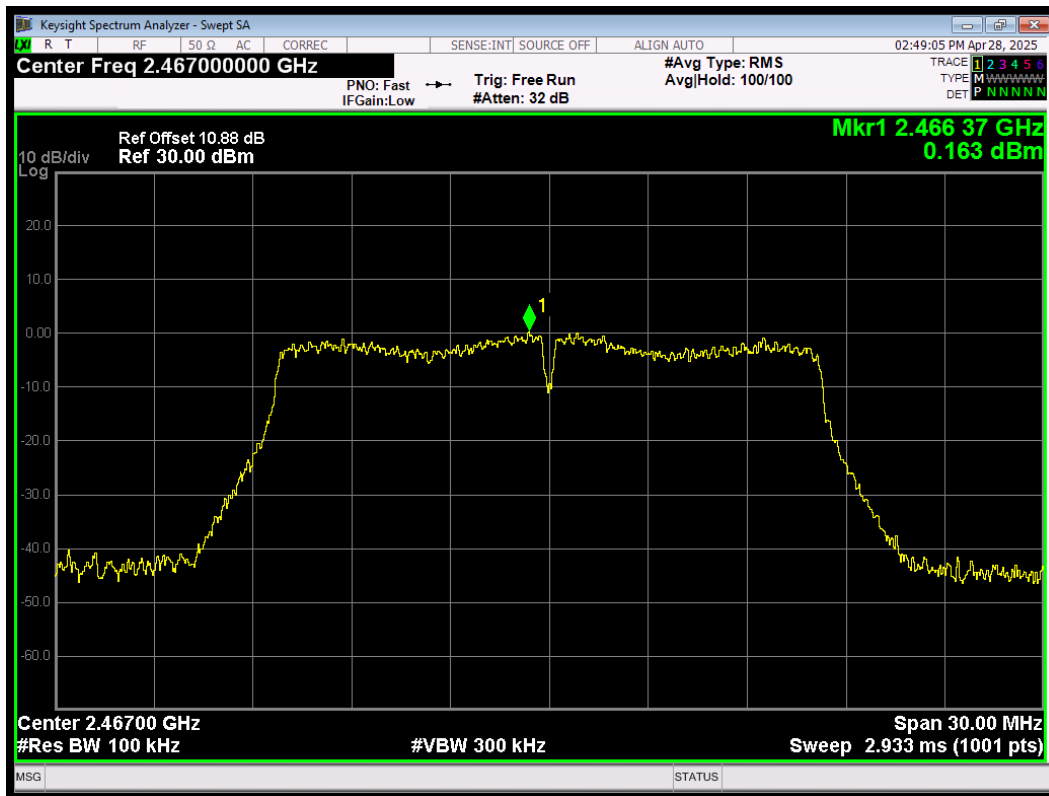


Band Edge 802.11g 2467MHz Emission

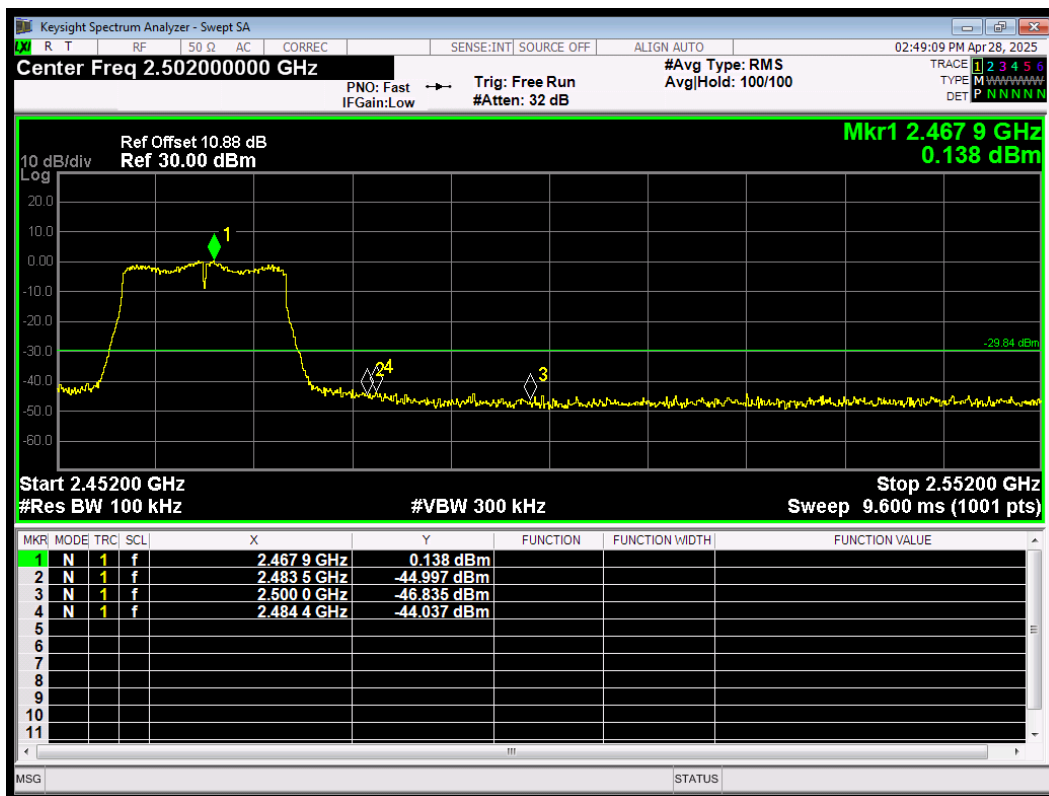


Band Edge 802.11g 2472MHz Ref

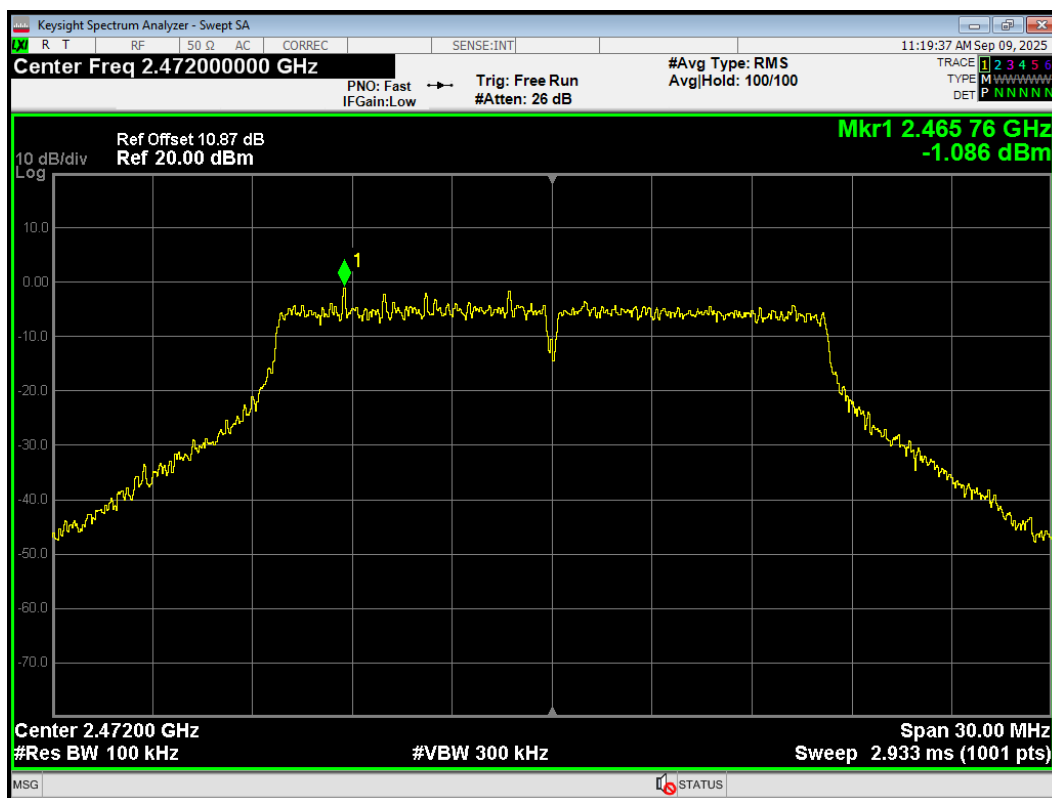


Band Edge 802.11g 2472MHz Emission

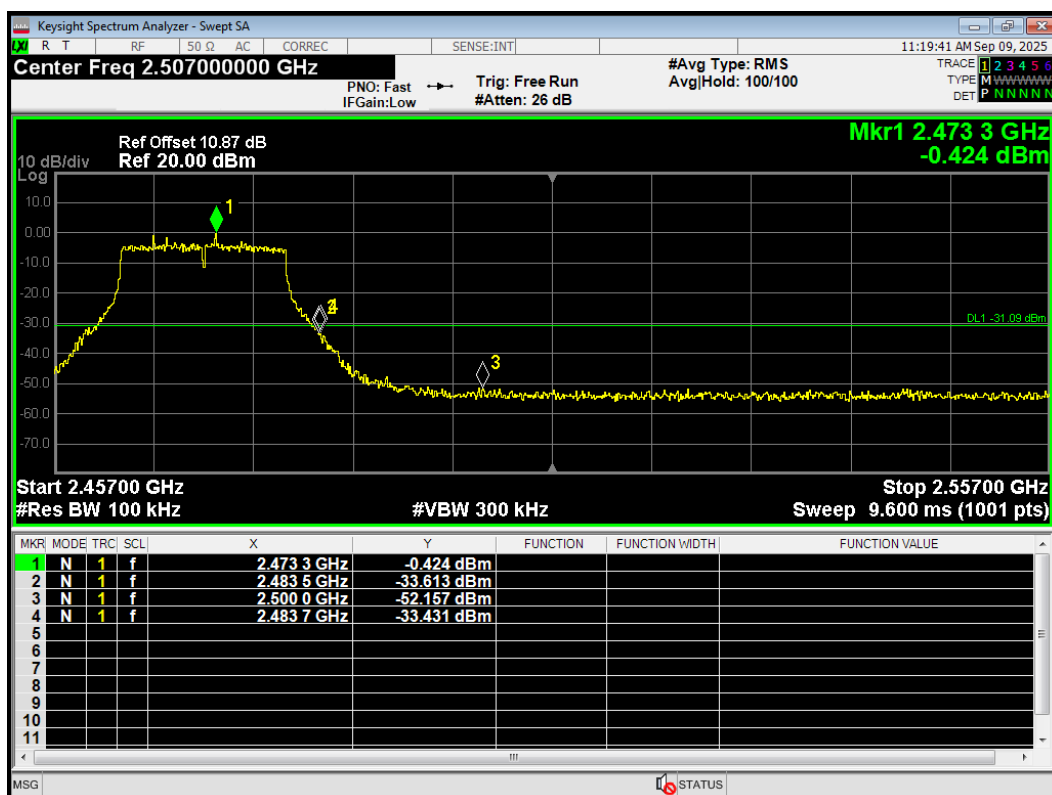


Band Edge 802.11n(HT20) 2412MHz Ref

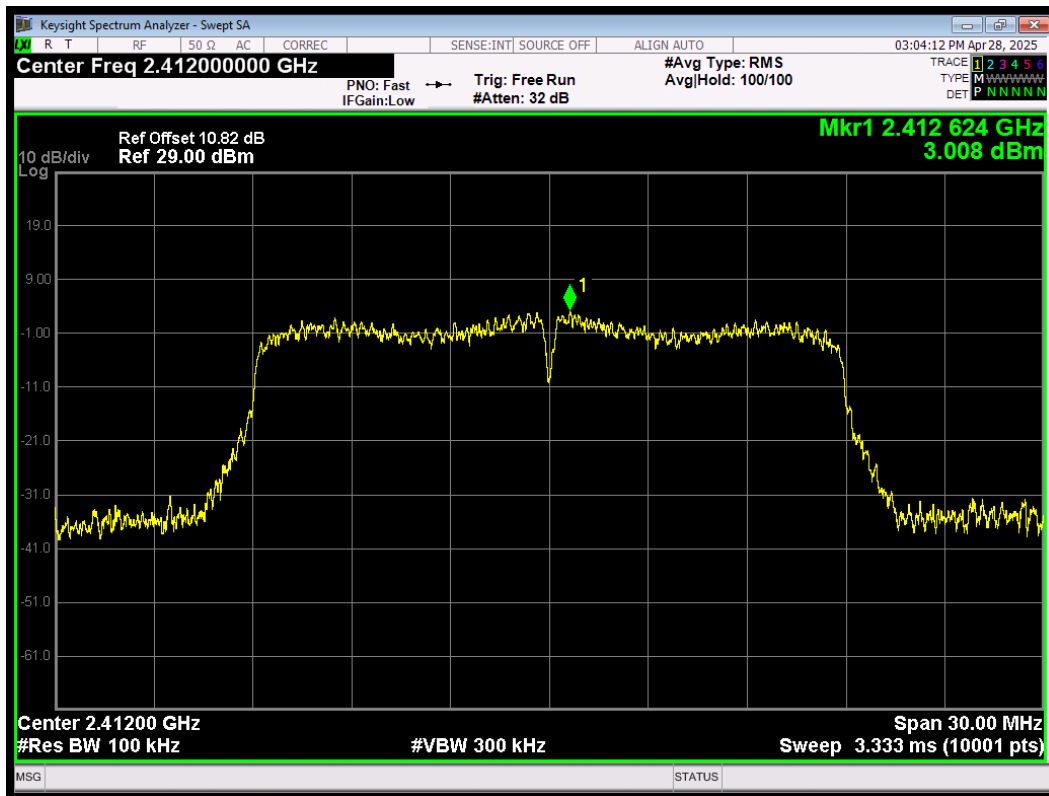


Band Edge 802.11n(HT20) 2412MHz Emission

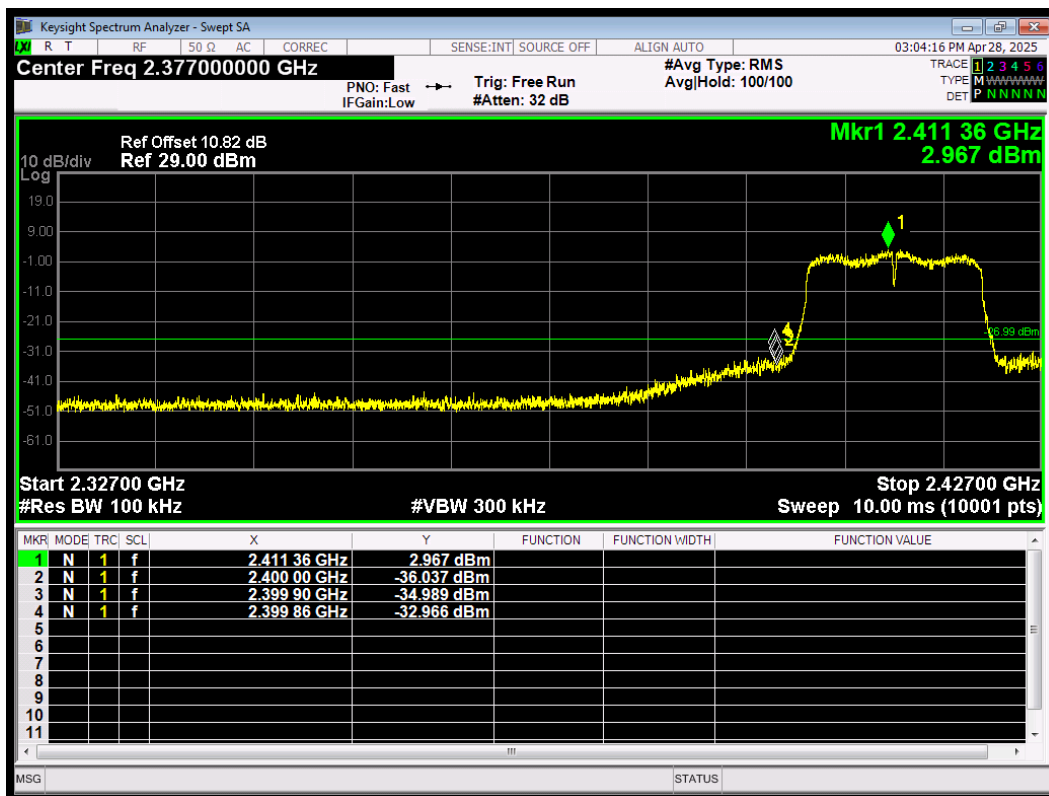


Band Edge 802.11n(HT20) 2462MHz Ref

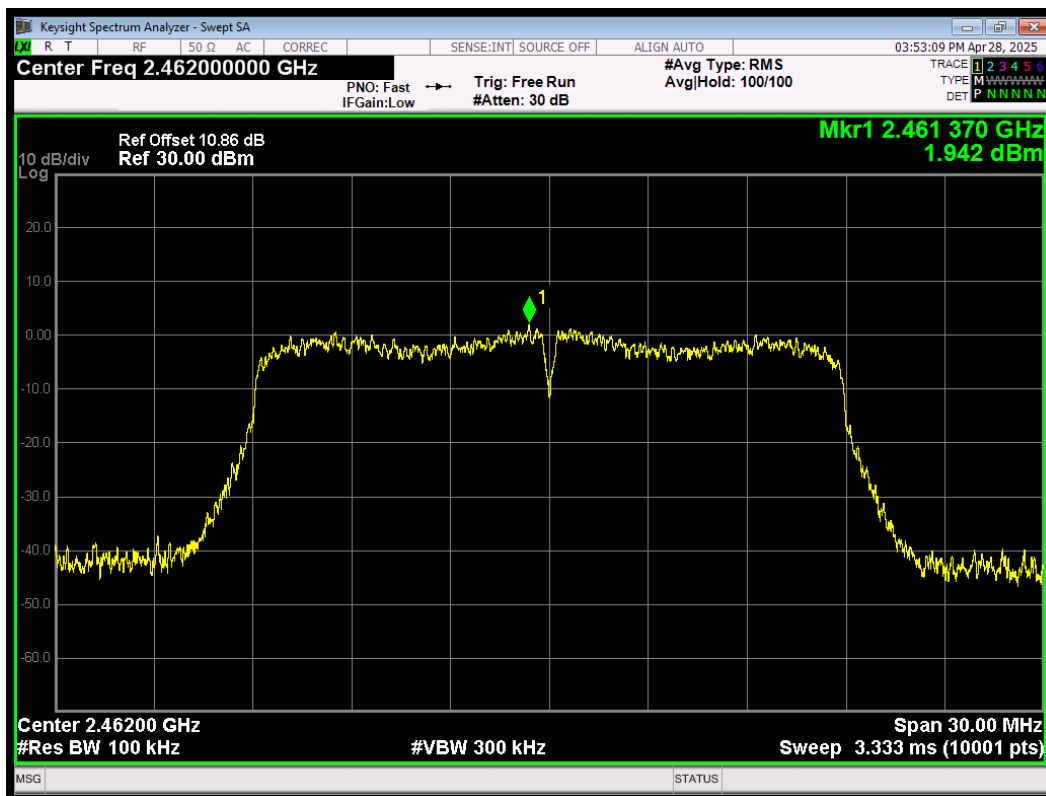


Band Edge 802.11n(HT20) 2462MHz Emission

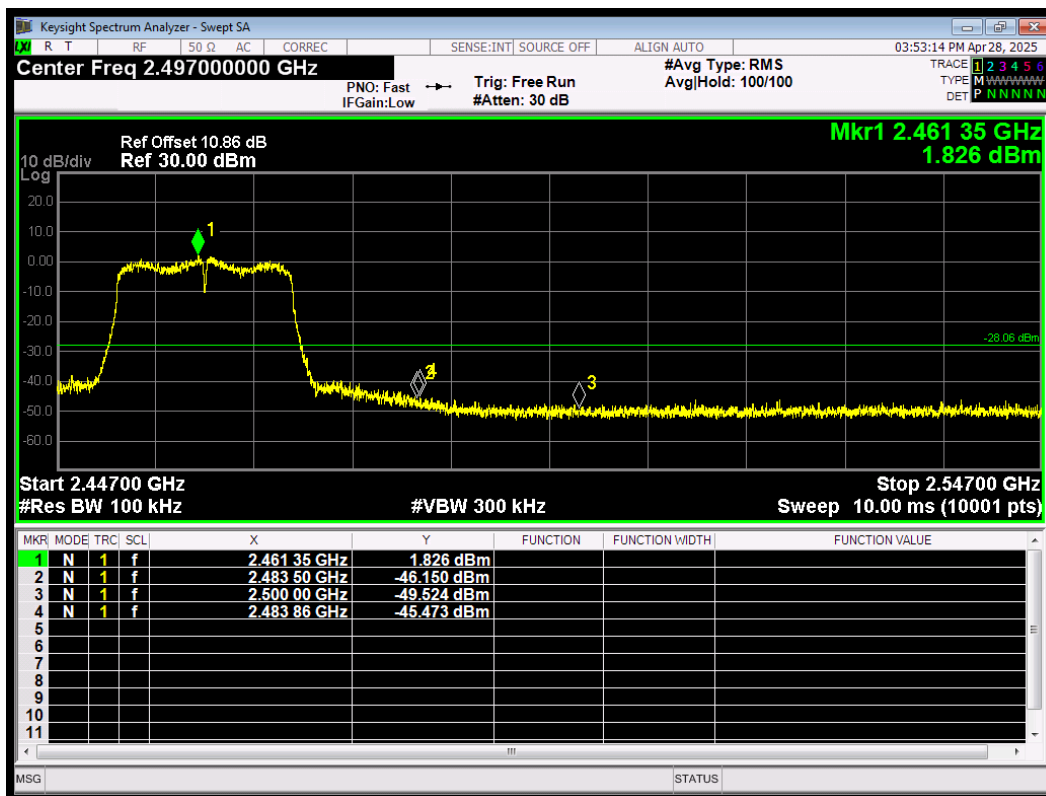


Band Edge 802.11n(HT20) 2467MHz Ref

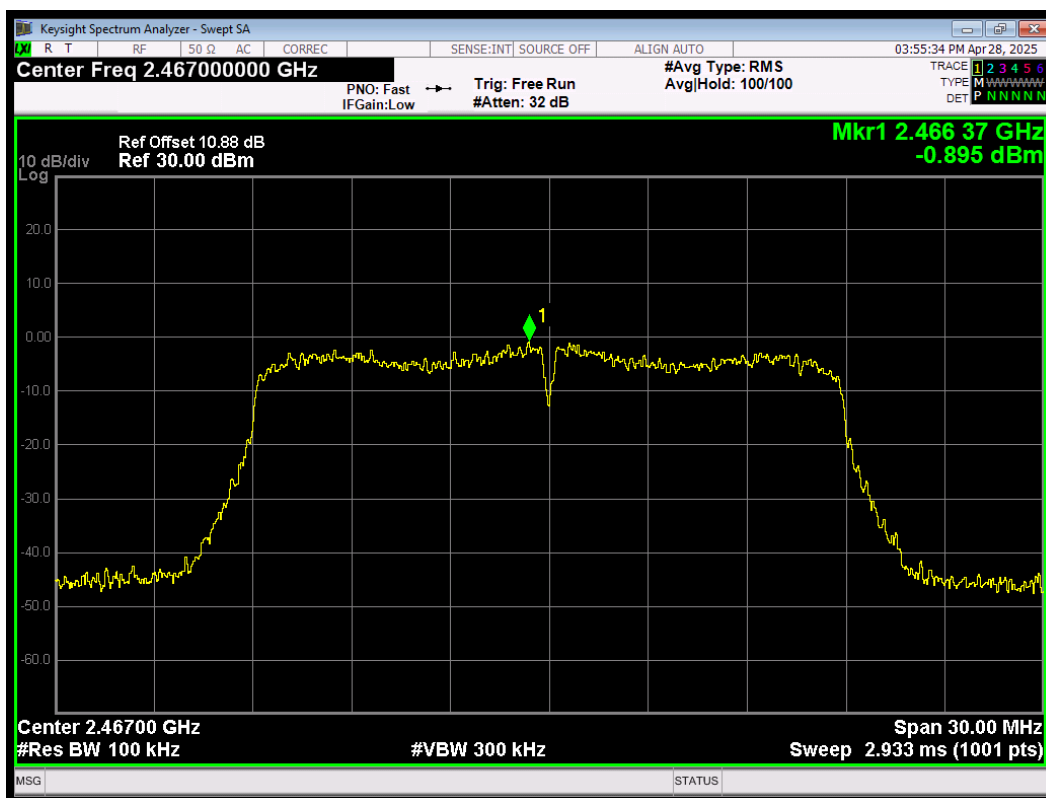


Band Edge 802.11n(HT20) 2467MHz Emission

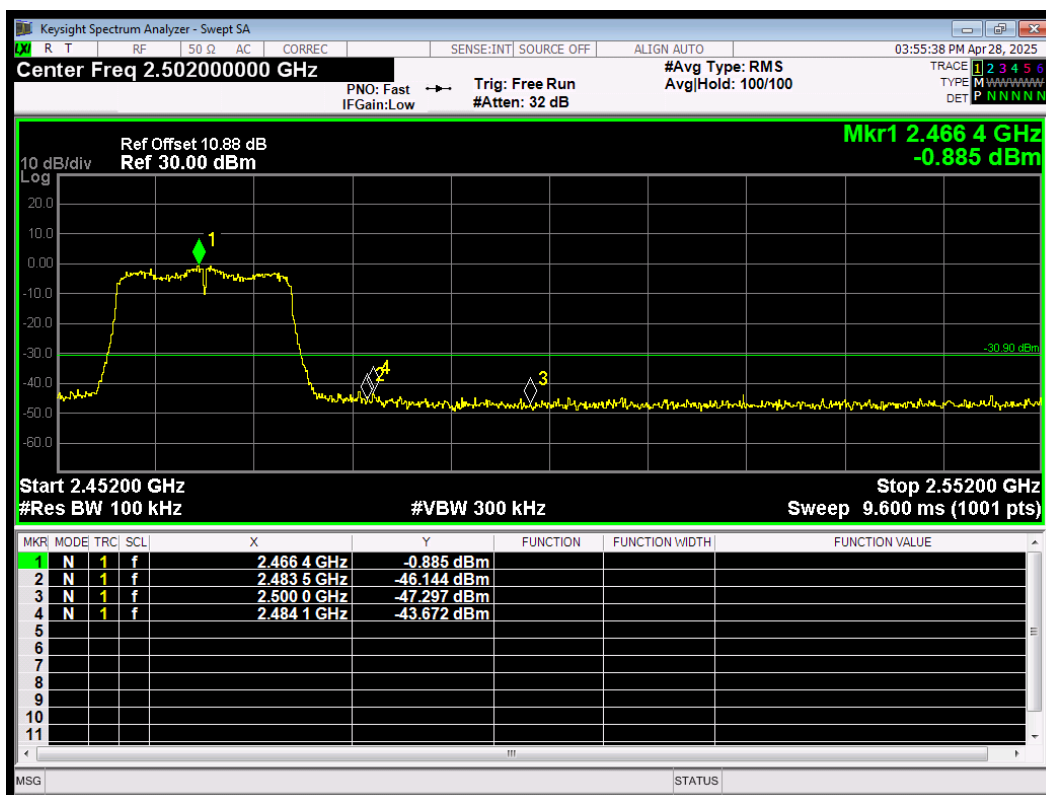


Band Edge 802.11n(HT20) 2472MHz Ref

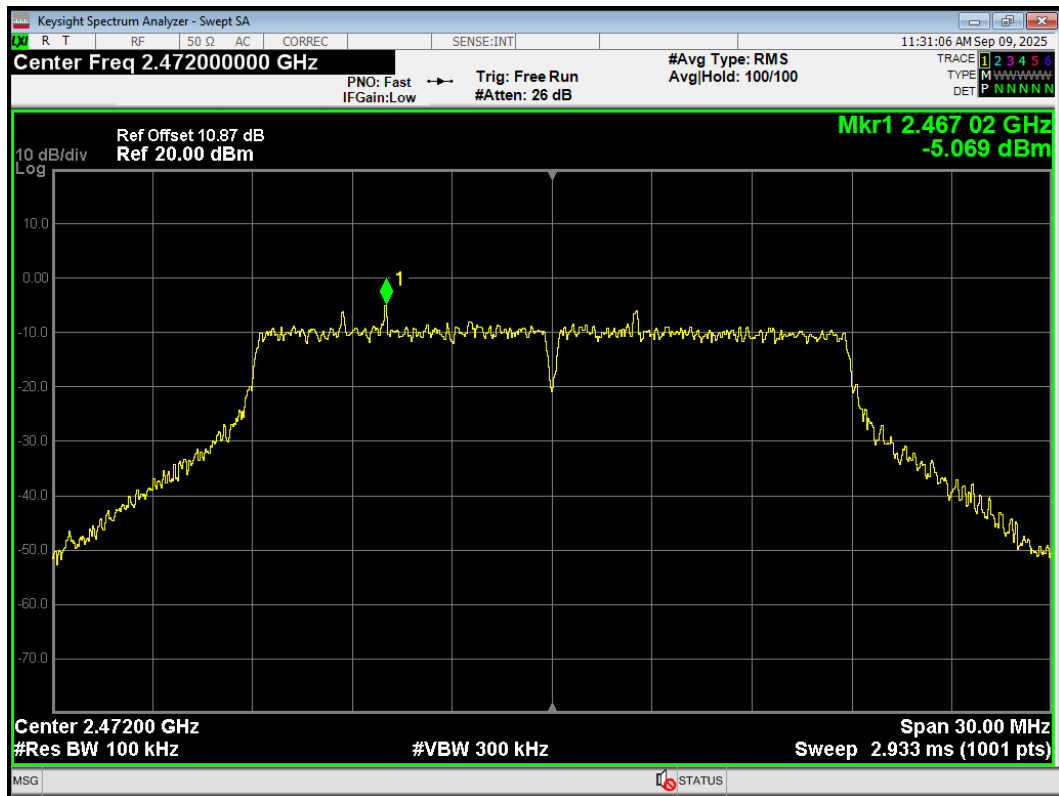


Band Edge 802.11n(HT20) 2472MHz Emission

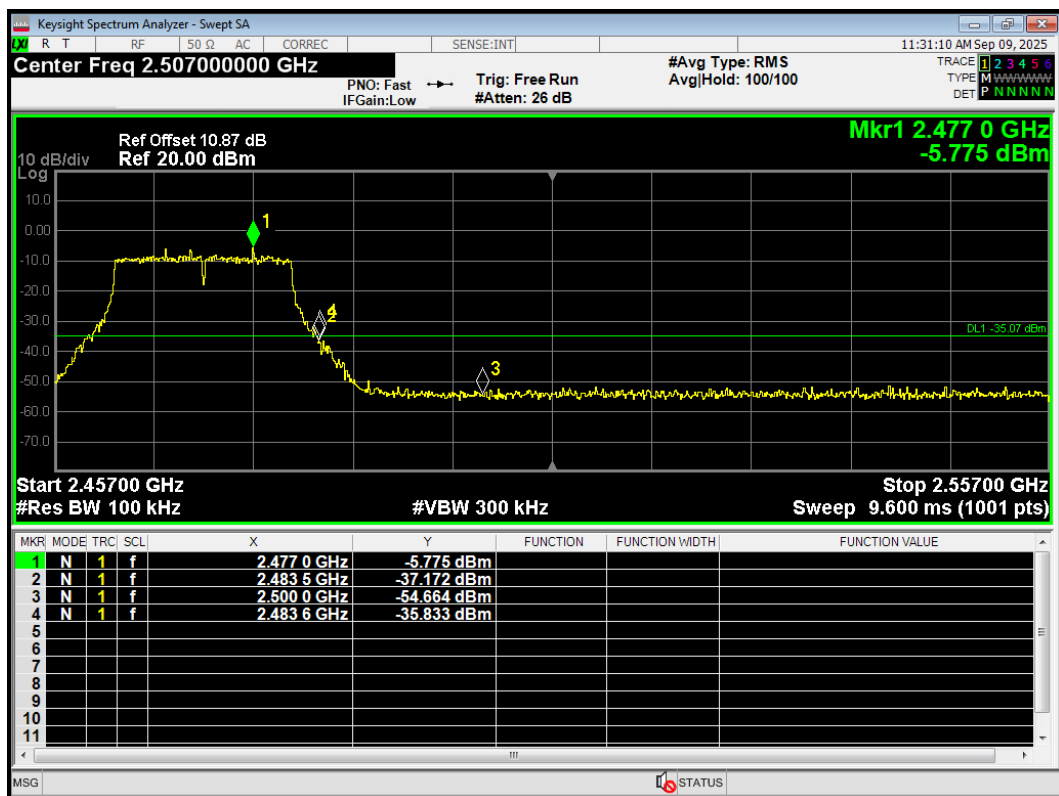


Band Edge 802.11n(HT40) 2422MHz Ref

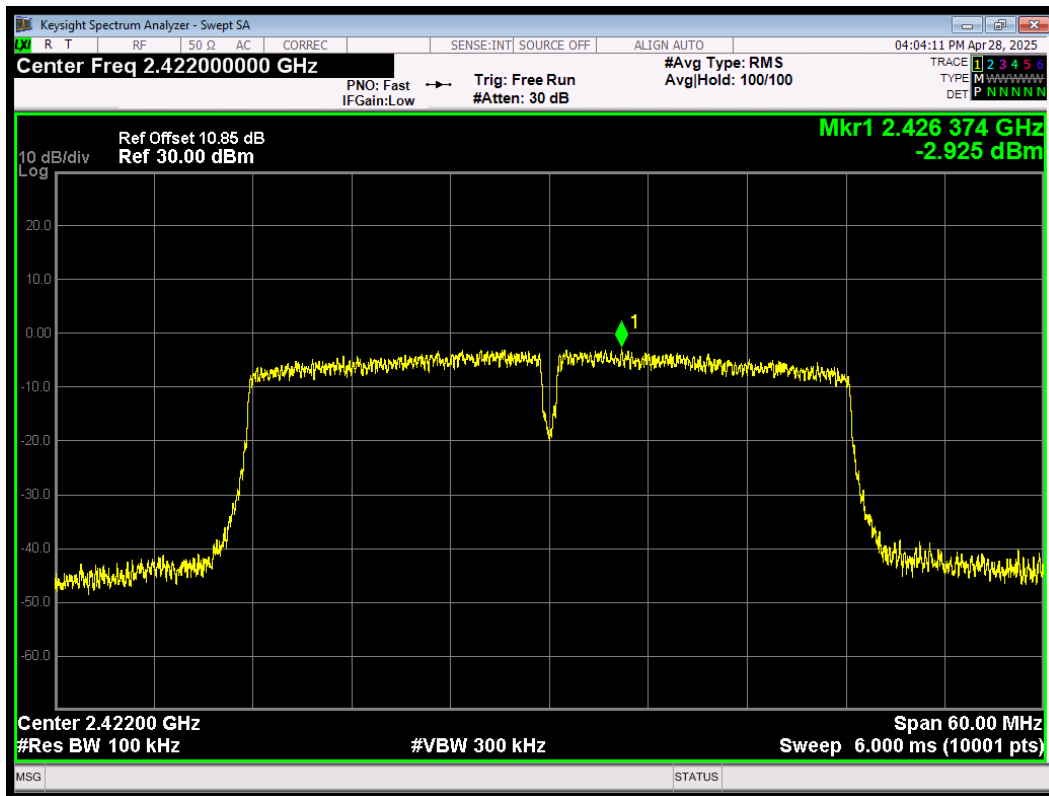


Band Edge 802.11n(HT40) 2422MHz Emission

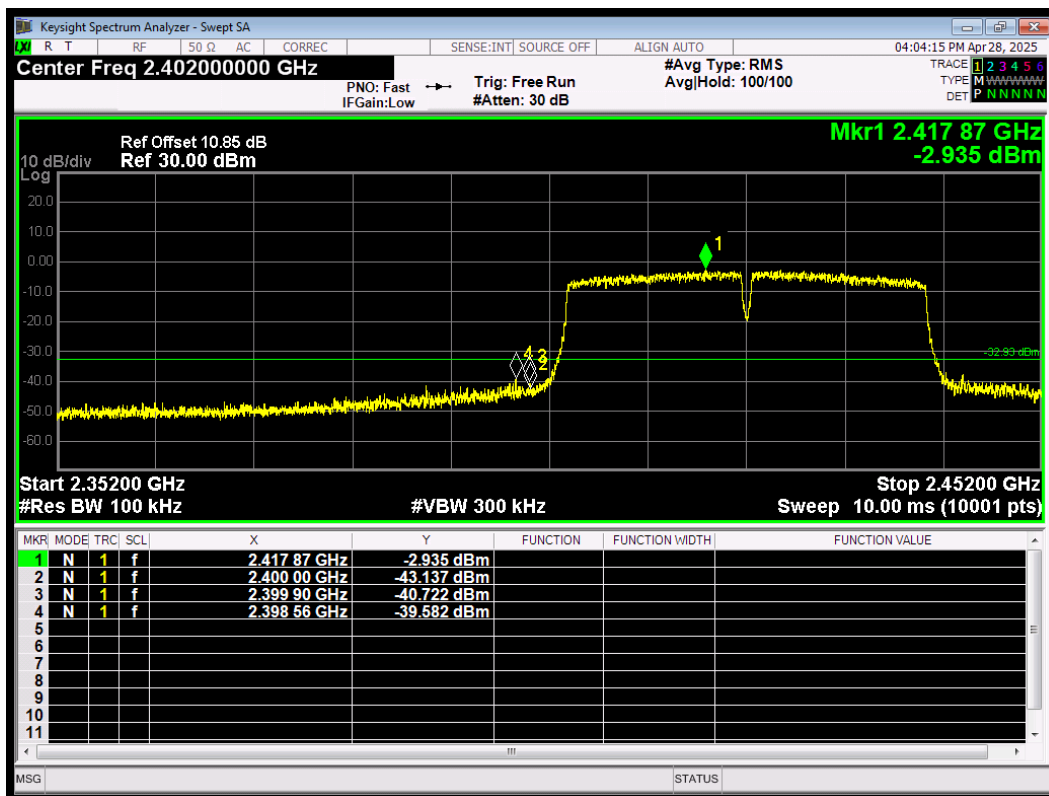


Band Edge 802.11n(HT40) 2452MHz Ref

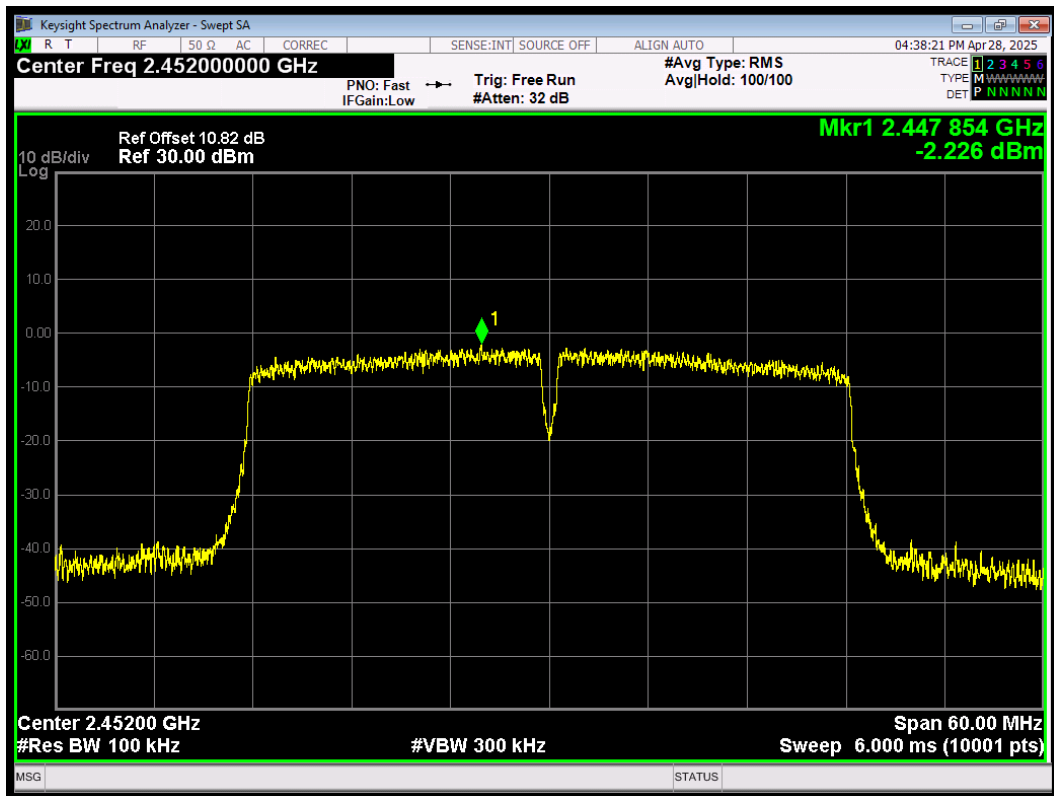


Band Edge 802.11n(HT40) 2452MHz Emission

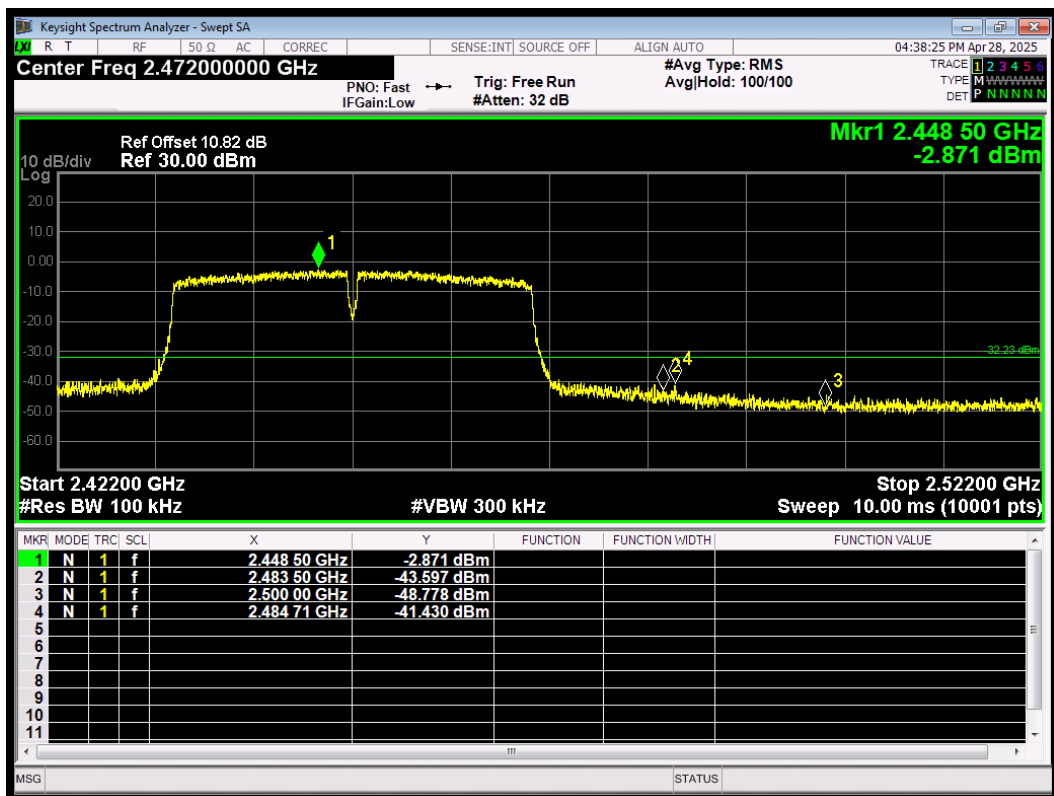


Band Edge 802.11n(HT40) 2457MHz Ref

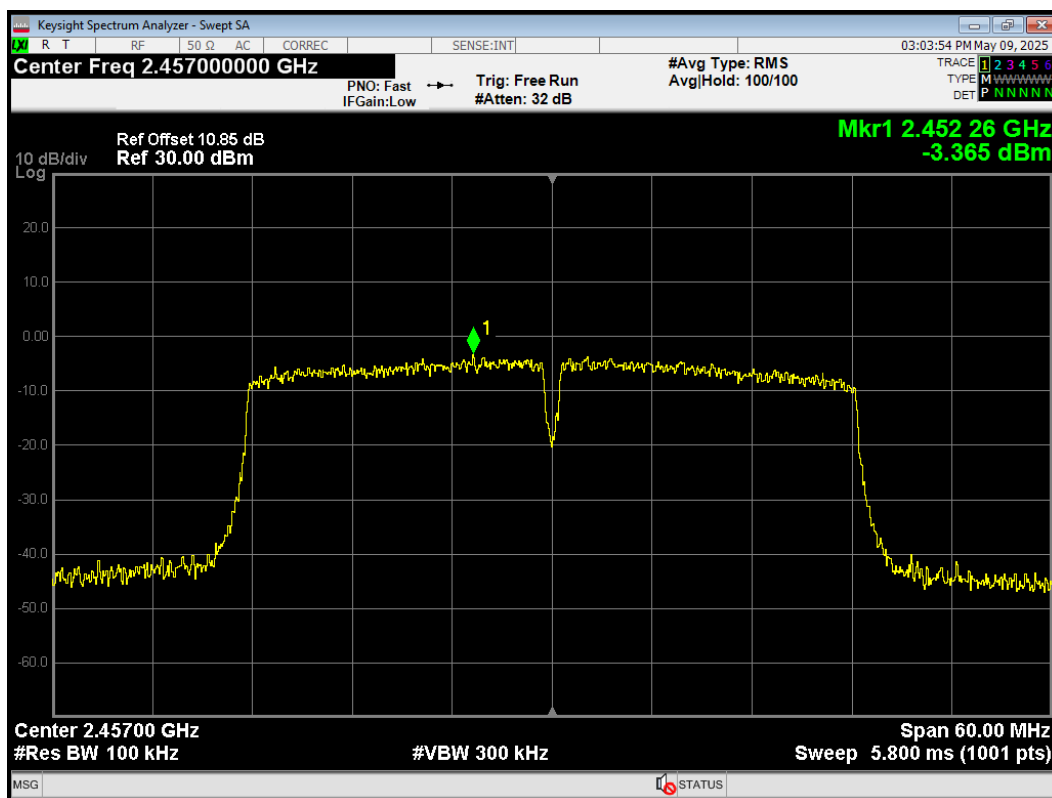


Band Edge 802.11n(HT40) 2457MHz Emission

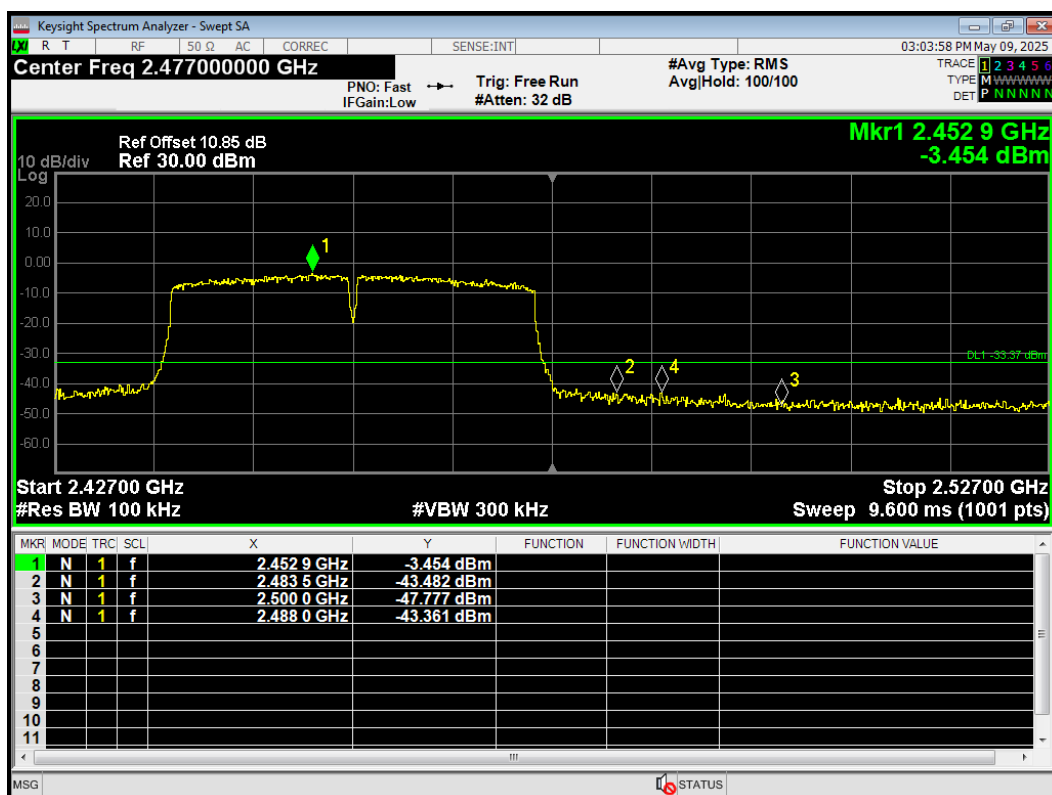


Band Edge 802.11n(HT40) 2462MHz Ref

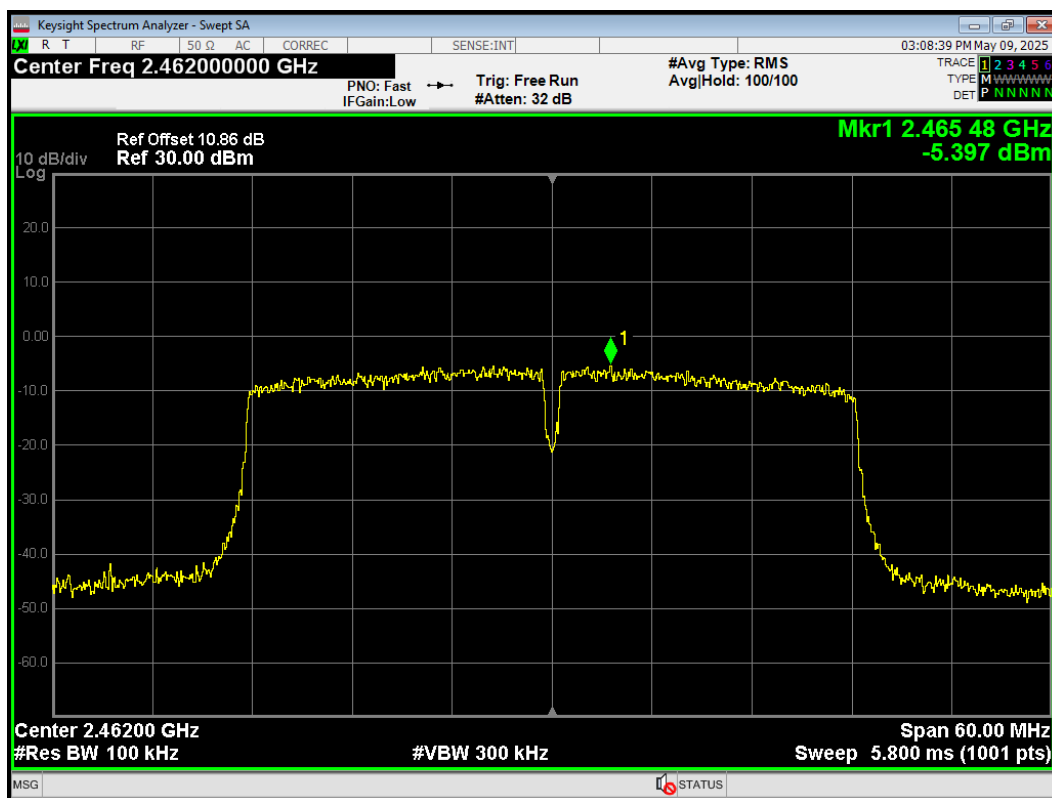


Band Edge 802.11n(HT40) 2462MHz Emission

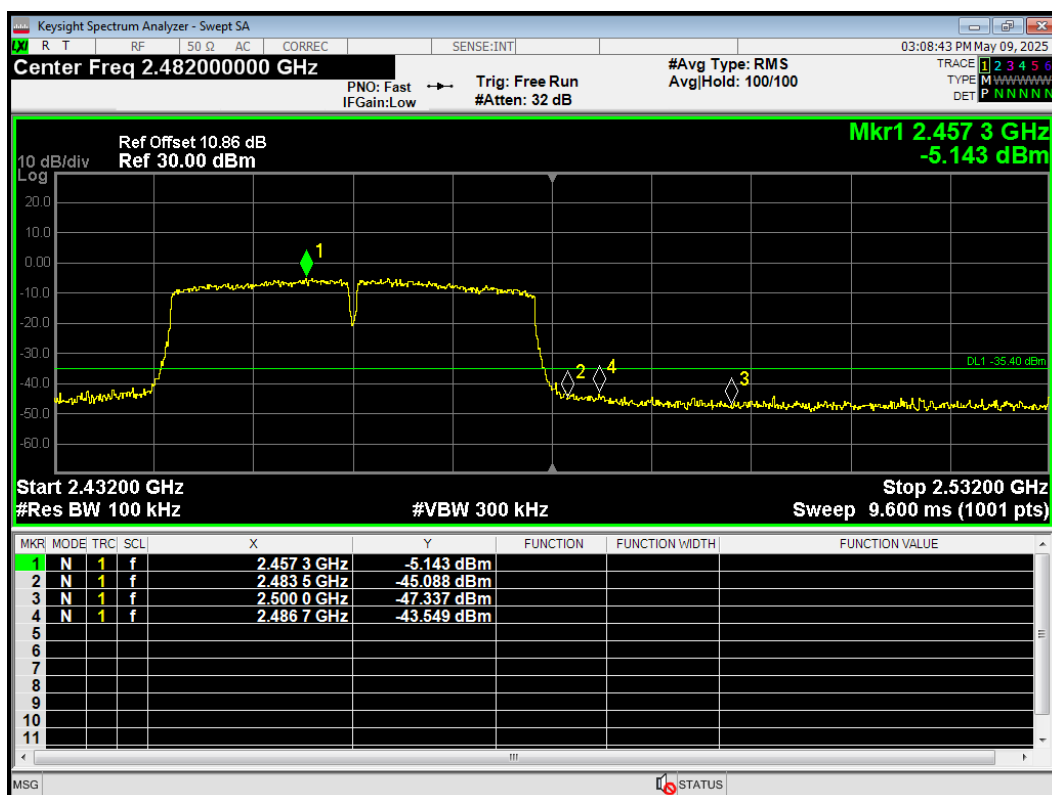


Band Edge Bluetooth LE(1M) 2402MHz Ref

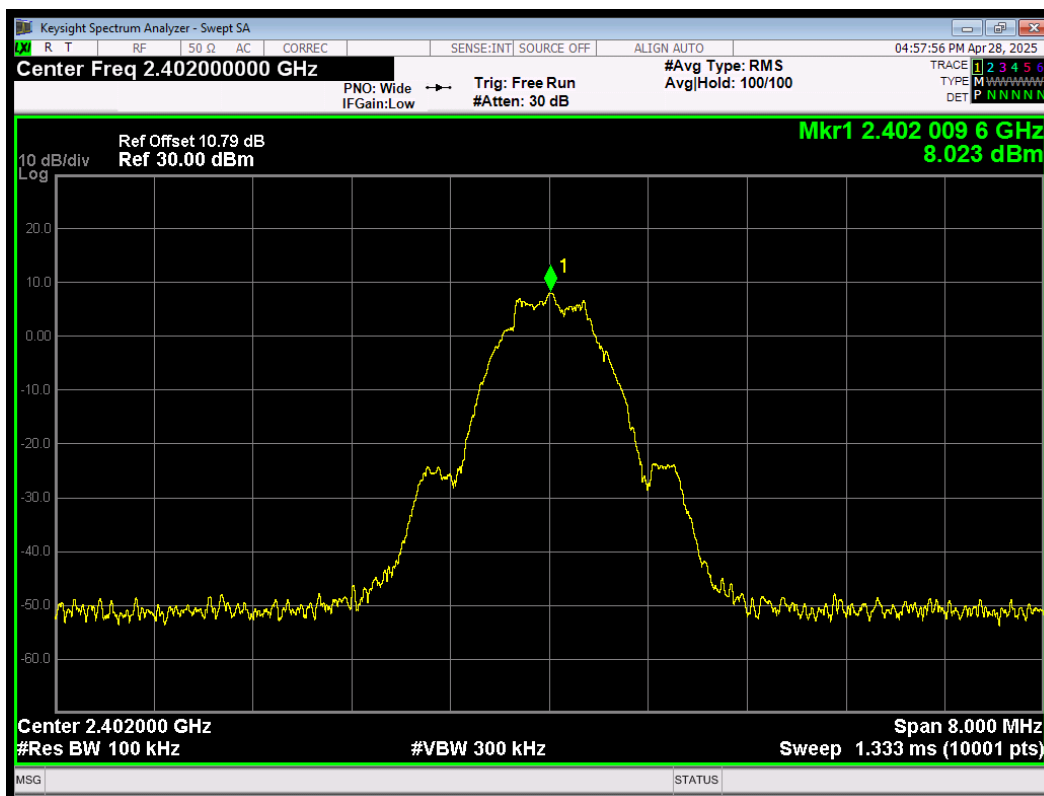


Band Edge Bluetooth LE(1M) 2402MHz Emission

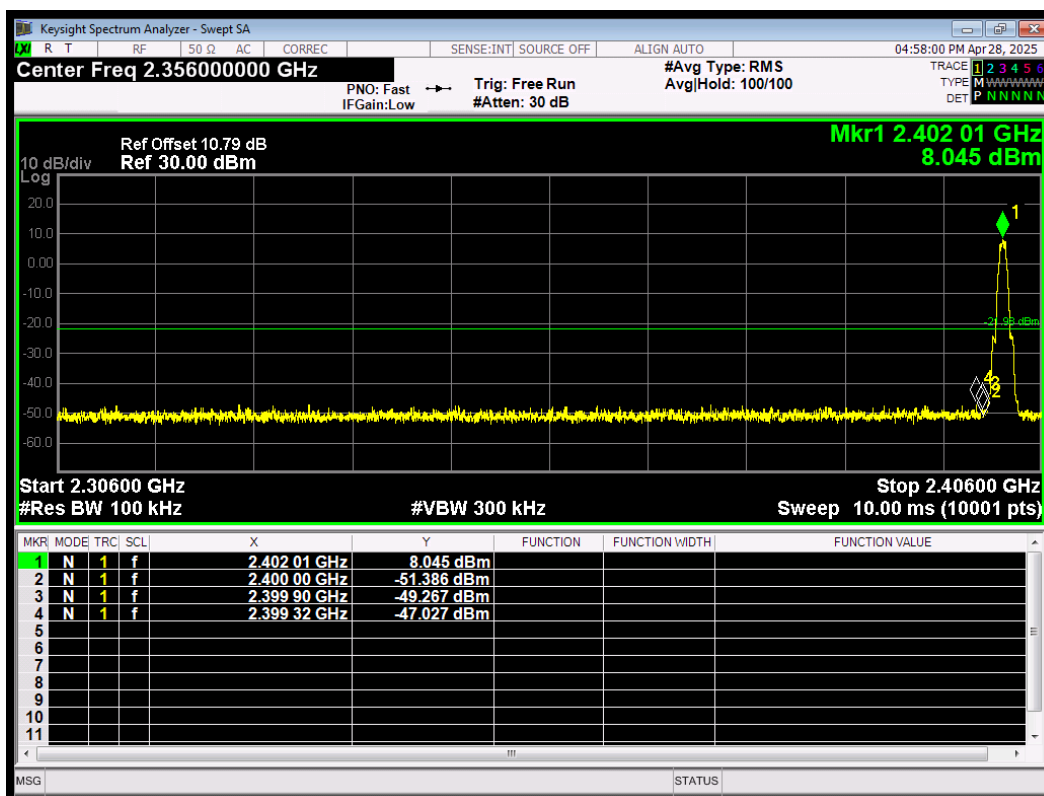

Band Edge Bluetooth LE(1M) 2480MHz Ref

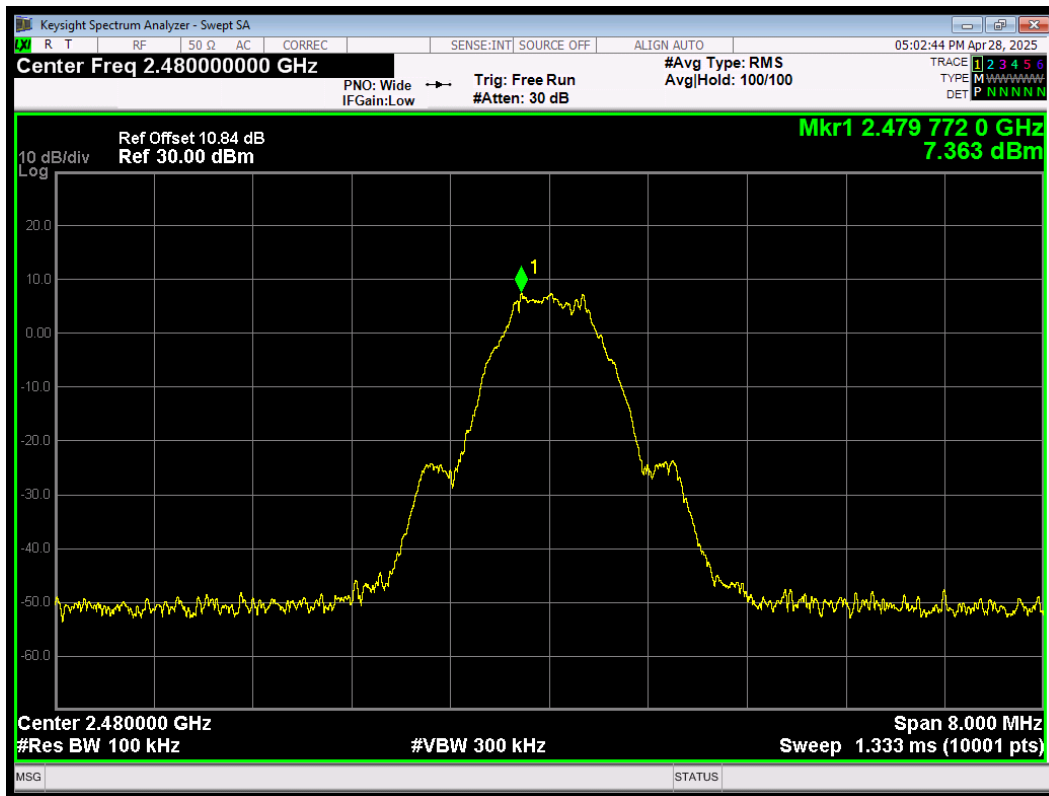


Band Edge Bluetooth LE(1M) 2480MHz Emission

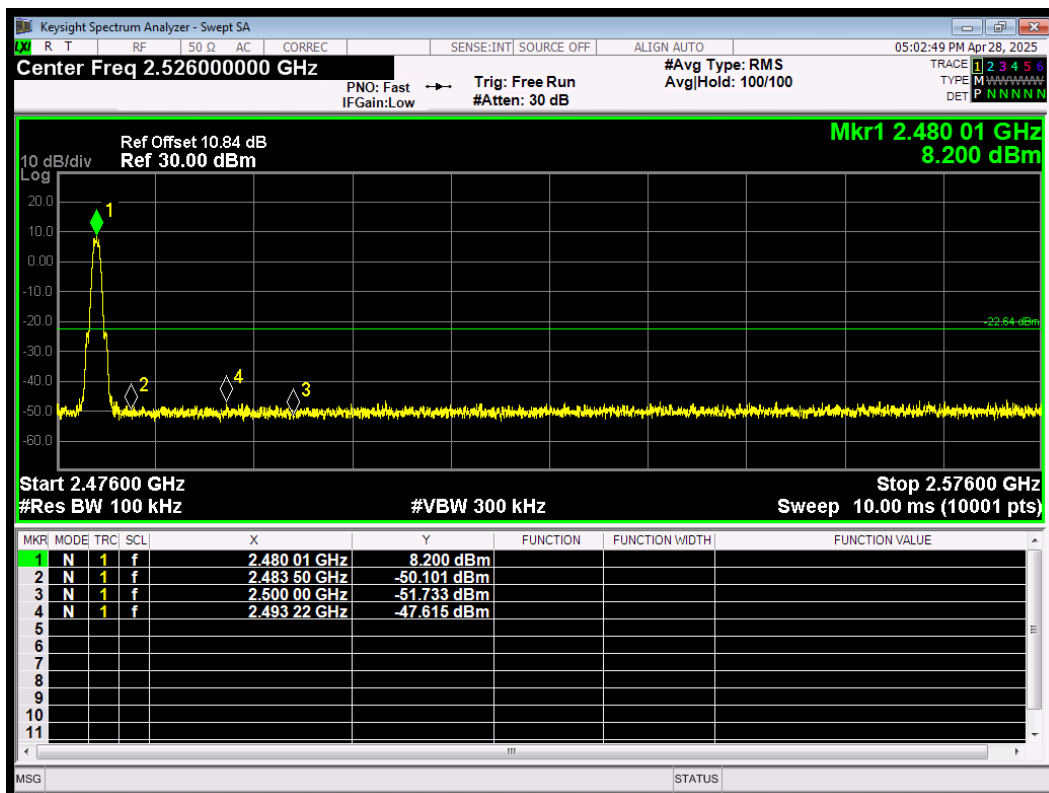

Band Edge Bluetooth LE(2M) 2404MHz Ref




Band Edge Bluetooth LE(2M) 2404MHz Emission

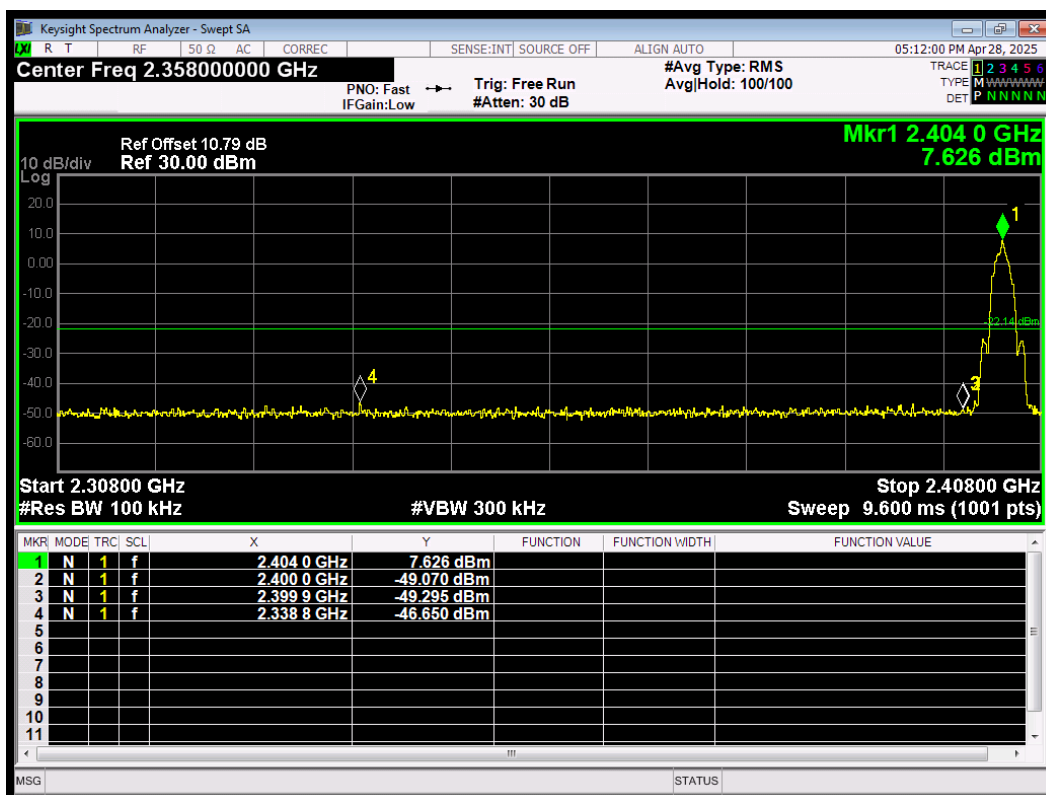


Band Edge Bluetooth LE(2M) 2478MHz Ref




Band Edge Bluetooth LE(2M) 2478MHz Emission

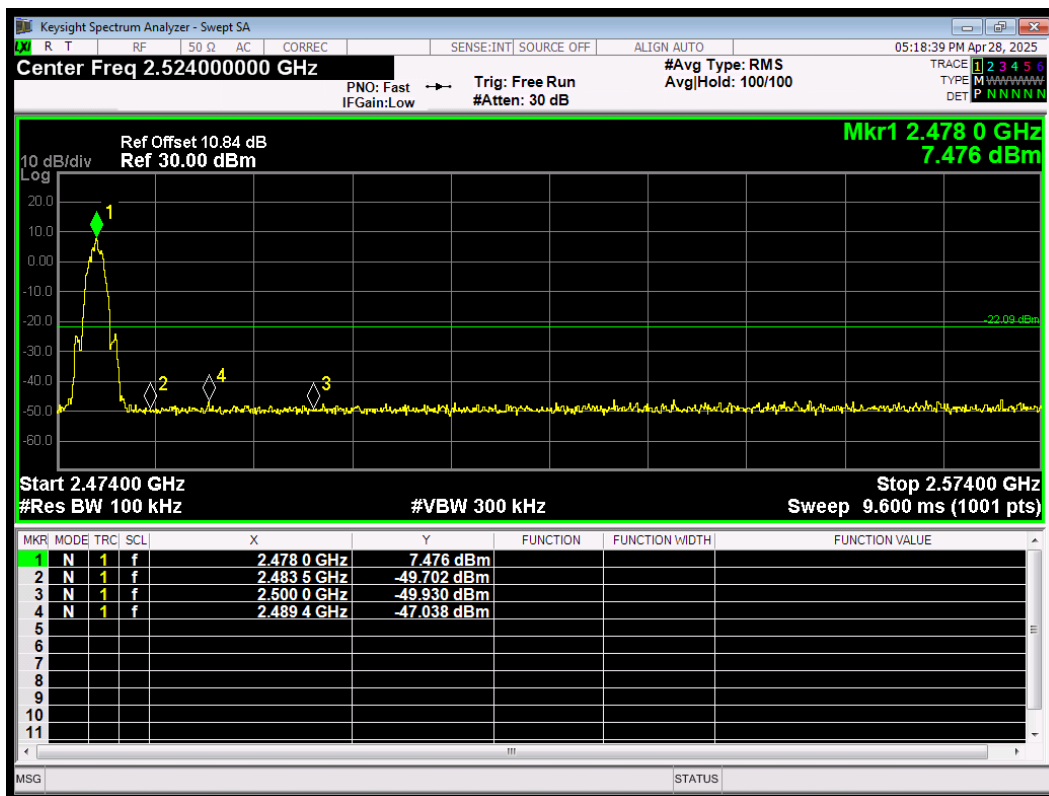


Band Edge Bluetooth LE(S=2) 2402MHz Ref

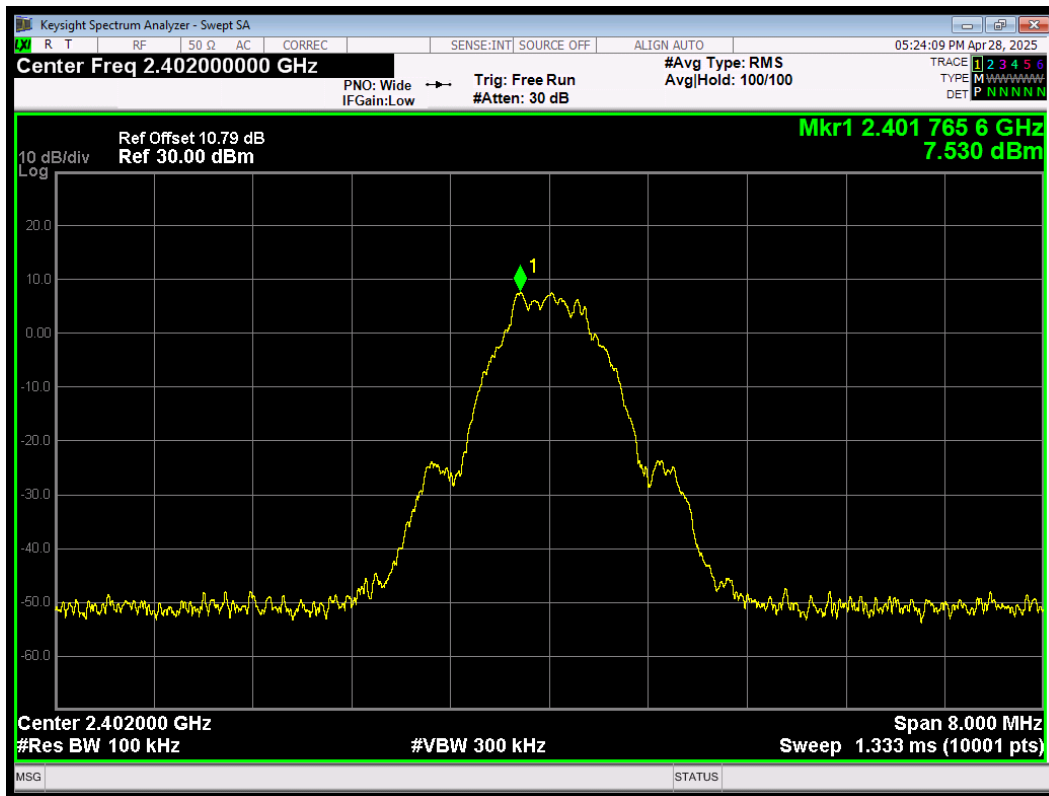

Band Edge Bluetooth LE(S=2) 2402MHz Emission

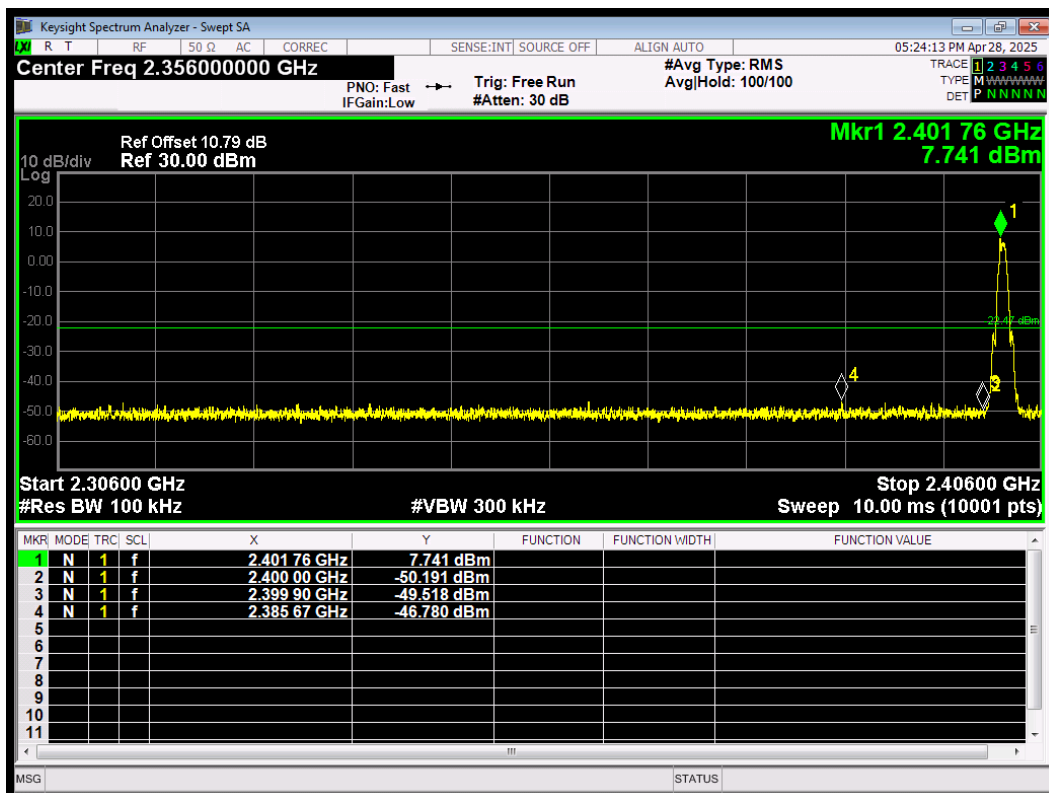

Band Edge Bluetooth LE(S=2) 2480MHz Ref

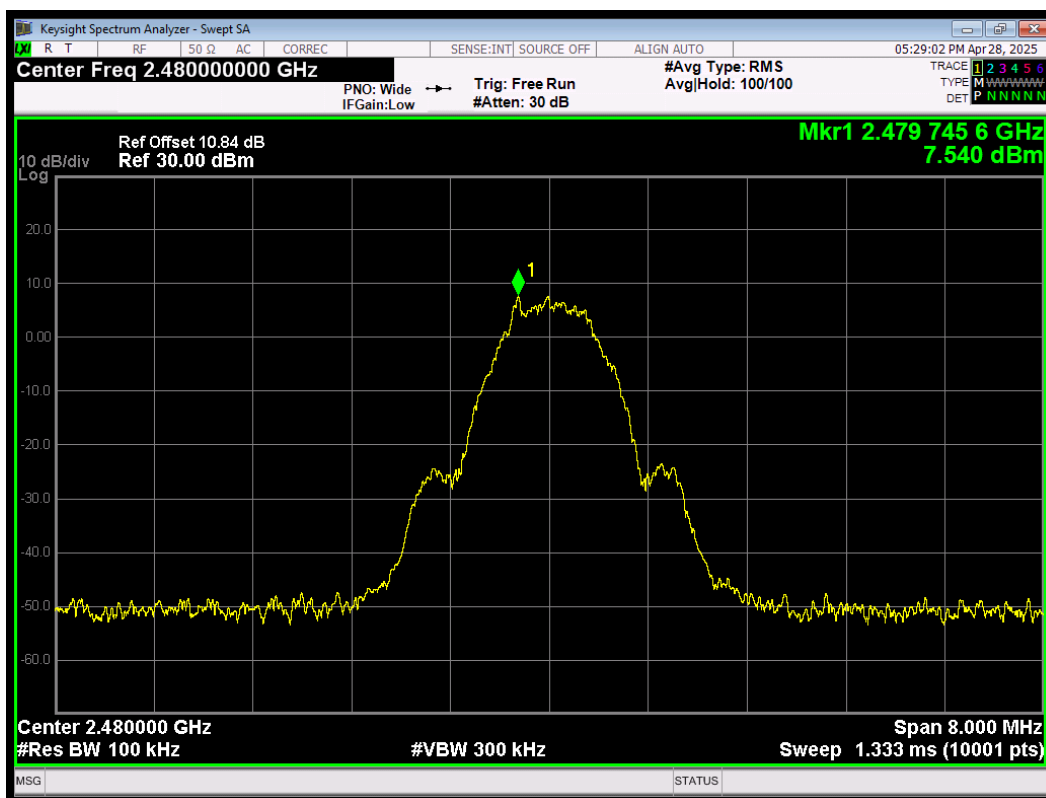

Band Edge Bluetooth LE(S=2) 2480MHz Emission

