

Appendix B

Highest Test Plots

Table of Contents

1. 2.4G Body-worn 0mm SAR 3

1. 2.4G Body-worn 0mm SAR

Date: 03.07.2025

Test Laboratory: Guangdong Dongdian Testing Service Co., Ltd.

Q25052915-1E

Serial: S25052915-1E

Communication System: UID 0, Bluetooth (0); Communication System Band: Bluetooth; Frequency: 2441 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 2441\text{ MHz}$, $\sigma = 1.802\text{ S/m}$, $\epsilon_r = 39.689$, $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3906; ComF(7.9, 7.9, 7.9) @ 2441 MHz; Calibrated: 28.05.2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1366; Calibrated: 28.05.2025
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1197
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Right side 3DH5 2441 MHz/Area Scan (16x26x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.0135 W/kg

Configuration/Right side 3DH5 2441 MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.757 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0140 W/kg


SAR(1 g) = 0.00948 W/kg; SAR(10 g) = 0.00765 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 78%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.0122 W/kg

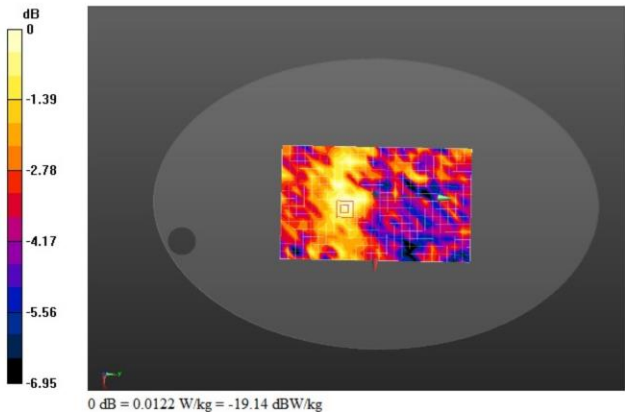

Date: 03.07.2025

Test Laboratory: Guangdong Dongdian Testing Service Co., Ltd.

Q25052915-1E

Serial: S25052915-1E

Communication System: UID 0, Bluetooth (0); Communication System Band: BLE; Frequency: 2440.4 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 2440.4 \text{ MHz}$; $\sigma = 1.802 \text{ S/m}$; $\epsilon_r = 39.691$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3906; ComF(7.9, 7.9, 7.9) @ 2440.4 MHz; Calibrated: 28.05.2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1366; Calibrated: 28.05.2025
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1197
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Left side SRD 2440.4 MHz/Area Scan (16x26x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.0557 W/kg

Configuration/Left side SRD 2440.4 MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.450 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0660 W/kg

SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.026 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 62%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.0568 W/kg

