




Plot 7:

Test Date	2024-10-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	BC1 (North American PCS)
Signal	CDMA (CDMA2000)
Frequency	1908.75
SAR 10g (W/Kg)	0.133
SAR 1g (W/Kg)	0.348
ConvF	2.24
Relative permittivity	40.76
Conductivity (S/m)	1.41

Maximum location: X=-7.00, Y=0.00 ; SAR Peak: 1.58 W/kg

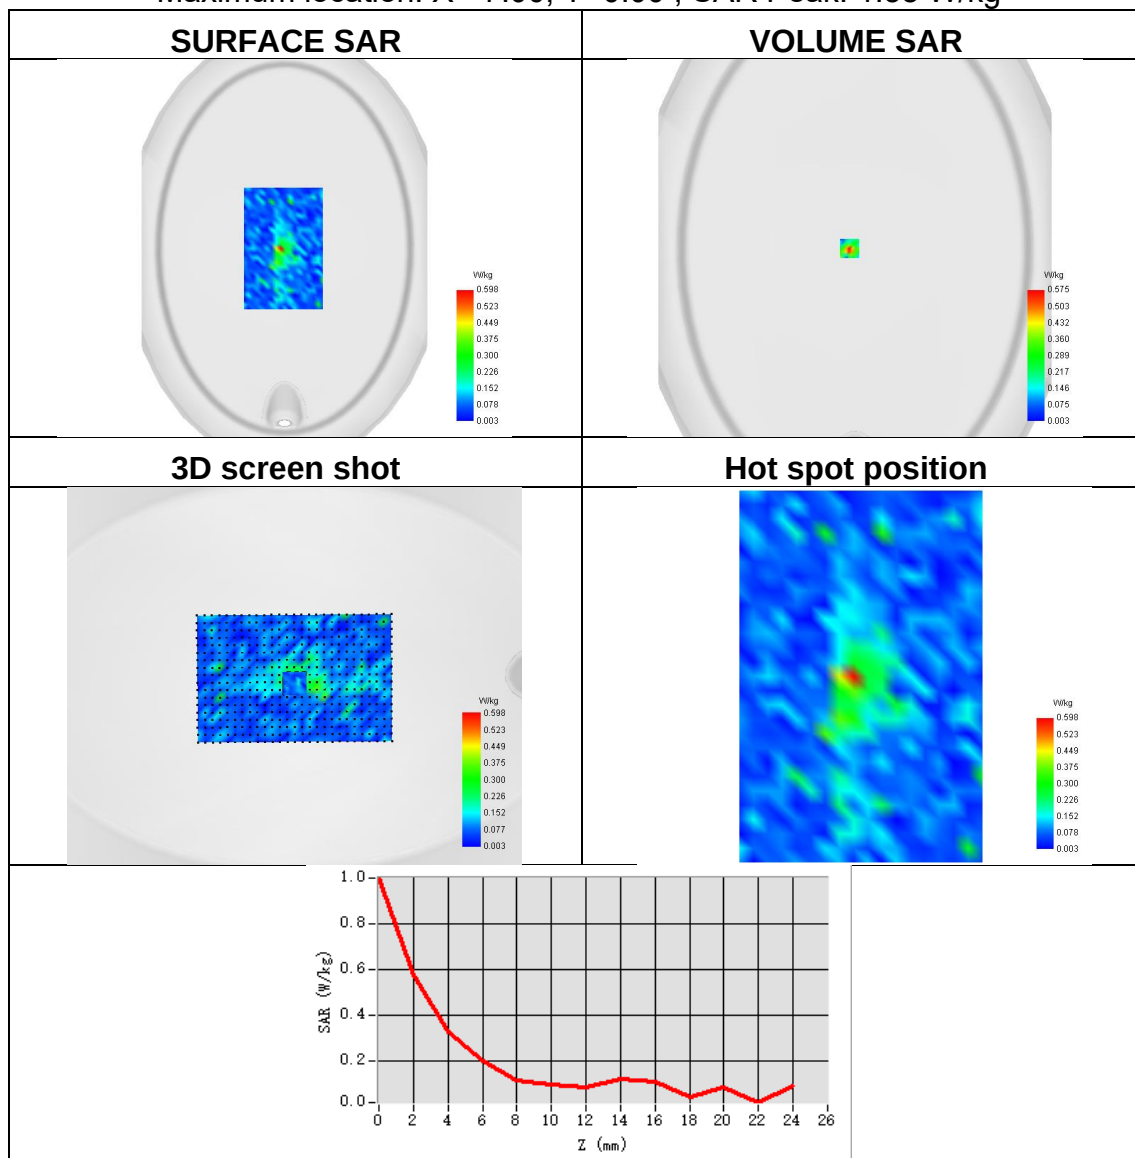




Plot 8:

Test Date	2024-10-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	ISM ANT 1
Signal	IEEE 802.11b
Frequency	2412
SAR 10g (W/Kg)	0.112
SAR 1g (W/Kg)	0.256
ConvF	2.30
Relative permittivity	40.54
Conductivity (S/m)	1.86

Maximum location: X=-35.00, Y=-7.00 ; SAR Peak: 0.78 W/kg

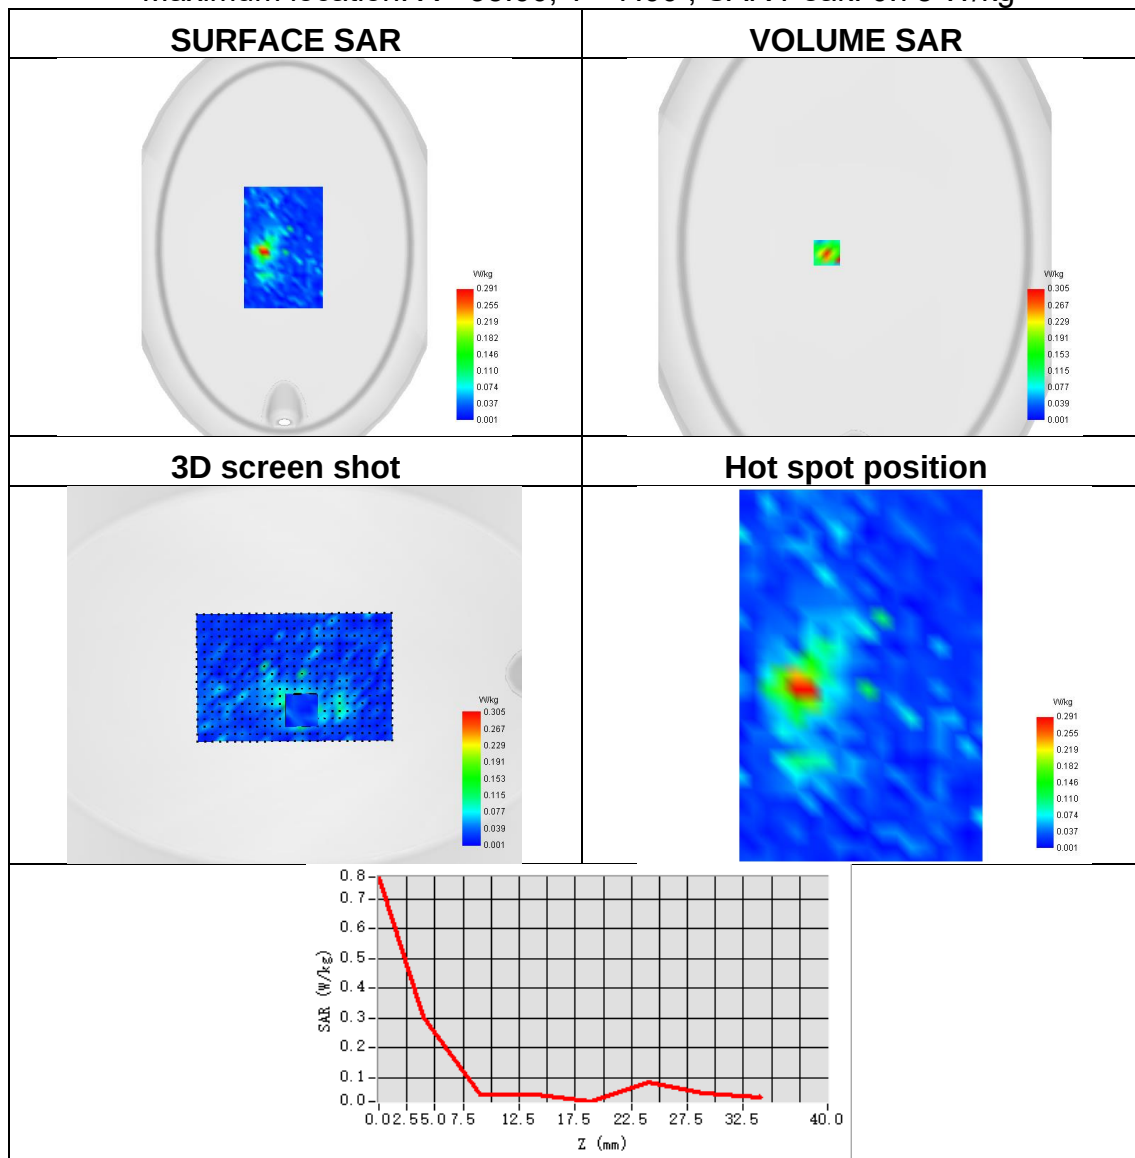




Plot 9:

Test Date	2024-10-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	ISM ANT 2
Signal	IEEE 802.11b
Frequency	2462
SAR 10g (W/Kg)	0.131
SAR 1g (W/Kg)	0.282
ConvF	2.30
Relative permittivity	40.54
Conductivity (S/m)	1.86

Maximum location: X=-35.00, Y=-8.00 ; SAR Peak: 0.54 W/kg

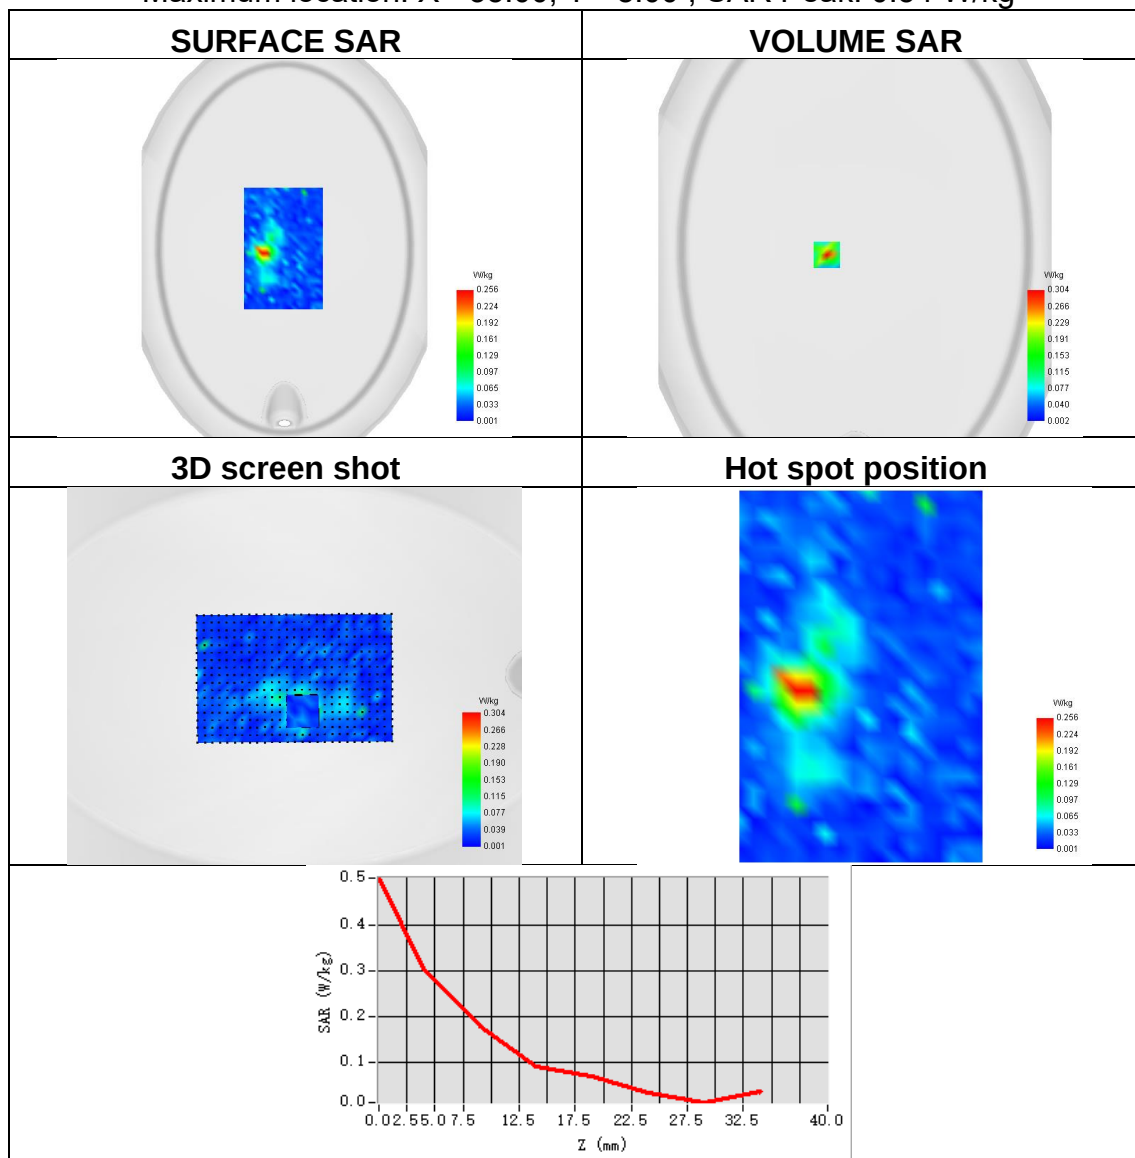




Plot 10:

Test Date	2024-10-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	ISM MIMO 1
Signal	IEEE 802.11ac
Frequency	2422
SAR 10g (W/Kg)	0.022
SAR 1g (W/Kg)	0.052
ConvF	2.30
Relative permittivity	40.54
Conductivity (S/m)	1.86

Maximum location: X=-46.00, Y=24.00 ; SAR Peak: 0.21 W/kg

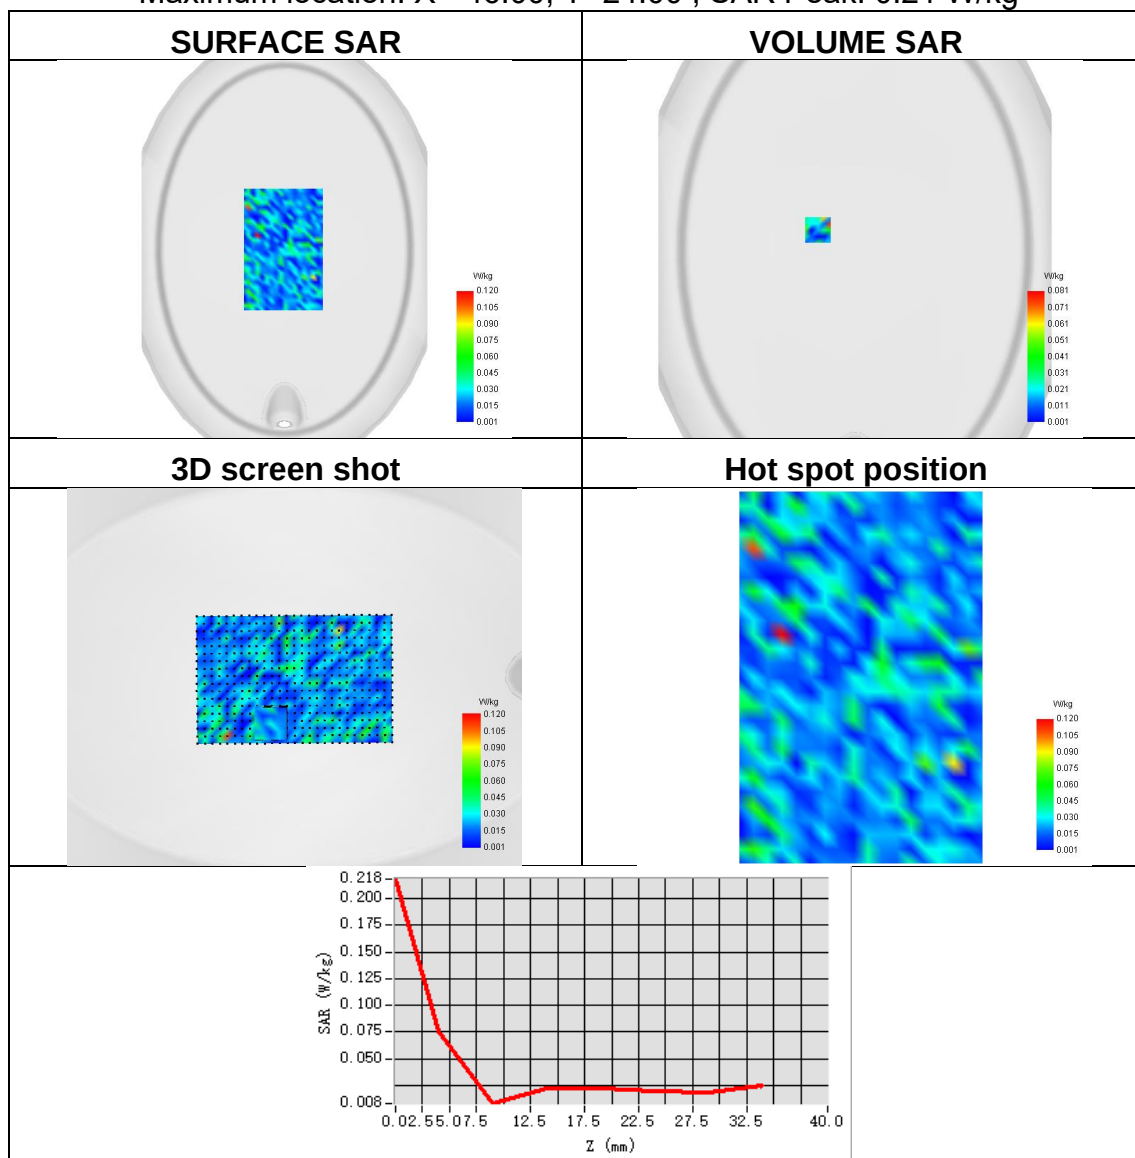




Plot 11:

Test Date	2024-10-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	ISM MIMO 2
Signal	IEEE 802.11ac
Frequency	2422
SAR 10g (W/Kg)	0.020
SAR 1g (W/Kg)	0.034
ConvF	2.30
Relative permittivity	40.54
Conductivity (S/m)	1.86

Maximum location: X=-24.00, Y=-57.00 ; SAR Peak: 0.08 W/kg

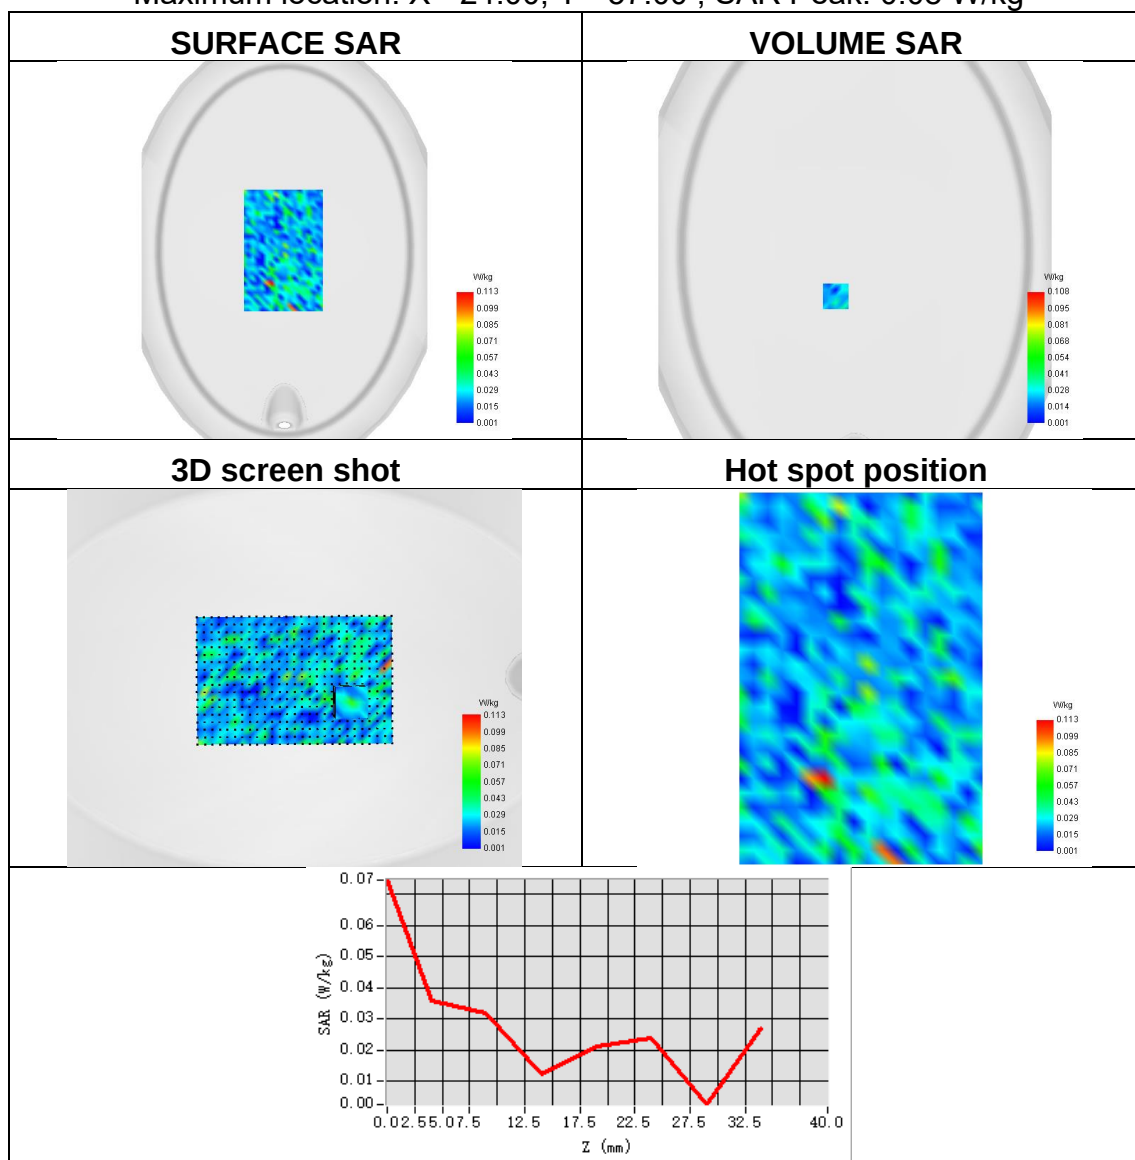




Plot 12:

Test Date	2024-10-09
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-1 ANT 1
Signal	IEEE 802.11a
Frequency	5180
SAR 10g (W/Kg)	0.142
SAR 1g (W/Kg)	0.307
ConvF	1.98
Relative permittivity	35.82
Conductivity (S/m)	4.65

Maximum location: X=-38.00, Y=-18.00 ; SAR Peak: 1.26 W/kg

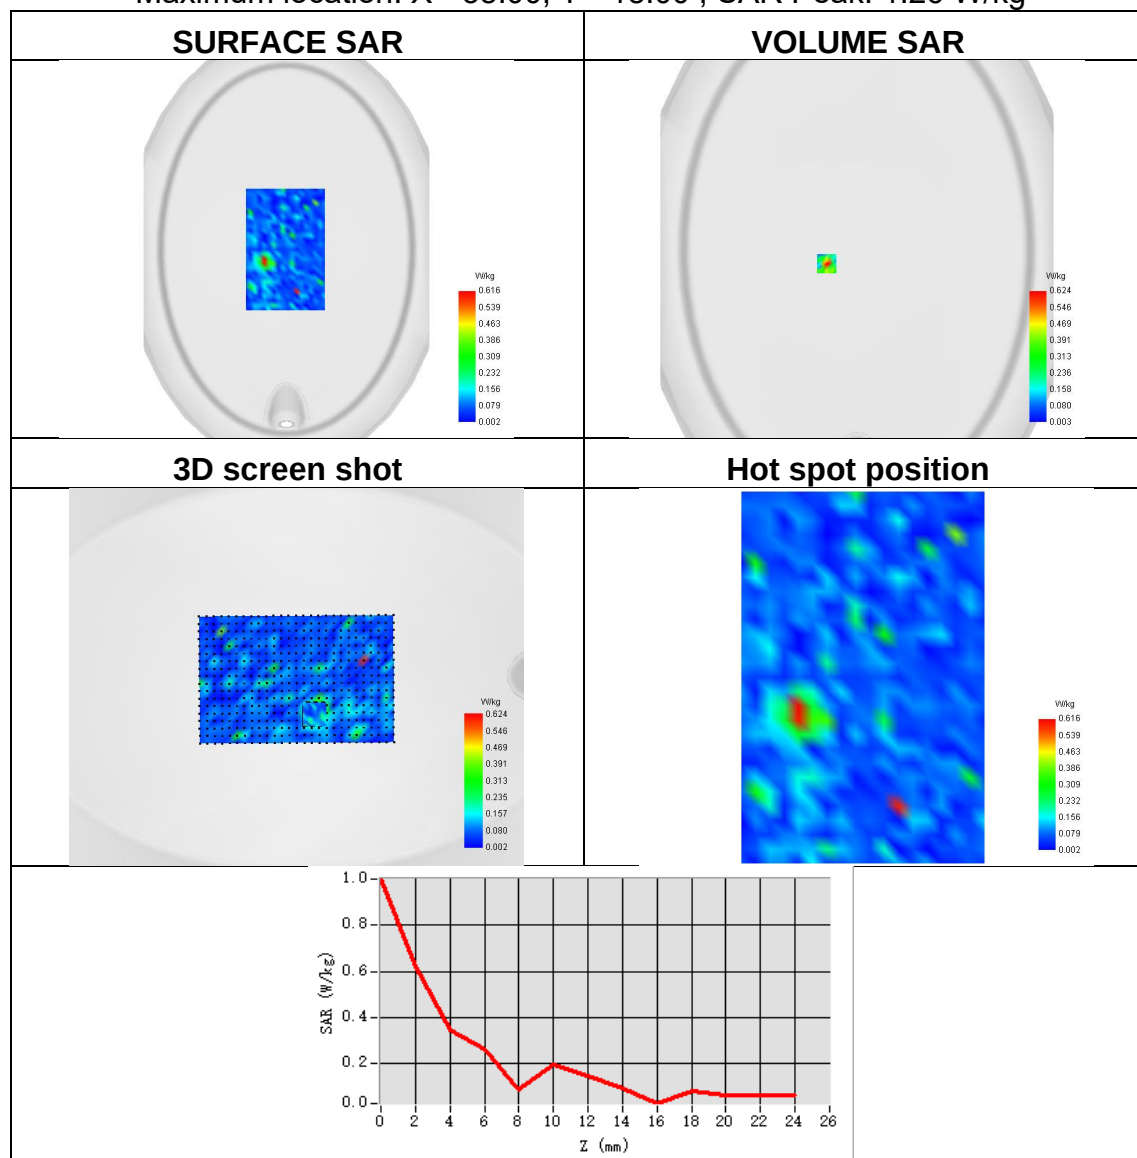




Plot 13:

Test Date	2024-10-09
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-1 ANT 2
Signal	IEEE 802.11a
Frequency	5180
SAR 10g (W/Kg)	0.127
SAR 1g (W/Kg)	0.305
ConvF	1.98
Relative permittivity	35.82
Conductivity (S/m)	4.65

Maximum location: X=-38.00, Y=-18.00 ; SAR Peak: 1.43 W/kg

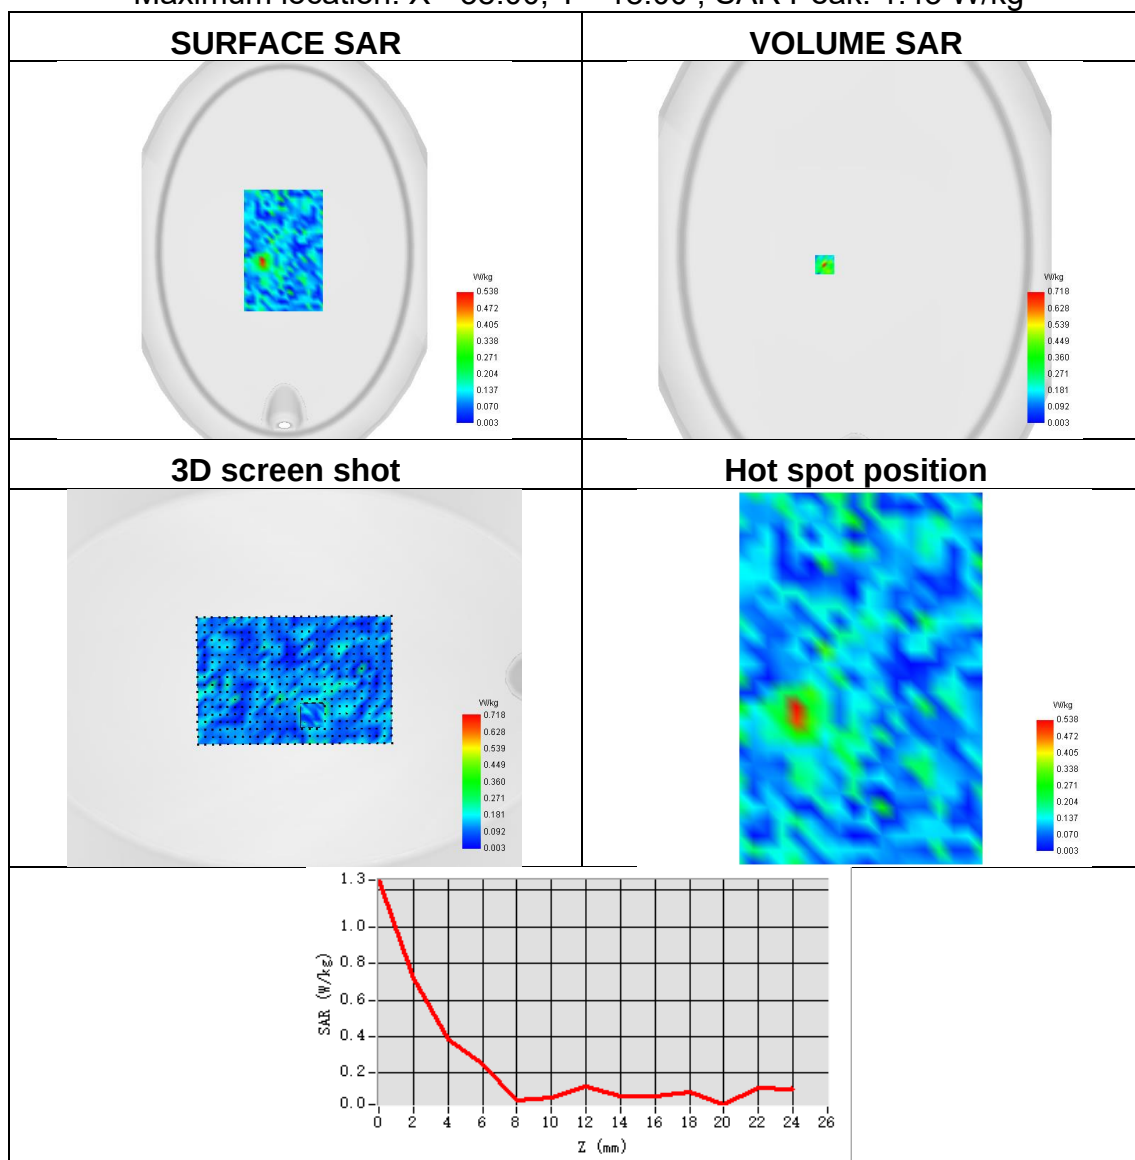




Plot 14:

Test Date	2024-10-09
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-1 MIMO 1
Signal	IEEE 802.11ax
Frequency	5240
SAR 10g (W/Kg)	0.060
SAR 1g (W/Kg)	0.150
ConvF	1.98
Relative permittivity	35.82
Conductivity (S/m)	4.65

Maximum location: X=-7.00, Y=-23.00 ; SAR Peak: 0.70 W/kg

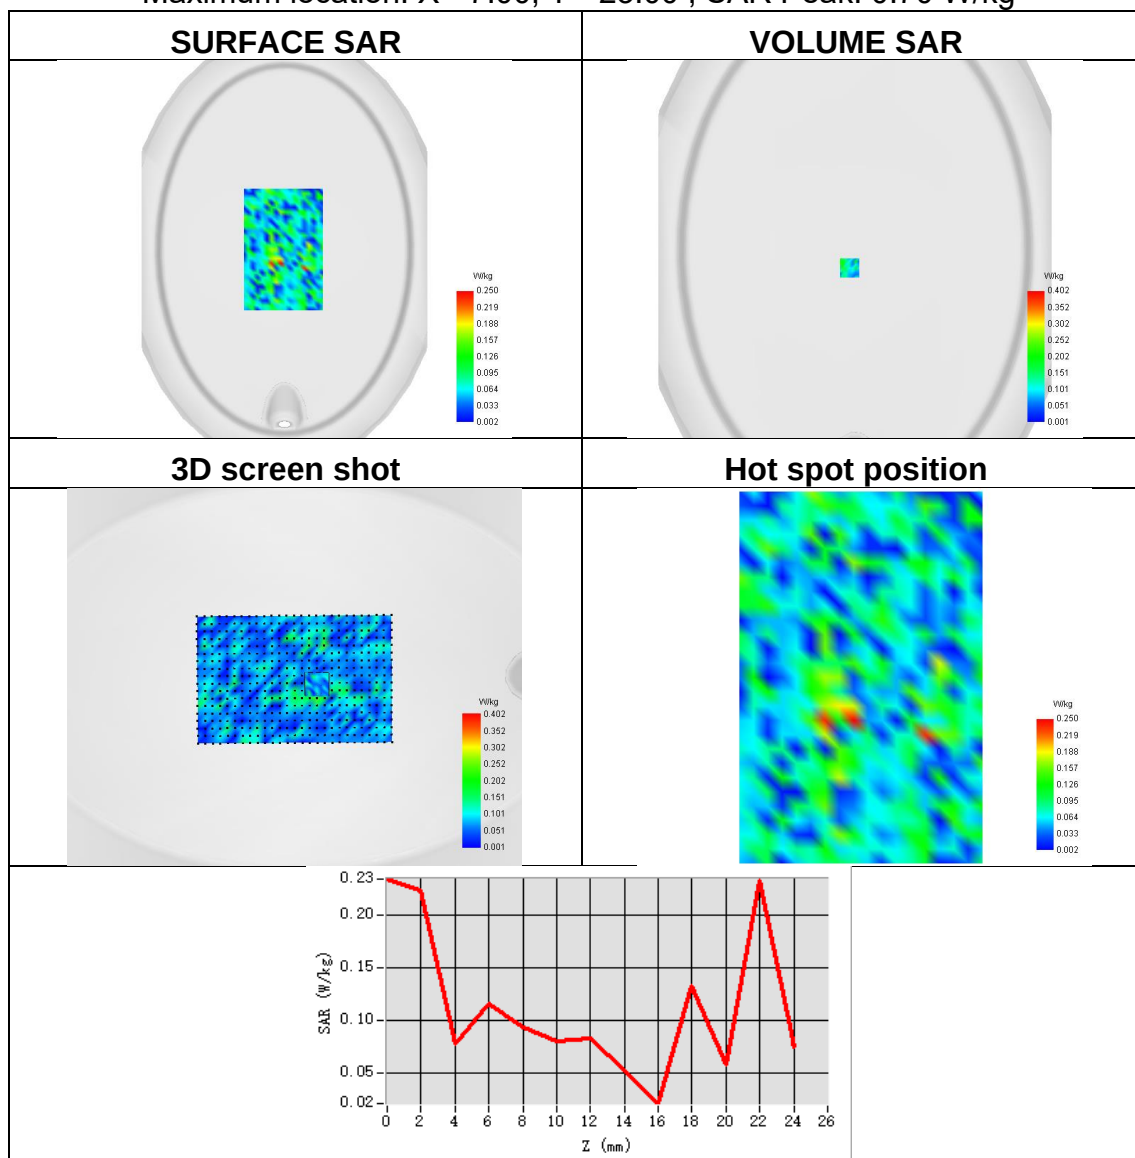




Plot 15:

Test Date	2024-10-09
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-1 MIMO 2
Signal	IEEE 802.11ax
Frequency	5240
SAR 10g (W/Kg)	0.055
SAR 1g (W/Kg)	0.091
ConvF	1.98
Relative permittivity	35.82
Conductivity (S/m)	4.65

Maximum location: X=-22.00, Y=80.00 ; SAR Peak: 0.57 W/kg

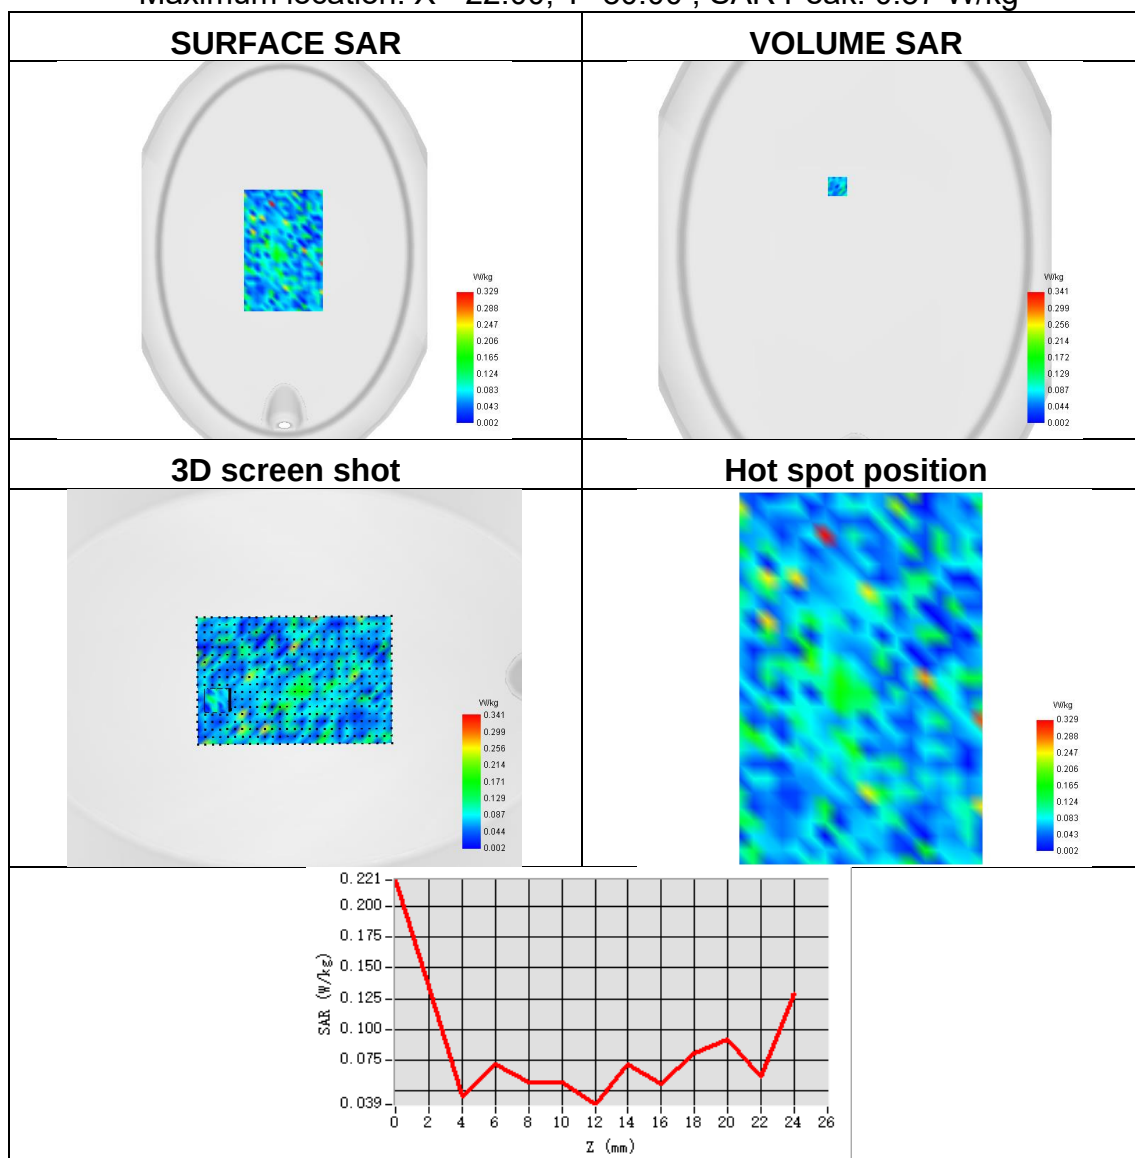




Plot 16:

Test Date	2024-10-09
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2A ANT 1
Signal	IEEE 802.11a
Frequency	5320
SAR 10g (W/Kg)	0.053
SAR 1g (W/Kg)	0.113
ConvF	1.83
Relative permittivity	36.00
Conductivity (S/m)	4.84

Maximum location: X=42.00, Y=32.00 ; SAR Peak: 0.89 W/kg

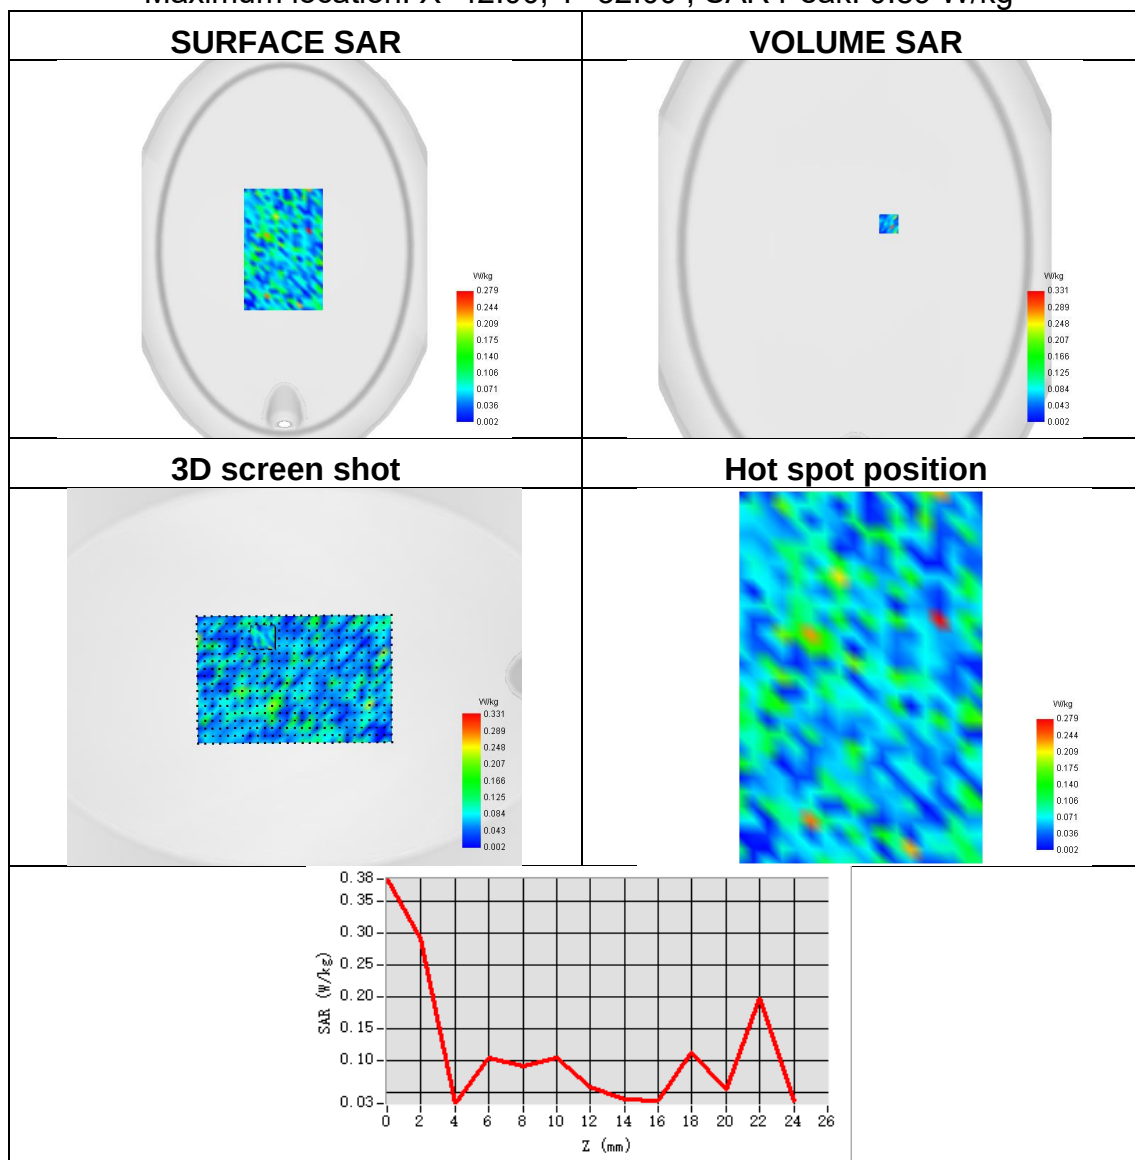




Plot 17:

Test Date	2024-10-09
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2A ANT 2
Signal	IEEE 802.11a
Frequency	5300
SAR 10g (W/Kg)	0.079
SAR 1g (W/Kg)	0.147
ConvF	1.83
Relative permittivity	36.00
Conductivity (S/m)	4.84

Maximum location: X=26.00, Y=72.00 ; SAR Peak: 0.78 W/kg

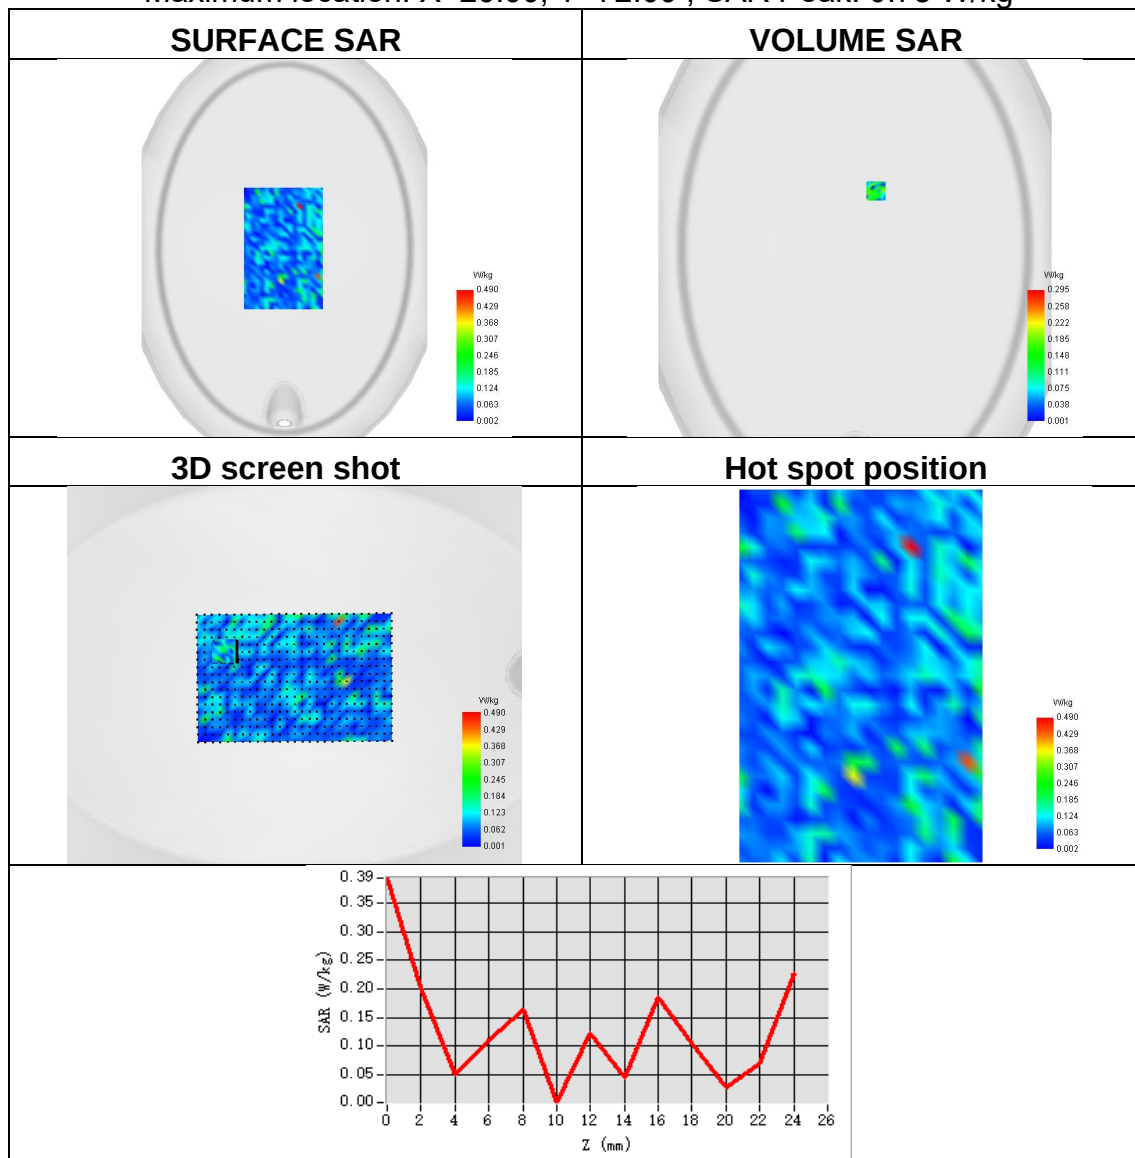




Plot 18:

Test Date	2024-10-09
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2A MIMO 1
Signal	IEEE 802.11n
Frequency	5260
SAR 10g (W/Kg)	0.085
SAR 1g (W/Kg)	0.199
ConvF	1.83
Relative permittivity	36.00
Conductivity (S/m)	4.84

Maximum location: X=-30.00, Y=32.00 ; SAR Peak: 1.02 W/kg

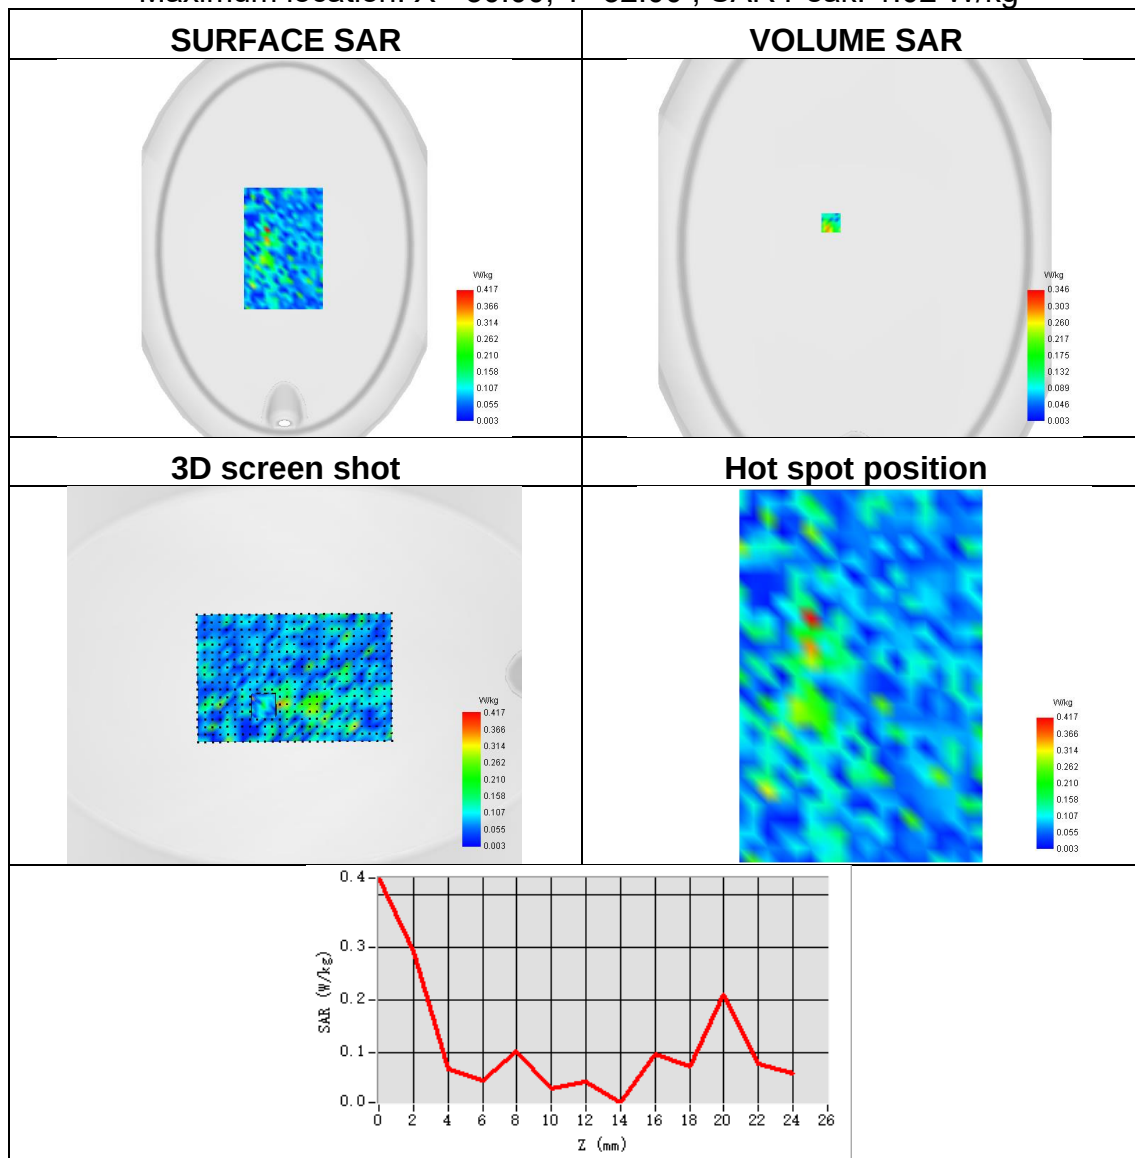




Plot 19:

Test Date	2024-10-09
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2A MIMO 2
Signal	IEEE 802.11n
Frequency	5260
SAR 10g (W/Kg)	0.083
SAR 1g (W/Kg)	0.201
ConvF	1.83
Relative permittivity	36.00
Conductivity (S/m)	4.84

Maximum location: X=-22.00, Y=-41.00 ; SAR Peak: 0.82 W/kg

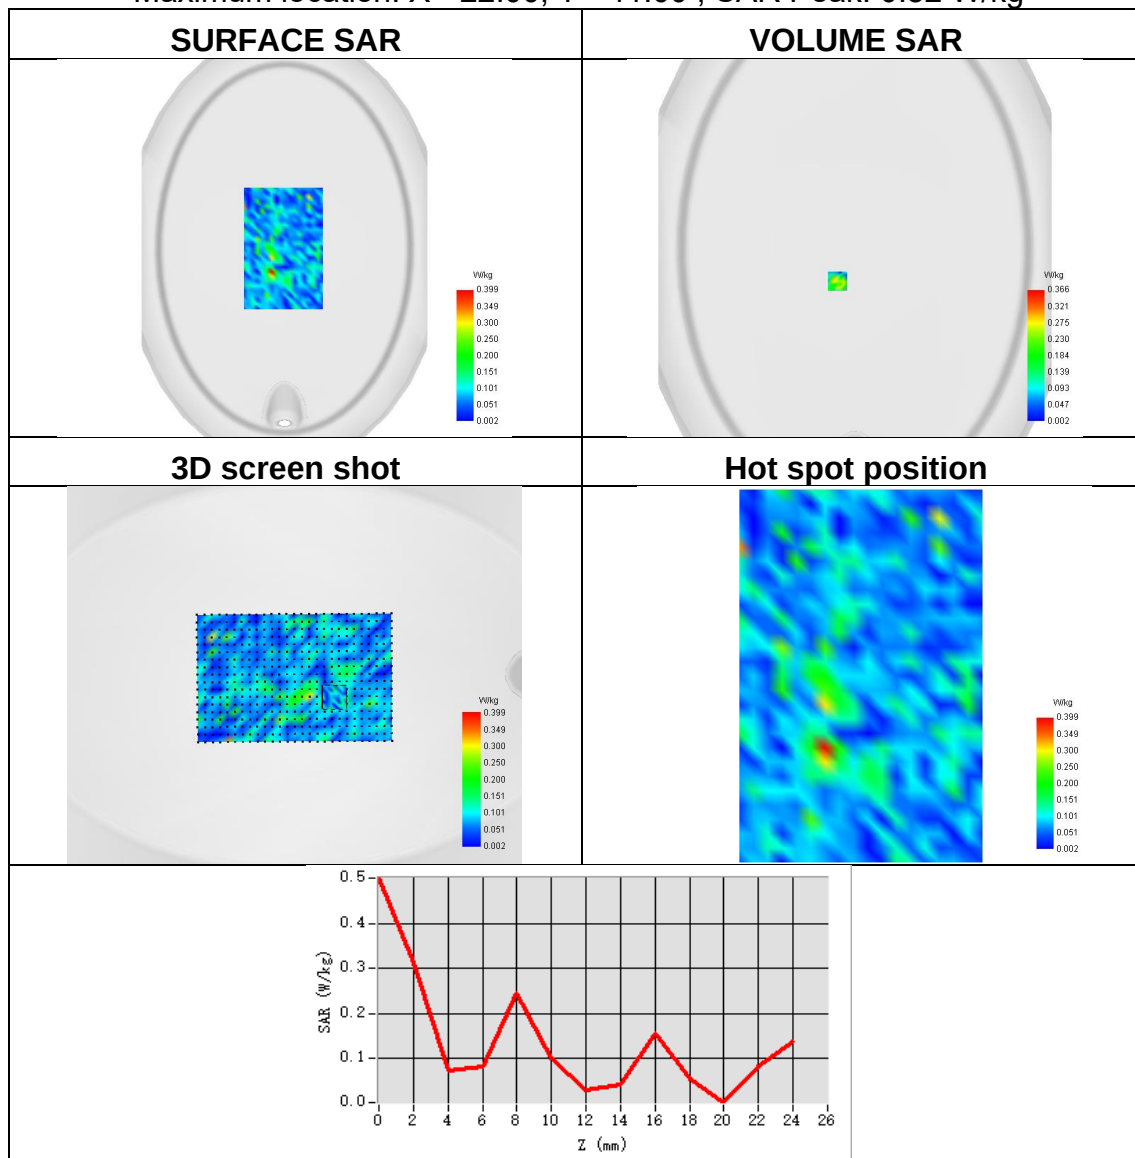




Plot 20:

Test Date	2024-10-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2C ANT 1
Signal	IEEE 802.11a
Frequency	5700
SAR 10g (W/Kg)	0.053
SAR 1g (W/Kg)	0.113
ConvF	1.86
Relative permittivity	35.86
Conductivity (S/m)	5.12

Maximum location: X=42.00, Y=32.00 ; SAR Peak: 0.89 W/kg

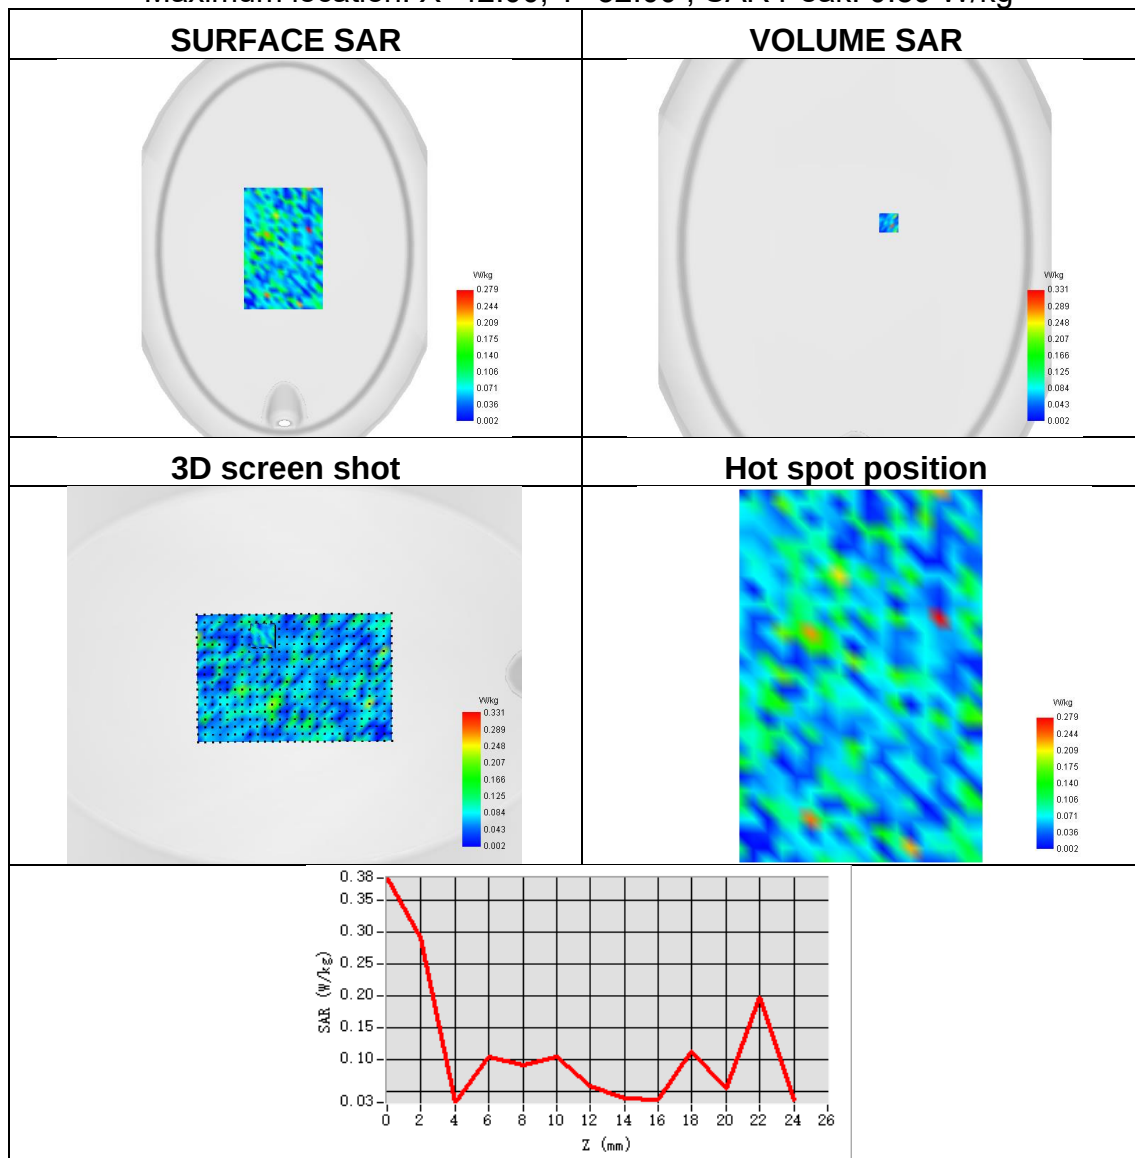




Plot 21:

Test Date	2024-10-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2C ANT 2
Signal	IEEE 802.11ax
Frequency	5530
SAR 10g (W/Kg)	0.118
SAR 1g (W/Kg)	0.314
ConvF	1.86
Relative permittivity	35.86
Conductivity (S/m)	5.12

Maximum location: X=-7.00, Y=-72.00 ; SAR Peak: 1.25 W/kg

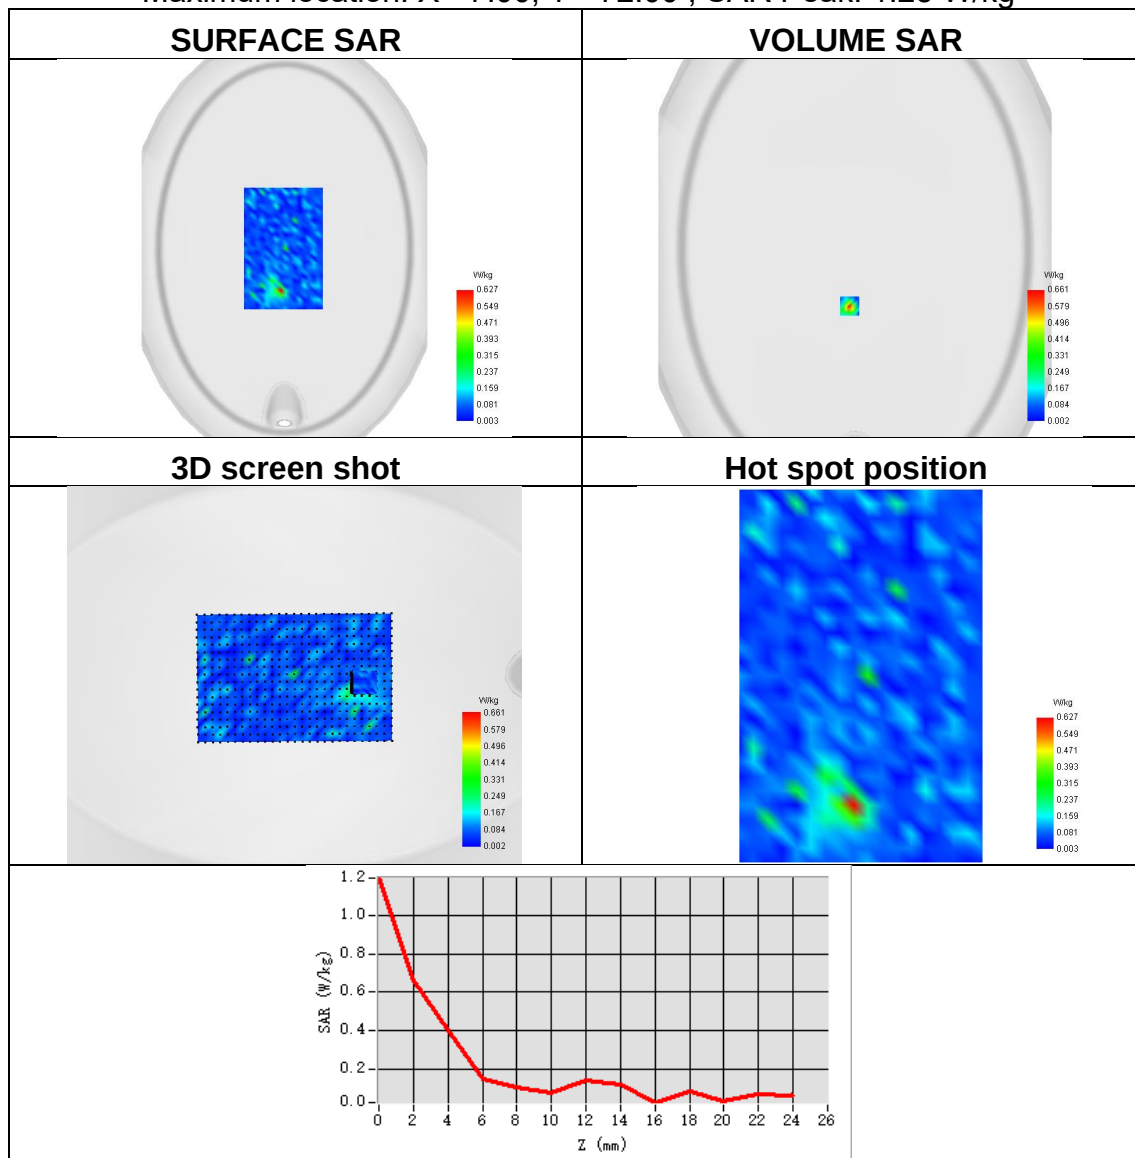




Plot 22:

Test Date	2024-10-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2C MIMO 1
Signal	IEEE 802.11n
Frequency	5700
SAR 10g (W/Kg)	0.128
SAR 1g (W/Kg)	0.213
ConvF	1.86
Relative permittivity	35.86
Conductivity (S/m)	5.12

Maximum location: X=-23.00, Y=-64.00 ; SAR Peak: 1.18 W/kg

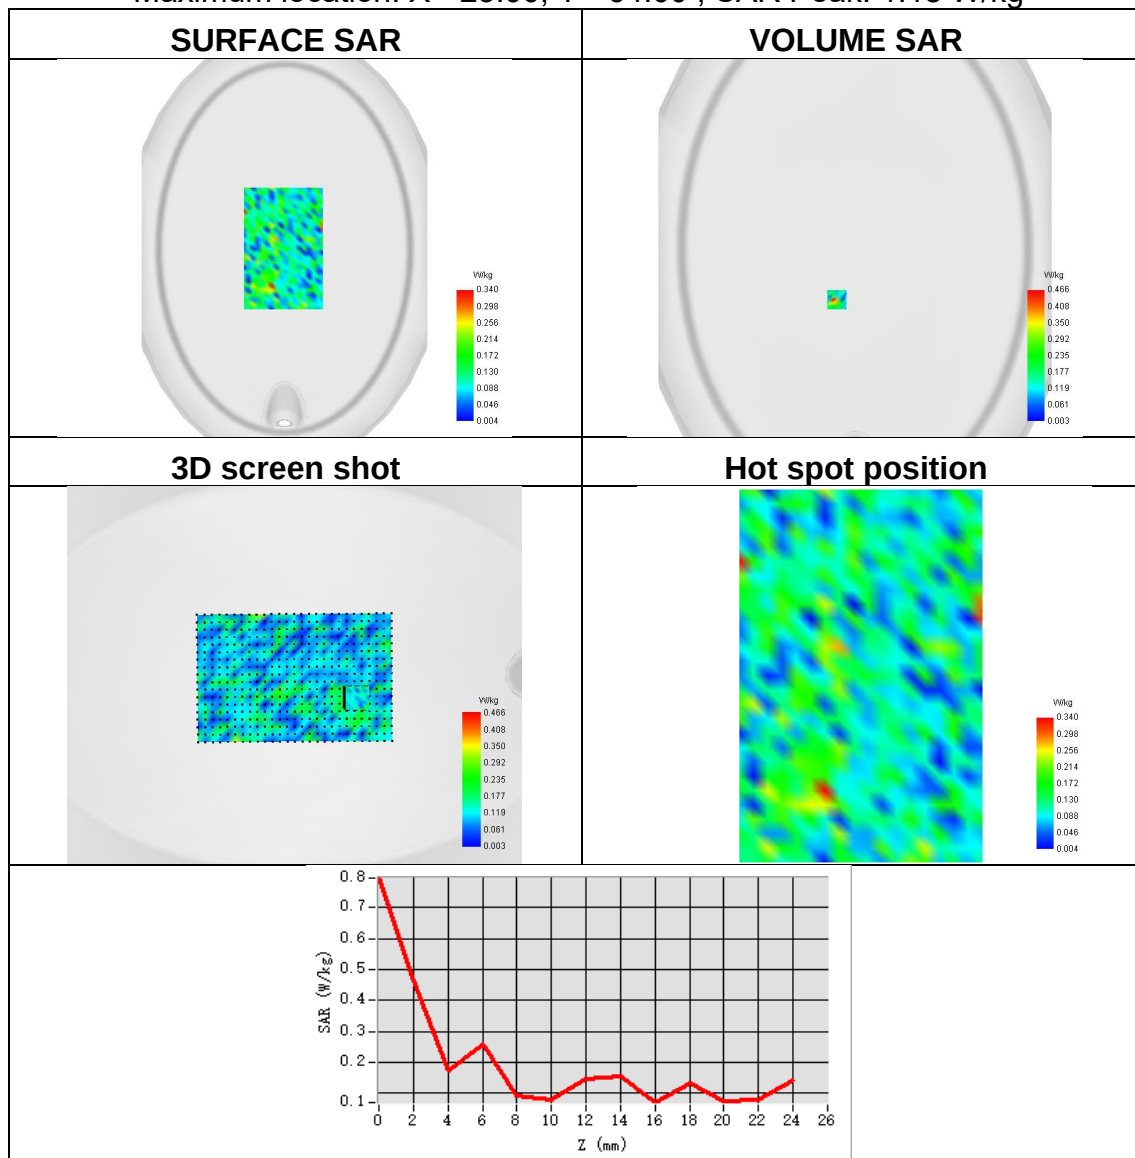




Plot 23:

Test Date	2024-10-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2C MIMO 2
Signal	IEEE 802.11n
Frequency	5700
SAR 10g (W/Kg)	0.058
SAR 1g (W/Kg)	0.108
ConvF	1.86
Relative permittivity	35.86
Conductivity (S/m)	5.12

Maximum location: X=-46.00, Y=80.00 ; SAR Peak: 0.70 W/kg

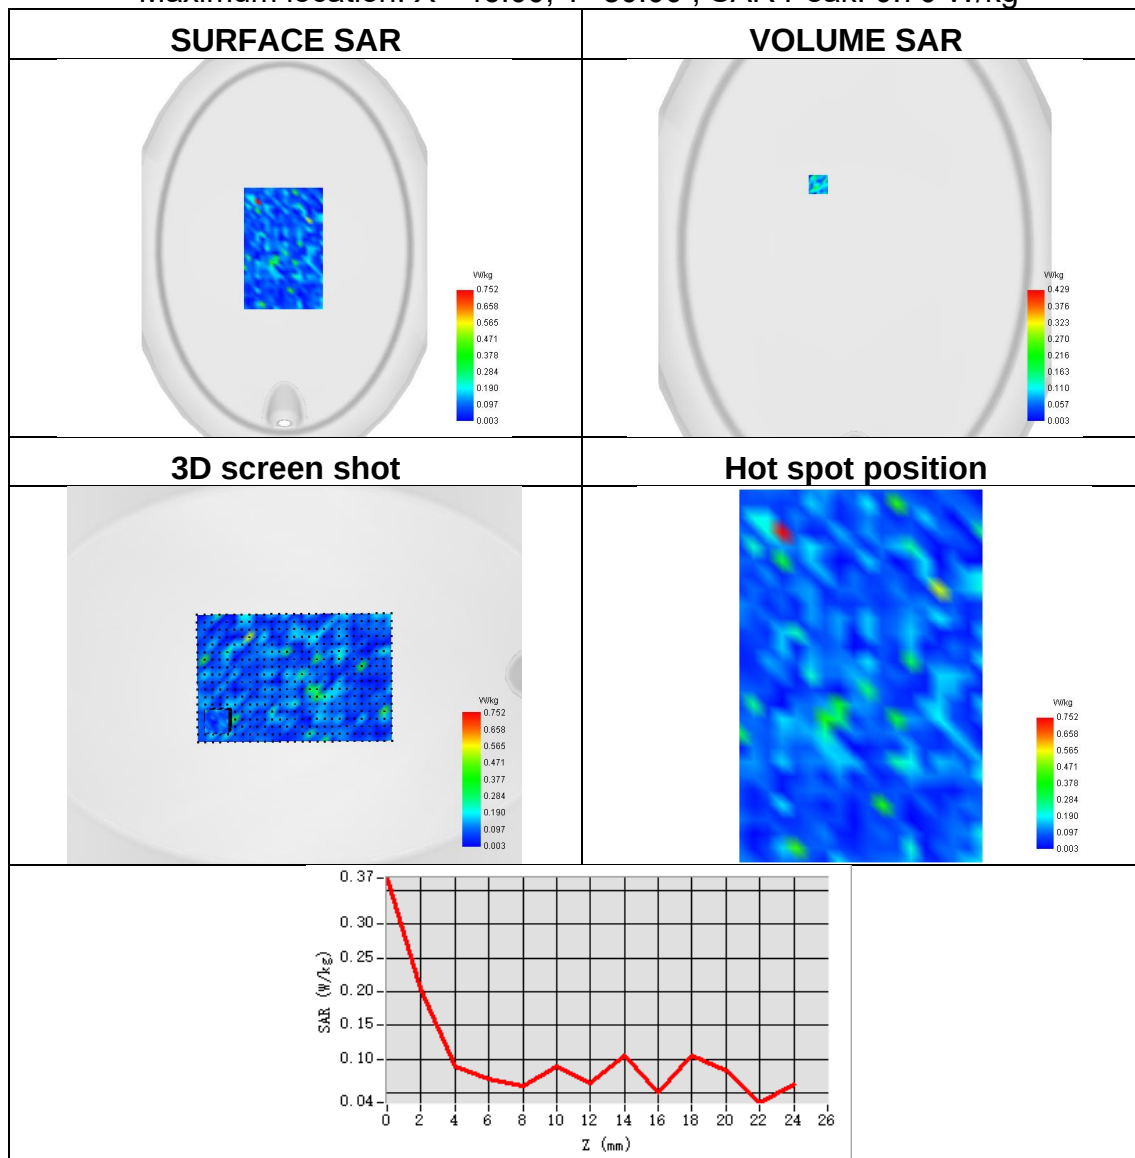




Plot 24:

Test Date	2024-10-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3 ANT 1
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	0.133
SAR 1g (W/Kg)	0.348
ConvF	1.71
Relative permittivity	35.39
Conductivity (S/m)	5.23

Maximum location: X=-7.00, Y=0.00 ; SAR Peak: 1.58 W/kg

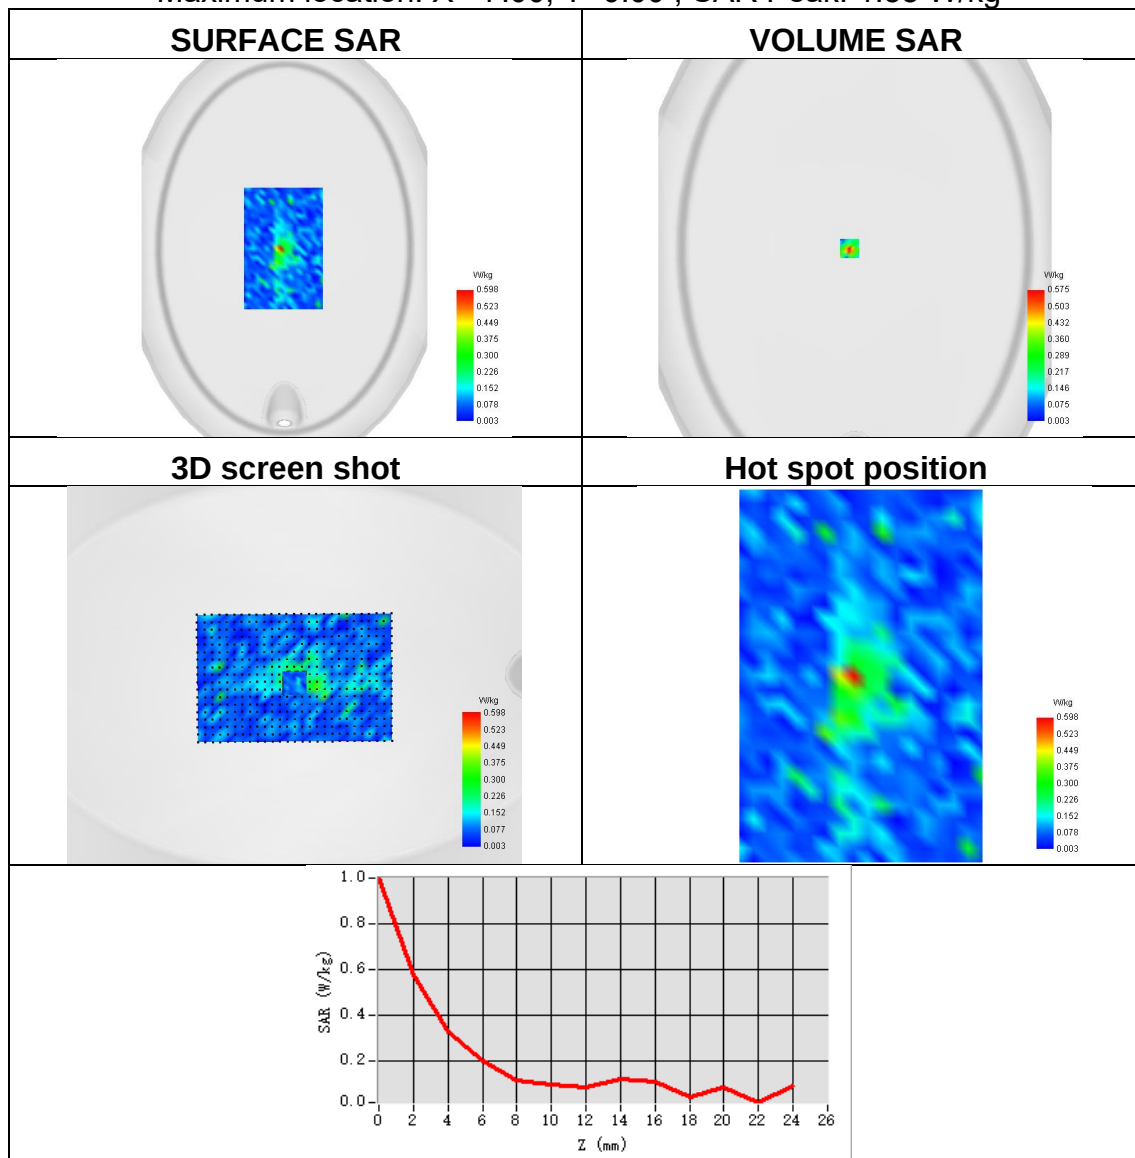




Plot 25:

Test Date	2024-10-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3 ANT 2
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	0.139
SAR 1g (W/Kg)	0.368
ConvF	1.71
Relative permittivity	35.39
Conductivity (S/m)	5.23

Maximum location: X=-7.00, Y=-64.00 ; SAR Peak: 1.90 W/kg

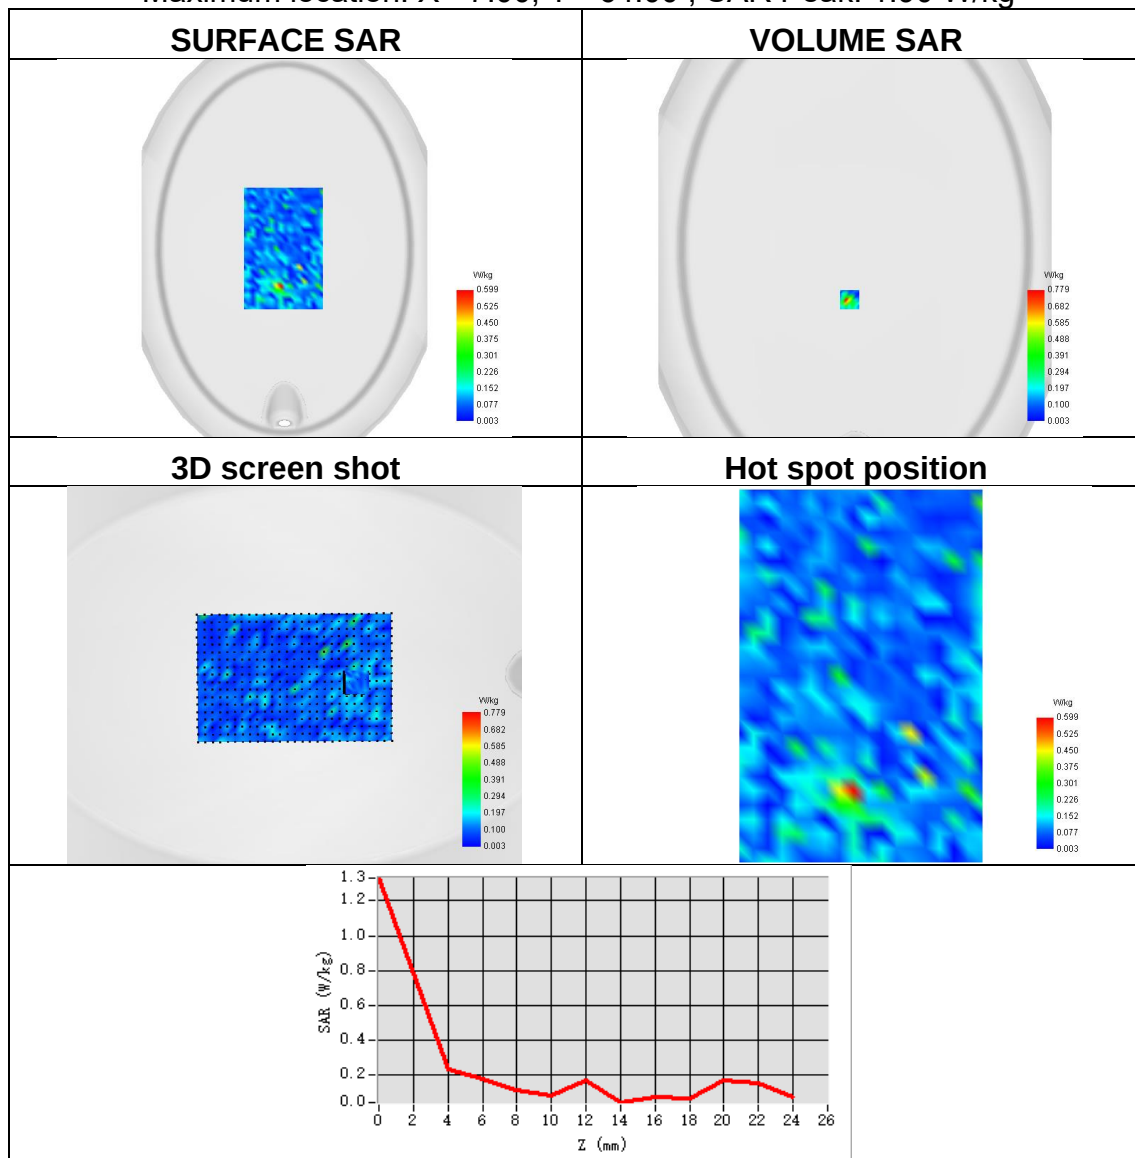




Plot 26:

Test Date	2024-10-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3 ANT 1
Signal	IEEE 802.11ac
Frequency	5745
SAR 10g (W/Kg)	0.060
SAR 1g (W/Kg)	0.127
ConvF	1.71
Relative permittivity	35.39
Conductivity (S/m)	5.23

Maximum location: X=-45.00, Y=-72.00 ; SAR Peak: 0.61 W/kg

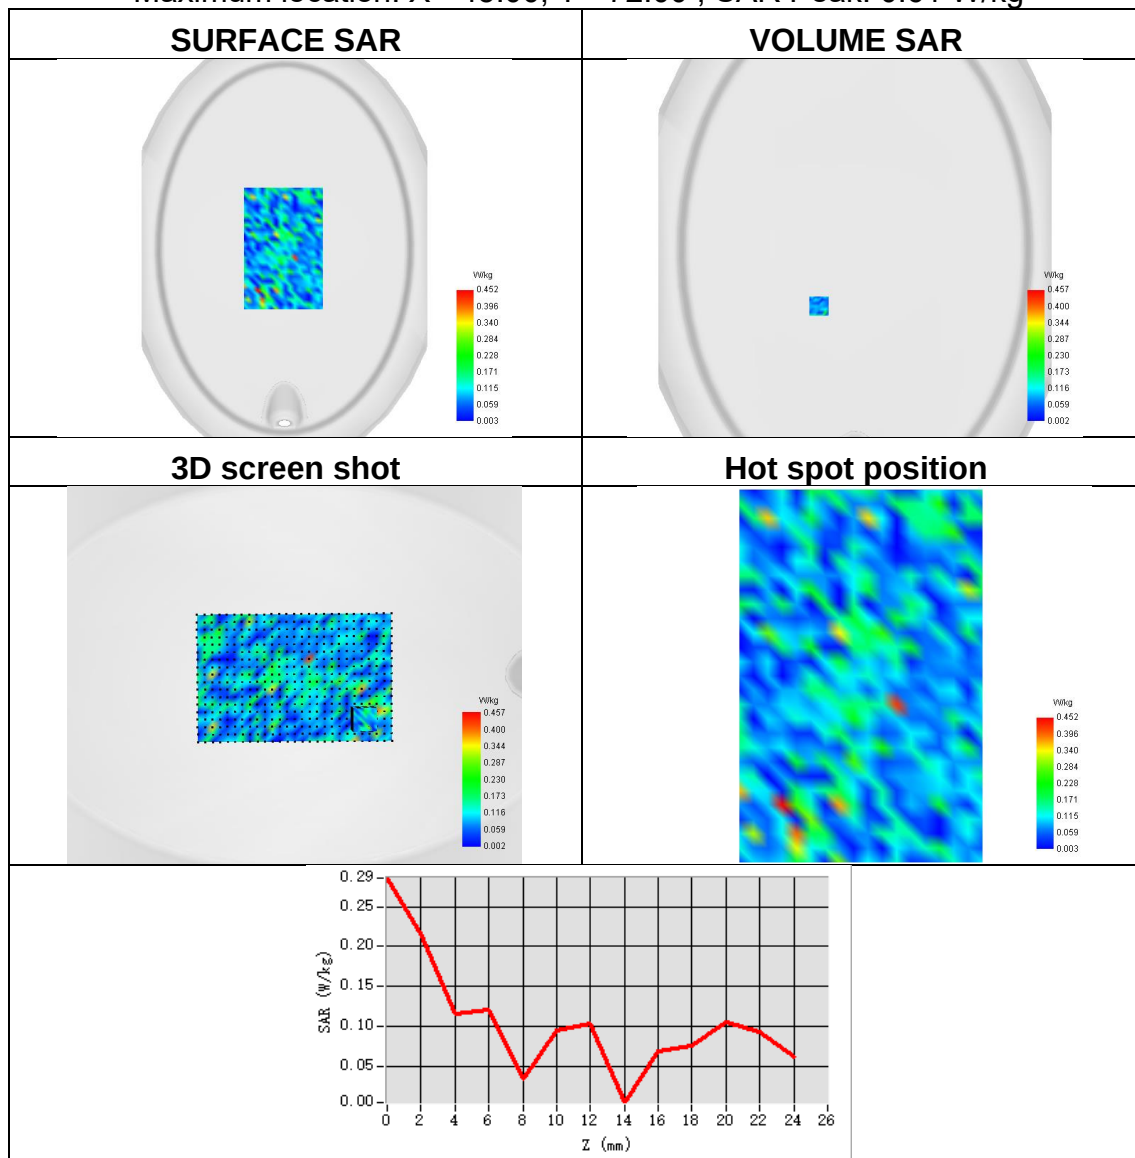




Plot 27:

Test Date	2024-10-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3 MIMO 1
Signal	IEEE 802.11ac
Frequency	5745
SAR 10g (W/Kg)	0.062
SAR 1g (W/Kg)	0.096
ConvF	1.71
Relative permittivity	35.39
Conductivity (S/m)	5.23

Maximum location: X=-14.00, Y=-80.00 ; SAR Peak: 0.56 W/kg

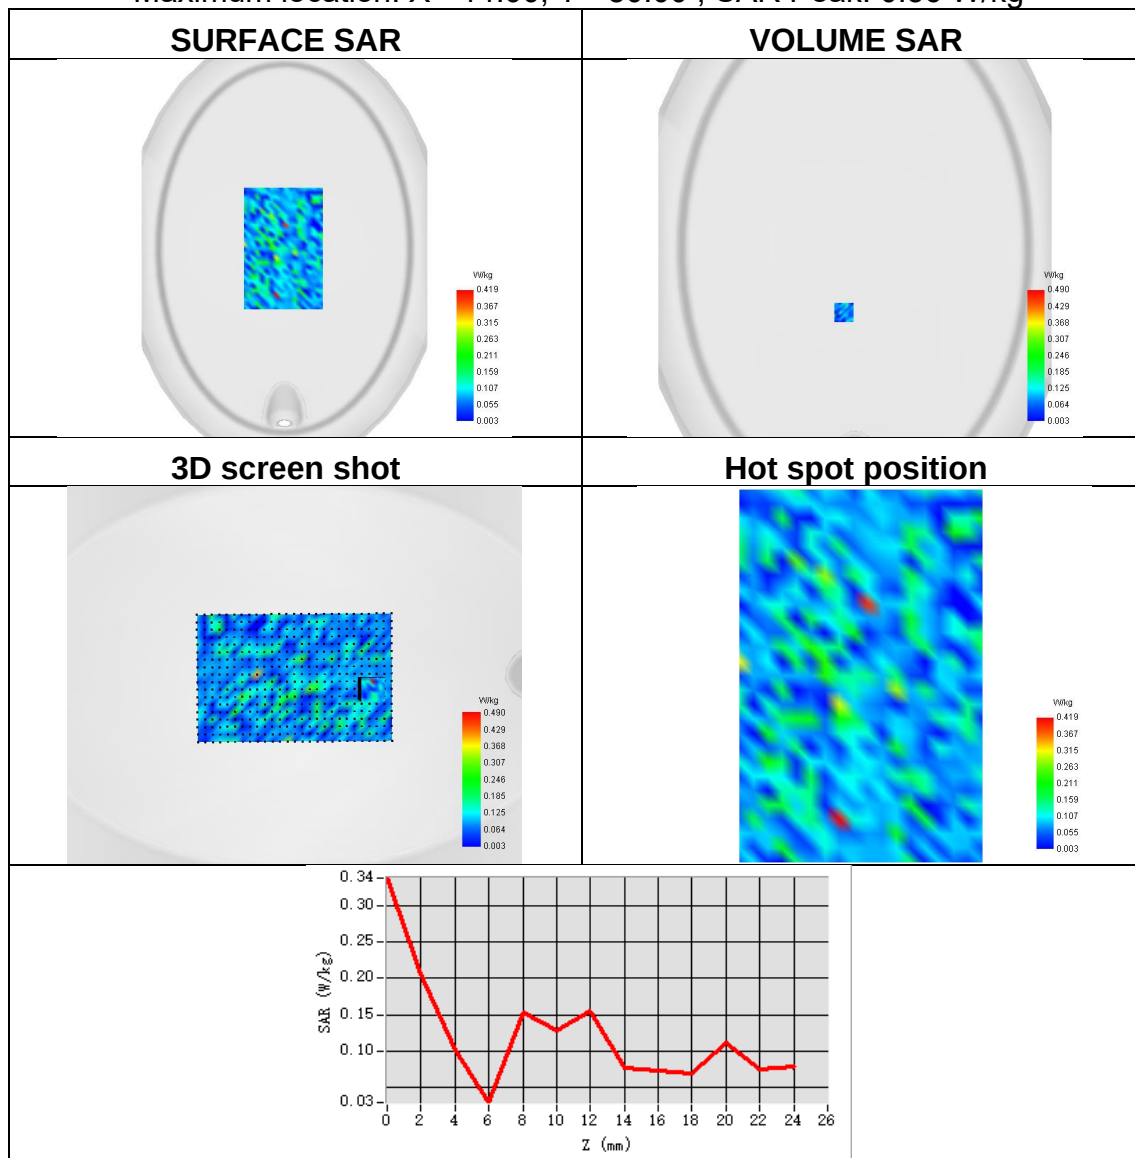




Plot 28:

Test Date	2024-10-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 2
Signal	LTE FDD
Frequency	1900
SAR 10g (W/Kg)	0.295
SAR 1g (W/Kg)	0.571
ConvF	2.24
Relative permittivity	40.68
Conductivity (S/m)	1.38

Maximum location: X=-17.00, Y=47.00 ; SAR Peak: 0.96 W/kg

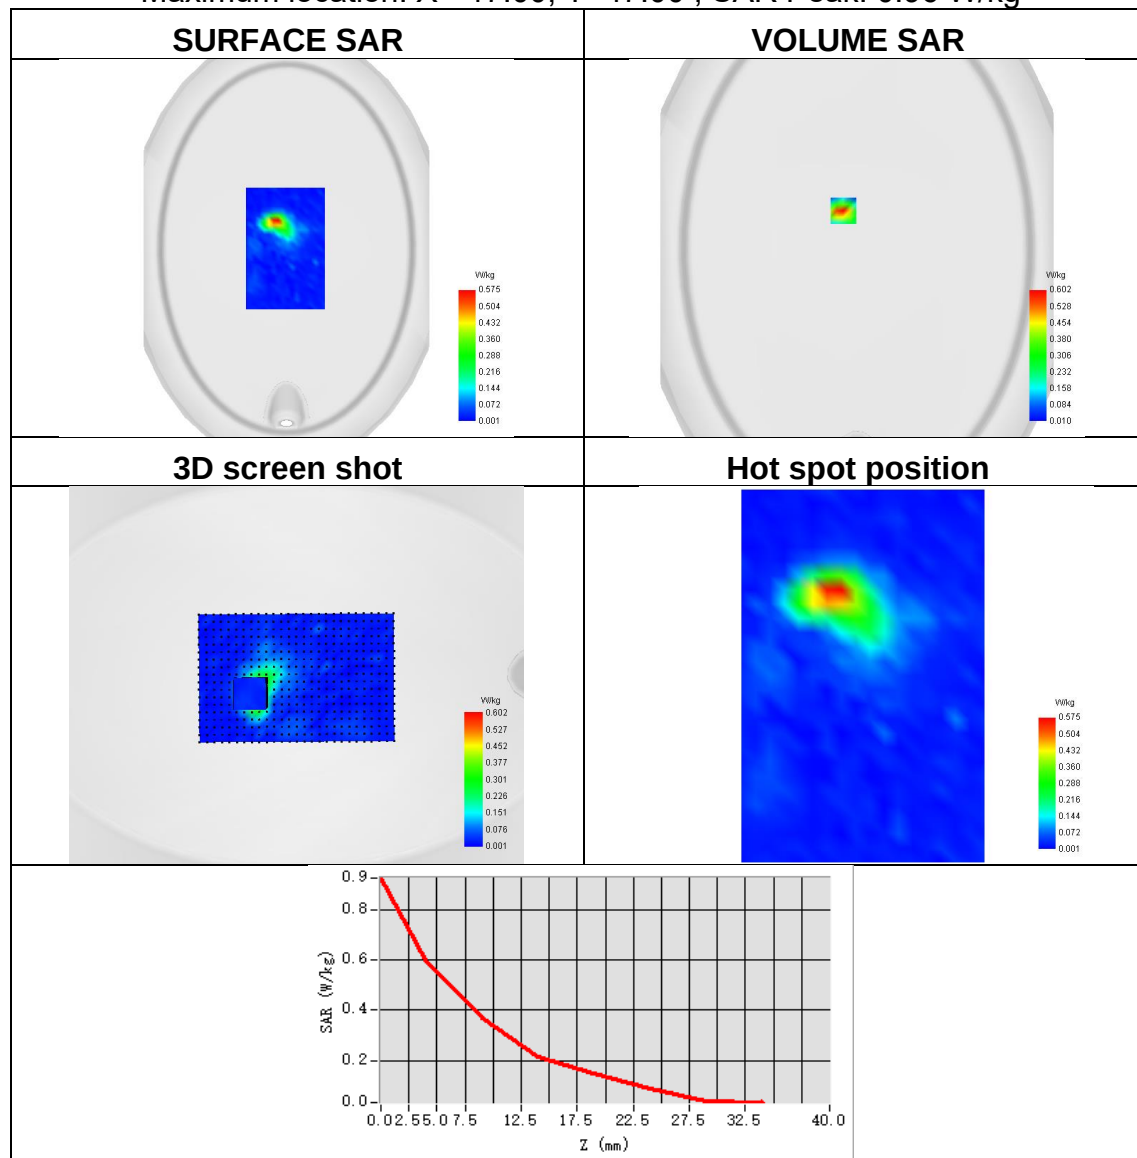




Plot 29:

Test Date	2024-10-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Back Side
Band	LTE band 4
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.436
SAR 1g (W/Kg)	0.820
ConvF	1.91
Relative permittivity	40.13
Conductivity (S/m)	1.38

Maximum location: X=-38.00, Y=56.00 ; SAR Peak: 1.35 W/kg

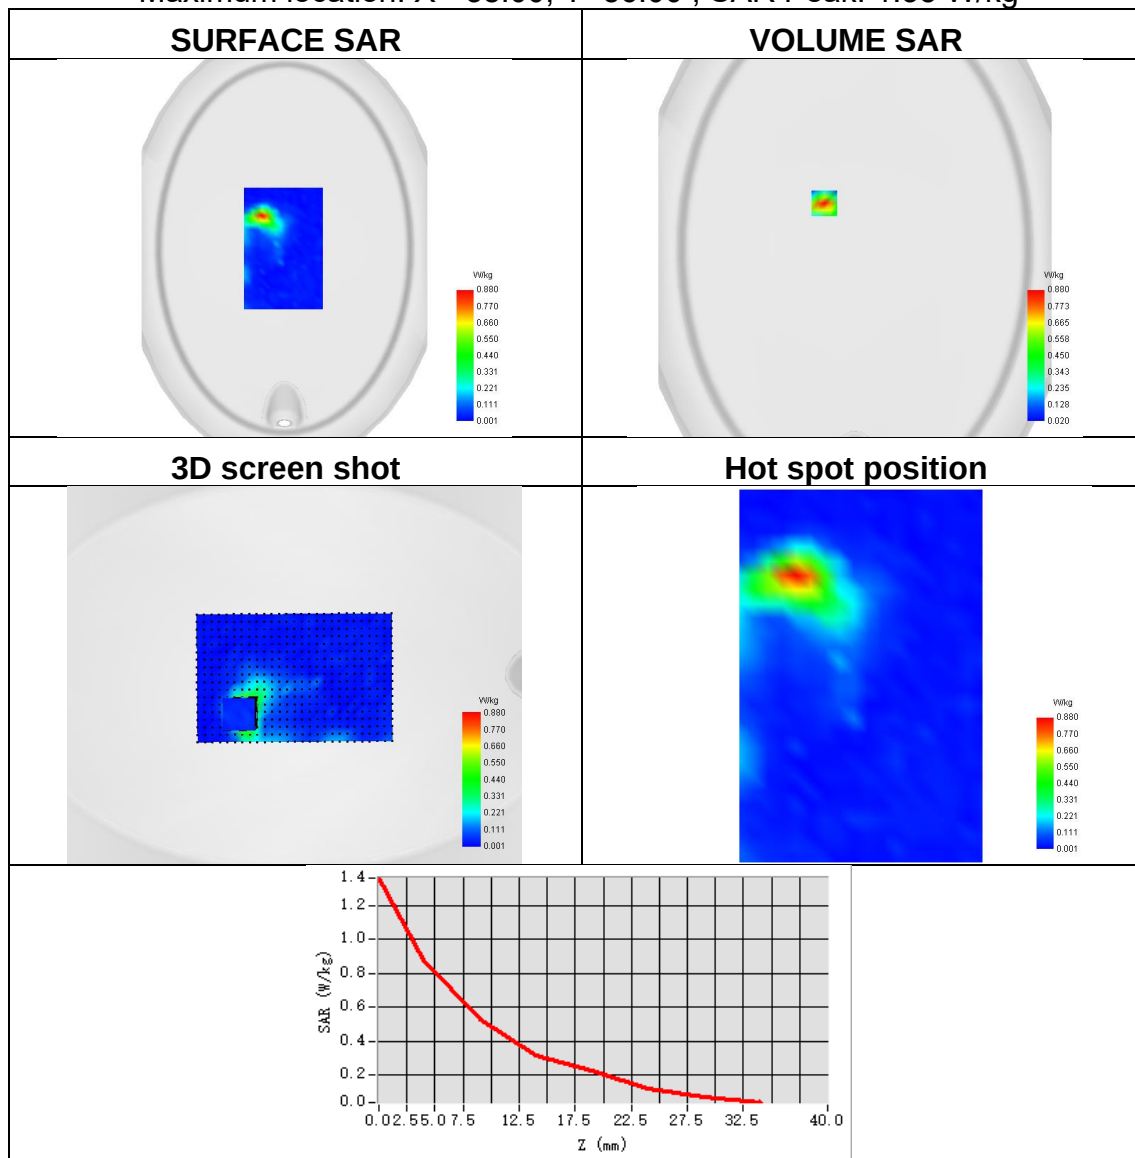




Plot 30:

Test Date	2025-12-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.441
SAR 1g (W/Kg)	0.823
ConvF	1.02
Relative permittivity	41.56
Conductivity (S/m)	0.86

Maximum location: X=-22.00, Y=-72.00 ; SAR Peak: 1.29 W/kg

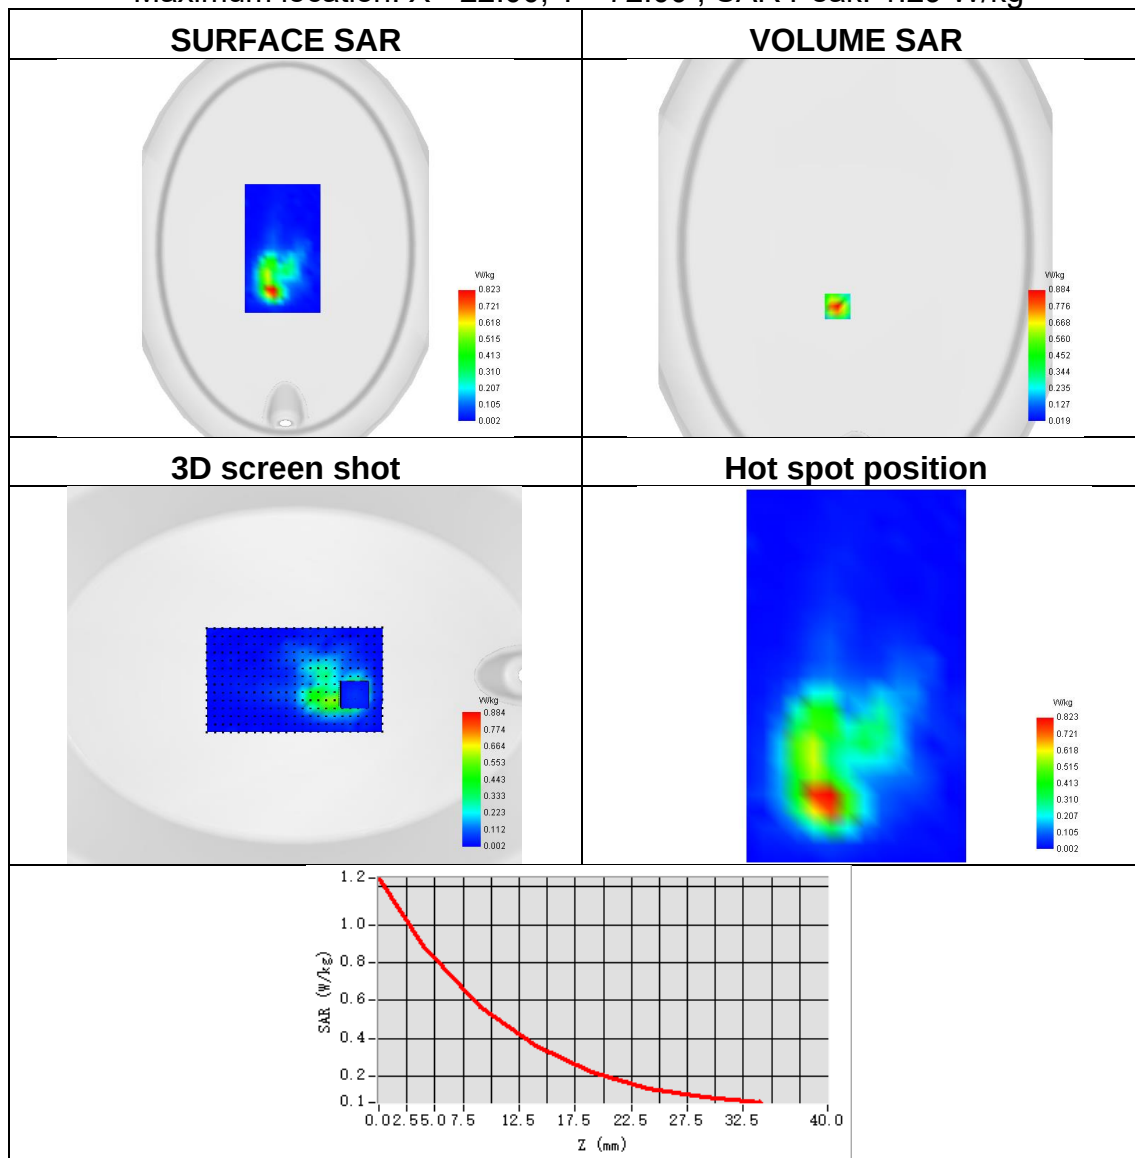




Plot 31:

Test Date	2024-10-03
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2535
SAR 10g (W/Kg)	0.458
SAR 1g (W/Kg)	0.940
ConvF	2.35
Relative permittivity	39.75
Conductivity (S/m)	1.93

Maximum location: X=-37.00, Y=-31.00 ; SAR Peak: 1.65 W/kg

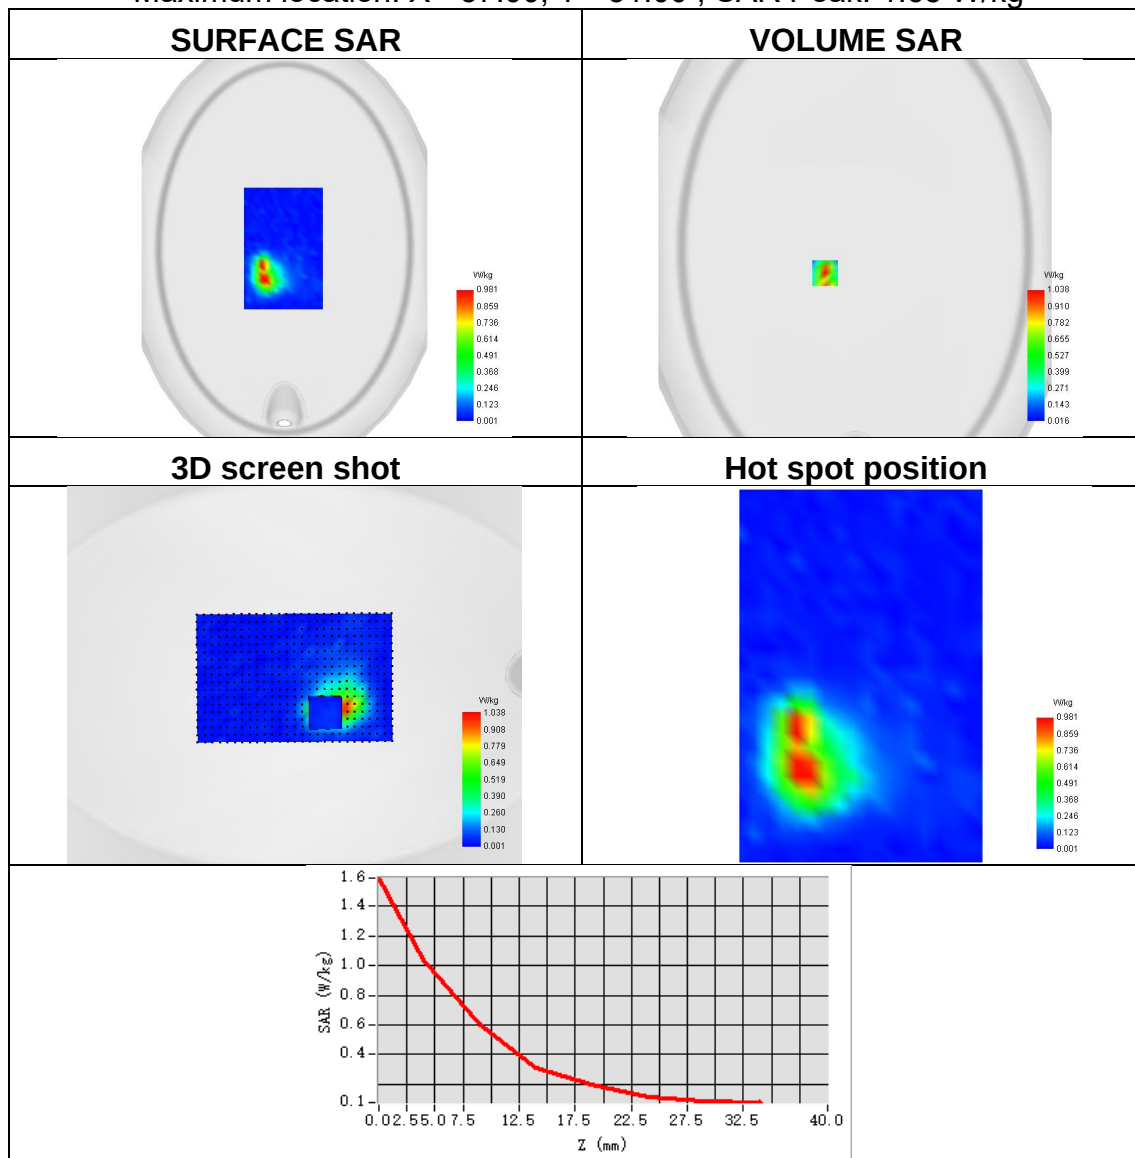




Plot 32:

Test Date	2024-10-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 12
Signal	LTE FDD
Frequency	704
SAR 10g (W/Kg)	0.260
SAR 1g (W/Kg)	0.514
ConvF	1.68
Relative permittivity	42.82
Conductivity (S/m)	0.87

Maximum location: X=-29.00, Y=25.00 ; SAR Peak: 0.82 W/kg

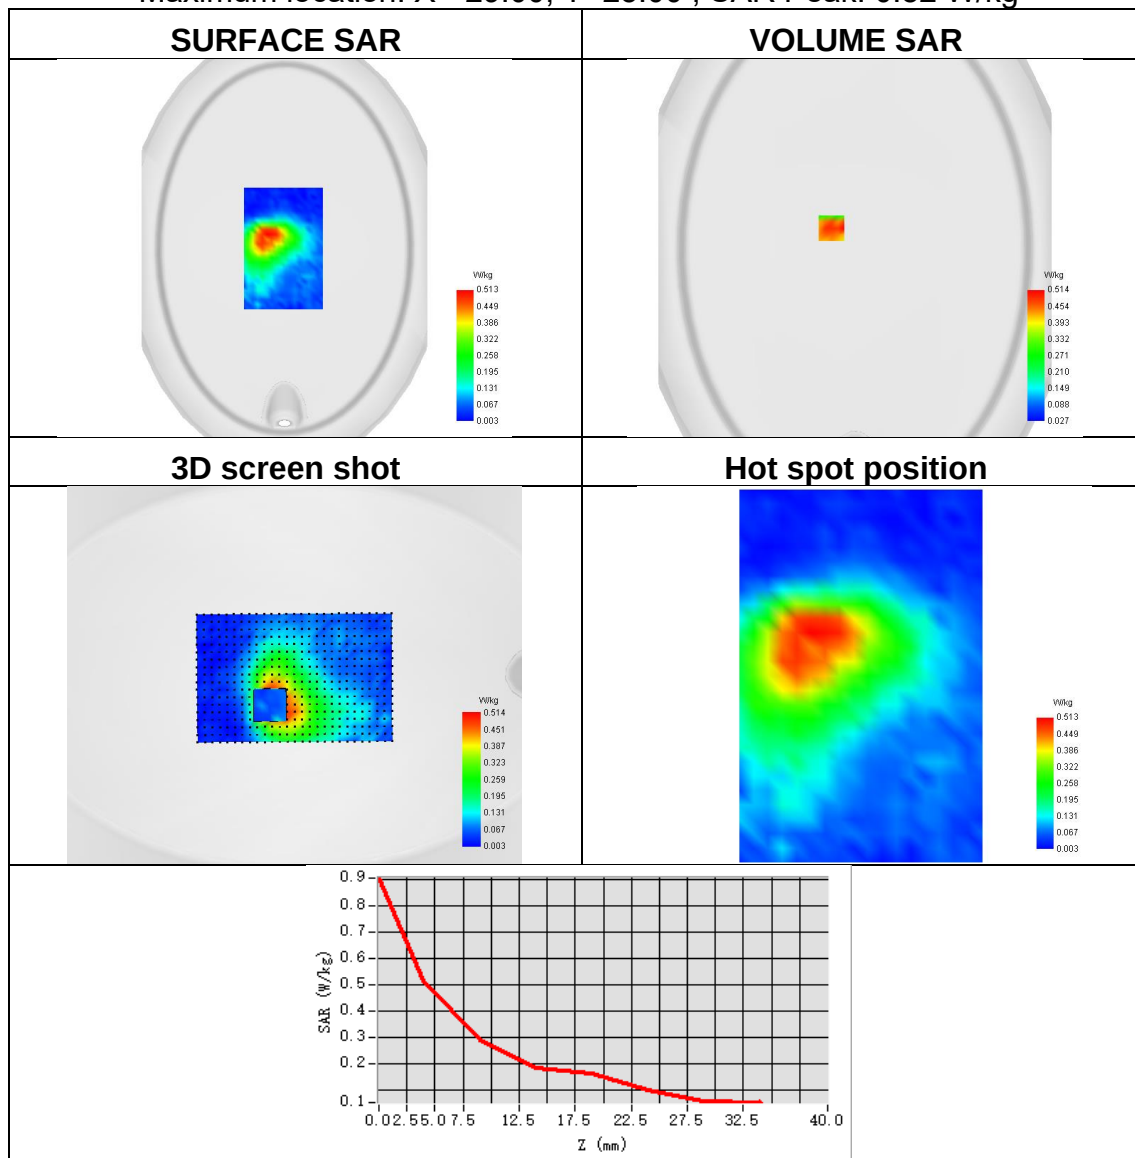




Plot 33:

Test Date	2024-10-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.282
SAR 1g (W/Kg)	0.504
ConvF	1.68
Relative permittivity	42.82
Conductivity (S/m)	0.87

Maximum location: X=-15.00, Y=25.00 ; SAR Peak: 0.74 W/kg

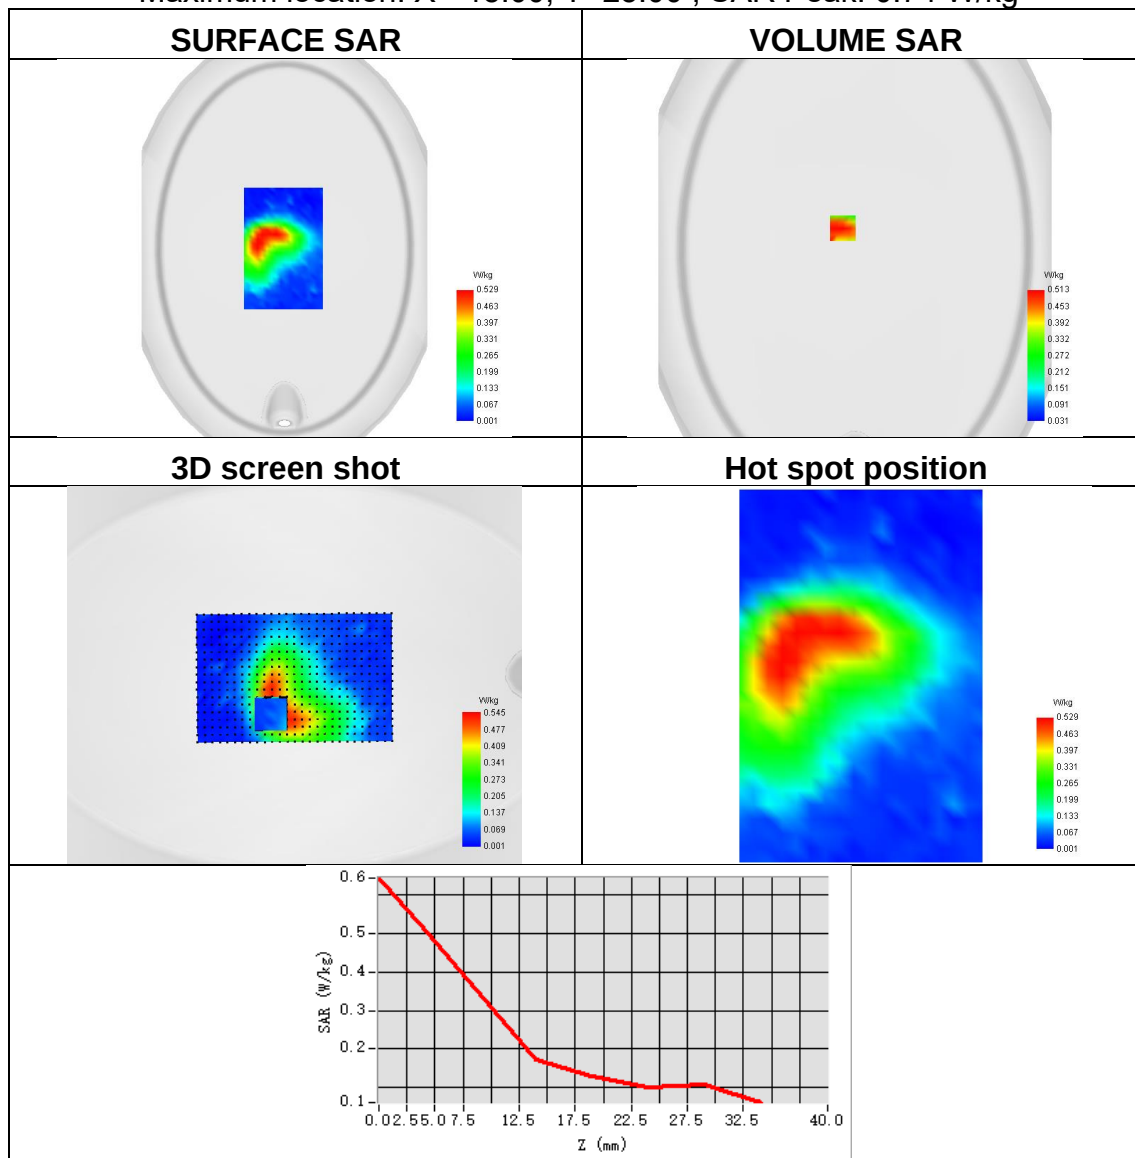




Plot 34:

Test Date	2024-10-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 17
Signal	LTE FDD
Frequency	709
SAR 10g (W/Kg)	0.304
SAR 1g (W/Kg)	0.532
ConvF	1.68
Relative permittivity	42.82
Conductivity (S/m)	0.87

Maximum location: X=-36.00, Y=24.00 ; SAR Peak: 0.82 W/kg

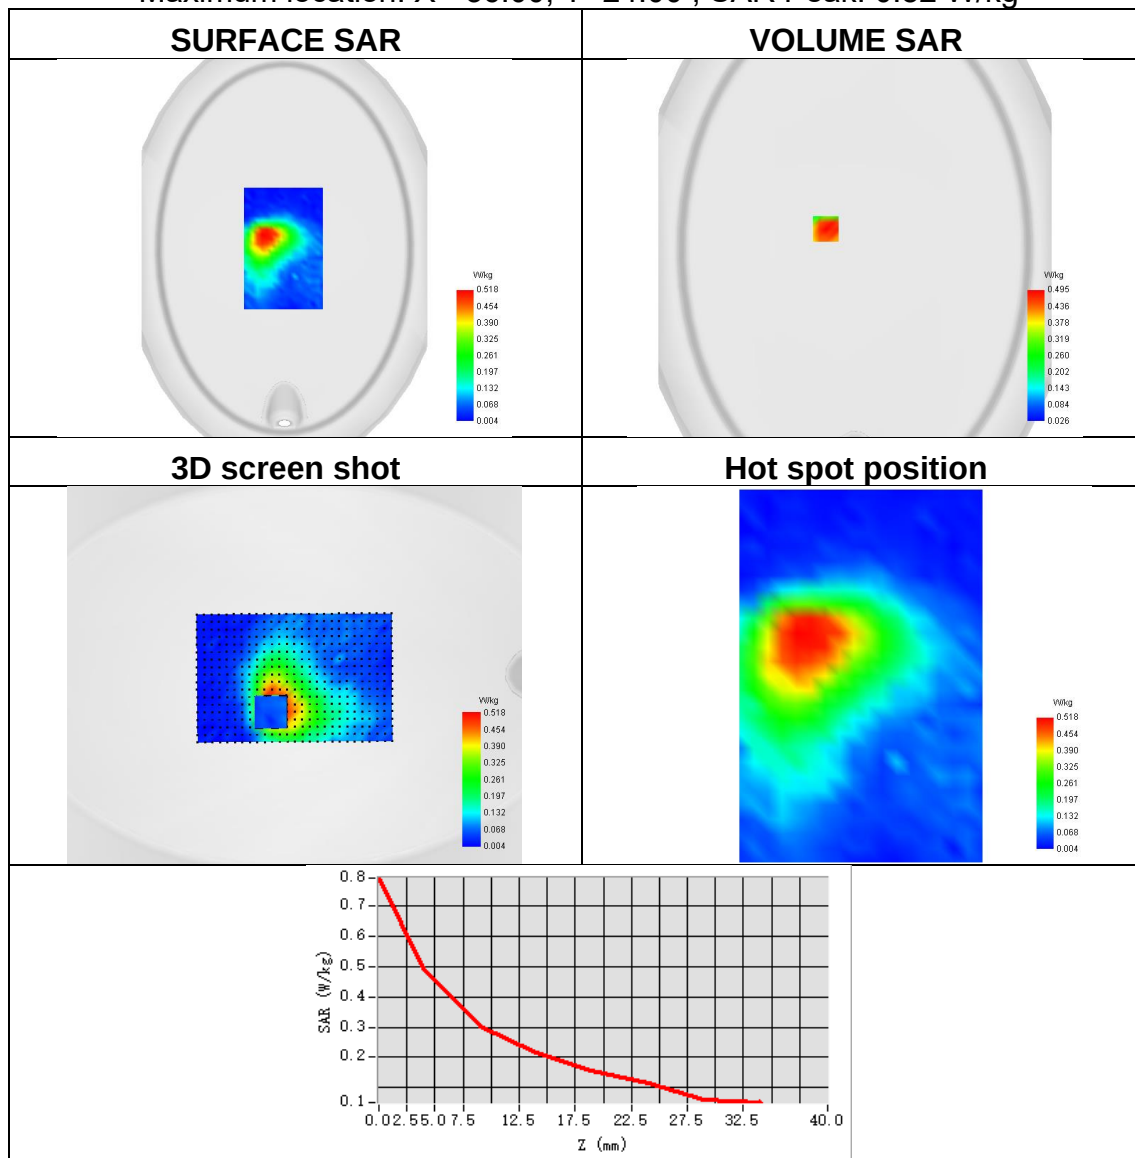




Plot 35:

Test Date	2024-10-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 25
Signal	LTE FDD
Frequency	1905
SAR 10g (W/Kg)	0.446
SAR 1g (W/Kg)	0.863
ConvF	2.24
Relative permittivity	40.76
Conductivity (S/m)	1.41

Maximum location: X=-33.00, Y=31.00 ; SAR Peak: 1.45 W/kg

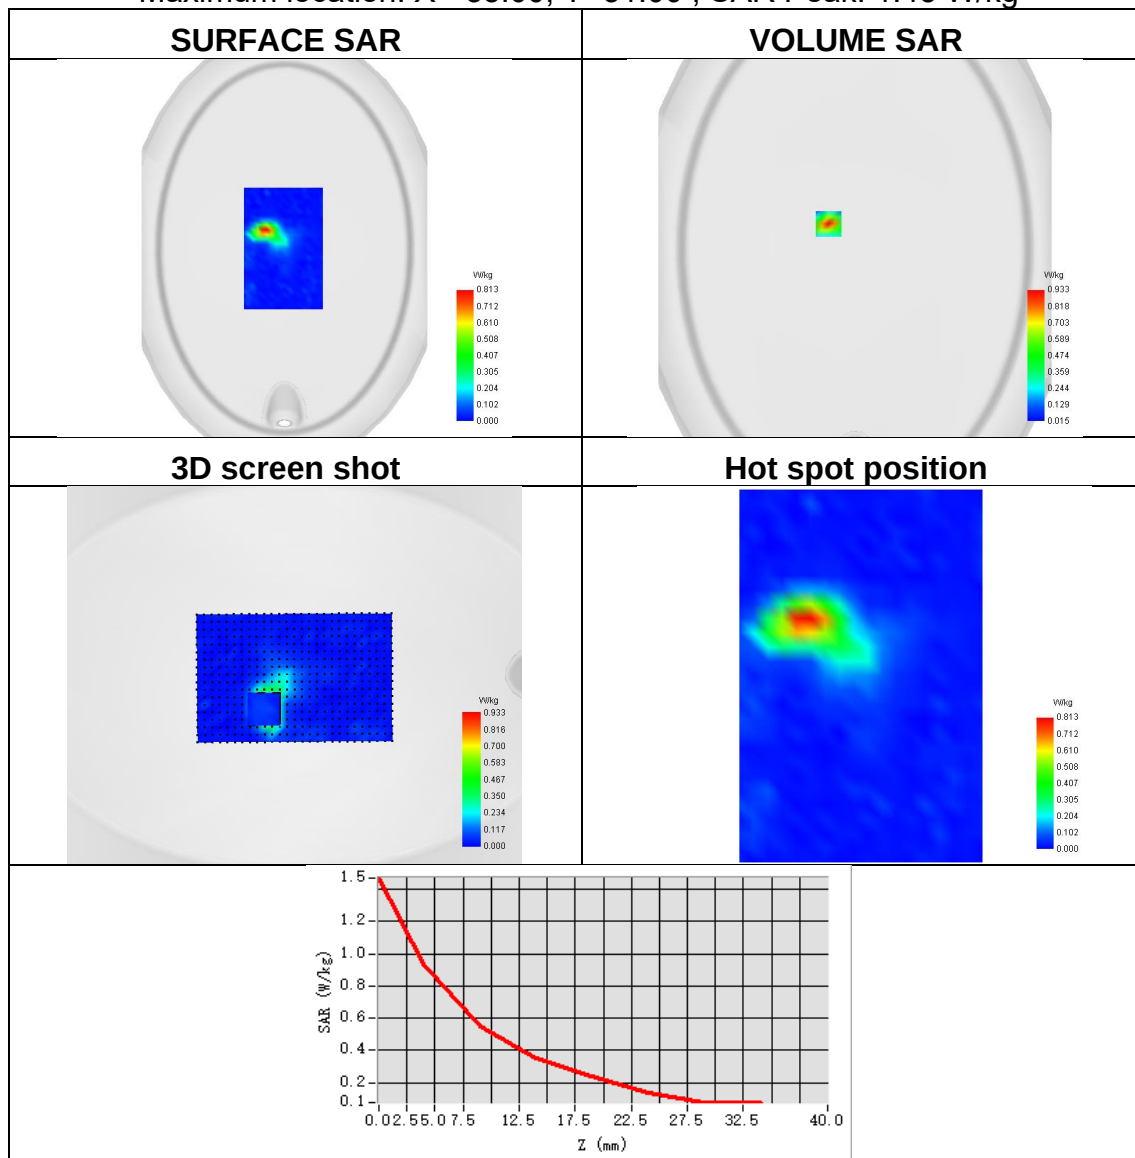




Plot 36:

Test Date	2024-10-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 26
Signal	LTE FDD
Frequency	841.5
SAR 10g (W/Kg)	0.210
SAR 1g (W/Kg)	0.416
ConvF	1.70
Relative permittivity	41.26
Conductivity (S/m)	0.93

Maximum location: X=-30.00, Y=17.00 ; SAR Peak: 0.66 W/kg

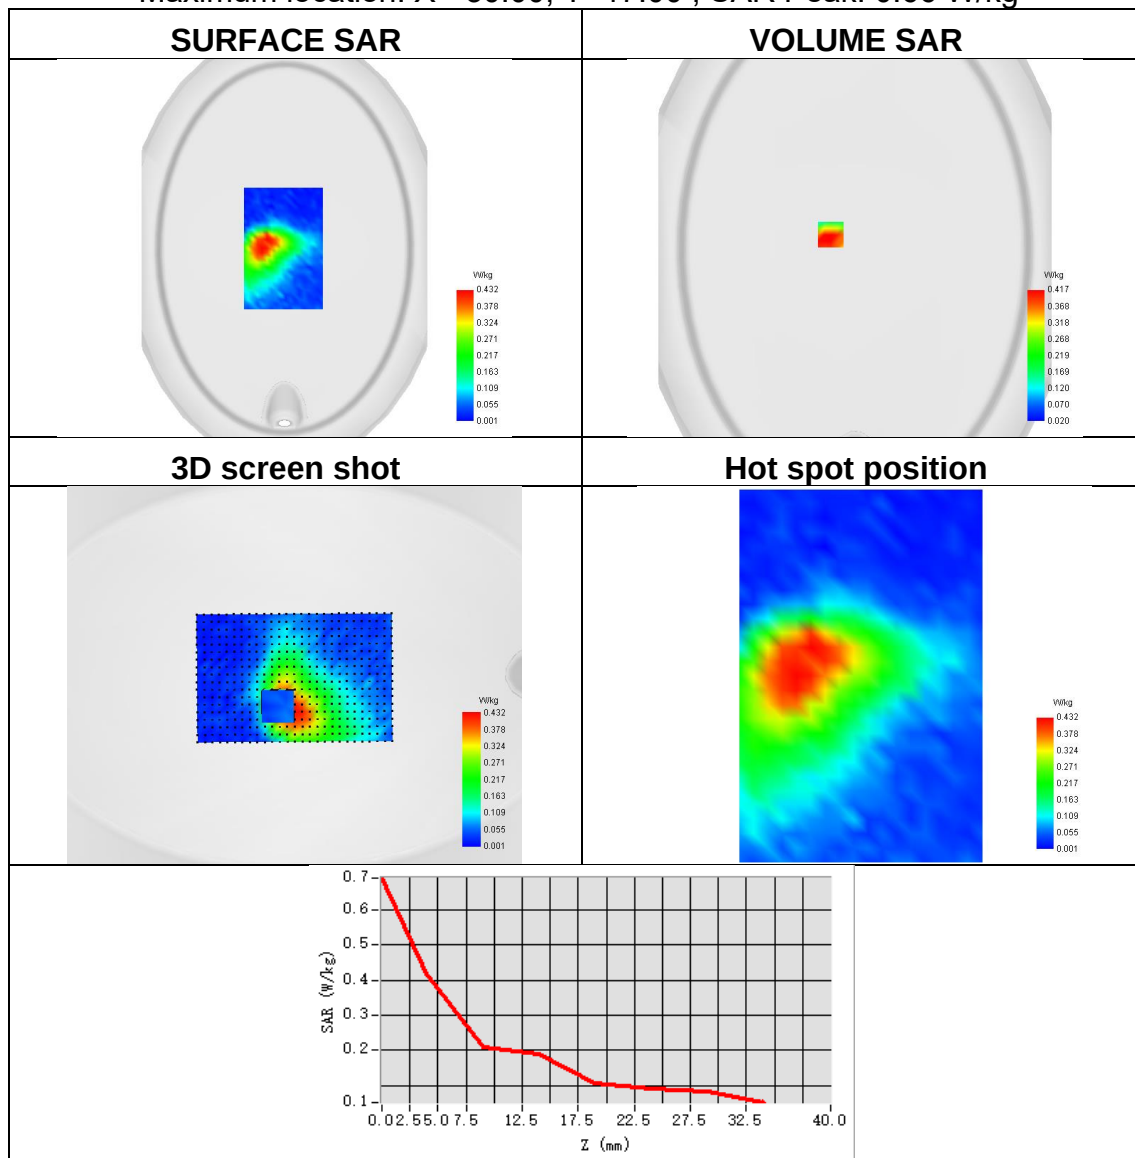




Plot 37:

Test Date	2024-10-03
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 38
Signal	LTE TDD
Frequency	2580
SAR 10g (W/Kg)	0.233
SAR 1g (W/Kg)	0.483
ConvF	2.35
Relative permittivity	39.75
Conductivity (S/m)	1.93

Maximum location: X=-24.00, Y=-42.00 ; SAR Peak: 0.81 W/kg

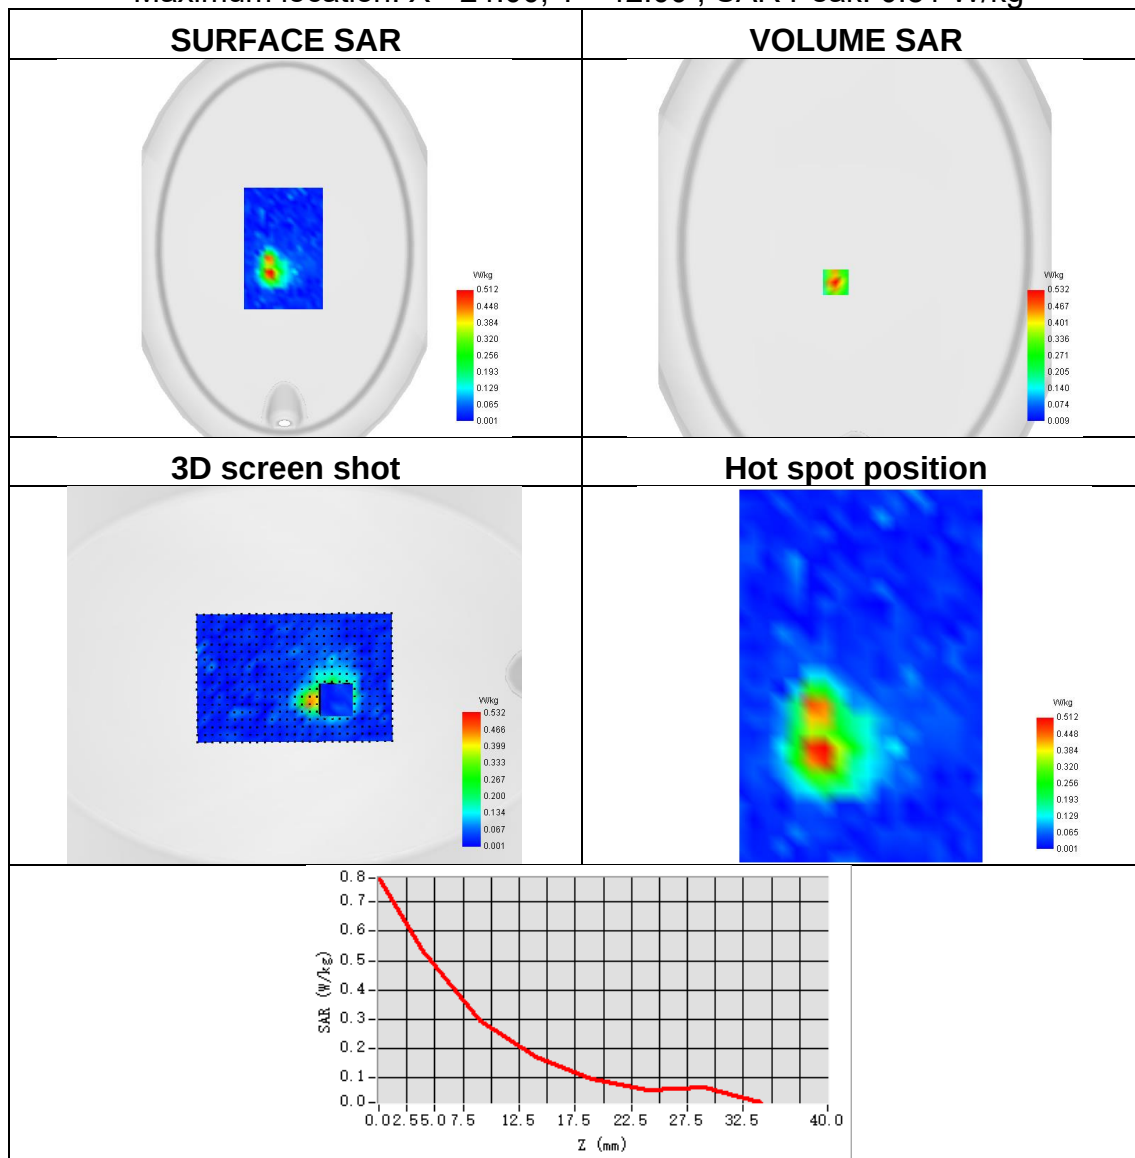




Plot 38:

Test Date	2024-10-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 40
Signal	LTE TDD
Frequency	2310
SAR 10g (W/Kg)	0.501
SAR 1g (W/Kg)	0.960
ConvF	2.31
Relative permittivity	40.42
Conductivity (S/m)	1.68

Maximum location: X=-22.00, Y=-48.00 ; SAR Peak: 1.65 W/kg

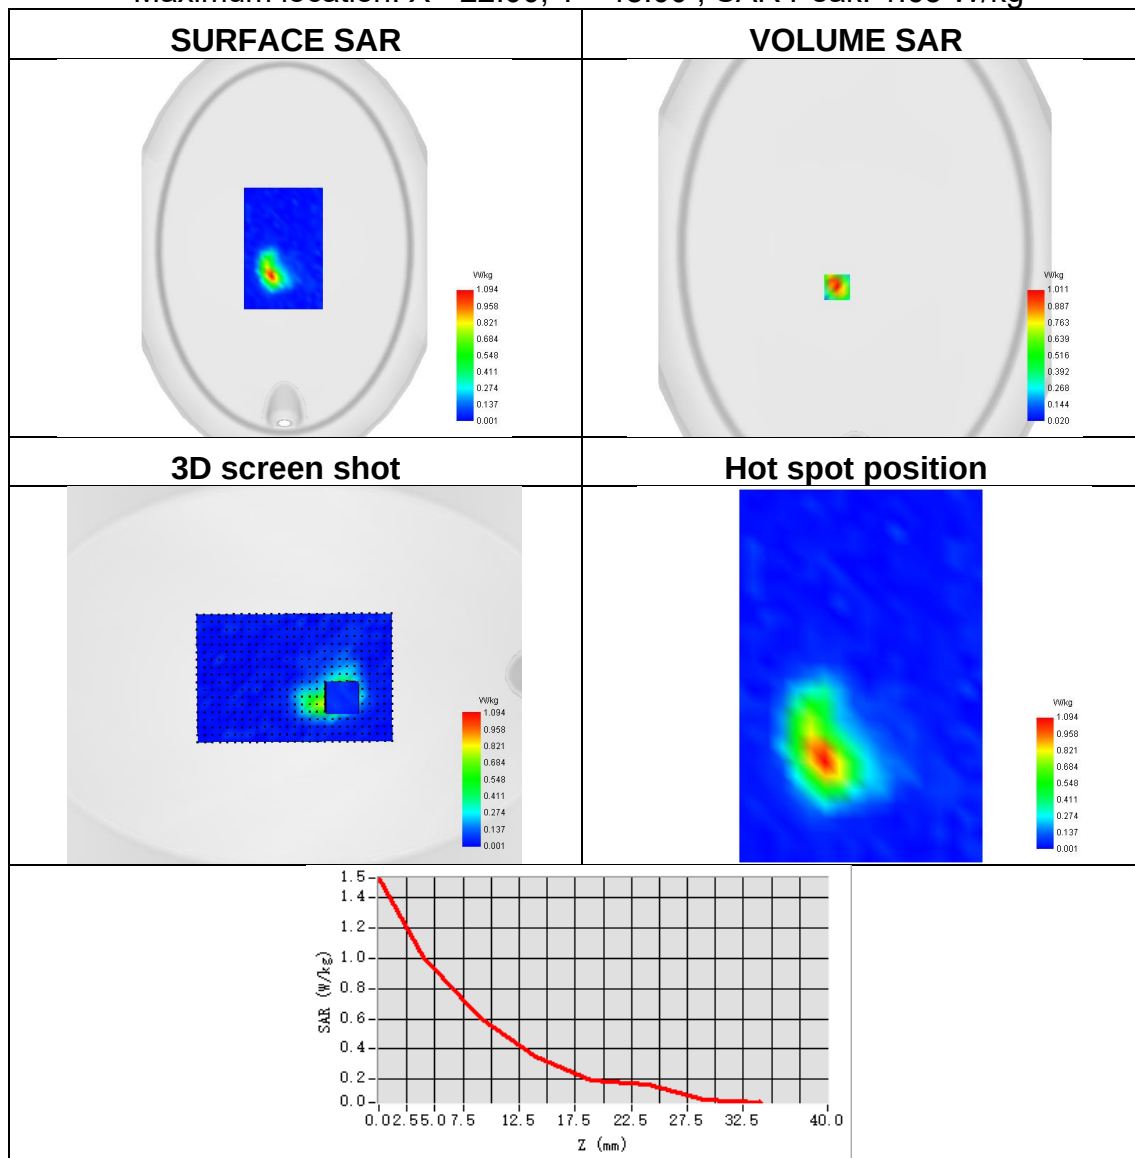




Plot 39:

Test Date	2024-10-03
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 41
Signal	LTE TDD
Frequency	2593
SAR 10g (W/Kg)	0.186
SAR 1g (W/Kg)	0.388
ConvF	2.35
Relative permittivity	39.75
Conductivity (S/m)	1.93

Maximum location: X=-24.00, Y=-62.00 ; SAR Peak: 0.64 W/kg

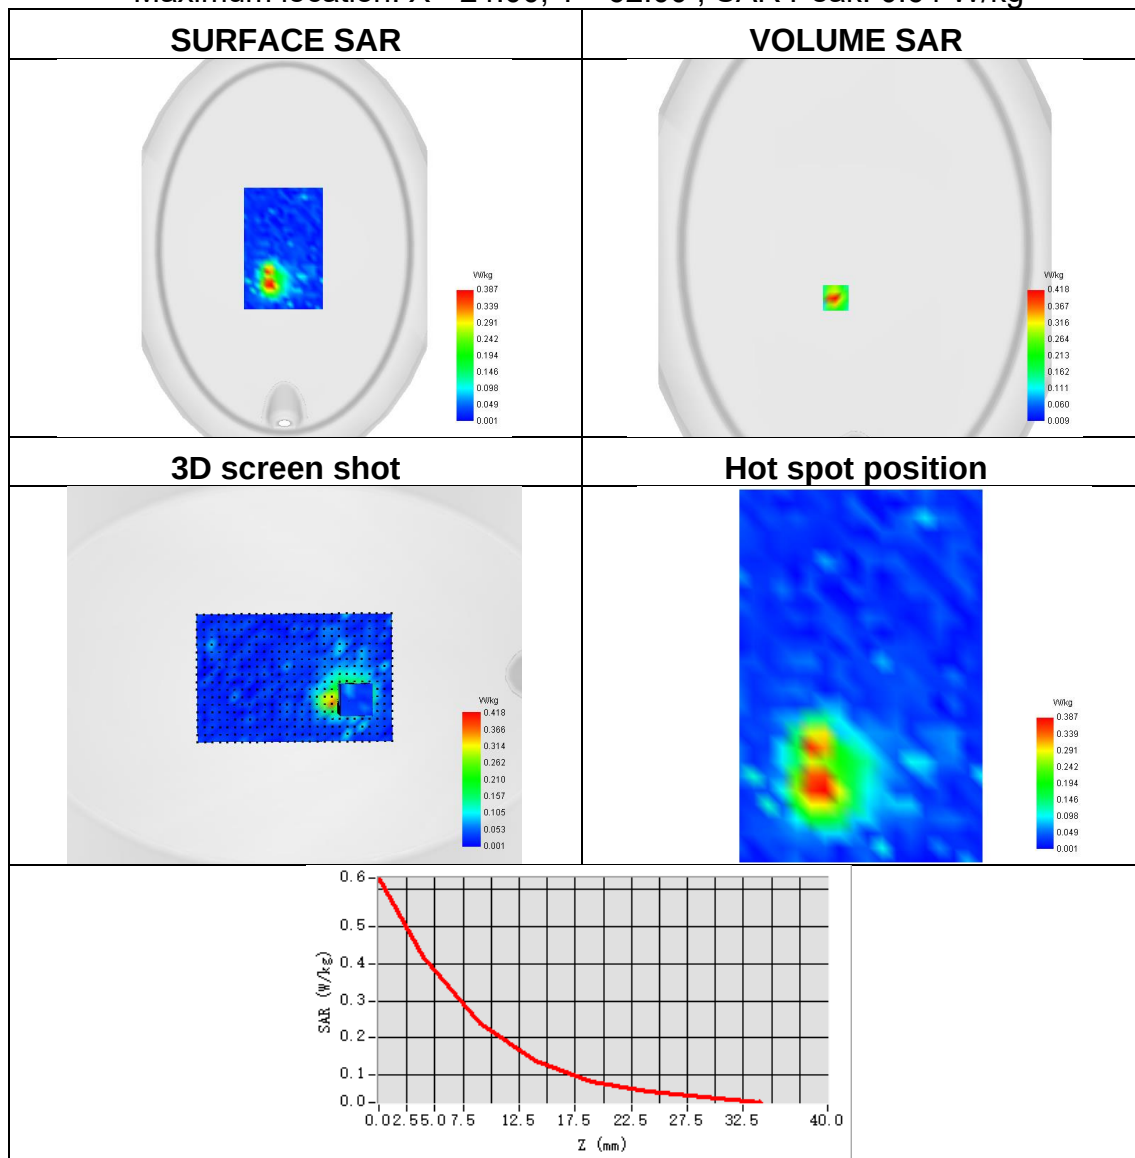




Plot 40:

Test Date	2024-10-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 66
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.419
SAR 1g (W/Kg)	0.774
ConvF	1.91
Relative permittivity	40.13
Conductivity (S/m)	1.38

Maximum location: X=-31.00, Y=32.00 ; SAR Peak: 1.20 W/kg

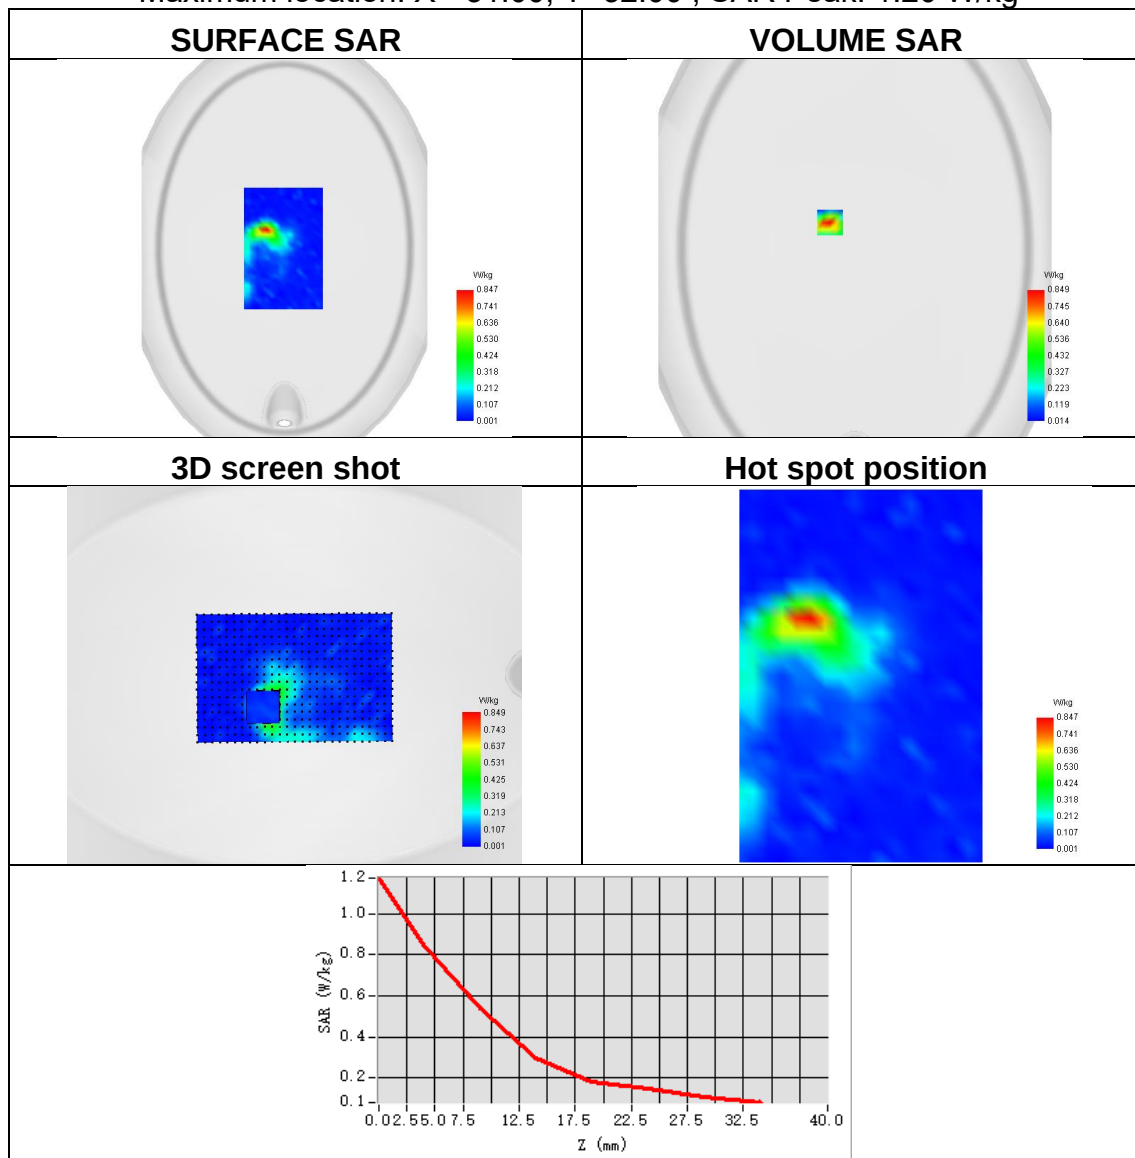




Plot 41:

Test Date	2024-10-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 2
Signal	NR FDD
Frequency	1900
SAR 10g (W/Kg)	0.196
SAR 1g (W/Kg)	0.380
ConvF	2.24
Relative permittivity	40.68
Conductivity (S/m)	1.38

Maximum location: X=5.00, Y=-10.00 ; SAR Peak: 0.59 W/kg

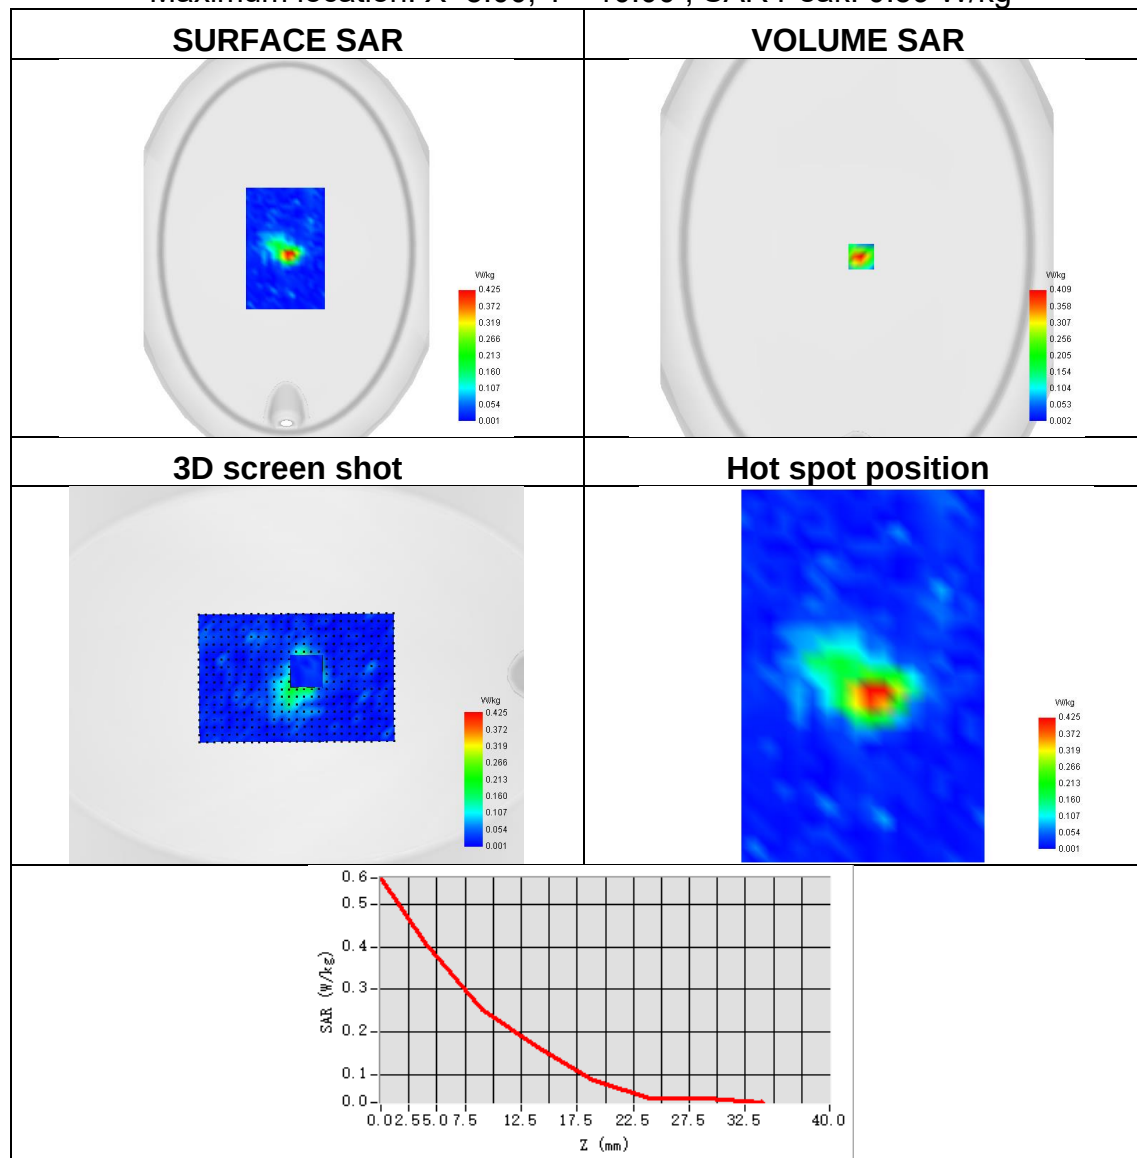




Plot 42:

Test Date	2024-10-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 5
Signal	NR FDD
Frequency	836.5
SAR 10g (W/Kg)	0.118
SAR 1g (W/Kg)	0.276
ConvF	1.70
Relative permittivity	41.60
Conductivity (S/m)	0.88

Maximum location: X=-5.00, Y=-44.00 ; SAR Peak: 0.89 W/kg

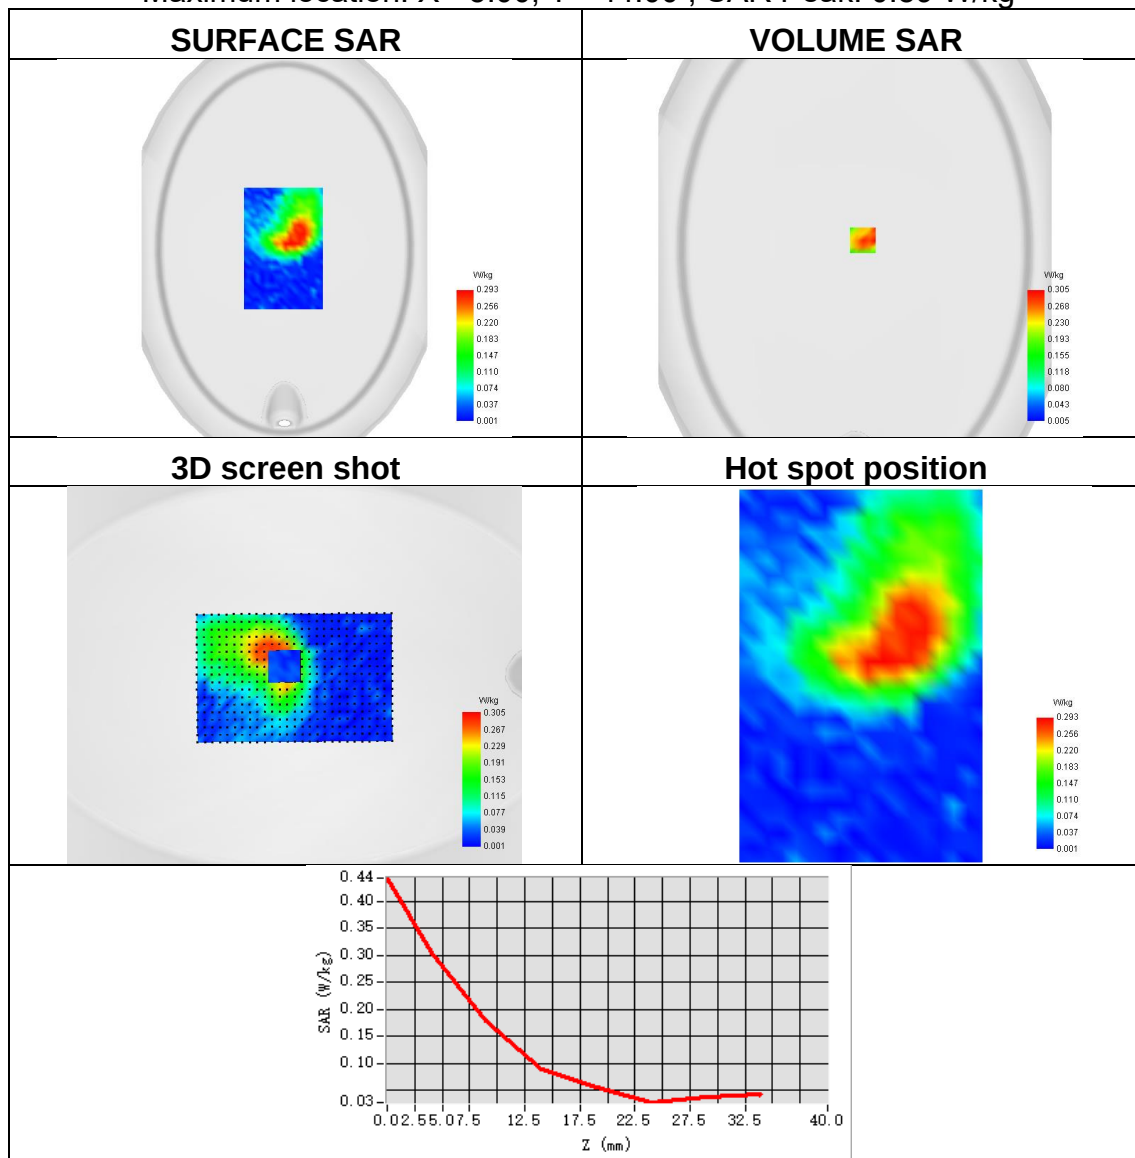




Plot 43:

Test Date	2024-10-03
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 7
Signal	NR FDD
Frequency	2535
SAR 10g (W/Kg)	0.237
SAR 1g (W/Kg)	0.490
ConvF	2.35
Relative permittivity	39.75
Conductivity (S/m)	1.93

Maximum location: X=-5.00, Y=-44.00 ; SAR Peak: 0.89 W/kg

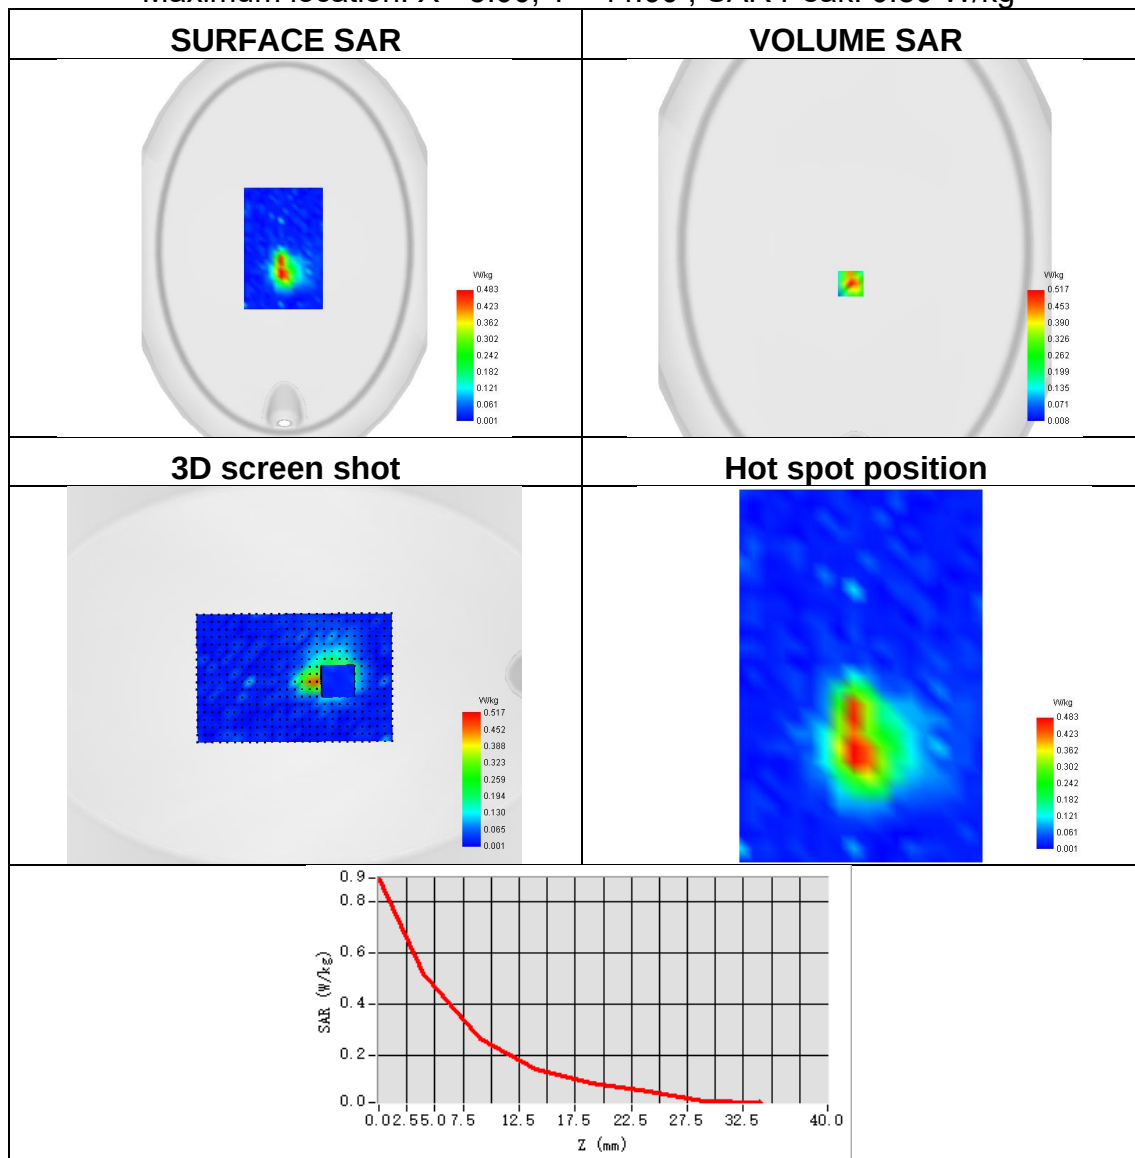




Plot 44:

Test Date	2024-10-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 25
Signal	NR FDD
Frequency	1905
SAR 10g (W/Kg)	0.221
SAR 1g (W/Kg)	0.438
ConvF	2.24
Relative permittivity	41.60
Conductivity (S/m)	0.88

Maximum location: X=11.00, Y=-8.00 ; SAR Peak: 0.76 W/kg

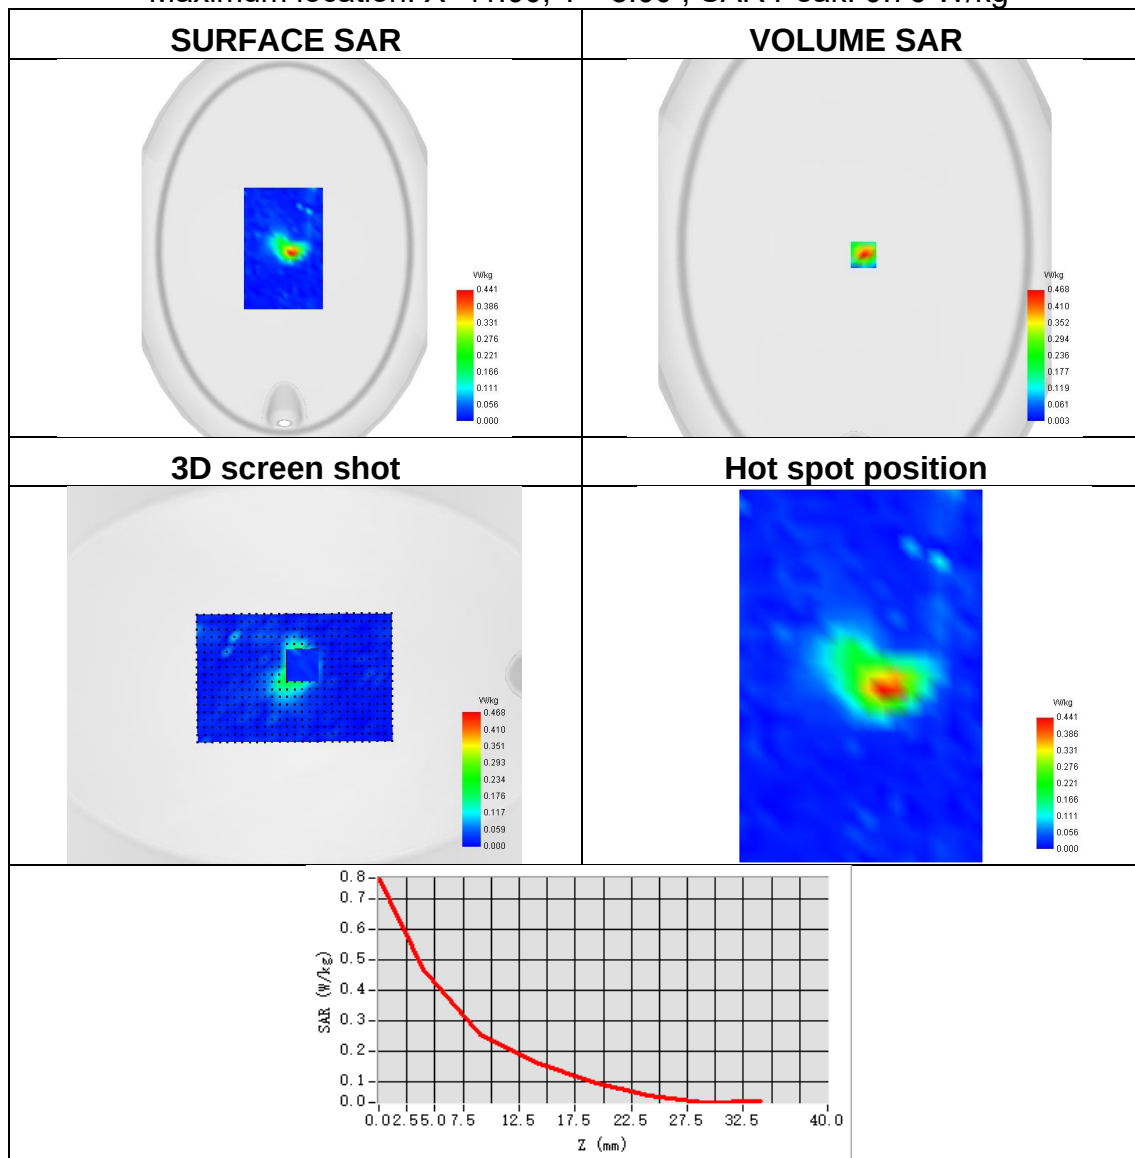




Plot 45:

Test Date	2024-10-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 26
Signal	NR FDD
Frequency	831.5
SAR 10g (W/Kg)	0.194
SAR 1g (W/Kg)	0.344
ConvF	1.70
Relative permittivity	41.60
Conductivity (S/m)	0.88

Maximum location: X=-38.00, Y=-8.00 ; SAR Peak: 0.54 W/kg

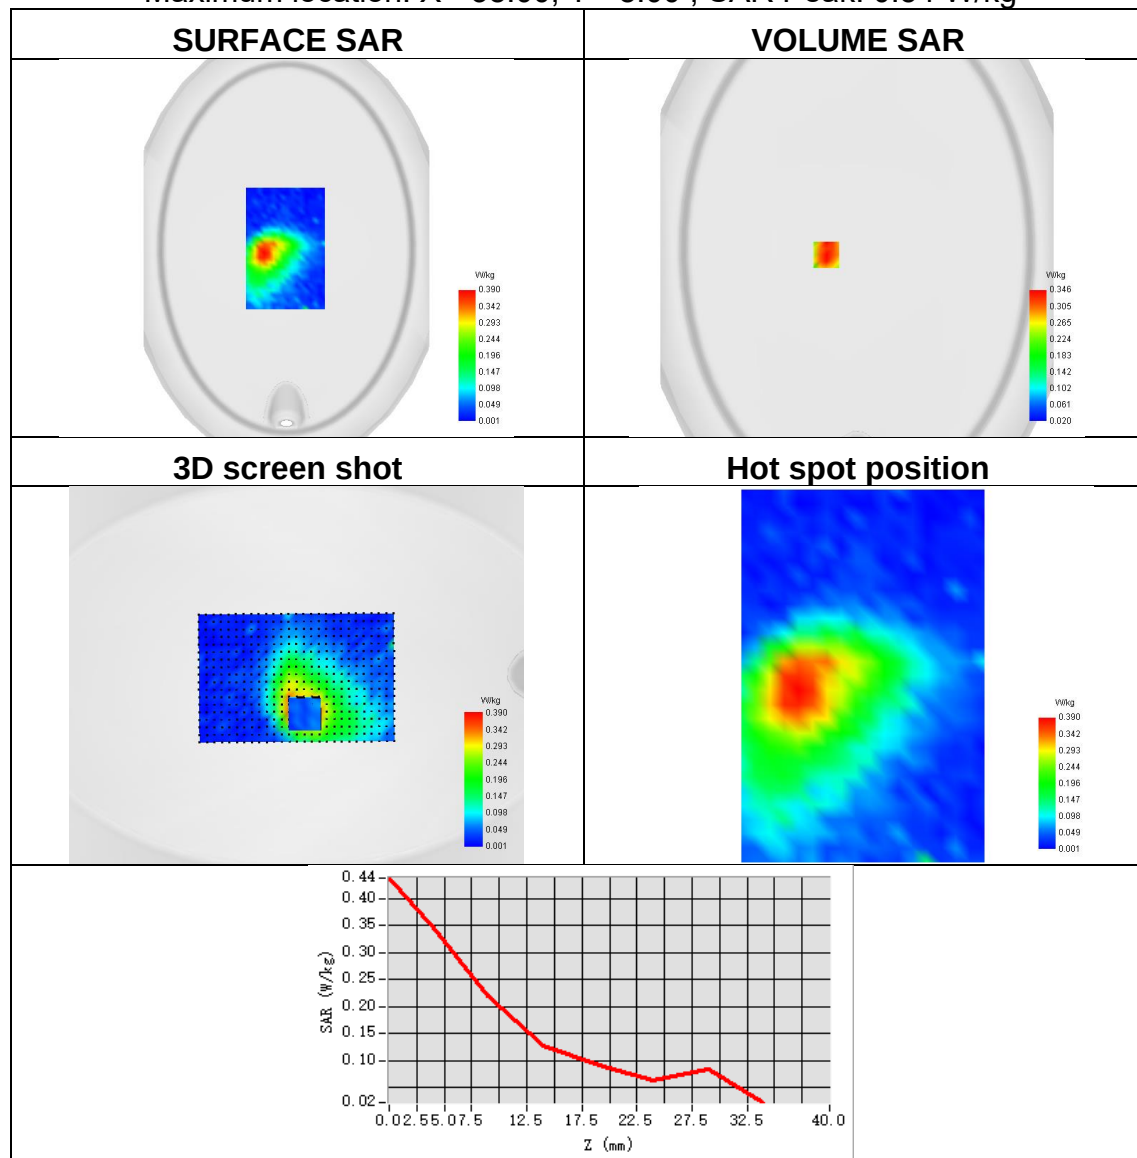




Plot 46:

Test Date	2024-10-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 38
Signal	NR TDD
Frequency	2600
SAR 10g (W/Kg)	0.239
SAR 1g (W/Kg)	0.503
ConvF	2.35
Relative permittivity	40.29
Conductivity (S/m)	1.92

Maximum location: X=-24.00, Y=-21.00 ; SAR Peak: 0.94 W/kg

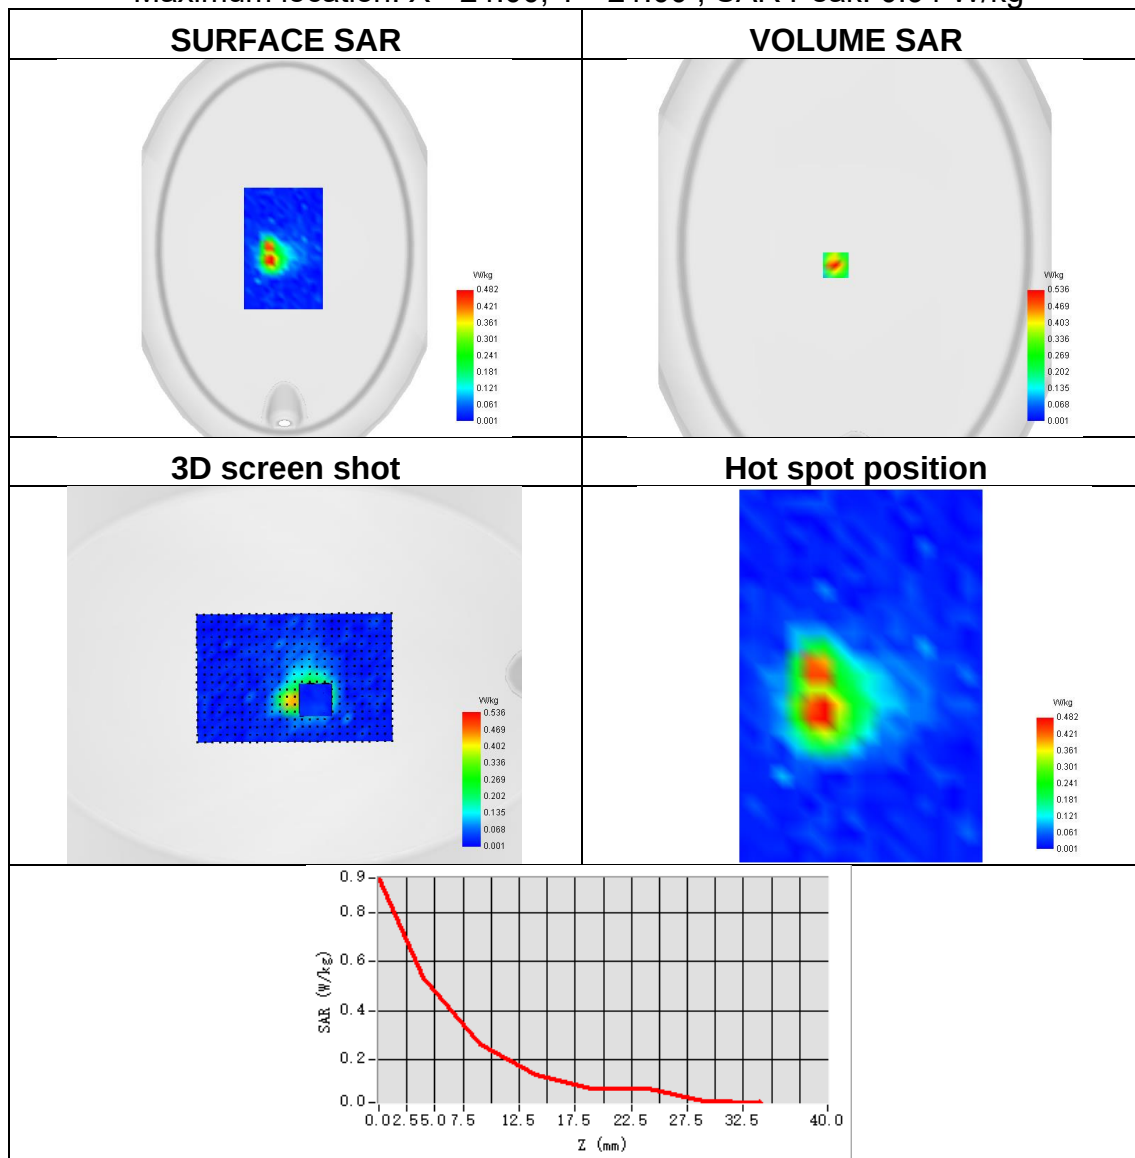




Plot 47:

Test Date	2025-12-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 41
Signal	NR TDD
Frequency	2640
SAR 10g (W/Kg)	0.273
SAR 1g (W/Kg)	0.506
ConvF	1.44
Relative permittivity	40.16
Conductivity (S/m)	1.90

Maximum location: X=-42.00, Y=-50.00 ; SAR Peak: 0.76 W/kg

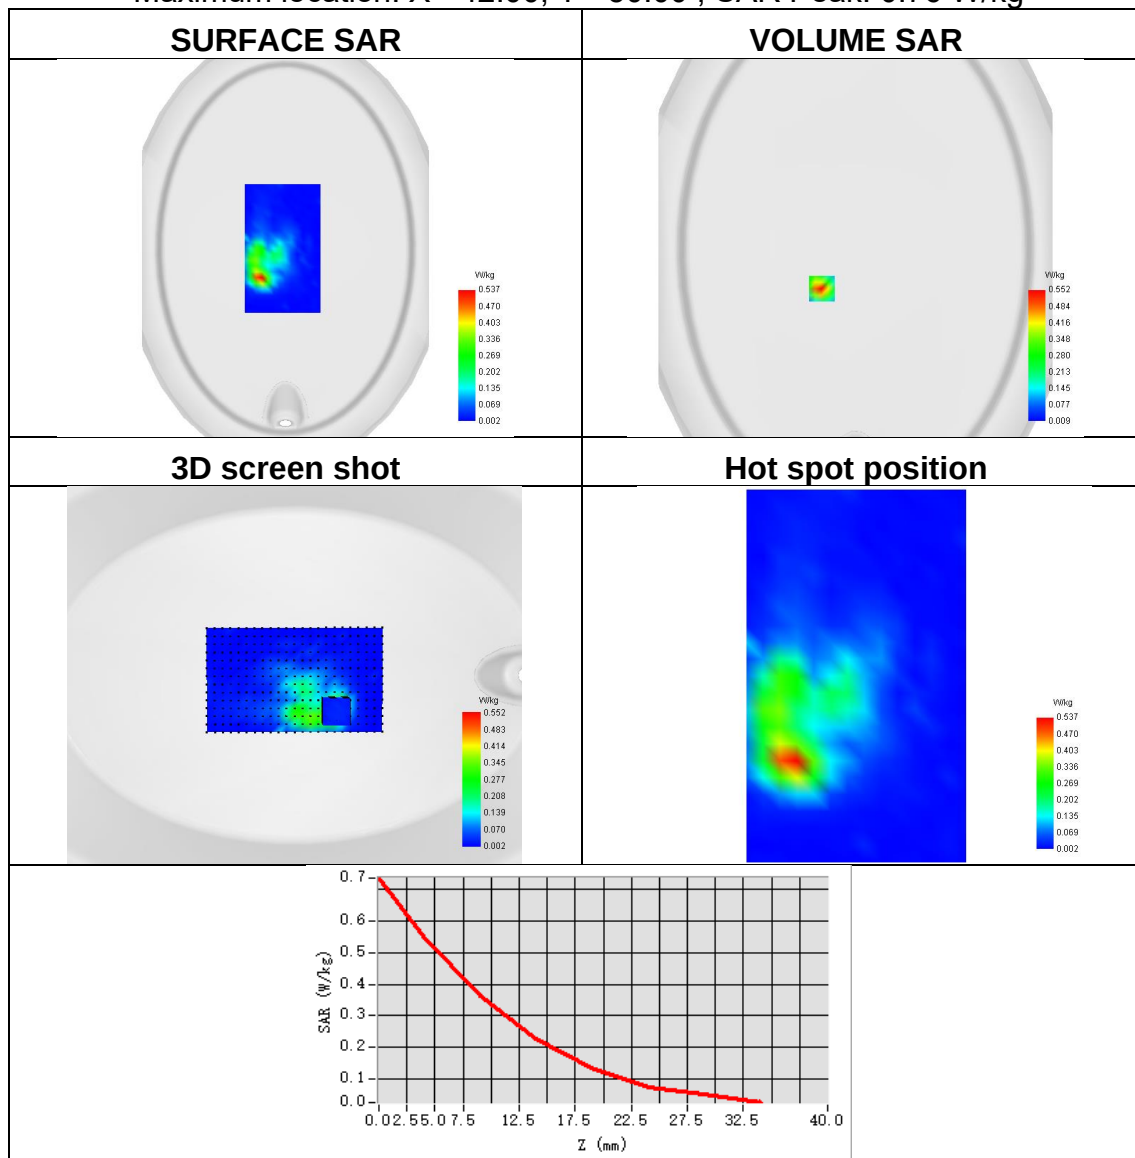




Plot 48:

Test Date	2024-10-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 77
Signal	NR TDD
Frequency	3750
SAR 10g (W/Kg)	0.202
SAR 1g (W/Kg)	0.526
ConvF	1.84
Relative permittivity	39.00
Conductivity (S/m)	3.12

Maximum location: X=-25.00, Y=18.00 ; SAR Peak: 1.45 W/kg

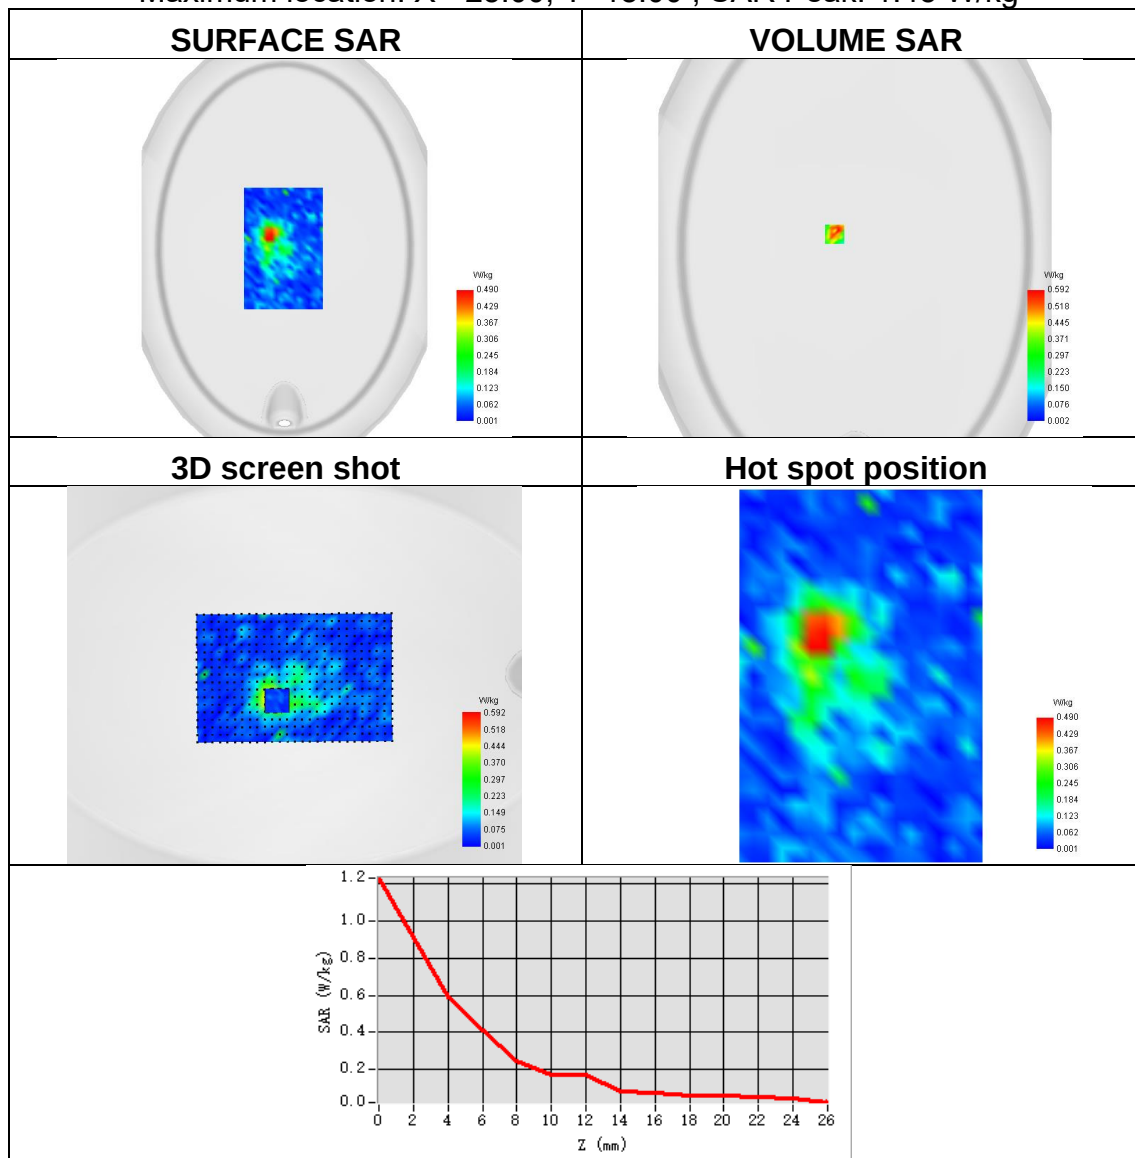




Plot 49:

Test Date	2024-10-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 78
Signal	NR TDD
Frequency	3750
SAR 10g (W/Kg)	0.379
SAR 1g (W/Kg)	0.843
ConvF	1.84
Relative permittivity	39.00
Conductivity (S/m)	3.12

Maximum location: X=-22.00, Y=15.00 ; SAR Peak: 1.75 W/kg

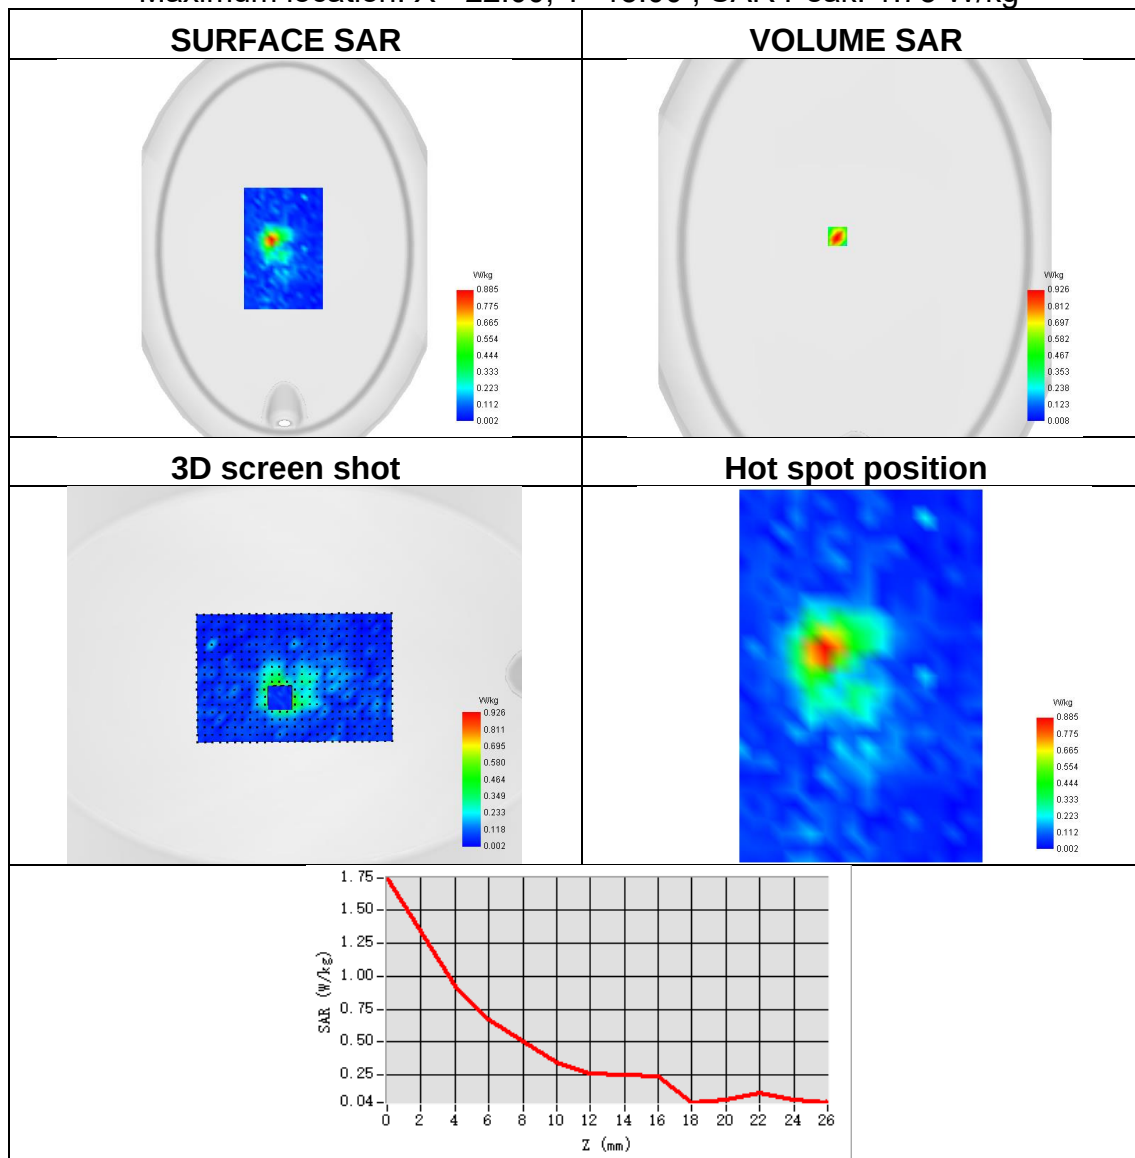



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※