



# RF TEST REPORT

Product Name: Smart phone

Model Name: TANK 2

FCC ID: 2BAVY-TANK2

Issued For : Shenzhen OBLUE Communication Technology Co., Ltd.

Room 702, Hepingdayou industrial and trade industrial park,  
No. 41, Yonghe Road, Heping Community, Fuhai Street,  
Baoan District, Shenzhen City, China

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Zhenxiong Industrial Park,  
No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan  
District, Shenzhen, Guangdong, China

Report Number: LGT23E024RF08

Sample Received Date: May 15, 2023

Date of Test: May 15, 2023 ~ Jun. 09, 2023

Date of Issue: Jun. 09, 2023

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



## TEST REPORT CERTIFICATION

**Applicant:** Shenzhen OBLUE Communication Technology Co., Ltd.  
Room 702, Hepingdayou industrial and trade industrial park, No.  
**Address:** 41, Yonghe Road, Heping Community, Fuhai Street, Baoan  
District, Shenzhen City, China

**Manufacturer:** Shenzhen OBLUE Communication Technology Co., Ltd.  
Room 702, Hepingdayou industrial and trade industrial park, No.  
**Address:** 41, Yonghe Road, Heping Community, Fuhai Street, Baoan  
District, Shenzhen City, China

**Product Name:** Smart phone

**Trademark:** 8849, Unihertz

**Model Name:** TANK 2

**Sample Status:** Normal

| APPLICABLE STANDARDS                           |              |
|------------------------------------------------|--------------|
| STANDARD                                       | TEST RESULTS |
| FCC Part 15.225, Subpart C<br>ANSI C63.10-2013 | PASS         |

Prepared by:

Zane Shan

Zane Shan  
Engineer

Approved by:

Vita Li

Vita Li  
Technical Director





## Table of Contents

|                                                              |           |
|--------------------------------------------------------------|-----------|
| <b>1. SUMMARY OF TEST RESULTS</b>                            | <b>6</b>  |
| 1.1 TEST FACTORY                                             | 7         |
| 1.2 MEASUREMENT UNCERTAINTY                                  | 7         |
| <b>2. GENERAL INFORMATION</b>                                | <b>8</b>  |
| 2.1 GENERAL DESCRIPTION OF THE EUT                           | 8         |
| 2.2 DESCRIPTION OF THE TEST MODES                            | 9         |
| 2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 9         |
| 2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS   | 10        |
| 2.5 EQUIPMENTS LIST                                          | 11        |
| <b>3. EMC EMISSION TEST</b>                                  | <b>12</b> |
| 3.1 CONDUCTED EMISSION MEASUREMENT                           | 12        |
| 3.2 TEST PROCEDURE                                           | 13        |
| 3.3 TEST SETUP                                               | 13        |
| 3.4 EUT OPERATING CONDITIONS                                 | 13        |
| 3.5 TEST RESULTS                                             | 14        |
| <b>4. RADIATED EMISSION MEASUREMENT</b>                      | <b>16</b> |
| 4.1 RADIATED EMISSION LIMITS                                 | 16        |
| 4.2 TEST PROCEDURE                                           | 18        |
| 4.3 TEST SETUP                                               | 19        |
| 4.4 EUT OPERATING CONDITIONS                                 | 19        |
| 4.5 FIELD STRENGTH CALCULATION                               | 20        |
| 4.6 TEST RESULTS                                             | 21        |
| <b>5. FREQUENCY TOLERANCE</b>                                | <b>26</b> |
| 5.1 LIMIT                                                    | 26        |
| 5.2 TEST PROCEDURE                                           | 26        |
| 5.3 TEST SETUP                                               | 26        |
| 5.4 EUT OPERATION CONDITIONS                                 | 26        |
| 5.5 TEST RESULTS                                             | 27        |
| <b>6. 20DB BANDWIDTH</b>                                     | <b>28</b> |
| 6.1 LIMIT                                                    | 28        |
| 6.2 TEST PROCEDURE                                           | 28        |
| 6.3 TEST SETUP                                               | 28        |
| 6.4 EUT OPERATION CONDITIONS                                 | 28        |



## Table of Contents

|                                         |           |
|-----------------------------------------|-----------|
| 6.5 TEST RESULTS                        | 29        |
| <b>7. ANTENNA REQUIREMENT</b>           | <b>30</b> |
| 7.1 STANDARD REQUIREMENT                | 30        |
| 7.2 EUT ANTENNA                         | 30        |
| <b>APPENDIX 1- PHOTOS OF TEST SETUP</b> | <b>31</b> |



### **Revision History**

| Rev. | Issue Date    | Contents      |
|------|---------------|---------------|
| 00   | Jun. 09, 2023 | Initial Issue |
|      |               |               |



## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| FCC Part 15.225, Subpart C   |                     |          |        |
|------------------------------|---------------------|----------|--------|
| Standard Section             | Test Item           | Judgment | Remark |
| 15.207                       | Conducted Emission  | PASS     | --     |
| 15.209<br>15.225(a)(b)(c)(d) | Radiated Emission   | PASS     | --     |
| 15.225(e)                    | Frequency Tolerance | PASS     | --     |
| 15.203                       | Antenna Requirement | PASS     | --     |
| 15.215                       | 20dB Bandwidth      | PASS     | --     |

### NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.



## 1.1 TEST FACTORY

|                           |                                                                                                                                                          |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Company Name:             | Shenzhen LGT Test Service Co., Ltd.                                                                                                                      |
| Address:                  | Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China |
| Accreditation Certificate | FCC Registration No.: 746540                                                                                                                             |
|                           | A2LA Certificate No.: 6727.01                                                                                                                            |

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95** %.

| No. | Item                              | Uncertainty          |
|-----|-----------------------------------|----------------------|
| 1   | RF output power, conducted        | $\pm 0.68\text{dB}$  |
| 2   | Unwanted Emissions, conducted     | $\pm 2.988\text{dB}$ |
| 3   | All emissions, radiated 9K-30MHz  | $\pm 2.84\text{dB}$  |
| 4   | All emissions, radiated 30M-1GHz  | $\pm 4.39\text{dB}$  |
| 5   | All emissions, radiated 1G-6GHz   | $\pm 5.10\text{dB}$  |
| 6   | All emissions, radiated >6G       | $\pm 5.48\text{dB}$  |
| 7   | Conducted Emission (9KHz-150KHz)  | $\pm 2.79\text{dB}$  |
| 8   | Conducted Emission (150KHz-30MHz) | $\pm 2.80\text{dB}$  |

Note: The measurement uncertainty is not included in the test result.



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

|                         |                                                                                                                                                                            |                    |  |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|--|
| Product Name:           | Smart phone                                                                                                                                                                |                    |  |
| Trademark:              | 8849,Unihertz                                                                                                                                                              |                    |  |
| Model Name:             | TANK 2                                                                                                                                                                     |                    |  |
| Series Model:           | N/A                                                                                                                                                                        |                    |  |
| Model Difference:       | N/A                                                                                                                                                                        |                    |  |
| Product Description:    | The EUT is a Smart phone                                                                                                                                                   |                    |  |
|                         | Operation Frequency:                                                                                                                                                       | 13.56MHz           |  |
|                         | Modulation Type:                                                                                                                                                           | FSK                |  |
|                         | Antenna Designation:                                                                                                                                                       | Please see Note 2. |  |
| Channel List:           | Please refer to the Note 2.                                                                                                                                                |                    |  |
| Adapter:                | Model: HJ-PD66W-US<br>Input: 100-240V, 50/60Hz, 1.5A<br>Output: 5V, 3A 15W,<br>OR 9V,3A 27W,<br>OR 12V,3A 36W,<br>OR 15V,3A 45W,<br>OR 20V,3.25A 65W,<br>OR 11V,6A 66W MAX |                    |  |
| Battery:                | Capacity: 15500mAh<br>Rated Voltage: 3.87V                                                                                                                                 |                    |  |
| Hardware Version:       | G88_V2.1                                                                                                                                                                   |                    |  |
| Software Version:       | TANK2_20230504                                                                                                                                                             |                    |  |
| Connecting I/O Port(s): | Please refer to the Note 1.                                                                                                                                                |                    |  |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.

2.

Table for Filed Antenna

| Ant. | Brand         | Model Name | Antenna Type | Connector | NOTE    |
|------|---------------|------------|--------------|-----------|---------|
| 1    | 8849,Unihertz | TANK 2     | Coil         | N/A       | NFC ANT |

Note: The antenna information refer the manufacturer provide report, applicable only to the tested sa-mple identified in the report.



## 2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions  
Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

| Worst Mode | Description |
|------------|-------------|
| Mode 1     | TX Mode     |

Note:


- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- (2) We have be tested for all avaiable U.S. voltage and Frequency (For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/60Hz is shown in the report.
- (3) The battery is fully-charged during the radited and RF conducted test.

## 2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Conducted Emission Test

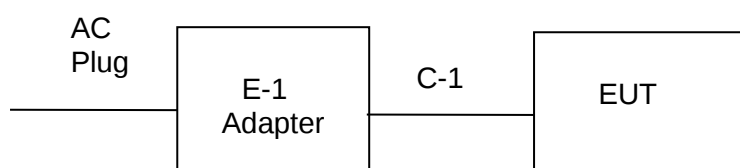



## 2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

### Accessories Equipment

| Description          | Manufacturer                        | Model       | S/N | Rating                                                                                                                                               |
|----------------------|-------------------------------------|-------------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Adapter              | Shenzhen Huajin Electronics Co.,Ltd | HJ-PD66W-US | N/A | Input: 100-240V ~ 50/60Hz 1.5A<br>Output: 5V, 3A 15W,<br>OR 9V,3A 27W,<br>OR 12V,3A 36W,<br>OR 15V,3A 45W,<br>OR 20V,3.25A 65W,<br>OR 11V,6A 66W MAX |
| USB-C to USB-C Cable | N/A                                 | N/A         | N/A | 1m, shielded, without ferrite core                                                                                                                   |
|                      |                                     |             |     |                                                                                                                                                      |

### Auxiliary Equipment

| Description | Manufacturer | Model  | S/N | Rating |
|-------------|--------------|--------|-----|--------|
| Laptop      | HUAWEI       | HKF-16 | N/A | N/A    |
|             |              |        |     |        |
|             |              |        |     |        |

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



## 2.5 EQUIPMENTS LIST

| Conducted Emission     |                     |           |             |            |            |
|------------------------|---------------------|-----------|-------------|------------|------------|
| Equipment              | Manufacturer        | Model No. | Serial No.  | Cal. Date  | Cal. Until |
| EMI Test Receiver      | R&S                 | ESU8      | 100372      | 2023.04.13 | 2024.04.12 |
| LISN                   | COM-POWER           | LI-115    | 02032       | 2023.04.07 | 2024.04.06 |
| LISN                   | SCHWARZBECK         | NNLK 8121 | 00847       | 2023.04.07 | 2024.04.06 |
| LISN                   | SCHWARZBECK         | NNLK 8122 | 00160       | 2023.04.07 | 2024.04.06 |
| ISN                    | FCC                 | T4-02     | 91317       | 2022.06.08 | 2023.06.07 |
| ISN                    | SCHWARZBECK         | NTFM 8158 | 00303       | 2023.04.07 | 2024.04.06 |
| Transient Limiter      | CYBERTEK            | EM5010A   | E2250100049 | 2023.04.07 | 2024.04.06 |
| Temperature & Humidity | KTJ                 | TA218B    | N.A         | 2023.04.24 | 2024.04.23 |
| Testing Software       | EMC-I_V1.4.0.3_SKET |           |             |            |            |

| Radiated Test equipment          |                     |           |            |            |            |
|----------------------------------|---------------------|-----------|------------|------------|------------|
| Equipment                        | Manufacturer        | Model No. | Serial No. | Cal. Date  | Cal. Until |
| EMI Test Receiver                | R&S                 | ESU8      | 100372     | 2023.04.13 | 2024.04.12 |
| Active loop Antenna              | ETS                 | 6502      | 00049544   | 2022.06.02 | 2025.06.01 |
| Spectrum Analyzer                | Keysight            | N9010B    | MY60242508 | 2023.04.10 | 2024.04.09 |
| Bilog Antenna                    | SCHAFFNER           | CBL6112B  | 2705       | 2022.06.05 | 2025.06.04 |
| Horn Antenna                     | SCHWARZBECK         | 3115      | 10SL0060   | 2022.06.02 | 2025.06.01 |
| Pre-amplifier(9kHz-1GHz)         | EMtrace             | RP01A     | 02017      | 2023.04.07 | 2024.04.06 |
| Pre-amplifier(1-26.5G)           | Agilent             | 8449B     | 3008A4722  | 2023.04.07 | 2024.04.06 |
| Wireless Communications Test Set | R&S                 | CMW 500   | 137737     | 2023.04.13 | 2024.04.12 |
| Temperature & Humidity           | KTJ                 | TA218B    | N.A        | 2023.04.24 | 2024.04.23 |
| Testing Software                 | EMC-I_V1.4.0.3_SKET |           |            |            |            |



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

| FREQUENCY (MHz) | Class B (dBuV) |           | Standard |
|-----------------|----------------|-----------|----------|
|                 | Quasi-peak     | Average   |          |
| 0.15 -0.5       | 66 - 56 *      | 56 - 46 * | FCC      |
| 0.50 -5.0       | 56.00          | 46.00     | FCC      |
| 5.0 -30.0       | 60.00          | 50.00     | FCC      |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |

### 3.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.3 TEST SETUP

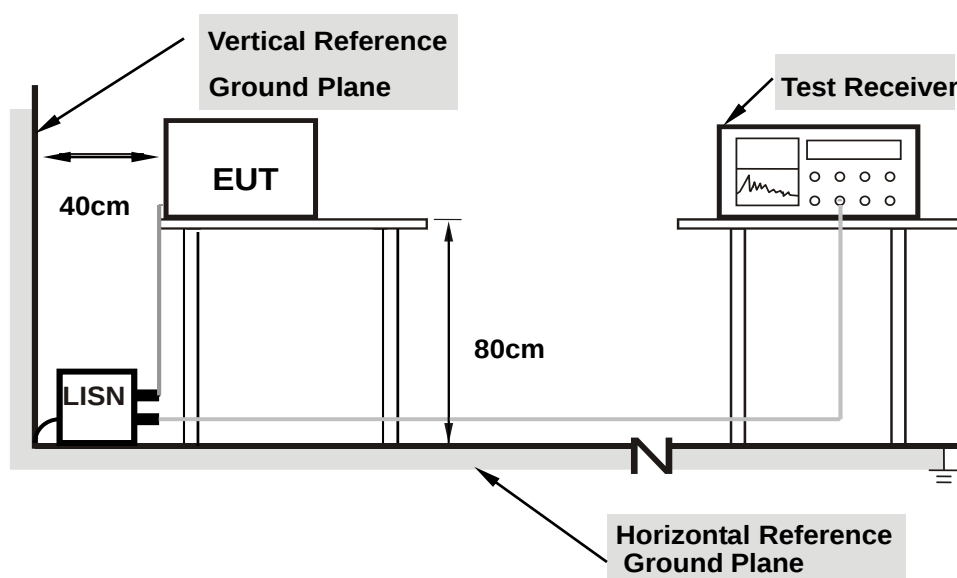

**Note: 1.Support units were connected to second LISN.**

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support.**


### 3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



### 3.5 TEST RESULTS


|                            |                          |
|----------------------------|--------------------------|
| Project: LGT23E024         | Test Engineer: Dylan.shi |
| EUT: Smart phone           | Temperature: 26.9°C      |
| M/N: TANK 2                | Humidity: 50%RH          |
| Test Voltage: AC 120V/60Hz | Test Data: 2023-05-12    |
| Test Mode: NFC             |                          |
| Note:                      |                          |

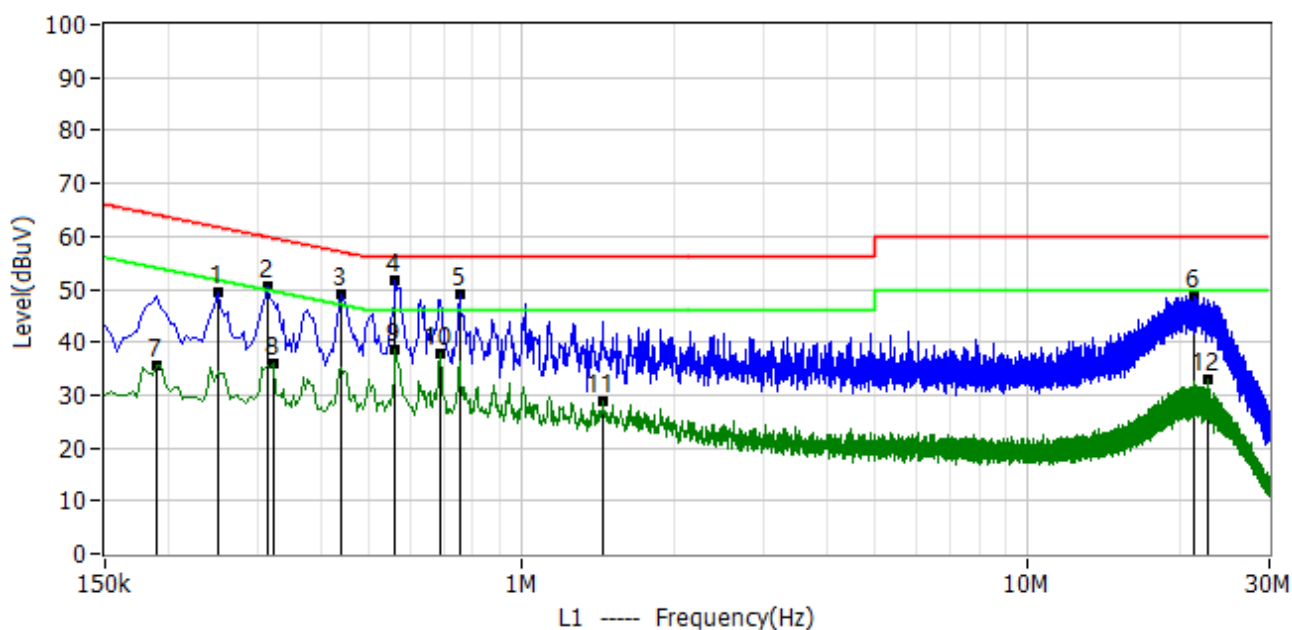

| No. | Frequency  | Reading dBuV | Factor dB | Level dBuV | Limit dBuV | Margin dB | Detector | Polar |
|-----|------------|--------------|-----------|------------|------------|-----------|----------|-------|
| 1*  | 250.000kHz | 38.94        | 10.60     | 49.54      | 61.76      | -12.22    | QP       | L1    |
| 2*  | 314.000kHz | 39.86        | 10.59     | 50.45      | 59.86      | -9.42     | QP       | L1    |
| 3*  | 438.000kHz | 38.44        | 10.58     | 49.02      | 57.10      | -8.08     | QP       | L1    |
| 4*  | 562.000kHz | 41.25        | 10.58     | 51.83      | 56.00      | -4.17     | QP       | L1    |
| 5*  | 754.000kHz | 38.67        | 10.58     | 49.25      | 56.00      | -6.75     | QP       | L1    |
| 6*  | 21.234MHz  | 37.39        | 11.26     | 48.65      | 60.00      | -11.35    | QP       | L1    |
| 7*  | 190.000kHz | 25.01        | 10.59     | 35.60      | 54.04      | -18.43    | AV       | L1    |
| 8*  | 322.000kHz | 25.52        | 10.59     | 36.11      | 49.66      | -13.55    | AV       | L1    |
| 9*  | 562.000kHz | 27.91        | 10.58     | 38.49      | 46.00      | -7.51     | AV       | L1    |
| 10* | 690.000kHz | 27.16        | 10.58     | 37.74      | 46.00      | -8.26     | AV       | L1    |
| 11* | 1.446MHz   | 18.18        | 10.66     | 28.84      | 46.00      | -17.16    | AV       | L1    |
| 12* | 22.726MHz  | 21.86        | 11.28     | 33.14      | 50.00      | -16.86    | AV       | L1    |



|                            |                          |
|----------------------------|--------------------------|
| Project: LGT23E024         | Test Engineer: Dylan.shi |
| EUT: Smart phone           | Temperature: 26.9°C      |
| M/N: TANK 2                | Humidity: 50%RH          |
| Test Voltage: AC 120V/60Hz | Test Data: 2023-05-12    |
| Test Mode: NFC             |                          |
| Note:                      |                          |

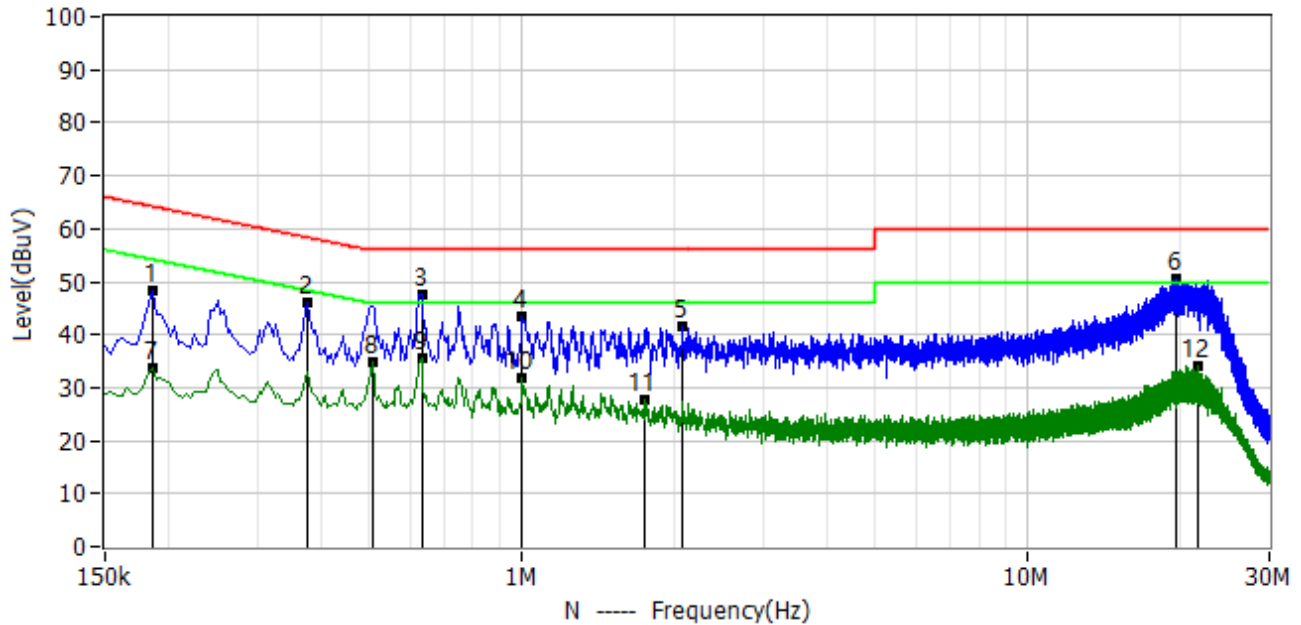

| No. | Frequency  | Reading<br>dBuV | Factor<br>dB | Level<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Polar |
|-----|------------|-----------------|--------------|---------------|---------------|--------------|----------|-------|
| 1*  | 186.000kHz | 37.79           | 10.59        | 48.38         | 64.21         | -15.83       | QP       | N     |
| 2*  | 378.000kHz | 35.31           | 10.58        | 45.89         | 58.32         | -12.43       | QP       | N     |
| 3*  | 634.000kHz | 37.09           | 10.58        | 47.67         | 56.00         | -8.33        | QP       | N     |
| 4*  | 1.002MHz   | 32.76           | 10.59        | 43.35         | 56.00         | -12.65       | QP       | N     |
| 5*  | 2.070MHz   | 30.69           | 10.75        | 41.44         | 56.00         | -14.56       | QP       | N     |
| 6*  | 19.690MHz  | 39.23           | 11.33        | 50.56         | 60.00         | -9.44        | QP       | N     |
| 7*  | 186.000kHz | 22.99           | 10.59        | 33.58         | 54.21         | -20.63       | AV       | N     |
| 8*  | 506.000kHz | 24.35           | 10.58        | 34.93         | 46.00         | -11.07       | AV       | N     |
| 9*  | 634.000kHz | 24.92           | 10.58        | 35.50         | 46.00         | -10.50       | AV       | N     |
| 10* | 1.002MHz   | 21.21           | 10.59        | 31.80         | 46.00         | -14.20       | AV       | N     |
| 11* | 1.750MHz   | 16.99           | 10.71        | 27.70         | 46.00         | -18.30       | AV       | N     |
| 12* | 21.726MHz  | 22.87           | 11.36        | 34.23         | 50.00         | -15.77       | AV       | N     |



## 4. RADIATED EMISSION MEASUREMENT

### 4.1 RADIATED EMISSION LIMITS

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

(Radiated Emission <30MHz (9KHz-30MHz, H-field)

According to FCC section 15.225, for <30MHz, Radiated emissions were measured according to ANSIC63.4. The EUT was set to transmit at the highest output power. The EUT was set 30 meter away from the measuring antenna. The loop antenna was positioned 1 meter above the ground from the center of the loop. The measuring bandwidth was set to 10KHz. (Note: During testing the receive antenna was rotated about its axis to maximize the emission from the EUT)

There was no detected Restricted bands and Radiated suprious emission below 30MHz. The 30m limit was converted to 3m Limit using square factor(x) as it was found by measurements as follows;

3 m Limit(dBuV/m) =  $20\log(X) + 40\log(30/3) = 20\log(15,848) + 40\log(30/3) = 124\text{dBuV}$

3 m Limit(dBuV/m) =  $20\log(X) + 40\log(30/3) = 20\log(334) + 40\log(30/3) = 90.47\text{dBuV}$

3 m Limit(dBuV/m) =  $20\log(X) + 40\log(30/3) = 20\log(106) + 40\log(30/3) = 80.506\text{dBuV}$

3 m Limit(dBuV/m) =  $20\log(X) + 40\log(30/3) = 20\log(30) + 40\log(30/3) = 69.54\text{dBuV}$

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

LIMITS OF RADIATED EMISSION MEASUREMENT (Frequency Range 9kHz-1000MHz)

| Frequency range (KHz) | Frequency (KHz) | Field Strength@300m |                          | Field Strength@3m        |
|-----------------------|-----------------|---------------------|--------------------------|--------------------------|
|                       |                 | $\mu\text{V/m}$     | $\text{dB}\mu\text{V/m}$ | $\text{dB}\mu\text{V/m}$ |
| 9 ~ 490               | 9               | 266.67              | 48.52                    | 128.52                   |
|                       | 150             | 16.00               | 24.08                    | 104.08                   |
|                       | 490             | 4.90                | 13.80                    | 93.80                    |

| Frequency range (KHz) | Frequency (KHz) | Field Strength@30m |                          | Field Strength@3m        |
|-----------------------|-----------------|--------------------|--------------------------|--------------------------|
|                       |                 | $\mu\text{V/m}$    | $\text{dB}\mu\text{V/m}$ | $\text{dB}\mu\text{V/m}$ |
| 490 ~ 1705            | 490             | 48.98              | 33.80                    | 73.80                    |
|                       | 1705            | 14.08              | 22.97                    | 62.97                    |

| Frequency range (KHz) | Frequency (KHz) | Field Strength@30m |                          | Field Strength@3m        |
|-----------------------|-----------------|--------------------|--------------------------|--------------------------|
|                       |                 | $\mu\text{V/m}$    | $\text{dB}\mu\text{V/m}$ | $\text{dB}\mu\text{V/m}$ |
| 1705 ~ 30000          | 1705            | 30.00              | 29.54                    | 69.54                    |
|                       | 30000           | 30.00              | 29.54                    | 69.54                    |



| Frequency range (MHz) | Field Strength@30m |                          | Field Strength@3m        |
|-----------------------|--------------------|--------------------------|--------------------------|
|                       | $\mu\text{V/m}$    | $\text{dB}\mu\text{V/m}$ | $\text{dB}\mu\text{V/m}$ |
| 13.110 ~ 13.410       | 106                | 40.5                     | 80.5                     |
| 13.410 ~ 13.553       | 334                | 50.5                     | 90.5                     |
| 13.553 ~13.567        | 15.848             | 84                       | 124.0                    |
| 13.567 ~ 13.710       | 334                | 50.5                     | 90.5                     |
| 13.710 ~14.010        | 106                | 40.5                     | 80.5                     |

NOTE:

- a) Field Strength ( $\text{dB}\mu\text{V/m}$ ) =  $20 \cdot \log[\text{Field Strength } (\mu\text{V/m})]$ .  
b) In the emission tables above, the tighter limit applies at the Band edge.

Radiated Emission >30MHz (30MHz-1GHz, E-field)

According to FCC section 15.205, the field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 30~88             | 100                               | 3                             |
| 88~216            | 150                               | 3                             |
| 216~960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

| Receiver Parameter     | Setting                              |
|------------------------|--------------------------------------|
| Attenuation            | Auto                                 |
| Start ~ Stop Frequency | 9kHz~90kHz / RB 200Hz for PK & AV    |
| Start ~ Stop Frequency | 90kHz~110kHz / RB 200Hz for QP       |
| Start ~ Stop Frequency | 110kHz~490kHz / RB 200Hz for PK & AV |
| Start ~ Stop Frequency | 490kHz~30MHz / RB 9kHz for QP        |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP     |



#### 4.2 TEST PROCEDURE


- a. The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower. For the test Antenna
- b. In the frequency range of 9KHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- c. In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.
- f. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- h. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### NOTE:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

#### 4.3 TEST SETUP

##### (A) Radiated Emission Test-Up Frequency Below 30MHz

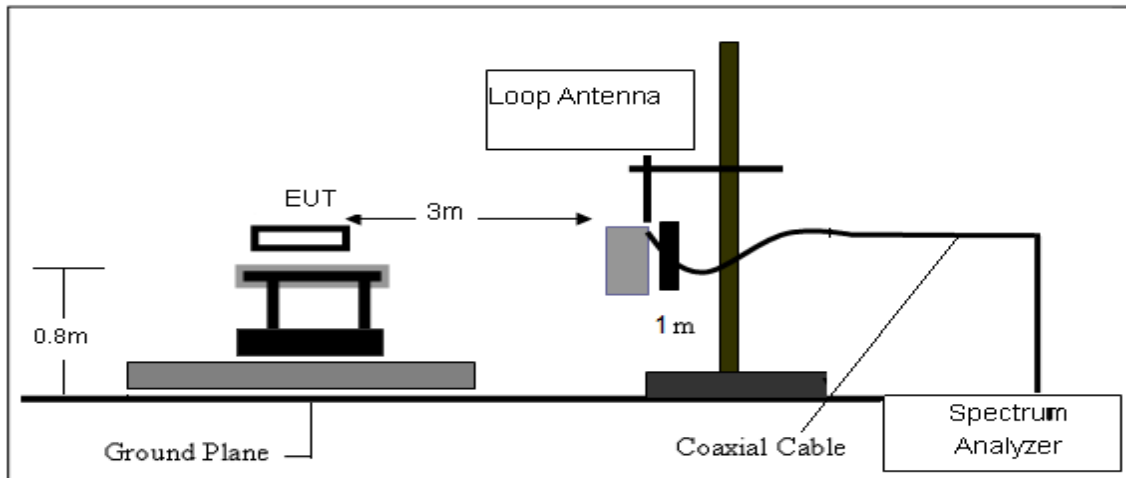

##### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

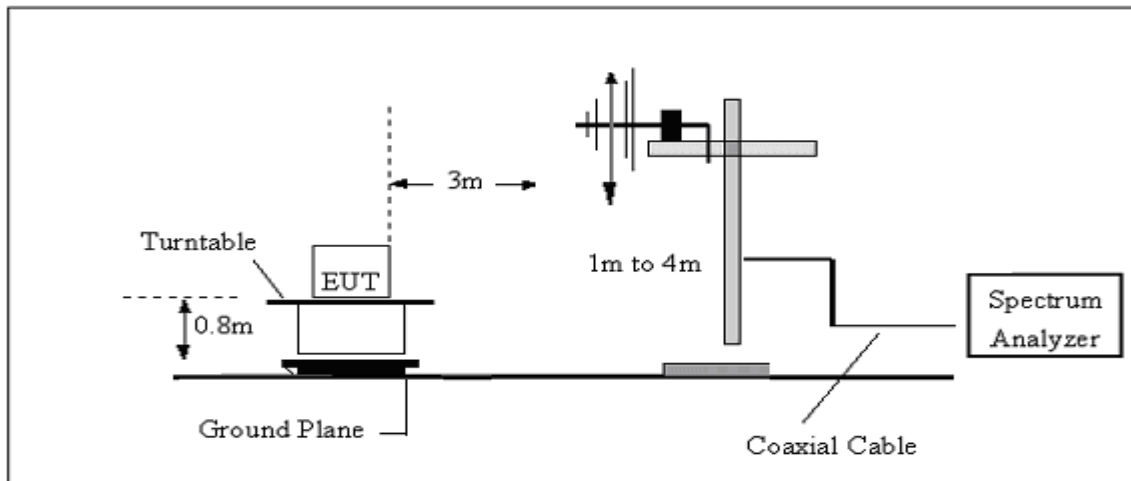

#### 4.4 EUT OPERATING CONDITIONS

Please refer to section 3.4 of this report.



#### 4.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

| Frequency | FS       | RA       | AF   | CL   | AG   | Factor |
|-----------|----------|----------|------|------|------|--------|
| (MHz)     | (dBμV/m) | (dBμV/m) | (dB) | (dB) | (dB) | (dB)   |
| 300       | 40       | 58.1     | 12.2 | 1.6  | 31.9 | -18.1  |

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$




#### 4.6 TEST RESULTS

(Radiated Emission<30MHz (9KHz-30MHz, H-field))

9KHz-150KHz


|                           |                          |
|---------------------------|--------------------------|
| Project: LGT23E024        | Test Engineer: Dylan.shi |
| EUT: Smart phone          | Temperature: 20.7°C      |
| M/N: TANK 2               | Humidity: 56%RH          |
| Test Voltage: Battery     | Test Data: 2023-06-09    |
| Test Mode: RFID Operating |                          |
| Note:                     |                          |

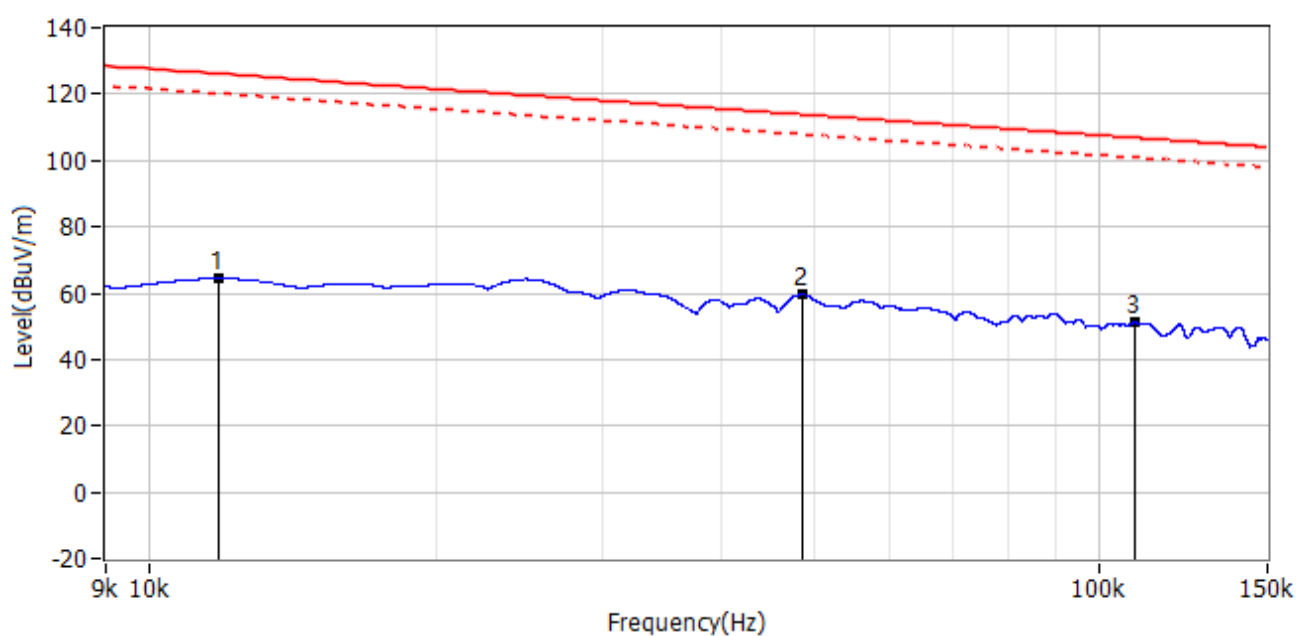

| No. | Frequency  | Reading<br>dBuV/m | Factor<br>dB/m | Level<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|------------|-------------------|----------------|-----------------|-----------------|--------------|----------|
| 1*  | 11.820kHz  | 42.82             | 21.57          | 64.39           | 126.15          | -61.76       | PK       |
| 2*  | 48.586kHz  | 38.30             | 21.21          | 59.51           | 113.87          | -54.36       | PK       |
| 3*  | 108.652kHz | 29.80             | 21.28          | 51.08           | 106.88          | -55.80       | PK       |




|                           |                          |
|---------------------------|--------------------------|
| Project: LGT23E024        | Test Engineer: Dylan.shi |
| EUT: Smart phone          | Temperature: 20.7°C      |
| M/N: TANK 2               | Humidity: 56%RH          |
| Test Voltage: Battery     | Test Data: 2023-06-09    |
| Test Mode: RFID Operating |                          |
| Note:                     |                          |

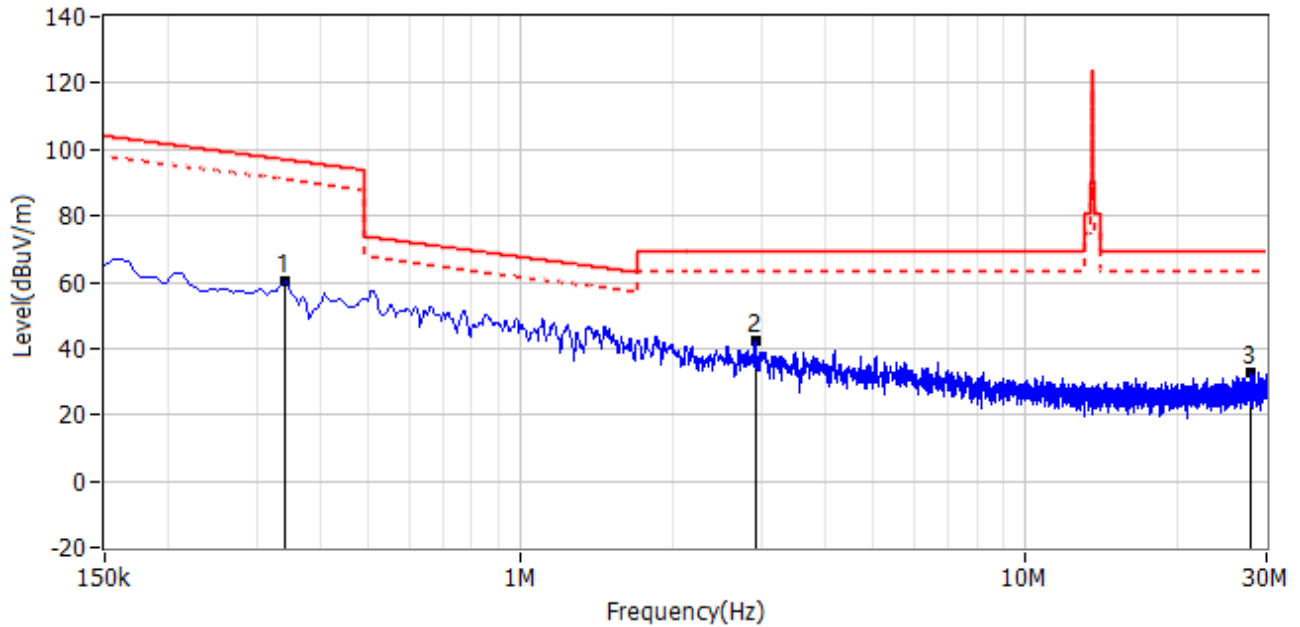

| No. | Frequency  | Reading<br>dBuV/m | Factor<br>dB/m | Level<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|------------|-------------------|----------------|-----------------|-----------------|--------------|----------|
| 1*  | 340.294kHz | 38.50             | 21.60          | 60.10           | 96.97           | -36.87       | PK       |
| 2*  | 2.911MHz   | 21.01             | 21.32          | 42.33           | 69.54           | -27.21       | PK       |
| 3*  | 27.873MHz  | 10.43             | 22.39          | 32.82           | 69.54           | -36.72       | PK       |



|                           |                          |
|---------------------------|--------------------------|
| Project: LGT23E024        | Test Engineer: Dylan.shi |
| EUT: Smart phone          | Temperature: 20.7°C      |
| M/N: TANK 2               | Humidity: 56%RH          |
| Test Voltage: Battery     | Test Data: 2023-06-09    |
| Test Mode: RFID Operating |                          |
| Note:                     |                          |

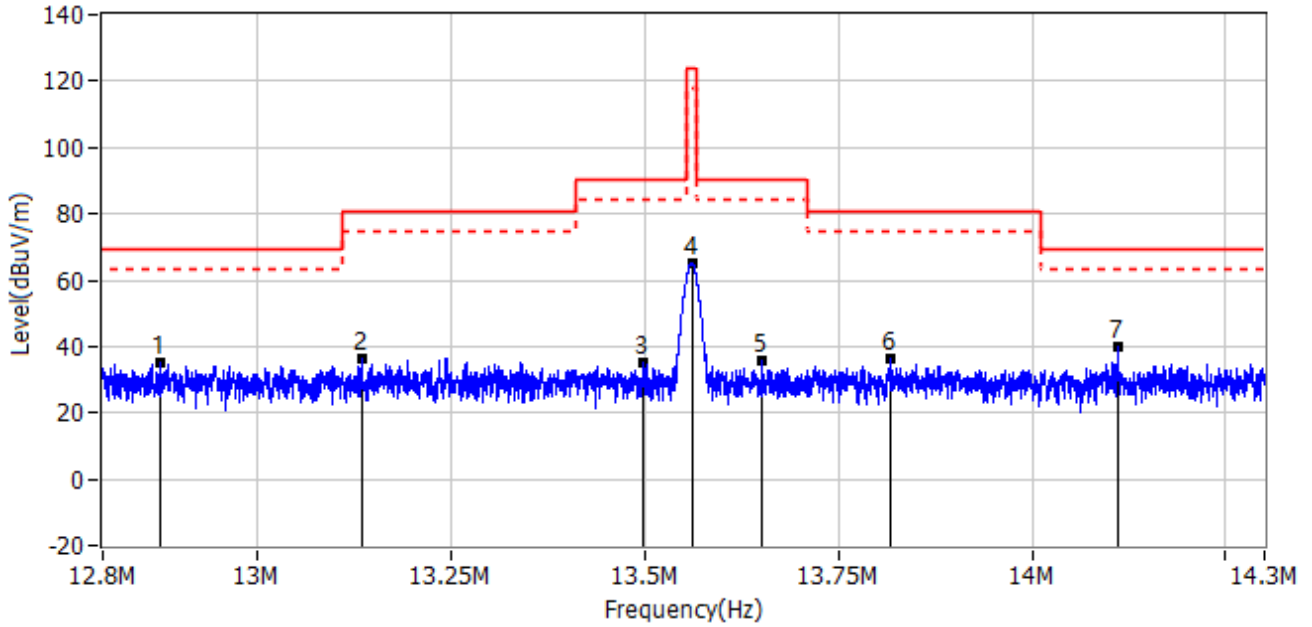


| No. | Frequency | Reading<br>dBuV/m | Factor<br>dB/m | Level<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector |
|-----|-----------|-------------------|----------------|-----------------|-----------------|--------------|----------|
| 1*  | 12.875MHz | 13.83             | 21.21          | 35.04           | 69.54           | -34.50       | PK       |
| 2*  | 13.134MHz | 15.22             | 21.21          | 36.43           | 80.50           | -44.07       | PK       |
| 3*  | 13.498MHz | 13.90             | 21.25          | 35.15           | 90.50           | -55.35       | PK       |
| 4*  | 13.561MHz | 44.00             | 21.26          | 65.26           | 124.00          | -58.74       | PK       |
| 5*  | 13.651MHz | 14.60             | 21.27          | 35.87           | 90.50           | -54.63       | PK       |
| 6*  | 13.817MHz | 14.78             | 21.28          | 36.06           | 80.50           | -44.44       | PK       |
| 7*  | 14.111MHz | 18.64             | 21.31          | 39.95           | 69.54           | -29.59       | PK       |



## Between 30-1000MHz


|                       |                          |
|-----------------------|--------------------------|
| Project: LGT23E024    | Test Engineer: Dylan.shi |
| EUT: Smart phone      | Temperature: 20.7°C      |
| M/N: TANK 2           | Humidity: 56%RH          |
| Test Voltage: Battery | Test Data: 2023-06-09    |
| Test Mode: NFC        |                          |
| Note:                 |                          |

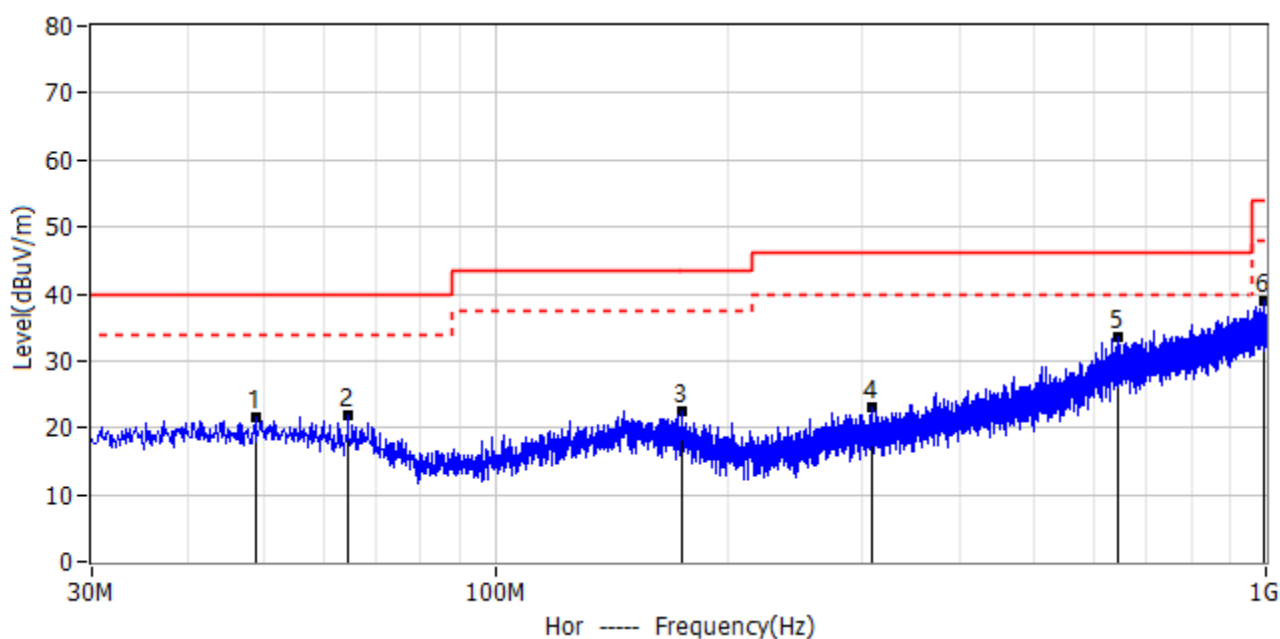

| No. | Frequency  | Reading dBuV | Factor dB/m | Level dBuV/m | Limit dBuV/m | Margin dB | Detector | Polar |
|-----|------------|--------------|-------------|--------------|--------------|-----------|----------|-------|
| 1*  | 48.915MHz  | 2.29         | 19.33       | 21.62        | 40.00        | -18.38    | PK       | Hor   |
| 2*  | 64.435MHz  | 3.54         | 18.37       | 21.91        | 40.00        | -18.09    | PK       | Hor   |
| 3*  | 174.651MHz | 3.08         | 19.34       | 22.42        | 43.50        | -21.08    | PK       | Hor   |
| 4*  | 307.905MHz | 2.85         | 20.16       | 23.01        | 46.00        | -22.99    | PK       | Hor   |
| 5*  | 643.768MHz | 4.51         | 29.08       | 33.59        | 46.00        | -12.41    | PK       | Hor   |
| 6*  | 995.756MHz | 4.47         | 34.55       | 39.02        | 54.00        | -14.98    | PK       | Hor   |



|                       |                          |
|-----------------------|--------------------------|
| Project: LGT23E024    | Test Engineer: Dylan.shi |
| EUT: Smart phone      | Temperature: 20.7°C      |
| M/N: TANK 2           | Humidity: 56%RH          |
| Test Voltage: Battery | Test Data: 2023-06-09    |
| Test Mode: NFC        |                          |
| Note:                 |                          |

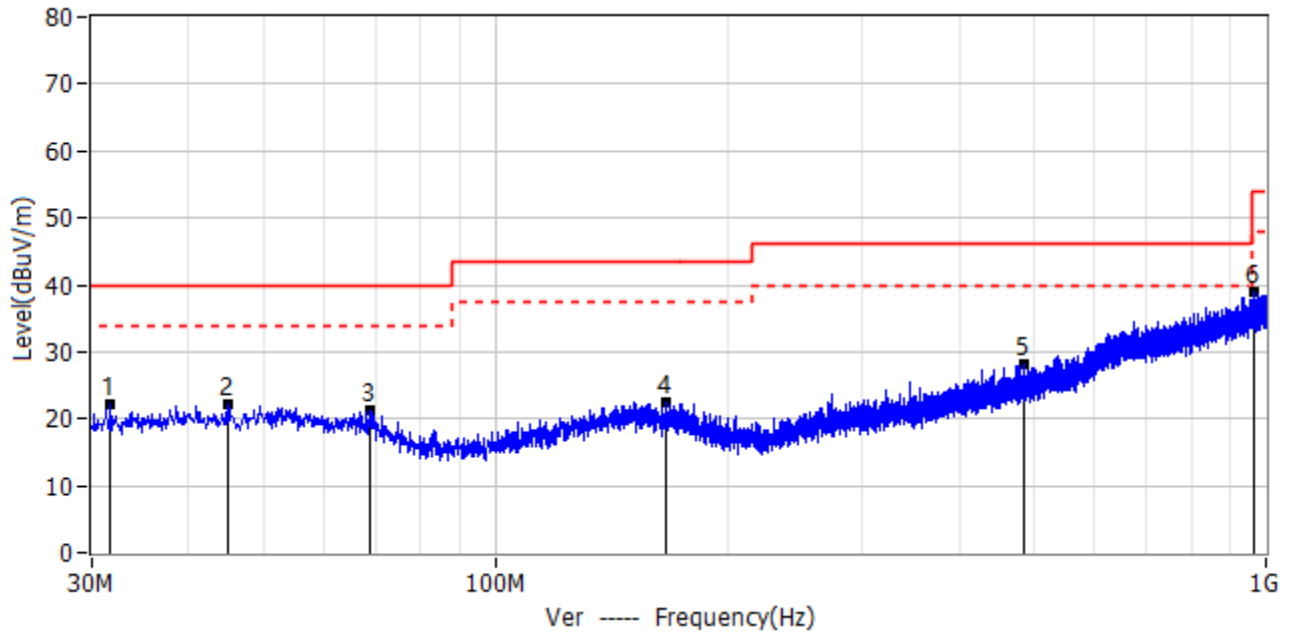

| No. | Frequency  | Reading dBuV | Factor dB/m | Level dBuV/m | Limit dBuV/m | Margin dB | Detector | Polar |
|-----|------------|--------------|-------------|--------------|--------------|-----------|----------|-------|
| 1*  | 31.698MHz  | 3.97         | 18.32       | 22.29        | 40.00        | -17.71    | PK       | Ver   |
| 2*  | 45.035MHz  | 2.96         | 19.22       | 22.18        | 40.00        | -17.82    | PK       | Ver   |
| 3*  | 68.800MHz  | 3.05         | 18.09       | 21.14        | 40.00        | -18.86    | PK       | Ver   |
| 4*  | 166.770MHz | 2.79         | 19.80       | 22.59        | 43.50        | -20.91    | PK       | Ver   |
| 5*  | 486.264MHz | 3.60         | 24.64       | 28.24        | 46.00        | -17.76    | PK       | Ver   |
| 6*  | 965.808MHz | 4.82         | 34.26       | 39.08        | 54.00        | -14.92    | PK       | Ver   |



## 5. FREQUENCY TOLERANCE


### 5.1 LIMIT

According to FCC section 15.225, the devices operating in the 13.553-13.567 MHz shall maintain the carrier frequency within 0.01% of the operating frequency over the temperature variation of -20°C to +50°C using an environmental chamber. The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

### 5.2 TEST PROCEDURE

According to FCC section 15.225(e), The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of -20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 5.3 TEST SETUP

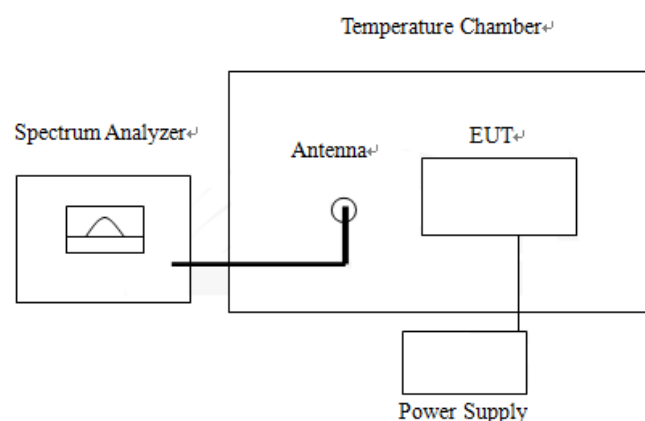

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading

### 5.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.



## 5.5 TEST RESULTS

|               |          |                    |         |
|---------------|----------|--------------------|---------|
| Temperature:  | 25 °C    | Relative Humidity: | 50%     |
| Test Voltage: | DC 3.87V | Test Mode:         | TX Mode |

**13.56MHz**

| VOLTAGE(%)           | Test Conditions |                     | Frequency<br>(Hz) | Deviation | Limit  | Verdict |
|----------------------|-----------------|---------------------|-------------------|-----------|--------|---------|
|                      | Power<br>(VDC)  | Temperature<br>(°C) |                   |           |        |         |
| 100                  | 3.85            | +20°C(Ref)          | 13559345          | -0.00483% | ±0.01% | PASS    |
| 100                  |                 | -20                 | 13561448          | 0.01068%  | ±0.01% |         |
| 100                  |                 | -10                 | 13559859          | -0.00104% | ±0.01% |         |
| 100                  |                 | 0                   | 13559381          | -0.00456% | ±0.01% |         |
| 100                  |                 | 10                  | 13559604          | -0.00292% | ±0.01% |         |
| 100                  |                 | 20                  | 13561309          | 0.00966%  | ±0.01% |         |
| 100                  |                 | 25                  | 13559187          | -0.00599% | ±0.01% |         |
| 100                  |                 | 30                  | 13559298          | -0.00518% | ±0.01% |         |
| 100                  |                 | 40                  | 13560114          | 0.00084%  | ±0.01% |         |
| 100                  |                 | 50                  | 13560713          | 0.00526%  | ±0.01% |         |
| Battery End<br>Point | 3.5             | 20                  | 13560322          | 0.00237%  | ±0.01% |         |
| 115                  | 4.35            | 20                  | 13560693          | 0.00511%  | ±0.01% |         |



## 6. 20DB BANDWIDTH

### 6.1 LIMIT

According to FCC section 15.215©, the 20dB bandwidth should be contained within the frequency band designated in the rule section under which the EUT is operated, it was measured with a spectrum analyzer connected the EUT while the EUT is operating in transmission mode.

### 6.2 TEST PROCEDURE

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §13.553-13.567 MHz and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. In the case of intentional radiators operating under the provisions of subpart E, the emission bandwidth may span across multiple contiguous frequency bands identified in that subpart. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

1. Set RBW = 1 kHz.
2. Set the video Mobile Phonewidth (VBW)  $\geq 3$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.3 TEST SETUP



### 6.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.




## 6.5 TEST RESULTS

|               |          |                    |         |
|---------------|----------|--------------------|---------|
| Temperature:  | 25 °C    | Relative Humidity: | 60%     |
| Test Voltage: | DC 3.87V | Test Mode:         | TX Mode |

13.56MHz

| Centre Frequency | Measurement    |               |                       |
|------------------|----------------|---------------|-----------------------|
|                  | 20dB Bandwidth | 99% Bandwidth | Frequency Range (MHz) |
|                  | (KHz)          | (KHz)         |                       |
| 13.56MHz         | 2.71           | 2.301         | 13.553-13.567         |

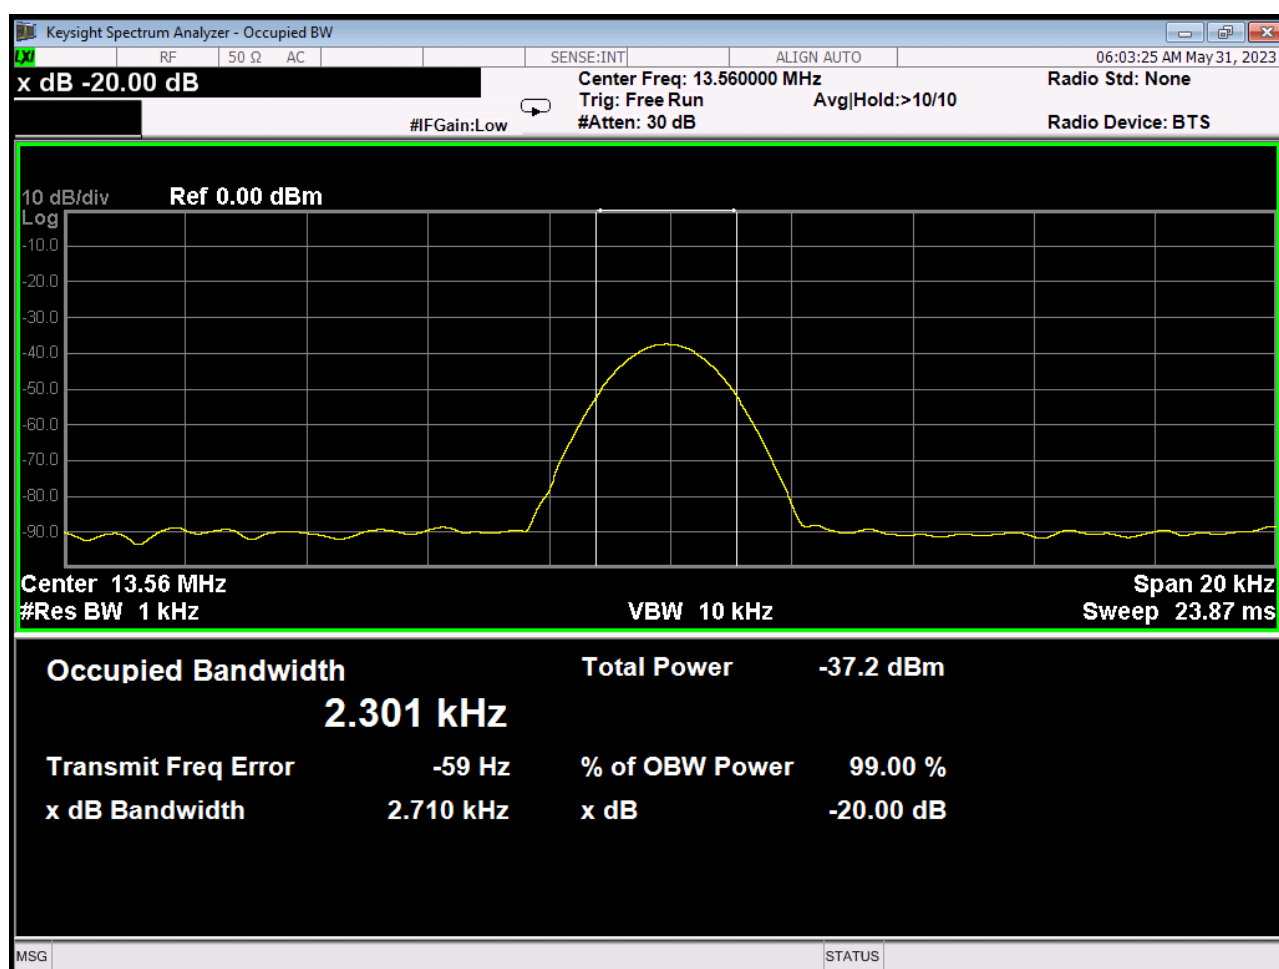



## 7. ANTENNA REQUIREMENT

### 7.1 STANDARD REQUIREMENT

Part 15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 7.2 EUT ANTENNA

The EUT antenna is coil Antenna. It comply with the standard requirement.



## **APPENDIX 1- PHOTOS OF TEST SETUP**

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*