




Test Graphs

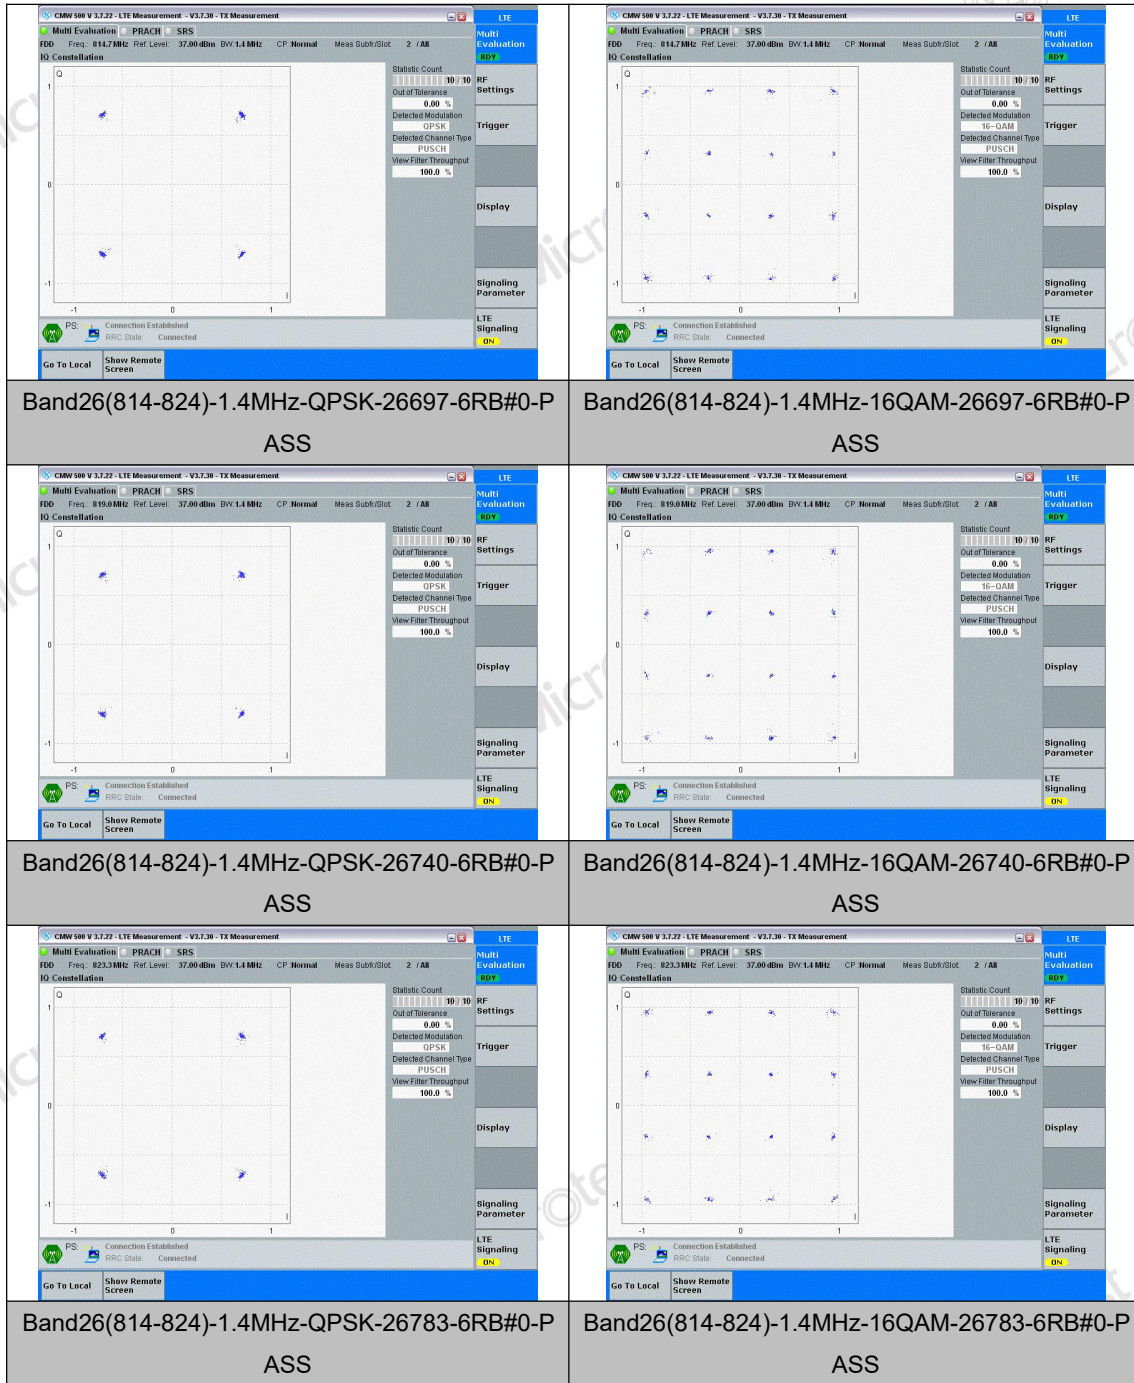

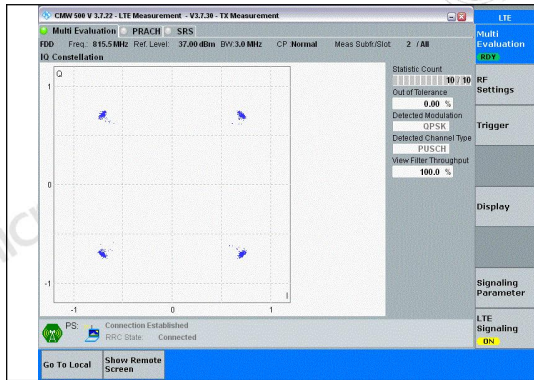


Band26(814-824)-3MHz-QPSK-26705-15RB#0-P

ASS

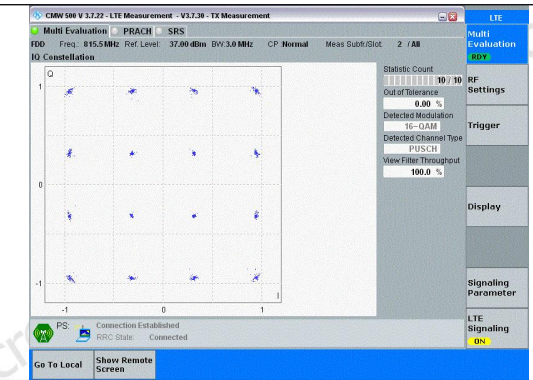


Band26(814-824)-3MHz-16QAM-26705-15RB#0-P

ASS

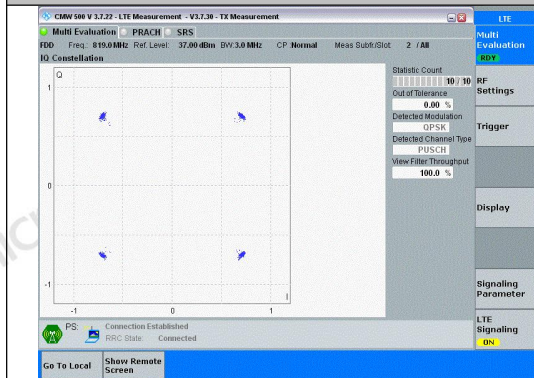


Band26(814-824)-3MHz-QPSK-26740-15RB#0-P

ASS

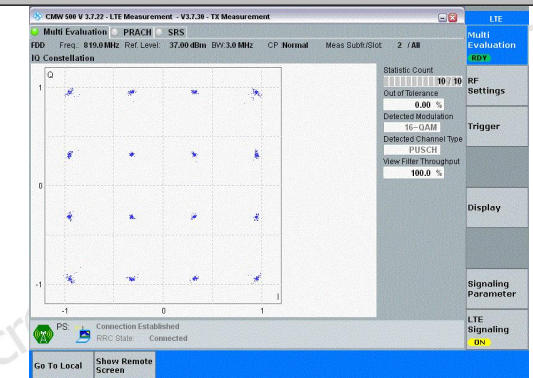


Band26(814-824)-3MHz-16QAM-26740-15RB#0-P

ASS

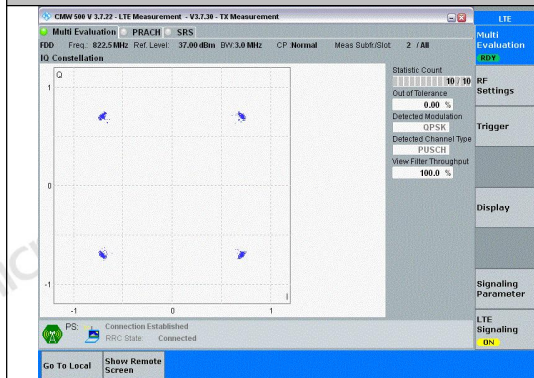


Band26(814-824)-3MHz-QPSK-26775-15RB#0-P

ASS

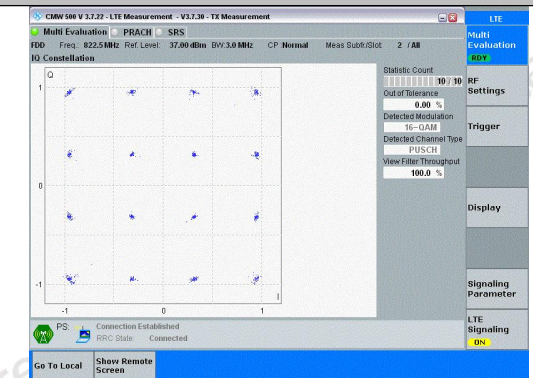


Band26(814-824)-3MHz-16QAM-26775-15RB#0-P

ASS

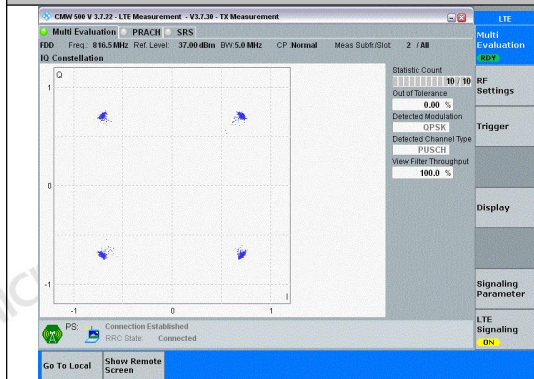









Band26(814-824)-5MHz-QPSK-26715-25RB#0-P









ASS

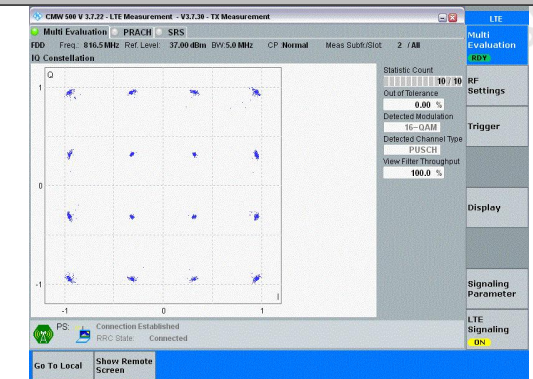


Band26(814-824)-5MHz-16QAM-26715-25RB#0-P


ASS

 CMW 580 V 3.2.22 - LTE Measurement - V3.7.30 - TX Measurement Multi Evaluation PRACH SRS FDD Freq: 819.0 MHz Ref Level: 37.00 dBm BW: 5.0 MHz CP: Normal Meas Subt/Slot: 2 / All IQ Constellation Statistic Count: 10 / 10 Out of Tolerance: 0.00 % Detected Modulation: QPSK Detected Channel Type: PUSCH View Filter Throughput: 100.0 % RF Settings Trigger Display Signaling Parameter LTE Signaling: ON Go To Local Show Remote Screen	 CMW 580 V 3.2.22 - LTE Measurement - V3.7.30 - TX Measurement Multi Evaluation PRACH SRS FDD Freq: 819.0 MHz Ref Level: 37.00 dBm BW: 5.0 MHz CP: Normal Meas Subt/Slot: 2 / All IQ Constellation Statistic Count: 10 / 10 Out of Tolerance: 0.00 % Detected Modulation: 16-QAM Detected Channel Type: PUSCH View Filter Throughput: 100.0 % RF Settings Trigger Display Signaling Parameter LTE Signaling: ON Go To Local Show Remote Screen
Band26(814-824)-5MHz-QPSK-26740-25RB#0-P ASS	Band26(814-824)-5MHz-16QAM-26740-25RB#0-P ASS
 CMW 580 V 3.2.22 - LTE Measurement - V3.7.30 - TX Measurement Multi Evaluation PRACH SRS FDD Freq: 821.5 MHz Ref Level: 37.00 dBm BW: 5.0 MHz CP: Normal Meas Subt/Slot: 2 / All IQ Constellation Statistic Count: 10 / 10 Out of Tolerance: 0.00 % Detected Modulation: QPSK Detected Channel Type: PUSCH View Filter Throughput: 100.0 % RF Settings Trigger Display Signaling Parameter LTE Signaling: ON Go To Local Show Remote Screen	 CMW 580 V 3.2.22 - LTE Measurement - V3.7.30 - TX Measurement Multi Evaluation PRACH SRS FDD Freq: 821.5 MHz Ref Level: 37.00 dBm BW: 5.0 MHz CP: Normal Meas Subt/Slot: 2 / All IQ Constellation Statistic Count: 10 / 10 Out of Tolerance: 0.00 % Detected Modulation: 16-QAM Detected Channel Type: PUSCH View Filter Throughput: 100.0 % RF Settings Trigger Display Signaling Parameter LTE Signaling: ON Go To Local Show Remote Screen
Band26(814-824)-5MHz-QPSK-26765-25RB#0-P ASS	Band26(814-824)-5MHz-16QAM-26765-25RB#0-P ASS
 CMW 580 V 3.2.22 - LTE Measurement - V3.7.30 - TX Measurement Multi Evaluation PRACH SRS FDD Freq: 824.7 MHz Ref Level: 37.00 dBm BW: 10.0 MHz CP: Normal Meas Subt/Slot: 2 / All IQ Constellation Statistic Count: 10 / 10 Out of Tolerance: 0.00 % Detected Modulation: QPSK Detected Channel Type: PUSCH View Filter Throughput: 100.0 % RF Settings Trigger Display Signaling Parameter LTE Signaling: ON Go To Local Show Remote Screen	 CMW 580 V 3.2.22 - LTE Measurement - V3.7.30 - TX Measurement Multi Evaluation PRACH SRS FDD Freq: 824.7 MHz Ref Level: 37.00 dBm BW: 10.0 MHz CP: Normal Meas Subt/Slot: 2 / All IQ Constellation Statistic Count: 10 / 10 Out of Tolerance: 0.00 % Detected Modulation: 16-QAM Detected Channel Type: PUSCH View Filter Throughput: 100.0 % RF Settings Trigger Display Signaling Parameter LTE Signaling: ON Go To Local Show Remote Screen
Band26(814-824)-10MHz-QPSK-26740-50RB#0-P PASS	Band26(814-824)-10MHz-16QAM-26740-27RB#0-P PASS
 CMW 580 V 3.2.22 - LTE Measurement - V3.7.30 - TX Measurement Multi Evaluation PRACH SRS FDD Freq: 824.7 MHz Ref Level: 37.00 dBm BW: 1.4 MHz CP: Normal Meas Subt/Slot: 2 / All IQ Constellation Statistic Count: 10 / 10 Out of Tolerance: 0.00 % Detected Modulation: QPSK Detected Channel Type: PUSCH View Filter Throughput: 100.0 % RF Settings Trigger Display Signaling Parameter LTE Signaling: ON Go To Local Show Remote Screen	 CMW 580 V 3.2.22 - LTE Measurement - V3.7.30 - TX Measurement Multi Evaluation PRACH SRS FDD Freq: 824.7 MHz Ref Level: 37.00 dBm BW: 1.4 MHz CP: Normal Meas Subt/Slot: 2 / All IQ Constellation Statistic Count: 10 / 10 Out of Tolerance: 0.00 % Detected Modulation: 16-QAM Detected Channel Type: PUSCH View Filter Throughput: 100.0 % RF Settings Trigger Display Signaling Parameter LTE Signaling: ON Go To Local Show Remote Screen
Band26(824-849)-1.4MHz-QPSK-26797-6RB#0-P ASS	Band26(824-849)-1.4MHz-16QAM-26797-6RB#0-P ASS

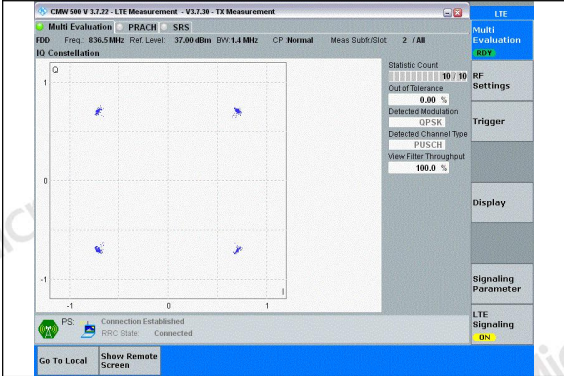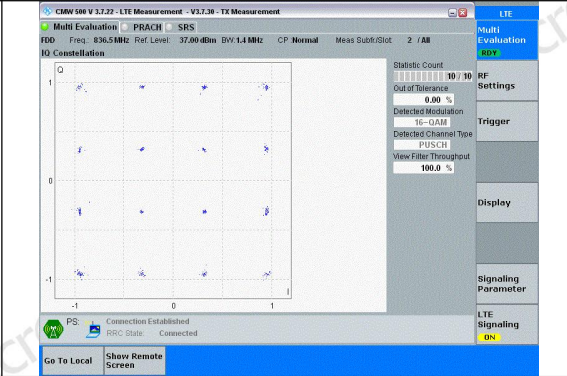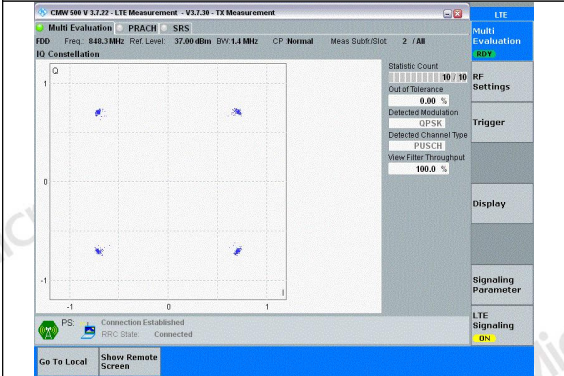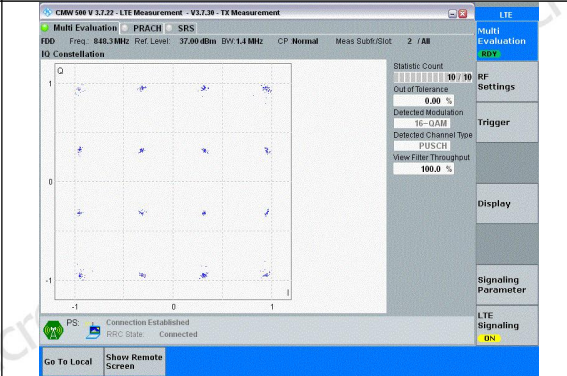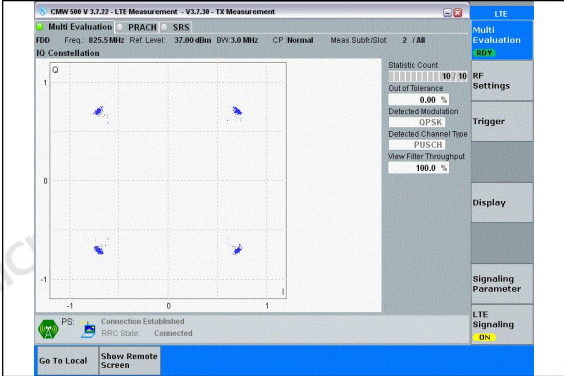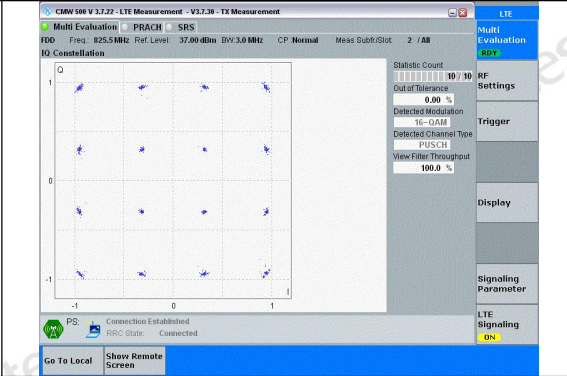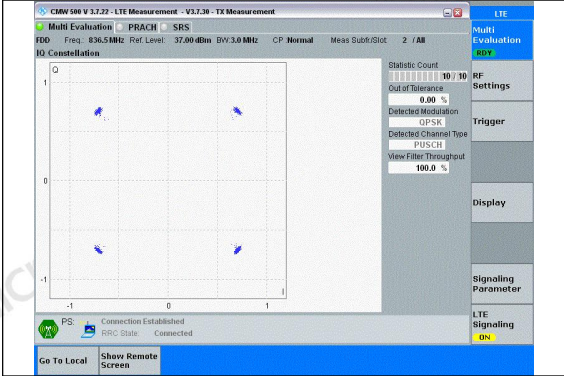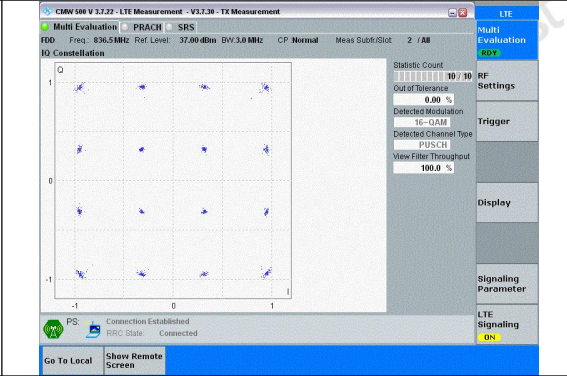
	
Band26(824-849)-1.4MHz-QPSK-26915-6RB#0-P ASS	Band26(824-849)-1.4MHz-16QAM-26915-6RB#0-P ASS
	
Band26(824-849)-1.4MHz-QPSK-27033-6RB#0-P ASS	Band26(824-849)-1.4MHz-16QAM-27033-6RB#0-P ASS
	
Band26(824-849)-3MHz-QPSK-26805-15RB#0-P ASS	Band26(824-849)-3MHz-16QAM-26805-15RB#0-P ASS
	
Band26(824-849)-3MHz-QPSK-26915-15RB#0-P ASS	Band26(824-849)-3MHz-16QAM-26915-15RB#0-P ASS

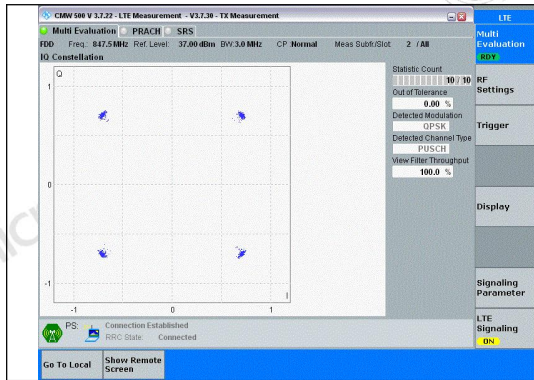


Band26(824-849)-3MHz-QPSK-27025-15RB#0-P
ASS

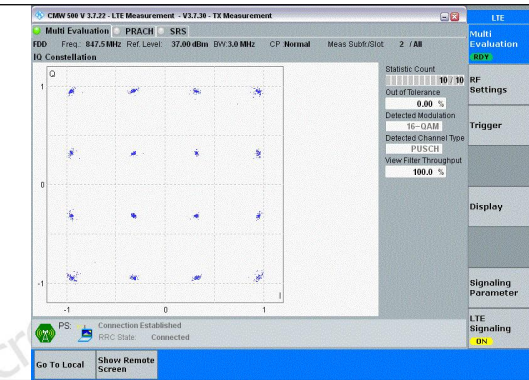


Band26(824-849)-3MHz-16QAM-27025-15RB#0-P
ASS

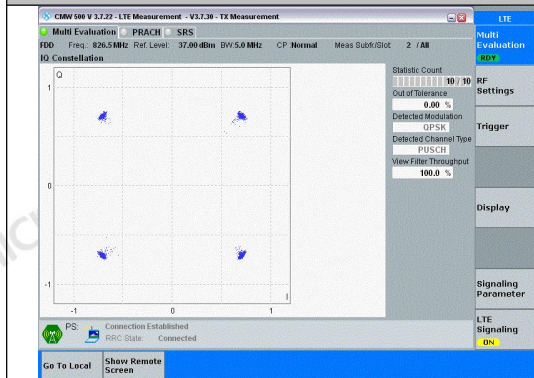


Band26(824-849)-5MHz-QPSK-26815-25RB#0-P
ASS

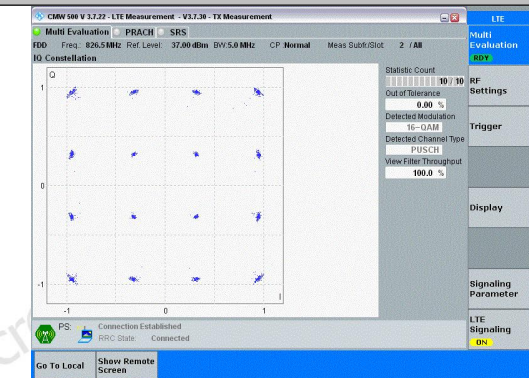


Band26(824-849)-5MHz-16QAM-26815-25RB#0-P
ASS

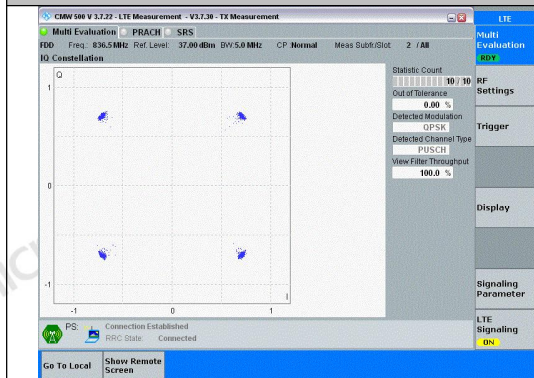


Band26(824-849)-5MHz-QPSK-26915-25RB#0-P
ASS

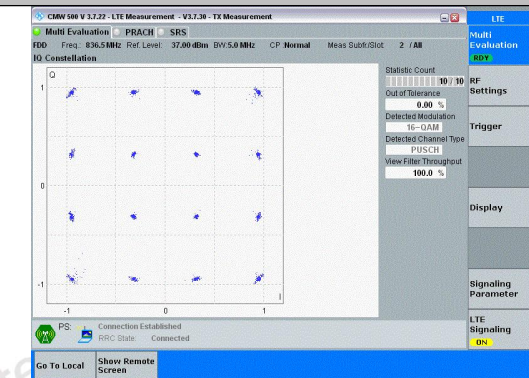

Band26(824-849)-5MHz-16QAM-26915-25RB#0-P
ASS

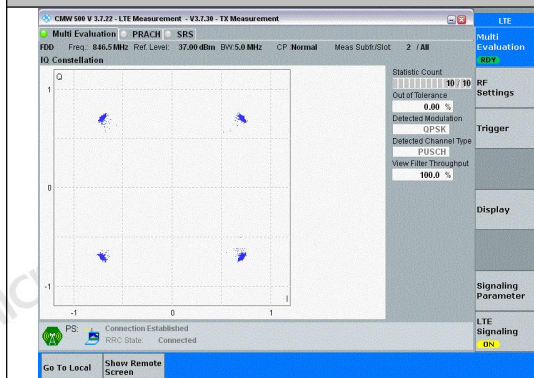

Band26(824-849)-5MHz-QPSK-27015-25RB#0-P
ASS

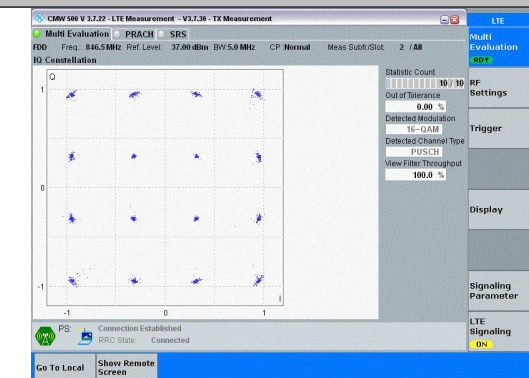

Band26(824-849)-5MHz-16QAM-27015-25RB#0-P
ASS