

3.2 x 1.6 x 1.2 (mm) WiFi/Bluetooth Ceramic Chip Antenna (YF300E) Engineering Specification

1. Product Number

YF 3216 F6 R 2G45

1 2 3 4 5



(1)Product Type	Chip Antenna
(2) Size Code	3.2x1.6mm
(3) Type Code	F6
(4) Packing	Tape and reel
(5) Frequency	2.45GHz



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO.,LTD

Prepared by : **harry**

Designed by : **andy**

Checked by : **andy**

Approved by: **oliver**

TITLE: 3.2x1.6 x 1.2mm) WiFi/Bluetooth Ceramic Chip
Antenna (YF300E) Engineering Specification

**DOCUMENT
NO.**

YF3216F6R2G45

**REV.
C**

2. Features

- *Stable and reliable in performances
- *Low temperature coefficient of frequency
- *Low profile, compact size
- *RoHS compliance
- *SMT processes compatible

3. Applications

- *Bluetooth earphone systems
- *Hand-held devices when WiFi /Bluetooth functions are needed, e.g., Smart phone.
- *IEEE802.11 b/g/n
- *ZigBee
- *Wireless PCMCIA cards or USB dongle

4. Description

Ying feng chip antenna series are specially designed for WiFi/Bluetooth applications. Based on yingfeng proprietary design and processes, this chip antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.

5. Electrical Specifications (40 x 40 mm² ground plane)

5-1. Electrical Table

Characteristics		Specifications	Unit
Outline Dimensions		3.2x1.6x1.2	mm
Working Frequency		2400~2500	MHz
VSWR		2 Max.	
Impedance		50	Ω
Polarization		Linear Polarization	
Gain	Peak	3(typical)	dBi
	Efficiency	76 (typical)	%



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by : harry

Designed by : andy

Checked by : andy

Approved by: oliver

TITLE: 3.2x1.6 x 1.2mm) WiFi/Bluetooth Ceramic Chip
Antenna (YF300E) Engineering Specification


DOCUMENT
NO.

YF3216F6R2G45

REV.
C

5-2. Return Loss & VSWR

Return Loss (S_{11})

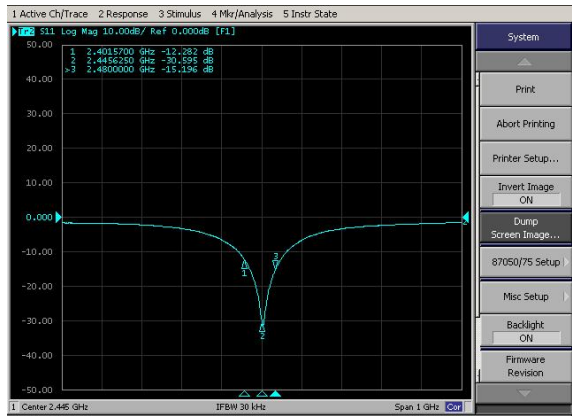

VSWR(S_{11})




6 Outline Dimensions of Antenna & Evaluation Board (unit: mm)

6-1. Antenna Dimensions

Configuration and Dimensions:

Dimension and Terminal Configuration

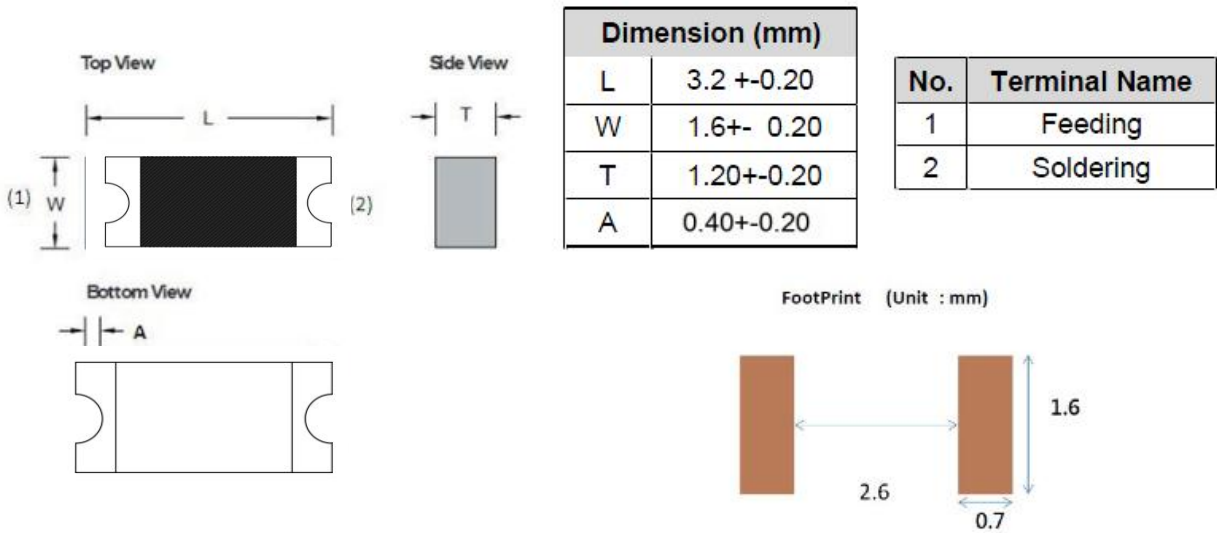

深圳市迎丰天线技术有限公司
SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by : harry

Designed by : andy

Checked by : andy


Approved by : oliver

TITLE: 3.2x1.6 x 1.2mm WiFi/Bluetooth Ceramic Chip Antenna (YF300E) Engineering Specification

DOCUMENT NO.


YF3216F6R2G45

REV. C

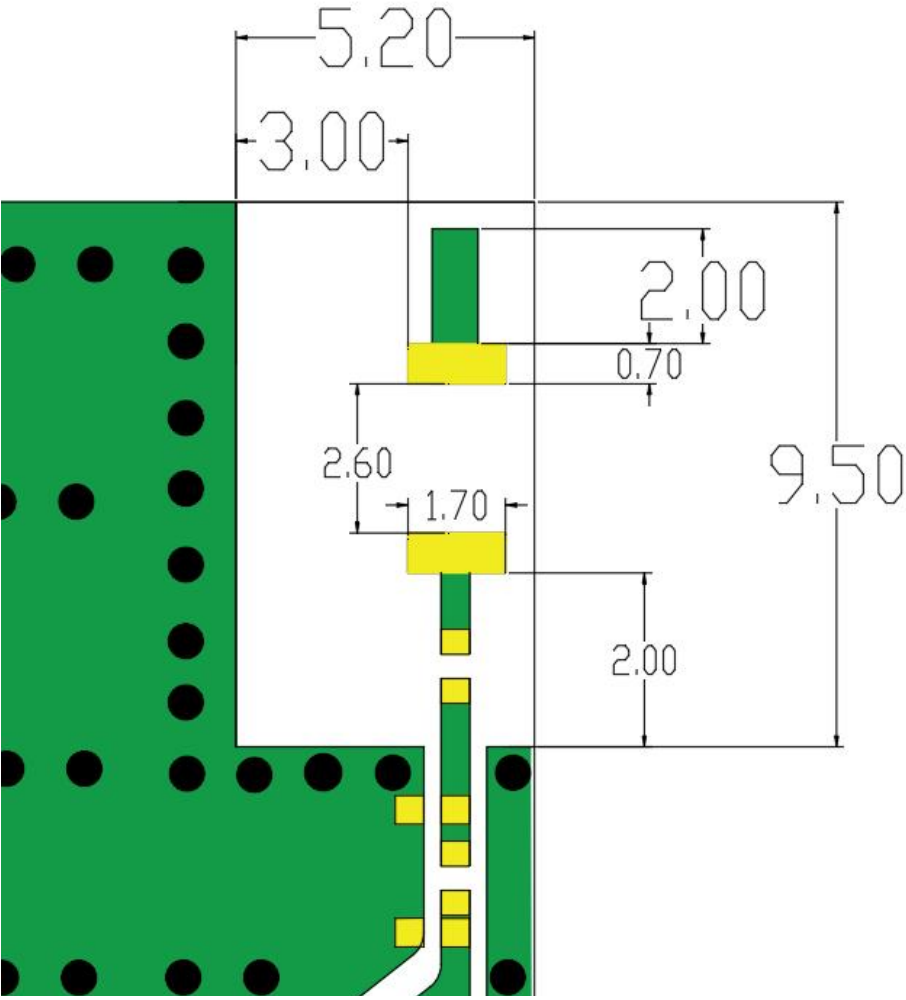

6-2-2. Matching Circuit:

With the following recommended values of matching and tuning components, the center frequencies will be about 2450 MHz at our standard 40x40 mm² evaluation board. However, these are reference values, may need to be changed when the circuit boards or part vendors are different.

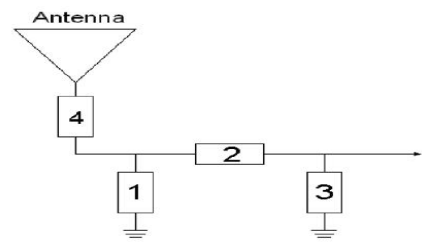

System Matching Circuit Component		
Location	Description	Vendor
1	N/A*	-
2	3.3nH, (0402)	DARFON
3	1.5pF, (0402)	MURATA
4	0Ω, (0402)	-



深圳市迎丰天线技术有限公司
SHEN ZHEN YINGFENG ANTENNA TECHNOLOYCO.,LTD


Prepared by : **harry** Designed by : **andy** Checked by : **andy** Approved by: **oliver**

TITLE: 3.2x1.6 x 1.2mm) WiFi/Bluetooth Ceramic Chip Antenna (YF300E) Engineering Specification	DOCUMENT NO.	YF3216F6R2G45	REV.
			C

PAGE 4 OF 10

EvaluationBoardReference

PCBDimension&AntennaLayoutReference

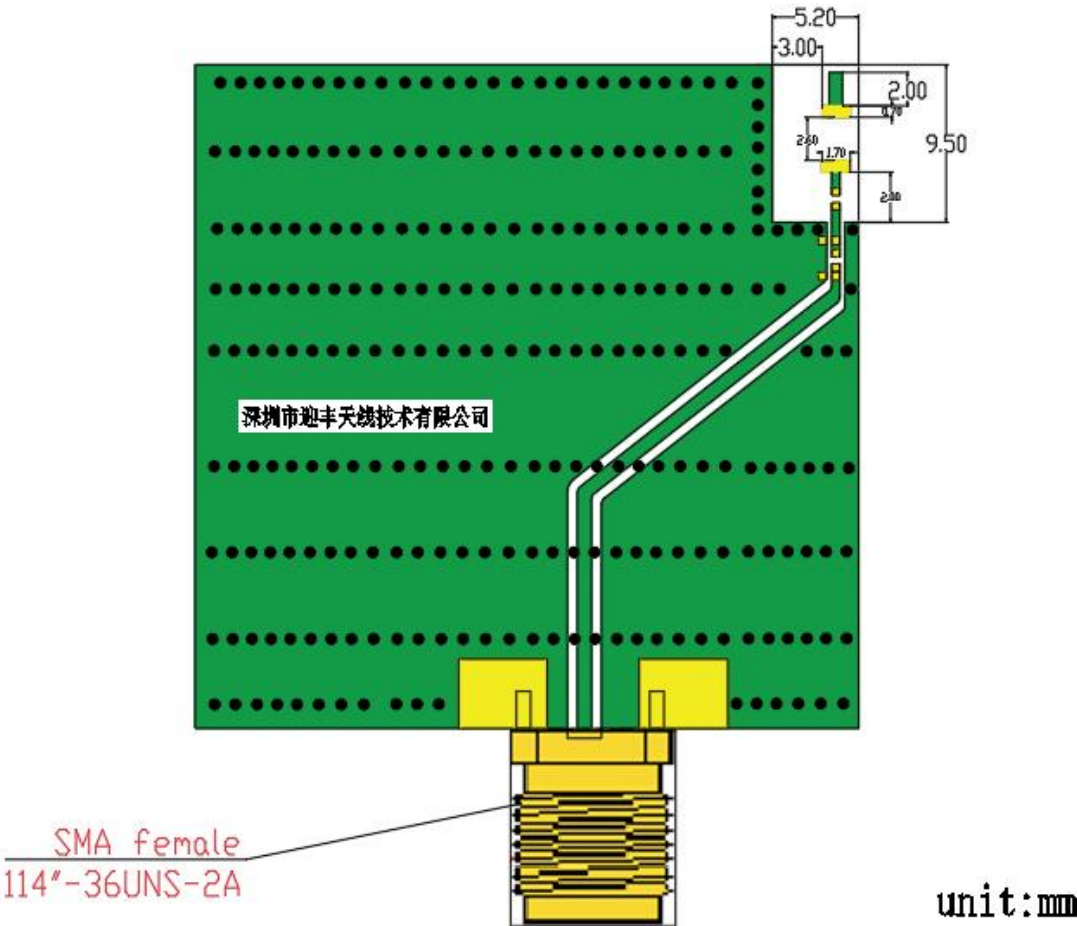

深圳市迎丰天线技术有限公司
SHEN ZHEN YINGFENG ANTENNA TECHNOLOYCO.,LTD

Prepared by : harry

Designed by : andy

Checked by : andy

Approved by: oliver

TITLE: 3.2x1.6 x 1.2mm) WiFi/Bluetooth Ceramic Chip
Antenna (YF300E) Engineering Specification



DOCUMENT
NO.

YF3216F6R2G45

REV.
C

7.Radiation Pattern (40x 40 mm² ground plane)

7-1. 3D Gain Pattern @ 2400 MHz

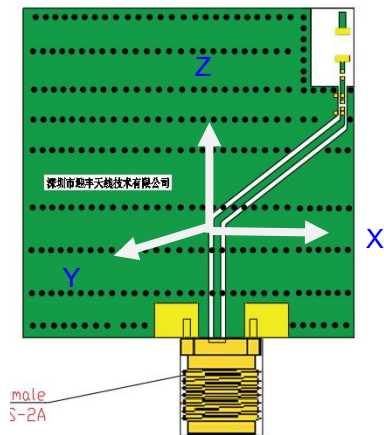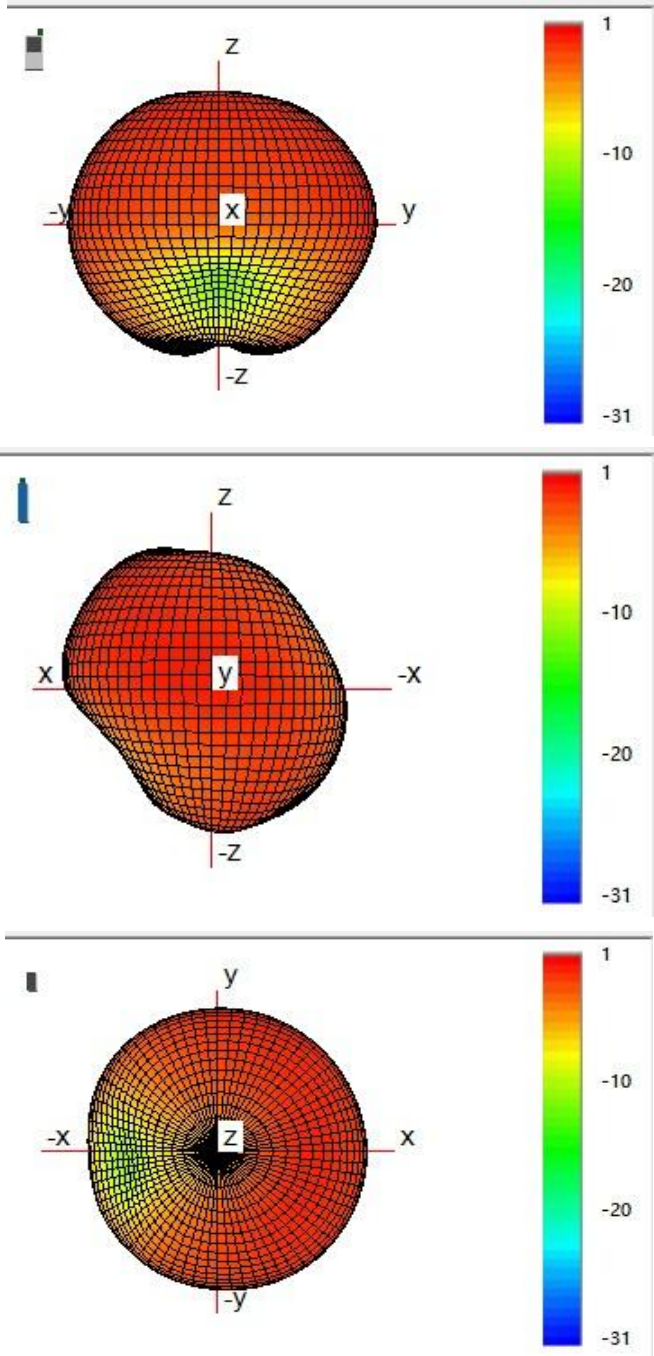

深圳市迎丰天线技术有限公司
SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by : harry

Designed by : andy

Checked by : andy

Approved by: oliver

TITLE: 3.2x1.6 x 1.2mm) WiFi/Bluetooth Ceramic Chip
Antenna (YF300E) Engineering Specification


DOCUMENT
NO.

YF3216F6R2G45

REV.
C

7.Radiation Pattern (40x 40 mm² ground plane)

7-2. 3D Gain Pattern @ 2450 MHz

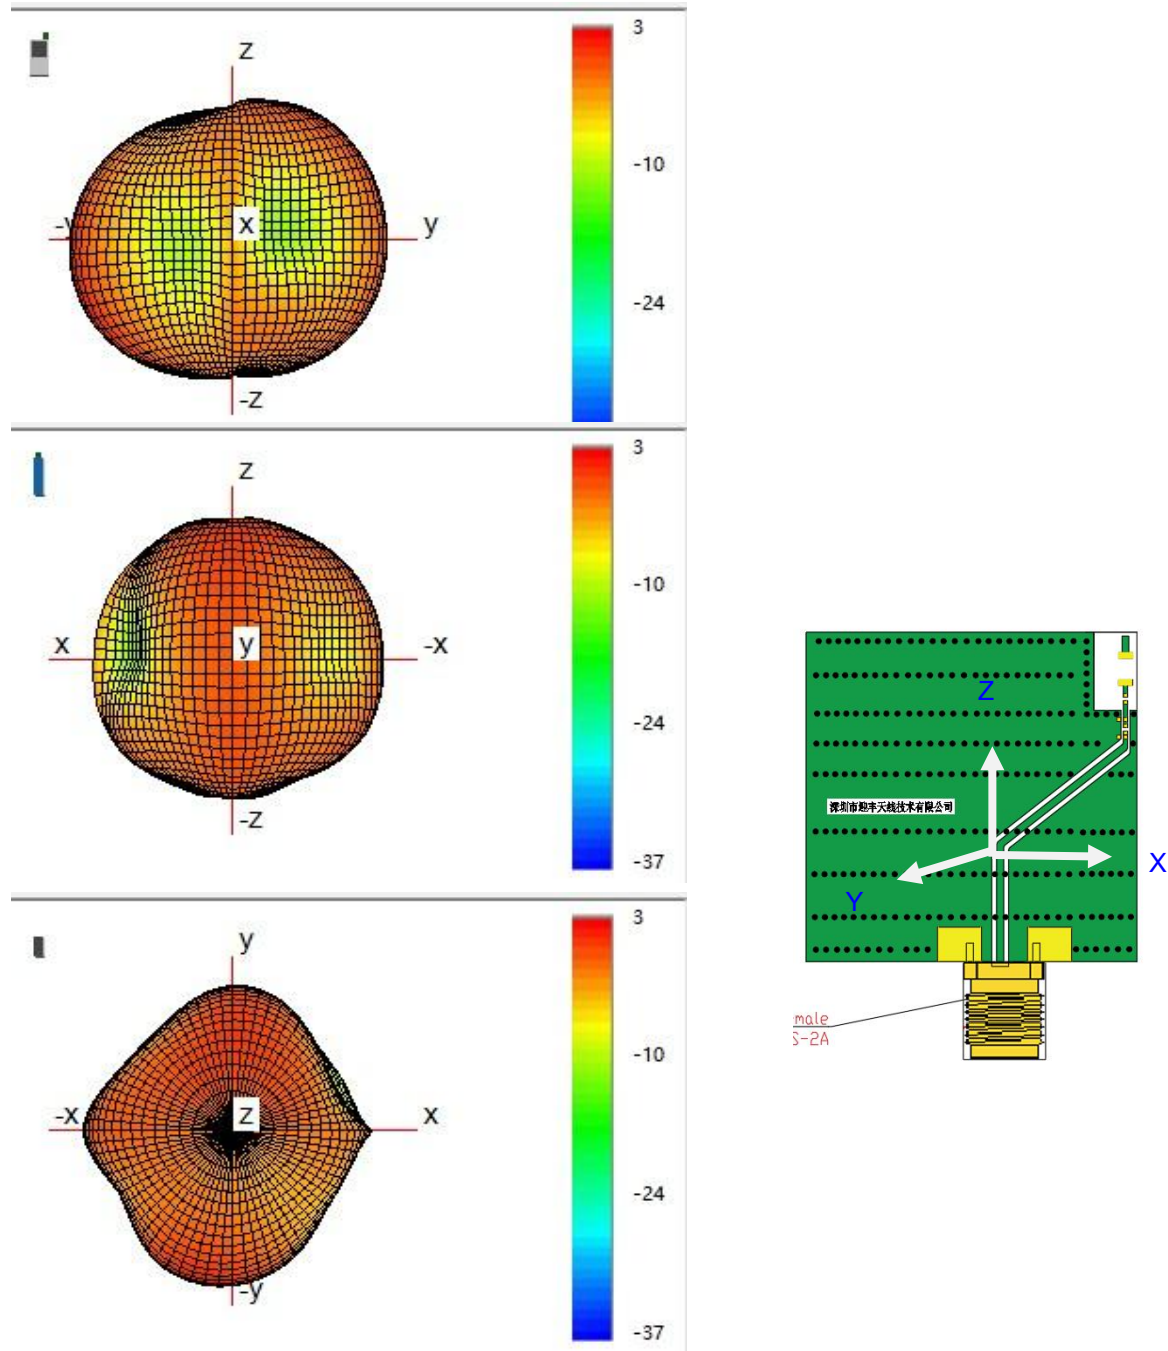

深圳市迎丰天线技术有限公司
SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by : **harry**

Designed by : **andy**

Checked by : **andy**

Approved by: **oliver**



TITLE: 3.2x1.6 x 1.2mm) WiFi/Bluetooth Ceramic Chip
Antenna (YF300E) Engineering Specification

**DOCUMENT
NO.**

YF3216F6R2G45

**REV.
C**

7-3. 3D Gain Pattern @ 2500 MHz

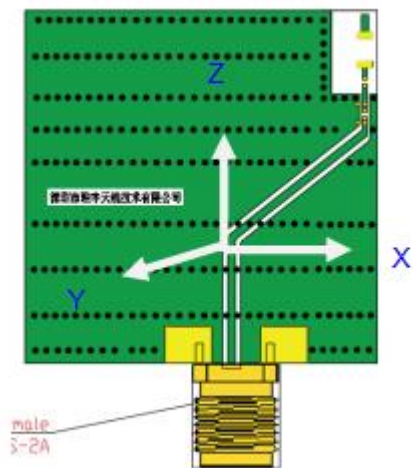
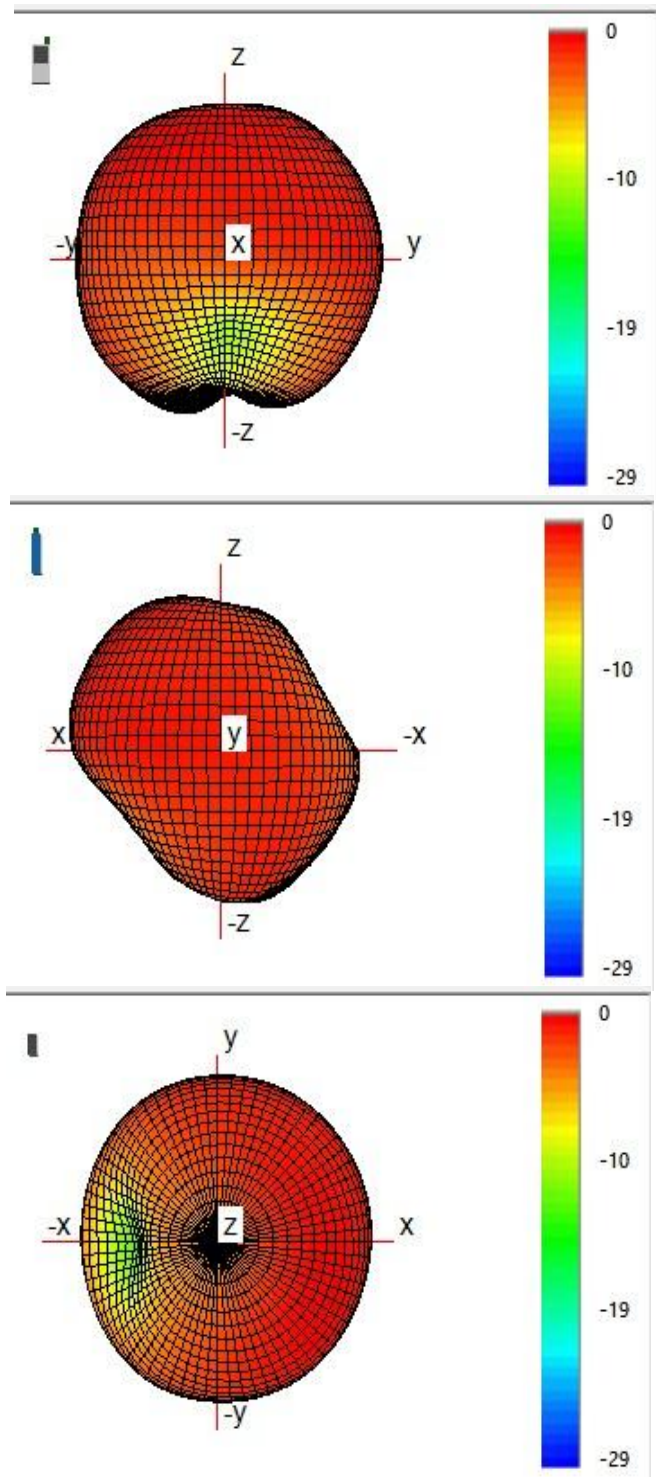


深圳市迎丰天线技术有限公司
SHEN ZHEN YINGFENG ANTENNA TECHNOLOYCO.,LTD

Prepared by : harry Designed by : andy Checked by : andy Approved by : oliver

TITLE: 3.2x1.6 x 1.2mm) WiFi/Bluetooth Ceramic Chip Antenna (YF300E) Engineering Specification	DOCUMENT NO.	YF3216F6R2G45	REV.
			C
		PAGE 8	OF 10

Taping Specifications

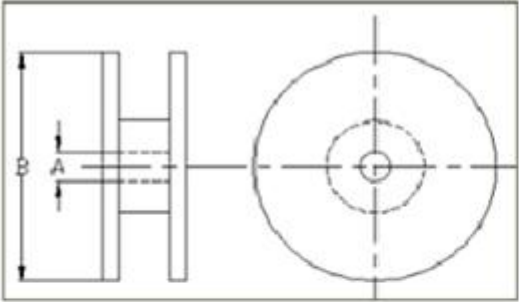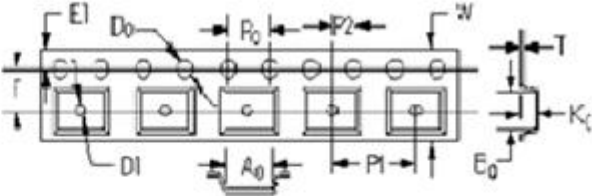Reel			Taping Blister Tape		
					
Checking note	Index	Spec (mm)	Checking note	Index	Spec (mm)
Internal diameter of reel	A	60.20 ± 0.50	Sprocket hole	D0	1.50 +0.10/-0.00
External diameter of reel	B	178 ± 1.00	Distance sprocket hole to outside	E1	1.75 ± 0.10
			Distance sprocket hole to pocket	F	5.50 ± 0.05
			Distance sprocket hole to sprocket hole	P0	4.00 ± 0.10
			Distance pocket to pocket	P1	4.00 ± 0.10
			Distance sprocket hole to pocket	P2	2.00 ± 0.05
Quantity/per reel	3000 pcs		Tape width	W	12.00 +0.30/-0.10
Tape material	Plastic (embossed)		Pocket width nominal clearance	A0	2.28 ± 0.13
			Pocket length nominal clearance	B0	5.70 ± 0.13
			Pocket depth minimum clearance	K0	1.58 ± 0.10
			Thickness of tape	T	0.23 ± 0.02



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by : **harry**

Designed by : **andy**

Checked by : **andy**

Approved by: **oliver**

TITLE: 3.2x1.6 x 1.2mm) WiFi/Bluetooth Ceramic Chip Antenna (YF300E) Engineering Specification

DOCUMENT NO.

YF3216F6R2G45

REV. C

Reliability Table

Test Item	Procedure	Requirements Ceramic Type	Remark (Reference)
Electrical Characterization		Fulfill the electrical specification	User Spec.
Thermal Shock	1. Preconditioning: 50 ± 10℃ / 1 hr , then keep for 24 ± 1 hrs at room temp. 2. Initial measure: Spec: refer Initial spec. 3. Rapid change of temperature test: -30℃ to +85℃; 100 cycles; 15 minutes at Lower category temperature; 15 minutes at Upper category temperature.	No Visible Damage. Fulfill the electrical specification.	MIL-STD-202 107
Temperature Cycling	1. Initial measure: Spec: refer Initial spec. 2. 100 Cycles (-30℃ to +85℃), Soak Mode=1 (2 Cycle/hours). 3. Measurement at 24 ± 2Hours after test condition.	No Visible Damage. Fulfill the electrical specification.	JESD22 JA104
High Temperature Exposure	1. Initial measure: Spec: refer Initial spec. 2. Unpowered; 500hours @ T=+85℃. 3. Measurement at 24 ± 2 hours after test.	No Visible Damage. Fulfill the electrical specification.	MIL-STD-202 108
Low Temperature Storage	1. Initial measure: Spec: refer Initial spec. 2. Unpowered: 500hours @ T= -30℃. 3. Measurement at 24 ± 2 hours after test.	No Visible Damage. Fulfill the electrical specification.	MIL-STD-202 108
Solderability (SMD Bottom Side)	Dipping method: a. Temperature: 235 ± 5℃ b. Dipping time: 3 ± 0.5s	The solder should cover over 95% of the critical area of bottom side.	IEC 60384-21/22 4.10
Soldering Heat Resistance (RSH)	Preheating temperature: 150 ± 10℃. Preheating time: 1~2 min. Solder temperature: 260 ± 5℃. Dipping time: 5 ± 0.5s	No Visible Damage.	IEC 60384-21/22 4.10
Vibration	5g's for 20 min., 12 cycles each of 3 orientations Note: Use 8"X5" PCB .031" thick 7 secure points on, one long side and 2 secure points at corners of opposite sides. Parts mounted within 2" from any secure point. Test from 10-2000 Hz	No Visible Damage.	MIL-STD-202 Method 204
Mechanical Shock	Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks) Peak value: 1,500g's Duration: 0.5ms Velocity change: 15.4 ft/s Waveform: Half-sine	No Visible Damage.	MIL-STD-202 Method 213
Humidity Bias	1. Humidity: 85% R.H., Temperature: 85 ± 2 °C. 2. Time: 500 ± 24 hours. 3. Measurement at 24 ± 2hrs after test condition.	No Visible Damage. Fulfill the electrical specification.	MIL-STD-202 Method 106



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by : **harry**

Designed by : **andy**

Checked by : **andy**

Approved by : **oliver**

TITLE: 3.2x1.6 x 1.2mm) WiFi/Bluetooth Ceramic Chip
Antenna (YF300E) Engineering Specification

**DOCUMENT
NO.**

YF3216F6R2G45

**REV.
C**