

TEST REPORT

Report No.: BCTC2508346815-1E

Applicant: Sharge Technology (Shenzhen) Co., Ltd.

Product Name: StangMag 15000 Power Bank

Test Model: E5

Tested Date: 2025-08-28 to 2025-10-13

Issued Date: 2025-10-13

Shenzhen **BCTC** Testing Co., Ltd.



FCC ID: 2BB2Z-E5

Product Name: StangMag 15000 Power Bank
SHARGE

Trademark: 

Model/Type Reference: E5

Prepared For: Sharge Technology (Shenzhen) Co., Ltd.
Room 305, Floor 3, Xinzhongtai Industrial Park, Building 3, Hengfeng Residential Quarter, Yousong Community, Longhua Sub-District, Longhua District, Shenzhen, Guangdong, China.

Address: Sharge Technology (Shenzhen) Co., Ltd.
Room 305, Floor 3, Xinzhongtai Industrial Park, Building 3, Hengfeng Residential Quarter, Yousong Community, Longhua Sub-District, Longhua District, Shenzhen, Guangdong, China.

Manufacturer: Sharge Technology (Shenzhen) Co., Ltd.
Room 305, Floor 3, Xinzhongtai Industrial Park, Building 3, Hengfeng Residential Quarter, Yousong Community, Longhua Sub-District, Longhua District, Shenzhen, Guangdong, China.

Address: Shenzhen BCTC Testing Co., Ltd.
1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2025-08-28

Sample Tested Date: 2025-08-28 to 2025-10-13


Issue Date: 2025-10-13

Report No.: BCTC2508346815-1E

Test Standards: FCC Part15.209
ANSI C63.10:2013

Test Results: PASS

Tested by:



Shanshan. Zhang / Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	4
2. Test Summary	5
3. Measurement Uncertainty	6
4. Product Information And Test Setup	7
4.1 Product Information	7
4.2 Support Equipment	7
4.3 Test Setup Configuration	8
4.4 Test Mode	9
5. Test Facility And Test Instrument Used	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. Conducted Emissions	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 EUT operating Conditions	12
6.5 Test Result	13
7. Radiated Emissions	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	16
7.3 Test procedure	16
7.4 Test Result	17
8. Bandwidth Test	27
8.1 Test Procedure	27
8.2 Test Setup	27
8.3 Test Result	28
9. Antenna Requirements	29
9.1 Limit	29
9.2 Test Result	29
10. EUT Photographs	30
11. EUT Test Setup Photographs	31

(Note: N/A Means Not Applicable)

1. Version

Report No.	Issue Date	Description	Approved
BCTC2508346815-1E	2025-10-13	Original	Valid

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Conducted Emission	15.207	PASS
2	Radiated Emission	15.209	PASS
3	20dB Bandwidth	15.215	PASS
4	Antenna Requirement	15.203	PASS



3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	Conducted Emission (150kHz-30MHz)	U=3.2dB
3	humidity uncertainty	U=5.3%
4	Temperature uncertainty	U=0.59°C

CO., LTD.

4. Product Information And Test Setup

4.1 Product Information

Model/Type Reference: E5
 Model Differences: N/A
 Hardware Version: N/A
 Software Version: N/A
 Modulation: ASK
 Operation Frequency: 115kHz-205kHz; 360kHz
 Antenna installation: loop coil antenna
 Ratings: USB-C1/ USB-C2 Input: DC 5V/3A, DC 9V/3A, DC 12V/3A, DC 15V/3A, DC 20V/3.25A
 USB-C1/ USB-C2 Output: DC 5V/3A, DC 9V/3A, DC 12V/3A, DC 15V/3A, DC 20V/5A
 USB-A Output: DC 5V/3A, DC 9V/2A, DC 10V/2.25A, DC 12V/1.75A
 Wireless Charging Output: 15W(Max)
 Battery: DC 11.1V

4.2 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	StangMag 15000 Power Bank	SHARGE	E5	N/A	EUT
E-2	Adapter	UGREEN	CD289	N/A	Auxiliary
E-3	Dummy load	--	DL01	N/A	Auxiliary

Notes:


1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.3 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.


Conducted Emission:

Test Mode 1, 5

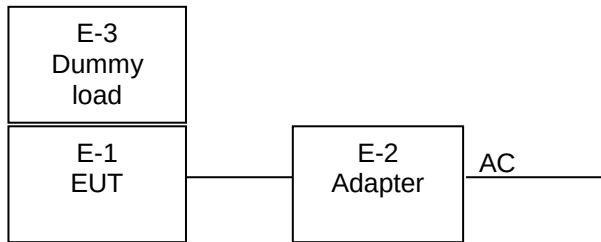


Radiated Spurious Emission:

Test Mode 1, 5

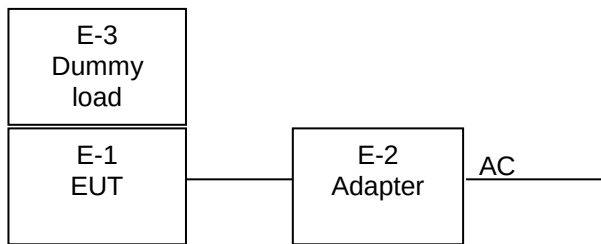

Test Mode 2-4



4.4 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

AC Mode	Mode 1	Charging+Type-C 5V/2A+USB-A 5V/1A+15W(360kHz)
	Mode 5	Charging+Type-C 5V/2A+USB-A 5V/1A+5W(115-205kHz)
DC Mode	Mode 2	Type-C 5V/1A*2+USB-A 5V/1A+15W(360kHz)
	Mode 3	Type-C 5V/1A*2+USB-A 5V/1A+7.5W(115-205kHz)
	Mode 4	Type-C 5V/1A*2+USB-A 5V/1A+5W(115-205kHz)

Note: All test mode were tested and passed, only shows the worst case mode which were recorded in this report.

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583

ISED CAB identifier: CN0017

5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 08, 2025	May 07, 2026
LISN	R&S	ENV216	101375	May 14, 2025	May 13, 2026
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Pulse limiter	Schwarzbeck	VTSD9561-F	01323	May 14, 2025	May 13, 2026


RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power Meter	Keysight	E4419	\	May 14, 2025	May 13, 2026
Power Sensor (AV)	Keysight	E9300A	\	May 14, 2025	May 13, 2026
Signal Analyzer 20kHz-26.5G Hz	Keysight	N9020A	MY49100060	May 14, 2025	May 13, 2026
Spectrum Analyzer 9kHz-40GHz	R&S	FSP 40	100363	May 14, 2025	May 13, 2026

Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 15, 2023	May 14, 2026
Receiver	R&S	ESR3	102075	May 08, 2025	May 07, 2026
Receiver	R&S	ESRP	101154	May 14, 2025	May 13, 2026
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 14, 2025	May 13, 2026
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 24, 2025	May 23, 2026
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 24, 2025	May 23, 2026
Amplifier	SKET	LAPA_01G1 8G-45dB	SK2021040901	May 14, 2025	May 13, 2026
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 24, 2025	May 23, 2026
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 24, 2025	May 23, 2026
Horn Antenna(18G Hz-40GHz)	Schwarzbeck	BBHA9170	00822	May 24, 2025	May 23, 2026
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 14, 2025	May 13, 2026
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

STING
ED

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

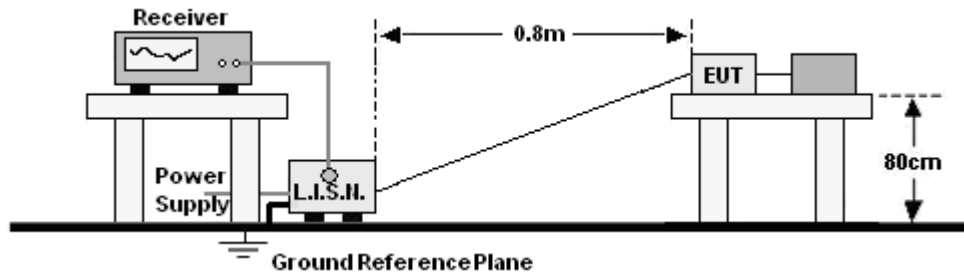

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:
1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

Temperature:	24.0 °C	Relative Humidity:	57%RH
Pressure:	101KPa	Phase :	L
Test Mode:	Mode 1(Worst case mode)	Test Voltage:	AC 120V/60Hz

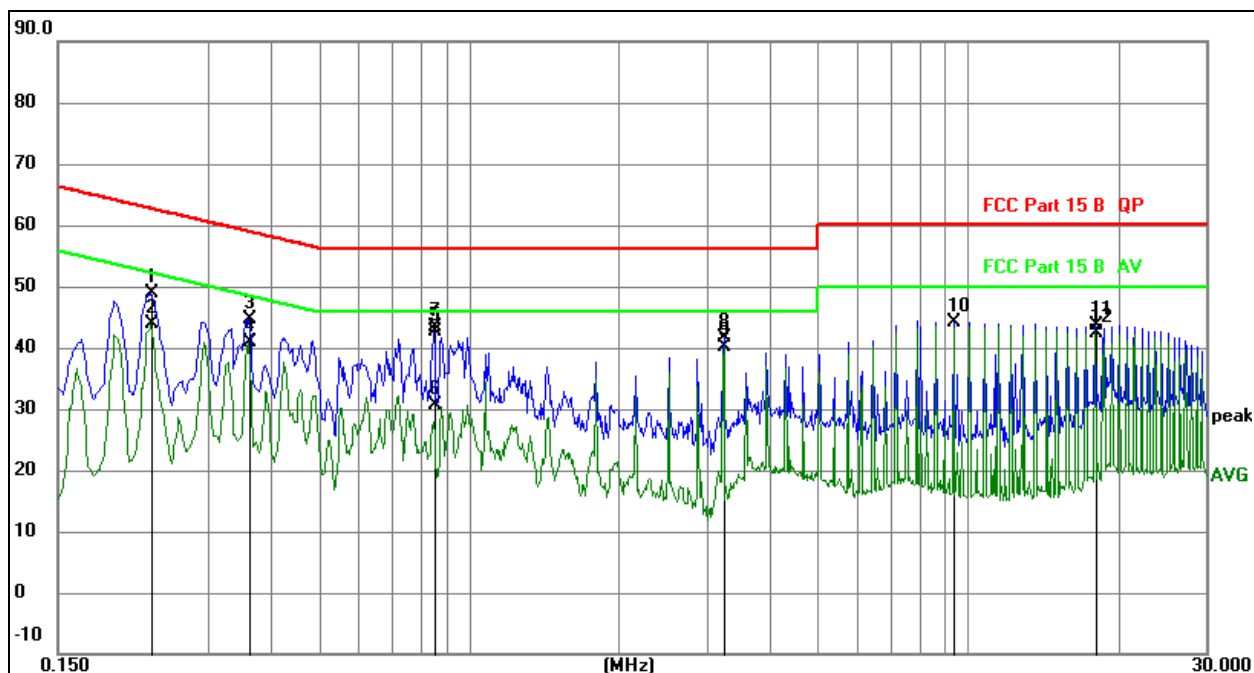


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2304	28.86	20.04	48.90	62.44	-13.54	QP
2		0.2304	23.75	20.04	43.79	52.44	-8.65	AVG
3		0.3615	24.54	20.05	44.59	58.69	-14.10	QP
4		0.3615	20.71	20.05	40.76	48.69	-7.93	AVG
5		0.8483	22.41	20.26	42.67	56.00	-13.33	QP
6		0.8483	10.49	20.26	30.75	46.00	-15.25	AVG
7	*	0.8483	23.14	20.26	43.40	46.00	-2.60	AVG
8		3.2411	21.11	20.45	41.56	56.00	-14.44	QP
9		3.2411	19.70	20.45	40.15	46.00	-5.85	AVG
10		9.3518	22.84	21.26	44.10	60.00	-15.90	QP
11		17.9441	20.54	23.13	43.67	60.00	-16.33	QP
12		17.9441	19.15	23.13	42.28	50.00	-7.72	AVG

Temperature:	24.0 °C	Relative Humidity:	57%RH
Pressure:	101KPa	Phase :	N
Test Mode:	Mode 1(Worst case mode)	Test Voltage:	AC 120V/60Hz

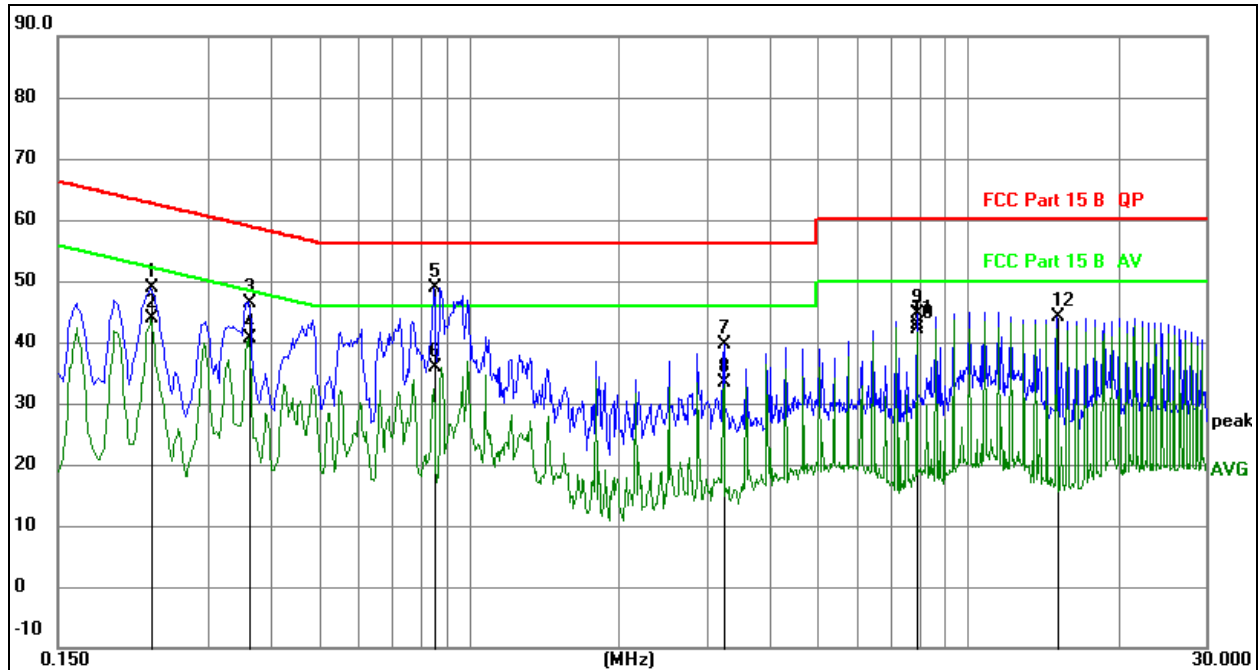
Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2310	28.75	20.04	48.79	62.41	-13.62	QP
2		0.2310	23.96	20.04	44.00	52.41	-8.41	AVG
3		0.3615	26.45	20.05	46.50	58.69	-12.19	QP
4		0.3615	20.54	20.05	40.59	48.69	-8.10	AVG
5	*	0.8520	28.66	20.26	48.92	56.00	-7.08	QP
6		0.8520	15.54	20.26	35.80	46.00	-10.20	AVG
7		3.2415	19.24	20.45	39.69	56.00	-16.31	QP
8		3.2415	12.98	20.45	33.43	46.00	-12.57	AVG
9		7.9215	23.51	21.06	44.57	60.00	-15.43	QP
10		7.9215	21.04	21.06	42.10	50.00	-7.90	AVG
11		7.9215	21.71	21.06	42.77	50.00	-7.23	AVG
12		15.1215	21.51	22.51	44.02	60.00	-15.98	QP


7. Radiated Emissions

7.1 Block Diagram Of Test Setup

(A) Radiated Emission Test-Up Frequency Below 30MHz

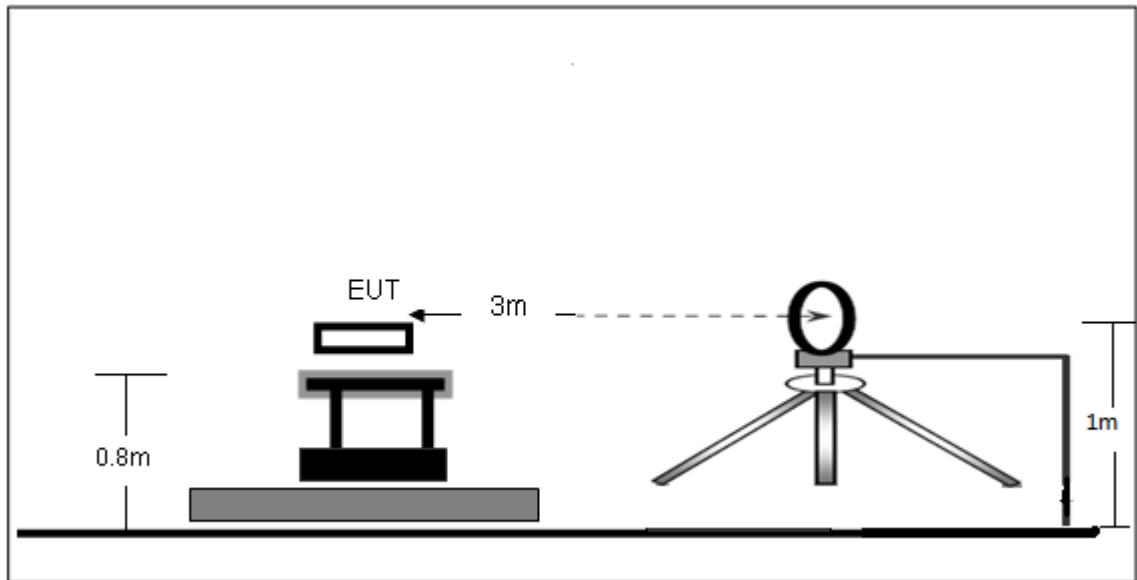

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

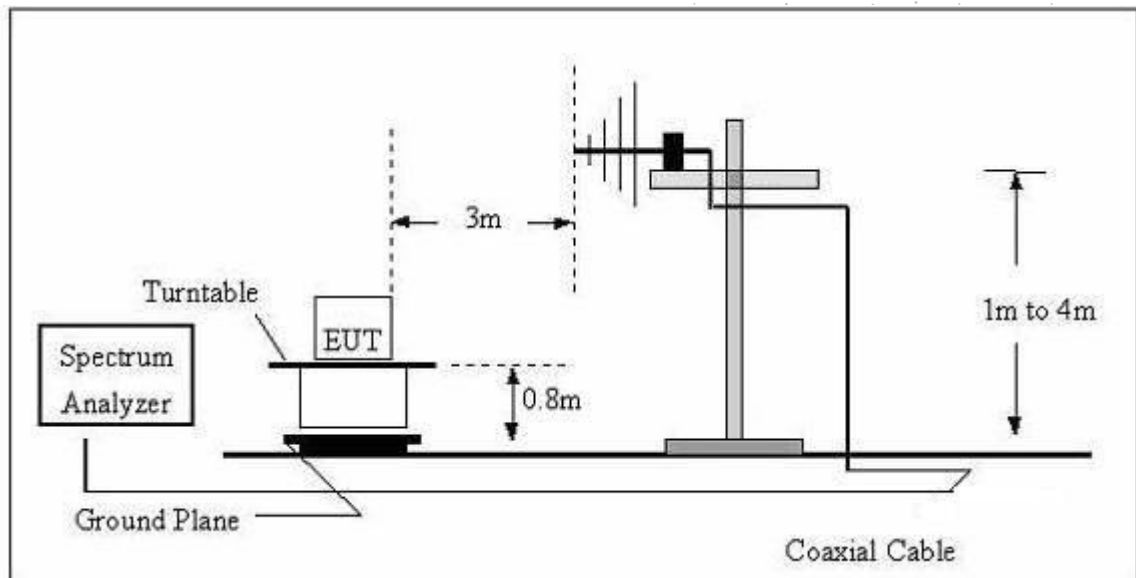

7.2 Limit

FCC §15.209; §15.205.

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz~1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz~30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel.

Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 Test Result


9kHz-30MHz

Temperature:	26.2℃	Relative Humidity:	54%RH
Pressure:	101 kPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 1	Polarization:	Coplanar(the worst mode)

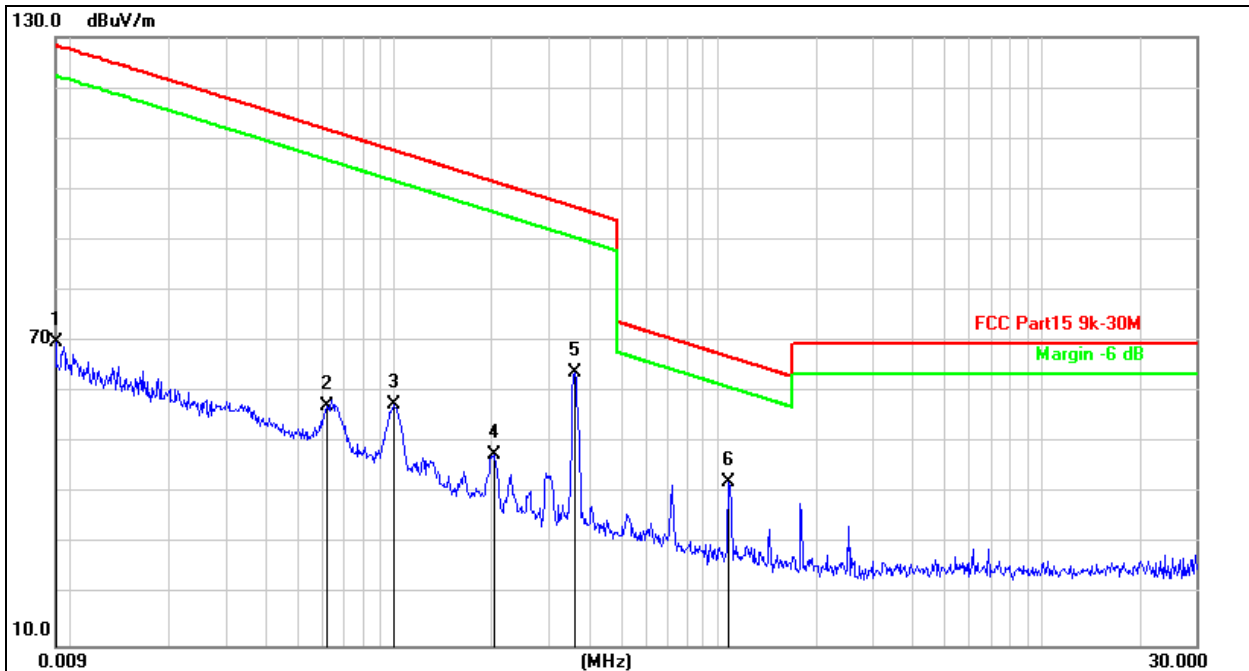

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		0.0090	77.72	-7.98	69.74	128.52	-58.78	Peak
2		0.0620	64.75	-7.53	57.22	111.76	-54.54	Peak
3		0.0993	65.10	-7.49	57.61	107.67	-50.06	Peak
4		0.2028	55.47	-7.78	47.69	101.46	-53.77	Peak
5		0.3607	71.42	-7.67	63.75	96.46	-32.71	Peak
6	*	1.0783	49.74	-7.36	42.38	66.97	-24.59	Peak

Temperature:	26.2°C	Relative Humidity:	54%RH
Pressure:	101 kPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 5	Polarization:	Coplanar(the worst mode)

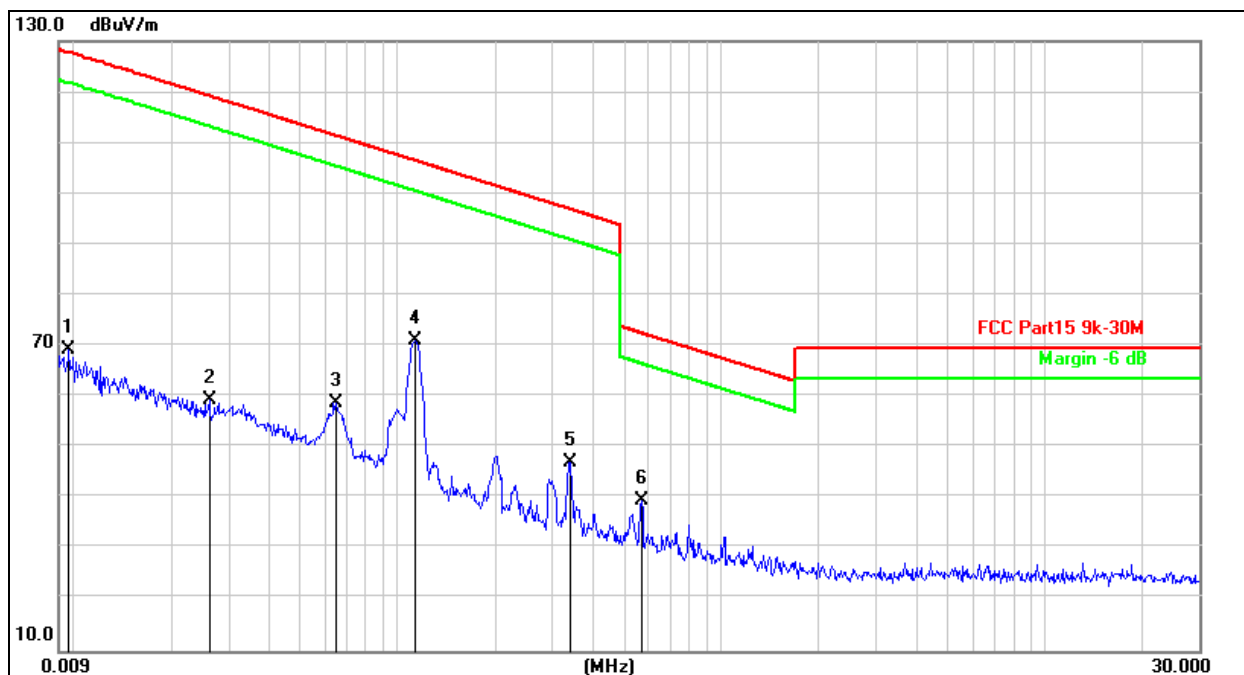

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		0.0097	76.77	-7.61	69.16	127.87	-58.71	Peak
2		0.0263	66.83	-7.45	59.38	119.21	-59.83	Peak
3		0.0646	66.27	-7.58	58.69	111.4	-52.71	Peak
4		0.1131	78.68	-7.51	71.17	106.54	-35.37	Peak
5		0.3407	54.78	-7.68	47.10	96.96	-49.86	Peak
6	*	0.5681	46.92	-7.50	39.42	72.52	-33.10	Peak


CO., LTD.

Temperature:	26.2°C	Relative Humidity:	54%RH
Pressure:	101 kPa	Test Voltage:	DC 11.1V
Test Mode:	Mode 2	Polarization:	Coplanar(the worst mode)



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		0.0092	77.36	-7.88	69.48	128.33	-58.85	Peak
2		0.0631	62.06	-7.55	54.51	111.6	-57.09	Peak
3		0.1287	53.32	-7.54	45.78	105.41	-59.63	Peak
4		0.3607	70.82	-7.67	63.15	96.46	-33.31	Peak
5	*	1.0783	49.17	-7.36	41.81	66.97	-25.16	Peak
6		5.4174	36.15	-7.09	29.06	69.54	-40.48	Peak


Temperature:	26.2°C	Relative Humidity:	54%RH
Pressure:	101 kPa	Test Voltage:	DC 11.1V
Test Mode:	Mode 3	Polarization:	Coplanar(the worst mode)

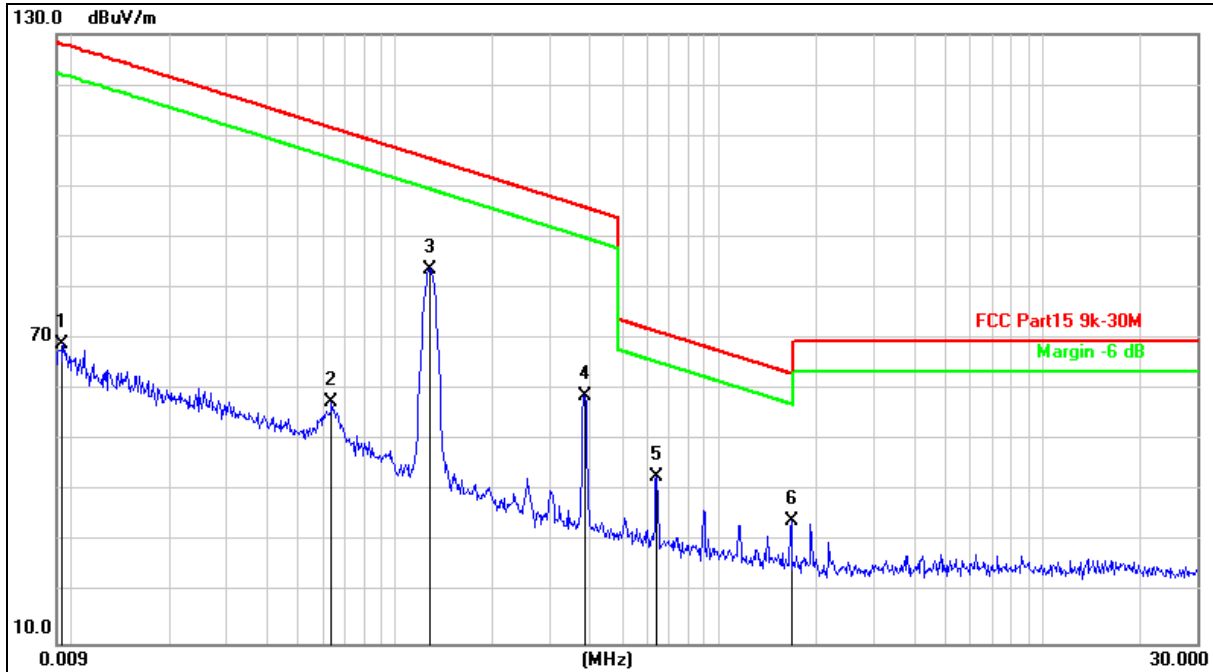

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		0.0094	76.63	-7.77	68.86	128.14	-59.28	Peak
2		0.0636	65.06	-7.56	57.50	111.54	-54.04	Peak
3	*	0.1276	91.27	-7.54	83.73	105.49	-21.76	Peak
4		0.3849	66.49	-7.65	58.84	95.90	-37.06	Peak
5		0.6416	50.27	-7.42	42.85	71.47	-28.62	Peak
6		1.6710	41.37	-7.33	34.04	63.17	-29.13	Peak

Between 30MHz – 1GHz

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Phase:	Horizontal
Test Mode:	Mode 1(the worst mode)	Test Voltage:	AC 120V/60Hz

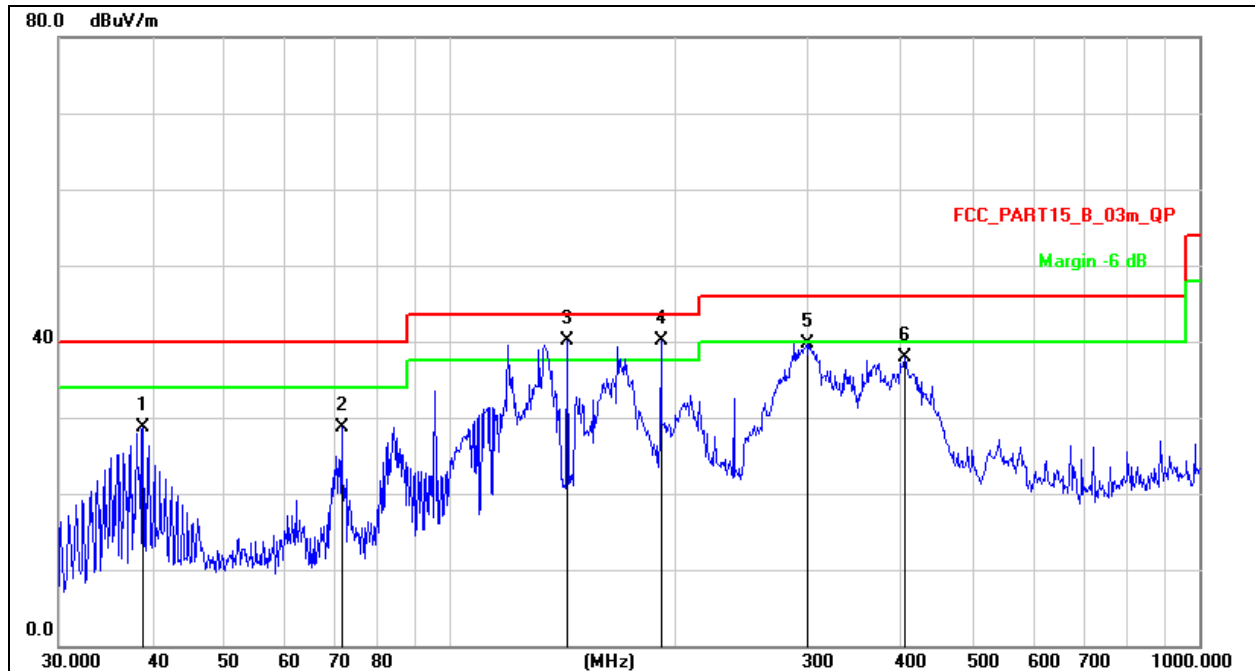


Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		38.8878	42.90	-14.18	28.72	40.00	-11.28	QP
2		71.5806	45.11	-16.41	28.70	40.00	-11.30	QP
3	!	143.3260	57.27	-17.22	40.05	43.50	-3.45	QP
4	*	191.0738	55.16	-14.97	40.19	43.50	-3.31	QP
5		299.3158	51.68	-12.02	39.66	46.00	-6.34	QP
6		404.6665	47.24	-9.31	37.93	46.00	-8.07	QP

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 1(the worst mode)	Test Voltage:	AC 120V/60Hz

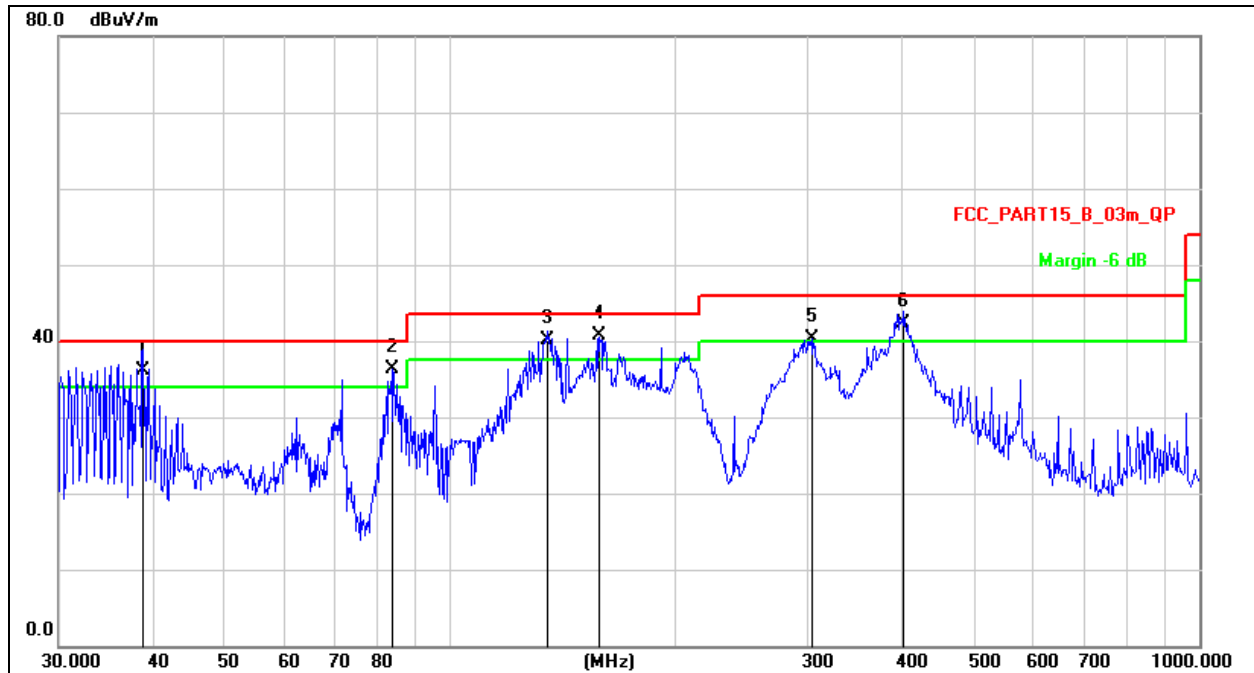


Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	!	38.8878	50.33	-14.18	36.15	40.00	-3.85	QP
2	!	83.5221	52.06	-15.69	36.37	40.00	-3.63	QP
3	!	134.5592	56.89	-16.73	40.16	43.50	-3.34	QP
4	*	158.1123	57.71	-17.08	40.63	43.50	-2.87	QP
5	!	303.5437	52.31	-11.91	40.40	46.00	-5.60	QP
6	!	403.2500	51.70	-9.34	42.36	46.00	-3.64	QP

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 5(the worst mode)	Test Voltage:	AC 120V/60Hz

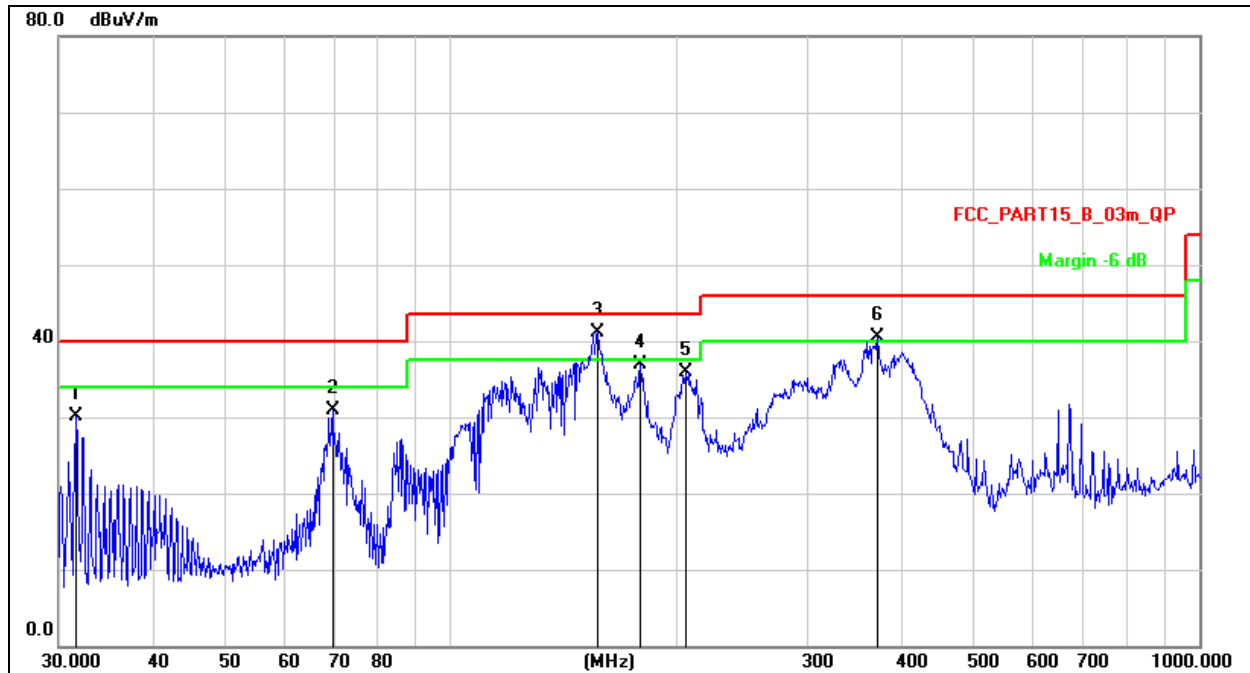


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		31.6202	45.17	-15.01	30.16	40.00	-9.84	QP
2		69.6005	47.36	-16.43	30.93	40.00	-9.07	QP
3	*	157.0074	58.22	-17.15	41.07	43.50	-2.43	QP
4		179.3863	52.71	-15.72	36.99	43.50	-6.51	QP
5		206.3976	50.17	-14.25	35.92	43.50	-7.58	QP
6	!	372.0045	50.72	-10.13	40.59	46.00	-5.41	QP

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 5(the worst mode)	Test Voltage:	AC 120V/60Hz

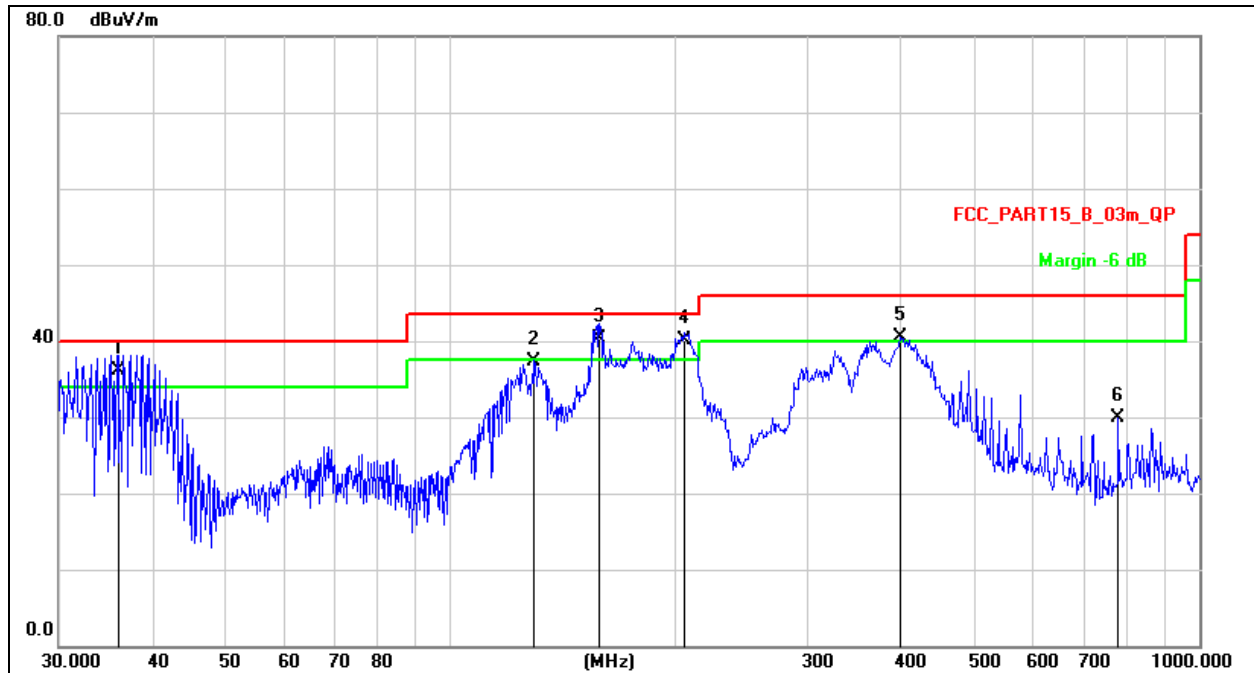


Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	!	36.0007	50.68	-14.51	36.17	40.00	-3.83	QP
2		129.4677	53.84	-16.44	37.40	43.50	-6.10	QP
3	*	158.1123	57.40	-17.08	40.32	43.50	-3.18	QP
4	!	204.9550	54.43	-14.28	40.15	43.50	-3.35	QP
5	!	399.0300	49.86	-9.43	40.43	46.00	-5.57	QP
6		779.6068	32.89	-3.07	29.82	46.00	-16.18	QP

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 2(the worst mode)	Test Voltage:	DC 11.1V

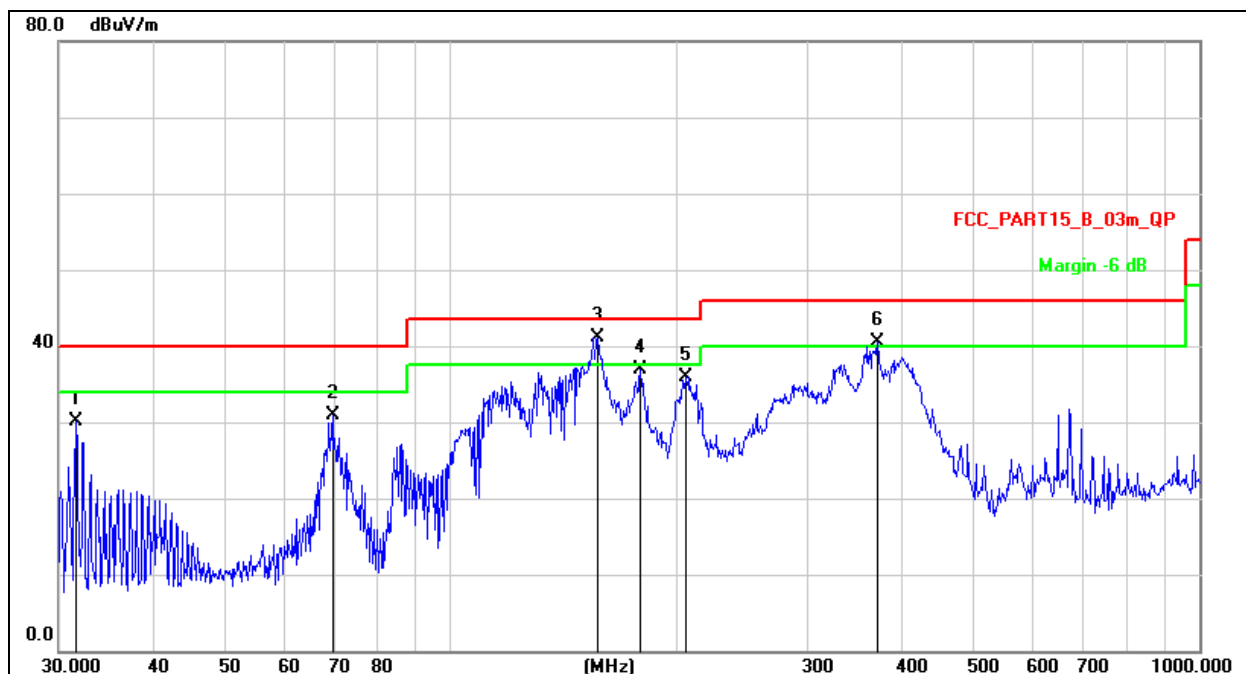


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		31.6202	45.17	-15.01	30.16	40.00	-9.84	QP
2		69.6005	47.36	-16.43	30.93	40.00	-9.07	QP
3	*	157.0074	58.22	-17.15	41.07	43.50	-2.43	QP
4		179.3863	52.71	-15.72	36.99	43.50	-6.51	QP
5		206.3976	50.17	-14.25	35.92	43.50	-7.58	QP
6	!	372.0045	50.72	-10.13	40.59	46.00	-5.41	QP

Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 2(the worst mode)	Test Voltage:	DC 11.1V

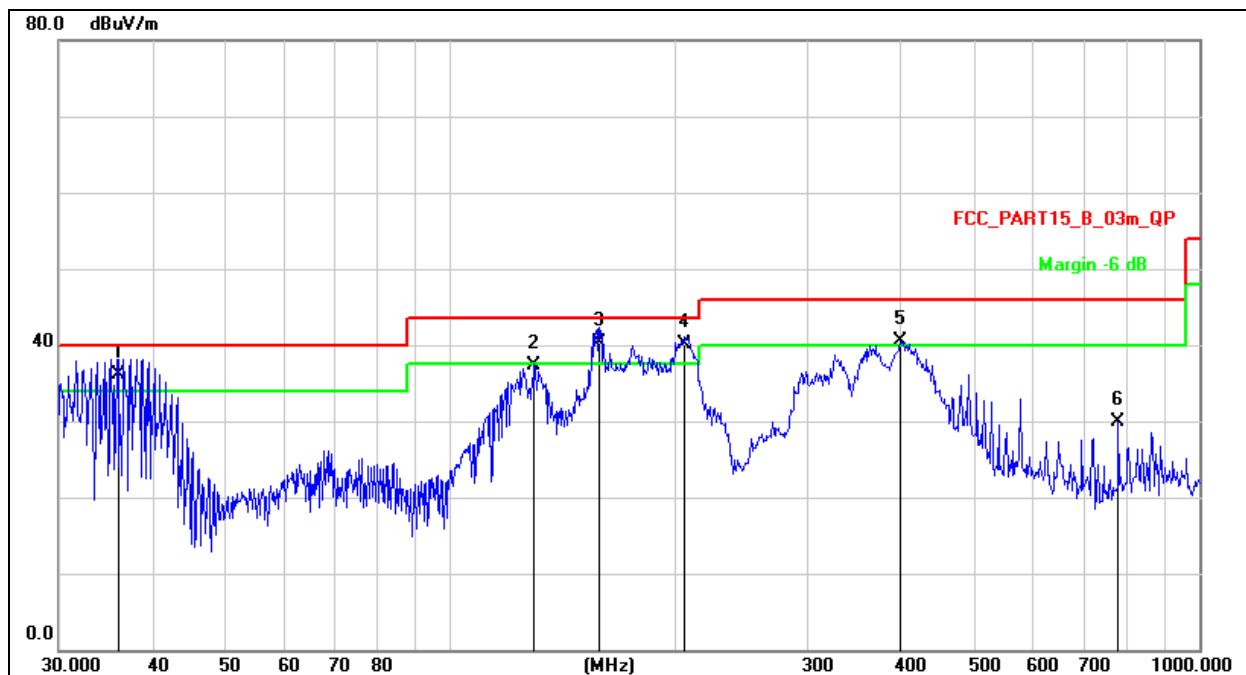

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	!	36.0007	50.68	-14.51	36.17	40.00	-3.83	QP
2		129.4677	53.84	-16.44	37.40	43.50	-6.10	QP
3	*	158.1123	57.40	-17.08	40.32	43.50	-3.18	QP
4	!	204.9550	54.43	-14.28	40.15	43.50	-3.35	QP
5	!	399.0300	49.86	-9.43	40.43	46.00	-5.57	QP
6		779.6068	32.89	-3.07	29.82	46.00	-16.18	QP

8. Bandwidth Test

8.1 Test Procedure



1. Set RBW = 1%~5% OBW.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

8.2 Test Setup

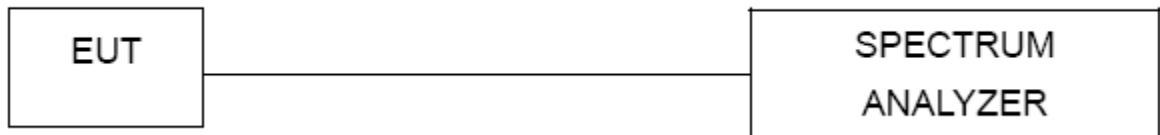

8.3 Test Result

Frequency (kHz)	20dB bandwidth (kHz)	Result
136.4	0.003	Pass
360	0.028	Pass

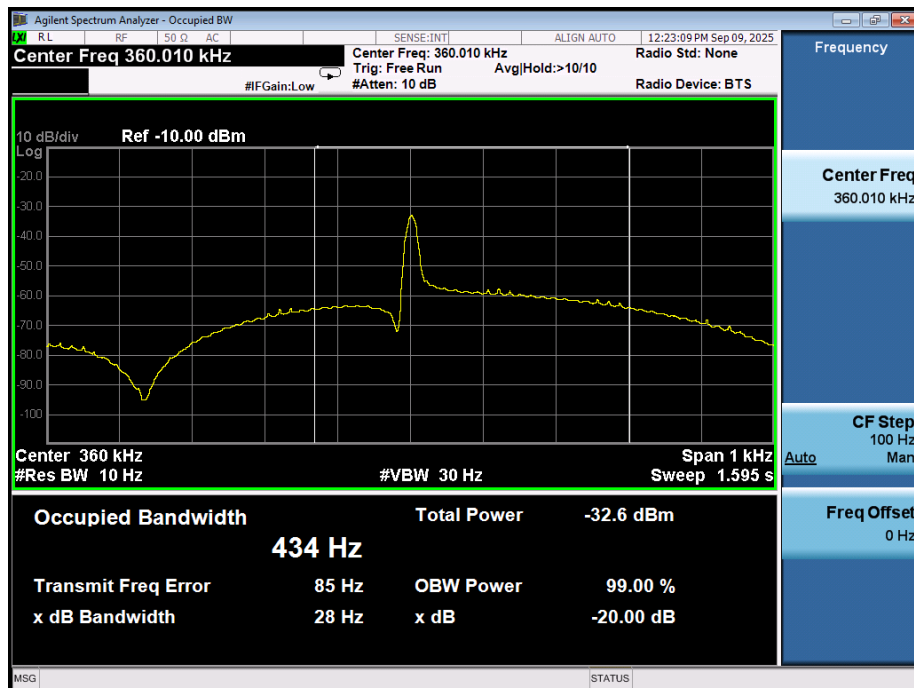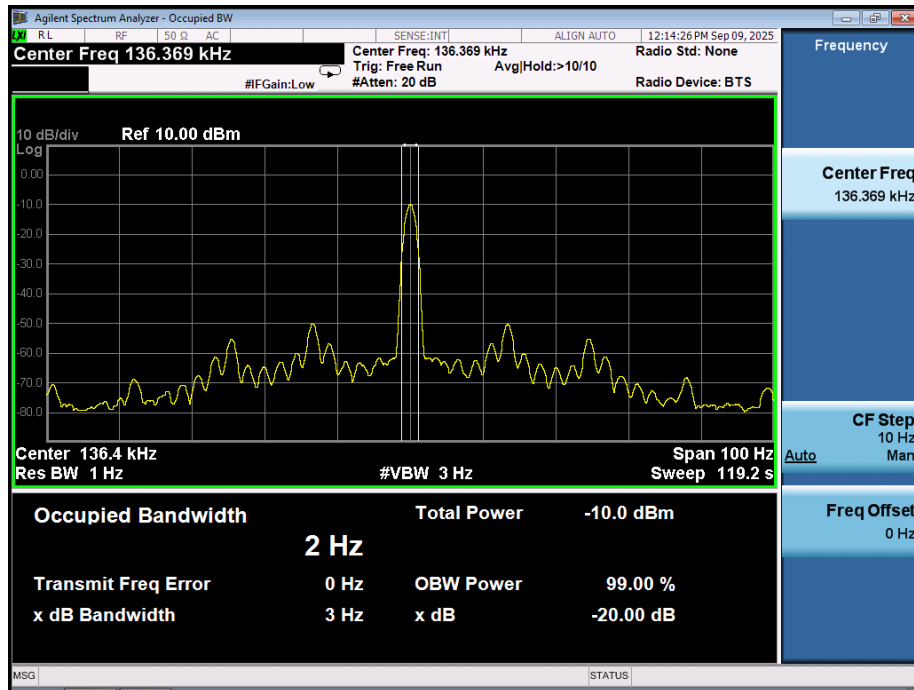


9. Antenna Requirements

9.1 Limit

For intentional device, according to FCC 47 CFR Section 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

9.2 Test Result

The antenna used for this product is Inductive Loop coil antenna.

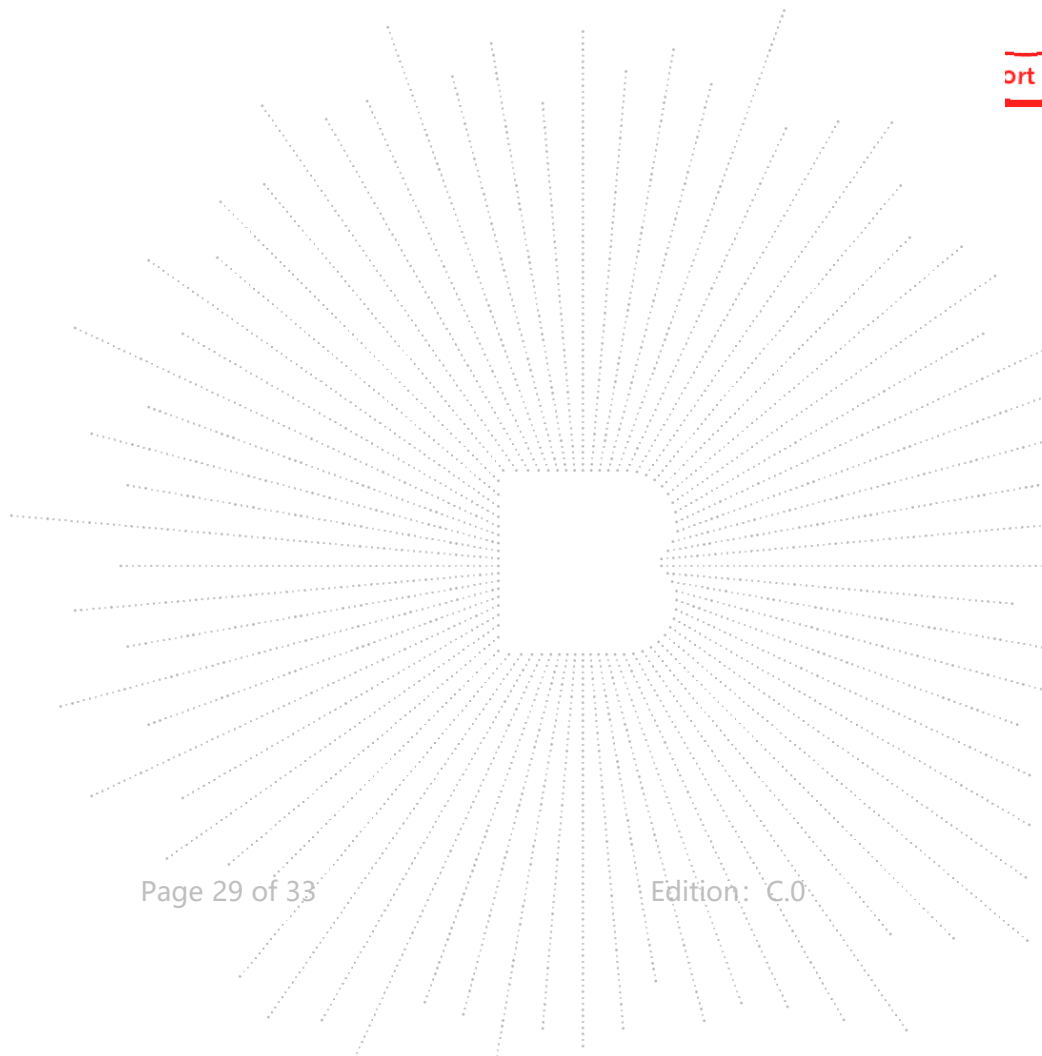

10. EUT Photographs


EUT Photo



NOTE: Appendix-Photographs Of EUT Constructional Details
(E5 _External & Internal Photos)

11. EUT Test Setup Photographs


Conducted emissions

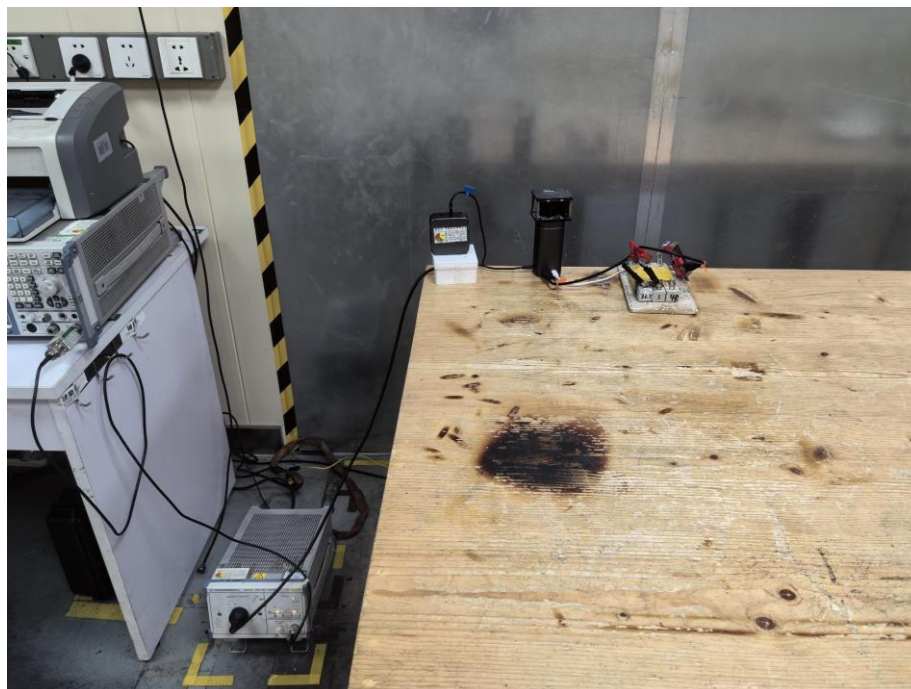


ST
C
ED
al

Radiated Measurement Photos

9kHz-30MHz

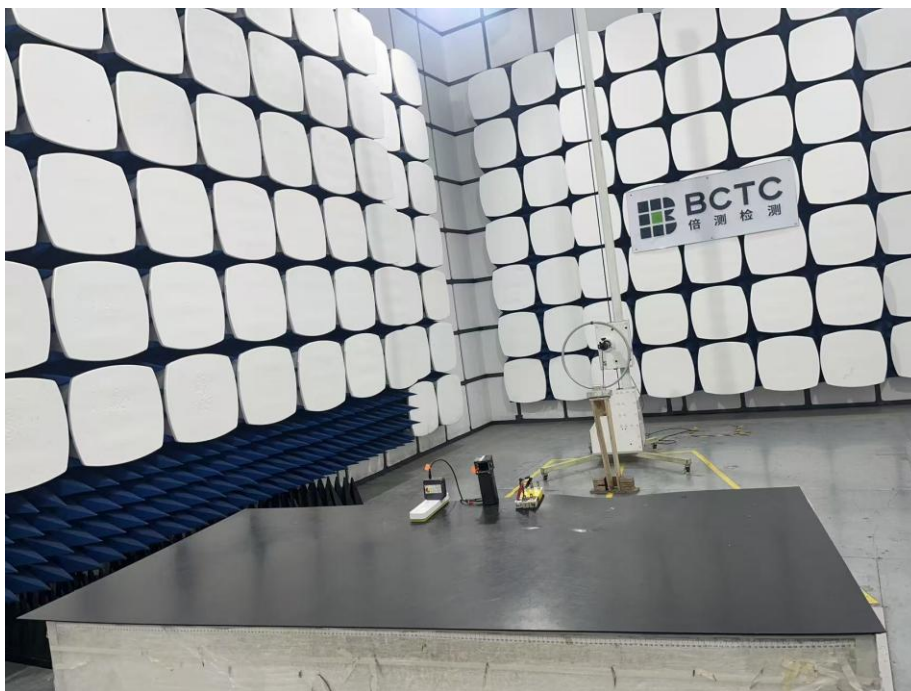

30MHz-1GHz

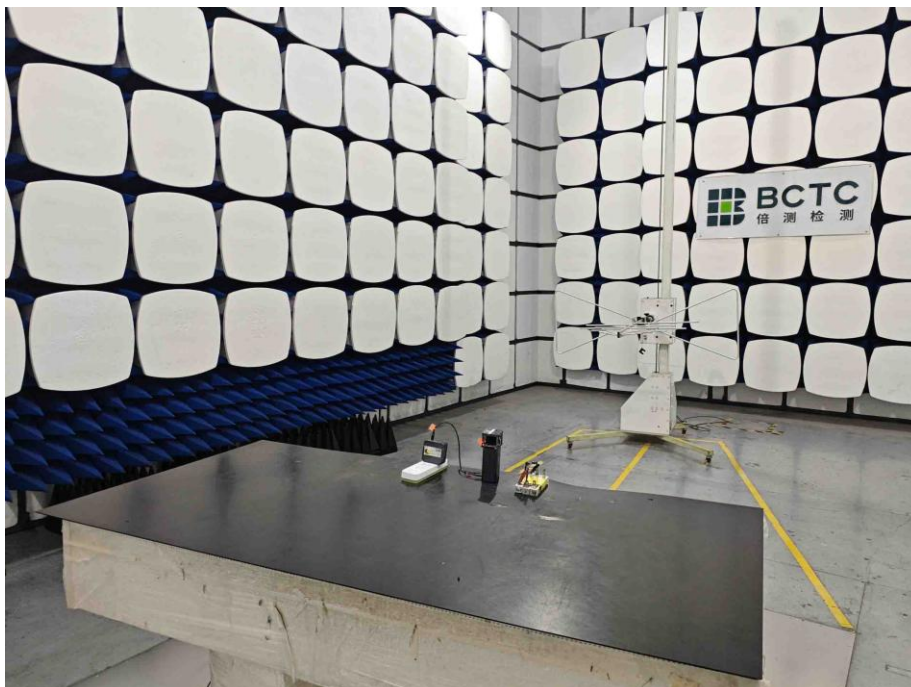

STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: bctc@bctc-lab.com.cn

Complaint/Advice E-mail: advice@bctc-lab.com.cn

***** END *****