

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED



东莞市金赞智能科技有限公司

产品规格书

PRODUCT SPECIFICATION

客 户:	广东高普达集团股份有限公司
CUSTOMER:	Guangdong Gaopuda Group Co., Ltd.
客户料号:	3010800468
CUST P/N:	
金赞料号:	J30-000833-001
K C P/N:	
产品型号:	20.5*38.5*0.08*24P*2P*11TS*40MM
D E S E:	
日 期:	2025.12.12
D A T E:	
版 本:	A.1
VERSION:	

(客户承认受领印) ACCEPTANCE STAMP

拟制 PREPARED BY	跟单员 MERCHANDISER	工程审核 ENGINEER CHECKED BY	批准 APPROVED BY 工程专用章
王振伟			

Address: 东莞市石碣镇西沙路 2 号 Tel: 86-076986018114 Fax: 86-076986015646
No. 2, Xisha Road, Shijie Town, Dongguan City

Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-09-008

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

规格内容
Specification


客户料号:
CUST P/N

3010800468

金赞型号:
KC DESE

20.5*38.5*0.08*24P*2P*11TS*
40MM

1. 产品外形尺寸 (OVERALL DIMENSIONS OF PRODUCTS):

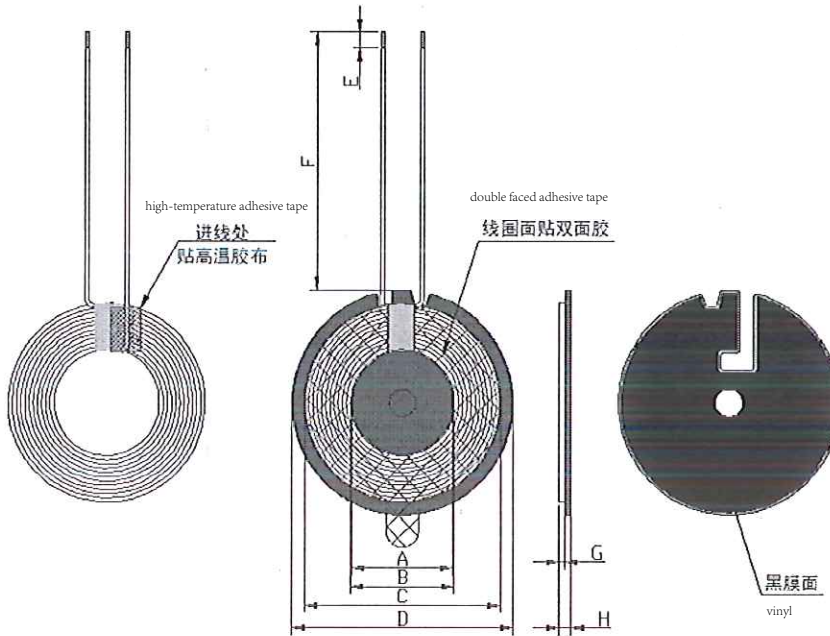

单位(Unit):毫米(mm)

A	B	C	D	E	F	G	H
20±0.5	20.5±1.5	38.5±1.5	G43+0.5/-1	3±1.5	40±2	0.55±0.05	1.8MAX

PS:1. (F) 为磁片外引线长度 (The length of the outer lead of the magnetic chip); 2. (H) 不含离型纸 (Excluding release paper); 3. 线圈面贴双面胶 (Double sided adhesive tape is applied to the coil surface).

圈数 Turns	线径 Wire Dia.	绕线方式 疏/密 Wdg. Type Spred/Close	绕线方向 Wdg. Direction	相交 是/否 Intersect Yes/Not	线圈 正/反贴 Coil Positive/Anti Paste
11TS	0.08*24P*2P 热风绞线 (Stranded wire)	密绕 (Close)	逆时针 (Anticlockwise)	是 (Yes)	反贴 (Anti/-Paste)

拟制 PREPARED BY	工程审核 ENGINEER CHECKED BY
王振伟	李进

Address: 东莞市石碣镇西沙路 2 号 Tel: 86-076986018114 Fax: 86-076986015646

No. 2, Xisha Road, Shijie Town, Dongguan City

Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-09-008

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

规格内容
Specification

客户料号:
CUST P/N

3010800468

金赞型号:
KC DESE

20.5*38.5*0.08*24P*2P*11TS*
40MM

所有材料要求合格 ROHS 标准 (All materials must comply with ROHS standards)

2. 电气特性 (ELECTRICAL CHARACTERISTICS):

温度 TEMPERATURE: $25 \pm 10^{\circ}\text{C}$, 湿度 RELATIVE HUMIDITY: $65 \pm 10\%$

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND	S-F	线圈加磁片: $8.1 \mu\text{H} \pm 10\%$	100kHz/1V	LCZ METER 1062
2	DCR	S-F	阻值: $100\text{m}\Omega \text{ MAX}$	/	LCZ METER 1062
3	Q 值	S-F	Q 值: 30MIN	100kHz/1V	LCZ METER 1062

3. 材料清单 (BILL OF MATERIALS):

序号 NO.	材料名称 Material name	品名描述 Description	物料代码 Material Code	厂商代码 Vendor code
1	线材 wire rod	0.08*24P*2P 热风绞线 (Stranded wire)	/	/
2	铁氧体 ferrite	硬磁 G43*5.3*0.8H 贴一面带孔带双 L 槽 哑光黑膜 (Apply a matte black film with holes and double L-slots on one side of the hard magnetic G43+0/-1*5.3*0.8H)	GCP-T-00540	LX
3	双面胶 double-sided tape	圆形双面胶 37*0.08H 无孔无槽带手撕 (No holes, no grooves, tear by hand)	SMJ-T-0127	HWD

拟制
PREPARED BY

王振伟

工程审核
ENGINEER CHECKED BY

李进

Address: 东莞市石碣镇西沙路 2 号 Tel: 86-076986018114 Fax: 86-076986015646

No. 2, Xisha Road, Shijie Town, Dongguan City
Http://www.jzcoil.com

文件编号 FileNo: KC-JZ-09-008

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

规格内容 Specification		客户料号: CUST P/N	3010800468	
		金赞型号: KC DESE	20.5*38.5*0.08*24P*2P*11TS* 40MM	
4	小磁片 magnetic sheet	圆形小磁片 20*0.5H (magnetic sheet)	GCP-T-00044	LX
5	小双面胶 double-sided tape	圆形普通双面胶 18*0.08 无孔无槽带手 撕 (No holes, no grooves, tear by hand)	SMJ-T-0010	MYS
6	金手指胶布 adhesive tape	5mm	高温胶纸 5MM	JRM
7	胶水 glue	JS-E7202 (加稠) 白胶 (White glue)	E7202W	HZY
8	锡条 tin	环保无铅焊锡条 tin	无铅高温锡条 tin	XC
9	金手指胶布 adhesive tape	8mm	高温胶纸 8MM tape	JRM

4. 包装材料 (PACKAGING MATERIALS):

序号 NO	材料名称 Material name	规格 specifications	数量 quantity
1	珍珠棉 Pearl cotton	32 格 380*270*62mm	320pcs
2	纸箱 carton	常规 40*28*21cm	960pcs

拟制 PREPARED BY	工程审核 ENGINEER CHECKED BY
王振伟	李进

Address: 东莞市石碣镇西沙路 2 号 Tel: 86-076986018114 Fax: 86-076986015646
 No. 2, Xisha Road, Shijie Town, Dongguan City
 Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-09-008