

HONANT


manufactur: HONANT

L

channel	power	Sensitivity
0	8.4	-93
39	8.3	-93
78	7.6	-93

Antenna impedance

L

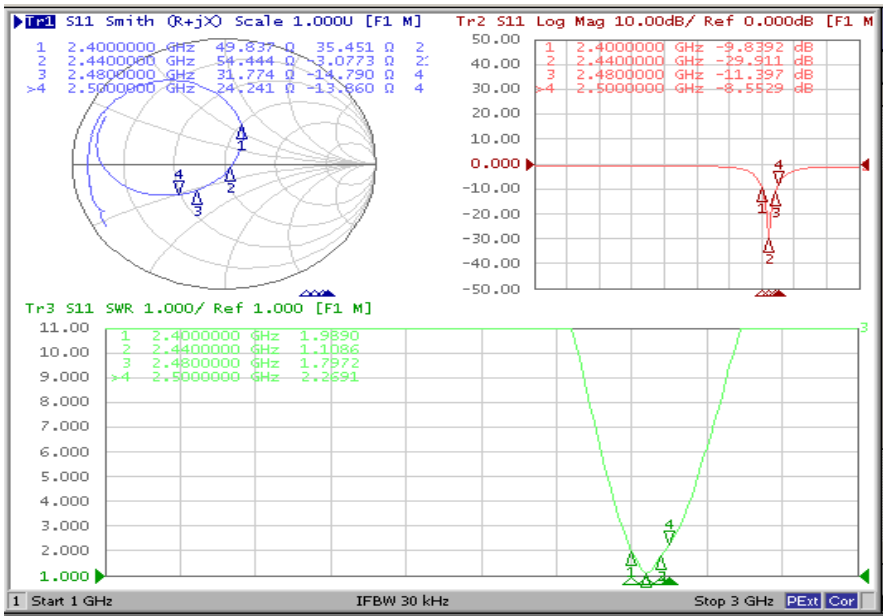


nagative

L


MHz	(dBi)	(dB)	(%)
2400	-2.32	-8.17	15.24

2410	-1.91	-7.79	16.63
2420	-1.43	-7.26	18.8
2430	-1.29	-7.21	19.01
2440	-1.19	-7.4	18.19
2450	-0.98	-7.44	18.04
2460	-1.05	-7.63	17.28
2470	-1.14	-7.87	16.32
2480	-1.15	-7.95	16.03
平均值	-1.38	-7.64	17.28

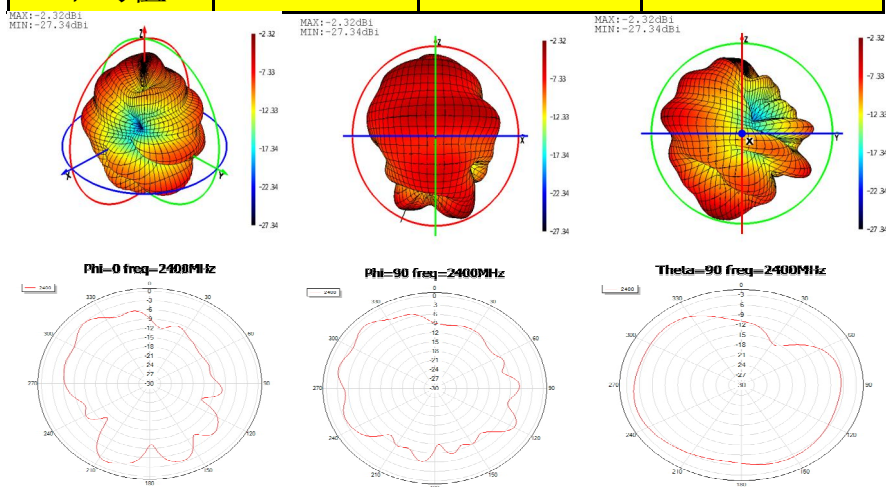


Active			
L-OTA			
freedom	Channel	TRP (dBm)	TIS (dBm)
L	CH 0	-1.32	-84.2
	CH 39	-0.52	-87.26
	CH 78	-1.9	-88.14
Head model	Channel	TRP (dBm)	TIS (dBm)
L	CH 0	-4.76	-80.57
	CH 39	-5.5	-82.48
	CH 78	-6.88	-82.3

match circuit	
L	

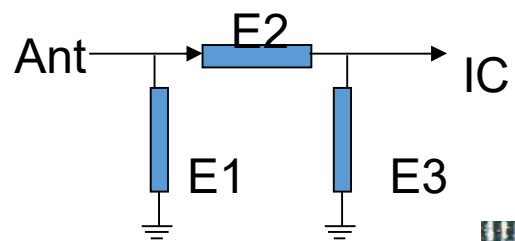

Element	Value
E1	N/A
E2	0Ω
E3	3.6PF

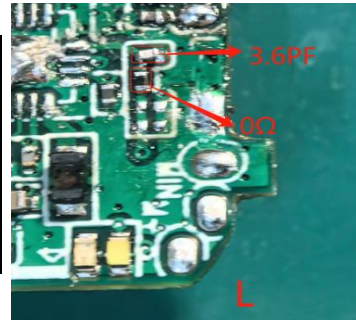

L ant

