


HONANT

manufactur: HONANT

R

channel	power	Sensitivity
0	8.3	-93
39	8.3	-93
78	7.8	-93

R

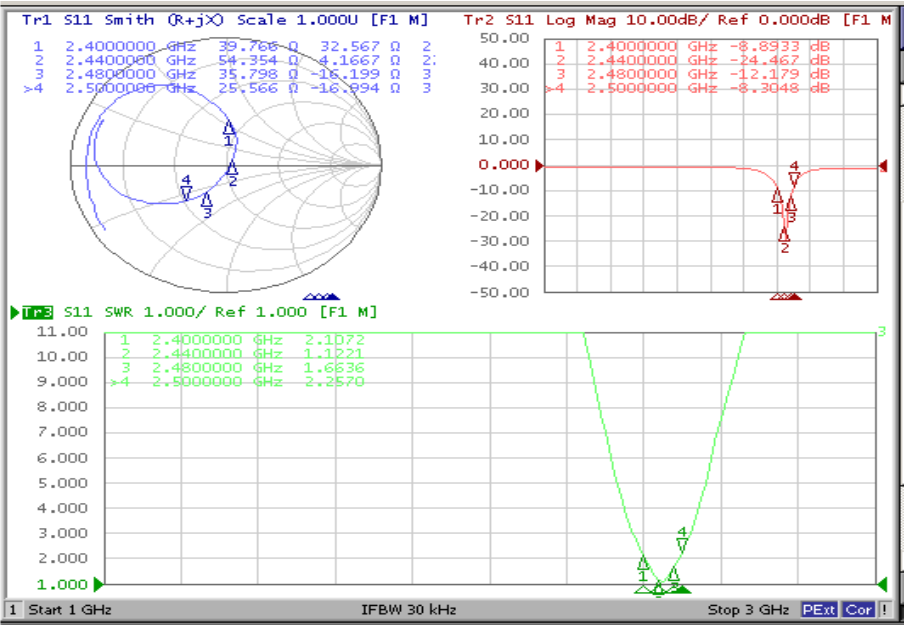


direction)

R


MHz	(dBi)	(dB)	(%)
2400	-2.31	-8.35	14.62

2410	-2.17	-8.15	15.33
2420	-1.2	-7.8	16.61
2430	-1.09	-7.38	18.26
2440	-1.41	-7.34	18.44
2450	-1.25	-7.49	17.83
2460	-1.37	-7.69	17.04
2470	-1.35	-7.82	16.51
2480	-1.31	-7.97	15.95
Ave	-1.50	-7.78	16.73

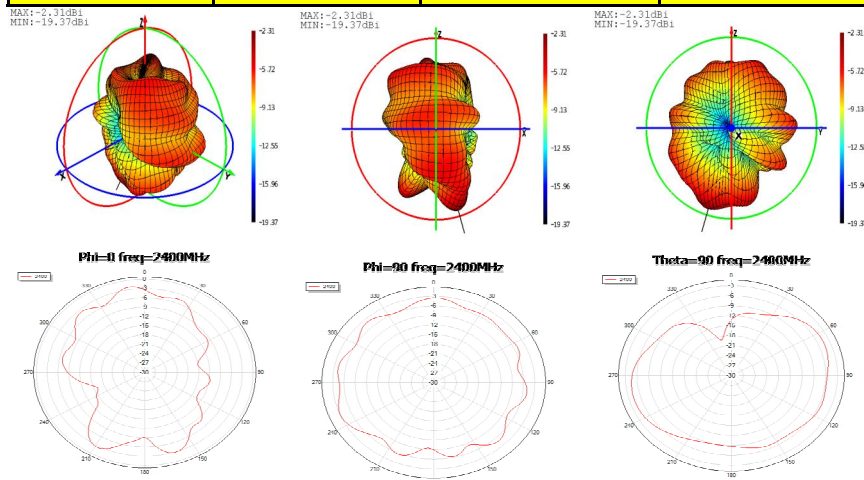

R-OTA			
freedom	Channel	TRP (dBm)	TIS (dBm)
R	CH 0	0.35	-86.71
	CH 39	-1.62	-88.41
	CH 78	-1.63	-88.69
Head model	Channel	TRP (dBm)	TIS (dBm)
R	CH 0	-5.12	-82.89
	CH 39	-5.85	-83.18
	CH 78	-5.17	-84.25

R

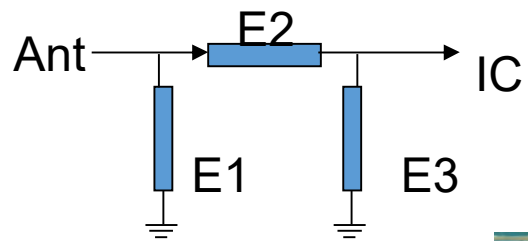

Element	Value
E1	N/A
E2	0Ω
E3	3PF

