

TEST REPORT

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2023-01654 Page (1) / (22) Pages	
--	---	--	--

1. Applicant

- Name : NEID CO.,LTD.
- Address : 1363, Hyohaeng-ro, Hwaseong-si, Gyeonggi-do, Republic of Korea
- Date of Receipt : 2023-06-19

2. Manufacturer

- Name : NEID CO.,LTD.
- Address : 1363, Hyohaeng-ro, Hwaseong-si, Gyeonggi-do, Republic of Korea

3. Use of Report : For FCC Certification / ISED Certification

4. Test Sample / Model : RFID Reader for PR-TL (NA-Prechecker)

/ RFID Reader for PR-TL (NA-Prechecker)

5. Date of Test : 2023-07-25 to 2023-07-27

6. Test Standard(method) used : FCC 47 CFR part 15 subpart C 15.225

RSS-Gen, RSS-210

7. Testing Environment: Temp.: (24 ± 1) °C, Humidity: (36 ± 5) % R.H.

8. Test Results : Compliance

9. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing

(Address : (Unhak-Dong) 5, Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This report cannot be reproduced or copied without the written consent of CTK.

Approval	Tested by  Ji-Hye, Kim: (Signature)	Technical Manager  Won-Jae, Hwang: (Signature)
----------	--	---

Remark. This report is not related to KOLAS accreditation and relevant regulation.

2023-07-31

CTK Co., Ltd.

 CTK Co., Ltd. The Prime Leader of Global Regulatory Compliance	CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2023-01654 Page (2) / (22) Pages	
--	---	--	--

REPORT REVISION HISTORY

Date	Revision	Page No
2023-07-31	Issued (CTK-2023-01654)	all

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.

CONTENTS

1. General Product Description	4
1.1 Applicant Information	4
1.2 Product Information.....	4
1.3 Antenna Information.....	4
1.4 Model Differences	4
2. Accreditations	5
2.1 Laboratory Accreditations and Listings	5
2.2 Calibration Details of Equipment Used for Measurement	5
3. Test Specifications	6
3.1 Standards.....	6
3.2 Mode of operation during the test.....	7
3.3 Peripheral Devices	7
3.4 Maximum Measurement Uncertainty	7
3.5 Test Software.....	7
4. Technical Characteristic Test.....	8
4.1 Emission Bandwidth.....	8
4.2 Field strength emissions.....	10
4.3 Frequency Stability.....	17
4.4 AC Power line Conducted Emissions	19
APPENDIX A – Test Equipment Used For Tests	22

1. General Product Description

1.1 Applicant Information

Company	NEID CO.,LTD.
Contact Point	1363, Hyohaeng-ro, Hwaseong-si, Gyeonggi-do, Republic of Korea
Contact Person	Name : SHIN SEOK MOO E-mail : smshin@neid.co.kr Tel : +82-2-969-6756

1.2 Product Information

FCC ID	2BB8X-PRECHECKER
IC	31018-PRECHECKER
Product Description	RFID Reader for PR-TL (NA-Prechecker)
Model name	RFID Reader for PR-TL (NA-Prechecker)
Variant Model name	-
Operating Frequency Range	13.56 MHz
RF Output Power	47.5 dBuV/m @ 3 m
Antenna Type	PCB antenna(Loop antenna)
Type of Modulation	ASK
Power Source	DC 5 V
Hardware Rev	4.6
Software Rev	V4.6

1.3 Antenna Information

☒	Integral antenna (antenna permanently attached)
☐	Temporary RF connector provided
☒	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
☐	External antenna (dedicated antennas)

1.4 Model Differences

Not applicable

2. Accreditations

2.1 Laboratory Accreditations and Listings

Country	Agency	Registration Number
USA	FCC	805871
CANADA	ISED	CN : 8737A CAB ID : KR0025
KOREA	NRRA	KR0025

2.2 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

3. Test Specifications

3.1 Standards

FCC Part Section(s)	RSS Section(s)	Requirement(s)	Status (Note 1)
15.203	RSS-Gen 6.8	Antenna Requirement	C
15.215(c)	RSS-Gen 6.7	Emission Bandwidth	C
15.225 (a)(b)(c)(d)	RSS-210 Annex B.6(a)	Field strength emissions	C
15.225(e)	RSS-210 Annex B.6(B)	Frequency tolerance	C
15.207	RSS-Gen 8.8	AC Power line Conducted Emissions	C
<u>Note 1:</u> C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable			
<u>Note 2:</u> The data in this test report are traceable to the national or international standards.			
<u>Note 3:</u> The sample was tested according to the following specification: ANSI C63.10-2013.			


3.2 Mode of operation during the test

The EUT is operated in a manner representative of the typical of the equipments.
 During at testing, system components were manipulated within the confines of typical usage to maximize each emission. All modulation modes were tests.
 The results are only attached worst cases.

Test mode

Transmit Status

Indication of the position of the EUT to be measured

EUT faces identified relative to view from receiving antenna	
--	--

3.3 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Switching Power Supply	Weidmuller	PRO MAX 120W 12V 10A	-

3.4 Maximum Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter.
 Coverage factor $k = 2$, Confidence levels of 95 %

Description	Uncertainty
Unwanted Emission(conducted)	3.0 dB (C.L.: Approx. 95 %, $k = 2$)
Radiated Emissions ($f \leq 1$ GHz)	3.88 dB (C.L.: Approx. 95 %, $k = 2$)
Line Conducted Emission	2.08 dB (C.L.: Approx. 95 %, $k = 2$)

3.5 Test Software

Radiated Test	ES10 Ver. 2022.04.000
Line Conducted Test	EMC32 Ver. 10.50.00

4. Technical Characteristic Test

4.1 Emission Bandwidth

Requirement

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

Test Procedures

For the emission bandwidth refer ANSI C63.10-2013, clause 6.9(Occupied bandwidth).


Test Setup

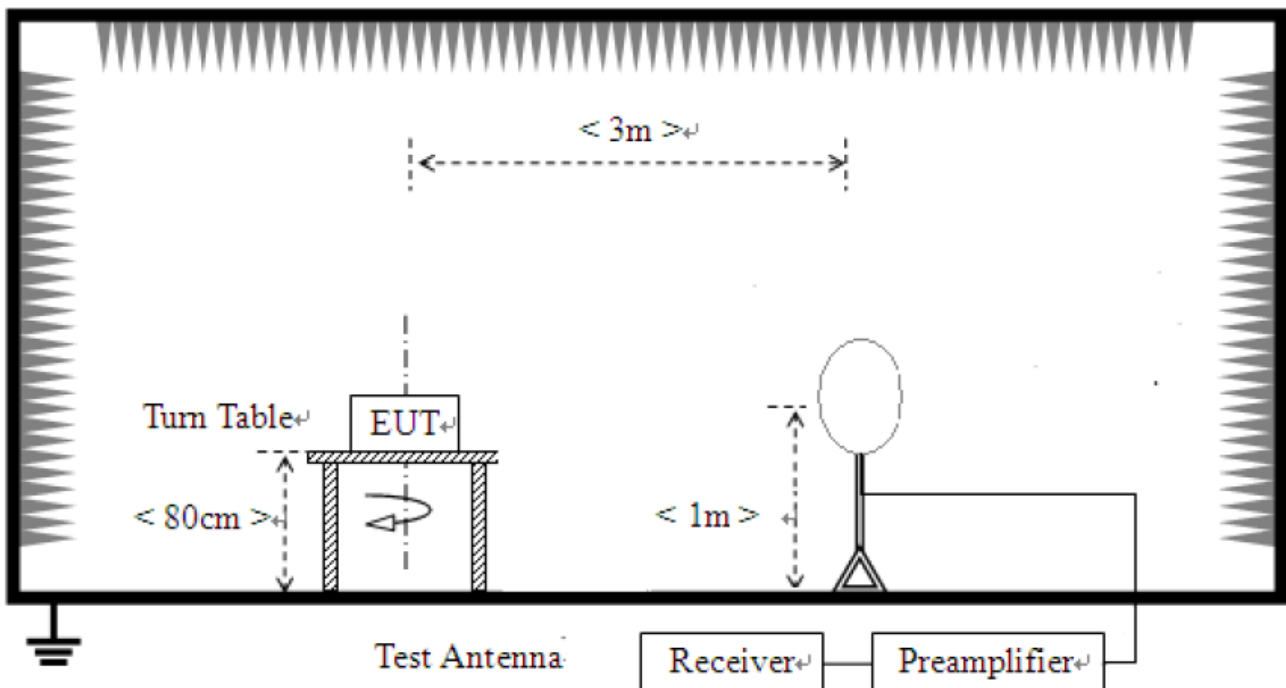

Test results

Emission Bandwidth	Result	Limit
20dB Bandwidth	0.37 kHz	N/A
99 % Bandwidth	0.32 kHz	N/A

Emission Bandwidth Plot 20dB Bandwidth

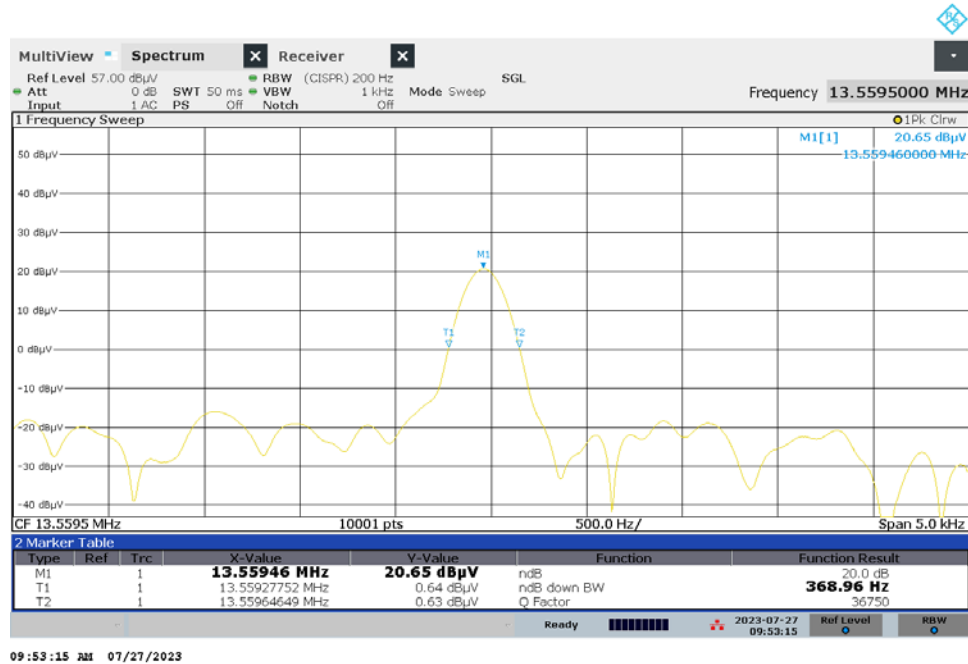

Emission Bandwidth Plot 99 % Bandwidth



4.2 Field strength emissions

Requirement

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

Frequency(MHz)	Field Strength uV / m@30m	Field Strength dBuV / m@30m	Field Strength dBuV / m@3m
13.553-13.567	15,848	84.0	124.0

- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

Frequency(MHz)	Field Strength uV / m@30m	Field Strength dBuV / m@30m	Field Strength dBuV / m@3m
13.410-13.553	334	50.5	90.5
13.567-13.710	334	50.5	90.5

- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

Frequency(MHz)	Field Strength uV / m@30m	Field Strength dBuV / m@30m	Field Strength dBuV / m@3m
13.110-13.410	106	40.5	80.5
13.710-14.010	106	40.5	80.5

- (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209(RSS-GEN).

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (uV / m)	Field Strength (dBuV / m)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	48.5 – 13.8	300
0.490-1.705	24000/F(kHz)	33.8 – 23	30
1.705-30	30	29.5	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3

** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Test Location

☒ 10 m SAC (test distance : ☐ 10 m, ☒ 3 m)


Test Procedures

Test Method	
☒	Refer as ANSI C63.10-2013, clause 6.4(Radiated emissions from unlicensed wireless devices below 30 MHz).
☒	Radiated emission tests shall be performed in the frequency range of 9 kHz to 30 MHz, using a calibrated loop antenna. When perpendicular to the ground plane, the lowest height of the magnetic antenna shall be 1 m above the ground and shall be positioned at the specified distance from the EUT. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
☒	The results shall be by using the square of an inverse linear distance extrapolation factor(40 dB/decade).
☒	Refer as ANSI C63.10-2013, clause 6.5(Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz).
☒	In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) is used. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.
☒	Emissions more than 20 dB below the limit do not need to be reported.


Measuring instrument Settings	
Frequency Range	9 kHz – 1 000 MHz
RBW	200 Hz (9 kHz – 150 kHz) 9 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1 000 MHz)
VBW	≥ RBW
Sweep time	auto couple
Detector function	CISPR quasi-peak(below 1 000 MHz)

Test Setup

- 1) For field strength of emissions from 9 kHz to 30 MHz

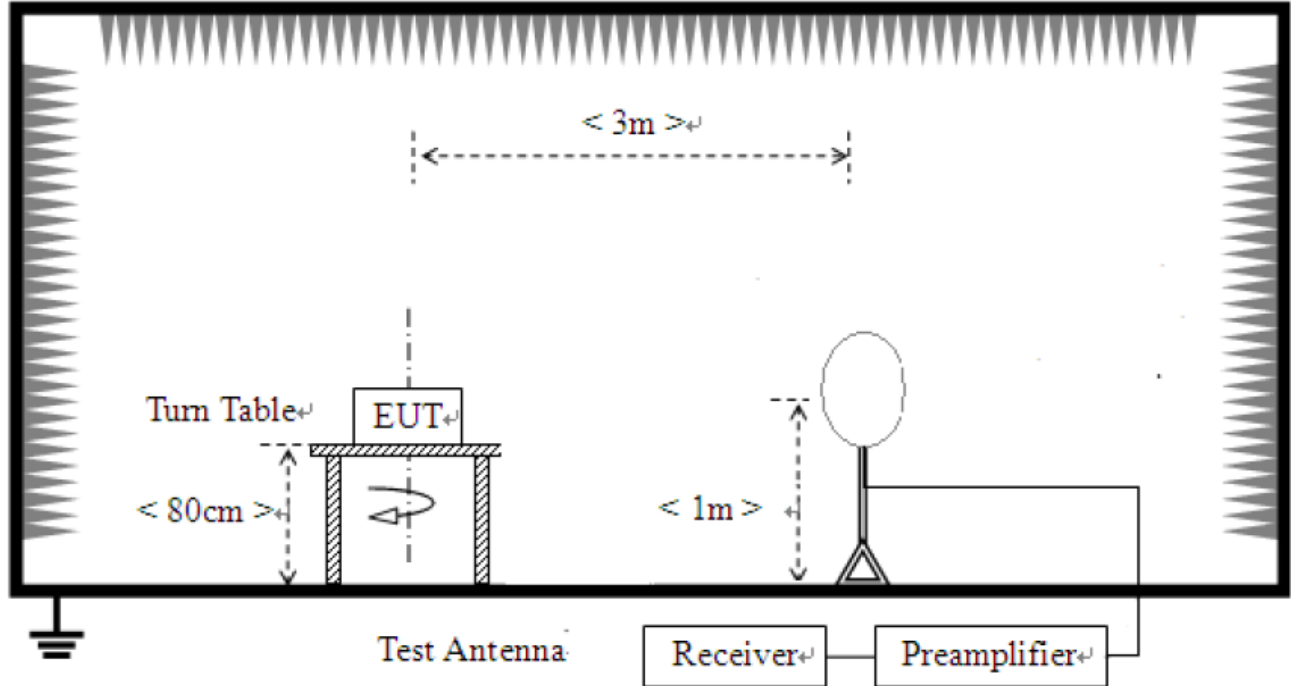

- 2) For field strength of emissions from 30 MHz to 1 GHz

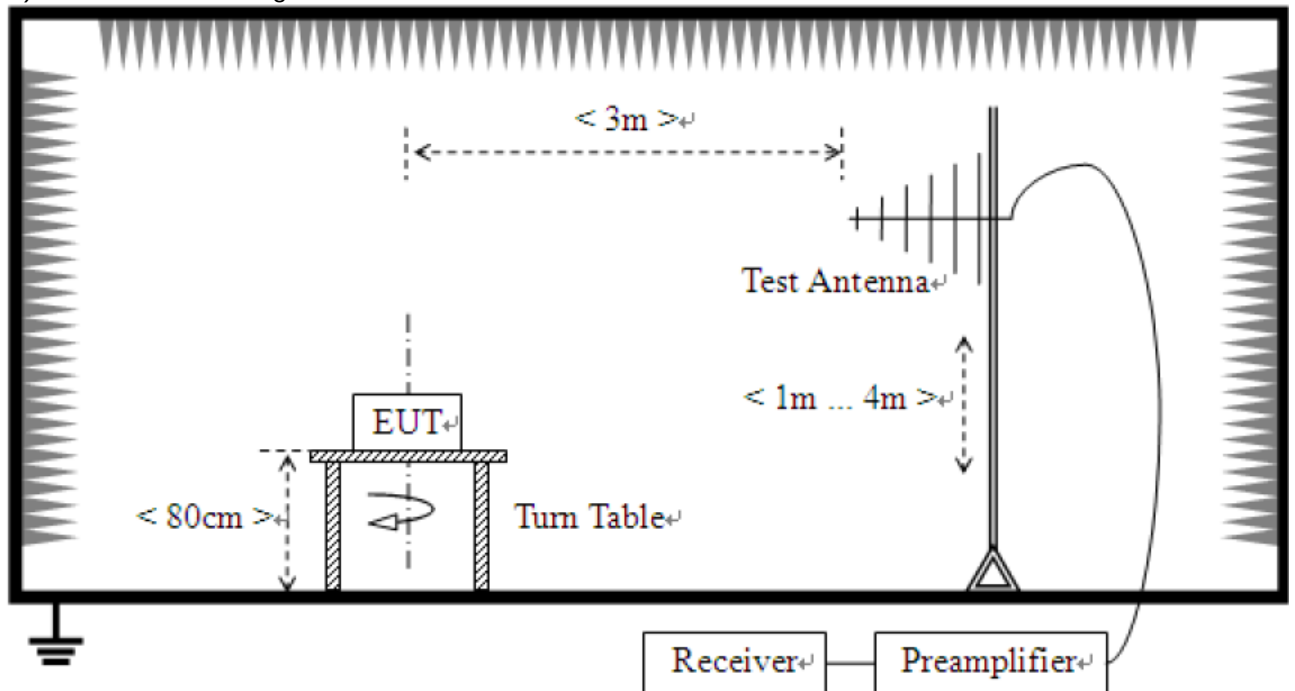


Test results

1) Radiated emissions within the band 13.110-14.010 MHz

The requirements are:

☒ Complies

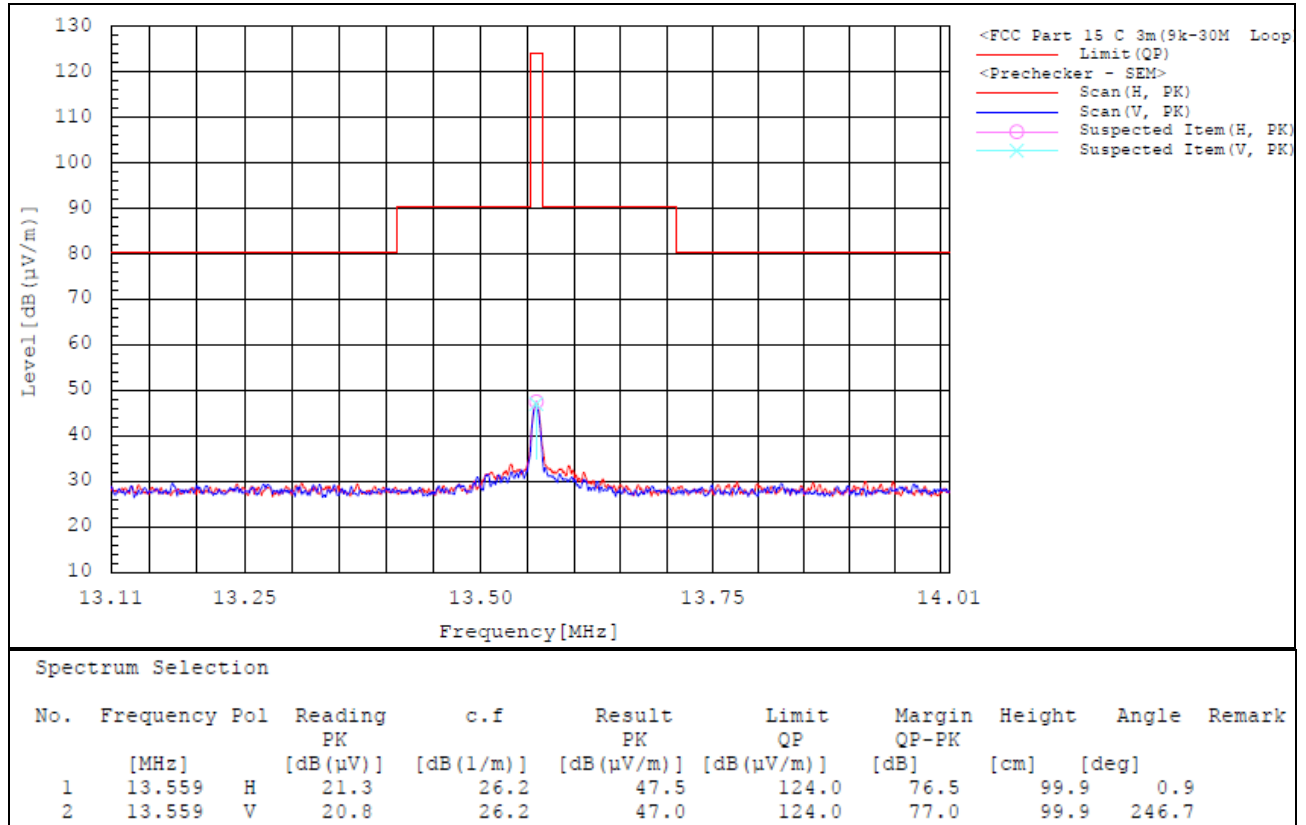

Remark :


1. Result = Reading + c.f(correction factor)
2. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
3. The test result in peak detector is less than quasi-peak limit.

2) Field strength of any emissions appearing outside of the 13.110-14.010 MHz

Frequency range : 9 kHz – 13.110 MHz

The requirements are:

☒ Complies

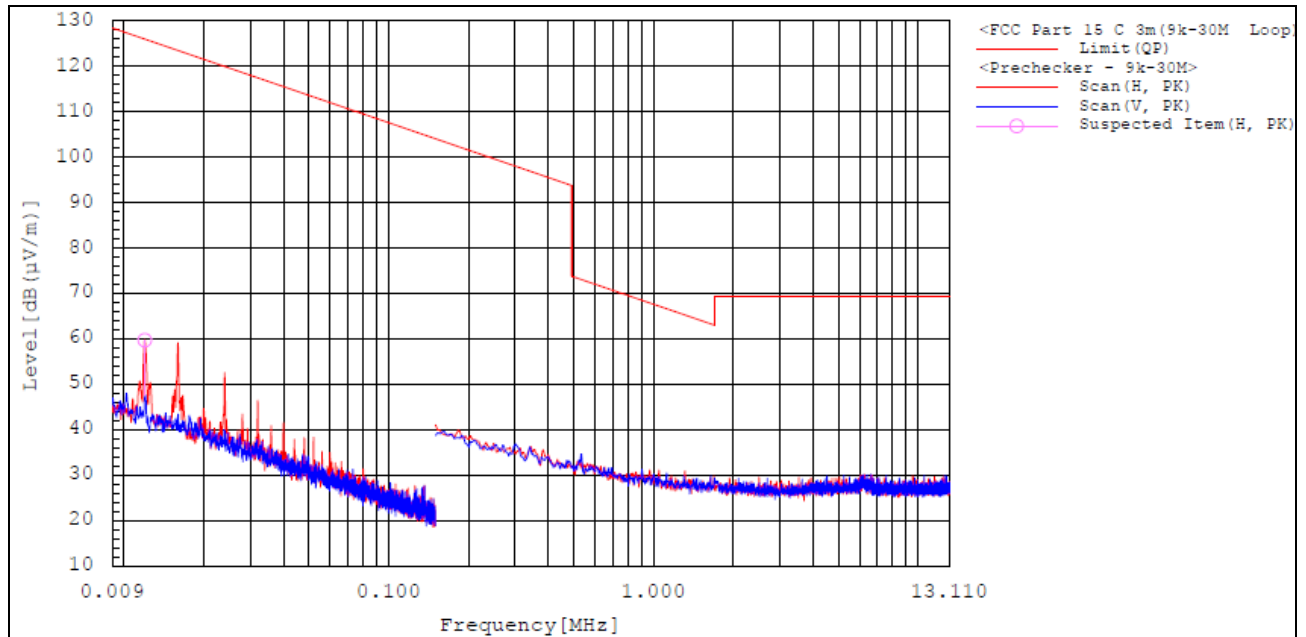


Remark :

1. Result = Reading + c.f(correction factor)
2. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
3. The test result in peak detector is less than quasi-peak limit.
4. Emissions more than 20 dB below the limit do not need to be reported.

Frequency range : 14.010 MHz – 30 MHz

The requirements are:

☒ Complies

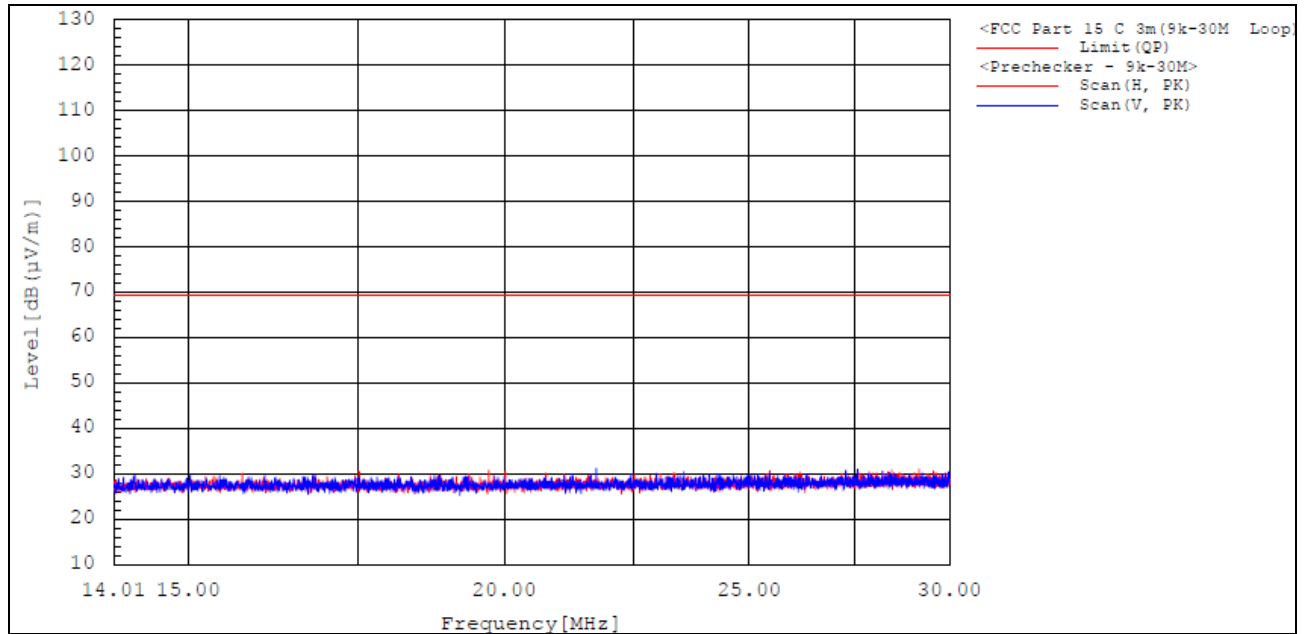


Remark :

1. Result = Reading + c.f(correction factor)
2. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
3. The test result in peak detector is less than quasi-peak limit.
4. Emissions more than 20 dB below the limit do not need to be reported.

3) Radiated emissions in the range of 30 MHz to 1 000 MHz band

The requirements are:

☒ Complies

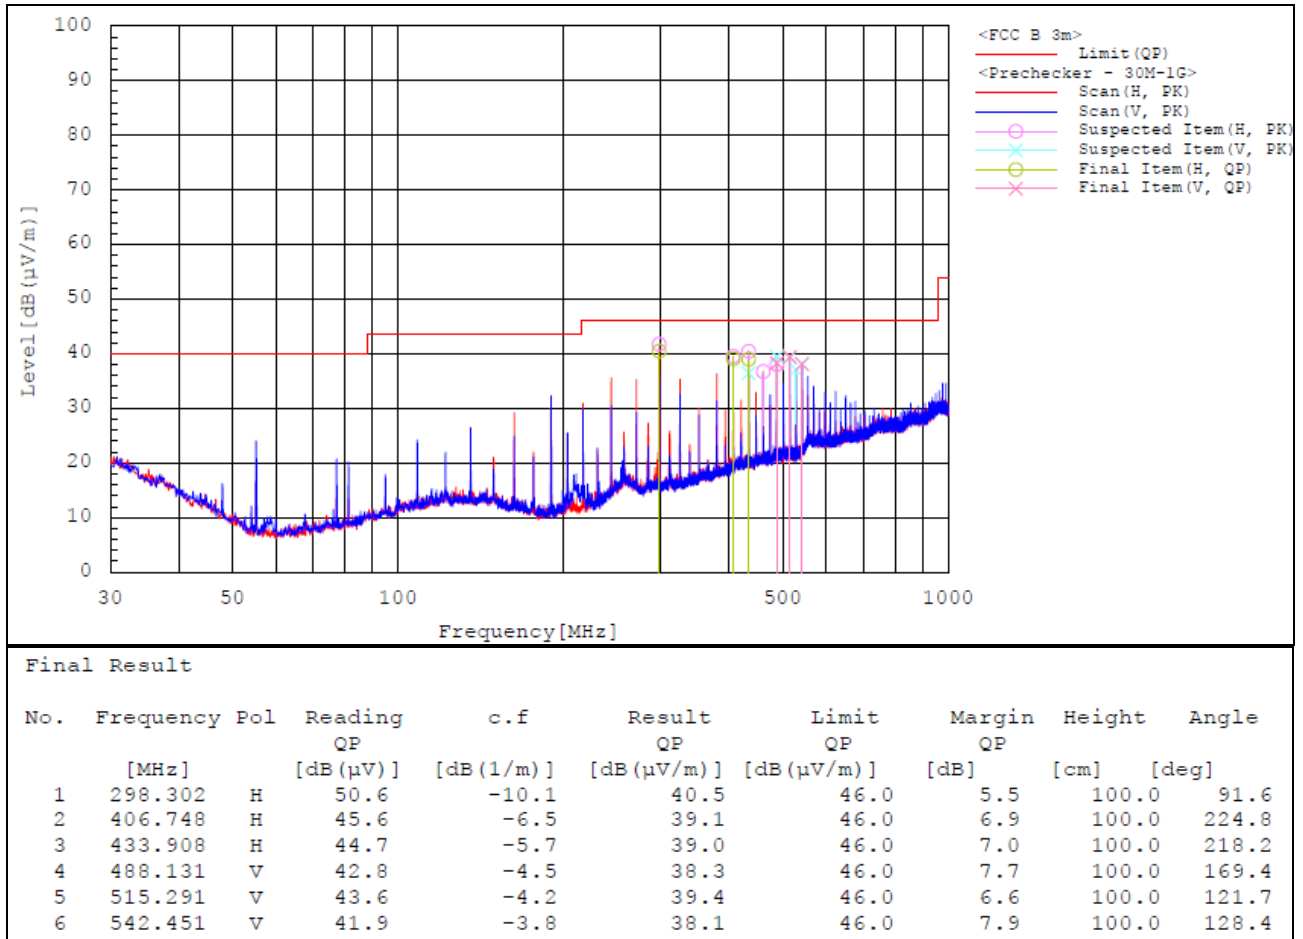

Remark :

1. Result = Reading + c.f(correction factor)
2. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain

4.3 Frequency Stability


Requirement

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

Test Procedures

For the emission bandwidth refer ANSI C63.10-2013, clause 6.8(Frequency stability tests).

Test Setup

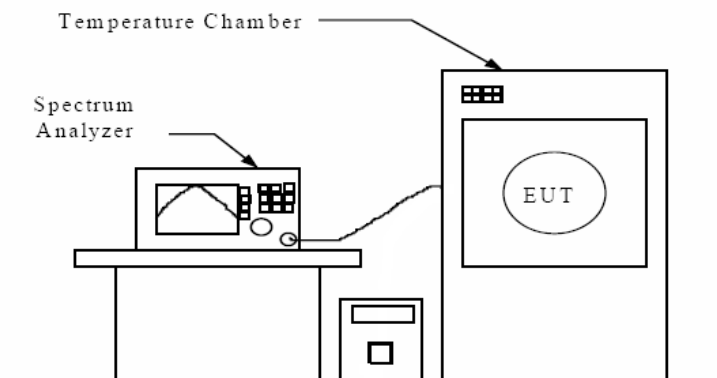



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01654
Page (18) / (22) Pages

Test Results

The requirements are:

☒ Complies

Condition		Measurement Frequency (MHz)	Frequency Stability (ppm)
Temperature (°C)	Voltage (V)		
50	5	13.559398	-9.29
40	5	13.559438	-6.34
30	5	13.559476	-3.54
20	5	13.559524	Reference
10	5	13.559554	2.21
0	5	13.559574	3.69
-10	5	13.559568	3.24
-20	5	13.559536	0.88
20	85%	13.559522	-0.15
20	115%	13.559510	-1.03
Limit(ppm)		-	±100

4.4 AC Power line Conducted Emissions

Requirement

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.


Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency.

Test Procedures

Refer as ANSI C63.10-2013, clause 6.2(Standard test method for ac power-line conducted emissions from unlicensed wireless devices).

Test Setup

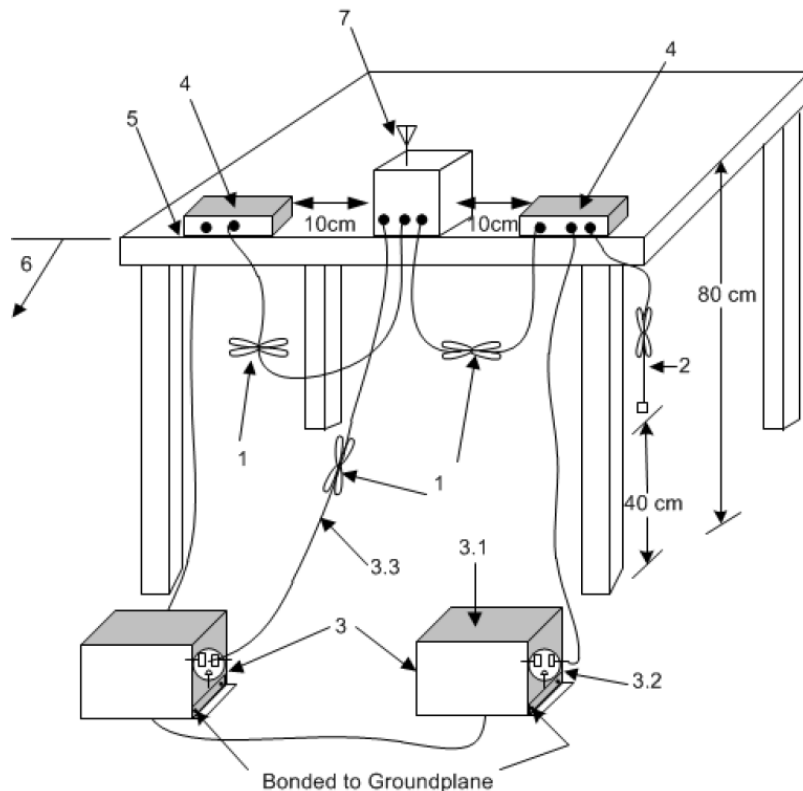


Test Results

The requirements are:

☒ Complies

[LINE]

Full Spectrum

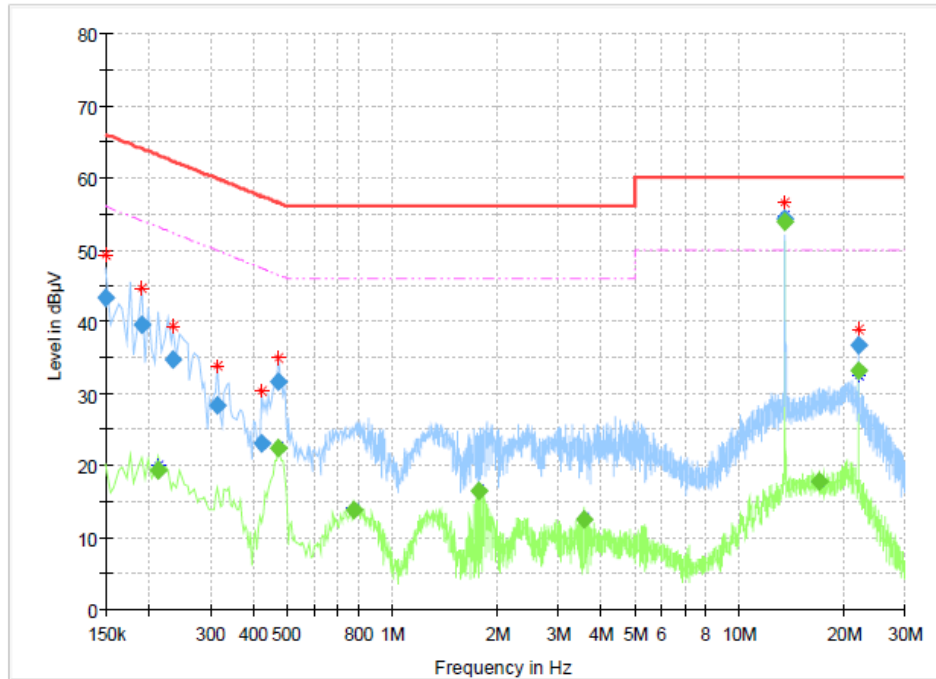

Final Result


Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.150000	43.24	---	66.00	22.76	15000.0	9.000	L1	ON	9.7
0.190500	39.62	---	64.02	24.40	15000.0	9.000	L1	ON	9.9
0.213000	---	19.41	53.09	33.67	15000.0	9.000	L1	ON	9.8
0.235500	34.71	---	62.25	27.54	15000.0	9.000	L1	ON	9.7
0.316500	28.33	---	59.80	31.47	15000.0	9.000	L1	ON	9.8
0.424500	23.10	---	57.36	34.26	15000.0	9.000	L1	ON	9.8
0.469500	---	22.51	46.52	24.01	15000.0	9.000	L1	ON	9.8
0.469500	31.57	---	56.52	24.95	15000.0	9.000	L1	ON	9.8
0.780000	---	13.95	46.00	32.05	15000.0	9.000	L1	ON	9.8
1.783500	---	16.43	46.00	29.57	15000.0	9.000	L1	ON	9.6
3.592500	---	12.63	46.00	33.37	15000.0	9.000	L1	ON	9.6
13.560000	---	53.79	50.00	-3.79	15000.0	9.000	L1	ON	9.8
13.560000	54.35	---	60.00	5.65	15000.0	9.000	L1	ON	9.8
16.948500	---	17.71	50.00	32.29	15000.0	9.000	L1	ON	9.9
22.119000	---	33.09	50.00	16.91	15000.0	9.000	L1	ON	9.9
22.119000	36.62	---	60.00	23.38	15000.0	9.000	L1	ON	9.9

Remark :

1. 13.569 MHz is the carrier frequencies.

[NEUTRAL]

Full Spectrum

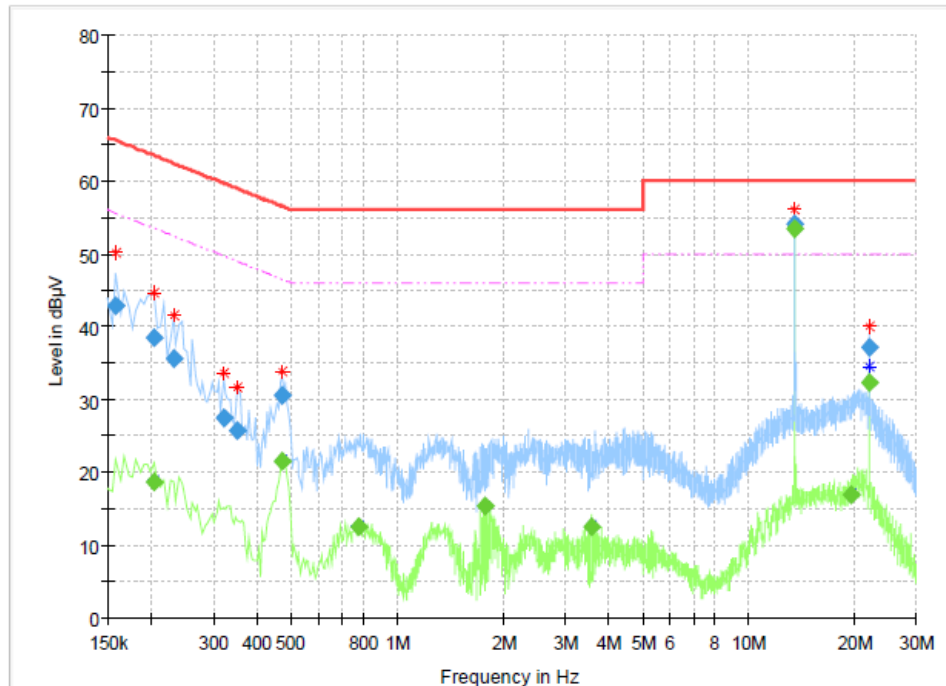

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.159000	42.94	---	65.52	22.58	15000.0	9.000	N	ON	9.8
0.204000	---	18.75	53.45	34.70	15000.0	9.000	N	ON	9.8
0.204000	38.48	---	63.45	24.97	15000.0	9.000	N	ON	9.8
0.231000	35.62	---	62.41	26.79	15000.0	9.000	N	ON	9.7
0.321000	27.40	---	59.68	32.28	15000.0	9.000	N	ON	9.8
0.352500	25.63	---	58.90	33.27	15000.0	9.000	N	ON	9.8
0.469500	---	21.55	46.52	24.98	15000.0	9.000	N	ON	9.8
0.469500	30.58	---	56.52	25.94	15000.0	9.000	N	ON	9.8
0.780000	---	12.64	46.00	33.36	15000.0	9.000	N	ON	9.8
1.783500	---	15.44	46.00	30.56	15000.0	9.000	N	ON	9.6
3.592500	---	12.47	46.00	33.53	15000.0	9.000	N	ON	9.7
13.560000	---	53.50	50.00	-3.50	15000.0	9.000	N	ON	9.9
13.560000	54.05	---	60.00	5.95	15000.0	9.000	N	ON	9.9
19.527000	---	16.84	50.00	33.16	15000.0	9.000	N	ON	10.0
22.119000	---	32.38	50.00	17.62	15000.0	9.000	N	ON	10.0
22.119000	37.04	---	60.00	22.96	15000.0	9.000	N	ON	10.0

Remark :

1. 13.569 MHz is the carrier frequencies.

APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date
1	EMI TEST RECEIVER	Rohde & Schwarz	ESW44	102039	2023-05-03	2024-05-03
2	BILOG ANTENNA	TESEQ	CBL6111D	60654	2021-09-03	2023-09-03
3	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2022-04-15	2024-04-15
4	6dB Attenuator	PASTERNAK	PE7AP006-06	L20210504000023	2022-08-10	2023-08-10
5	AMPLIFIER	SONOMA INSTRUMENT	310N	411011	2022-08-10	2023-08-10
6	EMI Test Receiver	R&S	ESR3	102826	2023-05-03	2024-05-03
7	LISN	R&S	ENV216	102698	2023-05-03	2024-05-03
8	Dual-Tracking DC Power Supply	Topward Electric Instruments Co.,Ltd.	6303D	692130	2023-04-19	2024-04-19
9	Signal Analyzer	Agilent	N9020A	MY49101016	2022-10-07	2023-10-07
10	DC Power Supply	HP	E3632A	KR75301278	2023-07-14	2024-07-14
11	Temp&Humi Chamber	ESPEC CORP.	SH-242	93008423	2023-04-28	2024-04-28

	Cable	Manufacturer	Model No.	Serial No.	Check Date
1	RF Cable (Conducted)	Junkosha Inc.	MWX221	1512S151	2023-07-25
2	RF Cable (Line Conducted)	Canare Corporation	L-5D2W	N/A	2023-03-06
3	RF Cable (9 kHz - 1 GHz Radiated)	HUBER+SUHNER	SUCOFLEX 104	MY27558/4	2023-03-06
4	RF Cable (9 kHz - 1 GHz Radiated)	HUBER+SUHNER	L-5D2W	N/A	2023-03-06

-END-