FCC TEST REPORT
FCC ID: 2BB95-J6

Report Number.....:	**ZHT-230703019E**
Date of Test.....	July 03, 2023 to July 22, 2023
Date of issue.....:	July 22, 2023
Test Result..... :	PASS
Testing Laboratory.....:	**Guangdong Zhonghan Testing Technology Co., Ltd.**
Address ..... :	Room 104, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Applicant's name .....:	Shenzhen Jilu Technology Co., Ltd
Address ..... :	Room 116, Building 1, No. 35 Guanlan Avenue, Xinhe Community, Fucheng Street, Longhua District, Shenzhen
Manufacturer's name .....:	Shenzhen Jilu Technology Co., Ltd
Address ..... :	Room 116, Building 1, No. 35 Guanlan Avenue, Xinhe Community, Fucheng Street, Longhua District, Shenzhen
Test specification:	
Standard.....:	FCC CFR Title 47 Part 15 Subpart C Section 15.247
Test procedure..... :	KDB558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10:2013
Non-standard test method .....:	N/A

This device described above has been tested by ZHT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.
This report shall not be reproduced except in full, without the written approval of ZHT, this document may be altered or revised by ZHT, personal only, and shall be noted in the revision of the document.

Product name.....:	**Dash Camera**
Trademark .....:	N/A
Model/Type reference..... :	J6 D530, D138, D380, D7, D9, D16, D17, D19, S30, J7, J9, J12, J16, J17, A1, A3, A6, A7, A8, A9, F2S, F3S, F7S, F8S, F9S, F12, F17, F19, K7, K9, R16, R18, R19
Ratings..... :	Input: DC 12-24 V

Testing procedure and testing location:

Testing Laboratory.....:	**Guangdong Zhonghan Testing Technology Co., Ltd.**
Address.....:	Room 104, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Tested by (name + signature).....:	Leon Li
Reviewer (name + signature).....:	Baret Wu
Approved (name + signature).....:	Levi Lee

Table of Contents

Page

1. VERSION **5**

2. SUMMARY OF TEST RESULTS **6**

2.1 TEST FACILITY 7

2.2 MEASUREMENT UNCERTAINTY 7

3. GENERAL INFORMATION **8**

3.1 GENERAL DESCRIPTION OF EUT 8

3.2 DESCRIPTION OF TEST MODES 9

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 10

3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) 10

3.5EQUIPMENTS LIST FOR ALL TEST ITEMS 11

4. EMC EMISSION TEST **13**

4.1 CONDUCTED EMISSION MEASUREMENT 13

4.1.1 POWER LINE CONDUCTED EMISSION Limits 13

4.1.2 TEST PROCEDURE 13

4.1.3 DEVIATION FROM TEST STANDARD 13

4.1.4 TEST SETUP 14

4.1.5 EUT OPERATING CONDITIONS 14

4.2 RADIATED EMISSION MEASUREMENT 15

4.2.1 RADIATED EMISSION LIMITS 15

4.2.2 TEST PROCEDURE 15

4.2.3 DEVIATION FROM TEST STANDARD 16

4.2.4 TEST SETUP 16

4.2.5 EUT OPERATING CONDITIONS 17

4.2.6 TEST RESULTS 17

5.RADIATED BAND EMISSIONMEASUREMENT **26**

5.1 TEST REQUIREMENT: 26

5.2 TEST PROCEDURE 26

5.3 DEVIATION FROM TEST STANDARD 26

5.4 TEST SETUP 27

5.5 EUT OPERATING CONDITIONS 27

5.6 TEST RESULT 28

6.POWER SPECTRAL DENSITY TEST **30**

6.1 APPLIED PROCEDURES / LIMIT 30

6.2 TEST PROCEDURE 30

6.3 DEVIATION FROM STANDARD 30

6.4 TEST SETUP 30

6.5 EUT OPERATION CONDITIONS 30

6.6 TEST RESULT 31
7. CHANNEL BANDWIDTH 37
7.1 APPLIED PROCEDURES / LIMIT 37
7.2 TEST PROCEDURE 37
7.3 DEVIATION FROM STANDARD 37
7.4 TEST SETUP 37
7.5 EUT OPERATION CONDITIONS 37
7.6 TEST RESULT 38
8.PEAK OUTPUT POWER TEST 41
8.1 APPLIED PROCEDURES/LIMIT 41
8.2 TEST PROCEDURE 41
8.3 DEVIATION FROM STANDARD 41
8.4 TEST SETUP 41
8.5 EUT OPERATION CONDITIONS 41
8.6 TEST RESULT 42
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION 43
9.1 APPLICABLE STANDARD 43
9.2 TEST PROCEDURE 43
9.3 DEVIATION FROM STANDARD 43
9.4 TEST SETUP 43
9.5 EUT OPERATION CONDITIONS 43
9.6 TEST RESULTS 43
10. ANTENNA REQUIREMENT 47
11. TEST SETUP PHOTO 48
12. EUT CONSTRUCTIONAL DETAILS 48

1. VERSION

Report No.	Version	Description	Approved
ZHT-230703019E	Rev.01	Initial issue of report	July 22, 2023

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (b)(4)	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	N/A	
FCC part 15.247 (b)(3)	Conducted Peak Output Power	PASS	
FCC part 15.247 (a)(2)	Channel Bandwidth	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247(d)	Band Edge	PASS	
FCC part 15.205/15.209	Spurious Emission	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

Guangdong Zhonghan Testing Technology Co., Ltd.
Add. : Room 104, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District Shenzhen, Guangdong, China

FCC Registration Number:255941
Designation Number: CN0325
IC Registered No.: 29832
CAB identifier: CN0143

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ± U · where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2 · providing a level of confidence of approximately 95 %。

No.	Item	Uncertainty
1	Conducted Emission Test	±1.38dB
2	RF power conducted	±0.16dB
3	Spurious emissions conducted	±0.21dB
4	All emissions radiated(9k-30MHz)	±4.68dB
5	All emissions radiated(<1G)	±4.68dB
6	All emissions radiated(>1G)	±4.89dB
7	Temperature	±0.5°C
8	Humidity	±2%
9	Occupied Bandwidth	±4.96dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Dash Camera
Model No.:	J6 D530, D138, D380, D7, D9, D16, D17, D19, S30, J7, J9, J12, J16, J17, A1, A3, A6, A7, A8, A9, F2S, F3S, F7S, F8S, F9S, F12, F17, F19, K7, K9, R16, R18, R19
Model Different:	All the model are of the same circuit and RF module, and the only difference is the model name. The model J6 is the tested sample.
Hardware Version:	V1.0
Software Version:	V1.0
Sample(s) Status:	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20):11
Operation Frequency:	802.11b/802.11g /802.11n(HT20): 2412-2462MHz
Channel separation:	5MHz
Modulation technology:	IEEE 802.11b: DQPSK/DBPSK/DSSS/CCK IEEE 802.11g: QPSK/BPSK/16QAM/64QAM/OFDM IEEE 802.11n: QPSK/BPSK/16QAM/64QAM/OFDM
Antenna Type:	FPC Antenna
Antenna gain:	2.61dBi
Power supply:	Input: DC 12-24 V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	**Frequency (MHz)**	
	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: EUT use new battery during the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	802.11b	802.11g	802.11n(HT20)
Data rate	1Mbps	6Mbps	6.5Mbps

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Emission



Conducted Spurious

3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Dash Camera	N/A	J6	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

(1) The support equipment was authorized by Declaration of Confirmation.
(2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Model	Last Cal.	Next Cal.
1	Receiver	R&S	ESCI	Mar 12, 2023	Mar 11, 2024
2	Loop antenna	EMCI	LAP600	Mar 12, 2023	Mar 11, 2024
3	Amplifier	Schwarzbeck	BBV 9743 B	Mar 12, 2023	Mar 11, 2024
4	Amplifier	Schwarzbeck	BBV 9718 B	Mar 12, 2023	Mar 11, 2024
5	Bilog Antenna	Schwarzbeck	VULB9162	Mar 17, 2023	Mar 16, 2024
6	Horn Antenna	Schwarzbeck	BBHA9120D	Mar 17, 2023	Mar 16, 2024
7	Horn Antenna	A.H.SYSTEMS	SAS574	Mar 12, 2023	Mar 11, 2024
8	Amplifier	AEROFLEX	100KHz-40GHz	Mar 12, 2023	Mar 11, 2024
9	Spectrum Analyzer	R&S	FSV40	Mar 12, 2023	Mar 11, 2024
10	CDNE	Schwarzbeck	CDNE M2 + CDNE M3	Aug. 09, 2022	Aug. 08, 2023
11	966 Anechoic Chamber	EMToni	9m6m6m	Nov. 25, 2021	Nov. 24, 2024
12	Spectrum Analyzer	KEYSIGHT	N9020A	Mar 12, 2023	Mar 11, 2024
13	WIDBAND RADIO COMMUNICATI ON TESTER	R&S	CMW500	Mar 12, 2023	Mar 11, 2024
14	Single Generator	Agilent	N5182A	Mar 12, 2023	Mar 11, 2024
15	Power Sensor	MWRFtest	MW100-RFCB	Mar 12, 2023	Mar 11, 2024
16	Audio analyzer	R&S	UPL	Mar 12, 2023	Mar 11, 2024
17	Single Generator	R&S	SMB100A	Mar 12, 2023	Mar 11, 2024
18	Power Amplifier Shielding Room	EMToni	2m3m3m	Nov. 25, 2021	Nov. 24, 2024

Conduction Test equipment

Equipment	Manufacturer	Model	Last Cal.	Next Cal.
Receiver	R&S	ESCI	Mar 12, 2023	Mar 11, 2024
LISN	R&S	ENV216	Mar 12, 2023	Mar 11, 2024
ISN CAT 6	Schwarzbeck	NTFM 8158	Mar 12, 2023	Mar 11, 2024
ISN CAT 5	Schwarzbeck	CAT5 8158	Mar 12, 2023	Mar 11, 2024
Capacitive Voltage Probe	Schwarzbeck	CVP 9222 C	Mar 12, 2023	Mar 11, 2024
Current Transformer Clamp	Schwarzbeck	SW 9605	Mar 12, 2023	Mar 11, 2024
CE Shielding Room	EMToni	9m4m3m	Nov. 25, 2021	Nov. 24, 2024

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE

a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
d. LISN at least 80 cm from nearest part of EUT chassis.
e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

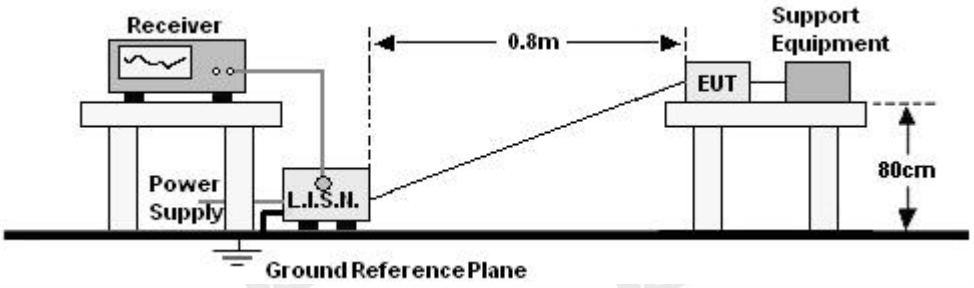

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 test result

N/A
The EUT is powered by battery.

4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209
Test Method:	ANSI C63.10:2013
Test Frequency Range:	9kHz to 25GHz
Test site:	Measurement Distance: 3m
Receiver setup:	

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

(1) The limit for radiated test was performed according to FCC PART 15C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoiccamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of avariable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD

No deviation

4.2.4 TEST SETUP

（A）Radiated Emission Test-Up Frequency Below 30MHz

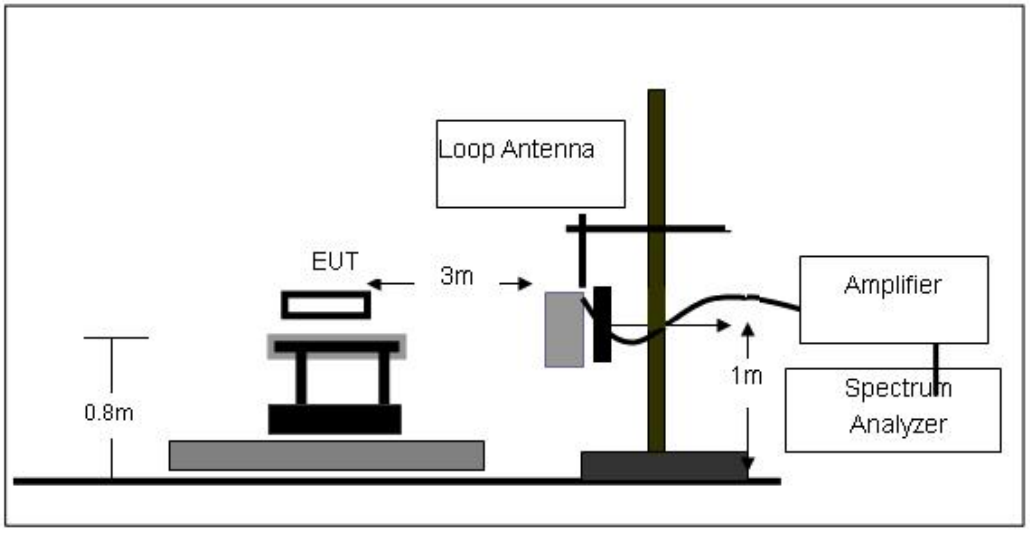

（B）Radiated Emission Test-Up Frequency 30MHz~1GHz

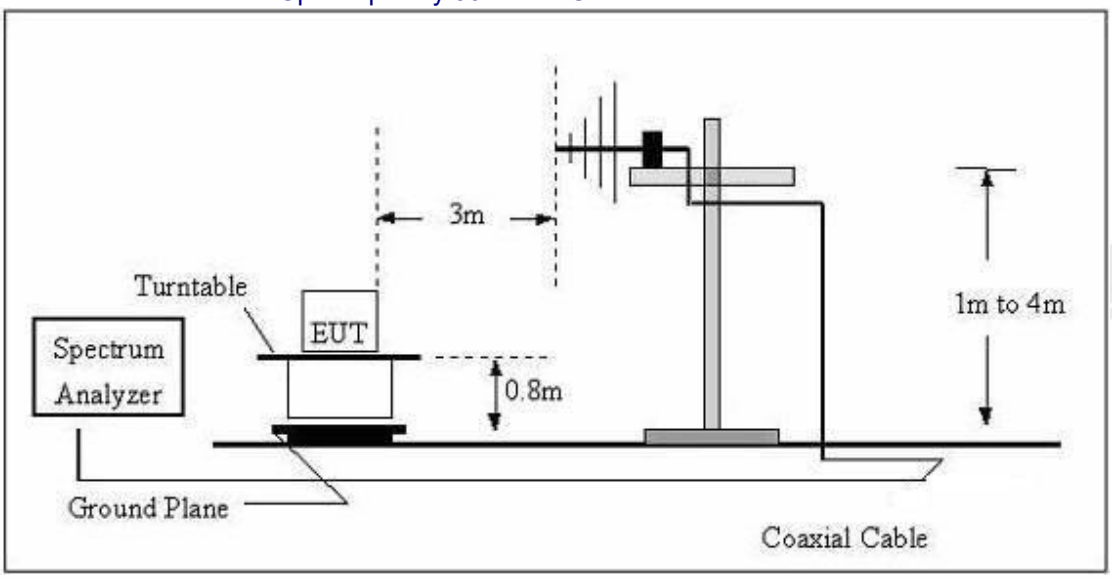

（C）Radiated Emission Test-Up Frequency Above 1GHz

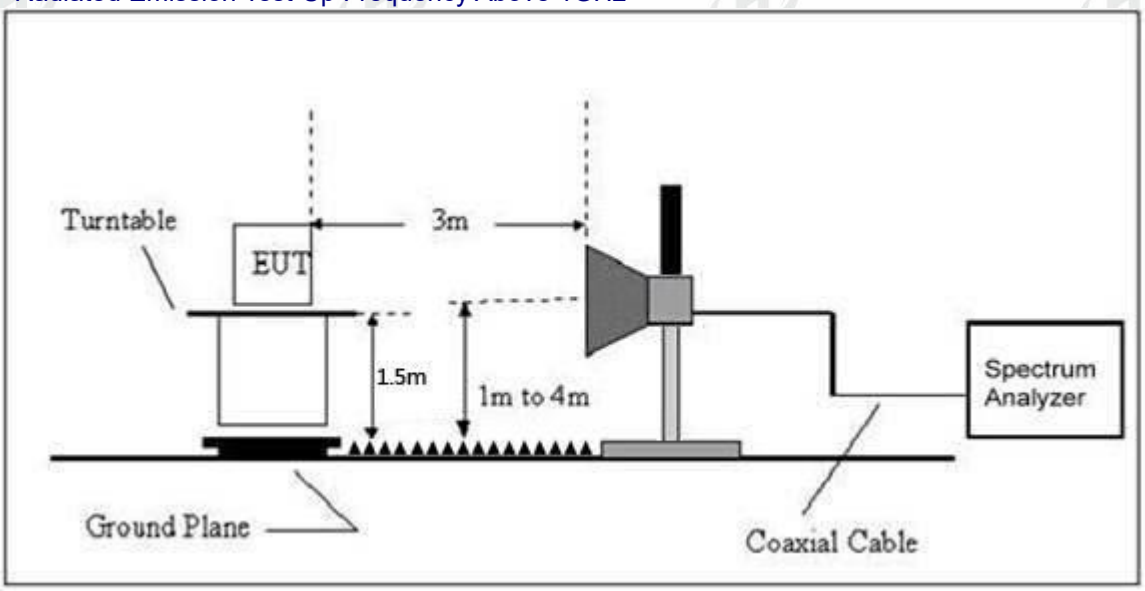

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS

Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Between 30MHz – 1GHz

Temperature :	25.1℃	Relative Humidity :	50%
Pressure :	101kPa	Polarization :	Horizontal
Test Voltage :	DC 12V		

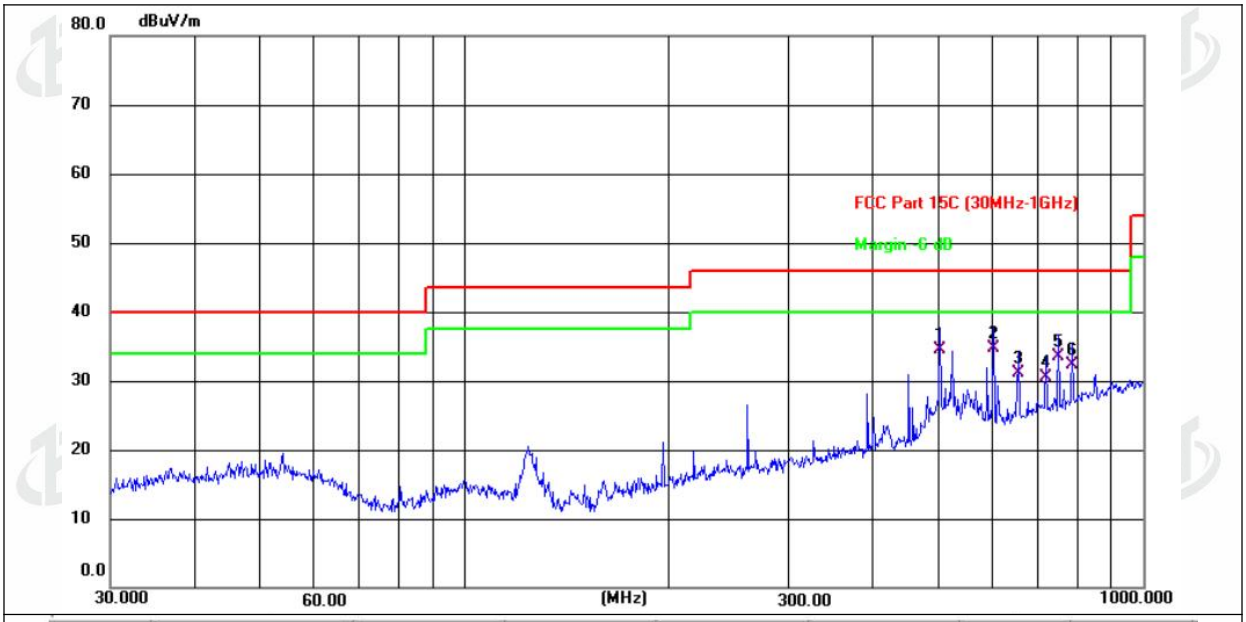

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	501.1790	38.43	-3.96	34.47	46.00	-11.53	QP
2 *	601.4265	36.89	-2.21	34.68	46.00	-11.32	QP
3	654.2318	32.17	-1.13	31.04	46.00	-14.96	QP
4	719.1995	30.47	0.07	30.54	46.00	-15.46	QP
5	750.1082	33.03	0.51	33.54	46.00	-12.46	QP
6	785.0934	31.34	1.02	32.36	46.00	-13.64	QP

Temperature :	25.1℃	Relative Humidity :	50%
Pressure :	101kPa	Polarization :	Vertical
Test Voltage :	DC 12V		

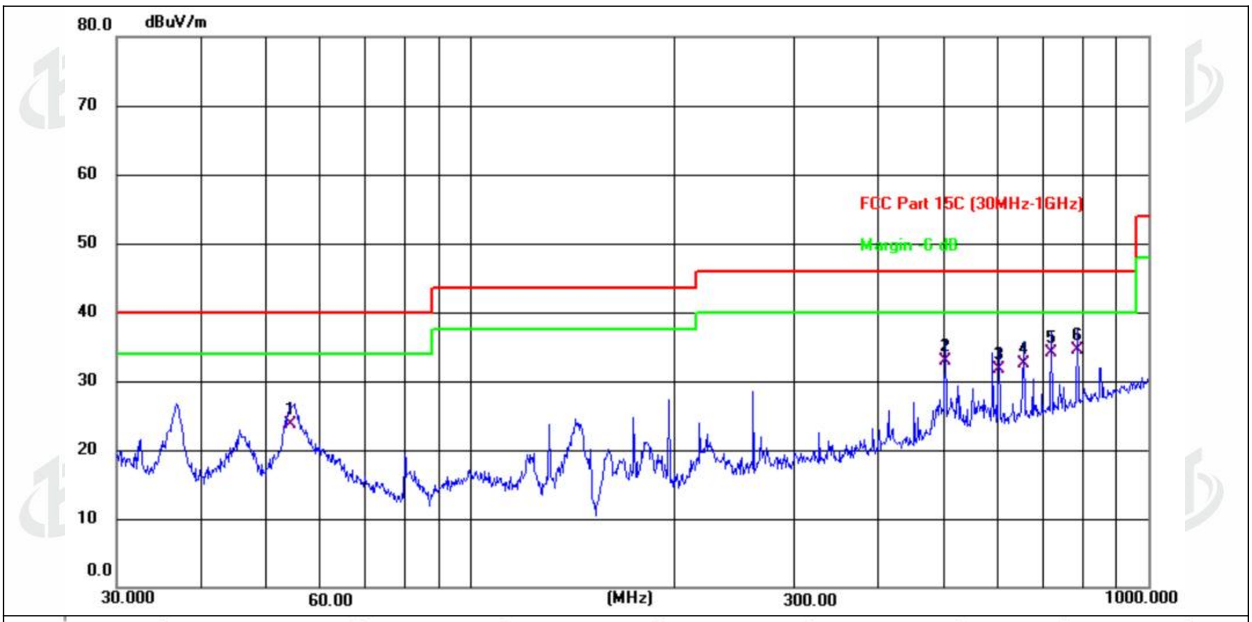

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	54.2610	32.49	-8.77	23.72	40.00	-16.28	QP
2	501.1790	36.88	-3.96	32.92	46.00	-13.08	QP
3	601.4265	33.97	-2.21	31.76	46.00	-14.24	QP
4	654.2318	33.69	-1.13	32.56	46.00	-13.44	QP
5	719.1995	33.97	0.07	34.04	46.00	-11.96	QP
6 *	785.0934	33.51	1.02	34.53	46.00	-11.47	QP

Remarks:
1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2.The emission levels of other frequencies are very lower than the limit and not show in test report.
3.The test data shows only the worst case 802.11b mode (Low Channel:2412MHz).

1GHz~25GHz

802.11b

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2412MHz									
V	4824.00	61.46	30.55	5.77	24.66	61.34	74	-12.66	PK
V	4824.00	43.96	30.55	5.77	24.66	43.84	54	-10.16	AV
V	7236.00	54.49	30.33	6.32	24.55	55.03	74	-18.97	PK
V	7236.00	37.61	30.33	6.32	24.55	38.15	54	-15.85	AV
V	9648.00	51.62	30.85	7.45	24.69	52.91	74	-21.09	PK
V	9648.00	35.35	30.85	7.45	24.69	36.64	54	-17.36	AV
V	12060.00	57.18	31.02	8.99	25.57	60.72	74	-13.28	PK
V	12060.00	38.92	31.02	8.99	25.57	42.46	54	-11.54	AV
H	4824.00	54.44	30.55	5.77	24.66	54.32	74	-19.68	PK
H	4824.00	37.68	30.55	5.77	24.66	37.56	54	-16.44	AV
H	7236.00	52.20	30.33	6.32	24.55	52.74	74	-21.26	PK
H	7236.00	36.56	30.33	6.32	24.55	37.1	54	-16.9	AV
H	9648.00	49.55	30.85	7.45	24.69	50.84	74	-23.16	PK
H	9648.00	36.14	30.85	7.45	24.69	37.43	54	-16.57	AV
H	12060.00	47.93	31.02	8.99	25.57	51.47	74	-22.53	PK
H	12060.00	33.66	31.02	8.99	25.57	37.2	54	-16.8	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2437MHz									
V	4874.00	61.09	30.55	5.77	24.66	60.97	74	-13.03	PK
V	4874.00	43.42	30.55	5.77	24.66	43.3	54	-10.7	AV
V	7311.00	53.47	30.33	6.32	24.55	54.01	74	-19.99	PK
V	7311.00	37.80	30.33	6.32	24.55	38.34	54	-15.66	AV
V	9748.00	52.21	30.85	7.45	24.69	53.5	74	-20.5	PK
V	9748.00	35.68	30.85	7.45	24.69	36.97	54	-17.03	AV
V	12185.00	56.63	31.02	8.99	25.57	60.17	74	-13.83	PK
V	12185.00	38.49	31.02	8.99	25.57	42.03	54	-11.97	AV
H	4874.00	54.31	30.55	5.77	24.66	54.19	74	-19.81	PK
H	4874.00	37.85	30.55	5.77	24.66	37.73	54	-16.27	AV
H	7311.00	51.69	30.33	6.32	24.55	52.23	74	-21.77	PK
H	7311.00	36.09	30.33	6.32	24.55	36.63	54	-17.37	AV
H	9748.00	49.68	30.85	7.45	24.69	50.97	74	-23.03	PK
H	9748.00	35.80	30.85	7.45	24.69	37.09	54	-16.91	AV
H	12185.00	48.04	31.02	8.99	25.57	51.58	74	-22.42	PK
H	12185.00	34.05	31.02	8.99	25.57	37.59	54	-16.41	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2462MHz									
V	4924.00	62.58	30.55	5.77	24.66	62.46	74	-11.54	PK
V	4924.00	44.11	30.55	5.77	24.66	43.99	54	-10.01	AV
V	7386.00	54.34	30.33	6.32	24.55	54.88	74	-19.12	PK
V	7386.00	37.71	30.33	6.32	24.55	38.25	54	-15.75	AV
V	9848.00	51.83	30.85	7.45	24.69	53.12	74	-20.88	PK
V	9848.00	36.03	30.85	7.45	24.69	37.32	54	-16.68	AV
V	12310.00	57.01	31.02	8.99	25.57	60.55	74	-13.45	PK
V	12310.00	39.02	31.02	8.99	25.57	42.56	54	-11.44	AV
H	4924.00	53.88	30.55	5.77	24.66	53.76	74	-20.24	PK
H	4924.00	37.50	30.55	5.77	24.66	37.38	54	-16.62	AV
H	7386.00	51.26	30.33	6.32	24.55	51.8	74	-22.2	PK
H	7386.00	36.57	30.33	6.32	24.55	37.11	54	-16.89	AV
H	9848.00	49.88	30.85	7.45	24.69	51.17	74	-22.83	PK
H	9848.00	34.88	30.85	7.45	24.69	36.17	54	-17.83	AV
H	12310.00	47.98	31.02	8.99	25.57	51.52	74	-22.48	PK
H	12310.00	33.28	31.02	8.99	25.57	36.82	54	-17.18	AV

Remark:
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11g

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2412MHz									
V	4824.00	61.17	30.55	5.77	24.66	61.05	74	-12.95	PK
V	4824.00	43.66	30.55	5.77	24.66	43.54	54	-10.46	AV
V	7236.00	53.96	30.33	6.32	24.55	54.5	74	-19.5	PK
V	7236.00	37.63	30.33	6.32	24.55	38.17	54	-15.83	AV
V	9648.00	52.15	30.85	7.45	24.69	53.44	74	-20.56	PK
V	9648.00	35.77	30.85	7.45	24.69	37.06	54	-16.94	AV
V	12060.00	57.06	31.02	8.99	25.57	60.6	74	-13.4	PK
V	12060.00	38.90	31.02	8.99	25.57	42.44	54	-11.56	AV
H	4824.00	54.59	30.55	5.77	24.66	54.47	74	-19.53	PK
H	4824.00	37.46	30.55	5.77	24.66	37.34	54	-16.66	AV
H	7236.00	52.09	30.33	6.32	24.55	52.63	74	-21.37	PK
H	7236.00	36.55	30.33	6.32	24.55	37.09	54	-16.91	AV
H	9648.00	50.08	30.85	7.45	24.69	51.37	74	-22.63	PK
H	9648.00	35.87	30.85	7.45	24.69	37.16	54	-16.84	AV
H	12060.00	47.70	31.02	8.99	25.57	51.24	74	-22.76	PK
H	12060.00	33.68	31.02	8.99	25.57	37.22	54	-16.78	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2437MHz									
V	4874.00	60.86	30.55	5.77	24.66	60.74	74	-13.26	PK
V	4874.00	43.76	30.55	5.77	24.66	43.64	54	-10.36	AV
V	7311.00	54.21	30.33	6.32	24.55	54.75	74	-19.25	PK
V	7311.00	37.42	30.33	6.32	24.55	37.96	54	-16.04	AV
V	9748.00	52.55	30.85	7.45	24.69	53.84	74	-20.16	PK
V	9748.00	35.21	30.85	7.45	24.69	36.5	54	-17.5	AV
V	12185.00	56.10	31.02	8.99	25.57	59.64	74	-14.36	PK
V	12185.00	39.11	31.02	8.99	25.57	42.65	54	-11.35	AV
H	4874.00	54.95	30.55	5.77	24.66	54.83	74	-19.17	PK
H	4874.00	37.61	30.55	5.77	24.66	37.49	54	-16.51	AV
H	7311.00	51.48	30.33	6.32	24.55	52.02	74	-21.98	PK
H	7311.00	36.83	30.33	6.32	24.55	37.37	54	-16.63	AV
H	9748.00	49.82	30.85	7.45	24.69	51.11	74	-22.89	PK
H	9748.00	36.08	30.85	7.45	24.69	37.37	54	-16.63	AV
H	12185.00	47.30	31.02	8.99	25.57	50.84	74	-23.16	PK
H	12185.00	33.43	31.02	8.99	25.57	36.97	54	-17.03	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2462MHz									
V	4924.00	62.30	30.55	5.77	24.66	62.18	74	-11.82	PK
V	4924.00	43.76	30.55	5.77	24.66	43.64	54	-10.36	AV
V	7386.00	53.95	30.33	6.32	24.55	54.49	74	-19.51	PK
V	7386.00	37.47	30.33	6.32	24.55	38.01	54	-15.99	AV
V	9848.00	52.18	30.85	7.45	24.69	53.47	74	-20.53	PK
V	9848.00	35.15	30.85	7.45	24.69	36.44	54	-17.56	AV
V	12310.00	56.65	31.02	8.99	25.57	60.19	74	-13.81	PK
V	12310.00	38.57	31.02	8.99	25.57	42.11	54	-11.89	AV
H	4924.00	54.13	30.55	5.77	24.66	54.01	74	-19.99	PK
H	4924.00	37.82	30.55	5.77	24.66	37.7	54	-16.3	AV
H	7386.00	51.14	30.33	6.32	24.55	51.68	74	-22.32	PK
H	7386.00	36.28	30.33	6.32	24.55	36.82	54	-17.18	AV
H	9848.00	49.54	30.85	7.45	24.69	50.83	74	-23.17	PK
H	9848.00	35.49	30.85	7.45	24.69	36.78	54	-17.22	AV
H	12310.00	47.78	31.02	8.99	25.57	51.32	74	-22.68	PK
H	12310.00	33.11	31.02	8.99	25.57	36.65	54	-17.35	AV

Remark:
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2412MHz									
V	4824.00	60.50	30.55	5.77	24.66	60.38	74	-13.62	PK
V	4824.00	43.24	30.55	5.77	24.66	43.12	54	-10.88	AV
V	7236.00	53.84	30.33	6.32	24.55	54.38	74	-19.62	PK
V	7236.00	37.75	30.33	6.32	24.55	38.29	54	-15.71	AV
V	9648.00	52.24	30.85	7.45	24.69	53.53	74	-20.47	PK
V	9648.00	35.85	30.85	7.45	24.69	37.14	54	-16.86	AV
V	12060.00	56.97	31.02	8.99	25.57	60.51	74	-13.49	PK
V	12060.00	38.64	31.02	8.99	25.57	42.18	54	-11.82	AV
H	4824.00	53.91	30.55	5.77	24.66	53.79	74	-20.21	PK
H	4824.00	37.27	30.55	5.77	24.66	37.15	54	-16.85	AV
H	7236.00	52.14	30.33	6.32	24.55	52.68	74	-21.32	PK
H	7236.00	36.60	30.33	6.32	24.55	37.14	54	-16.86	AV
H	9648.00	50.03	30.85	7.45	24.69	51.32	74	-22.68	PK
H	9648.00	35.16	30.85	7.45	24.69	36.45	54	-17.55	AV
H	12060.00	47.75	31.02	8.99	25.57	51.29	74	-22.71	PK
H	12060.00	32.87	31.02	8.99	25.57	36.41	54	-17.59	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2437MHz									
V	4874.00	60.57	30.55	5.77	24.66	60.45	74	-13.55	PK
V	4874.00	43.16	30.55	5.77	24.66	43.04	54	-10.96	AV
V	7311.00	53.76	30.33	6.32	24.55	54.3	74	-19.7	PK
V	7311.00	37.51	30.33	6.32	24.55	38.05	54	-15.95	AV
V	9748.00	51.45	30.85	7.45	24.69	52.74	74	-21.26	PK
V	9748.00	35.81	30.85	7.45	24.69	37.1	54	-16.9	AV
V	12185.00	56.81	31.02	8.99	25.57	60.35	74	-13.65	PK
V	12185.00	38.78	31.02	8.99	25.57	42.32	54	-11.68	AV
H	4874.00	54.74	30.55	5.77	24.66	54.62	74	-19.38	PK
H	4874.00	38.18	30.55	5.77	24.66	38.06	54	-15.94	AV
H	7311.00	51.64	30.33	6.32	24.55	52.18	74	-21.82	PK
H	7311.00	36.68	30.33	6.32	24.55	37.22	54	-16.78	AV
H	9748.00	49.02	30.85	7.45	24.69	50.31	74	-23.69	PK
H	9748.00	35.55	30.85	7.45	24.69	36.84	54	-17.16	AV
H	12185.00	47.57	31.02	8.99	25.57	51.11	74	-22.89	PK
H	12185.00	33.60	31.02	8.99	25.57	37.14	54	-16.86	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2462MHz									
V	4924.00	62.29	30.55	5.77	24.66	62.17	74	-11.83	PK
V	4924.00	43.15	30.55	5.77	24.66	43.03	54	-10.97	AV
V	7386.00	54.00	30.33	6.32	24.55	54.54	74	-19.46	PK
V	7386.00	38.53	30.33	6.32	24.55	39.07	54	-14.93	AV
V	9848.00	51.63	30.85	7.45	24.69	52.92	74	-21.08	PK
V	9848.00	35.33	30.85	7.45	24.69	36.62	54	-17.38	AV
V	12310.00	57.02	31.02	8.99	25.57	60.56	74	-13.44	PK
V	12310.00	38.85	31.02	8.99	25.57	42.39	54	-11.61	AV
H	4924.00	54.44	30.55	5.77	24.66	54.32	74	-19.68	PK
H	4924.00	37.75	30.55	5.77	24.66	37.63	54	-16.37	AV
H	7386.00	51.22	30.33	6.32	24.55	51.76	74	-22.24	PK
H	7386.00	36.83	30.33	6.32	24.55	37.37	54	-16.63	AV
H	9848.00	49.76	30.85	7.45	24.69	51.05	74	-22.95	PK
H	9848.00	35.18	30.85	7.45	24.69	36.47	54	-17.53	AV
H	12310.00	48.02	31.02	8.99	25.57	51.56	74	-22.44	PK
H	12310.00	33.22	31.02	8.99	25.57	36.76	54	-17.24	AV

Remark:
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5.RADIATED BAND EMISSIONMEASUREMENT

5.1 TEST REQUIREMENT:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205
Test Method:	ANSI C63.10: 2013
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.
Test site:	Measurement Distance: 3m
Receiver setup:	

Frequency	Detector	RBW	VBW	Value
Above 1GHz	Peak	1MHz	3MHz	Peak
	Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

(1) The limit for radiated test was performed according to FCC PART 15C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

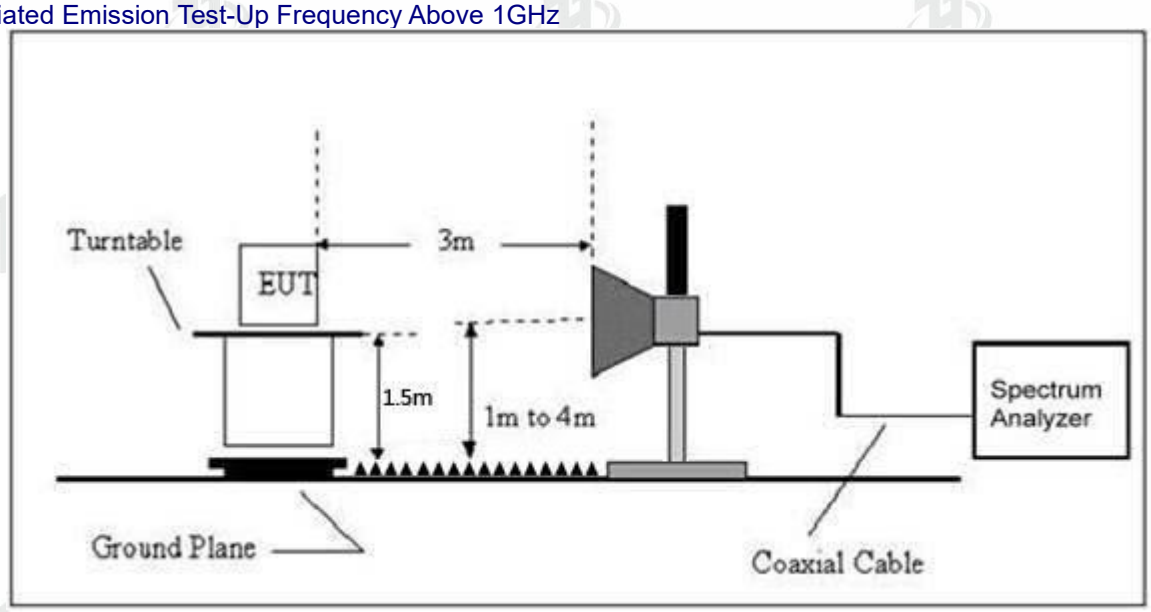

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type	Result
802.11b	Low Channel 2412MHz										
	H	2390.00	59.83	30.22	4.85	23.98	58.44	74	-15.56	PK	PASS
	H	2390.00	48.14	30.22	4.85	23.98	46.75	54	-7.25	AV	PASS
	H	2400.00	61.56	30.22	4.85	23.98	60.17	74	-13.83	PK	PASS
	H	2400.00	49.49	30.22	4.85	23.98	48.1	54	-5.9	AV	PASS
	V	2390.00	59.03	30.22	4.85	23.98	57.64	74	-16.36	PK	PASS
	V	2390.00	48.52	30.22	4.85	23.98	47.13	54	-6.87	AV	PASS
	V	2400.00	61.18	30.22	4.85	23.98	59.79	74	-14.21	PK	PASS
	V	2400.00	49.90	30.22	4.85	23.98	48.51	54	-5.49	AV	PASS
	High Channel 2462MHz										
	H	2483.50	59.10	30.22	4.85	23.98	57.71	74	-16.29	PK	PASS
	H	2483.50	47.43	30.22	4.85	23.98	46.04	54	-7.96	AV	PASS
	H	2500.00	61.89	30.22	4.85	23.98	60.5	74	-13.5	PK	PASS
	H	2500.00	50.38	30.22	4.85	23.98	48.99	54	-5.01	AV	PASS
	V	2483.50	59.94	30.22	4.85	23.98	58.55	74	-15.45	PK	PASS
	V	2483.50	48.42	30.22	4.85	23.98	47.03	54	-6.97	AV	PASS
	V	2500.00	59.29	30.22	4.85	23.98	57.9	74	-16.1	PK	PASS
	V	2500.00	48.19	30.22	4.85	23.98	46.8	54	-7.2	AV	PASS
802.11g	Low Channel 2412MHz										
	H	2390.00	59.40	30.22	4.85	23.98	58.01	74	-15.99	PK	PASS
	H	2390.00	47.46	30.22	4.85	23.98	46.07	54	-7.93	AV	PASS
	H	2400.00	60.84	30.22	4.85	23.98	59.45	74	-14.55	PK	PASS
	H	2400.00	48.25	30.22	4.85	23.98	46.86	54	-7.14	AV	PASS
	V	2390.00	59.09	30.22	4.85	23.98	57.7	74	-16.3	PK	PASS
	V	2390.00	48.08	30.22	4.85	23.98	46.69	54	-7.31	AV	PASS
	V	2400.00	60.42	30.22	4.85	23.98	59.03	74	-14.97	PK	PASS
	V	2400.00	49.66	30.22	4.85	23.98	48.27	54	-5.73	AV	PASS
	High Channel 2462MHz										
	H	2483.50	59.87	30.22	4.85	23.98	58.48	74	-15.52	PK	PASS
	H	2483.50	48.23	30.22	4.85	23.98	46.84	54	-7.16	AV	PASS
	H	2500.00	62.33	30.22	4.85	23.98	60.94	74	-13.06	PK	PASS
	H	2500.00	50.82	30.22	4.85	23.98	49.43	54	-4.57	AV	PASS
	V	2483.50	60.37	30.22	4.85	23.98	58.98	74	-15.02	PK	PASS
	V	2483.50	48.56	30.22	4.85	23.98	47.17	54	-6.83	AV	PASS
	V	2500.00	59.11	30.22	4.85	23.98	57.72	74	-16.28	PK	PASS
	V	2500.00	47.84	30.22	4.85	23.98	46.45	54	-7.55	AV	PASS

802.11n20	Low Channel 2412MHz										
	H	2390.00	60.38	30.22	4.85	23.98	58.99	74	-15.01	PK	PASS
	H	2390.00	47.46	30.22	4.85	23.98	46.07	54	-7.93	AV	PASS
	H	2400.00	61.65	30.22	4.85	23.98	60.26	74	-13.74	PK	PASS
	H	2400.00	49.20	30.22	4.85	23.98	47.81	54	-6.19	AV	PASS
	V	2390.00	59.14	30.22	4.85	23.98	57.75	74	-16.25	PK	PASS
	V	2390.00	48.10	30.22	4.85	23.98	46.71	54	-7.29	AV	PASS
	V	2400.00	60.68	30.22	4.85	23.98	59.29	74	-14.71	PK	PASS
	V	2400.00	49.65	30.22	4.85	23.98	48.26	54	-5.74	AV	PASS
	High Channel 2462MHz										
	H	2483.50	59.17	30.22	4.85	23.98	57.78	74	-16.22	PK	PASS
	H	2483.50	47.57	30.22	4.85	23.98	46.18	54	-7.82	AV	PASS
	H	2500.00	61.35	30.22	4.85	23.98	59.96	74	-14.04	PK	PASS
	H	2500.00	51.25	30.22	4.85	23.98	49.86	54	-4.14	AV	PASS
	V	2483.50	60.42	30.22	4.85	23.98	59.03	74	-14.97	PK	PASS
	V	2483.50	49.36	30.22	4.85	23.98	47.97	54	-6.03	AV	PASS
	V	2500.00	58.91	30.22	4.85	23.98	57.52	74	-16.48	PK	PASS
	V	2500.00	47.94	30.22	4.85	23.98	46.55	54	-7.45	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

6.POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz ≤ RBW ≤ 100 kHz.
4. Set the VBW ≥ 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULT

Temperature :	25.4℃	Relative Humidity :	52%
Pressure :	101kPa	Test Voltage :	DC 12V
Test Mode :	TX b Mode		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-15.84	8	PASS
2437 MHz	-16.31	8	PASS
2462 MHz	-15.98	8	PASS

TX CH01

TX CH06

TX CH11

Temperature :	25.4℃	Relative Humidity :	52%
Pressure :	101kPa	Test Voltage :	DC 12V
Test Mode :	TX g Mode		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-18.53	8	PASS
2437 MHz	-19.06	8	PASS
2462 MHz	-19.16	8	PASS

TX CH01

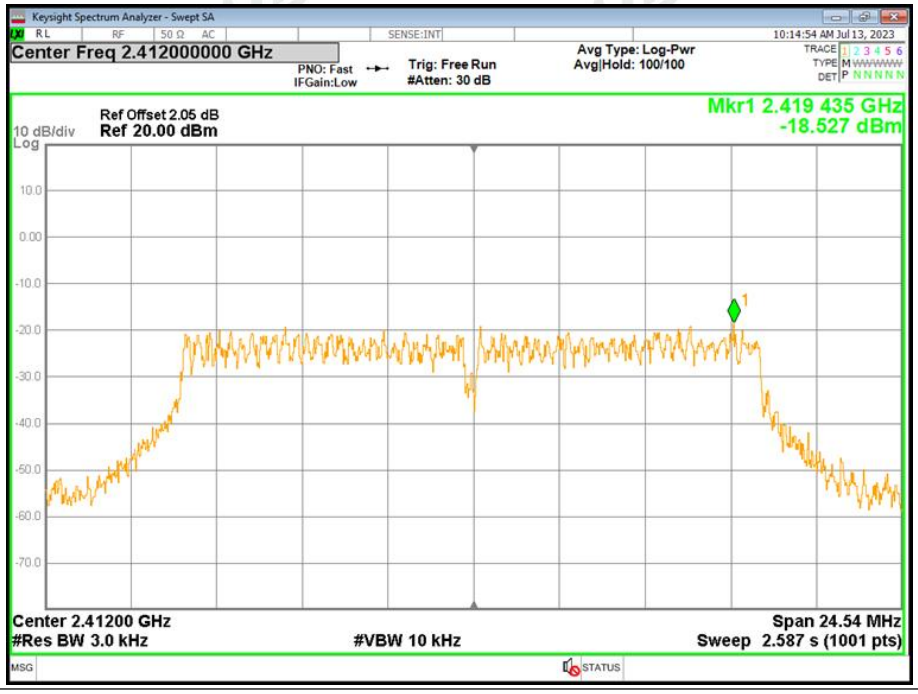

TX CH06

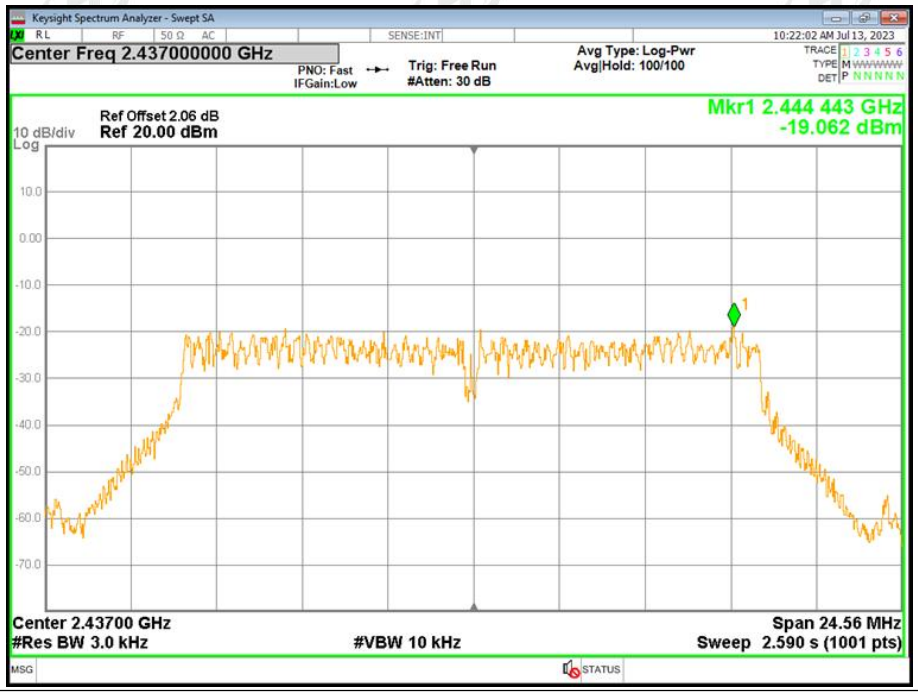

TX CH11

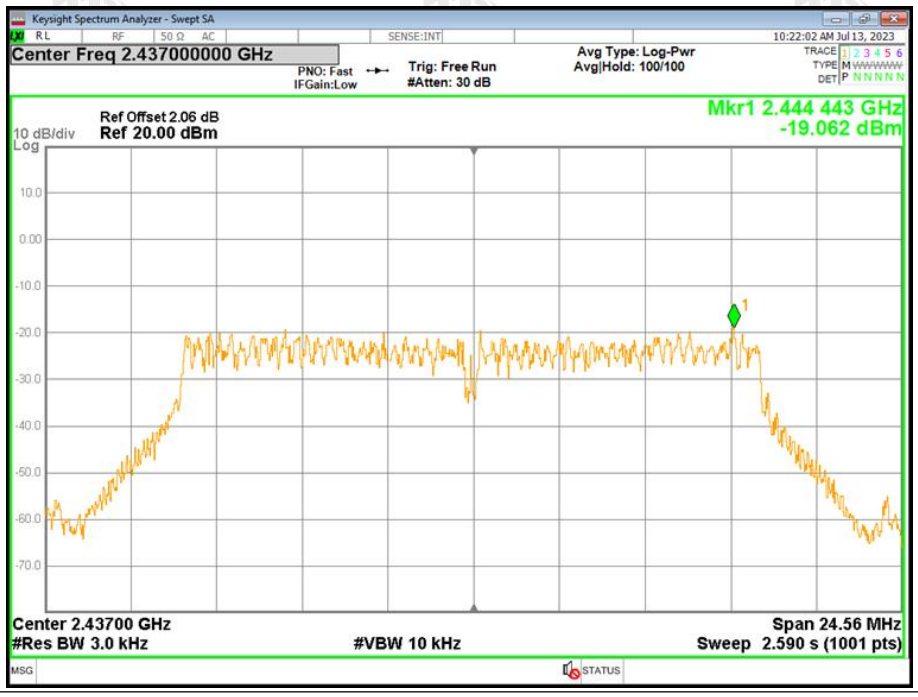

Temperature :	25.4℃	Relative Humidity :	52%
Pressure :	101kPa	Test Voltage :	DC 12V
Test Mode :	TX n Mode(20M)		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-19.47	8	PASS
2437 MHz	-19.27	8	PASS
2462 MHz	-19.14	8	PASS

TX CH01

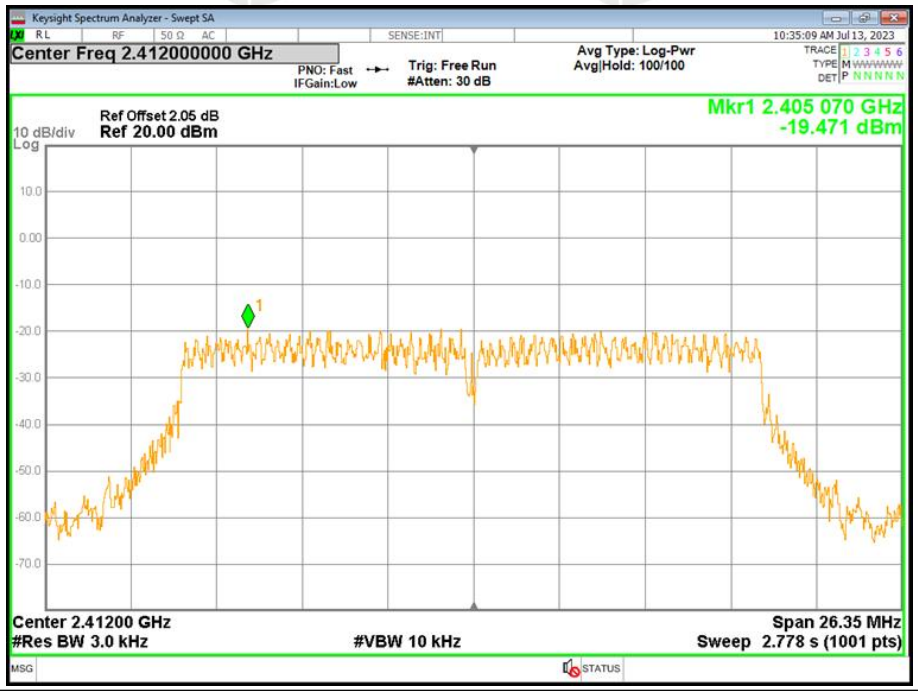

TX CH06

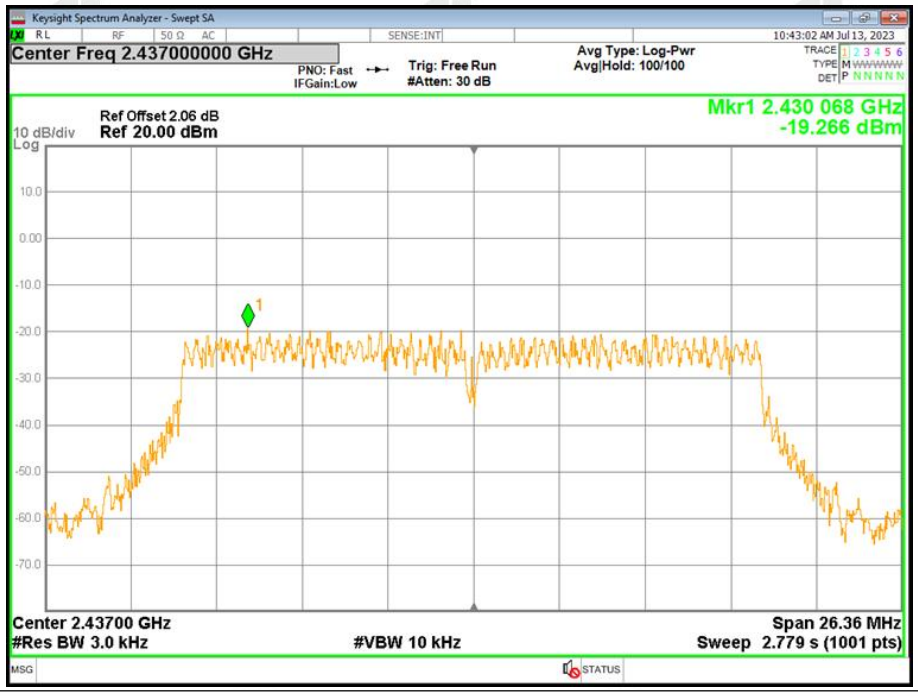

TX CH11

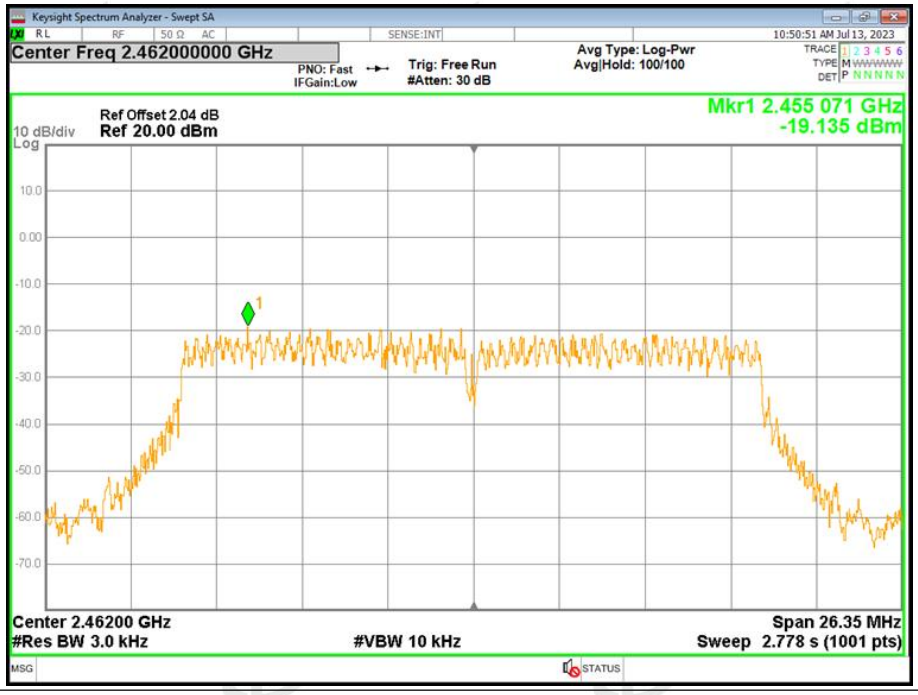

7. CHANNEL BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 xRBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULT

Temperature :	25.4℃	Relative Humidity :	52%
Pressure :	101kPa	Test Voltage :	DC 12V
Test Mode :	TX Mode		

Test CH	-6dB Occupy Bandwidth (MHz)				
	802.11b	802.11g	802.11n(HT20)	Limit(KHz)	Result
Lowest	9.043	16.358	17.567	>500	Pass
Middle	9.04	16.376	17.572		
Highest	8.497	16.332	17.564		

Test plot as follows:

802.11b

802.11g

Lowest channel

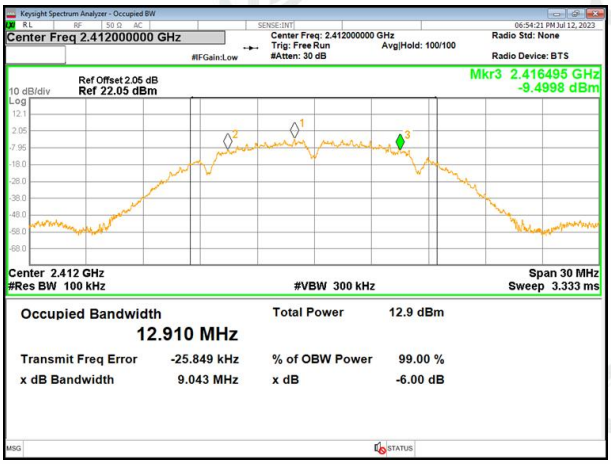

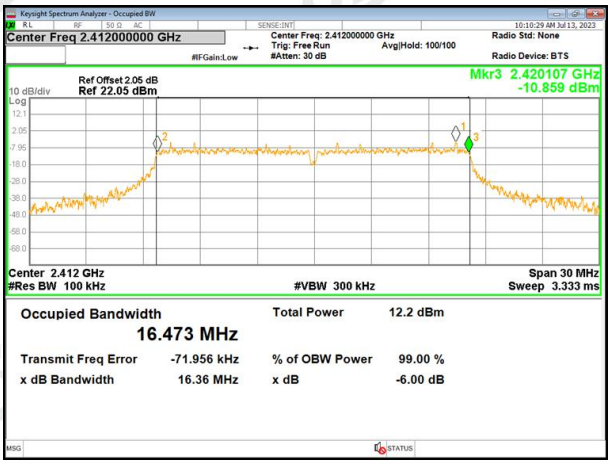

Middle channel

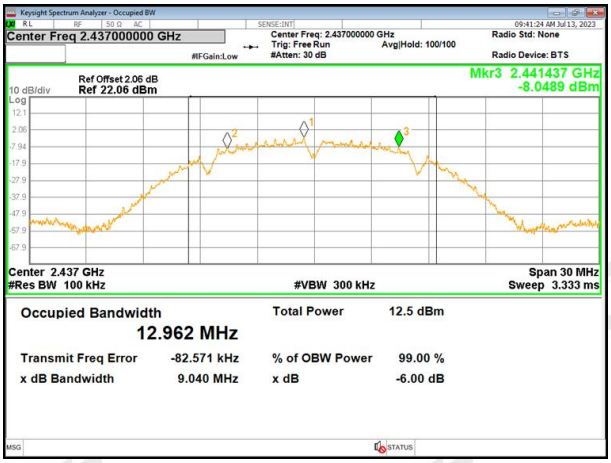

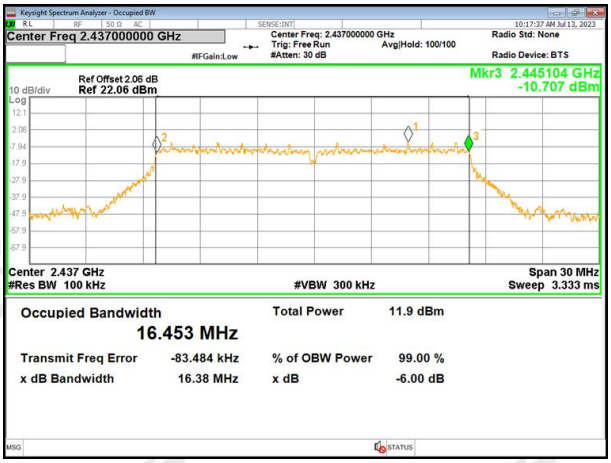

Highest channel

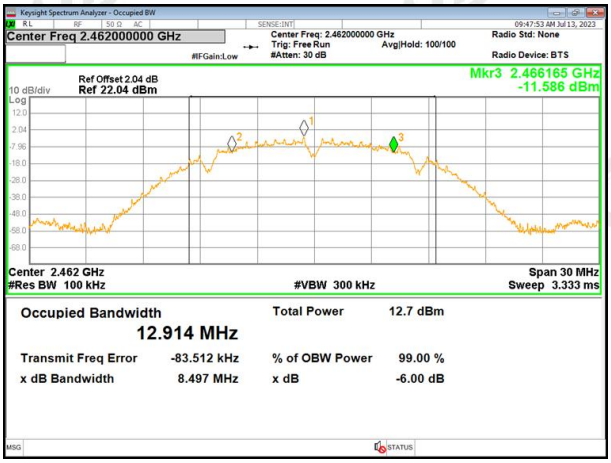

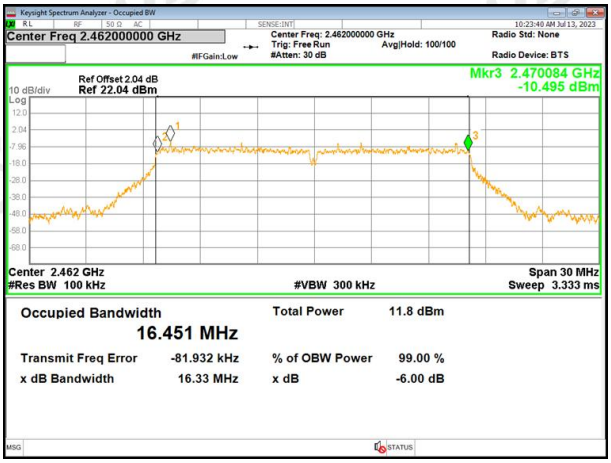

802.11n20

802.11n(HT20)

Lowest channel

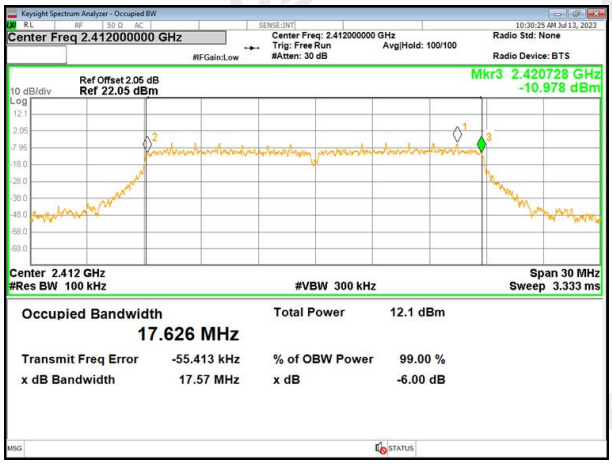

Middle channel

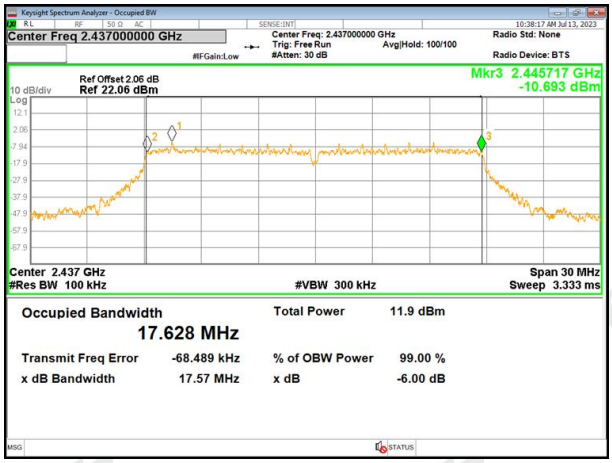

Highest channel

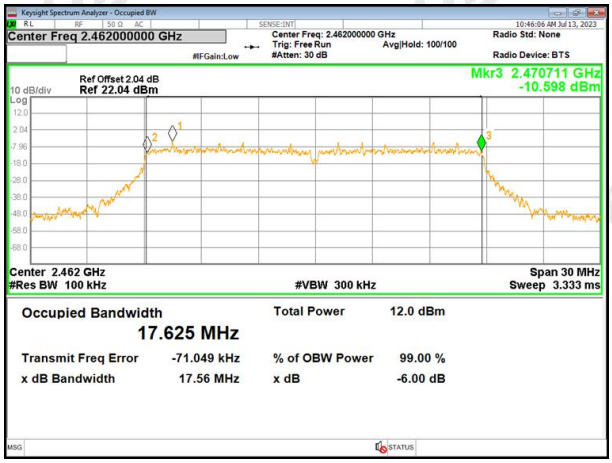

8.PEAK OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

a. The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

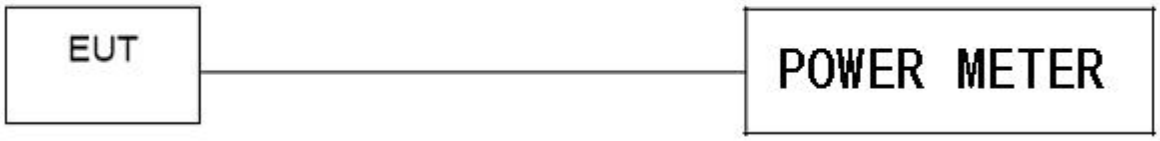

8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULT

Temperature：	25.2℃	Relative Humidity：	55%
Pressure：	101kPa	Test Voltage ：	DC 12V

Test CH	Peak Output Power (dBm)			Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)		
Lowest	8.08	10.86	10.74	30.00	Pass
Middle	7.52	10.66	10.45		
Highest	7.78	10.67	10.57		

9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

A) Set the RBW = 100KHz.
B) Set the VBW = 300KHz.
C) Sweep time = auto couple.
D) Detector function = peak.
E) Trace mode = max hold.
F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS

Test plot as follows:

Test mode:	802.11b

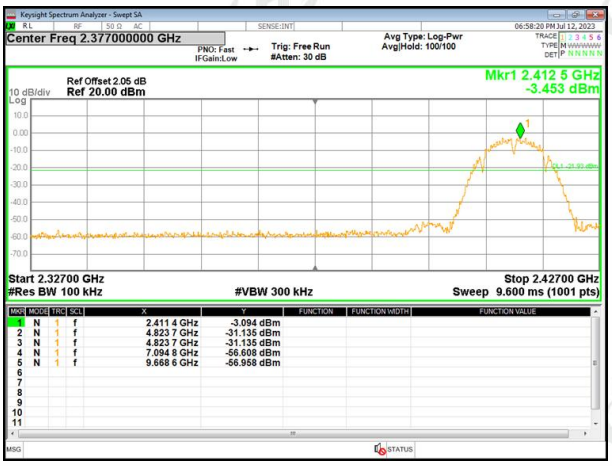

Lowest channel

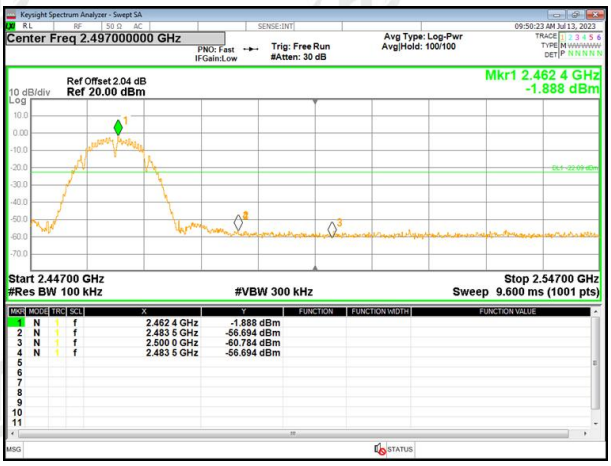

Highest channel

Test mode:	802.11g

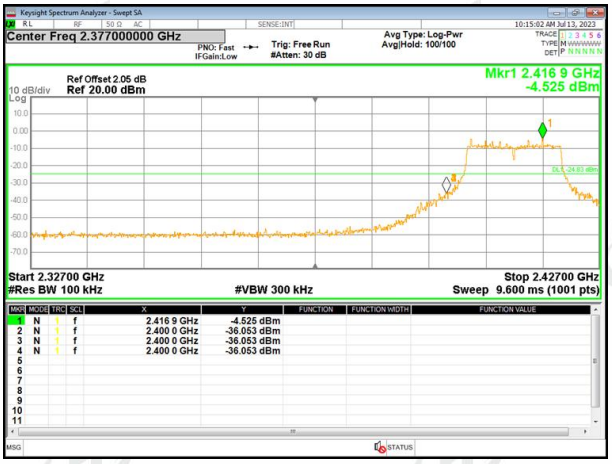

Lowest channel

Highest channel

Test mode:	802.11n(HT20)

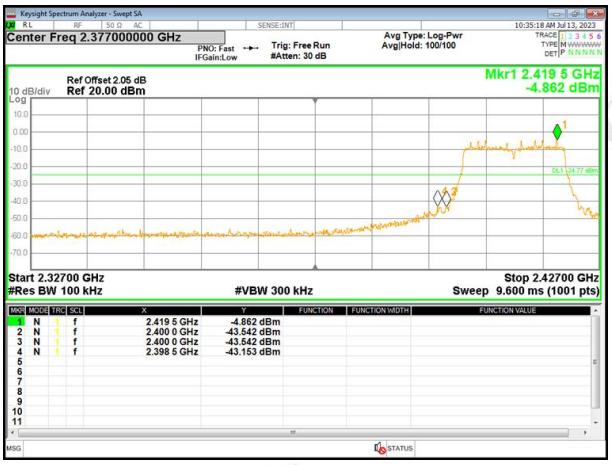

Lowest channel

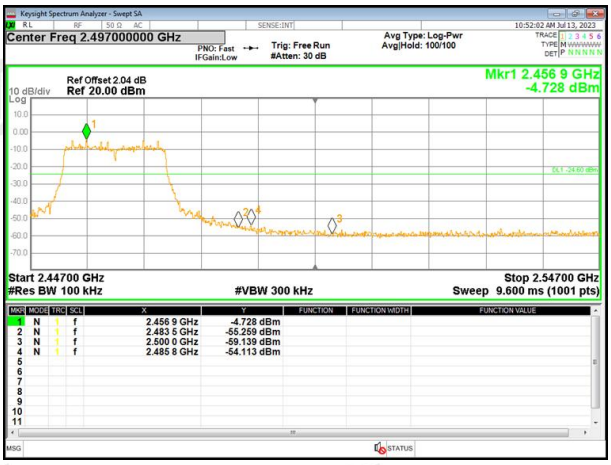

Highest channel

Test plot as follows:

802.11b	802.11g

Lowest channel

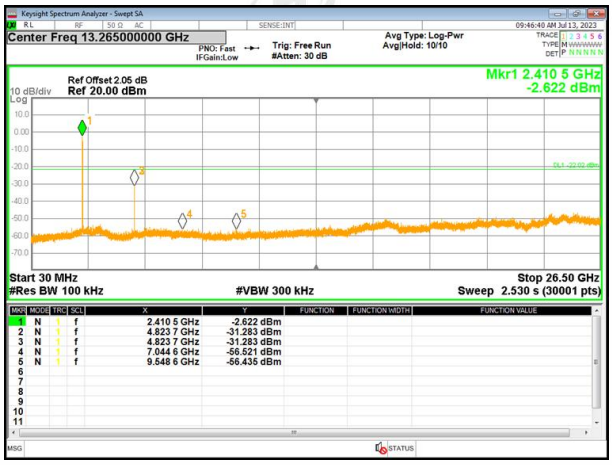

Middle channel

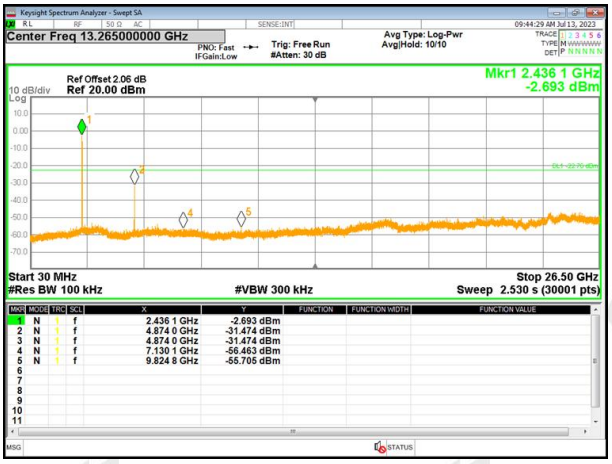

Highest channel

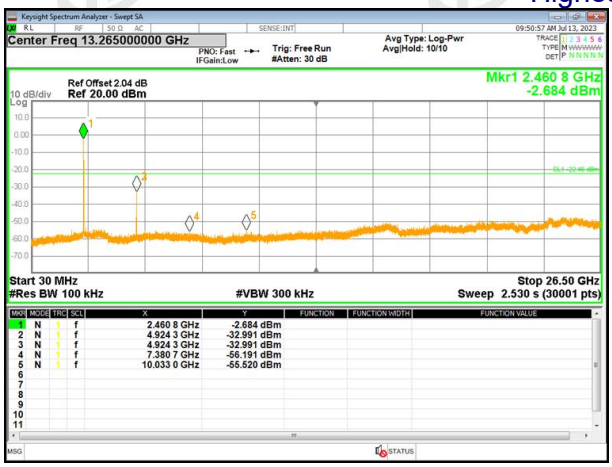

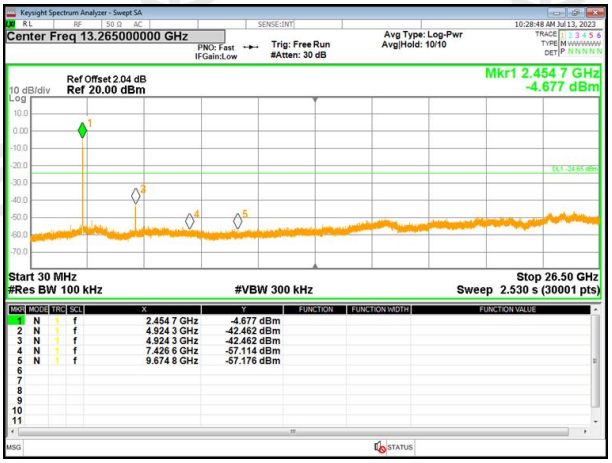

802.11n(HT20)	

Lowest channel

Middle channel

Highest channel

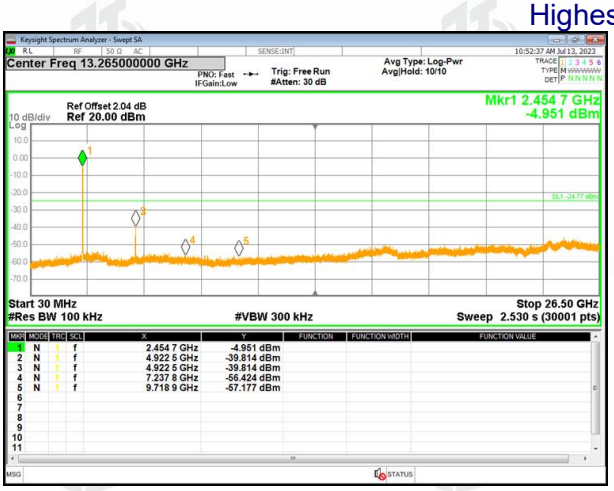

10. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(b)(4)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
The antenna is PCB Antenna, the best case gain of the antenna is 2.61dBi, reference to the appendix II for details	

11. TEST SETUP PHOTO

Reference to the appendix I for details.

12. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.