

HAIROBOTICS



<https://www.hairobotics.com/>

VPTA1H

Power supply : 14.4 V Lithium-Ion 3.45 Ah (Fuse 3A)

Operating temperature : - 20°C to + 55°C

Enclosure : IP54

Operating range : 0.1 to 2.5 m

Angle of radiation : 360°

Scan cycle time : 200 ms

MFR : HAI ROBOTICS CO., LTD.

Address : Room 201, 301, 401, Building B, Anluo Technology Industrial Park, Nanchang Community,Xixiang Street, Bao'an, Shenzhen, Guang dong, China



✓ Claim 1 - CAT 3/PLd
✓ Claim 2 - SIL 2

Directive 2014/53/EU
EN 60950-1:2012



FC CE IC



WARNING



Read the user manual before using this device.




The device generates radio waves that may affect the functionality of electronic medical devices.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCCID: 28BEG-VPTA1H
IC: 31079-VPTA1H

S/N

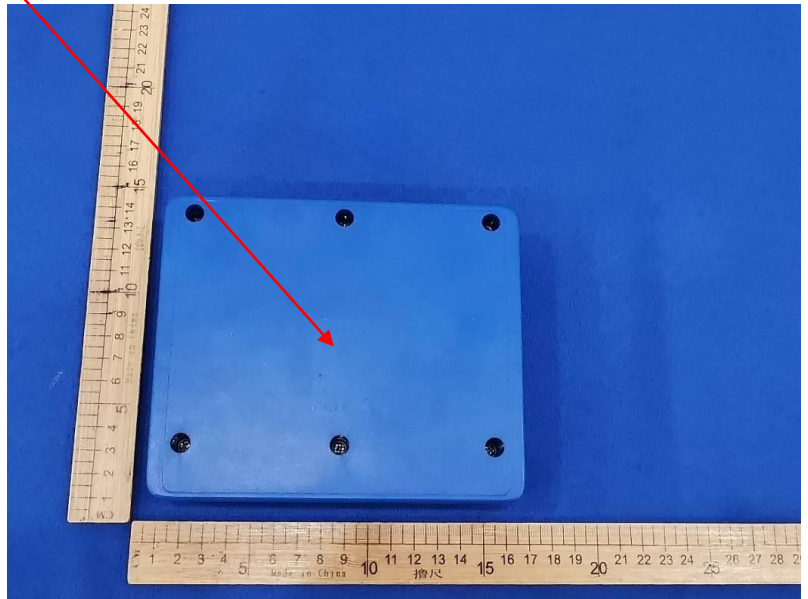



HAIROBOTICS

VPTA1H

Power supply : 14.4 V Lithium-Ion 3.45 Ah
Operating temperature : -20°C to +55°C
Enclosure : IP54
Operating range : 0.1 to 2.5 m
Angle of radiation : 360°
Scan cycle time : 200 ms
MFR : HAI ROBOTICS CO., LTD.
Address : Room 201, 301, 401, Building B, Anluo Technology Industrial Park, Nanchang Community, Xixiang Street, Bao'an, Shenzhen, Guangdong, China

<https://www.hairobotics.com/>

WARNING
Read the user manual before using this device.
The device generates radio waves that may affect the functionality of electronic medical devices.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
Contains FCCID: Y25-M7167
FCCID: 2B8EG-VPTA1H
IC: 31079-VPTA1H

FCC CE IC

CCC
✓ TYPE 2 (GB 4943.1)
✓ SIL 2 (GB 4943.1)
✓ CM 3 (GB 4943.1)

S/N