



FCC TEST REPORT

FCC ID:2BBFL-Q11

Report Number.....: ZKT-260430L1988E

Date of Test..... Apr. 20, 2026- May 14, 2026

Date of issue.....: May 14, 2026

Total number of pages..... 148

Test Result: PASS

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name: Shenzhen SaiFeng Electronic Technology Co., Ltd

Address: Community, Ban Tin Street, Longgang District,Shenzhen, China

Manufacturer's name: Shenzhen SaiFeng Electronic Technology Co., Ltd

Address: Community, Ban Tin Street, Longgang District,Shenzhen, China

Test specification:

Standard.....: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10-2020+Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024

Test procedure.....: /

Non-standard test method: N/A

Test Report Form No.....: TRF-EL-112_V0

Test Report Form(s) Originator.....: ZKT Testing

Master TRF: Dated: 2021-04-22

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name.....: Bluetooth earphones

Trademark: N/A

Model/Type reference.....: Q11

Ratings.....: Input: DC 5V $\pm$ 0.2 A or DC 3.7V powered by battery



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China

Tested by (name + signature).....: Jim Liu

Reviewer (name + signature).....: Jackson Fang

Approved (name + signature).....: Lake Xie





Table of Contents

	Page
1. VERSION	5
2. TEST SUMMARY	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 Test Setup Configuration	9
3.3 Support Equipment	10
3.4 Test Mode	11
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
4. EMC EMISSION TEST	13
4.1 Conducted emissions	13
4.1.1 POWER LINE CONDUCTED EMISSION Limits	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 Test Result	14
4.2 Radiated emissions	15
4.2.1 Radiated Emission Limits	15
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	16
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 TEST RESULTS	18
5. RADIATED BAND EMISSION MEASUREMENT	35
5.1 Test Requirement:	35
5.2 TEST PROCEDURE	35
5.3 DEVIATION FROM TEST STANDARD	36
5.4 TEST SETUP	36
5.5 EUT OPERATING CONDITIONS	36
Left earphone	37
5.6 TEST RESULT	37
Right earphone	39
5.6 TEST RESULT	39
6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	41
6.1 Limit	41
6.2 Test Setup	41
6.3 Test procedure	41
6.4 DEVIATION FROM STANDARD	41
6.5 Test Result	42
7. 20DB&99% BANDWIDTH	84
7.1 Test Setup	84
7.2 Limit	84
7.3 Test procedure	84
7.4 DEVIATION FROM STANDARD	84
7.5 Test Result	84
8. MAXIMUM PEAK OUTPUT POWER	96
8.1 Block Diagram Of Test Setup	96



8.2 Limit	96
8.3 Test procedure	96
8.4 DEVIATION FROM STANDARD	96
8.5 Test Result	96
Left earphone	96
Right earphone	102
9. HOPPING CHANNEL SEPARATION	108
9.1 Test Setup	108
9.2 Test procedure	108
9.3 DEVIATION FROM STANDARD	108
9.4 Test Result	109
10. NUMBER OF HOPPING FREQUENCY	121
10.1 Test Setup	121
10.2 Test procedure	121
10.3 DEVIATION FROM STANDARD	121
10.4 Test Result	122
11. DWELL TIME	126
11.1 Test Setup	126
11.2 Test procedure	126
11.3 DEVIATION FROM STANDARD	126
11.4 Test Result	127
12. ANTENNA REQUIREMENT	147
13. TEST SETUP PHOTO	148
14. EUT CONSTRUCTIONAL DETAILS	148



1. VERSION

Report No.	Version	Description	Approved
ZKT-260430L1988E	Rev.01	Initial issue of report	May 14, 2026

2. TEST SUMMARY



Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
15.203/15.247 (c)	Antenna Requirement	PASS	
15.207	AC Power Line Conducted Emission	N/A	
15.247 (b)(1)	Conducted Peak Output Power	PASS	
15.247 (a)(1)	20dB Occupied Bandwidth 99% OCB	PASS	
15.247 (a)(1)	Carrier Frequencies Separation	PASS	
15.247 (a)(1)(iii)	Hopping Channel Number	PASS	
15.247 (a)(1)(iii)	Dwell Time	PASS	
15.205/15.209	Radiated Emission and Restricted Band	PASS	
15.247(d)	Conducted Unwanted emissions and Band Edge	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.
Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street,
Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 927491
Designation Number: CN1431
IC Registered No.: 27033
Designation Number: CN0110



2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8dB
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59℃



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Bluetooth earphones
Model No.:	Q11
Model Different.:	Headphones come in different appearance colors, which do not affect testing, these product are same PCB Layout, Schematics, BOM
Sample ID	ZKT-260430L1988E
Sample(s) Status:	Engineer sample
Channel numbers:	79
Operation Frequency:	2402MHz~2480MHz
Modulation technology:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna Type:	SMD CERAMIC Antenna
Antenna gain:	2.78 dBi
Power supply:	Input: DC 5V ---0.2 A or DC 3.7V powered by battery

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		



Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

3.2 Test Setup Configuration

Radiated Emission

EUT



3.3 Support Equipment

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	bt_tool_v1.1.2.exe
Power level setup	7dBm



3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	Sep. 20, 2025	Sep. 19, 2026
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSQ	100363	Sep. 20, 2025	Sep. 19, 2026
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	Oct. 24, 2025	Oct. 23, 2026
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	Sep. 20, 2025	Sep. 19, 2026
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	Sep. 20, 2025	Sep. 19, 2026
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	Sep. 30, 2025	Sep. 29, 2026
7	Loop Antenna	TESEQ	HLA6121	58357	Sep. 20, 2025	Sep. 19, 2026
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	060747	Sep. 19, 2025	Sep. 18, 2026
9	Amplifier (1GHz-26.5GHz)	Agilent	8449B	3008A00315	Sep. 19, 2025	Sep. 18, 2026
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	Oct. 24, 2025	Oct. 23, 2026
11	Test Cable	N/A	R-01	N/A	Sept. 25, 2025	Sept. 24, 2026
12	Test Cable	N/A	R-02	N/A	Sept. 25, 2025	Sept. 24, 2026
13	Test Cable	N/A	R-03	N/A	Sept. 25, 2025	Sept. 24, 2026
14	Test Cable	N/A	RF-01	N/A	Sept. 25, 2025	Sept. 24, 2026
15	Test Cable	N/A	RF-02	N/A	Sept. 25, 2025	Sept. 24, 2026
16	Test Cable	N/A	RF-03	N/A	May. 25, 2025	May. 24, 2026
17	ESG Signal Generator	Agilent	E4421B	N/A	Sep. 19, 2025	Sep. 18, 2026
18	Signal Generator	Agilent	N5182A	N/A	Sep. 20, 2025	Sep. 19, 2026
19	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	Sep. 25, 2025	Sep. 24, 2026
20	Wideband Radio Communication Test	R&S	CMW500	106504	Sep. 28, 2025	Sep. 27, 2026
21	MWRF Power Meter Test system	MW	MW100-RPCB	N/A	Sep. 19, 2025	Sep. 18, 2026
22	D.C. Power Supply	LongWei	TPR-6405D	N/A	\	\
23	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\
24	RF Software	MW	MTS8310	V2.0.0.0	\	\
25	Turntable	MF	MF-7802BS	N/A	\	\
26	Antenna tower	MF	MF-7802BS	N/A	\	\



4. EMC EMISSION TEST

4.1 Conducted emissions

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

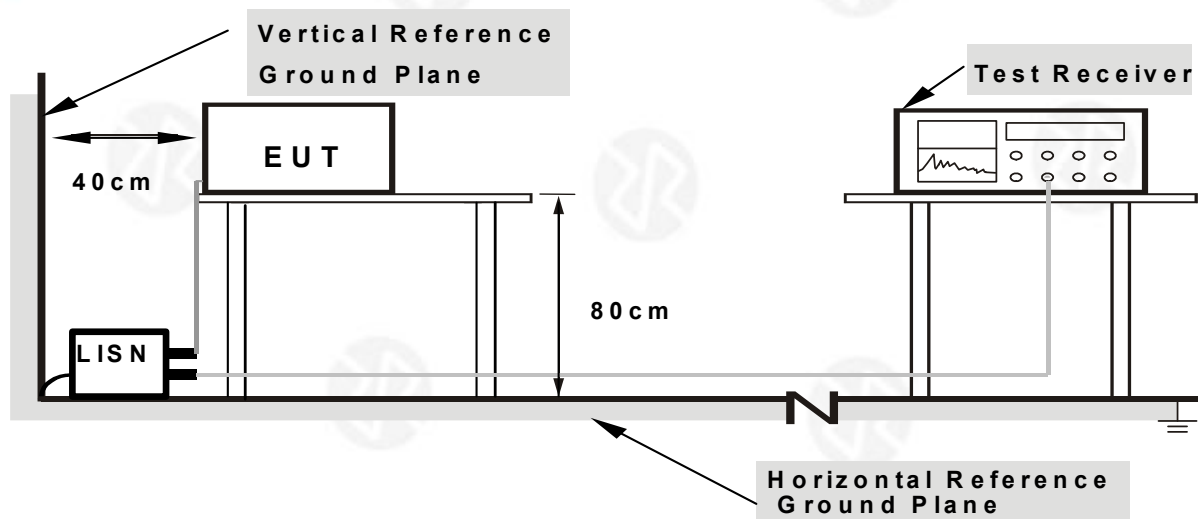

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 Test Result

N/A

The product cannot be charged during operation, and the test item is not applicable



4.2 Radiated emissions

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	MX5Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 Radiated Emission Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.



- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

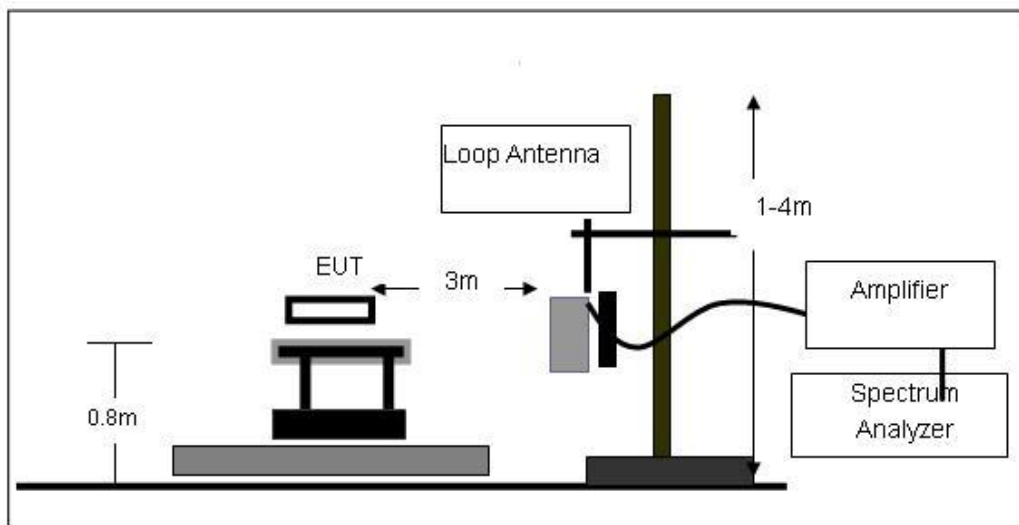




(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

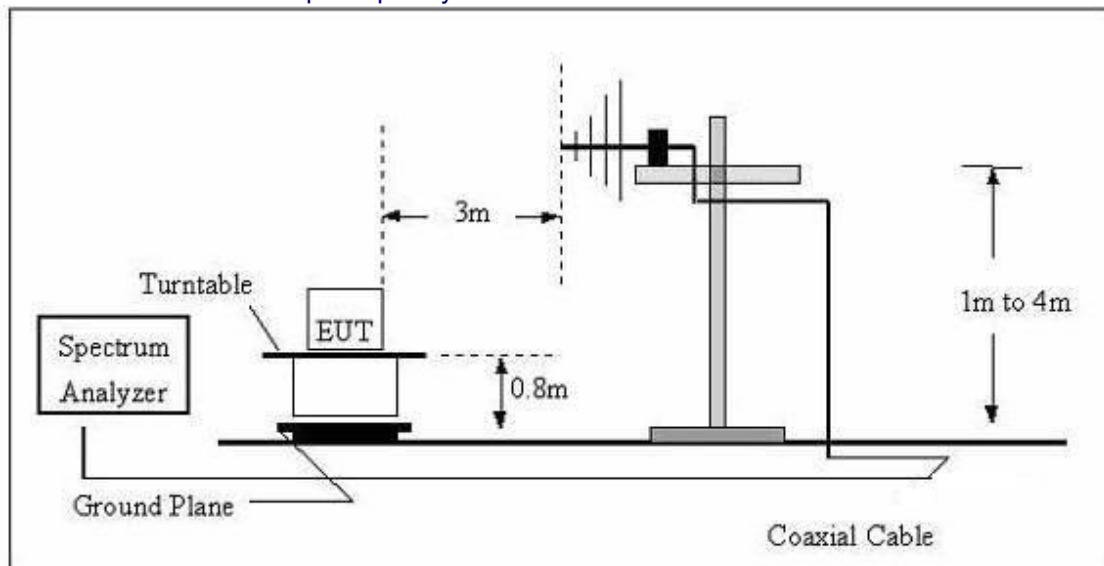

(C) Radiated Emission Test-Up Frequency Above 1GHz

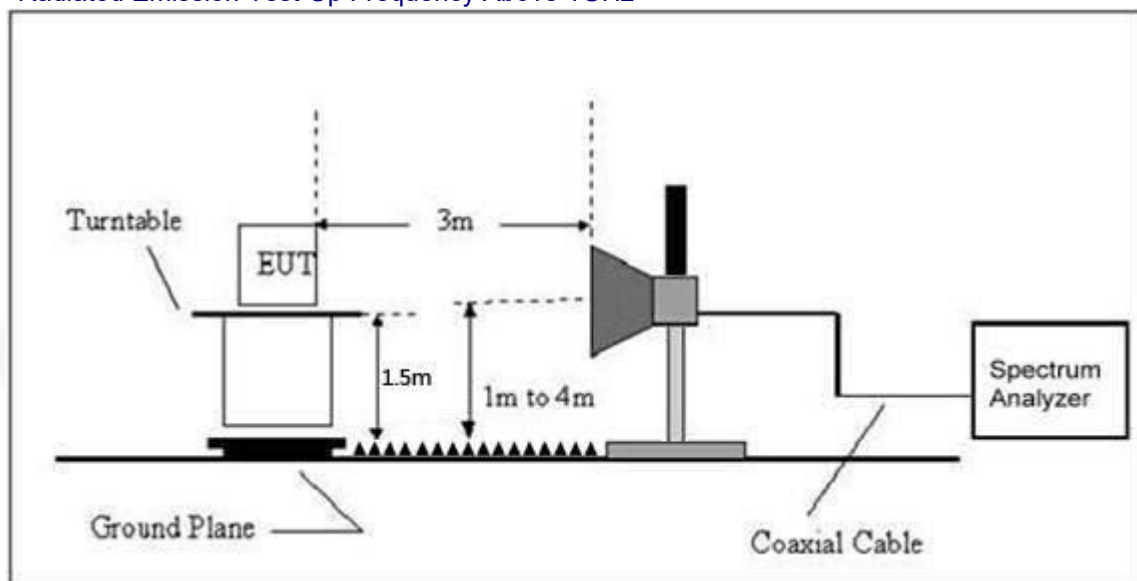

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



4.2.6 TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.




Between 30MHz – 1GHz
Left earphone

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V		

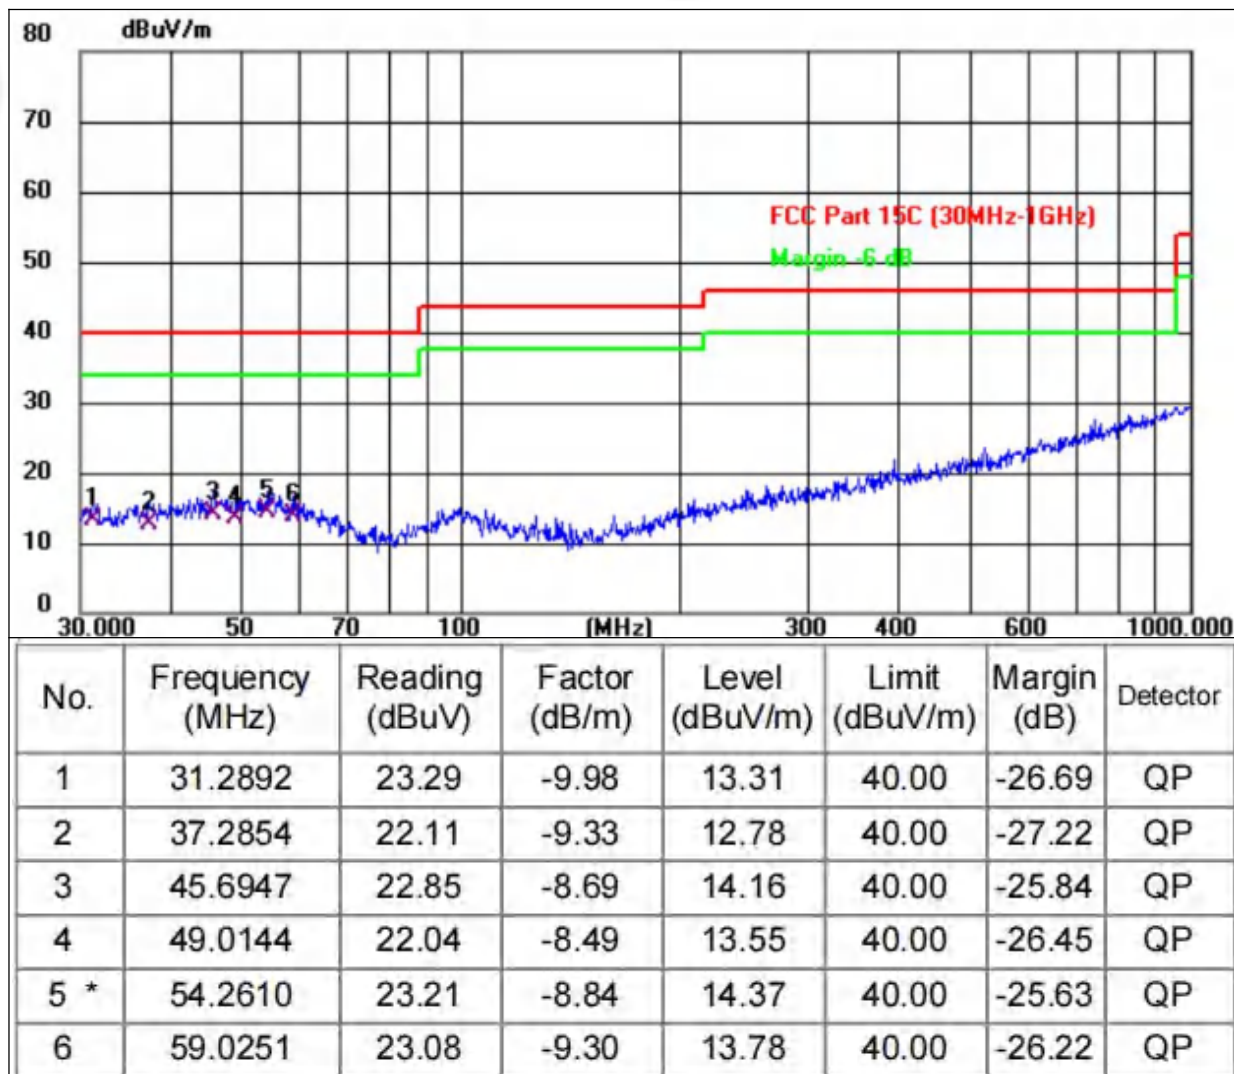



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V		

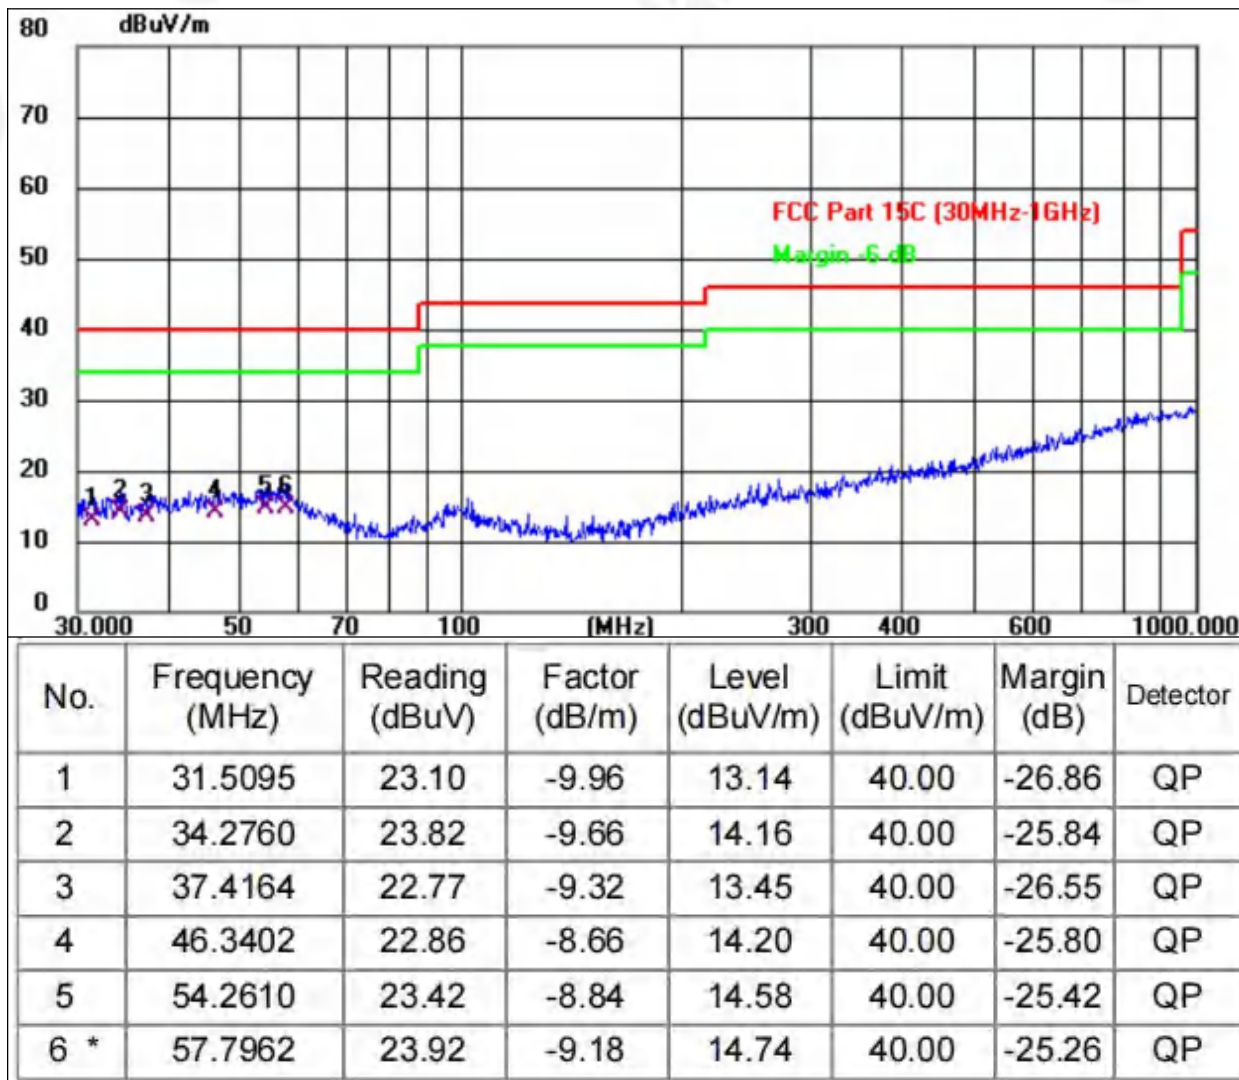


Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case GFSK mode




Right earphone

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V		

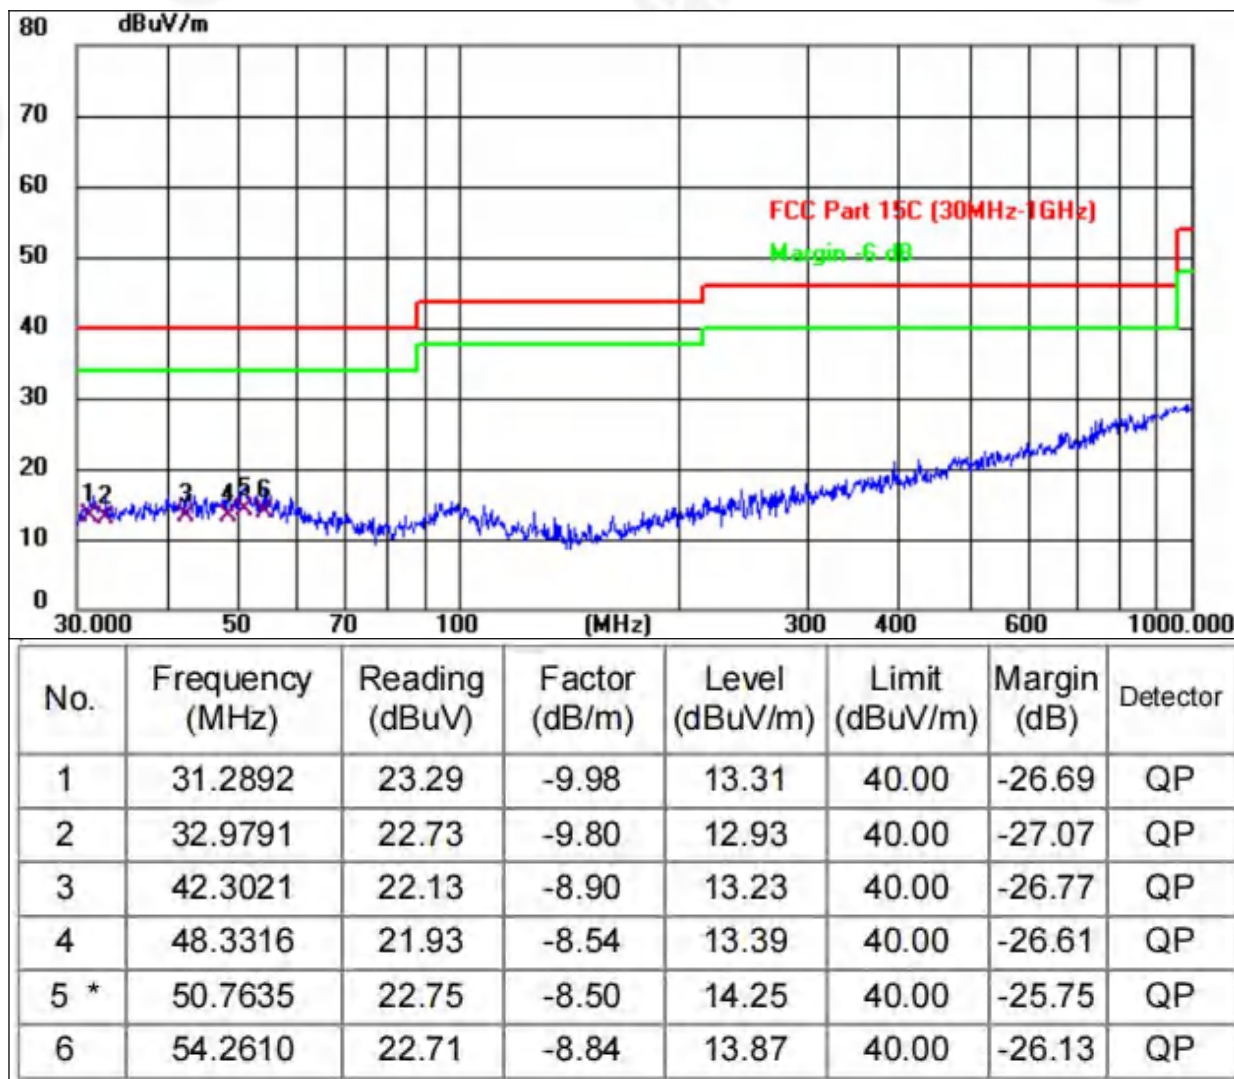



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V		

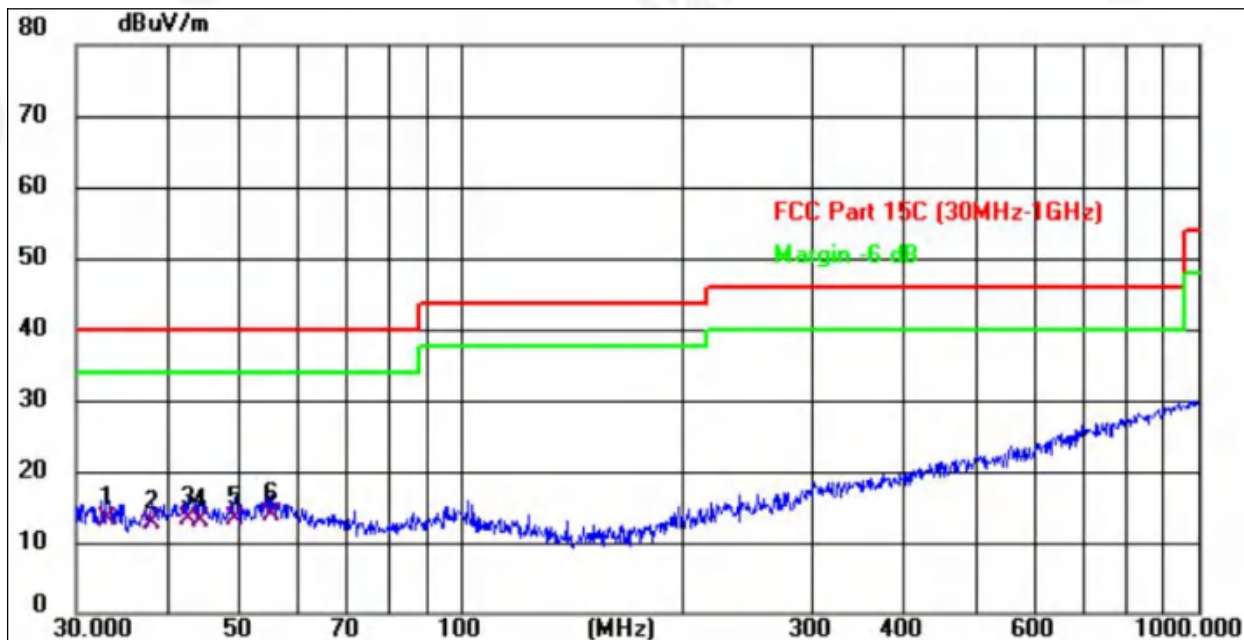

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	33.0950	22.94	-9.79	13.15	40.00	-26.85	QP
2	37.9450	21.85	-9.27	12.58	40.00	-27.42	QP
3	42.6000	22.28	-8.88	13.40	40.00	-26.60	QP
4	44.2751	21.91	-8.77	13.14	40.00	-26.86	QP
5	49.1865	21.81	-8.48	13.33	40.00	-26.67	QP
6 *	55.4147	22.71	-8.95	13.76	40.00	-26.24	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case GFSK mode



Left earphone

1GHz~25GHz

GFSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	55.72	30.55	5.77	24.66	55.6	74	-18.4	Pk
V	4804.00	42.37	30.55	5.77	24.66	42.25	54	-11.75	AV
V	7206.00	55.59	30.33	6.32	24.55	56.13	74	-17.87	Pk
V	7206.00	43.94	30.33	6.32	24.55	44.48	54	-9.52	AV
V	9608.00	57.25	30.55	5.77	24.66	57.13	74	-16.87	Pk
V	9608.00	44.8	30.55	5.77	24.66	44.68	54	-9.32	AV
V	12010.00	56.52	30.33	6.32	24.55	57.06	74	-16.94	Pk
V	12010.00	43.71	30.33	6.32	24.55	44.25	54	-9.75	AV
H	4804.00	55.44	30.55	5.77	24.66	55.32	74	-18.68	Pk
H	4804.00	41.87	30.55	5.77	24.66	41.75	54	-12.25	AV
H	7206.00	55.24	30.33	6.32	24.55	55.78	74	-18.22	Pk
H	7206.00	43.49	30.33	6.32	24.55	44.03	54	-9.97	AV
H	9608.00	56.79	30.55	5.77	24.66	56.67	74	-17.33	Pk
H	9608.00	41.55	30.55	5.77	24.66	41.43	54	-12.57	AV
H	12010.00	59.81	30.33	6.32	24.55	60.35	74	-13.65	Pk
H	12010.00	41.54	30.33	6.32	24.55	42.08	54	-11.92	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	56.73	30.55	5.77	24.66	56.61	74	-17.39	Pk
V	4882.00	43.5	30.55	5.77	24.66	43.38	54	-10.62	AV
V	7323.00	56.93	30.33	6.32	24.55	57.47	74	-16.53	Pk
V	7323.00	43.58	30.33	6.32	24.55	44.12	54	-9.88	AV
V	9764.00	58.42	30.55	5.77	24.66	58.3	74	-15.7	Pk
V	9764.00	44.47	30.55	5.77	24.66	44.35	54	-9.65	AV
V	12205.00	59.64	30.33	6.32	24.55	60.18	74	-13.82	Pk
V	12205.00	42.55	30.33	6.32	24.55	43.09	54	-10.91	AV
H	4882.00	56.62	30.55	5.77	24.66	56.5	74	-17.5	Pk
H	4882.00	41.38	30.55	5.77	24.66	41.26	54	-12.74	AV
H	7323.00	57.67	30.33	6.32	24.55	58.21	74	-15.79	Pk
H	7323.00	43.51	30.33	6.32	24.55	44.05	54	-9.95	AV
H	9764.00	60	30.55	5.77	24.66	59.88	74	-14.12	Pk
H	9764.00	41.36	30.55	5.77	24.66	41.24	54	-12.76	AV
H	12205.00	58.54	30.33	6.32	24.55	59.08	74	-14.92	Pk
H	12205.00	41.93	30.33	6.32	24.55	42.47	54	-11.53	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	55.91	30.55	5.77	24.66	55.79	74	-18.21	Pk
V	4960.00	41.55	30.55	5.77	24.66	41.43	54	-12.57	AV
V	7440.00	57.33	30.33	6.32	24.55	57.87	74	-16.13	Pk
V	7440.00	41.91	30.33	6.32	24.55	42.45	54	-11.55	AV
V	9920.00	55.55	30.55	5.77	24.66	55.43	74	-18.57	Pk
V	9920.00	44.17	30.55	5.77	24.66	44.05	54	-9.95	AV
V	12400.00	57	30.33	6.32	24.55	57.54	74	-16.46	Pk
V	12400.00	41.01	30.33	6.32	24.55	41.55	54	-12.45	AV
H	4960.00	55.2	30.55	5.77	24.66	55.08	74	-18.92	Pk
H	4960.00	44.2	30.55	5.77	24.66	44.08	54	-9.92	AV
H	7440.00	58.41	30.33	6.32	24.55	58.95	74	-15.05	Pk
H	7440.00	42.73	30.33	6.32	24.55	43.27	54	-10.73	AV
H	9920.00	58.21	30.55	5.77	24.66	58.09	74	-15.91	Pk
H	9920.00	41.97	30.55	5.77	24.66	41.85	54	-12.15	AV
H	12400.00	56.33	30.33	6.32	24.55	56.87	74	-17.13	Pk
H	12400.00	41.6	30.33	6.32	24.55	42.14	54	-11.86	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



$\pi/4$ -DQPSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	59.22	30.55	5.77	24.66	59.1	74	-14.9	Pk
V	4804.00	43.08	30.55	5.77	24.66	42.96	54	-11.04	AV
V	7206.00	57.61	30.33	6.32	24.55	58.15	74	-15.85	Pk
V	7206.00	44.62	30.33	6.32	24.55	45.16	54	-8.84	AV
V	9608.00	56.36	30.55	5.77	24.66	56.24	74	-17.76	Pk
V	9608.00	42.85	30.55	5.77	24.66	42.73	54	-11.27	AV
V	12010.00	57.39	30.33	6.32	24.55	57.93	74	-16.07	Pk
V	12010.00	43.86	30.33	6.32	24.55	44.4	54	-9.6	AV
H	4804.00	55.8	30.55	5.77	24.66	55.68	74	-18.32	Pk
H	4804.00	41.85	30.55	5.77	24.66	41.73	54	-12.27	AV
H	7206.00	56.46	30.33	6.32	24.55	57	74	-17	Pk
H	7206.00	44.31	30.33	6.32	24.55	44.85	54	-9.15	AV
H	9608.00	55.36	30.55	5.77	24.66	55.24	74	-18.76	Pk
H	9608.00	41.39	30.55	5.77	24.66	41.27	54	-12.73	AV
H	12010.00	55.74	30.33	6.32	24.55	56.28	74	-17.72	Pk
H	12010.00	41.02	30.33	6.32	24.55	41.56	54	-12.44	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	59.01	30.55	5.77	24.66	58.89	74	-15.11	Pk
V	4882.00	41.41	30.55	5.77	24.66	41.29	54	-12.71	AV
V	7323.00	57.67	30.33	6.32	24.55	58.21	74	-15.79	Pk
V	7323.00	44.49	30.33	6.32	24.55	45.03	54	-8.97	AV
V	9764.00	57.87	30.55	5.77	24.66	57.75	74	-16.25	Pk
V	9764.00	42.43	30.55	5.77	24.66	42.31	54	-11.69	AV
V	12205.00	58.11	30.33	6.32	24.55	58.65	74	-15.35	Pk
V	12205.00	44.48	30.33	6.32	24.55	45.02	54	-8.98	AV
H	4882.00	57.4	30.55	5.77	24.66	57.28	74	-16.72	Pk
H	4882.00	44.44	30.55	5.77	24.66	44.32	54	-9.68	AV
H	7323.00	59.82	30.33	6.32	24.55	60.36	74	-13.64	Pk
H	7323.00	41.36	30.33	6.32	24.55	41.9	54	-12.1	AV
H	9764.00	59.74	30.55	5.77	24.66	59.62	74	-14.38	Pk
H	9764.00	42.03	30.55	5.77	24.66	41.91	54	-12.09	AV
H	12205.00	56.47	30.33	6.32	24.55	57.01	74	-16.99	Pk
H	12205.00	42.07	30.33	6.32	24.55	42.61	54	-11.39	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	57.99	30.55	5.77	24.66	57.87	74	-16.13	Pk
V	4960.00	41.52	30.55	5.77	24.66	41.4	54	-12.6	AV
V	7440.00	57.15	30.33	6.32	24.55	57.69	74	-16.31	Pk
V	7440.00	44.47	30.33	6.32	24.55	45.01	54	-8.99	AV
V	9920.00	56.49	30.55	5.77	24.66	56.37	74	-17.63	Pk
V	9920.00	41.32	30.55	5.77	24.66	41.2	54	-12.8	AV
V	12400.00	58.81	30.33	6.32	24.55	59.35	74	-14.65	Pk
V	12400.00	41.36	30.33	6.32	24.55	41.9	54	-12.1	AV
H	4960.00	56.74	30.55	5.77	24.66	56.62	74	-17.38	Pk
H	4960.00	41.38	30.55	5.77	24.66	41.26	54	-12.74	AV
H	7440.00	58.81	30.33	6.32	24.55	59.35	74	-14.65	Pk
H	7440.00	41.86	30.33	6.32	24.55	42.4	54	-11.6	AV
H	9920.00	57.45	30.55	5.77	24.66	57.33	74	-16.67	Pk
H	9920.00	42.92	30.55	5.77	24.66	42.8	54	-11.2	AV
H	12400.00	58.8	30.33	6.32	24.55	59.34	74	-14.66	Pk
H	12400.00	41.27	30.33	6.32	24.55	41.81	54	-12.19	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



8-DPSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	56.82	30.55	5.77	24.66	56.7	74	-17.3	Pk
V	4804.00	43.95	30.55	5.77	24.66	43.83	54	-10.17	AV
V	7206.00	58.18	30.33	6.32	24.55	58.72	74	-15.28	Pk
V	7206.00	44.78	30.33	6.32	24.55	45.32	54	-8.68	AV
V	9608.00	55.09	30.55	5.77	24.66	54.97	74	-19.03	Pk
V	9608.00	41.08	30.55	5.77	24.66	40.96	54	-13.04	AV
V	12010.00	58.41	30.33	6.32	24.55	58.95	74	-15.05	Pk
V	12010.00	44.97	30.33	6.32	24.55	45.51	54	-8.49	AV
H	4804.00	57.92	30.55	5.77	24.66	57.8	74	-16.2	Pk
H	4804.00	41.13	30.55	5.77	24.66	41.01	54	-12.99	AV
H	7206.00	57.98	30.33	6.32	24.55	58.52	74	-15.48	Pk
H	7206.00	44.06	30.33	6.32	24.55	44.6	54	-9.4	AV
H	9608.00	59.16	30.55	5.77	24.66	59.04	74	-14.96	Pk
H	9608.00	41.46	30.55	5.77	24.66	41.34	54	-12.66	AV
H	12010.00	58.51	30.33	6.32	24.55	59.05	74	-14.95	Pk
H	12010.00	41.27	30.33	6.32	24.55	41.81	54	-12.19	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	56.52	30.55	5.77	24.66	56.4	74	-17.6	Pk
V	4882.00	41.7	30.55	5.77	24.66	41.58	54	-12.42	AV
V	7323.00	57.34	30.33	6.32	24.55	57.88	74	-16.12	Pk
V	7323.00	41.01	30.33	6.32	24.55	41.55	54	-12.45	AV
V	9764.00	56.32	30.55	5.77	24.66	56.2	74	-17.8	Pk
V	9764.00	42.99	30.55	5.77	24.66	42.87	54	-11.13	AV
V	12205.00	57.24	30.33	6.32	24.55	57.78	74	-16.22	Pk
V	12205.00	42.07	30.33	6.32	24.55	42.61	54	-11.39	AV
H	4882.00	59.61	30.55	5.77	24.66	59.49	74	-14.51	Pk
H	4882.00	44.47	30.55	5.77	24.66	44.35	54	-9.65	AV
H	7323.00	59.11	30.33	6.32	24.55	59.65	74	-14.35	Pk
H	7323.00	42.79	30.33	6.32	24.55	43.33	54	-10.67	AV
H	9764.00	58.2	30.55	5.77	24.66	58.08	74	-15.92	Pk
H	9764.00	43.89	30.55	5.77	24.66	43.77	54	-10.23	AV
H	12205.00	56.25	30.33	6.32	24.55	56.79	74	-17.21	Pk
H	12205.00	43.95	30.33	6.32	24.55	44.49	54	-9.51	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	57.41	30.55	5.77	24.66	57.29	74	-16.71	Pk
V	4960.00	41.68	30.55	5.77	24.66	41.56	54	-12.44	AV
V	7440.00	59.72	30.33	6.32	24.55	60.26	74	-13.74	Pk
V	7440.00	42.93	30.33	6.32	24.55	43.47	54	-10.53	AV
V	9920.00	58.31	30.55	5.77	24.66	58.19	74	-15.81	Pk
V	9920.00	41.08	30.55	5.77	24.66	40.96	54	-13.04	AV
V	12400.00	55.35	30.33	6.32	24.55	55.89	74	-18.11	Pk
V	12400.00	41.55	30.33	6.32	24.55	42.09	54	-11.91	AV
H	4960.00	58.26	30.55	5.77	24.66	58.14	74	-15.86	Pk
H	4960.00	41.77	30.55	5.77	24.66	41.65	54	-12.35	AV
H	7440.00	55.16	30.33	6.32	24.55	55.7	74	-18.3	Pk
H	7440.00	43.97	30.33	6.32	24.55	44.51	54	-9.49	AV
H	9920.00	55.71	30.55	5.77	24.66	55.59	74	-18.41	Pk
H	9920.00	44.22	30.55	5.77	24.66	44.1	54	-9.9	AV
H	12400.00	55.5	30.33	6.32	24.55	56.04	74	-17.96	Pk
H	12400.00	42.96	30.33	6.32	24.55	43.5	54	-10.5	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Right earphone

1GHz~25GHz

GFSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	56.97	30.55	5.77	24.66	56.85	74	-17.15	Pk
V	4804.00	41.98	30.55	5.77	24.66	41.86	54	-12.14	AV
V	7206.00	59.91	30.33	6.32	24.55	60.45	74	-13.55	Pk
V	7206.00	43.62	30.33	6.32	24.55	44.16	54	-9.84	AV
V	9608.00	58.24	30.55	5.77	24.66	58.12	74	-15.88	Pk
V	9608.00	41.09	30.55	5.77	24.66	40.97	54	-13.03	AV
V	12010.00	58.28	30.33	6.32	24.55	58.82	74	-15.18	Pk
V	12010.00	44.69	30.33	6.32	24.55	45.23	54	-8.77	AV
H	4804.00	55.25	30.55	5.77	24.66	55.13	74	-18.87	Pk
H	4804.00	41.34	30.55	5.77	24.66	41.22	54	-12.78	AV
H	7206.00	55.59	30.33	6.32	24.55	56.13	74	-17.87	Pk
H	7206.00	43.11	30.33	6.32	24.55	43.65	54	-10.35	AV
H	9608.00	59.62	30.55	5.77	24.66	59.5	74	-14.5	Pk
H	9608.00	41.71	30.55	5.77	24.66	41.59	54	-12.41	AV
H	12010.00	57.34	30.33	6.32	24.55	57.88	74	-16.12	Pk
H	12010.00	41.55	30.33	6.32	24.55	42.09	54	-11.91	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	58.54	30.55	5.77	24.66	58.42	74	-15.58	Pk
V	4882.00	41.68	30.55	5.77	24.66	41.56	54	-12.44	AV
V	7323.00	59.42	30.33	6.32	24.55	59.96	74	-14.04	Pk
V	7323.00	42.49	30.33	6.32	24.55	43.03	54	-10.97	AV
V	9764.00	56.64	30.55	5.77	24.66	56.52	74	-17.48	Pk
V	9764.00	43.06	30.55	5.77	24.66	42.94	54	-11.06	AV
V	12205.00	59.35	30.33	6.32	24.55	59.89	74	-14.11	Pk
V	12205.00	41.46	30.33	6.32	24.55	42	54	-12	AV
H	4882.00	59.25	30.55	5.77	24.66	59.13	74	-14.87	Pk
H	4882.00	44.52	30.55	5.77	24.66	44.4	54	-9.6	AV
H	7323.00	58.89	30.33	6.32	24.55	59.43	74	-14.57	Pk
H	7323.00	43.93	30.33	6.32	24.55	44.47	54	-9.53	AV
H	9764.00	55.11	30.55	5.77	24.66	54.99	74	-19.01	Pk
H	9764.00	41.56	30.55	5.77	24.66	41.44	54	-12.56	AV
H	12205.00	59.42	30.33	6.32	24.55	59.96	74	-14.04	Pk
H	12205.00	43.33	30.33	6.32	24.55	43.87	54	-10.13	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	56.52	30.55	5.77	24.66	56.4	74	-17.6	Pk
V	4960.00	41.55	30.55	5.77	24.66	41.43	54	-12.57	AV
V	7440.00	58.44	30.33	6.32	24.55	58.98	74	-15.02	Pk
V	7440.00	44.62	30.33	6.32	24.55	45.16	54	-8.84	AV
V	9920.00	55.24	30.55	5.77	24.66	55.12	74	-18.88	Pk
V	9920.00	41.32	30.55	5.77	24.66	41.2	54	-12.8	AV
V	12400.00	59.6	30.33	6.32	24.55	60.14	74	-13.86	Pk
V	12400.00	41.9	30.33	6.32	24.55	42.44	54	-11.56	AV
H	4960.00	59.43	30.55	5.77	24.66	59.31	74	-14.69	Pk
H	4960.00	41.39	30.55	5.77	24.66	41.27	54	-12.73	AV
H	7440.00	58.58	30.33	6.32	24.55	59.12	74	-14.88	Pk
H	7440.00	41.73	30.33	6.32	24.55	42.27	54	-11.73	AV
H	9920.00	59.95	30.55	5.77	24.66	59.83	74	-14.17	Pk
H	9920.00	43.71	30.55	5.77	24.66	43.59	54	-10.41	AV
H	12400.00	55.46	30.33	6.32	24.55	56	74	-18	Pk
H	12400.00	43.73	30.33	6.32	24.55	44.27	54	-9.73	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



$\pi/4$ -DQPSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	59.22	30.55	5.77	24.66	59.1	74	-14.9	Pk
V	4804.00	43.08	30.55	5.77	24.66	42.96	54	-11.04	AV
V	7206.00	57.61	30.33	6.32	24.55	58.15	74	-15.85	Pk
V	7206.00	44.62	30.33	6.32	24.55	45.16	54	-8.84	AV
V	9608.00	56.36	30.55	5.77	24.66	56.24	74	-17.76	Pk
V	9608.00	42.85	30.55	5.77	24.66	42.73	54	-11.27	AV
V	12010.00	57.39	30.33	6.32	24.55	57.93	74	-16.07	Pk
V	12010.00	43.86	30.33	6.32	24.55	44.4	54	-9.6	AV
H	4804.00	55.8	30.55	5.77	24.66	55.68	74	-18.32	Pk
H	4804.00	41.85	30.55	5.77	24.66	41.73	54	-12.27	AV
H	7206.00	56.46	30.33	6.32	24.55	57	74	-17	Pk
H	7206.00	44.31	30.33	6.32	24.55	44.85	54	-9.15	AV
H	9608.00	55.36	30.55	5.77	24.66	55.24	74	-18.76	Pk
H	9608.00	41.39	30.55	5.77	24.66	41.27	54	-12.73	AV
H	12010.00	55.74	30.33	6.32	24.55	56.28	74	-17.72	Pk
H	12010.00	41.02	30.33	6.32	24.55	41.56	54	-12.44	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	59.01	30.55	5.77	24.66	58.89	74	-15.11	Pk
V	4882.00	41.41	30.55	5.77	24.66	41.29	54	-12.71	AV
V	7323.00	57.67	30.33	6.32	24.55	58.21	74	-15.79	Pk
V	7323.00	44.49	30.33	6.32	24.55	45.03	54	-8.97	AV
V	9764.00	57.87	30.55	5.77	24.66	57.75	74	-16.25	Pk
V	9764.00	42.43	30.55	5.77	24.66	42.31	54	-11.69	AV
V	12205.00	58.11	30.33	6.32	24.55	58.65	74	-15.35	Pk
V	12205.00	44.48	30.33	6.32	24.55	45.02	54	-8.98	AV
H	4882.00	57.4	30.55	5.77	24.66	57.28	74	-16.72	Pk
H	4882.00	44.44	30.55	5.77	24.66	44.32	54	-9.68	AV
H	7323.00	59.82	30.33	6.32	24.55	60.36	74	-13.64	Pk
H	7323.00	41.36	30.33	6.32	24.55	41.9	54	-12.1	AV
H	9764.00	59.74	30.55	5.77	24.66	59.62	74	-14.38	Pk
H	9764.00	42.03	30.55	5.77	24.66	41.91	54	-12.09	AV
H	12205.00	56.47	30.33	6.32	24.55	57.01	74	-16.99	Pk
H	12205.00	42.07	30.33	6.32	24.55	42.61	54	-11.39	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2480MHz									
V	4960.00	57.99	30.55	5.77	24.66	57.87	74	-16.13	Pk
V	4960.00	41.52	30.55	5.77	24.66	41.4	54	-12.6	AV
V	7440.00	57.15	30.33	6.32	24.55	57.69	74	-16.31	Pk
V	7440.00	44.47	30.33	6.32	24.55	45.01	54	-8.99	AV
V	9920.00	56.49	30.55	5.77	24.66	56.37	74	-17.63	Pk
V	9920.00	41.32	30.55	5.77	24.66	41.2	54	-12.8	AV
V	12400.00	58.81	30.33	6.32	24.55	59.35	74	-14.65	Pk
V	12400.00	41.36	30.33	6.32	24.55	41.9	54	-12.1	AV
H	4960.00	56.74	30.55	5.77	24.66	56.62	74	-17.38	Pk
H	4960.00	41.38	30.55	5.77	24.66	41.26	54	-12.74	AV
H	7440.00	58.81	30.33	6.32	24.55	59.35	74	-14.65	Pk
H	7440.00	41.86	30.33	6.32	24.55	42.4	54	-11.6	AV
H	9920.00	57.45	30.55	5.77	24.66	57.33	74	-16.67	Pk
H	9920.00	42.92	30.55	5.77	24.66	42.8	54	-11.2	AV
H	12400.00	58.8	30.33	6.32	24.55	59.34	74	-14.66	Pk
H	12400.00	41.27	30.33	6.32	24.55	41.81	54	-12.19	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



8-DPSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	59.86	30.55	5.77	24.66	59.74	74	-14.26	Pk
V	4804.00	44.95	30.55	5.77	24.66	44.83	54	-9.17	AV
V	7206.00	55.73	30.33	6.32	24.55	56.27	74	-17.73	Pk
V	7206.00	42.79	30.33	6.32	24.55	43.33	54	-10.67	AV
V	9608.00	55.11	30.55	5.77	24.66	54.99	74	-19.01	Pk
V	9608.00	42.38	30.55	5.77	24.66	42.26	54	-11.74	AV
V	12010.00	58.71	30.33	6.32	24.55	59.25	74	-14.75	Pk
V	12010.00	43.95	30.33	6.32	24.55	44.49	54	-9.51	AV
H	4804.00	55.64	30.55	5.77	24.66	55.52	74	-18.48	Pk
H	4804.00	41.45	30.55	5.77	24.66	41.33	54	-12.67	AV
H	7206.00	59.05	30.33	6.32	24.55	59.59	74	-14.41	Pk
H	7206.00	43.65	30.33	6.32	24.55	44.19	54	-9.81	AV
H	9608.00	57.55	30.55	5.77	24.66	57.43	74	-16.57	Pk
H	9608.00	41.61	30.55	5.77	24.66	41.49	54	-12.51	AV
H	12010.00	56.37	30.33	6.32	24.55	56.91	74	-17.09	Pk
H	12010.00	41.27	30.33	6.32	24.55	41.81	54	-12.19	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	58.19	30.55	5.77	24.66	58.07	74	-15.93	Pk
V	4882.00	41.18	30.55	5.77	24.66	41.06	54	-12.94	AV
V	7323.00	56.46	30.33	6.32	24.55	57	74	-17	Pk
V	7323.00	44.88	30.33	6.32	24.55	45.42	54	-8.58	AV
V	9764.00	58.91	30.55	5.77	24.66	58.79	74	-15.21	Pk
V	9764.00	44.13	30.55	5.77	24.66	44.01	54	-9.99	AV
V	12205.00	55.47	30.33	6.32	24.55	56.01	74	-17.99	Pk
V	12205.00	43.38	30.33	6.32	24.55	43.92	54	-10.08	AV
H	4882.00	59.7	30.55	5.77	24.66	59.58	74	-14.42	Pk
H	4882.00	42.31	30.55	5.77	24.66	42.19	54	-11.81	AV
H	7323.00	58.27	30.33	6.32	24.55	58.81	74	-15.19	Pk
H	7323.00	43.84	30.33	6.32	24.55	44.38	54	-9.62	AV
H	9764.00	58.43	30.55	5.77	24.66	58.31	74	-15.69	Pk
H	9764.00	41.24	30.55	5.77	24.66	41.12	54	-12.88	AV
H	12205.00	57.83	30.33	6.32	24.55	58.37	74	-15.63	Pk
H	12205.00	44.77	30.33	6.32	24.55	45.31	54	-8.69	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	57.77	30.55	5.77	24.66	57.65	74	-16.35	Pk
V	4960.00	41.35	30.55	5.77	24.66	41.23	54	-12.77	AV
V	7440.00	58.39	30.33	6.32	24.55	58.93	74	-15.07	Pk
V	7440.00	41.38	30.33	6.32	24.55	41.92	54	-12.08	AV
V	9920.00	59.7	30.55	5.77	24.66	59.58	74	-14.42	Pk
V	9920.00	41.99	30.55	5.77	24.66	41.87	54	-12.13	AV
V	12400.00	55.57	30.33	6.32	24.55	56.11	74	-17.89	Pk
V	12400.00	41.91	30.33	6.32	24.55	42.45	54	-11.55	AV
H	4960.00	55.34	30.55	5.77	24.66	55.22	74	-18.78	Pk
H	4960.00	41.02	30.55	5.77	24.66	40.9	54	-13.1	AV
H	7440.00	55.62	30.33	6.32	24.55	56.16	74	-17.84	Pk
H	7440.00	41.75	30.33	6.32	24.55	42.29	54	-11.71	AV
H	9920.00	57.74	30.55	5.77	24.66	57.62	74	-16.38	Pk
H	9920.00	43.91	30.55	5.77	24.66	43.79	54	-10.21	AV
H	12400.00	58.81	30.33	6.32	24.55	59.35	74	-14.65	Pk
H	12400.00	44.04	30.33	6.32	24.55	44.58	54	-9.42	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



5. RADIATED BAND EMISSION MEASUREMENT

5.1 Test Requirement:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- The limit for radiated test was performed according to FCC PART 15C.
- The tighter limit applies at the band edges.
- Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel,the Highest channel



Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

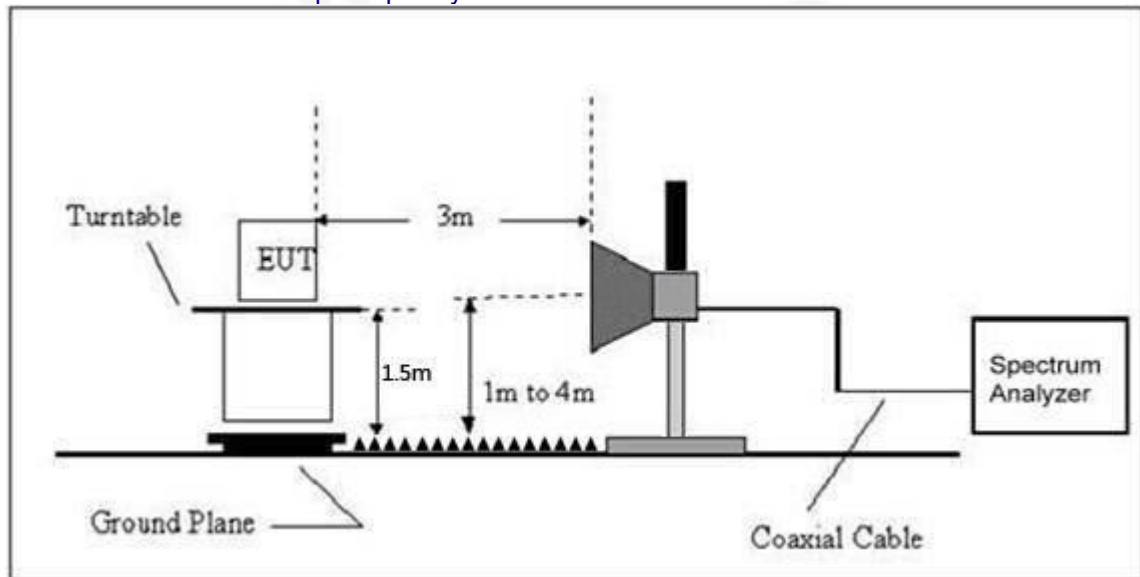

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



Left earphone

5.6 TEST RESULT

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
GFSK	Low Channel: 2402MHz									
	H	2390.00	59.71	30.22	4.85	23.98	58.32	74.00	PK	PASS
	H	2390.00	46.57	30.22	4.85	23.98	45.18	54.00	AV	PASS
	H	2400.00	62.36	30.22	4.85	23.98	60.97	74.00	PK	PASS
	H	2400.00	47.65	30.22	4.85	23.98	46.26	54.00	AV	PASS
	V	2390.00	59.62	30.22	4.85	23.98	58.23	74.00	PK	PASS
	V	2390.00	46.06	30.22	4.85	23.98	44.67	54.00	AV	PASS
	V	2400.00	61.98	30.22	4.85	23.98	60.59	74.00	PK	PASS
	V	2400.00	47.23	30.22	4.85	23.98	45.84	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	59.58	30.22	4.85	23.98	58.19	74.00	Pk	PASS
	H	2483.50	46.68	30.22	4.85	23.98	45.29	54.00	AV	PASS
	H	2500.00	61.69	30.22	4.85	23.98	60.30	74.00	Pk	PASS
	H	2500.00	48.24	30.22	4.85	23.98	46.85	54.00	AV	PASS
	V	2483.50	61.69	30.22	4.85	23.98	60.30	74.00	Pk	PASS
	V	2483.50	48.96	30.22	4.85	23.98	47.57	54.00	AV	PASS
	V	2500.00	62.70	30.22	4.85	23.98	61.31	74.00	Pk	PASS
	V	2500.00	47.31	30.22	4.85	23.98	45.92	54.00	AV	PASS
$\pi/4$ -DQPSK	Low Channel: 2402MHz									
	H	2390.00	59.76	30.22	4.85	23.98	58.37	74.00	PK	PASS
	H	2390.00	48.45	30.22	4.85	23.98	47.06	54.00	AV	PASS
	H	2400.00	59.38	30.22	4.85	23.98	57.99	74.00	PK	PASS
	H	2400.00	48.39	30.22	4.85	23.98	47.00	54.00	AV	PASS
	V	2390.00	59.51	30.22	4.85	23.98	58.12	74.00	PK	PASS
	V	2390.00	46.14	30.22	4.85	23.98	44.75	54.00	AV	PASS
	V	2400.00	60.51	30.22	4.85	23.98	59.12	74.00	PK	PASS
	V	2400.00	47.59	30.22	4.85	23.98	46.20	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	60.23	30.22	4.85	23.98	58.84	74.00	PK	PASS
	H	2483.50	46.25	30.22	4.85	23.98	44.86	54.00	AV	PASS
	H	2500.00	62.54	30.22	4.85	23.98	61.15	74.00	PK	PASS
	H	2500.00	48.83	30.22	4.85	23.98	47.44	54.00	AV	PASS
	V	2483.50	60.88	30.22	4.85	23.98	59.49	74.00	PK	PASS
	V	2483.50	47.67	30.22	4.85	23.98	46.28	54.00	AV	PASS
	V	2500.00	60.87	30.22	4.85	23.98	59.48	74.00	PK	PASS
	V	2500.00	46.60	30.22	4.85	23.98	45.21	54.00	AV	PASS
8-DPSK	Low Channel: 2402MHz									
	H	2390.00	61.26	30.22	4.85	23.98	59.87	74.00	PK	PASS
	H	2390.00	47.05	30.22	4.85	23.98	45.66	54.00	AV	PASS
	H	2400.00	61.12	30.22	4.85	23.98	59.73	74.00	PK	PASS
	H	2400.00	47.75	30.22	4.85	23.98	46.36	54.00	AV	PASS
	V	2390.00	62.13	30.22	4.85	23.98	60.74	74.00	PK	PASS
	V	2390.00	47.34	30.22	4.85	23.98	45.95	54.00	AV	PASS
	V	2400.00	60.35	30.22	4.85	23.98	58.96	74.00	PK	PASS
	V	2400.00	46.55	30.22	4.85	23.98	45.16	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	61.26	30.22	4.85	23.98	59.87	74.00	PK	PASS
	H	2483.50	47.05	30.22	4.85	23.98	45.66	54.00	AV	PASS
	H	2500.00	61.12	30.22	4.85	23.98	59.73	74.00	PK	PASS
	H	2500.00	47.75	30.22	4.85	23.98	46.36	54.00	AV	PASS
	V	2483.50	62.13	30.22	4.85	23.98	60.74	74.00	PK	PASS



	V	2483.50	47.34	30.22	4.85	23.98	45.95	54.00	AV	PASS
	V	2500.00	60.35	30.22	4.85	23.98	58.96	74.00	PK	PASS
	V	2500.00	46.55	30.22	4.85	23.98	45.16	54.00	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit



Right earphone

5.6 TEST RESULT

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
GFSK	Low Channel: 2402MHz									
	H	2390.00	60.41	30.22	4.85	23.98	59.02	74.00	PK	PASS
	H	2390.00	48.15	30.22	4.85	23.98	46.76	54.00	AV	PASS
	H	2400.00	60.91	30.22	4.85	23.98	59.52	74.00	PK	PASS
	H	2400.00	46.50	30.22	4.85	23.98	45.11	54.00	AV	PASS
	V	2390.00	60.85	30.22	4.85	23.98	59.46	74.00	PK	PASS
	V	2390.00	48.31	30.22	4.85	23.98	46.92	54.00	AV	PASS
	V	2400.00	62.81	30.22	4.85	23.98	61.42	74.00	PK	PASS
	V	2400.00	48.45	30.22	4.85	23.98	47.06	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	62.53	30.22	4.85	23.98	61.14	74.00	Pk	PASS
	H	2483.50	46.32	30.22	4.85	23.98	44.93	54.00	AV	PASS
	H	2500.00	61.43	30.22	4.85	23.98	60.04	74.00	Pk	PASS
	H	2500.00	47.82	30.22	4.85	23.98	46.43	54.00	AV	PASS
	V	2483.50	59.92	30.22	4.85	23.98	58.53	74.00	Pk	PASS
	V	2483.50	47.03	30.22	4.85	23.98	45.64	54.00	AV	PASS
	V	2500.00	60.18	30.22	4.85	23.98	58.79	74.00	Pk	PASS
	V	2500.00	48.61	30.22	4.85	23.98	47.22	54.00	AV	PASS
$\pi/4$ -DQPSK	Low Channel: 2402MHz									
	H	2390.00	59.27	30.22	4.85	23.98	57.88	74.00	PK	PASS
	H	2390.00	47.54	30.22	4.85	23.98	46.15	54.00	AV	PASS
	H	2400.00	61.90	30.22	4.85	23.98	60.51	74.00	PK	PASS
	H	2400.00	46.32	30.22	4.85	23.98	44.93	54.00	AV	PASS
	V	2390.00	62.56	30.22	4.85	23.98	61.17	74.00	PK	PASS
	V	2390.00	47.45	30.22	4.85	23.98	46.06	54.00	AV	PASS
	V	2400.00	60.02	30.22	4.85	23.98	58.63	74.00	PK	PASS
	V	2400.00	46.20	30.22	4.85	23.98	44.81	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	60.37	30.22	4.85	23.98	58.98	74.00	PK	PASS
	H	2483.50	47.65	30.22	4.85	23.98	46.26	54.00	AV	PASS
	H	2500.00	62.74	30.22	4.85	23.98	61.35	74.00	PK	PASS
	H	2500.00	47.52	30.22	4.85	23.98	46.13	54.00	AV	PASS
	V	2483.50	62.87	30.22	4.85	23.98	61.48	74.00	PK	PASS
	V	2483.50	48.98	30.22	4.85	23.98	47.59	54.00	AV	PASS
	V	2500.00	62.26	30.22	4.85	23.98	60.87	74.00	PK	PASS
	V	2500.00	48.66	30.22	4.85	23.98	47.27	54.00	AV	PASS
8-DPSK	Low Channel: 2402MHz									
	H	2390.00	60.78	30.22	4.85	23.98	59.39	74.00	PK	PASS
	H	2390.00	46.32	30.22	4.85	23.98	44.93	54.00	AV	PASS
	H	2400.00	62.03	30.22	4.85	23.98	60.64	74.00	PK	PASS
	H	2400.00	48.89	30.22	4.85	23.98	47.50	54.00	AV	PASS
	V	2390.00	60.69	30.22	4.85	23.98	59.30	74.00	PK	PASS
	V	2390.00	48.68	30.22	4.85	23.98	47.29	54.00	AV	PASS
	V	2400.00	59.75	30.22	4.85	23.98	58.36	74.00	PK	PASS
	V	2400.00	47.93	30.22	4.85	23.98	46.54	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	59.94	30.22	4.85	23.98	58.55	74.00	PK	PASS
	H	2483.50	48.59	30.22	4.85	23.98	47.20	54.00	AV	PASS
	H	2500.00	60.73	30.22	4.85	23.98	59.34	74.00	PK	PASS
	H	2500.00	48.78	30.22	4.85	23.98	47.39	54.00	AV	PASS
	V	2483.50	62.82	30.22	4.85	23.98	61.43	74.00	PK	PASS



	V	2483.50	46.03	30.22	4.85	23.98	44.64	54.00	AV	PASS
	V	2500.00	59.46	30.22	4.85	23.98	58.07	74.00	PK	PASS
	V	2500.00	48.76	30.22	4.85	23.98	47.37	54.00	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit



6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 Limit

Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.2 Test Setup



6.3 Test procedure

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

6.4 DEVIATION FROM STANDARD


No deviation.




6.5 Test Result

Left earphone Test Graphs

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

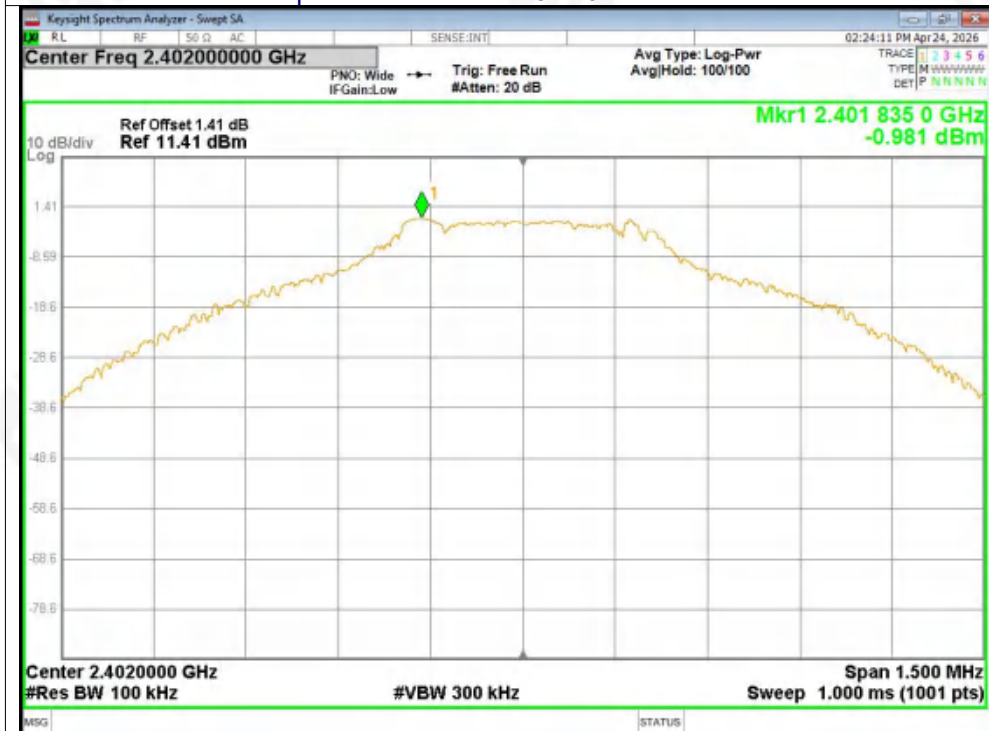


Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

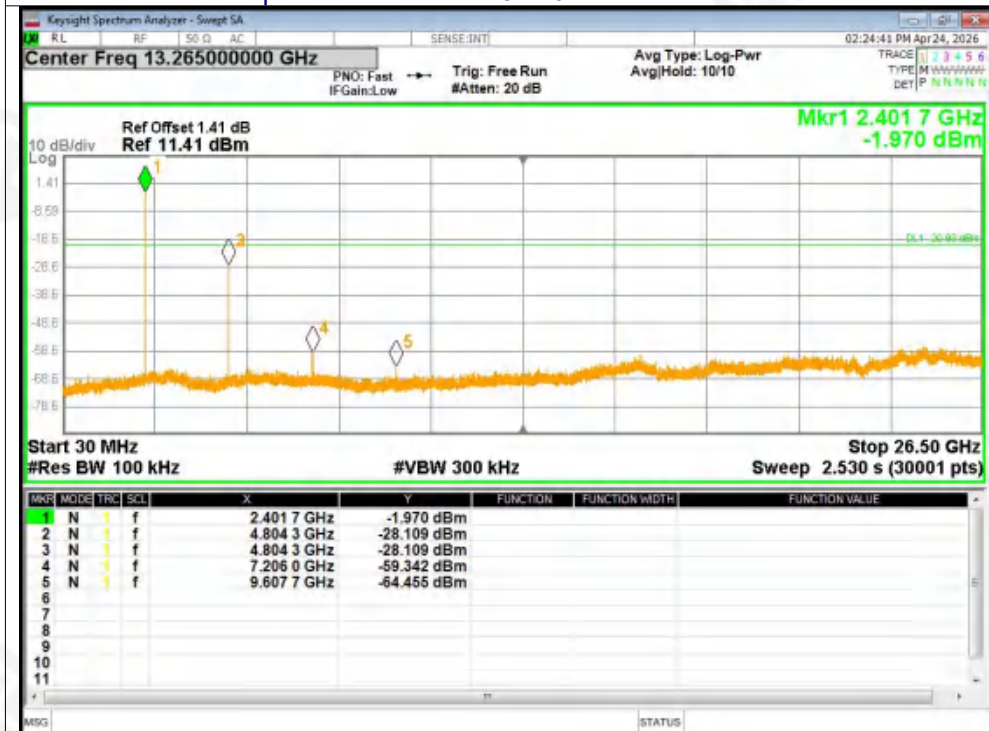




Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref

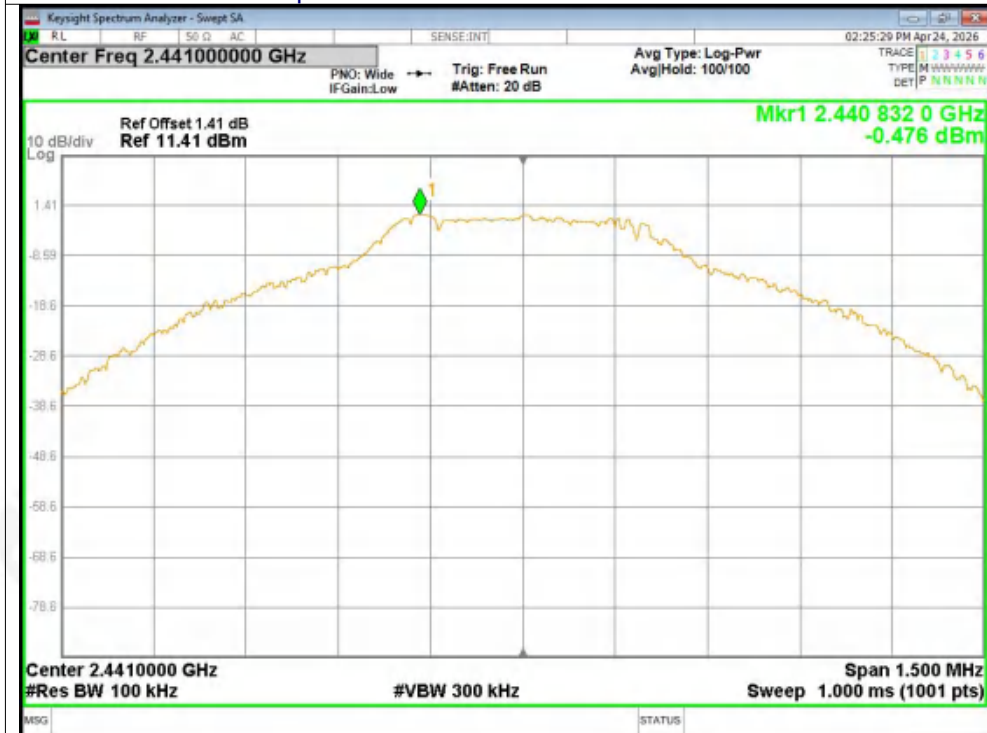


Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

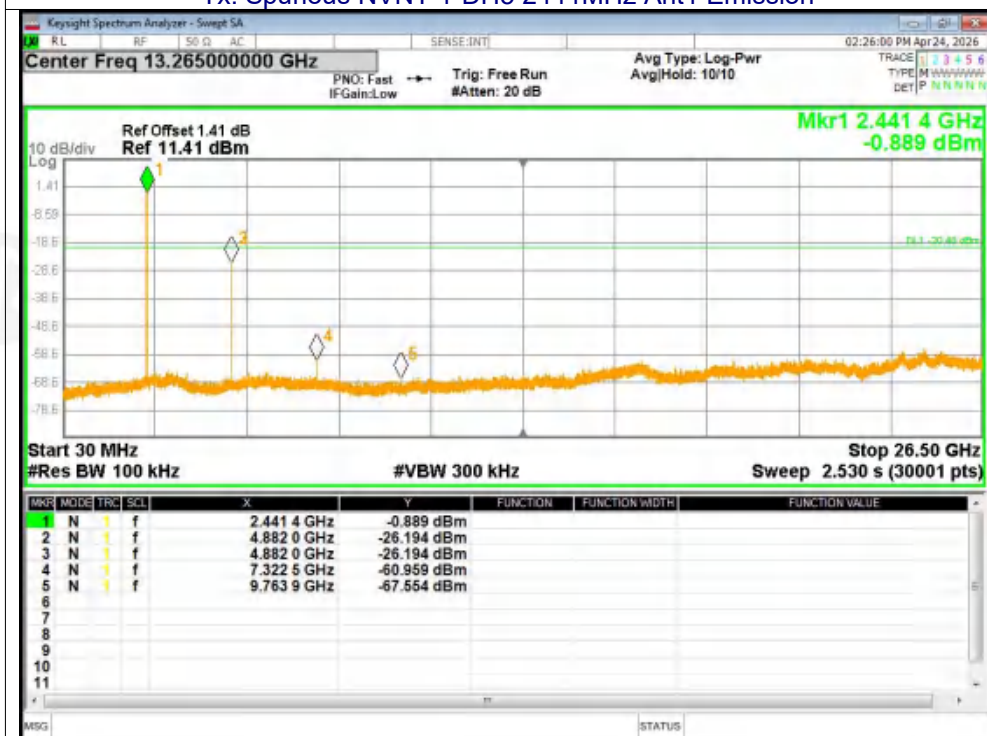




Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

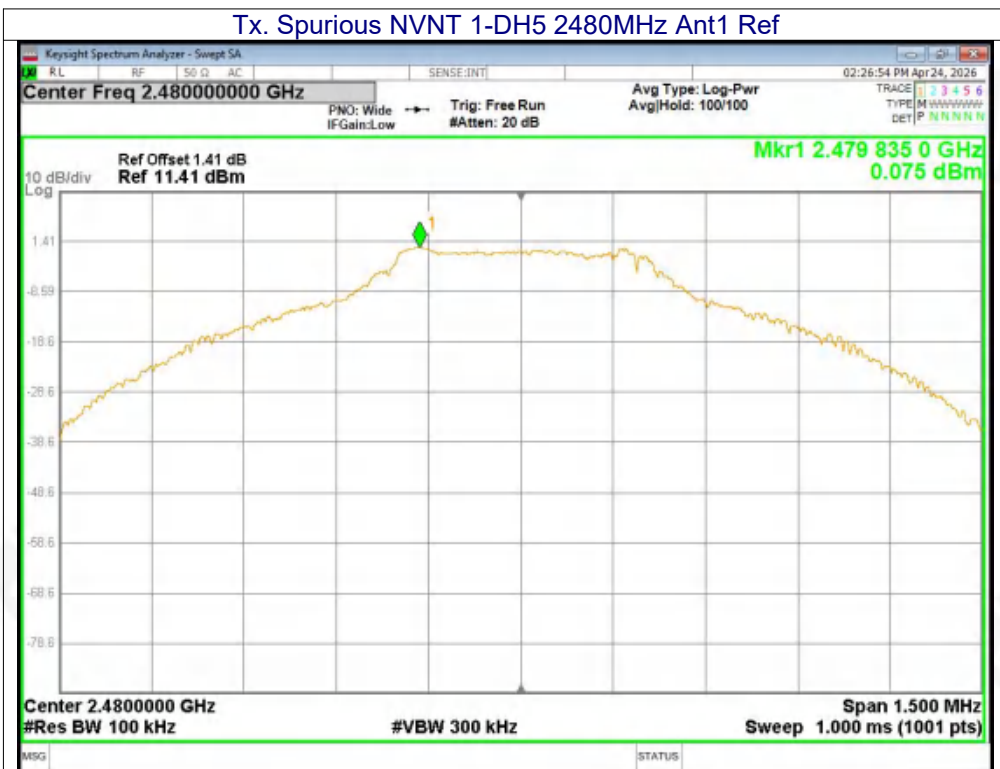


Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

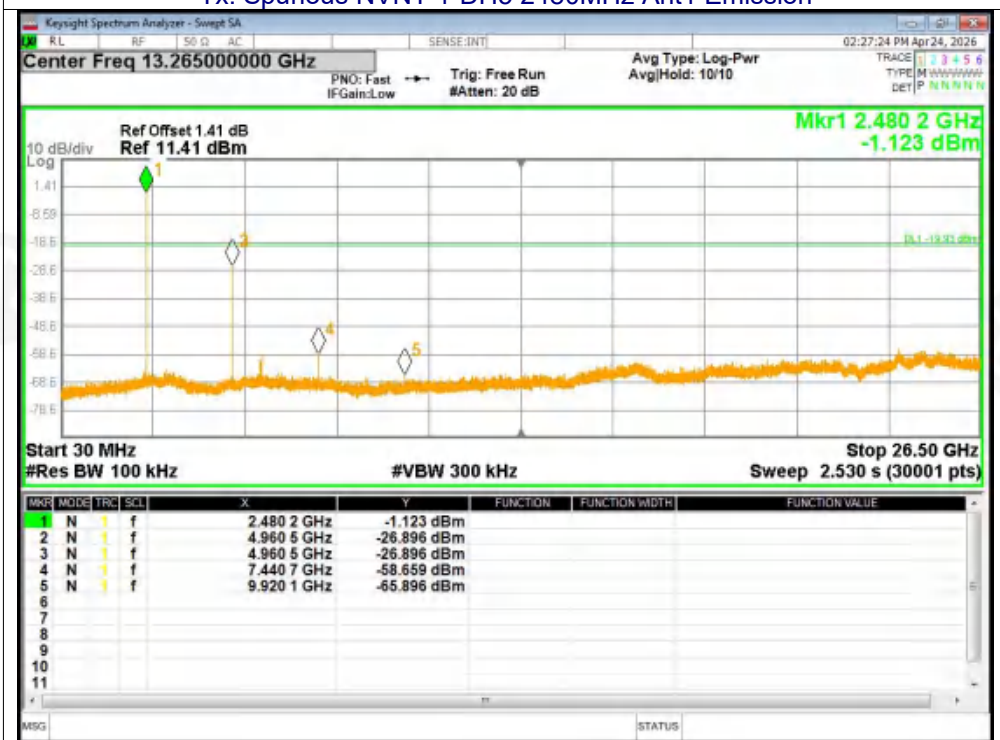



Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

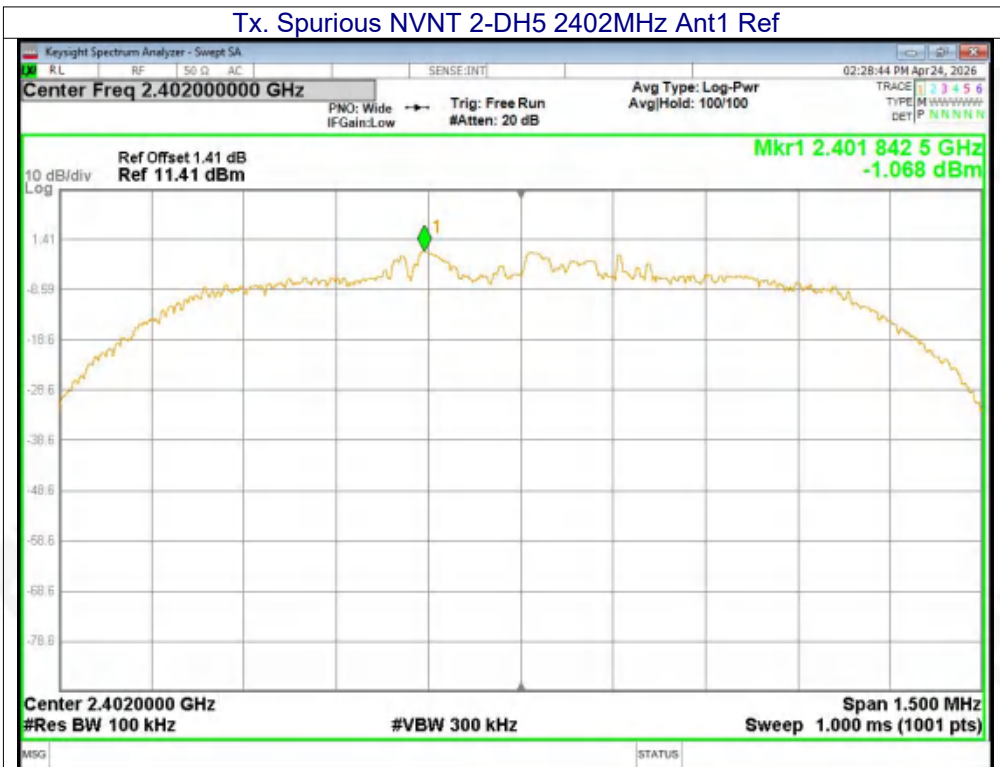


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission






Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

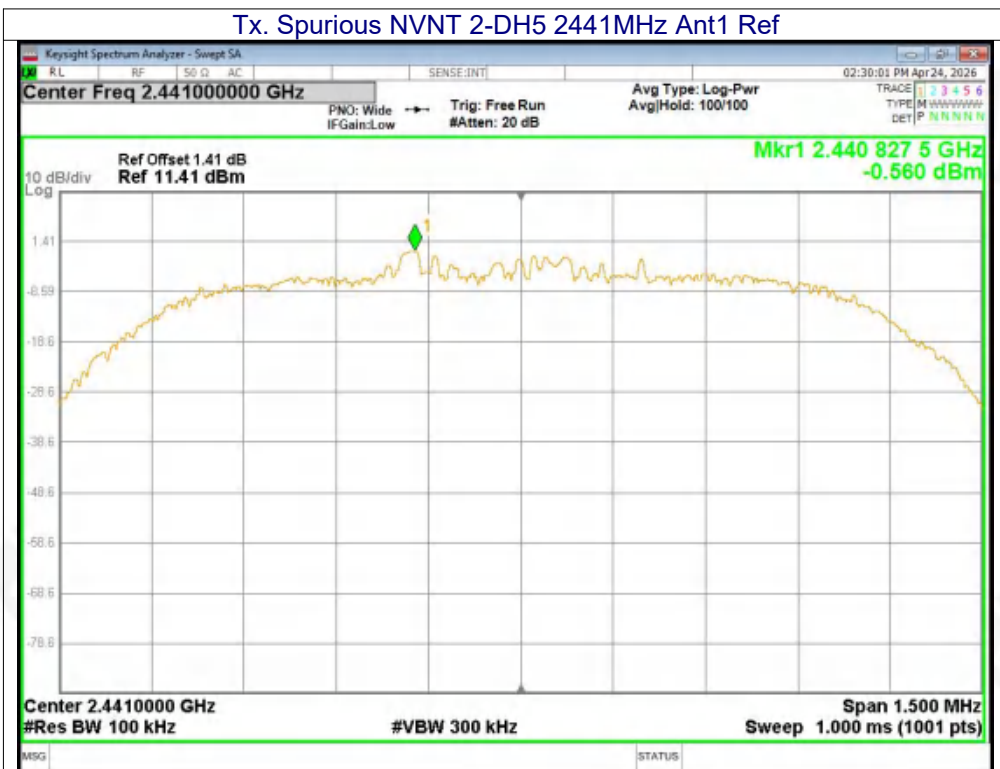


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

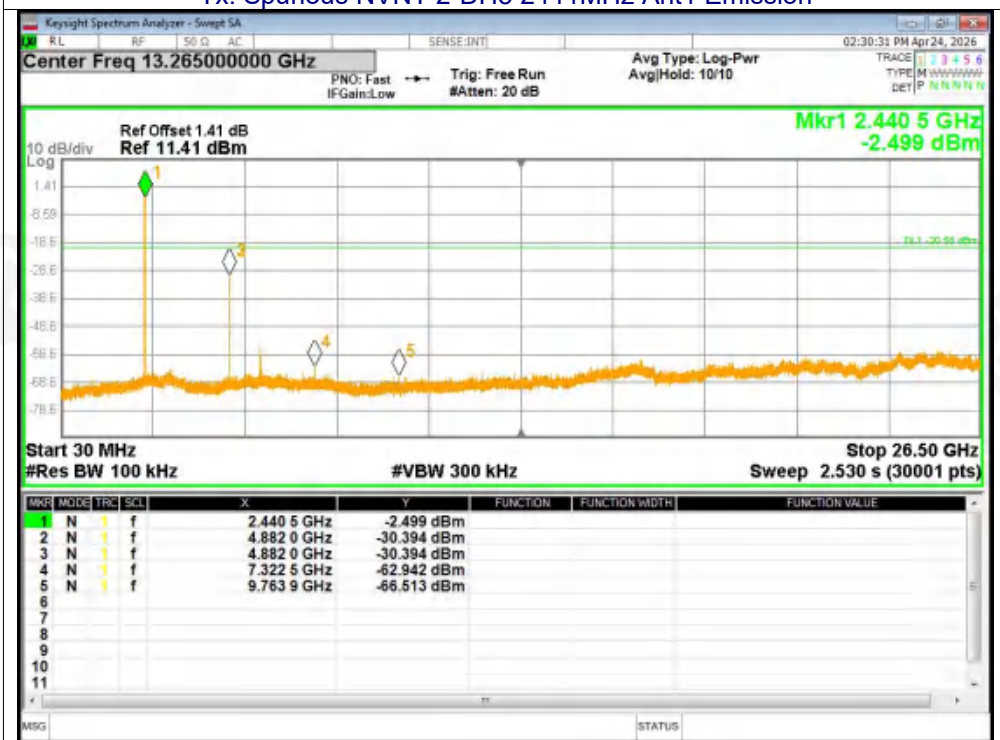



Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref

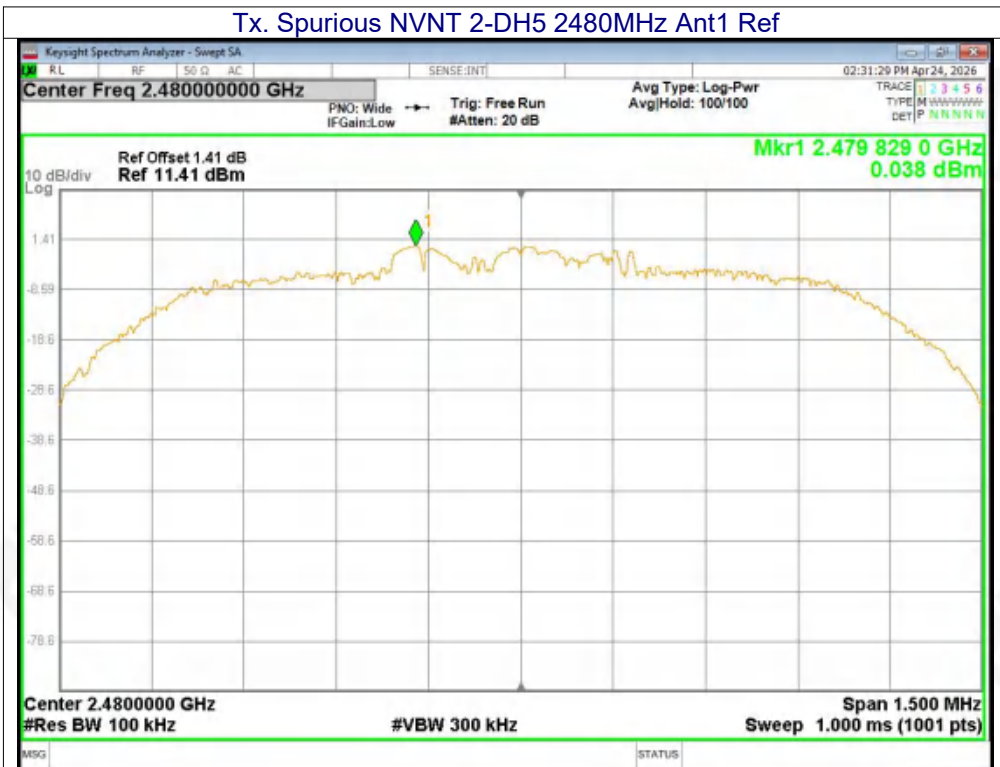


Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission





Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

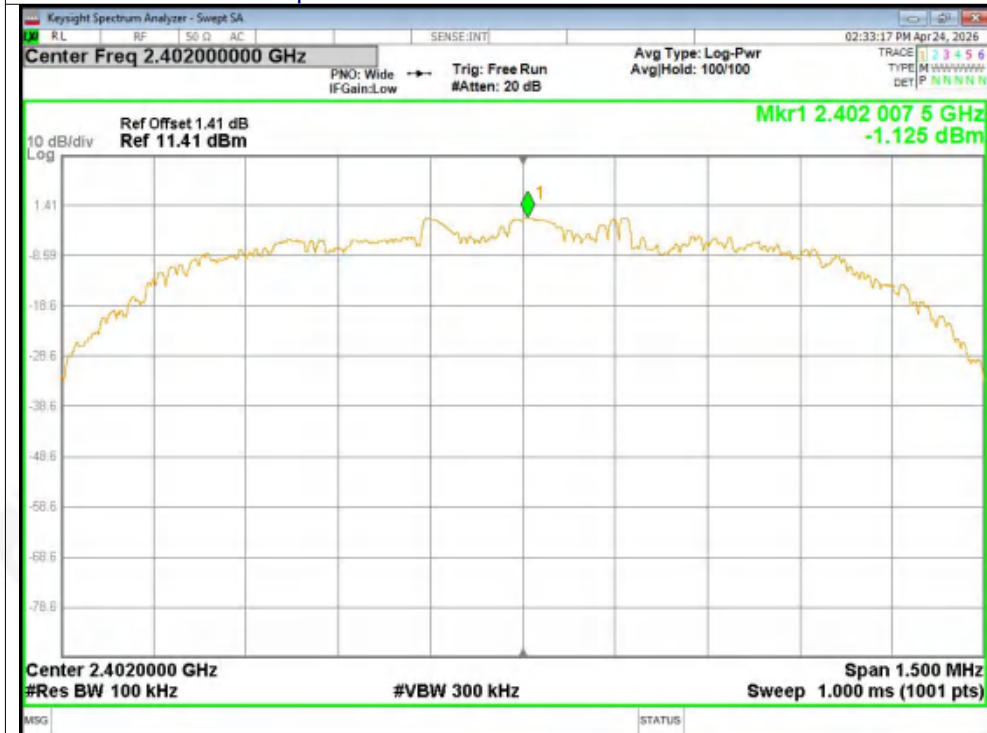

Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission






Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref




Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

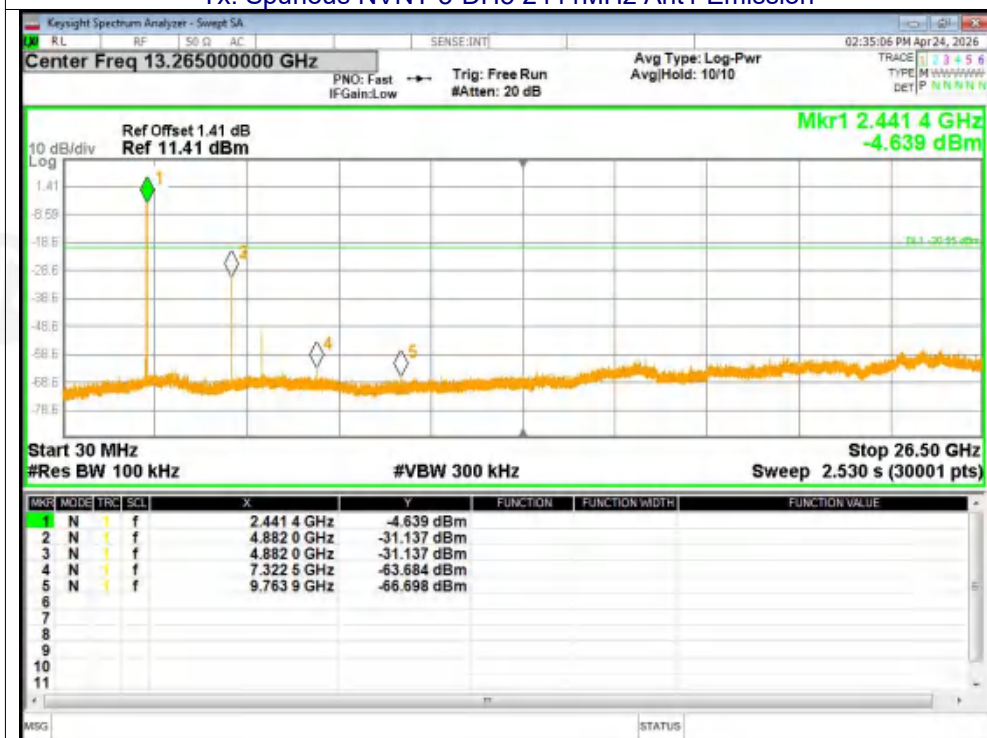




Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref

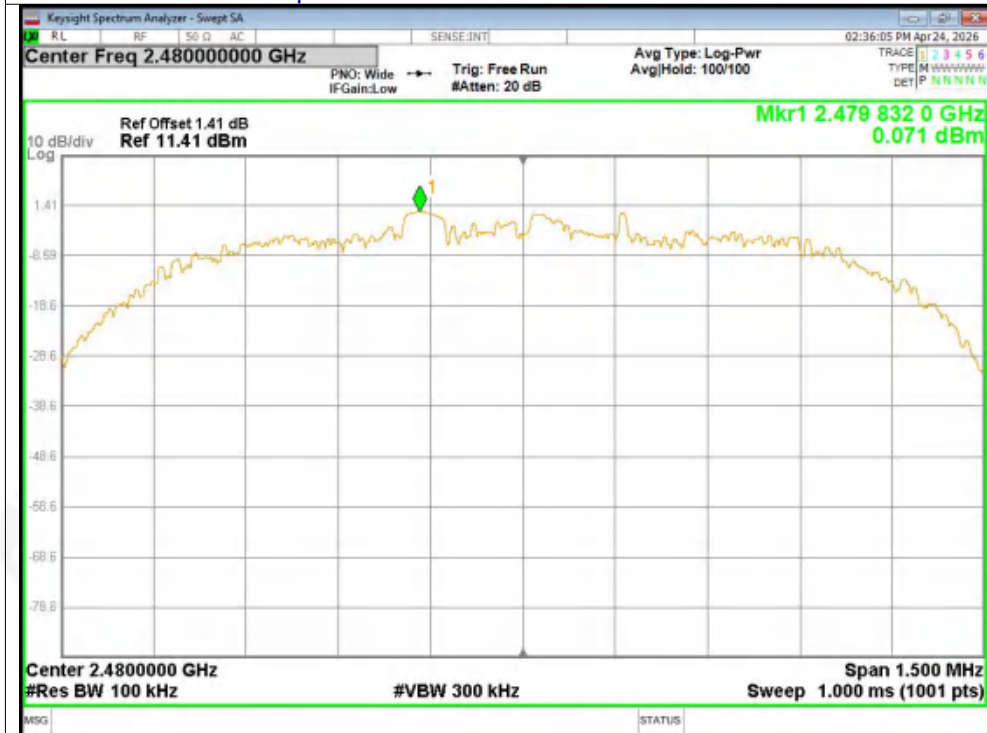


Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

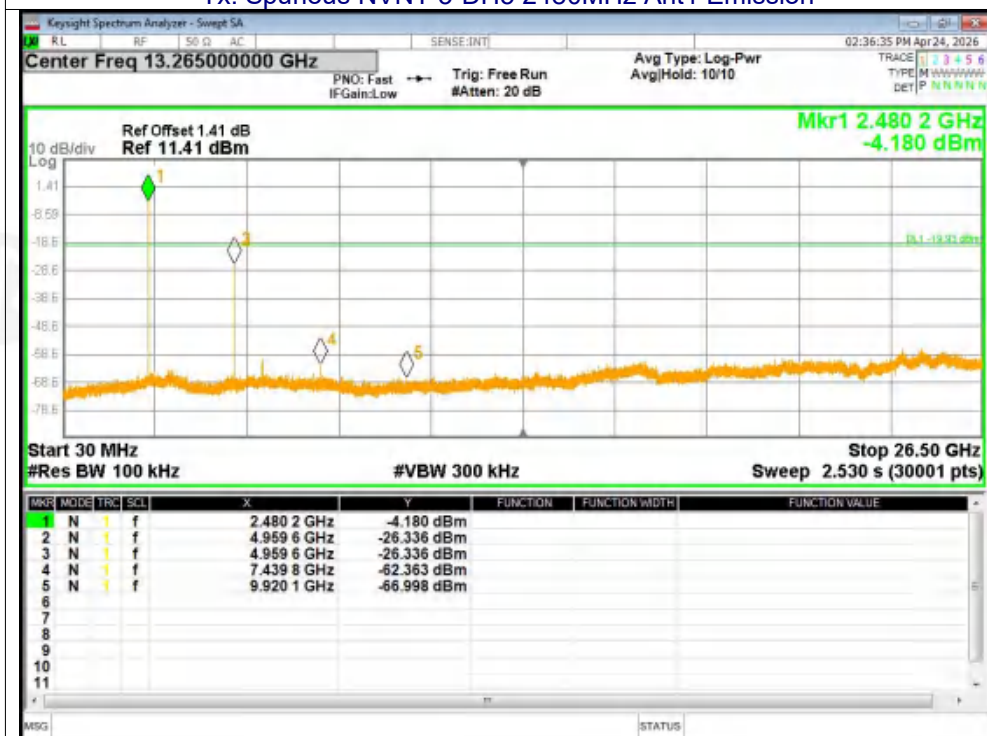




Right earphone
Test Graphs

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

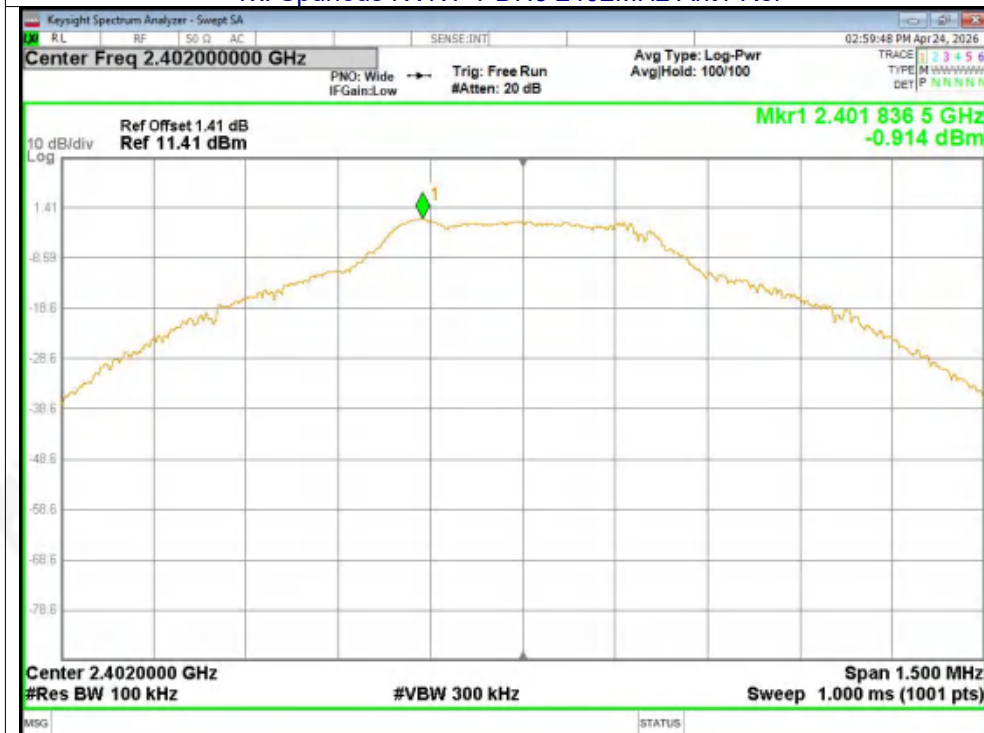


Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

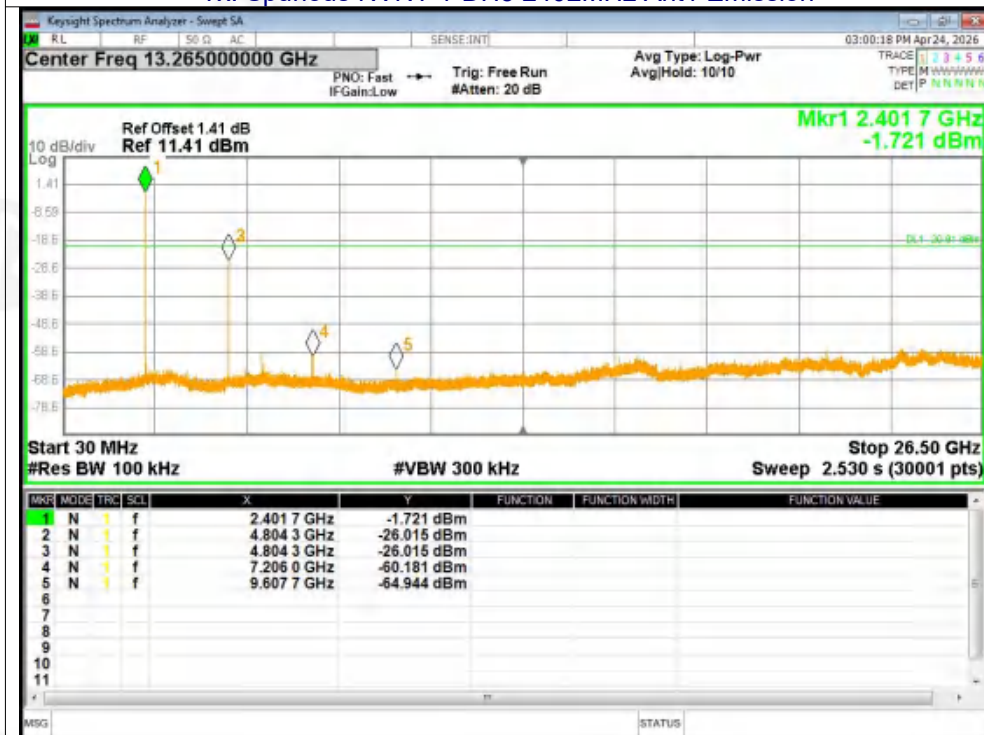




Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref

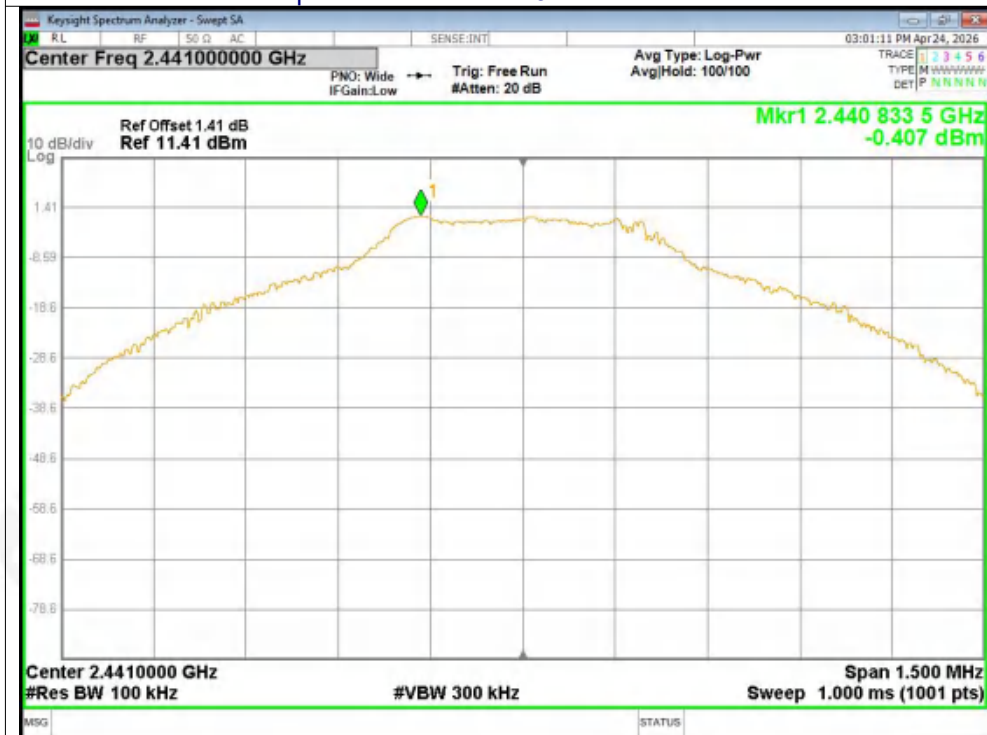

Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

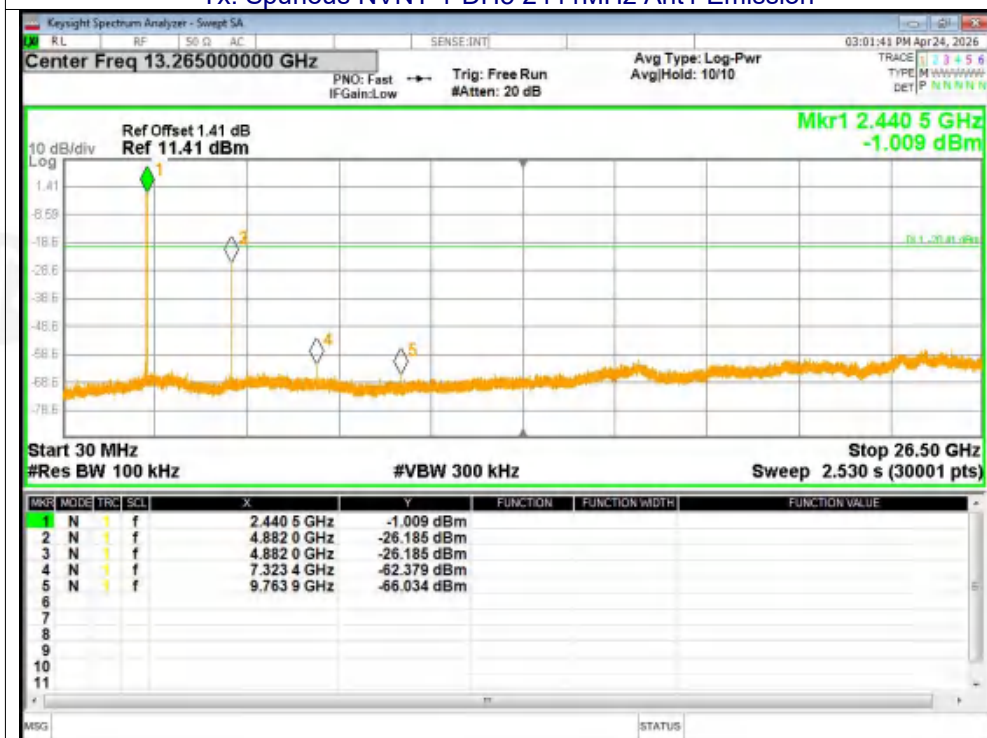




Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref




Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

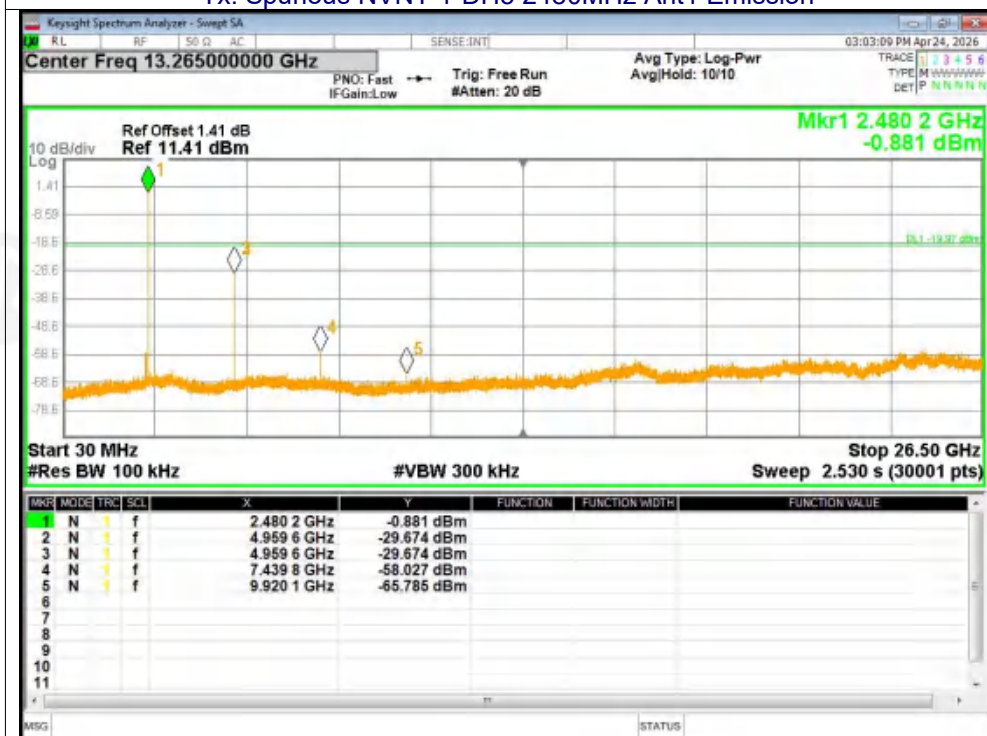




Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

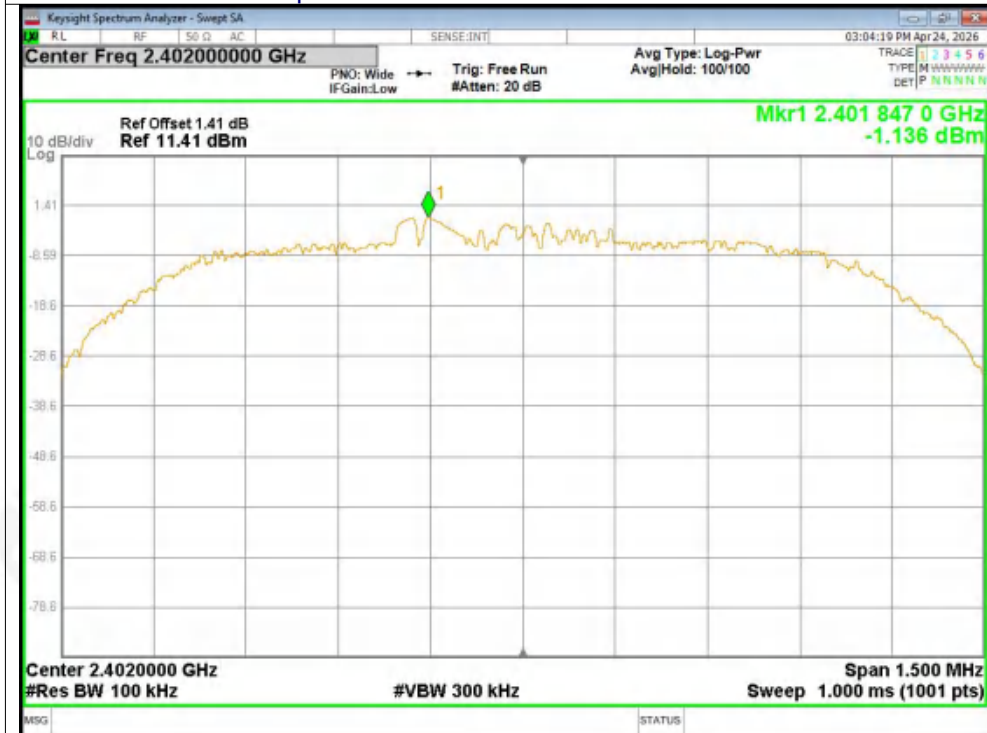


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

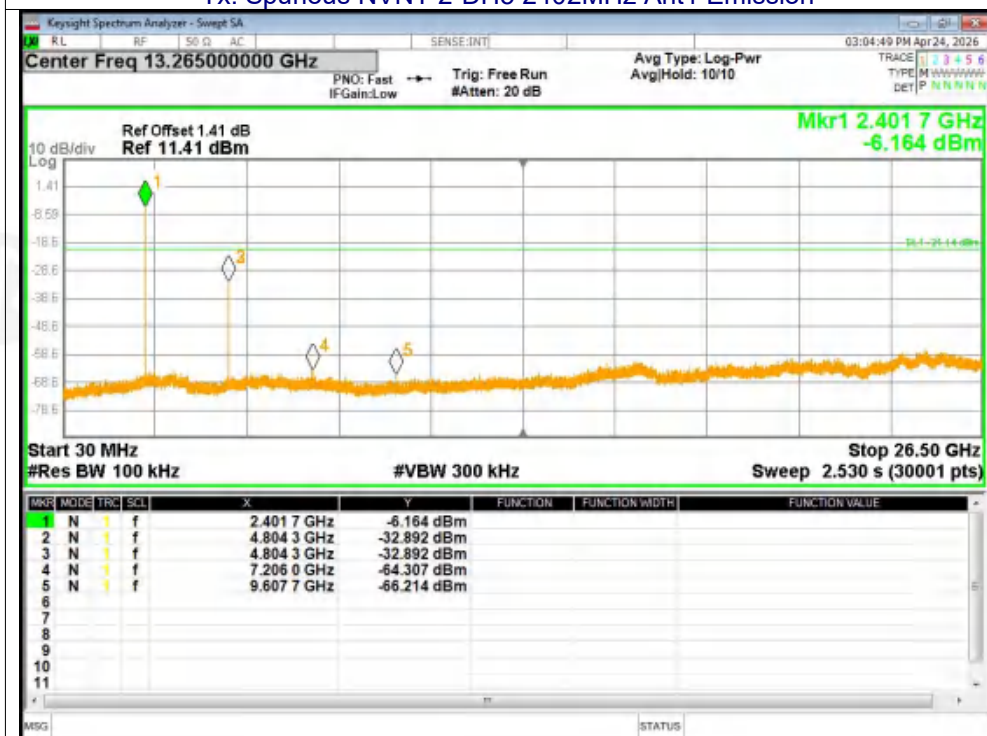




Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

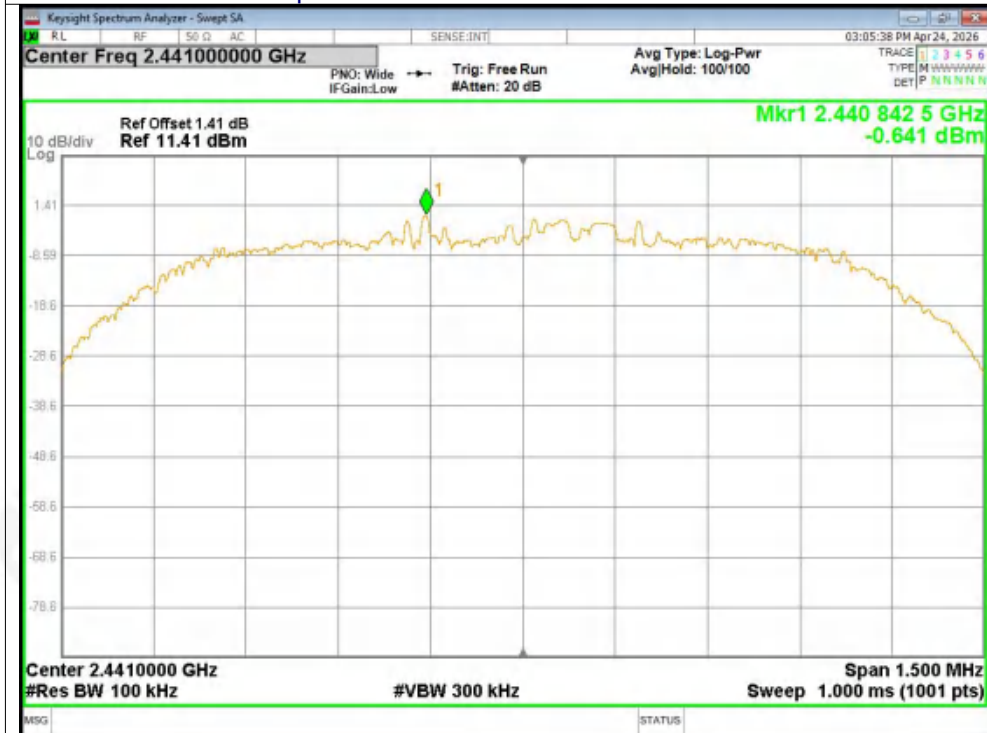


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

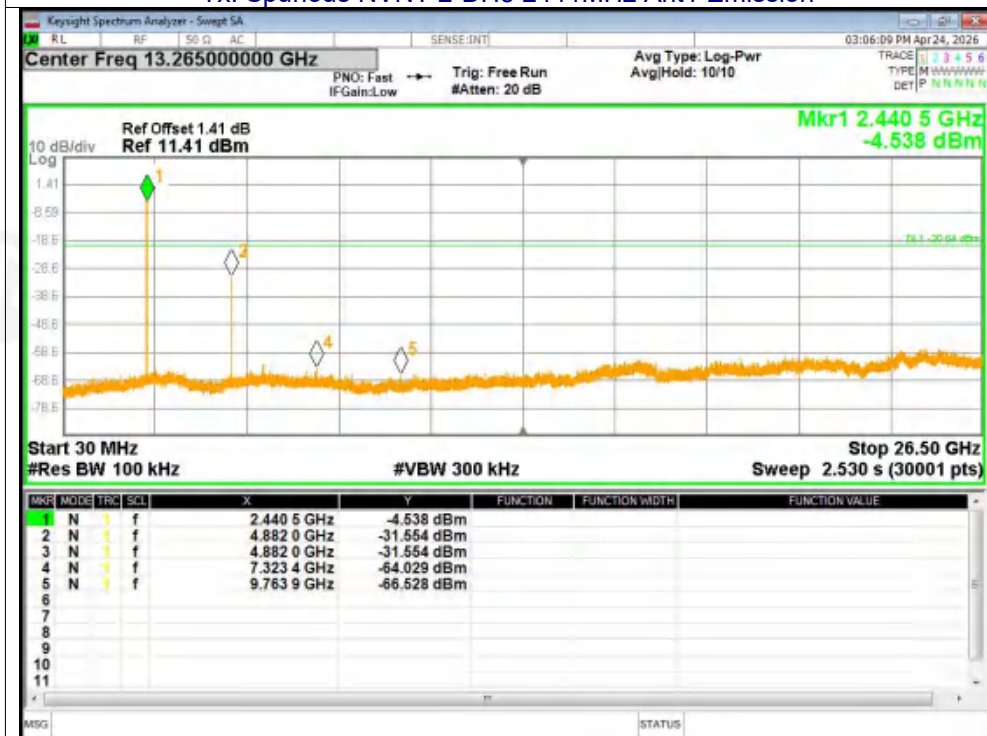




Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref

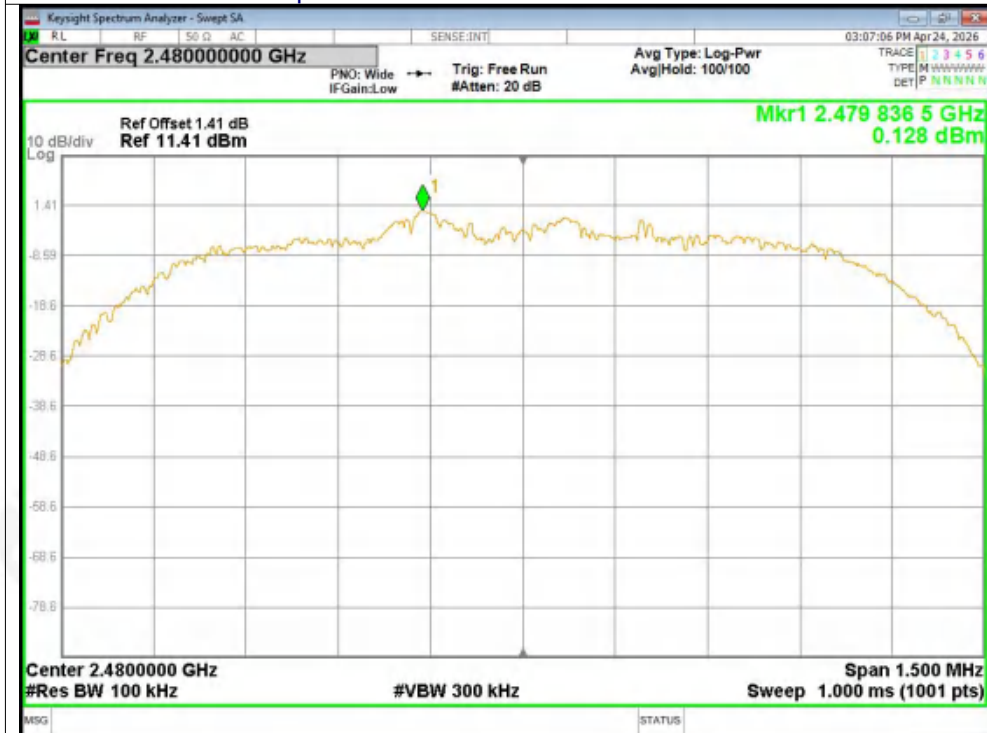


Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

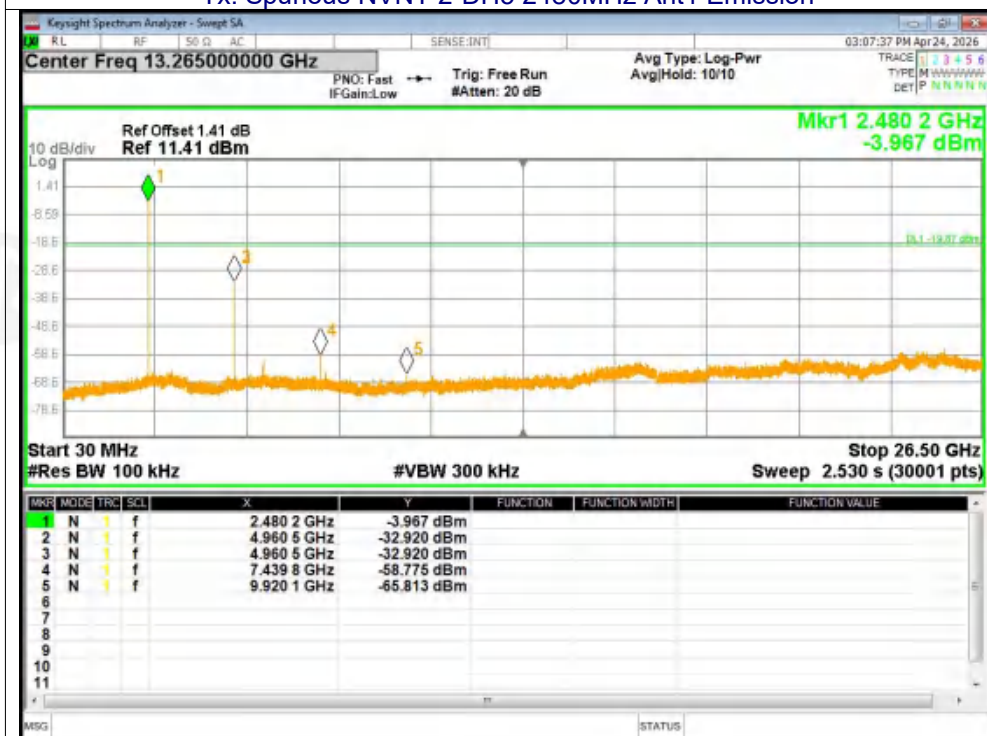




Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

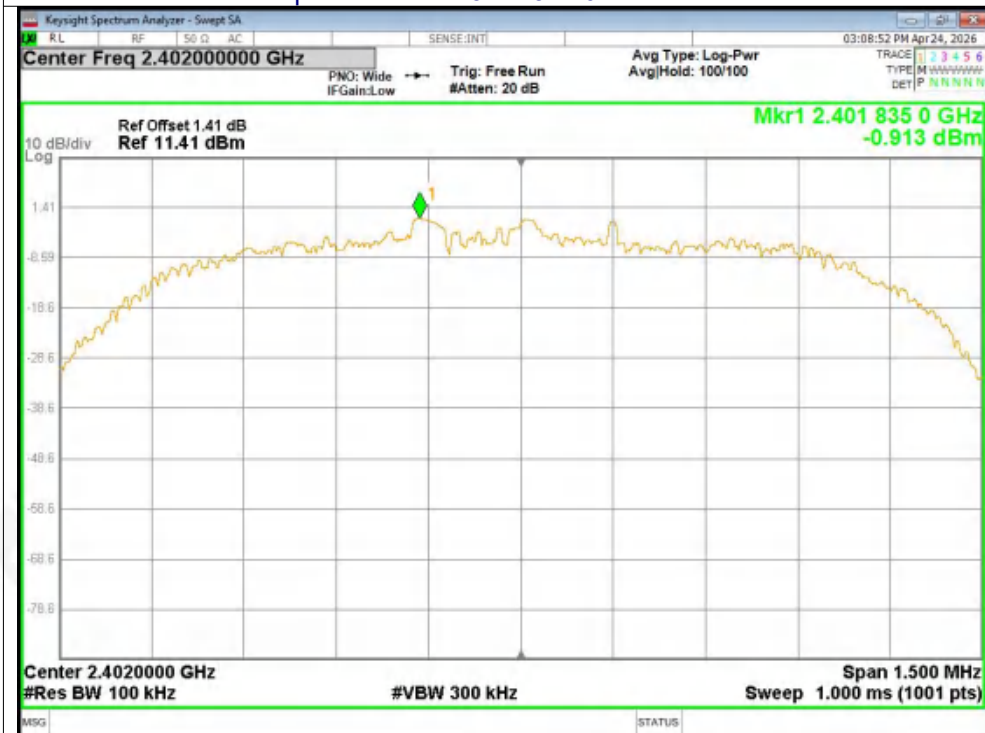


Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

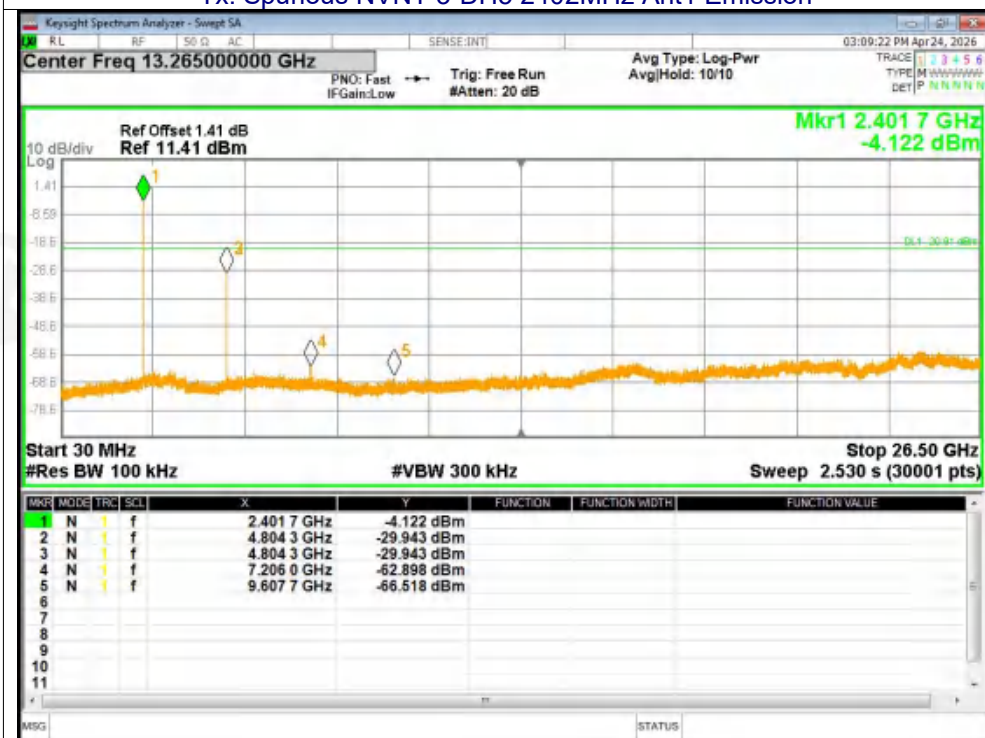



Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref

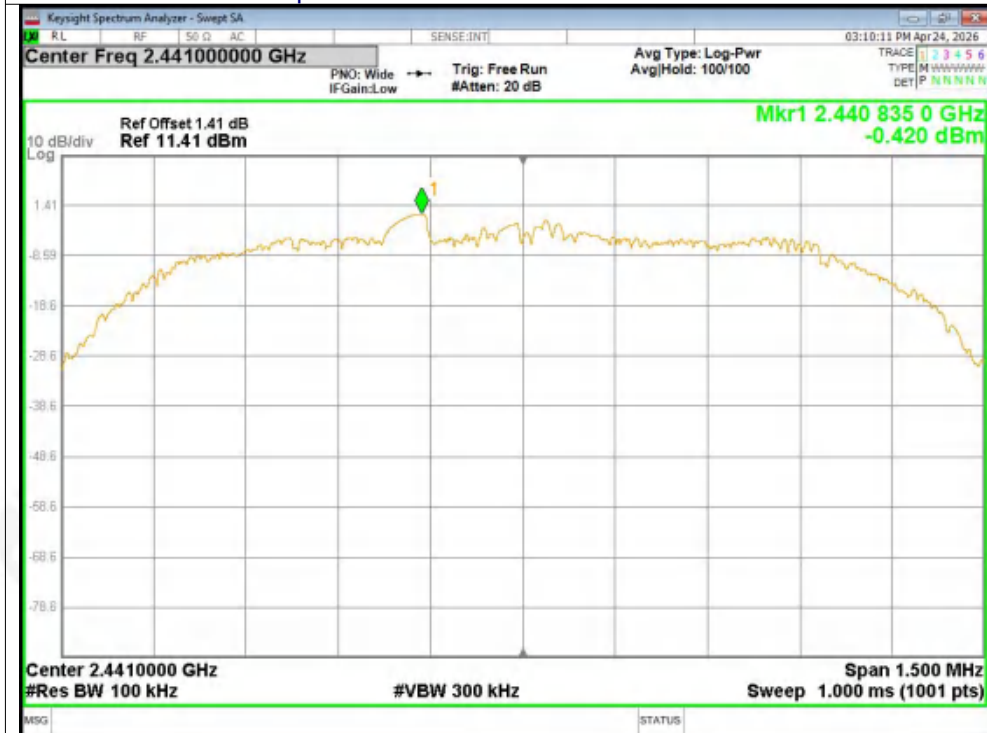

Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission






Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref



Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

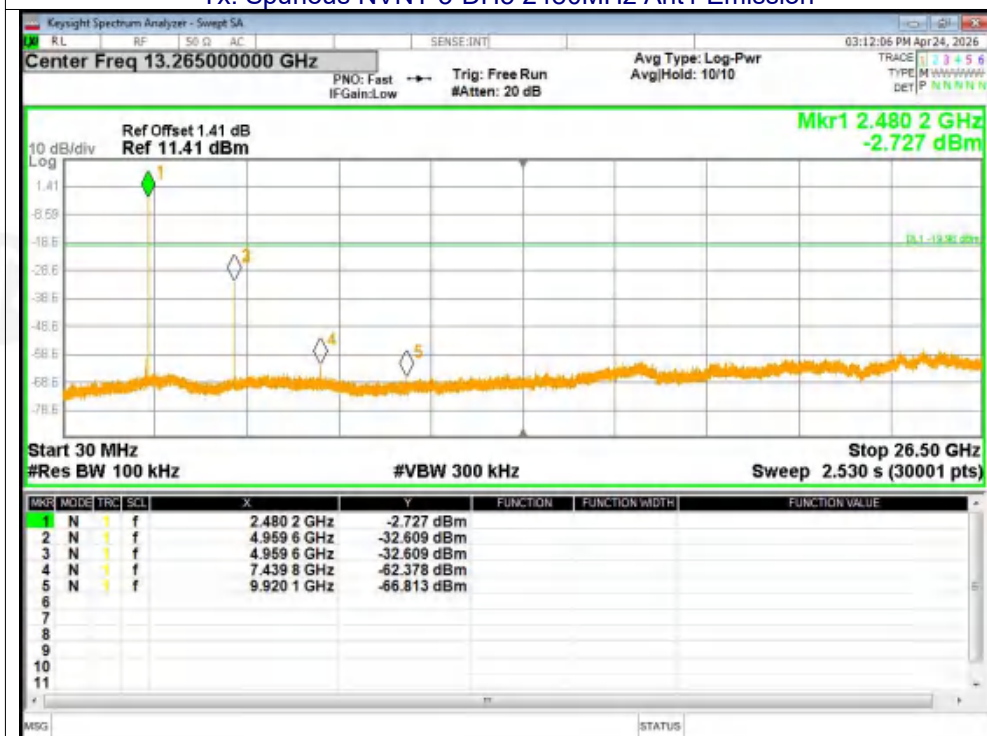




No-hopping Band edge-left side


Left earphone

Test Graphs

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

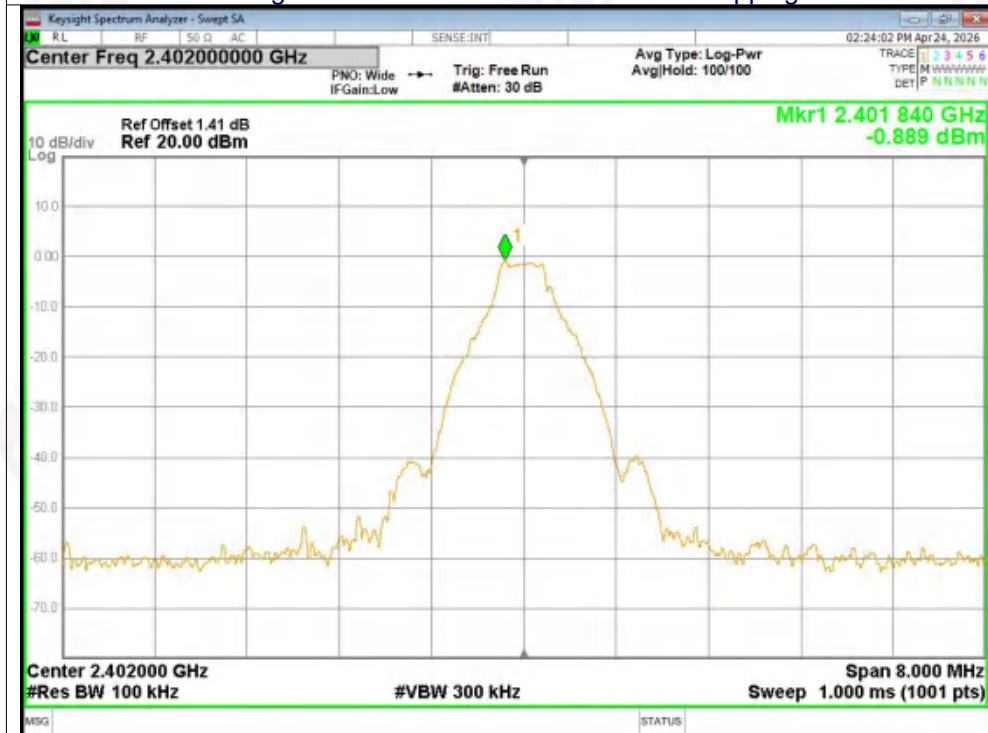


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

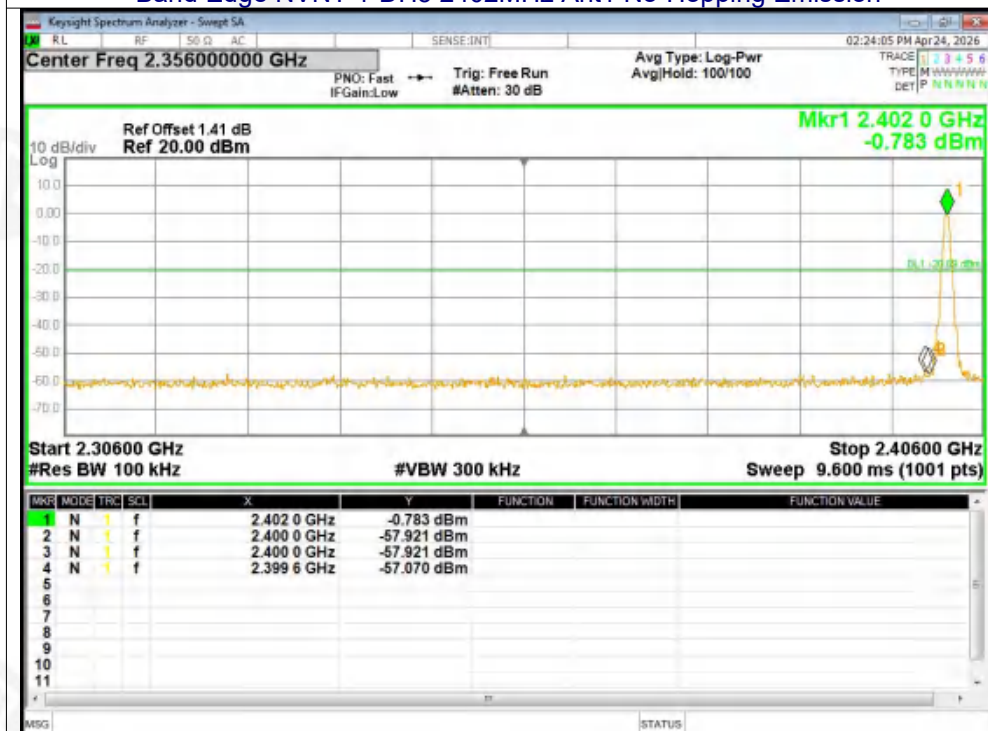



Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

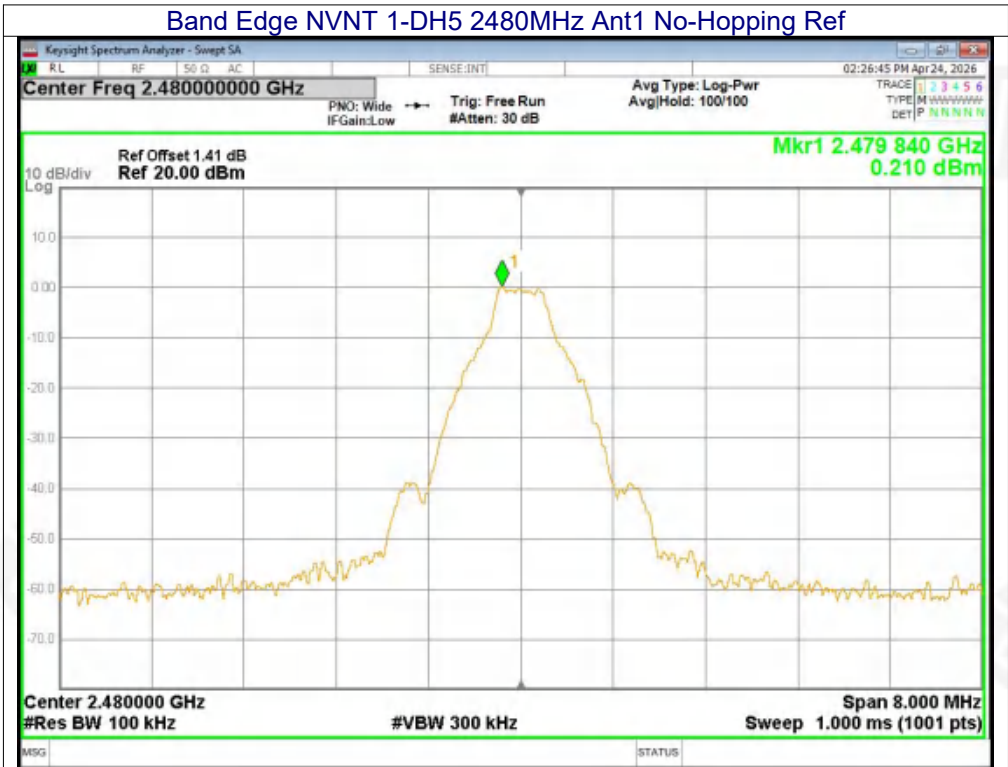


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission






Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

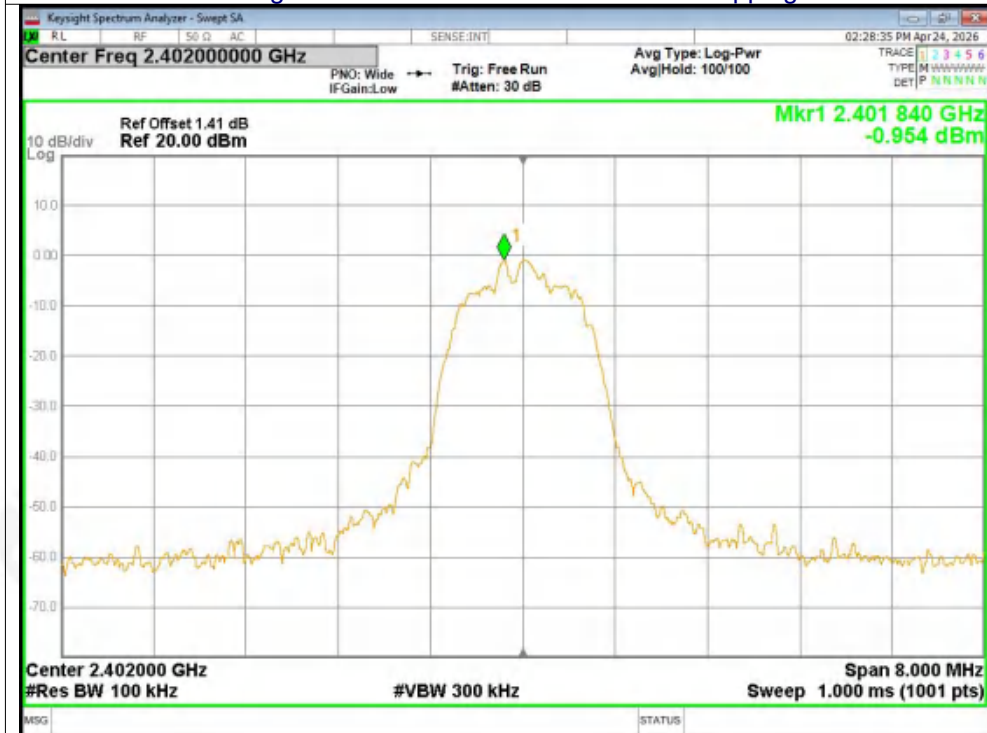


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

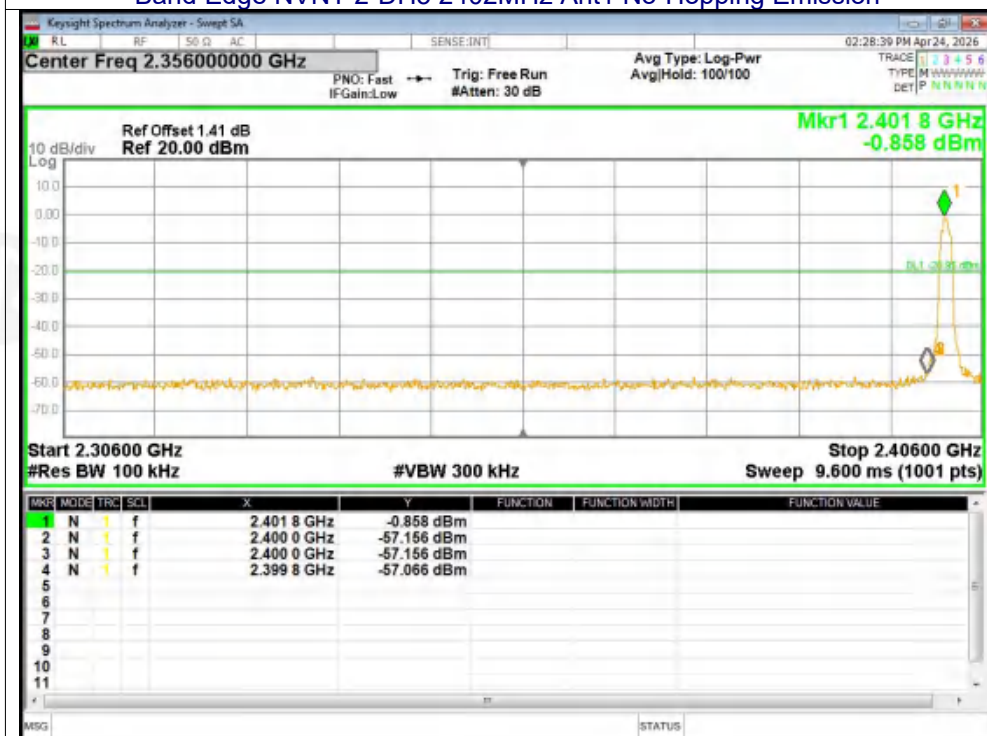



Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

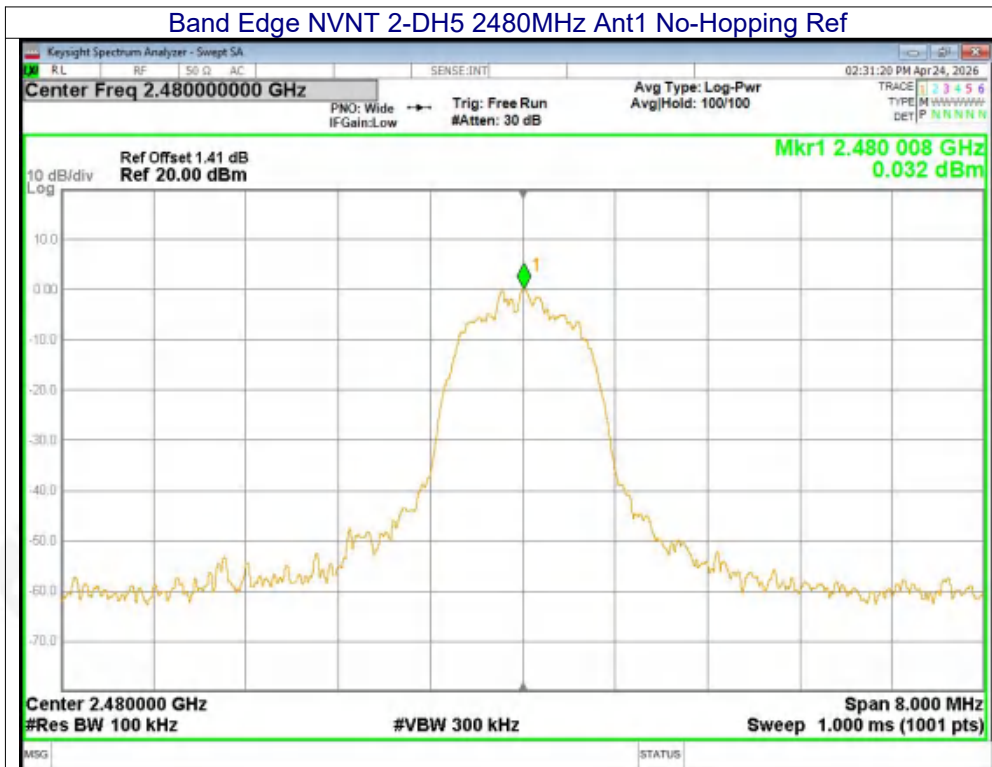


Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission






Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref

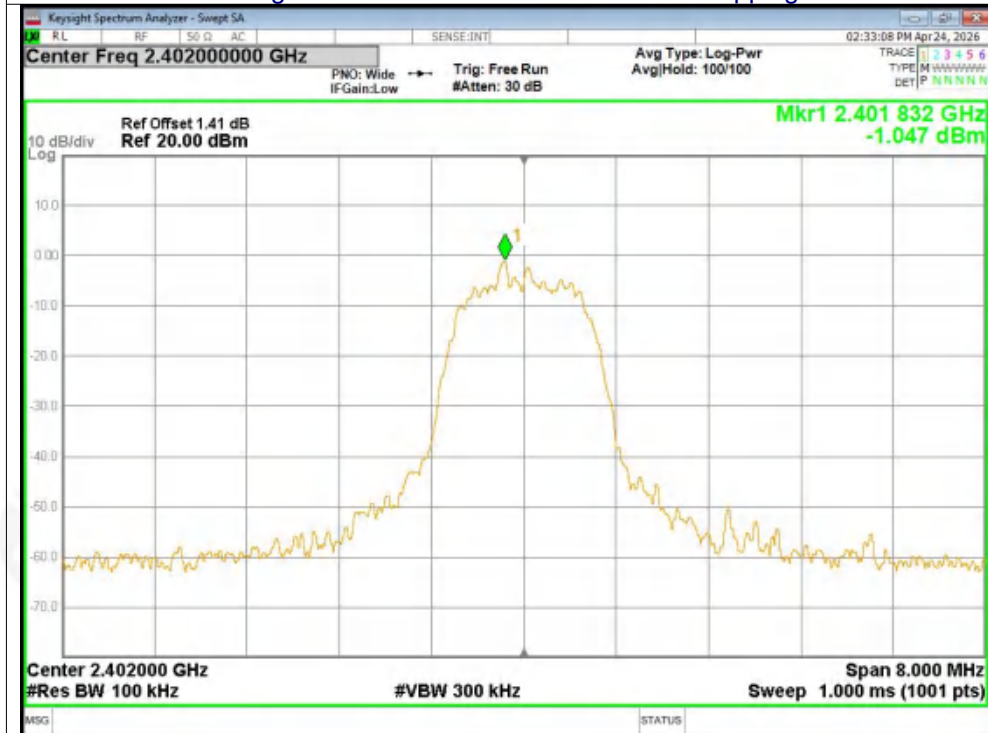


Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

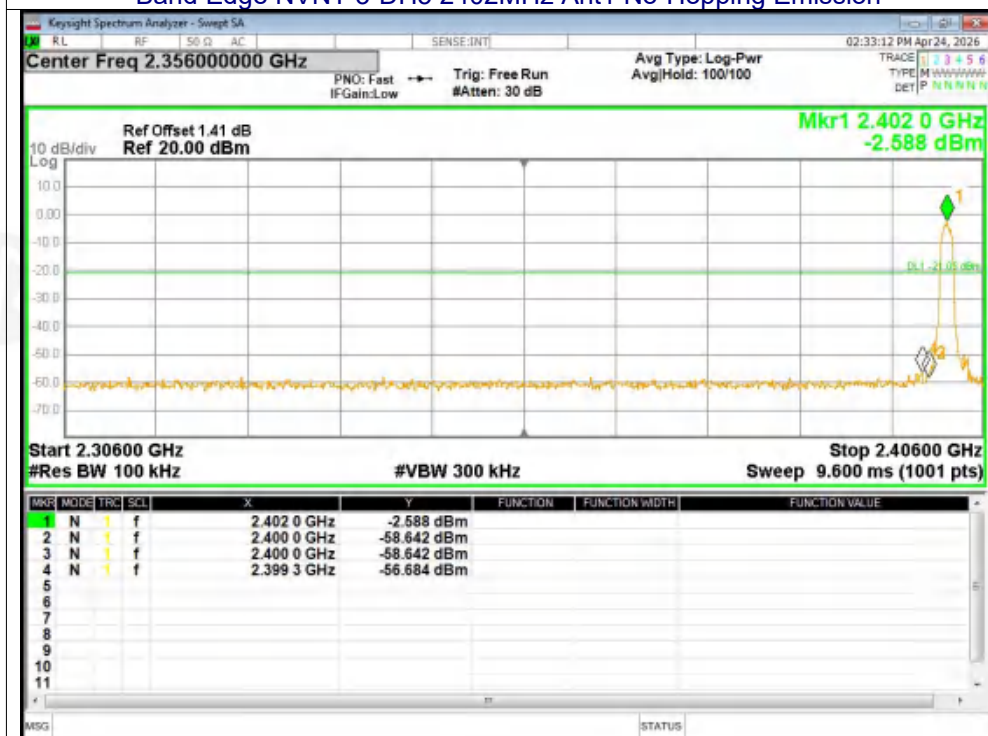



Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

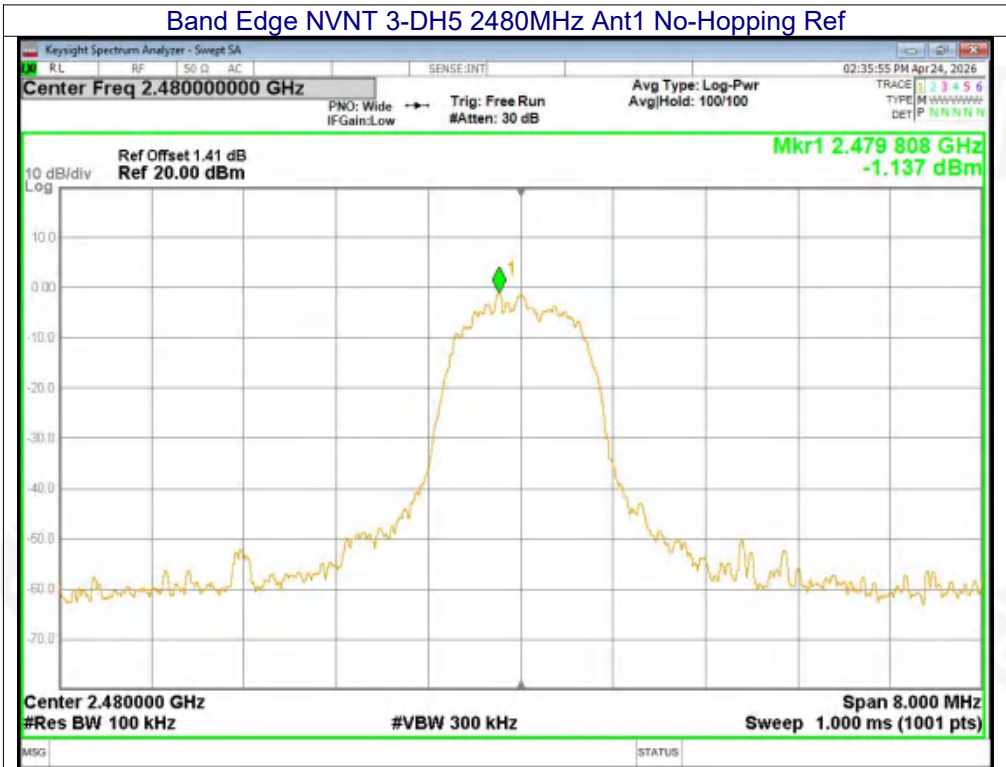

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission






Right earphone

Test Graphs

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

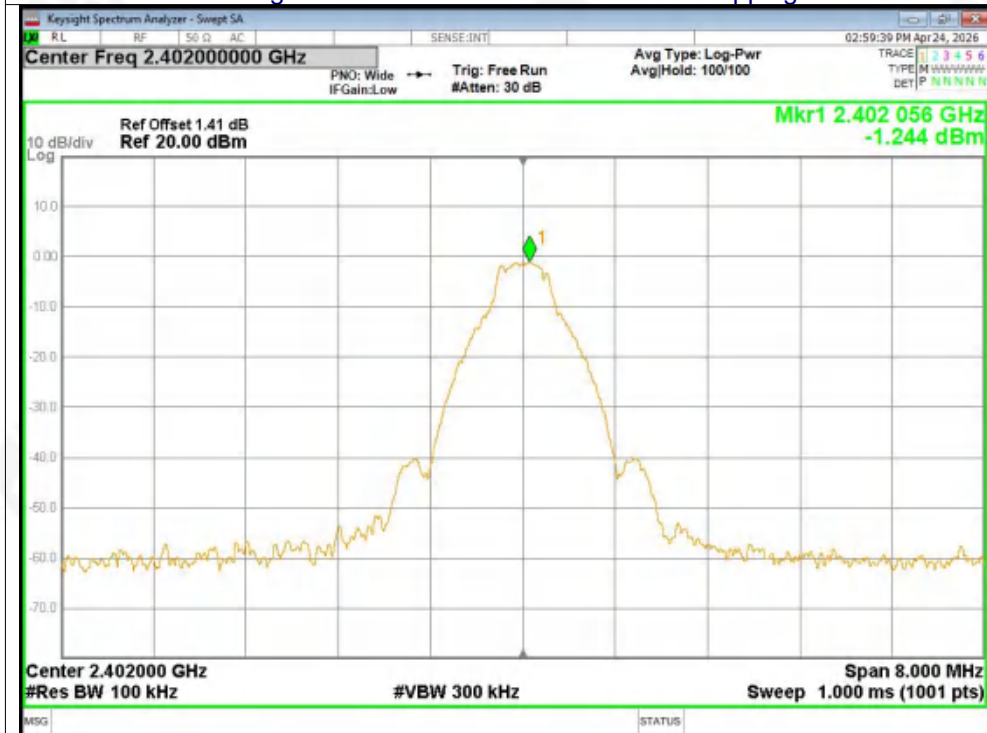


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission





Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

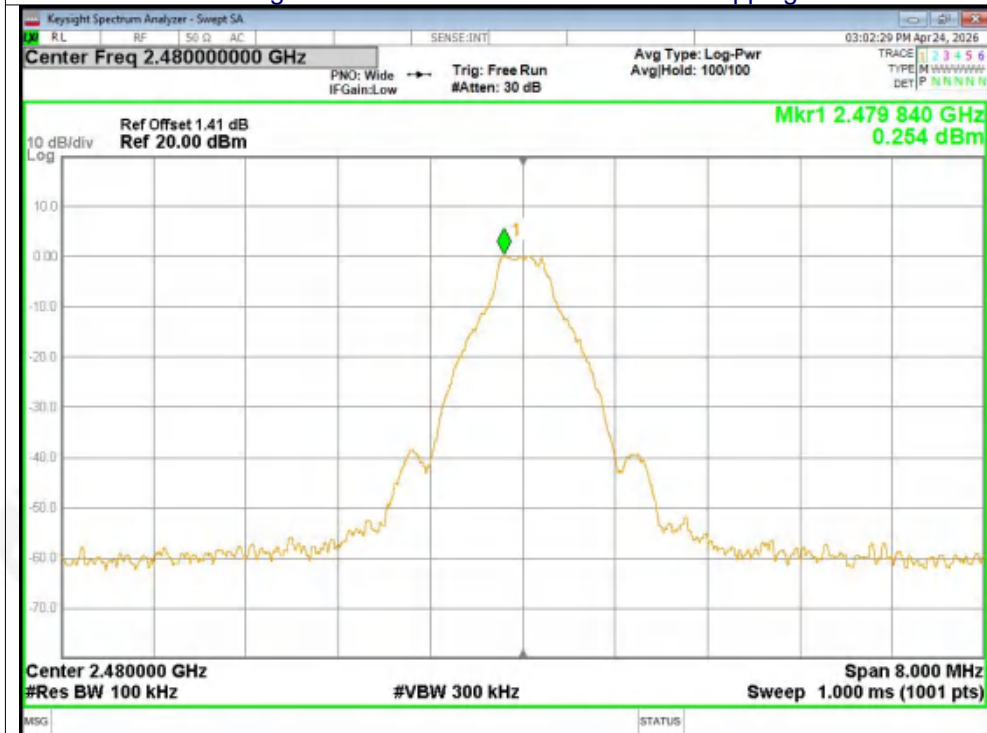


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission





Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

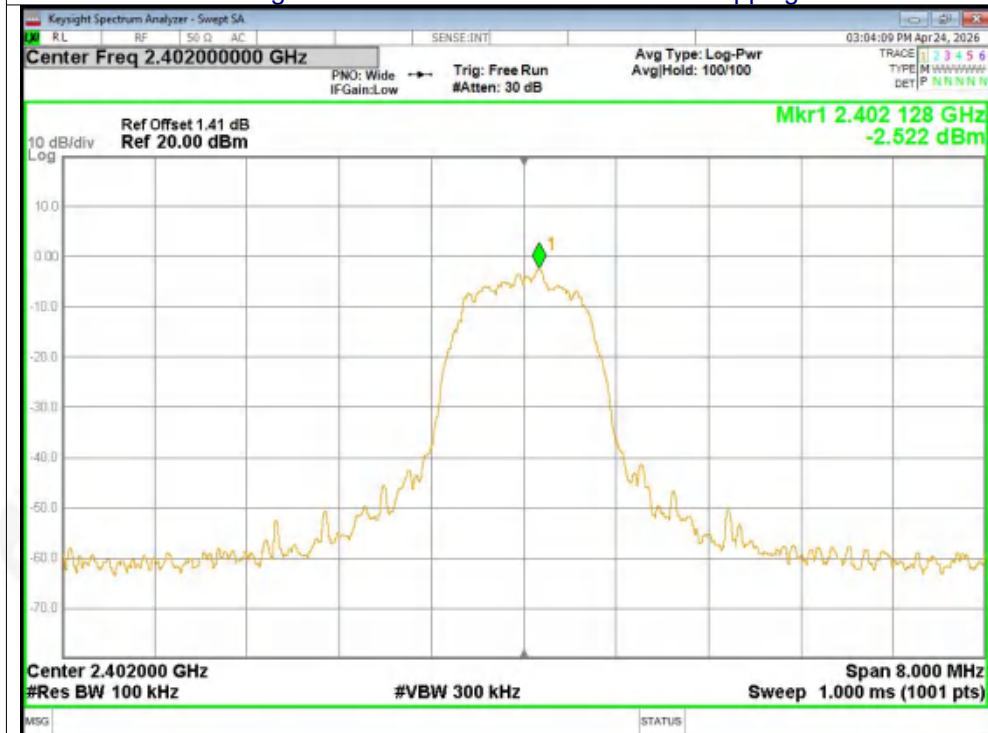


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission





Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

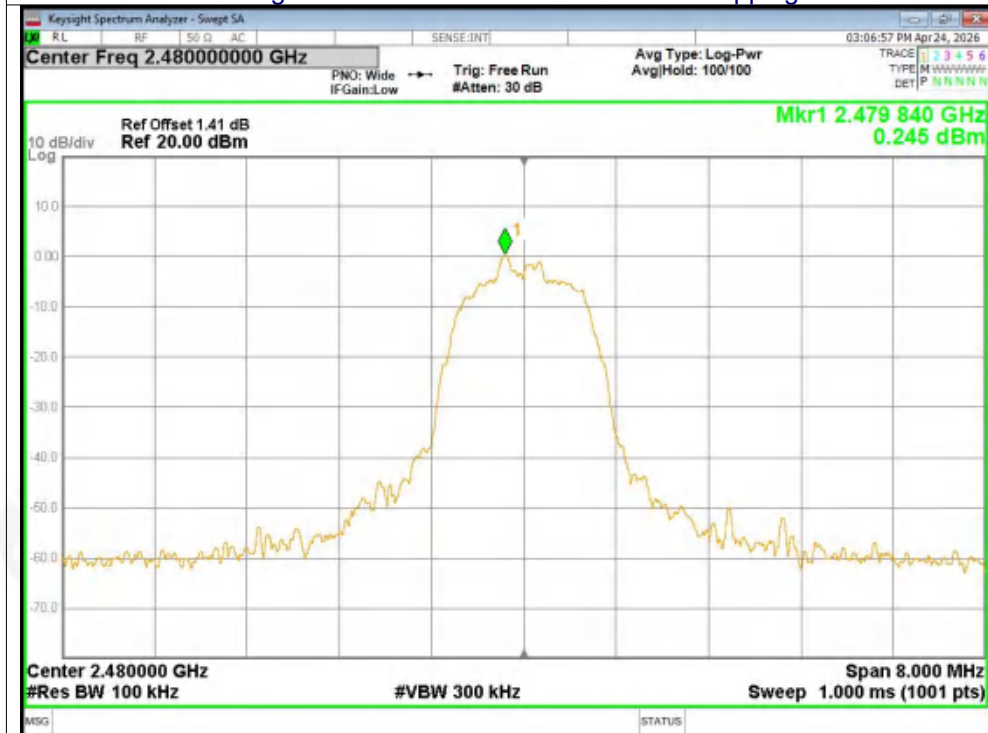


Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission






Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref

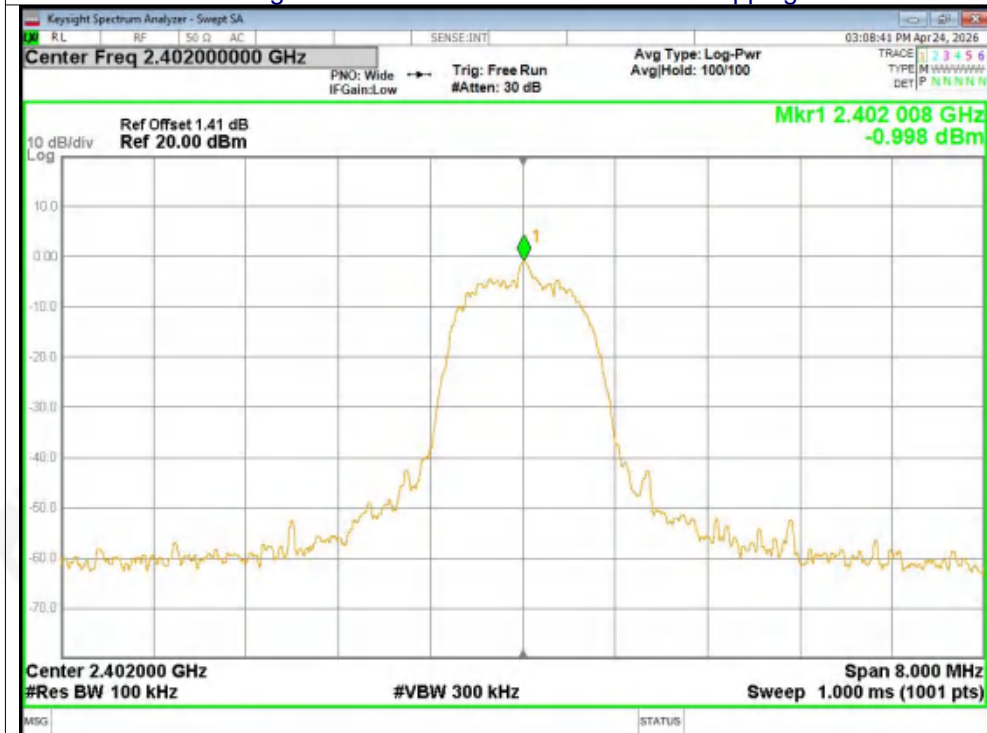


Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

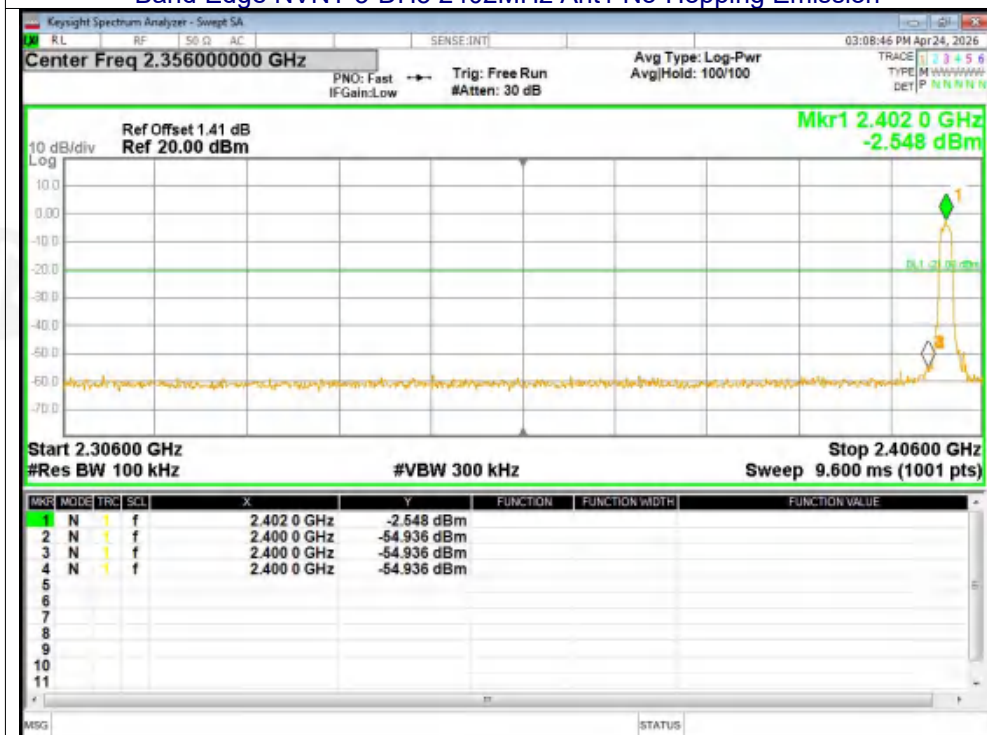



Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

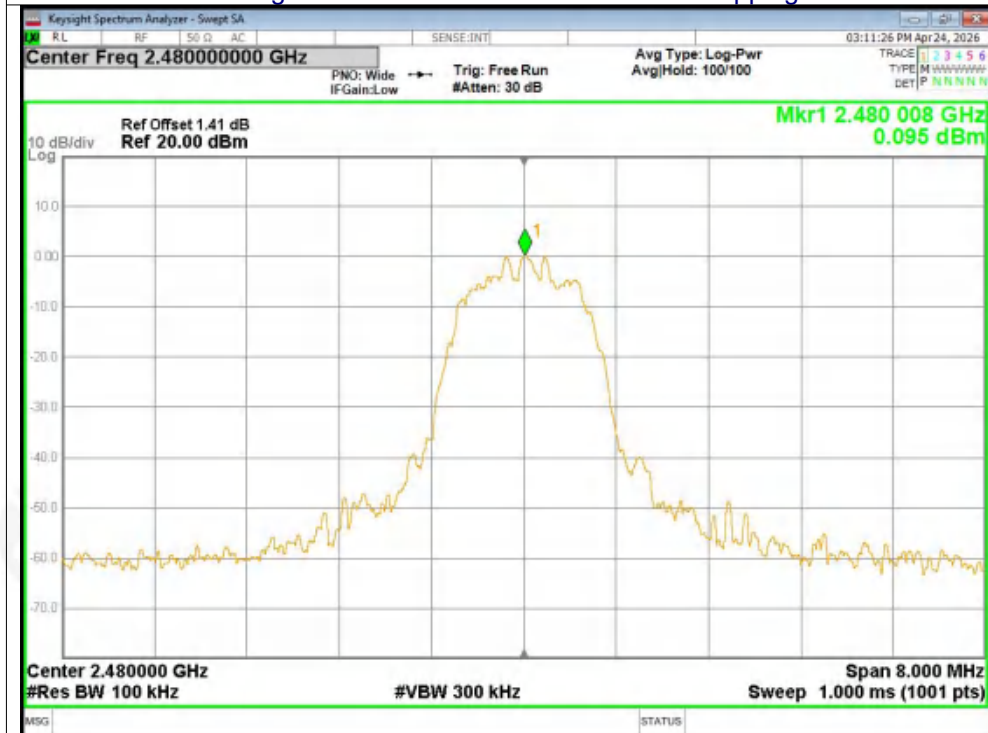

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission






Hopping Band edge-left side

Left earphone

Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref

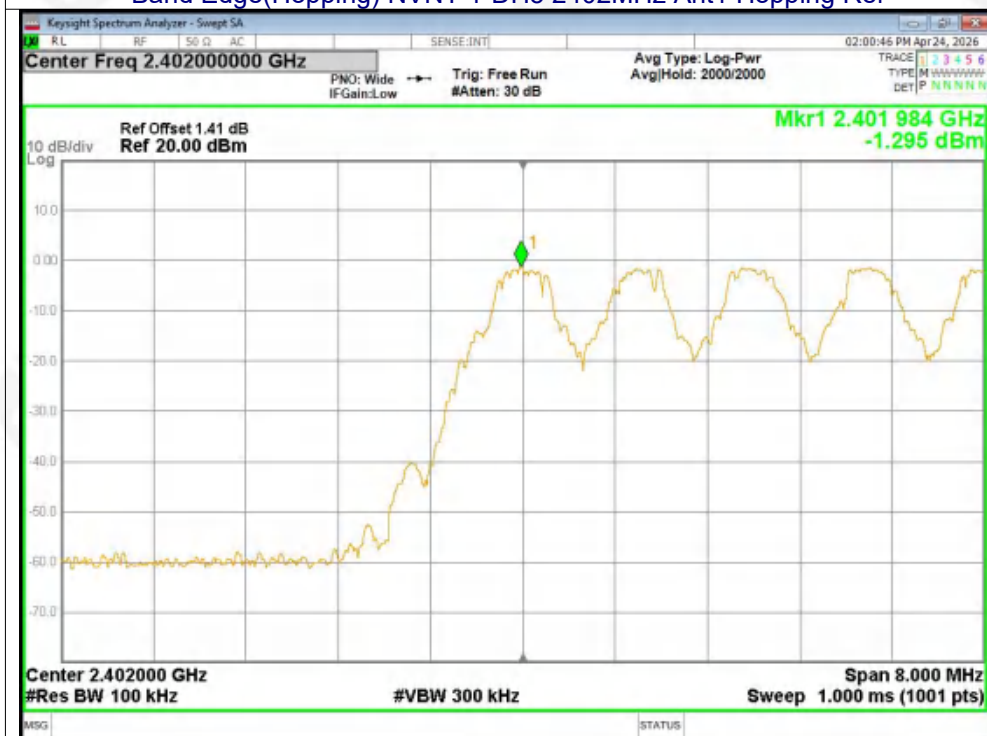

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission





Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission





Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission





Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission






Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref

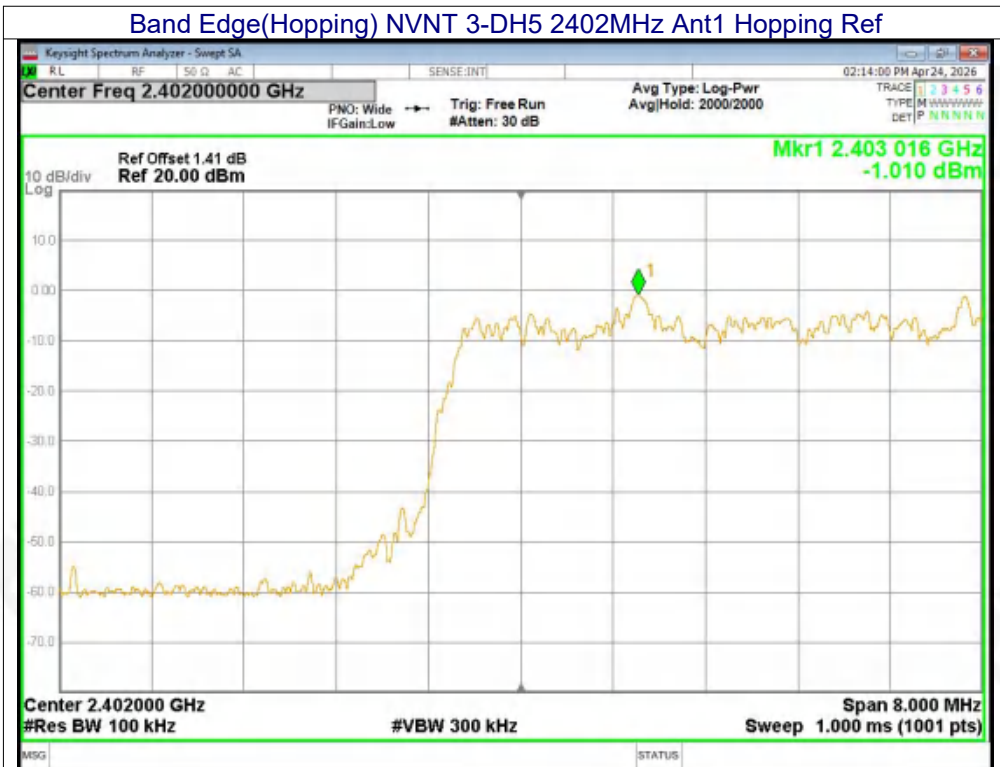

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

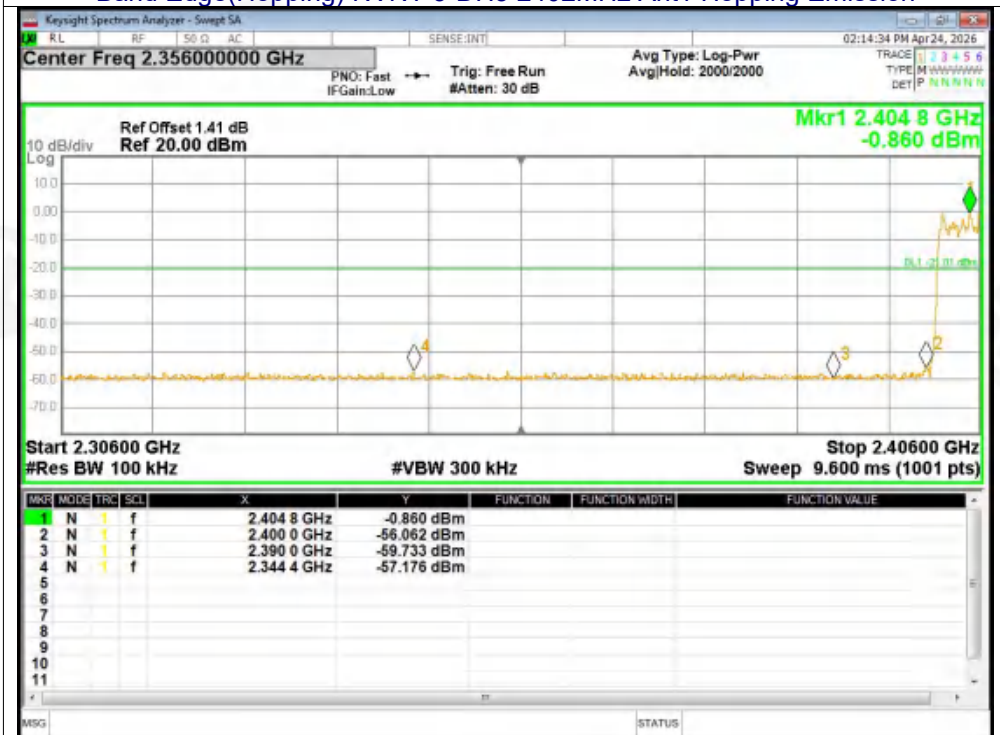



Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission






Right earphone

Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

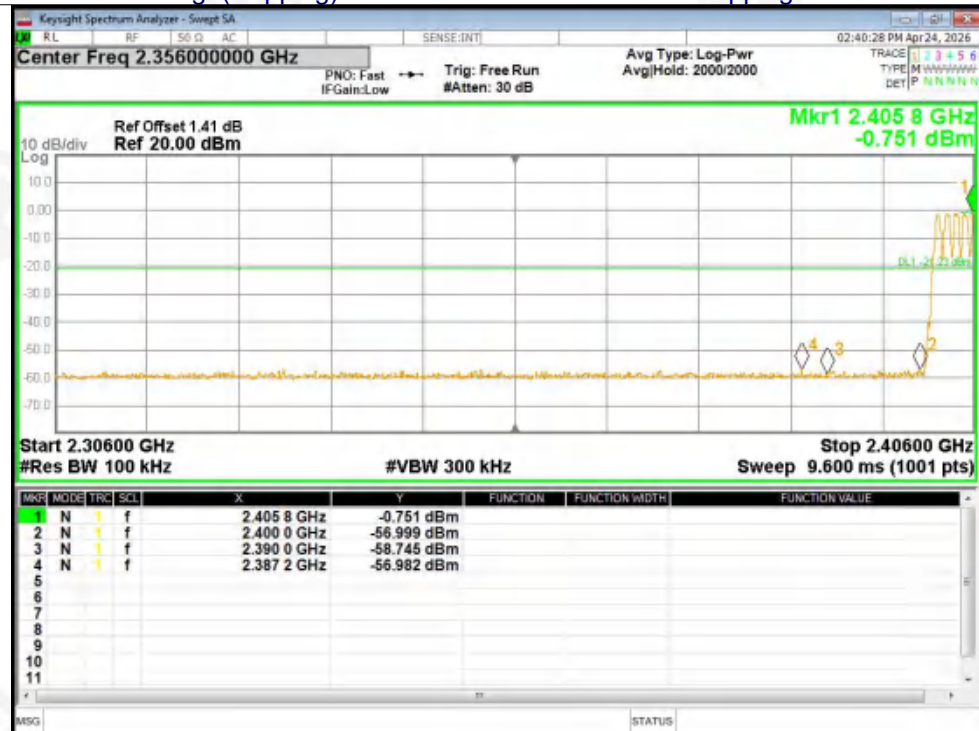



Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref

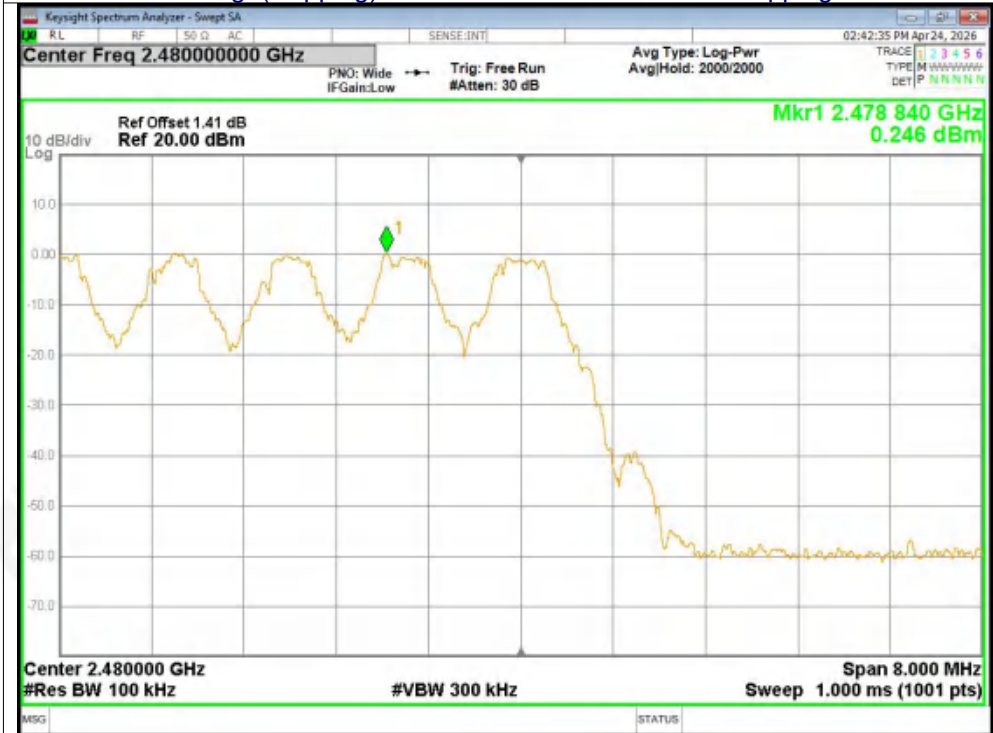


Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission





Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref

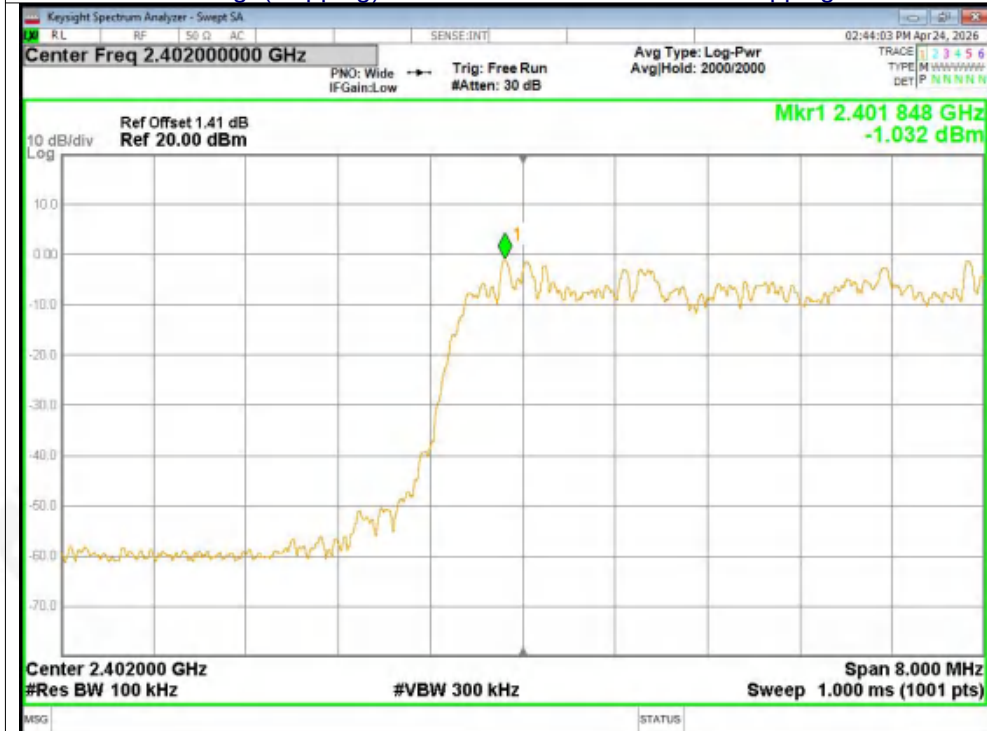

Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission





Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission





Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref

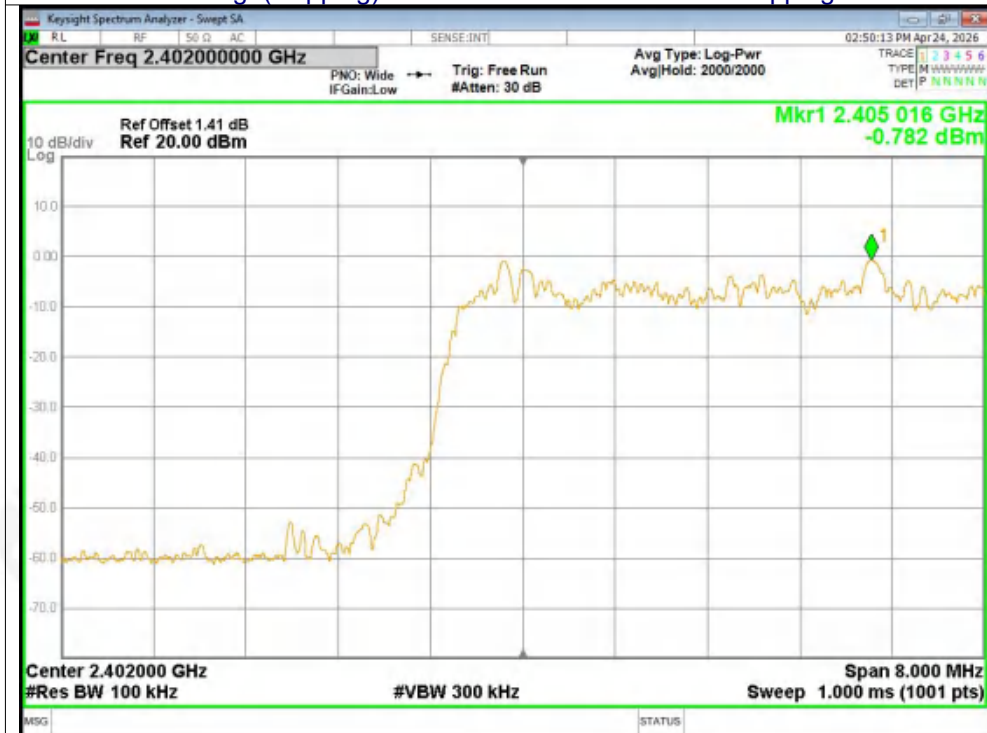

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission





Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission





7. 20DB&99% BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024

7.1 Test Setup



7.2 Limit

N/A

7.3 Test procedure

1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 DEVIATION FROM STANDARD

No deviation.

7.5 Test Result


Left earphone

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	0.928	Pass
	Middle	0.934	
	Highest	0.956	
$\pi/4$ -DQPSK	Lowest	1.241	Pass
	Middle	1.31	
	Highest	1.227	
8-DPSK	Lowest	1.26	Pass
	Middle	1.263	
	Highest	1.264	




Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1

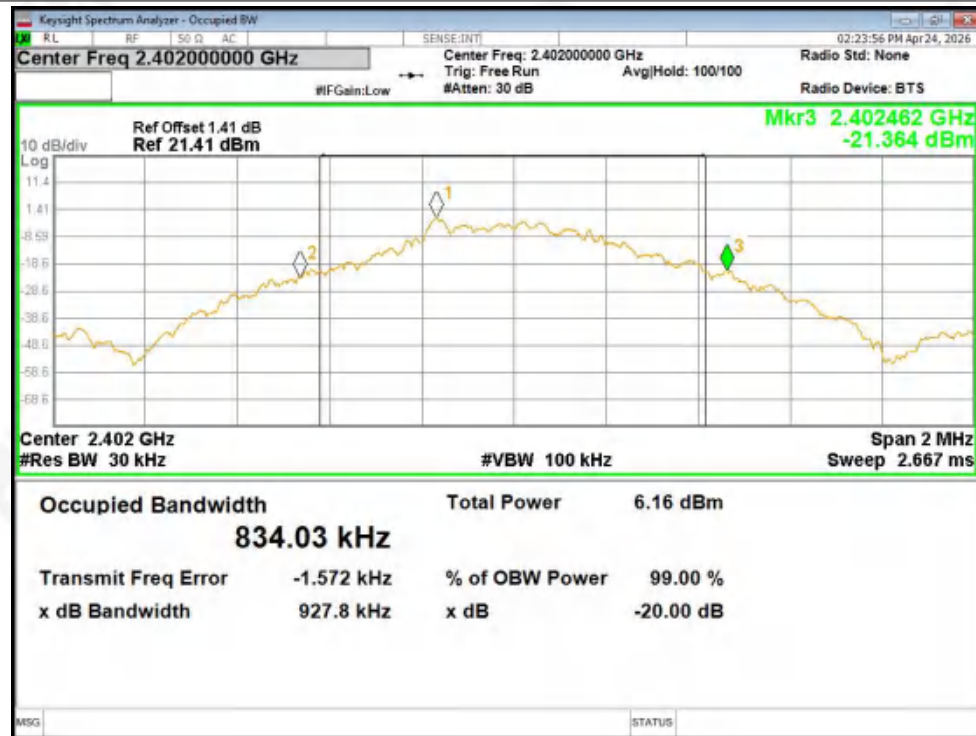


-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1

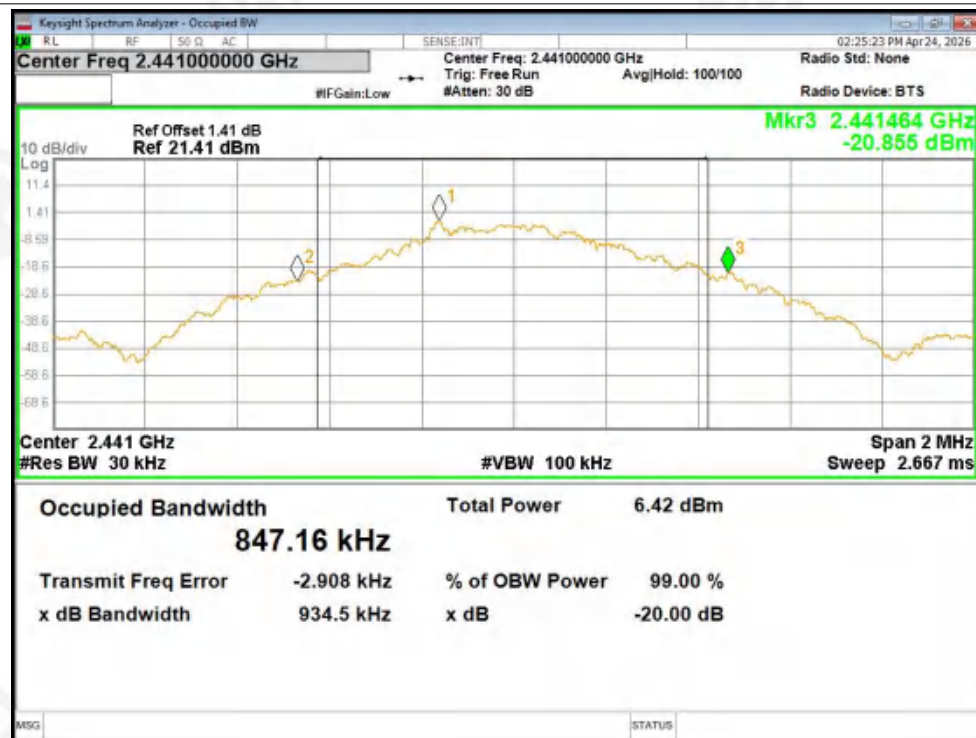




-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

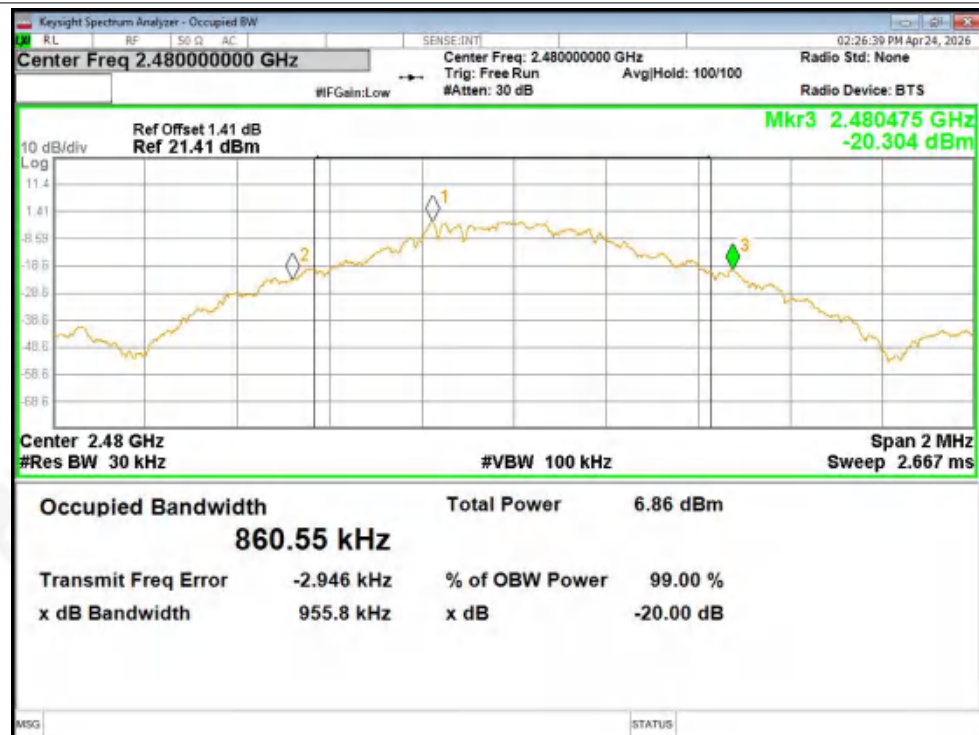


-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

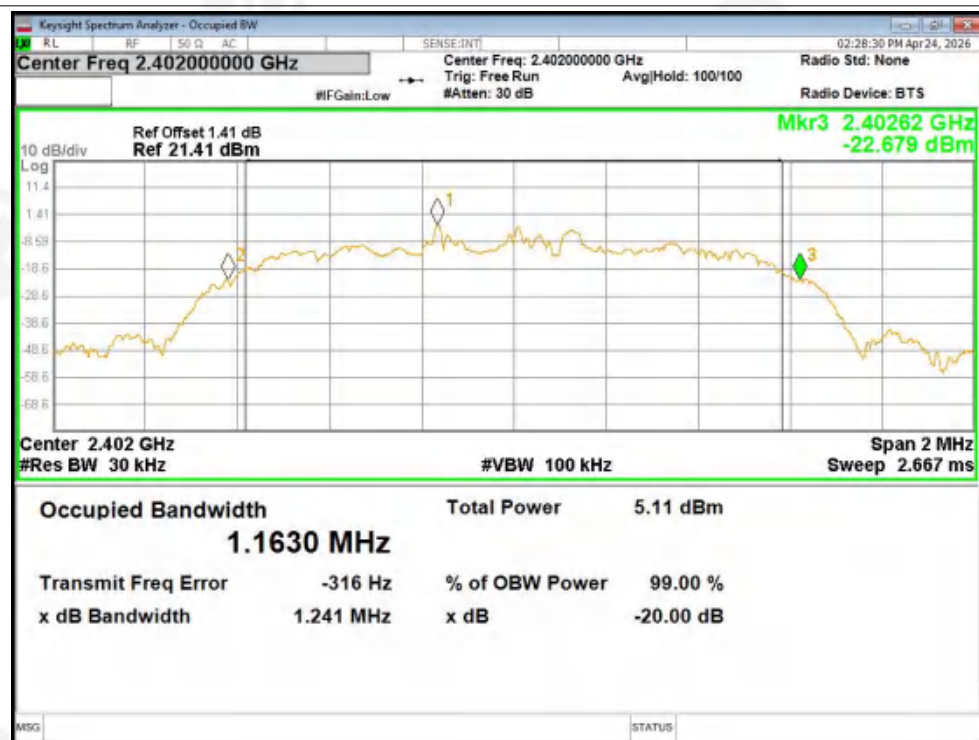




-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

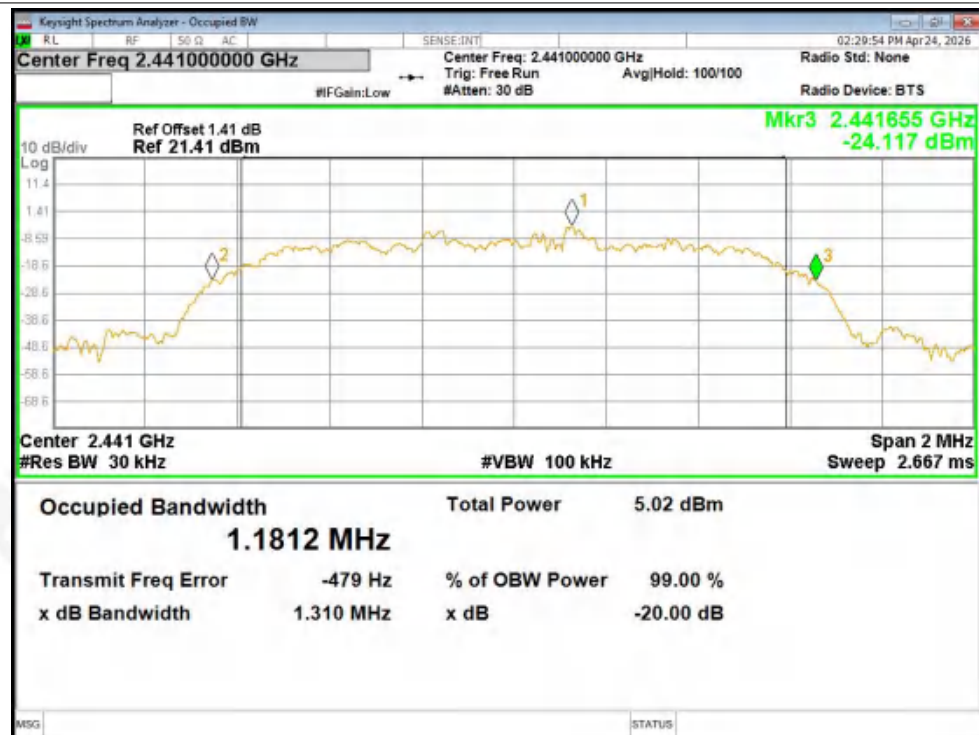


-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

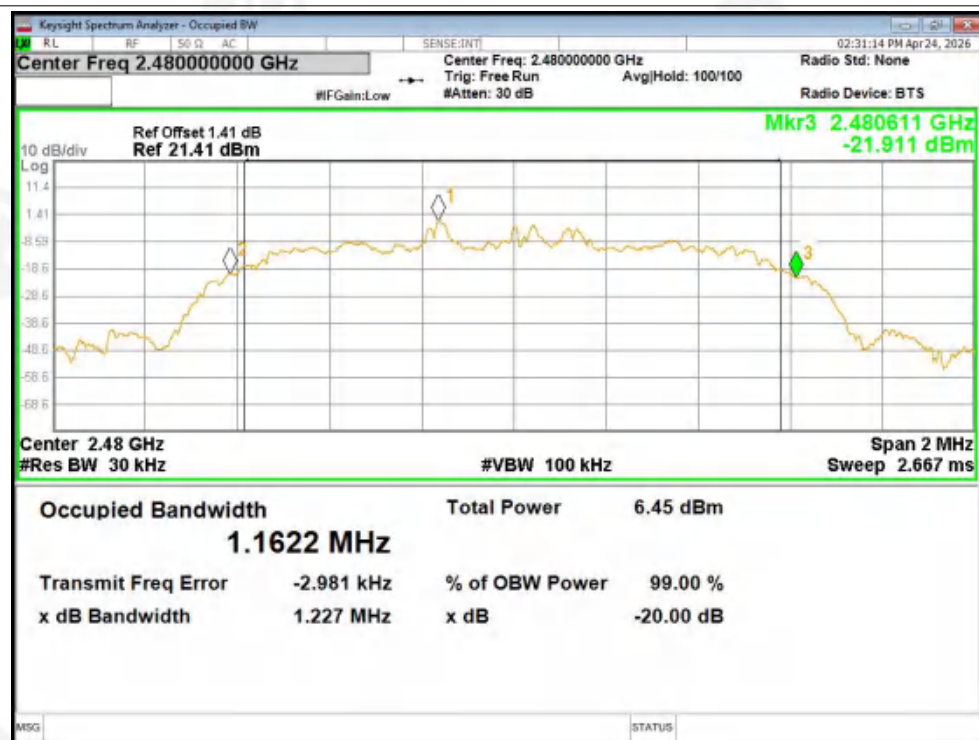




-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

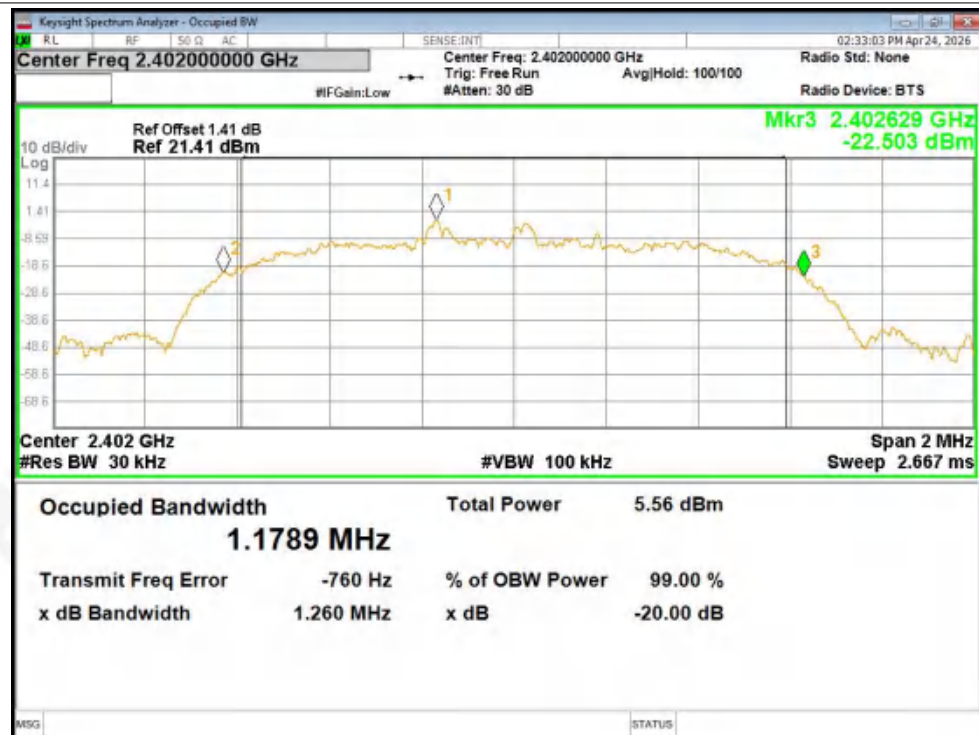


-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

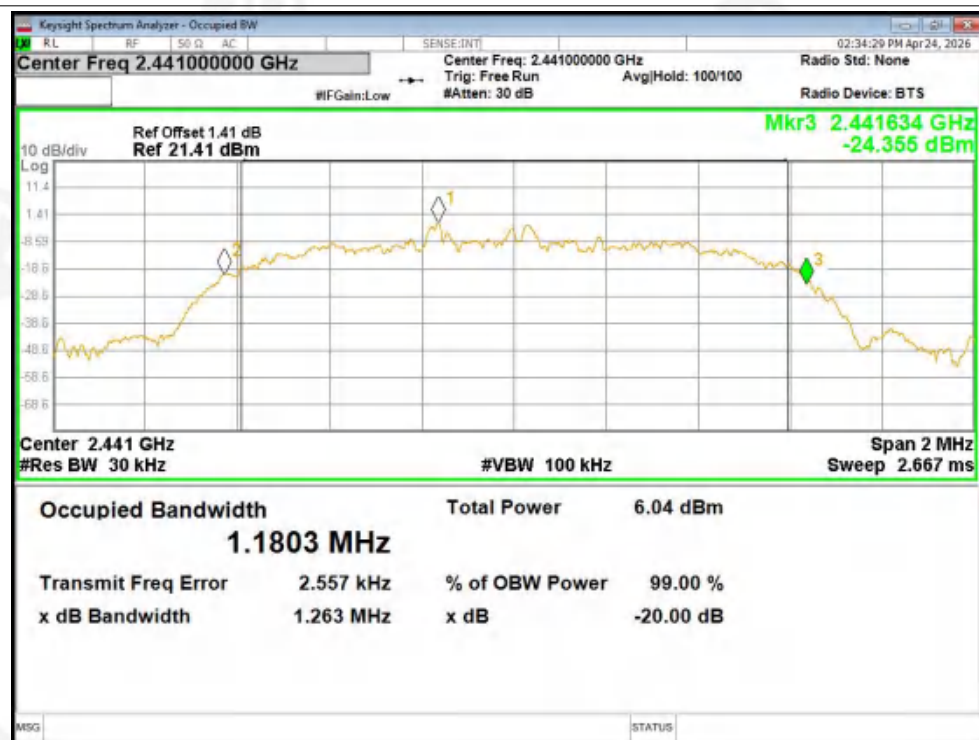



-20dB Bandwidth NVNT 3-DH5 2480MHz Ant1

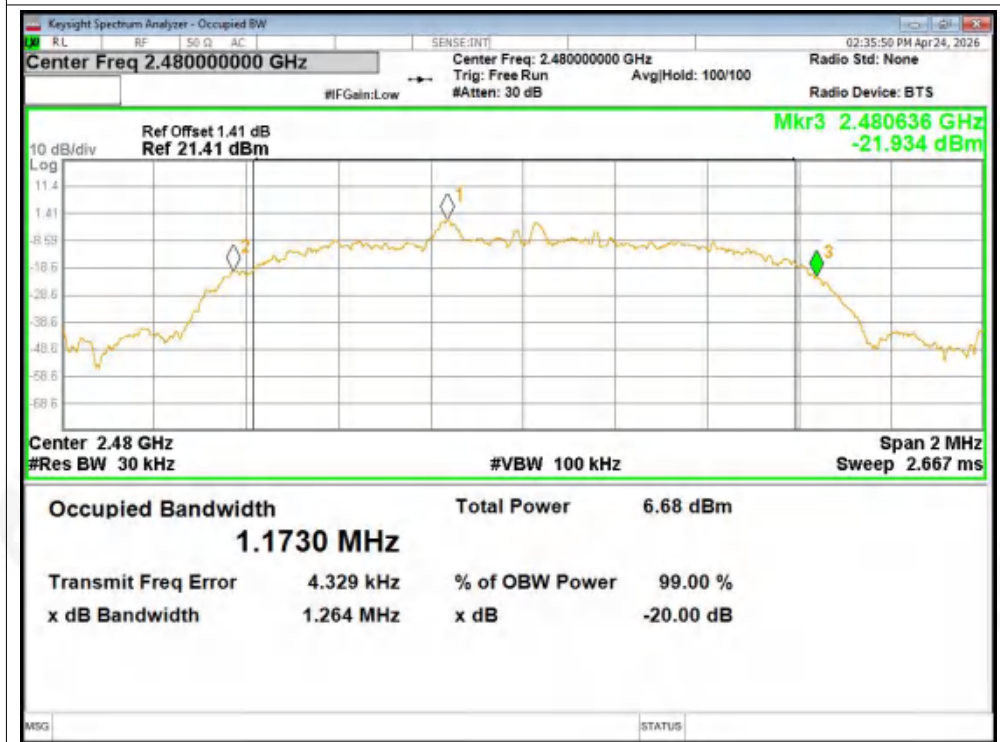




Right earphone

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	0.938	Pass
	Middle	0.948	
	Highest	0.934	
$\pi/4$ -DQPSK	Lowest	1.271	Pass
	Middle	1.259	
	Highest	1.324	
8-DPSK	Lowest	1.258	Pass
	Middle	1.25	
	Highest	1.262	




Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1

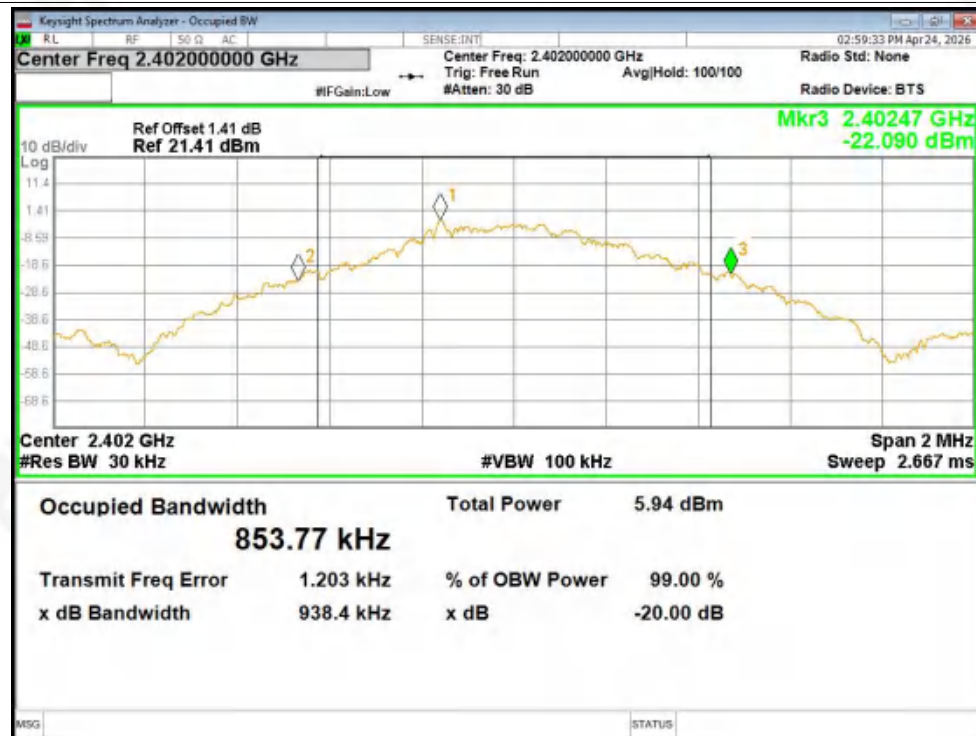


-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1

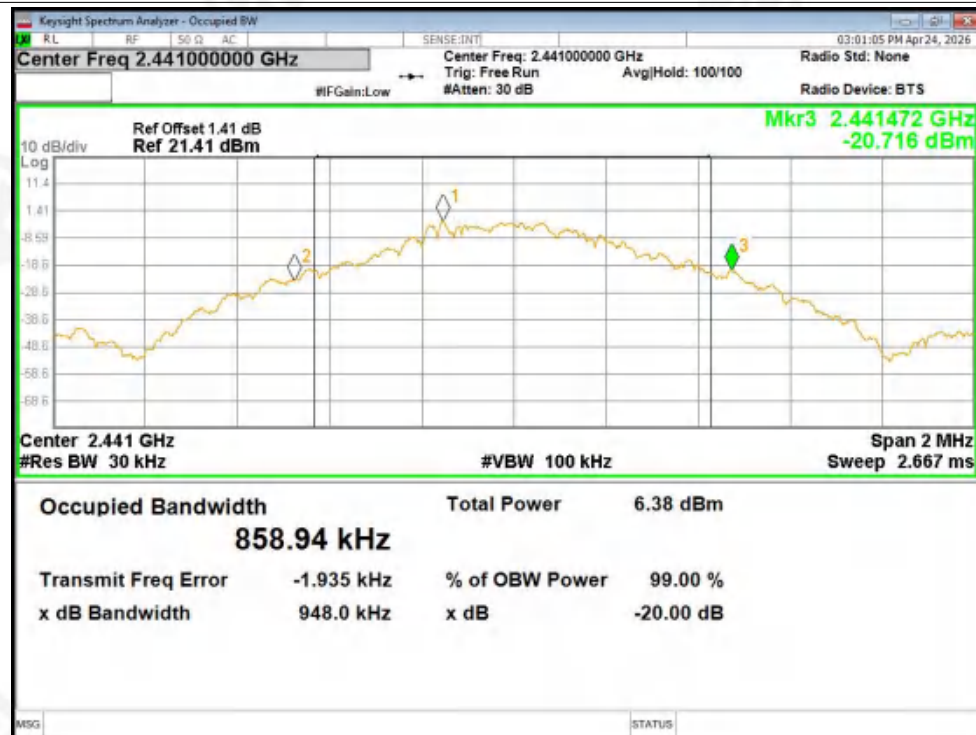




-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

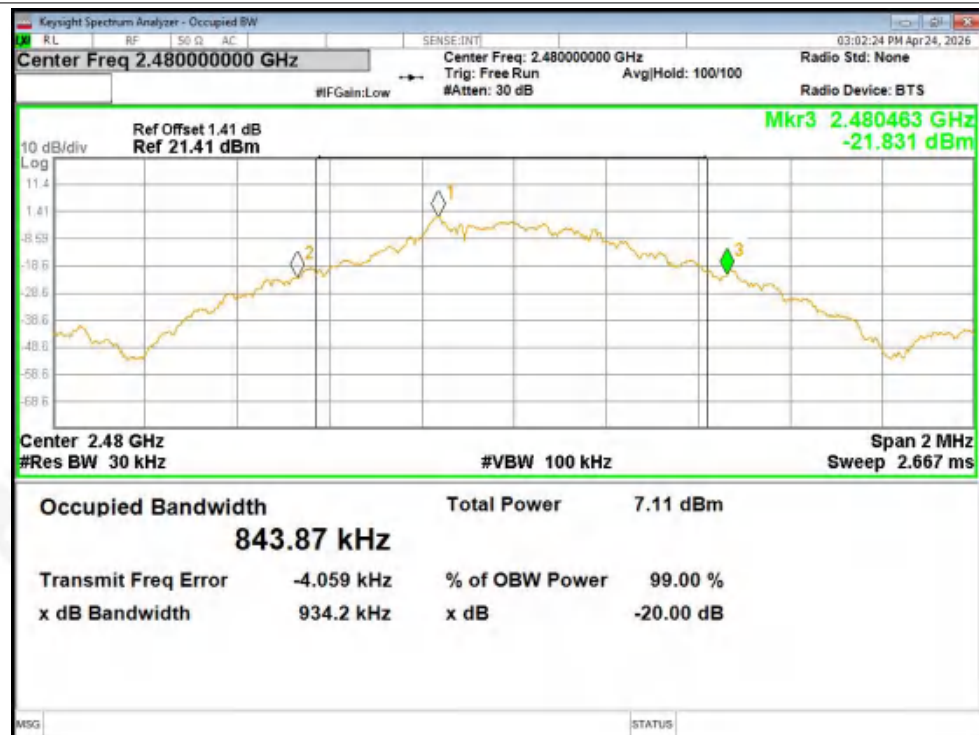


-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

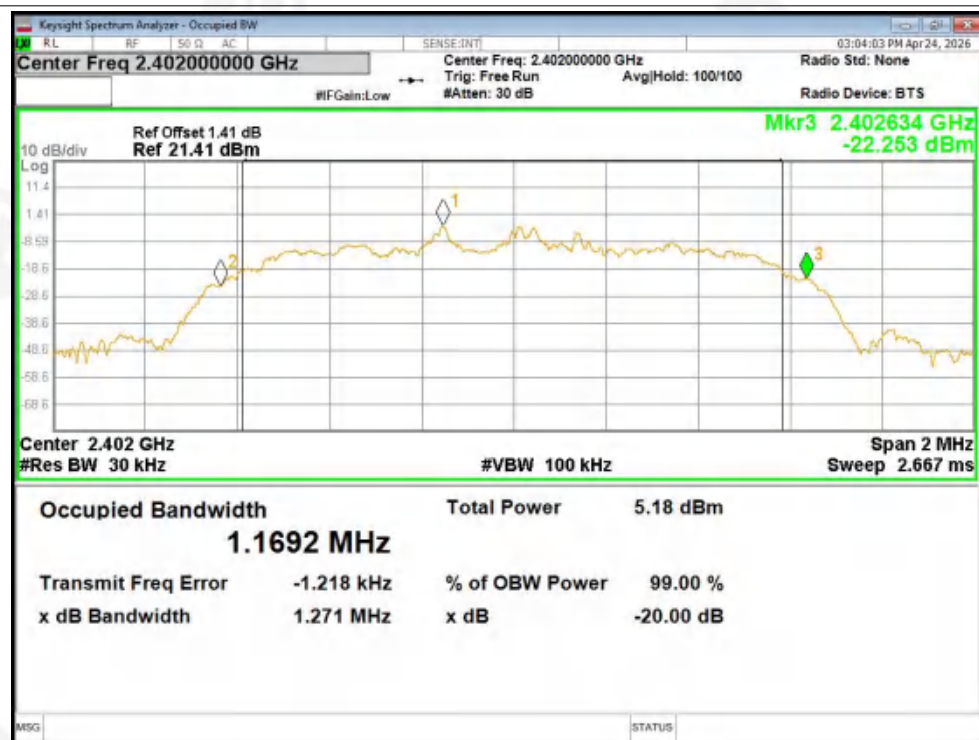




-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

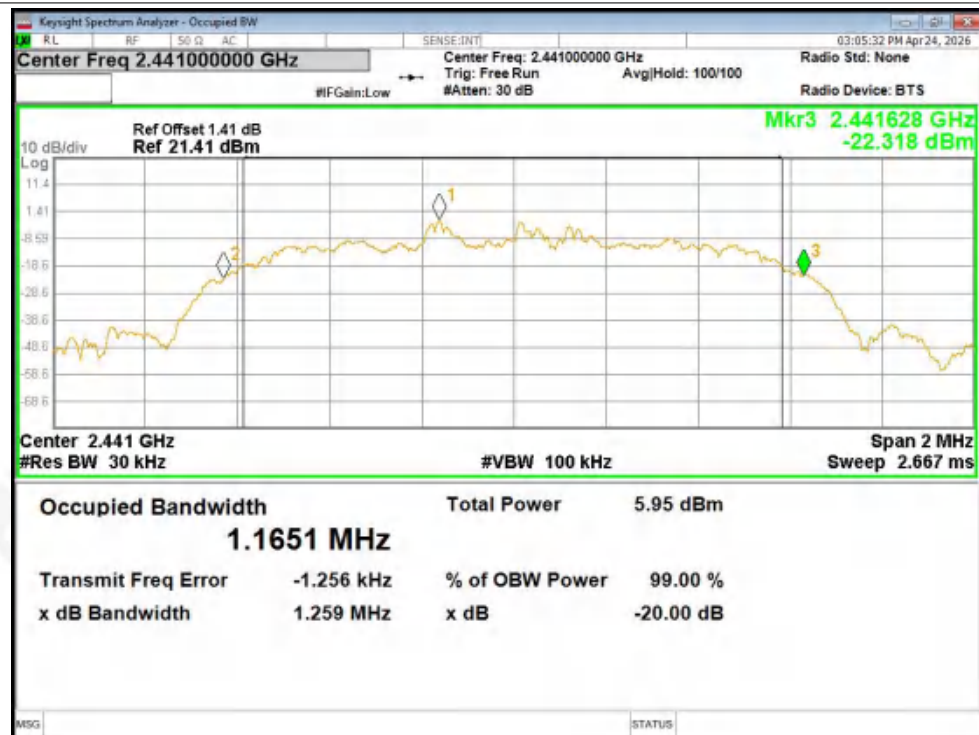


-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

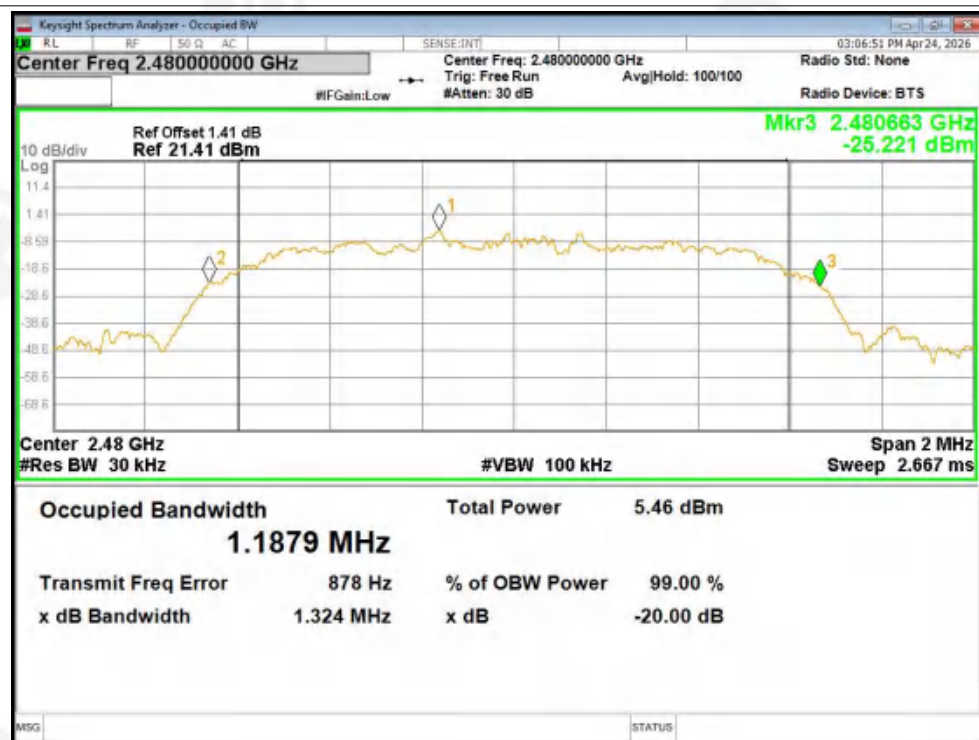




-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

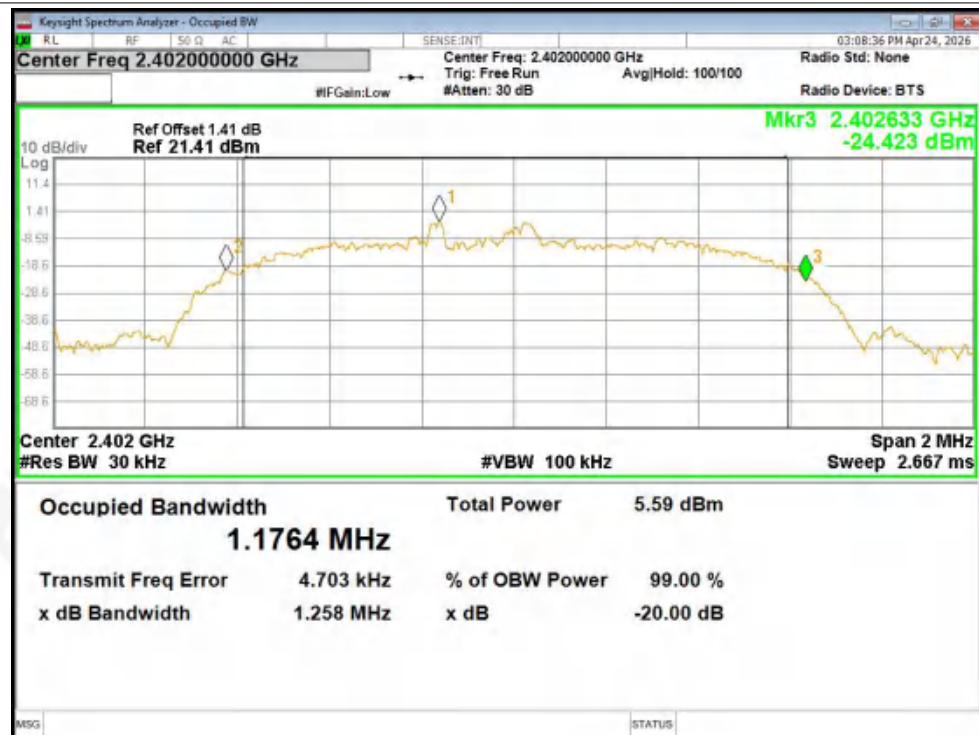


-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

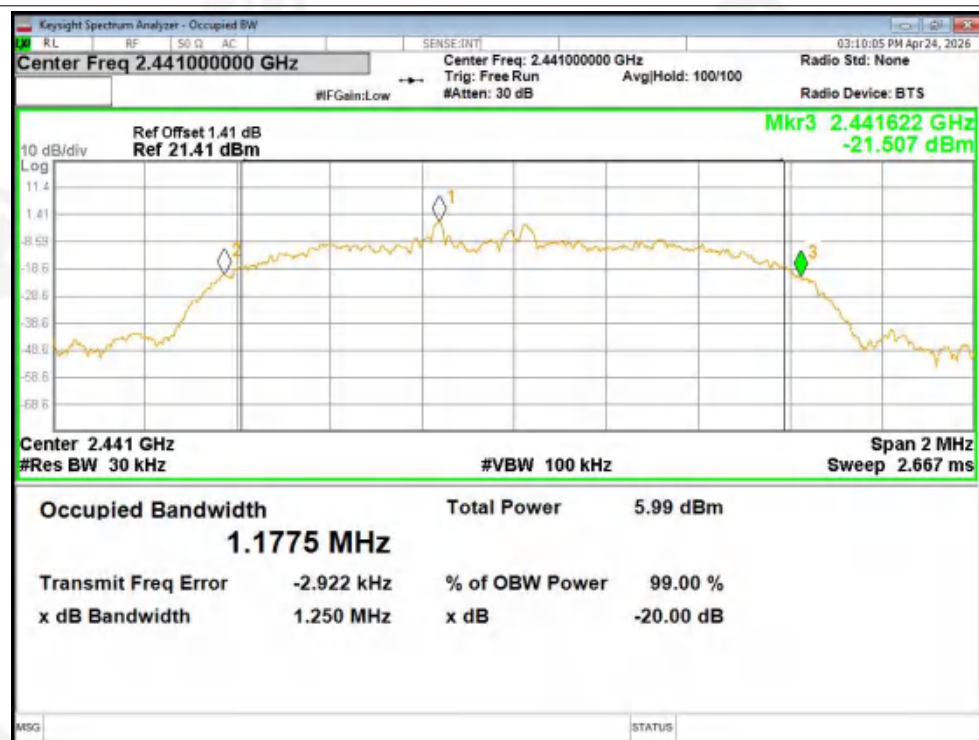



-20dB Bandwidth NVNT 3-DH5 2480MHz Ant1

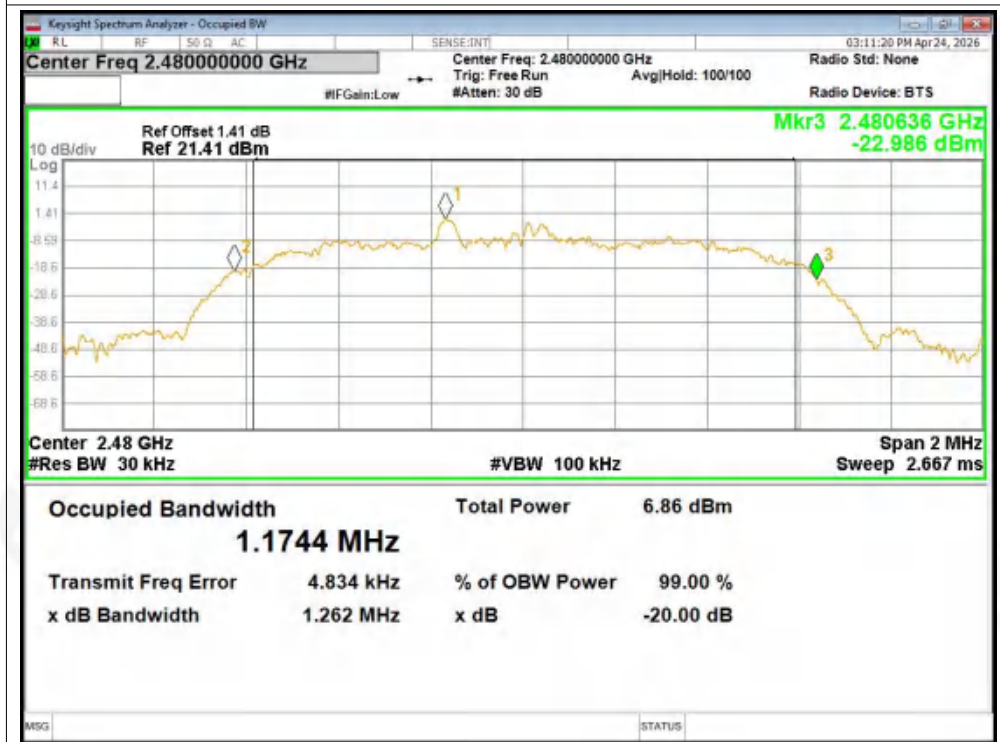



8. Maximum Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024
Limit:	GFSK & $\pi/4$ -DQPSK & 8-DPSK:21 dBm

8.1 Block Diagram Of Test Setup



8.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.
For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W.

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW =6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

8.4 DEVIATION FROM STANDARD

No deviation.

8.5 Test Result


Left earphone

Mode	Test channel	Peak Output Power (dBm)	FCC Limit (dBm)	Result
GFSK	Lowest	-0.57	21.00	Pass
	Middle	-0.08		
	Highest	0.51		
$\pi/4$ -DQPSK	Lowest	0.15	21.00	Pass
	Middle	0.65		
	Highest	1.25		
8-DPSK	Lowest	0.77	21.00	Pass
	Middle	1.29		
	Highest	1.85		


Test plots



Test Graphs
Peak Power NVNT 1-DH5 2402MHz Ant1

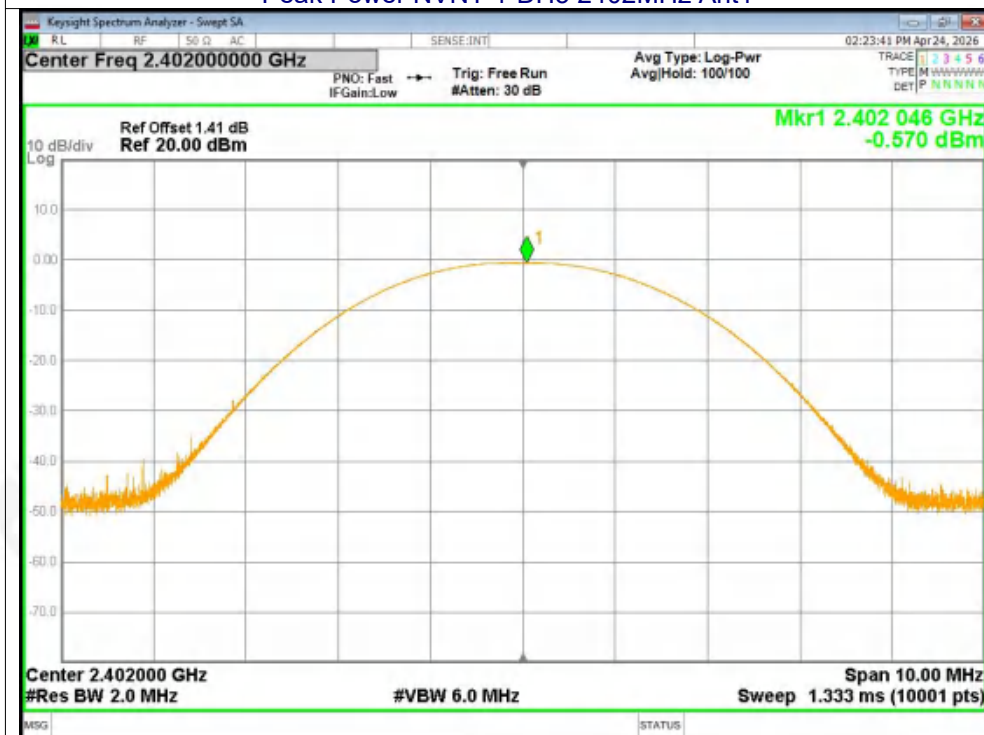


Peak Power NVNT 1-DH5 2441MHz Ant1

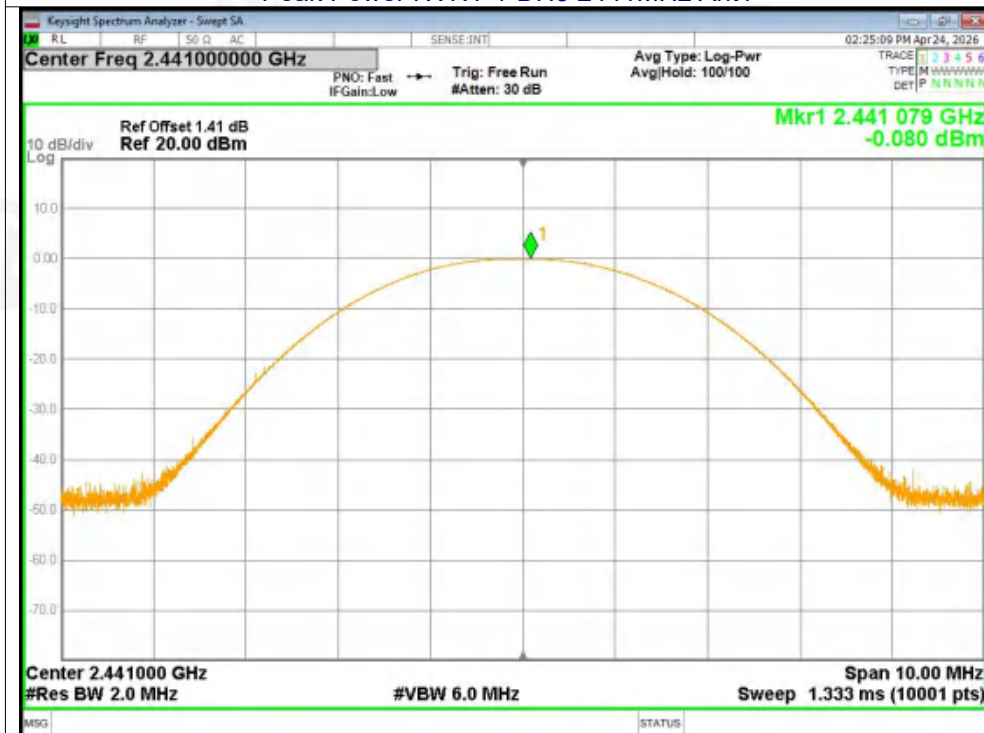




Peak Power NVNT 1-DH5 2480MHz Ant1

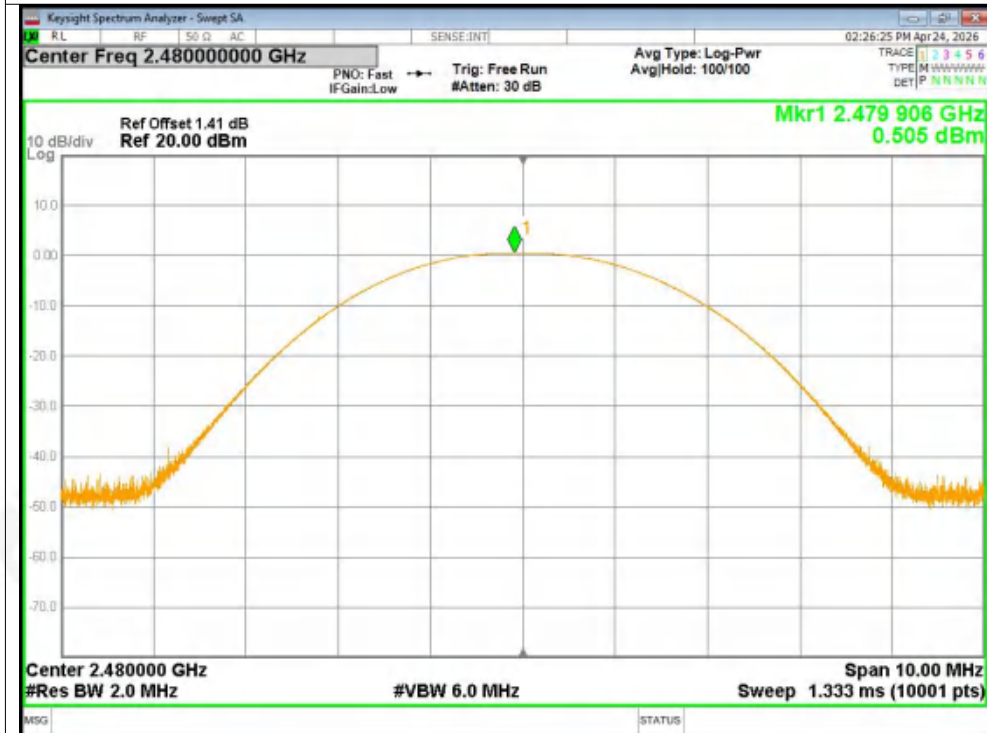


Peak Power NVNT 2-DH5 2402MHz Ant1

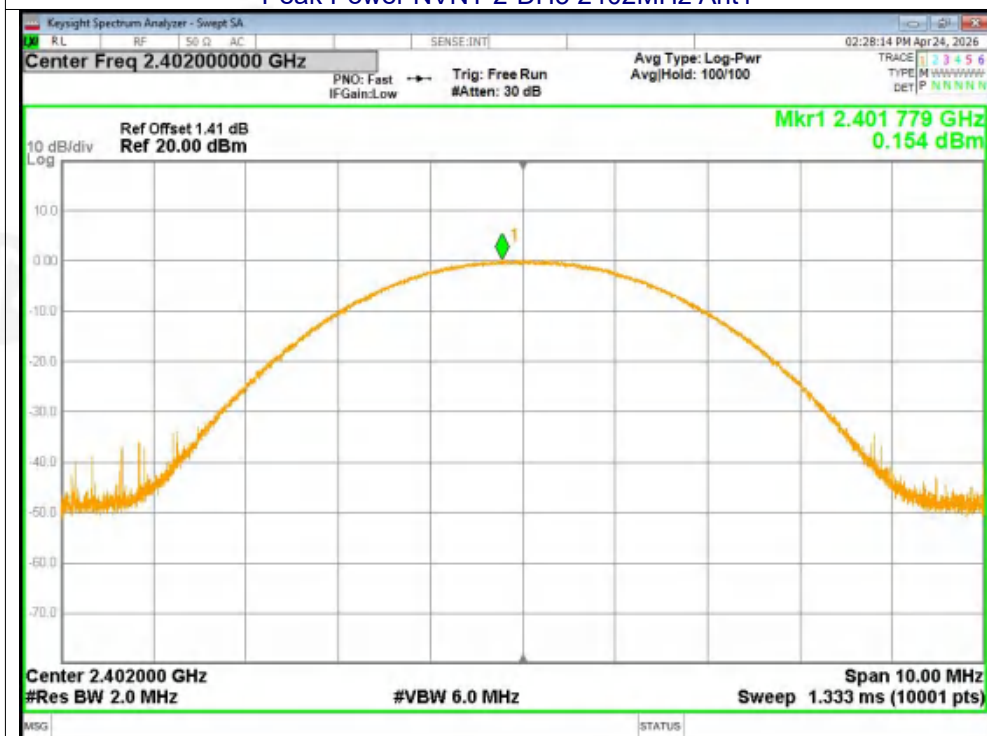




Peak Power NVNT 2-DH5 2441MHz Ant1

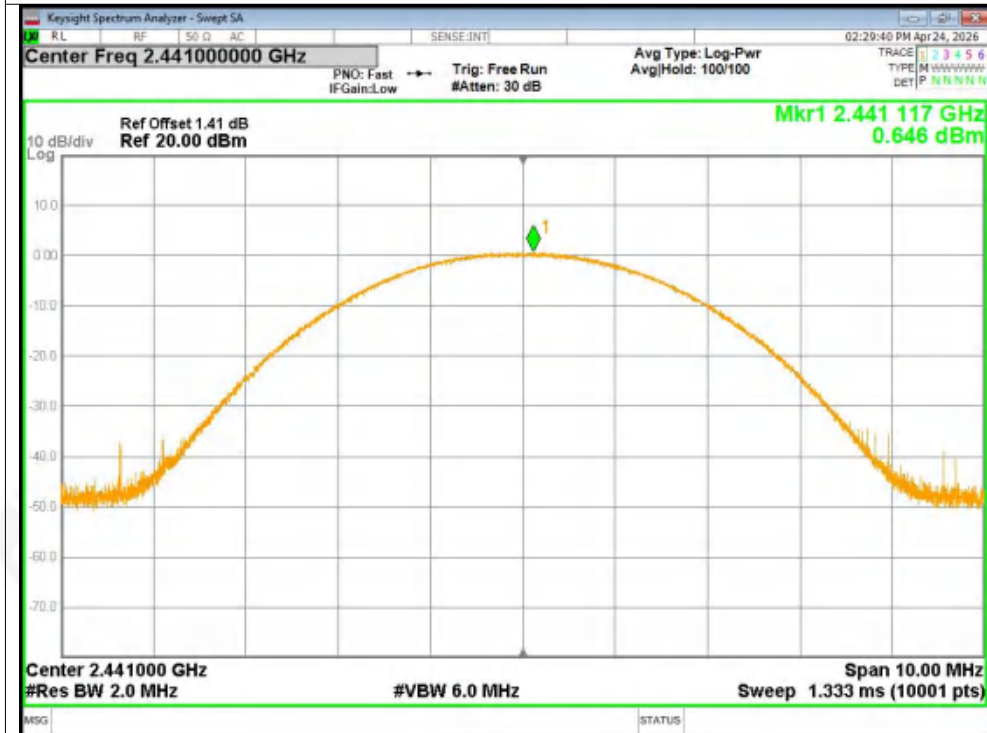


Peak Power NVNT 2-DH5 2480MHz Ant1

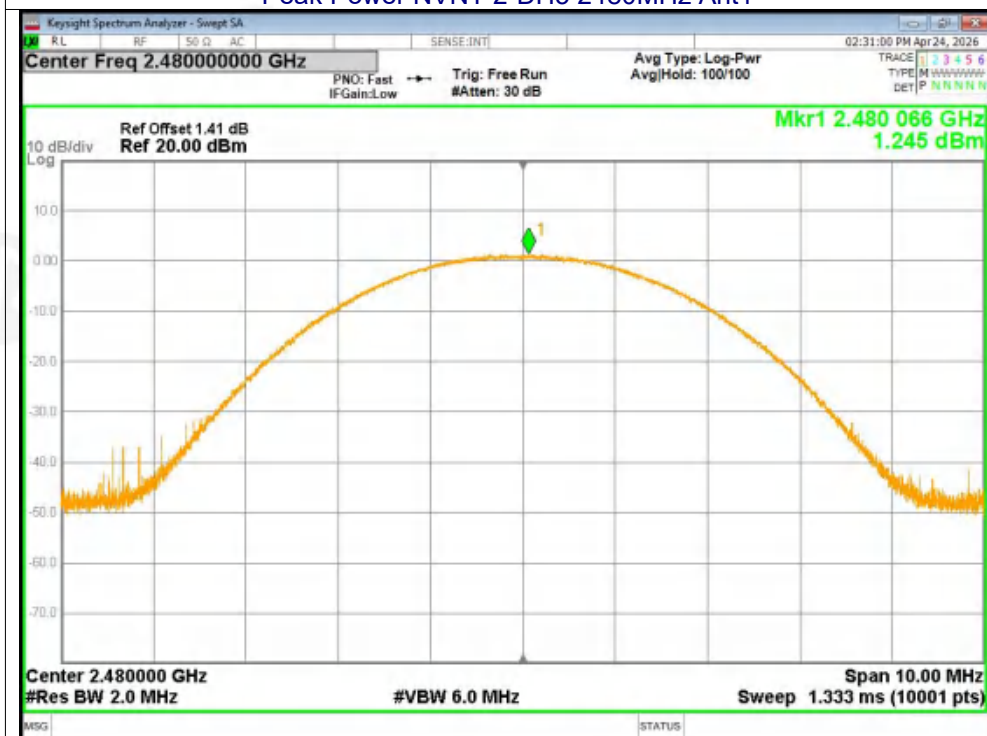





Peak Power NVNT 3-DH5 2402MHz Ant1

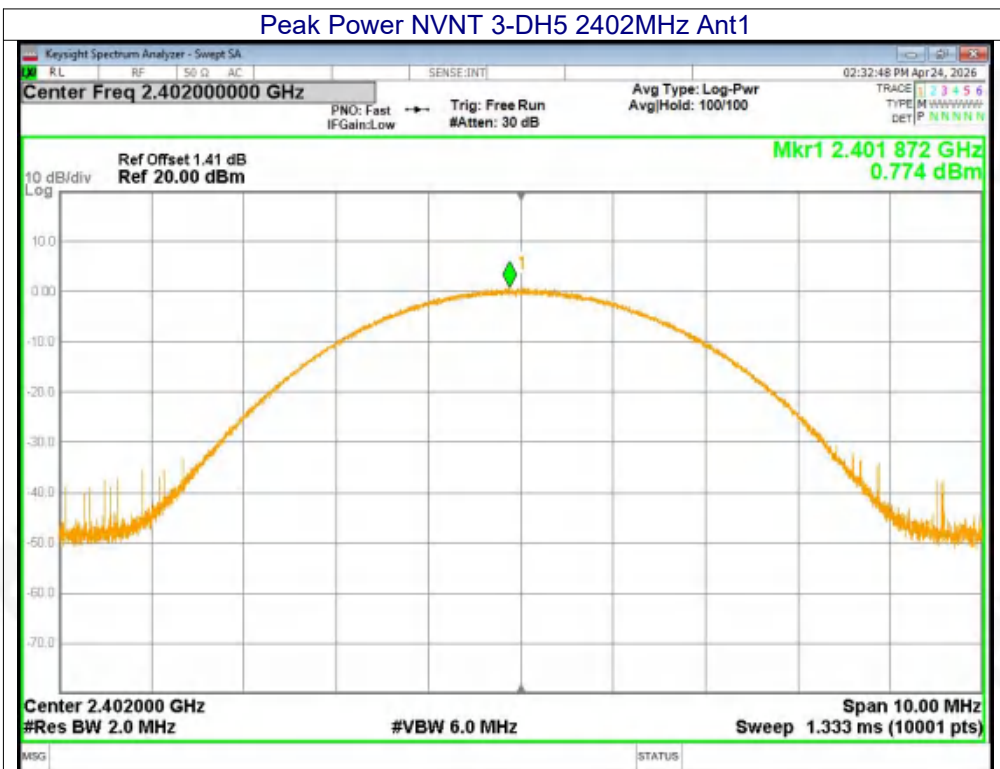

Peak Power NVNT 3-DH5 2441MHz Ant1

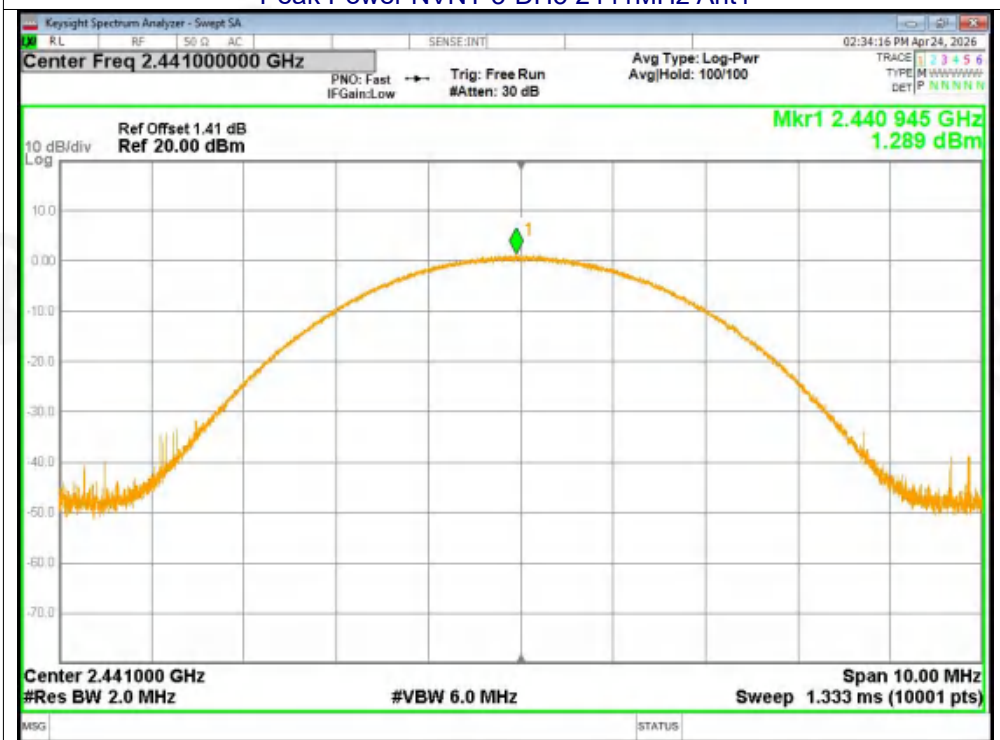

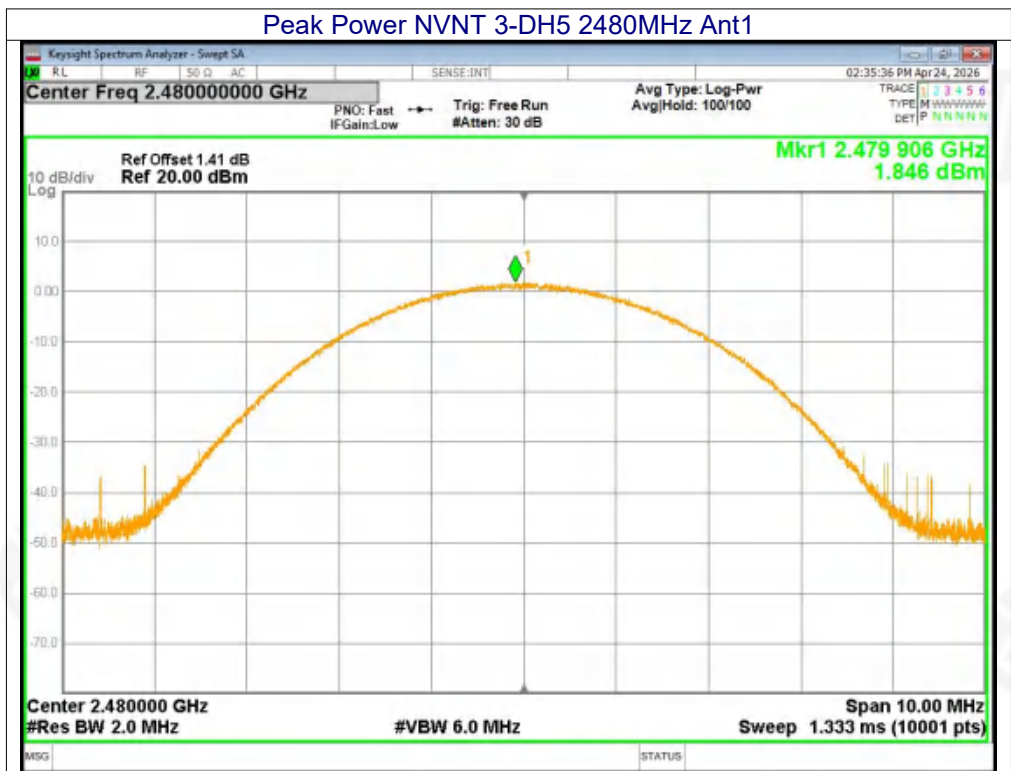




Right earphone


Mode	Test channel	Peak Output Power (dBm)	FCC Limit (dBm)	Result
GFSK	Lowest	-0.48	21.00	Pass
	Middle	0		
	Highest	0.57		
$\pi/4$ -DQPSK	Lowest	0.24	21.00	Pass
	Middle	0.74		
	Highest	1.3		
8-DPSK	Lowest	0.81	21.00	Pass
	Middle	1.29		
	Highest	1.79		



Test Graphs
Peak Power NVNT 1-DH5 2402MHz Ant1

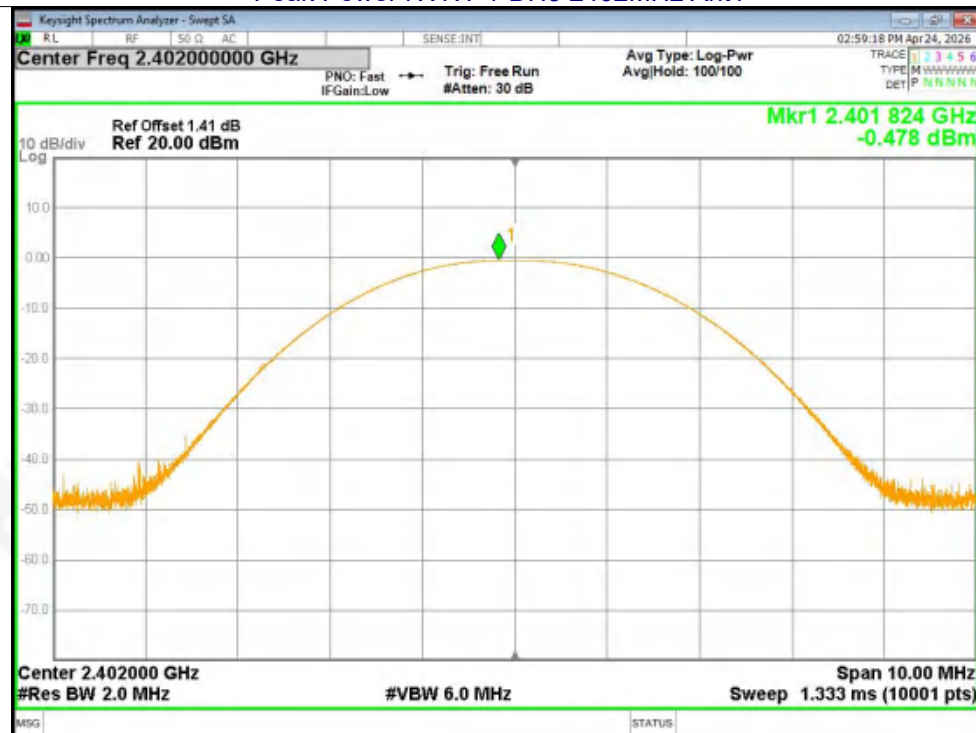


Peak Power NVNT 1-DH5 2441MHz Ant1

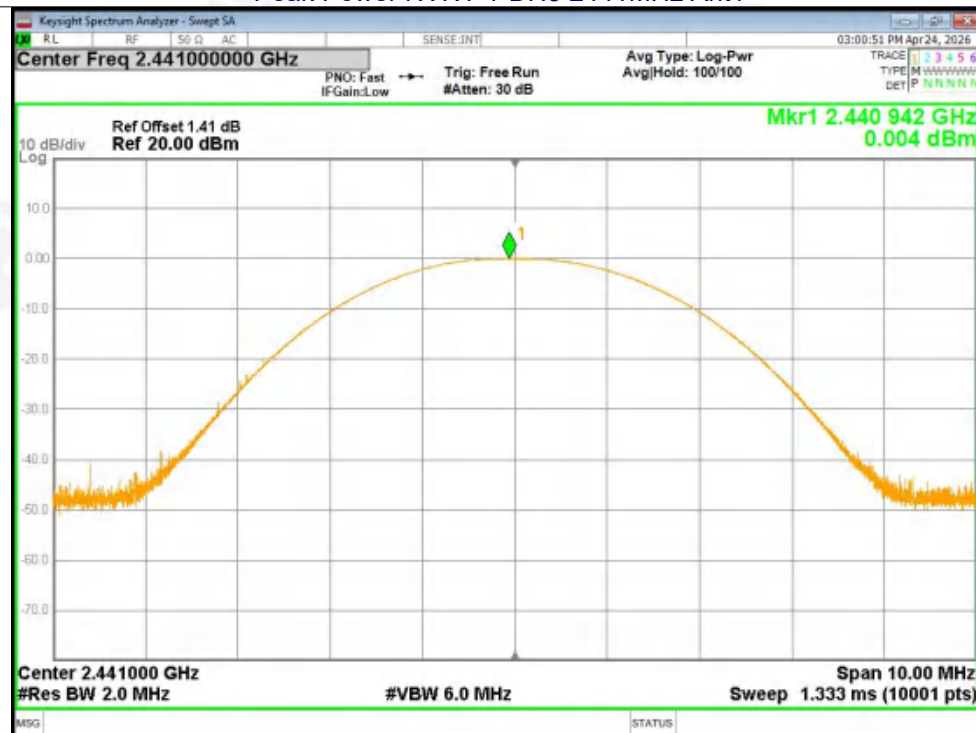




Peak Power NVNT 1-DH5 2480MHz Ant1

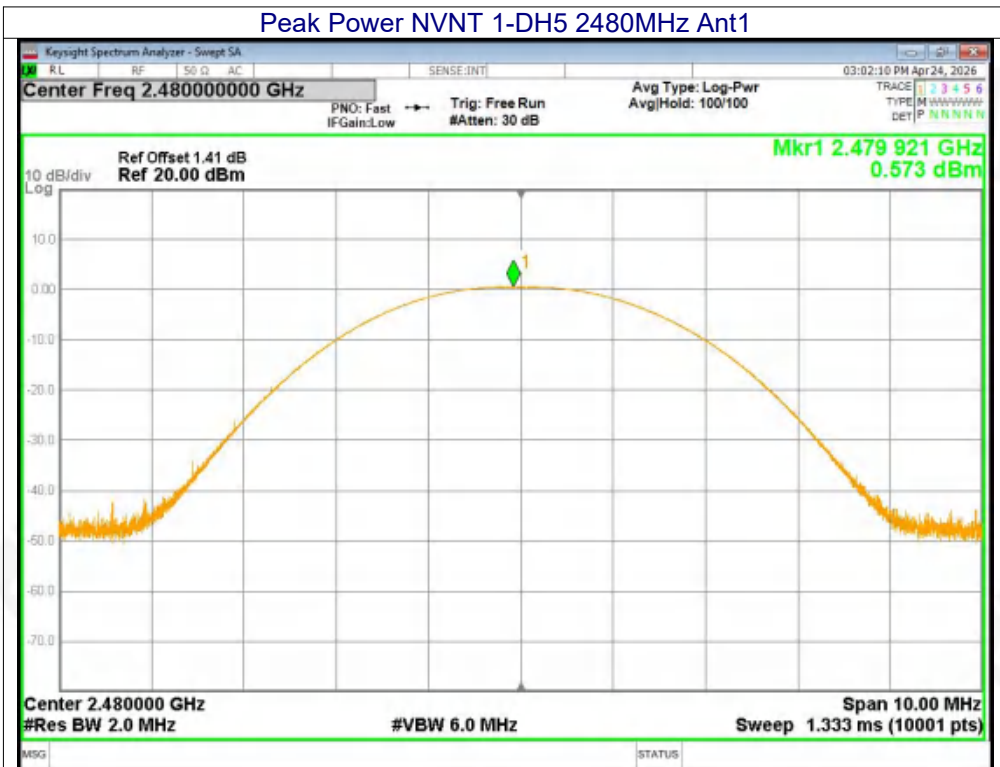


Peak Power NVNT 2-DH5 2402MHz Ant1

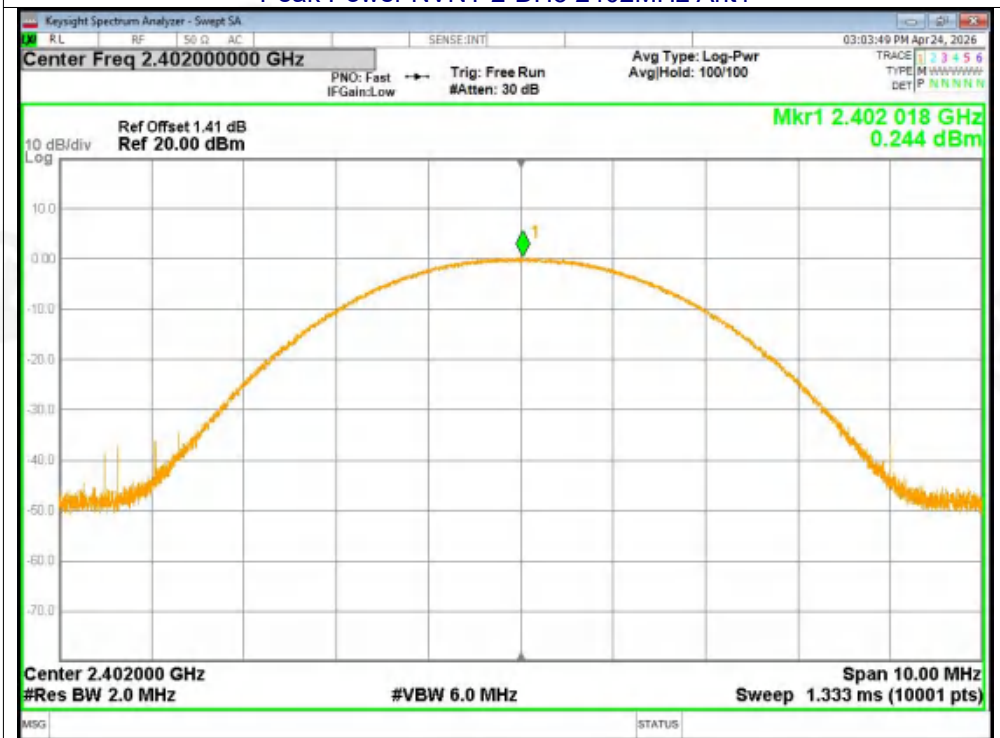




Peak Power NVNT 2-DH5 2441MHz Ant1

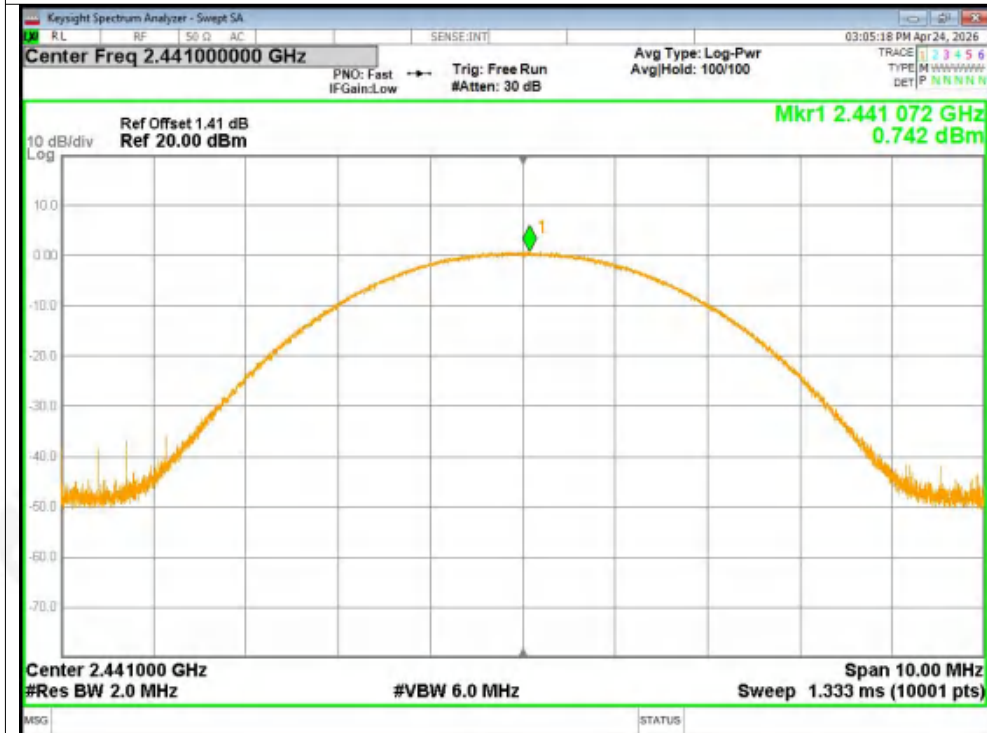


Peak Power NVNT 2-DH5 2480MHz Ant1

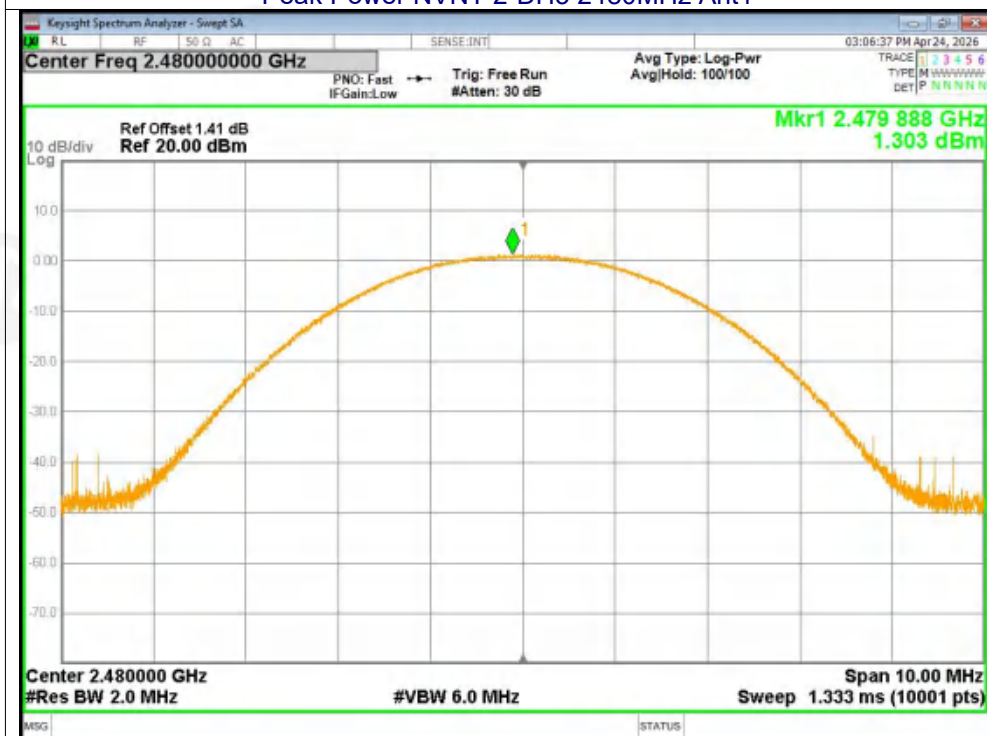





Peak Power NVNT 3-DH5 2402MHz Ant1

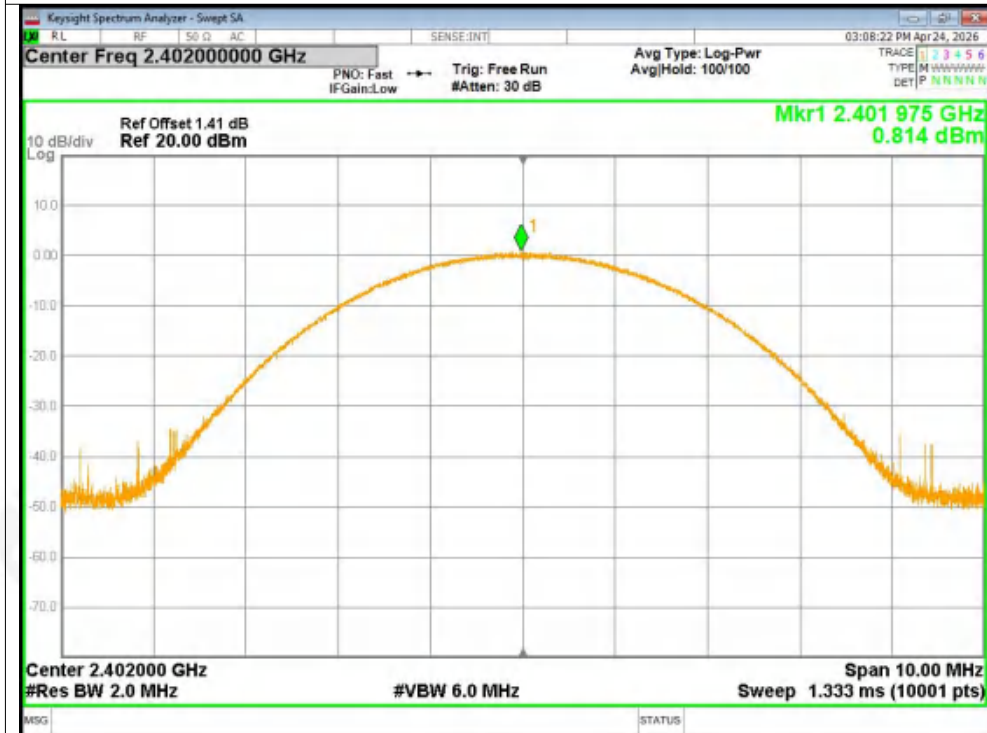

Peak Power NVNT 3-DH5 2441MHz Ant1

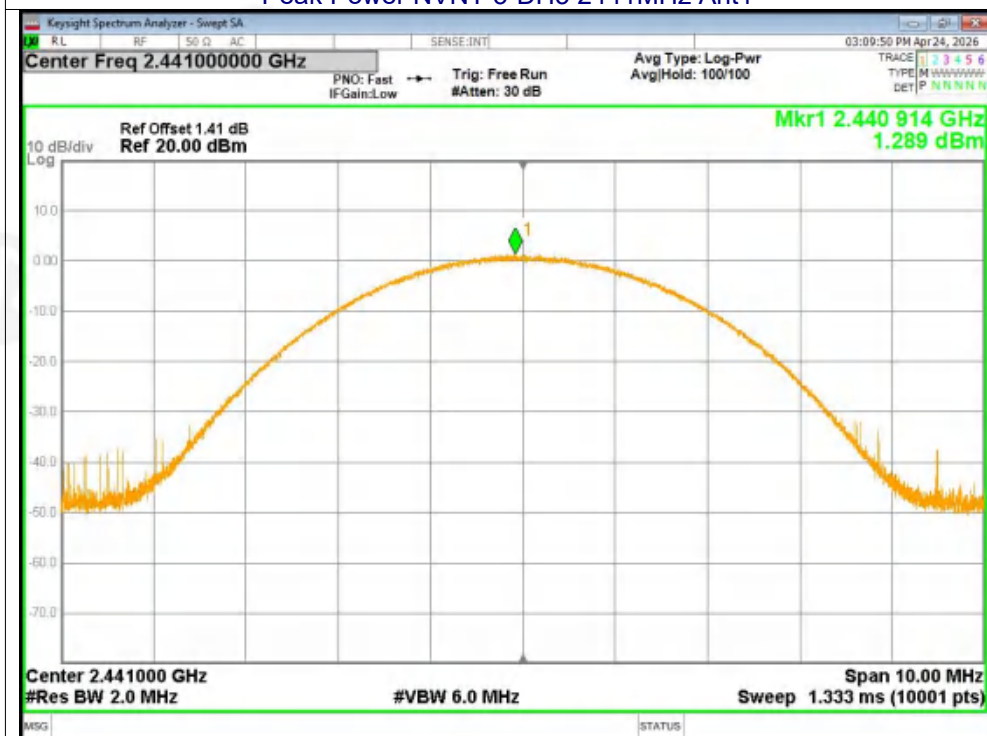

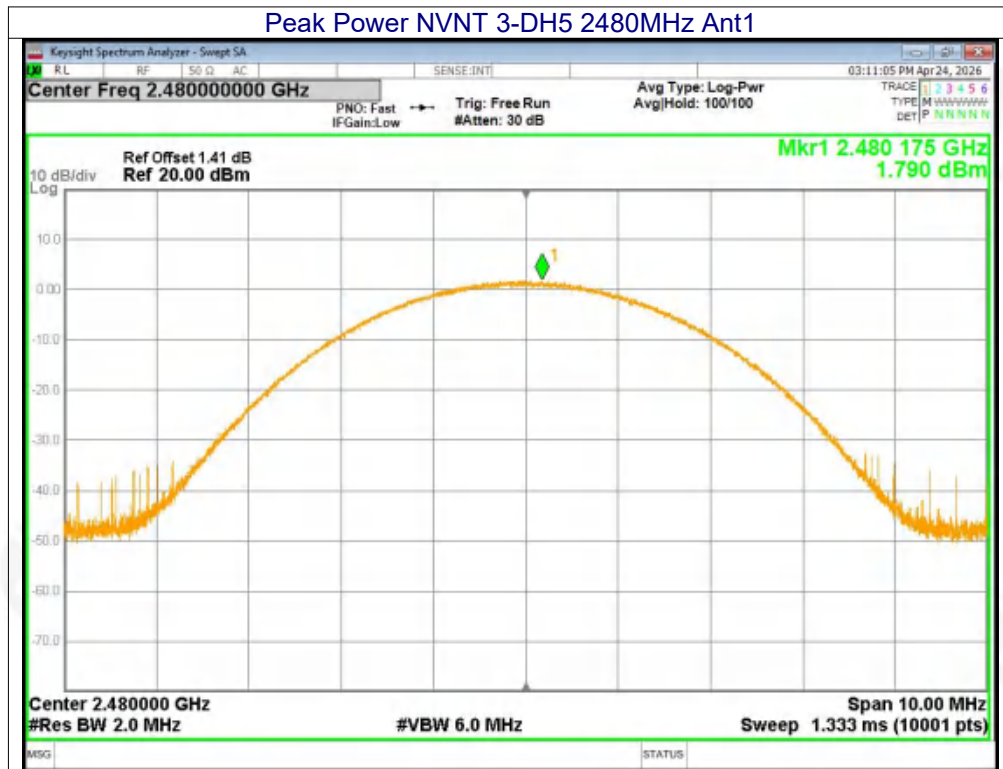




9. HOPPING CHANNEL SEPARATION

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024
Receiver setup:	RBW=300KHz, VBW=300KHz, detector=Peak
Limit:	GFSK, $\pi/4$ -DQPSK & 8DSK: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)

9.1 Test Setup

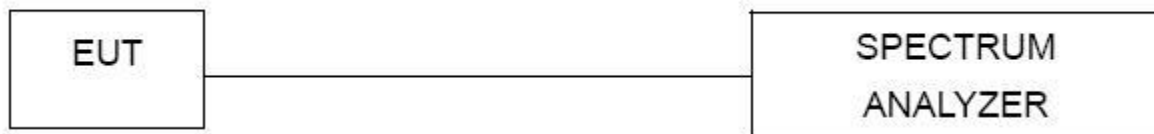

9.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 300kHz. VBW = 300kHz , Span = 2.0MHz for GFSK, RBW = 100kHz. VBW = 100kHz , Span = 2.6MHz for $\pi/4$ -DQPSK and 8-DPSK. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

9.3 DEVIATION FROM STANDARD

No deviation.




9.4 Test Result

Left earphone


Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.334	0.619	PASS
GFSK	Middle	1.334	0.623	PASS
GFSK	High	0.998	0.637	PASS
$\pi/4$ -DQPSK	Low	0.9724	0.827	PASS
$\pi/4$ -DQPSK	Middle	1.001	0.873	PASS
$\pi/4$ -DQPSK	High	1.0088	0.818	PASS
8-DPSK	Low	0.8684	0.840	PASS
8-DPSK	Middle	1.4664	0.842	PASS
8-DPSK	High	0.9568	0.843	PASS



Test Graphs
CFS NVNT 1-DH5 2402MHz Ant1

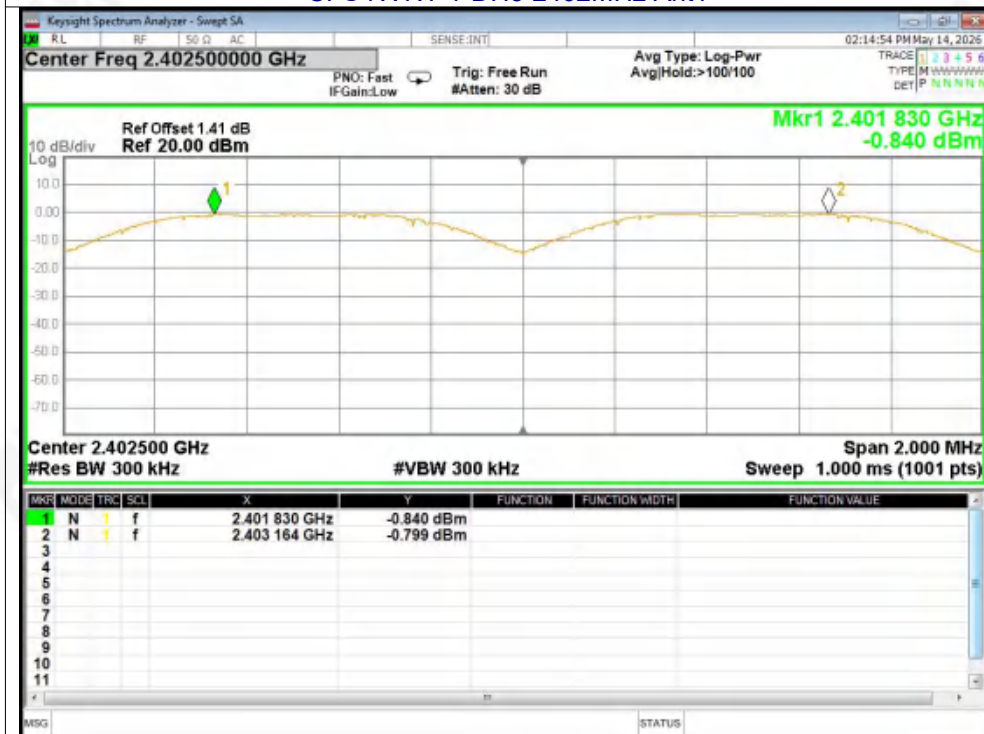


CFS NVNT 1-DH5 2441MHz Ant1

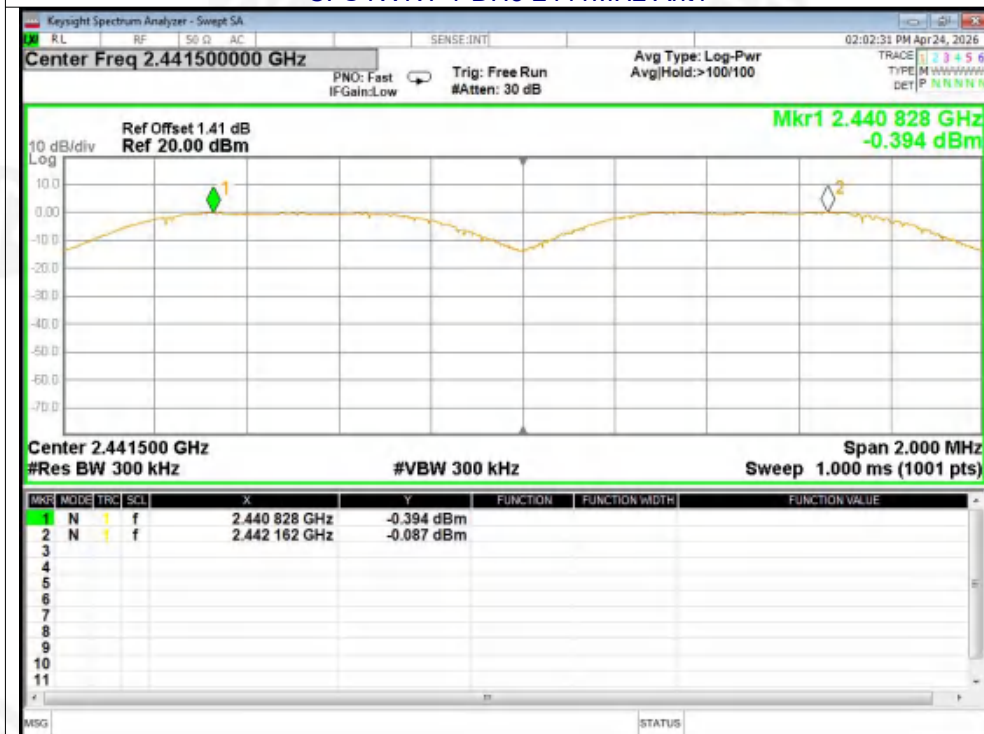




CFS NVNT 1-DH5 2480MHz Ant1

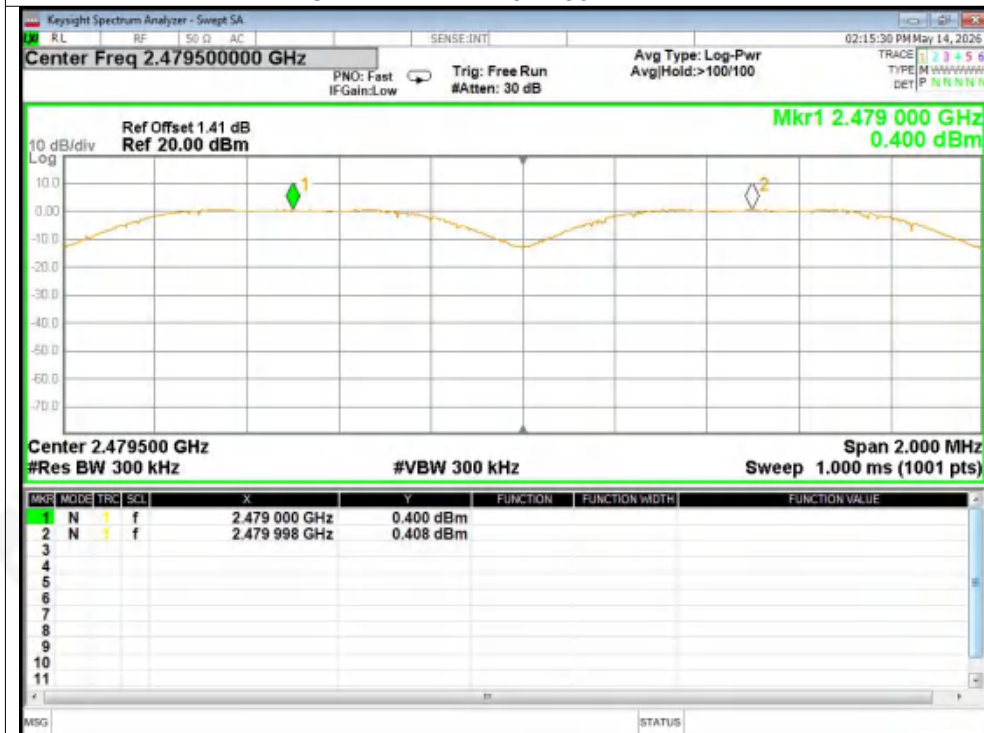

CFS NVNT 2-DH5 2402MHz Ant1

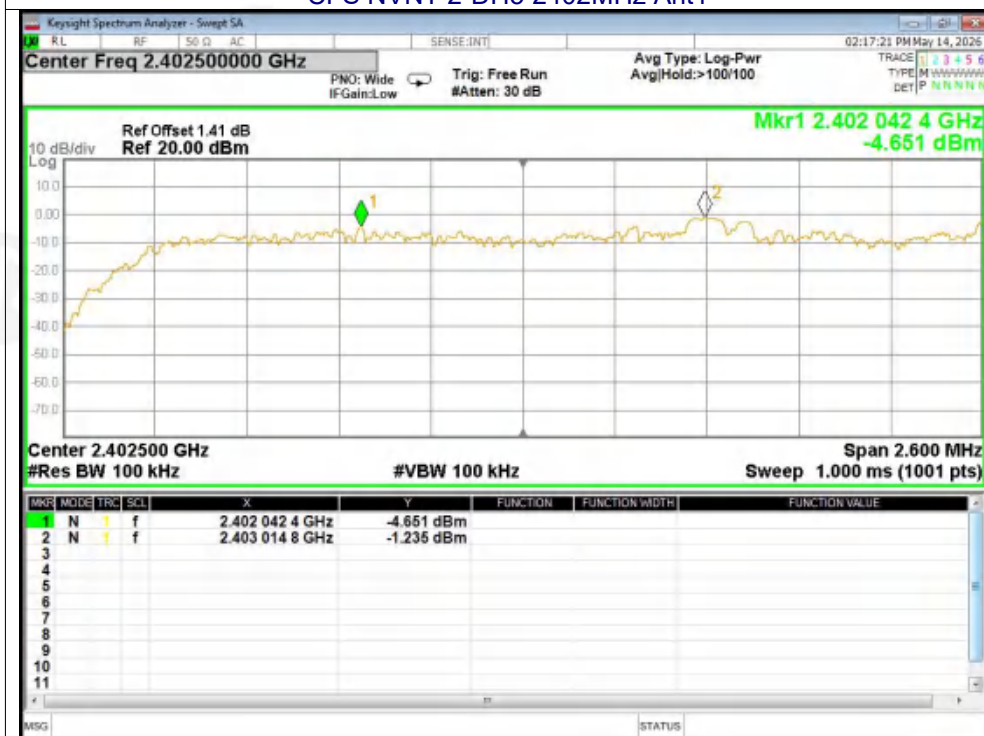




CFS NVNT 2-DH5 2441MHz Ant1



CFS NVNT 2-DH5 2480MHz Ant1

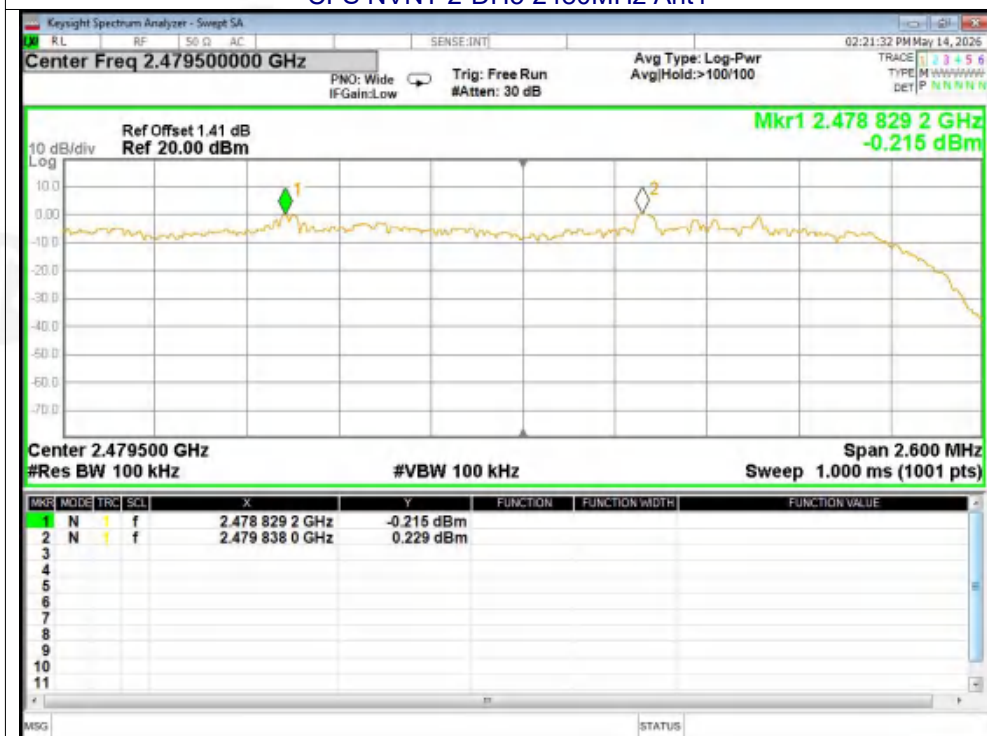





CFS NVNT 3-DH5 2402MHz Ant1



CFS NVNT 3-DH5 2441MHz Ant1

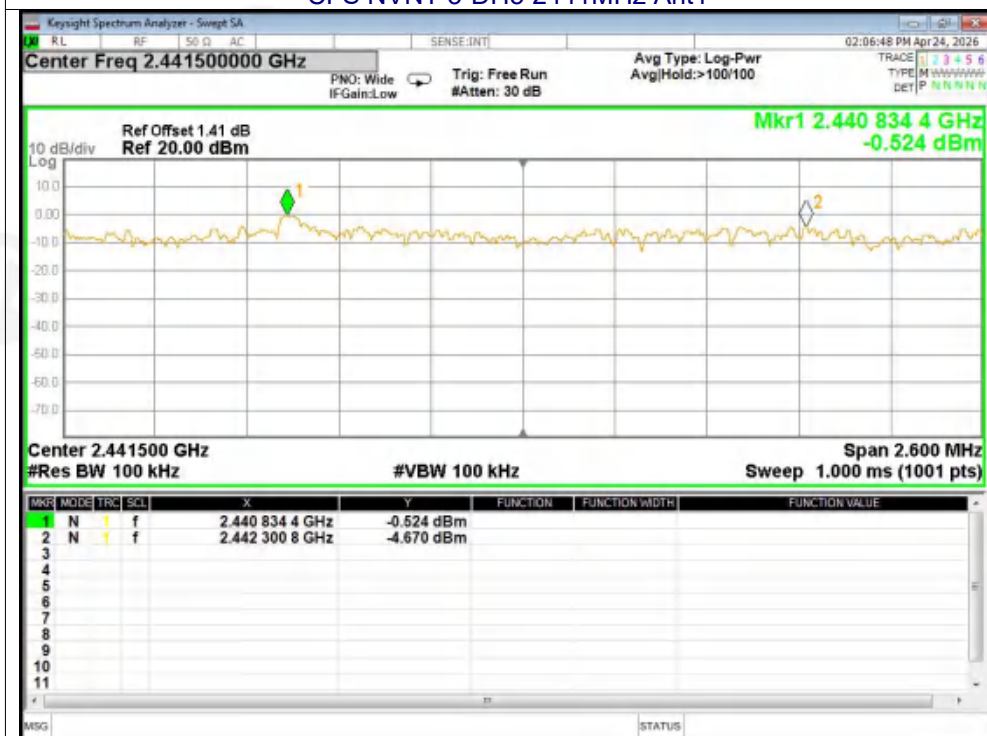

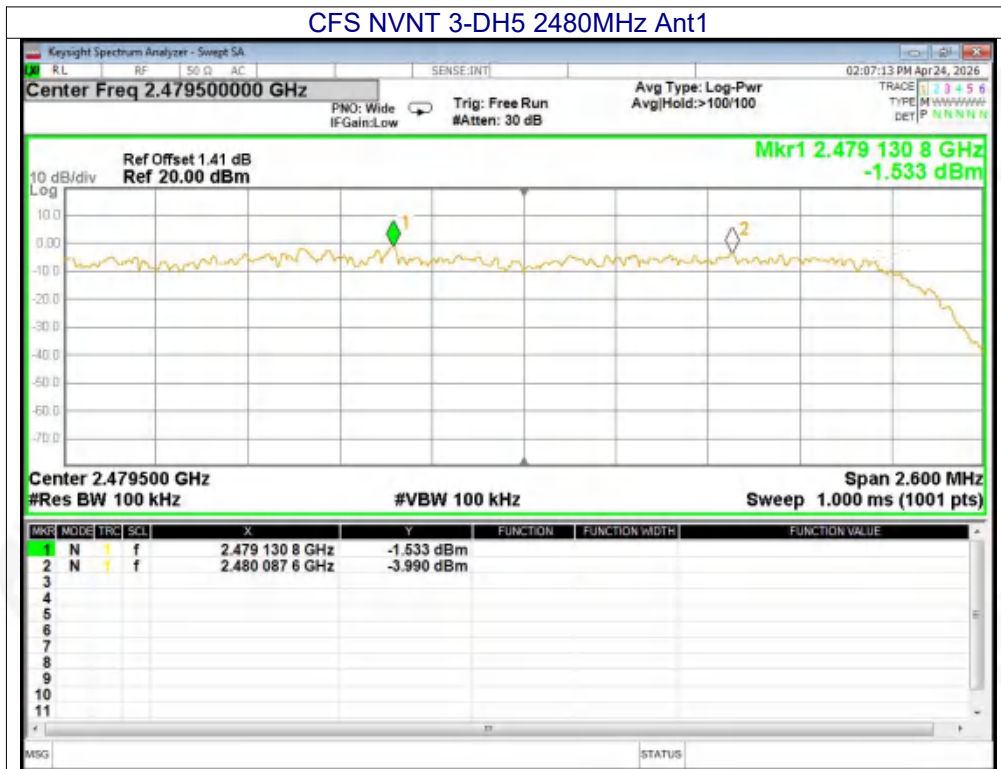




Right earphone

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.186	0.625	PASS
GFSK	Middle	1.15	0.632	PASS
GFSK	High	1.17	0.623	PASS
$\pi/4$ -DQPSK	Low	1.001	0.847	PASS
$\pi/4$ -DQPSK	Middle	0.9672	0.839	PASS
$\pi/4$ -DQPSK	High	1.0478	0.883	PASS
8-DPSK	Low	0.975	0.839	PASS
8-DPSK	Middle	1.0608	0.833	PASS
8-DPSK	High	1.0738	0.841	PASS



Test Graphs
CFS NVNT 1-DH5 2402MHz Ant1

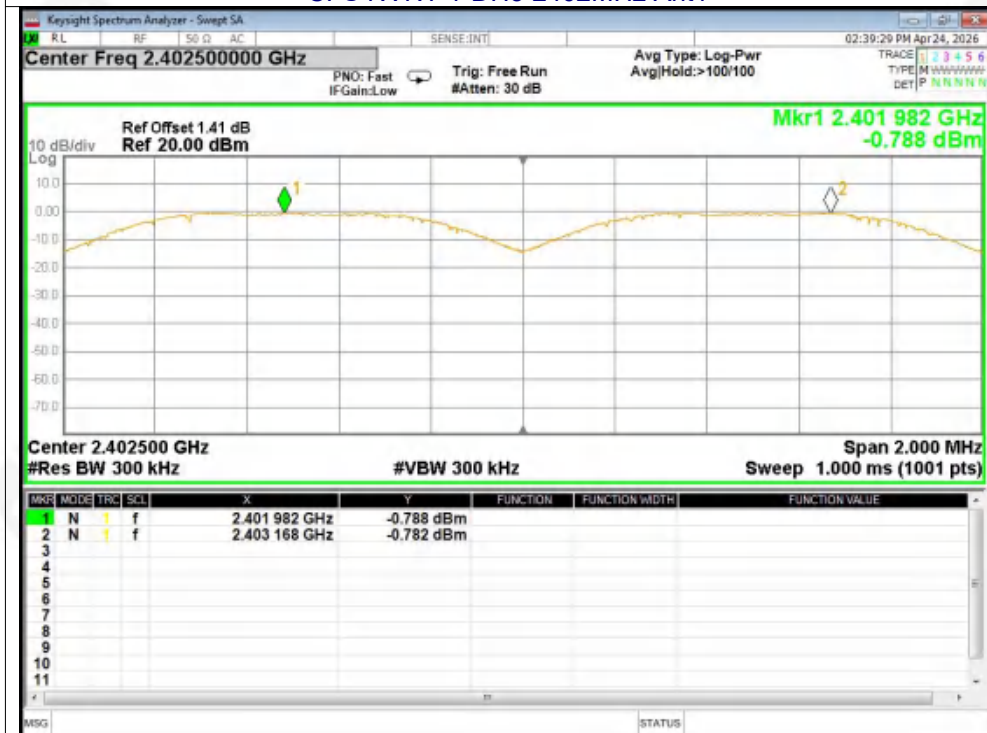


CFS NVNT 1-DH5 2441MHz Ant1






CFS NVNT 1-DH5 2480MHz Ant1

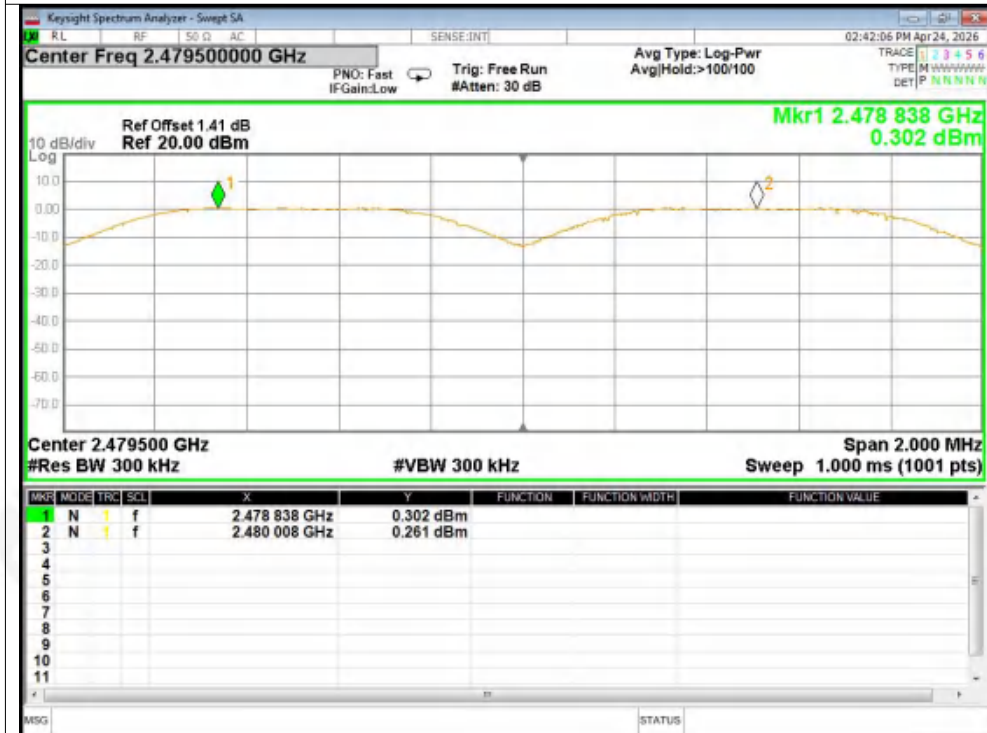

CFS NVNT 2-DH5 2402MHz Ant1

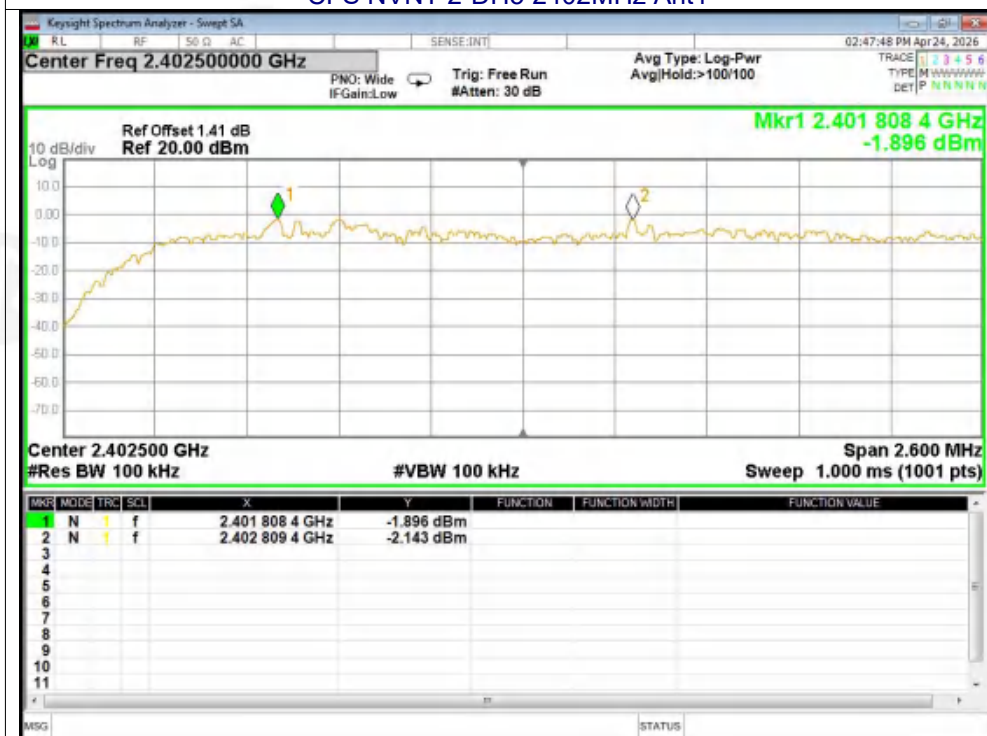




CFS NVNT 2-DH5 2441MHz Ant1




CFS NVNT 2-DH5 2480MHz Ant1

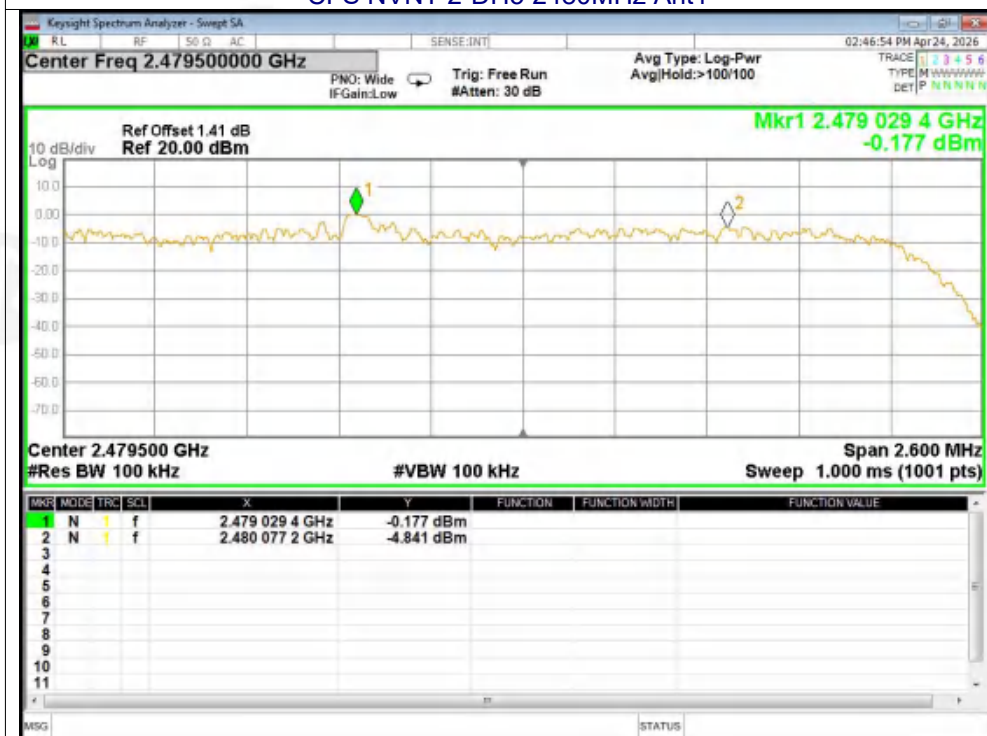





CFS NVNT 3-DH5 2402MHz Ant1

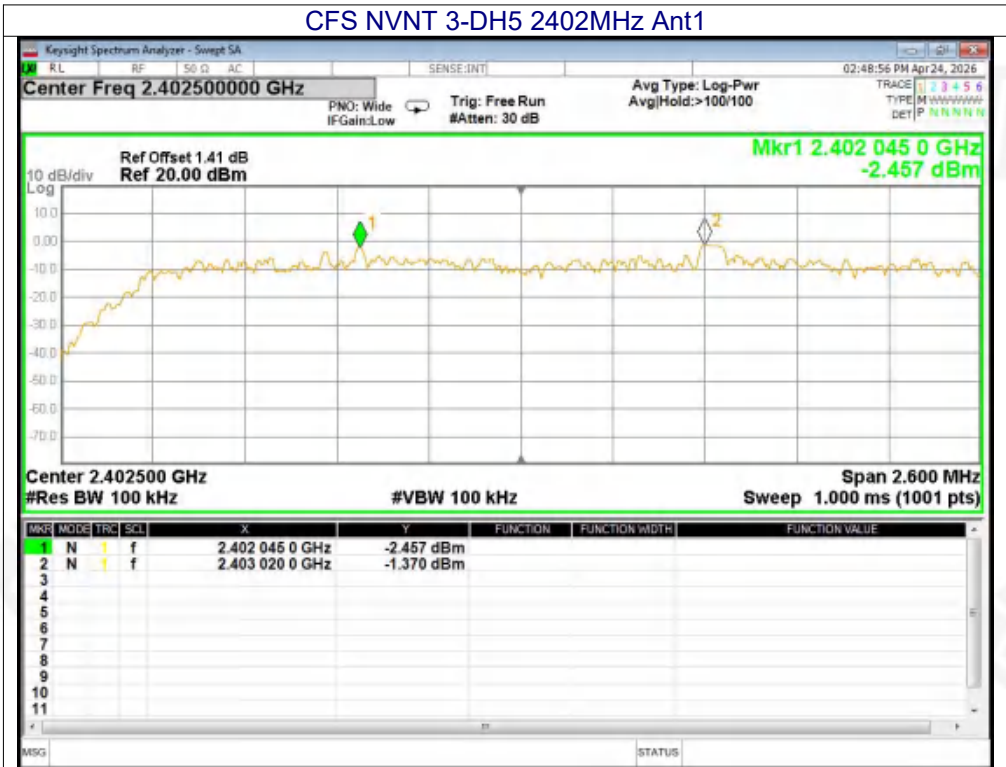

CFS NVNT 3-DH5 2441MHz Ant1

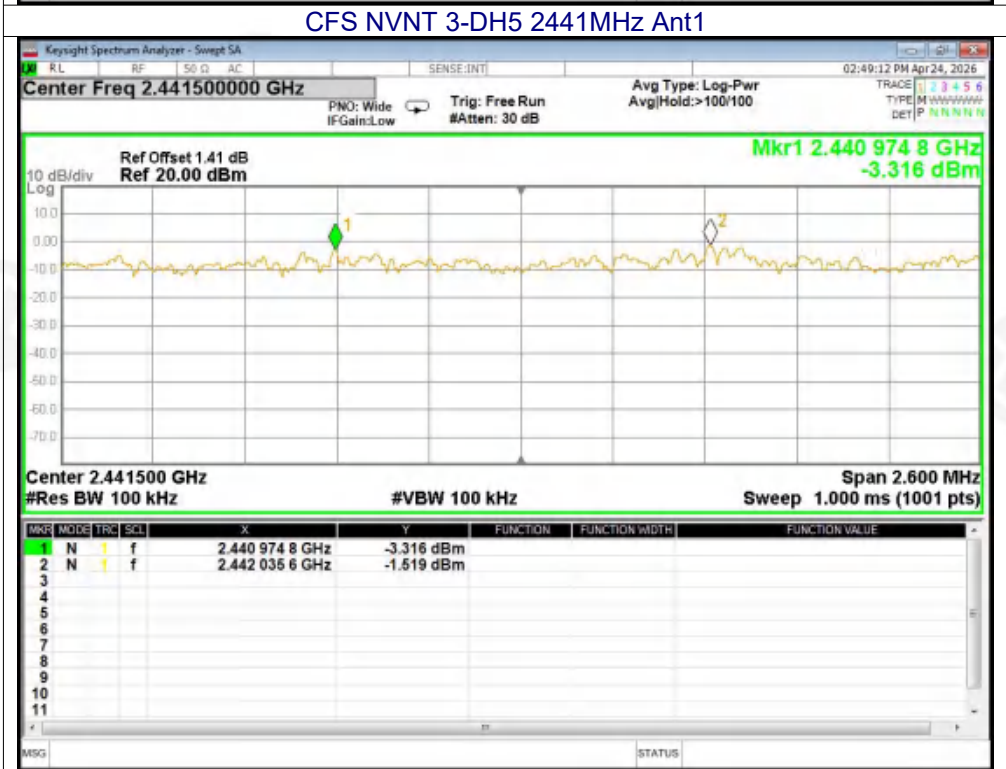

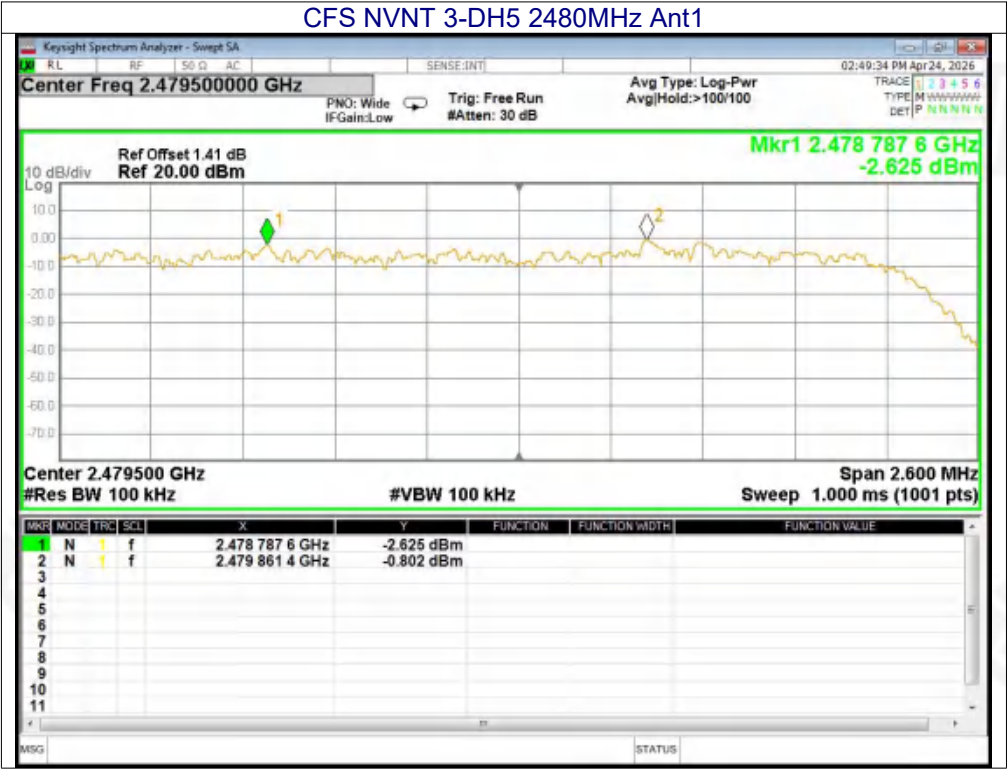



10.NUMBER OF HOPPING FREQUENCY

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels

10.1 Test Setup



10.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


10.3 DEVIATION FROM STANDARD

No deviation.



10.4 Test Result

Left earphone
Test Plots:
79 Channels in total
GFSK

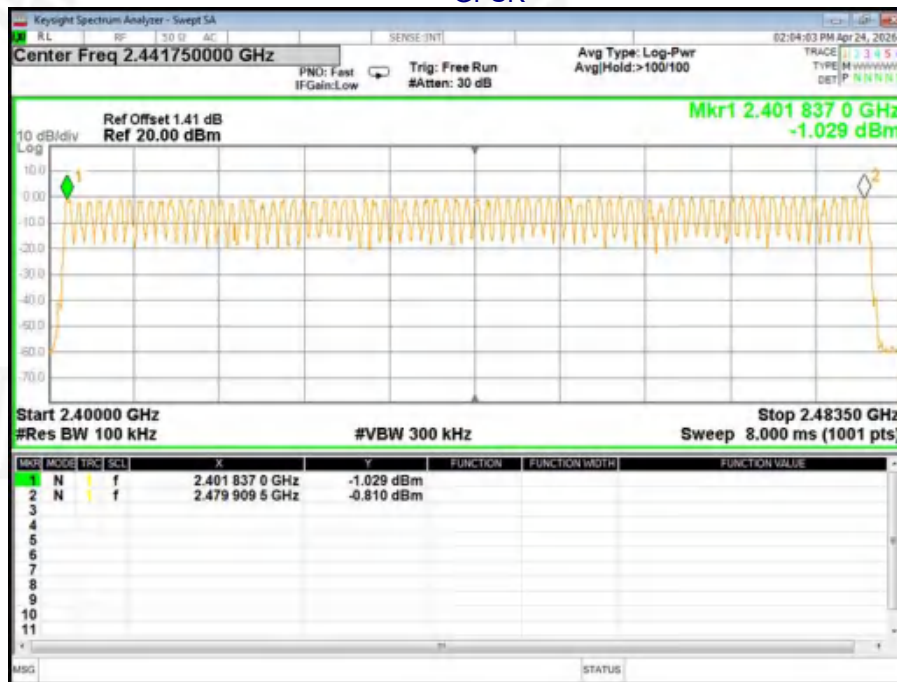




$\pi/4$ -DQPSK




8-DPSK

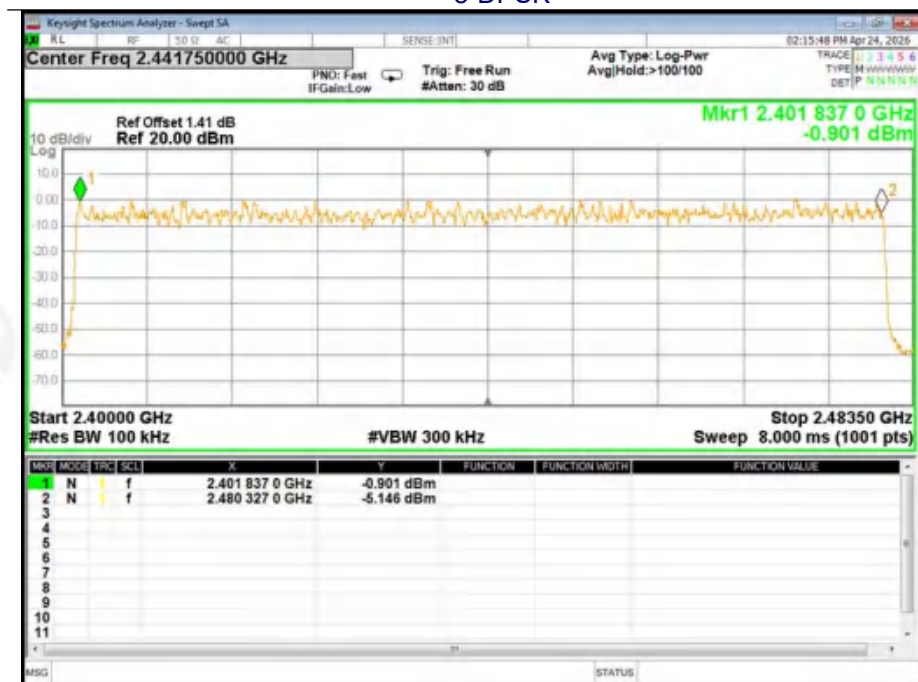




Right earphone
Test Plots:
79 Channels in total
GFSK

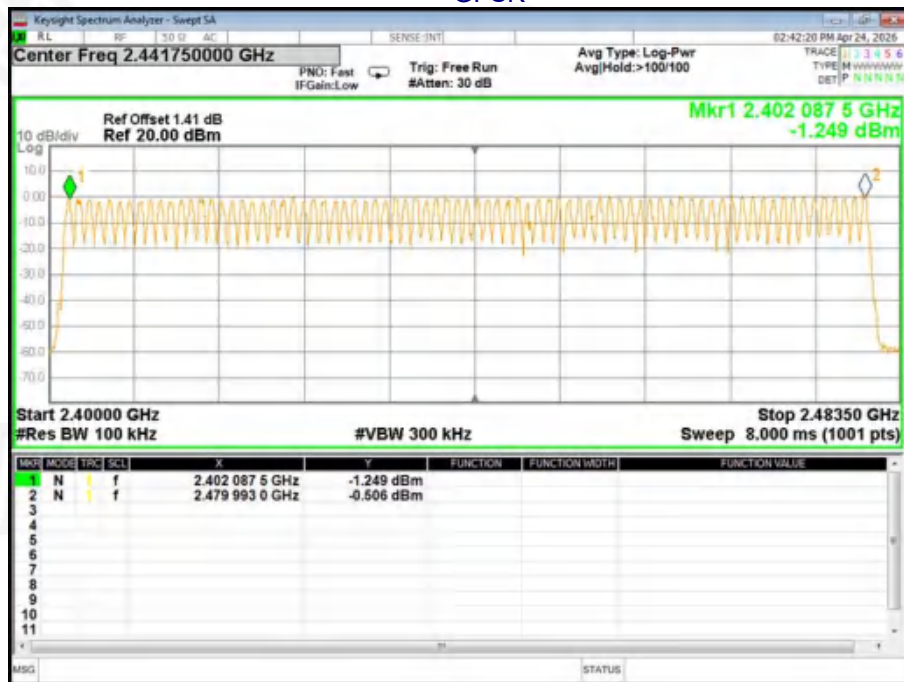



$\pi/4$ -DQPSK

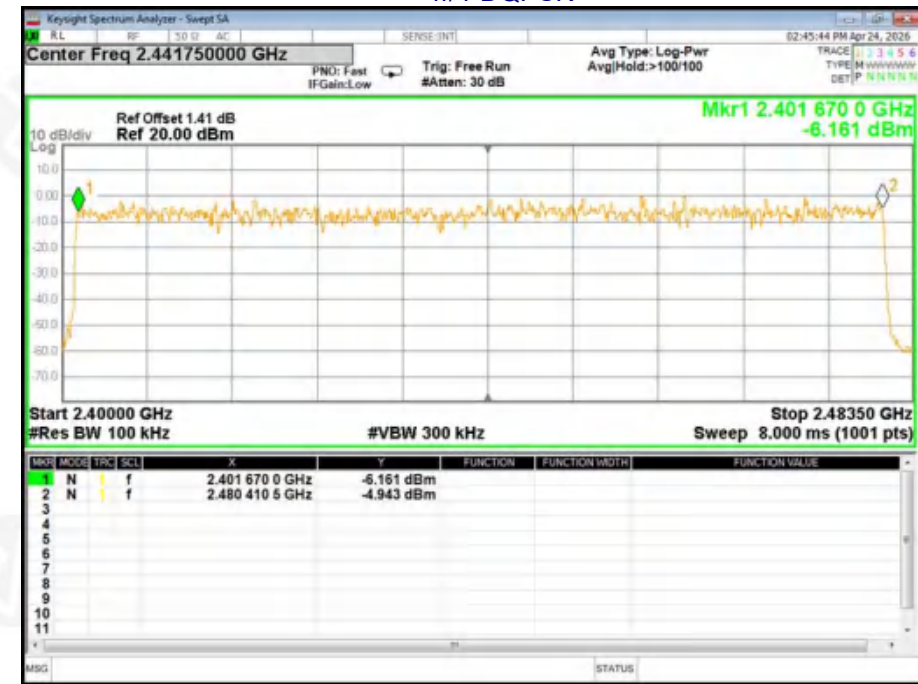

8-DPSK





11. DWELL TIME

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024
Receiver setup:	RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second

11.1 Test Setup



11.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0Hz;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

11.3 DEVIATION FROM STANDARD

No deviation.



11.4 Test Result

Left earphone

Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
1-DH1	2441	Ant1	0.4	127.6	319	31600	400	Pass
1-DH3	2441	Ant1	1.658	278.544	168	31600	400	Pass
1-DH5	2441	Ant1	2.906	340.002	117	31600	400	Pass
2-DH1	2441	Ant1	0.409	130.471	319	31600	400	Pass
2-DH3	2441	Ant1	1.663	262.754	158	31600	400	Pass
2-DH5	2441	Ant1	2.909	331.626	114	31600	400	Pass
3-DH1	2441	Ant1	0.41	130.79	319	31600	400	Pass
3-DH3	2441	Ant1	1.663	267.743	161	31600	400	Pass
3-DH5	2441	Ant1	2.911	302.744	104	31600	400	Pass




Test Graphs

Dwell NVNT 1-DH1 2441MHz Ant1 One Burst



Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated

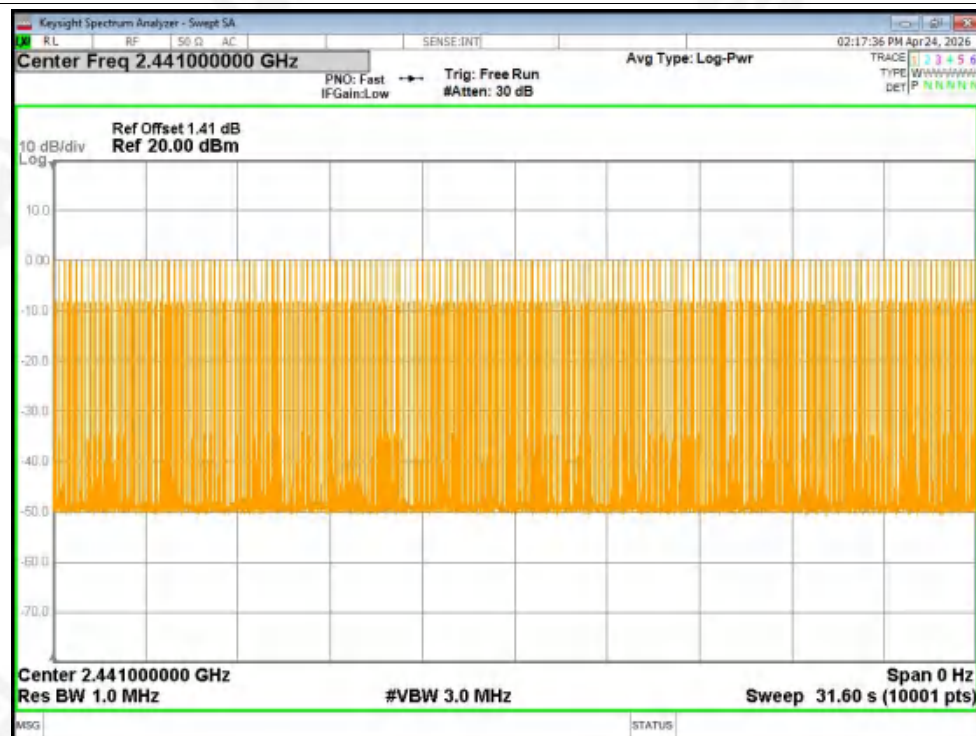




Dwell NVNT 1-DH3 2441MHz Ant1 One Burst




Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

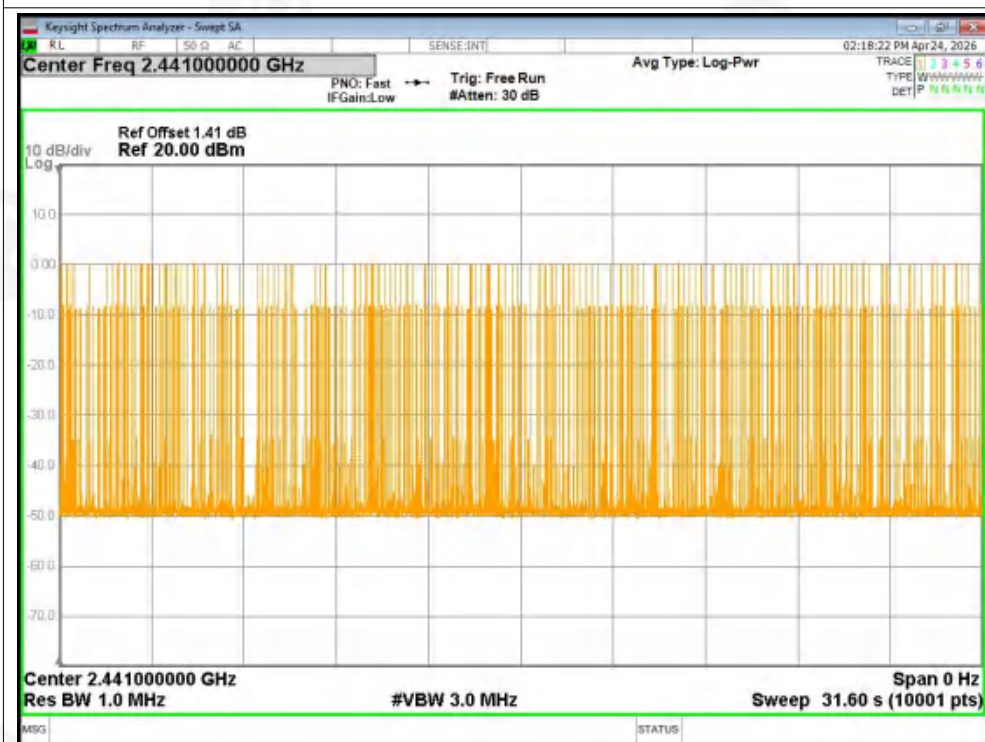






Dwell NVNT 2-DH1 2441MHz Ant1 One Burst

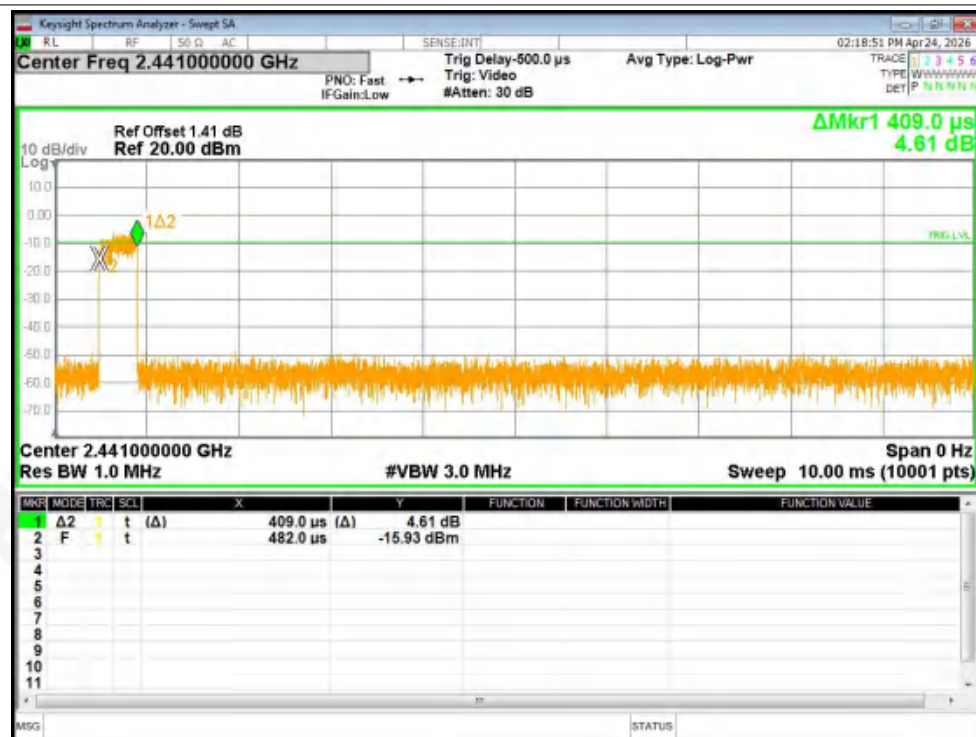

Dwell NVNT 2-DH1 2441MHz Ant1 Accumulated

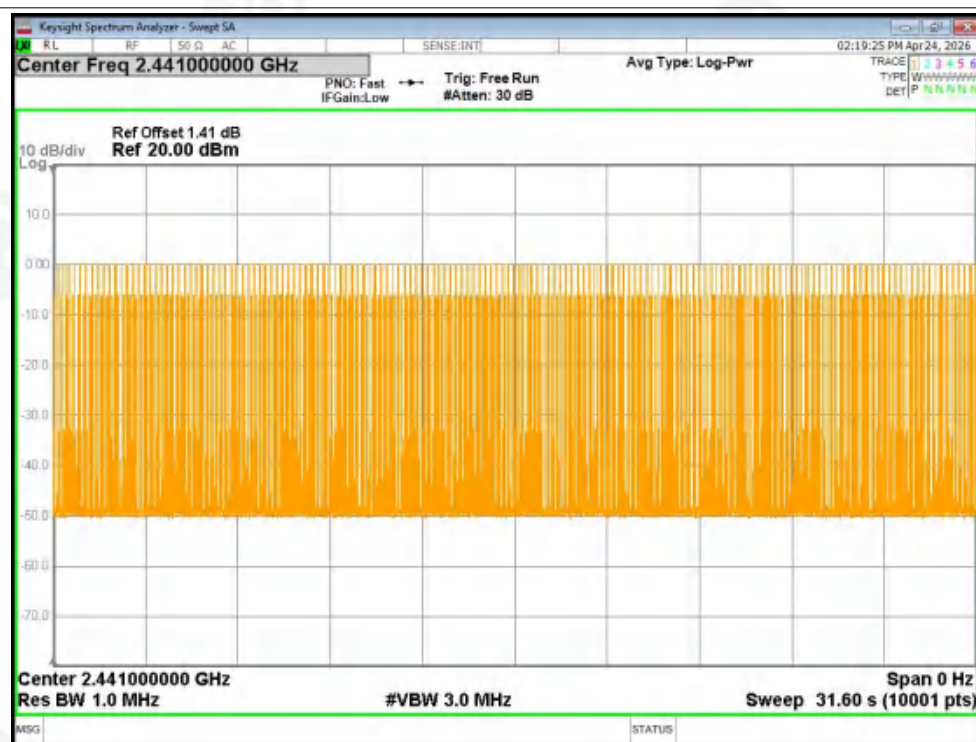




Dwell NVNT 2-DH3 2441MHz Ant1 One Burst



Dwell NVNT 2-DH3 2441MHz Ant1 Accumulated

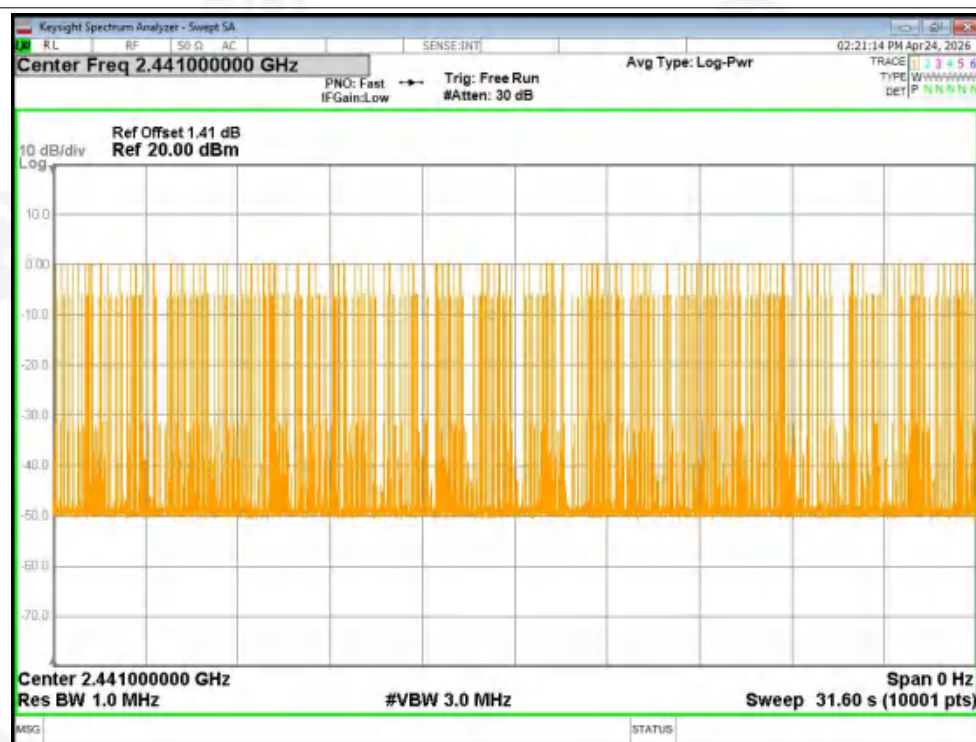




Dwell NVNT 2-DH5 2441MHz Ant1 One Burst




Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

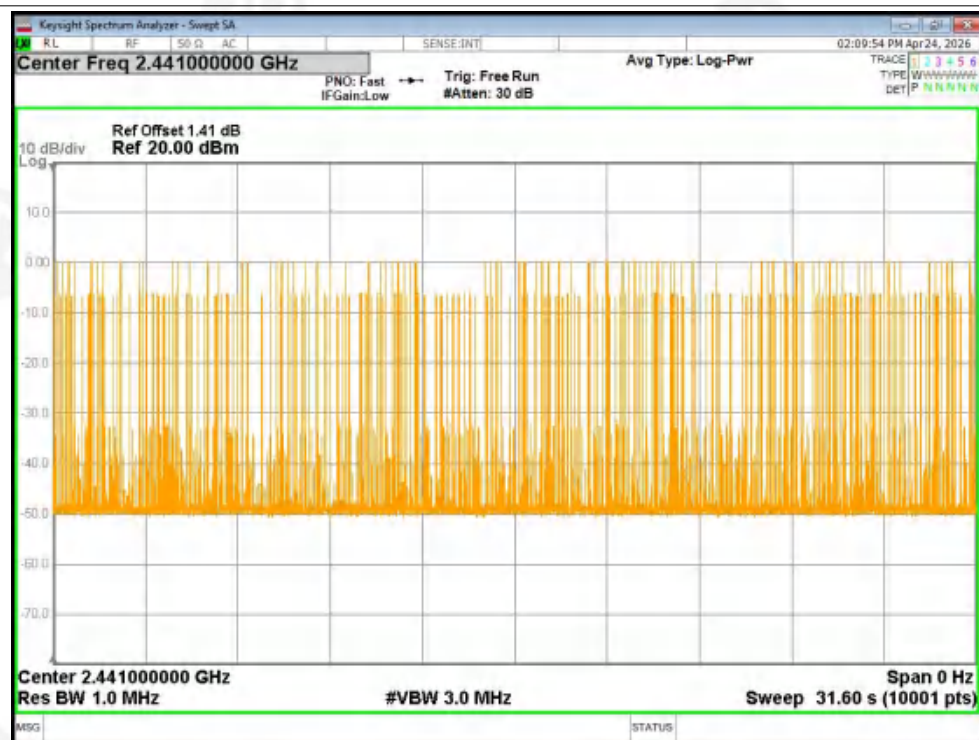




Dwell NVNT 3-DH1 2441MHz Ant1 One Burst

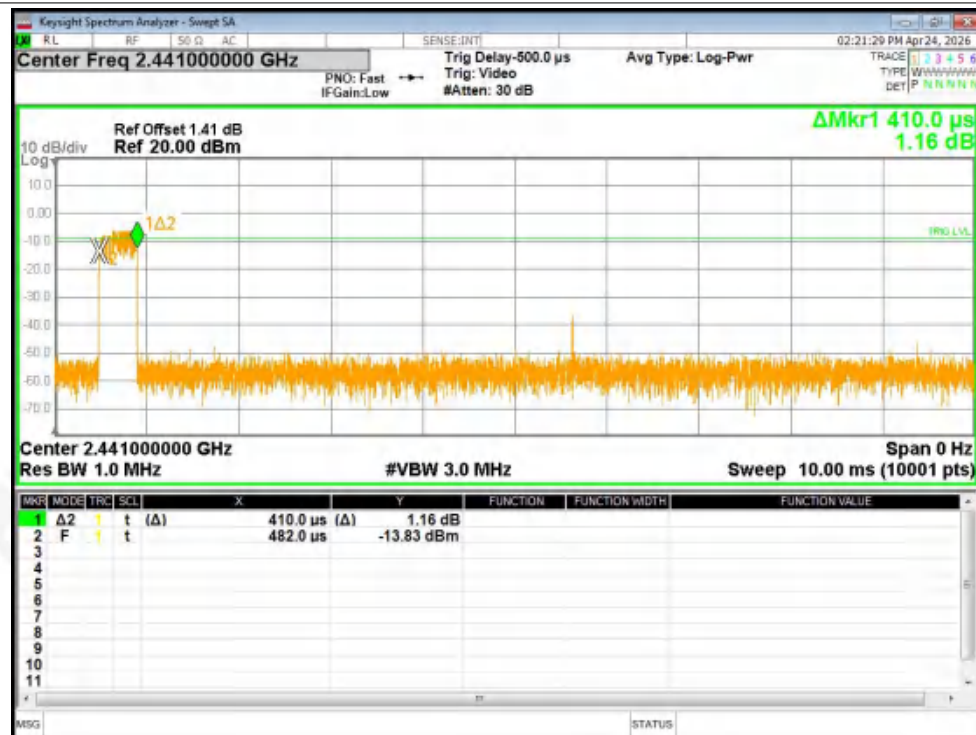

Dwell NVNT 3-DH1 2441MHz Ant1 Accumulated

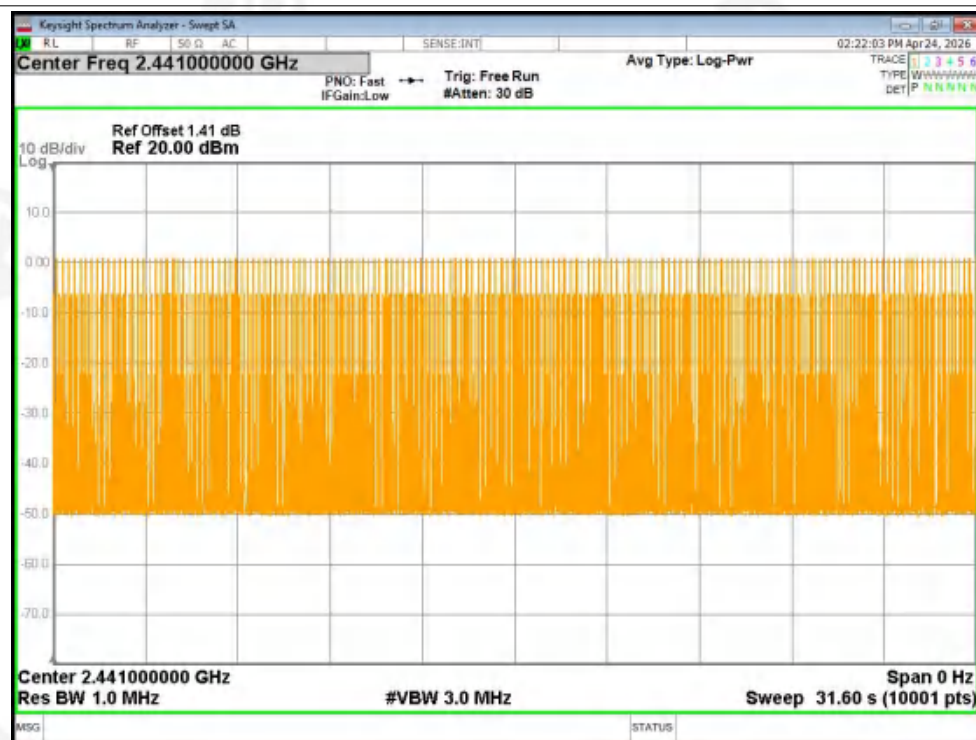




Dwell NVNT 3-DH3 2441MHz Ant1 One Burst




Dwell NVNT 3-DH3 2441MHz Ant1 Accumulated

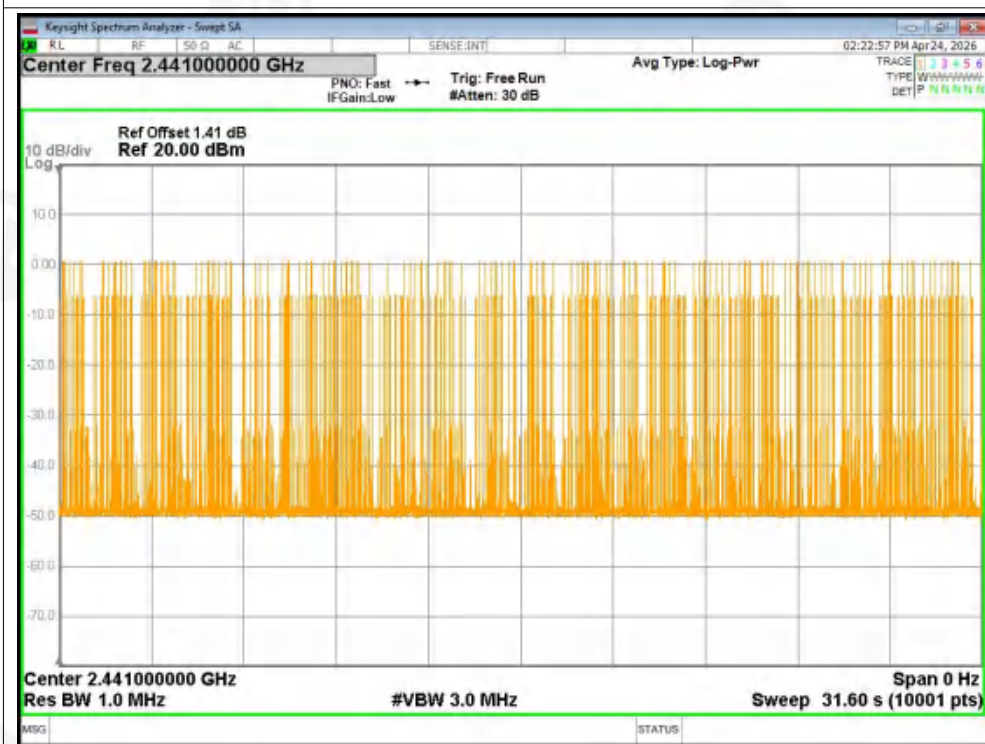




Dwell NVNT 3-DH5 2441MHz Ant1 One Burst

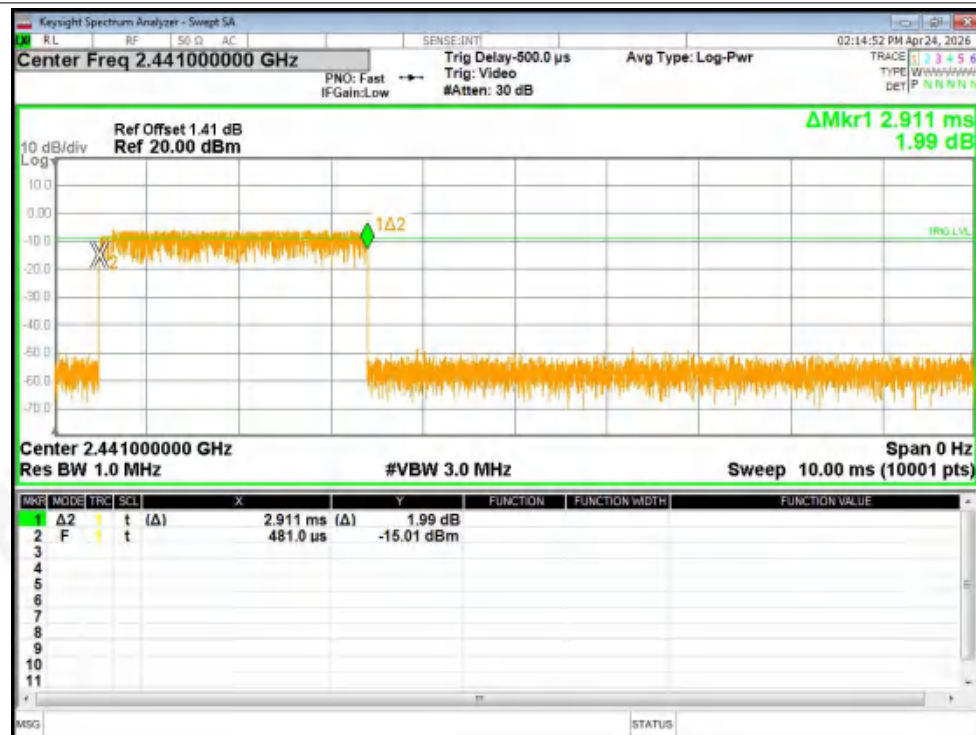

Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

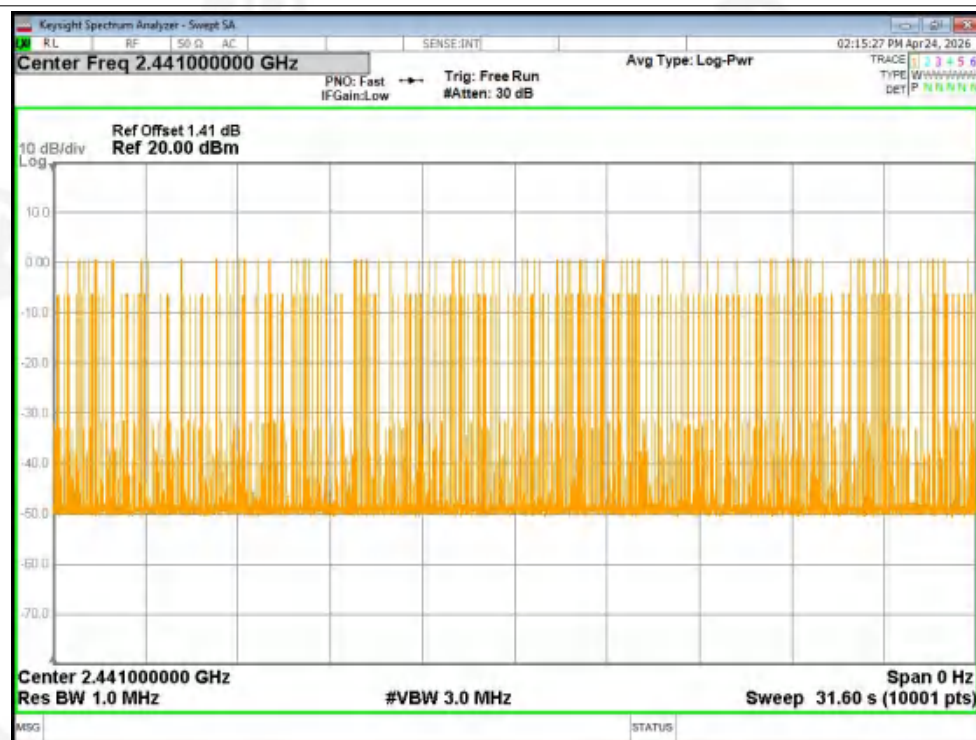




Right earphone

Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
1-DH1	2441	Ant1	0.4	127.6	319	31600	400	Pass
1-DH3	2441	Ant1	1.656	266.616	161	31600	400	Pass
1-DH5	2441	Ant1	2.904	290.4	100	31600	400	Pass
2-DH1	2441	Ant1	0.409	130.471	319	31600	400	Pass
2-DH3	2441	Ant1	1.661	279.048	168	31600	400	Pass
2-DH5	2441	Ant1	2.908	334.42	115	31600	400	Pass
3-DH1	2441	Ant1	0.41	130.79	319	31600	400	Pass
3-DH3	2441	Ant1	1.663	251.113	151	31600	400	Pass
3-DH5	2441	Ant1	2.914	314.712	108	31600	400	Pass




Test Graphs

Dwell NVNT 1-DH1 2441MHz Ant1 One Burst

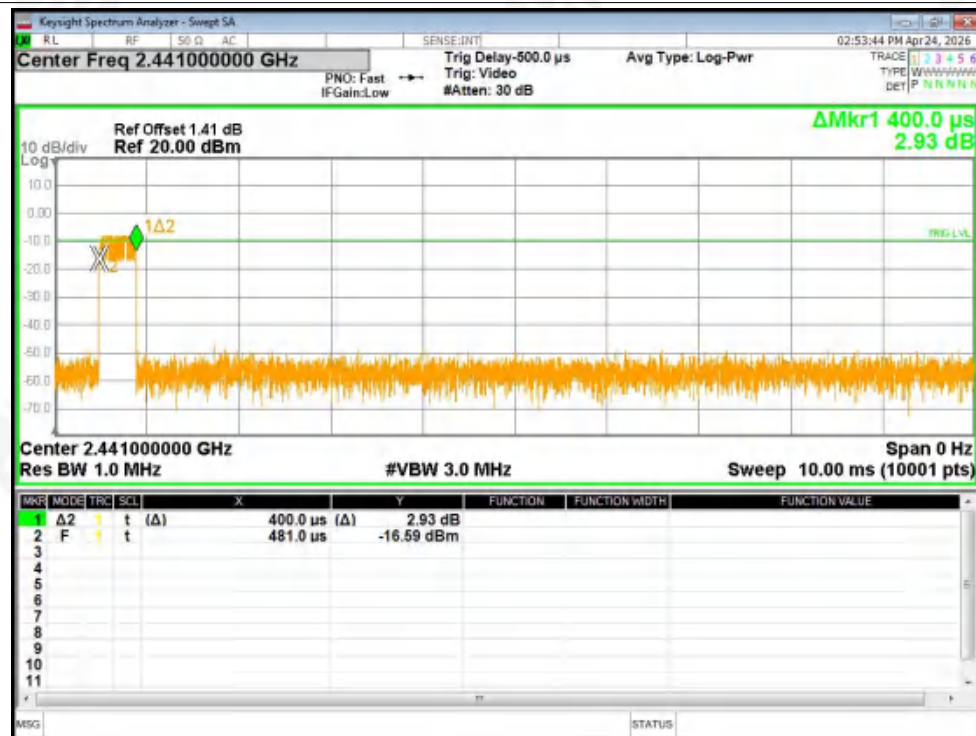

Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated

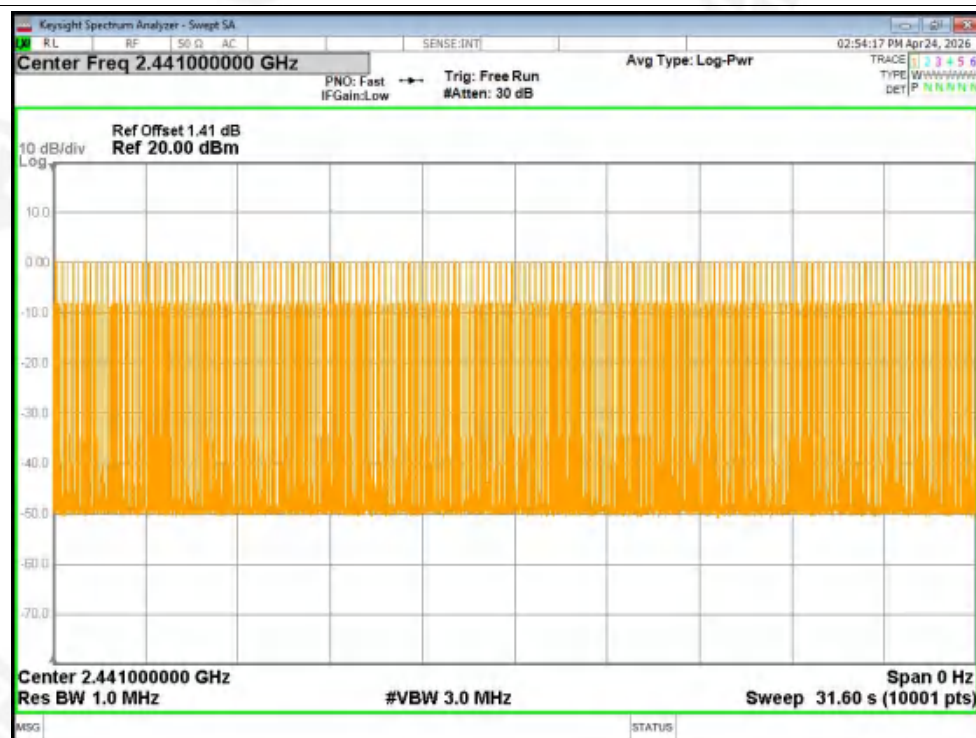




Dwell NVNT 1-DH3 2441MHz Ant1 One Burst



Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

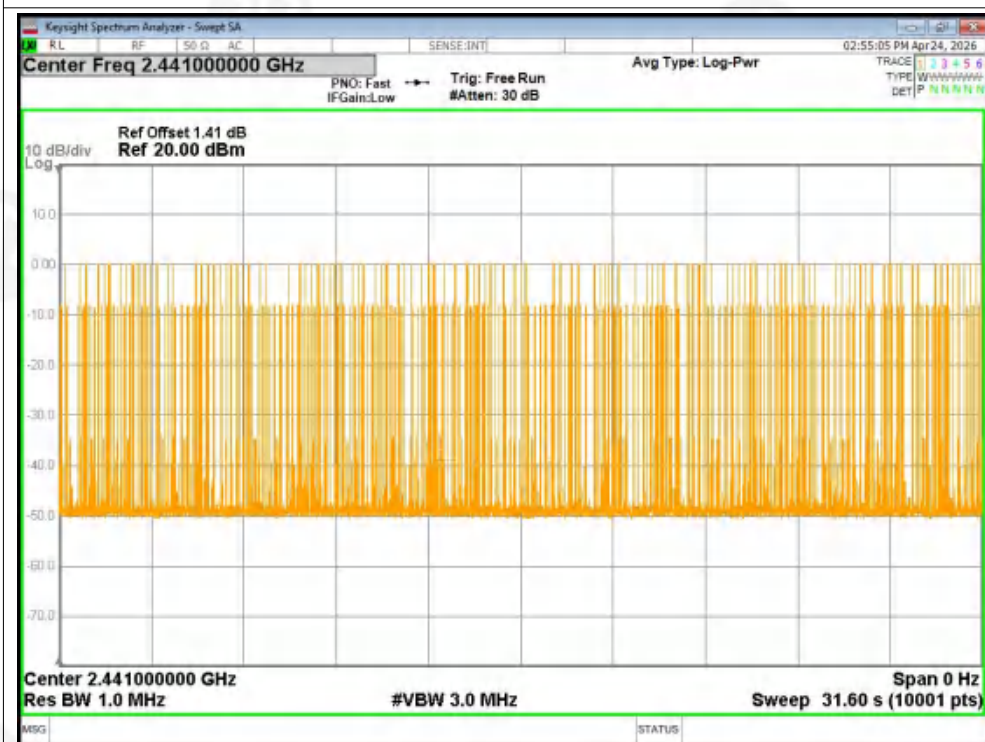



Dwell NVNT 1-DH5 2441MHz Ant1 One Burst



Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated






Dwell NVNT 2-DH1 2441MHz Ant1 One Burst



Dwell NVNT 2-DH1 2441MHz Ant1 Accumulated

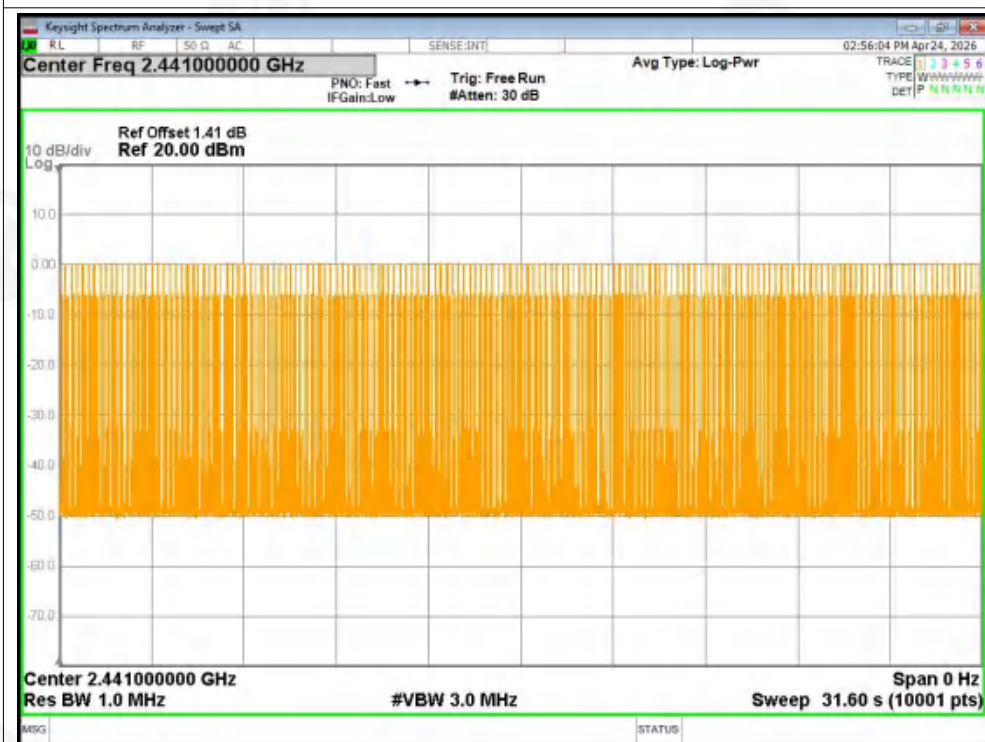




Dwell NVNT 2-DH3 2441MHz Ant1 One Burst



Dwell NVNT 2-DH3 2441MHz Ant1 Accumulated

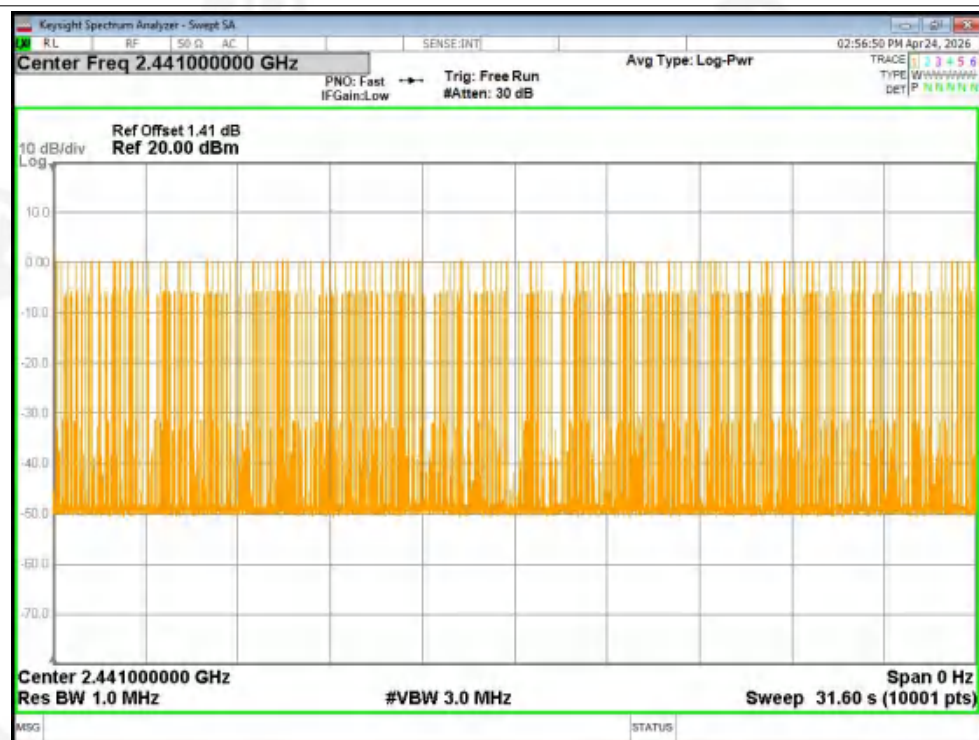




Dwell NVNT 2-DH5 2441MHz Ant1 One Burst



Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

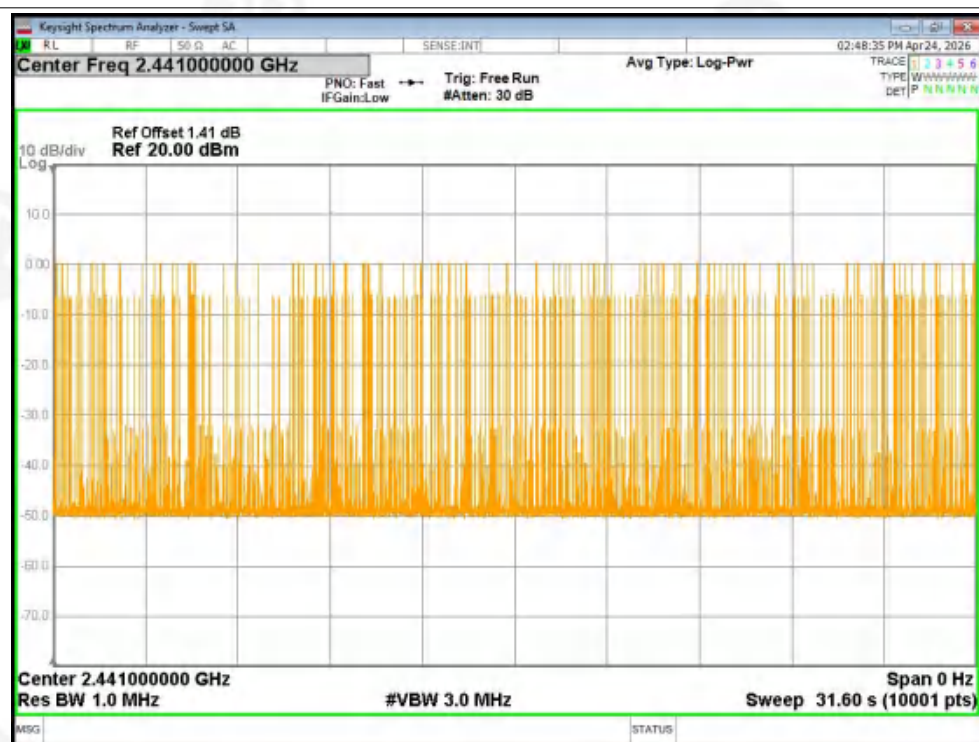



Dwell NVNT 3-DH1 2441MHz Ant1 One Burst



Dwell NVNT 3-DH1 2441MHz Ant1 Accumulated






Dwell NVNT 3-DH3 2441MHz Ant1 One Burst



Dwell NVNT 3-DH3 2441MHz Ant1 Accumulated

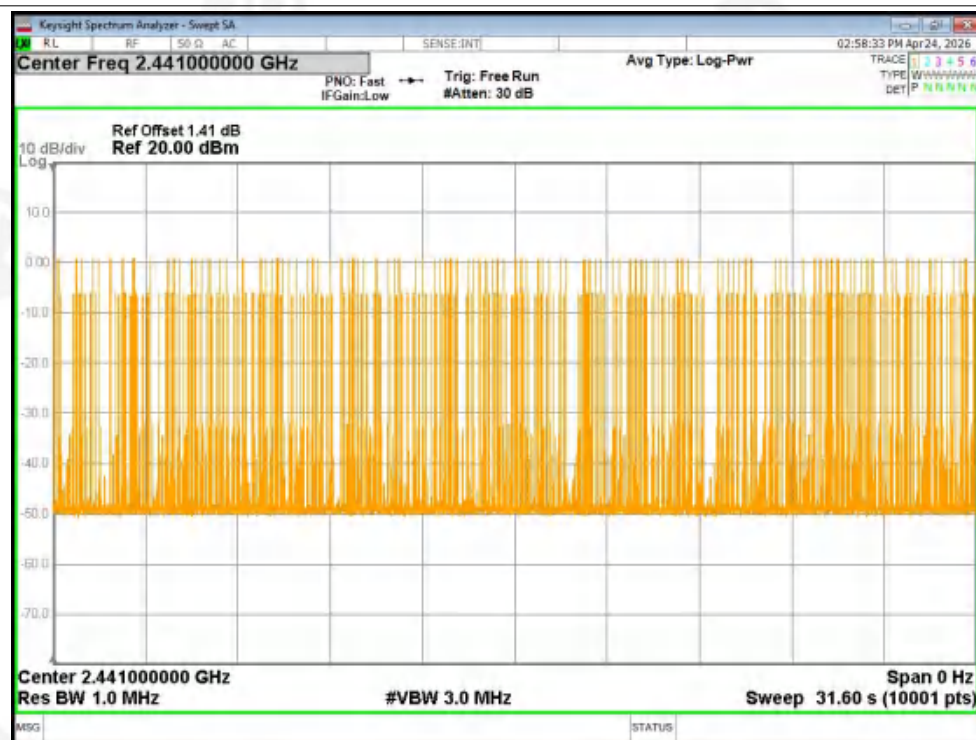




Dwell NVNT 3-DH5 2441MHz Ant1 One Burst



Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

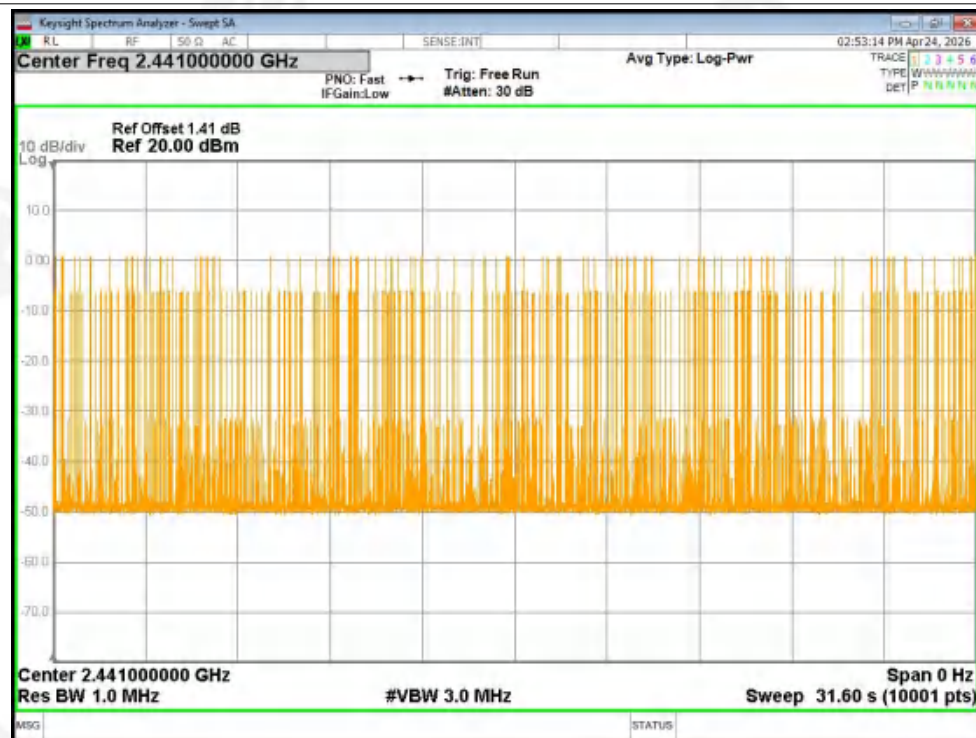



12. Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is SMD CERAMIC Antenna, the best case gain of the antennas is 2.78dBi, reference to the appendix II for details	



13. Test Setup Photo

Reference to the appendix I for details.

14. EUT Constructional Details

Reference to the appendix II for details.

***** END OF REPORT *****