



TEST REPORT

Test item description: Electric Bike
FCC ID: 2BBGK-RUNS
Trademark(s): N/A
Model/Type reference: Run S, Run Plus
Applicant's name: Shenzhen Xincheng Times Technology Co.,Ltd
Address: 104-105, Block C, Donghai Wang Building, No. 369 Bulong Road, Ma'antang Community, Bantian Street, Longgang District, Shenzhen
Manufacturer: Shenzhen Xincheng Times Technology Co.,Ltd
Address: 104-105, Block C, Donghai Wang Building, No. 369 Bulong Road, Ma'antang Community, Bantian Street, Longgang District, Shenzhen
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Mar. 04, 2026
Sample tested Date: Mar. 04, 2026 to Mar. 17, 2026
Issue Date: Mar. 17, 2026
Report No.: CTB26030413809RF01
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2020
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Reviewed by:

Approved by:

Kai Chen

Kai Chen

Martin Feng

Martin Feng

Bin Mei

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration.....	6
4.3 Support Equipment.....	6
4.4 Channel List	7
4.5 Test Mode	7
4.6 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup.....	11
6.2 Limit.....	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	17
7.1 Block Diagram Of Test Setup.....	17
7.2 Limit.....	17
7.3 Test procedure	17
7.4 Test Result	19
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS.....	39
8.1 Block Diagram Of Test Setup.....	39
8.2 Limit.....	39
8.3 Test procedure	39
8.4 Test Result	40
9. CONDUCTED OUTPUT POWER.....	42
9.1 Block Diagram Of Test Setup.....	42
9.2 Limit.....	42
9.3 Test procedure	42
9.4 Test Result	42
10. 6DB OCCUPIED BANDWIDTH.....	44
10.1 Block Diagram Of Test Setup.....	44
10.2 Limit.....	44
10.3 Test procedure	44
10.4 Test Result	44
11. POWER SPECTRAL DENSITY.....	46
11.1 Block Diagram Of Test Setup.....	46
11.2 Limit.....	46
11.3 Test procedure	46
11.4 Test Result	46
12. ANTENNA REQUIREMENT	48
13. EUT TEST SETUP PHOTOGRAPHS.....	49

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB26030413809RF01	Mar. 17, 2026	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2020	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2020	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2020	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2020	PASS
Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2020	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2020/ KDB 558074 D01v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS

Remark:

Test according to ANSI C63.10-2020.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density, Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9k-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
Humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
Frequency	1×10 ⁻⁷
Conducted Emission(150kHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model/Type reference:	Run S, Run Plus
Model Description:	All the model are the same circuit and RF module, only the model names, appearance colors, adapter, battery are different. Test sample model: Run S, Run Plus
Bluetooth Version:	Bluetooth 5.0
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: 2.034dBm
Type of Modulation:	Bluetooth: GFSK
Antenna installation:	Bluetooth: PCB antenna
Antenna Gain:	Bluetooth: 1.7dBi
Ratings:	Run S : INPUT: 100-240V 50/60Hz OUTPUT: 54.6V $\approx$ 2.0A Battery parameters of Run S: 48V,10.4AH Run plus : INPUT: 100-240V 50/60Hz OUTPUT: 54.6V $\approx$ 3.0A Battery parameters of Run plus: 48V, 10.4AH+15.6AH

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH No.	Frequency (MHz)	CH No.	Frequency (MHz)	CH No.	Frequency (MHz)	CH No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK)	2402MHz	2440MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: CN1276

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated Date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/5/23	2026/5/22
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/5/23	2026/5/22
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/5/23	2026/5/22
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/5/23	2026/5/22
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/5/22	2026/5/21
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/5/22	2026/5/21
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/5/22	2026/5/21
9	2.4 GHz Filter	Shenxiang	MSF2400-2483. 5MS-1154	20181015001	/	2025/6/18	2026/6/17
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	/	2025/6/18	2026/6/17
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	/	2025/5/24	2026/5/23
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/10/20	2026/10/19
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/5/22	2026/5/21
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/	/
16	966 chamber	C.R.T.	966	/	/	2024/6/23	2027/6/22

17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/5/23	2026/5/22
18	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/2	2026/6/1
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/1	2026/5/31
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/2	2026/6/1
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/2	2026/6/1
27	Power Meter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/2	2026/6/1


Continuous disturbance							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2024/6/22	2027/6/21
2	LISN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/5/22	2026/5/21
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/5/22	2026/5/21
4	Coaxial cable	ZDECL	Z302S	18091904	/	2025/5/22	2026/5/21
5	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/18	2026/6/17
6	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2025/9/19	2026/9/18
7	EZ-EMC	Frad	EMC-con3A1.1	/	/	/	/
8	Current Probe	FCC	F-52B	199453	/	2025/5/24	2026/5/23
9	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
10	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

Radiated emission(No.2 Chamber)							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2024/6/8	2027/6/7
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/6/1	2026/5/31
3	Broadband Antenna	Schwarzbeck	VULB 9168	1471	/	2025/9/19	2026/9/18

4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/3	2026/6/2
5	Preamplifier	Schwarzbeck	BBV 9743 B	00500	/	2025/5/30	2026/5/29
6	EMI TEST RECEIVER	R&S	ESCI7	100861	/	2025/9/19	2026/9/18
7	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
8	EMI test software	Farad	EZ-EMC	/	Ver. FARAD-3A1+	/	/
9	Coaxial cable	Rosenberg	8m	/	/	2025/9/19	2026/9/18
10	Coaxial cable	Times	2m	/	/	2025/9/19	2026/9/18
11	Coaxial cable	Times	2m	/	/	2025/9/19	2026/9/18
12	Coaxial cable	Times	1m	/	/	2025/9/19	2026/9/18
13	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

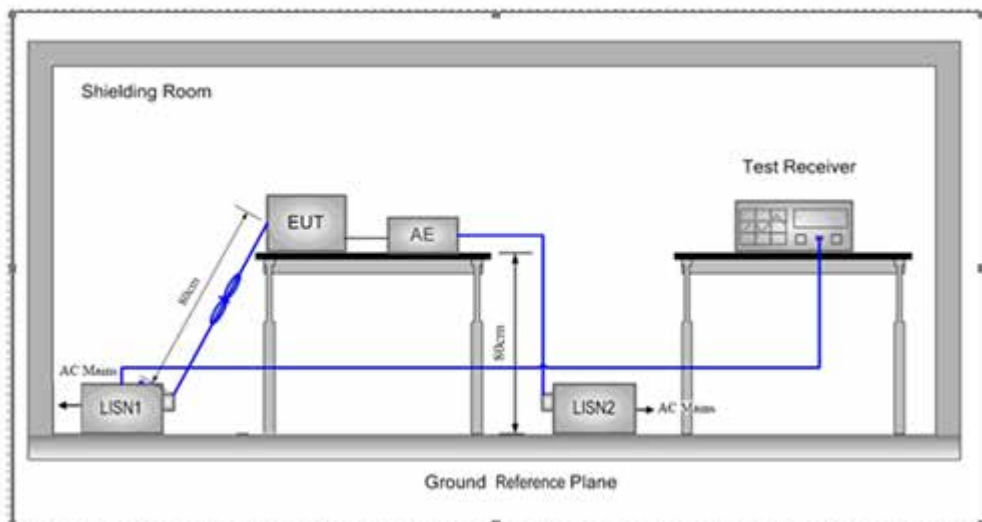

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the


horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

Run S

L: Worst case-GFSK(low channel)

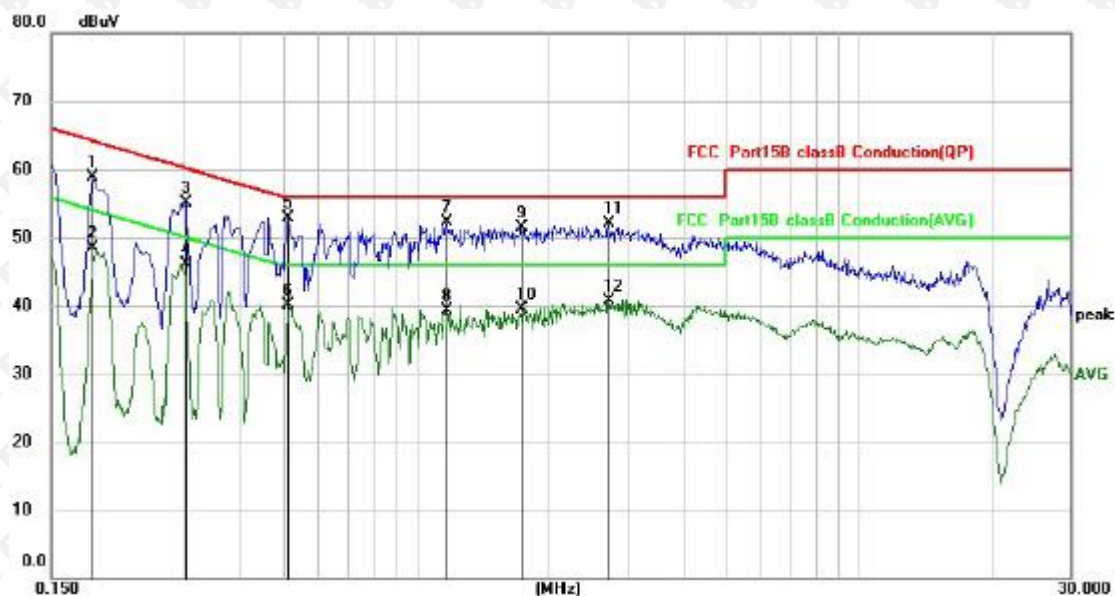


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1860	48.89	10.08	58.97	64.21	-5.24	QP
2		0.1860	38.34	10.08	48.42	54.21	-5.79	AVG
3		0.3020	44.99	10.08	55.07	60.19	-5.12	QP
4		0.3020	35.96	10.08	46.04	50.19	-4.15	AVG
5	*	0.5140	42.76	10.09	52.85	56.00	-3.15	QP
6		0.5140	29.92	10.09	40.01	46.00	-5.99	AVG
7		1.1660	42.15	10.14	52.29	56.00	-3.71	QP
8		1.1660	29.20	10.14	39.34	46.00	-6.66	AVG
9		1.7260	41.36	10.16	51.52	56.00	-4.48	QP
10		1.7260	29.44	10.16	39.60	46.00	-6.40	AVG
11		2.7100	41.89	10.20	52.09	56.00	-3.91	QP
12		2.7100	30.44	10.20	40.64	46.00	-5.36	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

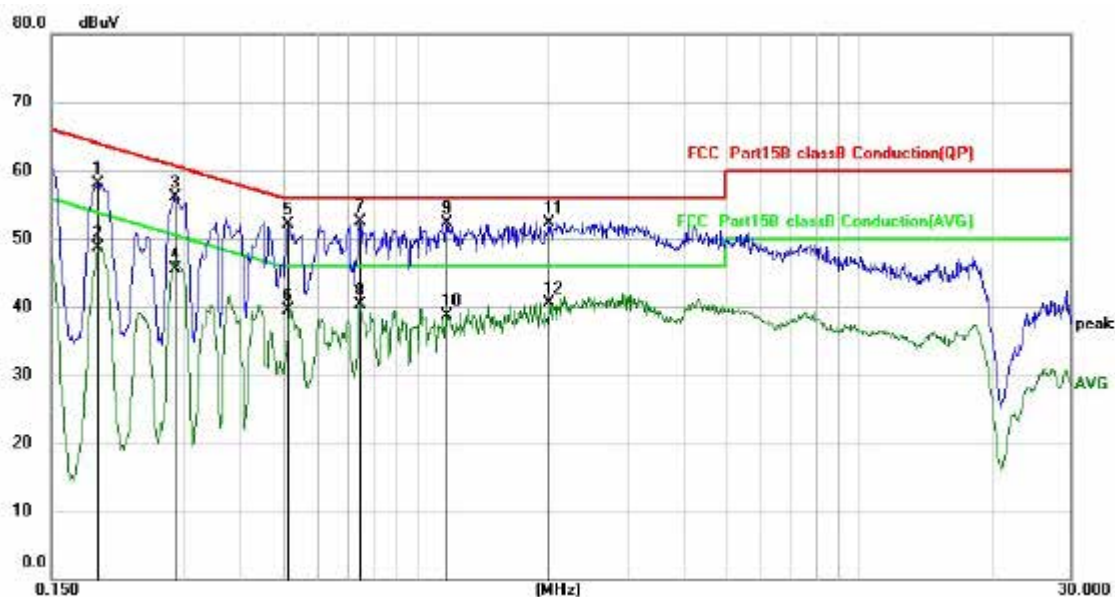


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.1912	47.97	10.08	58.05	63.98	-5.93	QP
2		0.1912	38.68	10.08	48.76	53.98	-5.22	AVG
3		0.2859	46.06	10.08	56.14	60.64	-4.50	QP
4		0.2859	35.51	10.08	45.59	50.64	-5.05	AVG
5		0.5140	41.99	10.09	52.08	56.00	-3.92	QP
6		0.5140	29.49	10.09	39.58	46.00	-6.42	AVG
7	*	0.7459	42.32	10.11	52.43	56.00	-3.57	QP
8		0.7459	30.26	10.11	40.37	46.00	-5.63	AVG
9		1.1659	42.21	10.14	52.35	56.00	-3.65	QP
10		1.1659	28.61	10.14	38.75	46.00	-7.25	AVG
11		1.9979	42.10	10.17	52.27	56.00	-3.73	QP
12		1.9979	30.31	10.17	40.48	46.00	-5.52	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Run plus

L: Worst case-GFSK(low channel)

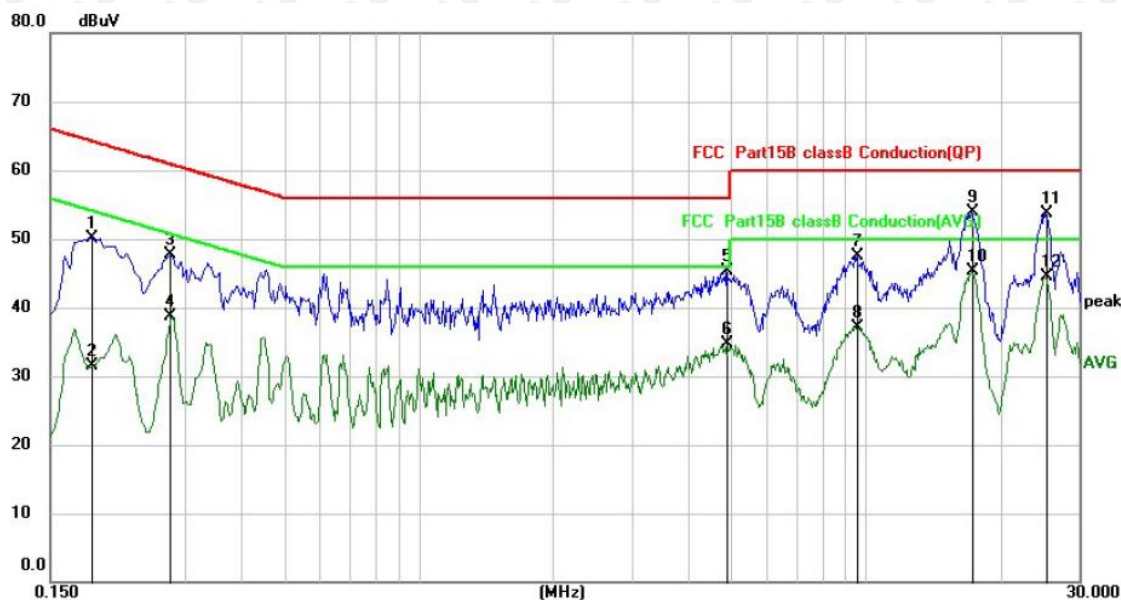


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1859	40.05	10.08	50.13	64.22	-14.09	QP
2		0.1859	21.43	10.08	31.51	54.22	-22.71	AVG
3		0.2779	37.62	10.08	47.70	60.88	-13.18	QP
4		0.2779	28.70	10.08	38.78	50.88	-12.10	AVG
5		4.8900	34.96	10.28	45.24	56.00	-10.76	QP
6		4.8900	24.38	10.28	34.66	46.00	-11.34	AVG
7		9.5579	37.17	10.43	47.60	60.00	-12.40	QP
8		9.5579	26.77	10.43	37.20	50.00	-12.80	AVG
9		17.2739	43.10	10.83	53.93	60.00	-6.07	QP
10	*	17.2739	34.48	10.83	45.31	50.00	-4.69	AVG
11		25.2220	42.48	11.20	53.68	60.00	-6.32	QP
12		25.2220	33.37	11.20	44.57	50.00	-5.43	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

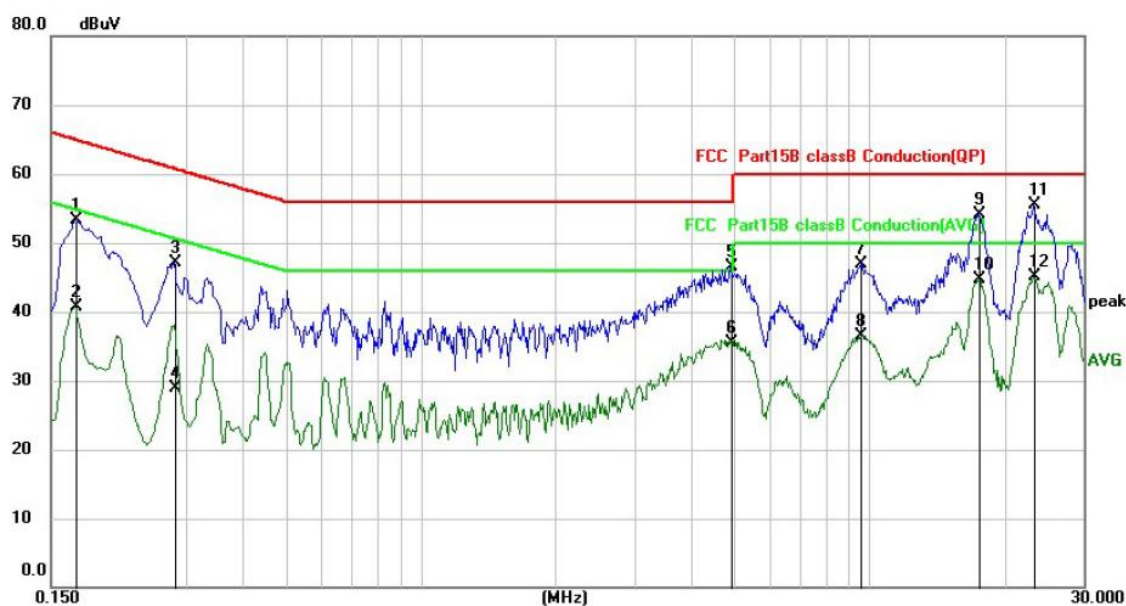

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1700	43.15	10.07	53.22	64.96	-11.74	QP
2		0.1700	30.69	10.07	40.76	54.96	-14.20	AVG
3		0.2818	36.99	10.08	47.07	60.76	-13.69	QP
4		0.2818	18.86	10.08	28.94	50.76	-21.82	AVG
5		4.9058	36.21	10.28	46.49	56.00	-9.51	QP
6		4.9058	25.14	10.28	35.42	46.00	-10.58	AVG
7		9.5900	36.44	10.43	46.87	60.00	-13.13	QP
8		9.5900	26.03	10.43	36.46	50.00	-13.54	AVG
9		17.5657	43.25	10.85	54.10	60.00	-5.90	QP
10		17.5657	33.91	10.85	44.76	50.00	-5.24	AVG
11	*	23.2340	44.35	11.11	55.46	60.00	-4.54	QP
12		23.2340	33.96	11.11	45.07	50.00	-4.93	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

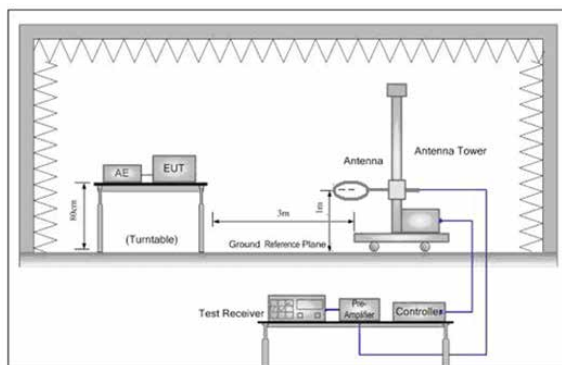


Figure 1. Below 30MHz

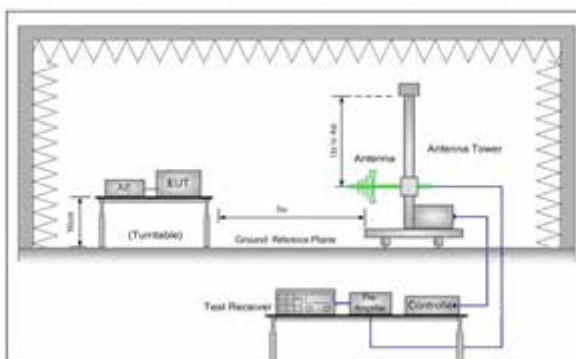


Figure 2. 30MHz to 1GHz

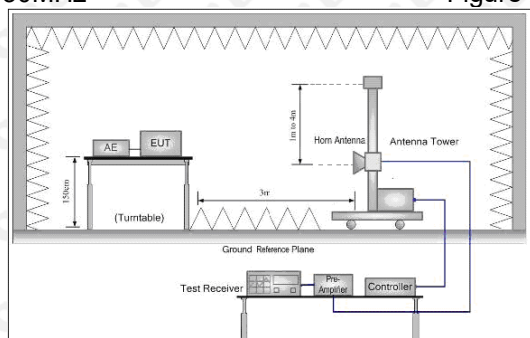


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.

e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).

h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel

i.Repeat above procedures until all frequencies measured was complete.

j. Full battery is used during test.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


7.4 Test Result

Run S

Below 1GHz Test Results:

Antenna polarity: H

Worst case-GFSK(low channel)

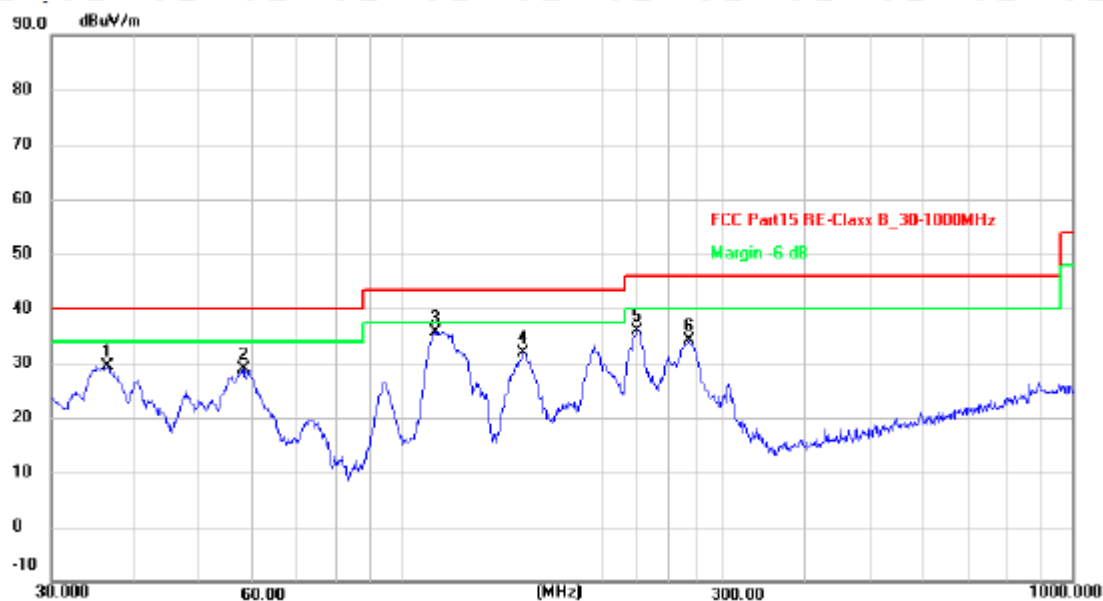

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	36.3814	42.63	-13.32	29.31	40.00	-10.69	peak
2	57.9993	42.42	-13.61	28.81	40.00	-11.19	peak
3 *	112.1305	52.65	-16.95	35.70	43.50	-7.80	peak
4	151.5972	44.12	-12.23	31.89	43.50	-11.61	peak
5	224.5193	50.85	-14.88	35.97	46.00	-10.03	peak
6	268.4853	47.49	-13.31	34.18	46.00	-11.82	peak

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Antenna polarity: V
Worst case-GFSK(low channel)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	35.7490	49.59	-13.37	36.22	40.00	-3.78	QP
2 *	56.5930	50.35	-13.54	36.81	40.00	-3.19	QP
3 !	111.3468	56.17	-17.01	39.16	43.50	-4.34	QP
4	153.2001	49.73	-12.23	37.50	43.50	-6.00	QP
5	224.5192	52.77	-14.88	37.89	46.00	-8.11	QP
6	263.8190	49.56	-13.48	36.08	46.00	-9.92	QP


Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Run plus

Below 1GHz Test Results:

Antenna polarity: H


Worst case-GFSK(low channel)

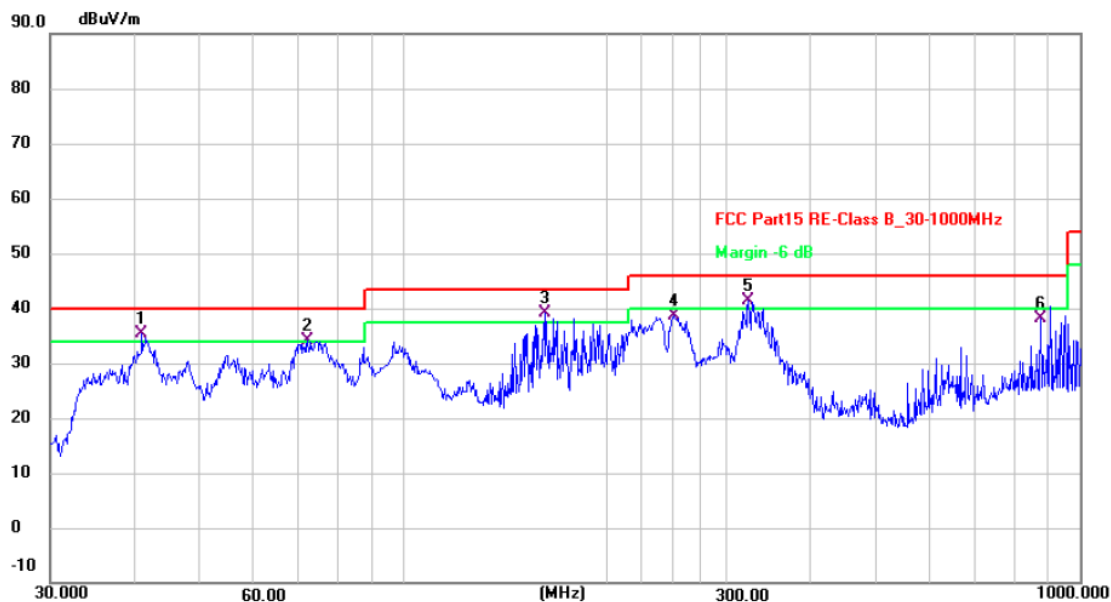

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	40.9880	48.51	-13.08	35.43	40.00	-4.57	QP
2 !	72.0841	49.74	-15.59	34.15	40.00	-5.85	QP
3 *	162.0413	51.41	-12.34	39.07	43.50	-4.43	QP
4	251.1802	52.63	-13.95	38.68	46.00	-7.32	QP
5 !	323.3201	53.04	-11.72	41.32	46.00	-4.68	QP
6	875.2470	39.15	-1.13	38.02	46.00	-7.98	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Antenna polarity: V
Worst case-GFSK(low channel)

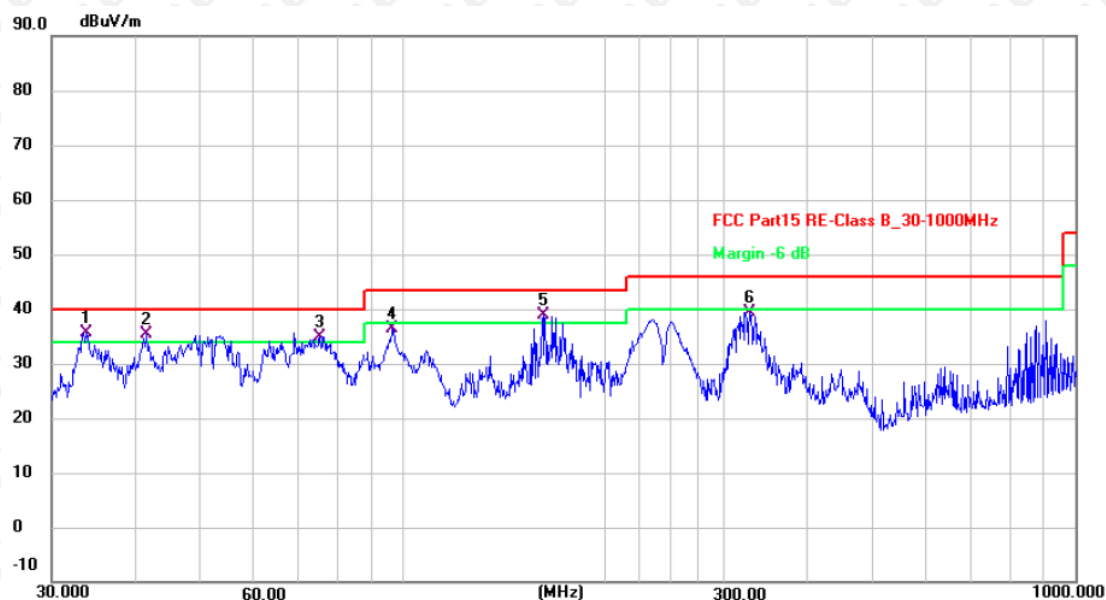

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	33.7986	49.02	-13.47	35.55	40.00	-4.45	QP
2 !	41.5670	48.51	-13.08	35.43	40.00	-4.57	QP
3 !	75.1821	50.98	-16.07	34.91	40.00	-5.09	QP
4	96.4360	54.25	-17.80	36.45	43.50	-7.05	QP
5 !	162.0413	51.29	-12.34	38.95	43.50	-4.55	QP
6	327.8872	51.04	-11.64	39.40	46.00	-6.60	QP


Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Run S

Above 1 GHz Test Results:

Antenna polarity: H


Worst case-GFSK(low channel)

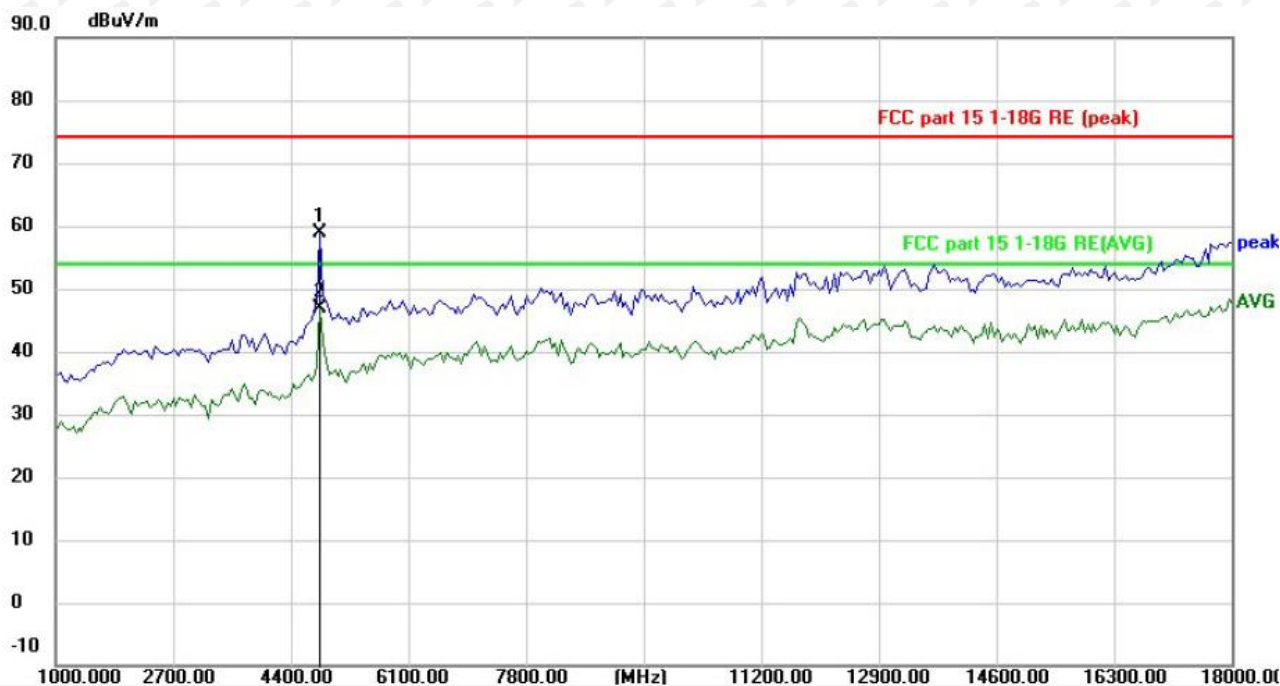

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		4825.000	45.02	13.82	58.84	74.00	-15.16	peak
2	*	4825.000	33.05	13.82	46.87	54.00	-7.13	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Antenna polarity: V

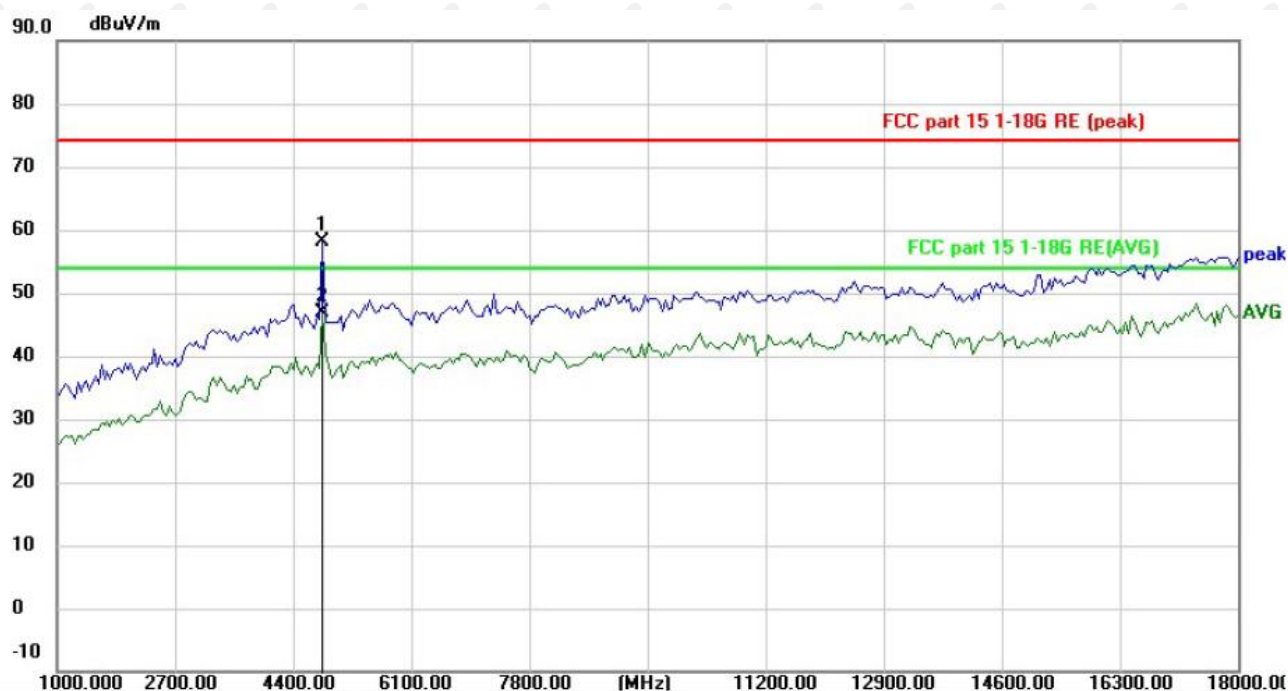

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		4825.000	44.42	13.82	58.24	74.00	-15.76	peak
2	*	4825.000	33.12	13.82	46.94	54.00	-7.06	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit


Antenna polarity: H
Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		23740.000	63.36	-8.45	54.91	74.00	-19.09	peak
2		23740.000	51.29	-8.45	42.84	54.00	-11.16	AVG
3		24335.000	63.66	-7.55	56.11	74.00	-17.89	peak
4		24335.000	51.36	-7.55	43.81	54.00	-10.19	AVG
5		24807.500	65.26	-6.83	58.43	74.00	-15.57	peak
6	*	24807.500	54.73	-6.83	47.90	54.00	-6.10	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Antenna polarity: V

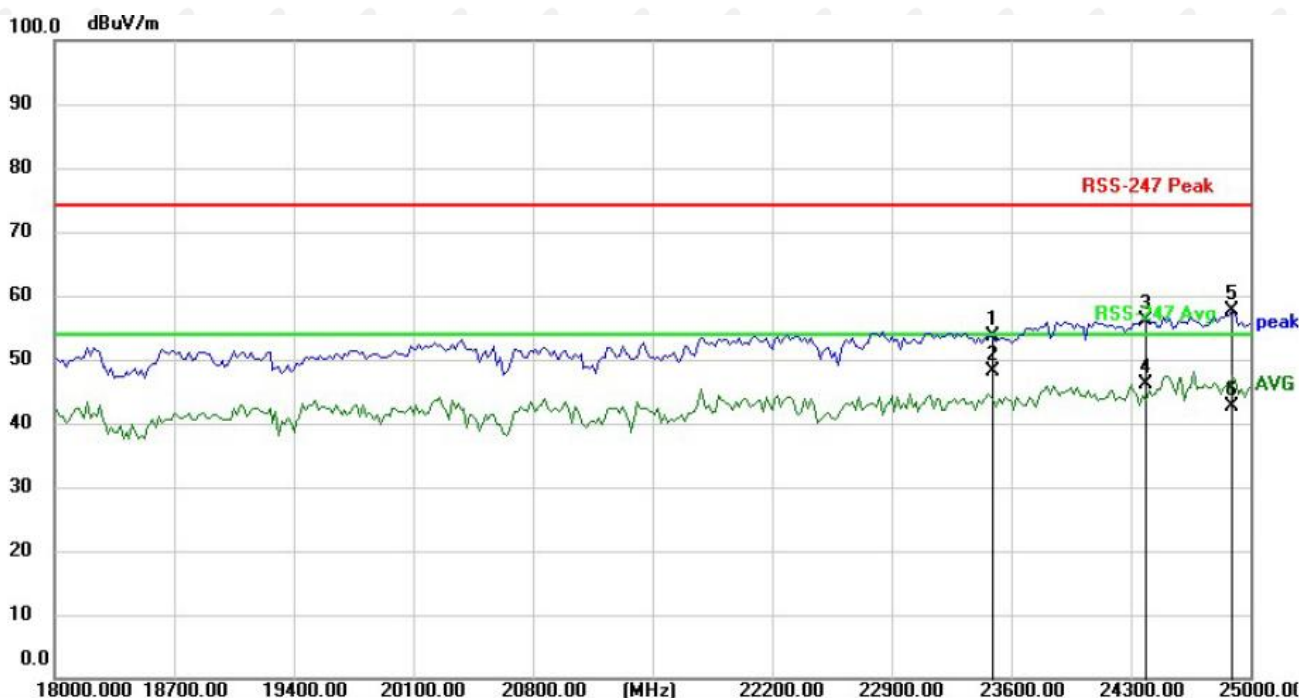

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		23495.000	62.49	-8.82	53.67	74.00	-20.33	peak
2	*	23495.000	56.97	-8.82	48.15	54.00	-5.85	AVG
3		24387.500	63.69	-7.47	56.22	74.00	-17.78	peak
4		24387.500	53.59	-7.47	46.12	54.00	-7.88	AVG
5		24895.000	64.38	-6.70	57.68	74.00	-16.32	peak
6		24895.000	49.43	-6.70	42.73	54.00	-11.27	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Remark:

(1) Measuring frequencies from 9KHz to the 25 GHz, The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report.


(2). All modes of GFSK were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported for below 1GHz test.

(3). By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.

(4). Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

Restricted bands around fundamental frequency (Radiated)


Antenna polarity: H
GFSK(Low channel)

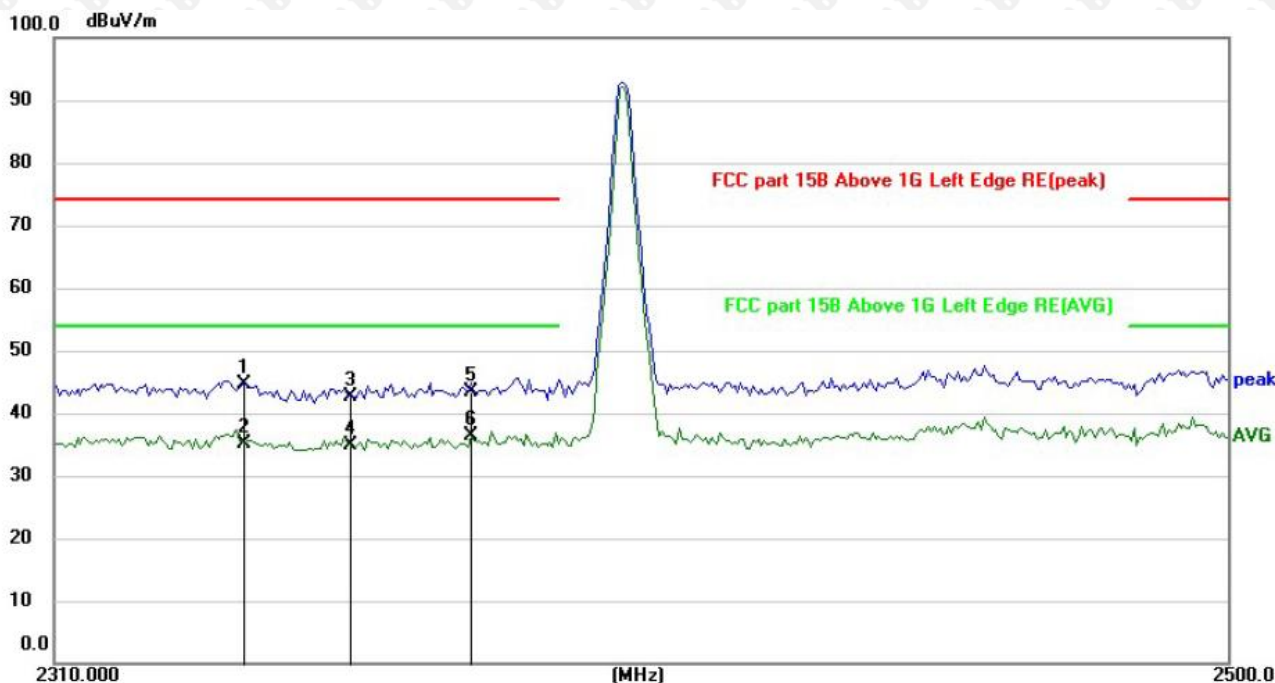

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBm	dB	Detector
1		2339.400	40.98	3.60	44.58	74.00	-29.42	peak
2		2339.400	31.65	3.60	35.25	54.00	-18.75	AVG
3		2356.567	38.86	3.68	42.54	74.00	-31.46	peak
4		2356.567	31.10	3.68	34.78	54.00	-19.22	AVG
5		2375.268	39.63	3.77	43.40	74.00	-30.60	peak
6	*	2375.268	32.64	3.77	36.41	54.00	-17.59	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit


Antenna polarity: V

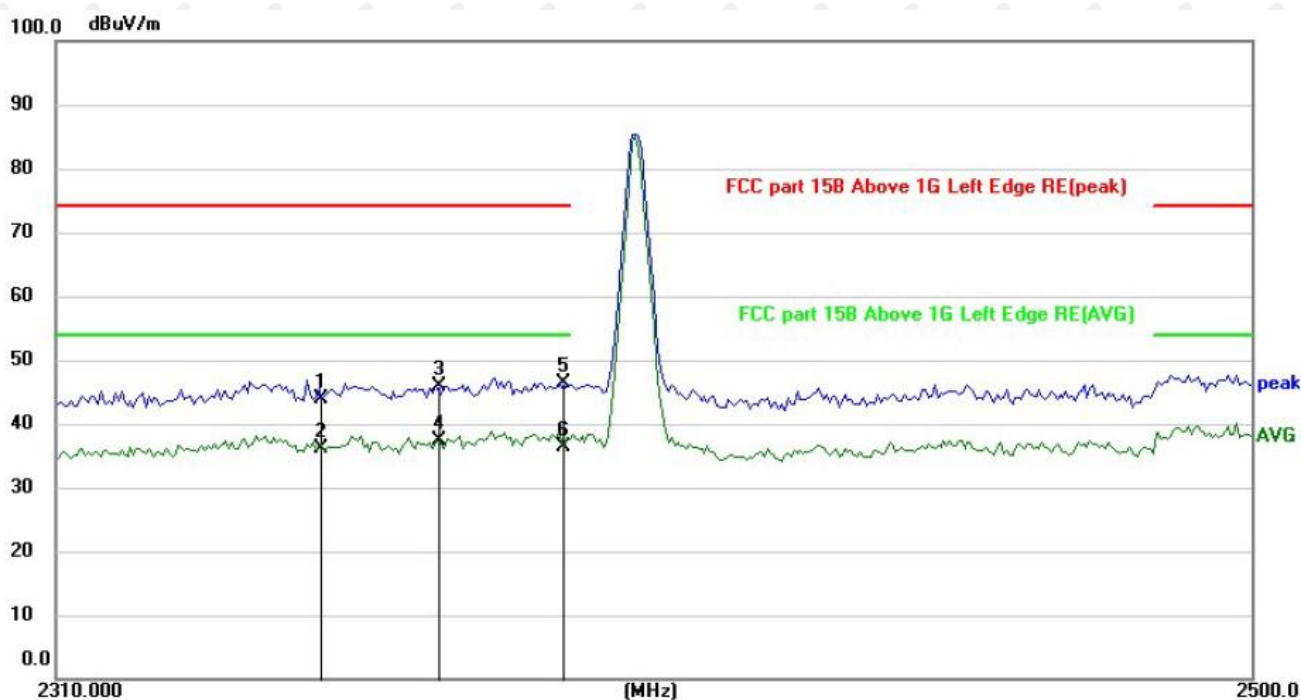

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			
			dBuV	dB	dBuV/m	dB/m	dB	Detector
1		2350.985	40.32	3.65	43.97	74.00	-30.03	peak
2		2350.985	32.44	3.65	36.09	54.00	-17.91	AVG
3		2368.706	42.15	3.74	45.89	74.00	-28.11	peak
4	*	2368.706	33.69	3.74	37.43	54.00	-16.57	AVG
5		2388.447	42.45	3.83	46.28	74.00	-27.72	peak
6		2388.447	32.64	3.83	36.47	54.00	-17.53	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit


Antenna polarity: H
GFSK(High channel)

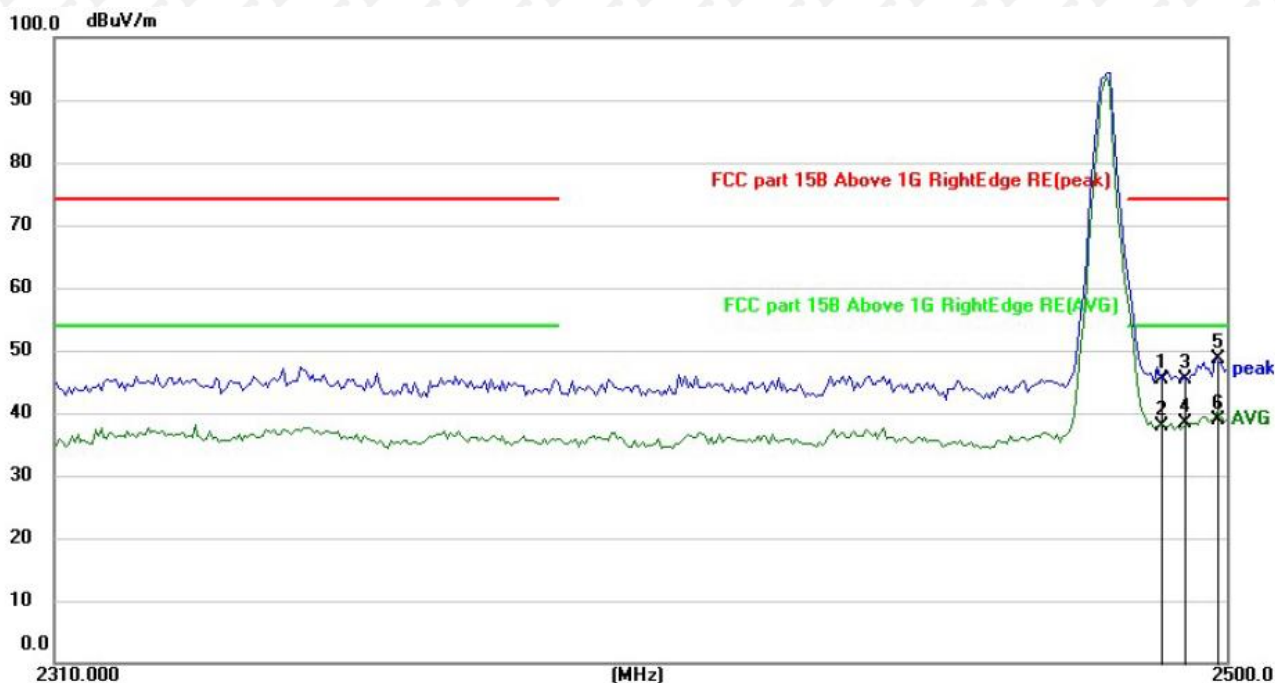

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		2489.155	41.01	4.29	45.30	74.00	-28.70	peak
2		2489.155	33.51	4.29	37.80	54.00	-16.20	AVG
3		2493.093	41.09	4.31	45.40	74.00	-28.60	peak
4		2493.093	33.99	4.31	38.30	54.00	-15.70	AVG
5		2498.025	44.34	4.34	48.68	74.00	-25.32	peak
6	*	2498.025	34.65	4.34	38.99	54.00	-15.01	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Antenna polarity: V

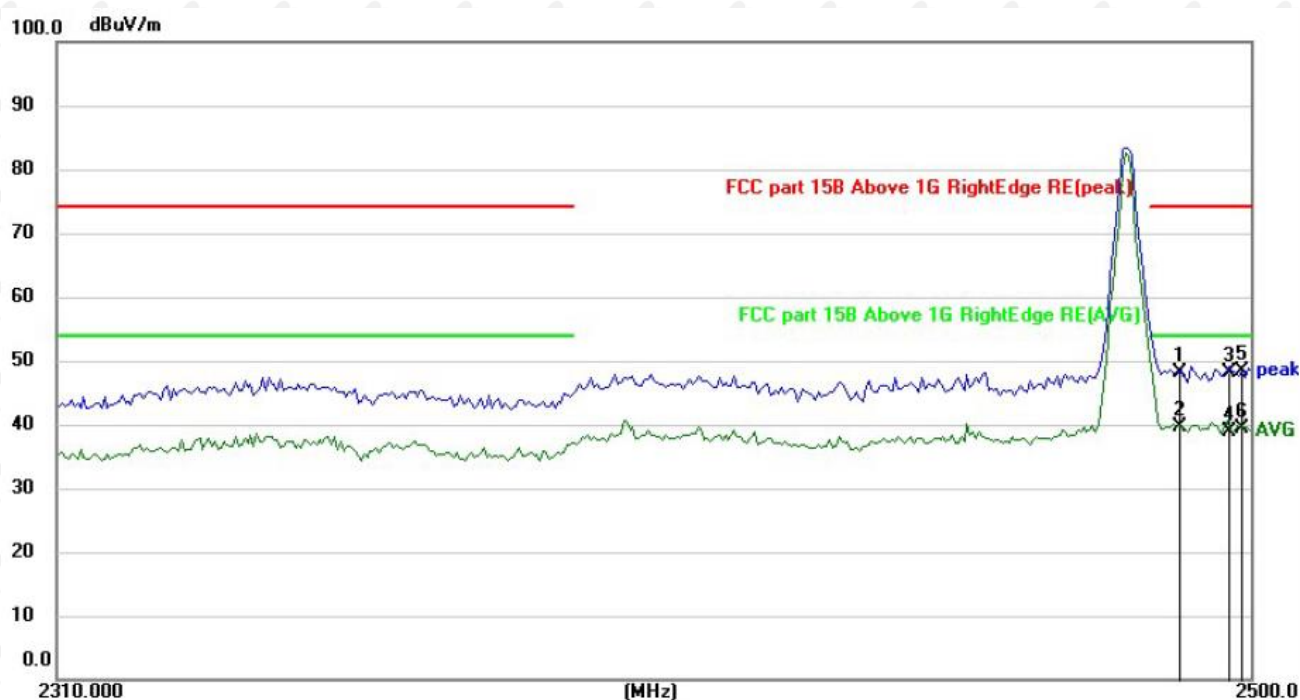

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		2488.171	43.76	4.29	48.05	74.00	-25.95	peak
2	*	2488.171	35.26	4.29	39.55	54.00	-14.45	AVG
3		2496.051	43.85	4.33	48.18	74.00	-25.82	peak
4		2496.051	34.63	4.33	38.96	54.00	-15.04	AVG
5		2498.518	44.08	4.34	48.42	74.00	-25.58	peak
6		2498.518	35.10	4.34	39.44	54.00	-14.56	AVG


Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Run plus

Above 1 GHz Test Results:

Antenna polarity: H


Worst case-GFSK(low channel)

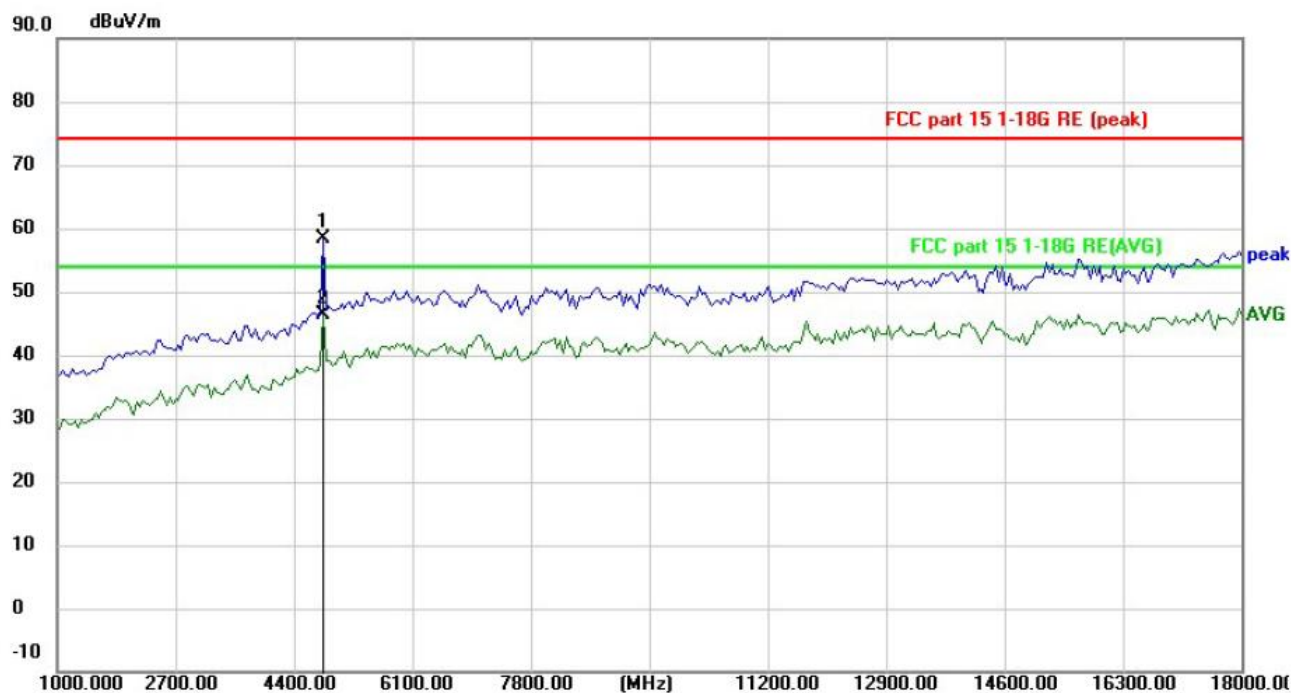

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		4825.000	44.52	13.82	58.34	74.00	-15.66	peak
2	*	4825.000	32.55	13.82	46.37	54.00	-7.63	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit


Antenna polarity: V

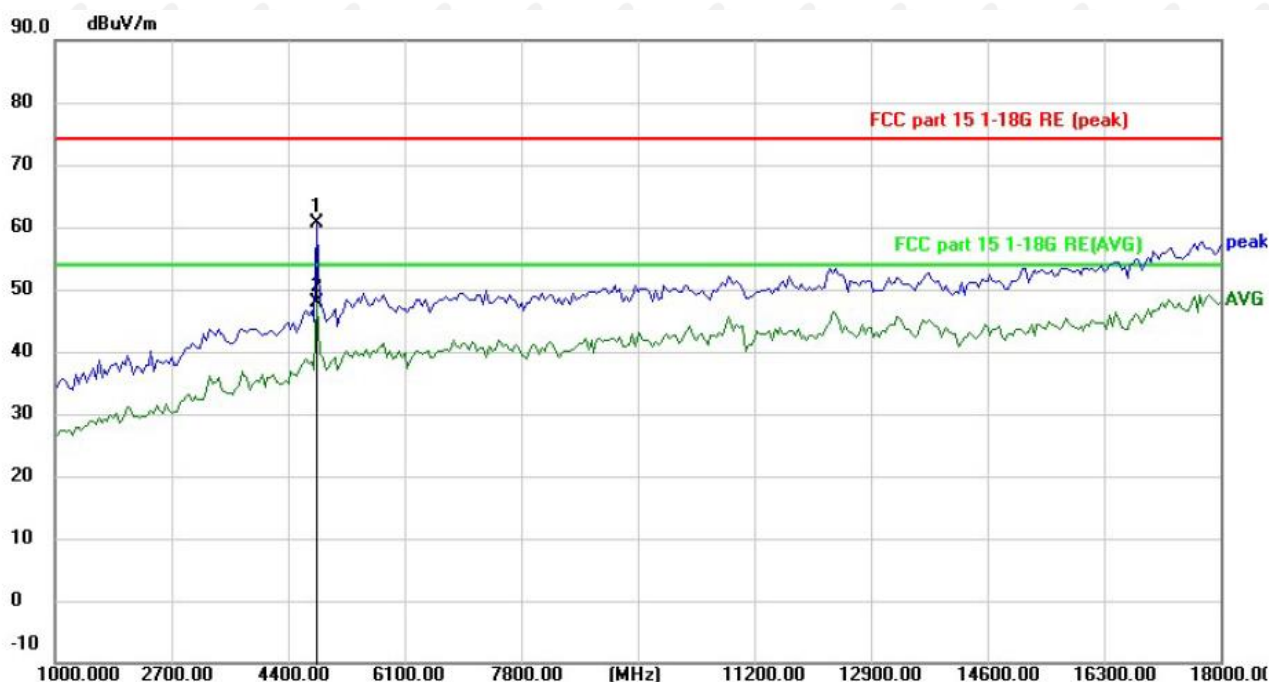

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			
			dBuV	dB	dBuV/m	dB/m	dB	Detector
1		4825.000	46.92	13.82	60.74	74.00	-13.26	peak
2	*	4825.000	34.12	13.82	47.94	54.00	-6.06	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit


Antenna polarity: H
Worst case-GFSK(low channel)

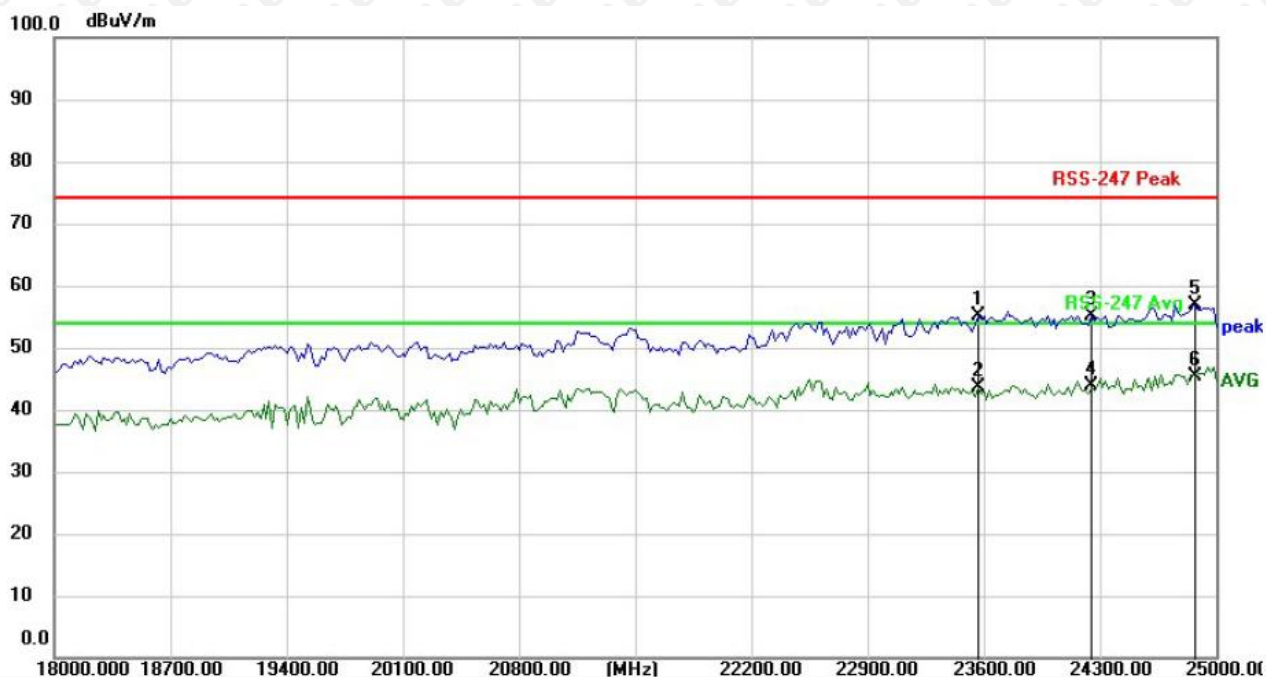

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		23565.000	63.82	-8.71	55.11	74.00	-18.89	peak
2		23565.000	52.37	-8.71	43.66	54.00	-10.34	AVG
3		24247.500	62.84	-7.68	55.16	74.00	-18.84	peak
4		24247.500	51.51	-7.68	43.83	54.00	-10.17	AVG
5		24877.500	63.59	-6.73	56.86	74.00	-17.14	peak
6	*	24877.500	52.07	-6.73	45.34	54.00	-8.66	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Antenna polarity: V

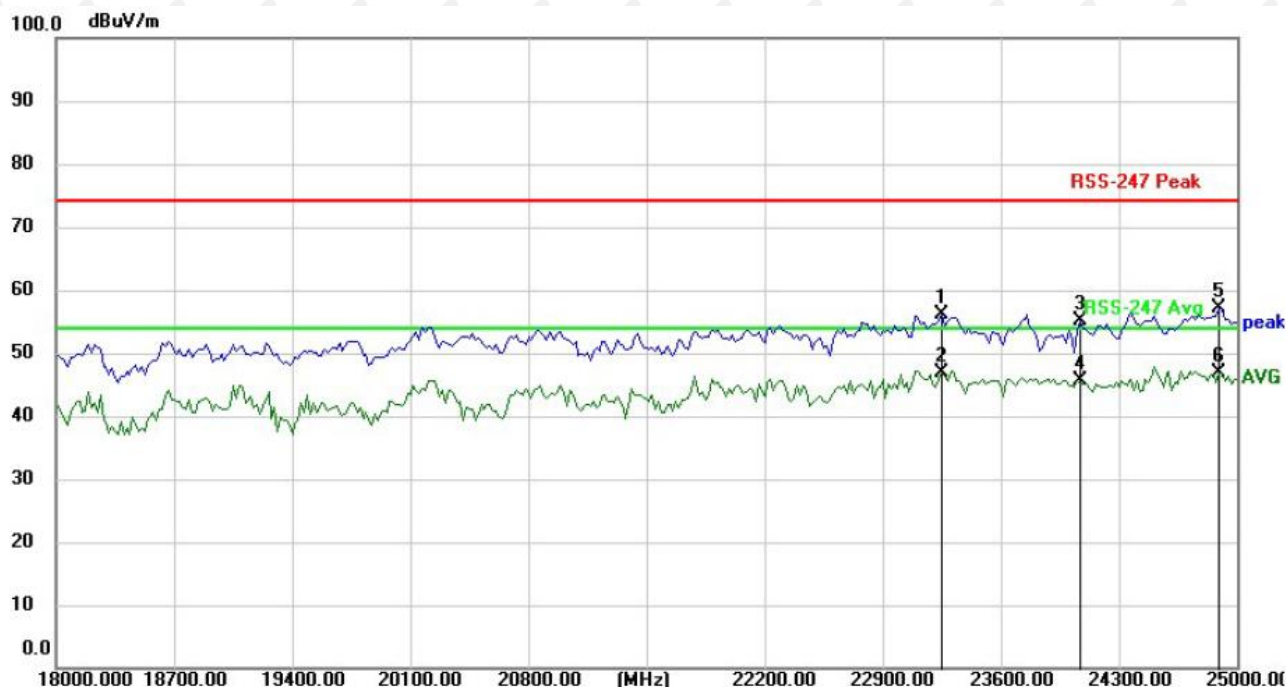

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		23250.000	65.26	-9.19	56.07	74.00	-17.93	peak
2	*	23250.000	56.00	-9.19	46.81	54.00	-7.19	AVG
3		24072.500	63.08	-7.95	55.13	74.00	-18.87	peak
4		24072.500	53.50	-7.95	45.55	54.00	-8.45	AVG
5		24895.000	63.88	-6.70	57.18	74.00	-16.82	peak
6		24895.000	53.47	-6.70	46.77	54.00	-7.23	AVG


Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Remark:

- (1) Measuring frequencies from 9KHz to the 25 GHz, The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report.
- (2) All modes of GFSK were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported for below 1GHz test.
- (3) By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- (4) Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

Restricted bands around fundamental frequency (Radiated)


Antenna polarity: H
GFSK(Low channel)

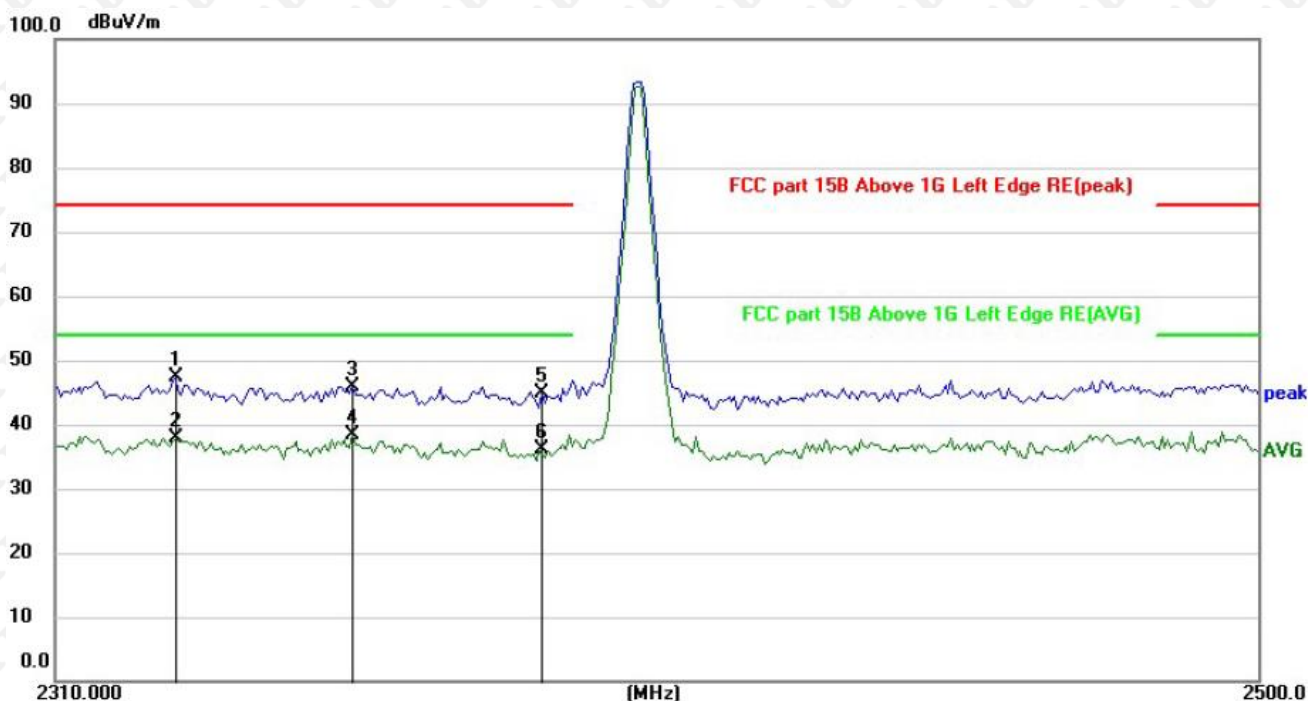

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		2328.331	43.92	3.55	47.47	74.00	-26.53	peak
2		2328.331	34.31	3.55	37.86	54.00	-16.14	AVG
3		2355.636	42.29	3.68	45.97	74.00	-28.03	peak
4	*	2355.636	34.62	3.68	38.30	54.00	-15.70	AVG
5		2385.145	40.96	3.81	44.77	74.00	-29.23	peak
6		2385.145	32.32	3.81	36.13	54.00	-17.87	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit


Antenna polarity: V

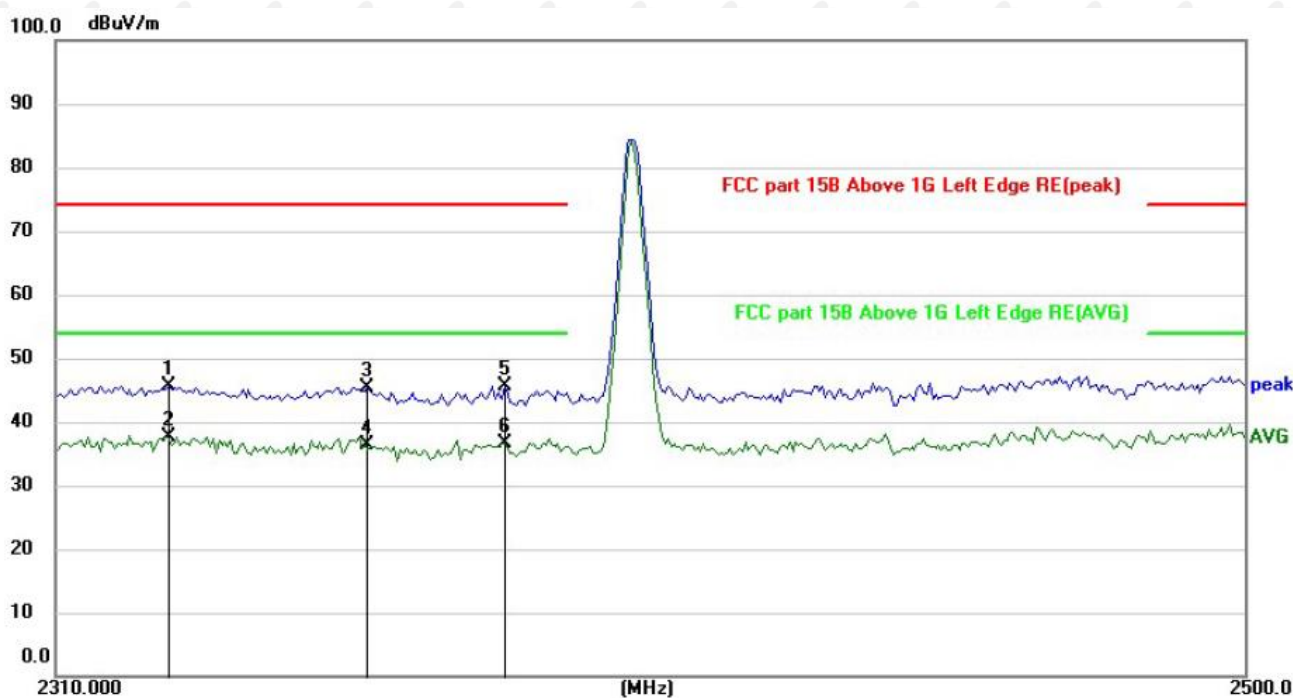

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		2327.411	42.04	3.55	45.59	74.00	-28.41	peak
2	*	2327.411	34.10	3.55	37.65	54.00	-16.35	AVG
3		2358.430	41.75	3.69	45.44	74.00	-28.56	peak
4		2358.430	32.62	3.69	36.31	54.00	-17.69	AVG
5		2379.966	41.91	3.79	45.70	74.00	-28.30	peak
6		2379.966	32.95	3.79	36.74	54.00	-17.26	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit


Antenna polarity: H
GFSK(High channel)

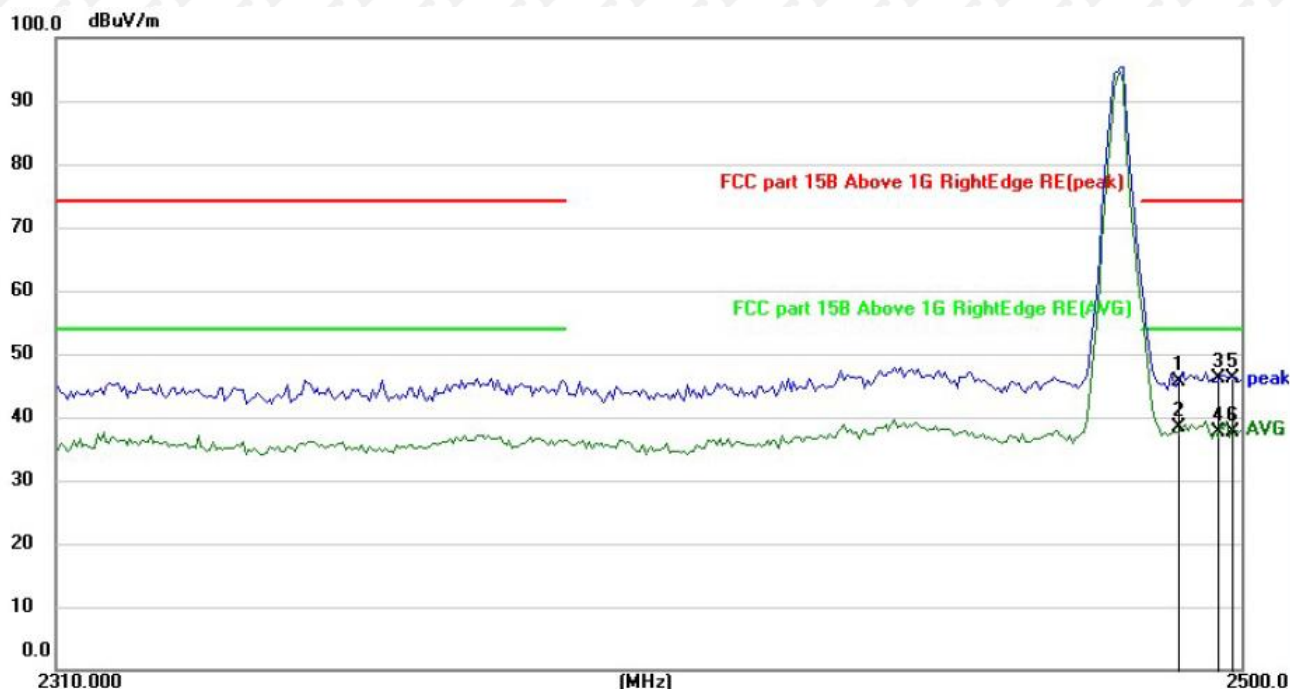

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		2489.647	41.39	4.30	45.69	74.00	-28.31	peak
2	*	2489.647	34.00	4.30	38.30	54.00	-15.70	AVG
3		2495.558	41.72	4.32	46.04	74.00	-27.96	peak
4		2495.558	33.30	4.32	37.62	54.00	-16.38	AVG
5		2498.025	41.84	4.34	46.18	74.00	-27.82	peak
6		2498.025	33.32	4.34	37.66	54.00	-16.34	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Antenna polarity: V

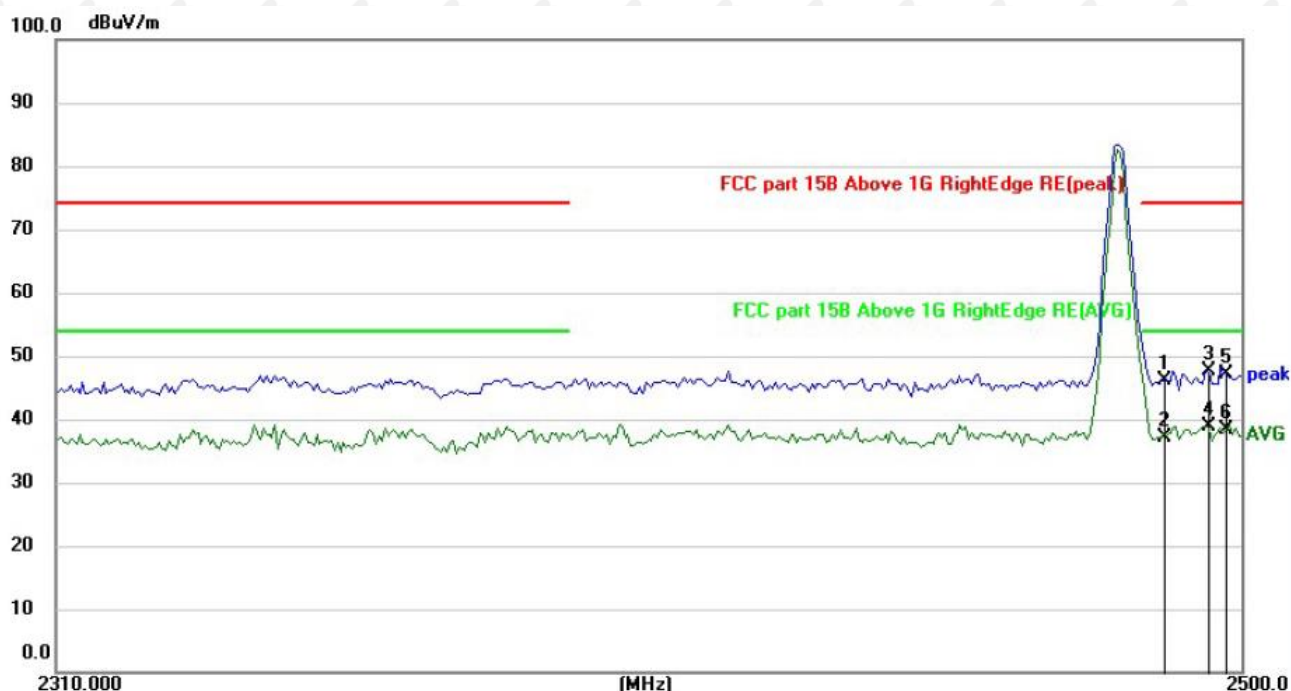


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		2486.697	41.84	4.28	46.12	74.00	-27.88	peak
2		2486.697	32.78	4.28	37.06	54.00	-16.94	AVG
3		2494.079	43.19	4.32	47.51	74.00	-26.49	peak
4	*	2494.079	34.49	4.32	38.81	54.00	-15.19	AVG
5		2497.531	42.68	4.33	47.01	74.00	-26.99	peak
6		2497.531	33.93	4.33	38.26	54.00	-15.74	AVG

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

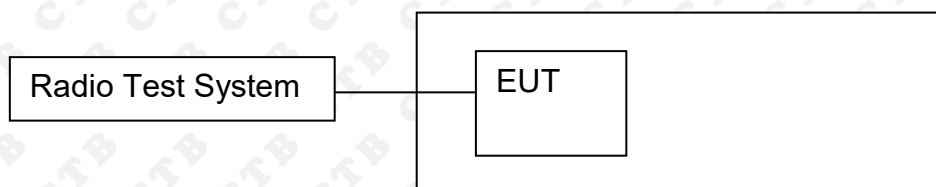

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto


Detector function = peak, Trace = max hold

Above 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto


Detector function = peak, Trace = max hold

8.4 Test Result

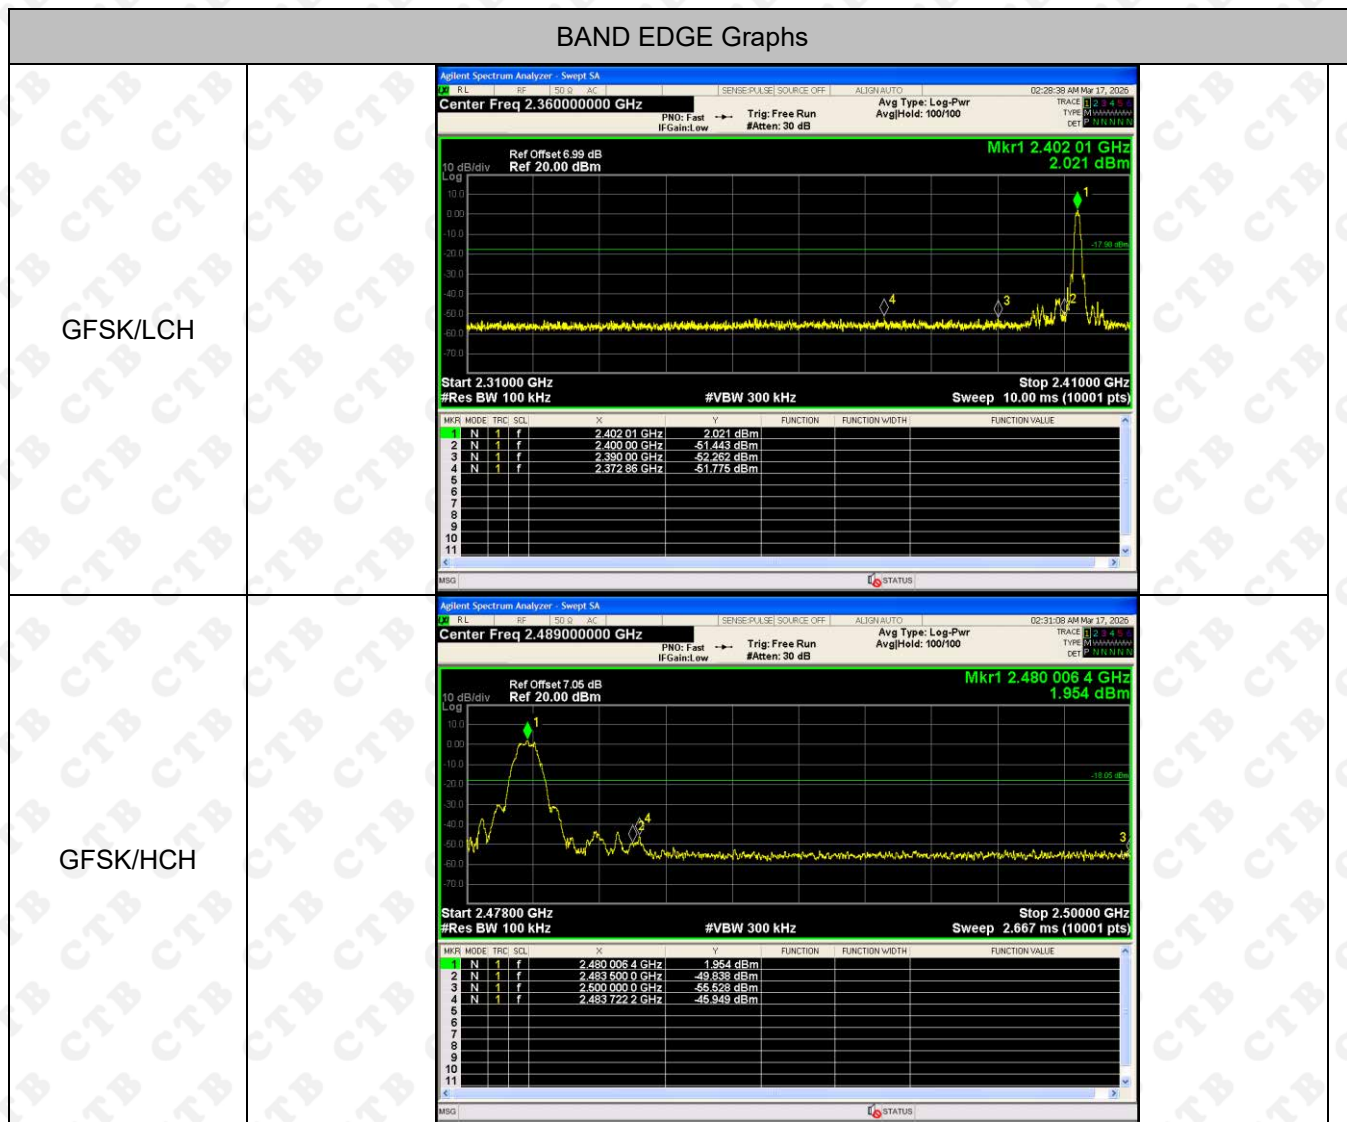


RF Conducted Spurious Emissions Graphs


GFSK/LCH

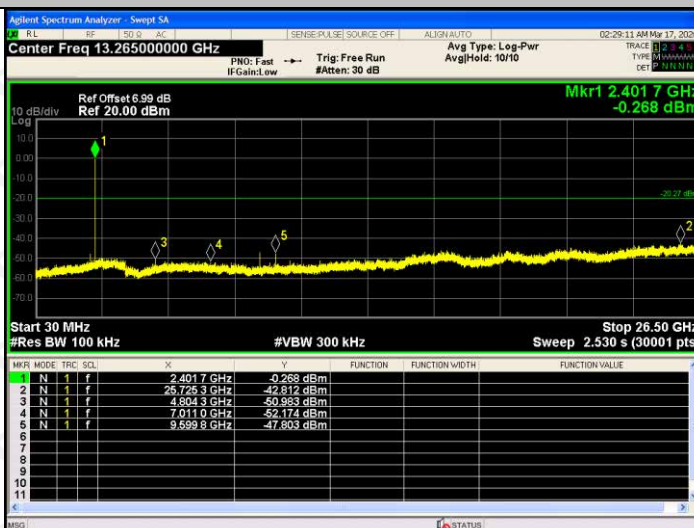

GFSK/MCH

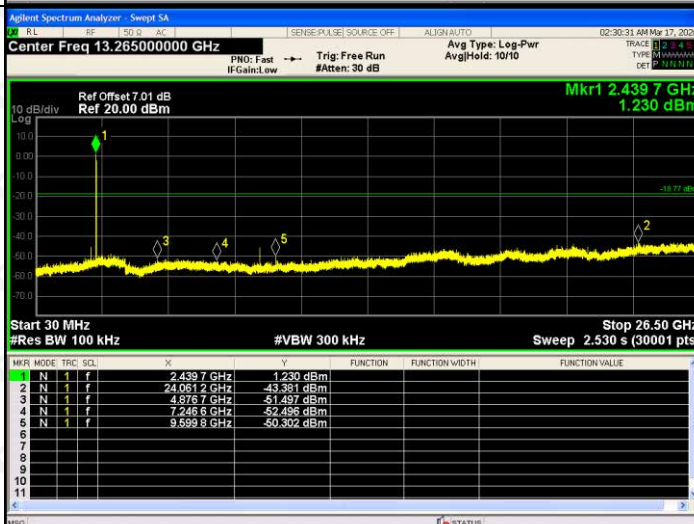


GFSK/HCH

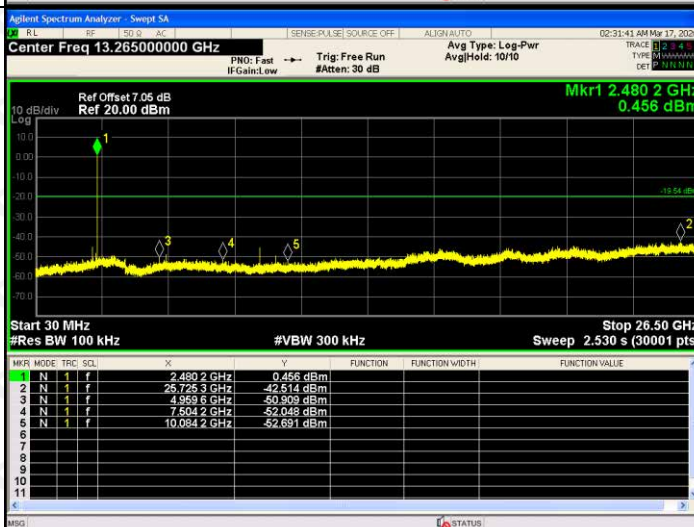

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

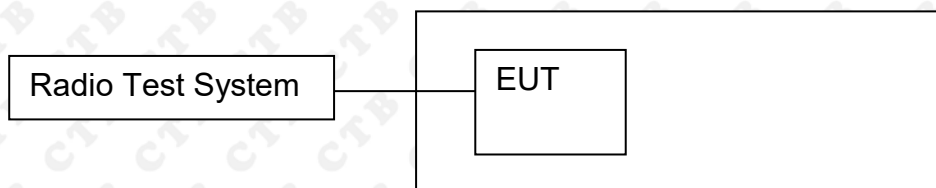

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Channel power measurement. Sweep = auto; Detector Function = peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.


9.4 Test Result

Mode	Channel.	Maximum Output Power [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2.034	30	PASS
	MCH	1.35	30	PASS
	HCH	2.015	30	PASS

Duty Cycle


Mode	Channel.	Duty Cycle(%)	Correction Factor (dB)
GFSK	LCH	100	0
	MCH	100	0
	HCH	100	0

Test Graph:

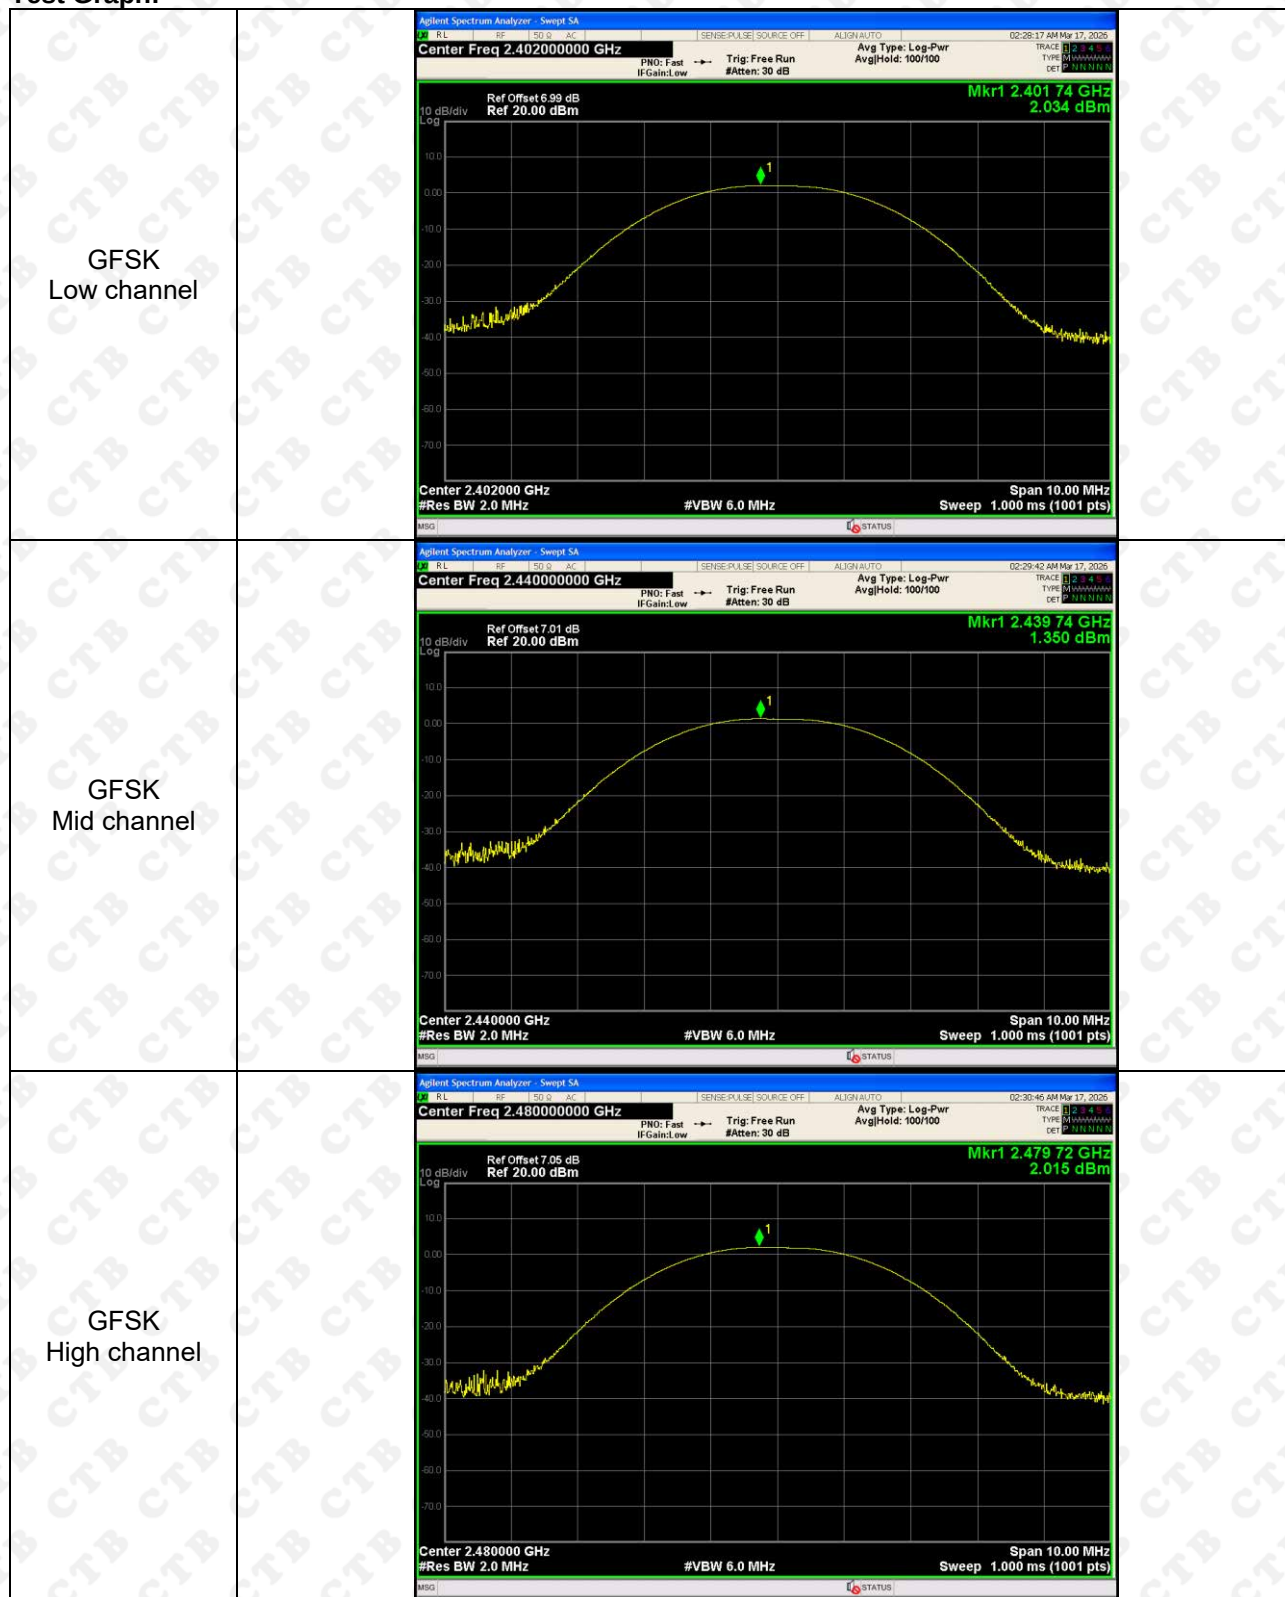

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

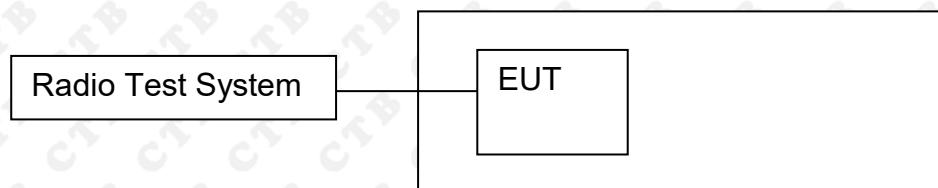

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{kHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure




1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit (kHz)	Result
GFSK	Low channel	0.665	≥ 500	PASS
	Mid channel	0.668	≥ 500	PASS
	High channel	0.665	≥ 500	PASS


Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:

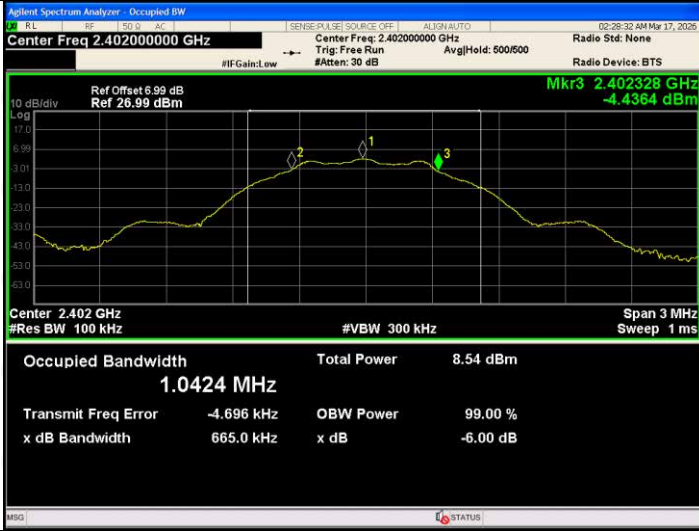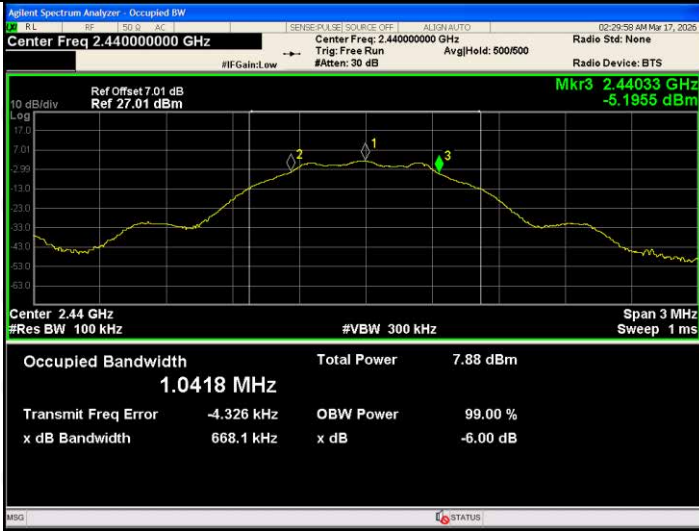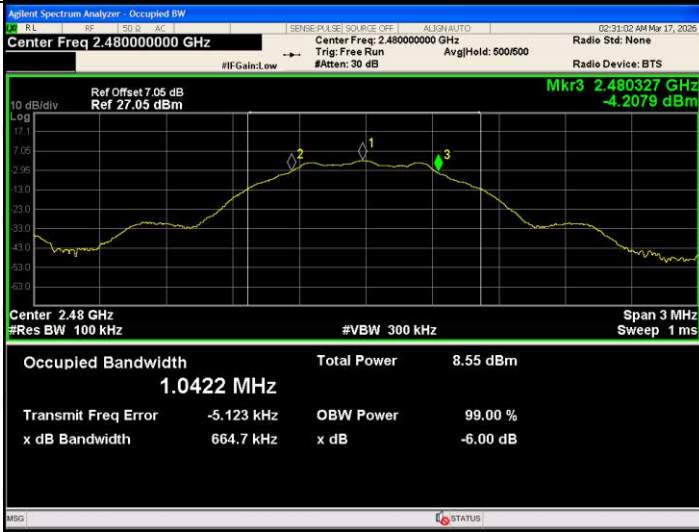GFSK Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Ref Offset 6.99 dB Ref 26.99 dBm Mkr3 2.402328 GHz -4.4364 dBm Center 2.402 GHz #Res BW 100 kHz Occupied Bandwidth 1.0424 MHz Total Power 8.54 dBm Transmit Freq Error -4.696 kHz OBW Power 99.00 % x dB Bandwidth 665.0 kHz x dB -6.00 dB
GFSK Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.44000000 GHz Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.44033 GHz -5.1955 dBm Center 2.44 GHz #Res BW 100 kHz Occupied Bandwidth 1.0418 MHz Total Power 7.88 dBm Transmit Freq Error -4.326 kHz OBW Power 99.00 % x dB Bandwidth 668.1 kHz x dB -6.00 dB
GFSK High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.48000000 GHz Ref Offset 7.05 dB Ref 27.05 dBm Mkr3 2.480327 GHz -4.2079 dBm Center 2.48 GHz #Res BW 100 kHz Occupied Bandwidth 1.0422 MHz Total Power 8.55 dBm Transmit Freq Error -5.123 kHz OBW Power 99.00 % x dB Bandwidth 664.7 kHz x dB -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

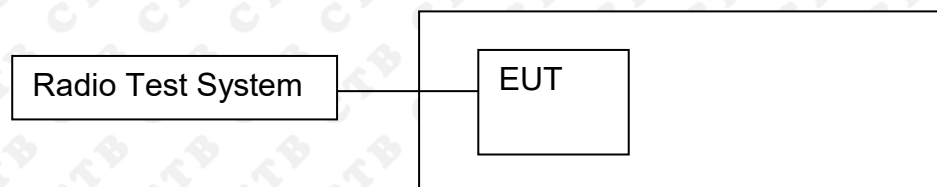

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3kHz)	2400-2483.5	PASS




11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

Mode	Channel.	Power Spectral Density (dBm/3kHz)	Limit(dBm/3kHz)	Verdict
GFSK	LCH	-8.742	8	PASS
	MCH	-9.581	8	PASS
	HCH	-8.764	8	PASS

Test Graph

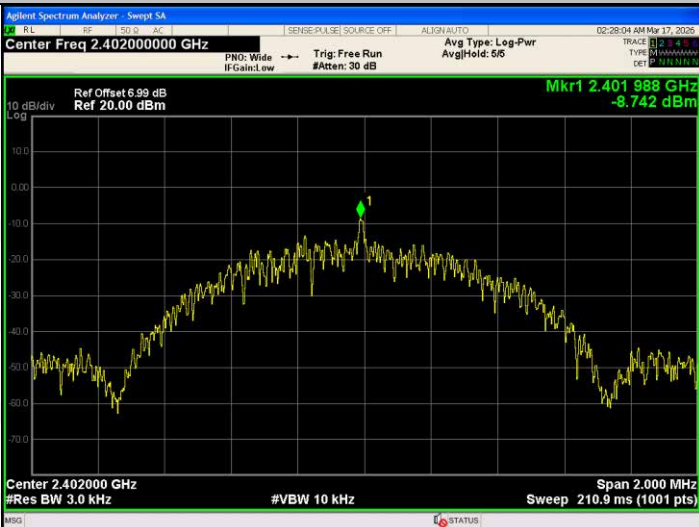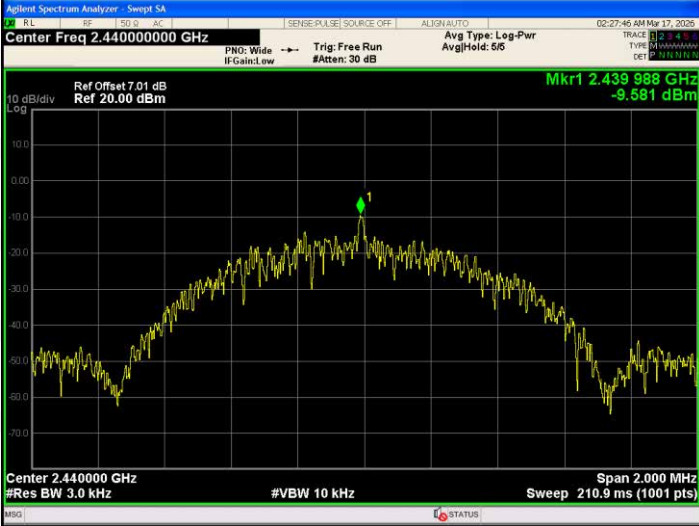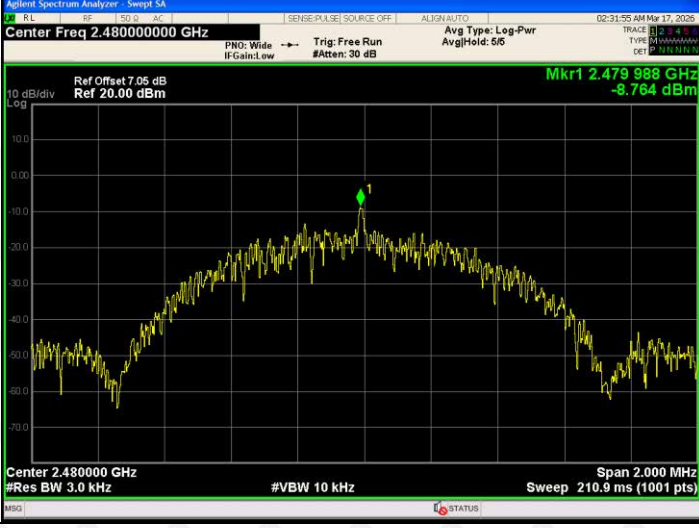Graphs	
GFSK/LCH	
GFSK/MCH	
GFSK/HCH	

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The EUT antenna is PCB antenna. The best case gain of the antenna is 1.7dBi.

13. EUT TEST SETUP PHOTOGRAPHS

Run S :
Radiated Emissions

Below 1G



Above 1G



Conducted emission



Run Plus :
Radiated Emissions

Below 1G



Above 1G



Conducted emission



***** END OF REPORT *****