
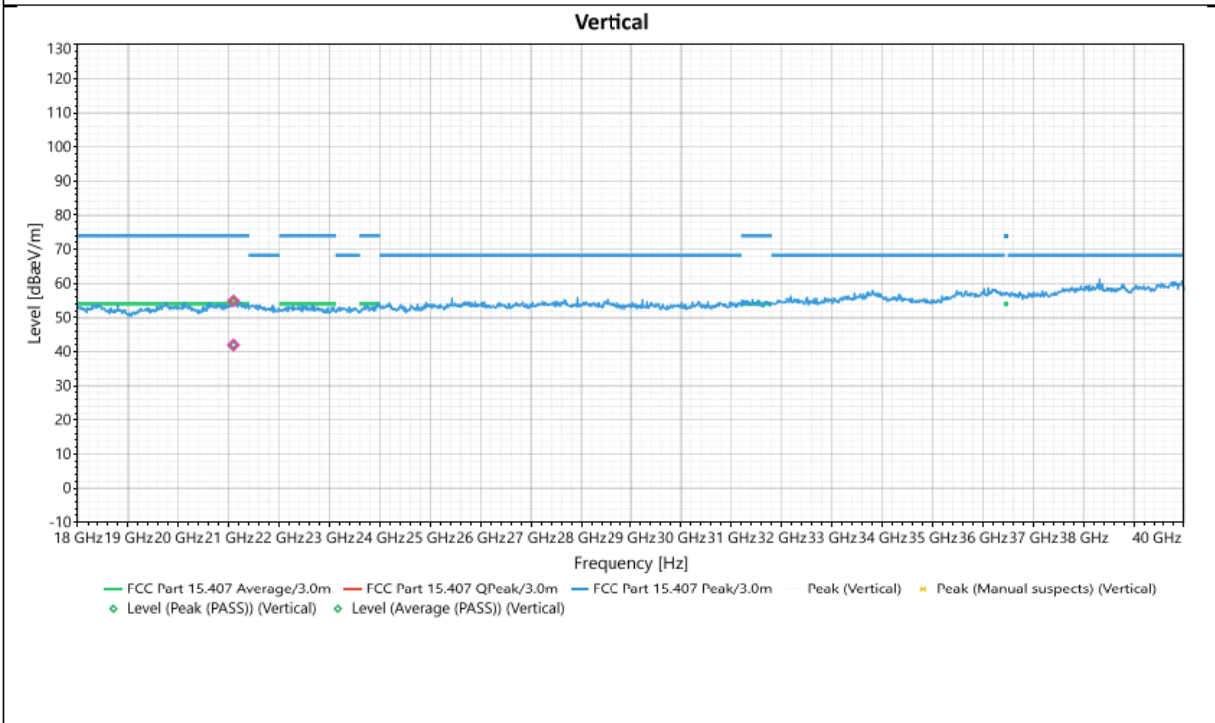


CHANNEL	802.11N HT20 5280 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		


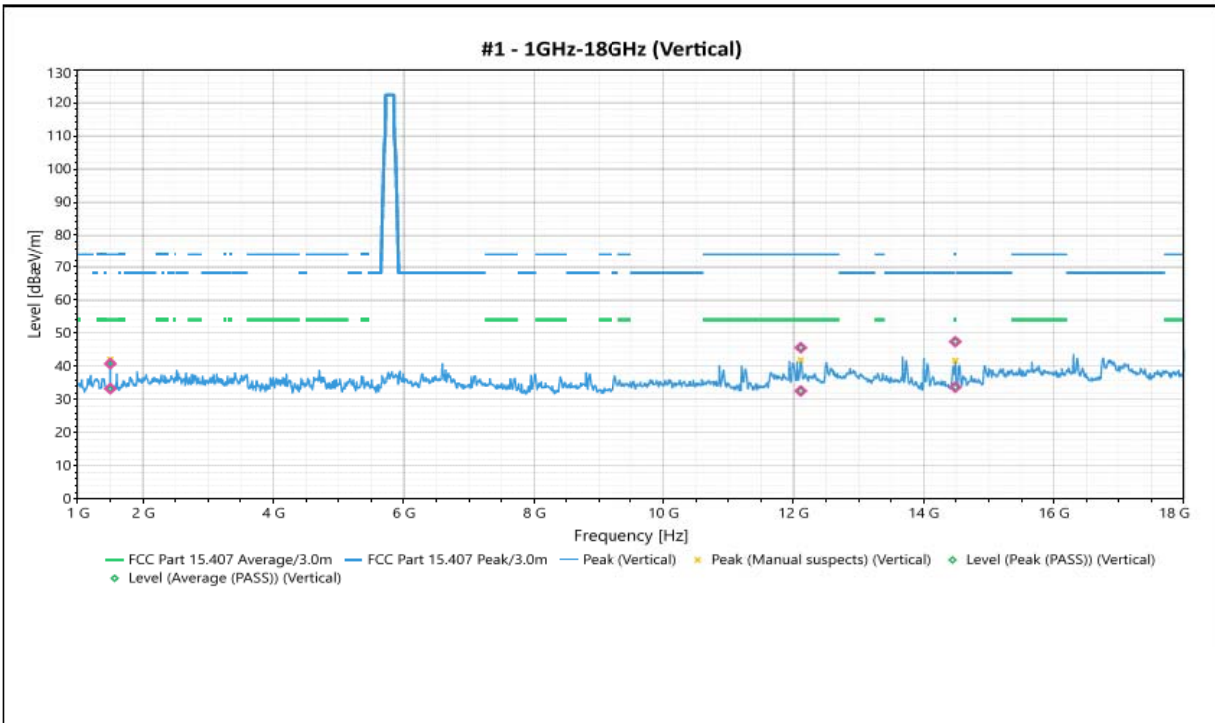


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	1499.7	Vertical	40.806	74	-33.194	1.01	346	-2.5	Peak (PASS)
2	1499.7	Vertical	33.258	54	-20.742	1.01	346	-2.5	Average (PASS)
3	12112.8	Vertical	45.638	74	-28.362	3.09	328	7.54	Peak (PASS)
4	12112.8	Vertical	32.565	54	-21.435	3.09	328	7.54	Average (PASS)
5	14486	Vertical	47.419	74	-26.581	3.12	353	6.7	Peak (PASS)
6	14486	Vertical	33.709	54	-20.291	3.12	353	6.7	Average (PASS)
7	21093.18	Vertical	54.897	74	-19.103	1.97	74	8.63	Peak (PASS)
8	21093.18	Vertical	41.954	54	-12.046	1.97	74	8.63	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT20 5280 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

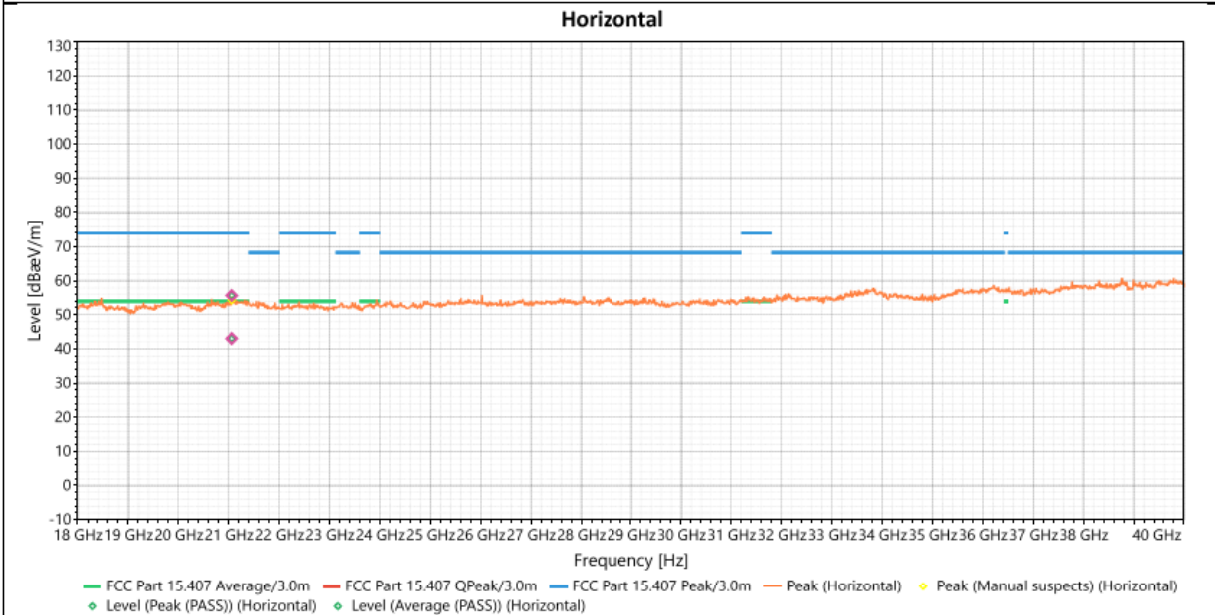
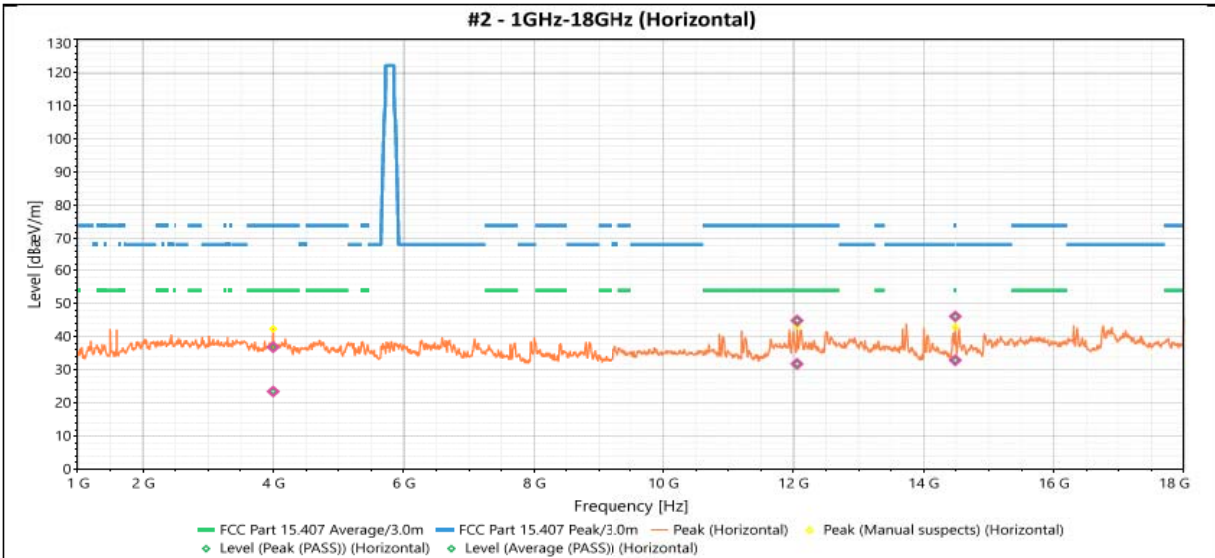


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	3998.7	Horizontal	36.833	74	-37.167	1	313	3.27	Peak (PASS)
2	3998.7	Horizontal	23.463	54	-30.537	1	313	3.27	Average (PASS)
3	12055	Horizontal	44.849	74	-29.151	1.78	55	7.51	Peak (PASS)
4	12055	Horizontal	31.803	54	-22.197	1.78	55	7.51	Average (PASS)
5	14486	Horizontal	46.096	74	-27.904	1.39	212	6.83	Peak (PASS)
6	14486	Horizontal	32.869	54	-21.131	1.39	212	6.83	Average (PASS)
7	21060.1	Horizontal	55.637	74	-18.363	1.79	172	8.5	Peak (PASS)
8	21060.1	Horizontal	43.007	54	-10.993	1.79	172	8.5	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT20 5320 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

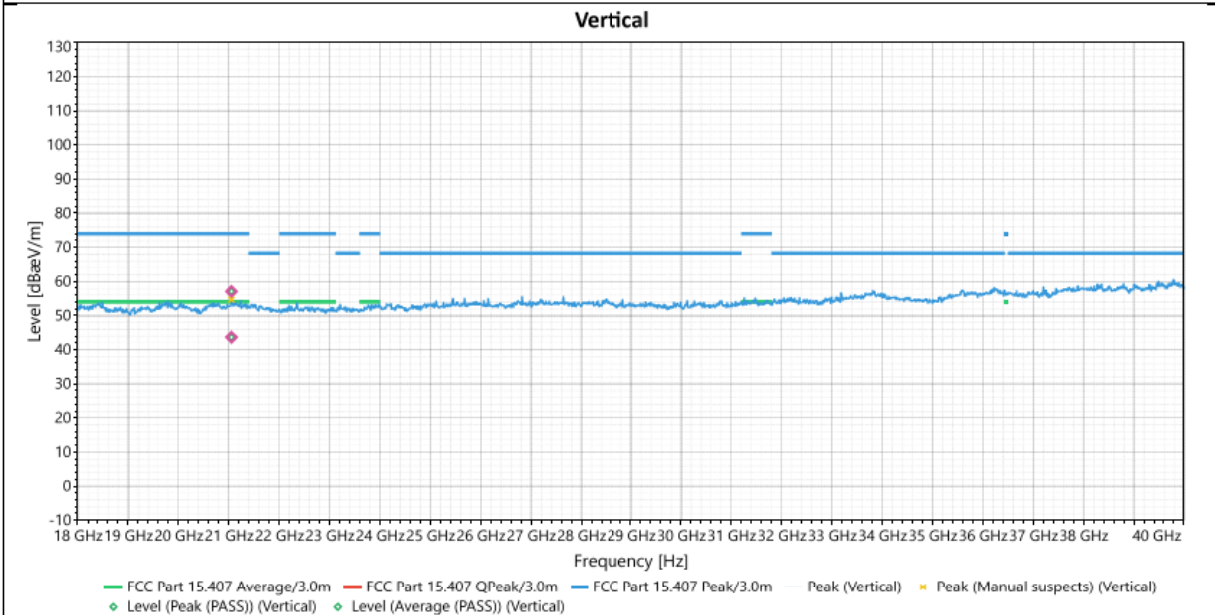
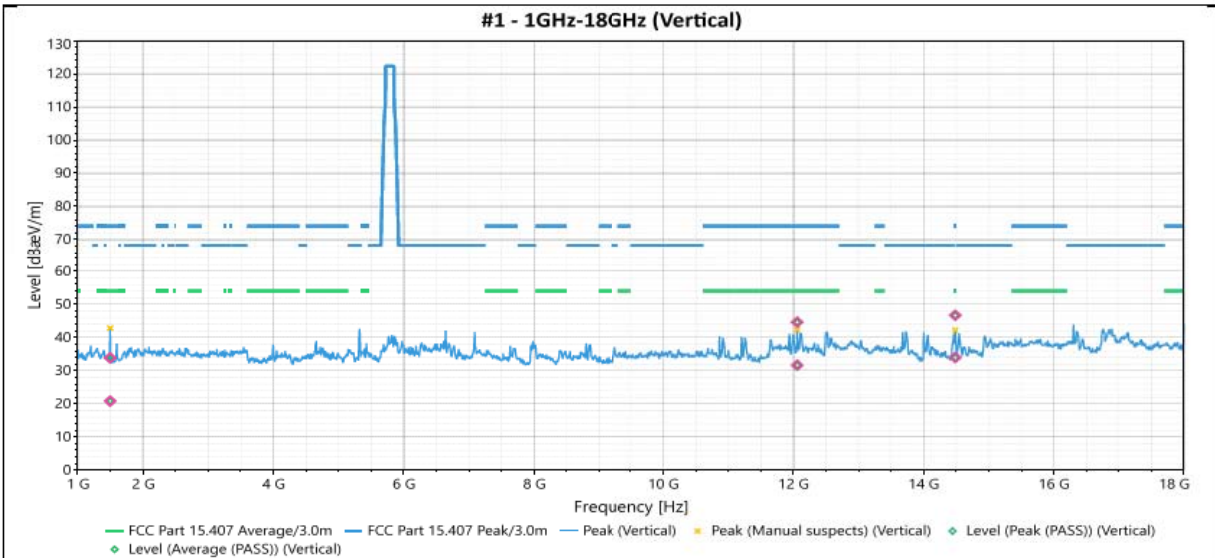


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	1498	Vertical	33.835	74	-40.165	1	244	-2.49	Peak (PASS)
2	1498	Vertical	20.791	54	-33.209	1	244	-2.49	Average (PASS)
3	12056.7	Vertical	44.601	74	-29.399	1.92	63	7.49	Peak (PASS)
4	12056.7	Vertical	31.614	54	-22.386	1.92	63	7.49	Average (PASS)
5	14486	Vertical	46.692	74	-27.308	3.29	280	6.7	Peak (PASS)
6	14486	Vertical	33.935	54	-20.065	3.29	280	6.7	Average (PASS)
7	21053.64	Vertical	57.078	74	-16.922	1.61	168	8.64	Peak (PASS)
8	21053.64	Vertical	43.637	54	-10.363	1.61	168	8.64	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT20 5320 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

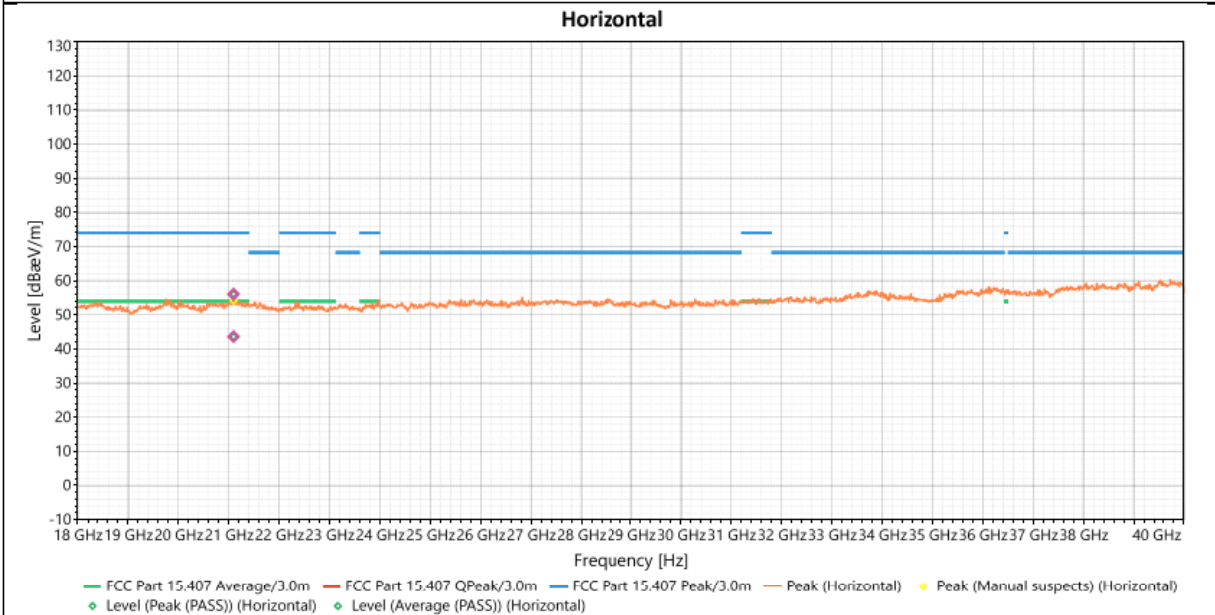
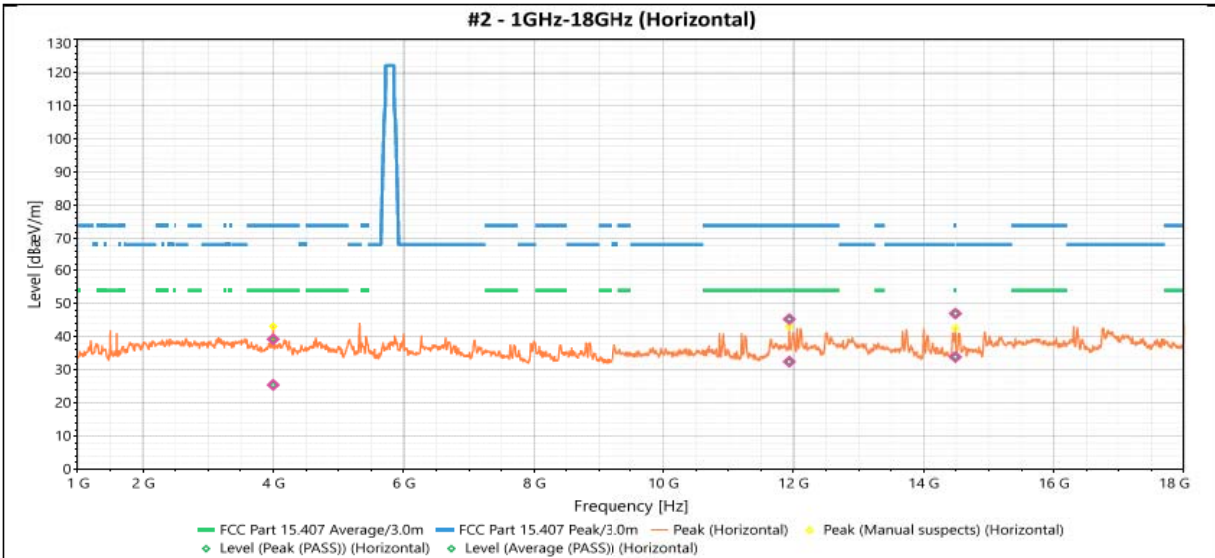


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	3998.7	Horizontal	39.233	74	-34.767	1	27	3.27	Peak (PASS)
2	3998.7	Horizontal	25.447	54	-28.553	1	27	3.27	Average (PASS)
3	11936	Horizontal	45.273	74	-28.727	2.83	248	7.46	Peak (PASS)
4	11936	Horizontal	32.447	54	-21.553	2.83	248	7.46	Average (PASS)
5	14487.7	Horizontal	46.959	74	-27.041	3.01	128	6.83	Peak (PASS)
6	14487.7	Horizontal	33.866	54	-20.134	3.01	128	6.83	Average (PASS)
7	21093.1	Horizontal	56.05	74	-17.95	1.6	270	8.49	Peak (PASS)
8	21093.1	Horizontal	43.617	54	-10.383	1.6	270	8.49	Average (PASS)

REMARKS:

1. Level (dBUV) = Reading (dBUV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT20 5500 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

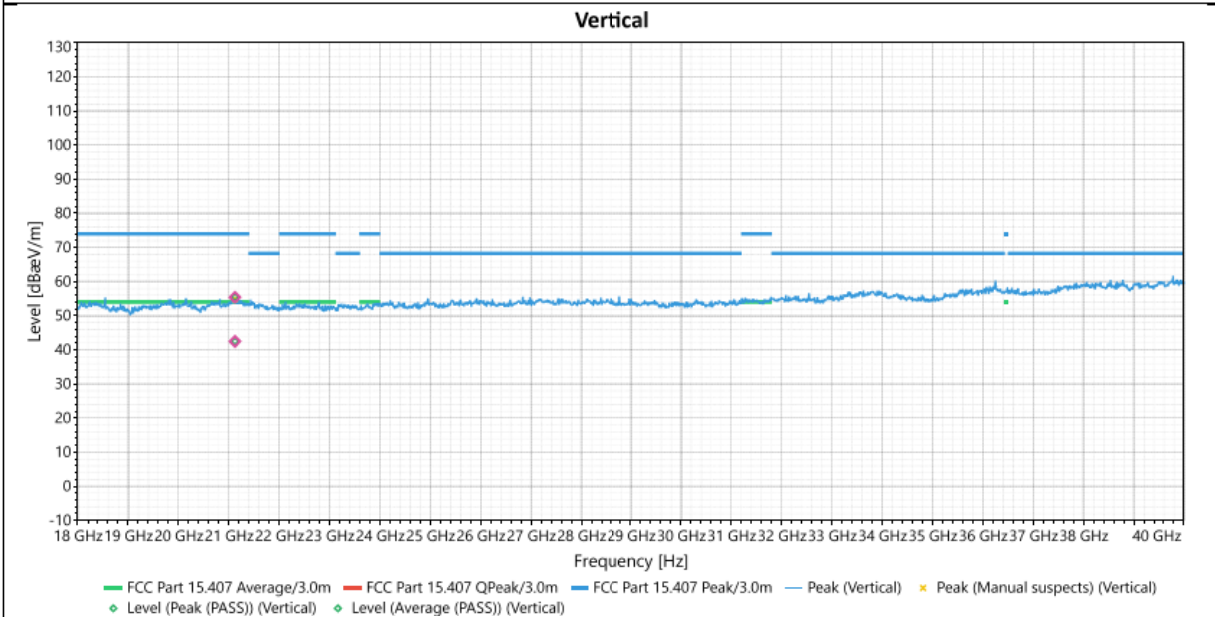
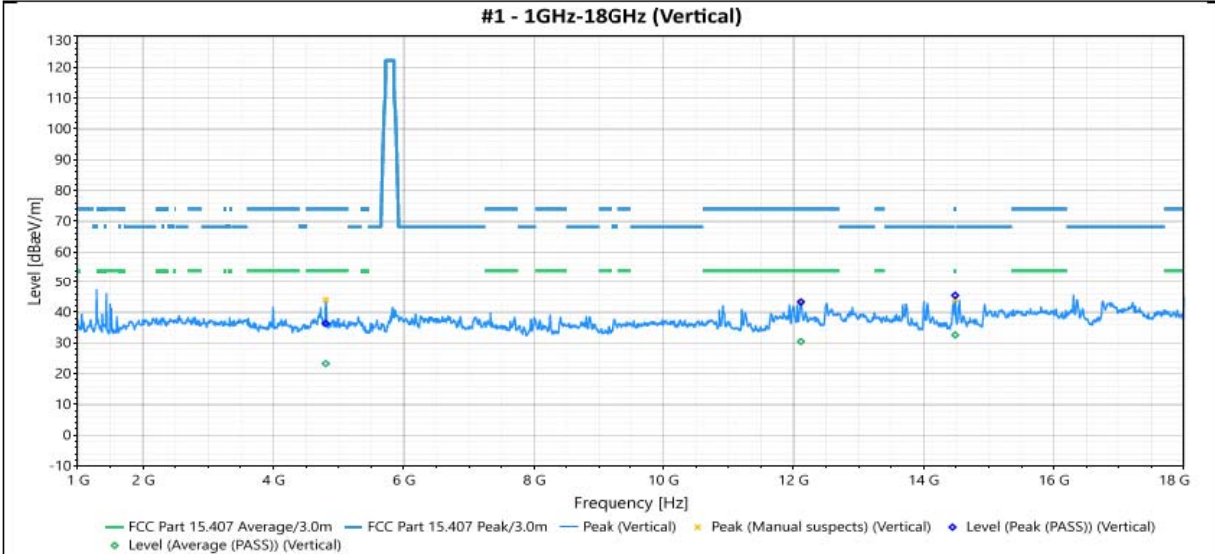


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	4804.5	Vertical	36.327	74	-37.673	1	347	3.99	Peak (PASS)
2	4804.5	Vertical	23.289	54	-30.711	1	347	3.99	Average (PASS)
3	12114.5	Vertical	43.317	74	-30.683	2.58	355	7.54	Peak (PASS)
4	12114.5	Vertical	30.467	54	-23.533	2.58	355	7.54	Average (PASS)
5	14484.3	Vertical	45.455	74	-28.545	2.91	93	6.7	Peak (PASS)
6	14484.3	Vertical	32.602	54	-21.398	2.91	93	6.7	Average (PASS)
7	21121.84	Vertical	55.369	74	-18.631	1.7	238	8.59	Peak (PASS)
8	21121.84	Vertical	42.454	54	-11.546	1.7	238	8.59	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT20 5500 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

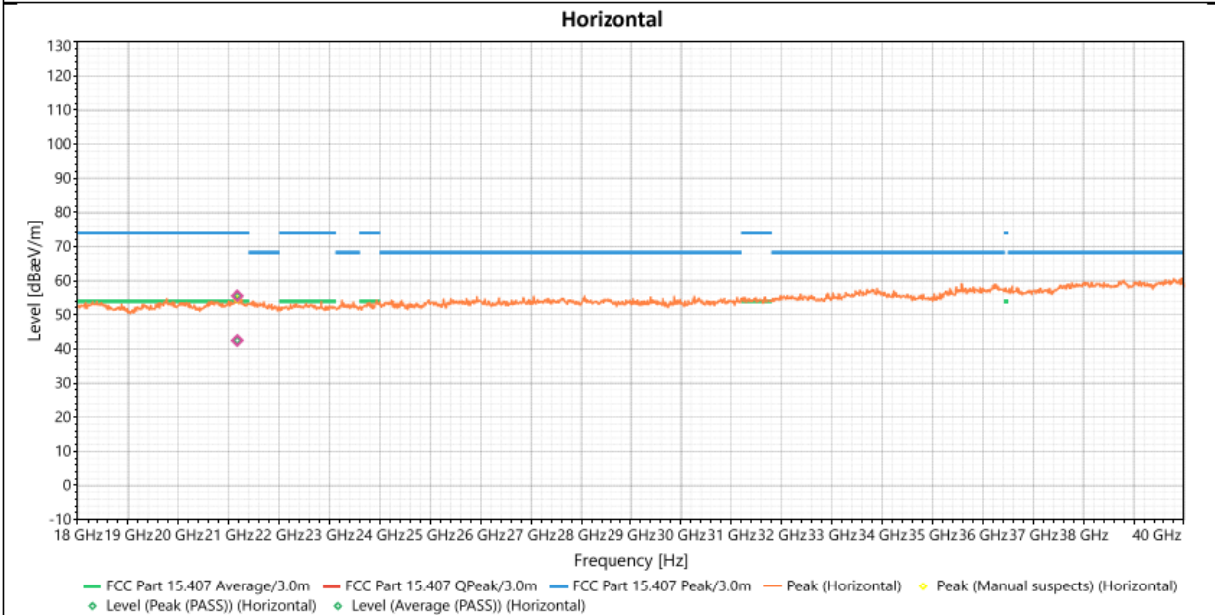
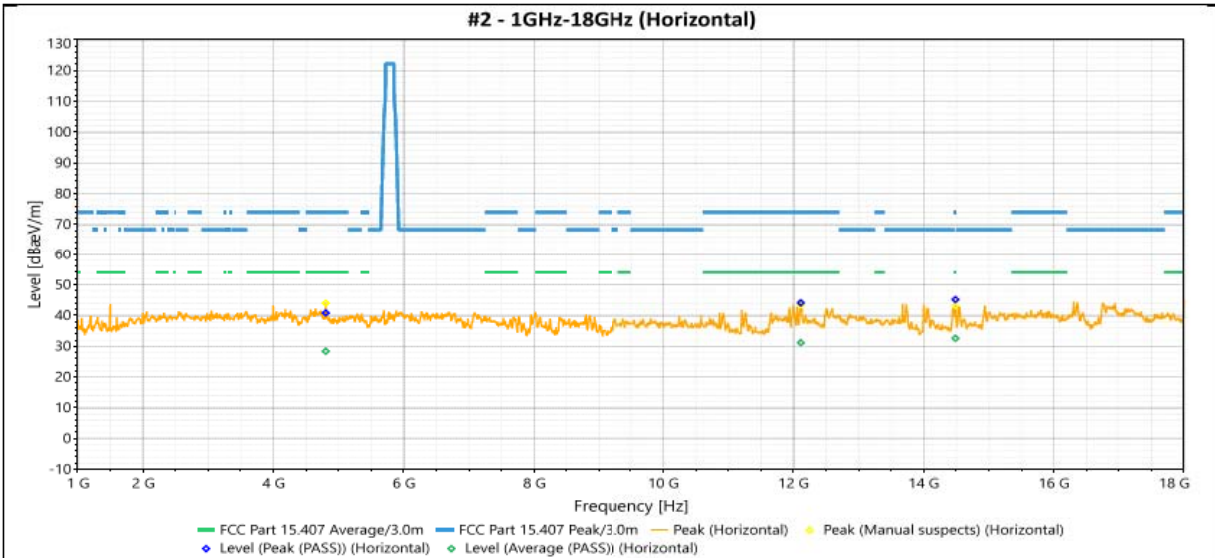


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	4804.5	Horizontal	40.801	74	-33.199	1.63	355	3.97	Peak (PASS)
2	4804.5	Horizontal	28.332	54	-25.668	1.63	355	3.97	Average (PASS)
3	12112.8	Horizontal	44.106	74	-29.894	2.72	137	7.55	Peak (PASS)
4	12112.8	Horizontal	31.12	54	-22.88	2.72	137	7.55	Average (PASS)
5	14487.7	Horizontal	45.138	74	-28.862	2.4	0	6.83	Peak (PASS)
6	14487.7	Horizontal	32.556	54	-21.444	2.4	0	6.83	Average (PASS)
7	21167.9	Horizontal	55.522	74	-18.478	1.63	356	8.4	Peak (PASS)
8	21167.9	Horizontal	42.469	54	-11.531	1.63	356	8.4	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT20 5580 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

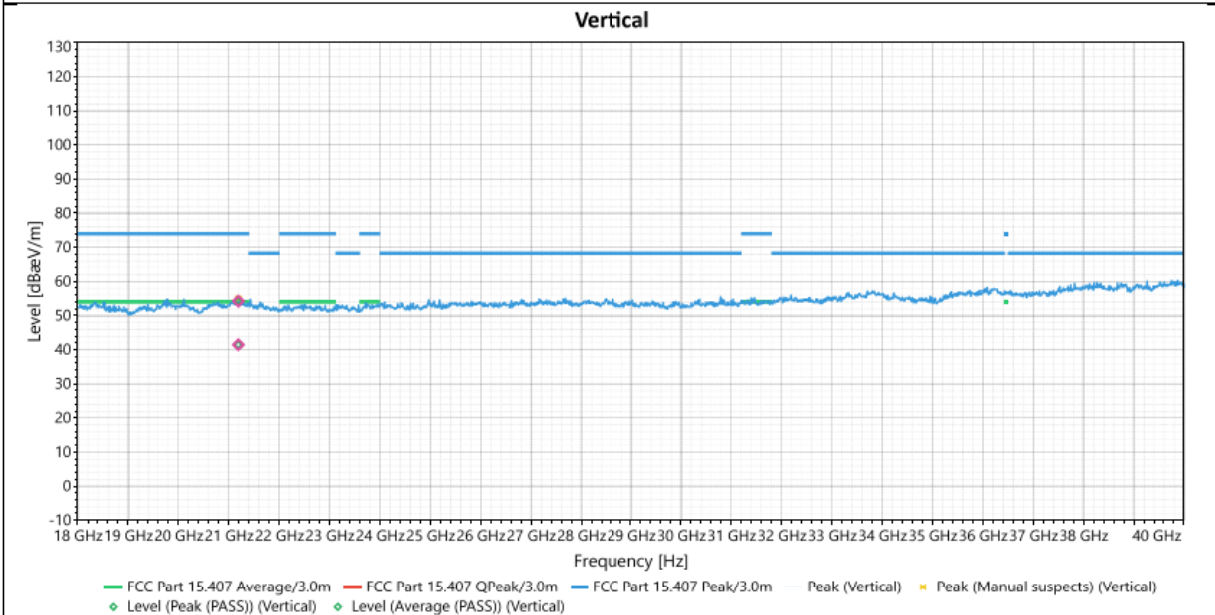
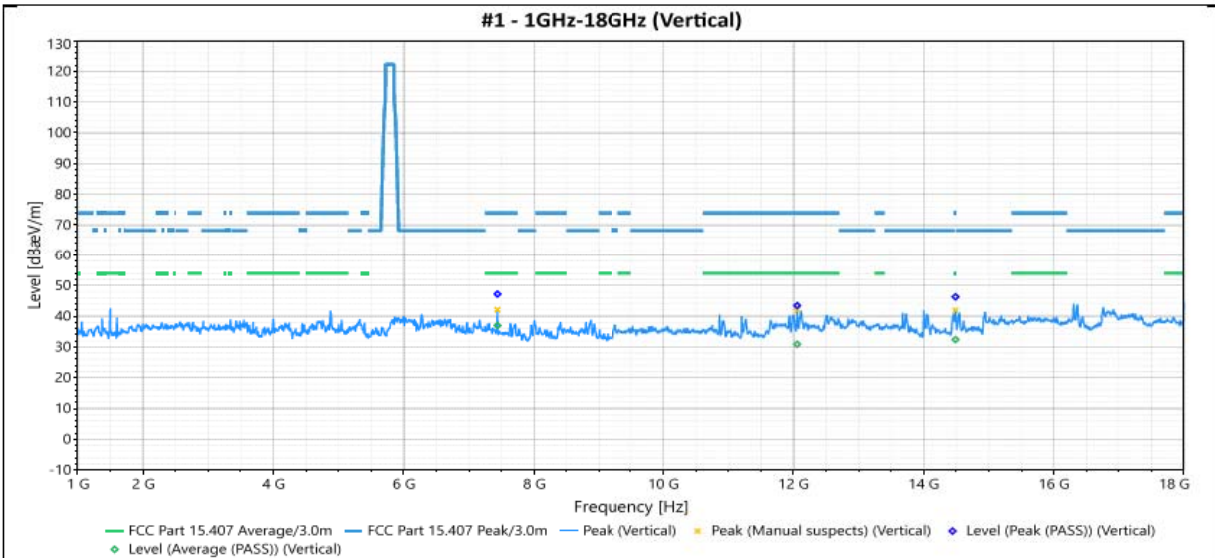


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	7439.5	Vertical	47.149	74	-26.851	1.56	348	5.88	Peak (PASS)
2	7439.5	Vertical	36.944	54	-17.056	1.56	348	5.88	Average (PASS)
3	12056.7	Vertical	43.44	74	-30.56	2.24	316	7.49	Peak (PASS)
4	12056.7	Vertical	30.854	54	-23.146	2.24	316	7.49	Average (PASS)
5	14489.4	Vertical	46.258	74	-27.742	2.8	202	6.71	Peak (PASS)
6	14489.4	Vertical	32.371	54	-21.629	2.8	202	6.71	Average (PASS)
7	21190.03	Vertical	54.225	74	-19.775	1	203	8.47	Peak (PASS)
8	21190.03	Vertical	41.452	54	-12.548	1	203	8.47	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT20 5580 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

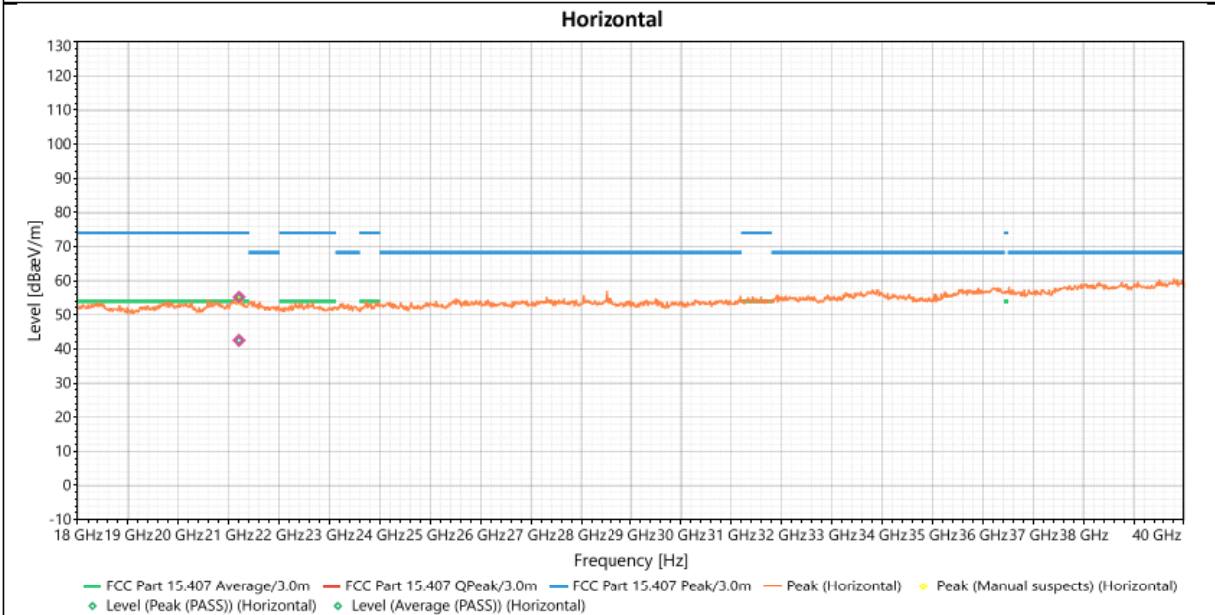
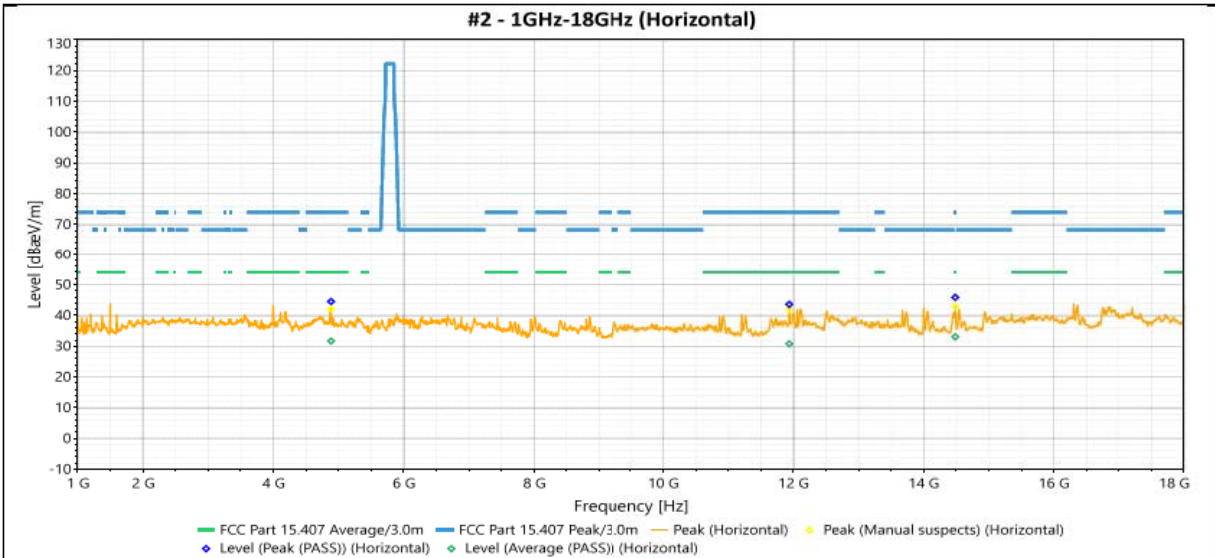


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	4886.1	Horizontal	44.503	74	-29.497	1.79	357	4.02	Peak (PASS)
2	4886.1	Horizontal	31.665	54	-22.335	1.79	357	4.02	Average (PASS)
3	11936	Horizontal	43.613	74	-30.387	2.62	301	7.46	Peak (PASS)
4	11936	Horizontal	30.714	54	-23.286	2.62	301	7.46	Average (PASS)
5	14486	Horizontal	45.832	74	-28.168	3.06	219	6.83	Peak (PASS)
6	14486	Horizontal	33.021	54	-20.979	3.06	219	6.83	Average (PASS)
7	21203.1	Horizontal	55.171	74	-18.829	2	116	8.36	Peak (PASS)
8	21203.1	Horizontal	42.509	54	-11.491	2	116	8.36	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT20 5700 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

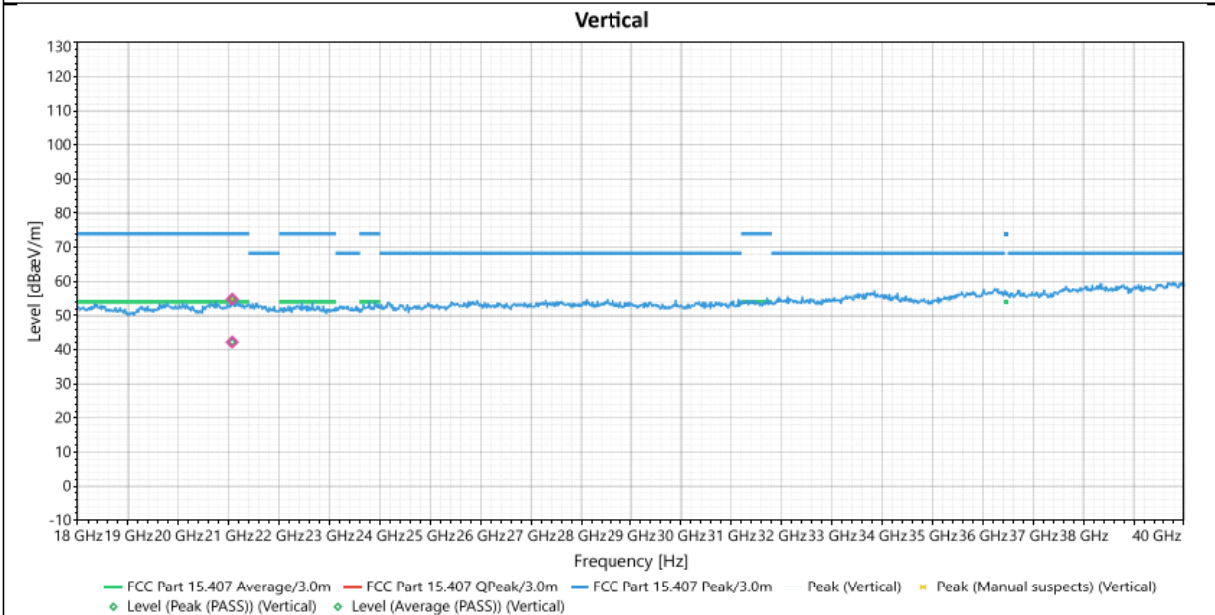
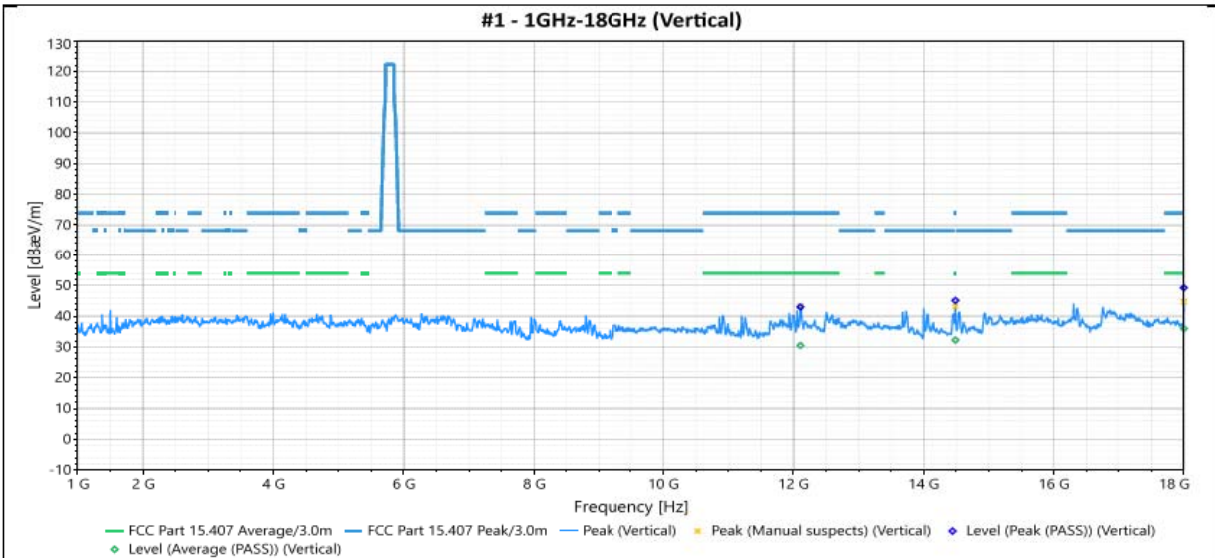


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	12106	Vertical	42.93	74	-31.07	1.29	314	7.54	Peak (PASS)
2	12106	Vertical	30.418	54	-23.582	1.29	314	7.54	Average (PASS)
3	14487.7	Vertical	45.075	74	-28.925	2.09	46	6.71	Peak (PASS)
4	14487.7	Vertical	32.214	54	-21.786	2.09	46	6.71	Average (PASS)
5	17996.5	Vertical	49.218	74	-24.782	3.1	112	6.82	Peak (PASS)
6	17996.5	Vertical	35.964	54	-18.036	3.1	112	6.82	Average (PASS)
7	21066.8	Vertical	54.824	74	-19.176	1.69	237	8.64	Peak (PASS)
8	21066.8	Vertical	42.207	54	-11.793	1.69	237	8.64	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT20 5700 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

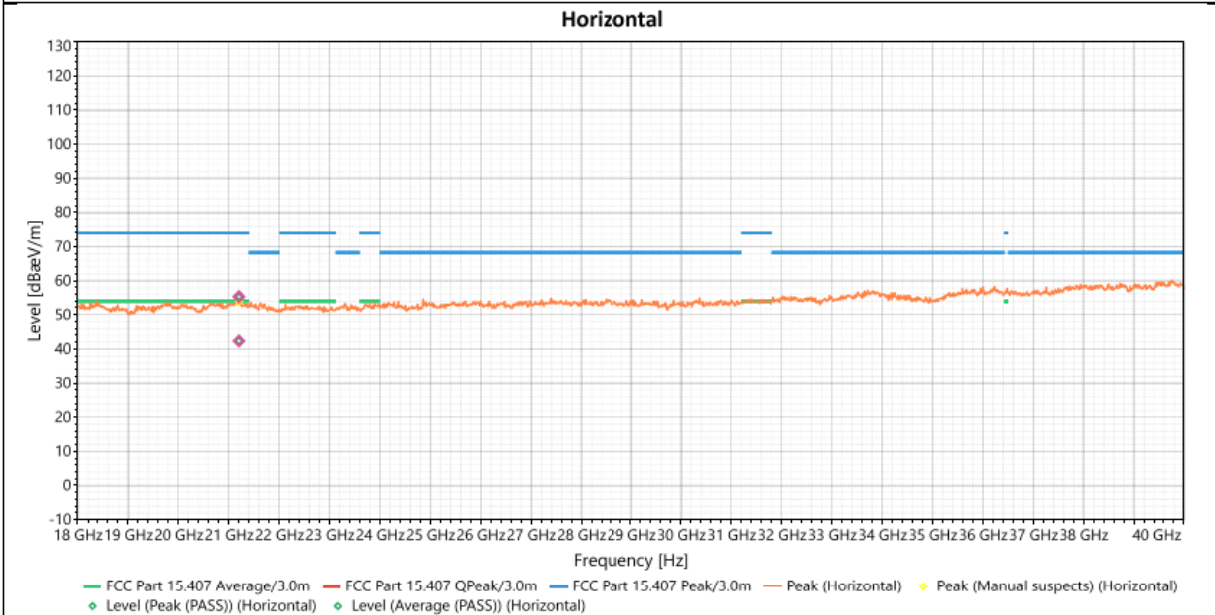
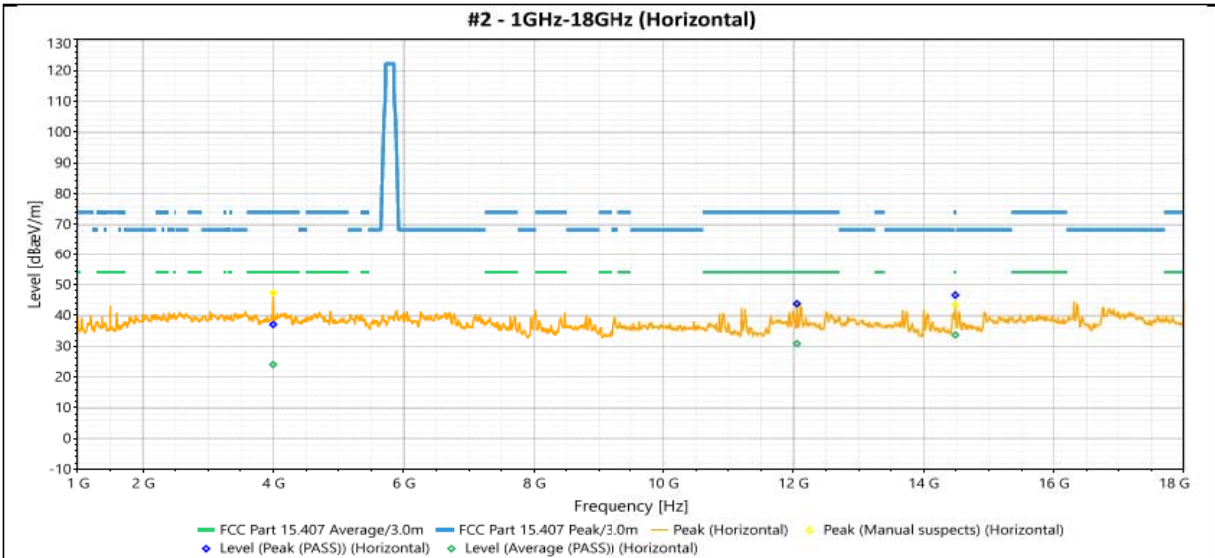


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	3998.7	Horizontal	37.023	74	-36.977	1	328	3.27	Peak (PASS)
2	3998.7	Horizontal	24.018	54	-29.982	1	328	3.27	Average (PASS)
3	12053.3	Horizontal	43.759	74	-30.241	1.91	333	7.51	Peak (PASS)
4	12053.3	Horizontal	30.81	54	-23.19	1.91	333	7.51	Average (PASS)
5	14486	Horizontal	46.561	74	-27.439	3.4	265	6.83	Peak (PASS)
6	14486	Horizontal	33.664	54	-20.336	3.4	265	6.83	Average (PASS)
7	21200.9	Horizontal	55.292	74	-18.708	1.25	263	8.36	Peak (PASS)
8	21200.9	Horizontal	42.351	54	-11.649	1.25	263	8.36	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT20 5745 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

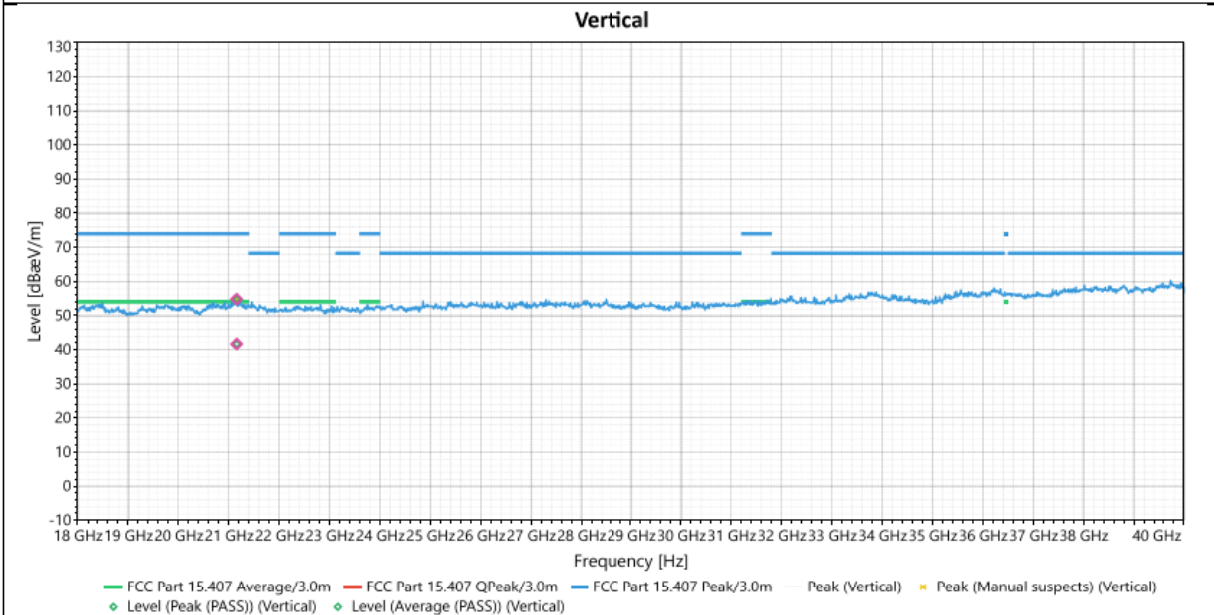
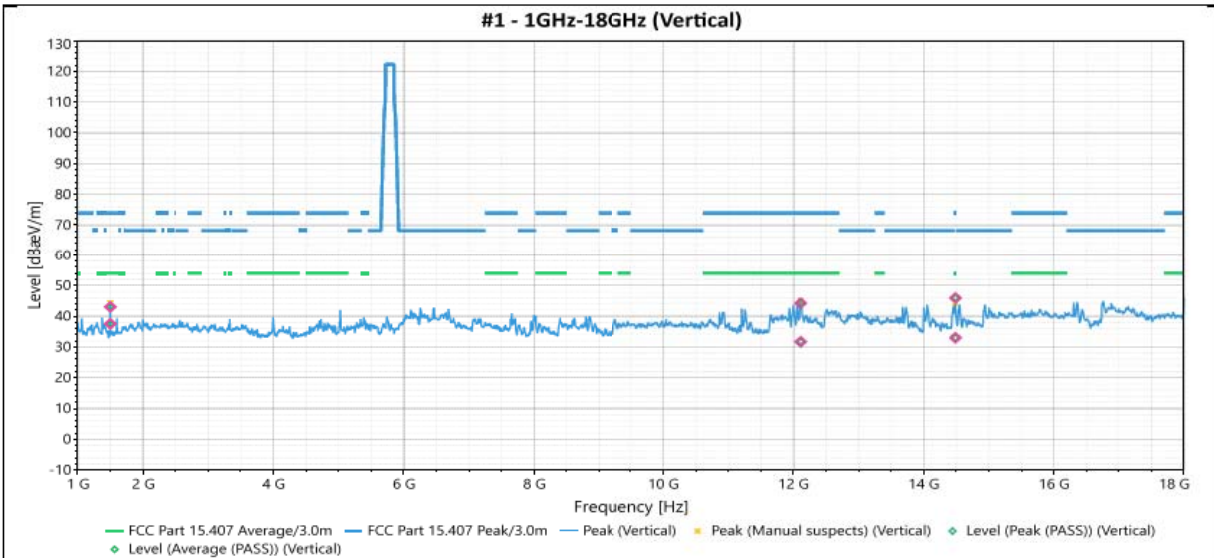


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	1499.7	Vertical	42.99	74	-31.01	2.35	166	-2.5	Peak (PASS)
2	1499.7	Vertical	37.489	54	-16.511	2.35	166	-2.5	Average (PASS)
3	12111.1	Vertical	44.197	74	-29.803	2.08	97	7.54	Peak (PASS)
4	12111.1	Vertical	31.656	54	-22.344	2.08	97	7.54	Average (PASS)
5	14487.7	Vertical	45.892	74	-28.108	2	64	6.71	Peak (PASS)
6	14487.7	Vertical	32.973	54	-21.027	2	64	6.71	Average (PASS)
7	21157.01	Vertical	54.795	74	-19.205	1.23	157	8.53	Peak (PASS)
8	21157.01	Vertical	41.655	54	-12.345	1.23	157	8.53	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT20 5745 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

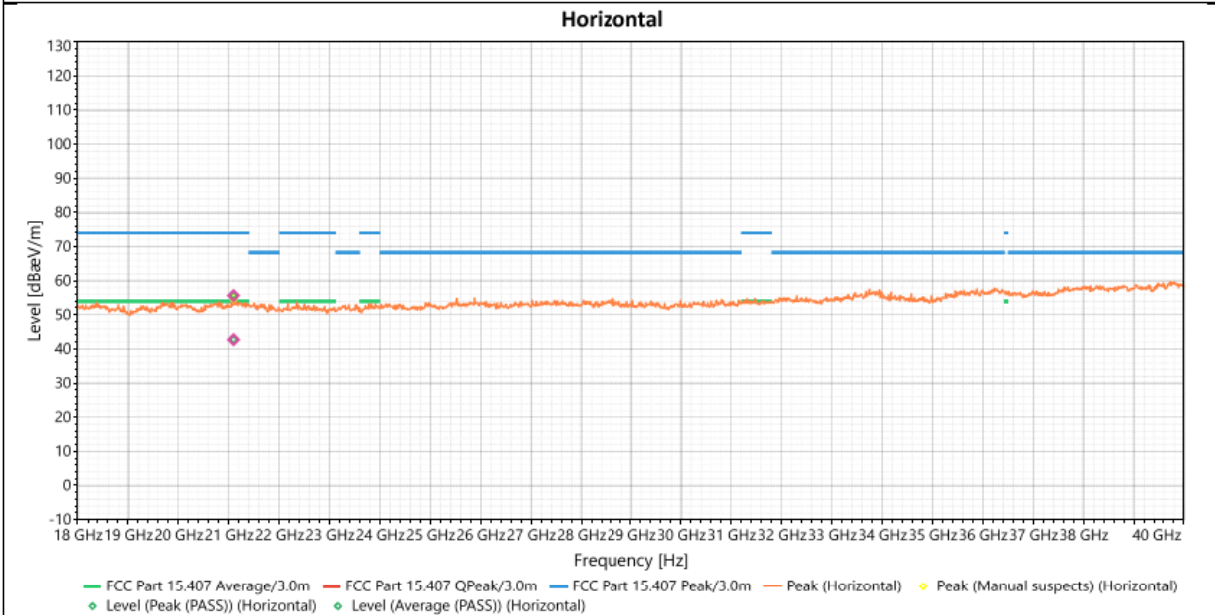
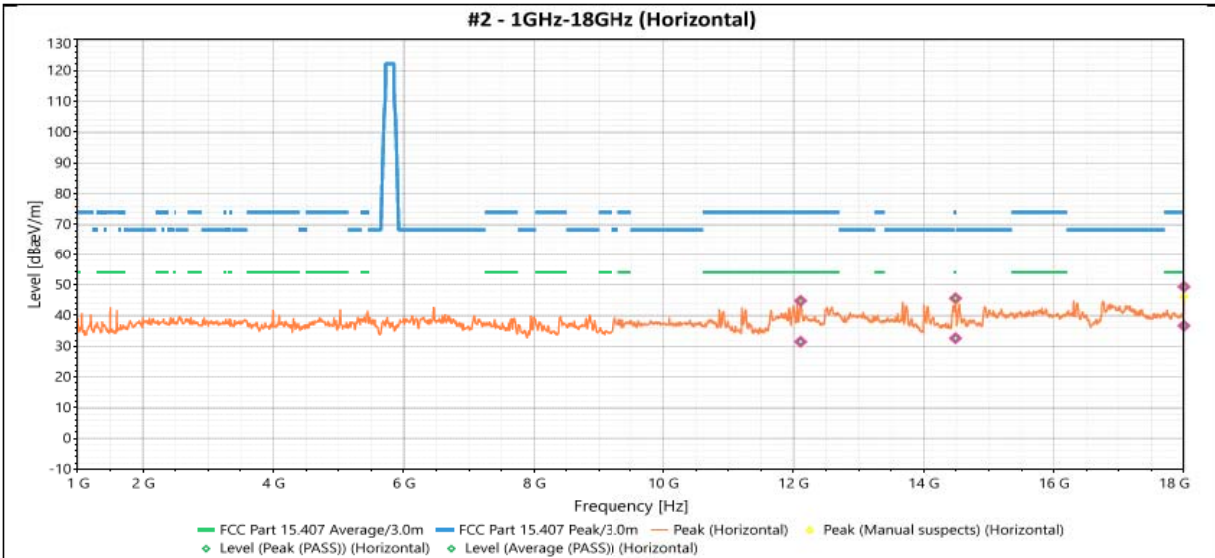


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	12109.4	Horizontal	44.732	74	-29.268	2.73	210	7.55	Peak (PASS)
2	12109.4	Horizontal	31.427	54	-22.573	2.73	210	7.55	Average (PASS)
3	14489.4	Horizontal	45.546	74	-28.454	1	14	6.84	Peak (PASS)
4	14489.4	Horizontal	32.574	54	-21.426	1	14	6.84	Average (PASS)
5	17998.2	Horizontal	49.293	74	-24.707	1.96	335	6.64	Peak (PASS)
6	17998.2	Horizontal	36.602	54	-17.398	1.96	335	6.64	Average (PASS)
7	21093.1	Horizontal	55.621	74	-18.379	1.94	100	8.49	Peak (PASS)
8	21093.1	Horizontal	42.733	54	-11.267	1.94	100	8.49	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT20 5785 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

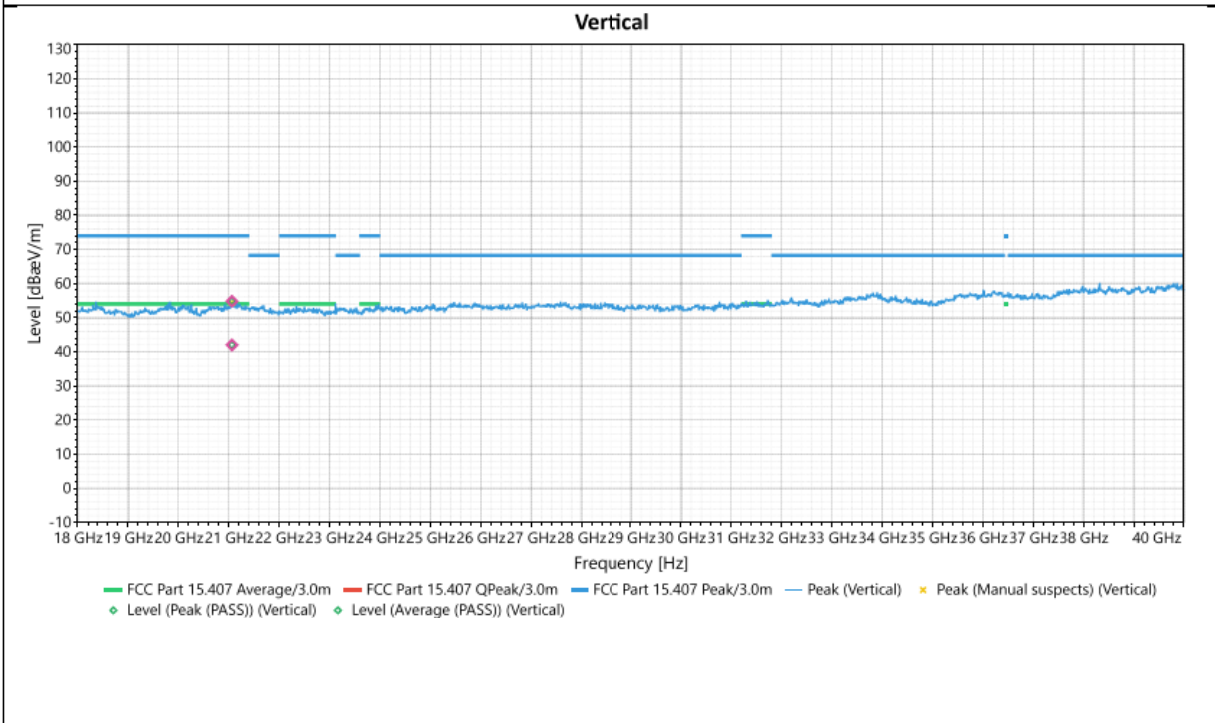
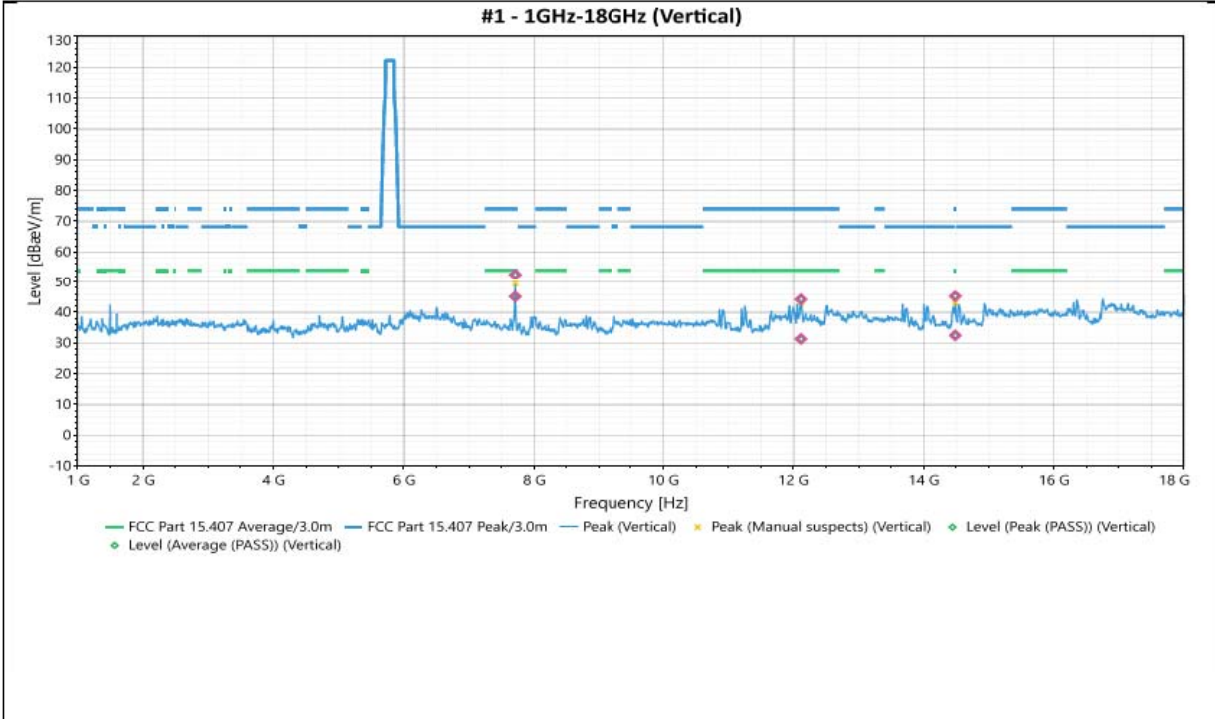


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	7713.2	Vertical	52.568	74	-21.432	1.63	360	5.83	Peak (PASS)
2	7713.2	Vertical	45.149	54	-8.851	1.63	360	5.83	Average (PASS)
3	12116.2	Vertical	44.239	74	-29.761	1.52	35	7.54	Peak (PASS)
4	12116.2	Vertical	31.308	54	-22.692	1.52	35	7.54	Average (PASS)
5	14486	Vertical	45.254	74	-28.746	1.69	177	6.7	Peak (PASS)
6	14486	Vertical	32.463	54	-21.537	1.69	177	6.7	Average (PASS)
7	21062.4	Vertical	54.793	74	-19.207	2	324	8.64	Peak (PASS)
8	21062.4	Vertical	41.991	54	-12.009	2	324	8.64	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT20 5785 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

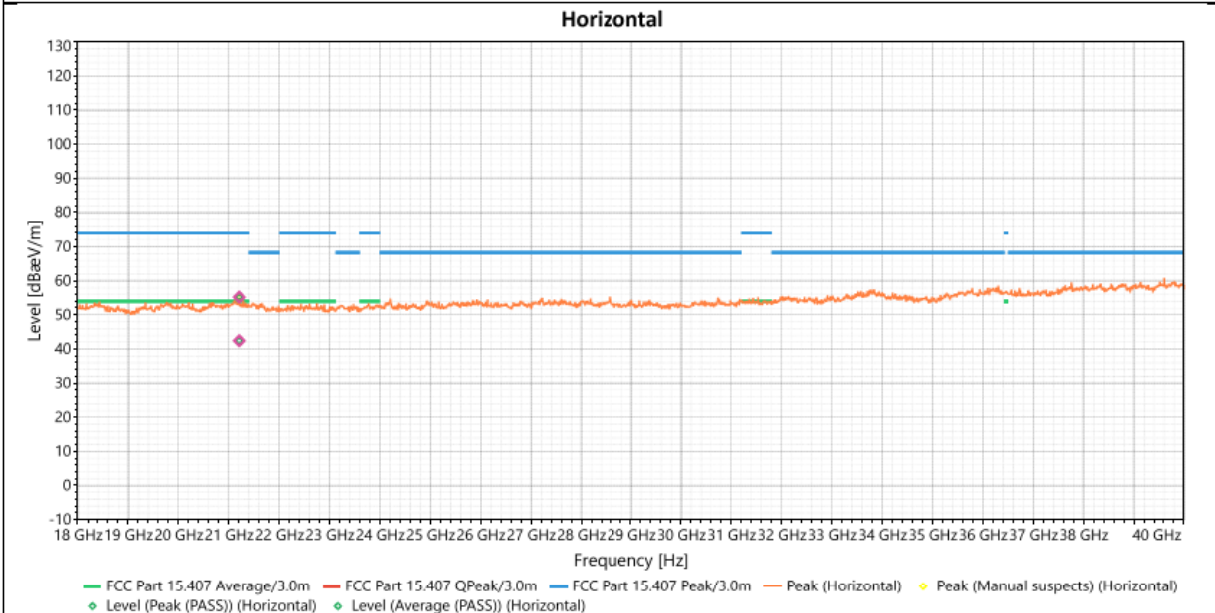
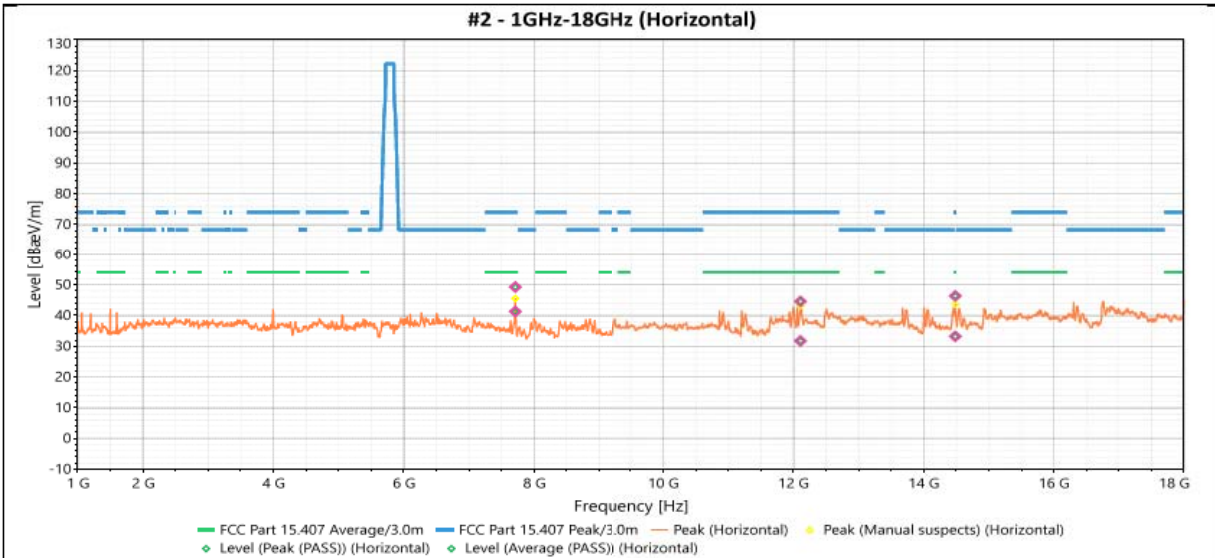


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	7713.2	Horizontal	49.201	74	-24.799	1.68	340	5.82	Peak (PASS)
2	7713.2	Horizontal	41.229	54	-12.771	1.68	340	5.82	Average (PASS)
3	12107.7	Horizontal	44.527	74	-29.473	2.09	207	7.55	Peak (PASS)
4	12107.7	Horizontal	31.68	54	-22.32	2.09	207	7.55	Average (PASS)
5	14486	Horizontal	46.304	74	-27.696	1.74	170	6.83	Peak (PASS)
6	14486	Horizontal	33.175	54	-20.825	1.74	170	6.83	Average (PASS)
7	21207.5	Horizontal	55.179	74	-18.821	1.14	271	8.36	Peak (PASS)
8	21207.5	Horizontal	42.403	54	-11.597	1.14	271	8.36	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT20 5825 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

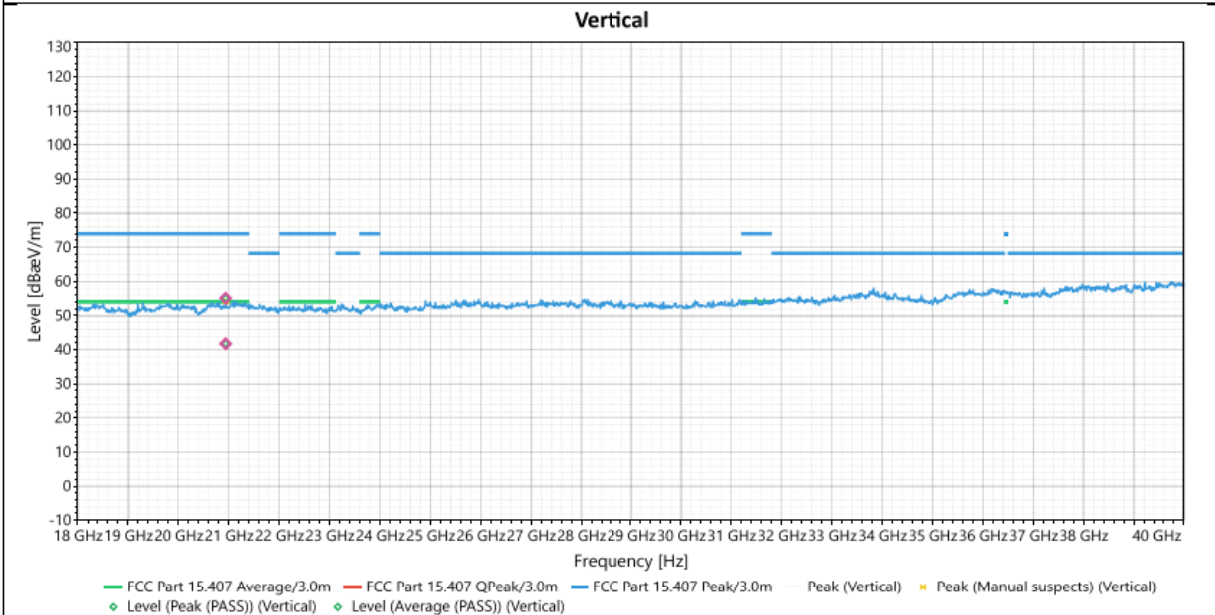
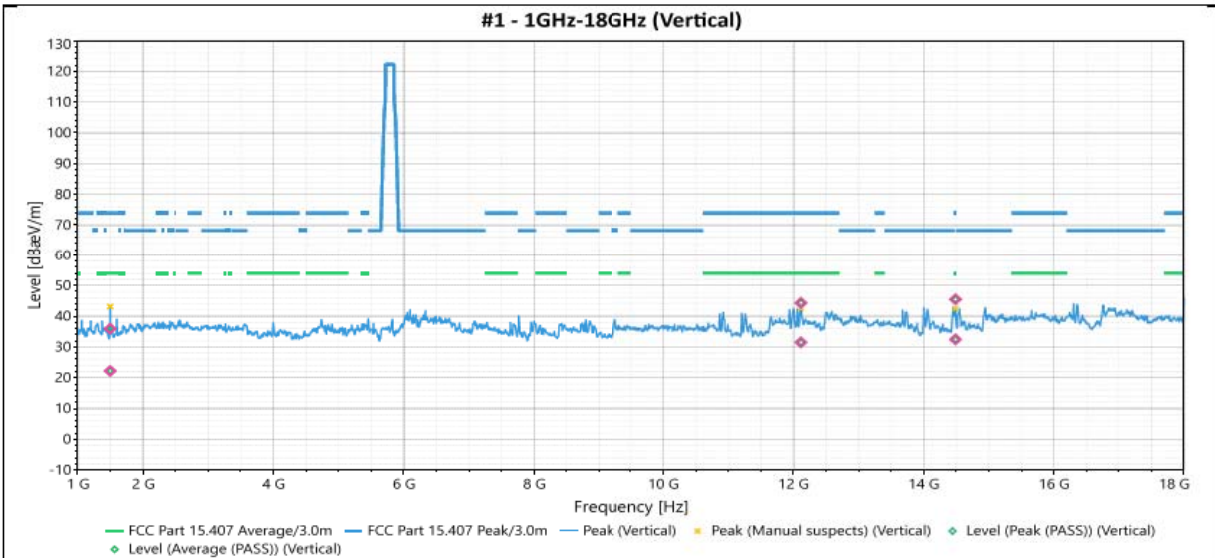


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	1498	Vertical	35.92	74	-38.08	1.66	352	-2.49	Peak (PASS)
2	1498	Vertical	22.179	54	-31.821	1.66	352	-2.49	Average (PASS)
3	12114.5	Vertical	44.3	74	-29.7	2.06	216	7.54	Peak (PASS)
4	12114.5	Vertical	31.446	54	-22.554	2.06	216	7.54	Average (PASS)
5	14489.4	Vertical	45.472	74	-28.528	1.63	0	6.71	Peak (PASS)
6	14489.4	Vertical	32.425	54	-21.575	1.63	0	6.71	Average (PASS)
7	20937.06	Vertical	55.072	74	-18.928	1.02	223	8.6	Peak (PASS)
8	20937.06	Vertical	41.748	54	-12.252	1.02	223	8.6	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT20 5825 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

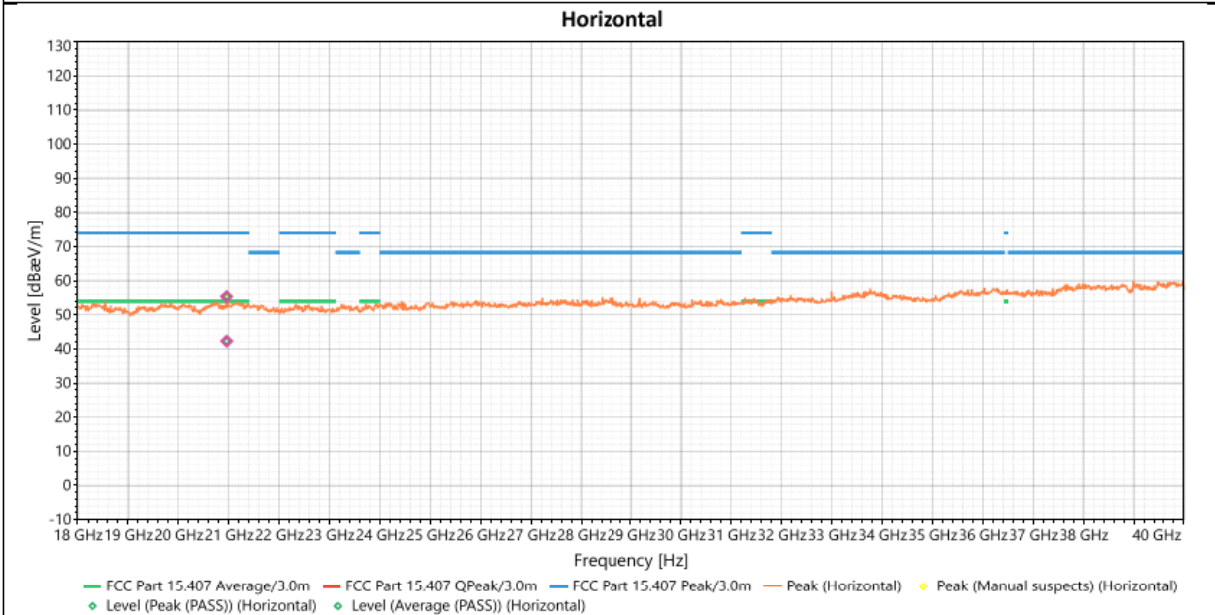
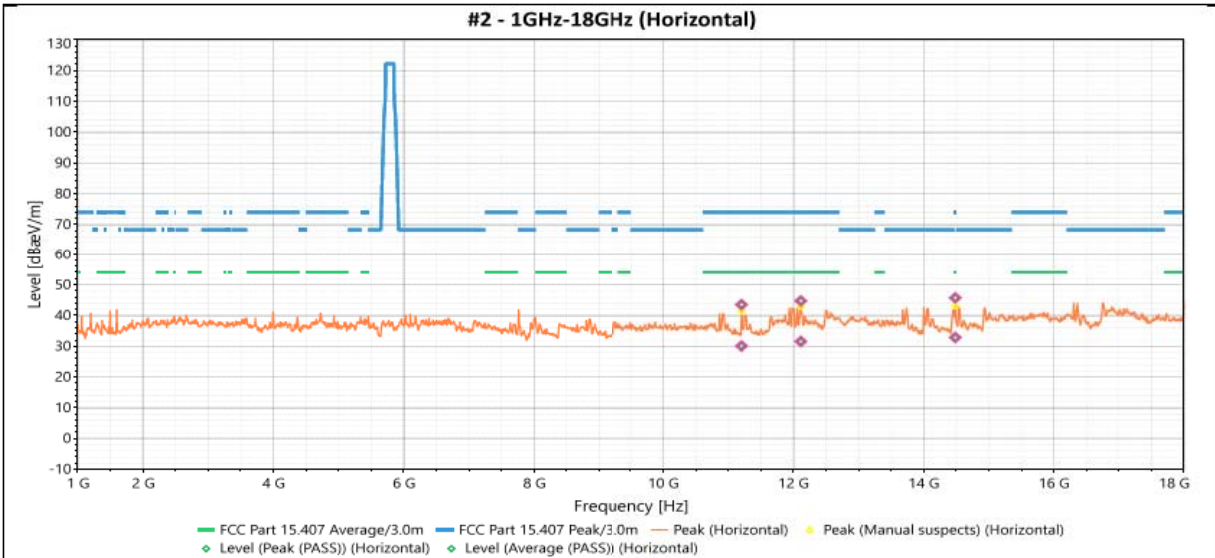


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	11201.6	Horizontal	43.47	74	-30.53	2	124	6.49	Peak (PASS)
2	11201.6	Horizontal	30.033	54	-23.967	2	124	6.49	Average (PASS)
3	12112.8	Horizontal	44.7	74	-29.3	1.33	198	7.55	Peak (PASS)
4	12112.8	Horizontal	31.505	54	-22.495	1.33	198	7.55	Average (PASS)
5	14486	Horizontal	45.692	74	-28.308	1.38	131	6.83	Peak (PASS)
6	14486	Horizontal	32.807	54	-21.193	1.38	131	6.83	Average (PASS)
7	9482.361	Horizontal	26.098	74	-47.902	1.36	37	2.32	Peak (PASS)
8	9482.361	Horizontal	20.837	54	-33.163	1.36	37	2.32	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT40 5190 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

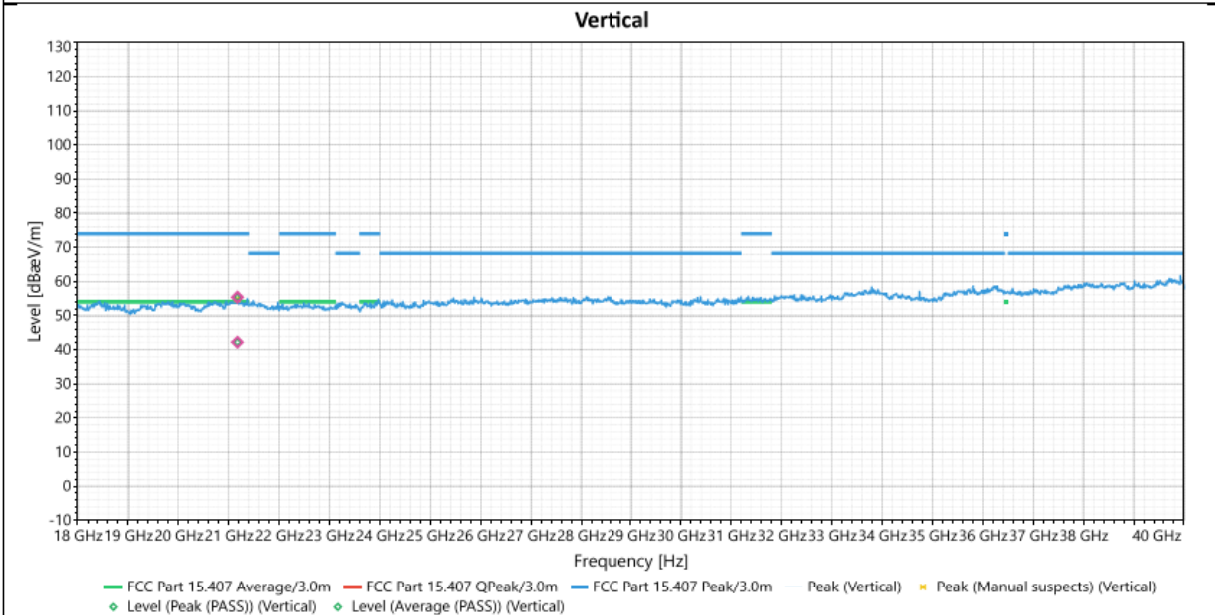
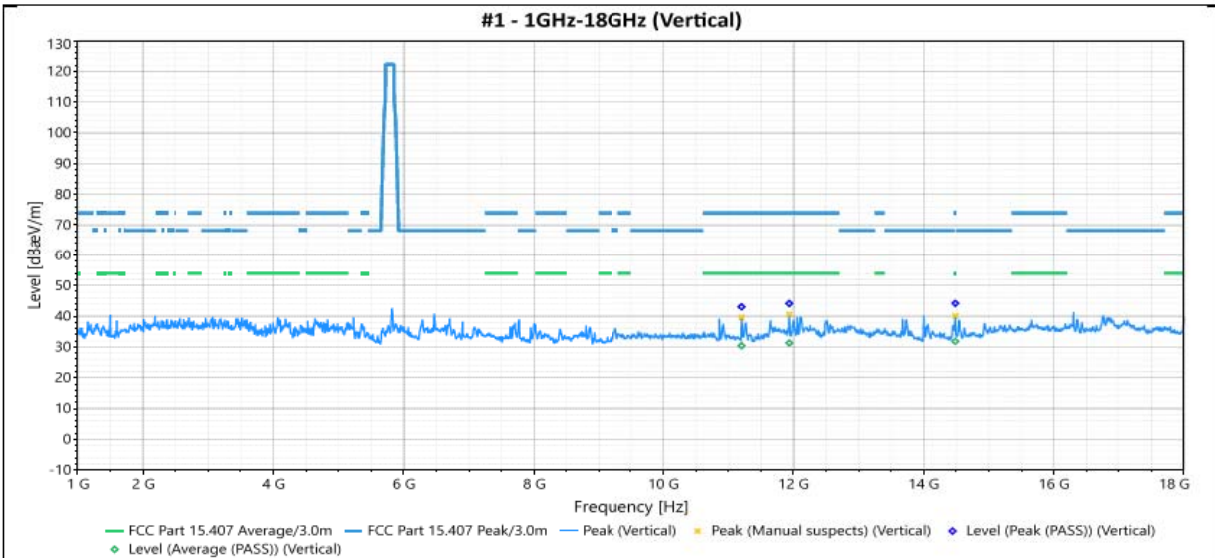


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	11201.6	Vertical	43.043	74	-30.957	1.51	2	6.51	Peak (PASS)
2	11201.6	Vertical	30.375	54	-23.625	1.51	2	6.51	Average (PASS)
3	11936	Vertical	44.117	74	-29.883	1.4	333	7.43	Peak (PASS)
4	11936	Vertical	31.25	54	-22.75	1.4	333	7.43	Average (PASS)
5	14486	Vertical	44.171	74	-29.829	2.52	231	6.7	Peak (PASS)
6	14486	Vertical	31.796	54	-22.204	2.52	231	6.7	Average (PASS)
7	21172.36	Vertical	55.347	74	-18.653	1.5	243	8.5	Peak (PASS)
8	21172.36	Vertical	42.198	54	-11.802	1.5	243	8.5	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT40 5190 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

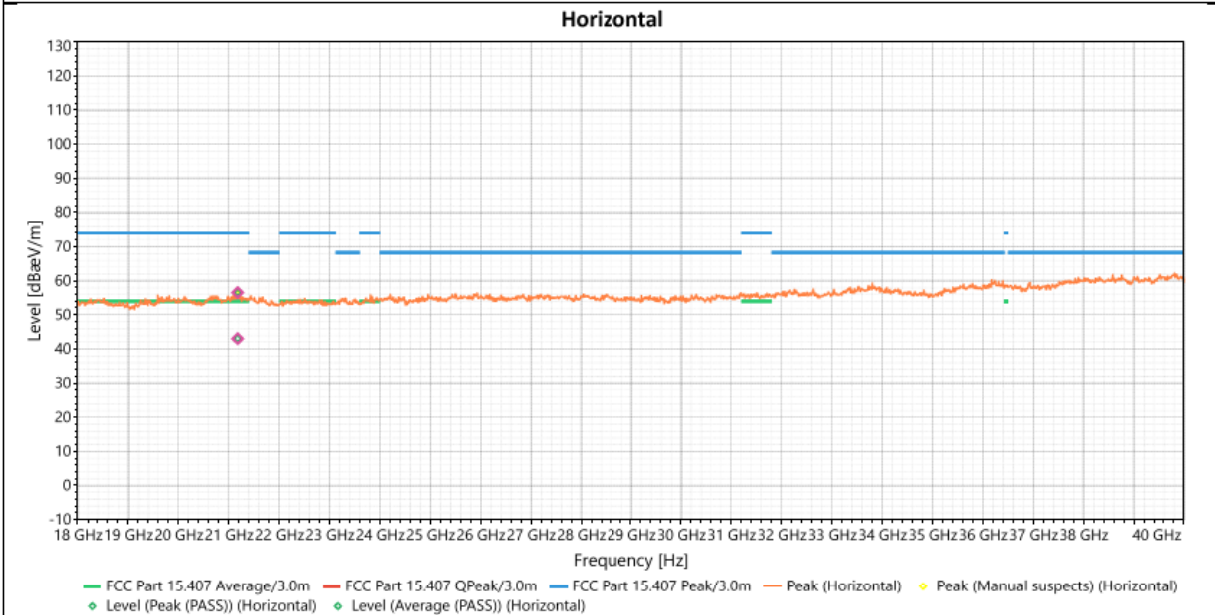
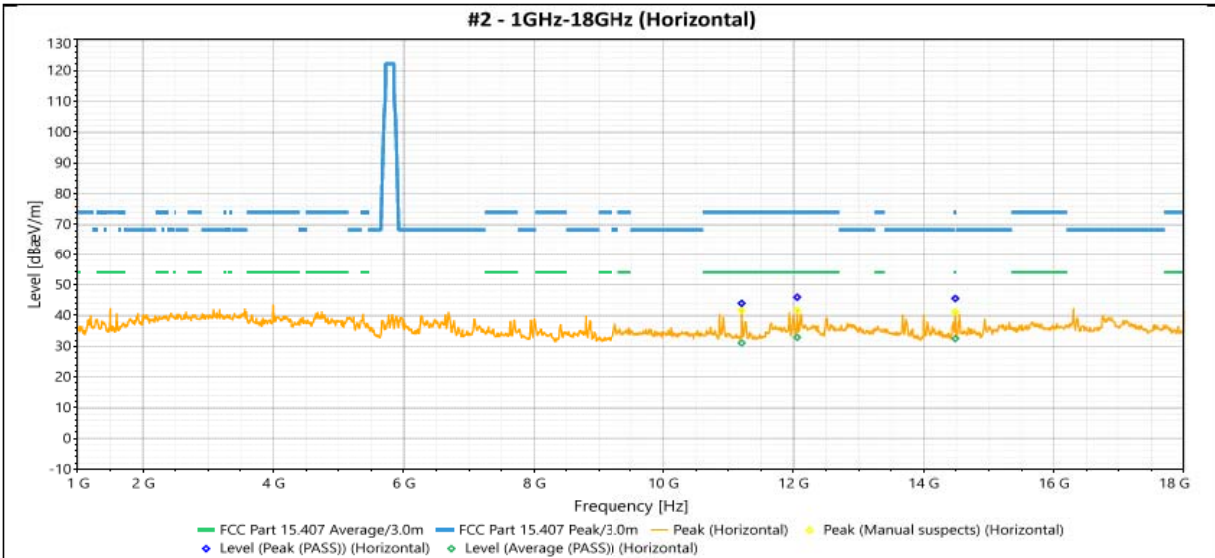


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	11203.3	Horizontal	43.894	74	-30.106	3.17	75	6.49	Peak (PASS)
2	11203.3	Horizontal	31.051	54	-22.949	3.17	75	6.49	Average (PASS)
3	12056.7	Horizontal	45.89	74	-28.11	2.96	195	7.51	Peak (PASS)
4	12056.7	Horizontal	32.838	54	-21.162	2.96	195	7.51	Average (PASS)
5	14486	Horizontal	45.485	74	-28.515	3.12	336	6.83	Peak (PASS)
6	14486	Horizontal	32.426	54	-21.574	3.12	336	6.83	Average (PASS)
7	21176.8	Horizontal	56.52	74	-17.48	1.27	172	8.39	Peak (PASS)
8	21176.8	Horizontal	43.014	54	-10.986	1.27	172	8.39	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

CHANNEL	802.11N HT40 5230 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

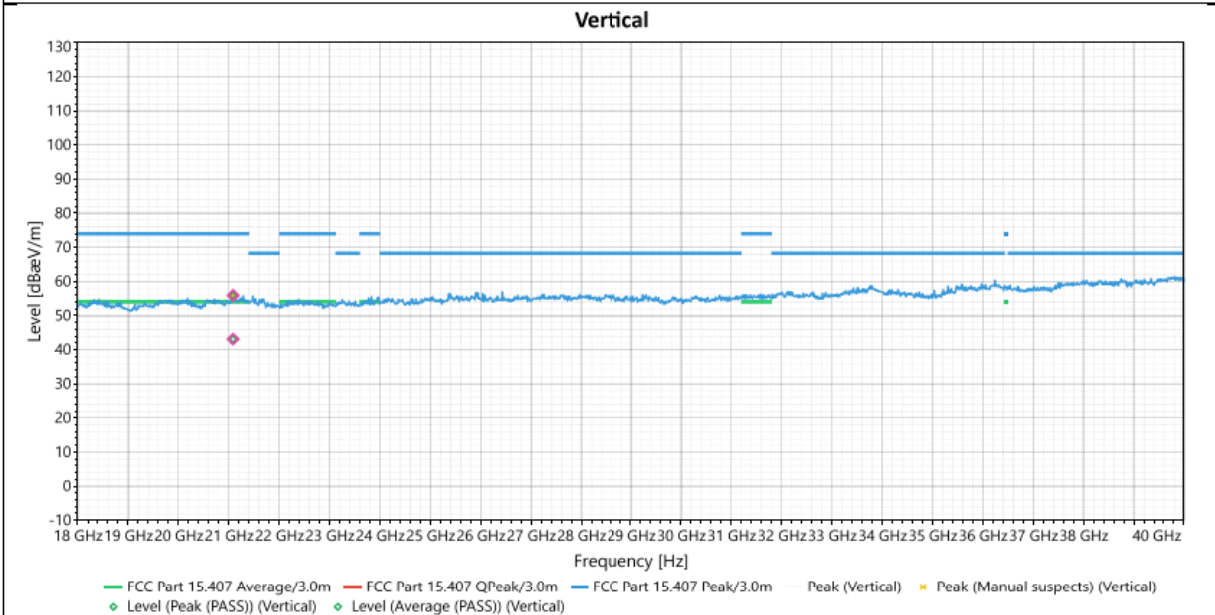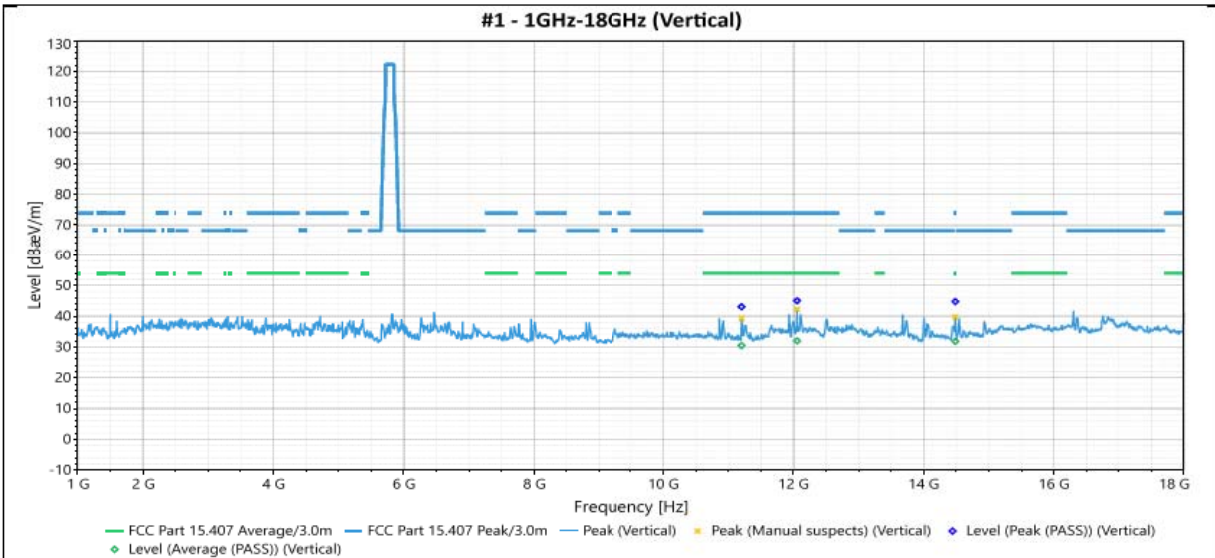

Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	11201.6	Vertical	43.037	74	-30.963	1.04	28	6.51	Peak (PASS)
2	11201.6	Vertical	30.42	54	-23.58	1.04	28	6.51	Average (PASS)
3	12055	Vertical	44.99	74	-29.01	1.36	175	7.48	Peak (PASS)
4	12055	Vertical	31.958	54	-22.042	1.36	175	7.48	Average (PASS)
5	14486	Vertical	44.739	74	-29.261	1.02	54	6.7	Peak (PASS)
6	14486	Vertical	31.769	54	-22.231	1.02	54	6.7	Average (PASS)
7	21084.37	Vertical	55.902	74	-18.098	1	245	8.63	Peak (PASS)
8	21084.37	Vertical	43.101	54	-10.899	1	245	8.63	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin agains

Frequency	802.11N HT40 5230 MHz	DETECTOR FUNCTION	Prak/Average
FREQUENCY RANGE	1GHz-40GHz		

