TEST REPORT

Applicant Name :	Shanghai ABXY Tech Co., Ltd.
Address :	5F, Building 11, No.6055 Jinhai Highway, Fengxian District, Shanghai
Report Number :	RA230523-28733E-RF-00A
FCC ID:	2BBMD-ABXYLUTE1

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type:	Handheld Game Console
Model No.:	abxylute_one
Trade Mark:	abxylute
Date Received:	2023-05-23
Date of Test:	2023-06-03 to 2023-06-13
Report Date:	2023-06-15

Test Result:	Pass*

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Roger.Ling

Roger.Ling
EMC Engineer

Approved By:

Candy. Li

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".
Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY **4**

GENERAL INFORMATION **5**

PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 5
OBJECTIVE 5
TEST METHODOLOGY 5
MEASUREMENT UNCERTAINTY 6
TEST FACILITY 6

SYSTEM TEST CONFIGURATION **7**

DESCRIPTION OF TEST CONFIGURATION 7
SPECIAL ACCESSORIES 7
EQUIPMENT MODIFICATIONS 7
EUT EXERCISE SOFTWARE 7
SUPPORT EQUIPMENT LIST AND DETAILS 7
EXTERNAL I/O CABLE 7
BLOCK DIAGRAM OF TEST SETUP 8

SUMMARY OF TEST RESULTS **9**

TEST EQUIPMENT LIST **10**

FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE **11**

APPLICABLE STANDARD 11
TEST RESULT: 11

FCC §15.203-ANTENNA REQUIREMENT **12**

APPLICABLE STANDARD 12
ANTENNA CONNECTOR CONSTRUCTION 12

FCC §15.207 (a)-AC LINE CONDUCTED EMISSIONS **13**

APPLICABLE STANDARD 13
EUT SETUP 13
EMI TEST RECEIVER SETUP 13
TEST PROCEDURE 14
CALCULATION 14
TEST DATA 14

FCC §15.205, §15.209 & §15.247(d)-RADIATED EMISSIONS **17**

APPLICABLE STANDARD 17
EUT SETUP 17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP 18
TEST PROCEDURE 18
FACTOR & MARGIN CALCULATION 18
TEST DATA 18

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST **24**

APPLICABLE STANDARD 24
TEST PROCEDURE 24
TEST DATA 24

FCC §15.247(a) (1)-20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH **27**

APPLICABLE STANDARD 27
TEST PROCEDURE 27
TEST DATA 28

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST 38
APPLICABLE STANDARD 38
TEST PROCEDURE 38
TEST DATA 38
FCC §15.247(a) (1) (iii)-TIME OF OCCUPANCY (DWELL TIME) 41
APPLICABLE STANDARD 41
TEST PROCEDURE 41
TEST DATA 41
FCC §15.247(b) (1)-PEAK OUTPUT POWER MEASUREMENT 51
APPLICABLE STANDARD 51
TEST PROCEDURE 51
TEST DATA 51
FCC §15.247(d)- BAND EDGES TESTING 57
APPLICABLE STANDARD 57
TEST PROCEDURE 57
TEST DATA 57

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA230523-28733E-RF-00A	Original Report	2023-06-15

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product Type	Handheld Game Console
Tested Model	abxylute_one
Frequency Range	Bluetooth:2402-2480MHz
Maximum Conducted Peak Output Power	7.67dBm
Modulation Technique	BDR(GFSK)/EDR(π/4-DQPSK)/EDR(8DPSK)
Antenna Specification*	Internal Antenna: 1.69dBi(provided by the applicant)
Voltage Range	DC 3.87V from battery or DC 5V from USB port
Sample number	264K-5 (CE&RE), 264K-1 (RF Conducted Test) (assigned by ATC, Shenzhen)
Sample/EUT Status	Good condition

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		$0.082*10^{-7}$
RF output power, conducted		0.71dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.74dB
Emissions, Radiated	30MHz - 1GHz	5.08dB
	1GHz - 18GHz	4.96dB
	18GHz - 26.5GHz	5.16dB
Temperature		1℃
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA).The Certificate Number is 4297.01.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 30241.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

Special Accessories

N/A.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

“adb command*” was used during testing and power level setting was 2*, which provided by manufacturer.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Hisense	Adapter	E010-1D050200VCU	Unknown
SCI	Earphone	SCRC-130A	Unknown
Kingston	SD card	32GB	Unknown

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	0.8	EUT	Adapter
Un-shielding Detachable Earphone Cable	0.8	EUT	Earphone

Block Diagram of Test Setup

For Conducted Emission:

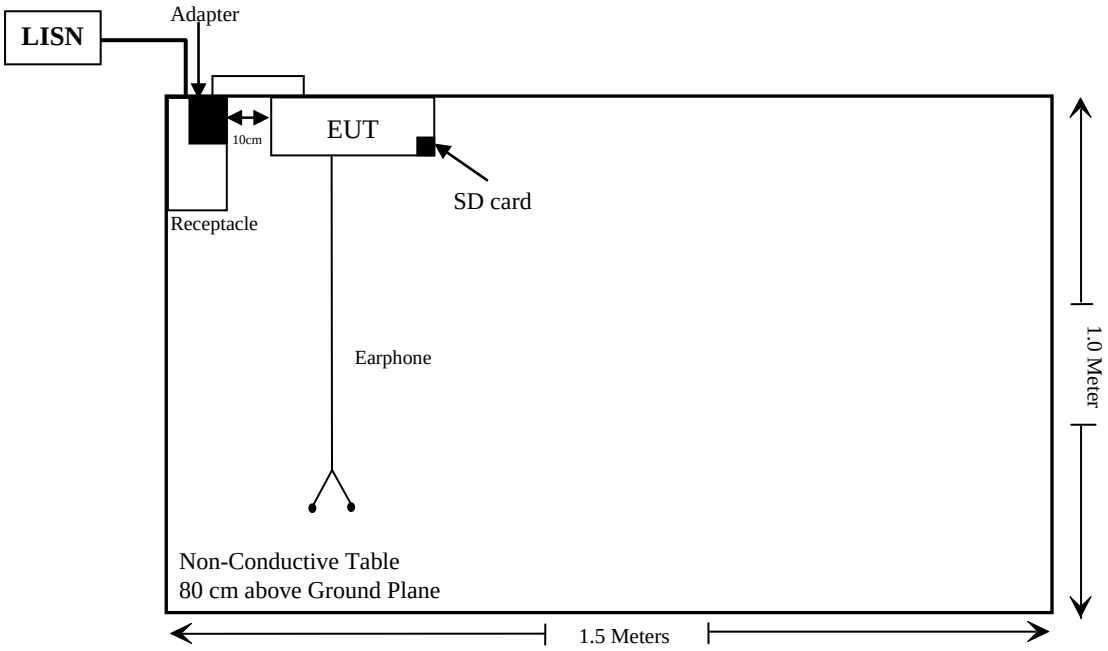

For Radiated Emission:

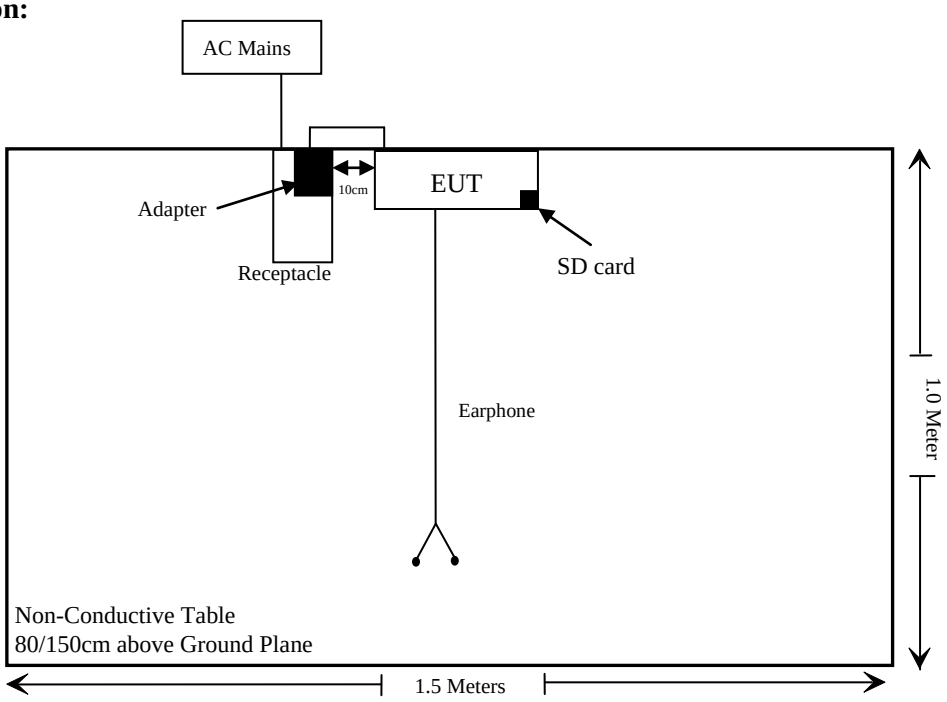

Note: the support table edge was flush with the center of turntable.

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100784	2022/11/25	2023/11/24
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2022/11/25	2023/11/24
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2022/12/07	2023/12/06
Unknown	RF Coaxial Cable	No.17	N0350	2022/11/25	2023/11/24
Conducted Emission Test Software: e3 191218 (V9)					
Radiated Emissions Test					
Rohde & Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	837	2023/02/22	2026/02/21
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2022/12/26	2025/12/25
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.16	N650	2022/11/25	2023/11/24
Wainwright	High Pass Filter	WHKX3.6/18G-10SS	5	2022/11/25	2023/11/24
Radiated Emission Test Software: e3 191218 (V9)					
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2022/11/25	2023/11/24
Rohde & Schwarz	Open Switch and Control Unit	OSP120 + OSP-B157	101244 + 100866	2022/11/25	2023/11/24
WEINSCHEL	10dB Attenuator	5324	AU 3842	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.31	RF-01	Each time	

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:
[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] · [√f(GHz)] ≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where
1. f(GHz) is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Test Result:

For worst case:

Mode	Frequency (MHz)	Maximum Tune-up power		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
		(dBm)	(mW)				
BT	2402-2480	8.0	6.31	5	2.0	3.0	Yes

Result: No Standalone SAR test is required

FCC §15.203-ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

a. Antenna must be permanently attached to the unit.
b. Antenna must use a unique type of connector to attach to the EUT.
c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is 1.69 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant.

FCC §15.207 (a)-AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

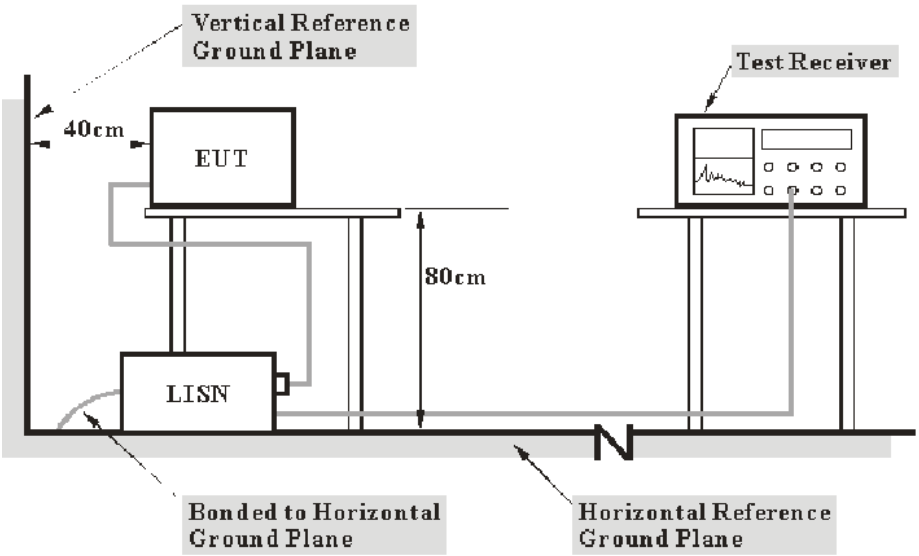

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

Factor = LISN VDF + Cable Loss

The "**Over limit**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

Over Limit = Level – Limit
Level = Read Level + Factor

Test Data

Environmental Conditions

Temperature:	23℃
Relative Humidity:	49%
ATM Pressure:	101.0kPa

The testing was performed by Jerry Wu on 2023-06-12.

EUT operation mode: BT Transmitting (worst case 8DPSK low channel)

AC 120V/60 Hz, Line

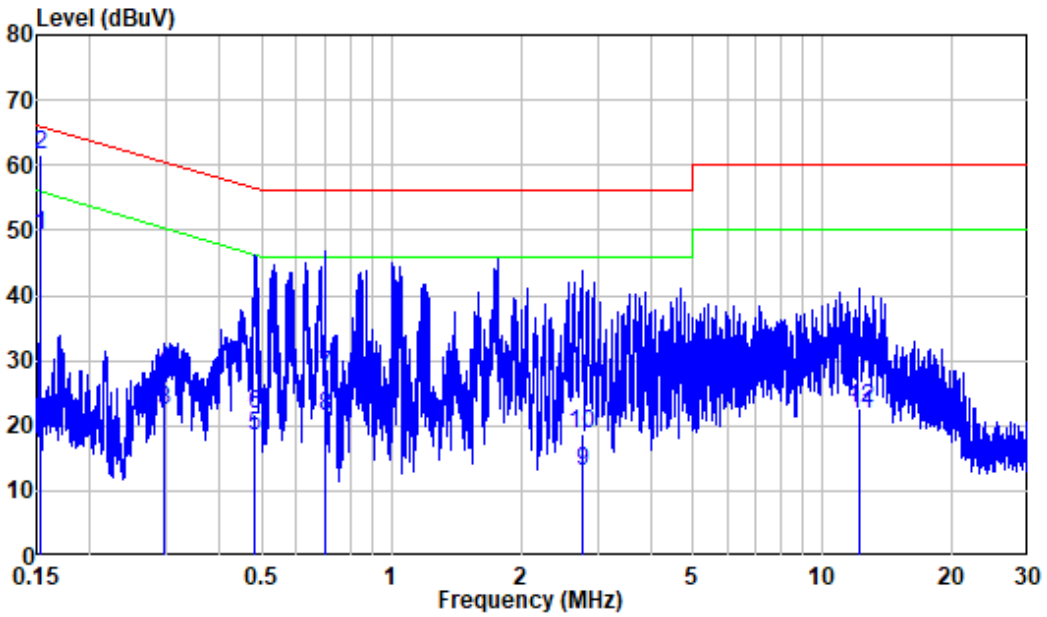

Site : Shielding Room
Condition: Line
Job No. : RA230523-28733E-RF
Mode : BT Transmitting
Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.153	10.36	38.74	49.10	55.84	-6.74	Average
2	0.153	10.36	51.22	61.58	65.84	-4.26	QP
3	0.298	10.40	11.98	22.38	50.31	-27.93	Average
4	0.298	10.40	18.01	28.41	60.31	-31.90	QP
5	0.482	10.55	7.95	18.50	46.31	-27.81	Average
6	0.482	10.55	11.33	21.88	56.31	-34.43	QP
7	0.702	10.67	17.07	27.74	46.00	-18.26	Average
8	0.702	10.67	10.82	21.49	56.00	-34.51	QP
9	2.759	10.47	2.51	12.98	46.00	-33.02	Average
10	2.759	10.47	8.27	18.74	56.00	-37.26	QP
11	12.196	10.41	11.25	21.66	50.00	-28.34	Average
12	12.196	10.41	12.18	22.59	60.00	-37.41	QP

AC 120V/60 Hz, Neutral

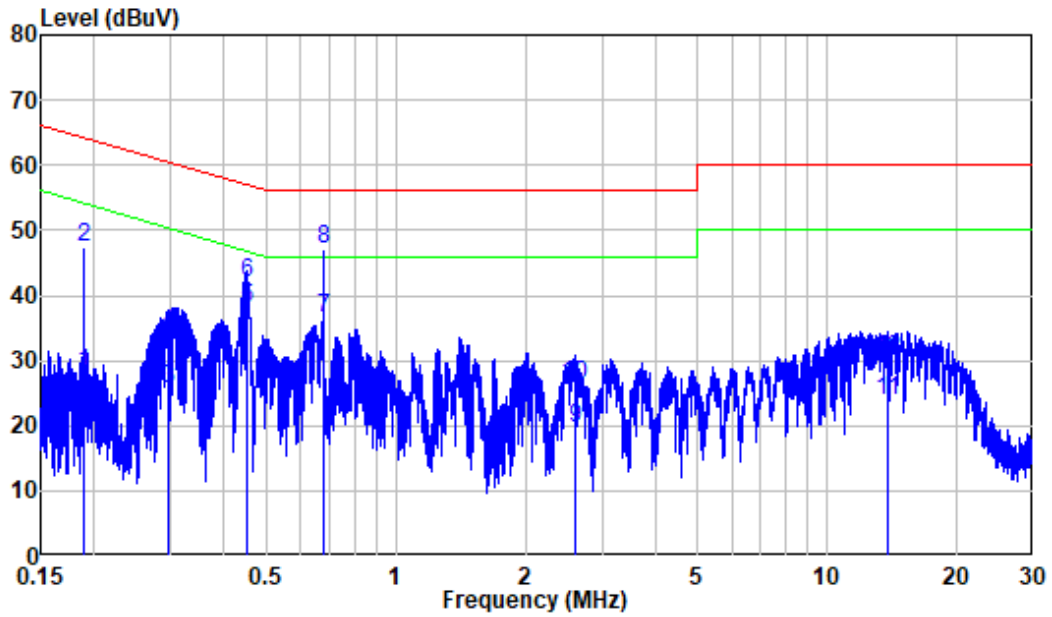

Site : Shielding Room
Condition: Neutral
Job No. : RA230523-28733E-RF
Mode : BT Transmitting
Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.188	10.28	17.82	28.10	54.11	-26.01	Average
2	0.188	10.28	37.25	47.53	64.11	-16.58	QP
3	0.296	10.35	15.37	25.72	50.35	-24.63	Average
4	0.296	10.35	23.77	34.12	60.35	-26.23	QP
5	0.451	10.45	27.49	37.94	46.86	-8.92	Average
6	0.451	10.45	31.45	41.90	56.86	-14.96	QP
7	0.676	10.47	26.00	36.47	46.00	-9.53	Average
8	0.676	10.47	36.76	47.23	56.00	-8.77	QP
9	2.591	10.52	9.12	19.64	46.00	-26.36	Average
10	2.591	10.52	15.75	26.27	56.00	-29.73	QP
11	13.741	10.29	13.44	23.73	50.00	-26.27	Average
12	13.741	10.29	20.00	30.29	60.00	-29.71	QP

FCC §15.205, §15.209 & §15.247(d)-RADIATED EMISSIONS

Applicable Standard

FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:

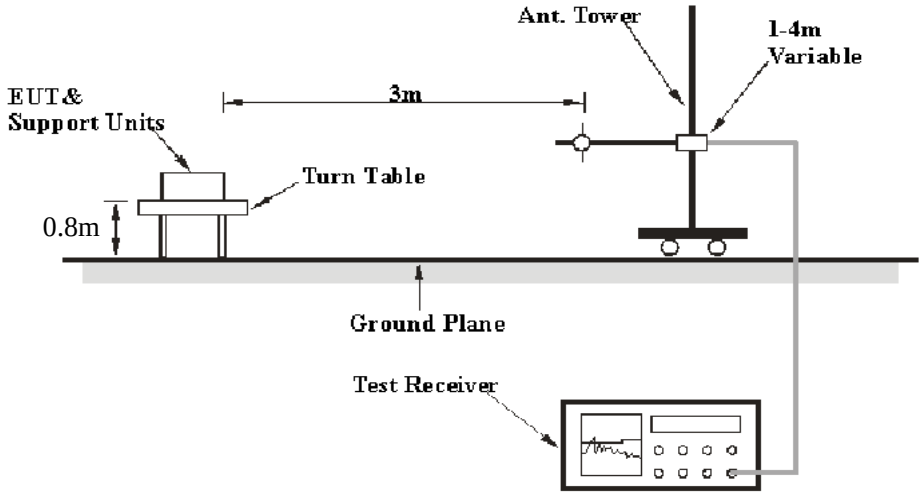

Above 1GHz:

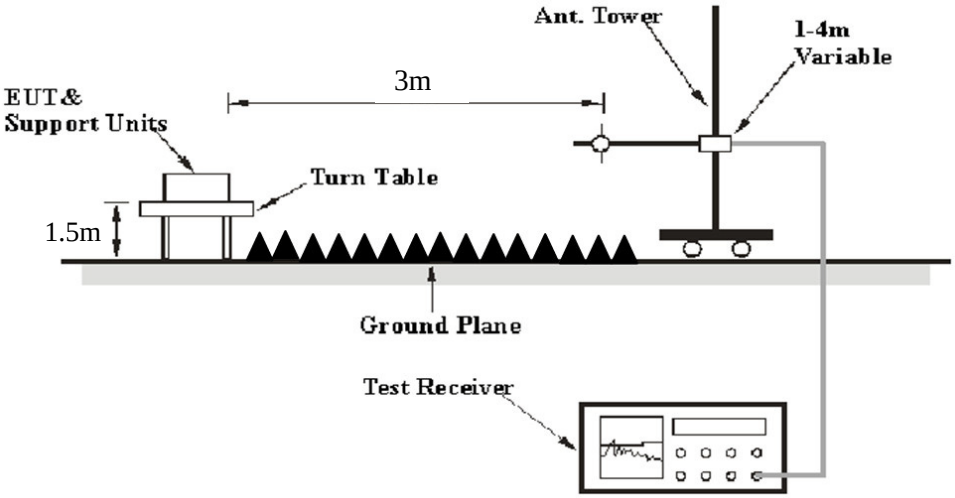

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK

For average measurement:

Use the duty cycle factor correction factor method per 15.35(c).
Duty cycle=On time/100milliseconds, On time=N1*L1+N2*L2+…Nn-1*Ln-1+Nn*Ln,
Where N1 is number of type 1 pulses, L1 is length of type 1 pulse, etc.
Average Emission Level=Peak Emission Level+20*log(Duty cycle)

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

If the maximized peak measured value complies with the limit, then it is unnecessary to perform an QP/Average measurement

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

Factor = Antenna Factor + Cable Loss - Amplifier Gain

The "**Over Limit/Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

Over Limit/Margin = Level / Corrected Amplitude – Limit
Level / Corrected Amplitude = Read Level + Factor

Test Data

Environmental Conditions

Temperature:	23-24°C
Relative Humidity:	52-56%
ATM Pressure:	101.0kPa

The Below 1GHz testing was performed by Jason Liu on 2023-06-12.
The Above 1GHz testing was performed by Jeef Huang on 2023-06-03.

EUT operation mode: BT Transmitting
(Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Below 1GHz:

Worst case for 8DPSK, Low Channel:

Horizontal

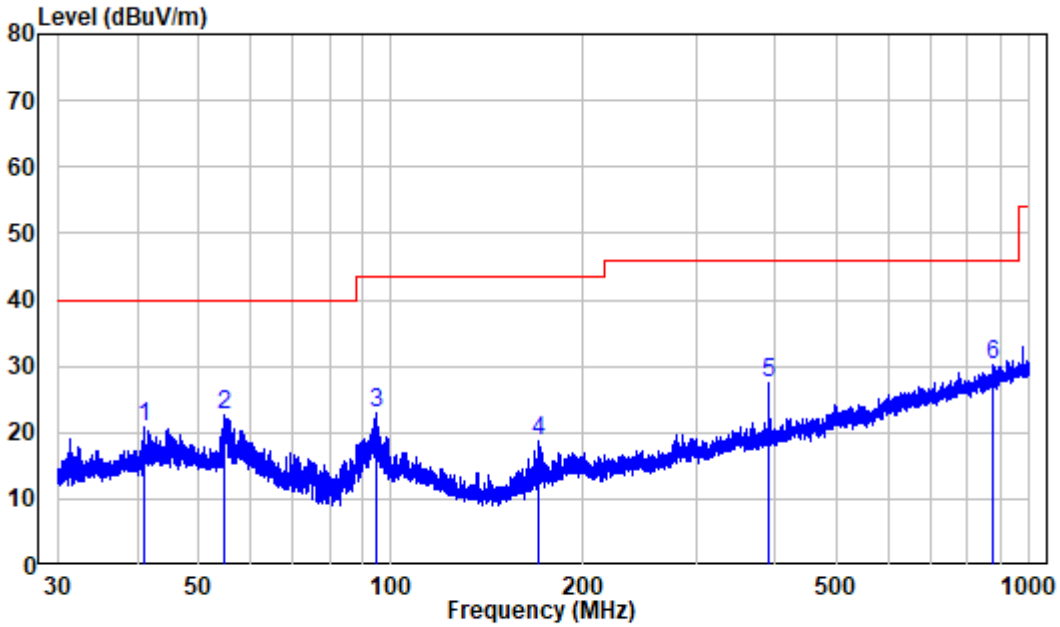

Site : chamber
Condition: 3m HORIZONTAL
Job No. : RA230523-28733E-RF
Test Mode: BT Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	41.114	-10.16	30.98	20.82	40.00	-19.18	Peak
2	54.931	-10.28	32.79	22.51	40.00	-17.49	Peak
3	94.511	-12.58	35.39	22.81	43.50	-20.69	Peak
4	169.971	-13.58	32.19	18.61	43.50	-24.89	Peak
5	390.038	-6.89	34.25	27.36	46.00	-18.64	Peak
6	873.714	1.12	28.92	30.04	46.00	-15.96	Peak

Vertical

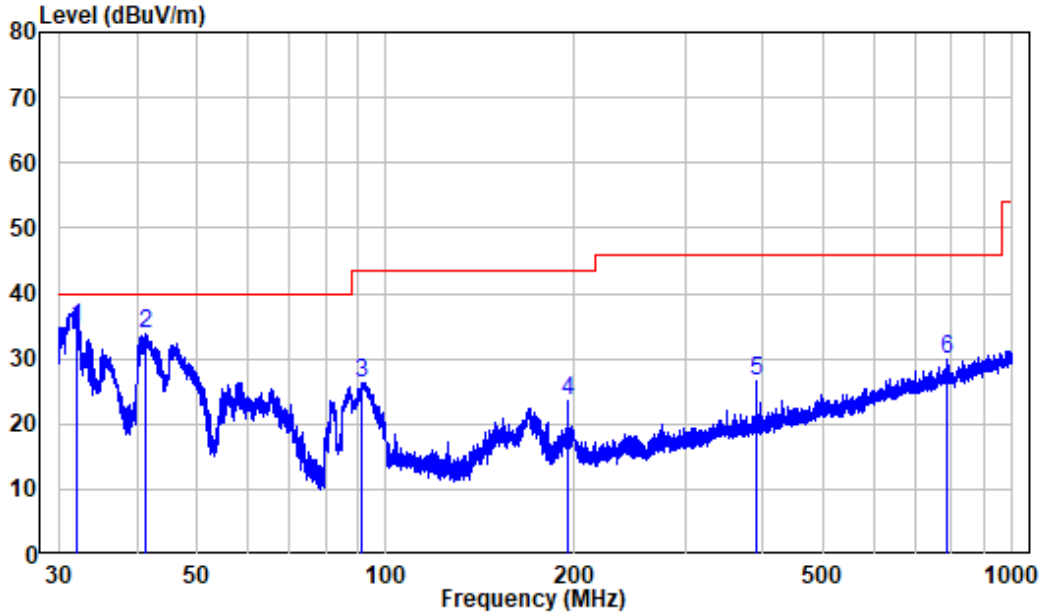

Site : chamber
Condition: 3m VERTICAL
Job No. : RA230523-28733E-RF
Test Mode: BT Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	32.011	-12.17	46.88	34.71	40.00	-5.29	QP
2	41.313	-10.13	43.83	33.70	40.00	-6.30	Peak
3	91.655	-13.42	39.69	26.27	43.50	-17.23	Peak
4	194.966	-11.43	34.90	23.47	43.50	-20.03	Peak
5	390.038	-6.89	33.58	26.69	46.00	-19.31	Peak
6	784.406	-0.01	29.91	29.90	46.00	-16.10	Peak

Note: For below 1GHz, when the test result of peak was 6dB below to the limit of QP, just peak value was recorded.

Above 1GHz (worst case for 8DPSK):

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel									
2310	56.29	PK	136	1.6	H	-10.32	45.97	74	-28.03
2310	55.25	PK	339	1.2	V	-10.32	44.93	74	-29.07
2390	56.01	PK	201	1.6	H	-10.62	45.39	74	-28.61
2390	56.8	PK	194	1.4	V	-10.62	46.18	74	-27.82
4804	53.4	PK	201	1.6	H	-5.58	47.82	74	-26.18
4804	51	PK	20	1.7	V	-5.58	45.42	74	-28.58
Middle Channel									
4882	47.25	PK	95	1.9	H	-5.23	42.02	74	-31.98
4882	46.33	PK	121	1.9	V	-5.23	41.1	74	-32.9
High Channel									
2483.5	55.84	PK	220	1.6	H	-10.46	45.38	74	-28.62
2483.5	56.43	PK	85	1.6	V	-10.46	45.97	74	-28.03
2500	55.51	PK	36	1.9	H	-10.32	45.19	74	-28.81
2500	55.84	PK	345	1.5	V	-10.32	45.52	74	-28.48
4960	46.68	PK	36	1.9	H	-4.90	41.78	74	-32.22
4960	46.91	PK	274	1.5	V	-4.90	42.01	74	-31.99

Note:
Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Factor + Reading
Margin = Corrected Amplitude – Limit
The other spurious emission which is in the noise floor level was not recorded.
For above 1GHz, when the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, just peak value was recorded.

1 GHz - 18 GHz: (Pre-Scan plots)

Worst case for 8DPSK, Low Channel:

Horizontal

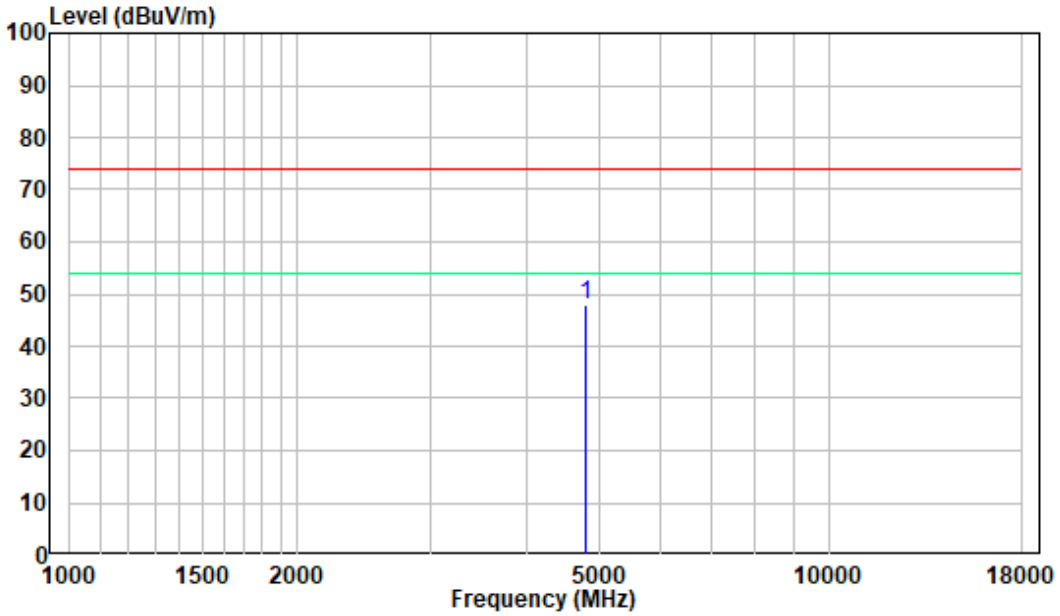

Vertical

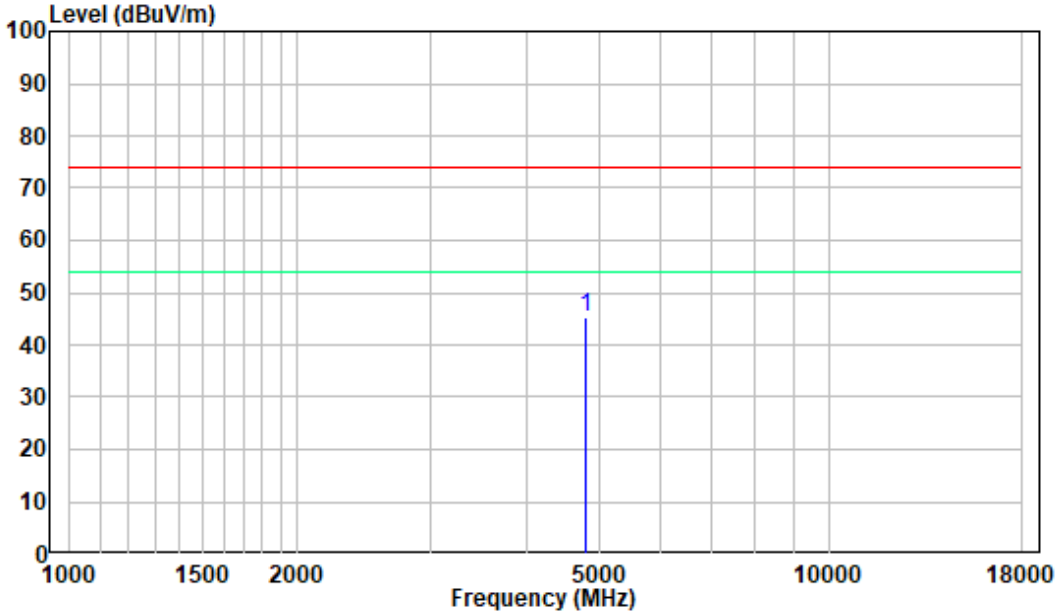

18-25GHz: (Pre-Scan plots)

Worst case for 8DPSK, Low Channel:

Horizontal

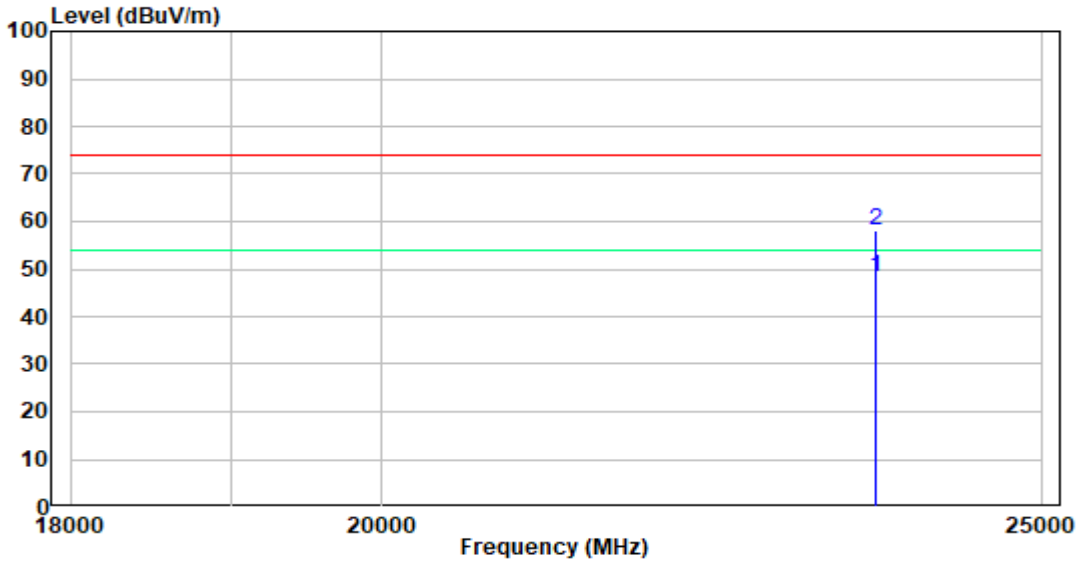

Vertical

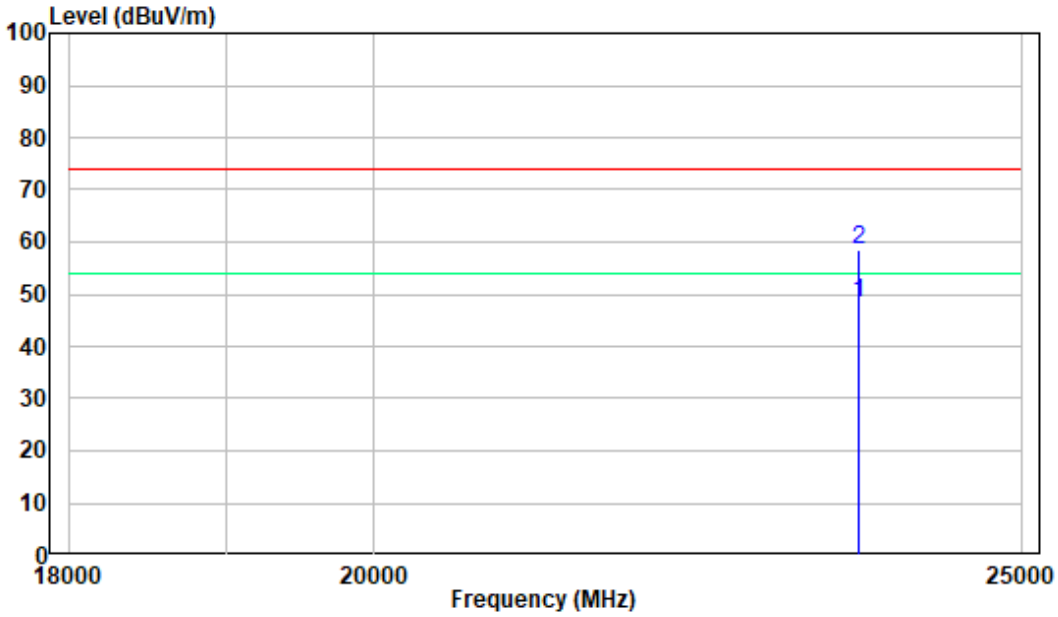

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hoping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

According to ANSI C63.10-2013, section 7.8.2

1. Set the EUT in TX mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.



Test Data

Environmental Conditions

Temperature:	26℃
Relative Humidity:	46%
ATM Pressure:	101.0kPa

The testing was performed by Matt Liang on 2023-06-13.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the below table and plots:

Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1	≥0.540	PASS
2DH5	Ant1	Hop	1	≥0.820	PASS
3DH5	Ant1	Hop	1	≥0.813	PASS

Note: The limit = (2/3) * 20dB bandwidth

DH5_Ant1_Hop

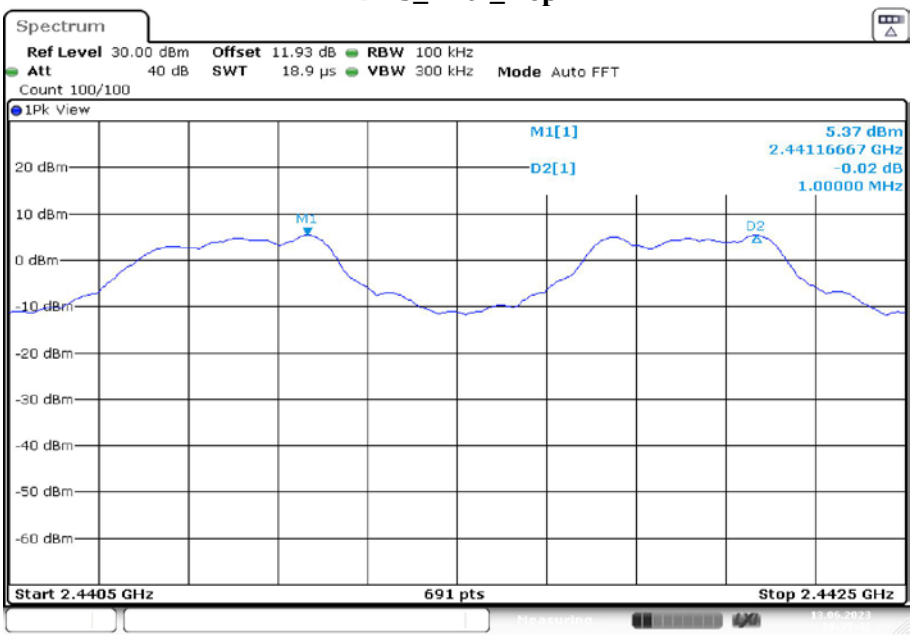

Date: 13.JUN.2023 10:35:42

2DH5_Ant1_Hop

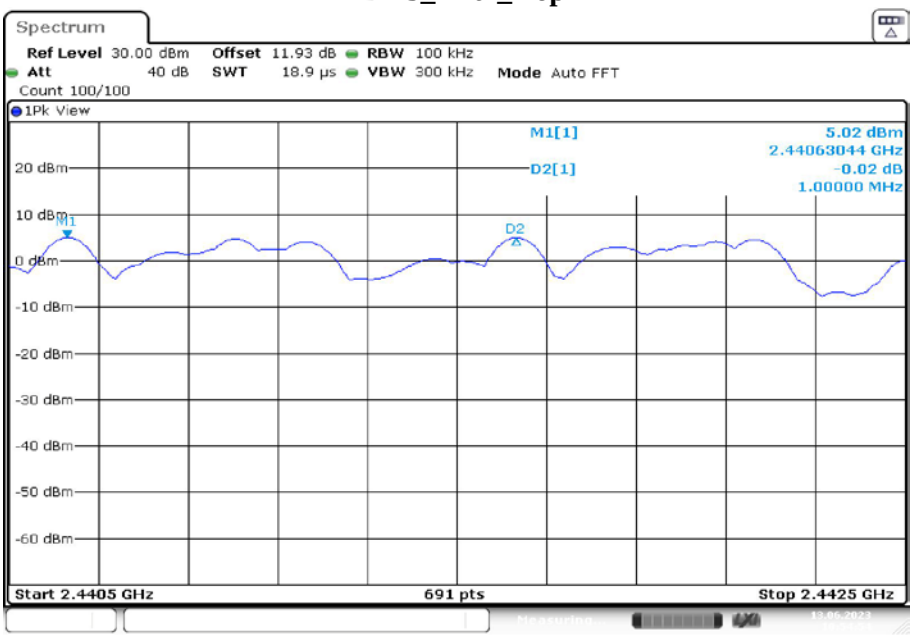

Date: 13.JUN.2023 10:54:55

3DH5_Ant1_Hop

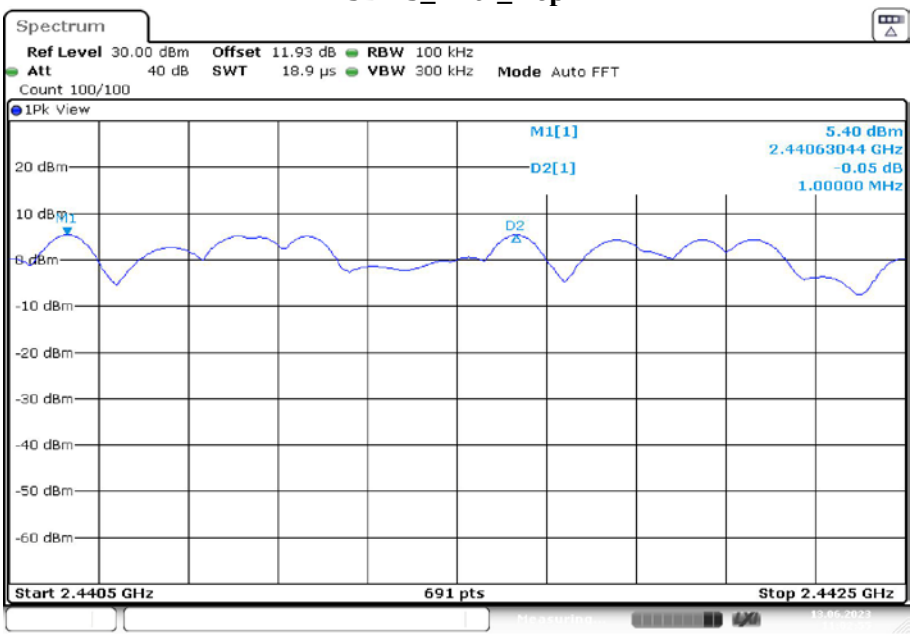

Date: 13.JUN.2023 11:02:56

FCC §15.247(a) (1)-20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

According to ANSI C63.10-2013, section 7.8.7 and section 6.9.2

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:
• The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

• The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.

• The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not TX continuously.

• The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.
For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



Test Data

Environmental Conditions

Temperature:	26℃
Relative Humidity:	46%
ATM Pressure:	101.0kPa

The testing was performed by Matt Liang on 2023-06-13.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the below table and plots:

Test Mode	Antenna	Channel	20db EBW[MHz]	OCB [MHz]	Verdict
DH5	Ant1	2402	0.80	0.875	PASS
		2441	0.80	0.869	PASS
		2480	0.81	0.875	PASS
2DH5	Ant1	2402	1.23	1.181	PASS
		2441	1.23	1.181	PASS
		2480	1.23	1.181	PASS
3DH5	Ant1	2402	1.22	1.172	PASS
		2441	1.22	1.175	PASS
		2480	1.22	1.175	PASS

20 dB EMISSION BANDWIDTH_DH5_Ant1_2402

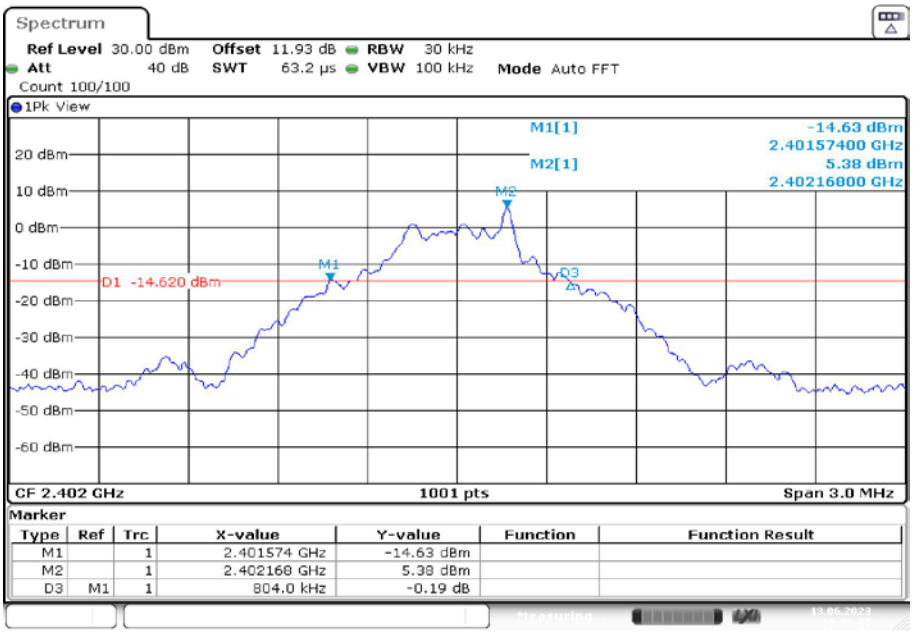

Date: 13.JUN.2023 10:20:35

99% OCCUPIED BANDWIDTH_DH5 _Ant1_2402

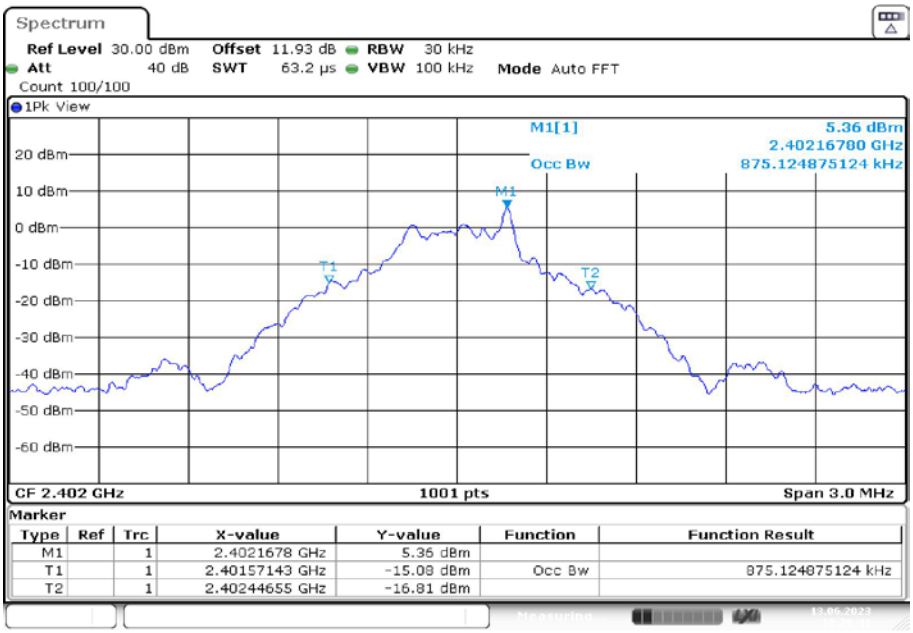

Date: 13.JUN.2023 10:20:41

20 dB EMISSION BANDWIDTH_DH5 _Ant1_2441

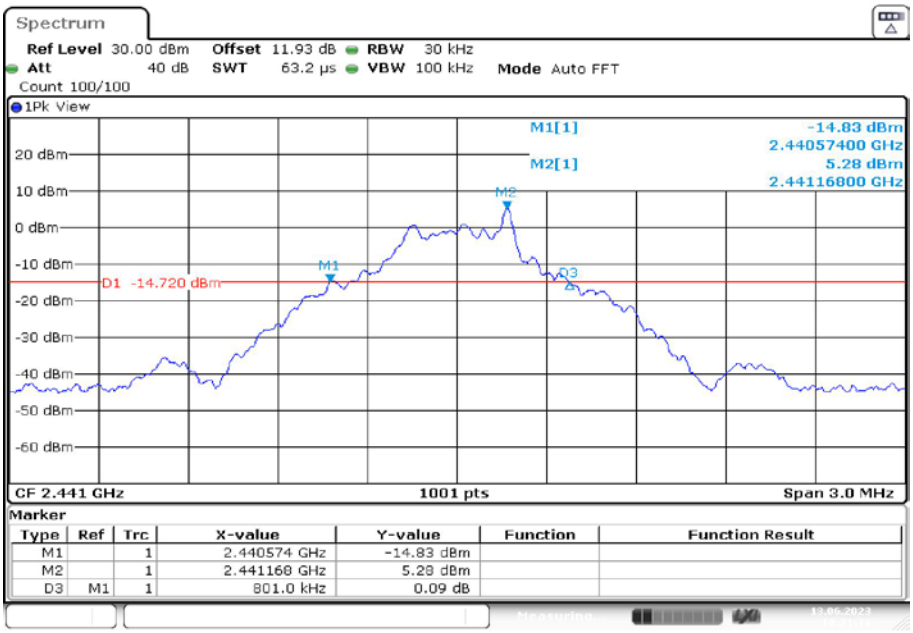

Date: 13.JUN.2023 10:21:13

99% OCCUPIED BANDWIDTH_DH5 _Ant1_2441

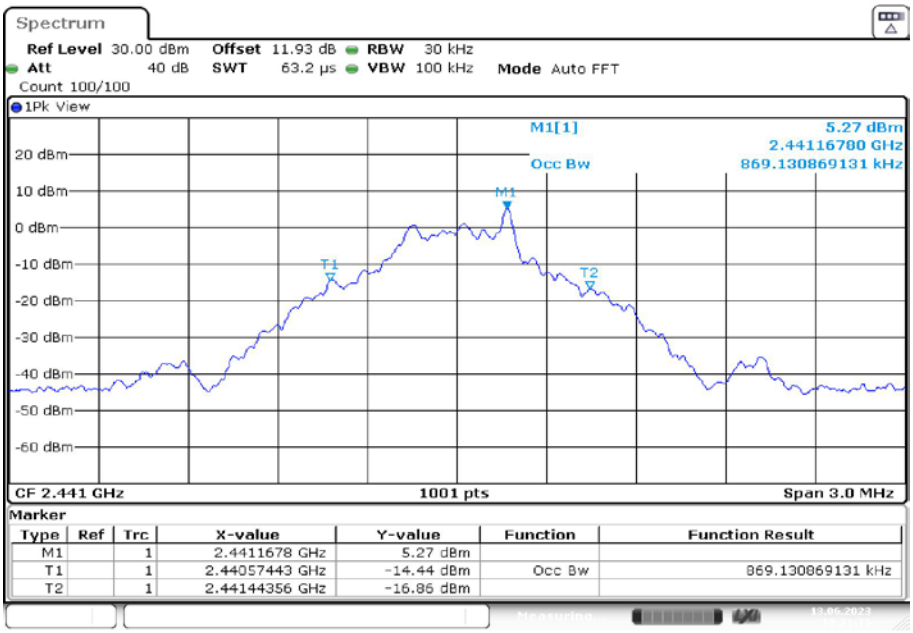

Date: 13.JUN.2023 10:21:19

20 dB EMISSION BANDWIDTH_DH5 _Ant1_2480

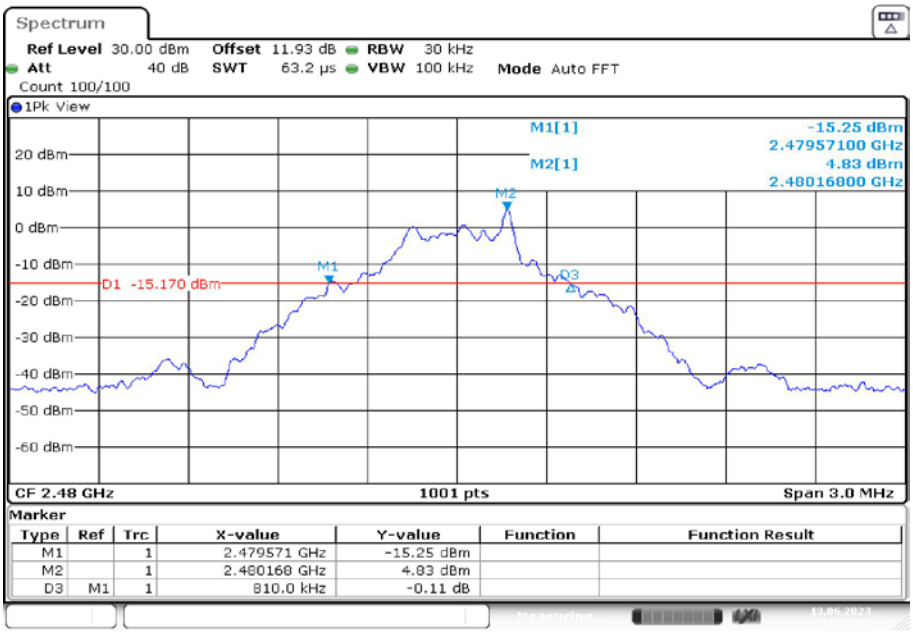

Date: 13.JUN.2023 10:21:47

99% OCCUPIED BANDWIDTH_DH5 _Ant1_2480

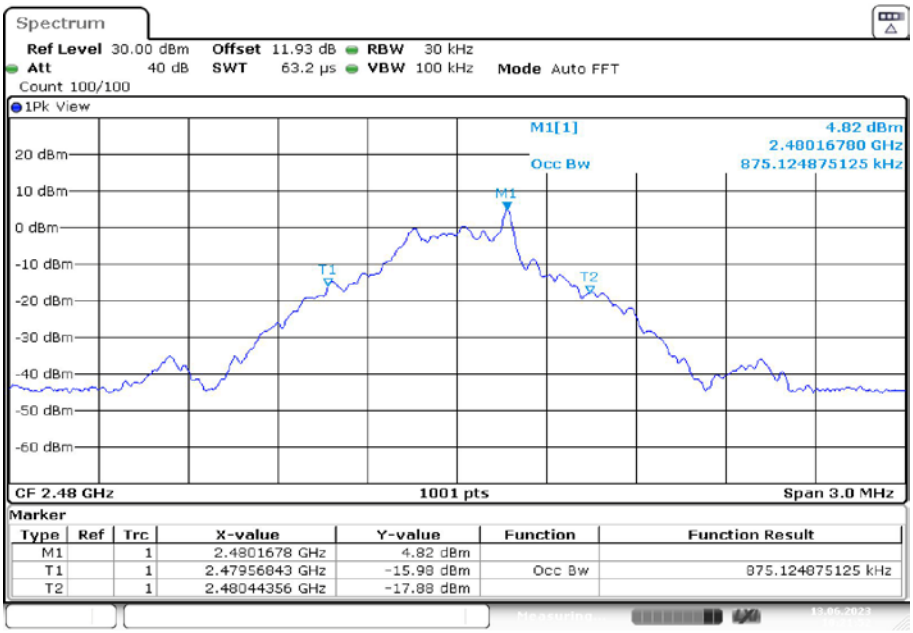

Date: 13.JUN.2023 10:21:52

20 dB EMISSION BANDWIDTH_2DH5 _Ant1_2402

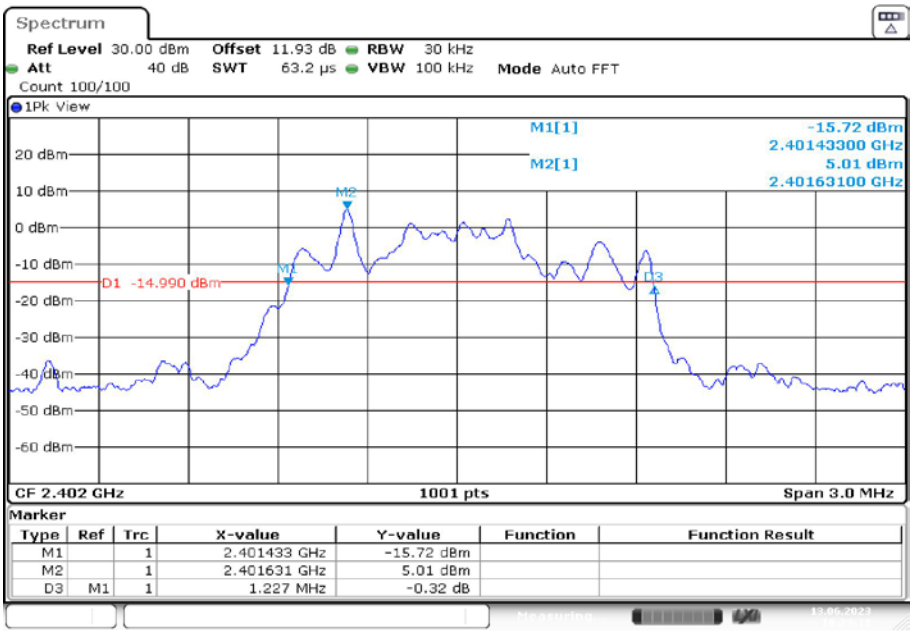

Date: 13.JUN.2023 10:23:11

99% OCCUPIED BANDWIDTH_2DH5 _Ant1_2402

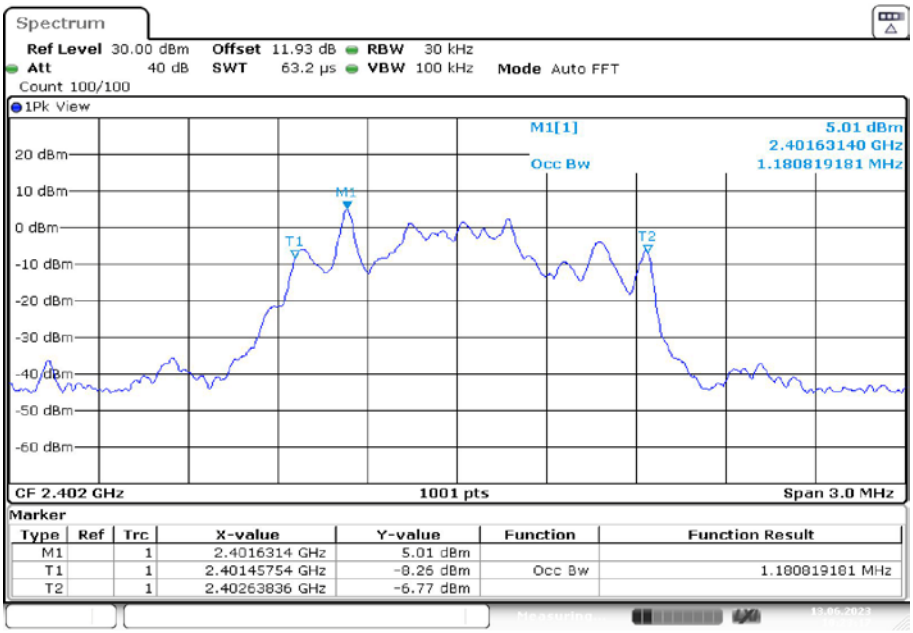

Date: 13.JUN.2023 10:23:17

20 dB EMISSION BANDWIDTH_2DH5 _Ant1_2441

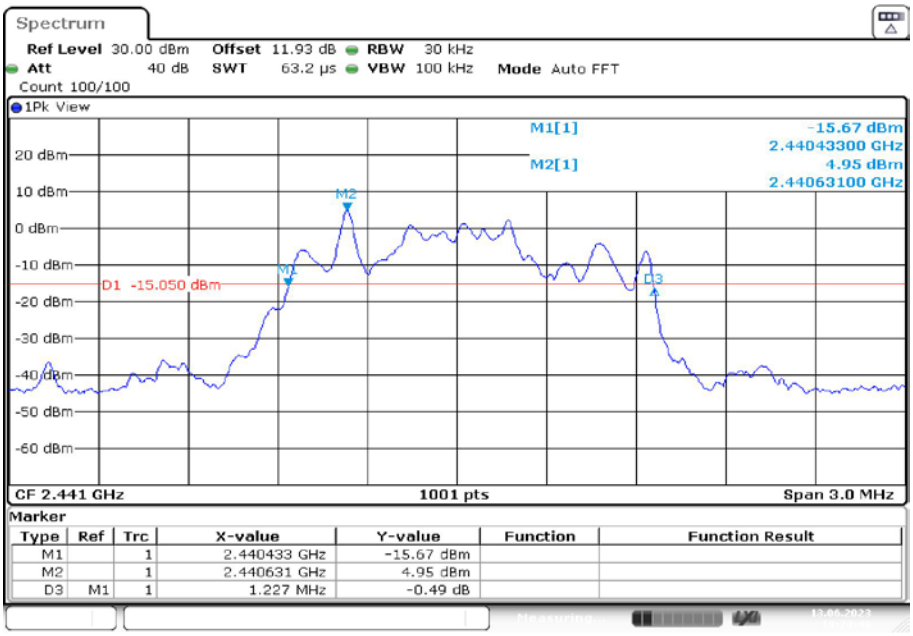

Date: 13.JUN.2023 10:23:46

99% OCCUPIED BANDWIDTH_2DH5 _Ant1_2441

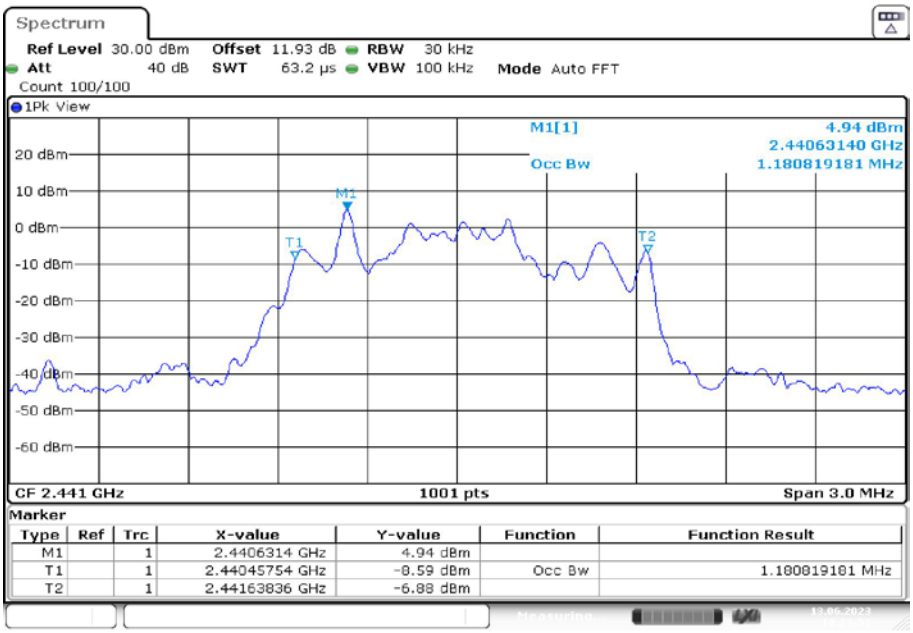

Date: 13.JUN.2023 10:23:52

20 dB EMISSION BANDWIDTH _2DH5_Ant1_2480

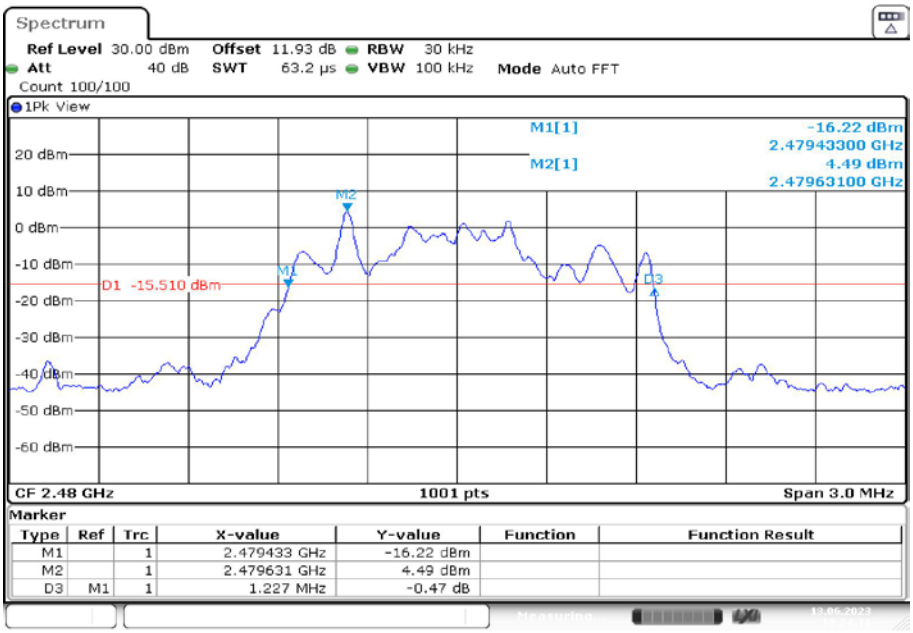

Date: 13.JUN.2023 10:24:18

99% OCCUPIED BANDWIDTH _2DH5_Ant1_2480

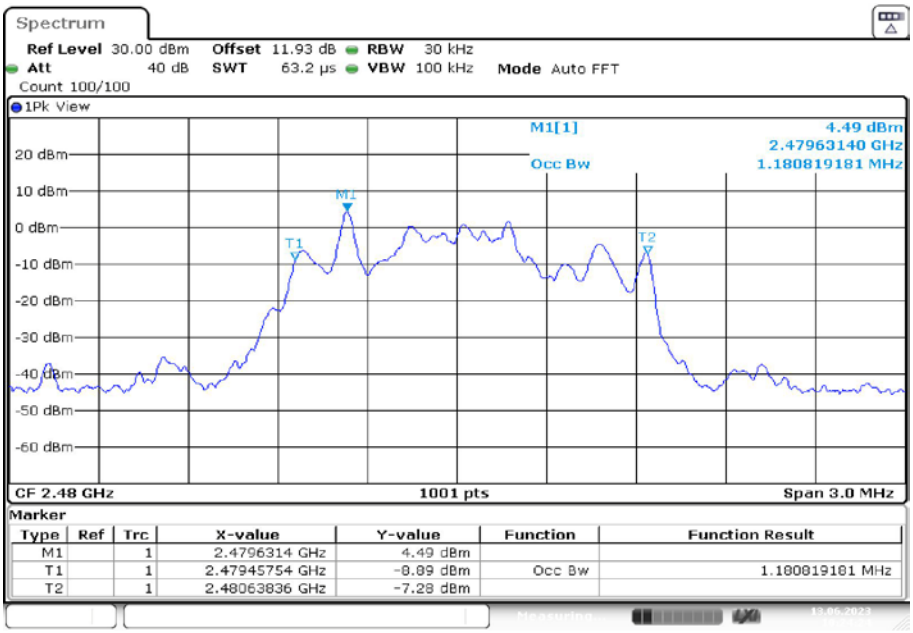

Date: 13.JUN.2023 10:24:24

20 dB EMISSION BANDWIDTH _3DH5_Ant1_2402

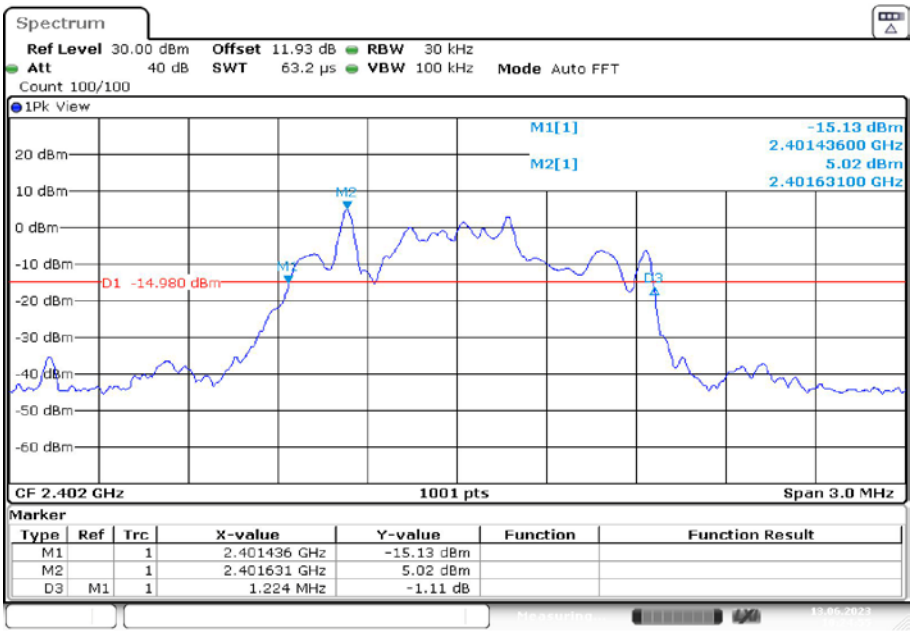

Date: 13.JUN.2023 10:24:56

99% OCCUPIED BANDWIDTH _3DH5_Ant1_2402

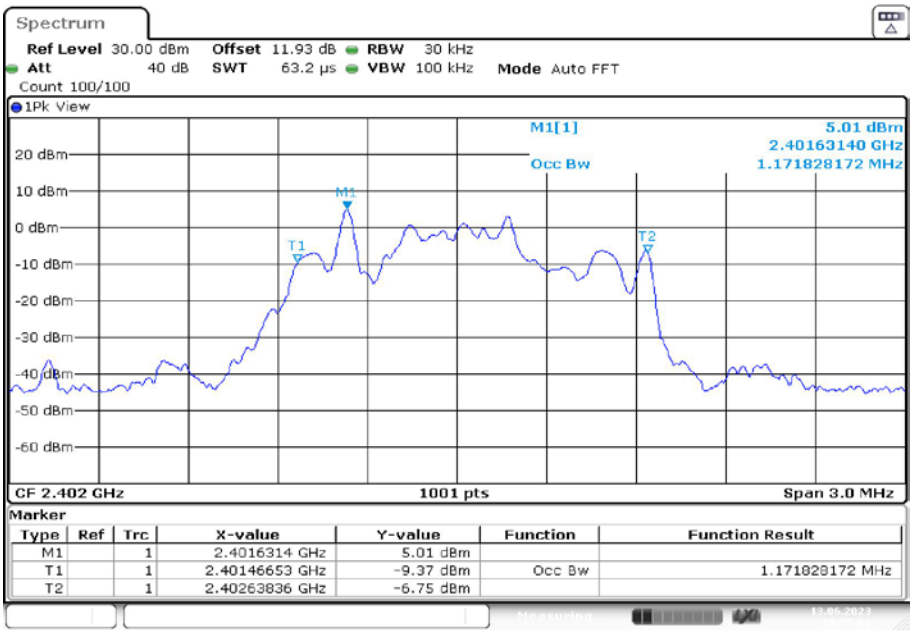

Date: 13.JUN.2023 10:25:01

20 dB EMISSION BANDWIDTH _3DH5_Ant1_2441

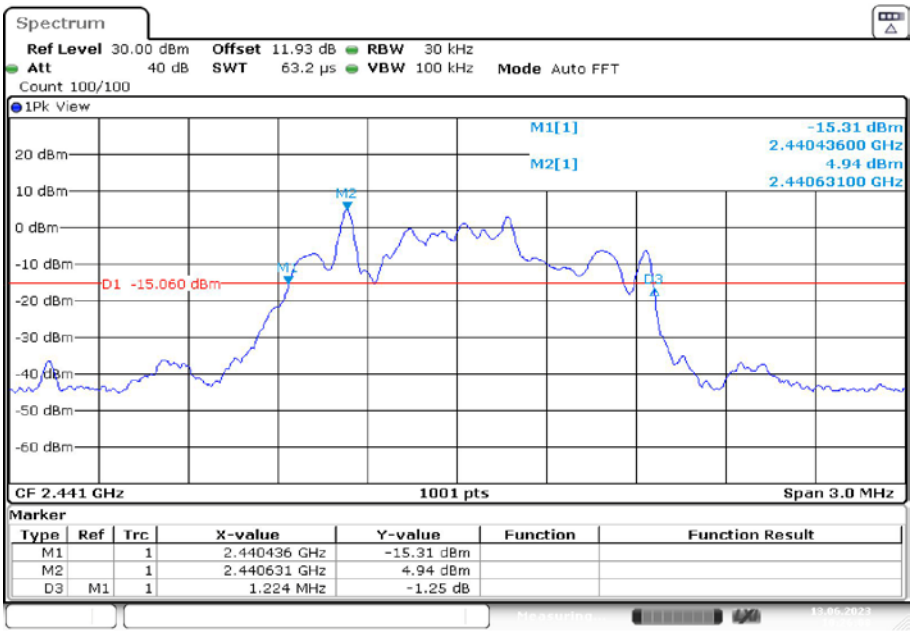

Date: 13.JUN.2023 10:26:08

99% OCCUPIED BANDWIDTH _3DH5_Ant1_2441

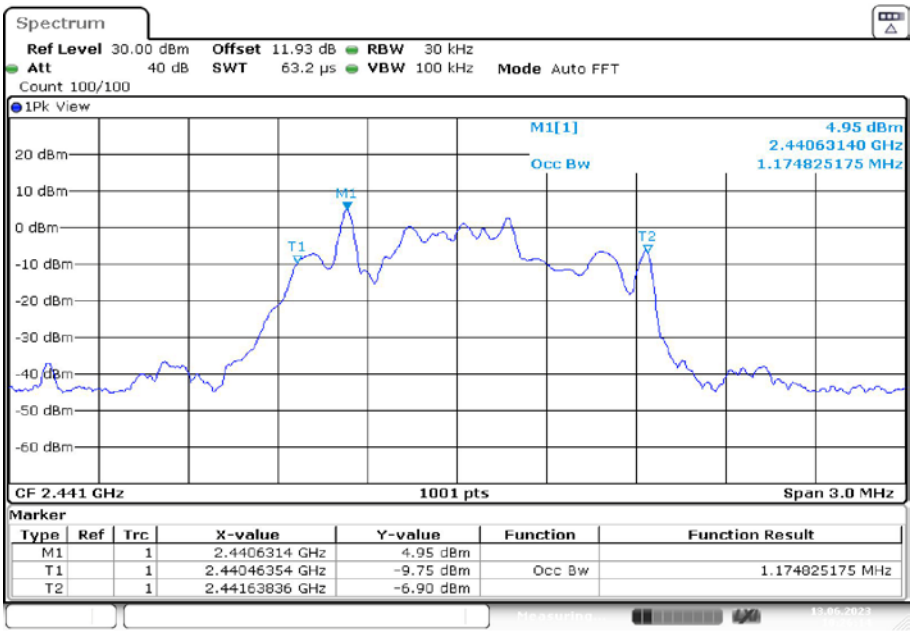

Date: 13.JUN.2023 10:26:14

20 dB EMISSION BANDWIDTH _3DH5_Ant1_2480

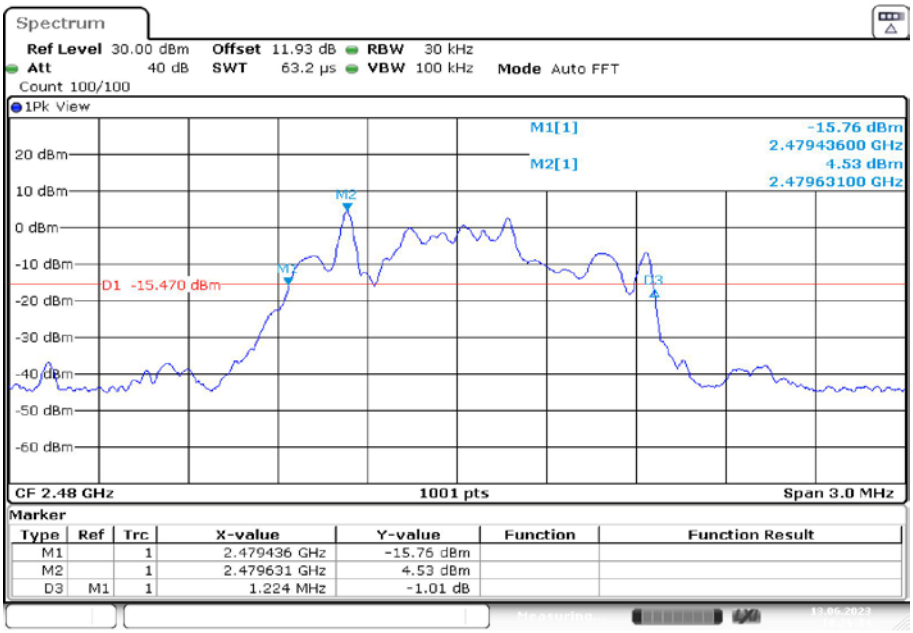

Date: 13.JUN.2023 10:26:35

99% OCCUPIED BANDWIDTH _3DH5_Ant1_2480

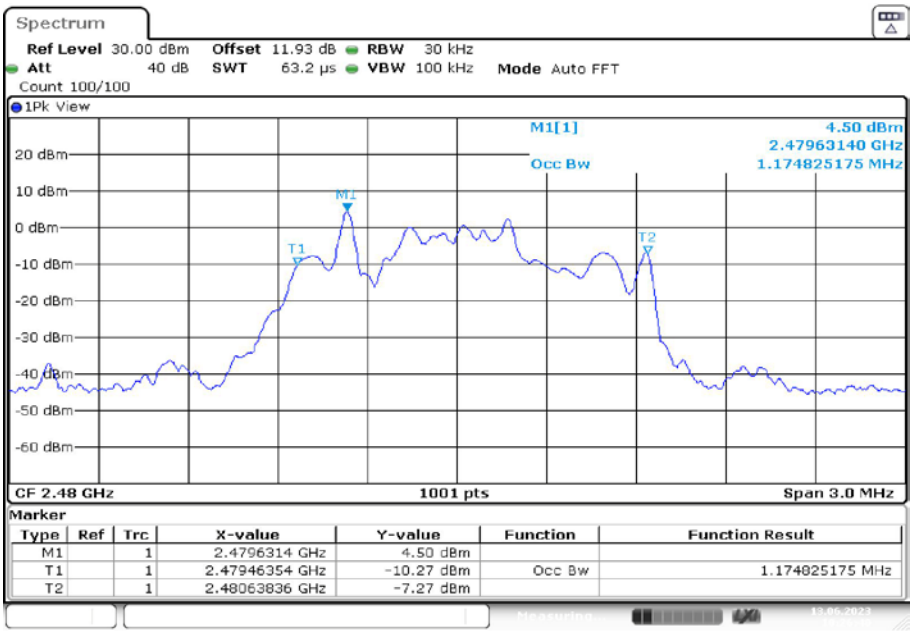

Date: 13.JUN.2023 10:26:40

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

According to ANSI C63.10-2013, section 7.8.3

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.

2. Set the EUT in hopping mode from first channel to last.

3. By using the max-hold function record the quantity of the channel.



Test Data

Environmental Conditions

Temperature:	26℃
Relative Humidity:	46%
ATM Pressure:	101.0kPa

The testing was performed by Matt Liang on 2023-06-13.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the below table and plots:

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	>=15	PASS
2DH5	Ant1	Hop	79	>=15	PASS
3DH5	Ant1	Hop	79	>=15	PASS

DH5_Ant1_Hop

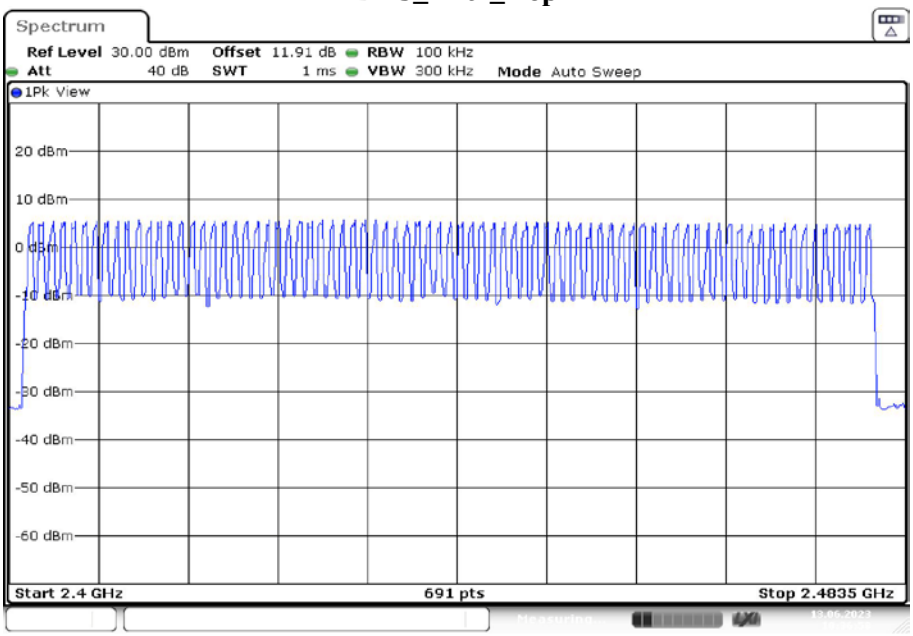

Date: 13.JUN.2023 10:36:58

2DH5_Ant1_Hop

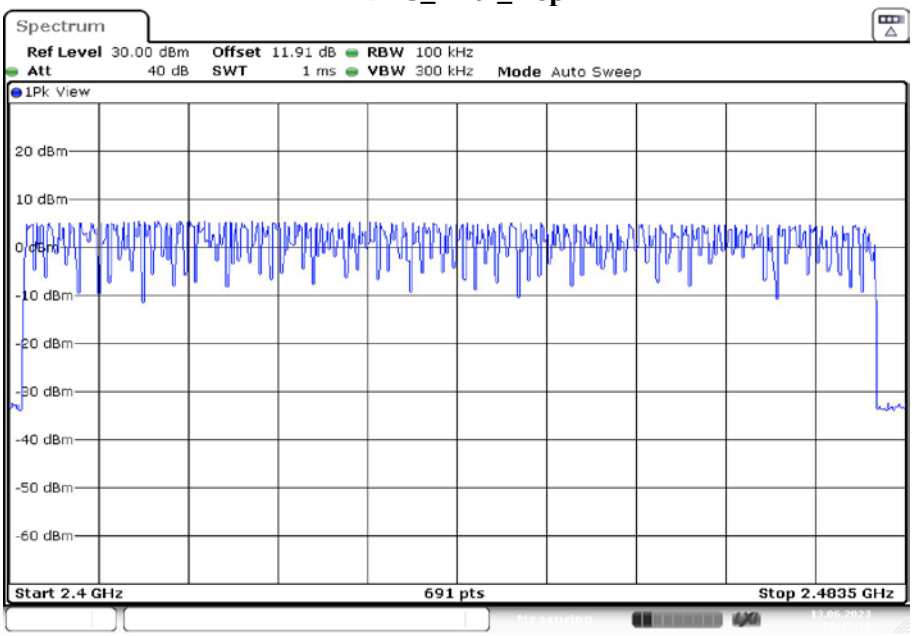

Date: 13.JUN.2023 10:45:11

3DH5_Ant1_Hop

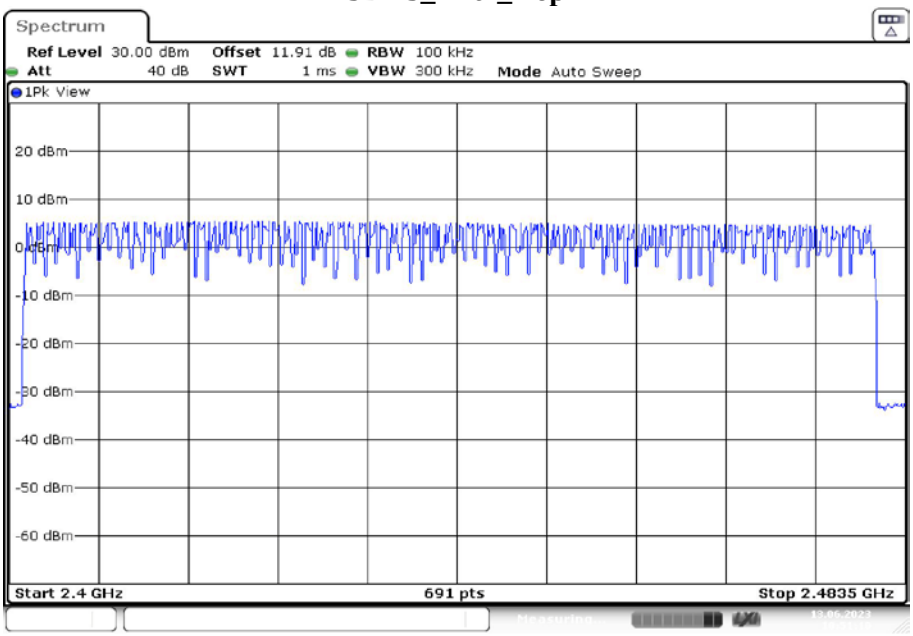

Date: 13.JUN.2023 10:51:11