



Prüfbericht-Nr.: Test report no.:	CN23XIWU (P15C-125k) 001	Auftrags-Nr.: Order no.:	48218991	Seite 1 von 16 Page 1 of 16
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2023-05-04	
Auftraggeber: Client:	Whetron Electronics CO.,LTD. No.16, Xingye Rd.,Ta Fa Ind., Daliao Dist., Kaohsiung City 831, Taiwan (R.O.C.)			
Prüfgegenstand: Test item:	SMART KEY SYSTEM Host			
Bezeichnung / Typ-Nr.: Identification / Type no.:	S100394400			
Auftrags-Inhalt: Order content:	FCC Part 15C Test report			
Prüfgrundlage: Test specification:	FCC 47CFR Part 15: Subpart C Section 15.207 and 15.209			
Wareneingangsdatum: Date of sample receipt:	2023-05-09			
Prüfmuster-Nr.: Test sample no.:	A003471758-003			
Prüfzeitraum: Testing period:	2023-07-05			
Ort der Prüfung: Place of testing:	EMC/RF Taipei Testing Site			
Prüflaboratorium: Testing laboratory:	Taipei Testing Laboratories			
Prüfergebnis*: Test result*:	Pass			
zusammengestellt von: compiled by:			genehmigt von: authorized by:	
Datum: Date:	2023-07-06	Ausstellungsdatum: Issue date:	2023-07-06	
Stellung / Position:	Senior Project Manager	Stellung / Position:	Senior Project Manager	
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable
5 = mangelhaft N/T = nicht getestet				
5 = poor N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

V05

Prüfbericht - Nr.: CN23XIWU (P15C-125k) 001
Test Report No.**Seite 2 von 16**
Page 2 of 16

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.203	Antenna Requirement	Pass
5.1.2	15.209	Radiated Spurious Emissions	Pass
-	15.207	Mains Conducted Emission	Not Applicable

Note:

1. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	4
1. GENERAL REMARKS	5
1.1 COMPLEMENTARY MATERIALS.....	5
1.2 DECISION RULE OF CONFORMITY	5
2. TEST SITES	6
2.1 TEST LABORATORY	6
2.2 TEST FACILITY.....	6
2.3 TRACEABILITY	7
2.4 CALIBRATION	7
2.5 MEASUREMENT UNCERTAINTY	7
3. GENERAL PRODUCT INFORMATION.....	8
3.1 PRODUCT FUNCTION AND INTENDED USE	8
3.2 SYSTEM DETAILS AND RATINGS.....	8
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	9
3.4 SUBMITTED DOCUMENTS.....	9
4. TEST SET-UP AND OPERATION MODES.....	10
4.1 PRINCIPLE OF CONFIGURATION SELECTION	10
4.2 TEST OPERATION AND TEST SOFTWARE.....	10
4.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4 TEST SETUP DIAGRAM	11
5. TEST RESULTS	12
5.1 TRANSMITTER REQUIREMENT & TEST SUITES	12
5.1.1 Antenna Requirement	12
5.1.2 Radiated Spurious Emissions	13
APPENDIX A - TEST RESULT OF RADIATED EMISSIONS	
APPENDIX SP - PHOTOGRAPHS OF TEST SETUP	
APPENDIX EP – PHOTOGRAPHS OF EUT	

Prüfbericht - Nr.: CN23XIWU (P15C-125k) 001
Test Report No.

Seite 4 von 16
Page 4 of 16

HISTORY OF THIS TEST REPORT

Report No.	Description	Date Issued
CN23XIWU (P15C-125k) 001	Original Release	2023-07-06

1. General Remarks

1.1 Complementary Materials

The following attachments are integral parts of this test report:

Appendix A - Test Result of Radiated Emissions

Appendix SP - Photographs of Test Setup

Appendix EP – Photographs of EUT

Test Specifications

The following standards were applied.

Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart C Section 15.207 and 15.209
ANSI C63.10:2013

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 180491
ISED Registration No.: 25563

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.32 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.31 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a SMART KEY SYSTEM Host. It contains a 125 kHz compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	SMART KEY SYSTEM Host
Type Identification	S100394400
FCC ID	2BBQI-S100394400

Technical Specification of EUT

Item	EUT information
Operating Frequency	125 kHz
Operation Voltage	12 Vdc
Modulation	ASK
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.3

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum emission level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Setup for testing: Power on the EUT and the EUT will start Power transmission using the fundamental frequency in the range of 125 kHz.

The samples were used as follows:

A003471758-003

Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To	Description
	Radiated Spurious Emissions	
-	√	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on Z-plane. "-" means no effect.

Radiated Spurious Emissions

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (kHz)	Tested Frequency (kHz)
-	125	125

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Radiated Spurious Emissions	23.7-24.6 °C	69.2-72.4 %	Roger Liao

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT


None

Support Unit

No.	Description	Brand	Model	S/N	Remark
Radiated Test					
A	Fixture_Controller	Kwang Yang	Kwang Yang-001	-	200cm non-shielded cable w/o core
1	DC Power Supply	Gwinstek	GPS-3030	-	--

4.4 Test Setup Diagram

<Radiated Spurious Emissions Mode>

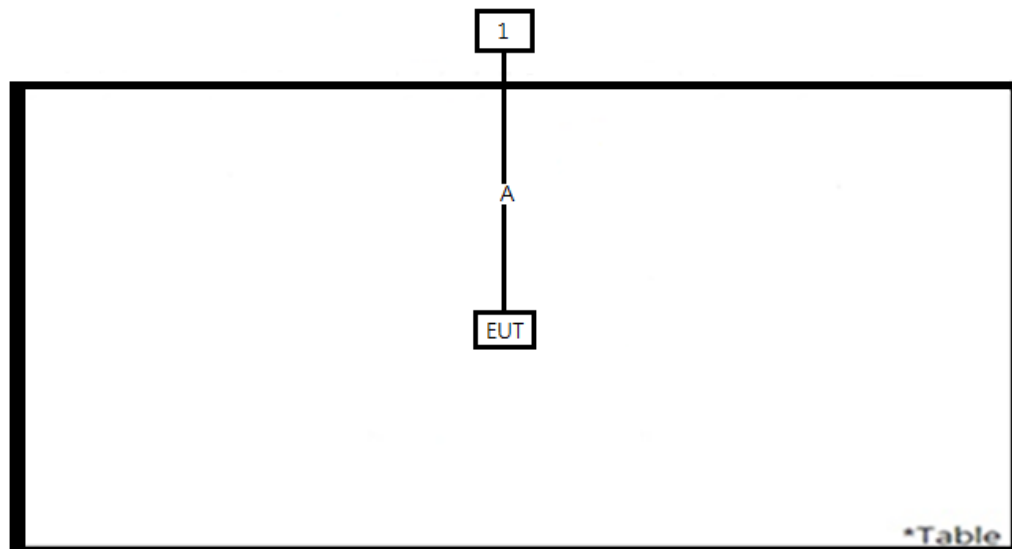

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement Use of approved antennas only

The antenna is a ferrite magnetic antenna with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.

5.1.2 Radiated Spurious Emissions

Limit


The field strength of any emissions shall not exceed the general radiated emission limits in §15.209 as below table:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup

<Radiated Emissions below 30 MHz>

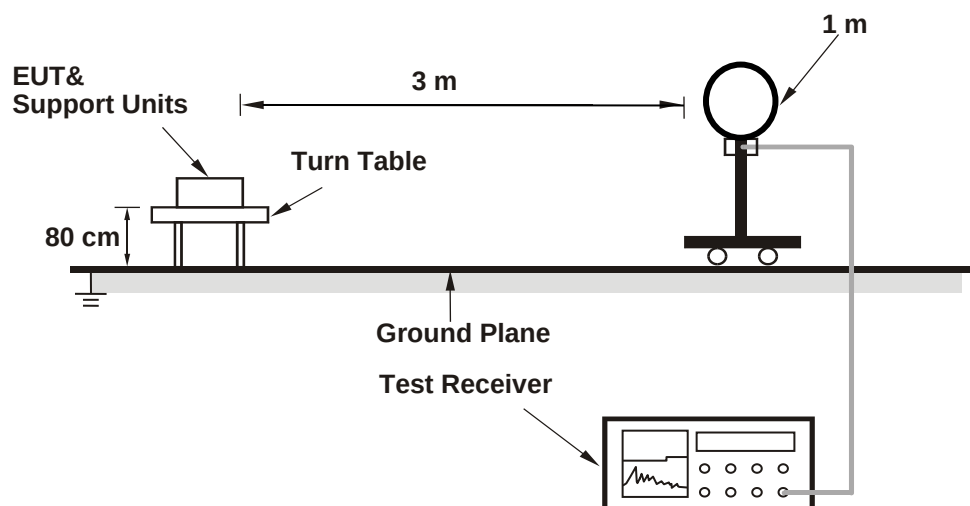

<Radiated Emissions 30 MHz to 1 GHz>

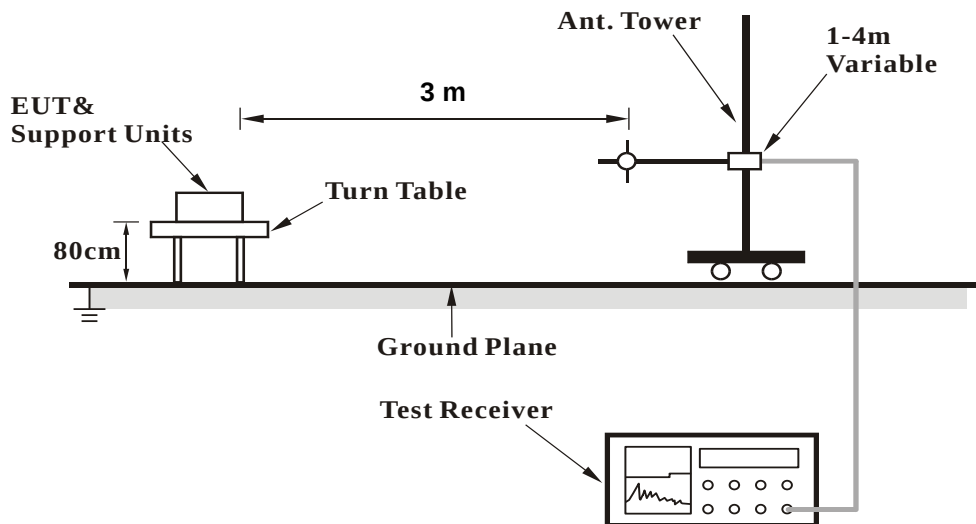

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Test Instruments

Test Date: 2023/7/5

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
30MHz-1GHz					
Receiver	R&S	ESR7	102109	2023/2/24	2024/2/23
Bilog Antenna	SCHWARZBECK	VULB-9168	00951	2023/3/31	2024/3/29
LF-AMP	Agilent	8447D	2727A05146	2023/2/16	2024/2/15
Below 30MHz					
Receiver	R&S	ESR7	102109	2023/2/24	2024/2/23
Loop Antenna	SCHWARZBECK	FMZB 1519B	00215	2023/1/4	2024/1/3

Test Procedures**For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency are 9-90 kHz, 110-490 kHz and above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.
3. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.
4. The emission levels of other frequencies (including the 10th harmonic of the highest fundamental frequency) are very lower than the limit and are not shown in the test report.

Prüfbericht - Nr.: CN23XIWU (P15C-125k) 001
Test Report No.

Seite 16 von 16
Page 16 of 16

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)

Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix A.

Appendix B: Test Results of Radiated Spurious Emissions

Fundamental


125kHz

Open

Close




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

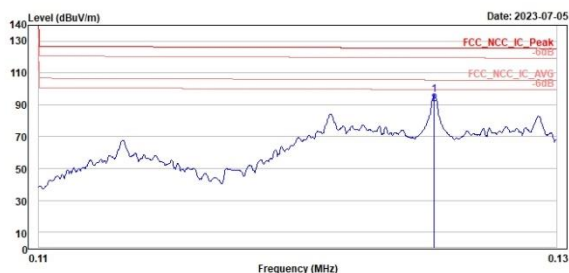

	Freq	Level	Read	Level	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	0.13	96.18	78.16	18.02	125.64	-29.46	180	66	Peak	Open	
2	0.13	90.74	72.72	18.02	105.64	-14.90	180	66	Average	Open	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

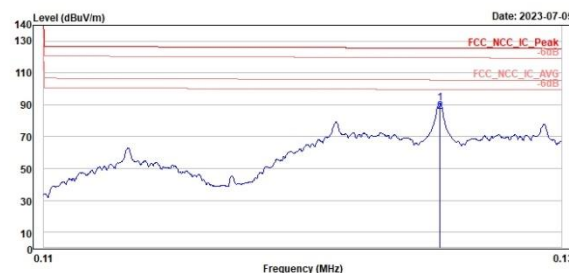


	Freq	Level	Read	Level	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	0.13	91.20	73.18	18.02	125.64	-34.44	180	360	Peak	Close	
2	0.13	85.76	67.74	18.02	105.64	-19.88	180	360	Average	Close	

125kHz

Ground



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

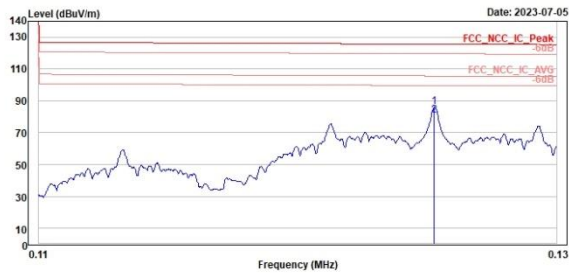

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.13	86.09	68.07	18.02	125.64	-39.55	100	250	Peak	Ground		
2	0.13	80.65	62.63	18.02	105.64	-24.99	100	250	Average	Ground		


Spurious Emissions, Tx Mode, 9kHz ~ 30MHz

125kHz

(Open) 9kHz~150kHz




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

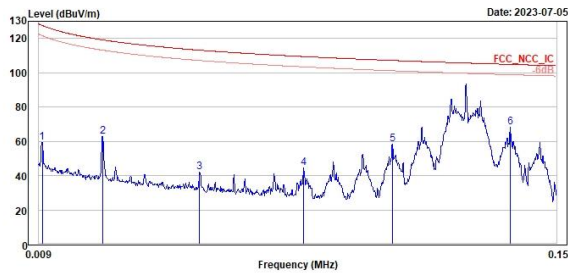

Peak	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.01	59.51	41.79	17.72	127.60	-68.09	100	140	Peak	Open		
2	0.03	62.63	43.68	18.95	119.13	-56.50	100	274	Peak	Open		
3	0.05	41.78	22.73	19.05	113.13	-71.35	100	360	Peak	Open		
4	0.08	44.43	26.06	18.37	109.41	-64.98	100	97	Peak	Open		
5	0.11	58.50	40.56	17.94	107.15	-48.65	100	97	Peak	Open		
6	0.14	68.03	49.96	18.07	104.04	-36.01	100	97	Peak	Open		



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

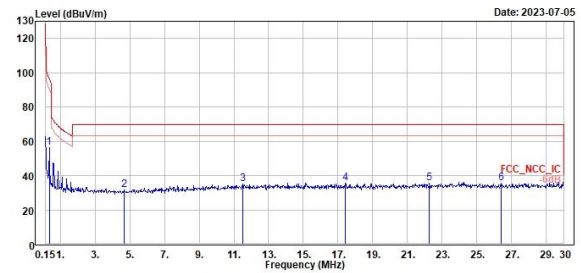

Peak	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.36	56.56	37.79	18.77	96.50	-39.94	100	99	Peak	Open		
2	4.69	31.39	11.93	19.46	69.50	-38.11	100	160	Peak	Open		
3	11.49	35.21	13.62	21.59	69.50	-34.29	100	360	Peak	Open		
4	17.40	35.36	13.37	21.99	69.50	-34.14	100	99	Peak	Open		
5	22.27	35.82	13.64	22.18	69.50	-33.68	100	257	Peak	Open		
6	26.42	35.77	13.56	22.21	69.50	-33.73	100	159	Peak	Open		

Spurious Emissions, Tx Mode, 30MHz ~ 1GHz


125kHz

(Horizontal)

(Vertical)




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

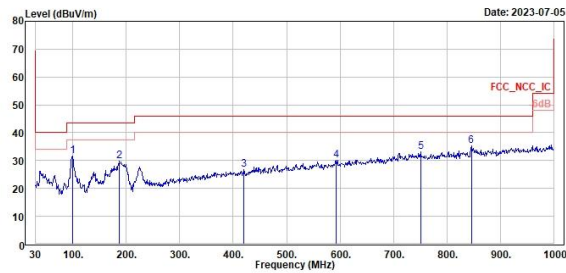

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	98.87	31.55	42.48	-10.93	43.50	-11.95	300	269	Peak	Horizontal		
2	186.17	29.79	37.31	-7.52	43.50	-13.71	200	272	Peak	Horizontal		
3	419.94	26.87	29.52	-2.65	46.00	-19.13	400	312	Peak	Horizontal		
4	592.60	30.19	29.87	0.32	46.00	-15.81	400	302	Peak	Horizontal		
5	750.71	33.28	30.12	3.16	46.00	-12.72	400	131	Peak	Horizontal		
6	845.77	35.30	31.20	4.10	46.00	-10.70	261	360	Peak	Horizontal		



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

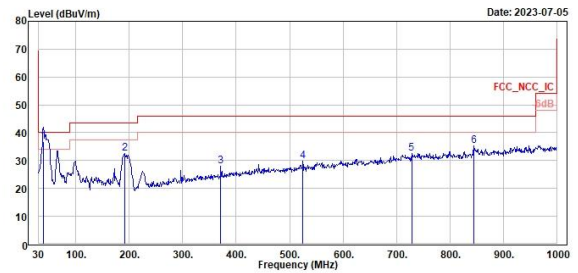

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	38.73	36.79	43.81	-7.02	40.00	-3.21	200	142	QP	Vertical		
2	191.99	32.41	40.36	-7.95	43.50	-11.09	100	145	Peak	Vertical		
3	371.44	27.96	31.33	-3.37	46.00	-18.04	105	360	Peak	Vertical		
4	524.70	29.81	30.65	-0.84	46.00	-16.19	100	360	Peak	Vertical		
5	728.40	32.68	30.56	2.12	46.00	-13.32	100	97	Peak	Vertical		
6	844.80	35.34	31.22	4.12	46.00	-10.66	300	237	Peak	Vertical		