TEST REPORT

Part 15 Subpart C 15.247

Equipment under test	ELECTRIC FAN
Model name	FAN CLASSIC3
FCC ID	2BBRP-FANCLASSIC3
Applicant	LUMENA Co., Ltd.
Manufacturer	Zhejiang Xingyue Electric Equipment Co.,Ltd.
Date of test(s)	2023.06.08 ~ 2023.06.14
Date of issue	2023.07.13

Issued to
LUMENA Co., Ltd.
98, Songjeongjungang-ro 5beon-gil, Haeundae-gu, Busan, South Korea
Tel: +82-51-714-1692 / Fax: +82-051-714-3141

Issued by
KES Co., Ltd.
3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,
Gyeonggi-do, 14057, Korea
473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test and report completed by :	**Report approval by :**
Gu-Bong, Kang Test engineer	Yeong-Jun Cho Technical manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Revision history

Revision	Date of issue	Test report No.	Description
-	2023.07.13	KES-RF-23T0098	Initial

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

TABLE OF CONTENTS

1. General information 4
1.1. EUT description 4
1.2. Test configuration 4
1.3. Information about derivative model 4
1.4. Accessory information 5
1.5. Sample calculation 5
1.6. Worst case data rate 5
1.7. Measurement Uncertainty 5
1.8. Frequency/channel operations 6
2. Summary of tests 7
3. Test results 8
3.1. 6 dB bandwidth 8
3.2. Output power 13
3.3. Power spectral density 15
3.4. Radiated restricted band and emissions 20
3.5. Conducted spurious emissions & band edge 56
3.6. AC conducted emissions 65
3.7. Antenna Requirement 68
Appendix A. Measurement equipment 69
Appendix B. Test setup photos 70

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1. General information

Applicant:	LUMENA Co., Ltd.
Applicant address:	98, Songjeongjungang-ro 5beon-gil, Haeundae-gu, Busan, South Korea
Test site:	KES Co., Ltd.
Test site address:	☐ 3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea ☒ 473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea
Test Facility	FCC Accreditation Designation No.: KR0100, Registration No.: 444148
FCC rule part(s):	15.247
FCC ID:	2BBRP-FANCLASSIC3
Test device serial No.:	☒ Production ☐ Pre-production ☐ Engineering

1.1. EUT description

Equipment under test	ELECTRIC FAN	
Frequency range	2 402 ㎒ ~ 2 480 ㎒ (LE 1 Mbps) 2 412 ㎒ ~ 2 462 ㎒ (802.11b/g/n_HT20)	
Model	FAN CLASSIC3	
Modulation technique	GFSK, DSSS, OFDM	
Number of channels	2 402 ㎒ ~ 2 480 ㎒ (LE 1 Mbps) : 40 ch 2 412 ㎒ ~ 2 462 ㎒ (802.11b/g/n_HT20) : 11 ch	
Antenna specification	Pattern Antenna // Peak gain: 2.54 ㏈i	
Power source	AC 120 V for charging (AC/DC adapter output 12 V)	
Internal Battery specification	DC 12 V	
H/W version	MAIN PCBA	ZMZF10-CONTROL-V04
S/W version	MAIN PCBA	LUMENA_F10_0xECD8_20230317_ht32f65240_1.0.1

1.2. Test configuration

The **LUMENA Co., Ltd. // ELECTRIC FAN // FAN CLASSIC3 // FCC ID: 2BBRP-FANCLASSIC3** was tested according to the specification of EUT, the EUT must comply with following standards and KDB documents.

FCC Part 15.247
KDB 558074 D01 v05 r02
ANSI C63.10-2013

1.3. Information about derivative model

N/A

1.4. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source
AC/DC adapter	Zhongshan Baolijin Electronic Co., Ltd.	BLJ24W120200P-K	HU0702397-20003	AC 120 V input, DC 12 V, 2.0 A output
IR Remote Control	-	-	-	-

1.5. Sample calculation

Where relevant, the following sample calculation is provided
For all conducted test items :

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

For 802.11b/g/n_HT20,
Offset(㎲) = RF cable loss(㎲) + attenuator factor(㎲).
= 0.71 + 20 = 20.71 (㎲)

For LE 1 Mbps,
Offset(㎲) = RF cable loss(㎲) + attenuator factor(㎲).
= 0.63 + 10 = 10.63 (㎲)

For Radiation test :
Field strength level (㎲/m) = Measured level (㎲) + Antenna factor (㎲) + Cable loss (㎲) – Amplifier gain (㎲)

1.6. Worst case data rate

Worst-case data rates as provided by the client were:
2.4 ㎓ 802.11b : **1 Mbps**, 802.11g : **6 Mbps**, 802.11n_HT20 : **MCS0**

1.7. Measurement Uncertainty

Test Item		Uncertainty
Uncertainty for Conduction emission test		2.22 ㎲ (SHIELD ROOM #6)
Uncertainty for Radiation emission test (include Fundamental emission)	Below 1 ㎓	4.04 ㎲ (SAC #6)
	Above 1 ㎓	5.32 ㎲ (SAC #5)
Note. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.		

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.8. Frequency/channel operations

Ch.	Frequency (㎒)	Rate(Mbps)
00	2 402	LE 1 Mbps
⋮	⋮	⋮
20	2 442	LE 1 Mbps
⋮	⋮	⋮
39	2 480	LE 1 Mbps

Ch.	Frequency (㎒)	Rate(Mbps)
01	2 412	802.11b/g/n_HT20
⋮	⋮	⋮
06	2 437	802.11b/g/n_HT20
⋮	⋮	⋮
11	2 462	802.11b/g/n_HT20

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2. Summary of tests

Section in FCC Part 15	Test description	Test results
15.247(a)(2)	6 dB bandwidth	Pass
15.247(b)(3)	Output power	Pass
15.247(e)	Power spectral density	Pass
15.205, 15.209	Radiated restricted band and emission	Pass Note1
15.247(d)	Conducted spurious emission and band edge	Pass
15.207(a)	AC Conducted emissions	Pass Note1
15.203	Antenna Requirement	Pass

Note.
1. This device is Floor-standing device.
2. By the request of the applicant, test was performed with condition below:

Mode	Frequency (㎒)	Power Setting value
802.11b	2 412 ~ 2 462 ㎒	77
802.11g		88
802.11n_HT20		89
LE 1 Mbps	2 402 ~ 2 480 ㎒	0x2a, 06

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

3. Test results

3.1. 6 dB bandwidth

Test procedure

ANSI C63.10-2013 - Section 11.8.2

Test setup



ANSI C63.10-2013 - Section 11.8.2

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW ≥ 3 × RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

Limit

According to §15.247(a)(2), systems using digital modulation techniques may operate 902 ~ 928 MHz, 2 400 ~ 2 483.5 MHz, and 5 725 ~ 5 850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test results

Mode : 802.11b

Frequency(㎒)	6 ㏈ bandwidth(㎒)	Limit(㎒)
2 412	9.08	≥ 0.500
2 437	9.99	
2 462	9.00	

802.11b

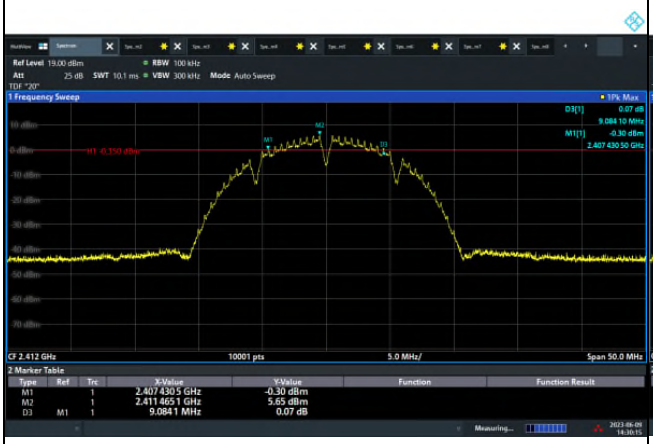

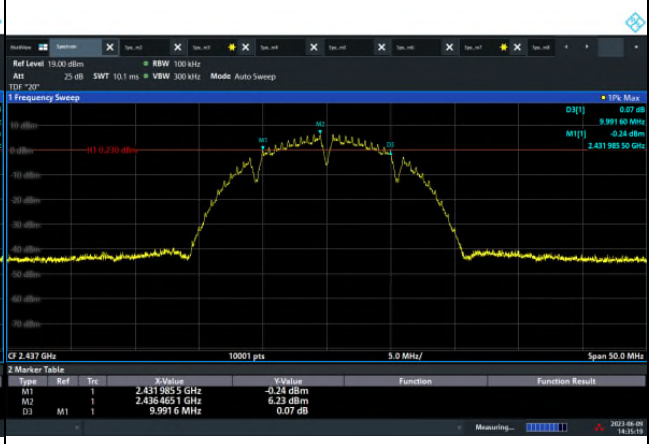

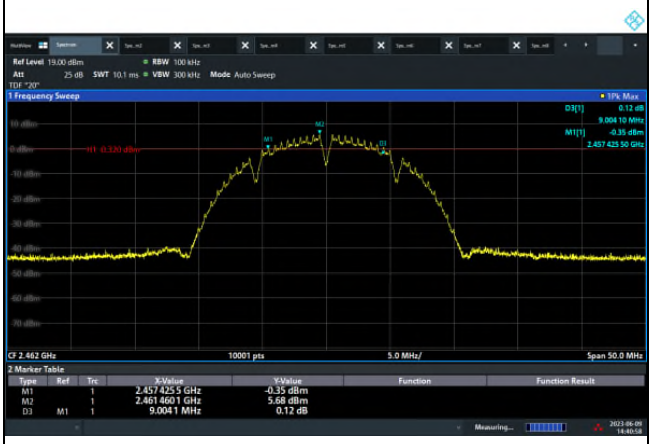

BLANK

Mode : 802.11g

Frequency(㎒)	6 ㏈ bandwidth(㎒)	Limit(㎒)
2 412	16.53	≥ 0.500
2 437	16.53	
2 462	16.50	

802.11g

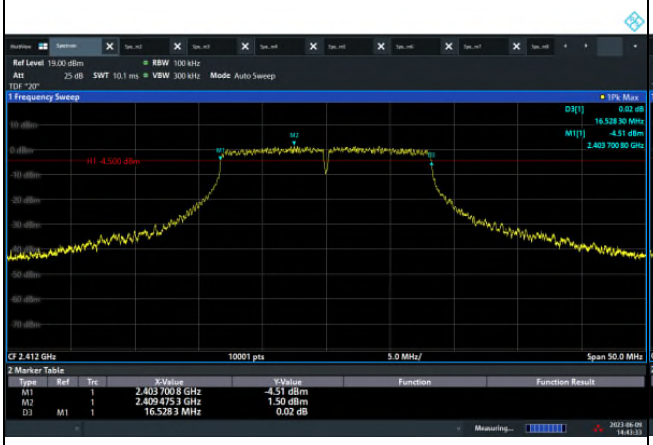

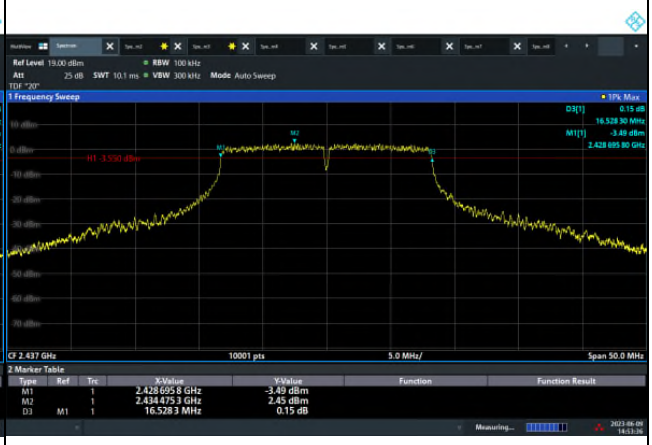

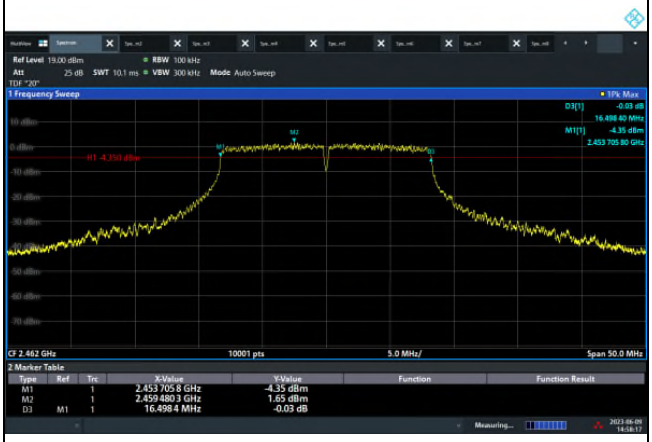

BLANK

Mode : 802.11n_HT20

Frequency(㎒)	6 ㏈ bandwidth(㎒)	Limit(㎒)
2 412	17.65	≥ 0.500
2 437	17.74	
2 462	17.69	

802.11n_HT20

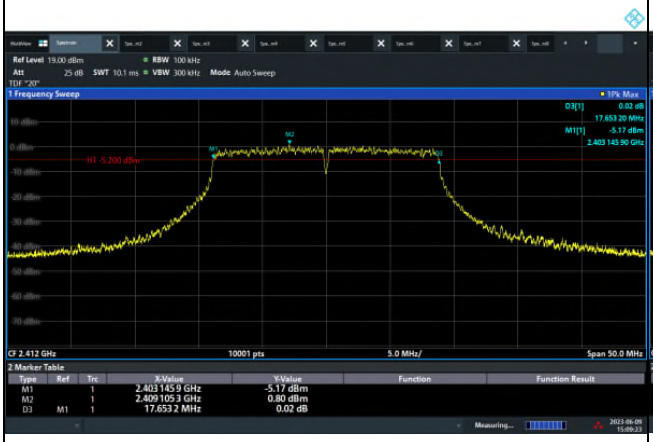

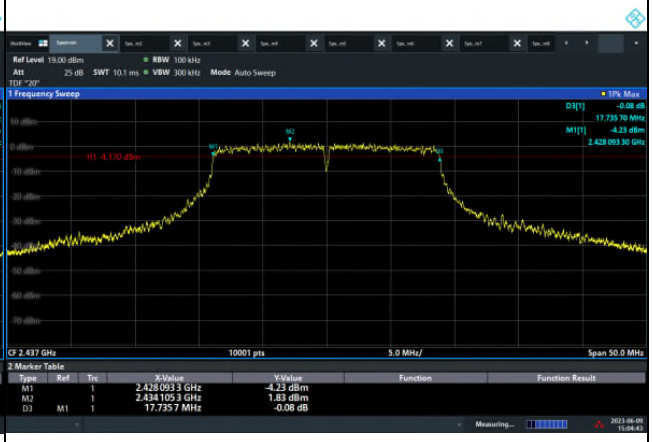

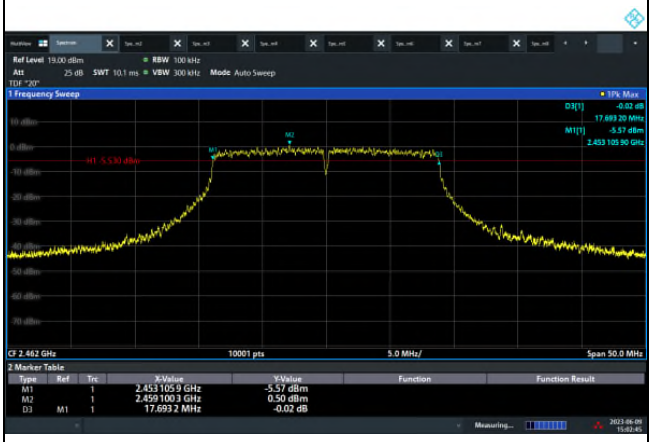

BLANK

Mode : LE 1 Mbps

Frequency(㎒)	6 dB bandwidth(㎒)	Limit(㎒)
2 402	0.660 9	≥ 0.500
2 442	0.649 9	
2 480	0.659 9	

LE 1 Mbps

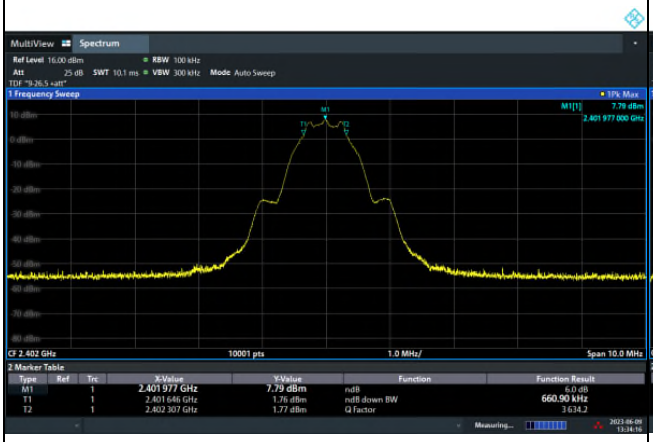

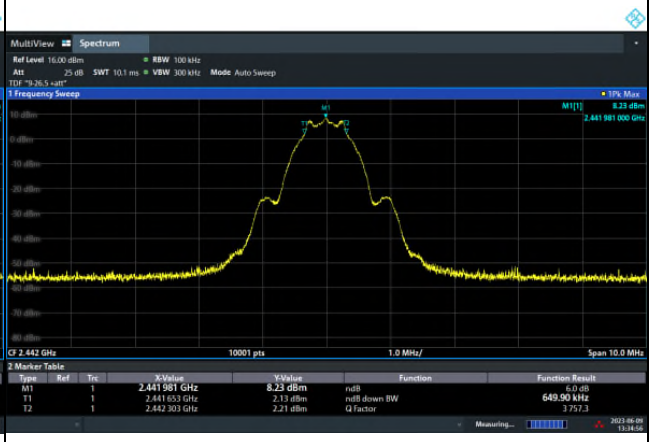

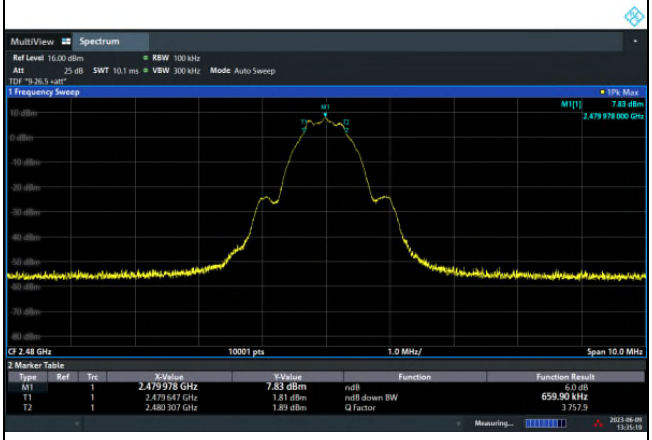

N/A

3.2. Output power

Test procedure

ANSI C63.10-2013 - Section 11.9.1.3 and 11.9.2.3.2

Test setup

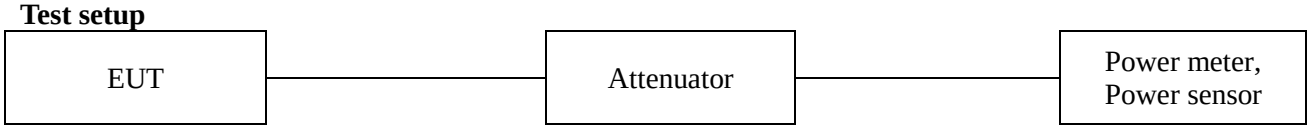

ANSI C63.10-2013 - Section 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS ba ndwidth and shall use a fast-responding diode detector.

ANSI C63.10-2013 - Section 11.9.2.3.2

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

Limit

According to §15.247(b)(3), For systems using digital modulation in the 902~928 ㎒, 2 400~2 483.5 ㎒, and 5 725~5 850 ㎒ bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted out-put power. Maximum Conducted Out-put Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test results

Mode	2 412 ㎒		2 437 ㎒		2 462 ㎒	
	Average (dBm)	Peak (dBm)	Average (dBm)	Peak (dBm)	Average (dBm)	Peak (dBm)
802.11b	14.99	17.50	15.42	17.95	14.95	17.48
802.11g	15.12	23.16	16.22	23.44	14.83	22.83
802.11n_HT20	14.23	22.46	15.22	22.97	14.07	22.27

Mode	2 402 ㎒		2 442 ㎒		2 480 ㎒	
	Average (dBm)	Peak (dBm)	Average (dBm)	Peak (dBm)	Average (dBm)	Peak (dBm)
LE 1 Mbps	6.20	6.58	6.18	6.55	6.76	7.15

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

3.3. Power spectral density

Test procedure

ANSI C63.10-2013 - Section 11.10.2

Test setup

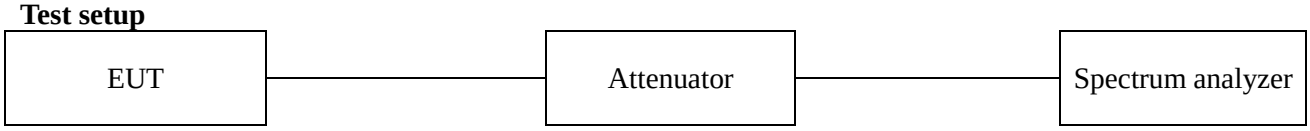

Section 10.2 & ANSI C63.10-2013 - Section 11.10.2

a. Set analyzer center frequency to DTS channel center frequency.
b. Set the span to 1.5 times the DTS bandwidth.
c. Set the RBW to 3 ㎑ ≤ RBW ≤ 100 ㎑
d. Set the VBW ≥ [3 × RBW].
e. Detector = peak.
f. Sweep time = auto couple.
g. Trace mode = max hold.
h. Allow trace to fully stabilize.
i. Use the peak marker function to determine the maximum amplitude level within the RBW.
j. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

Limit

According to §15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 ㏈m in any 3 ㎑ band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Results

Mode : 802.11b

Frequency(㎒)	PSD (dBm)	Limit(dBm)
2 412	-15.00	≤ 8
2 437	-14.44	
2 462	-14.90	

802.11b

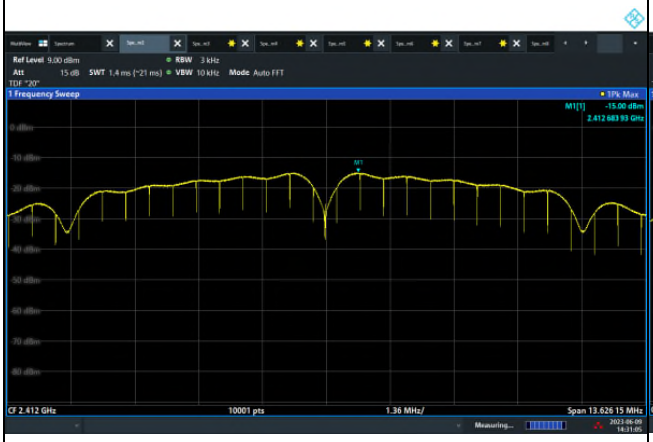

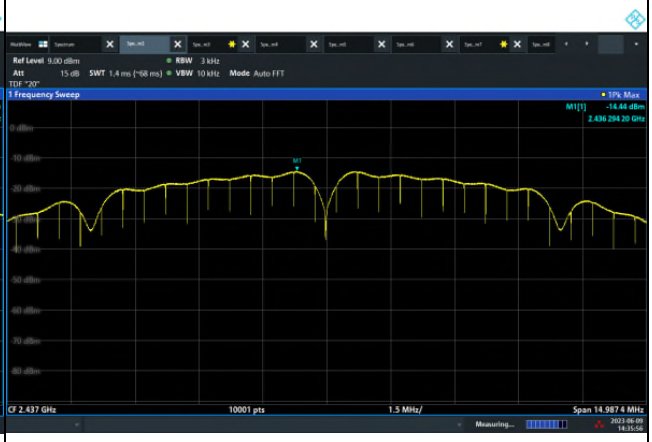

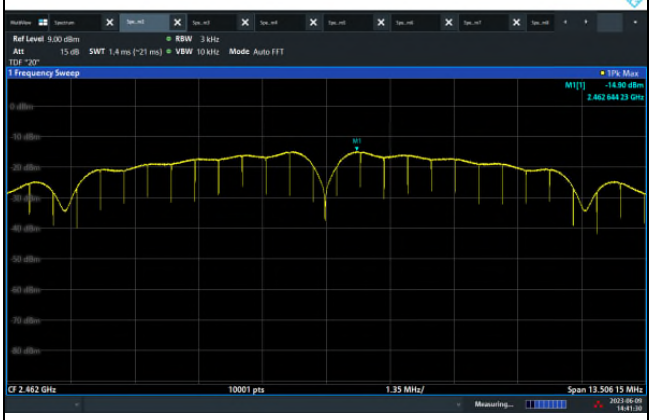

BLANK

Mode : 802.11g

Frequency(㎒)	PSD (㏈m)	Limit(㏈m)
2 412	-13.30	≤ 8
2 437	-12.24	
2 462	-13.63	

802.11g

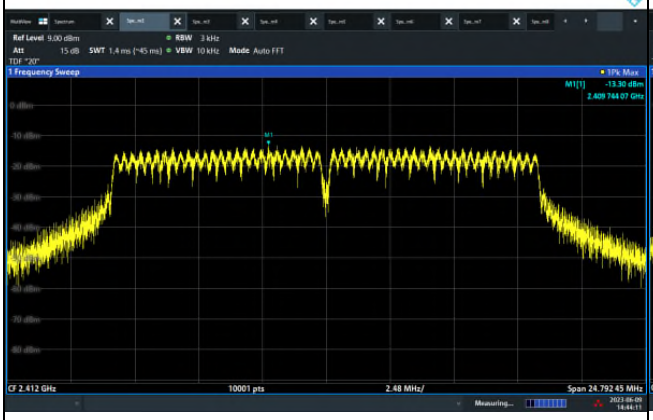

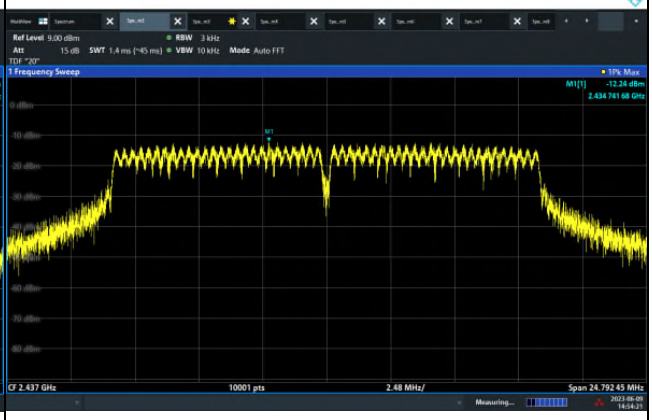

BLANK

Mode : 802.11n_HT20

Frequency(㎒)	PSD (㏈m)	Limit(㏈m)
2 412	-13.48	≤ 8
2 437	-12.56	
2 462	-13.90	

802.11n_HT20

BLANK

Mode : LE 1 Mbps

Frequency(㎒)	PSD (dBm)	Limit(dBm)
2 402	-7.27	≤ 8
2 442	-6.46	
2 480	-8.00	

LE 1 Mbps

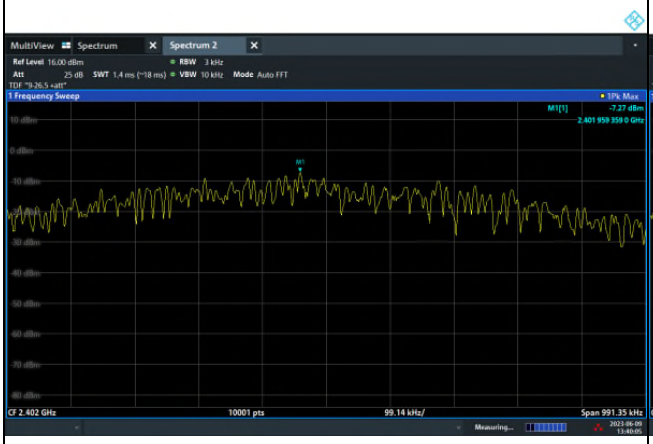

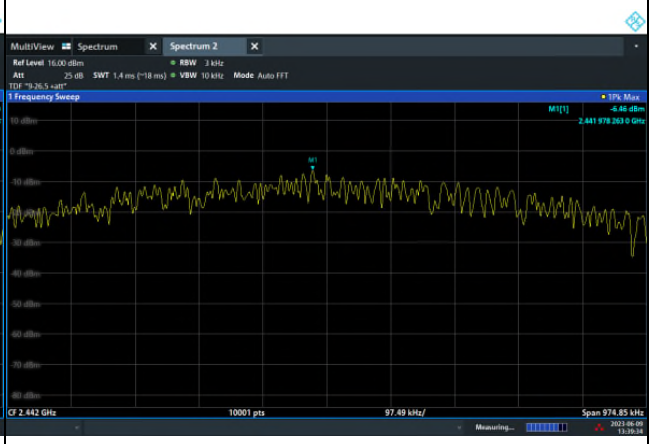

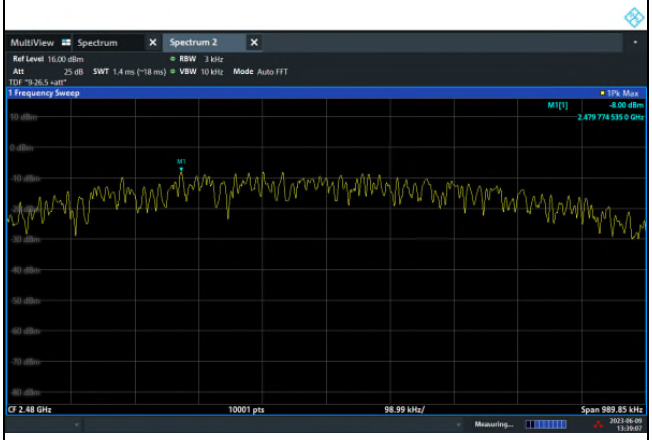

Blank

3.4. Radiated restricted band and emissions

Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 ㎑ to 30 ㎒ Emissions.

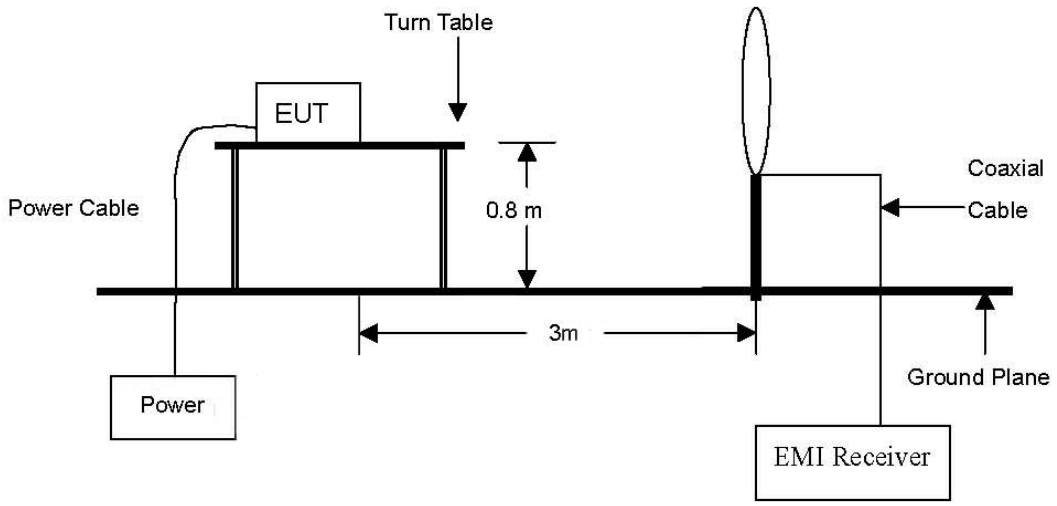

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 ㎒ to 1 ㎓ emissions.

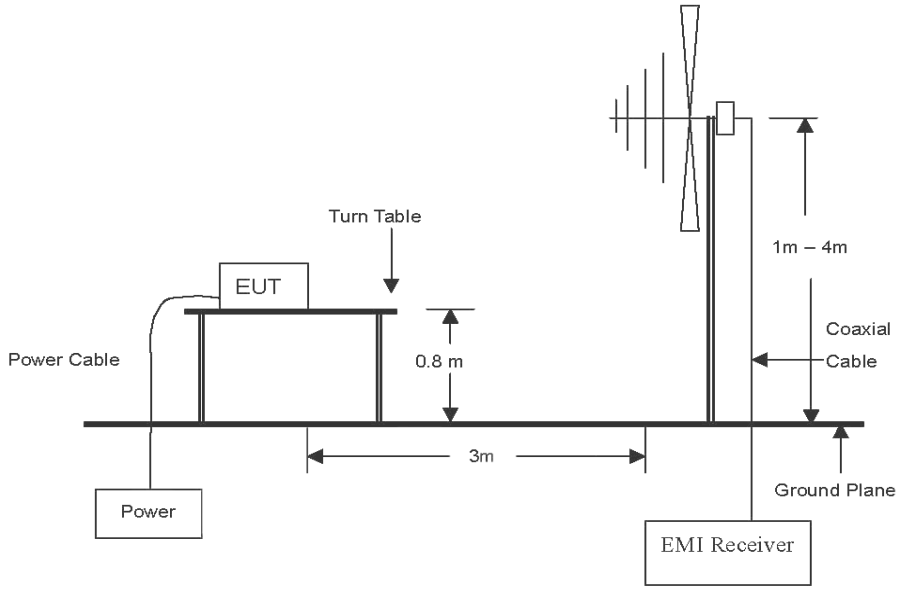

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 ㎓ to the tenth harmonic of the highest fundamental frequency or to 40 ㎓ emissions, whichever is lower.

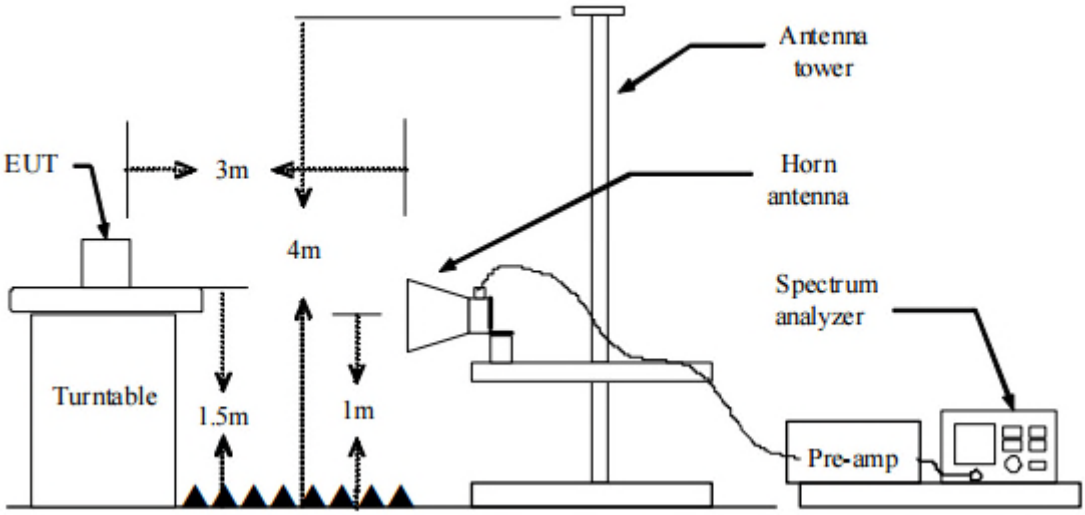

Test procedure

Radiated emissions from the EUT were measured according to the dictates in section 11.11 & 11.12 of ANSI C63.10-2013.

Test procedure below 30 ㎒

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel, ground parallel and perpendicular of the antenna are set to make the measurement. It was determined that **parallel** was worst-case orientation; therefore, all final radiated testing was performed with the EUT in **parallel.**
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum hold mode.

Test procedure above 30 ㎒

1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The antenna is a bi-log antenna, a horn antenna ,and its height are varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

5. Spectrum analyzer settings for f < 1 ㎓:
   ① Span = wide enough to fully capture the emission being measured
   ② RBW = 100 ㎑
   ③ VBW ≥ RBW
   ④ Detector = quasi peak
   ⑤ Sweep time = auto
   ⑥ Trace = max hold
6. Spectrum analyzer settings for f ≥1 ㎓: Peak
   ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
   ② RBW = 1 ㎒
   ③ VBW ≥ 3 ㎒
   ④ Detector = peak
   ⑤ Sweep time = auto
   ⑥ Trace = max hold
   ⑦ Trace was allowed to stabilize

7. Spectrum analyzer settings for f ≥1 ㎓: Average
   ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
   ② RBW = 1 ㎒
   ③ VBW ≥ 3 × RBW
   ④ Detector = RMS, if span/(# of points in sweep) ≤ (RBW/2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
   ⑤ Averaging type = power(i.e., RMS)
      1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
      2) Some instruments require linear display mode in order to use linear voltage averaging. Log or ㏈ averaging shall not be used.
   ⑥ Sweep = auto
   ⑦ Trace = max hold
   ⑧ Perform a trace average of at least 100 traces.
   ⑨ A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
      1) If power averaging (RMS) mode was used in step ⑤, then the applicable correction factor is 10 log(1/x), where x is the duty cycle.
      2) If linear voltage averaging mode was used in step ⑤, then the applicable correction factor is 20 log(1/x), where x is the duty cycle.
      3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Note.

1. f <30 ㎒, extrapolation factor of 40 ㏈/decade of distance. $F_d = 40\log(D_m/Ds)$
   f ≥30 ㎒, extrapolation factor of 20 ㏈/decade of distance. $F_d = 20\log(D_m/Ds)$
   Where:
   F_d = Distance factor in ㏈
   D_m = Measurement distance in meters
   D_s = Specification distance in meters
2. Field strength(㏈㎶/m) = Level(㏈㎶) + CF (㏈) + or DCF(㏈)
3. Margin(㏈) = Limit(㏈㎶/m) - Field strength(㏈㎶/m)
4. Emissions below 18 ㎓ were measured at a 3 meter test distance while emissions above 18 ㎓ were measured at a 1 meter test distance with the application of a distance correction factor.
5. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that **X orientation** was worst-case orientation; therefore, all final radiated testing was performed with the EUT in **X orientation.**
6. The worst-case emissions are reported however emissions whose levels were not within 20 ㏈ of respective limits were not reported.
7. According to exploratory test no any obvious emission were detected from 9 ㎑ to 30 ㎒. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values：

Frequency (㎒)	Distance (Meters)	Radiated (㎶/m)
0.009 ~ 0.490	300	2400/F(㎑)
0.490 ~ 1.705	30	24000/F(㎑)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 ㎒, 76 ~ 88 ㎒, 174 ~ 216 ㎒ or 470 ~ 806 ㎒. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Duty cycle

Regarding to KDB 558074 D01_v05 r02, 6. Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

a) A diode detector and an oscilloscope that together have sufficiently short response time to permit accurate measurements of the on- and off-times of the transmitted signal.

b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on- and off-times of the transmitted signal.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Mode	T_{on} time (㎳)	Period (㎳)	Duty cycle (Linear)	Duty cycle (%)	Duty cycle correction factor (㏈)
802.11b	100.00	100.00	1.00	100.00	0
802.11g	100.00	100.00	1.00	100.00	0
802.11n_HT20	100.00	100.00	1.00	100.00	0
LE 1 Mbps	0.411 92	0.624 92	0.66	65.92	1.81

Duty cycle (Linear) = T_{on} time/Period
DCF(Duty cycle correction factor (㏈)) = 10log(1/duty cycle)

802.11b

802.11g

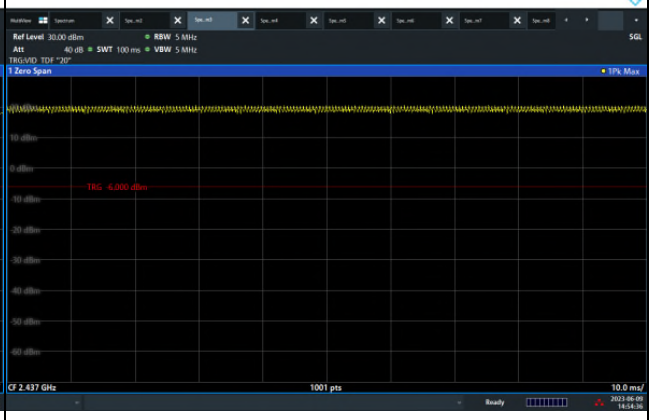

802.11n_HT20

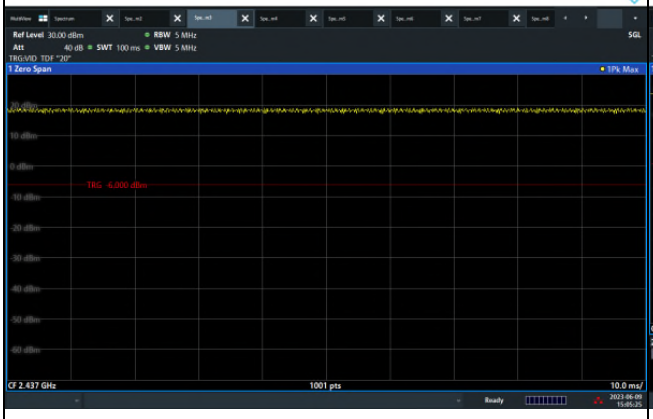

LE 1 Mbps

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test results (Below 30 ㎒)

Mode: 802.11g (Worst case)

Distance of measurement: 3 meter

Channel: 06 (Worst case)

Parallel

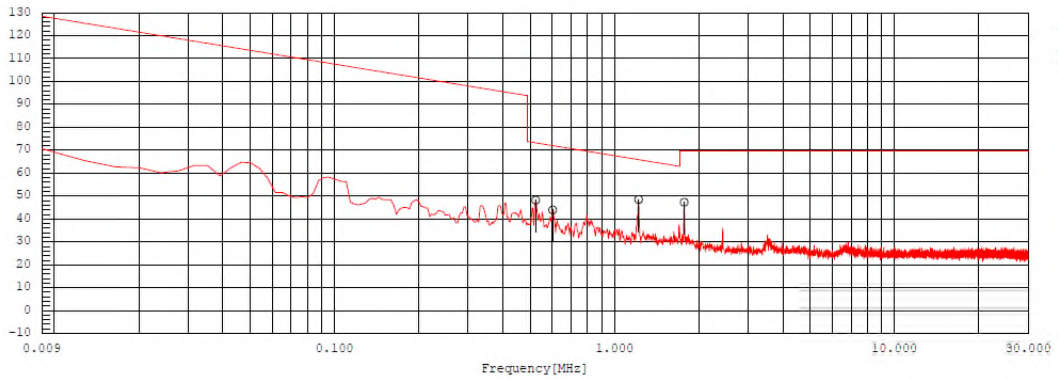

No.	Range	Frequency [MHz]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Angle [deg]	Remark
1	Range1	0.523	28.6	19.7	48.3	----------	203.2	
2	Range1	0.601	24.2	19.8	44.0	----------	313.7	
3	Range1	1.220	28.2	20.3	48.5	----------	313.7	
4	Range1	1.775	27.1	20.2	47.3	----------	203.2	

Note.
1. The above test result is the peak result.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test results (Below 30 ㎒)

Mode:	LE 1 Mbps
Distance of measurement:	3 meter
Channel:	39 (Worst case)

Parallel

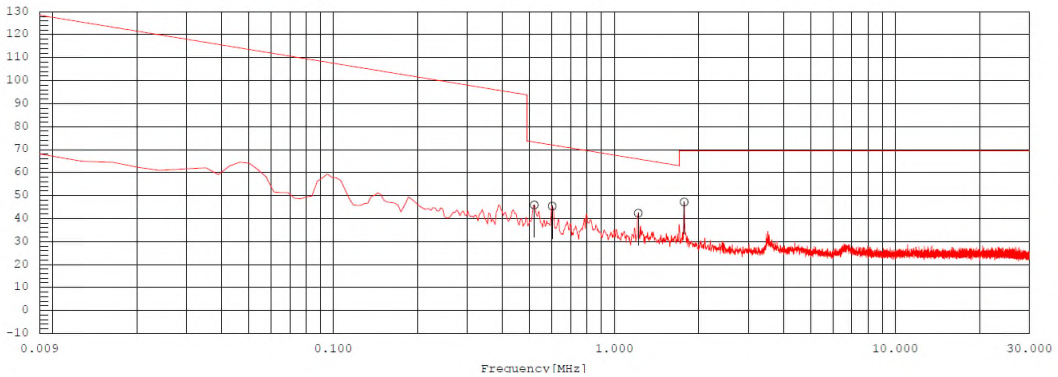

No.	Range	Frequency [MHz]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Angle [deg]	Remark
1	Range1	0.519	26.2	19.7	45.9	----------	332.0	
2	Range1	0.601	25.7	19.8	45.5	----------	336.5	
3	Range1	1.216	22.0	20.3	42.3	----------	332.0	
4	Range1	1.775	27.1	20.2	47.3	----------	0.0	

Note.
1. The above test result is the peak result.

Test results (Below 1 000 ㎒)

Mode:	802.11g (Worst case)
Distance of measurement:	3 meter
Channel:	06 (Worst case)

Horizontal // Vertical

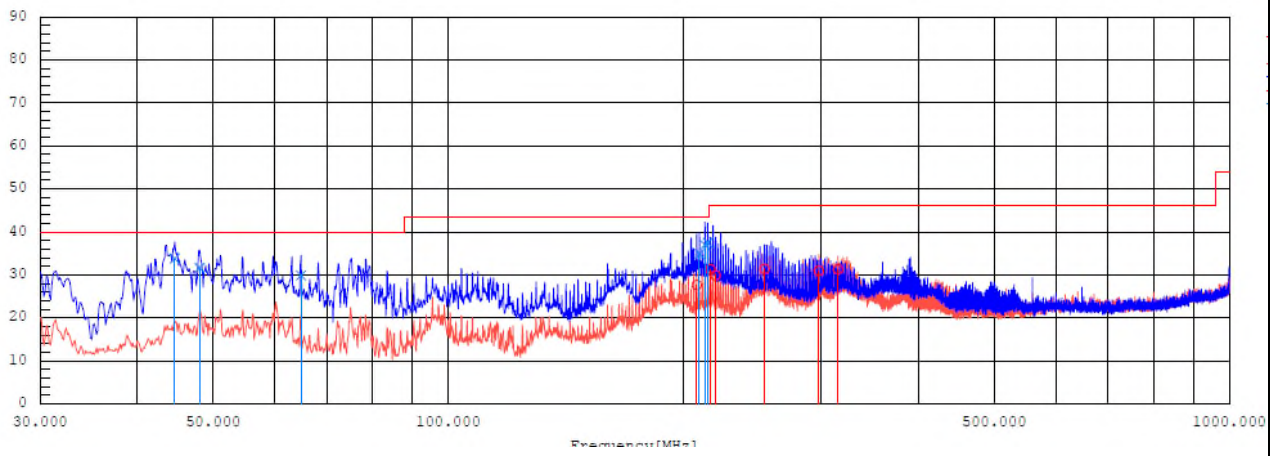

Final Result

No.	Frequency [MHz]	Pol	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	44.671	V	46.3	-12.5	33.8	40.0	6.2	115.0	267.4	
2	48.066	V	43.5	-11.9	31.6	40.0	8.4	113.0	359.9	
3	64.799	V	44.1	-14.2	29.9	40.0	10.1	100.0	201.4	
4	208.116	H	40.2	-12.5	27.7	43.5	15.8	187.0	333.5	
5	209.814	V	47.3	-12.4	34.9	43.5	8.6	103.0	134.3	
6	213.209	V	49.3	-12.3	37.0	43.5	6.5	105.0	112.2	
7	214.906	V	49.7	-12.2	37.5	43.5	6.0	100.0	134.3	
8	216.604	H	43.5	-12.2	31.3	46.0	14.7	367.0	0.0	
9	219.999	H	42.0	-12.1	29.9	46.0	16.1	397.0	337.2	
10	254.070	H	42.4	-11.0	31.4	46.0	14.6	197.0	0.0	
11	298.448	H	41.1	-10.1	31.0	46.0	15.0	205.0	133.9	
12	315.544	H	40.7	-9.4	31.3	46.0	14.7	179.0	45.9	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test results (Below 1 000 ㎒)

Mode:	LE 1 Mbps
Distance of measurement:	3 meter
Channel:	39 (Worst case)

Horizontal // Vertical

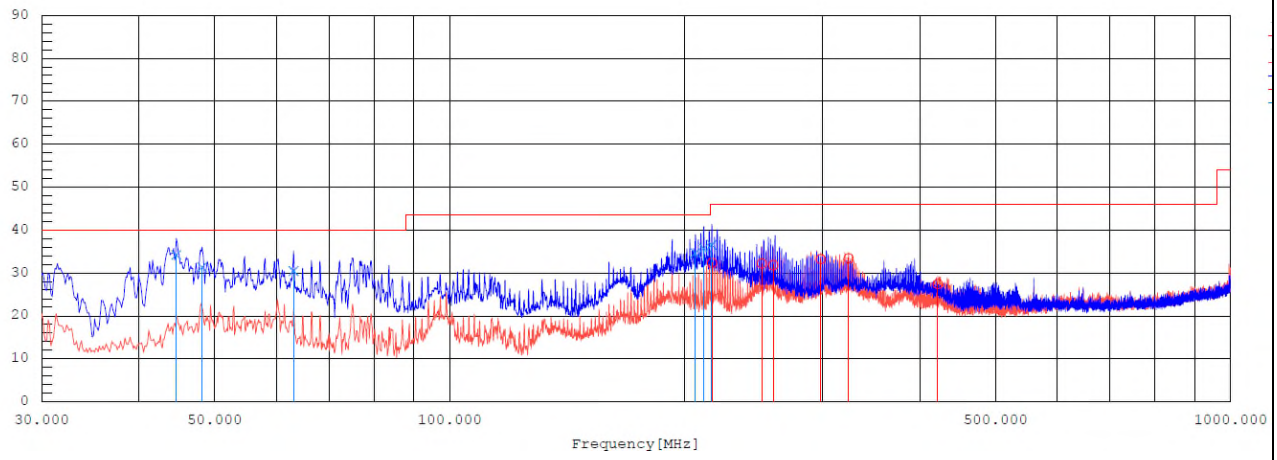

Final Result

No.	Frequency [MHz]	Pol	Reading QP [dB(µV)]	c.f [dB(1/m)]	Result QP [dB(µV/m)]	Limit QP [dB(µV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	44.671	V	46.7	-12.5	34.2	40.0	5.8	103.0	114.6	
2	48.188	V	43.2	-11.9	31.3	40.0	8.7	101.0	92.8	
3	63.101	V	44.1	-13.7	30.4	40.0	9.6	100.0	160.1	
4	206.419	V	47.1	-12.5	34.6	43.5	8.9	100.0	137.4	
5	211.633	V	48.0	-12.3	35.7	43.5	7.8	106.0	160.1	
6	216.604	V	48.7	-12.2	36.5	46.0	9.5	100.0	92.8	
7	216.846	H	44.5	-12.2	32.3	46.0	13.7	189.0	337.2	
8	251.039	H	43.3	-11.1	32.2	46.0	13.8	215.0	337.2	
9	259.647	H	42.7	-10.9	31.8	46.0	14.2	176.0	337.2	
10	298.811	H	43.3	-10.1	33.2	46.0	12.8	217.0	77.1	
11	324.395	H	42.4	-9.0	33.4	46.0	12.6	376.0	27.5	
12	421.880	H	34.2	-6.8	27.4	46.0	18.6	178.0	314.7	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test results (Above 1 000 ㎒)

Mode: 802.11b

Distance of measurement: 3 meter

Channel: 1

- **Spurious**

Frequency (㎒)	Level (dB㎶)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
1 010.90	46.17	Peak	V	-10.01	-	36.16	74.00	37.84
1 327.87	45.66	Peak	H	-7.66	-	38.00	74.00	36.00
2 731.73	44.02	Peak	V	-0.38	-	43.64	74.00	30.36
4 824.60	43.59	Peak	H	5.26	-	48.85	74.00	25.15

- **Band edge**

Frequency (㎒)	Level (dB㎶)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
2 351.90	45.80	Peak	V	-1.91	-	43.89	74.00	30.11
2 383.57	47.28	Peak	H	-1.90	-	45.38	74.00	28.62

Restricted band // Horizontal // Peak

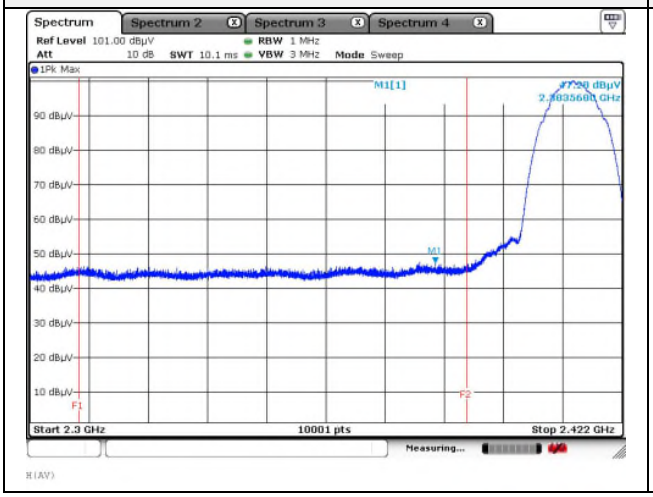

Restricted band // Vertical // Peak

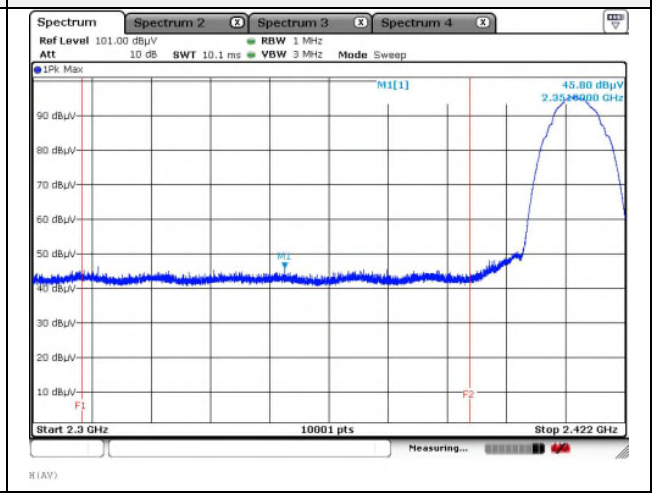

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Horizontal // Peak for 1 ㎓ to 3 ㎓	Vertical // Peak for 1 ㎓ to 3 ㎓
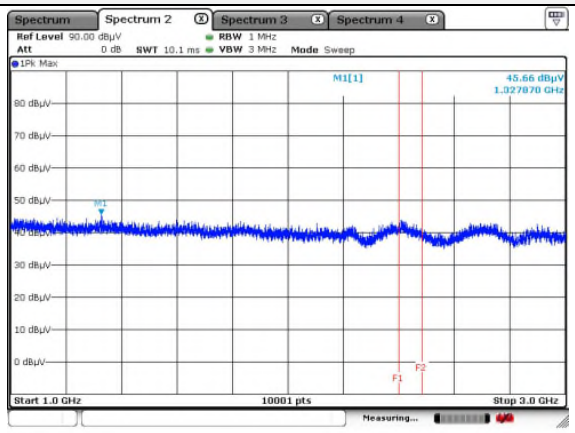	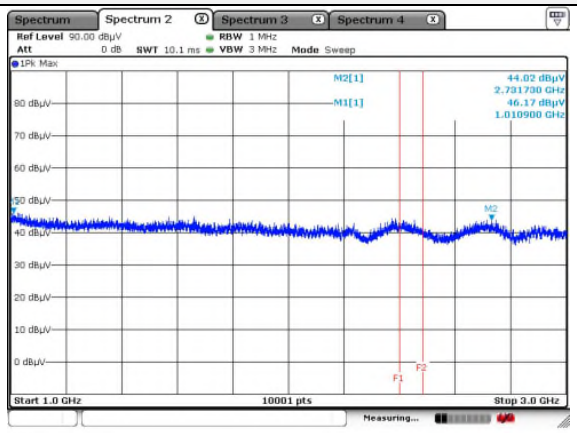
Horizontal // Peak for 3 ㎓ to 18 ㎓	**Vertical // Peak for 3 ㎓ to 18 ㎓**
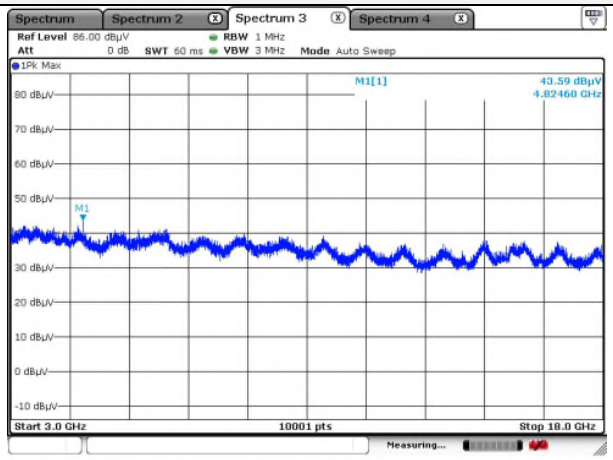	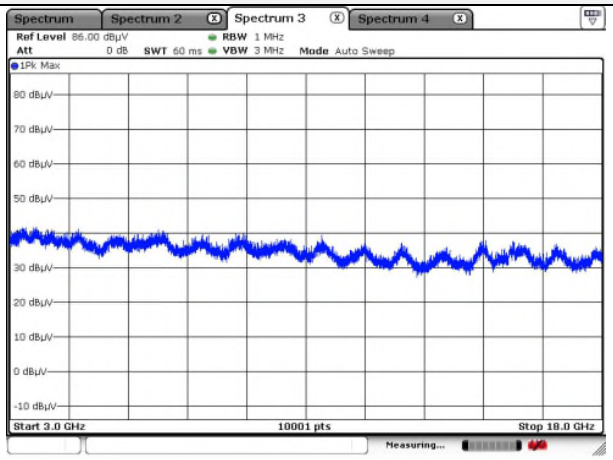

Note.
1. No spurious emission were detected above 3 ㎓.
2. Average test would be performed if the peak result were greater than the average limit.

Mode: 802.11b

Distance of measurement: 3 meter

Channel: 6

- **Spurious**

Frequency (㎒)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 328.27	46.73	Peak	V	-7.65	-	39.08	74.00	34.92
1 333.67	45.65	Peak	H	-7.61	-	38.04	74.00	35.96
4 874.10	44.15	Peak	H	5.61	-	49.76	74.00	24.24

Horizontal // Peak for 1 ㎓ to 3 ㎓

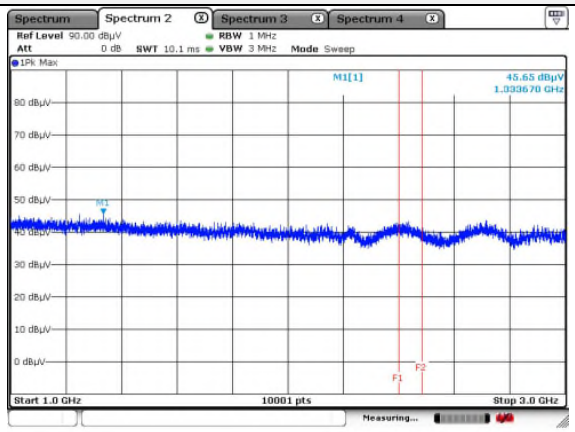

Vertical // Peak for 1 ㎓ to 3 ㎓

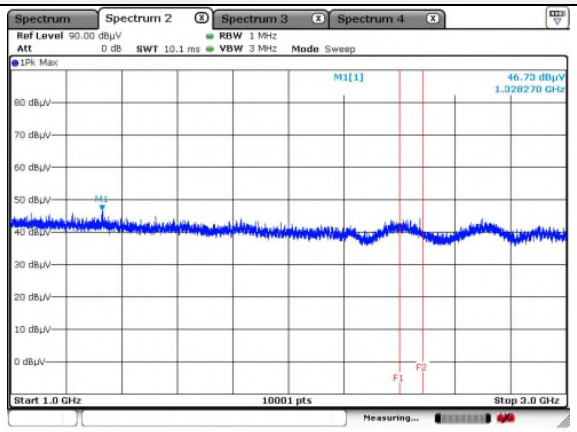

Horizontal // Peak for 3 ㎓ to 18 ㎓

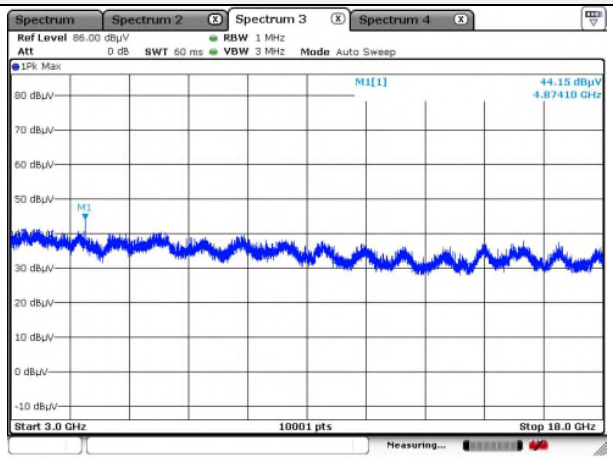

Vertical // Peak for 3 ㎓ to 18 ㎓

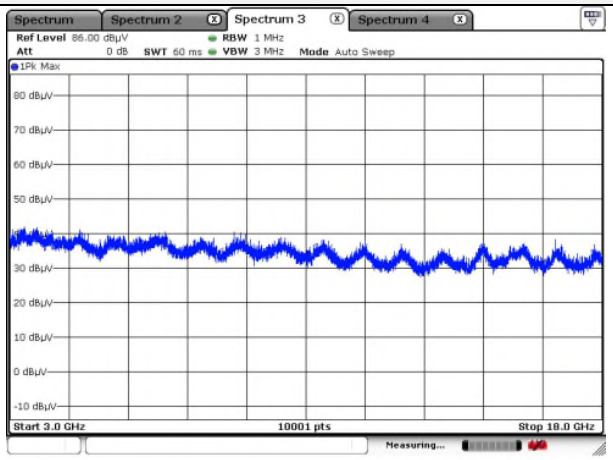

Note.
1. No spurious emission were detected above 3 ㎓.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Mode: 802.11b

Distance of measurement: 3 meter

Channel: 11

- **Spurious**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 013.50	46.15	Peak	H	-9.99	-	36.16	74.00	37.84
2 686.93	43.89	Peak	V	-0.61	-	43.28	74.00	30.72
4 923.60	42.31	Peak	H	5.96	-	48.27	74.00	25.73

- **Band edge**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 490.38	46.94	Peak	H	-1.66	-	45.28	74.00	28.72
2 491.86	45.38	Peak	V	-1.66	-	44.39	74.00	29.61

Restricted band // Horizontal // Peak

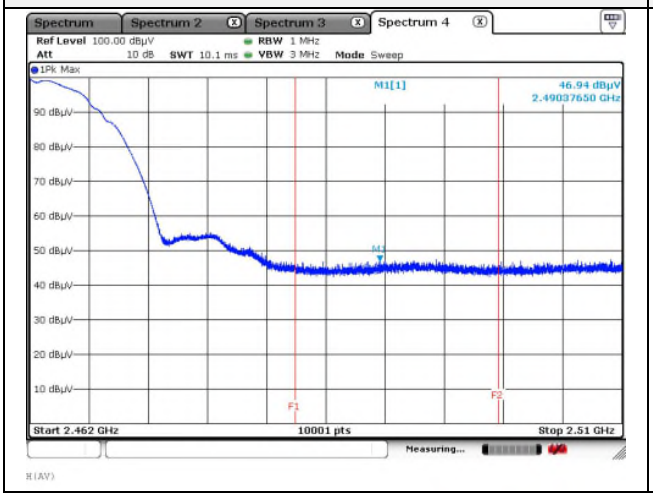

Restricted band // Vertical // Peak

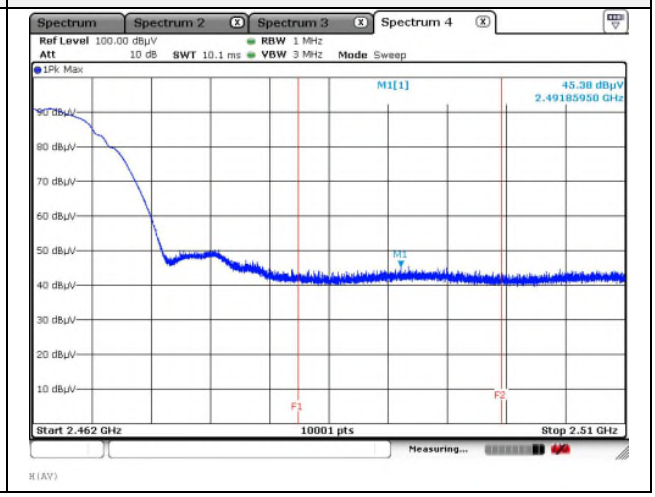

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Horizontal // Peak for 1 ㎓ to 3 ㎓	Vertical // Peak for 1 ㎓ to 3 ㎓
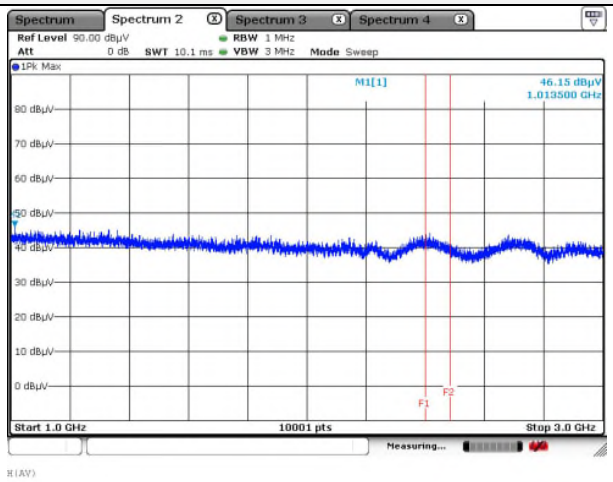	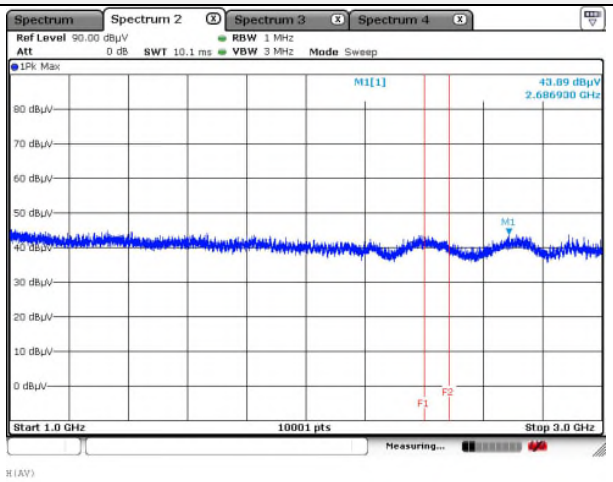
Horizontal // Peak for 3 ㎓ to 18 ㎓	**Vertical // Peak for 3 ㎓ to 18 ㎓**
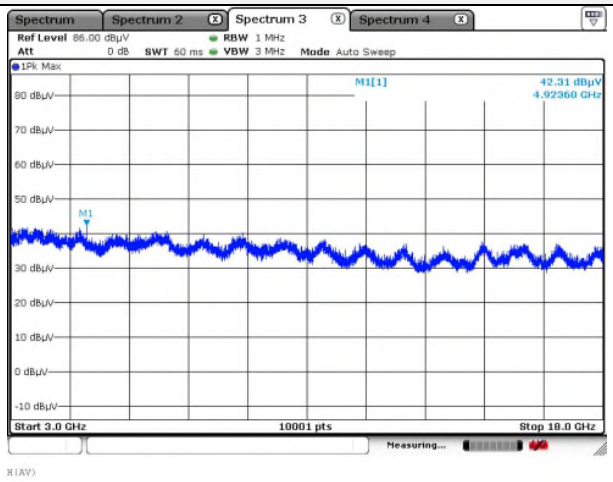	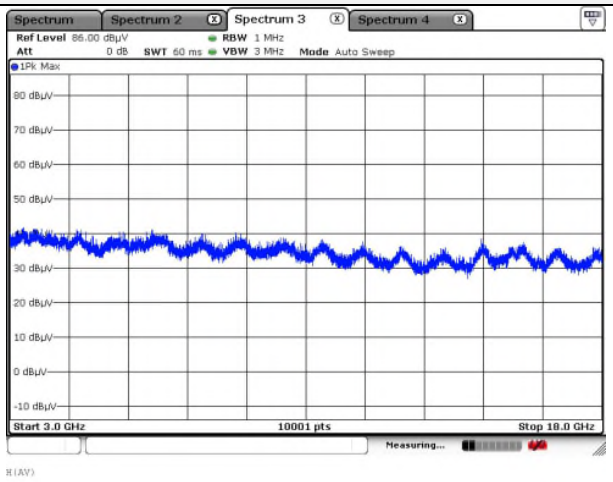

Note.

1. No spurious emission were detected above 3 ㎓.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test results (Above 1 000 ㎒)

Mode: 802.11g

Distance of measurement: 3 meter

Channel: 1

- **Spurious**

Frequency (㎒)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 332.27	47.48	Peak	H	-7.62	-	39.86	74.00	34.14
1 667.63	45.44	Peak	V	-5.27	-	40.17	74.00	33.83

- **Band edge**

Frequency (㎒)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 387.14	63.02	Peak	H	-1.90	-	61.12	74.00	12.88
2 387.14	47.37	Average	H	-1.90	-	45.47	54.00	8.53
2 387.14	51.83	Peak	V	-1.90	-	49.93	74.00	24.07
2 389.56	66.81	Peak	H	-1.90	-	64.91	74.00	9.09
2 389.56	51.15	Average	H	-1.90	-	49.25	54.00	4.75
2 389.56	55.36	Peak	V	-1.90	-	53.46	74.00	20.54

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Restricted band // Horizontal // Peak	Restricted band // Vertical // Peak
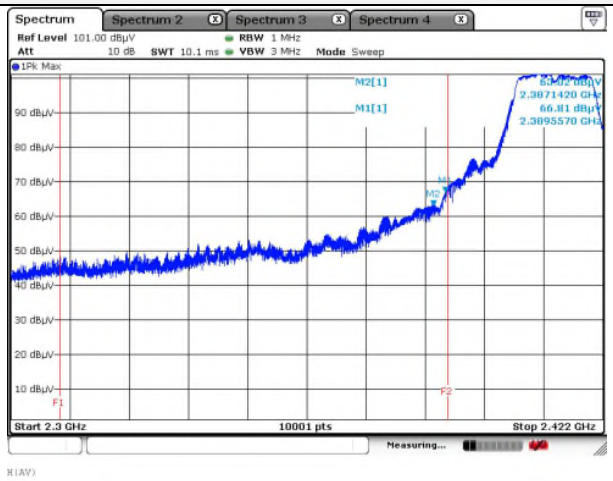	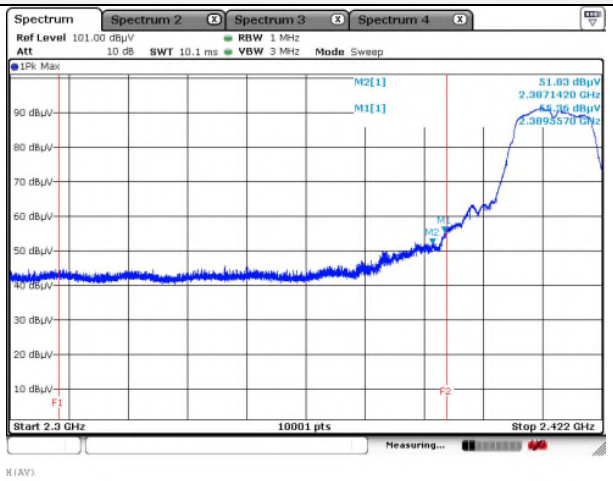
Restricted band // Horizontal // Average	**Restricted band // Vertical // Average**
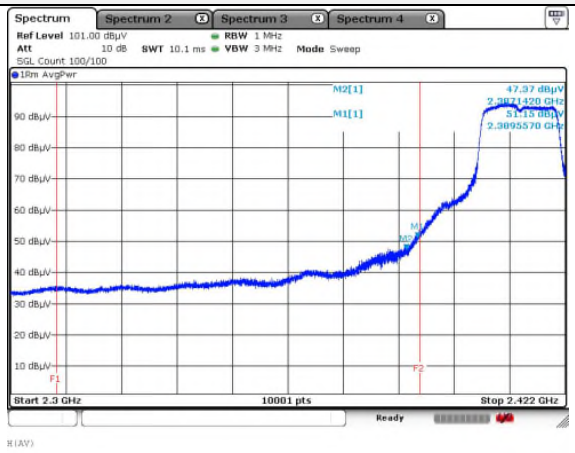	Blank

Horizontal // Peak for 1 ㎓ to 3 ㎓	Vertical // Peak for 1 ㎓ to 3 ㎓
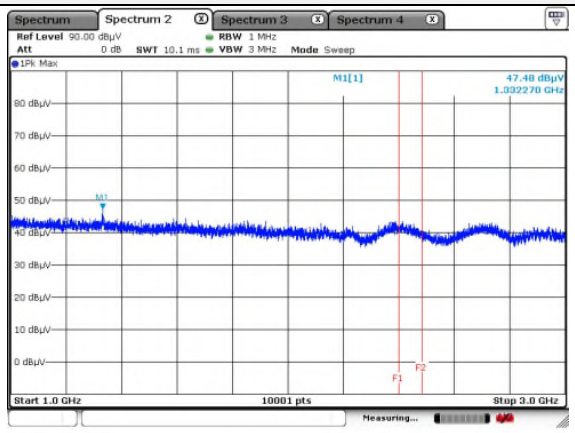	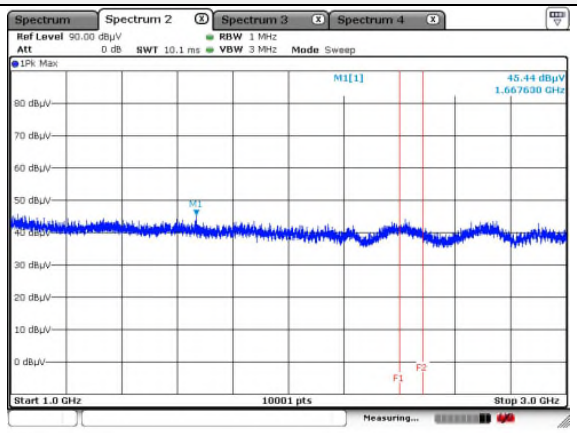
Horizontal // Peak for 3 ㎓ to 18 ㎓	**Vertical // Peak for 3 ㎓ to 18 ㎓**
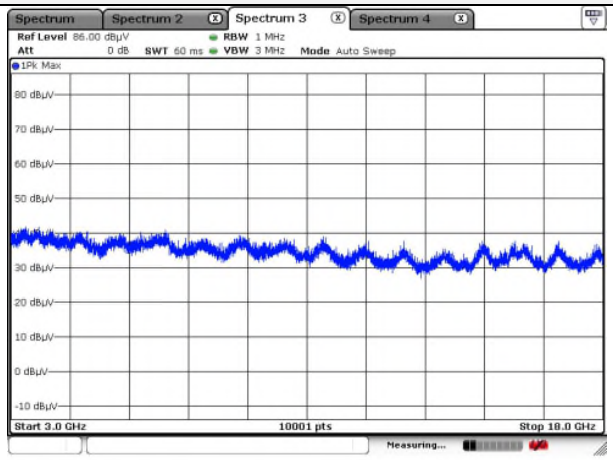	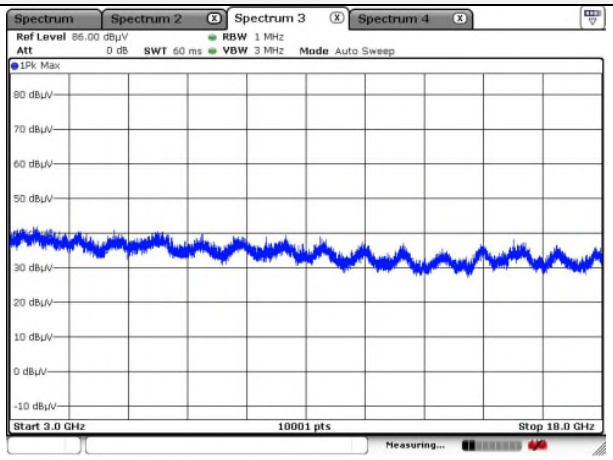

Note.
1. No spurious emission were detected above 3 ㎓.
2. Average test would be performed if the peak result were greater than the average limit.

Mode: 802.11g

Distance of measurement: 3 meter

Channel: 6

- **Spurious**

Frequency (㎒)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 014.30	45.81	Peak	V	-9.99	-	35.82	74.00	38.18
1 093.09	45.25	Peak	H	-9.46	-	35.79	74.00	38.21
1 625.24	45.19	Peak	V	-5.80	-	39.39	74.00	34.61

Horizontal // Peak for 1 ㎓ to 3 ㎓

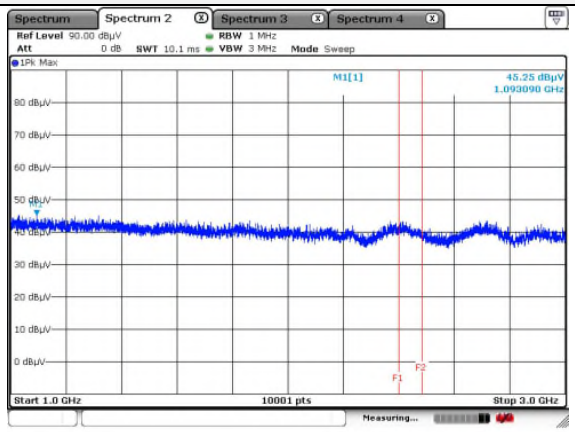

Vertical // Peak for 1 ㎓ to 3 ㎓

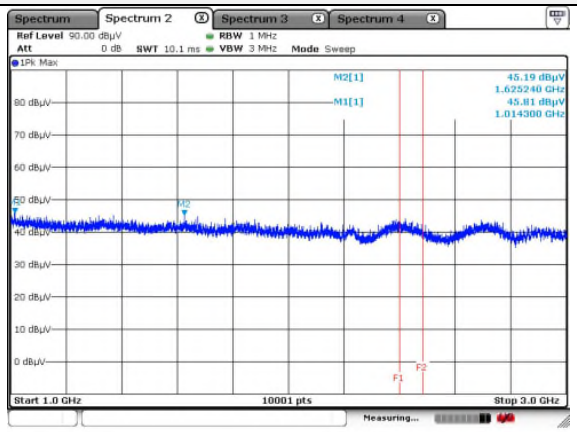

Horizontal // Peak for 3 ㎓ to 18 ㎓

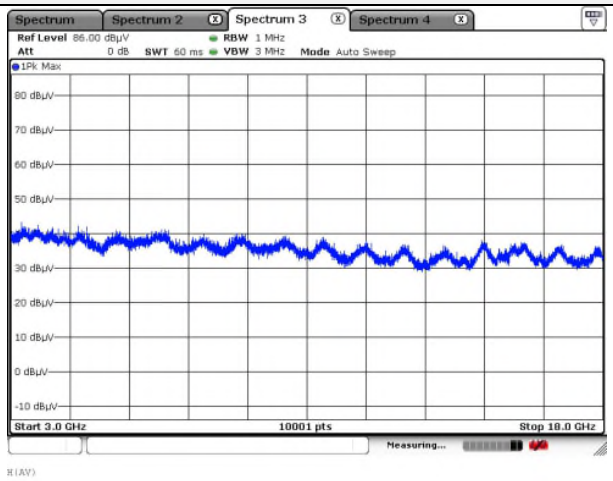

Vertical // Peak for 3 ㎓ to 18 ㎓

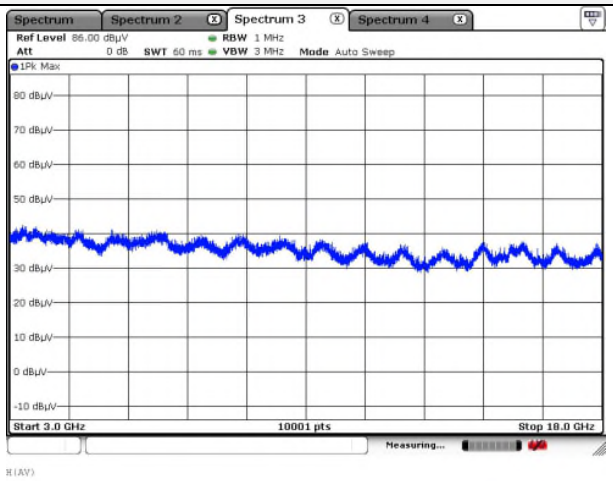

Note.
1. No spurious emission were detected above 3 ㎓.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Mode: 802.11g

Distance of measurement: 3 meter

Channel: 11

- **Spurious**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 104.69	44.95	Peak	V	-9.38	-	35.57	74.00	38.43
1 331.87	46.87	Peak	H	-7.62	-	39.25	74.00	34.75

- **Band edge**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 483.74	58.90	Peak	V	-1.68	-	57.22	74.00	16.78
2 483.74	45.12	Average	V	-1.68	-	44.11	54.00	9.89
2 483.76	66.32	Peak	H	-1.68	-	64.64	74.00	9.36
2 483.76	50.90	Average	H	-1.68	-	49.22	54.00	4.78
2 484.21	58.85	Peak	V	-1.67	-	57.18	74.00	16.82
2 484.21	44.98	Average	V	-1.67	-	43.31	54.00	10.69
2 484.25	65.96	Peak	H	-1.67	-	64.29	74.00	9.71
2 484.25	49.60	Average	H	-1.67	-	57.22	74.00	16.78

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Restricted band // Horizontal // Peak	Restricted band // Vertical // Peak
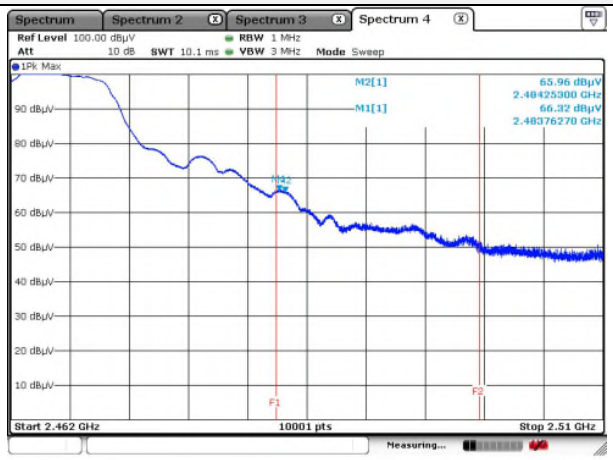	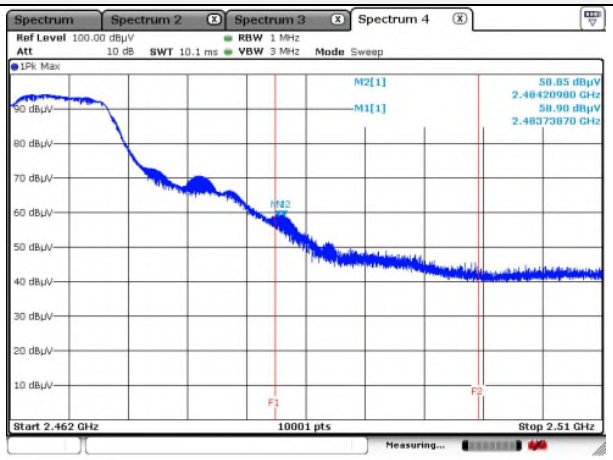
Restricted band // Horizontal // Average	**Restricted band // Vertical // Average**
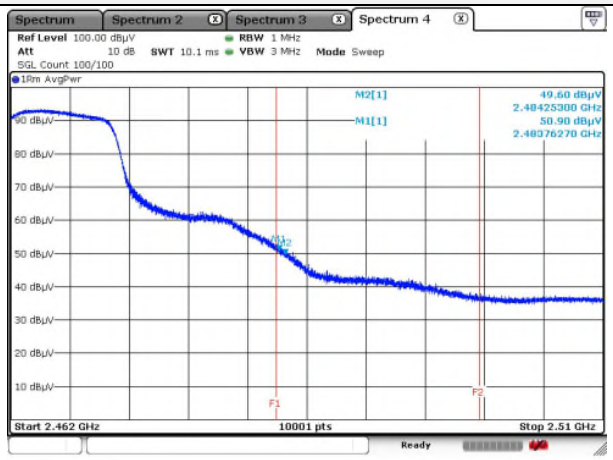	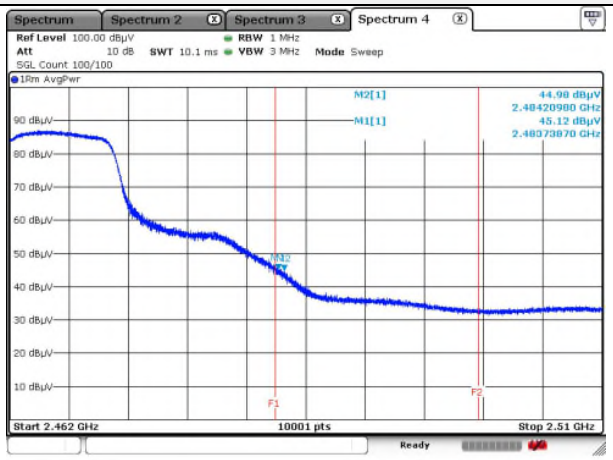

Horizontal // Peak for 1 ㎓ to 3 ㎓	Vertical // Peak for 1 ㎓ to 3 ㎓
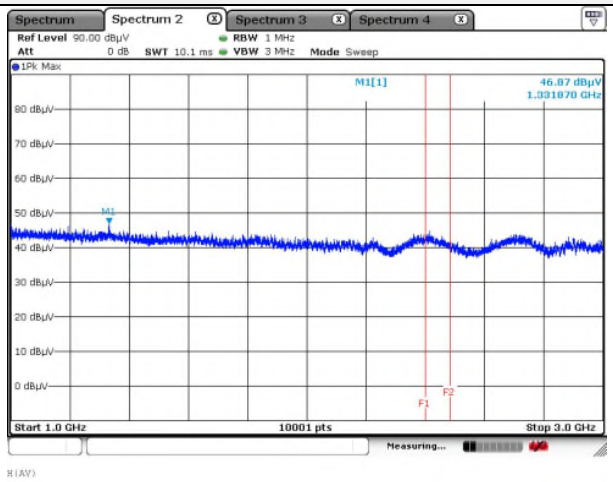	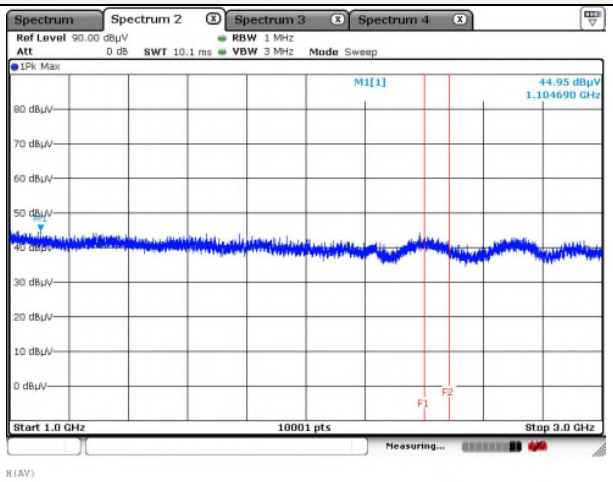
Horizontal // Peak for 3 ㎓ to 18 ㎓	**Vertical // Peak for 3 ㎓ to 18 ㎓**
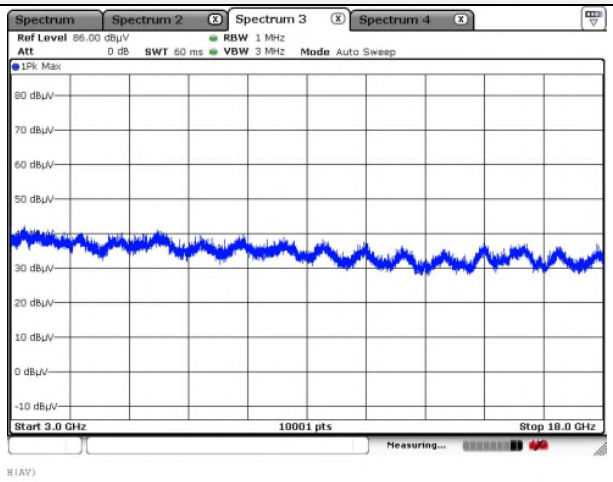	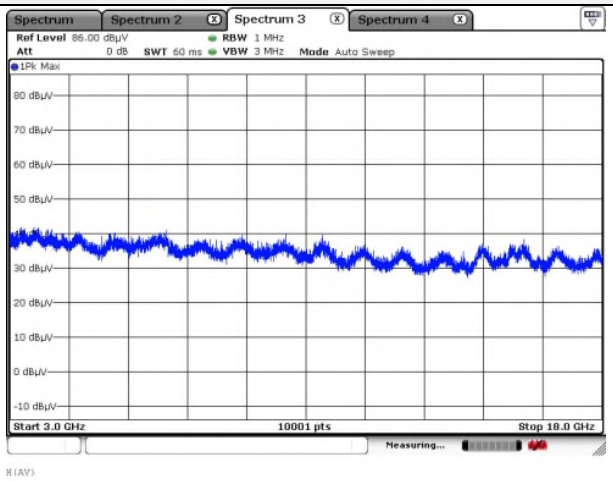

Note.
1. Average test would be performed if the peak result were greater than the average limit.

Mode: 802.11n_HT20

Distance of measurement: 3 meter

Channel: 1

- **Spurious**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 018.70	45.31	Peak	V	-9.96	-	35.35	74.00	38.65
1 068.49	45.74	Peak	H	-9.62	-	36.12	74.00	37.88
1 329.67	46.18	Peak	H	-7.64	-	38.54	74.00	35.46

- **Band edge**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 388.78	68.06	Peak	H	-1.90	-	66.16	74.00	7.84
2 388.78	47.25	Average	H	-1.90	-	45.35	54.00	8.65
2 388.94	53.79	Peak	V	-1.90	-	51.89	74.00	22.11
2 389.66	69.05	Peak	H	-1.90	-	67.15	74.00	6.85
2 389.66	50.36	Average	H	-1.90	-	48.46	54.00	5.54
2 389.69	56.50	Peak	V	-1.90	-	54.60	74.00	19.40
2 389.69	37.38	Average	V	-1.90	-	35.48	54.00	18.52

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Restricted band // Horizontal // Peak	Restricted band // Vertical // Peak
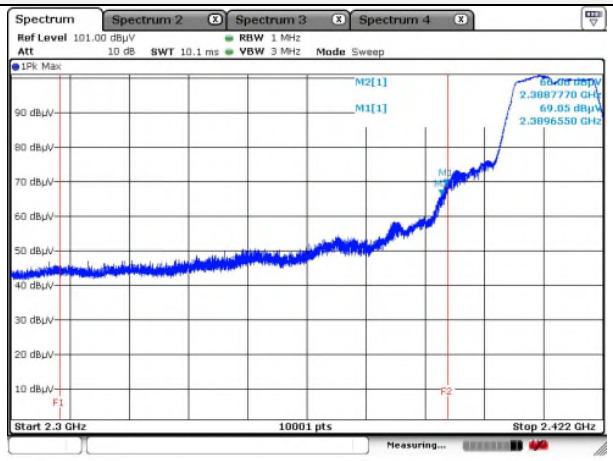	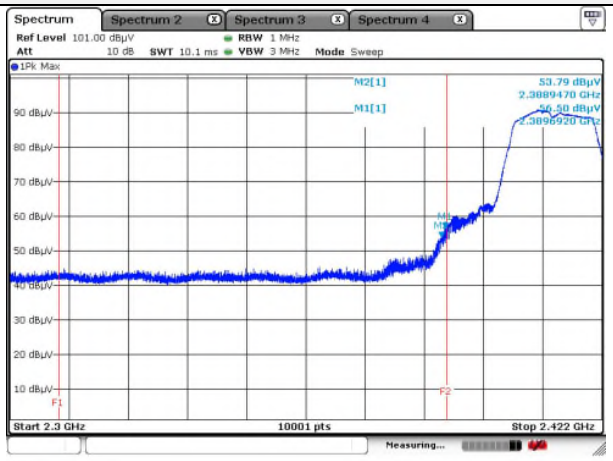
Restricted band // Horizontal // Average	**Restricted band // Vertical // Average**
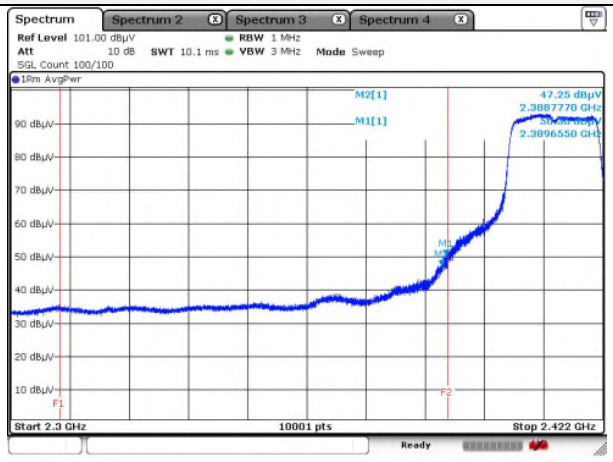	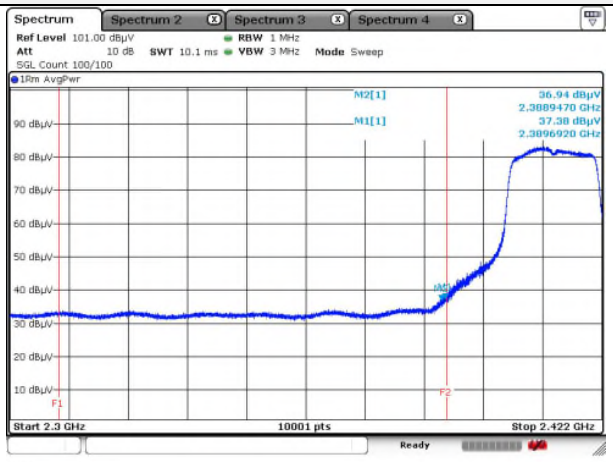

Horizontal // Peak for 1 ㎓ to 3 ㎓	Vertical // Peak for 1 ㎓ to 3 ㎓
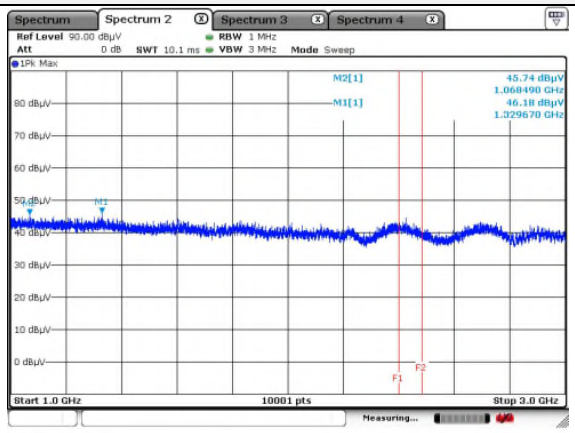	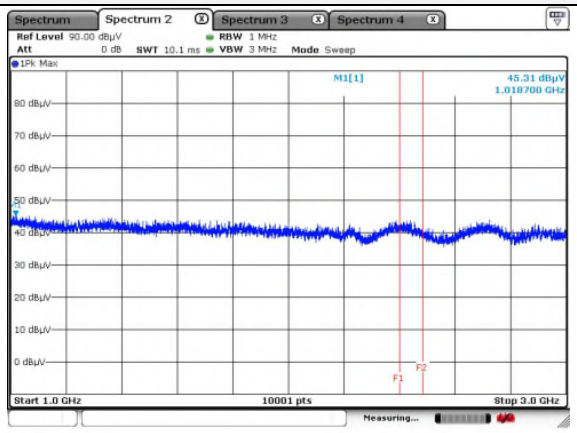
Horizontal // Peak for 3 ㎓ to 18 ㎓	**Vertical // Peak for 3 ㎓ to 18 ㎓**
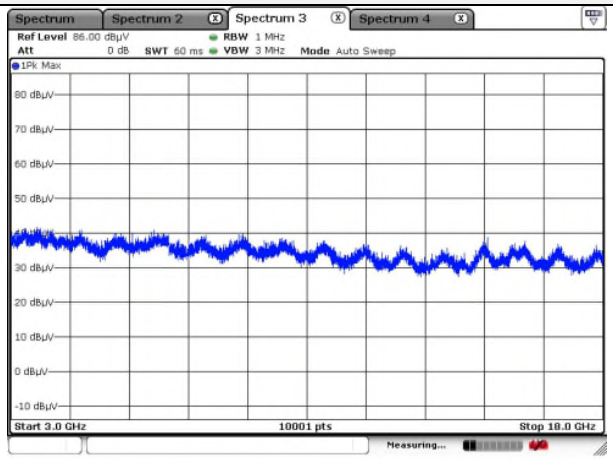	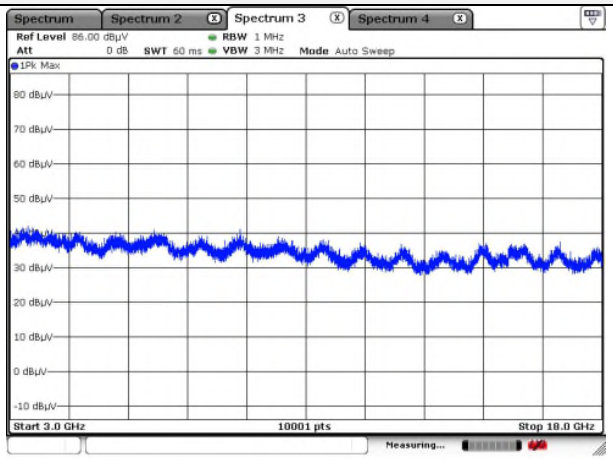

Note.
1. Average test would be performed if the peak result were greater than the average limit.

Mode: 802.11n_HT20

Distance of measurement: 3 meter

Channel: 6

- **Spurious**

Frequency (㎒)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 095.69	45.42	Peak	V	-9.44	-	35.98	74.00	38.02
1 333.07	46.36	Peak	H	-7.61	-	38.75	74.00	35.25
1 380.06	45.27	Peak	H	-7.21	-	38.06	74.00	35.94

Horizontal // Peak for 1 ㎓ to 3 ㎓

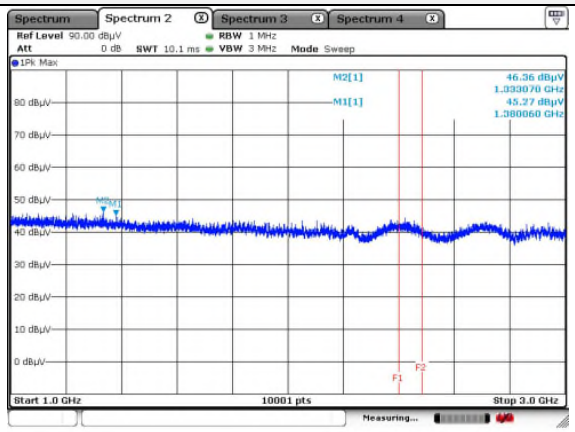

Vertical // Peak for 1 ㎓ to 3 ㎓

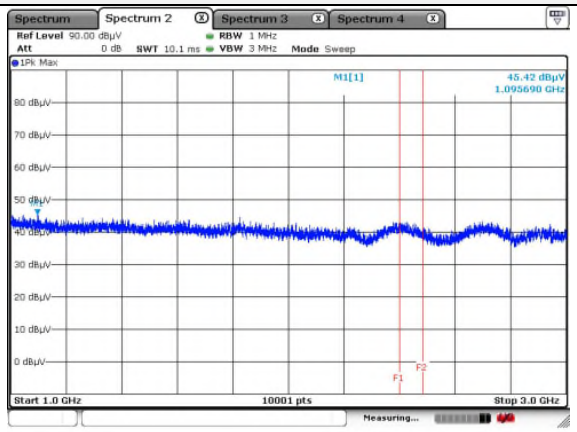

Horizontal // Peak for 3 ㎓ to 18 ㎓

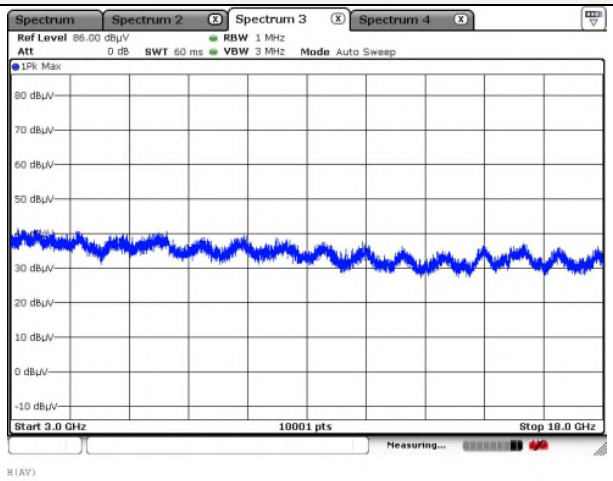

Vertical // Peak for 3 ㎓ to 18 ㎓

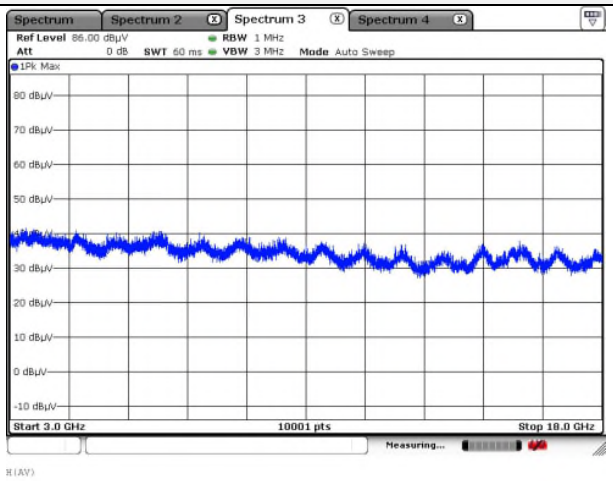

Note.
1. No spurious emission were detected above 3 ㎓.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Mode: 802.11n_HT20

Distance of measurement: 3 meter

Channel: 11

- **Spurious**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 030.50	45.17	Peak	H	-9.88	-	35.29	74.00	38.71
1 680.03	44.95	Peak	V	-5.11	-	39.84	74.00	34.16
1 827.42	44.94	Peak	V	-3.43	-	41.51	74.00	32.49
2 696.93	43.41	Peak	H	-0.56	-	42.85	74.00	31.15

- **Band edge**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 483.66	65.05	Peak	H	-1.68	-	63.37	74.00	10.63
2 483.66	49.15	Average	H	-1.68	-	48.14	54.00	5.86
2 483.67	59.45	Peak	V	-1.68	-	57.77	74.00	16.23
2 483.67	43.76	Average	V	-1.68	-	42.08	54.00	11.92
2 484.10	65.26	Peak	H	-1.68	-	63.58	74.00	10.42
2 484.10	48.38	Average	H	-1.68	-	46.70	54.00	7.30
2 484.15	48.38	Peak	V	-1.67	-	46.71	74.00	27.29
2 484.15	43.48	Average	V	-1.67	-	41.81	54.00	12.19

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Restricted band // Horizontal // Peak	Restricted band // Vertical // Peak
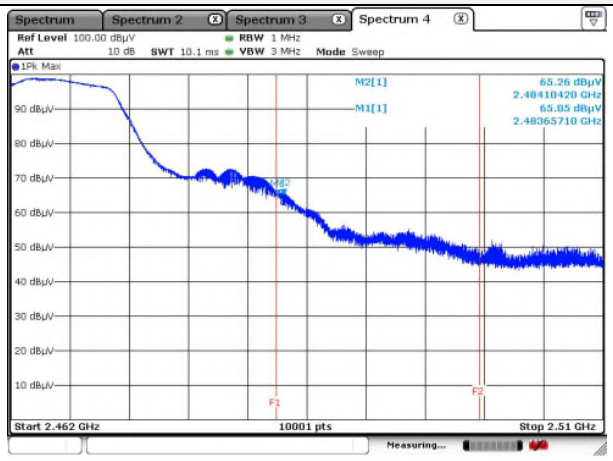	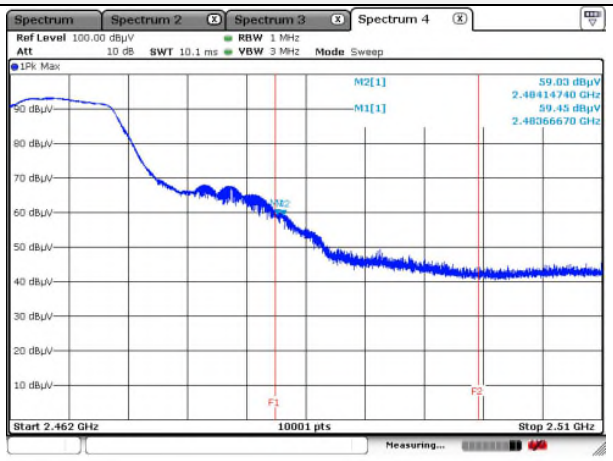
Restricted band // Horizontal // Average	**Restricted band // Vertical // Average**
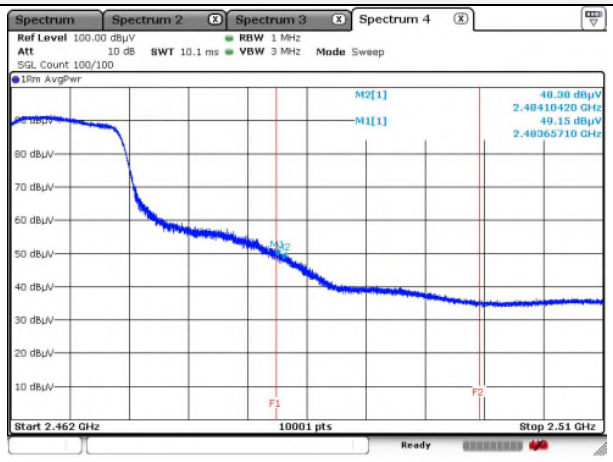	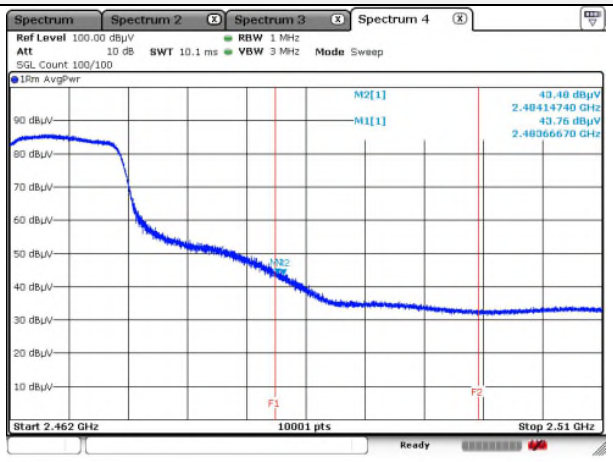

Horizontal // Peak for 1 ㎓ to 3 ㎓	Vertical // Peak for 1 ㎓ to 3 ㎓
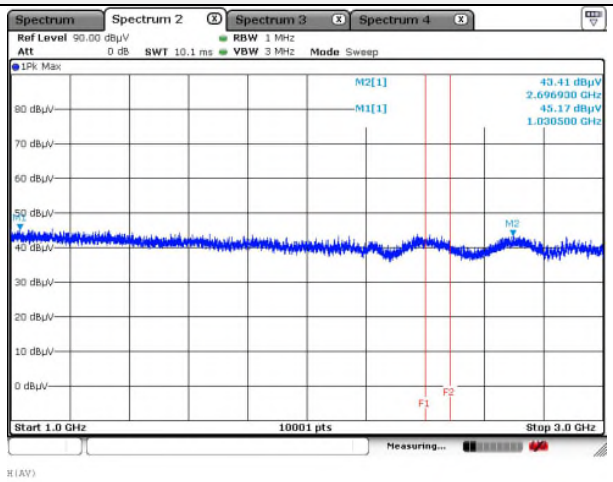	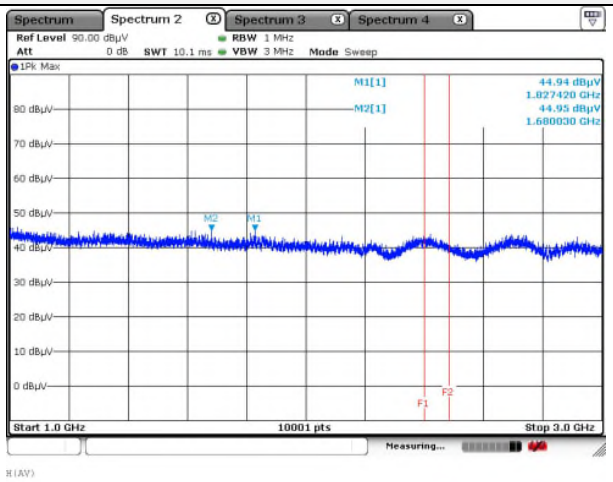
Horizontal // Peak for 3 ㎓ to 18 ㎓	**Vertical // Peak for 3 ㎓ to 18 ㎓**
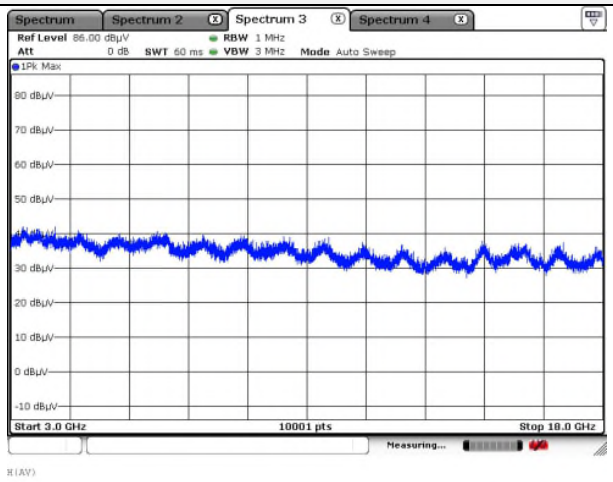	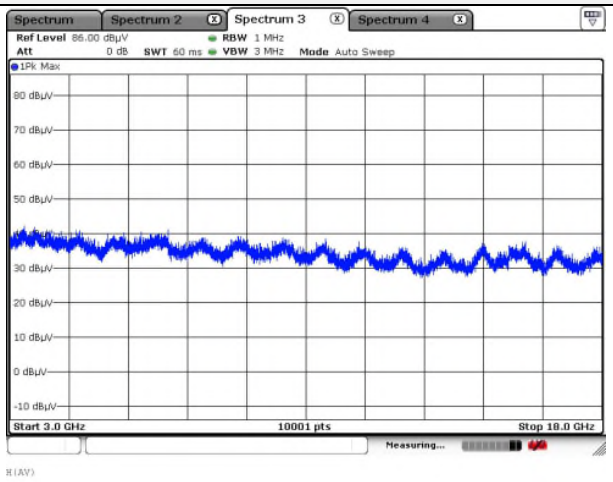

Note.
1. Average test would be performed if the peak result were greater than the average limit.

Test results (18 ㎓ to 30 ㎓)

Mode:	802.11g (Worst case)
Distance of measurement:	3 meter
Channel:	06 (Worst case)

Horizontal Peak	Vertical Peak
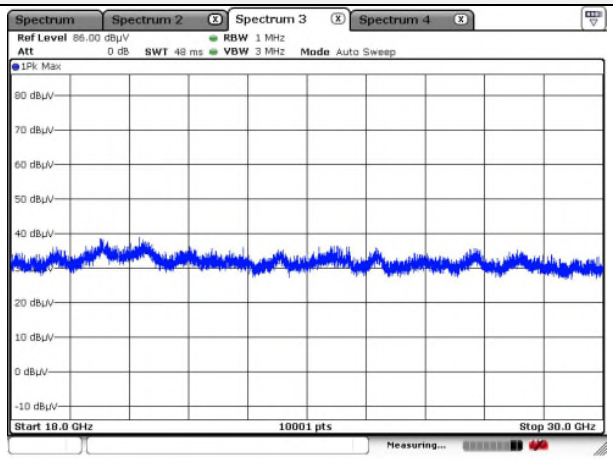	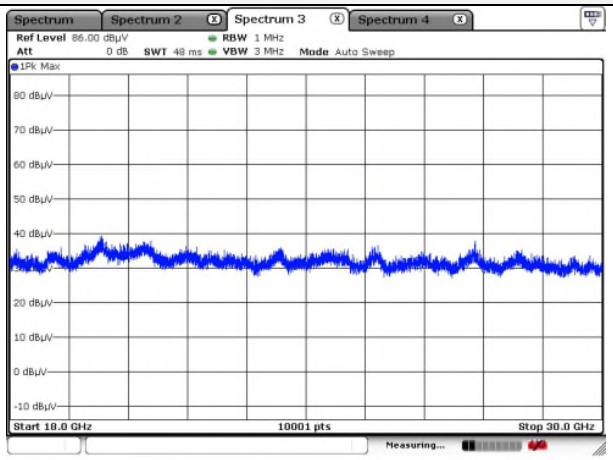

Note.

1. No spurious emission were detected above 18 ㎓.

Mode: LE 1 Mbps

Distance of measurement: 3 meter

Channel: 00

- **Spurious**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 198.28	48.09	Peak	V	-8.75	-	39.34	74.00	34.66
1 332.07	50.15	Peak	H	-7.62	-	42.53	74.00	31.47
1 327.27	47.76	Peak	V	-7.66	-	40.10	74.00	33.90

- **Band edge**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 364.85	44.72	Peak	V	-1.91	-	42.81	74.00	31.19
2 366.01	45.40	Peak	H	-1.90	-	43.50	74.00	30.50

Restricted band // Horizontal // Peak

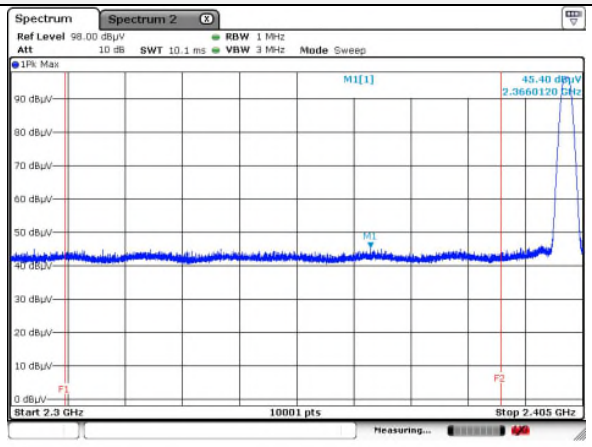

Restricted band // Vertical // Peak

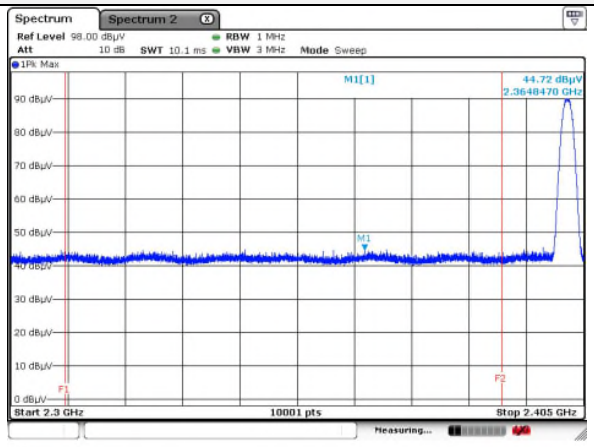

Horizontal // Peak for 1 ㎓ to 3 ㎓	Vertical // Peak for 1 ㎓ to 3 ㎓
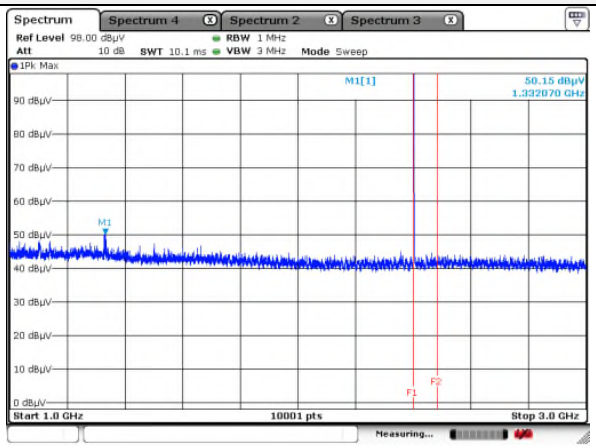	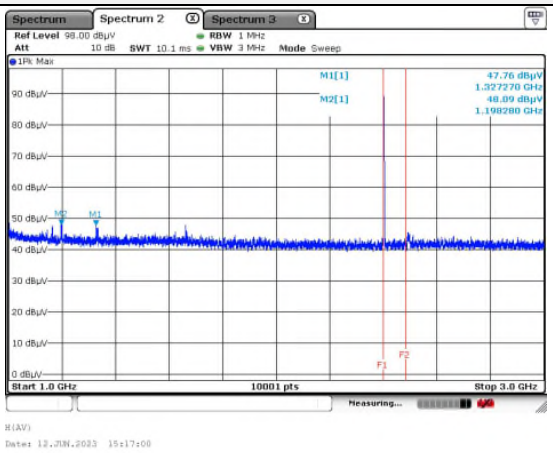
Horizontal // Peak for 3 ㎓ to 18 ㎓	**Vertical // Peak for 3 ㎓ to 18 ㎓**
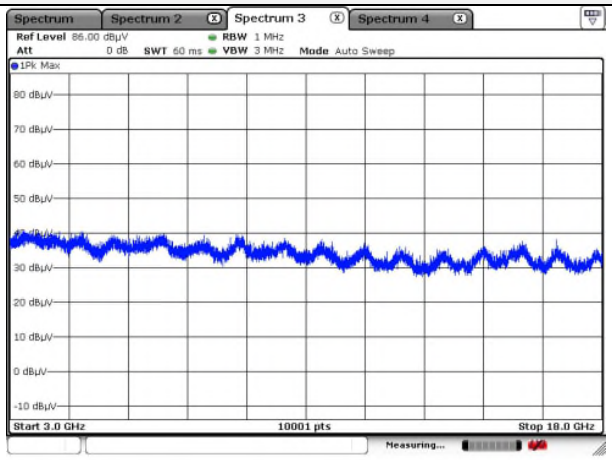	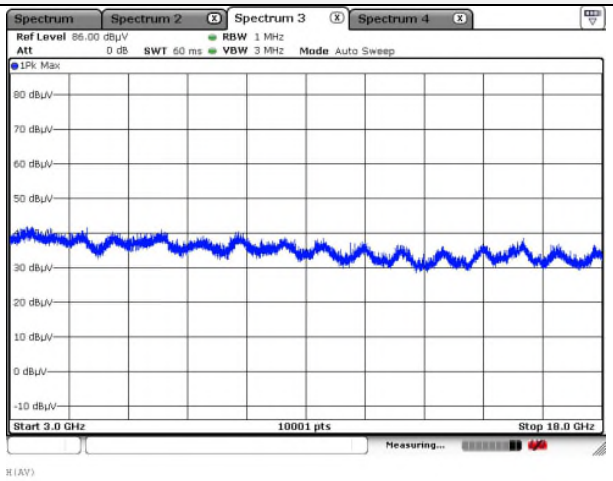

Note.
1. No spurious emission were detected above 3 ㎓.
2. Average test would be performed if the peak result were greater than the average limit.

Mode: LE 1 Mbps

Distance of measurement: 3 meter

Channel: 20

- **Spurious**

Frequency (㎒)	Level (dB㎶)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB㎶/m)	Limit (dB㎶/m)	Margin (dB)
1 166.88	47.44	Peak	V	-8.96	-	38.48	74.00	35.52
1 327.27	49.15	Peak	H	-7.66	-	41.49	74.00	32.51
1 661.83	47.67	Peak	V	-5.34	-	42.33	74.00	31.67
1 666.83	45.93	Peak	H	-5.28	-	40.65	74.00	33.35

Horizontal // Peak for 1 ㎓ to 3 ㎓

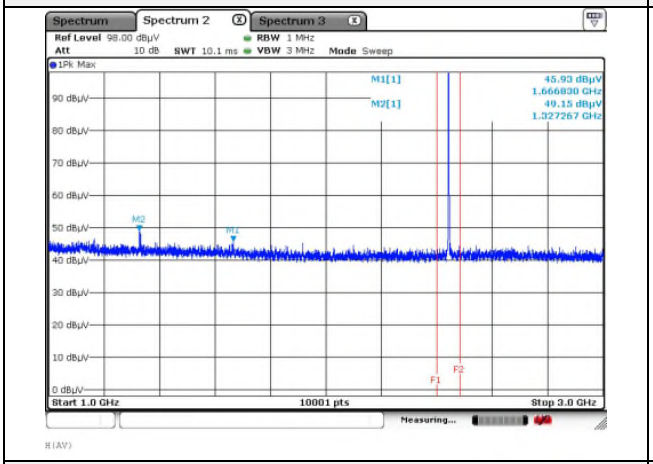

Vertical // Peak for 1 ㎓ to 3 ㎓

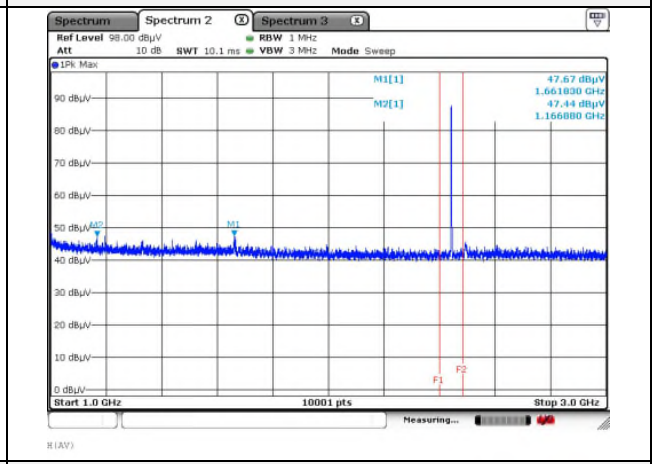

Horizontal // Peak for 3 ㎓ to 18 ㎓

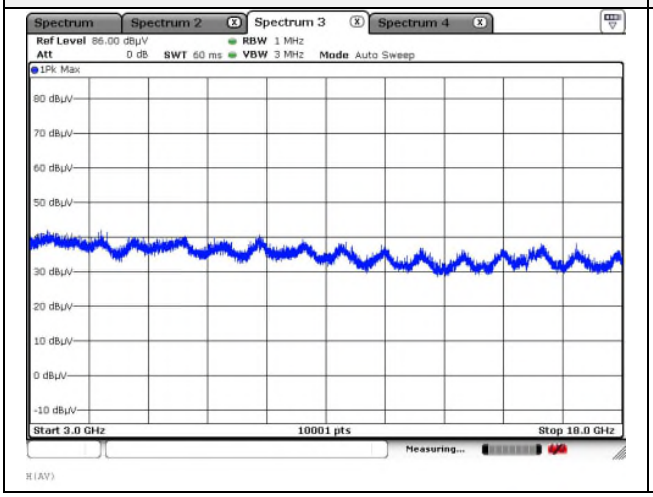

Vertical // Peak for 3 ㎓ to 18 ㎓

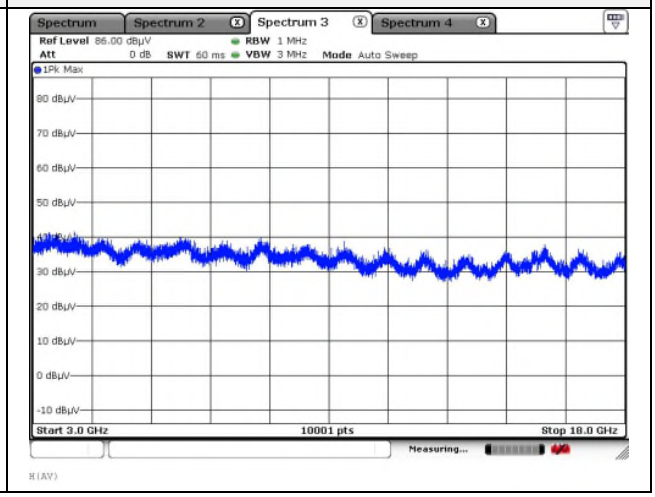

Note.
1. No spurious emission were detected above 3 ㎓.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Mode: LE 1 Mbps
Distance of measurement: 3 meter
Channel: 39

- **Spurious**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 163.68	47.04	Peak	H	-8.98	-	38.06	74.00	35.94
1 195.08	48.87	Peak	V	-8.77	-	40.10	74.00	33.90
1 660.43	47.77	Peak	V	-5.36	-	42.41	74.00	31.59
1 331.27	49.61	Peak	H	-7.63	-	41.98	74.00	32.02

- **Band edge**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 495.49	45.35	Peak	H	-1.65	-	43.70	74.00	30.30
2 497.49	46.94	Peak	V	-1.64	-	45.97	74.00	28.03

Restricted band // Horizontal // Peak

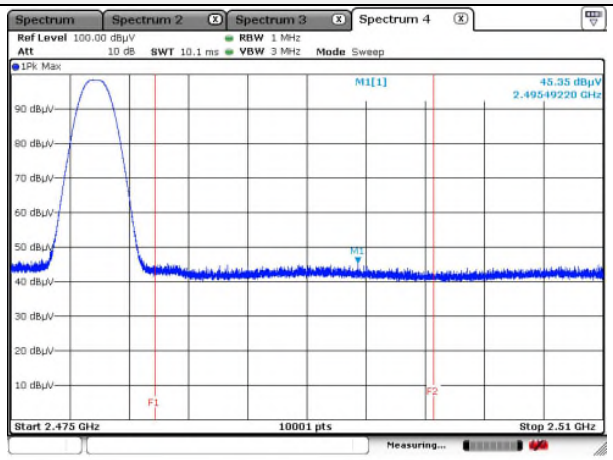

Restricted band // Vertical // Peak

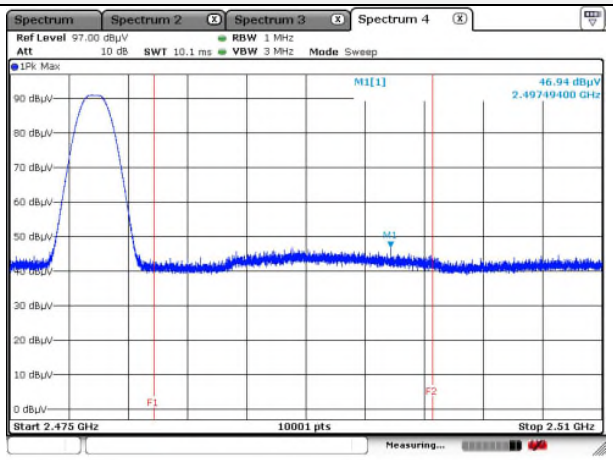

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Horizontal // Peak for 1 ㎓ to 3 ㎓	Vertical // Peak for 1 ㎓ to 3 ㎓
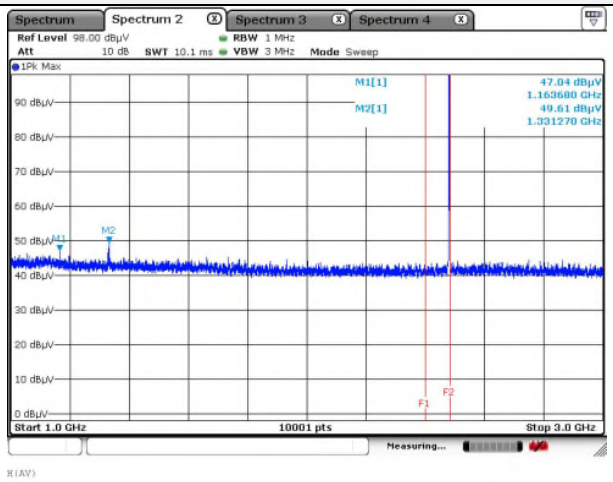	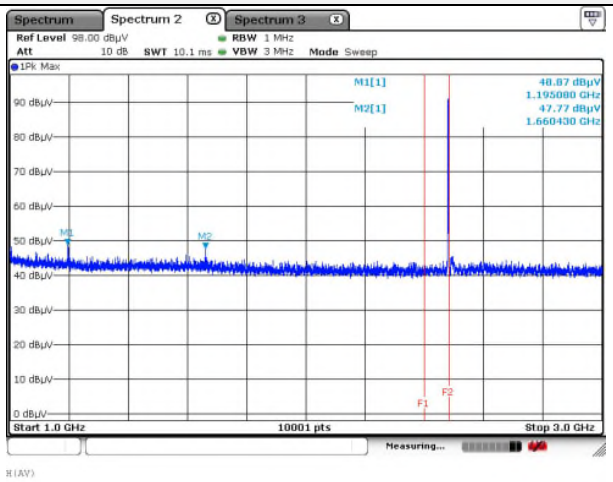
Horizontal // Peak for 3 ㎓ to 18 ㎓	**Vertical // Peak for 3 ㎓ to 18 ㎓**
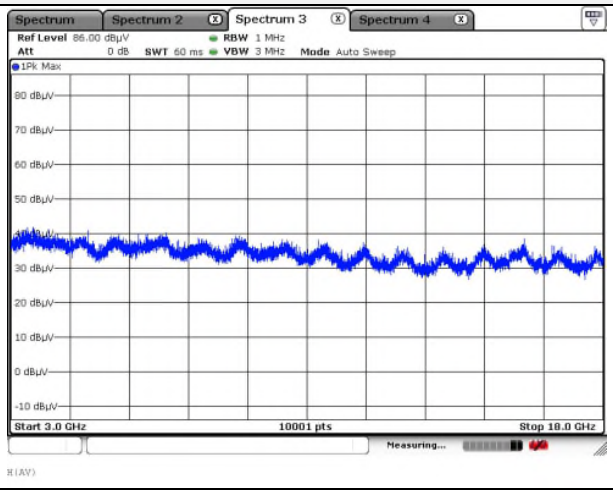	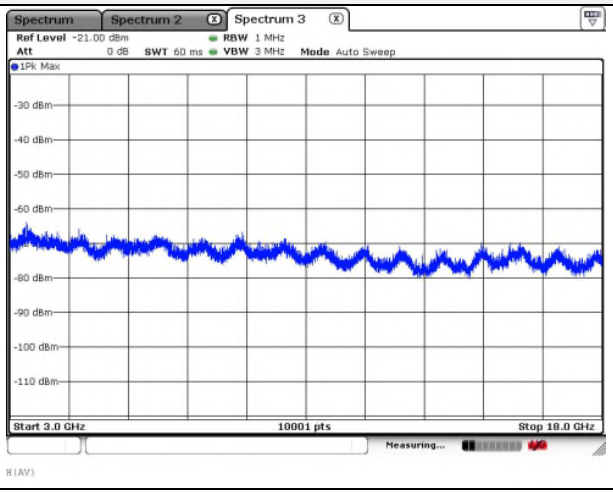

Note.
1. No spurious emission were detected above 3 ㎓.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test results (18 ㎓ to 30 ㎓) – Worst case

Mode:	LE 1 Mbps
Distance of measurement:	3 meter
Channel:	39 (Worst case)

Horizontal Peak	Vertical Peak
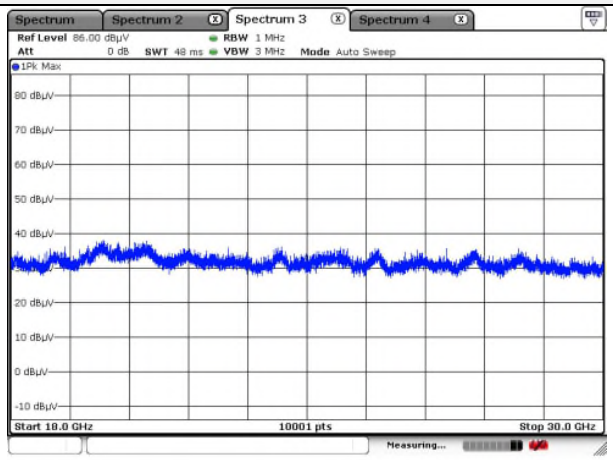	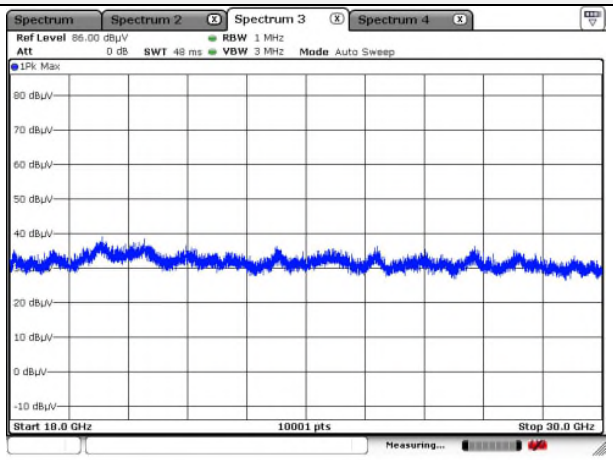

Note.
No spurious emission were detected above 18 ㎓.

3.5. Conducted spurious emissions & band edge

Test setup

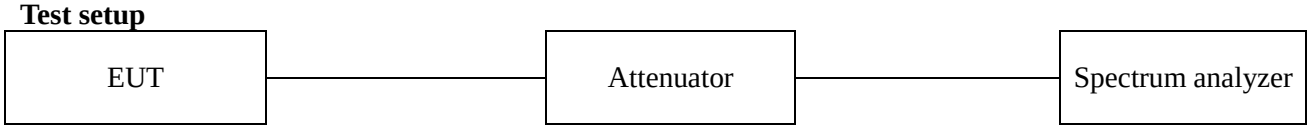

Test procedure

Band edge

ANSI C63.10-2013 - Section 11.11

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Set the RBW = 100 ㎑
4. Set the VBW = [3 × RBW].
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow trace to fully stabilize.

Out of band emissions

ANSI C63.10-2013 - Section 11.11

1. Start frequency was set to 30 ㎒ and stop frequency was set to 25 ㎓ for 2.4 ㎓ frequencies and 40 ㎓ for 5 ㎓ frequencies
2. Set the RBW = 100 ㎑
3. Set the VBW = [3 × RBW].
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow trace to fully stabilize.

Limit

According to 15.247(d), in any 100 ㎑ bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 ㏈ below that in the 100 ㎑ bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval , as permitted under paragraph(b)(3) of this section , the attenuation required under this paragraph shall be 30 ㏈ instead of 20 ㏈. Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section 15.205(a), must also comply the radiated emission limits specified in section 15.209(a) (see section 15.205(c))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test results

802.11b	
2 412 MHz	2 437 MHz
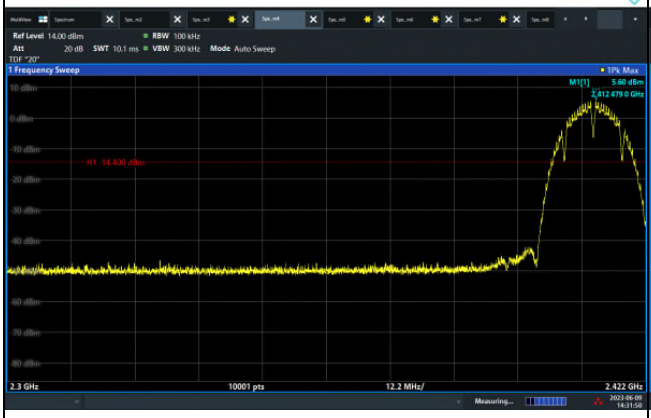	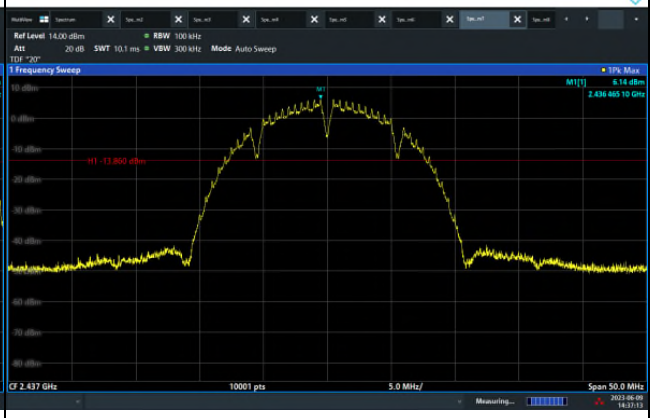
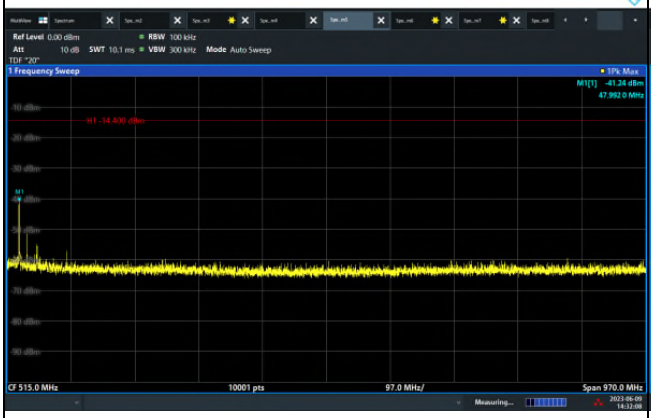	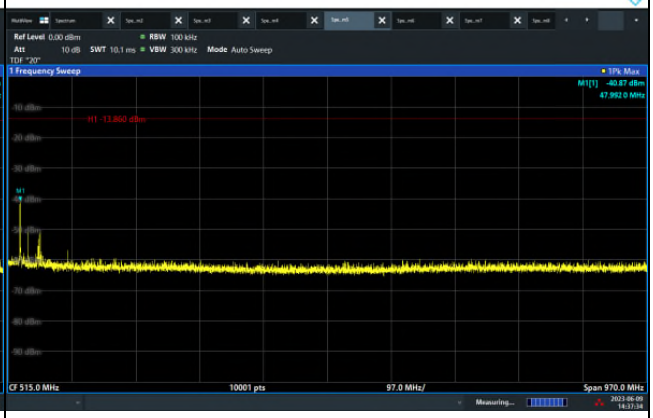

802.11b	
2 462 MHz	-
	BLANK
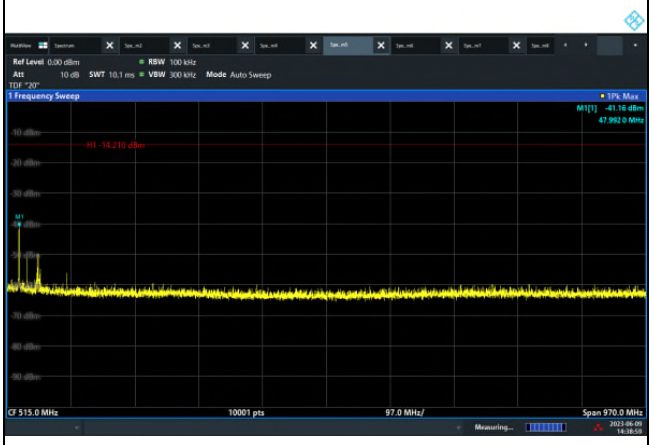	BLANK
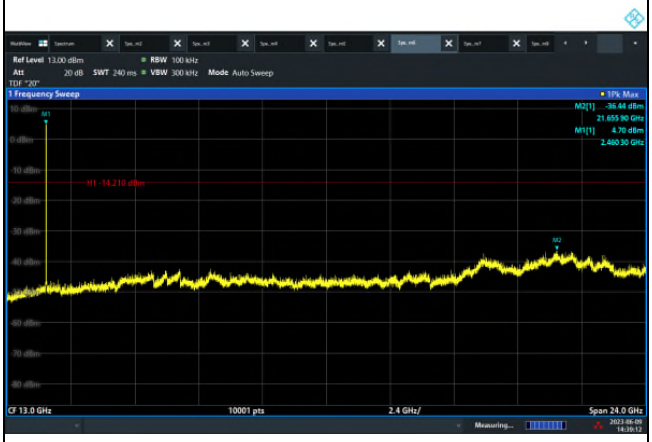	BLANK

802.11g	
2 412 MHz	2 437 MHz
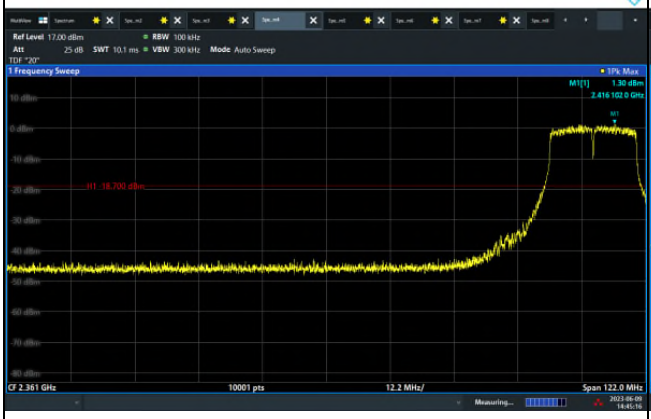	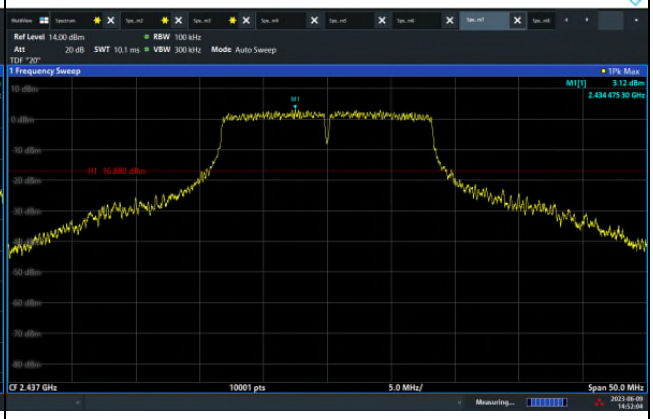
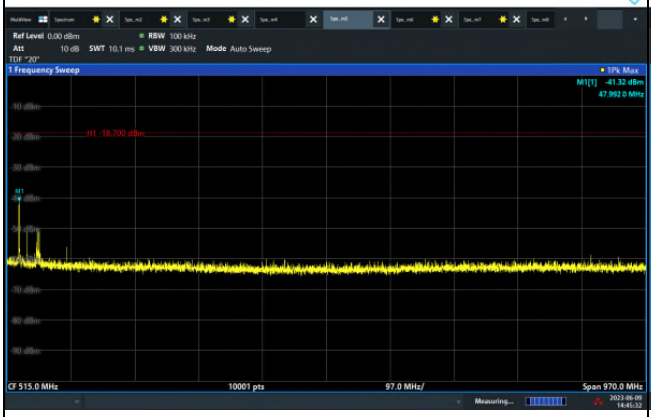	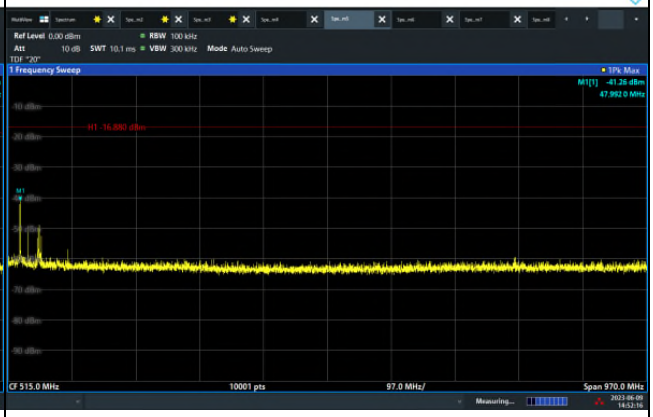
	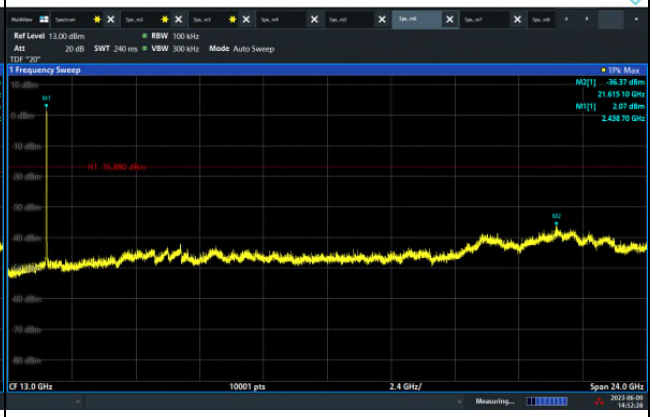

802.11g	
2 462 MHz	-
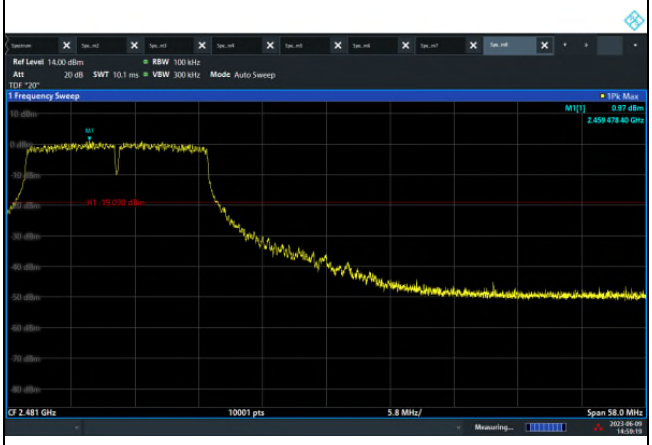	BLANK
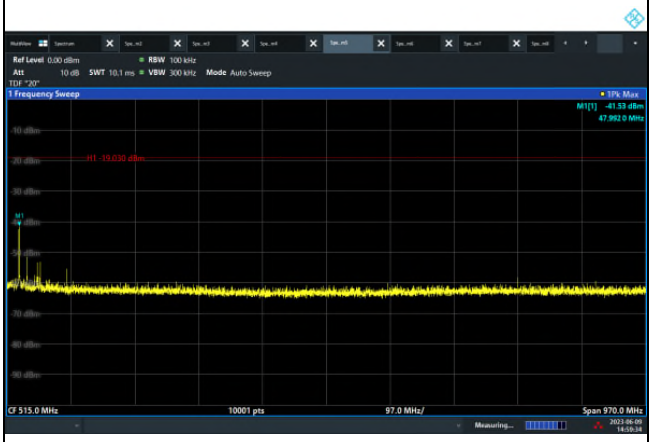	BLANK
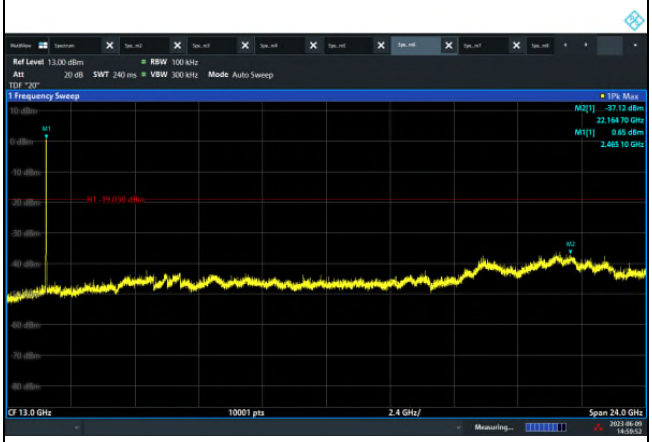	BLANK

802.11n_HT20	
2 412 MHz	2 437 MHz
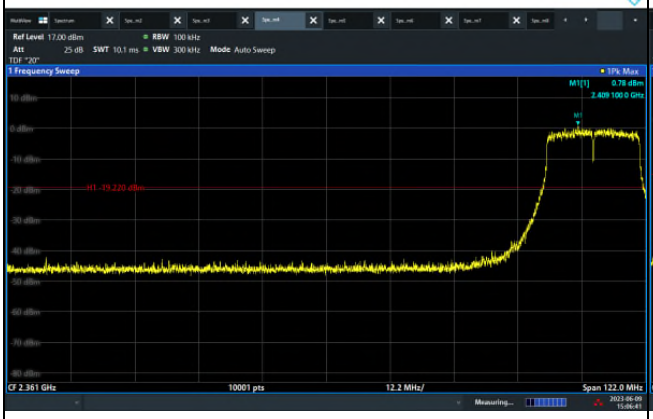	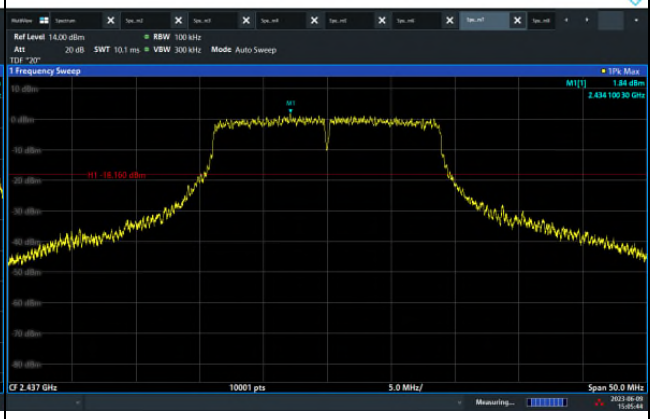
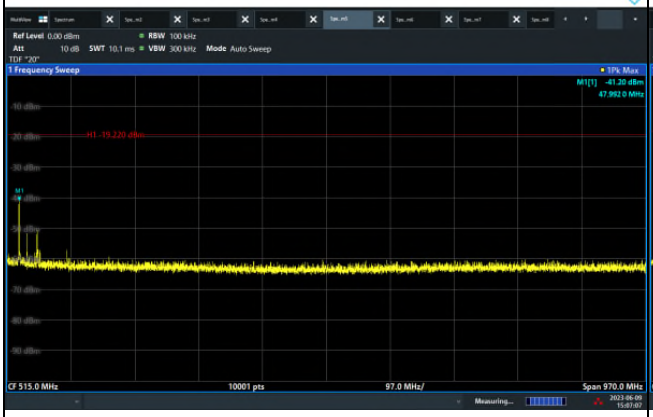	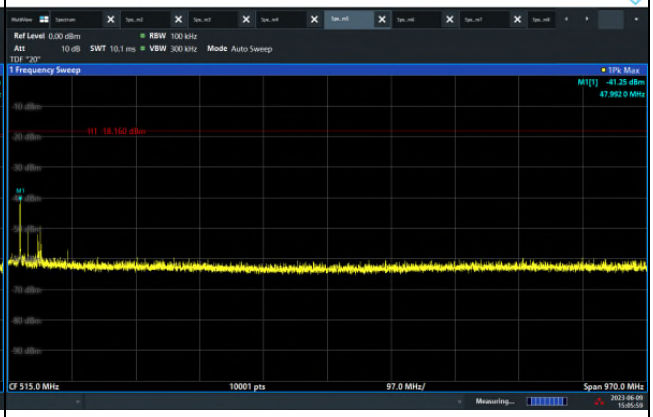
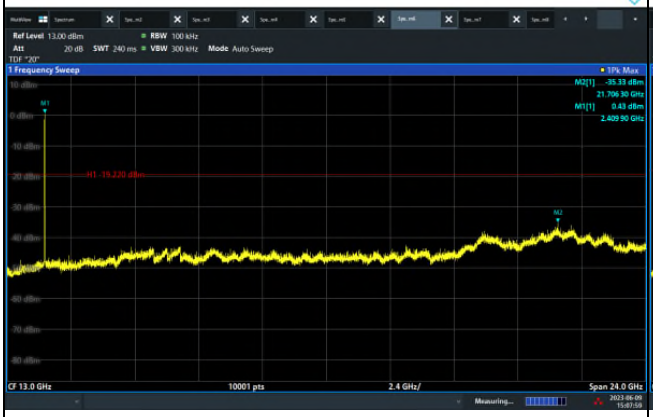	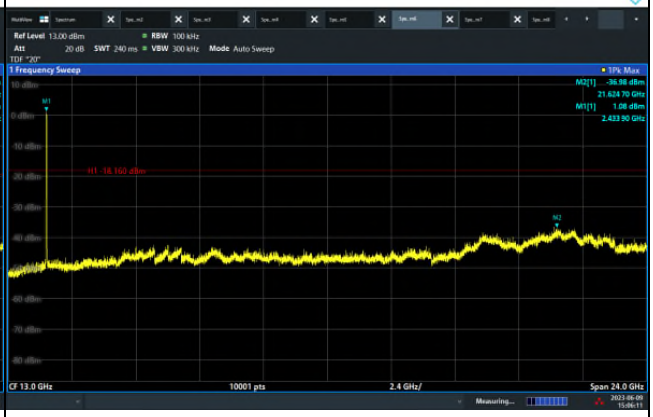

802.11n_HT20	
2 462 MHz	-
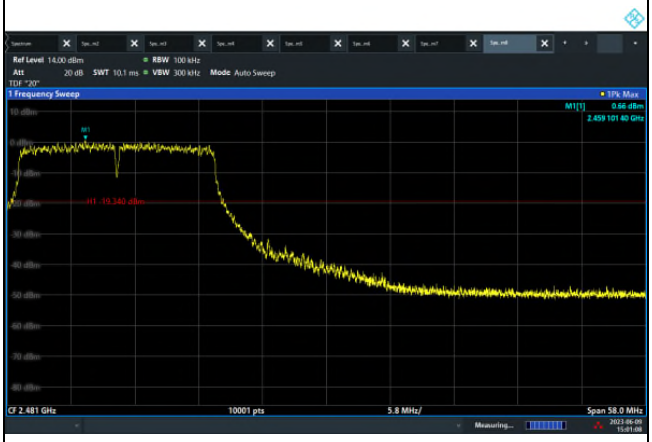	BLANK
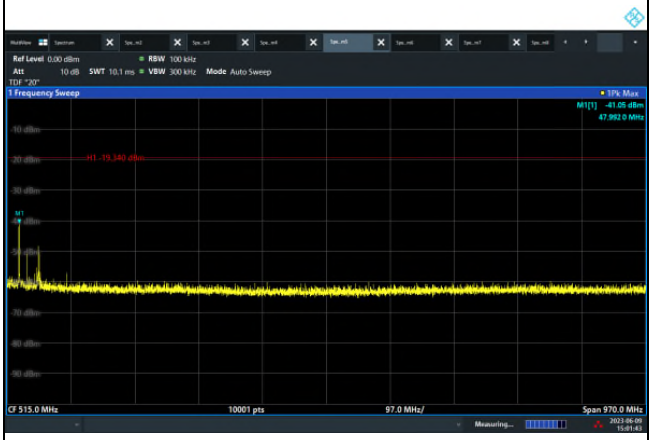	BLANK
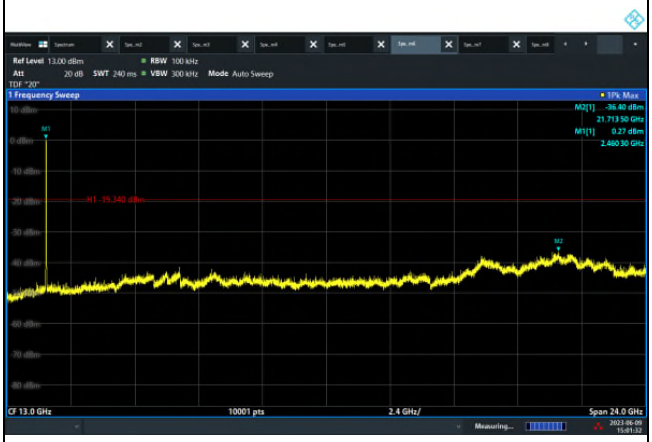	BLANK

LE 1 Mbps	
2 402 MHz	2 442 MHz
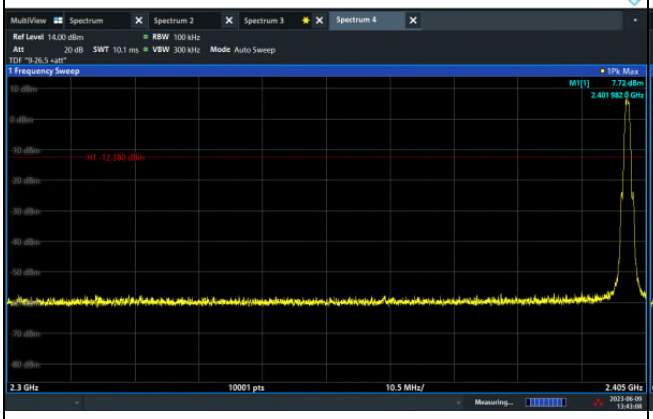	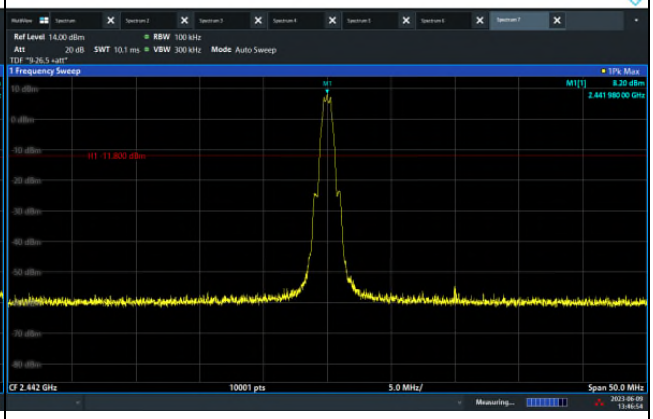
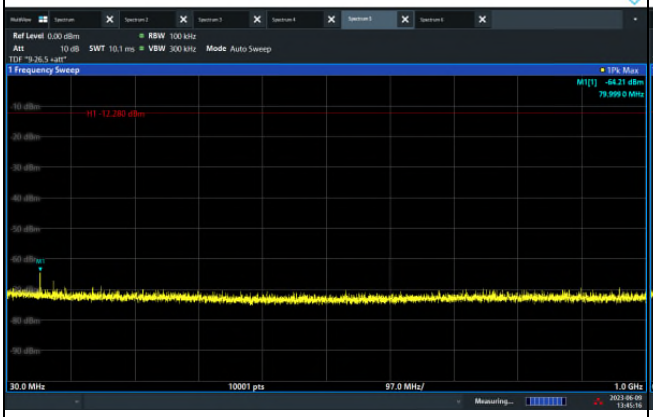	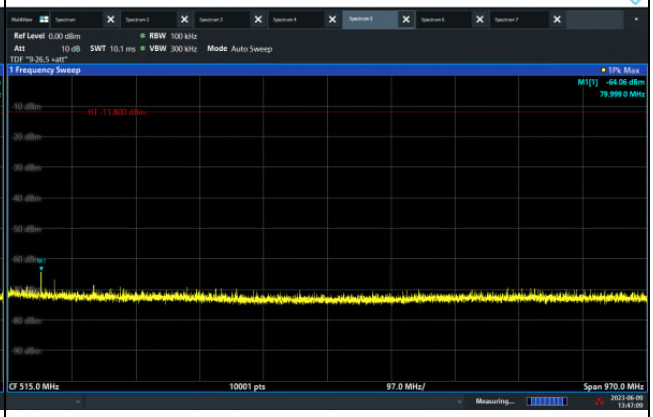

LE 1Mbps	
2 480 MHz	-
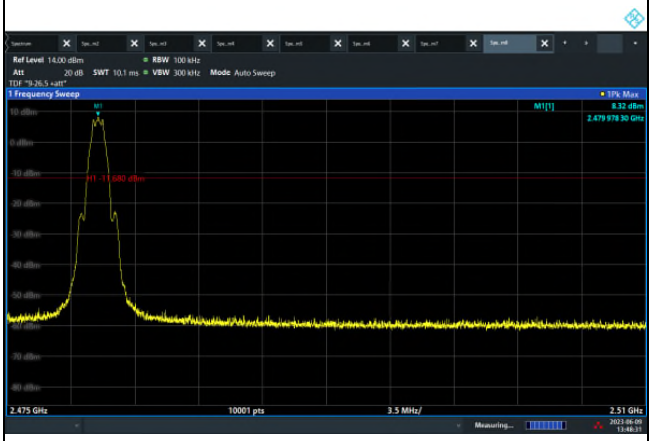	BLANK
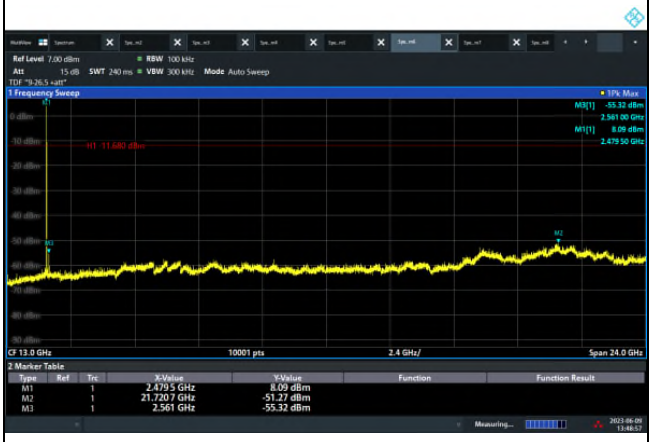	BLANK
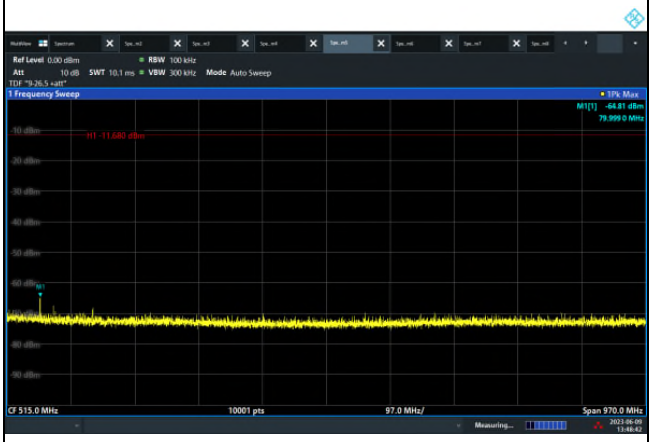	BLANK

3.6. AC conducted emissions

Limit

According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 ㎑ to 30 ㎒, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (㎒)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

Test results

Mode:	802.11g (Worst case)
Distance of measurement:	3 meter
Channel:	06 (Worst case)

Hot Line

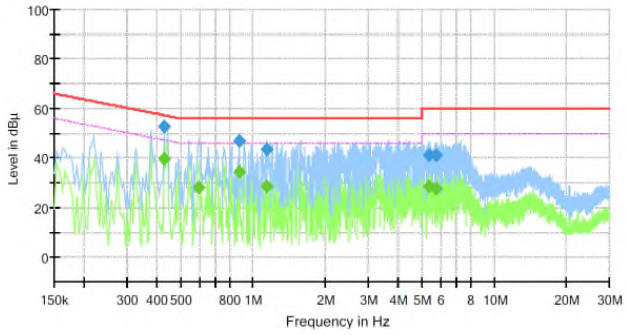

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.430000	52.55	---	57.25	4.70	1000.0	9.000	L1	19.8
0.430000	---	39.51	47.25	7.74	1000.0	9.000	L1	19.8
0.594000	---	28.23	46.00	17.77	1000.0	9.000	L1	19.9
0.878000	46.83	---	56.00	9.17	1000.0	9.000	L1	20.1
0.878000	---	34.15	46.00	11.85	1000.0	9.000	L1	20.1
1.142000	43.60	---	56.00	12.40	1000.0	9.000	L1	20.3
1.142000	---	28.46	46.00	17.54	1000.0	9.000	L1	20.3
5.378000	41.19	---	60.00	18.81	1000.0	9.000	L1	19.9
5.378000	---	28.57	50.00	21.43	1000.0	9.000	L1	19.9
5.778000	41.17	---	60.00	18.83	1000.0	9.000	L1	19.8
5.778000	---	27.68	50.00	22.32	1000.0	9.000	L1	19.8

Neutral Line

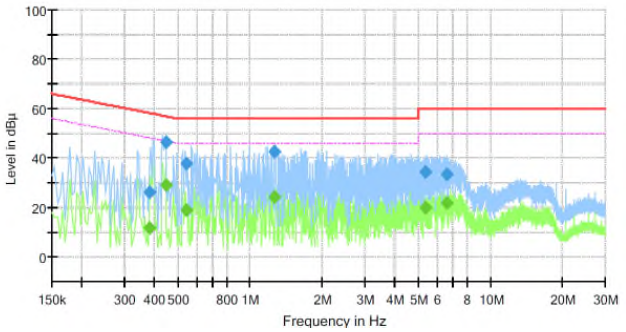

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.382000	26.21	---	58.24	32.03	1000.0	9.000	N	19.7
0.382000	---	11.54	48.24	36.70	1000.0	9.000	N	19.7
0.446000	---	29.27	46.95	17.68	1000.0	9.000	N	19.8
0.446000	46.57	---	56.95	10.38	1000.0	9.000	N	19.8
0.542000	37.81	---	56.00	18.19	1000.0	9.000	N	19.9
0.542000	---	19.02	46.00	26.98	1000.0	9.000	N	19.9
1.262000	---	24.22	46.00	21.78	1000.0	9.000	N	20.3
1.262000	42.60	---	56.00	13.40	1000.0	9.000	N	20.3
5.394000	34.22	---	60.00	25.78	1000.0	9.000	N	19.9
5.394000	---	20.09	50.00	29.91	1000.0	9.000	N	19.9
6.590000	33.38	---	60.00	26.62	1000.0	9.000	N	19.8
6.590000	---	21.85	50.00	28.15	1000.0	9.000	N	19.8

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Mode: LE 1 Mbps

Channel: 39 (Worst case)

Hot Line

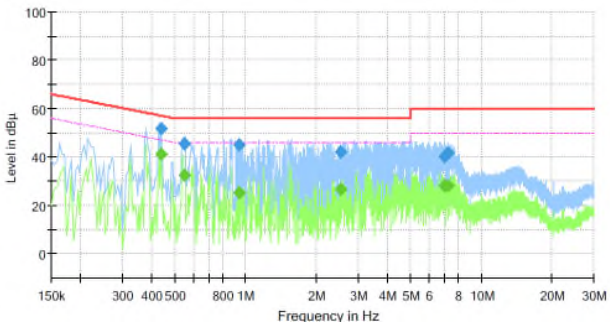

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.438000	51.88	---	57.10	5.22	1000.0	9.000	L1	19.8
0.438000	---	40.98	47.10	6.12	1000.0	9.000	L1	19.8
0.550000	---	32.40	46.00	13.60	1000.0	9.000	L1	19.9
0.550000	45.54	---	56.00	10.46	1000.0	9.000	L1	19.9
0.942000	---	25.28	46.00	20.72	1000.0	9.000	L1	20.2
0.942000	45.08	---	56.00	10.92	1000.0	9.000	L1	20.2
2.534000	---	26.76	46.00	19.24	1000.0	9.000	L1	20.4
2.534000	42.31	---	56.00	13.69	1000.0	9.000	L1	20.4
7.006000	---	28.10	50.00	21.90	1000.0	9.000	L1	19.8
7.006000	40.31	---	60.00	19.69	1000.0	9.000	L1	19.8
7.206000	---	27.95	50.00	22.05	1000.0	9.000	L1	19.9
7.206000	41.52	---	60.00	18.48	1000.0	9.000	L1	19.9

Neutral Line

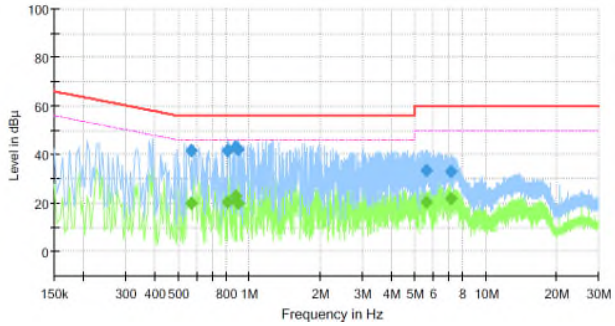

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.570000	41.69	---	56.00	14.31	1000.0	9.000	N	19.9
0.570000	---	20.09	46.00	25.91	1000.0	9.000	N	19.9
0.814000	---	20.54	46.00	25.46	1000.0	9.000	N	20.1
0.814000	41.71	---	56.00	14.29	1000.0	9.000	N	20.1
0.878000	---	22.69	46.00	23.31	1000.0	9.000	N	20.1
0.878000	42.88	---	56.00	13.12	1000.0	9.000	N	20.1
0.894000	---	19.79	46.00	26.21	1000.0	9.000	N	20.1
0.894000	42.28	---	56.00	13.72	1000.0	9.000	N	20.1
5.638000	---	20.28	50.00	29.72	1000.0	9.000	N	19.8
5.638000	33.61	---	60.00	26.39	1000.0	9.000	N	19.8
7.122000	---	21.80	50.00	28.20	1000.0	9.000	N	19.8
7.122000	32.70	---	60.00	27.30	1000.0	9.000	N	19.8

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

3.7. Antenna Requirement

According to 15.207(a), An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum analyzer	R&S	FSV3044	101272	1 year	2024.03.16
Spectrum analyzer	R&S	FSV40-N	102194	1 year	2023.08.11
MXG Vector SIGNAL GENERATOR	Agilent	N5182A	MY50143829	1 year	2024.01.12
SIGNAL GENERATOR	Anritsu	68369B	002118	1 year	2024.05.12
BAND REJECT FILTER	MICRO-TRONICS	BRM50702	G272	1 year	2024.01.12
Attenuator	Mini-Circuits	BW-S10-2W263+	3	1 year	2024.01.13
Attenuator	HUBER+SUHNER	6806.17.A	-	1 year	2024.03.21
Power Meter	Anritsu	ML2495A	2010001	1 year	2024.04.19
Pulse Power Sensor	Anritsu	MA2411B	1911111	1 year	2024.04.18
Loop Antenna	Schwarzbeck	FMZB1513	1513-257	2 years	2025.01.16
BILOG ANTENNA	Schwarzbeck	VULB 9168	9168-461	2 years	2024.04.27
Horn Antenna	A.H	SAS-571	414	1 year	2024.01.16
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA 9170550	1 year	2024.01.16
AMPLIFIER	SONOMA INSTRUMENT	310N	401123	1 year	2024.05.31
RF AMPLIFIER	HP	8449B	3008A00538	1 year	2024.05.31
BROADBAND AMPLIFIER	SCHWARZBECK	BBV9721	PS9721-003	1 year	2024.01.16
AC POWER SOURCE/ ANALYZER	HP	6813A	3729A00754	1 year	2024.01.12
EMI Test Receiver	R&S	ESU26	100517	1 year	2023.08.01
EMI Test Receiver	R&S	ESR3	101783	1 year	2023.11.11
PULSE LIMITER	R&S	ESH2-Z2	101915	1 year	2023.11.10
LISN	R&S	ENV216	101787	1 year	2023.11.10

Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook computer	LG Electronics Inc.,	LGS53	306QCZP560949
Test Jig Board	N/A	N/A	N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr