


TEST REPORT

Applicant:	Aurodi Corporation
Address of Applicant:	Suite 1100, 7887 E Belleview Ave, Denver, CO 80111, United States
Manufacturer:	Jingrui Inspire Co.,Ltd.
Address of Manufacturer:	RM1306, Block 3 (C-1), Runhui Science Park,18 Shenzhou Rd., Huangpu Dist., Guangzhou, Guangdong Prov., P.R. China, 510663
Product name:	Lora Temp sensor
Model(s):	VTS13W01, VTS13W02, VTS13W03, VTS13W04, VTS13W05, VTS13W06, VTS13P01
Rating(s):	DC 3.6V, 120mA lithium-iron battery power supply
Trademark:	V-MARK
Standards:	47 CFR Part 15 Subpart C section 15.247
FCC ID:	2BBTA-VTS13W0X
Data of Receipt:	2025-07-30
Date of Test:	2025-07-30~2026-01-27
Date of Issue:	2026-01-27
Test Result	Pass*


* In the configuration tested, the test item complied with the standards specified above.

Authorized for issue by:**Test by:**

Jan. 27, 2026 Chivas Tsang 
Project Engineer

Date Name/Position Signature

Reviewed by:

Jan. 27, 2026 Victor Meng 
Project Manager

Date Name/Position Signature

Testing Laboratory information:

Testing Laboratory Name : ITL Co., Ltd

Address : No. 8, Jinqianling Street 5, Huangjiang Town, Dongguan,
Guangdong, China

Testing location : Same as above

Tel : 0086-769-39001678

Fax : 0086-20-62824387

E-mail : itl@i-testlab.com

Possible test case verdicts:

- test case does not apply to the test object.. : N/A
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.. : F (Fail)

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report would be invalid test report without all the signatures of testing technician and approver.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

General product information:

Differences Summary:

- 1.VTS13W02 uses an External digital temperature probe, measurement range -40℃~105℃.
- 2.VTS13W03 uses an PT1000 platinum resistance temperature probe, measurement range -200℃~200℃.
3. VTS13W04 uses an Built-in temperature and humidity probe, measurement range -40℃~85℃,0~100%RH.
- 4.VTS13W05 uses an High precision External digital temperature probe, measurement range -40℃~105℃.
5. VTS13W06 uses an High precision External temperature and humidity probe, measurement range -40℃~85℃,0~100%RH.
6. VTS13P01 Support multiple temperature/humidity probes,It includes the following types, and only one can be connected at a time:
 - Ordinary External Digital Temperature Probe;
 - PT1000 Platinum Resistance Temperature Probe;
 - High Precision External Digital Temperature Probe;
 - High Precision External Temperature and Humidity Probe;All the models are the same except for the model names and accessories.
All tests were performed on the model VTS13W01 as representative.

1 Test Summary

Test	Test Requirement	Test method	Result
Antenna Requirement	FCC PART 15 C section 15.247 (c) and Section 15.203	FCC PART 15 C section 15.247 (c) and Section 15.203	PASS
Occupied Bandwidth	FCC PART 15 C section 15.247 (a)(2)	ANSI C63.10:2020	PASS
Maximum Peak Output Power	FCC PART 15 C section 15.247(b)(3)	ANSI C63.10: 2020	PASS
Peak Power Spectral Density	FCC PART 15 C section 15.247(e)	ANSI C63.10:2020	PASS
Conducted Spurious Emission (30MHz to 25GHz)	FCC PART 15 C section 15.209&15.247(d)	ANSI C63.10:2020	PASS
Radiated Spurious Emission (30 MHz to 25 GHz)	FCC PART 15 C section 15.209&15.247(d)	ANSI C63.10:2020	PASS
Radiated Emissions which fall in the restricted bands	FCC PART 15 C section 15.209	ANSI C63.10:2020	PASS
Band Edges Measurement	FCC PART 15 C section 15.209&15.247(d)	ANSI C63.10:2020	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10:2020	PASS

2 Contents

	Page
TEST REPORT	1
1 TEST SUMMARY	3
2 CONTENTS	4
3 GENERAL INFORMATION	5
3.1 CLIENT INFORMATION	5
3.2 GENERAL DESCRIPTION OF E.U.T.	5
3.3 DETAILS OF E.U.T.	5
3.4 DESCRIPTION OF SUPPORT UNITS	5
3.5 TEST LOCATION	5
3.6 DEVIATION FROM STANDARDS	5
3.7 ABNORMALITIES FROM STANDARD CONDITIONS	5
3.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
3.9 TEST FACILITY	6
3.10 MEASUREMENT UNCERTAINTY	6
4 INSTRUMENTS USED DURING TEST	7
5 TEST RESULTS	8
5.1 E.U.T. TEST CONDITIONS	8
5.2 ANTENNA REQUIREMENT	10
5.3 OCCUPIED BANDWIDTH	11
5.4 MAXIMUM PEAK OUTPUT POWER	16
5.5 PEAK POWER SPECTRAL DENSITY	19
5.6 CONDUCTED SPURIOUS EMISSIONS	23
5.7 RADIATED SPURIOUS EMISSIONS	26
5.7.1 <i>Harmonic and other spurious emissions</i>	29
5.8 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	38
5.9 BAND EDGES REQUIREMENT	41
5.10 CONDUCTED EMISSIONS AT MAINS TERMINALS 150 KHz TO 30MHz	43

3 General Information

3.1 Client Information

Applicant: Aurodi Corporation.
Address of Applicant: Suite 1100, 7887 E Belleview Ave, Denver, CO 80111, United States.

3.2 General Description of E.U.T.

Name: Lora Temp sensor
Model No.: VTS13W01
Operating Frequency: 2400 MHz to 2483.5 MHz
15 channels with 5MHz step

Channels:

channel	Frequency	channel	Frequency	channel	Frequency	channel	Frequency
1	2405	5	2425	9	2445	13	2465
2	2410	6	2430	10	2450	14	2470
3	2415	7	2435	11	2455	15	2475
4	2420	8	2440	12	2460		

Type of Modulation: CSS
Antenna Type: FPCB Antenna with 2 dBi peak Gain
Serial number: /
Hardware Version: V1.1
Software Version: 1.0.0

3.3 Details of E.U.T.

EUT Power Supply: DC 3.6V, 120mA lithium-iron battery power supply
Test mode: The program used to control the EUT for staying in continuous transmitting and receiving mode is programmed. Channel lowest (2405MHz), middle (2445MHz) and highest (2475MHz) are chosen for full testing.

3.4 Description of Support Units

3.5 Test Location

All the tests were performed in ITL Co., Ltd. Which is located at No. 8, Jinqianling Street 5, Huangjiang Town, Dongguan, Guangdong, China.

Tel: 0086-769-39001678, Fax: 0086-20-62824387

No tests were sub-contracted.

3.6 Deviation from Standards

None.

3.7 Abnormalities from Standard Conditions

None.

3.8 Other Information Requested by the Customer

None.

3.9 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS Lab code:L9342**
- **FCC Designation No.:CN5035**
- **IC Registration NO.: 12593A**
- **NVLAP LAB CODE: 600199-0**

3.10 Measurement Uncertainty

The below measurement uncertainties given below are based on a 95% confidence level (base on a coverage factor (k=2).)

Parameter	Uncertainty
Radio frequency	2.25%
total RF power, conducted	±1.34 dB
RF power density , conducted	±1.49 dB
All emissions, radiated	±2.72 dB
Temperature	±5.02 dB
Humidity	±0.8°C
DC and low frequency voltages	±1.5 %

4 Instruments Used during Test

No.	Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
DGITL-115	50Ω Coaxial Cable	Mini-cicuts	CBL	C001	2025.03.14	2026.03.14
DGITL-182	Test software	2.0.0.0	MTS 8310	/	/	/
DGITL-190	Filter	COM-MW	K6-2400-2483.5-100S5010-007	12230496	2025.01.10 2026.01.14	2026.01.09 2027.01.13
DGITL-191	Filter	COM-MW	K6-5150-5850-100S5010-003	12234382	2025.01.10 2026.01.14	2026.01.09 2027.01.13
DGITL-301	Semi-Anechoic chamber	ETS•Lindgren	9*6*6	CT000874-1181	2023.08.02	2026.08.02
DGITL-307	EMI test receiver	SCHWARZBECK	ESVS10	833616 /003	2025.03.14	2026.03.13
DGITL-376	Wideband Radio Communication Tester	SCHWARZBECK	CMW500	LR114195	2025.03.14	2026.03.13
DGITL-349a	Vector Signal Generator	ROHDE&SCHWARZ	SMBV100A	259268	2025.03.14	2026.03.13
DGITL-194	Power Meter	MWRFTest	MW100-PSB	MW202006002	2025.03.14	2026.03.13
DGITL-306	Spectrum Analyzer	Agilent Technologies	N9010A	MY54200334	2025.03.14	2026.03.13
DGITL-352	Pre Amplifier	MInI-CIrcuits	ZFC-1000HX	SN292801110	2025.03.14	2026.03.13
DGITL-375	Spectrum Analyzer	SCHWARZBECK	FSV40-N	6625-01-588-5515	2025.03.14	2026.03.13
DGITL-309	Horn Antenna	ETS Lindgren	3117	SN00152265	2025.05.13	2026.05.12
DGITL-308	Bilog Antenna	ETS· Lindgren	3142E	156975	2025.05.13	2026.05.12
DGITL-350	Wideband Amplifier Super Ultra	MInI-CIrcuits	ZVA-183X-S+	SN986401426	2025.03.14	2026.03.12
DGITL-371	Pre Amplifier	teramicrowave	TALA-0040G35	18081001	2025.03.14	2026.03.12
DGITL-363	Active Loop Antenna	SCHWARZBECK	FMZB1519B	00062	2024.05.15	2026.05.14
DGITL-302	Shielded Room	ETS•Lindgren	8*4*3	CT09010	2023.08.02	2026.08.02
DGITL-304	L.I.S.N.#1	R&S	ESH3-Z5	100272	2025.03.13	2026.03.12

5 Test Results

5.1 E.U.T. test conditions

Test Voltage:	DC 3.6V, 120mA lithium-iron battery power supply
Temperature:	23.2 -25.0 °C
Humidity:	38-50 % RH
Atmospheric Pressure:	1000 -1010 mbar
Requirements:	15.31(e): For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery. 15.32: Power supplies and CPU boards used with personal computers and for which separate authorizations are required to be obtained shall be tested as follows: Testing shall be in accordance with the procedures specified in Section 15.31 of this part.
Test frequencies and frequency range:	According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table: According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which	Number of	Location in frequency range
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

Frequency range of radiated emission measurements

Lowest frequency generated	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz,
At or above 10 GHz to below	5th harmonic of highest fundamental frequency or to 100 GHz,
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz,

EUT channels and frequencies list:

channel	Frequency	channel	Frequency	channel	Frequency	channel	Frequency
1	2405	5	2425	9	2445	13	2465
2	2410	6	2430	10	2450	14	2470
3	2415	7	2435	11	2455	15	2475
4	2420	8	2440	12	2460		

Test frequencies are the lowest channel: 1 channel (2405MHz), middle channel: 9 channel (2445 MHz) and highest channel: 15 channel (2475 MHz)

Test the EUT in continuous transmission mode, duty cycle > 98%.

5.2 Antenna requirement

Standard requirement

15.203 requirement:

For intentional device. According to 15.203. An intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz bands that are used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna


The antenna is a FPCB Antenna and no consideration of replacement. The best-case gain of the antenna is 2.0 dBi.

Test result: The unit does meet the FCC requirements.

5.3 Occupied Bandwidth

Test Requirement:	FCC Part 15 C section 15.247 (a)(2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10:2020
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

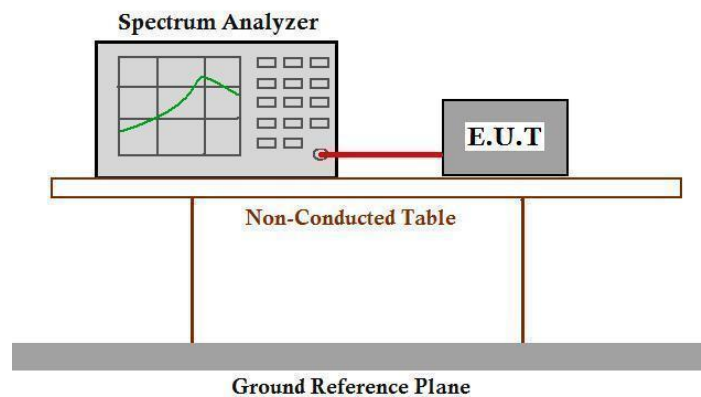

Test Procedure:

6 dB bandwidth

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW=100 kHz. VBW = 300 kHz, Sweep = auto; Detector Function = Peak. Trace = Max Hold, Set span to encompass the entire emission bandwidth of the signal.
3. Mark the peak power frequency and -6dB (upper and lower) power frequency.
4. Repeat until all the test status is investigated.
5. Report the worst case.

99% bandwidth

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW= 1-5% of the OBW. VBW = 3 x RBW, Sweep = auto; Detector Function = Peak. Trace = Max Hold, Set span to encompass the entire emission bandwidth of the signal.
3. Mark the peak power frequency and OBW 99% power frequency.
4. Repeat until all the test status is investigated.
5. Report the worst case.

Test result (6 dB bandwidth)

Channel No.	Frequency (MHz)	Measured 6dB bandwidth (MHz)	Limit	Result
1	2405	1.361	≥500KHz	Pass
9	2445	1.500		Pass
15	2475	1.413		Pass



Test result (99% bandwidth)


Channel No.	Frequency (MHz)	Measured 99% bandwidth (MHz)	Result
1	2405	1.666	Pass
9	2445	1.679	Pass
15	2475	1.669	Pass

The unit does meet the FCC requirements.

-6dB bandwidth:


Result plot as follows:

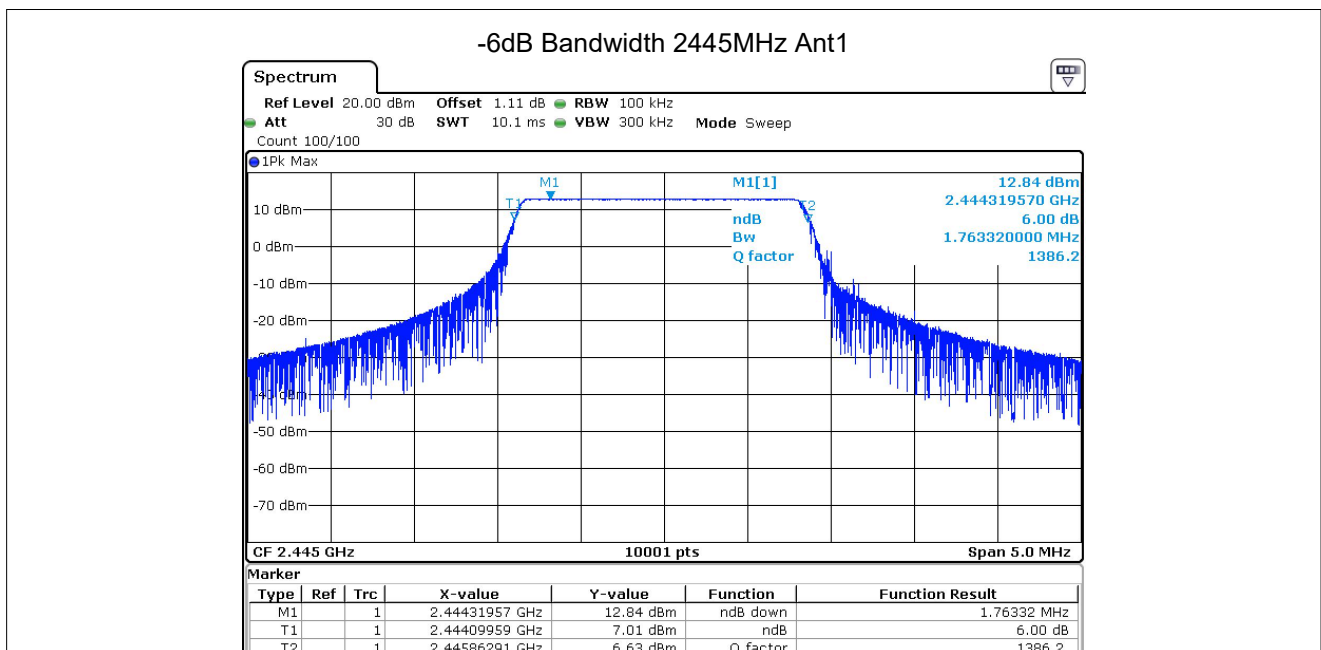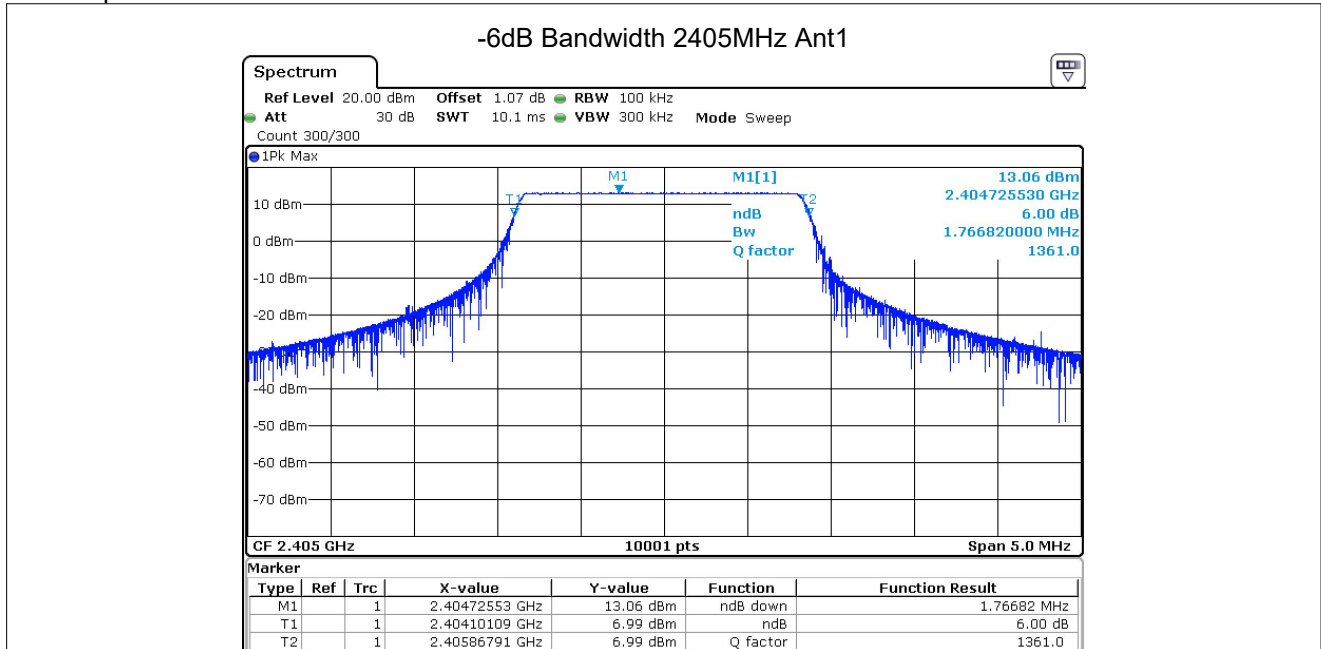

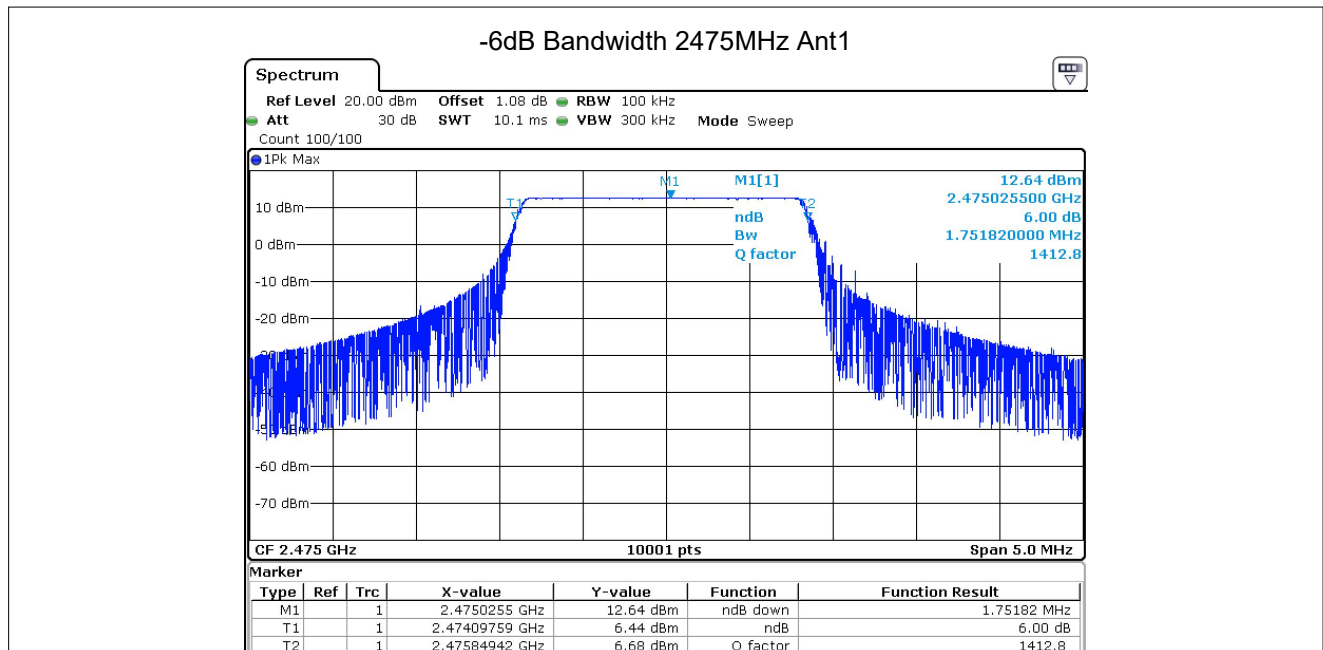


99% bandwidth:


Result plot as follows:

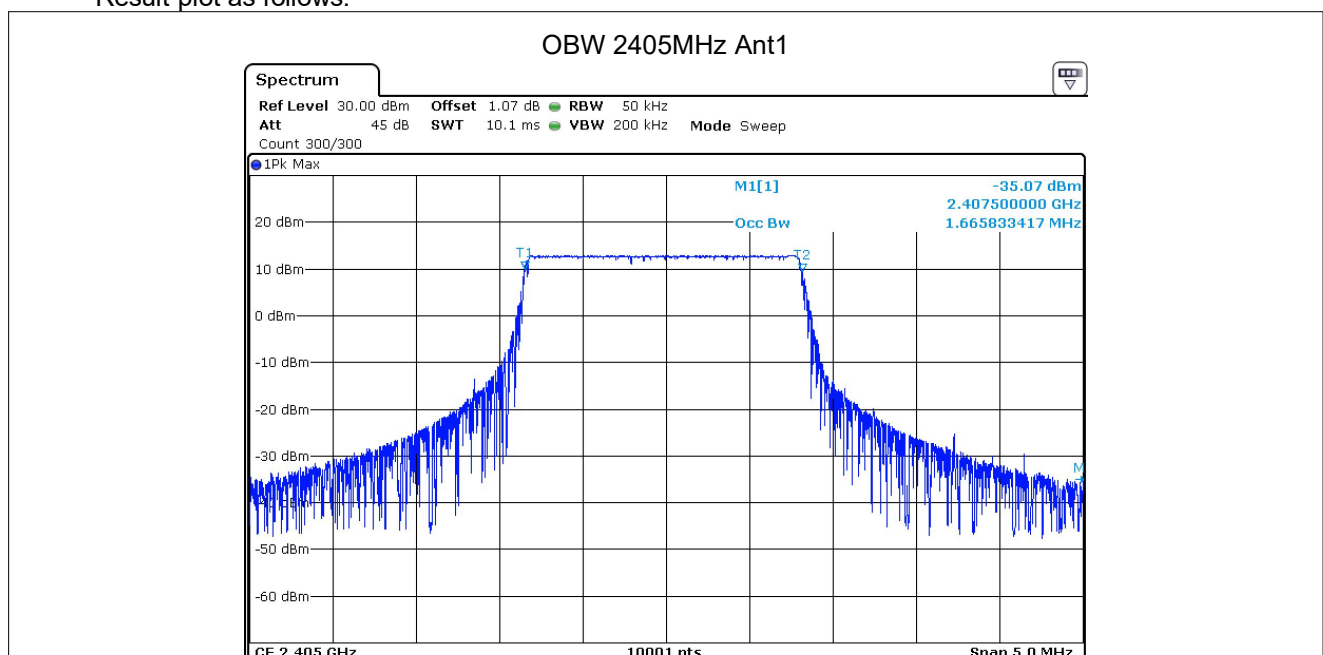

OBW 2445MHz Ant1

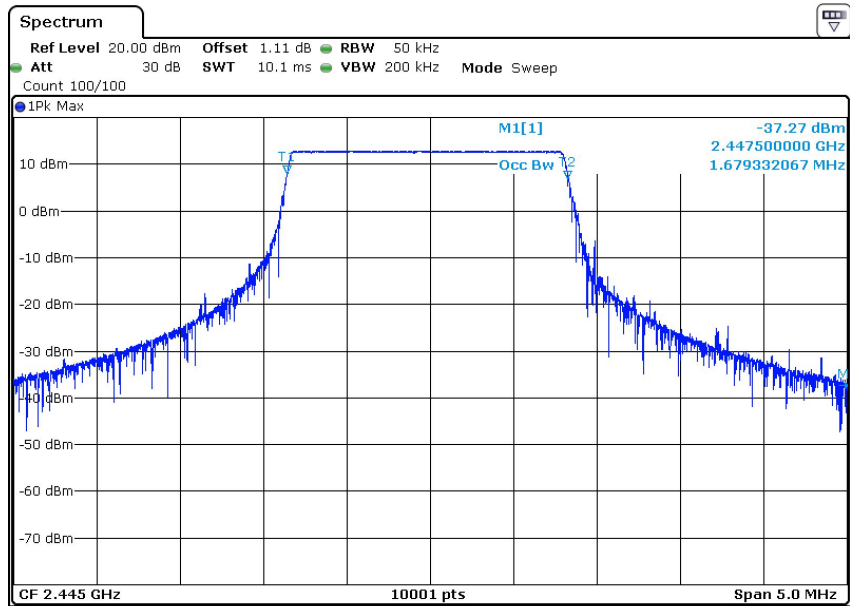

OBW 2475MHz Ant1

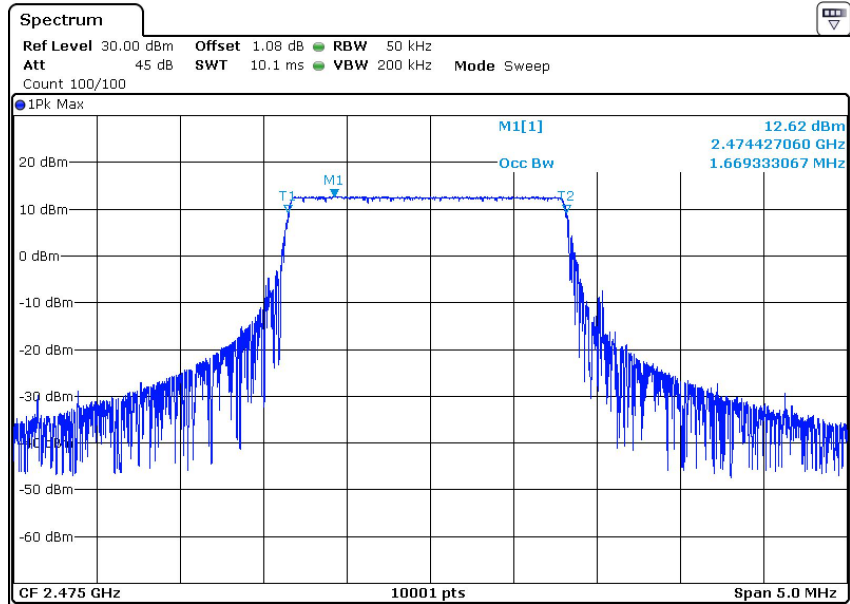

5.4 Maximum Peak Output Power

Test Requirement: FCC Part 15 C section 15.247

(b)(3) For systems using digital modulation in the 902-928 MHz,


2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b) (1), (b) (2), and (b) (3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Method: ANSI C63.10:2020

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

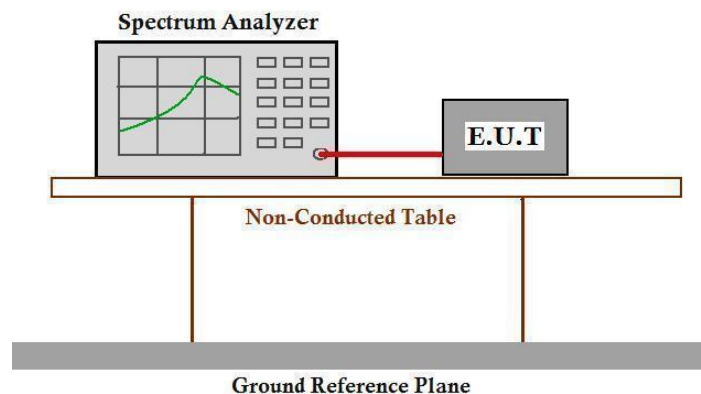

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable from the antenna port to the spectrum.
2. Set the RBW $\geq$ DTS bandwidth
3. Set VBW $\geq 3 \times$ RBW
4. Set span $\geq 3 \times$ RBW.
5. Sweep time = auto.
6. Detector = peak.
7. Trace mode = max hold.
8. Allow trace to fully stabilize
9. Use peak marker function to determine the peak amplitude level


Test Data:

Channel No.	Frequency (MHz)	Measured Power (dBm)	Limit (dBm)	Result
1	2405	13.02	30	Pass
9	2445	12.95		Pass
15	2475	12.69		Pass


The unit does meet the FCC requirements.

Result plot as follows:


Channel 1:2.405GHz:

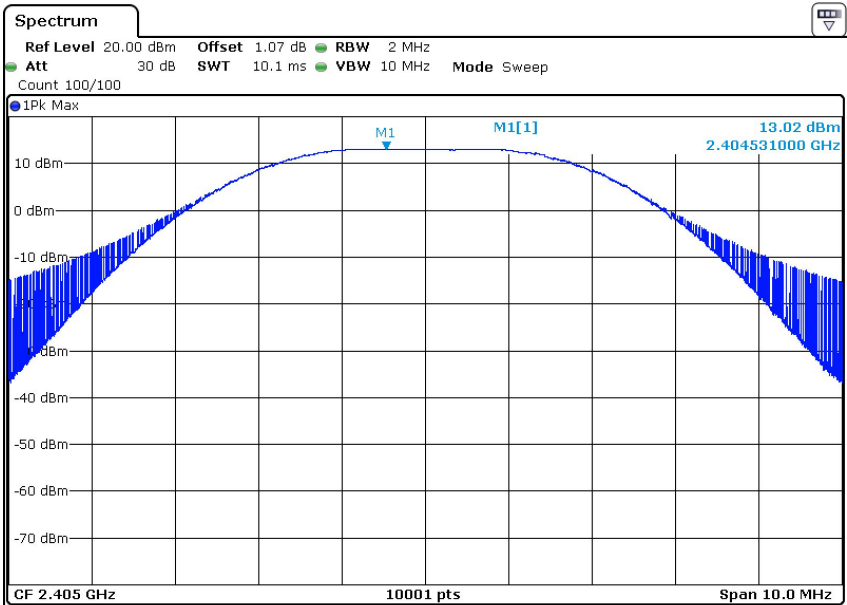

Channel 9: 2.440GHz:

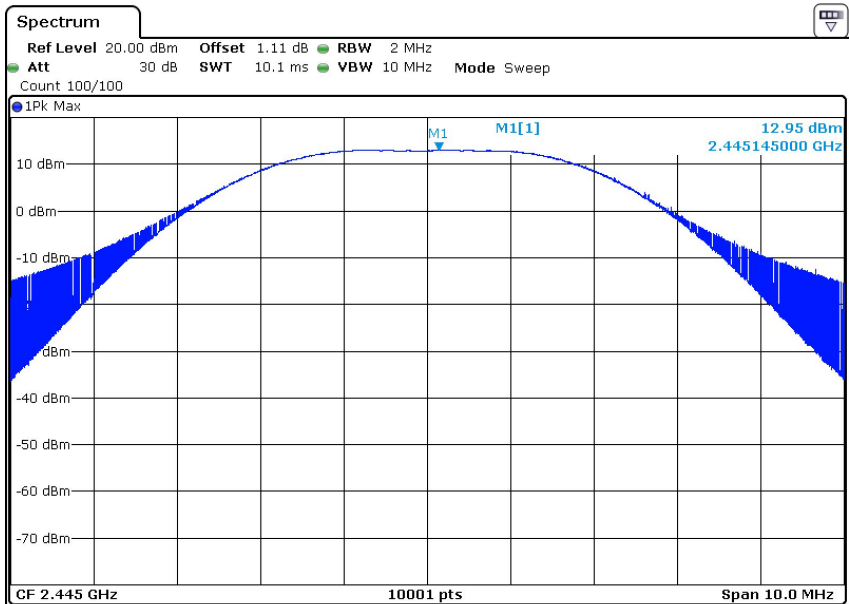

Channel 15: 2.475GHz:

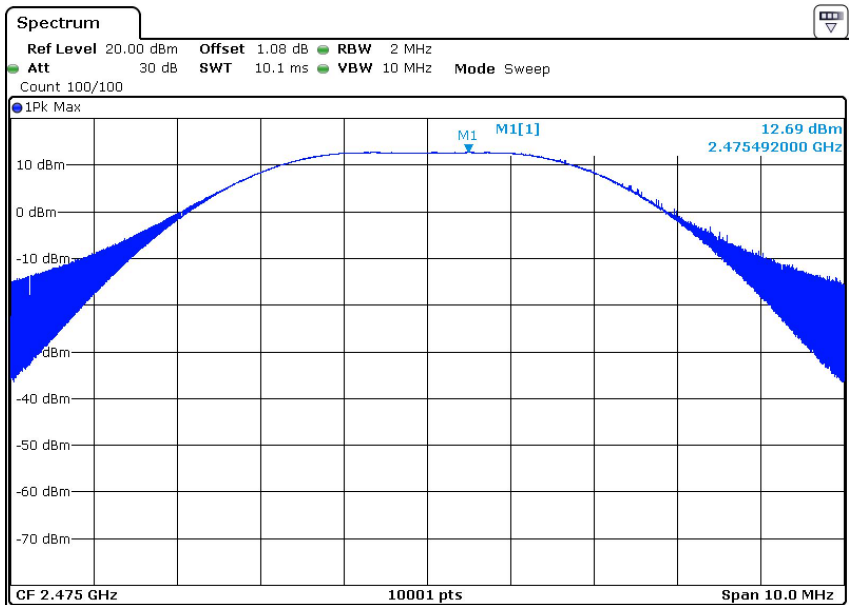


5.5 Peak Power Spectral Density

Test Requirement: FCC Part 15 C section 15.247
(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Method: ANSI C63.10:2020

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channel and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

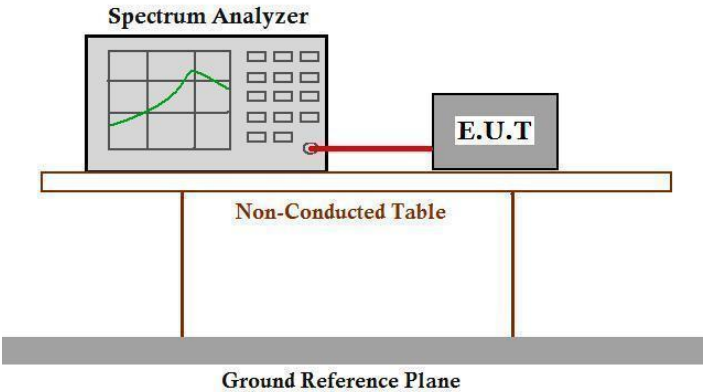

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable from the antenna port to the spectrum analyzer or power meter.
2. Set the spectrum analyzer:
 - a) Set instrument center frequency to DTS channel center frequency.
 - b) Set the span to 1.5 times the DTS bandwidth.
 - c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
 - d) Set the VBW $\geq [3 \times \text{RBW}]$.
 - e) Detector = peak.
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum amplitude level within RBW.
 - j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.
3. Repeat until all the test status is investigated.
4. Report the worst case.


Test result:

Channel No.	Frequency (MHz)	Measured Peak Power Spectral Density (dBm/3kHz)	Limit	Result
1	2405	1.390	8dBm/3kHz	Pass
9	2445	1.280		Pass
15	2475	1.380		Pass


The unit does meet the FCC requirements.

Result plot as follows:


Channel 1: 2.405 GHz:

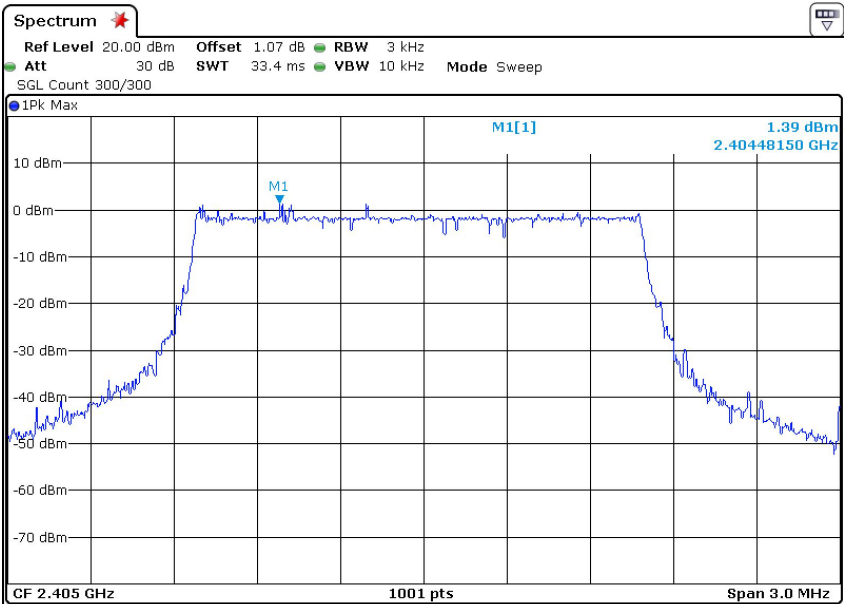

Channel 9: 2.445GHz:

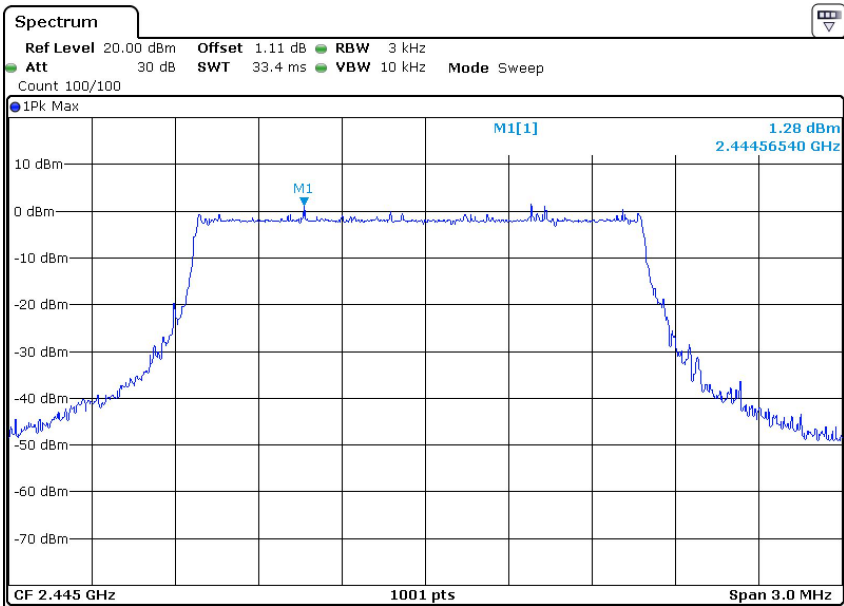

Channel 15: 2.475 GHz:

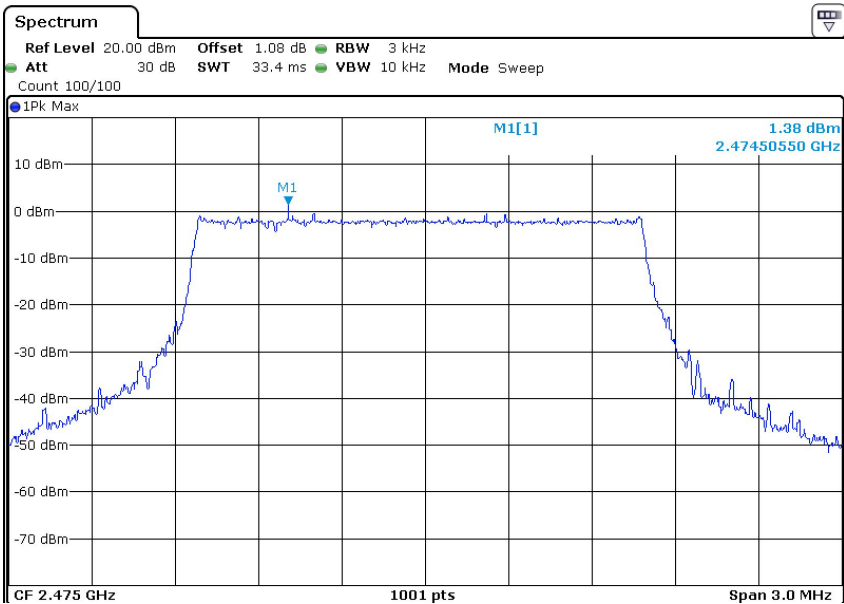

5.6 Conducted Spurious Emissions


Test Requirement: FCC Part 15 C section 15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Method: ANSI C63.10:2020

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channel and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

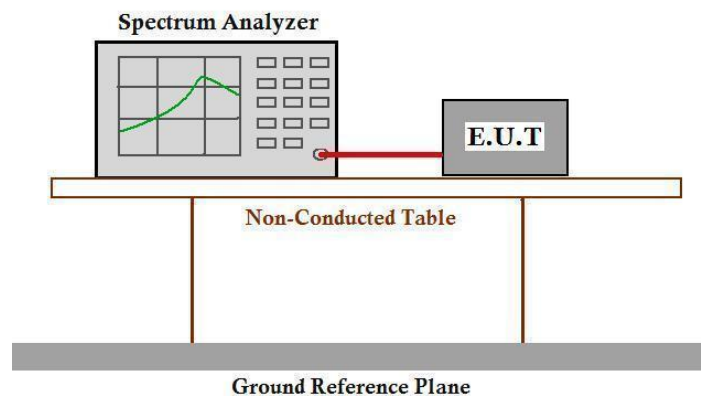


Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer or power meter.
2. Set the spectrum analyzer: RBW=100 KHz, VBW = 300KHz. Sweep = auto; Detector Function = Peak. Trace = Max Hold, Scan up through 10th harmonic.
3. Measure the Conducted Spurious Emissions of the test frequency with special test status.
4. Repeat until all the test status is investigated.
5. Report the worst case.


Result plot as follows:

Channel 1: 2.405 GHz

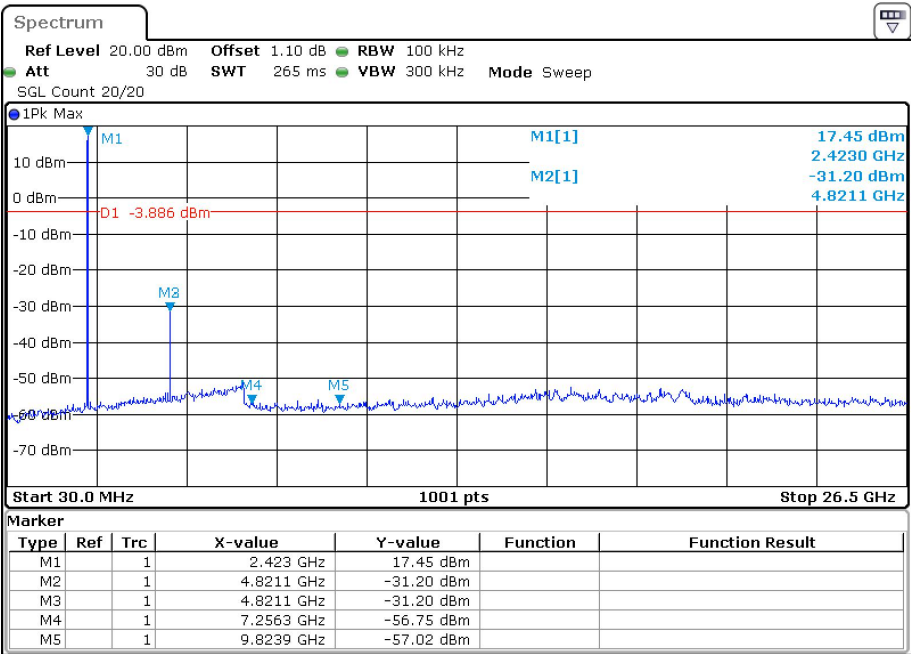


Note: This line in the plots is a reference line for the 20dB down limit, not the limit.

Channel 9: 2.445 GHz

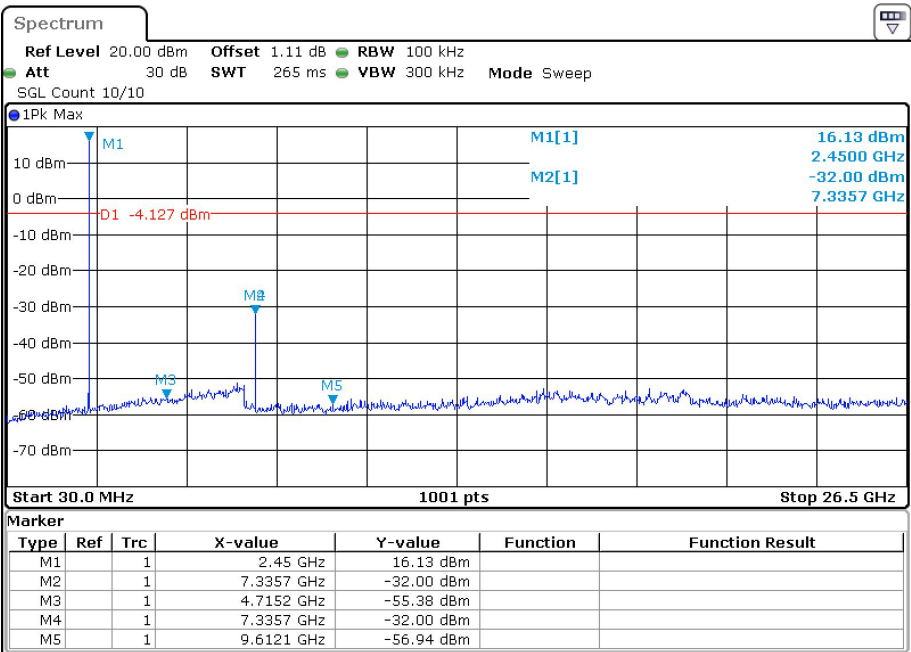

Note: This line in the plots is a reference line for the 20dB down limit, not the limit.

Channel 15: 2.475 GHz

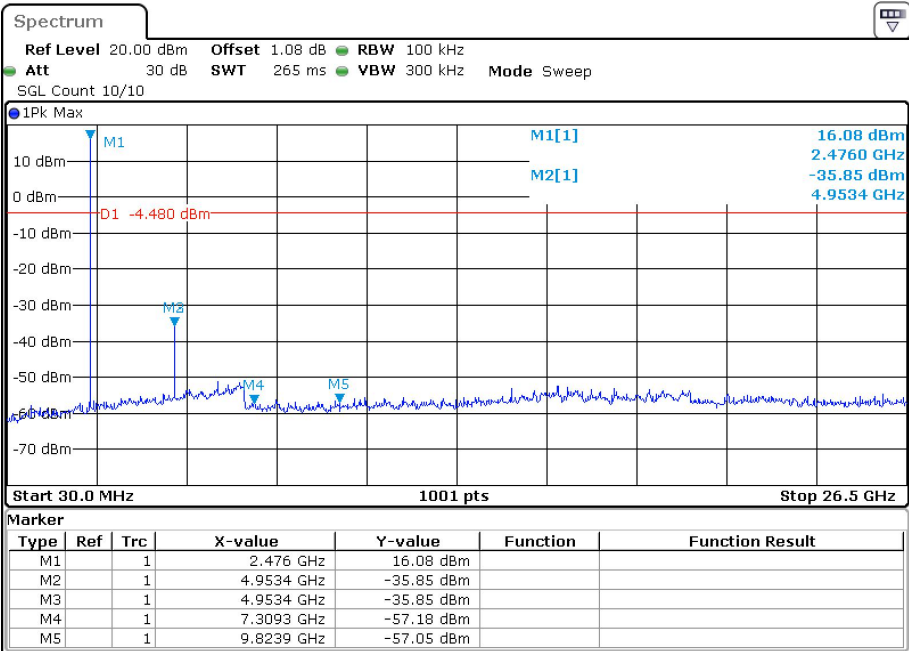

Note: This line in the plots is a reference line for the 20dB down limit, not the limit.


The results do meet the FCC requirements.

5.7 Radiated Spurious Emissions


Test Requirement:	FCC Part 15 C section 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that Contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, and provided the transmitter demonstrates compliance with the peak conducted power limits.
Test Method:	ANSI C63.10:2020
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Detector: For PK value:	RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW $\geq$ RBW Sweep = auto Detector function = peak Trace = max hold For AV value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz, 9kHz for < 30 MHz VBW = 10 Hz Sweep = auto Detector function = peak Trace = max hold
15.209 Limit:	40.0 dB μ V/m between 30 MHz & 88 MHz 43.5 dB μ V/m between 88 MHz & 216 MHz 46.0 dB μ V/m between 216 MHz & 960 MHz 54.0 dB μ V/m above 960 MHz

Test Configuration:


1) 9kHz to 30MHz emissions:

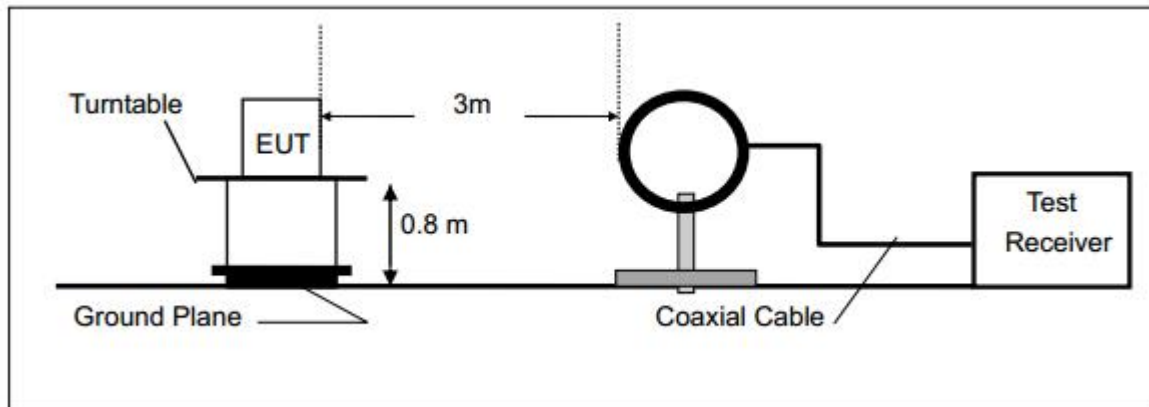

2) 30 MHz to 1 GHz emissions:

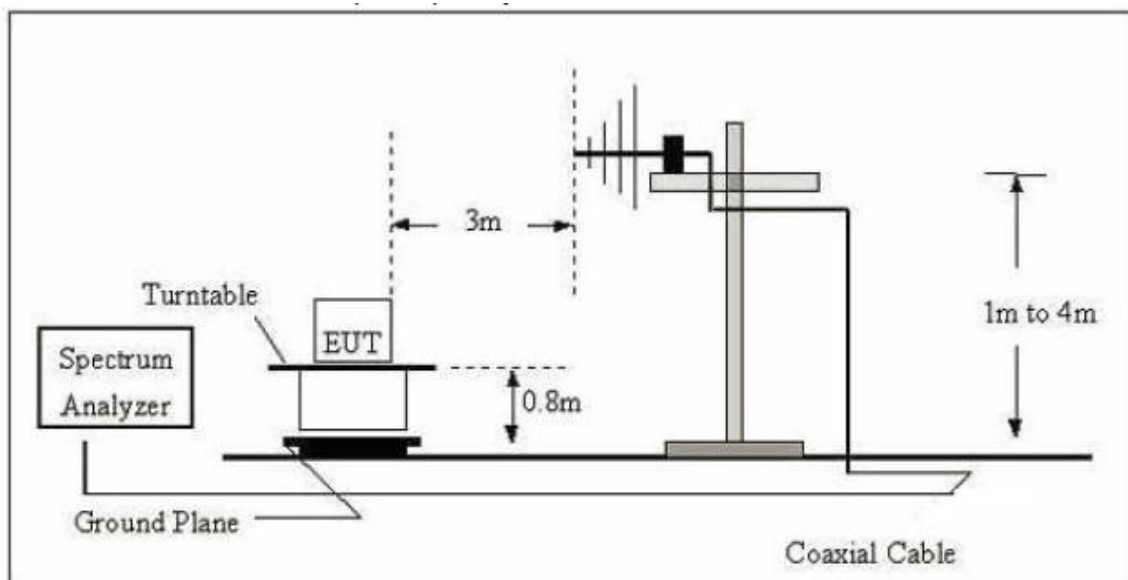

3) 1 GHz to 40 GHz emissions:

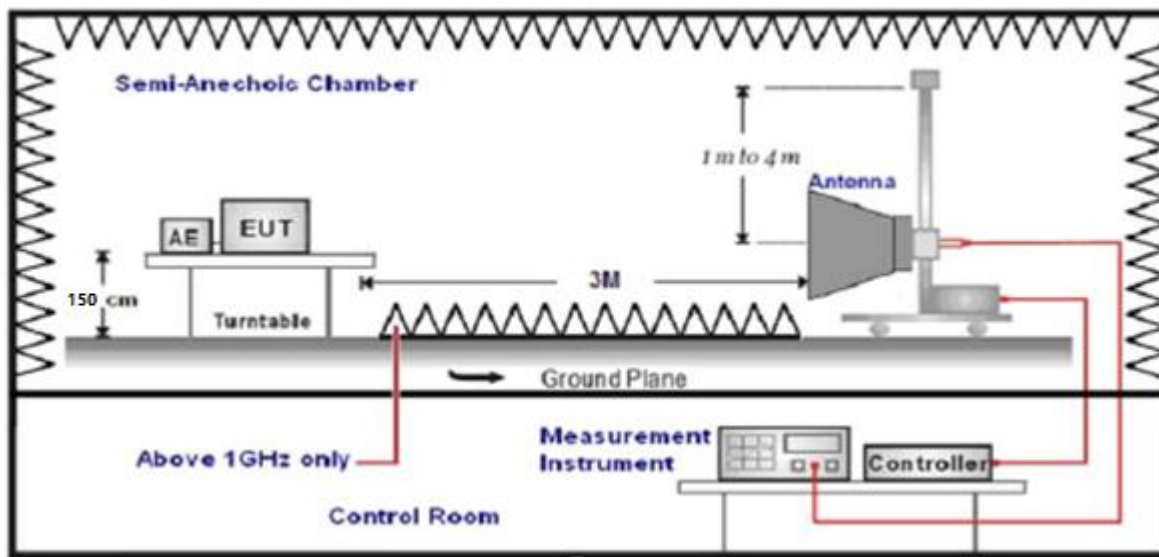**Test Procedure:**

1) 9 kHz to 30 MHz emissions:

For testing performed with the loop antenna. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the special distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

2) 30 MHz to 1 GHz emissions:

For testing performed with the bi-log type antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

3) 1 GHz to 25 GHz emissions:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2010 was used to perform radiated emission test above 1 GHz.

For testing performed with the horn antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

4) The receiver was scanned from 9 kHz to 25 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

5.7.1 Harmonic and other spurious emissions

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions. Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dBμV/m)

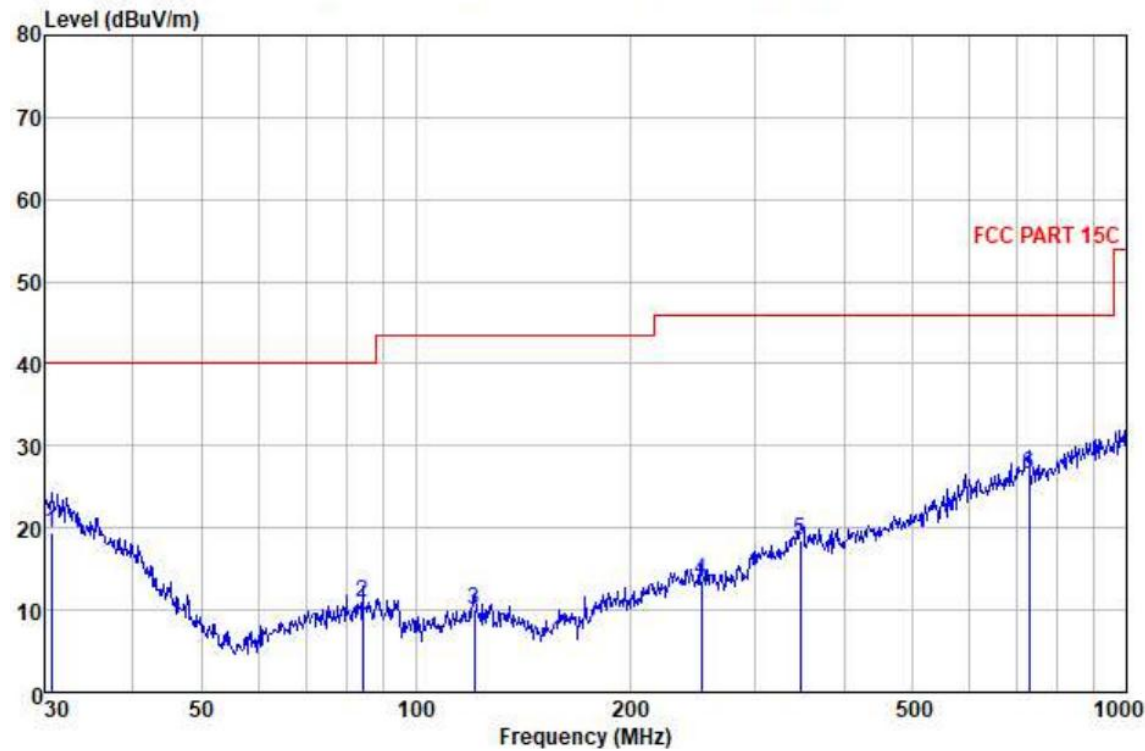

Quasi-peak measurement


No.	Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
1	30.638	24.08	23.09	0.64	28.51	19.30	40.00	-20.70	HORIZONTAL	QP
2	84.110	29.54	8.50	1.07	28.23	10.88	40.00	-29.12	HORIZONTAL	QP
3	120.699	27.04	10.14	1.30	28.49	9.99	43.50	-33.51	HORIZONTAL	QP
4	252.063	25.85	13.16	1.94	27.36	13.59	46.00	-32.41	HORIZONTAL	QP
5	346.809	28.89	14.67	2.27	27.32	18.51	46.00	-27.49	HORIZONTAL	QP
6	729.358	30.37	20.30	3.40	27.58	26.49	46.00	-19.51	HORIZONTAL	QP

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Vertical:

Peak scan

Level (dBμV/m)

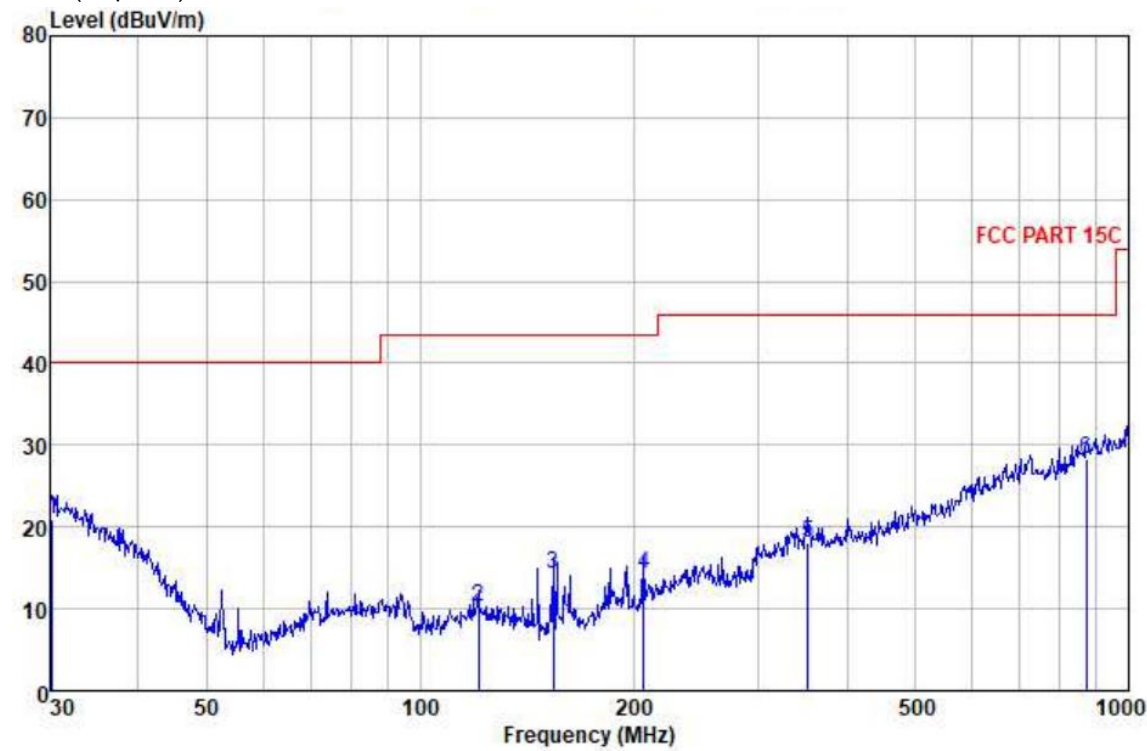

Quasi-peak measurement

No.	Freq MHz	Read Level dBμV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBμV/m	Limit Line dBμV/m	Over Limit dB	Pol/Phase	Remark
1	30.211	25.35	23.43	0.63	28.50	20.91	40.00	-19.09	VERTICAL	QP
2	120.699	27.23	10.14	1.30	28.49	10.18	43.50	-33.32	VERTICAL	QP
3	154.279	32.75	8.33	1.48	28.38	14.18	43.50	-29.32	VERTICAL	QP
4	206.398	29.66	10.51	1.73	27.64	14.26	43.50	-29.24	VERTICAL	QP
5	352.943	28.52	14.74	2.29	27.43	18.12	46.00	-27.88	VERTICAL	QP
6	872.183	29.66	22.09	3.73	27.24	28.24	46.00	-17.76	VERTICAL	QP

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor


Spurious emissions above 1GHz

Test at low Channel in transmitting status

Horizontal:

Peak scan

Level (dBμV/m)

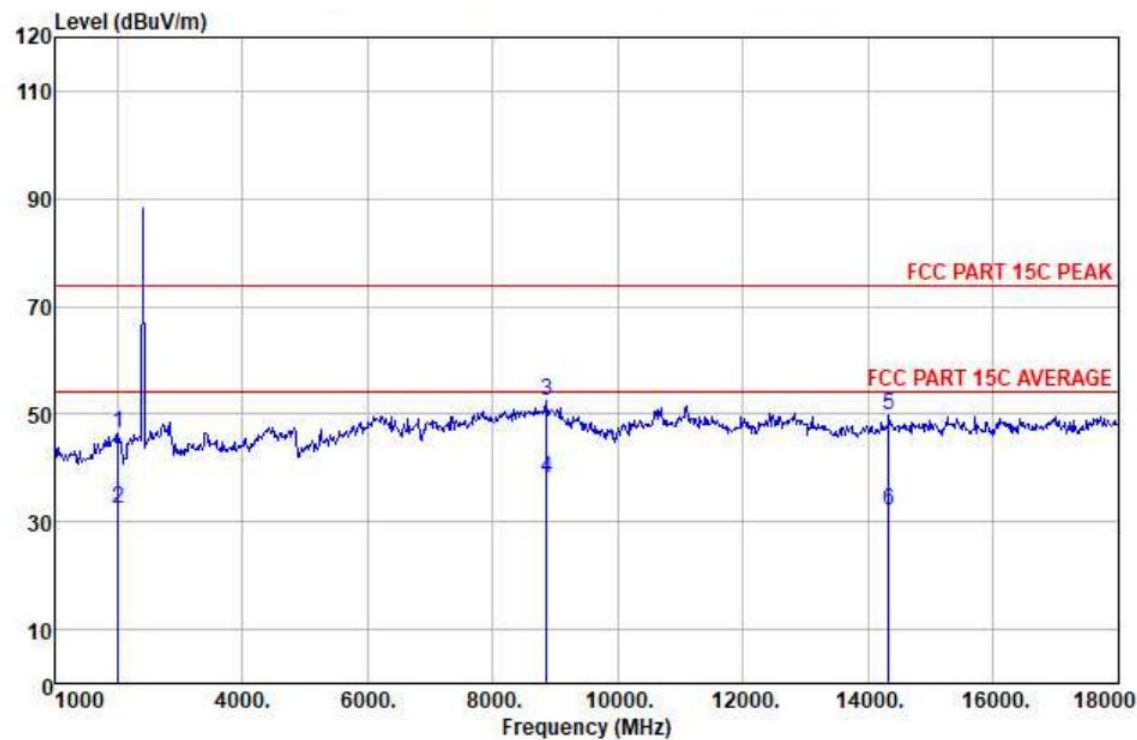

Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
MHz	Level	Factor	Loss	Factor	dBμV/m	Line	Limit		
	dBuV	dB	dB	dB		dBμV/m	dB		
2020.000	40.28	28.09	5.87	27.70	46.51	74.00	-27.46	HORIZONTAL	Peak
2020.000	26.10	28.09	5.87	27.70	32.36	54.00	-21.64	HORIZONTAL	Average
8854.000	27.36	38.51	13.75	27.22	52.40	74.00	-21.60	HORIZONTAL	Peak
8854.000	12.92	38.51	13.75	27.22	37.96	54.00	-16.04	HORIZONTAL	Average
14328.000	18.25	39.53	18.26	26.17	49.87	74.00	-24.13	HORIZONTAL	Peak
14328.000	0.53	39.53	18.26	26.17	32.15	54.00	-21.85	HORIZONTAL	Average


Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note: The emission above limit is fundamental emission, which is not subject to the limit.

Vertical:

Peak scan

Level (dBµV/m)

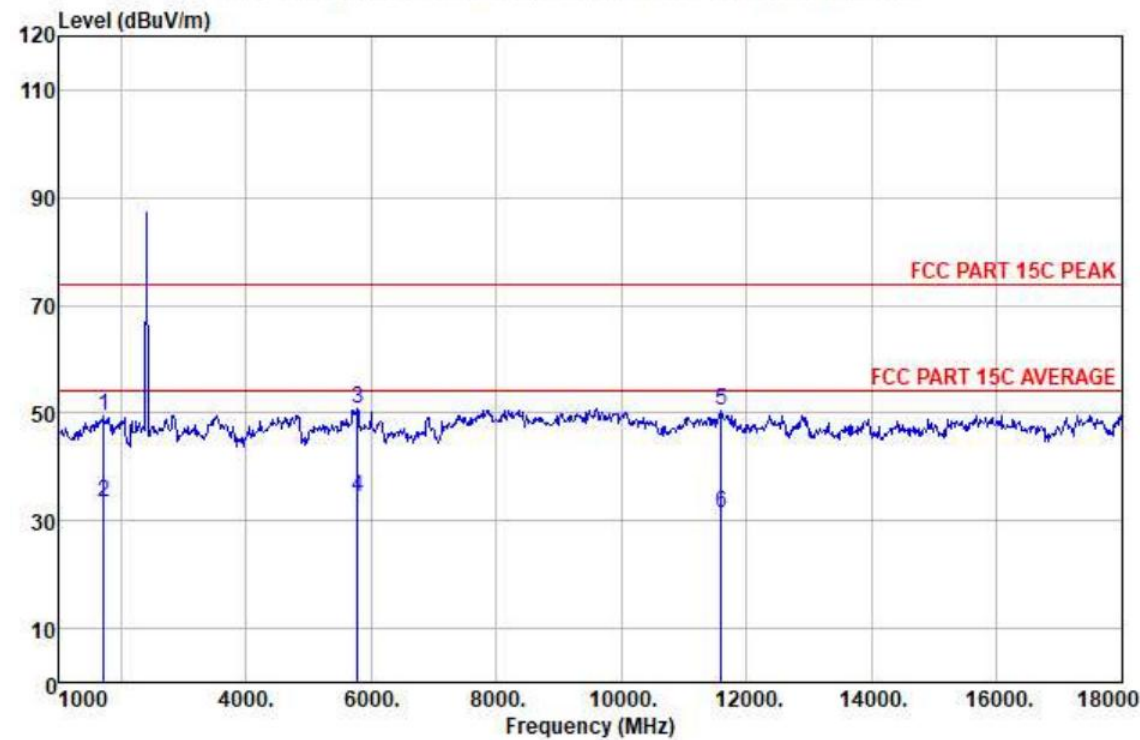

Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamplifier Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
1731.000	45.50	26.16	5.39	27.57	49.48	74.00	-24.52	VERTICAL	Peak
1731.000	29.47	26.16	5.39	27.57	33.45	54.00	-20.55	VERTICAL	Average
5777.000	32.47	35.06	10.66	27.45	50.74	74.00	-23.26	VERTICAL	Peak
5777.000	16.29	35.06	10.66	27.45	34.56	54.00	-19.44	VERTICAL	Average
11591.000	21.77	39.60	16.02	26.95	50.44	74.00	-23.56	VERTICAL	Peak
11591.000	2.82	39.60	16.02	26.95	31.49	54.00	-22.51	VERTICAL	Average


Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note: The emission above limit is fundamental emission, which is not subject to the limit.

Test at Middle Channel in transmitting status Horizontal:

Peak scan

Level (dBµV/m)

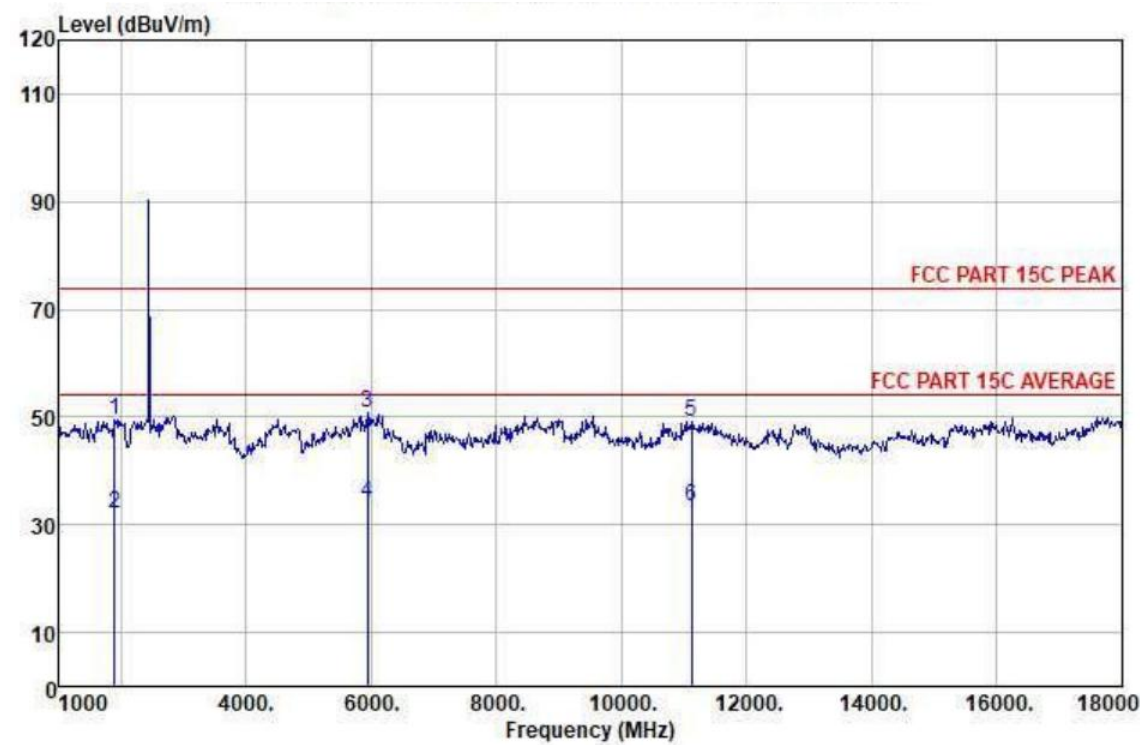

Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
MHz	Level	Factor	Loss	Factor	dBuV/m	Line	Limit		
	dBuV	dB	dB	dB		dBuV/m	dB		
1901.000	44.17	27.39	5.67	27.65	49.58	74.00	-24.42	HORIZONTAL	Peak
1901.000	26.53	27.39	5.67	27.65	31.94	54.00	-22.06	HORIZONTAL	Average
5947.000	31.51	35.78	10.84	27.43	50.70	74.00	-23.30	HORIZONTAL	Peak
5947.000	15.03	35.78	10.84	27.43	34.22	54.00	-19.78	HORIZONTAL	Average
11115.000	21.07	39.29	15.67	27.02	49.01	74.00	-24.99	HORIZONTAL	Peak
11115.000	5.44	39.29	15.67	27.02	33.38	54.00	-20.62	HORIZONTAL	Average


Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note: The emission above limit is fundamental emission, which is not subject to the limit.

Vertical:

Peak scan

Level (dBµV/m)

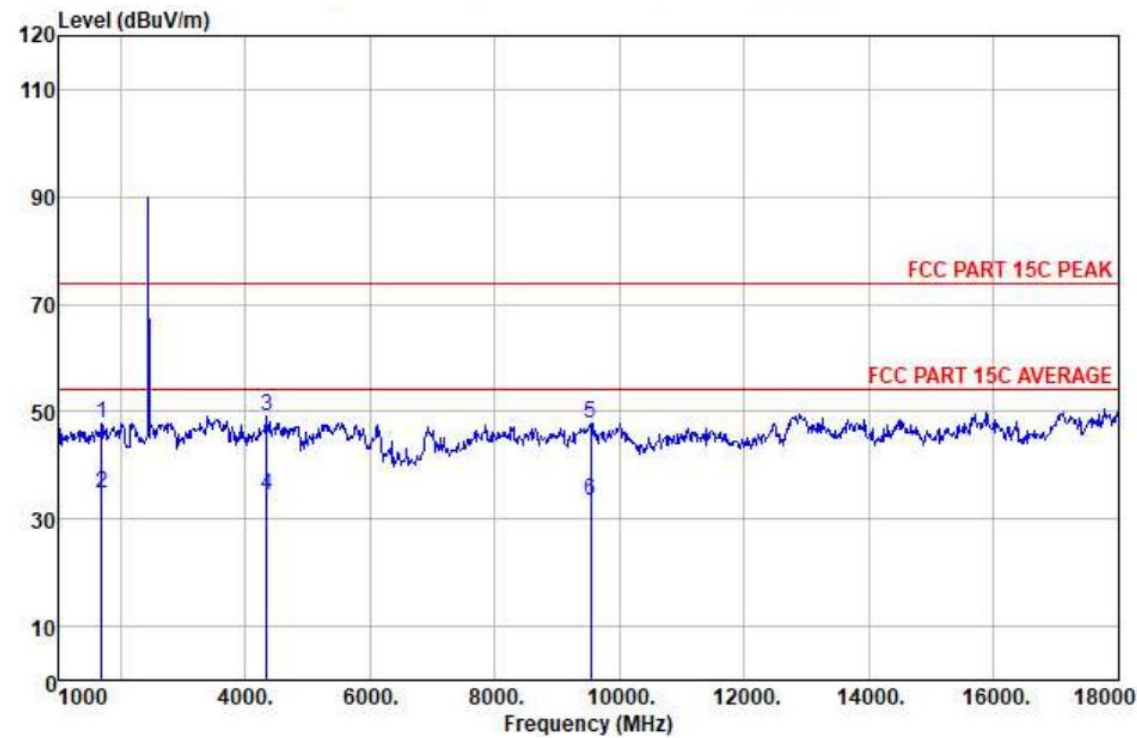

Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
MHz	Level	Factor	Loss	Factor	dBuV/m	Line	Limit		
	dBuV	dB	dB	dB		dBuV/m	dB		
1697.000	43.98	25.92	5.33	27.55	47.68	74.00	-26.32	VERTICAL	Peak
1697.000	30.92	25.92	5.33	27.55	34.62	54.00	-19.38	VERTICAL	Average
4349.000	35.86	32.01	9.04	27.71	49.20	74.00	-24.80	VERTICAL	Peak
4349.000	21.23	32.01	9.04	27.71	34.57	54.00	-19.43	VERTICAL	Average
9534.000	21.78	38.81	14.36	27.15	47.80	74.00	-26.20	VERTICAL	Peak
9534.000	7.36	38.81	14.36	27.15	33.38	54.00	-20.62	VERTICAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor


Note: The emission above limit is fundamental emission, which is not subject to the limit.

Test at high Channel in transmitting status

Horizontal:

Peak scan

Level (dBμV/m)

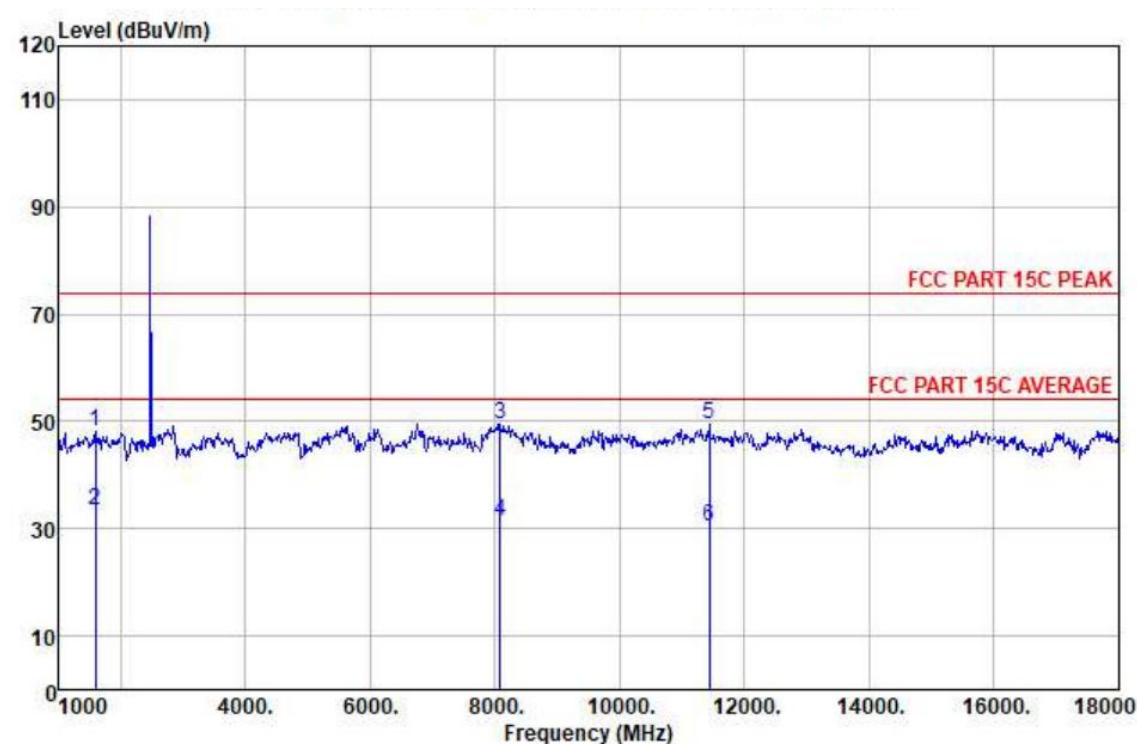

No.	Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
1595.000	1595.000	45.27	25.18	5.16	27.51	48.10	74.00	-25.90	HORIZONTAL	Peak
1595.000	1595.000	30.69	25.18	5.16	27.51	33.52	54.00	-20.48	HORIZONTAL	Average
8089.000	8089.000	26.70	37.14	13.00	27.29	49.55	74.00	-24.45	HORIZONTAL	Peak
8089.000	8089.000	8.66	37.14	13.00	27.29	31.51	54.00	-22.49	HORIZONTAL	Average
11438.000	11438.000	21.02	39.55	15.90	26.98	49.49	74.00	-24.51	HORIZONTAL	Peak
11438.000	11438.000	2.05	39.55	15.90	26.98	30.52	54.00	-23.48	HORIZONTAL	Average


Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note: The emission above limit is fundamental emission, which is not subject to the limit.

Vertical:

Peak scan

Level (dBµV/m)

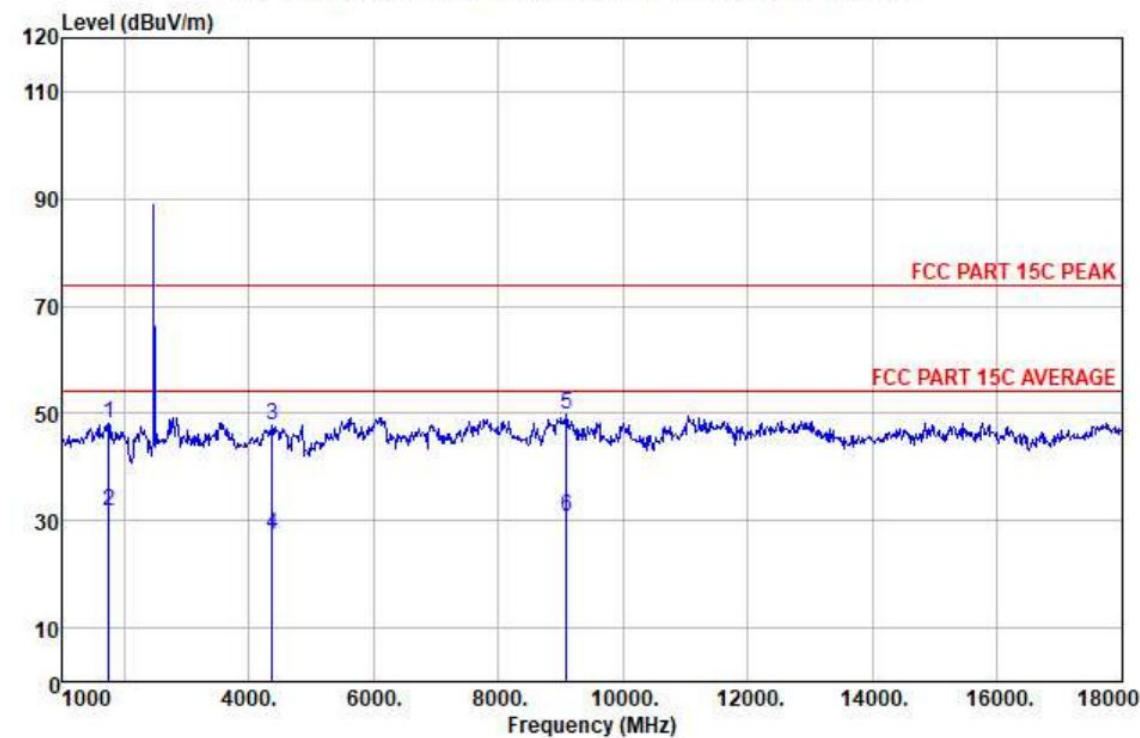

Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
1748.000	44.13	26.29	5.42	27.58	48.26	74.00	-25.74	VERTICAL	Peak
1748.000	27.74	26.29	5.42	27.58	31.87	54.00	-22.13	VERTICAL	Average
4366.000	34.29	32.14	9.06	27.70	47.79	74.00	-26.21	VERTICAL	Peak
4366.000	14.04	32.14	9.06	27.70	27.54	54.00	-26.46	VERTICAL	Average
59092.000	24.14	38.80	13.97	27.20	49.71	74.00	-24.29	VERTICAL	Peak
69092.000	5.07	38.80	13.97	27.20	30.64	54.00	-23.36	VERTICAL	Average

$$\text{Level} = \text{Read Level} + \text{Antenna Factor} + \text{Cable Loss} - \text{Preamp Factor}$$

Note: The emission above limit is fundamental emission, which is not subject to the limit.

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), the amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

Remark:

- 1) .For this intentional radiator operates below 25 GHz. The spectrum shall be investigated to the tenth harmonics of the highest fundamental frequency. And above the third harmonic of this intentional radiator, the disturbance is very low. So the test result only displays to 3rd harmonic.
- 2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
- 3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

Test result: The unit does meet the FCC requirements.

5.8 Radiated Emissions which fall in the restricted bands

Test Requirement:	FCC Part 15 C section 15.247 (d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10:2020
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)
Limit:	40.0 dB μ V/m between 30MHz & 88MHz; 43.5 dB μ V/m between 88MHz & 216MHz; 46.0 dB μ V/m between 216MHz & 960MHz; 54.0 dB μ V/m above 960MHz.
Detector:	For PK value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW $\geq$ RBW Sweep = auto Detector function = peak Trace = max hold For AV value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW = 10Hz Sweep = auto Detector function = peak Trace = max hold

Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section. Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	
13.36 - 13.41	322 - 335.4		

Test Result:


Frequency (MHz)	Reading Level (dB μ V/m)	Correct (dB/m)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna polarization	Detector
Low Channel							
2310.000	32.14	6.54	38.68	74.00	-35.32	H	PK
2310.000	27.26	6.54	33.80	54.00	-20.20	H	AV
2390.000	33.25	6.61	39.86	74.00	-34.14	V	PK
2390.000	23.47	6.61	30.08	54.00	-23.92	V	AV
High Channel							
2483.500	32.77	6.70	39.47	74.00	-34.53	H	PK
2483.500	27.69	6.70	34.39	54.00	-19.61	H	AV
2500.000	34.26	6.72	40.98	74.00	-33.02	V	PK
2500.000	26.74	6.72	33.46	54.00	-20.54	V	AV

Remark: No any other emission which falls in restricted bands can be detected and be reported.

Test result: The unit does meet the FCC requirements.

5.9 Band Edges Requirement

Test Requirement:	FCC Part 15 C section 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.
Frequency Band:	2400 MHz to 2483.5 MHz
Test Method:	ANSI C63.10:2020
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test Configuration:	

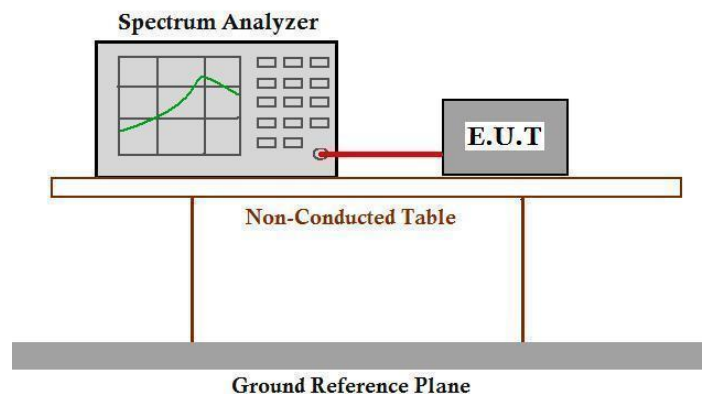

Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer or power meter.
2. Set RBW=100 kHz, VBW=300 KHz, suitable frequency span including 1000 kHz bandwidth from band edge.
3. Measure the Conducted Spurious Emissions and Radiated Emissions of the test frequency with special test status.
4. Repeat until all the test status is investigated.
5. Report the worse.

Test result with plots as follows:


The band edges was measured and recorded Result:
The Lower Edges attenuated more than 20dB.
The Upper Edges attenuated more than 20dB.

Result plot as follows:

Channel 1: 2.405 GHz

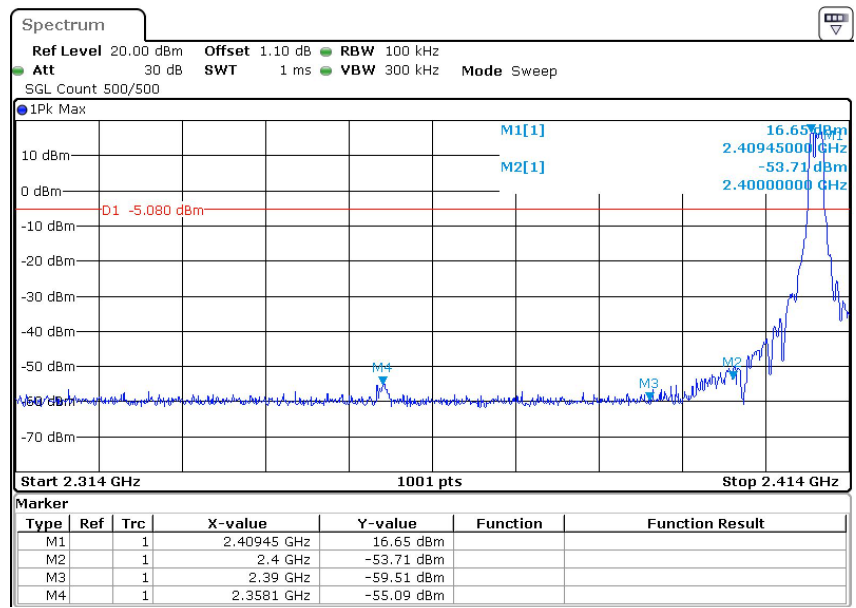

Channel 15: 2.475 GHz

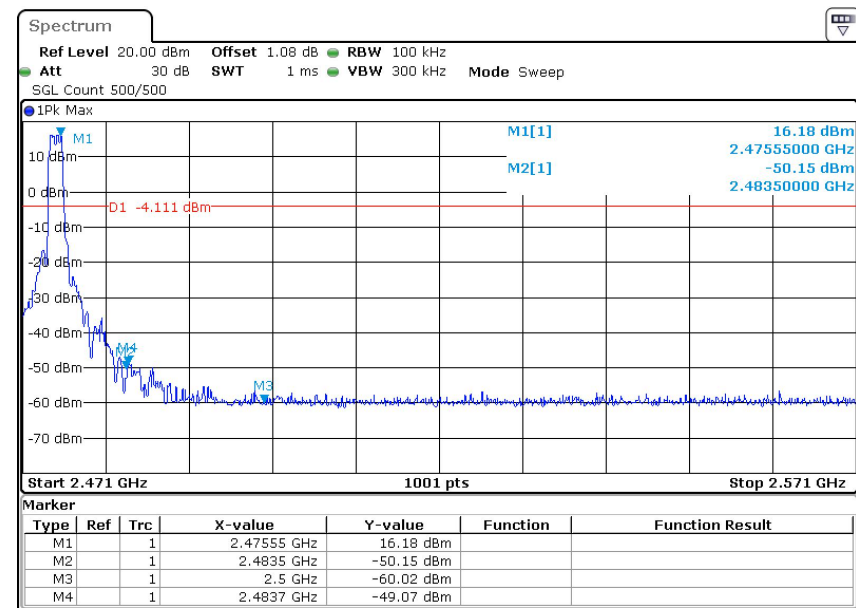

Note: This line in the plots is a reference line for the 20dB down limit, not the limit.

Test result: The unit does meet the FCC requirements.

5.10 Conducted Emissions at Mains Terminals 150 kHz to 30MHz

Test Requirement: FCC Part 15 C section 15.207
Test Voltage: N/A
Test Method: ANSI C63.10:2020 Clause 6.2
Frequency Range: 150 kHz to 30 MHz
Detector: Peak for pre-scan (9 kHz Resolution Bandwidth)

Test Limit**Limits for conducted disturbance at the mains ports of class B**

Frequency Range	Class B Limit dB(μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
NOTE 1 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.		

-- End of test report --