

RF Test Data for Bluetooth LE (Conducted Measurements)

General Description of EUT	
Product Name:	4G Smartphone
Test Model:	Connect Pro
Sample ID:	202304-0231-9-#2
Environmental Conditions	
Temperature:	25°C
Relative Humidity:	55%
Test Voltage:	DC 3.8V
Test Engineer:	Huang jian ping
Note: For a more detailed features description, please refer to the report TBR-C-202304-0231-101 The report only show the worst case data.	

Contents


1. Duty Cycle	3
2. Maximum Conducted Output Power	7
3. -6dB Bandwidth	11
4. Occupied Channel Bandwidth	15
5. Maximum Power Spectral Density Level	19
6. Band Edge	23
7. Conducted RF Spurious Emission	28
8. Restrict Band	35

1. Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1Mbps	2402	Ant1	85.2	0.7	0.47
NVNT	BLE 1Mbps	2440	Ant1	85.2	0.7	0.47
NVNT	BLE 1Mbps	2480	Ant1	85.2	0.7	0.47
NVNT	BLE 2Mbps	2402	Ant1	56.91	2.45	0.93
NVNT	BLE 2Mbps	2440	Ant1	57.22	2.42	0.93
NVNT	BLE 2Mbps	2480	Ant1	56.91	2.45	0.93



Test Graphs

Duty Cycle NVNT BLE 1Mbps 2402MHz Ant1

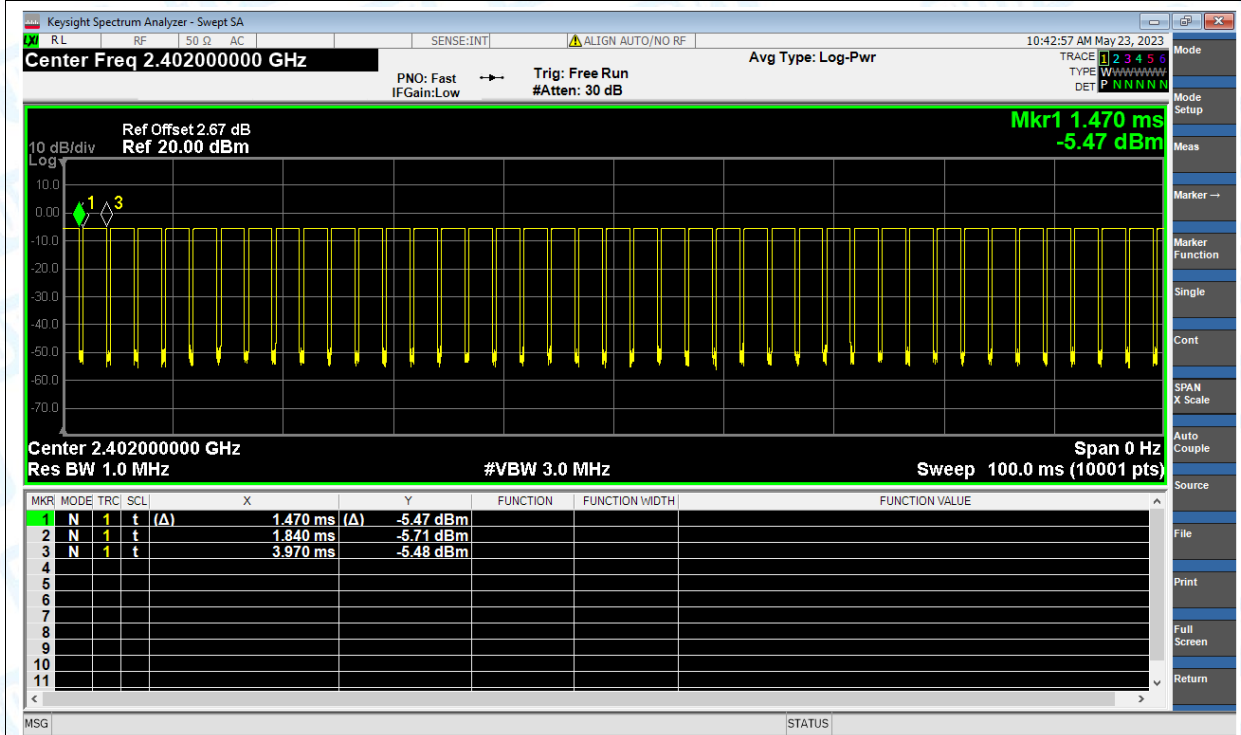


Duty Cycle NVNT BLE 1Mbps 2440MHz Ant1

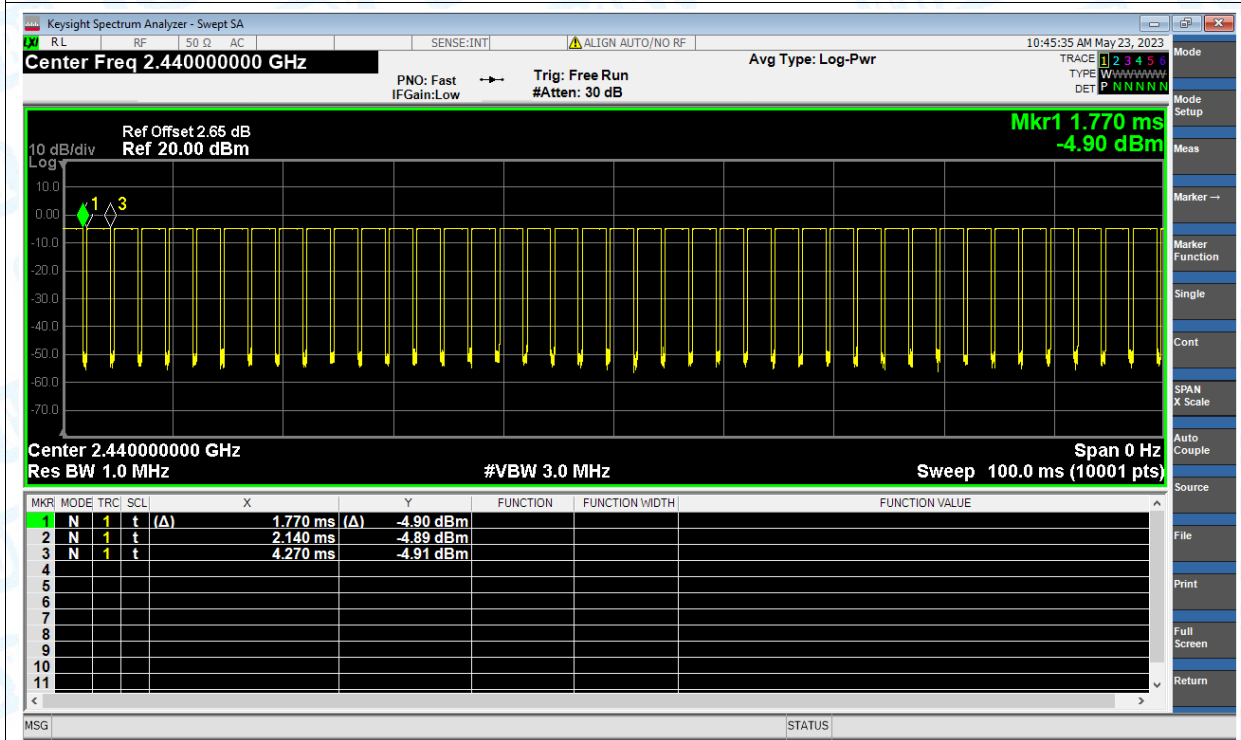


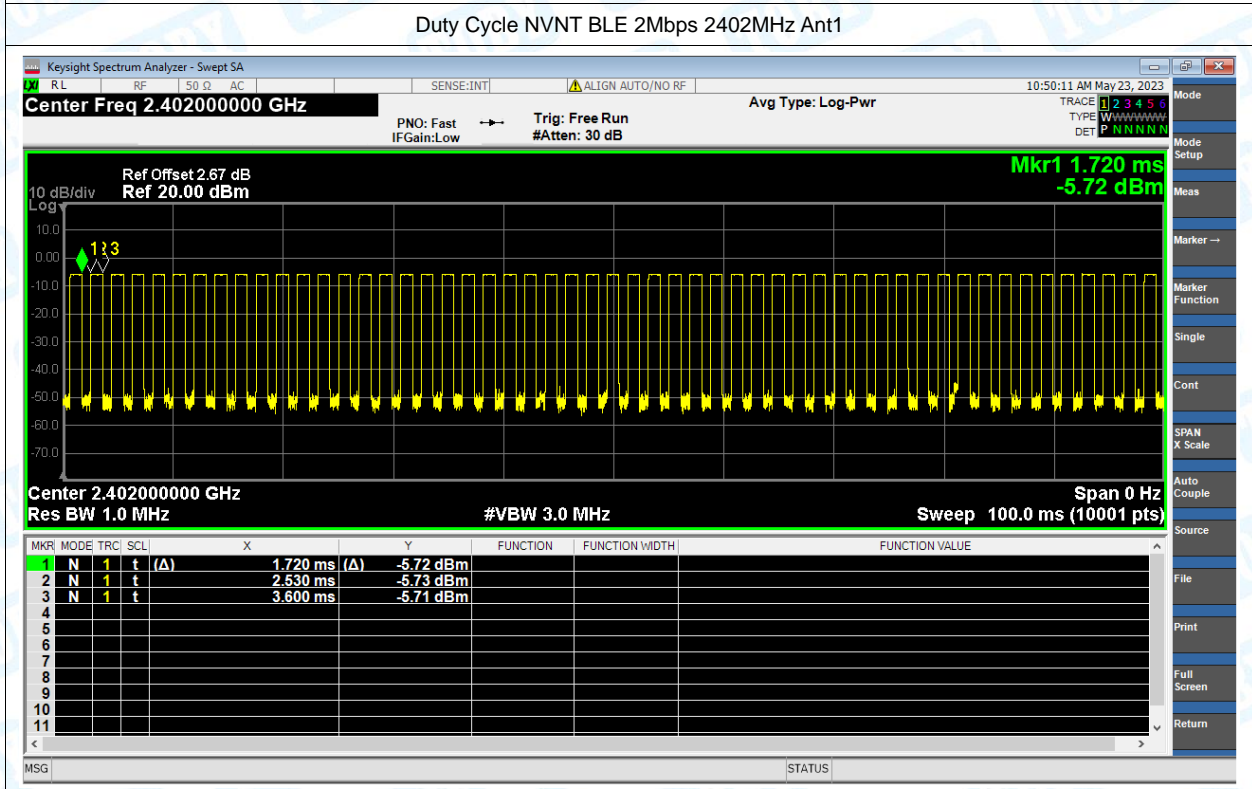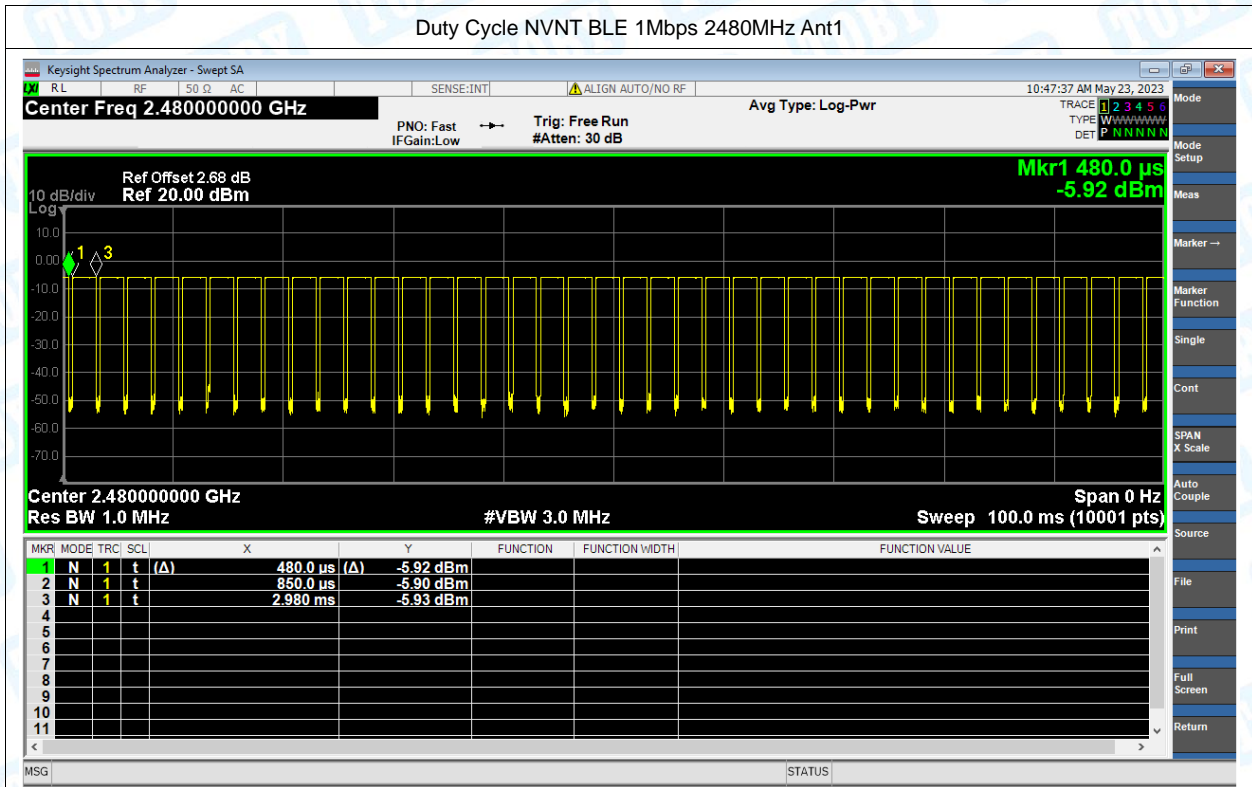

Duty Cycle NVNT BLE 2Mbps 2440MHz Ant1

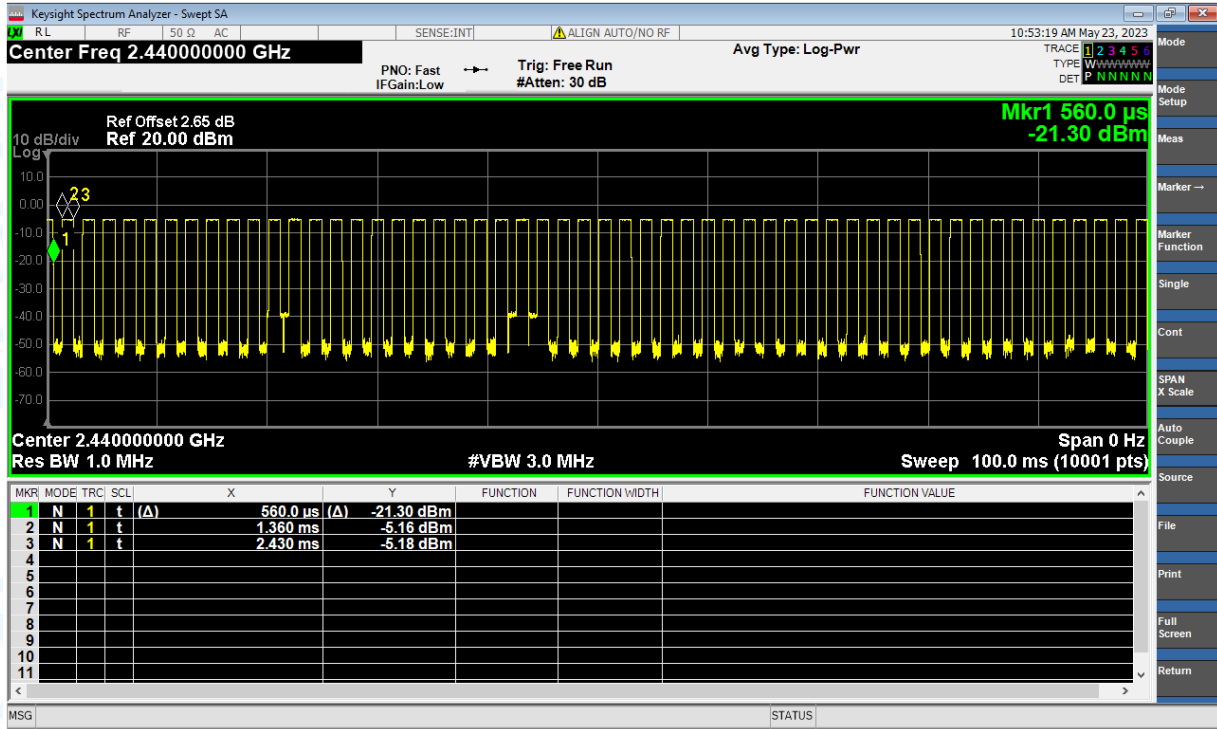

Duty Cycle NVNT BLE 2Mbps 2480MHz Ant1

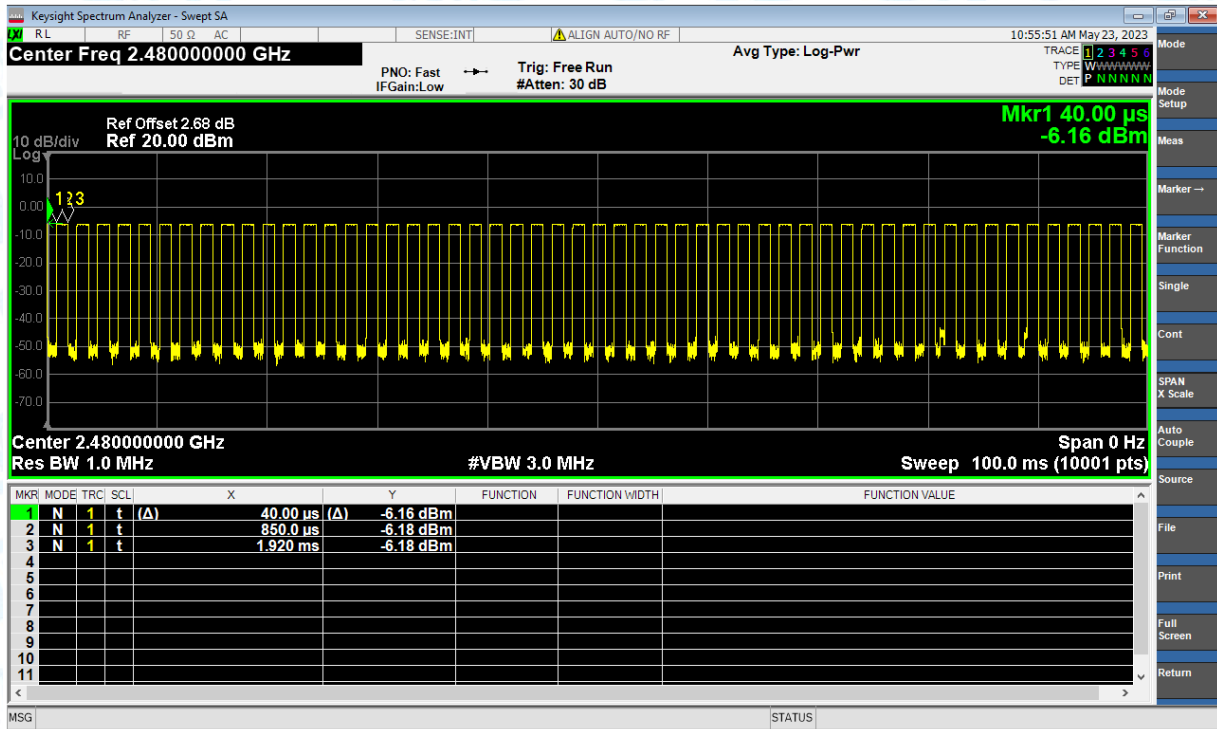


2. Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-5.211	30	Pass
NVNT	BLE 1Mbps	2440	Ant1	-4.628	30	Pass
NVNT	BLE 1Mbps	2480	Ant1	-5.644	30	Pass
NVNT	BLE 2Mbps	2402	Ant1	-5.258	30	Pass
NVNT	BLE 2Mbps	2440	Ant1	-4.66	30	Pass
NVNT	BLE 2Mbps	2480	Ant1	-5.684	30	Pass

Test Graphs

Power NVNT BLE 1Mbps 2402MHz Ant1

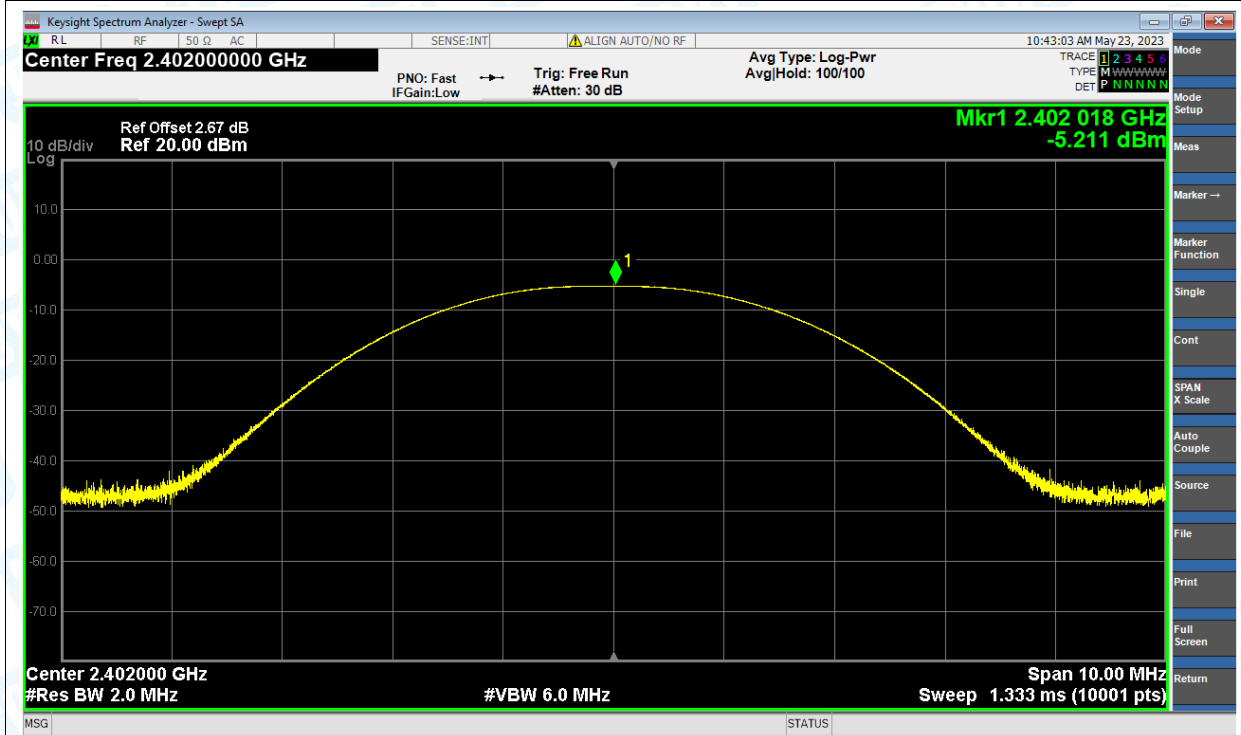

Power NVNT BLE 1Mbps 2440MHz Ant1

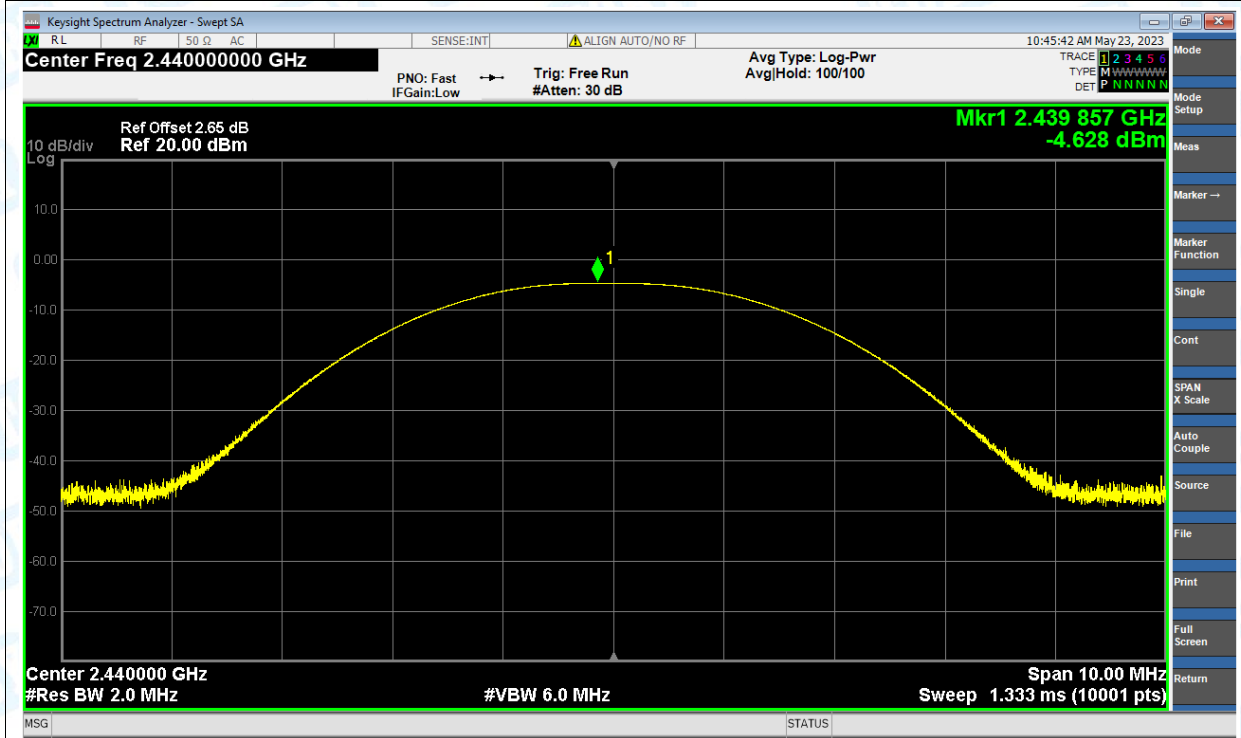

Power NVNT BLE 1Mbps 2480MHz Ant1




Power NVNT BLE 2Mbps 2402MHz Ant1



Power NVNT BLE 2Mbps 2440MHz Ant1



Power NVNT BLE 2Mbps 2480MHz Ant1

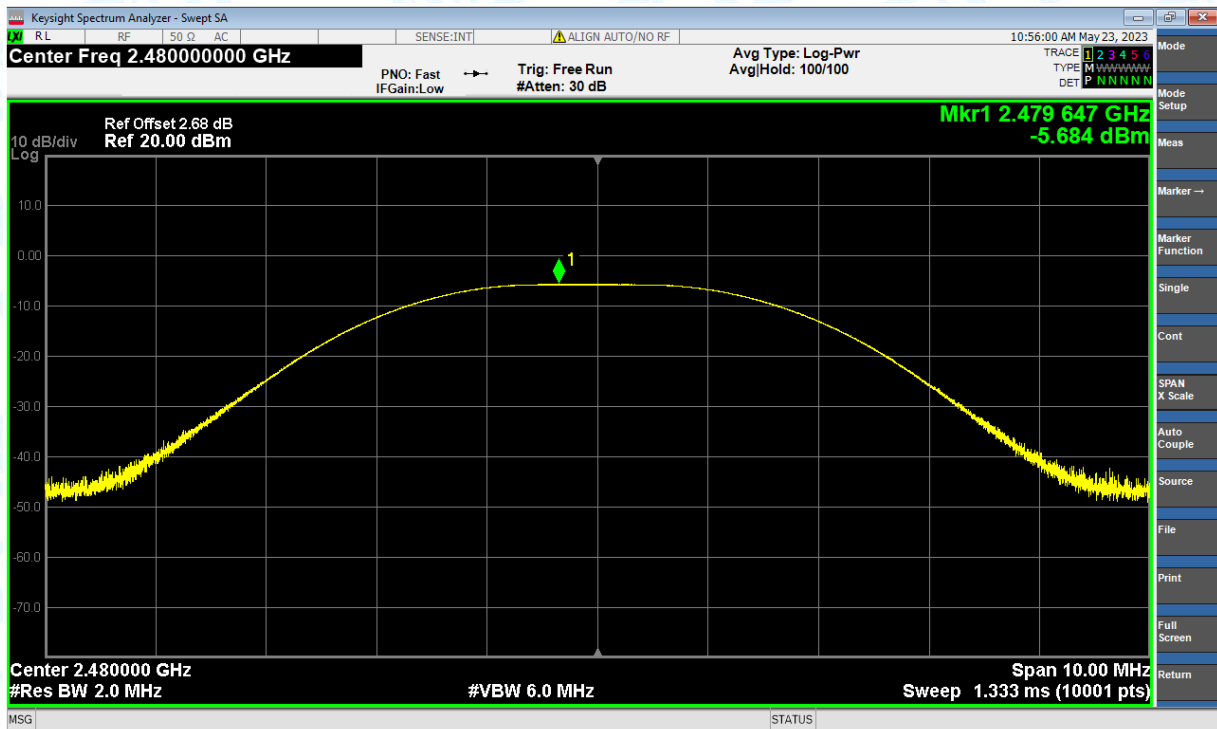


3. -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	0.66	0.5	Pass
NVNT	BLE 1Mbps	2440	Ant1	0.65	0.5	Pass
NVNT	BLE 1Mbps	2480	Ant1	0.71	0.5	Pass
NVNT	BLE 2Mbps	2402	Ant1	1.13	0.5	Pass
NVNT	BLE 2Mbps	2440	Ant1	1.23	0.5	Pass
NVNT	BLE 2Mbps	2480	Ant1	1.26	0.5	Pass

Test Graphs


-6dB Bandwidth NVNT BLE 1Mbps 2402MHz Ant1

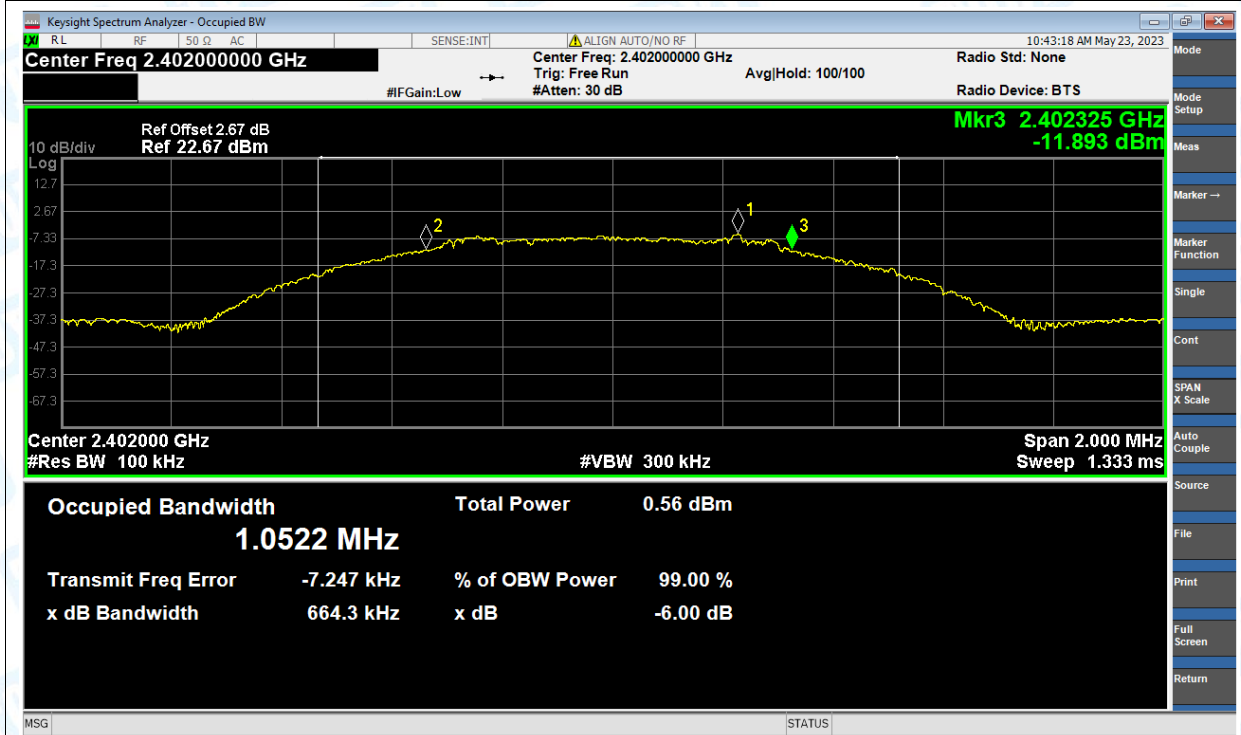


-6dB Bandwidth NVNT BLE 1Mbps 2440MHz Ant1

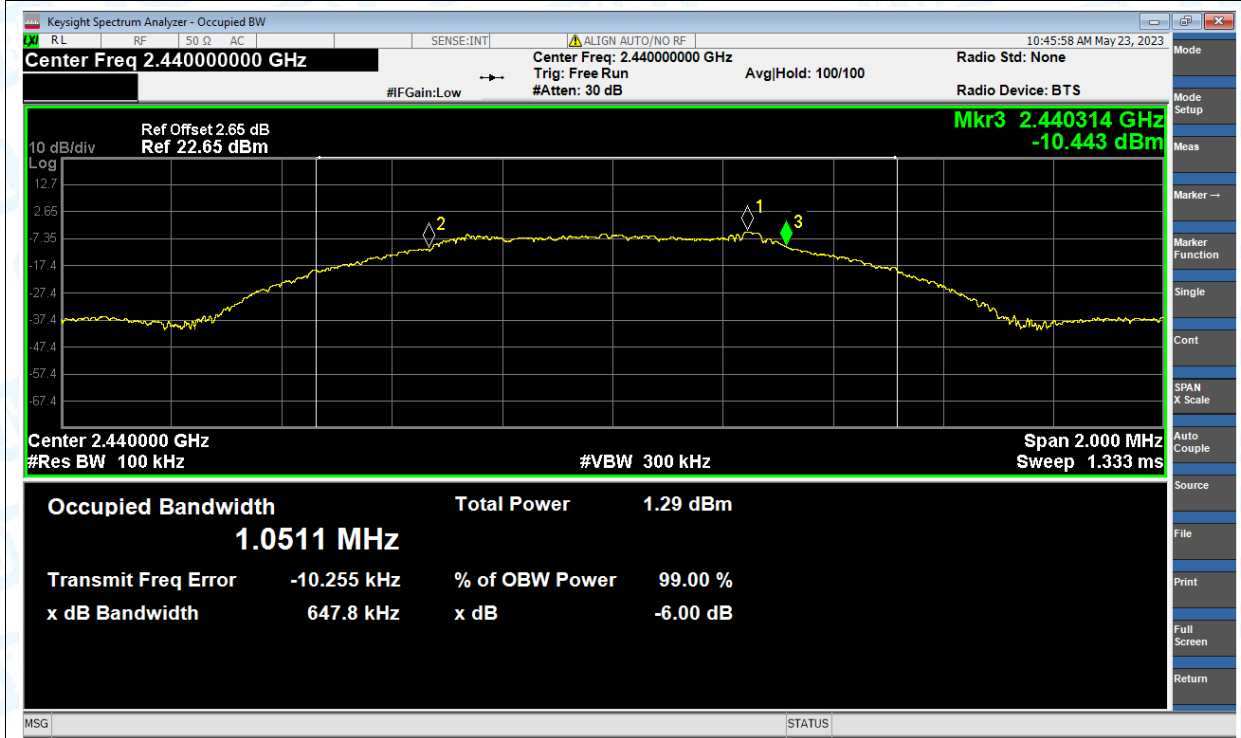


-6dB Bandwidth NVNT BLE 1Mbps 2480MHz Ant1

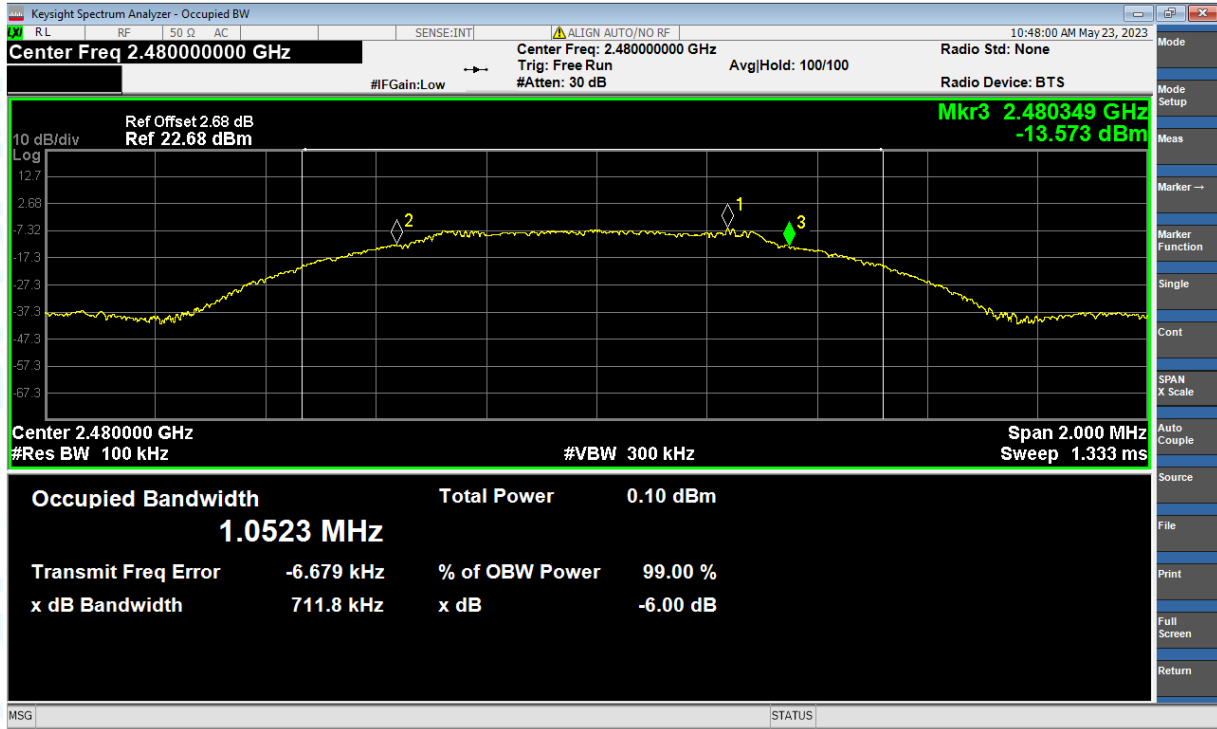


-6dB Bandwidth NVNT BLE 2Mbps 2402MHz Ant1

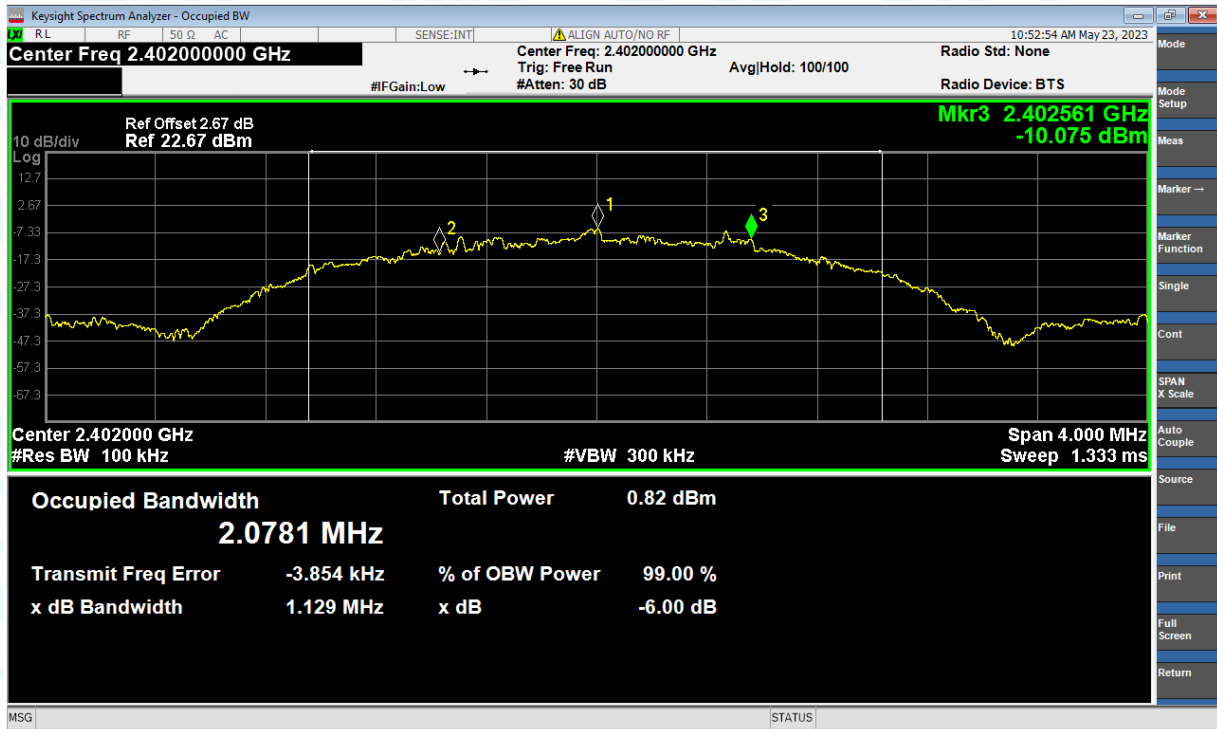

-6dB Bandwidth NVNT BLE 2Mbps 2440MHz Ant1

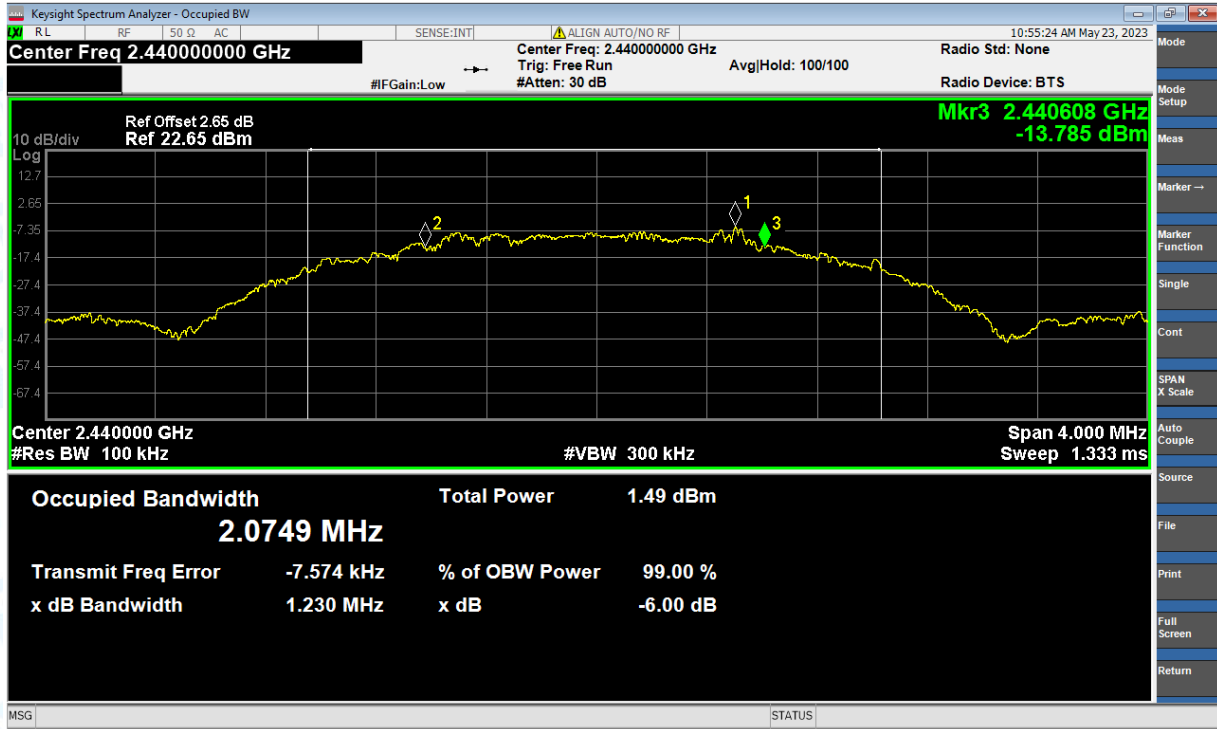

-6dB Bandwidth NVNT BLE 2Mbps 2480MHz Ant1

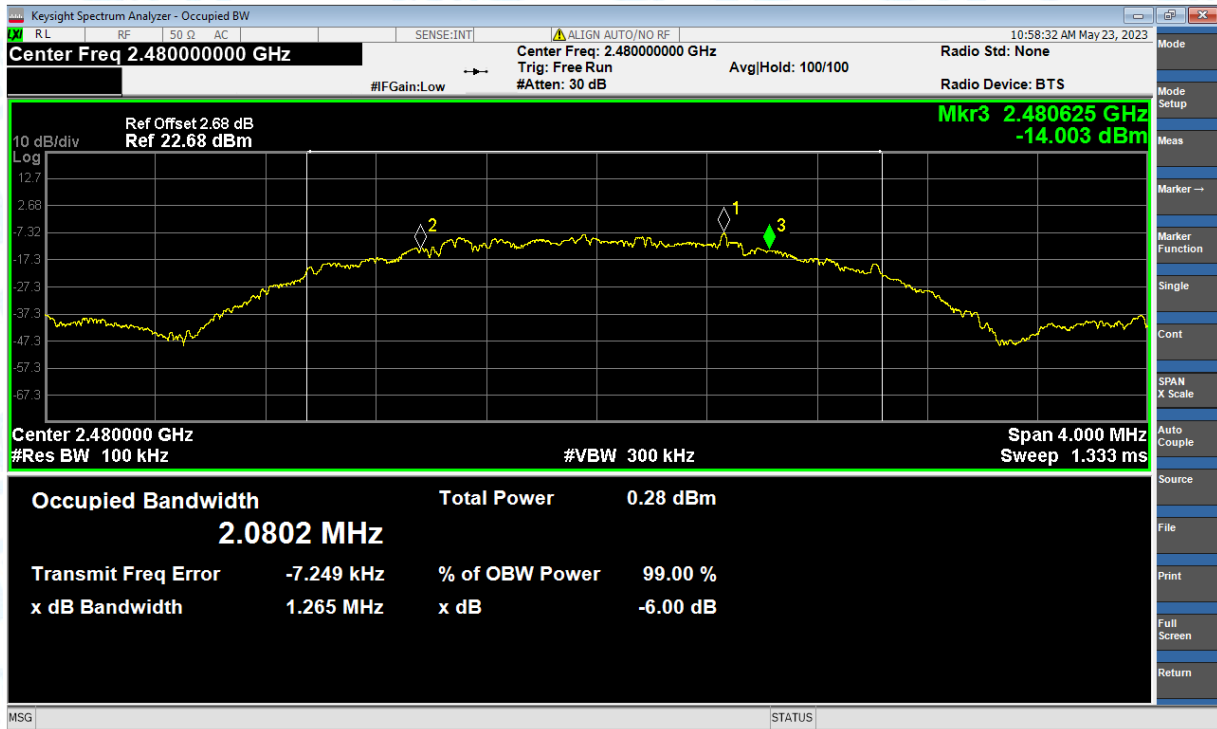


4. Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1Mbps	2402	Ant1	1.045
NVNT	BLE 1Mbps	2440	Ant1	1.042
NVNT	BLE 1Mbps	2480	Ant1	1.048
NVNT	BLE 2Mbps	2402	Ant1	2.073
NVNT	BLE 2Mbps	2440	Ant1	2.079
NVNT	BLE 2Mbps	2480	Ant1	2.073

Test Graphs


OBW NVNT BLE 1Mbps 2402MHz Ant1

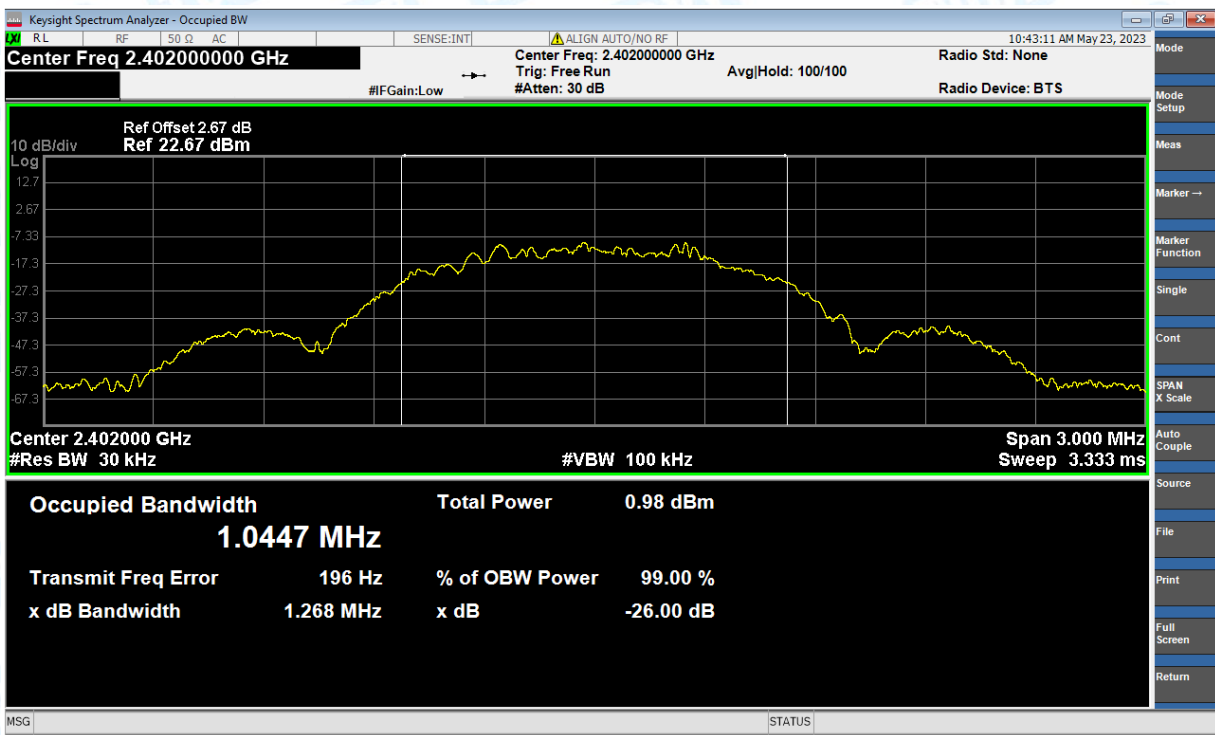


OBW NVNT BLE 1Mbps 2440MHz Ant1

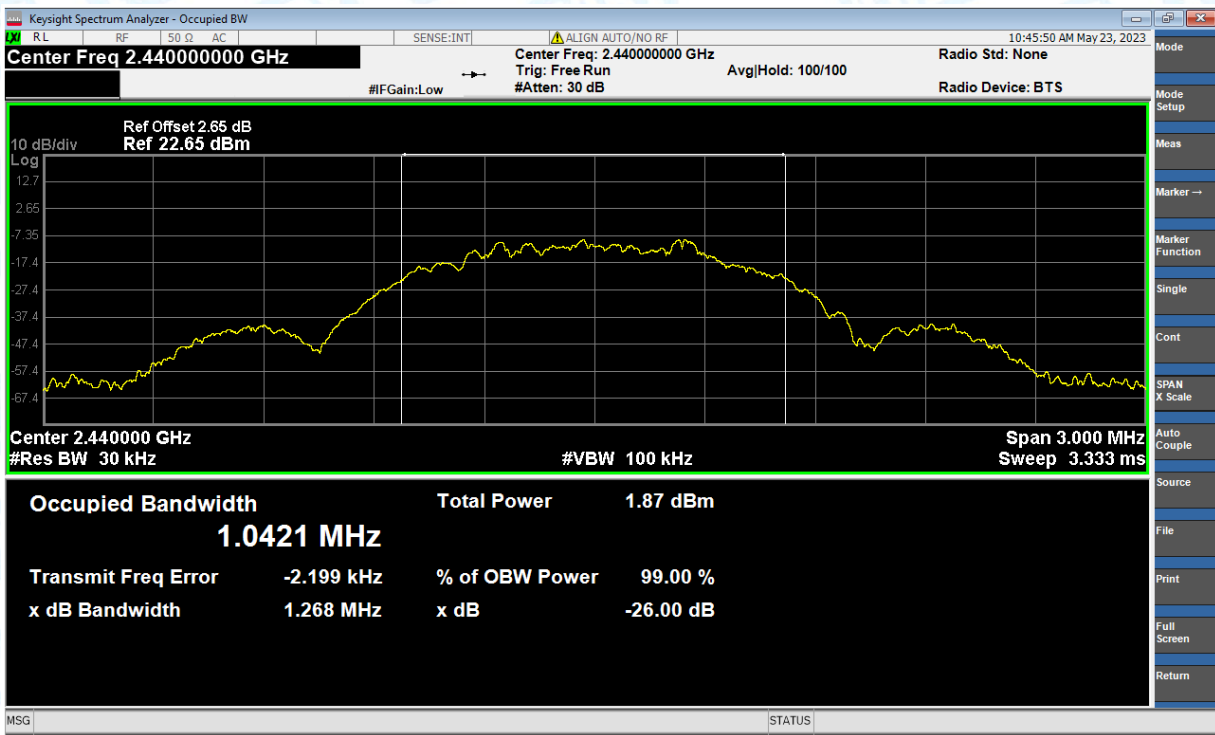


OBW NVNT BLE 1Mbps 2480MHz Ant1

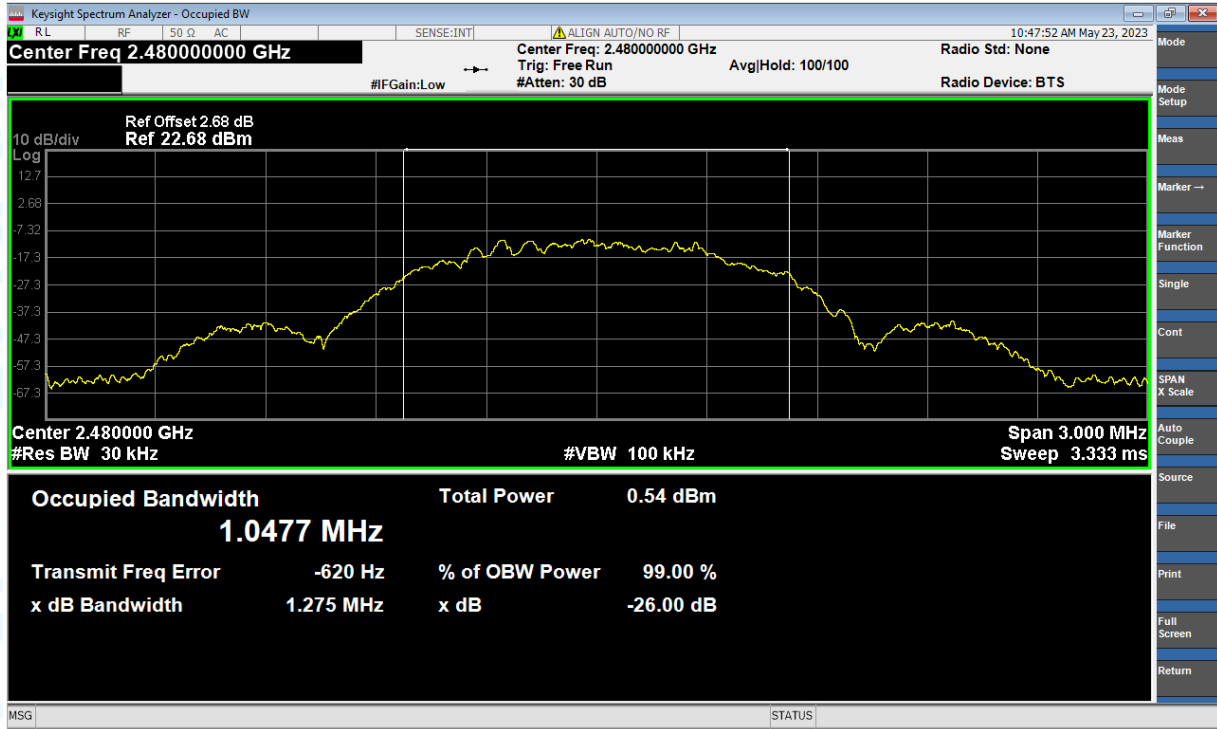


OBW NVNT BLE 2Mbps 2402MHz Ant1

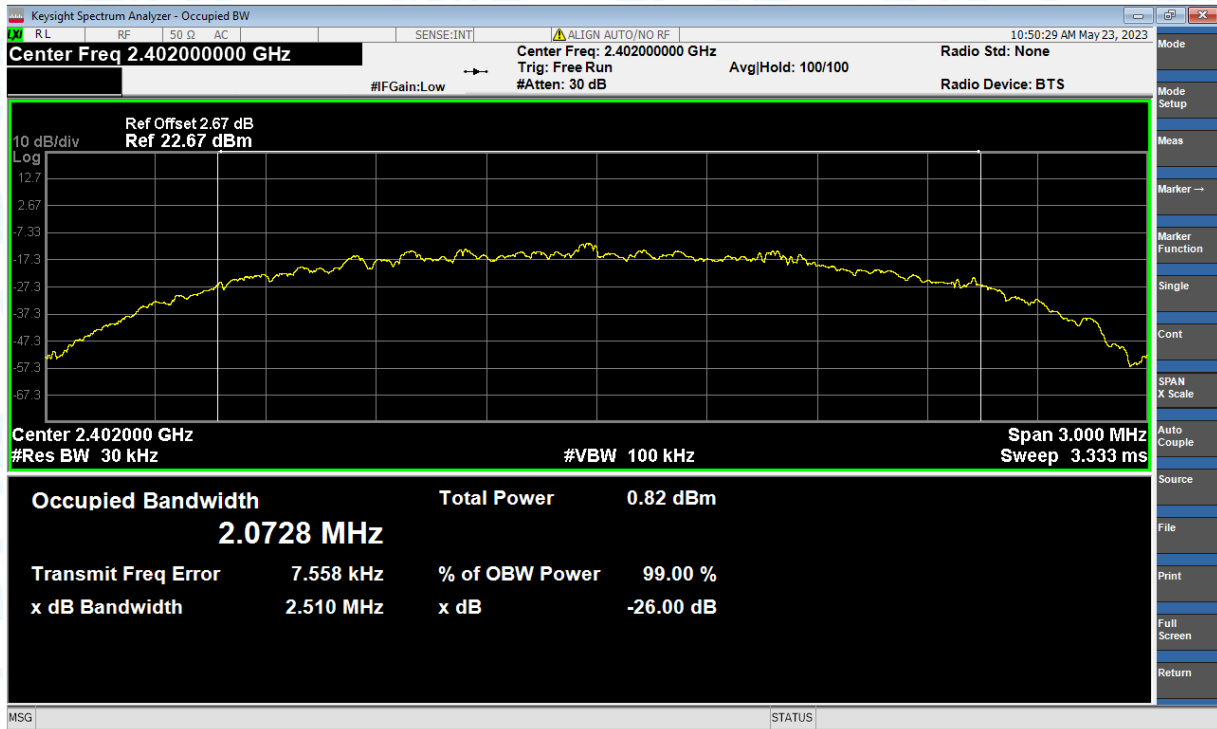

OBW NVNT BLE 2Mbps 2440MHz Ant1

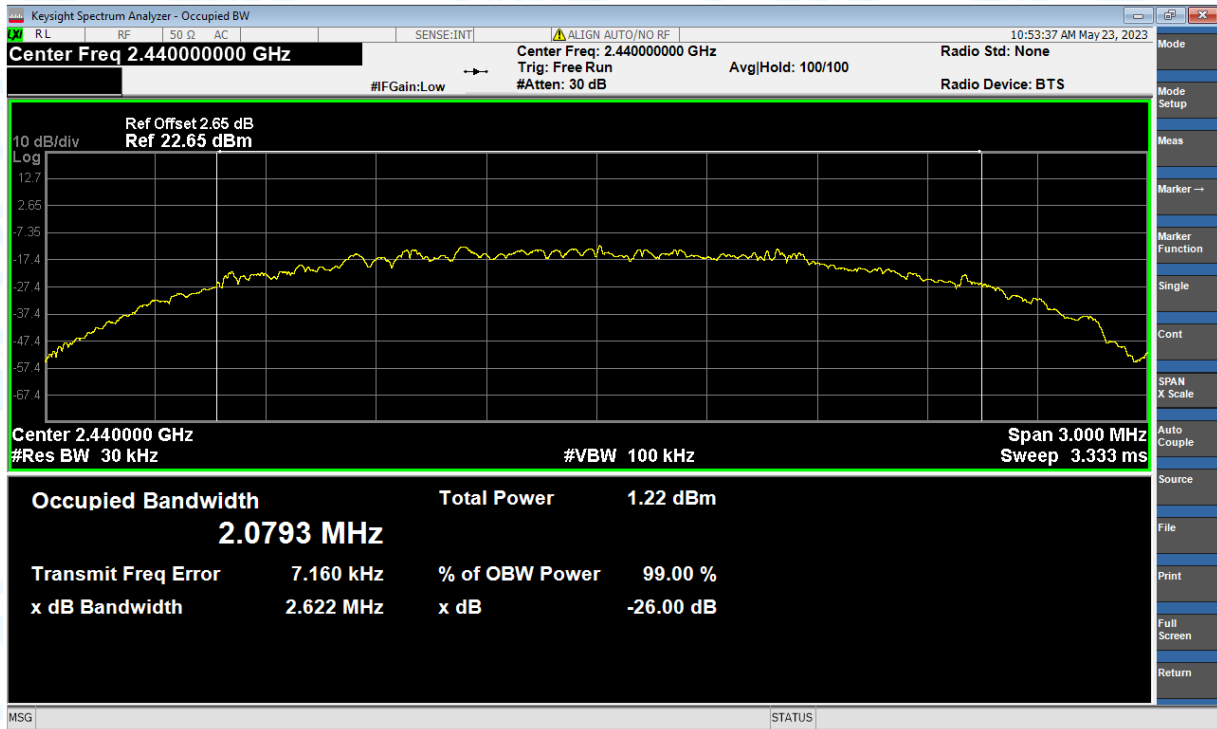

OBW NVNT BLE 2Mbps 2480MHz Ant1

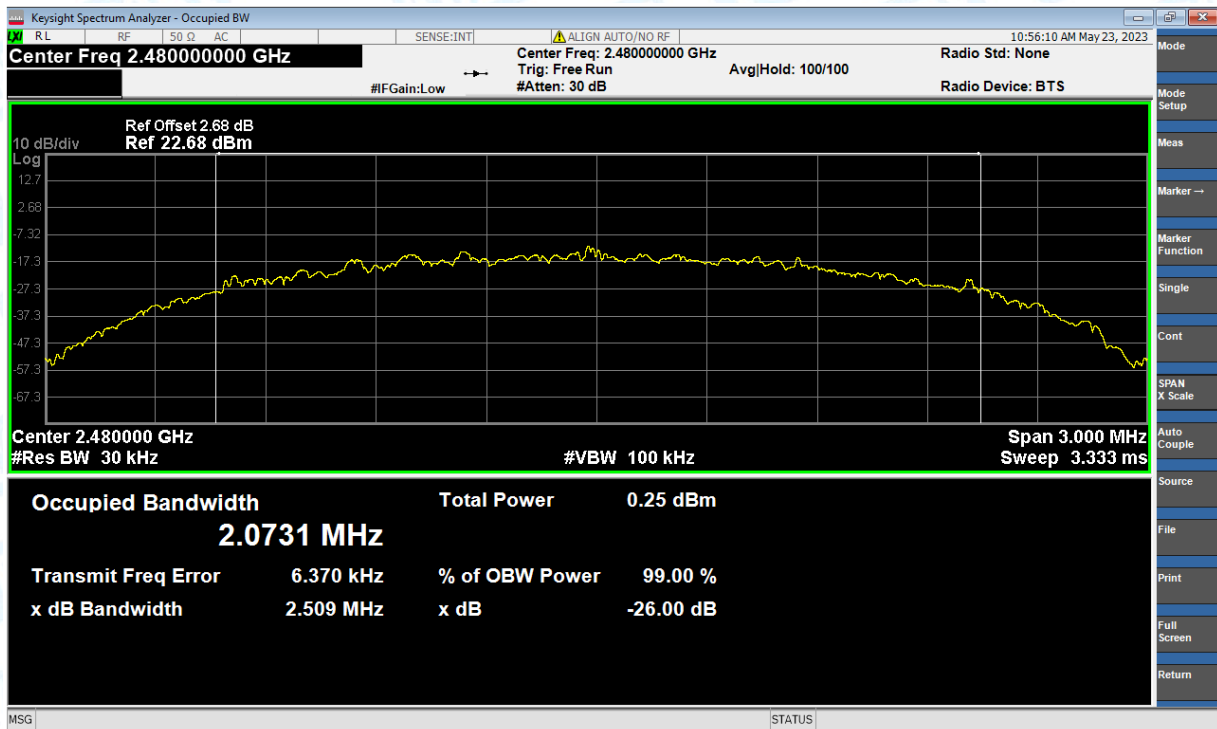


5. Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-21.517	8	Pass
NVNT	BLE 1Mbps	2440	Ant1	-20.934	8	Pass
NVNT	BLE 1Mbps	2480	Ant1	-21.998	8	Pass
NVNT	BLE 2Mbps	2402	Ant1	-23.913	8	Pass
NVNT	BLE 2Mbps	2440	Ant1	-23.32	8	Pass
NVNT	BLE 2Mbps	2480	Ant1	-24.393	8	Pass



Test Graphs



PSD NVNT BLE 1Mbps 2402MHz Ant1

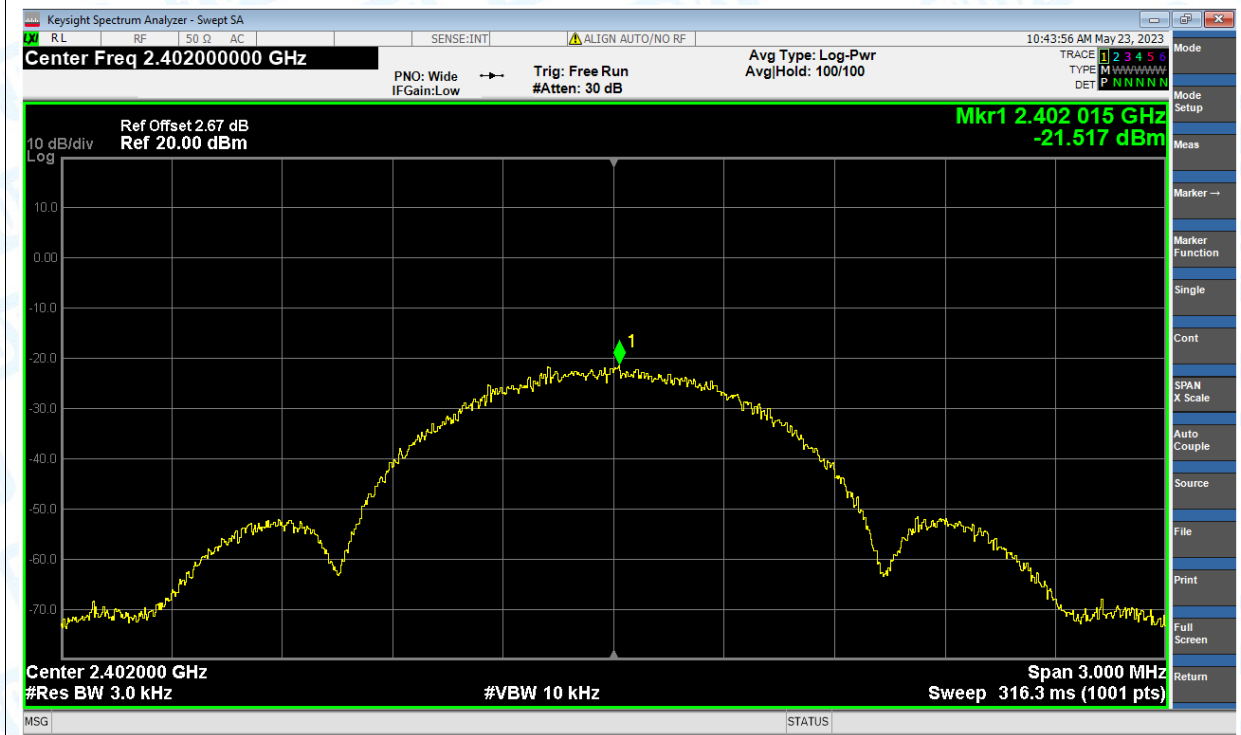

PSD NVNT BLE 1Mbps 2440MHz Ant1

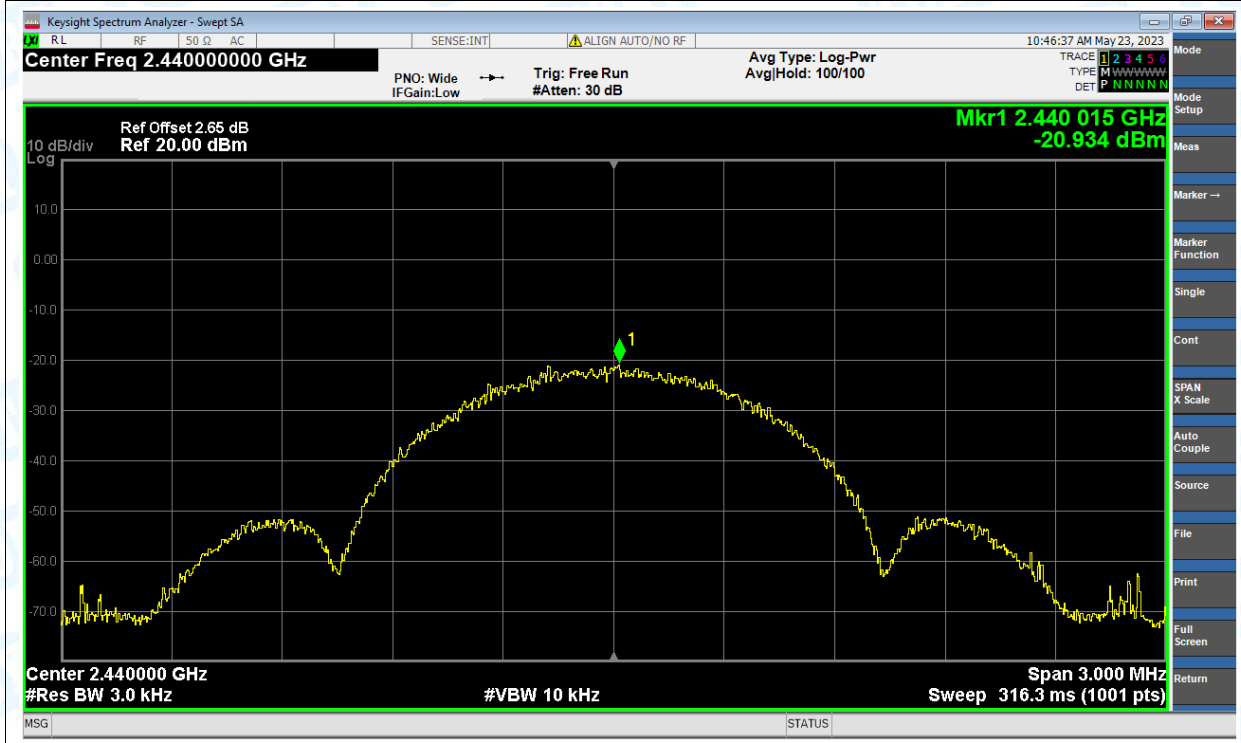

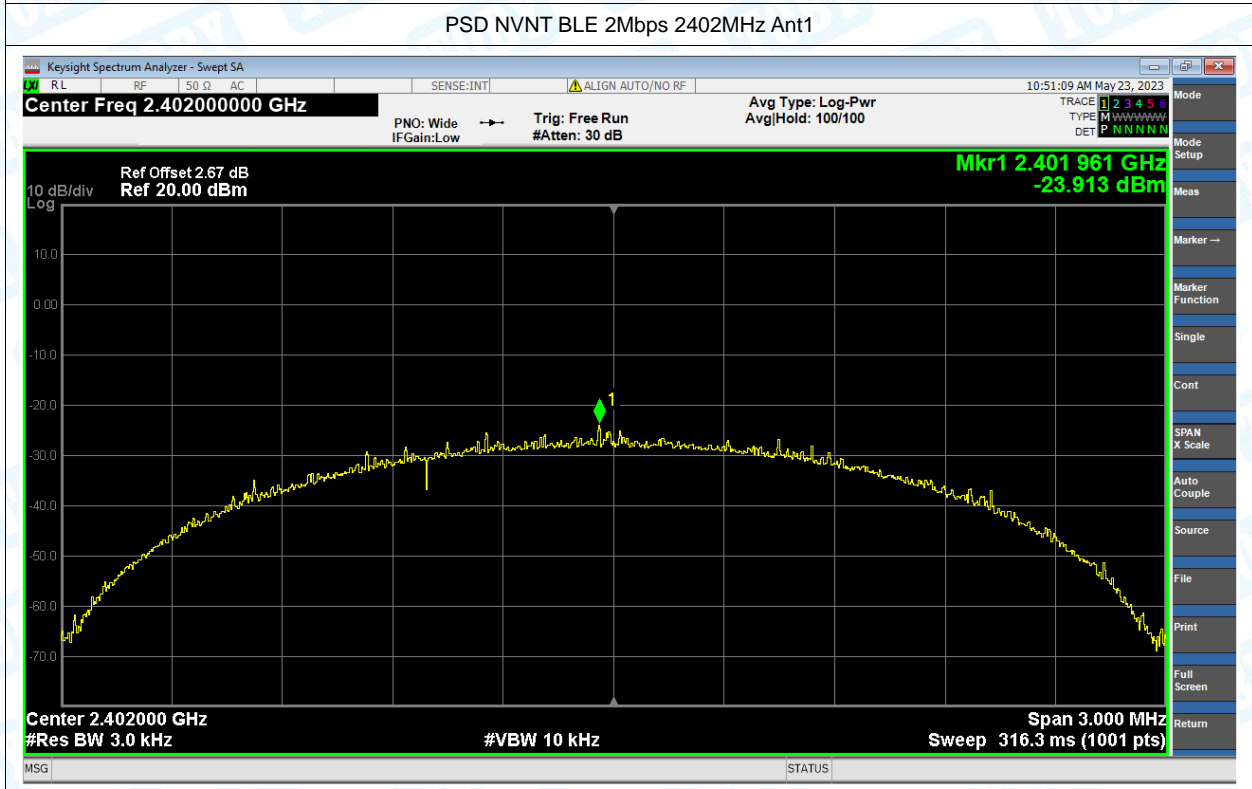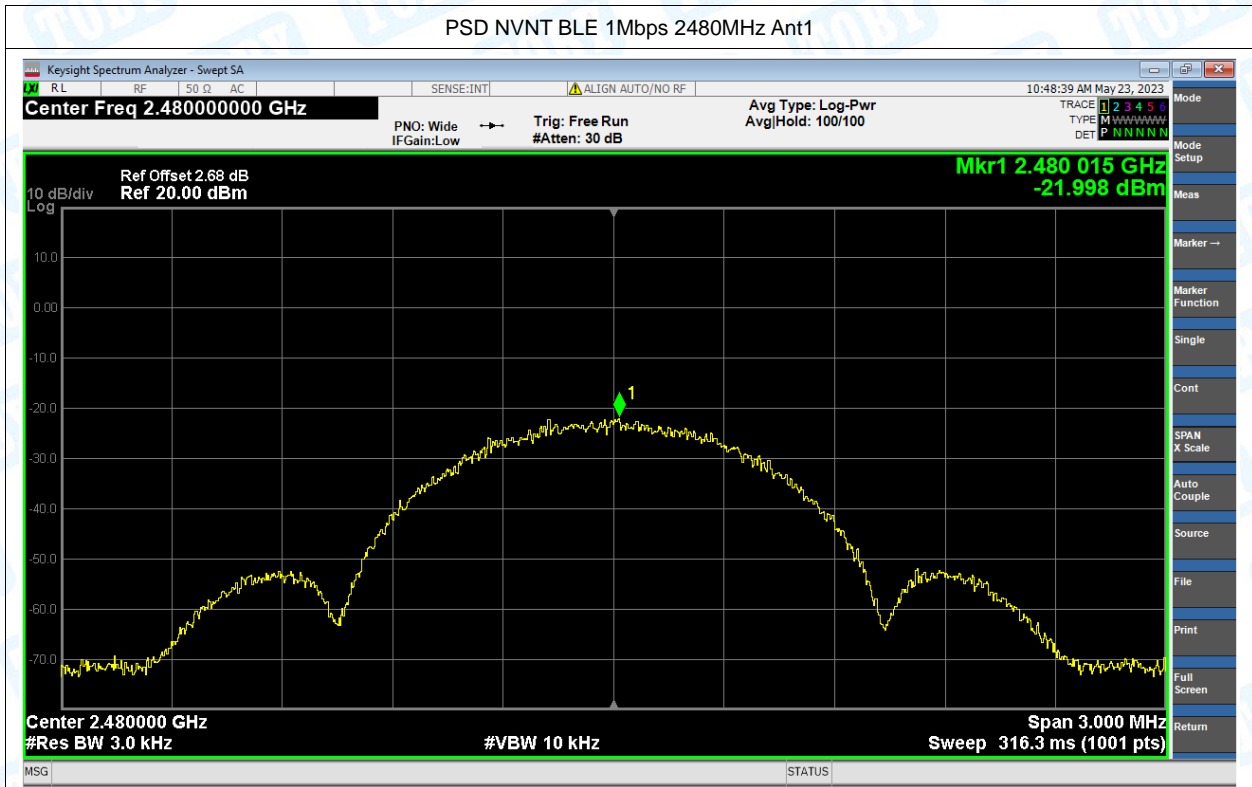

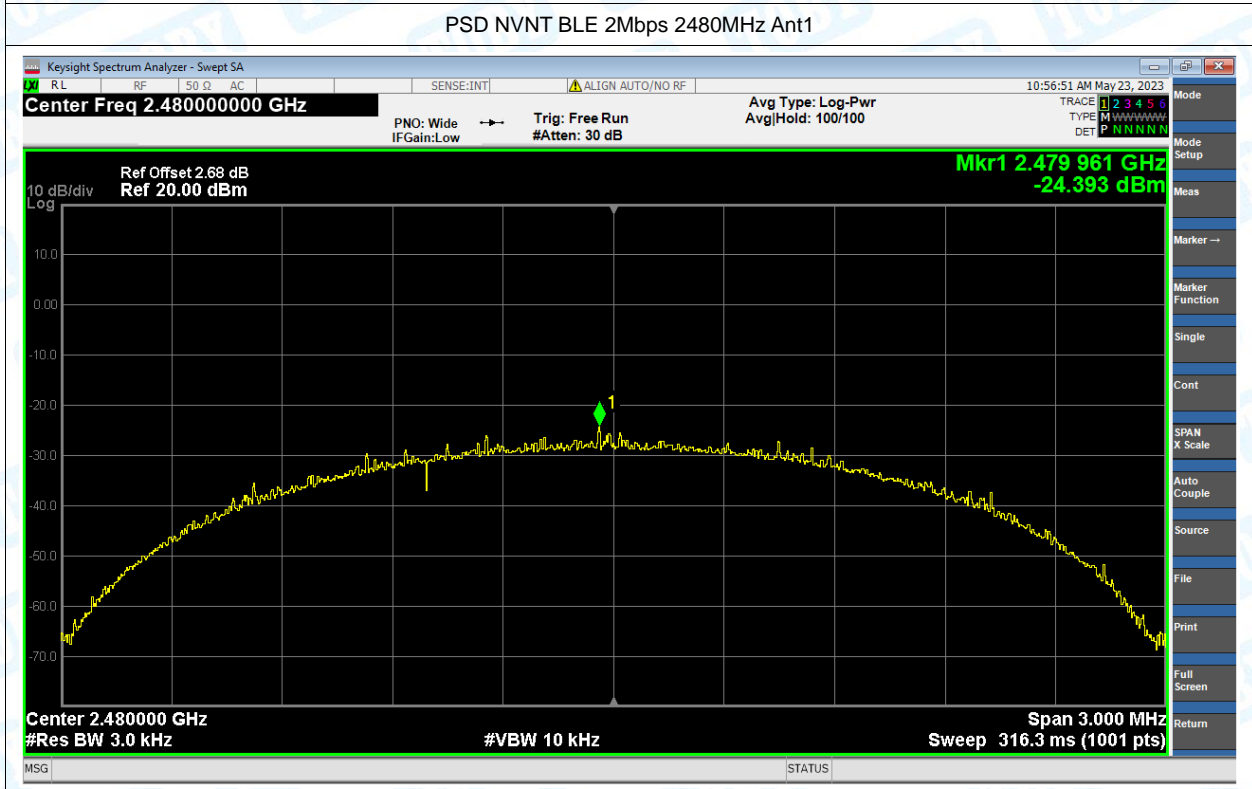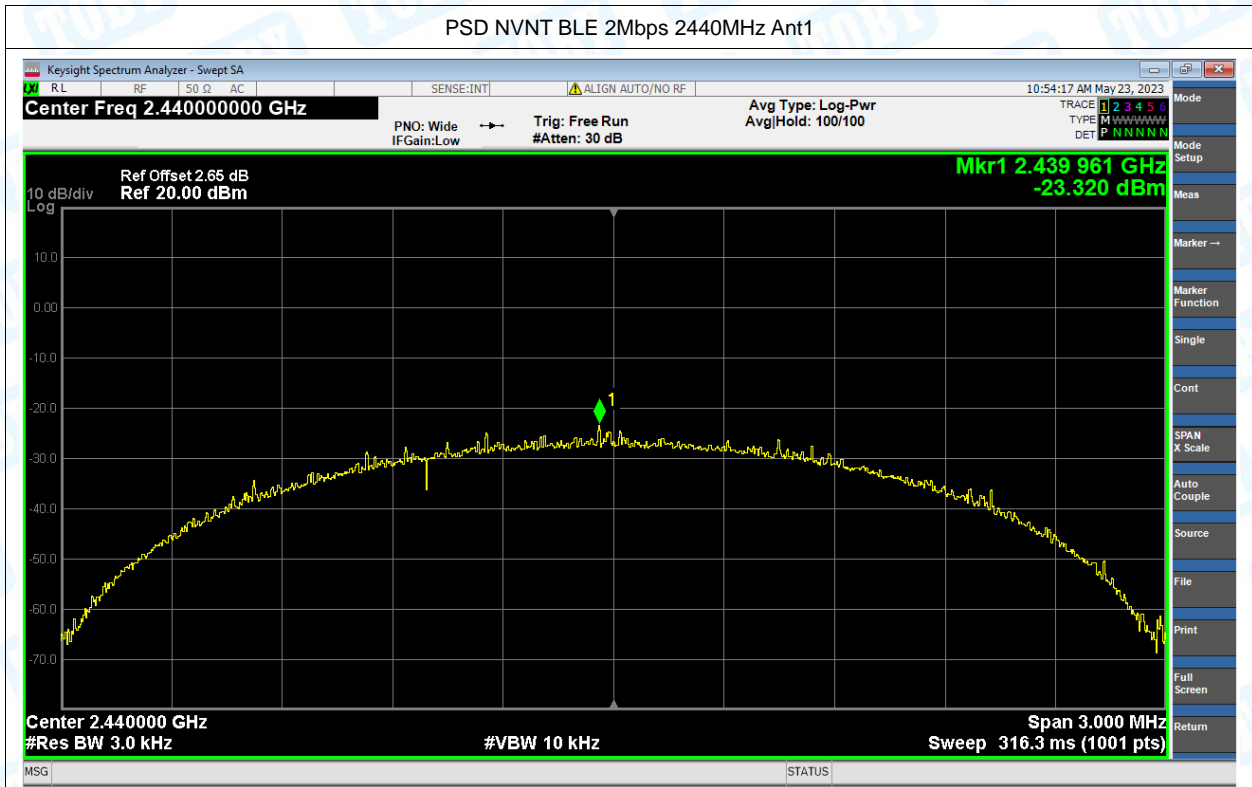


6. Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-50.21	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	-44.77	-20	Pass
NVNT	BLE 2Mbps	2402	Ant1	-48.97	-20	Pass
NVNT	BLE 2Mbps	2480	Ant1	-47.68	-20	Pass

Test Graphs


Band Edge NVNT BLE 1Mbps 2402MHz Ant1 Ref

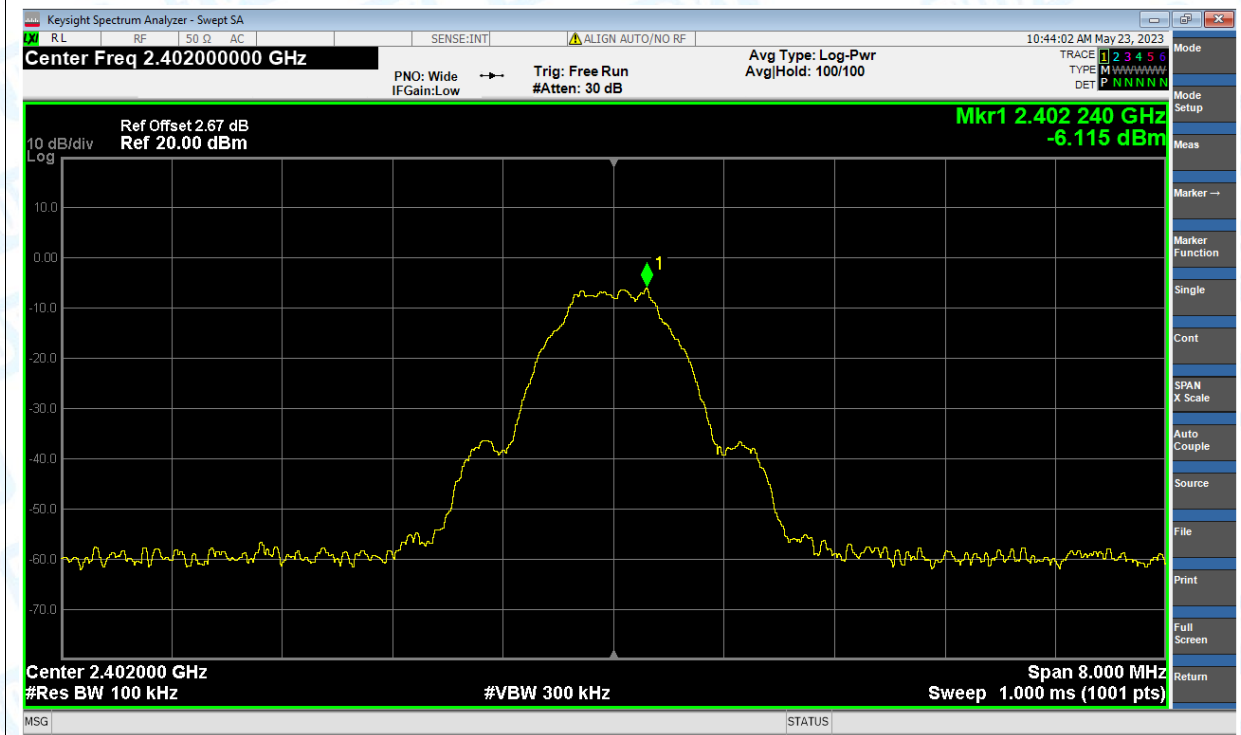


Band Edge NVNT BLE 1Mbps 2402MHz Ant1 Emission

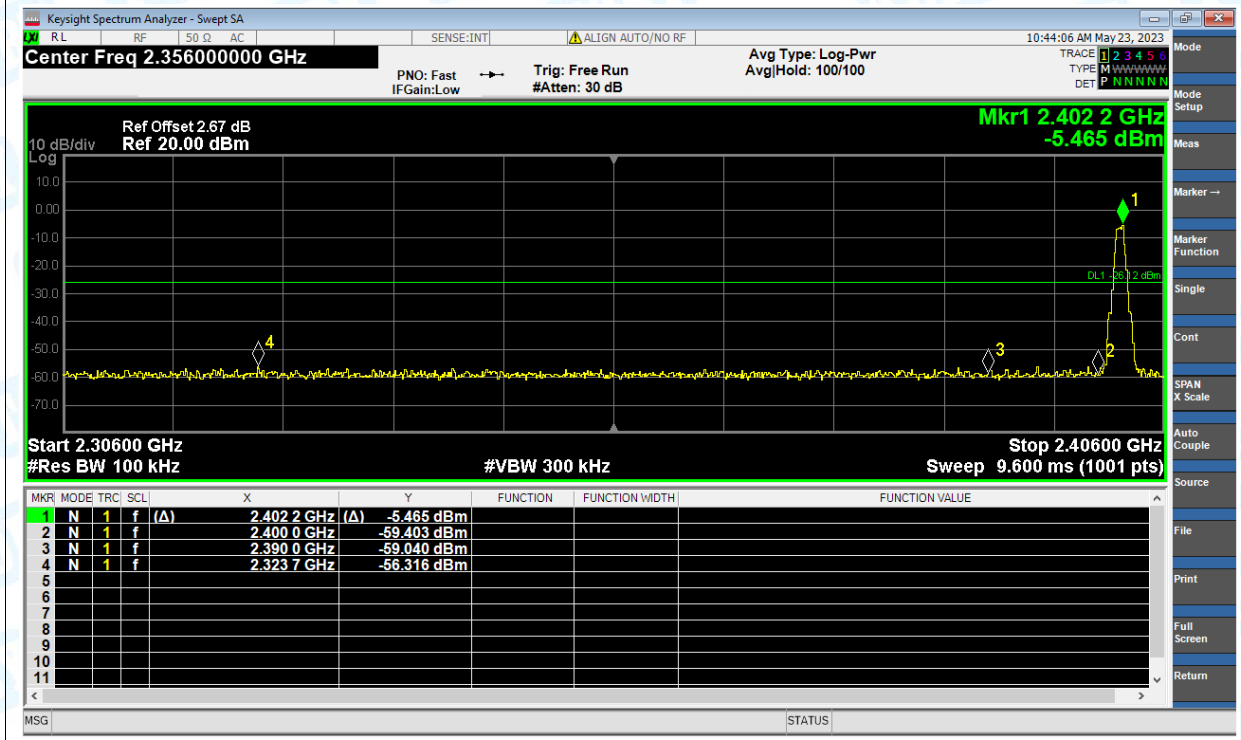

Band Edge NVNT BLE 1Mbps 2480MHz Ant1 Ref

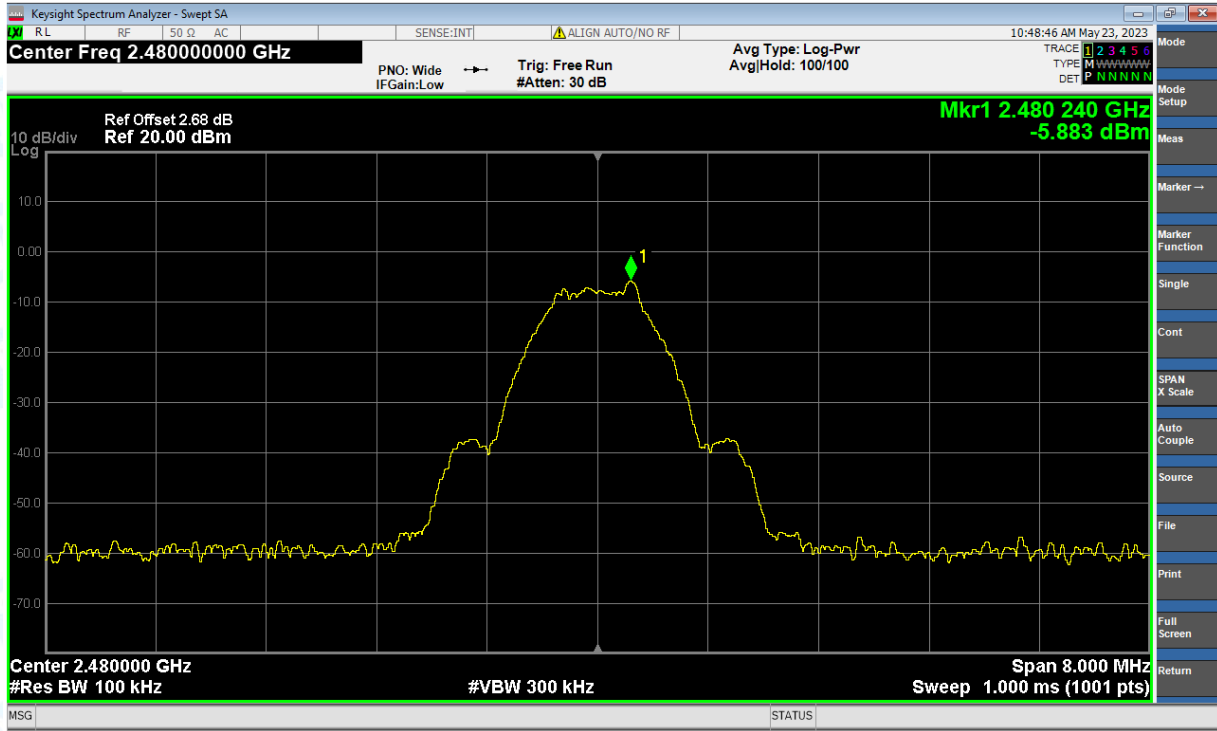


Band Edge NVNT BLE 1Mbps 2480MHz Ant1 Emission

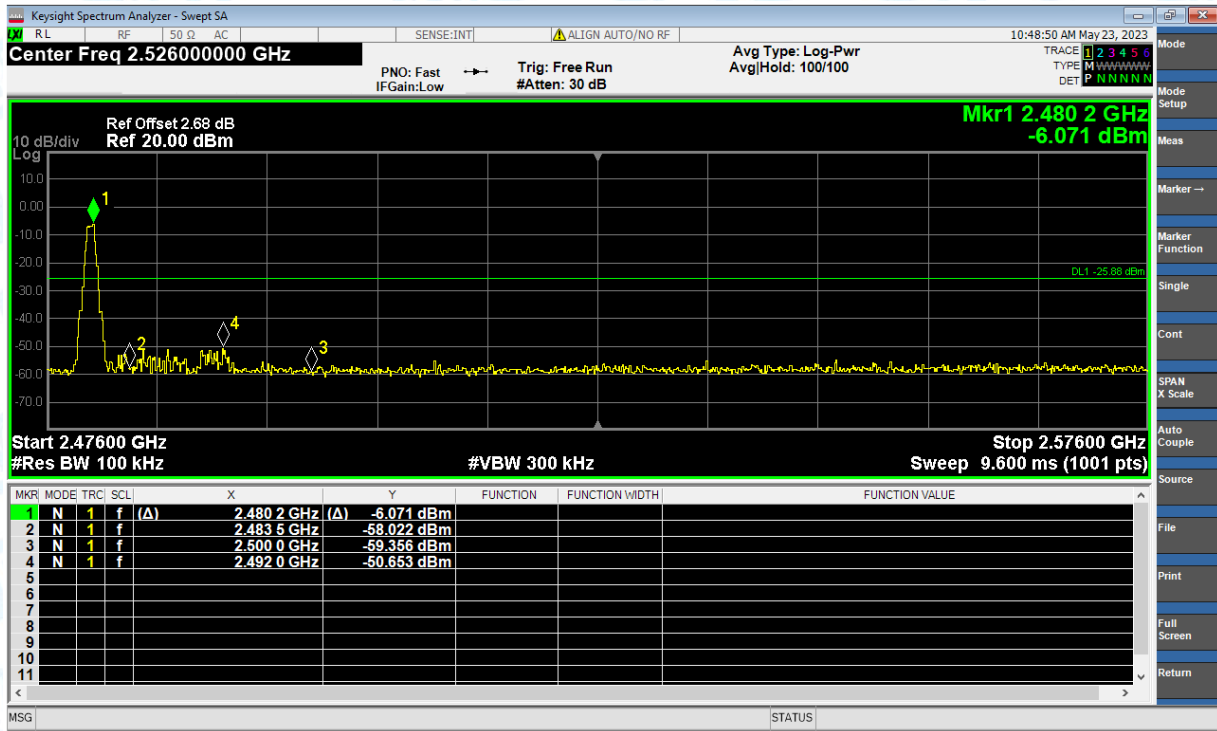

Band Edge NVNT BLE 2Mbps 2402MHz Ant1 Ref




Band Edge NVNT BLE 2Mbps 2402MHz Ant1 Emission

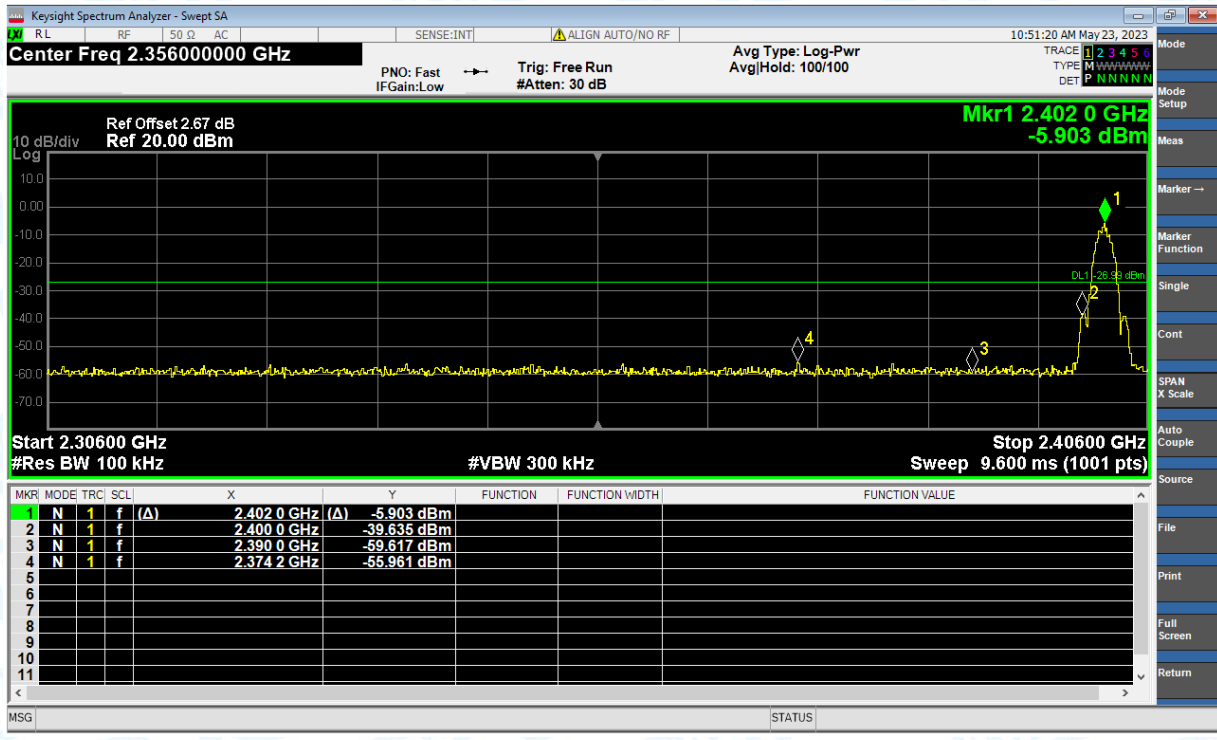

Band Edge NVNT BLE 2Mbps 2480MHz Ant1 Ref



Band Edge NVNT BLE 2Mbps 2480MHz Ant1 Emission

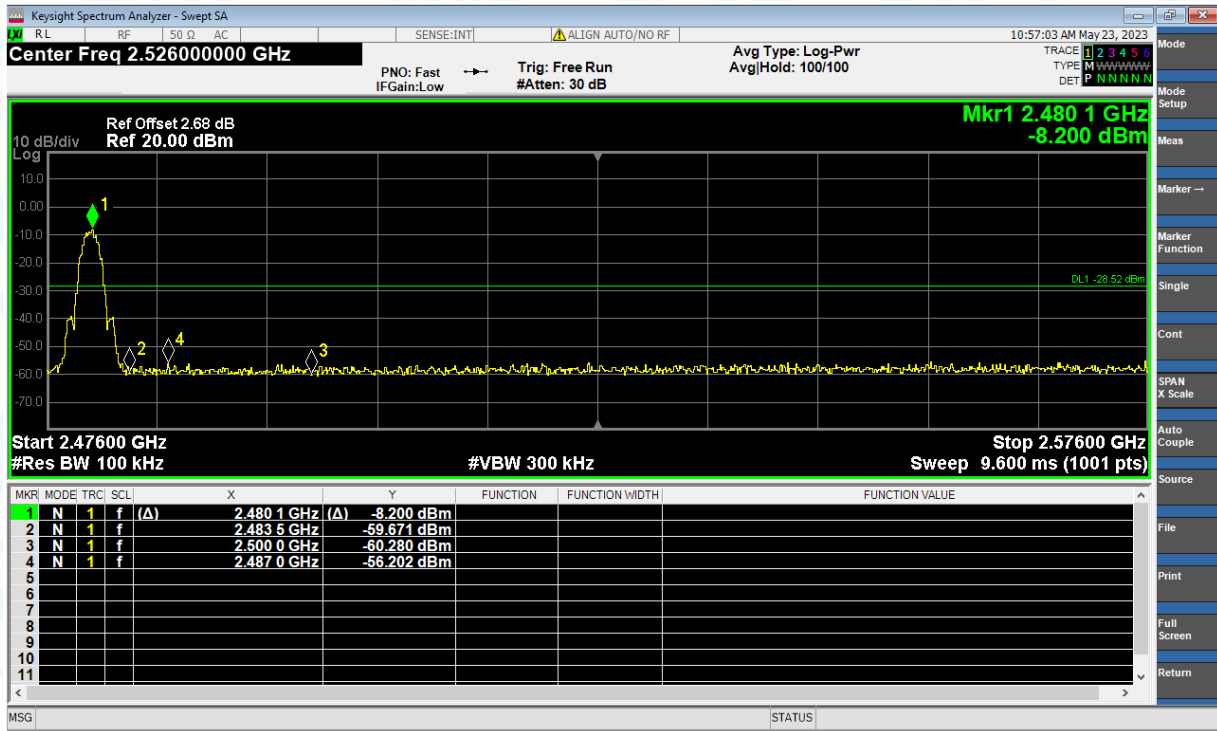


7. Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-36.25	-20	Pass
NVNT	BLE 1Mbps	2440	Ant1	-36.94	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	-35.7	-20	Pass
NVNT	BLE 2Mbps	2402	Ant1	-35.05	-20	Pass
NVNT	BLE 2Mbps	2440	Ant1	-35.81	-20	Pass
NVNT	BLE 2Mbps	2480	Ant1	-36.1	-20	Pass

Test Graphs


Tx. Spurious NVNT BLE 1Mbps 2402MHz Ant1 Ref

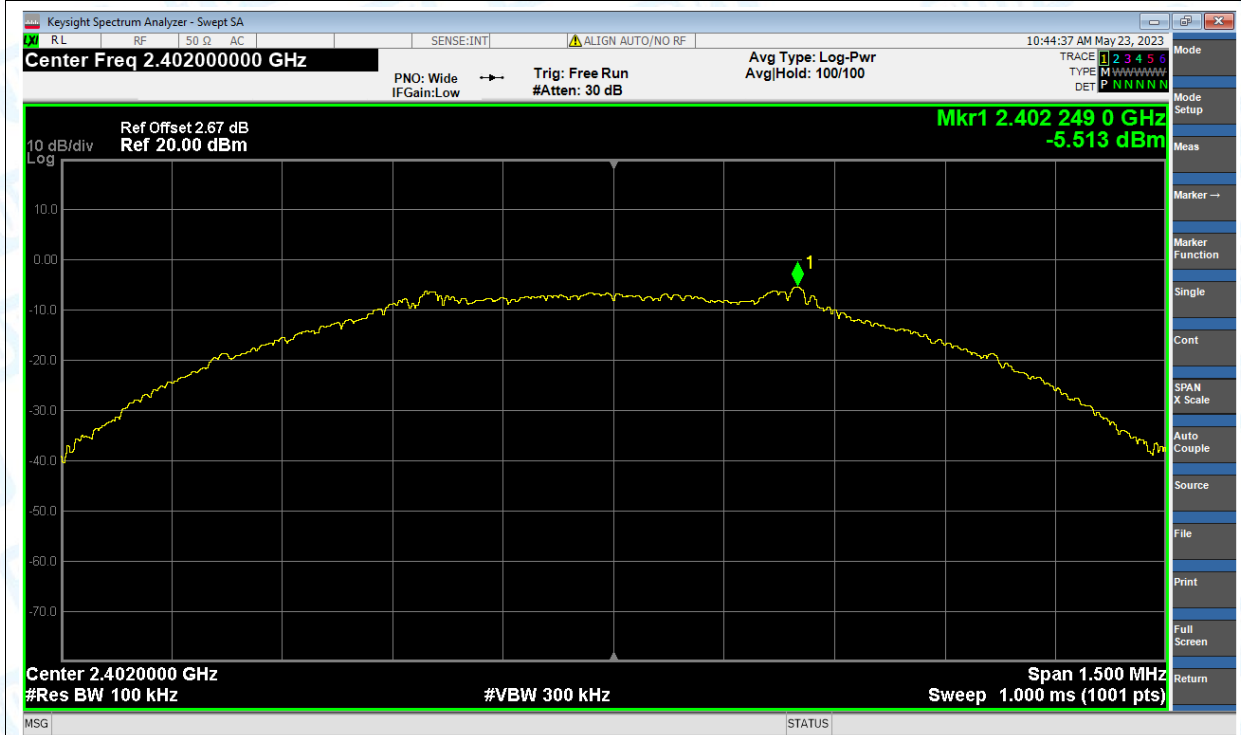


Tx. Spurious NVNT BLE 1Mbps 2402MHz Ant1 Emission

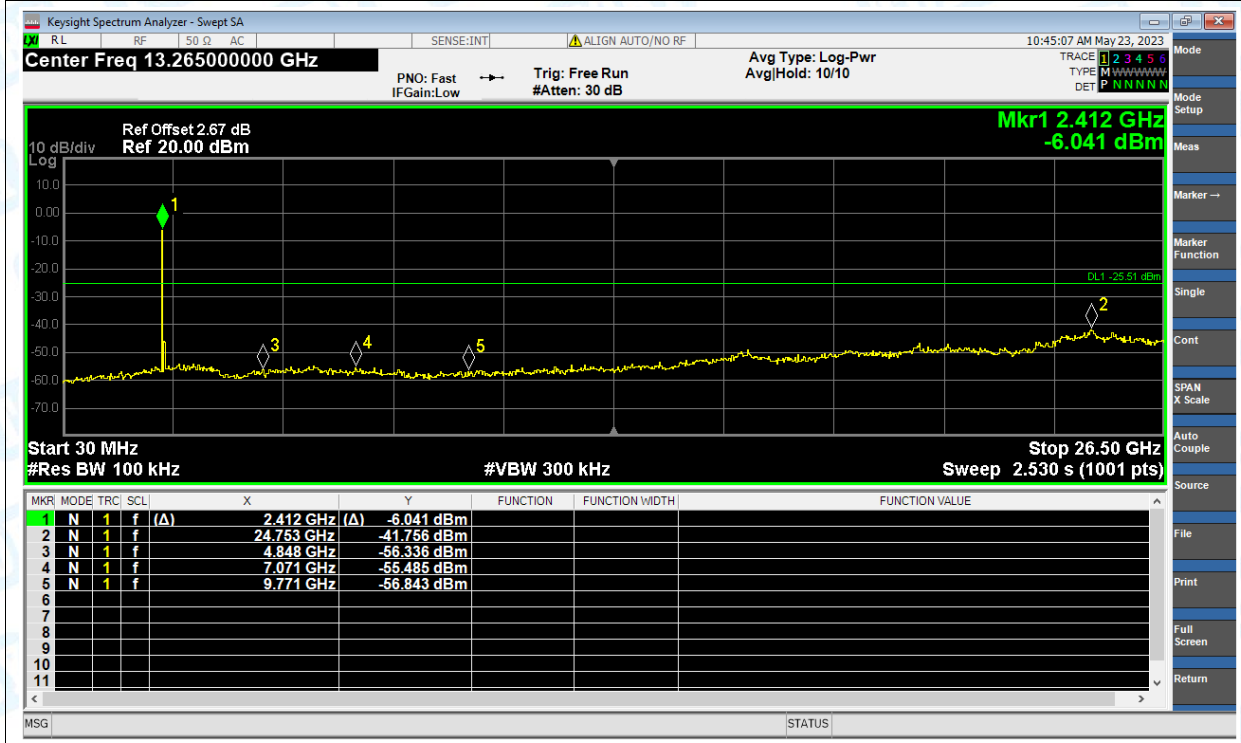


Tx. Spurious NVNT BLE 1Mbps 2440MHz Ant1 Ref

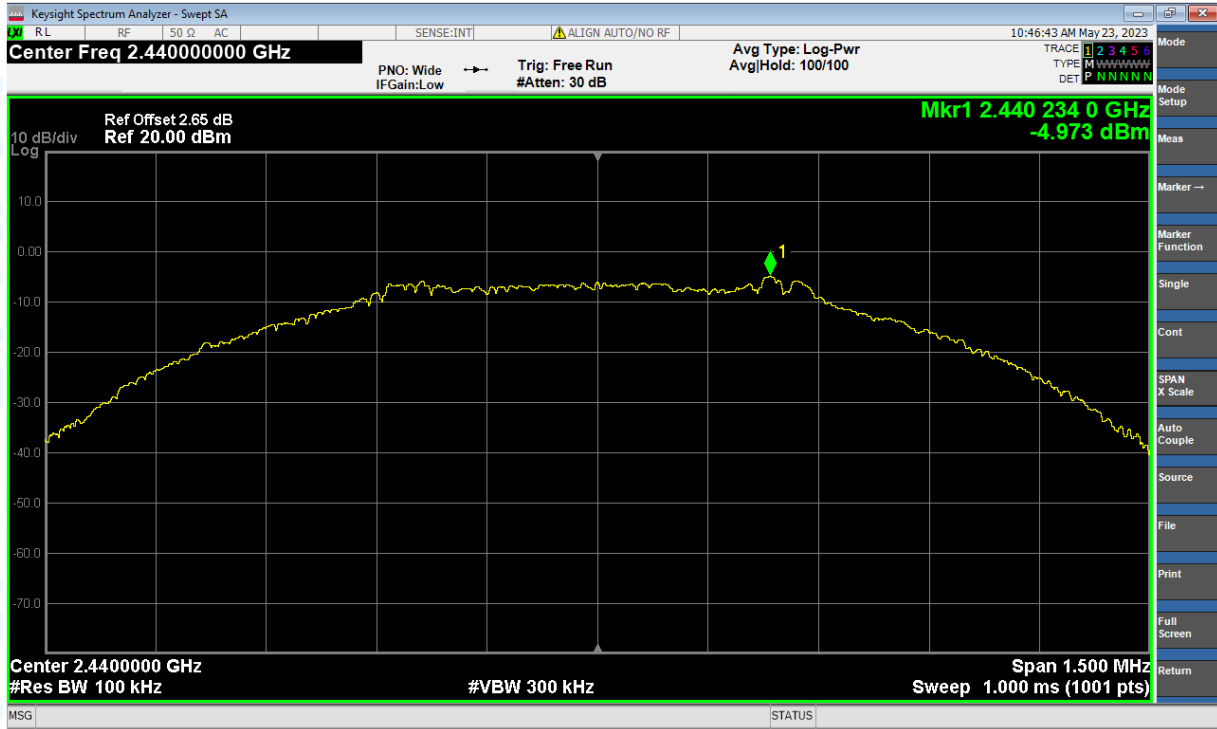


Tx. Spurious NVNT BLE 1Mbps 2440MHz Ant1 Emission

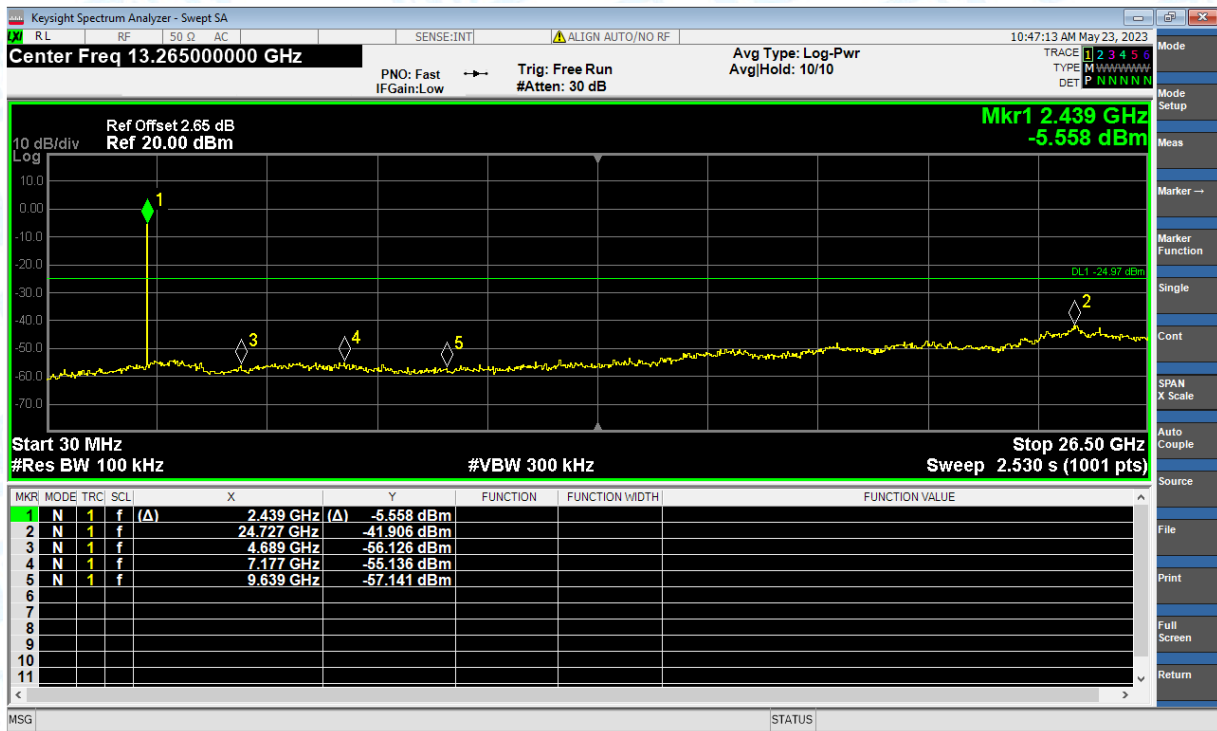


Tx. Spurious NVNT BLE 1Mbps 2480MHz Ant1 Ref

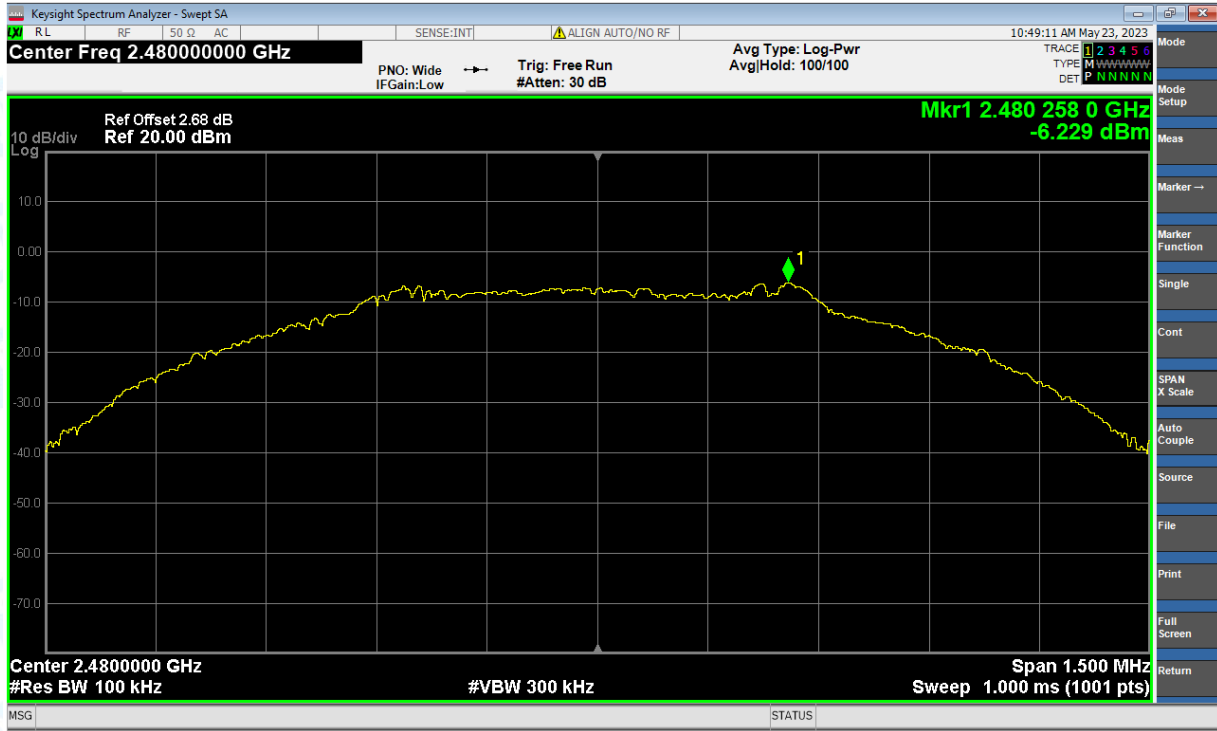


Tx. Spurious NVNT BLE 1Mbps 2480MHz Ant1 Emission

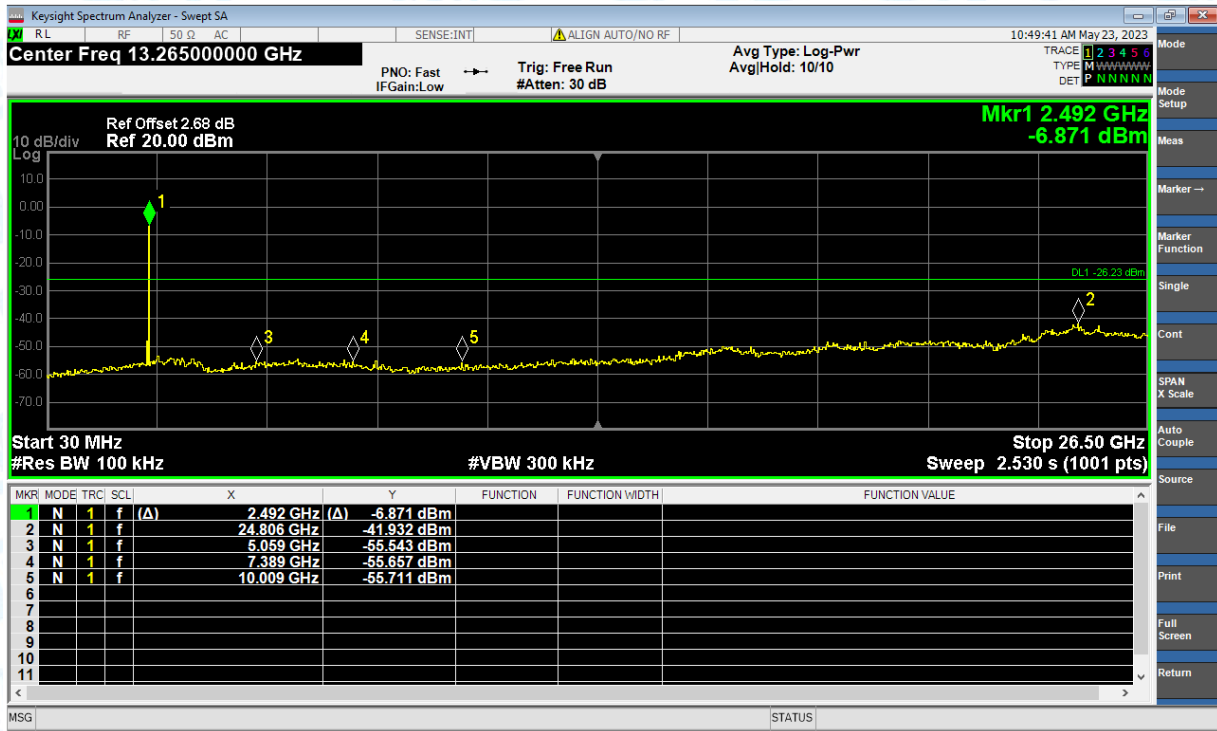


Tx. Spurious NVNT BLE 2Mbps 2402MHz Ant1 Ref

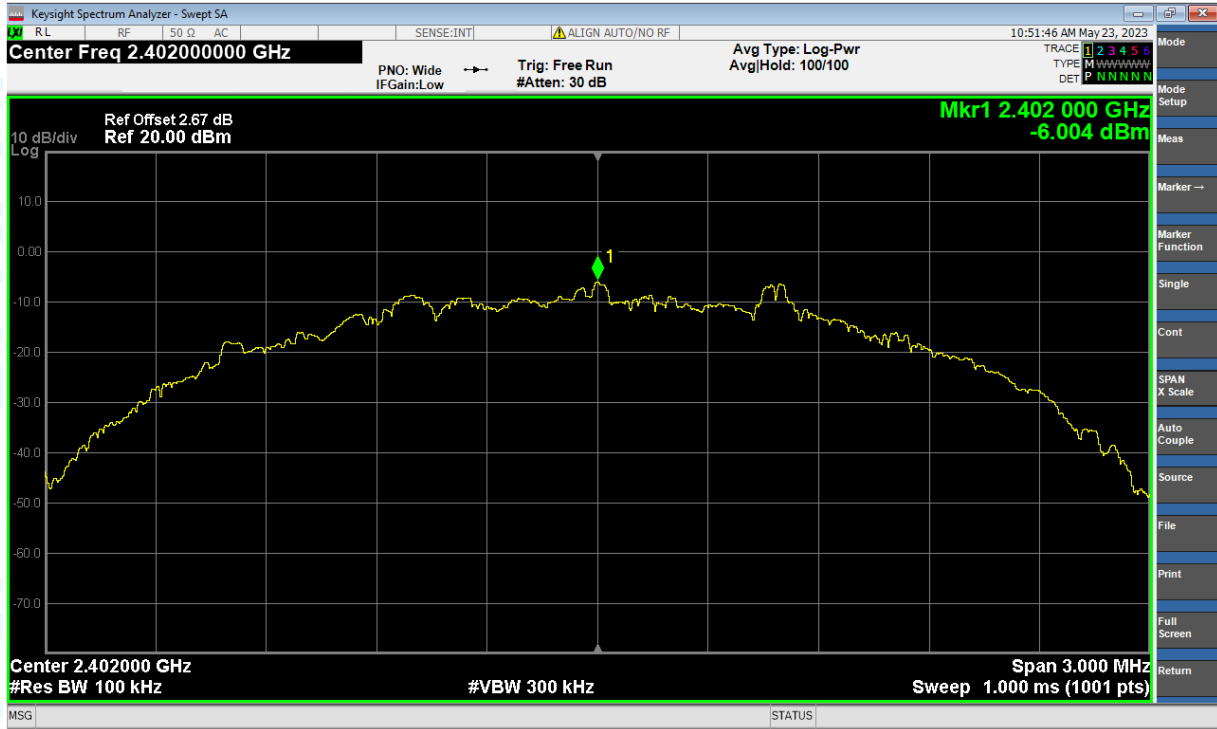


Tx. Spurious NVNT BLE 2Mbps 2402MHz Ant1 Emission

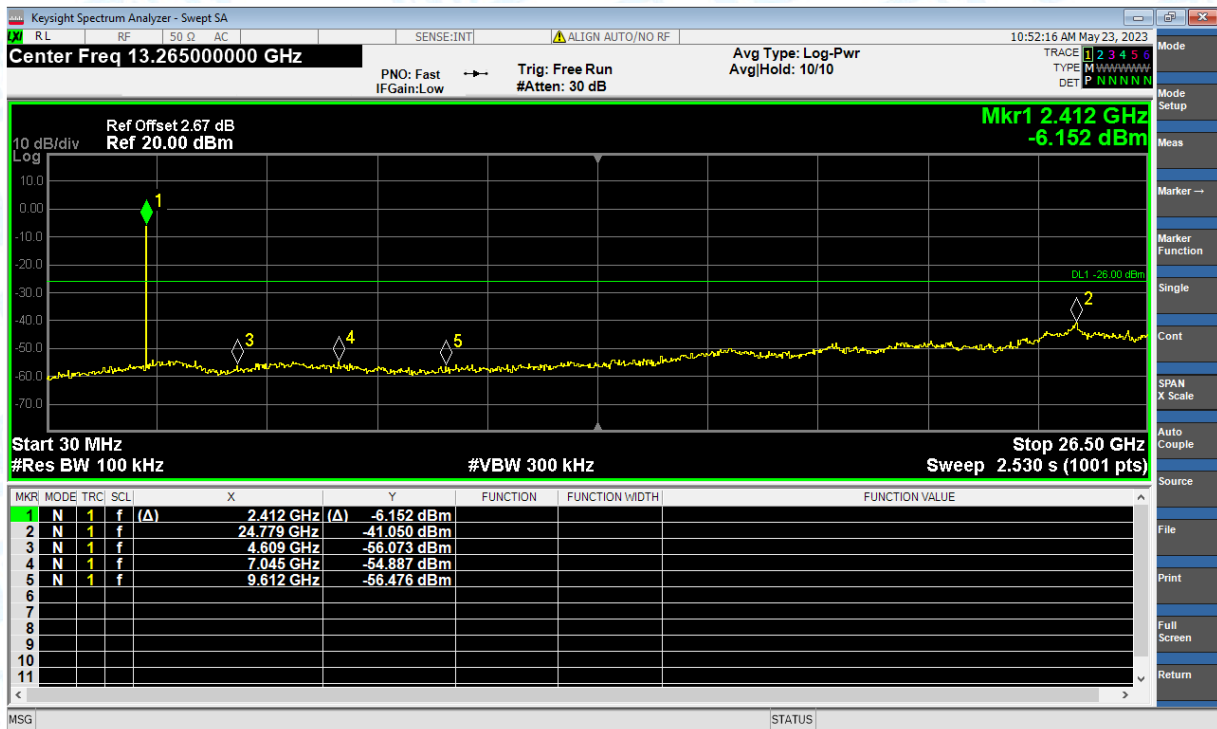


Tx. Spurious NVNT BLE 2Mbps 2440MHz Ant1 Ref

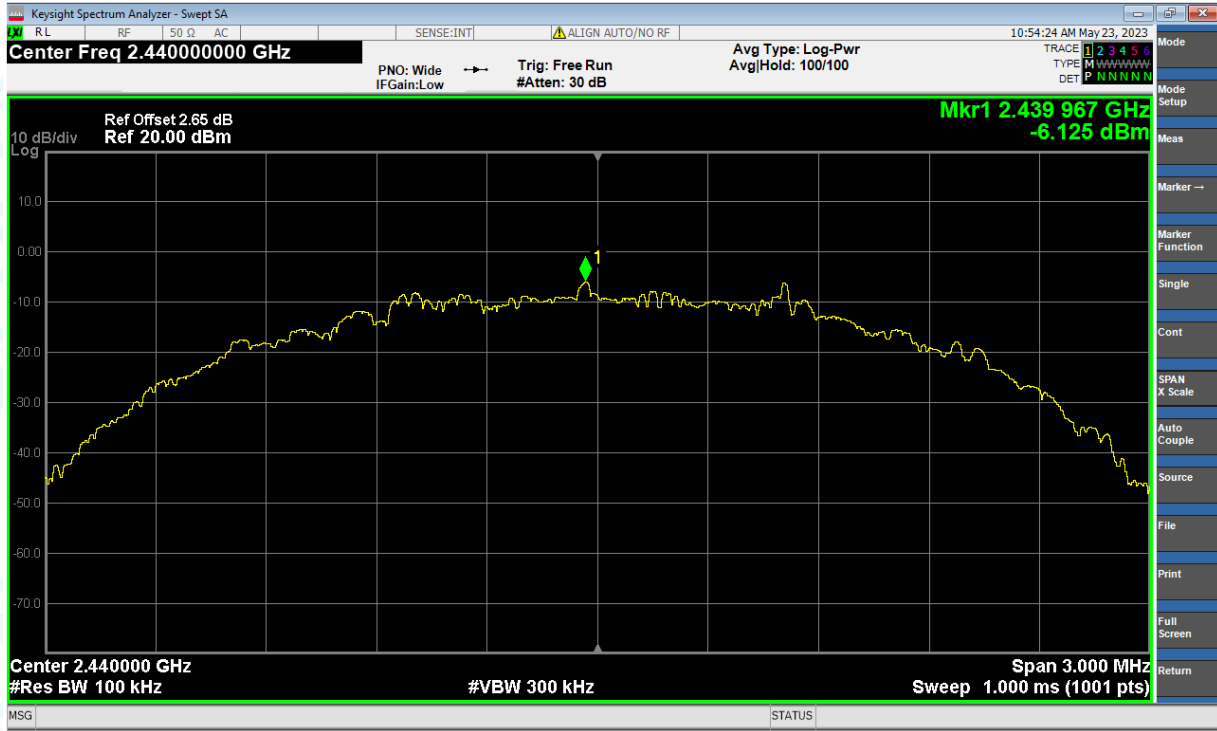


Tx. Spurious NVNT BLE 2Mbps 2440MHz Ant1 Emission

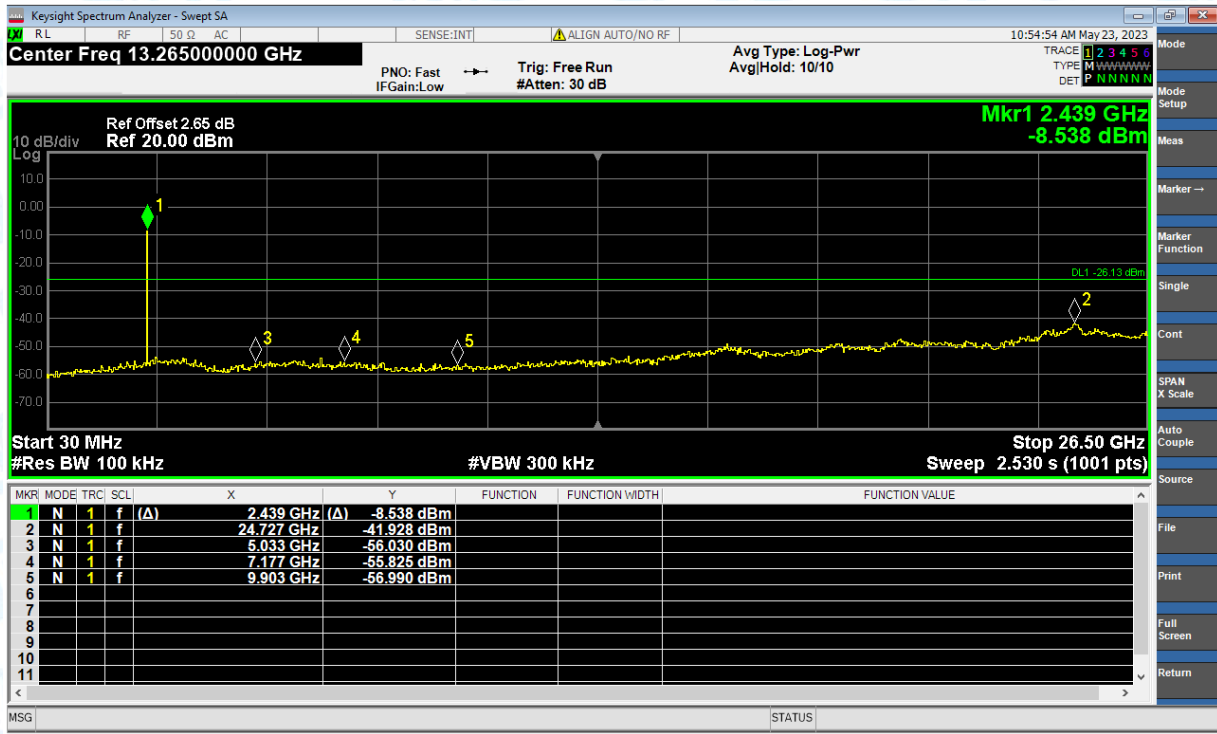

Tx. Spurious NVNT BLE 2Mbps 2480MHz Ant1 Ref

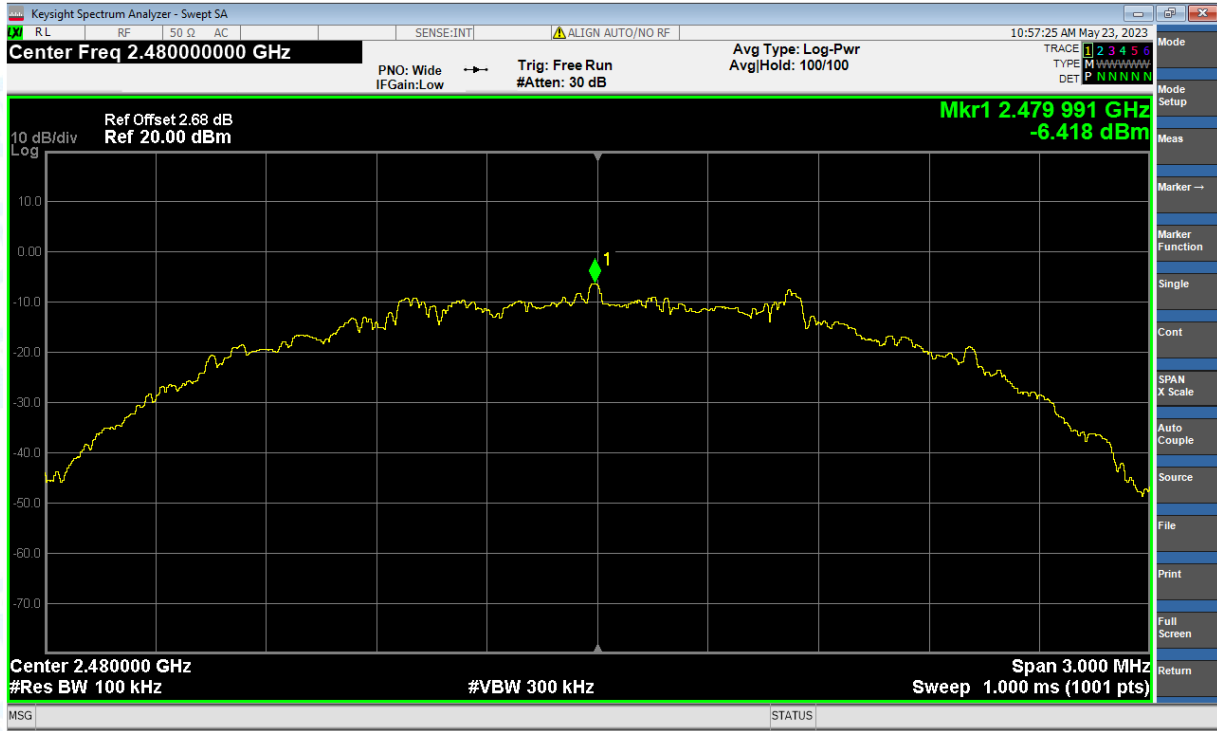

Tx. Spurious NVNT BLE 2Mbps 2480MHz Ant1 Emission

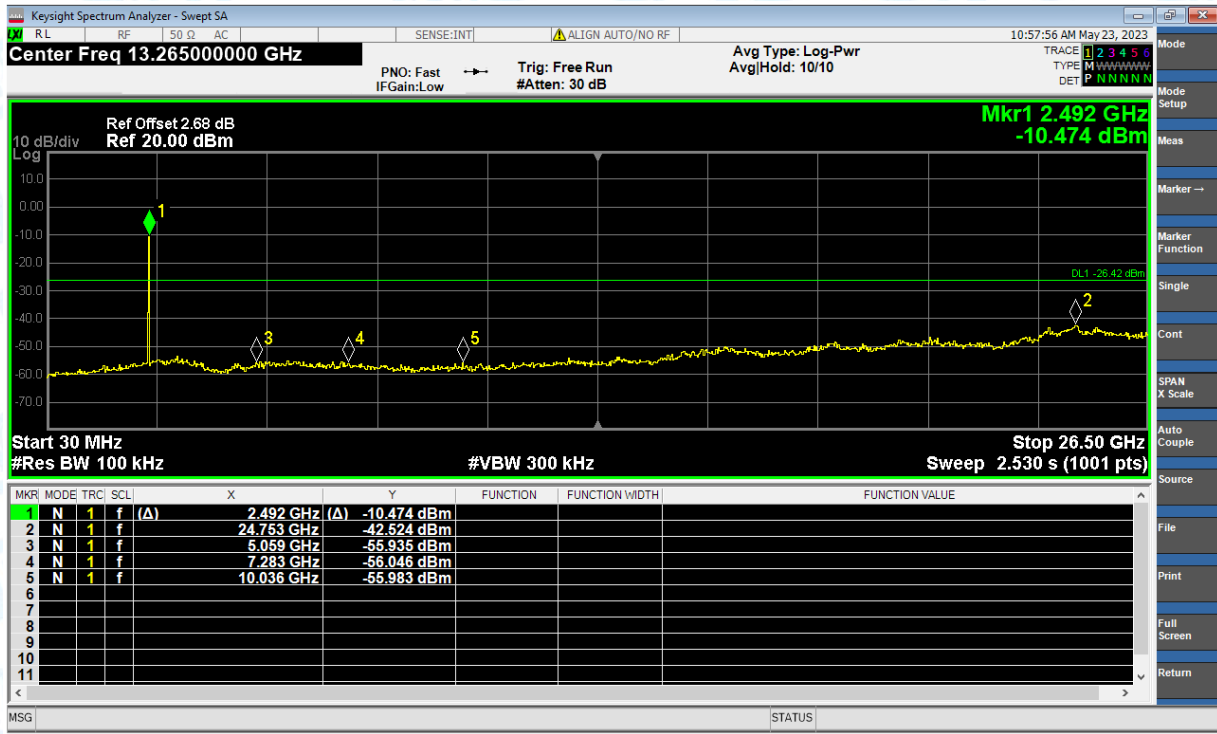


8. Restrict Band


Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	2310	-49.46	2	47.8	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2310	-58.51	2	38.75	Average	54	Pass
NVNT	BLE 1Mbps	2402	Ant1	2369.04	-46.33	2	50.93	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2388.048	-58.25	2	39.01	Average	54	Pass
NVNT	BLE 1Mbps	2402	Ant1	2390	-48.78	2	48.48	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2390	-58.26	2	39	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.5	-48.42	2	48.84	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.5	-58.21	2	39.05	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2499.4	-45.69	2	51.57	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2487.736	-53.59	2	43.67	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2500	-49.72	2	47.54	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2500	-58.28	2	38.98	Average	54	Pass
NVNT	BLE 2Mbps	2402	Ant1	2310	-49.78	2	47.48	Peak	74	Pass
NVNT	BLE 2Mbps	2402	Ant1	2310	-58.22	2	39.04	Average	54	Pass
NVNT	BLE 2Mbps	2402	Ant1	2382	-45.71	2	51.55	Peak	74	Pass
NVNT	BLE 2Mbps	2402	Ant1	2316.048	-57.86	2	39.4	Average	54	Pass
NVNT	BLE 2Mbps	2402	Ant1	2390	-49.02	2	48.24	Peak	74	Pass
NVNT	BLE 2Mbps	2402	Ant1	2390	-58.01	2	39.25	Average	54	Pass
NVNT	BLE 2Mbps	2480	Ant1	2483.5	-49.13	2	48.13	Peak	74	Pass
NVNT	BLE 2Mbps	2480	Ant1	2483.5	-57.07	2	40.19	Average	54	Pass
NVNT	BLE 2Mbps	2480	Ant1	2488.48	-45.94	2	51.32	Peak	74	Pass
NVNT	BLE 2Mbps	2480	Ant1	2483.512	-57.07	2	40.19	Average	54	Pass
NVNT	BLE 2Mbps	2480	Ant1	2500	-47.73	2	49.53	Peak	74	Pass
NVNT	BLE 2Mbps	2480	Ant1	2500	-58.13	2	39.13	Average	54	Pass

Test Graphs


Restrict Band NVNT BLE 1Mbps 2402MHz Ant1 Peak

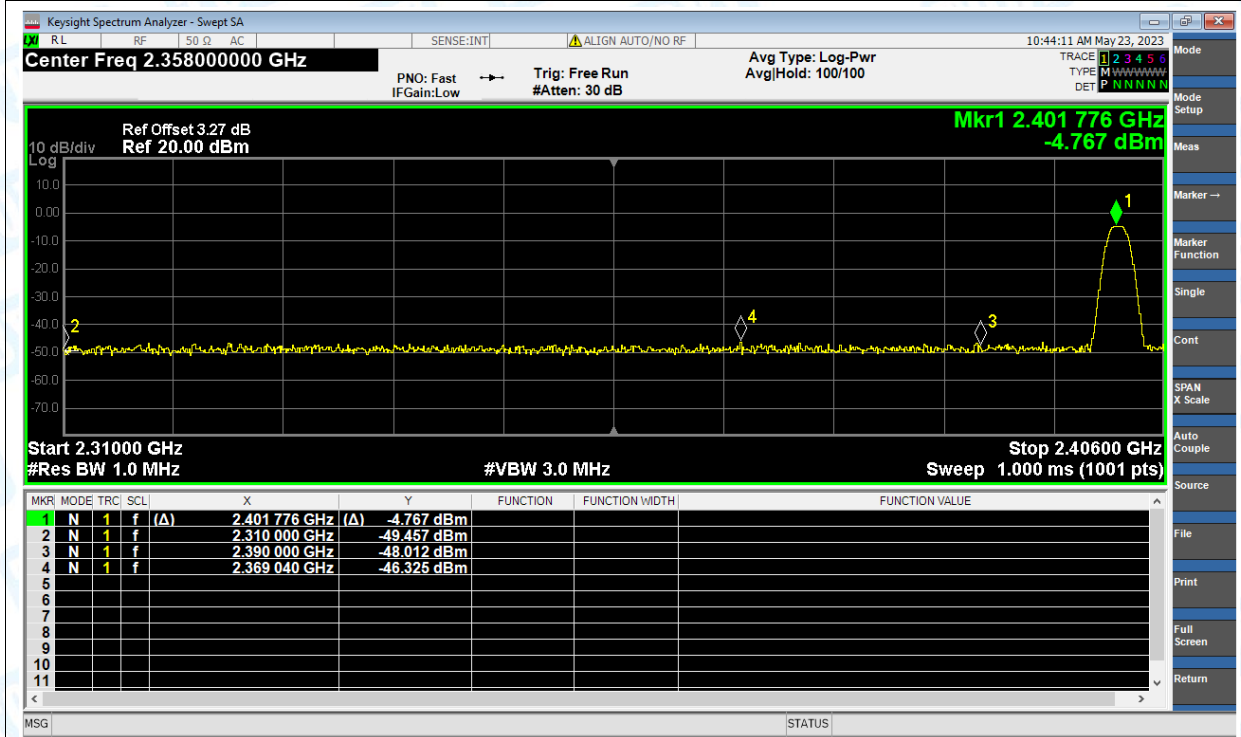


Restrict Band NVNT BLE 1Mbps 2402MHz Ant1 Average

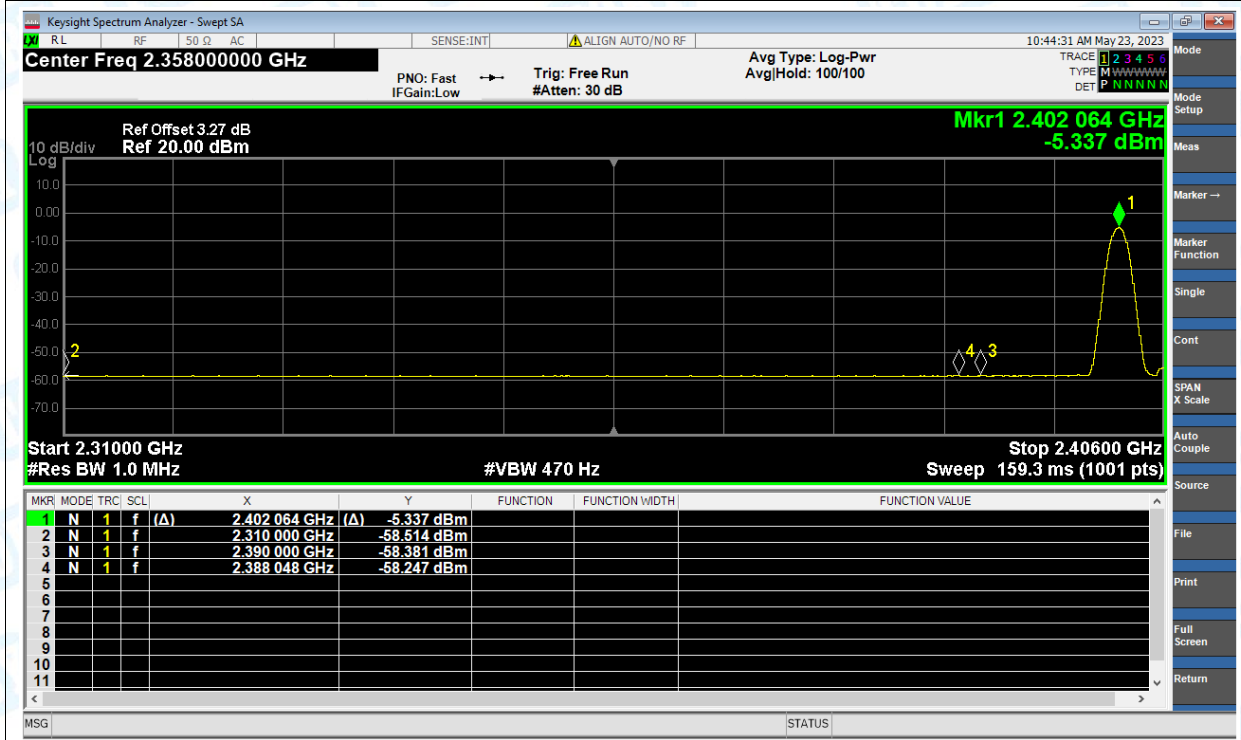


Restrict Band NVNT BLE 1Mbps 2480MHz Ant1 Peak

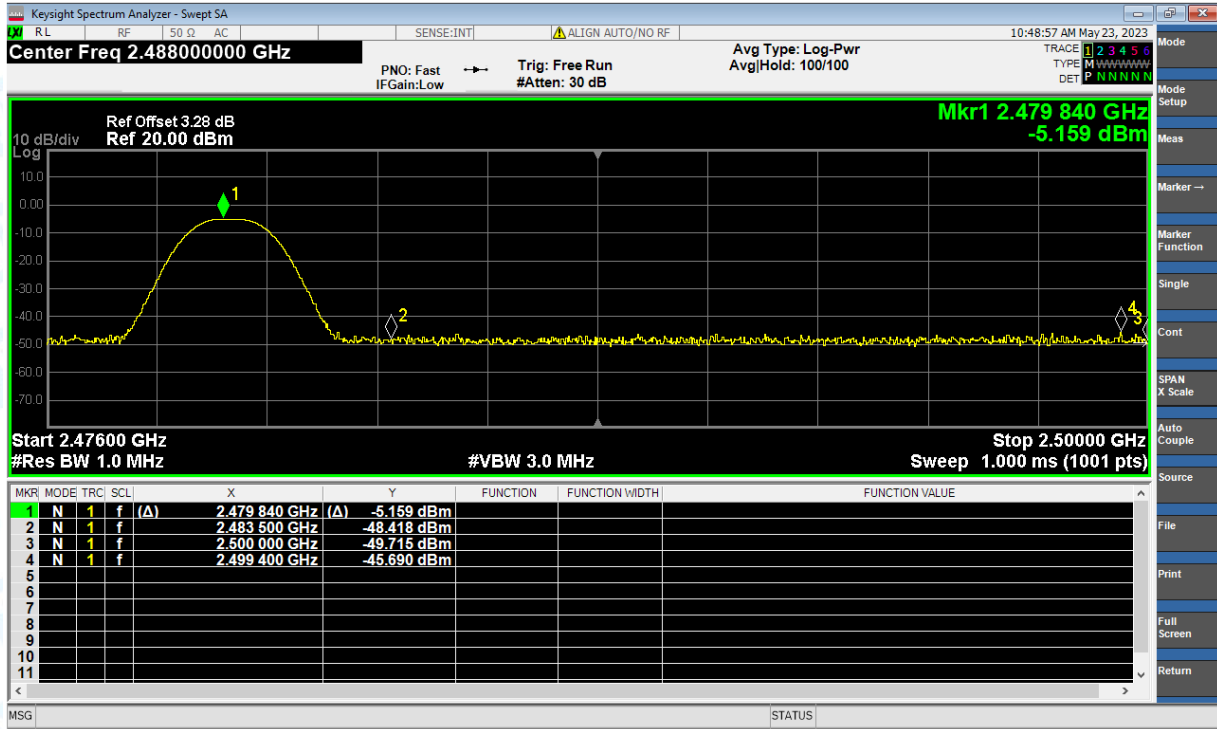


Restrict Band NVNT BLE 1Mbps 2480MHz Ant1 Average

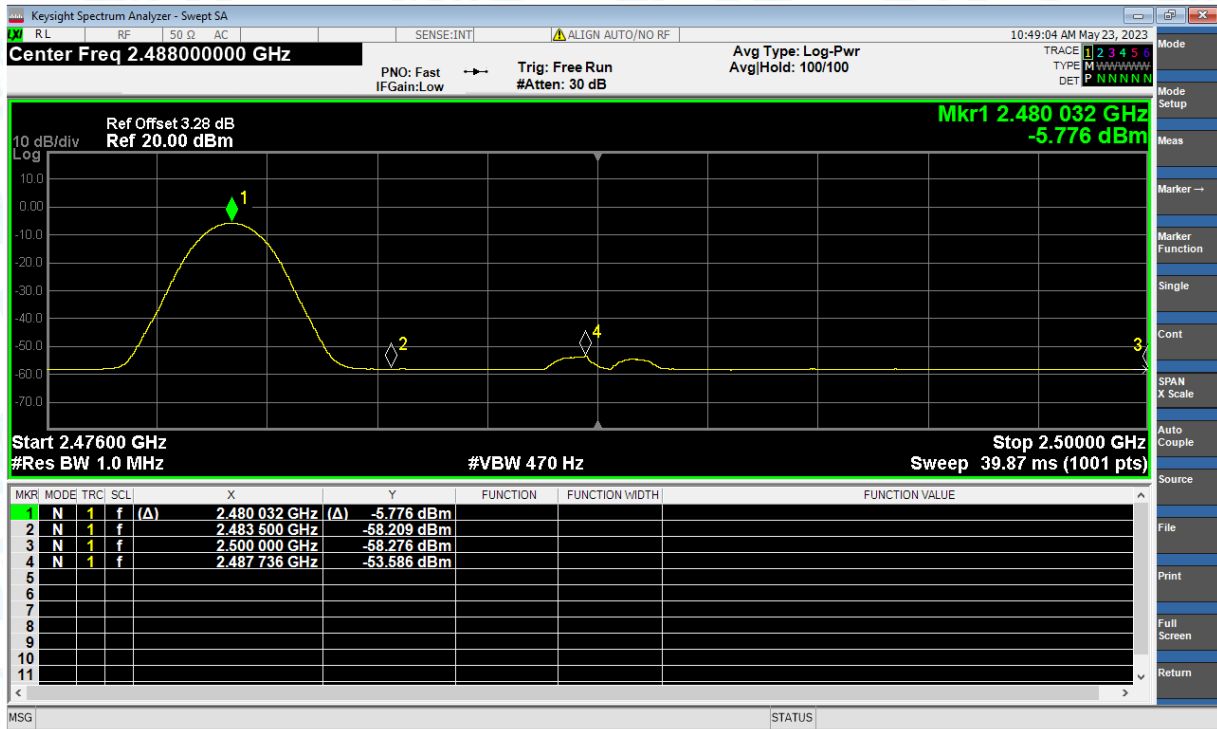


Restrict Band NVNT BLE 2Mbps 2402MHz Ant1 Peak

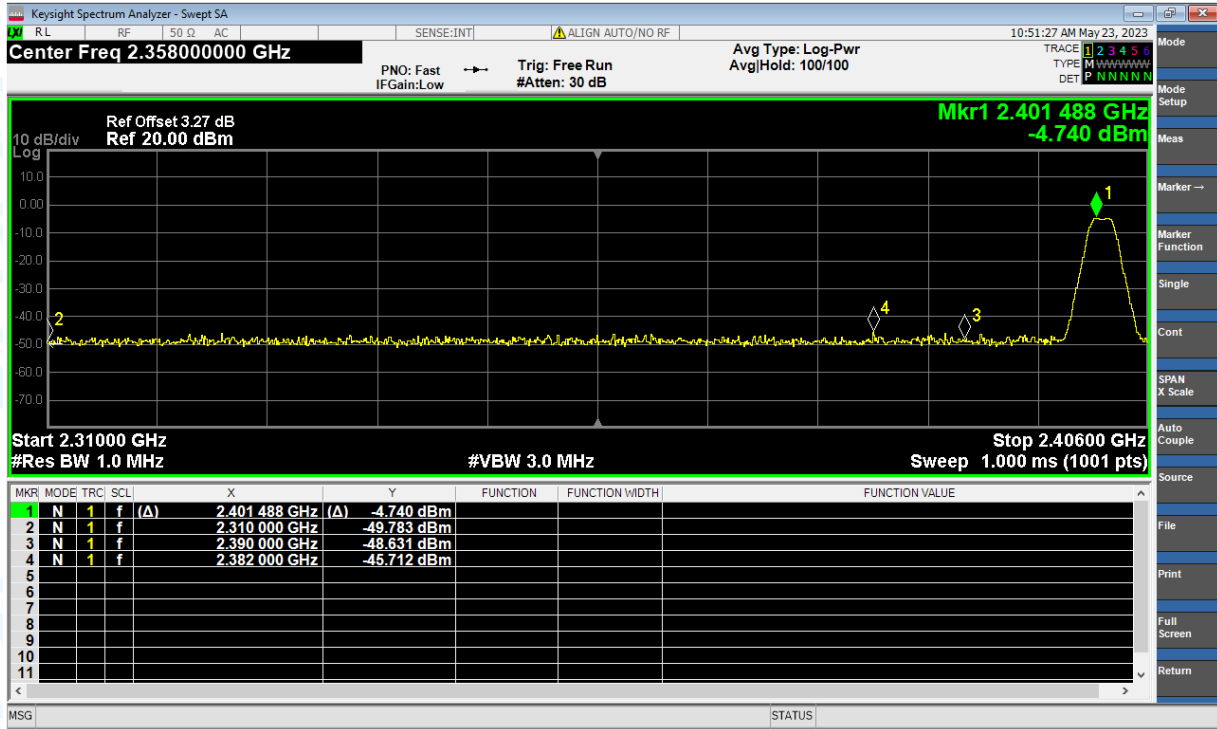

Restrict Band NVNT BLE 2Mbps 2402MHz Ant1 Average

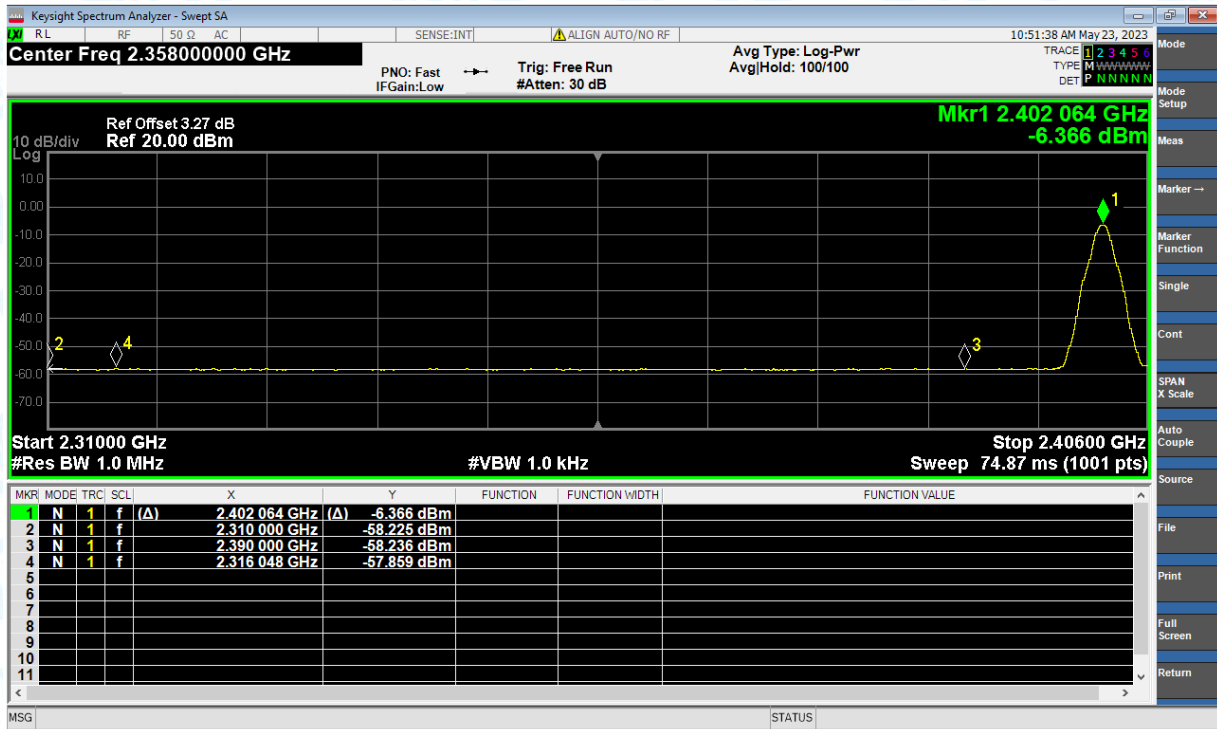

Restrict Band NVNT BLE 2Mbps 2480MHz Ant1 Peak

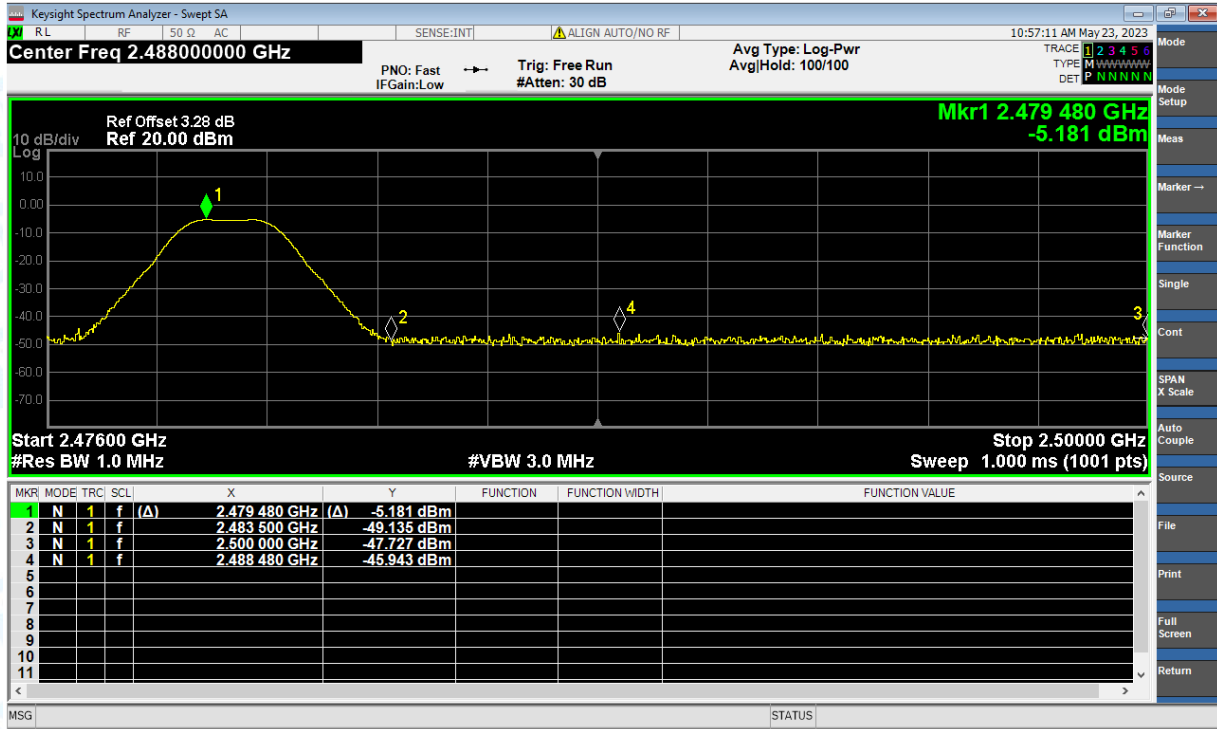

Restrict Band NVNT BLE 2Mbps 2480MHz Ant1 Average



----END OF THE REPORT----